APPENDIX C

Air Quality & Greenhouse Gas Emissions

NEPA

Air Quality & Greenhouse Gas Technical Report

References

SEPA

Air Quality and Human Health Risk Assessment

Technical Report

Health Effects of Aviation Ultrafine and Ultra-Ultrafine

Particles Technical Report

SEA SAMP NTP Climate Synthesis

APPENDIX C

Air Quality & Greenhouse Gas Emissions

Air Quality & Greenhouse Gas Technical Report Attachments

Attachment 1: Aircraft
Attachment 2: Auxiliary Power Usage
Attachment 3: Ground Support Equipment
Attachment 4: Stationary Sources
Attachment 5: Mobile Sources
Attachment 6: Construction
Attachment 7: NEPA Air Quality Protocol and NEPA Climate Protocol

After the publication of the Draft EA, Executive Order 13990, which was relied upon for the January 2023 CEQ draft GHG guidance, was revoked and CEQ revoked its regulations (40 CFR parts 1500-1508) implementing NEPA, 42 U.S.C. 4321 et seq., as amended, in response to Executive Order 14154. In addition, the Supreme Court issued the Seven County Infrastructure Coalition v. Eagle County, 605 U. S. 975 (2025) ruling on May 29, 2025. As a result of these changes, the references to climate, qualitative climate evaluation that discussed the level of preparedness with respect to the impacts of climate change, the extent to which the alternatives could be affected by future climate conditions, and if the alternatives are consistent with national, state, and local climate goals, and the cumulative impact analysis were removed from the Final EA. Though the NEPA Climate Protocol included methodology for both a climate change and cumulative impact analysis, FAA's final decision will only rely upon the GHG emissions disclosed in the Final EA.

Sustainable Airport Master Plan – Near-Term Projects

Air Quality and Greenhouse Gas Technical Report

March 2024

PREPARED FOR

PORT OF SEATTLE

PREPARED BY
Landrum & Brown, Incorporated

Contents

			Page
1.		Introduction	1
	1.1	Description of the Proposed Action	1
	1.2	Alternatives to the Proposed Action	5
2.		Regulatory Setting for Air Quality	5
	2.1	Federal Regulatory Setting	5
	2.2	State Regulations	7
	2.3	King County Air Quality Status	7
3.		Overall Approach for Air Quality Assessment	8
4.		Air Quality Methodology	9
	4.1	Models Used in the Emissions Analysis	9
	4.2	Criteria Pollutants	9
		4.2.1 Pollutants Not Included	10
	4.3	Sources of Emissions	10
	4.4	Data Used in the Analysis	11
5.		Existing (2022) Condition	12
	5.1	Aircraft	12
		5.1.1 Aircraft Fleet Mix and Activity Level	12
		5.1.2 Aircraft Approach and Climb	12
		5.1.3 Aircraft Taxi Time	13
		5.1.4 APUs	13
		5.1.5 Aircraft Run-Ups	14
	5.2	Ground Support Equipment (GSE)	14
		5.2.1 Tenant-Owned GSE	14
		5.2.2 Port-Owned Airfield Vehicles and Equipment	14
	5.3	Stationary Sources	15
		5.3.1 Natural Gas Boilers and Heaters	15
		5.3.2 Diesel Generators	15
		5.3.3 Fuel Farm Tanks	15
	5.4	Motor Vehicles	15
		5.4.1 Motor Vehicles (On- and Off-Airport Roadways)	15
		5.4.2 Motor Vehicles (Parking Facilities)	19
	5.5	Existing (2022) Condition Criteria Pollutant Emissions Inventory	19
6.		Construction Emissions Inventories	21
	6.1	Construction Schedule	21
	6.2	On-Road Construction Vehicles	21
	6.3	Non-Road Construction Equipment	21
	6.4	Proposed Action - Criteria Pollutant Construction Emissions Inventory	22

6.5 Hybrid Option - Criteria Pollutant Construction Emissions Inventory 22
7. Future (2032) No Action Alternative 23
7.1 Aircraft 23
7.1.1 Aircraft Fleet Mix and Activity Levels 23
7.1.2 Aircraft Taxi Time 23
7.1.3 APUs 24
7.1.4 Aircraft Run-Ups 24
7.2 Ground Support Equipment 24
7.2.1 Tenant-Owned GSE 24
7.2.2 Port-Owned Airfield Vehicles and Equipment 24
7.3 Stationary Sources 25
7.3.1 Natural Gas Boilers and Heaters 25
7.3.2 Diesel Generators 25
7.3.3 Fuel Farm Tanks 25
7.4 Motor Vehicles 25
7.4.1 Motor Vehicles (On- and Off-Airport Roadways) 25
7.4.2 Motor Vehicles (Parking Facilities) 26
7.5 Future (2032) No Action Alternative Criteria Pollutant Emissions Inventory 26
8. Future (2032) Proposed Action 27
8.1 Aircraft 27
8.1.1 Aircraft Fleet Mix and Activity Levels 27
8.1.2 Aircraft Taxi Time 27
8.1.3 APUs 28
8.1.4 Aircraft Run-Ups 28
8.2 Ground Support Equipment 28
8.2.1 Tenant-Owned GSE 28
8.2.2 Port-Owned Airfield Vehicles and Equipment 28
8.3 Stationary Sources 29
8.3.1 Natural Gas Boilers and Heaters 29
8.3.2 Diesel Generators 29
8.3.3 Fuel Farm Tanks 29
8.4 Motor Vehicles 29
8.4.1 Motor Vehicles (On- and Off-Airport Roadways) 29
8.4.2 Motor Vehicles (Parking Facilities) 30
8.5 Future (2032) Proposed Action Criteria Pollutant Emissions Inventory 31
9. Future (2032) Hybrid Option 31
10. Comparison of 2032 Alternatives 32
10.1 Future (2032) Proposed Action 32
10.2 Future (2032) Hybrid Option 33
11. Future (2037) No Action Alternative 33

11.1 Aircraft 33
11.1.1 Aircraft Fleet Mix and Activity Levels 33
11.1.2 Aircraft Taxi Time 33
11.1.3 APUs 34
11.1.4 Aircraft Run-Ups 34
11.2 Ground Support Equipment 34
11.2.1 Tenant-Owned GSE 34
11.2.2 Port-Owned Airfield Vehicles and Equipment 34
11.3 Stationary Sources 35
11.3.1 Natural Gas Boilers and Heaters 35
11.3.2 Diesel Generators 35
11.3.3 Fuel Farm Tanks 35
11.4 Motor Vehicles 35
11.4.1 Motor Vehicles (On- and Off-Airport Roadways) 35
11.4.2 Motor Vehicles (Parking Facilities) 36
11.5 Future (2037) No Action Alternative Criteria Pollutant Emissions Inventory 36
12. Future (2037) Proposed Action 37
12.1 Aircraft 37
12.1.1 Aircraft Fleet Mix and Activity Levels 37
12.1.2 Aircraft Taxi Time 37
12.1.3 APUs 37
12.1.4 Aircraft Run-Ups 37
12.2 Ground Support Equipment 38
12.2.1 Tenant-Owned GSE 38
12.2.2 Port-Owned Airfield Vehicles and Equipment 38
12.3 Stationary Sources 38
12.3.1 Natural Gas Boilers and Heaters 38
12.3.2 Diesel Generators 38
12.3.3 Fuel Farm Tanks 38
12.4 Motor Vehicles 39
12.4.1 Motor Vehicles (On- and Off-Airport Roadways) 39
12.4.2 Motor Vehicles (Parking Facilities) 39
12.5 Future (2037) Proposed Action Criteria Pollutant Emissions Inventory 39
13. Future (2037) Hybrid Option 40
14. Comparison of 2037 Alternatives 40
14.1 Future (2037) Proposed Action 40
14.2 Future (2037) Hybrid Option 41
15. Air Quality Significance Determination 42
16. Federal Regulatory Setting for GHG 42
17. Overall Approach to GHG Assessment 42
18. GHG Methodology 43

18.1 Pollutants 43
18.2 Global Warming Potential 43
18.3 Scope/Categories of Emissions 44
18.4 Scope 1 44
18.4.1 Port-Owned Airfield Vehicles and Equipment 44
18.4.2 Stationary Sources 45
18.5 Scope 2 47
18.5.1 Port of Seattle Electricity Consumption 47
18.6 Scope 3 48
18.6.1 Aircraft Landing and Take-off (Includes Start-Up, Approach, Climb, and Taxiing), APUs, and Aircraft Run-Up Activity 48
18.6.2 Tenant-Owned GSE 48
18.6.3 Tenant Electricity Consumption 49
18.6.4 Motor Vehicles on- and off-Airport Roadways and Parking Lots (Including Airside Deliveries) 50
19. GHG Construction Emissions Inventories 50
19.1 Proposed Action - GHG Construction Emissions Inventory 50
19.2 Hybrid Terminal Option - GHG Construction Emissions Inventory 51
20. GHG Operational Emissions Inventories 52
20.1 Existing (2022) Condition 52
20.2 Future (2032) No Action Alternative 53
20.3 Future (2032) Proposed Action 54
20.4 Future (2032) Hybrid Terminal Option 54
20.5 Comparison of 2032 Alternatives 55
20.5.1 Future (2032) Proposed Action 55
20.5.2 Future (2032) Hybrid Terminal Option 56
20.6 Future (2037) No Action Alternative 57
20.7 Future (2037) Proposed Action Alternative 57
20.8 Future (2037) Hybrid Terminal Option 58
20.9 Comparison of 2037 Alternatives 58
20.9.1 Future (2037) Proposed Action 59
20.9.2 Future (2037) Hybrid Terminal Option 59

Attachments

Attachment 1 Aircraft
Attachment 2 Auxiliary Power Unit Usage
Attachment 3 Ground Support Equipment
Attachment 4 Stationary Sources
Attachment 5 Mobile Sources
Attachment 6 Construction
Attachment 7 NEPA Air Quality Protocol and NEPA Climate Protocol

List of Tables

Page

Table 1: National Ambient Air Quality Standards 6
Table 2: Vehicle Classifications 17
Table 3: Vehicle Distribution on King County Roadways 18
Table 4: Vehicle Distribution on Airport-Specific Roadways 18
Table 5: Annual Operational Emissions Inventory - Existing (2022) Condition 20
Table 6: Annual Construction Emissions Inventory - Proposed Action 22
Table 7: Annual Construction Emissions Inventory - Hybrid Terminal Option 23
Table 8: Annual Operational Emissions Inventory - Future (2032) No Action Alternative 27
Table 9: Annual Operational Emissions Inventory - Future (2032) Proposed Action 31
Table 10: Summary of Annual Criteria Pollutant Emissions, Proposed Action Compared to the No Action Alternative in 2032 32
Table 11: Summary of Annual Criteria Pollutant Emissions, Hybrid Terminal Option Compared to the No Action Alternative in 2032 33
Table 12: Annual Operational Emissions Inventory - Future (2037) No Action Alternative 36
Table 13: Annual Operational Emissions Inventory - Future (2037) Proposed Action 40
Table 14: Summary of Annual Criteria Pollutant Emissions, Proposed Action Compared to the No Action Alternative in 2037 41
Table 15: Summary of Annual Criteria Pollutant Emissions, Hybrid Terminal Option Compared to the No Action Alternative in 2037 41
Table 16: Port-Owned GSE – Summary Comparison of Annual Usage 45
Table 17: GHG Emission Factors for Stationary Sources 45
Table 18: Natural Gas Boilers and Heaters – Summary Comparison of Annual Usage 46
Table 19: Diesel Generators – Summary Comparison of Annual Usage 46
Table 20: GHG Emission Factors for Off-Site (Purchased) Electricity Generation 47
Table 21: Port of Seattle Electricity Consumption – Summary Comparison of Annual Consumption 48
Table 22: GHG Emission Factors for Aircraft Engine Fuel 48
Table 23: Tenant-Owned GSE – Summary Comparison of Annual Usage 49
Table 24: Tenant Electricity Consumption–Summary Comparison of Annual Usage 49
Table 25: Construction GHG Emissions Inventory - Proposed Action 50
Table 26: Construction GHG Emissions Inventory - Hybrid Terminal Option 51
Table 27: Annual Operational GHG Emissions Inventory – Existing (2022) Condition 52
Table 28: Annual Operational GHG Emissions Inventory – Future (2032) No Action Alternative 53
Table 29: Annual Operational GHG Emissions Inventory – Future (2032) Proposed Action 54
Table 30: Summary of GHG Emissions, Proposed Action Compared to the No Action Alternative in 2032 55
Table 31: Summary of GHG Emissions, Hybrid Terminal Option Compared to the No Action Alternative in 2032 56

Table 32: Annual Operational GHG Emissions Inventory – Future (2037) No Action Alternative 57
Table 33: Annual Operational GHG Emissions Inventory – Future (2037) Proposed Action 58
Table 34: Summary of GHG Emissions, Proposed Action Compared to the No Action Alternative in 2037 59
Table 35:Summary of GHG Emissions, Hybrid Terminal Option Compared to the No Action Alternative in 2037 59

List of Exhibits

Page

Exhibit 1, Proposed Action 3
Exhibit 2, Landing and Take-Off Cycle 13

1. Introduction

Landrum & Brown completed an air quality and greenhouse gas (GHG)[1] assessment to determine the potential construction and operational impacts to air quality and GHG emissions resulting from the Sustainable Airport Master Plan (SAMP) – Near-Term Projects (NTPs) at the Seattle-Tacoma International Airport (SEA or Airport). This technical report documents the overall approach, methods, and results of the air quality and GHG assessment to demonstrate compliance with the National Environmental Policy Act (NEPA).

This air quality and GHG technical report is organized in the following manner:

- **Air quality** is provided in Sections 2 through 15 which includes the regulatory setting, methodology, emissions inventories, and summary of impacts for criteria pollutants.
- **GHG Emissions** is provided in Section 16 through 22 which includes the regulatory setting, methodology, emissions inventories, and summary of impacts for greenhouse gases.
- Due to the size of the tables and exhibits that substantiate the analysis, they are provided at the end of this technical report as **Attachments,** which are organized in the following order.
  - Attachment 1, Aircraft
  - Attachment 2, Auxiliary Power Unit Usage
  - Attachment 3, Ground Support Equipment
  - Attachment 4, Stationary Sources
  - Attachment 5, Mobile Sources
  - Attachment 6, Construction
  - Attachment 7, NEPA Air Quality Protocol and NEPA Climate Protocol

The approach, methods, and models used in the technical report are consistent with the NEPA Air Quality Protocol and NEPA Climate Protocol (Attachment 7 of this Air Quality and Greenhouse Gas Report) approved by the Federal Aviation Administration (FAA) and the Puget Sound Clean Air Agency (PSCAA).[2,3]

1.1 Description of the Proposed Action

The Port identified a set of NTPs to address the near-term activity levels projected to occur at the Airport. The NTPs include more than 30 projects that would improve efficiency, safety of the Airport, access to the Airport, and support facilities for airlines and the Airport. The NTPs (as a whole) are referred to as the Proposed Action. The elements of the Proposed Action are shown on **Exhibit 1, *Proposed Action*.** The Proposed Action is anticipated to cause emissions from construction and operational activities which necessitates the need for this analysis. Construction refers to the process of building or putting in place the proposed improvements. Operational emissions refer to the emissions emitted once the proposed improvements are operational.

---

1 After the publication of the draft EA, Executive Order (EO) 13990, which was relied upon for the January 2023 CEQ draft GHG guidance, was revoked. In addition, CEQ revoked its regulations (40 CFR parts 1500-1508) implementing NEPA, 42 U.S.C. 4321 et seq., as amended, in response to EO 14154. As a result of these changes, all references to climate and the qualitative climate evaluation that discussed the level of preparedness with respect to the impacts of climate change, the extent to which the alternatives could be affected by future climate conditions, and if the alternatives are consistent with national, state, and local climate goals has been removed from this Technical Report.

2 Erik Saganić, PSCAA, Email to Kandice Krull, FAA, RE: SEA SAMP NTP EA NEPA AQ Protocol, July 26, 2023.

3 Erik Saganić, PSCAA, Email to Kandice Krull, FAA, RE: Sea-Tac Int'l Airport: Sustainable Airport Master Plan Near-Term Projects Environmental Review - Climate Assessment Protocol - PLEASE REVIEW, November 21, 2023.

THIS PAGE INTENTIONALLY LEFT BLANK

EXHIBIT 1, PROPOSED ACTION

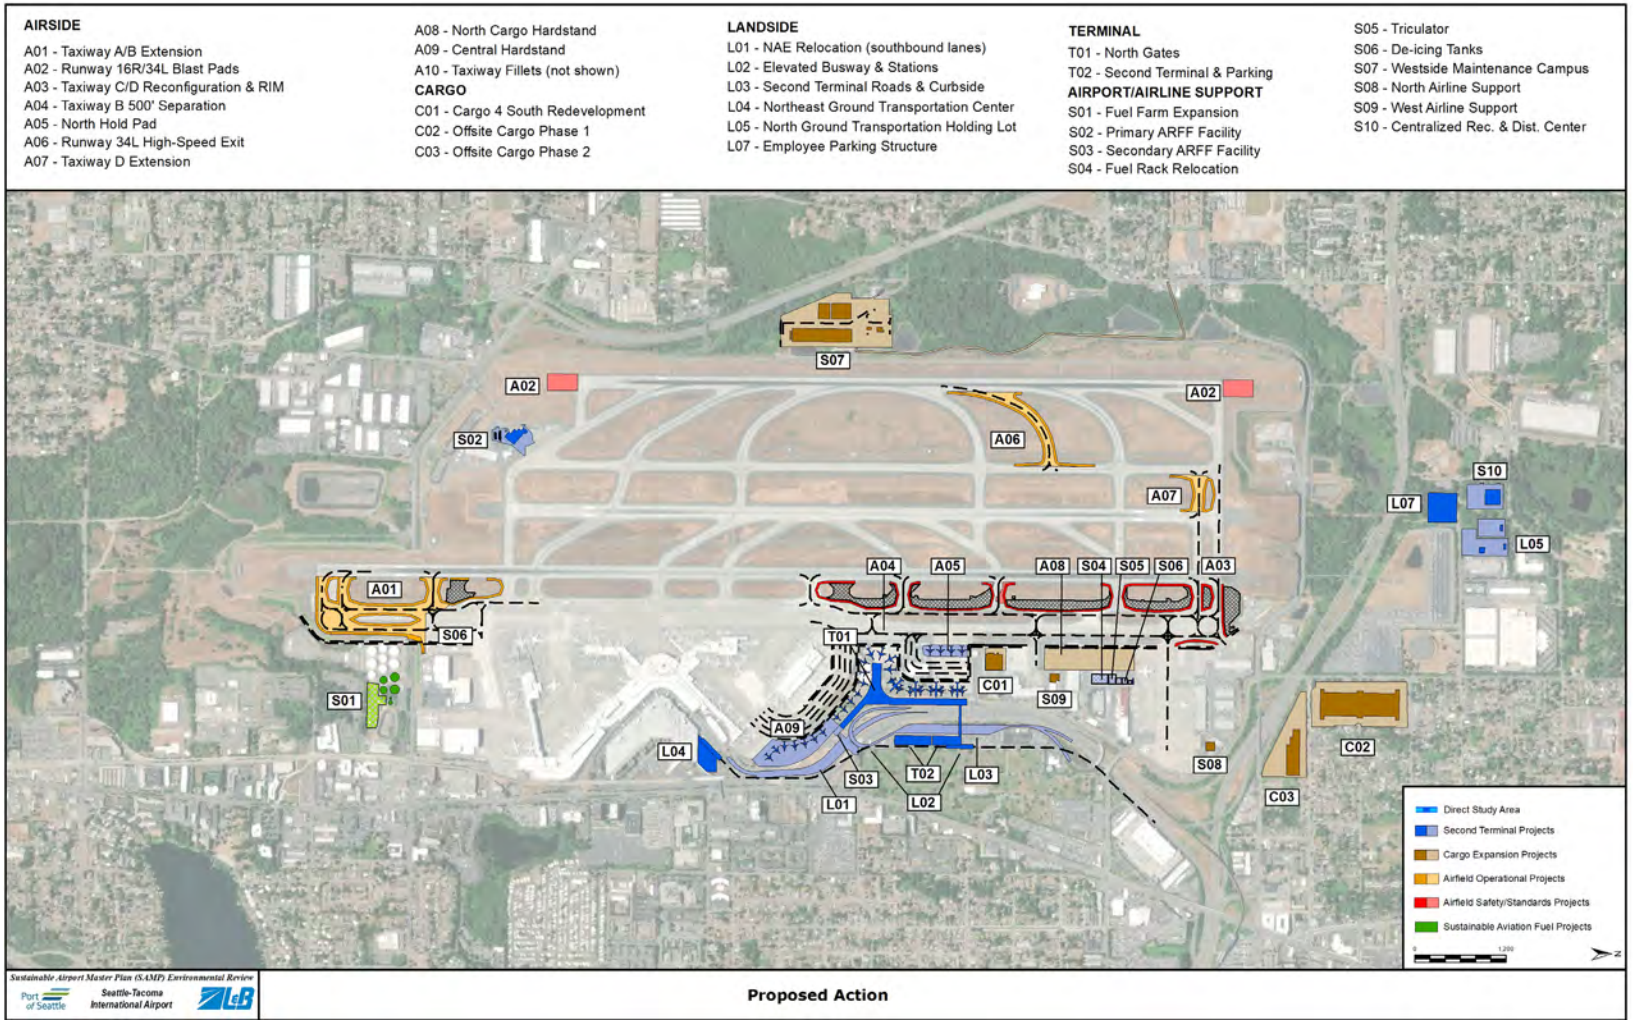

Note: NAE = North Airport Expressway; GT = ground transportation; ARFF = aircraft rescue and firefighting

THIS PAGE INTENTIONALLY LEFT BLANK

1.2 Alternatives to the Proposed Action

In addition to the Proposed Action, a No Action Alternative was also considered as required under NEPA. The No Action Alternative would include no physical improvements to the Airport, but includes projects that have recently been constructed, or will be constructed by 2037.

The passenger and aircraft operations from the Constrained Operating Growth Scenarios were used for this analysis. The Constrained Operating Growth Scenario is provided in Appendix A, Forecast and Operational Assumptions, of the Environmental Assessment for the SAMP NTPs. Overall, there are more aircraft operations forecast with the Proposed Action as compared to the No Action Alternative. Implementation of the Proposed Action would increase the Airport's ability to accommodate increased aircraft operations and passenger activity by adding aircraft gates and passenger processing facilities.

The analysis also includes an assessment of a Hybrid Terminal Option. This alternative includes the same elements as the Proposed Action but connects the new concourse to the existing Concourse D.

2. Regulatory Setting for Air Quality

2.1 Federal Regulatory Setting

The Clean Air Act (CAA) established the standards and programs used to evaluate, achieve, and maintain acceptable air quality in the United States. Under the CAA, the U.S. Environmental Protection Agency (USEPA) established a set of standards, the National Ambient Air Quality Standards (NAAQS), for six pollutants determined to be potentially harmful to human health and welfare.[4]

- Carbon monoxide (CO);
- Ozone (O_3);
- Nitrogen dioxide (NO_2);
- Sulfur dioxide (SO_2);
- Particulate matter (PM_{10} and $PM_{2.5}$); and
- Lead (Pb).

For each of the criteria pollutants, the USEPA established primary standards intended to protect public health, and secondary standards for the protection of public welfare, which captures factors such as preventing materials damage, preventing crop and vegetation damage, and assuring good visibility. The NAAQS are summarized in **Table 1**.

[4] USEPA, Code of Federal Regulations, Title 40, Part 50 (40 C.F.R. Part 50) National Primary and Secondary Ambient Air Quality Standards (NAAQS), July 2011.

TABLE 1: NATIONAL AMBIENT AIR QUALITY STANDARDS

Pollutant	Primary/ Secondary	Averaging Time	Level	Form Of Measurement
Carbon Monoxide	Primary	8 hour	9 ppm	Not to be exceeded more than once per year
Carbon Monoxide	Primary	1 hour	35 ppm	Not to be exceeded more than once per year
Lead	Primary and Secondary	Rolling 3-month average	0.15 µg/m^3 (1)	Not to be exceeded
Nitrogen Dioxide	Primary	1 hour	100 ppb	98th percentile of 1-hour daily maximum concentrations, averaged over 3 years
Nitrogen Dioxide	Primary and Secondary	1 year	53 ppb (2)	Annual Mean
Ozone	Primary and Secondary	8 hours	0.070 ppm (3)	Annual fourth-highest daily maximum 8-hour concentration, averaged over 3 years
Particulate Matter ($PM_{2.5}$)	Primary	1 year	9.0 µg/m^3	Annual mean, averaged over 3 years
Particulate Matter ($PM_{2.5}$)	Secondary	1 year	15.0 µg/m^3	Annual mean, averaged over 3 years
Particulate Matter ($PM_{2.5}$)	Primary and Secondary	24 hours	35 µg/m^3	98th percentile, averaged over 3 years
Particulate Matter (PM_{10})	Primary and Secondary	24 hours	150 µg/m^3	Not to be exceeded more than once per year on average over 3 years
Sulfur Dioxide	Primary	1 hour	75 ppb (4)	99th percentile of 1-hour daily maximum concentrations, averaged over 3 years
Sulfur Dioxide	Secondary	3 hours	0.5 ppm	Not to be exceeded more than once per year

(1) In areas designated nonattainment for the Pb standards prior to the promulgation of the current (2008) standards, and for which implementation plans to attain or maintain the current (2008) standards have not been submitted and approved, the previous standards (1.5 µg/m^3 as a calendar quarter average) also remain in effect.
(2) The level of the annual NO_2 standard is 0.053 ppm. It is shown here in terms of ppb for the purposes of clearer comparison to the 1-hour standard level.
(3) Final rule signed October 1, 2015, and effective December 28, 2015. The previous (2008) O_3 standards are not revoked and remain in effect for designated areas. Additionally, some areas may have certain continuing implementation obligations under the prior revoked 1-hour (1979) and 8-hour (1997) O_3 standards.
(4) The previous SO_2 standards (0.14 ppm 24-hour and 0.03 ppm annual) will additionally remain in effect in certain areas: (1) any area for which it is not yet 1 year since the effective date of designation under the current (2010) standards, and (2) any area for which an implementation plan providing for attainment of the current (2010) standard has not been submitted and approved and which is designated nonattainment under the previous SO_2 standards or is not meeting the requirements of a SIP call under the previous SO_2 standards (40 C.F.R. 50.4(3)). A SIP call is an EPA action requiring a state to resubmit all or part of its State Implementation Plan to demonstrate attainment of the required NAAQS.
Notes: ppm is parts per million; ppb is parts per billion, and µg/m^3 is micrograms per cubic meter.
Source: EPA, https://www.epa.gov/criteria-air-pollutants/naaqs-table, Accessed March 2024.

After EPA sets a new NAAQS or revises an existing standard for a criteria air pollutant, the CAA requires EPA to determine if areas of the country meet the new standards. If the air quality in a geographic area meets or is cleaner than the national standard, it is called an attainment area (designated “attainment/unclassifiable”); areas that don't meet the national standard are called nonattainment areas. In some cases, EPA is not able to determine an area's status after evaluating the available information and those areas are designated "unclassifiable." A maintenance area is an area previously designated nonattainment that subsequently meets the requirements in the CAA Section 107(d)(3). Such an area remains designated as maintenance for a period of up to 20 years provided that the NAAQS were sufficiently maintained throughout the maintenance period. Once designations take effect, state and local governments with nonattainment areas must develop State Implementation Plans (SIPs) outlining how areas will attain and maintain the standards by reducing air pollutant emissions.

Section 176(c) of the CAA requires federal actions to conform to the appropriate SIPs in order to attain the CAA’s air quality goals. To address this, EPA promulgated a Transportation Conformity Rule (40 Code of Federal Regulations [C.F.R.] Part 93, subpart A) and a General Conformity Rule (40 C.F.R. Part 93, subpart B). The Transportation Conformity Rule does not apply for this analysis because the Proposed Action will not be funded through U.S.C. Title 23 or the Federal Transit Act.

Most actions by the FAA fall under the General Conformity provisions of the CAA.[5] The General Conformity Rule under the CAA is conducted in three phases, depending on the extent of the proposed federal action: (1) applicability, (2) evaluation, and (3) determination. The applicability phase has two parts. The first part is to determine if the Proposed Action is located in a USEPA-designated nonattainment or maintenance area for one or more of the regulated criteria pollutants. If it is not, then the General Conformity Rule does not apply. Since the Proposed Action is not located in a USEPA-designated nonattainment or maintenance area for one or more of the regulated criteria pollutants, the General Conformity Rule does not apply.

2.2 State Regulations

In addition to federal requirements, the Airport is subject to state and local air quality regulations that the Washington State Department of Ecology and PSCAA enforce, respectively. Based on the Air Quality Data Summary for 2022 prepared by the PSCAA, the State of Washington and the Puget Sound region have adopted the EPA’s NAAQS.[6,7]

2.3 King County Air Quality Status

The Airport is located within King County, Washington, which is included in the Puget Sound Intrastate Air Quality Control Region. As previously stated, the Proposed Action would occur in areas that are currently in attainment for all criteria pollutants.

---

5 General Conformity ensures that the actions taken by federal agencies, such as airport construction, do not interfere with a state’s plans to attain and maintain national standards for air quality. Additional information for General Conformity can be found on-line: https://www.epa.gov/general-conformity

6 Puget Sound Clean Air Agency. 2022 Air Quality Data Summary, December 2023. Available on-line: https://pscleanair.gov/DocumentCenter/View/5360/Air-Quality-Data-Summary-2022-PDF?bidId=

7 The Puget Sound Clean Air Agency has developed an air quality health goal for daily $PM_{2.5}$ concentrations. The health goal of 25 µg/m^3 for a daily average is more protective than the current federal standard of 35 µg/m^3. However, the State of Washington has not approved this health goal as an ambient air quality standard. The goal is not enforced by regulation but a standard the state is voluntarily trying to achieve beyond the federal standard.

For background information, the area was previously designated maintenance for ozone under the 1-hour 1979 ozone standard; however, the 1-hour standard was revoked by the EPA effective June 15, 2005. The maintenance period for ozone ended on October 25, 2016.[8] The region is currently designated as in attainment for both the 2015 and 2008 8-hour ozone standard. The region is not subject to a maintenance plan for ozone, although ozone has been considered an important pollutant tracked by the state and local agencies.

In the past, King County was also designated as nonattainment for carbon monoxide (CO); however, on October 11, 1996, the EPA determined the area had attained the standard and the region was re-designated to attainment. The maintenance period for CO ended on October 11, 2016.[9] Several areas within King County are classified as maintenance for the PM_{10} (coarse particles) standard, including Kent, Duwamish and Tacoma. Neither the Proposed Action nor any part of the Airport is within any of these areas. Therefore, the Proposed Action would occur in an area considered in attainment for all criteria pollutants.

3. Overall Approach for Air Quality Assessment

The overall approach to conducting this air quality analysis follows FAA guidelines for preparing NEPA documents, which includes FAA Order 1050.1F, *Environmental Impacts: Policies and Procedures (including the Desk Reference);* FAA Order 5050.4B, *National Environmental Policy Act (NEPA) Implementing Instructions for Airport Actions*; and FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1.* In accordance with these orders, the overall approach and goal of the air quality impact analysis is to meet the requirements of NEPA and the CAA.

- NEPA: Compliance with NEPA is accomplished by disclosing the potential emissions associated with the Proposed Action. This includes preparation of emission inventories of both construction activities and operational conditions for the Proposed Action, any development alternatives, and the No Action Alternative. NEPA also requires that the project is shown qualitatively or quantitatively as to not cause, or contribute to, violations of the NAAQS.
- CAA: The CAA requires that project emissions do not cause or contribute to violations of the NAAQS. In nonattainment and maintenance areas, a project's compliance with this requirement can be demonstrated by showing that the project emissions are *de minimis* or that they conform to the SIP for achieving and maintaining the NAAQS.

As previously discussed, the Proposed Action would occur in areas that are currently in attainment for all criteria pollutants; therefore, conformity does not apply. Per the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1,* when an action is not located in an EPA-designated nonattainment or maintenance area, the comparison of the emission inventories is used for disclosure purposes. Comments received during scoping were taken into consideration by the FAA in the development of the methodology and protocol document for this air quality and GHG analysis.

[8] Washington State Department of Ecology. Plans for Maintaining Air Quality. Website accessed December 2023 at https://ecology.wa.gov/Regulations-Permits/Plans-policies/State-implementation-plans/Maintenance-SIPs

[9] Ibid.

4. Air Quality Methodology

The air quality assessment included an evaluation of operational activities for the Existing (2022) Condition; and the Proposed Action, No Action Alternative, and the Hybrid Terminal Option for the projected future conditions in 2032 and 2037. The year 2032 will be used as a basis for analysis because 2032 is the projected opening year of the Proposed Action. In addition, 2037 will be used as a basis for analysis, because it represents a condition five years beyond the opening year.[10] The air quality analysis will also disclose the potential air quality impacts due to construction activities during the years 2025 to 2032. Because the area of the Proposed Action is in attainment and conformity does not apply, no potential SIP milestone years will be analyzed.

4.1 Models Used in the Emissions Analysis

Operational emissions were evaluated using the FAA's Aviation Environmental Design Tool (AEDT) Version 3f.[11] AEDT models aircraft performance in space and time to estimate fuel consumption, air quality emissions, and noise consequences at airports. The EPA's Motor Vehicle Emissions Simulator version 4 (MOVES4) was used to develop the emissions inventory for motor vehicles on roadways that may be affected by the Proposed Action.[12] MOVES is an emission modeling system that estimates emissions for mobile sources at the national, county, and project level for criteria air pollutants, greenhouse gases, and air toxics.

Construction emissions were evaluated using the Airport Construction Emissions Inventory Tool (ACEIT) to estimate the type of construction equipment, horsepower, load factor, and operating hours for each project element and phase. The EPA's MOVES4 was used to identify the emission factor of each criteria and greenhouse gas pollutant for each construction equipment type.

4.2 Criteria Pollutants

The analysis included the following EPA criteria air pollutants: carbon monoxide (CO), nitrogen dioxide (NO_2), coarse particulate matter (PM_{10}), fine particulate matter ($PM_{2.5}$), and sulfur dioxide (SO_2). Ozone is not directly emitted from a source. Rather, ozone is formed through photochemical reactions involving emissions of the precursor pollutants nitrogen oxides (NO_x) and volatile organic compounds (VOCs) in the presence of abundant sunlight, and heat. Therefore, emissions of ozone are not directly provided; however, emissions are disclosed for the ozone precursor pollutants, NO_x and VOCs.

While some active general aviation airports prepare lead emissions inventories due to use of leaded Avgas, this is not warranted for SEA because: 1) the area is in attainment for lead, 2) Avgas (the only aviation fuel containing lead) fueling ceased at SEA in 2018, and 3) the Proposed Action does not involve any potentially significant source of lead emissions.

---

10 The FAA's Desk Reference Section 11.3 states "The environmental consequences section of the NEPA document will include the analysis of the potential noise impacts of the proposed action and alternative(s) for each timeframe evaluated… Timeframes usually selected are the year of anticipated project implementation and 5 to 10 years after implementation." The FAA's Desk Reference Section 1.3.2 for air quality states, "the emissions inventory usually is calculated for the year(s) of project implementation, the planning horizon year(s) in the EA or EIS, and sometimes for intermediate years, if appropriate due to project phasing or if requested by a reviewing agency." The air quality analysis would be conducted consistent with the noise analysis and therefore include an assessment of the implementation year and of the project five years after implementation.

11 The latest version of the FAA's AEDT is version 3f, which was released on December 15, 2023.

12 The EPA released MOVES4 in August 2023. (FR Vol. 88, No. 175 September 12, 2023).

4.2.1 Pollutants Not Included

4.2.1.1 Hazardous Air Pollutants

Hazardous air pollutants (HAPs) are pollutants for which there are no NAAQS but are still regulated under the federal CAA because of their potentially adverse effects on human health and the environment. Per FAA guidance provided in the *Aviation Emissions and Air Quality Handbook Version 3 Update 1*, a HAPs emissions inventory should be considered if the Proposed Action is considered "major" (e.g., new airport, new runway, major runway extension, etc.); if the Proposed Action is located in a nonattainment or maintenance area; and/or if a criteria air pollutant emissions inventory is also prepared. A HAPs inventory analysis will not be conducted as part of the NEPA assessment because the Proposed Action is not considered a "major" action (e.g., new airport, new runway, major runway extension, etc.) and is not located in a nonattainment or maintenance area.

4.2.1.2 Ultrafine Particles

Ultrafine particles (UFPs) are defined as particles with a diameter less than 0.1 micrometers ($PM_{0.1}$). The existing science is not fully mature, and the measurement and understanding of UFPs and their related health risks has not been clearly defined. Currently UFPs are not regulated by the EPA or the state either through rate of emissions or concentrations (other than being a subset component of $PM_{2.5}$) and are therefore not typically considered in formal reviews. Furthermore, since UFPs are not specifically listed as a criteria pollutant, air toxic, or HAP, an analysis of UFPs is not a requirement of NEPA or the CAA. Therefore, no analysis or discussion of UFPs was included in the NEPA evaluation.

4.3 Sources of Emissions

The following sources of emissions are included in this analysis.

- Aircraft
  - Landing and Take-off Cycles (Engine Start-Up, Approach, Climb, and Taxi)
  - Auxiliary Power Units (APUs)
  - Aircraft Run-Ups
- Ground Support Equipment (GSE)
  - Airline/Tenant-owned GSE
  - Port-owned airfield vehicles and equipment
- Stationary Sources
  - Natural Gas Boilers and Heaters
  - Diesel Generators
  - Fuel Farm Tanks
- Motor Vehicles
  - On and Off-Airport roadways and Parking Lots (including Port-owned roadway vehicles)
  - Airside Contractor and Delivery Vehicles
- Construction Activity
  - On-road activity including construction employee vehicle trips and material delivery/hauling trips
  - Off-road activity including use of construction equipment such as excavators, graders, and pavers

4.4 Data Used in the Analysis

A wide range of data is needed for input into the models previously identified. Sources of information on operation of the Airport and the Proposed Action are:

- FAA's Air Traffic Activity System (ATADS) was used to identify the total aircraft operations by FAA categories of activity in 2022. The ATADS data are available to the public on FAA's website.[13]
- The Port's Constrained Operating Growth Scenarios represents the best projection of how aviation activity growth will occur over time with and without the NTPs.[14] This was used to identify the total number of operations for the No Action and Proposed Action in 2032 and 2037.
- The Port's EnvironmentalVue Flight Track Monitoring System[15] data for the period January 2022 through December 2022 was used to identify information about each flight, time of day, airline, and aircraft type. Data from the EnvironmentalVue Flight Track Monitoring System is available to the public by specific request to the Port.
- Diio Mi[16] was used to identify the engine type for the various airline/operator for the specific aircraft type. The Diio Mi database is available by paid subscription only.
- The tenant-owned GSE was determined by conducting a GSE survey (i.e., field verification and Port of Seattle data) to identify equipment types and usage for passenger and cargo aircraft. The AEDT model's default GSE were used to assign GSE defaults for general aviation aircraft operations. Usage for the future conditions was based on the increases in aircraft levels.
- Port-owned airfield vehicles and equipment usage was obtained from the Port. Usage for future conditions was adjusted based on the increases in aircraft levels.
- The AEDT database was used to assign the APU equipment type for each aircraft type. The APU usage for Existing (2022) Condition and for future conditions was based on the Port of Seattle's Rules and Regulations.
- For off-Airport roadways, existing and future conditions information from the surface transportation study developed for the NEPA Environmental Assessment (EA) was used. Where data was not collected for roadway segments within the study area, Washington Department of Transportation (WSDOT) data was utilized. For on-Airport roadways in the Existing (2022) Condition, Port information on the number and types of airside delivery vehicles accessing the airfield through security gates was used. For future conditions, the vehicles were increases based on the increase in passenger levels.
- Emissions factors from AEDT and MOtor Vehicle Emission Simulator (MOVES) were used for the respective time periods (2022, 2032, and 2037).
- Construction information including the phasing schedule was provided by the Port and is included in Attachment 6.

13 FAA's website https://aspm.faa.gov/opsnet/sys/Main.asp. Accessed July 2023.
14 Constrained Operating Growth Scenario, prepared by Port of Seattle/Landrum & Brown, 2023.
15 EnvironmentalVue is a secure, web-based application that provides flight track information to the Port of Seattle.
16 Diio Mi is a comprehensive web-based collection of critical data sources designed for aviation professionals used to analyze the airline market. This tool available by paid subscription only includes worldwide schedule data, both historical and future; U.S. Departments of Transportation traffic, fare, load factor, financial, and on-time performance data; and industry fleet information.

5. Existing (2022) Condition

The Existing (2022) Condition is provided for background and context only.

5.1 Aircraft

5.1.1 Aircraft Fleet Mix and Activity Level

The number and type of aircraft operations directly affect emissions. Aircraft emissions depend partly on the physical characteristics and performance parameters of each aircraft. This includes the airframe type and the type and number of engines. In order to calculate emissions from aircraft, information concerning aircraft operations was collected from FAA's ATADS. According to FAA data, there were 401,351 total annual operations at the Airport during 2022.

ATADS data only provides annual operations by FAA general category (air carrier, air taxi,[17] general aviation, and military). The Port's EnvironmentalVue Flight Track Monitoring System was used to identify the specific aircraft types, operation type, and the aircraft operators. From this information, the types of operations and a specific aircraft code were determined. Specific airframe and engine combinations were developed from the Diio Mi database. Annual operational totals derived from EnvironmentalVue for each airframe engine combination were scaled to match the ATADS annual operational total of 401,351. The scaling was based on each airframe engine combination's percentage of total operations reported in EnvironmentalVue. This scaling results in fractional annual operational totals for each of the airframe engine combinations. Table 1-1 in Attachment 1 presents the annual operations with the AEDT airframe and engine code modeled for the Existing (2022) Condition.

5.1.2 Aircraft Approach and Climb

In addition to the physical characteristics of the aircraft operating at the Airport, emissions further depend on the time that each aircraft type operates in the various modes that define a landing and take-off cycle (LTO). According to the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*, an LTO generally consists of the approach, landing, taxi into the gate/terminal/or parking area, start-up, taxi out, take-off, and climb. **Exhibit 2, *Landing and Take-Off Cycle*** provides an illustration of the LTO. The approach and climb portions of the LTO only go from or to the mixing height, or 3,084 feet AFE.[18] Emissions that occur within the LTO are quantified by adding the AEDT Climb Below Mixing Height and Descend Below Mixing Height values.[19]

---

17 FAA defines air taxi as an aircraft designed to have a maximum seating capacity of 60 seats or less or a maximum payload capacity of 18,000 pounds or less carrying passengers or cargo for hire or compensation. Definition available at: https://aspm.faa.gov/aspmhelp/index/Glossary.html

18 The mixing height used in this assessment is defined as 3,084 feet in altitude above field elevation, which is the recommendation by the FAA based on the USPEA's *Mixing Heights, Wind Speeds, and Potential for Urban Air Pollution Throughout the Contiguous United States*. Available on-line: https://nepis.epa.gov/Exe/ZyNET.exe/20013CDS.TXT?ZyActionD=ZyDocument&Client=EPA&Index=Prior+to+1976&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A%5Czyfiles%5CIndex%20Data%5C70thru75%5CTxt%5C00000005%5C20013CDS.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h%7C-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=hpfr&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURL

19 For more detailed information and definition of AEDT terms, the AEDT user's guide may be accessed at https://aedt.faa.gov/

EXHIBIT 2, LANDING AND TAKE-OFF CYCLE

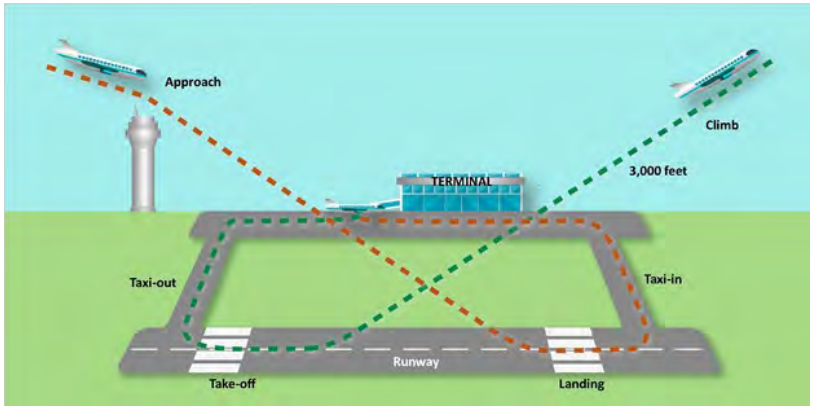

Source: Landrum & Brown, 2023.

5.1.3 Aircraft Taxi Time

The amount of time an aircraft spends taxiing affects emissions. The taxi in and taxi out time is dependent on the airfield configuration, annual operating levels, and available facilities. The average taxi in and taxi out time for the existing conditions was based on the FAA's operations and performance data for SEA including Aviation System Performance Metrics (ASPM) in 2022. The average taxi in time was ten minutes and 16 seconds and the average taxi out time was 18 minutes and 53 seconds for the Existing (2022) condition, for a total of 29 minutes and ten seconds.

5.1.4 APUs

Most of the larger jet aircraft use APUs (turbine engines in the tails of aircraft that burn jet fuel) to operate the heating, air conditioning, and electric systems when the main aircraft engines are not running. The APU is also used to 'start-up' or restart the aircraft engines before departing from the gate or cargo area.

APUs typically remain in use while the aircraft is parked and serviced, unless an alternative source of electricity and pre-conditioned air (PC Air) is made available. The Port has installed PC Air and a fixed power supply at most of the passenger terminal gates. These features allow pilots to avoid using the APU while the aircraft are parked at the gate. However, APU usage is within the control of the pilot; therefore, APU use and emissions can vary greatly from one airline/operator to another and even one aircraft to another.

Furthermore, the use of hardstand and cargo operations (when aircraft are not using gates and jet bridges) impacts the usage of APUs. In addition to PC Air and a fixed power supply being installed at the terminal gates, there are portable ground power units (GPUs) that are used for cargo and hardstand operations. Emissions from portable GPUs are disclosed in the GSE section.

For the existing conditions analysis, the AEDT database was used to assign the specific types of APU used for each aircraft type and the Port of Seattle's Rules and Regulations will be used to assign APU usage for passenger and cargo operations. In June 2020, the Port updated their rules and regulations for airfield operations.[20] Effective January 1, 2021, aircraft operators are required to use 400Hz ground power and PC Air sources where available and practicable. Operators are required to connect to those sources and discontinue APUs promptly (within seven minutes) after chocking the aircraft wheels upon

[20] The Port of Seattle has the ability to enforce the rules and regulations on tenants through lease agreements.

parking. In addition, the Port requires aircraft operators to limit APU use to 15 minutes for International Civil Aviation Organization (ICAO) type Code C[21] aircraft; or to 25 minutes for ICAO type Code D[22] or above aircraft prior to departure.[23]

General aviation operations were assigned the AEDT default APU equipment and usage as there is no single operator for these operations and the Port of Seattle's Rules and Regulations do not have any requirements for general aviation aircraft. In addition, some of the smaller aircraft in the general aviation operation category do not have or use APUs. See Table 2-1 in Attachment 2 for the estimated annual APU usage for the Existing (2022) Condition.

5.1.5 Aircraft Run-Ups

Emissions from aircraft run-up operations were included for the Existing (2022) Condition. Aircraft engine ground run-ups are routine aircraft engine maintenance tests performed to test engines and diagnose engine issues. Aircraft run-up activity logs were provided by the Port to determine the amount of run-up operations, the location of the run-up, average duration, and the associated airframe and engine. A total of 477 run-up operations were reported in the run-up activity logs for the Airport in 2022.

5.2 Ground Support Equipment (GSE)

5.2.1 Tenant-Owned GSE

Most of the GSE at the Airport is owned and operated by the individual airlines and service providers contracted by the airlines, not the Port. Typical tenant-owned GSE includes baggage tractors, belt loaders, and catering vehicles that support aircraft operations.

The Port has installed over 400 charging points/stations for electric ground support equipment (eGSE) throughout the Airport across all terminals. As such, a GSE survey was conducted to inform the modeling of tenant-owned GSE to account for the use of eGSE. The survey included the field verification and review of Port data to identify the most commonly used GSE types and duration of usage for a select group of representative aircraft by airline operating at the Airport. The results of the survey were used to develop the AEDT inputs for GSE by aircraft operation. Operational emissions from vehicles such as catering trucks that operate on airport roadways beyond the immediate vicinity of the aircraft were quantified in the motor vehicle emissions inventory.

Table 3-1 in Attachment 3 provides the tenant-owned GSE modeled for the Existing (2022) Condition.

5.2.2 Port-Owned Airfield Vehicles and Equipment

The Port owns and operates various vehicles and equipment for airfield maintenance purposes and to support hardstand operations at the Airport. These vehicles include pickup trucks, snowplows, belt loaders, forklifts, shuttle buses, trimmers, and pressure washers. Data was obtained from the Port on the use of Port-owned airfield vehicles and equipment to develop the emissions inventory for the Existing (2022) Condition. Only the vehicles used primarily on the airfield were included in this portion of the inventory, while the Port-owned airfield vehicles that primarily operate on roadways were included in the motor vehicle emissions inventory later in this report. In order to determine emissions,

---

21 ICAO Annex 14, Seventh Edition – July 2016 define Code C aircraft as having a wingspan of 24 meters up to but not including 36 meters. The outer main gear wheel span is 6 meters up to but not including 9 meters.

22 ICAO Annex 14, Seventh Edition – July 2016 define Code D aircraft as having a wingspan of 36 meters up to but not including 52 meters. The outer main gear wheel span is 9 meters up to but not including 14 meters.

23 Port of Seattle, Schedule of Rules and Regulations No. 5, Effective February 12, 2015. Updated June 9, 2020. https://www.airportprojects.net/sampenvironmentalreview/rules-and-regs-9-1-23/.

all of the various types of Port-owned airfield vehicles and equipment were grouped to representative AEDT equipment types to be modeled. For example, all of the gasoline Ford F150 pickup trucks were included in the gasoline F250/F350 Service Trucks AEDT equipment category. Table 3-2 in Attachment 3 provides the estimated fuel consumption for the Port-owned airfield vehicles and equipment for the Existing (2022) Condition.

5.3 Stationary Sources

Stationary sources of emissions include generators, boilers and heaters, and fuel tanks located on airport property which may be affected by the Proposed Action. Emissions from purchased electricity generated off-site are not included in the criteria pollutant emissions inventory per the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*. Data was obtained from the Port on the existing use of stationary sources to develop an inventory of boilers and heaters, generators, and fuel tanks for the Existing (2022) Condition.

5.3.1 Natural Gas Boilers and Heaters

Table 4-1 in Attachment 4 provides the location, equipment type, and usage of the natural gas boilers and heaters modeled for the Existing (2022) Condition. The Port collects the data in therms, which were converted to 1000s of meters cubed for input into the AEDT model.

5.3.2 Diesel Generators

The Airport operated 31 diesel generators in 2022 to supply standby and emergency power. Emissions from the use of the generators were based on how many hours a year each generator was operated. The annual hours of operation for each diesel generator were provided by the Port. Table 4-2 in Attachment 4 provides the location, description, horsepower, and annual usage (hours) of diesel-powered generators for the Existing (2022) Condition.

5.3.3 Fuel Farm Tanks

According to data from the Port, the total volume of aviation fuel (Jet A) that was supplied to aircraft at the Airport in 2022 was 595,696,138 gallons, which was stored among eight fuel tanks located at the Airport's fuel farm. Fuel storage in the fuel tanks was modeled in AEDT as a stationary source and therefore was a source of evaporative emissions resulting in VOC emissions.

5.4 Motor Vehicles

Motor vehicles include airport passenger vehicles; vehicles transporting airport and tenant employees; and vehicles transporting cargo to and from the Airport. The consideration of motor vehicle emissions typically focuses on identifying where and how a Proposed Action and its alternatives may affect surface travel (including the number and types of vehicles). For this analysis, the study area is the same as the surface transportation study developed for this EA. The study area boundary is shown in Exhibits 5-1 through 5-11 in Attachment 5. The following section describes the data used to estimate the number and types of vehicles occurring in the study area.

5.4.1 Motor Vehicles (On- and Off-Airport Roadways)

Emissions from motor vehicles traveling on and off-airport roadways are a function of the vehicle-miles-traveled (VMT) within a specific roadway segment by a specific type of vehicle and the emission factor. Vehicle types such as passenger cars and long-haul trucks, have different emission factors. In addition, vehicles traveling at different rates of speed have different emission factors. The following provides a

summary of the approach taken to document emissions from motor vehicles on roadways. The approach taken for vehicles in parking facilities is discussed separately.

1. Roadway segments were defined for both on- and off-airport roadways. These included roadway segments where it is reasonable to anticipate changes in vehicle traffic from the Proposed Action. Distances for each roadway segment were calculated. The speeds in miles per hour (mph) on these roadway segments were based on the surface transportation study where data was available and, where data was not available, posted speed limits were used.
2. Average annual daily traffic data on the roadway segments was collected from the surface transportation study, the Port, and the Washington State Department of Transportation.[24] The data obtained was utilized to estimate VMTs. The distance of the roadway segment was multiplied by the traffic volume to determine the daily VMT for each segment, which was then converted to annual VMT by multiplying the daily VMT by 365. See Attachment 5 for the VMTs on each roadway segment.
3. Emission factors were determined for various speeds for different vehicle groups using EPA MOVES4.
4. All vehicle types were grouped into four main categories based on similar engine and operating characteristics in order to assign an emission factor. The vehicle distribution (vehicle mix) on each roadway segment was developed based on King County data contained in MOVES4.
5. Emissions were calculated by multiplying the annual VMT of each roadway segment by the emission factor using the specific vehicle distribution.

5.4.1.1 Roadway Segments

For the Existing (2022) Condition, the roadway segments were grouped together into ten areas where it is reasonable to anticipate changes in vehicle traffic due to the Proposed Action. The roadway segments are shown in Exhibits 5-1 through 5-11 in Attachment 5. The following provides a general description of each area.

- **Area 1** is located north and northwest of the Airport. This area contains State Route 518, Des Moines Memorial Drive S, and 24th Avenue S., and was included to capture traffic accessing the Airport from the north.
- **Area 2** is located north and east of the Airport. This area contains Air Cargo Road, Airport Expressway, State Route 99, Southcenter Boulevard, and Military Road S. These roads were selected to capture traffic accessing the Airport from the north and the east.

[24] Peak hour average day data provided specifically from the Port were converted to average annual daily traffic volumes (AADT). Based on 2022 vehicle traffic data and the conversion of peak hour average day to average annual day provided by the Port of Seattle, peak hour was multiplied by 316.5 instead of 365 to get an average annual day.

- **Area 3** is located east of the Airport, including the main terminal and parking facilities. This area contains the curb front roads used to access the Airport from the north, including Airport Expressway, Arrivals Dr, Departures Dr, Air Cargo Road, S. 170th Street, and State Route 99/Tukwila International Boulevard. These roads were selected to capture traffic accessing the Airport from the north and south.
- **Area 4** is located south of the Airport. This area contains South 188th Street, 28th Avenue, South 192nd Street, and State Route 99. These roads were selected to capture traffic accessing the Airport from the east and south.
- **Area 5** is located west of the Airport, including State Route 509/Des Moines Memorial Drive S, S Normandy Rd, and South 186th Street. These roads were selected to capture traffic accessing the Airport from the west.
- **Area 6** is located west of the Airport, including State Route 509/Des Moines Memorial Dr S, S Normandy Rd, and S 156th Street, and S 156th Way/154th Street. These roads were selected to capture traffic accessing the Airport from State Route 509.
- **Area 7** is located east of the Airport, including S 189th St, Military Rd S, and S 176th St. This also includes a segment of Interstate 5 south of SR 518These roads were selected to capture traffic accessing the Airport from Interstate 5.
- **Area 8** is located southeast of the Airport, including State Route 99, S 200th St, and 28th Ave S. These roads were selected to capture traffic accessing the Airport from the south and from Interstate 5.
- **Area 9** is located south of the Airport, including S 200th St, S 216th St, and Des Moines Memorial Drive S. These roads were selected to capture traffic accessing the Airport from Des Moines Memorial Drive S.
- **Area 10** is located east of the Airport, including Interstate 405, State Route 518, and Southcenter Blvd. These roads were selected to capture traffic accessing the Airport from Interstate 405 and Southcenter Blvd.

5.4.1.2 Vehicle Classification

In order to determine emissions, all of the various types of vehicles operating on and off-airport roadways were grouped into four main vehicle classifications according to MOVES in order to assign an appropriate emission factor. **Table 2** provides the vehicle classifications used in the Existing (2022) Condition.

TABLE 2: VEHICLE CLASSIFICATIONS

MOVES Database Classification	General Vehicle Description
Passenger Car (PC)	Includes passenger cars, rental cars, employee cars, taxis, motorcycles
Passenger Truck (PT)	Includes light duty pickup trucks, vans
Short-Haul Truck (SHT)	Includes buses, shuttle buses, hotel shuttle buses, box trucks, refuse trucks, single unit trucks, medium duty trucks
Long-Haul Truck (LHT)	Includes heavy duty trucks, fueling trucks, tractor trailers

Source: L&B 2023 and MOVES4 database classifications.

5.4.1.3 Vehicle Distribution

The EPA's MOVES model was used to estimate vehicle distribution of the different vehicle classifications on roadways specific to King County.[25] **Table 3** provides the vehicle distribution that was used for the Existing (2022) Condition.

TABLE 3: VEHICLE DISTRIBUTION ON KING COUNTY ROADWAYS

County	Passenger Car (%)	Passenger Truck (%)	Single Unit Short-Haul Truck (%)	Long-Haul Truck (%)
King County	44.6	44.6	5.4	5.4

Note: See Table 2 for description of vehicle classifications.
Source: MOVES4, 2024.

There are several roadways that are known by the Port to have a different vehicle distribution than the King County average because of passenger and cargo operations supporting aircraft activity. The Port collects specific data concerning vehicles on these roadways. The Port collected data on the types of and number of vehicles operating on Airport Drives, S. 170th Street, and Air Cargo Road. **Table 4** provides the vehicle distribution as a percentage, used for these specific roadway segments.

TABLE 4: VEHICLE DISTRIBUTION ON AIRPORT-SPECIFIC ROADWAYS

Roadway Description	Passenger Car (%)	Passenger Truck (%)	Single Unit Short-Haul Truck (%)	Long-Haul Truck (%)
Airport Drives (South of 170th)	46.0	46.0	6.9	1.1
S. 170th St. (Between Air Cargo Road and the Expressway)	39.0	39.0	21.0	1.0
Air Cargo Road (Between S 170th St and the Expressway)	38.5	38.5	22.0	1.0
Air Cargo Road (Between the Expressway and S. 166th St.)	41.0	41.0	17.0	1.0
Airside Deliveries	0.0	63.1	36.0	0.9

Note: See Table 2 for description of vehicle classifications.
Source: Port of Seattle, 2023.

5.4.1.4 Traffic Volumes

Data was collected on the traffic volumes for the roadway segments in the Existing (2022) Condition from the Port and the Washington State Department of Transportation. The distance of the roadway segment, as measured using a geographic information system (GIS) mapping tool, was multiplied by the traffic volume to determine the daily VMT, which was converted to annual VMT by multiplying by 365 for each segment. The traffic volumes for each roadway segment are provided in Table 5-1 in Attachment 5. Approximately 1,004,717,456 annual VMTs were estimated for the Existing (2022) Condition.

[25] The vehicle distribution for air quality utilized specific Port data and King County averages from MOVES4. The surface transportation analysis also presented in this EA utilized peak hour values for the Synchro analysis, which was based on the 2022 intersection counts and was not applicable for this purpose.

5.4.1.5 Airside Delivery Vehicles

Information on the number and types of airside delivery vehicles accessing the airfield through security gates was obtained from the Port. There were three main access points for deliveries, with negligible travel differences between them. A distance of two miles, as measured with GIS, was applied to all the airside delivery vehicles. An average speed of 15 mph was assumed for vehicles making airside deliveries.

5.4.1.6 Emission Factors

The EPA's MOVES4 was used to compute motor vehicle emissions rates in grams of pollutant per vehicle mile traveled (g/VMT). The emission factors are unique to King County and are different for each criteria pollutant, speed, and vehicle type. The emission factors for each pollutant by speed and vehicle type are provided Table 5-2 in Attachment 5.

5.4.2 Motor Vehicles (Parking Facilities)

Emissions from parking facilities where it is reasonable to anticipate changes in vehicle traffic due to the Proposed Action are included in the Existing (2022) Condition emissions inventory. Emissions are based on volumes of vehicles in the parking facilities, distance traveled within the parking facility, and speed of vehicles. Volumes for the Doug Fox Lot were estimated assuming the lot operated at full capacity meaning there are vehicles in all of the stalls.[26] For the main parking garage and the North Employee Parking Lot, parking lot transaction data was obtained from the Port. The volume data for the main parking garage contained information on employee traffic (identified as Corporate) and passenger vehicles (identified as Terminal and Direct). Distance for a vehicle to travel was mapped using GIS on the length from the first parking stall from the entrance to the last stall using every aisle and floor if applicable. The main parking garage is eight stories, with employee parking on floors one (ground level) and two and passenger parking on floors one through eight. The average calculated distance traveled for vehicles in the main parking garage was 0.96 miles, the average distance traveled by vehicles in the Doug Fox Lot was 0.80 miles, and the average distance traveled by vehicles in the North Employee Parking Lot was 4.24 miles. In order to determine emissions, an average speed of 5 mph was assumed for vehicles in the main parking garage, the Doug Fox Lot, and the North Employee Parking Lot.

5.5 Existing (2022) Condition Criteria Pollutant Emissions Inventory

The emissions inventory for the Existing (2022) Condition is shown in **Table 5** and provides the total annual pollutant emissions as short tons per year.[27] The Existing (2022) Condition emissions inventory shows the pollutants with the greatest emissions are CO and NO_x. There were approximately 5,178 tons of CO and 2,537 tons of NO_x emitted in 2022. These pollutants are produced from the incomplete combustion of aircraft and motor vehicle engines. Motor vehicles produce the greatest contribution to CO emissions (61.2 percent) while aircraft produce the greatest contribution to NO_x emissions (82.0 percent).

[26] A daily turnover rate of 1.0 means a car is there all day long. A daily turnover rate of 4.0 is used for quick turn-overs experienced at grocery stores and banks. No specific turnover rate was available, therefore for this analysis, a daily turnover rate of 2.5 was applied based on professional judgment.

[27] A short ton in the United States is commonly just called a ton. One short ton equals 2,000 pounds.

TABLE 5: ANNUAL OPERATIONAL EMISSIONS INVENTORY - EXISTING (2022) CONDITION

Emission Source	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)
Aircraft	**1,798**	**255**	**2,081**	**186**	**21**	**21**
LTO (includes Start-Up, Approach, Climb, and Taxiing)	1,681	244	1,977	175	12	12
Aircraft Run-Ups	1	0	44	2	0	0
APUs	116	10	60	9	9	9
GSE	**196**	**6**	**17**	**0**	**1**	**1**
Tenant-Owned GSE	193	6	13	0	1	1
Port-Owned Airfield Vehicles and Equipment	3	0	4	0	0	0
Stationary Sources	**15**	**10**	**25**	**33**	**1**	**1**
Natural Gas Boilers and Heaters	13	1	16	0	0	0
Diesel Generators	2	0	10	33	0	0
Fuel Farm Tanks	0	9	0	0	0	0
Motor Vehicles	**3,169**	**60**	**413**	**2**	**8**	**8**
Parking Facilities	52	2	6	0	0	0
On and Off-Airport Roadways (includes Airside Deliveries)	3,117	58	408	2	8	8
Total	**5,178**	**332**	**2,537**	**221**	**31**	**31**

Note: Totals may not sum due to rounding. CO = carbon monoxide, VOC = Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x = sulfur oxides, PM_{10} = coarse particulate matter, $PM_{2.5}$ = fine particulate matter, ST = short tons.
Source: Port of Seattle and L&B, 2024.

6. Construction Emissions Inventories

Temporary air quality impacts would result from construction activities associated with the Proposed Action and the Hybrid Terminal Option. Air pollutants would be emitted by construction equipment and fugitive dust generated during demolition and construction of the proposed development. There would be no construction related emissions resulting from the No Action Alternative.

6.1 Construction Schedule

Subject to FAA and Port Commission approval, construction would start in 2025 and would continue through 2032 for the Proposed Action and the Hybrid Terminal Option. The detailed construction phasing schedule for the Proposed Action and the Hybrid Terminal Option are provided in Attachment 6.

6.2 On-Road Construction Vehicles

Potential sources of construction emissions include construction vehicles and equipment. Potential on-road construction emissions were estimated using the following formula as provided in the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*.

- *Emission Rate (tons/year) for on-road vehicles = Emission Factor (grams/mile) x miles per day x # of days/year x (1 pound/453.59 grams) x (1 ton/2,000 pounds)*

Emission factors for on-road construction vehicles were developed using the MOVES4 model. For employee vehicle trips related to construction activities, the model was run using gasoline passenger vehicles including cars and light duty pickup trucks. For material delivery and off-site haul vehicle trips, diesel combination short-haul trucks were assumed as they are the most common type of vehicle for this service.

Total VMT for vehicles operating during each Proposed Action element and for each type of on-road construction activity during each construction year was estimated. This includes construction employee vehicle trips to and from the job site. The analysis also included material delivery trips and off-site hauling trips using heavy duty trucks. Potential on-road construction emissions were estimated by multiplying the VMT data by the appropriate emission factors and the necessary conversion factors to present the criteria air pollutant emissions in tons. The detailed assumptions for on-road construction vehicles and the emission factors for the Proposed Action and Hybrid Terminal Option are provided in Attachment 6 of this technical report.

6.3 Non-Road Construction Equipment

Potential non-road construction emissions were estimated using the following formula as provided in the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*.

- *Equipment Emission Rate (tons/year) = Full Throttle Emission Factor (grams/hp-hour) x size (hp) x hours per year x Load Factor x usage Factor x (1 pound/453.59 grams) x (1 ton/2,000 pounds)*

The construction phasing schedule and the dimensions of the Proposed Action elements including building dimension in square feet were obtained from the Port. Each proposed element was input into the ACEIT to estimate the type of construction equipment, horsepower, load factor, and operating hours for each project element and phase. The ACEIT was developed by the Airport Cooperative Research Program (ACRP) and the equipment and assumptions used in the program are drawn from ACRP

Report 102, Guidance for Estimating Airport Construction Emissions. The EPA's MOVES model was used to identify the emission factor of each criteria air pollutant for each equipment type. Non-road construction equipment emissions were calculated based on the number of operating hours of equipment use and the emission factors. The detailed assumptions of non-road construction equipment and the emission factors for the Proposed Action and Hybrid Terminal Option are provided in Attachment 6 of this technical report.

6.4 Proposed Action - Criteria Pollutant Construction Emissions Inventory

A summary of the construction emissions inventory with both on-road and non-road construction equipment for each year of construction of the Proposed Action is shown in **Table 6**. Peak construction emissions are expected to occur in 2028 for NO_x (40 tons) and 2029 for CO (239 tons). Fugitive dust from grading, moving soil, and digging, loading/unloading of trucks, movement of trucks on unpaved surfaces, and wind erosion of stockpiles is included in PM_{10} and $PM_{2.5}$ totals.

TABLE 6: ANNUAL CONSTRUCTION EMISSIONS INVENTORY - PROPOSED ACTION

Year	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)
2025	17	1	8	0	8	1
2026	124	3	24	0	8	2
2027	204	4	36	0	9	2
2028	214	5	40	0	9	2
2029	239	5	36	0	9	2
2030	181	3	24	0	8	2
2031	143	2	18	0	8	1
2032	40	1	9	0	8	1

Note: CO = carbon monoxide, VOC = Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x = sulfur oxides, PM_{10} = coarse particulate matter, $PM_{2.5}$ = fine particulate matter, ST = short tons.
Source: Port of Seattle and L&B, 2024.

6.5 Hybrid Option - Criteria Pollutant Construction Emissions Inventory

A summary of the construction emissions inventory for the Hybrid Terminal Option is shown in **Table 7**. Like the Proposed Action, peak construction emissions are expected to occur in 2028 for NO_x (47 tons) and 2029 for CO (242 tons), and would be equal to or slightly greater than the Proposed Action due to changes to the phasing schedule and the additional elements that must be constructed such as the proposed connection to Concourse D.

TABLE 7: ANNUAL CONSTRUCTION EMISSIONS INVENTORY - HYBRID TERMINAL OPTION

Year	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)
2025	17	1	8	0	8	1
2026	124	3	24	0	8	2
2027	201	5	39	0	9	2
2028	211	5	47	0	10	3
2029	242	5	44	0	9	3
2030	188	4	37	0	9	2
2031	149	3	31	0	9	2
2032	42	1	15	0	8	1

Note: Minor differences from the Proposed Action may not be evident due to rounding and the number of significant digits displayed. CO = carbon monoxide, VOC = Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x = sulfur oxides, PM_{10} = coarse particulate matter, $PM_{2.5}$ = fine particulate matter, ST = short tons.
Source: Port of Seattle and L&B, 2024.

7. Future (2032) No Action Alternative

7.1 Aircraft

7.1.1 Aircraft Fleet Mix and Activity Levels

Based on the aircraft activity forecast, there would be an increase in operations from the Existing (2022) Condition to the Future (2032) No Action Alternative. The No Action Alternative would include none of the federal actions and no additional physical improvements to the Airport that are included in the Proposed Action, but includes projects that have recently been constructed, or will be constructed by 2032.[28] Even with no facility improvements there would be a total of 466,900 aircraft operations forecast for the Future (2032) No Action Alternative. This would be 65,549 annual operations more than the Existing (2022) Condition. Table 1-2 in Attachment 1 presents the average annual operations for specific aircraft types with the AEDT engine code modeled in AEDT for the Future (2032) No Action Alternative.

7.1.2 Aircraft Taxi Time

The airfield configuration (the layout of the runways and taxiways) identified for the Existing (2022) Condition would remain the same for the Future (2032) No Action Alternative. The average taxi in and taxi out time for the Future (2032) No Action Alternative was determined by using the delay analysis developed with the Total Airspace and Airport Modeler (TAAM) tool normalized to the ASPM data.[29,30] The average taxi in time was nine minutes and 26 seconds and the average taxi out time was 21 minutes and 28 seconds for the Future (2032) No Action Alternative, for a total of 30 minutes and 54 seconds. These taxi in and taxi out times were applied to each operation in AEDT to develop the emissions inventory. The overall average taxi time increased one minute and 44 seconds for the Future (2032) No Action Alternative as compared to the Existing (2022) Condition. A summary of the taxi times for each scenario is provided in Table 1-6 in Attachment 1.

---

28 These future actions were established in August 2023 and include the North Satellite Redevelopment program, International Arrivals Facility, Terminal Renovations, C Concourse Expansion, A Concourse Building Expansion, Widen Arrivals Drive project, and Runway Renumbering. These projects are independent from the Proposed Action in this EA and have received or will receive separate environmental review and approval. These future actions are included in both, the future No Action and Proposed Action scenarios.

29 Leigh Fisher. Environmental Review Airside Modeling, June 2020.

30 Kandice Krull, FAA, Email to Sarah Potter, L&B, RE: SAMP NTP Env Review Normalized Taxi Times, July 10, 2023.

7.1.3 APUs

The APU durations per aircraft type identified for the Existing (2022) Condition would remain the same for the Future (2032) No Action Alternative. As previously discussed, regional and narrow body aircraft were considered Code C aircraft and assigned a total APU duration of 22 minutes per operation and wide body aircraft were considered Code D or above and assigned a total APU duration of 32 minutes per operation. The AEDT database was used to assign the specific types of APU equipment used for each aircraft type. General Aviation operations were assigned the AEDT default APU equipment and usage per operation because data on specific general aviation equipment and usage were not available. The Future (2032) No Action Alternative would have greater APU usage as compared to the Existing (2022) Condition because of the increase in overall aircraft operations. See Table 2-2 in Attachment 2 for the estimated annual APU usage for the Future (2032) No Action Alternative.

7.1.4 Aircraft Run-Ups

The increase in overall aircraft operations in the Future (2032) No Action Alternative from the Existing (2022) Condition is anticipated to result in an increase the number of run-ups. Therefore, the number of aircraft run-ups was increased proportional to the forecast increase in aircraft operations. This resulted in a total of 555 run-up operations estimated for the Future (2032) No Action Alternative. This is an increase of 78 additional aircraft engine run-up operations over the Existing (2022) Condition.

7.2 Ground Support Equipment

7.2.1 Tenant-Owned GSE

The analysis assumed that tenant-owned GSE usage would increase commensurate with the forecast in aircraft activity and that the same types of vehicles would be used.[31] Therefore, the type of tenant-owned GSE identified for the Existing (2022) Condition would remain the same for the Future (2032) No Action Alternative. As such, no new pieces of equipment were added for the analysis; it was estimated that there would only be an increase in usage in those same pieces of equipment. Table 3-3 in Attachment 3 provides the tenant-owned GSE and estimated hours of annual usage for the Future (2032) No Action Alternative.

7.2.2 Port-Owned Airfield Vehicles and Equipment

The analysis assumed that Port-owned airfield vehicles and equipment usage would increase commensurate with the forecast in aircraft activity and that the same types of vehicles would be used.[32] Therefore, the type of Port-owned airfield vehicles and equipment identified for the Existing (2022) Condition would remain the same for the Future (2032) No Action Alternative. This means no new pieces of Port-owned airfield vehicles and equipment were added for the analysis; it was estimated that there would only be an increase in usage in those same pieces of equipment. This includes Port vehicles and equipment used for airfield maintenance purposes and to support hardstand operations at the Airport. Table 3-4 in Attachment 3 provides the Port-owned airfield vehicles and equipment and estimated annual usage for the Future (2032) No Action Alternative.

---

31 No future assumptions could be made on potential new equipment purchased by tenants operating at the Airport. While these tenants would need to buy new equipment as older equipment reaches its end-of-life cycle, there are no known existing agreements or contracts for the purchase of any future equipment.

32 No future assumptions could be made on potential new equipment purchased by the Port. While the Port would need to buy new equipment as older equipment reaches its end-of-life cycle, there are no existing agreements or contracts for the purchase of any future Port equipment.

7.3 Stationary Sources

7.3.1 Natural Gas Boilers and Heaters

The Future (2032) No Action Alternative would have additional natural gas boiler and heater usage for the Terminal Renovation, A Concourse Building Expansion, and C Concourse Expansion. Table 4-3 in Attachment 4 provides the location, equipment type, and usage of the natural gas boilers and heaters used for the Future (2032) No Action Alternative. It is assumed that there would be no other changes to the existing facilities or natural gas usage with the Future (2032) No Action Alternative. While there would be more passengers in the terminal facilities as compared to the Existing (2022) Condition, it was assumed there would be no change to the natural gas usage because natural gas usage is based on the area of the facility, not the number of passengers.

7.3.2 Diesel Generators

The Port would continue to conduct routine testing to make sure the generators are performing as they should and would be available if needed. The Future (2032) No Action Alternative would have additional diesel generators for the Terminal Renovation, A Concourse Building Expansion, and C Concourse Expansion that were not included in the Existing (2022) Condition. The location, name, horsepower, and annual usage of diesel-powered generators identified for the Future (2032) No Action Alternative are provided in Table 4-4 in Attachment 4. Table 4-7 in Attachment 4 provides a summary comparison of the diesel generator usage under the various alternatives.

7.3.3 Fuel Farm Tanks

There would be no change to the number or type of fuel tanks in the fuel farm with the Future (2032) No Action Alternative relative to the Existing (2022) Condition. The total volume of aviation fuel (Jet A) would be stored among eight existing fuel tanks located at the Airport's fuel farm. Therefore, the only change from the baseline conditions would be the potential increase in Jet A fuel use throughput based on the forecast increase in aircraft operations. It is estimated that the total volume of aviation fuel (Jet A) that would be supplied to aircraft would be 692,985,758 gallons for the Future (2032) No Action Alternative.

7.4 Motor Vehicles

7.4.1 Motor Vehicles (On- and Off-Airport Roadways)

The roadway segment identifier, segment length, vehicle classification, vehicle distribution, and speed for each roadway segment identified for the Existing (2022) Condition would remain the same for the Future (2032) No Action Alternative. Traffic volumes would be anticipated to change as would the emission factors, as described in the following sections.

7.4.1.1 Traffic Volumes

Surface traffic levels would be expected to increase in the future with the Future (2032) No Action Alternative as compared to the Existing (2022) Condition. Traffic volumes were provided by the Port for this scenario to account for employee and cargo growth. Roadways for which only WSDOT data was available, traffic volumes were increased proportional to the forecast increase in passengers. The traffic volume on each roadway segment and the annual VMT per roadway segment are provided in Table 5-3 in Attachment 5. For the Future (2032) No Action Alternative there are anticipated to be 1,218,311,481 annual VMTs, an increase of 213,594,025 as compared to the Existing (2022) Condition.

7.4.1.2 Emissions Factors

The EPA's MOVES4 was used to generate emissions rates in grams of pollutant per vehicle mile traveled (g/VMT). The emission factors are unique to the year 2032 and King County and are different for each criteria pollutant, speed, and vehicle type. The emission factors for each pollutant by speed and vehicle type for the Future (2032) No Action Alternative are provided in Table 5-4 in Attachment 5. Emission factors for the Future (2032) No Action Alternative are lower as compared to the Existing (2022) Condition emissions factors. This is because EPA assumes in MOVES that older vehicles are gradually replaced by newer vehicles.[33] Newer vehicles would have lower emission rates according to newer emission standards as compared to older vehicles. Therefore, while there are more vehicles on- and off-roadways traveling more miles in the future, because the emission factors are lower, total emissions for motor vehicles would be less as compared to the Existing (2022) Condition.

7.4.2 Motor Vehicles (Parking Facilities)

The parking lots identified for the Existing (2022) Condition would remain the same for the Future (2032) No Action Alternative meaning there would be no new lots, change in vehicle speed or distance, or any increase in the number of parking stalls in the lots. The potential volume increase in motor vehicles using the Doug Fox Lot and the Terminal Parking Lot for the Future (2032) No Action Alternative was based on the forecast increase in passengers. The number of motor vehicles in those parking lots would increase commensurate with the increase in passengers. The potential volume increase in motor vehicles using the North Employee Parking Lot for the Future (2032) No Action Alternative was based on the forecast increase in aircraft operations. It was assumed that as aircraft operations increase so would the number of employees. Therefore, the number of motor vehicles estimated for the Future (2032) No Action Alternative in the North Employee Parking Lot was increased proportional to the forecast increase in aircraft operations.

7.5 Future (2032) No Action Alternative Criteria Pollutant Emissions Inventory

The criteria pollutant emissions inventory provides the total annual pollutant emissions as short tons per year. The emissions inventory for the Future (2032) No Action Alternative is shown in **Table 8**. The Future (2032) No Action Alternative emissions inventory shows the pollutants with the greatest emissions are CO and NOx. There were approximately 4,447 tons of CO and 2,923 tons of NO_x potentially emitted for the Future (2032) No Action Alternative. Aircraft produce the greatest contribution to CO emissions (48.4 percent) and NO_x emissions (94.4 percent).

[33] For EPA's guidance on emission factors see the following technical reports, Exhaust Emission Rates for Heavy-Duty Onroad Vehicles in MOVES4 (EPA-420-R-23-027 dated August 2023 and Exhaust Emission Rates for Light-Duty Onroad Vehicles in MOVES4 (EPA-420-R-23-028 dated August 2023) available online at https://www.epa.gov/moves/moves-onroad-technical-reports.

TABLE 8: ANNUAL OPERATIONAL EMISSIONS INVENTORY - FUTURE (2032) NO ACTION ALTERNATIVE

Emission Source	CO (ST)	VOC (ST)	NOx (ST)	SOx (ST)	PM10 (ST)	PM2.5 (ST)
Aircraft	**2,152**	**249**	**2,761**	**236**	**27**	**27**
LTO (includes Start-Up, Approach, Climb, and Taxiing)	2,042	233	2,631	222	14	14
APUs	109	16	73	11	13	13
Aircraft Run-Ups	1	0	57	2	0	0
GSE	**190**	**6**	**14**	**0**	**1**	**1**
Tenant-Owned GSE	187	6	9	0	1	0
Port-Owned Airfield Vehicles and Equipment	3	0	4	0	0	0
Stationary Sources	**16**	**11**	**27**	**37**	**1**	**1**
Natural Gas Boilers and Heaters	13	1	16	0	0	0
Diesel Generators	2	0	11	37	0	0
Fuel Farm Tanks	0	10	0	0	0	0
Motor Vehicles	**2,089**	**18**	**122**	**2**	**4**	**3**
Parking Facilities	35	1	3	0	0	0
On and Off-Airport Roadways (includes Airside Deliveries)	2,054	17	119	2	4	3
Total	**4,447**	**283**	**2,923**	**275**	**32**	**32**

Note: Totals may not sum due to rounding. CO = carbon monoxide, VOC = Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x = sulfur oxides, PM_{10} = coarse particulate matter, $PM_{2.5}$ = fine particulate matter, ST = short tons.
Source: Port of Seattle and L&B, 2024.

8. Future (2032) Proposed Action

8.1 Aircraft

8.1.1 Aircraft Fleet Mix and Activity Levels

A total of 475,655 aircraft operations were forecast for the Future (2032) Proposed Action. This would be 8,755 annual operations more than the Future (2032) No Action Alternative. Table 1-3 in Attachment 1 presents the average annual operations with the specific airframe and AEDT engine code used for emissions modeling in AEDT for the Future (2032) Proposed Action.

8.1.2 Aircraft Taxi Time

The Proposed Action includes improvements to the existing airfield, which would potentially change the aircraft taxi time. The average taxi in and taxi out time for the Future (2032) Proposed Action was determined by using the delay analysis developed with the TAAM tool normalized to the ASPM data.[34,35] The average taxi in time was nine minutes and 12 seconds and the average taxi out time was 21 minutes and 18 seconds for the Future (2032) Proposed Action, for a total of 30 minutes and 30 seconds. These taxi in and taxi out times were applied to each operation in AEDT to develop the emissions inventory. The overall average taxi time decreased 24 seconds for the Future (2032) Proposed Action as compared to the Future (2032) No Action Alternative. While the Proposed Action has more aircraft operations than the No Action Alternative, the proposed improvements would increase the Airport's ability to accommodate increased aircraft operations and passenger activity by enhancing the efficiency of the overall taxiway layout and adding aircraft gates and passenger

[34] Leigh Fisher. Environmental Review Airside Modeling, June 2020.
[35] Kandice Krull, FAA, Email to Sarah Potter, L&B, RE: SAMP NTP Env Review Normalized Taxi Times, July 10, 2023.

processing facilities, reducing congestion in the terminal area. These improvements would reduce congestion on the taxiways and at the terminal. A summary of the taxi times for each scenario is provided in Table 1-6 in Attachment 1.

8.1.3 APUs

The APU durations per aircraft type identified for the Existing (2022) Condition would remain the same for the Future (2032) Proposed Action. As previously discussed, regional and narrow body aircraft were considered Code C aircraft and assigned a total APU duration of 22 minutes per operation and wide body aircraft were considered Code D or above and assigned a total APU duration of 32 minutes per operation. The AEDT database was used to assign the specific types of APU equipment used for each aircraft type. General Aviation operations were assigned the AEDT default APU equipment and usage per operation because data on specific general aviation equipment and usage were not available. The Future (2032) Proposed Action would have greater APU usage as compared to the Future (2032) No Action Alternative because of the increase in overall aircraft operations. See Table 2-3 in Attachment 2 for the estimated annual APU usage for the Future (2032) Proposed Action.

8.1.4 Aircraft Run-Ups

The increase in overall aircraft operations in the Future (2032) Proposed Action from the Existing (2022) Condition is anticipated to result in an increase the number of run-ups. Therefore, the number of aircraft run-ups was increased proportional to the forecast increase in aircraft operations. Therefore, a total of 565 run-up operations are estimated for the Future (2032) Proposed Action. This is an increase of ten additional run-up operations over the Future (2032) No Action Alternative.

8.2 Ground Support Equipment

8.2.1 Tenant-Owned GSE

The analysis assumed that tenant-owned GSE usage would increase commensurate with the forecast in aircraft activity and that the same types of vehicles would be used.[36] Therefore, the type of tenant-owned GSE identified for the Existing (2022) Condition would remain the same for the Future (2032) Proposed Action. As such, no new pieces of equipment were added for the analysis; it was estimated that there would only be an increase in usage in those same pieces of equipment. Table 3-5 in Attachment 3 provides the tenant-owned GSE and estimated hours of annual usage for the Future (2032) Proposed Action.

8.2.2 Port-Owned Airfield Vehicles and Equipment

The analysis assumed that Port-owned airfield vehicles and equipment usage would increase commensurate with the forecast in aircraft activity and that the same types of vehicles would be used. [37] The annual usage was increased proportional to the forecasted increase in aircraft operations. This includes Port vehicles and equipment used for airfield maintenance purposes and to support hardstand operations at the Airport. Table 3-6 in Attachment 3 provides the Port-owned airfield vehicles and equipment and estimated annual usage for the Future (2032) Proposed Action.

---

[36] No future assumptions could be made on potential new equipment purchased by the tenants operating at the Airport. While these tenants would need to buy new equipment as older equipment reaches its end-of-life cycle, there are no known existing agreements or contracts for the purchase of any future equipment.

[37] No future assumptions could be made on potential new equipment purchased by the Port. While the Port would need to buy new equipment as older equipment reaches its end-of-life cycle, there are no existing agreements or contracts for the purchase of any future Port equipment.

8.3 Stationary Sources

8.3.1 Natural Gas Boilers and Heaters

In addition to the Future (2032) No Action Alternative natural gas boilers and heaters, the Future (2032) Proposed Action includes new facilities that would use potentially new natural gas boilers. Table 4-5 in Attachment 4 provides the location, equipment type, and estimated usage of only the potential new natural gas boilers and heaters used for the Future (2032) Proposed Action. The number of potential new natural gas boilers and heaters were based on the proposed new facilities and the usage was based on how the Port uses the current natural gas boilers and heaters. All proposed new facilities were assumed to require natural gas usage to provide heat. While the Port would attempt to purchase more energy-efficient equipment, there are no existing agreements, contracts, or new energy code legislation that would require the Port to purchase higher efficiency boilers in the future. Therefore, the existing type of boilers were assumed to operate in the proposed new facilities.

8.3.2 Diesel Generators

In addition to the location, description, horsepower, and estimated annual usage of diesel-powered generators identified for the Future (2032) No Action Alternative, the Future (2032) Proposed Action includes potential new facilities that would require the use of new diesel-powered generators for standby and emergency power. The number of potential new generators was based on the proposed new facilities and the usage was based on how the Port uses and tests the current generators. Table 4-6 in Attachment 4 provides the location, description, horsepower, and estimated annual usage of the new diesel-powered generators for the Future (2032) Proposed Action. Table 4-7 in Attachment 4 provides a summary comparison of diesel generator usage under the various alternatives.

8.3.3 Fuel Farm Tanks

The Future (2032) Proposed Action includes four new fuel farm tanks to be able to meet future fuel demands. The potential increase in Jet A fuel throughput for the Future (2032) Proposed Action was based on the forecast increase in aircraft operations and the additional tanks. It is estimated that the total volume of aviation fuel (Jet A) that would be supplied to aircraft would be 705,980,168 gallons for the Future (2032) Proposed Action. This is 12,994,411 gallons of Jet A fuel throughput more than the Future (2032) No Action Alternative. The total volume of aviation fuel (Jet A) would be stored among 12 total fuel tanks, including eight existing fuel tanks and four new fuel tanks to be located at the Airport's fuel farm as part of the Proposed Action.

8.4 Motor Vehicles

8.4.1 Motor Vehicles (On- and Off-Airport Roadways)

The vehicle classifications and vehicle distribution identified for the Future (2032) No Action Alternative would remain the same for the Future (2032) Proposed Action. The emission factors identified for the Future (2032) No Action Alternative would also remain the same for the Future (2032) Proposed Action as emission factors are a function of year/age of the vehicle and vehicle classification. Roadway segments and traffic volumes would be anticipated to change due to the Proposed Action, as described in the following sections.

8.4.1.1 Roadway Segments

The Proposed Action would result in elimination of several existing roadway segments and construction and operation of several new roadways to accommodate the new proposed facilities. The roadway segments that were eliminated and constructed are identified in Table 5-5 in Attachment 5. The roadway segments identified for the Proposed Action are provided in Exhibits 5-12 through 5-22 in Attachment 5.

8.4.1.2 Traffic Volumes

Traffic volumes were provided by the Port for this scenario to account for employee and cargo growth. Roadways for which only WSDOT data was available, traffic volumes were increased proportionally to the forecast increase in passengers. The traffic volume on each roadway segment and the annual VMT per roadway segment are provided in Table 5-5 in Attachment 5. For the Future (2032) Proposed Action there are anticipated to be 1,247,969,250 annual VMTs, an increase of 29,657,769 annual VMTs as compared to the Future (2032) No Action Alternative.

8.4.2 Motor Vehicles (Parking Facilities)

Emissions are based on volumes of vehicles in the parking facilities, distance traveled within the parking facility, and speed of vehicles. The potential volume increase in passenger traffic in the terminal parking lot for the Future (2032) Proposed Action was based on the forecasted increase in passengers. The total forecast of passengers was used to represent the potential increase in traffic volumes. The potential volume increase in motor vehicles using the North Employee Parking Lot for the Future (2032) Proposed Action was based on the forecast increase in aircraft operations. It was assumed that as aircraft operations increase, and new facilities are constructed, the number of employees would also grow. Therefore, the number of motor vehicles estimated for the Future (2032) Proposed Action in the North Employee Parking Lot was increased proportional to the forecast increase in aircraft operations. There would be no change in vehicle speed or distance in these parking lots from the Future (2032) No Action Alternative.

The Proposed Action includes the removal of the Doug Fox Lot and the addition of new parking lots. For the new employee parking structure (L07), new north holding lot (L05), and the new terminal parking structure (T02), volumes were estimated by assuming the lots would operate at full capacity, meaning it was estimated there would be vehicles in all of the stalls.[38] Distance for a vehicle to travel was based on the length from the first parking stall from the entrance to the last stall using every aisle and floor if applicable. It was calculated that the average distance traveled for vehicles in the new employee parking structure (L07) was 0.38 miles, the average distance traveled by vehicles in the new north holding lot (L05) was 0.42 miles, and the average distance traveled by vehicles in the new terminal parking structure (T02) was 0.48 miles. In order to determine emissions, an average speed of five (5) mph was assumed for vehicles in these new parking lots.

[38] A daily turnover rate of 2.5 was applied on the terminal parking and daily turnover rate of 3 was applied to the employee parking based on professional judgment.

8.5 Future (2032) Proposed Action Criteria Pollutant Emissions Inventory

The criteria pollutant emissions inventory provides the total annual pollutant emissions as short tons per year. The emissions inventory for the Future (2032) Proposed Action is shown in **Table 9**. The Future (2032) Proposed Action emissions inventory shows the pollutants with the greatest emissions are CO and NOx. There were approximately 4,517 tons of CO and 2,984 tons of NO_x potentially emitted for the Future (2032) Proposed Action. Aircraft produce the greatest contribution to CO emissions (48.7 percent) and NO_x emissions (96 percent). A summary comparison of the Future (2032) No Action Alternative and the Future (2032) Proposed Action is provided in Section 10.1 of this technical report.

TABLE 9: ANNUAL OPERATIONAL EMISSIONS INVENTORY - FUTURE (2032) PROPOSED ACTION

Emission Source	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)
Aircraft	**2,166**	**251**	**2,807**	**239**	**28**	**28**
LTO (includes Start-Up, Approach, Climb, and Taxiing)	2,054	235	2,675	225	14	14
APUs	111	16	74	11	13	13
Aircraft Run-Ups	1	0	58	2	0	0
GSE	**194**	**6**	**14**	**0**	**1**	**1**
Tenant-Owned GSE	191	6	9	0	1	0
Port-Owned Airfield Vehicles and Equipment	3	0	4	0	0	0
Stationary Sources	**23**	**15**	**39**	**54**	**1**	**1**
Natural Gas Boilers and Heaters	19	1	23	0	0	0
Diesel Generators	4	0	16	54	0	0
Fuel Farm Tanks	0	13	0	0	0	0
Motor Vehicles	**2,135**	**18**	**124**	**2**	**4**	**3**
Parking Facilities	39	1	3	0	0	0
On and Off-Airport Roadways (includes Airside Deliveries)	2,096	17	121	2	4	3
Total	**4,517**	**290**	**2,984**	**295**	**33**	**33**

Note: Totals may not sum due to rounding. CO = carbon monoxide, VOC = Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x = sulfur oxides, PM_{10} = coarse particulate matter, $PM_{2.5}$ = fine particulate matter, ST = short tons.
Source: Port of Seattle and L&B, 2024.

9. Future (2032) Hybrid Option

The Future (2032) Hybrid Terminal Option would have the same operational impacts as the Future (2032) Proposed Action because the only differences in the two alternatives would be related to the location of passenger loading bridges and aircraft hardstands. The number of future aircraft operations would be the same. Therefore, the criteria pollutant emissions inventory for the Future (2032) Hybrid Terminal Option would be the same as the Future (2032) Proposed Action.

10. Comparison of 2032 Alternatives

The results of the emission inventories prepared for the Future (2032) Proposed Action and the Future (2032) Hybrid Terminal Option were compared to the results of the emission inventories prepared for the Future (2032) No Action Alternative to disclose the potential increase in emissions.

10.1 Future (2032) Proposed Action

The results of the comparison between the Future (2032) Proposed Action and the Future (2032) No Action Alternative are shown in **Table 10**.

TABLE 10: SUMMARY OF ANNUAL CRITERIA POLLUTANT EMISSIONS, PROPOSED ACTION COMPARED TO THE NO ACTION ALTERNATIVE IN 2032

Emission Source	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)
2032 No Action Alternative	4,447	283	2,923	275	32	32
2032 Proposed Action	4,557	291	2,993	295	41	34
Construction	*40*	*1*	*9*	*0*	*8*	*1*
Operational	*4,517*	*290*	*2,984*	*295*	*33*	*33*
2032 Increase in Emissions	**110**	**8**	**70**	**20**	**9**	**2**

Note: Totals may not sum due to rounding. CO = carbon monoxide, VOC = Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x = sulfur oxides, PM_{10} = coarse particulate matter, $PM_{2.5}$ = fine particulate matter.
Source: Port of Seattle and L&B, 2024.

Emissions of all pollutants are expected to be greater with the Future (2032) Proposed Action than the Future (2032) No Action Alternative, mainly due to the higher level of airport activity that the Future (2032) Proposed Action would serve. Overall, there are more aircraft operations forecast with the Proposed Action as compared to the No Action Alternative in future years. Implementation of the NTPs would increase the Airport's ability to accommodate increased aircraft operations and passenger activity by adding aircraft gates and passenger processing facilities. Annual aircraft operations for the Future (2032) Proposed Action are forecast to increase to 475,655 aircraft operations. The Future (2032) Proposed Action would serve 8,755 more operations (1.9 percent) than the Future (2032) No Action Alternative, which would result in a potential increase in emissions. While operational efficiencies would be achieved with the Proposed Action, emissions would be greater due to the higher level of operations.

10.2 Future (2032) Hybrid Option

The results of the comparison between the Future (2032) Hybrid Terminal Option and the Future (2032) No Action Alternative are shown in **Table 11**.

TABLE 11: SUMMARY OF ANNUAL CRITERIA POLLUTANT EMISSIONS, HYBRID TERMINAL OPTION COMPARED TO THE NO ACTION ALTERNATIVE IN 2032

Emission Source	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)
2032 No Action Alternative	4,447	283	2,923	275	32	32
2032 Hybrid Terminal Option	4,559	291	2,999	295	41	34
Construction	42	1	15	0	8	1
Operational	4,517	290	2,984	295	33	33
2032 Increase in Emissions	**112**	**8**	**76**	**20**	**9**	**2**

Note: Totals may not sum due to rounding. CO = carbon monoxide, VOC = Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x = sulfur oxides, PM_{10} = coarse particulate matter, $PM_{2.5}$ = fine particulate matter, ST = short tons.
Source: Port of Seattle and L&B, 2024.

The Future (2032) Hybrid Terminal Option would have the same operational impacts as the Future (2032) Proposed Action because the only differences in the two alternatives would be related to the location of passenger loading bridges and aircraft hardstands. The number of future aircraft operations would be the same. Minor differences in construction activities for Future (2032) Hybrid Terminal Option would result in the Future (2032) Hybrid Terminal Option having slightly greater overall emissions as compared to those for the Future (2032) Proposed Action.

11. Future (2037) No Action Alternative

11.1 Aircraft

11.1.1 Aircraft Fleet Mix and Activity Levels

Based on the aircraft activity forecast, there would be an increase in operations from the Future (2032) No Action Alternative to the Future (2037) No Action Alternative. There would be a total of 474,874 aircraft operations forecast for the Future (2037) No Action Alternative. Table 1-4 in Attachment 1 presents the average annual operations with the specific airframe type and AEDT engine code used for AEDT modeling for the Future (2037) No Action Alternative.

11.1.2 Aircraft Taxi Time

The airfield configuration (runway layout and taxiways) identified for the Future (2032) Condition would remain the same for the Future (2037) No Action Alternative. The average taxi in and taxi out time for the Future (2037) No Action Alternative was determined by using the delay analysis developed with the TAAM tool normalized to the ASPM data.[39,40] The average taxi in time was nine minutes and 41 seconds and the average taxi out time was 21 minutes and 42 seconds for the Future (2037) No Action Alternative for a total of 31 minutes and 23 seconds. These taxi in and taxi out times were applied to each operation in AEDT to develop the emissions inventory. The additional aircraft created additional taxi time on the taxiways. A summary of the taxi times for each scenario is provided in Table 1-6 in Attachment 1.

[39] Leigh Fisher. Environmental Review Airside Modeling, June 2020.
[40] Kandice Krull, FAA, Email to Sarah Potter, L&B, RE: SAMP NTP Env Review Normalized Taxi Times, July 10, 2023.

11.1.3 APUs

The APU durations per aircraft type identified for the Future (2032) No Action Alternative would remain the same for the Future (2037) No Action Alternative. As previously discussed, regional and narrow body aircraft were considered Code C aircraft and assigned a total APU duration of 22 minutes per operation and wide body aircraft were considered Code D or above and assigned a total APU duration of 32 minutes per operation. The AEDT database was used to assign the specific types of APU equipment used for each aircraft type. General Aviation operations were assigned the AEDT default APU equipment and usage per operation because data on specific general aviation equipment and usage were not available. The Future (2037) No Action Alternative would have greater APU usage as compared to the Future (2032) No Action Alternative because of the increase in overall aircraft operations. See Table 2-4 in Attachment 2 for the estimated annual APU usage for the Future (2037) No Action Alternative.

11.1.4 Aircraft Run-Ups

The number of aircraft run-ups was increased proportional to the forecast increase in aircraft operations. Therefore, a total of 564 run-up operations are estimated for the Future (2037) No Action Alternative.

11.2 Ground Support Equipment

11.2.1 Tenant-Owned GSE

The analysis assumed that tenant-owned GSE usage would increase commensurate with the forecast in aircraft activity and that the same types of vehicles would be used.[41] Therefore, the type of tenant-owned GSE identified for the Existing (2022) Condition would remain the same for the Future (2037) No Action Alternative. As such, no new pieces of equipment were added for the analysis; it was estimated that there would only be an increase in usage in those same pieces of equipment. Table 3-7 in Attachment 3 provides the tenant-owned GSE and estimated hours of annual usage modeled for the Future (2037) No Action Alternative.

11.2.2 Port-Owned Airfield Vehicles and Equipment

The type of Port-owned airfield vehicles and equipment identified for the Future (2037) No Action Alternative would remain the same as for the Future (2032) No Action Alternative. As with the Future (2032) No Action Alternative, the analysis assumed that Port-owned airfield vehicles and equipment usage would increase commensurate with the forecast in aircraft activity and that the same types of vehicles would be used. [42] The annual usage was increased proportional to the forecast increase in aircraft operations. This includes Port vehicles and equipment used for airfield maintenance purposes and to support hardstand operations at the Airport. Table 3-8 in Attachment 3 provides the Port-owned airfield vehicles and equipment and estimated annual usage for the Future (2037) No Action Alternative.

---

41 No future assumptions could be made on potential new equipment purchased by the tenants operating at the Airport. While these tenants would need to buy new equipment as older equipment reaches its end-of-life cycle, there are no known existing agreements or contracts for the purchase of any future equipment.

42 No future assumptions could be made on potential new equipment purchased by the Port. While the Port would need to buy new equipment as older equipment reaches its end-of-life cycle, there are no existing agreements or contracts for the purchase of any future Port equipment.

11.3 Stationary Sources

11.3.1 Natural Gas Boilers and Heaters

The location, equipment type, and usage of natural gas boilers and heaters identified for the Future (2032) No Action Alternative would remain the same for the Future (2037) No Action Alternative.

11.3.2 Diesel Generators

The location, name, horsepower, and annual usage of diesel-powered generators identified for the Future (2032) No Action Alternative would remain the same for the Future (2037) No Action Alternative.

11.3.3 Fuel Farm Tanks

The potential increase in Jet A fuel throughput for the Future (2037) No Action Alternative was based on the forecast increase in aircraft operations. It is estimated that the total volume of aviation fuel (Jet A) that would be supplied to aircraft would be 704,820,987 gallons for the Future (2037) No Action Alternative. The total volume of aviation fuel (Jet A) would be stored among eight existing fuel tanks located at the Airport's fuel farm.

11.4 Motor Vehicles

11.4.1 Motor Vehicles (On- and Off-Airport Roadways)

The roadway segment identifier, segment length, vehicle classification, vehicle distribution, and speed for each roadway segment identified for the Future (2032) No Action Alternative would remain the same for the Future (2037) No Action Alternative. Traffic volumes would be anticipated to change as would the emission factors, as described in the following sections.

11.4.1.1 Traffic Volumes

The forecasted traffic volume on each roadway segment and the annual VMT per roadway segment are provided in Table 5-6 in Attachment 5. The table notes the length of the segment and the average daily traffic, which is then multiplied by 365 to provide an annual total. Traffic volumes were provided by the Port for this scenario to account for employee and cargo growth. Roadways for which only WSDOT data was available, traffic volumes were increased proportional to the forecast increase in passengers. For the Future (2037) No Action Alternative there are anticipated to be 1,295,066,721 annual VMTs.

11.4.1.2 Emissions Factors

The EPA's MOVES4 was used to generate emissions rates in grams of pollutant per vehicle mile traveled (g/VMT). The emission factors are unique to the year 2037 and King County and are different for each criteria pollutant, speed, and vehicle type. The emission factors for each pollutant by speed and vehicle type for the Future (2037) No Action Alternative are provided in Table 5-7 in Attachment 5. Emission factors for the Future (2037) No Action Alternative are lower as compared to the Existing (2022) Condition and the Future (2032) No Action Alternative emissions factors. As previously stated, EPA assumes in MOVES that older vehicles are gradually replaced by newer vehicles.[43] Therefore, while there are more vehicles on- and off-roadways traveling more miles in the future, because the

[43] For EPA's guidance on emission factors see the following technical reports, Exhaust Emission Rates for Heavy-Duty Onroad Vehicles in MOVES4 (EPA-420-R-23-027 dated August 2023 and Exhaust Emission Rates for Light-Duty Onroad Vehicles in MOVES4 (EPA-420-R-23-028 dated August 2023) available online at https://www.epa.gov/moves/moves-onroad-technical-reports.

emission factors are lower, total emissions for motor vehicles for the Future (2037) No Action Alternative would be less as compared to the Future (2032) No Action Alternative.

11.4.2 Motor Vehicles (Parking Facilities)

The parking lots identified for the Future (2032) No Action Alternative would remain the same for the Future (2037) No Action Alternative meaning there would be no new lots, change in vehicle speed or distance within the lots, or any increase in the number of parking stalls in the lots. The potential volume increase in motor vehicles using the Doug Fox Lot and the Terminal Parking Lot for the Future (2037) No Action Alternative was based on the forecast increase in total passengers. The number of motor vehicles in those parking lots would increase commensurate with the increase in total passengers. The potential volume increase in motor vehicles using the North Employee Parking Lot for the Future (2037) No Action Alternative was based on the forecast increase in aircraft operations. It was assumed that as aircraft operations increase so would the number of employees. Therefore, the number of motor vehicles estimated for the Future (2037) No Action Alternative in the North Employee Parking Lot was increased proportional to the forecast increase in aircraft operations.

11.5 Future (2037) No Action Alternative Criteria Pollutant Emissions Inventory

The criteria pollutant emissions inventory provides the total annual pollutant emissions as short tons per year. The emissions inventory for the Future (2037) No Action Alternative is shown in **Table 12**. The Future (2037) No Action Alternative emissions inventory shows the pollutants with the greatest emissions are CO and NOx. There were approximately 3,982 tons of CO and 3,088 tons of NO_x potentially emitted for the Future (2037) No Action Alternative. Aircraft produce the greatest contribution to CO emissions (52.5 percent) and NO_x emissions (96.3 percent).

TABLE 12: ANNUAL OPERATIONAL EMISSIONS INVENTORY - FUTURE (2037) NO ACTION ALTERNATIVE

Emission Source	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)
Aircraft	**2,089**	**238**	**2,975**	**242**	**29**	**29**
LTO (includes Start-Up, Approach, Climb, and Taxiing)	1,972	222	2,842	227	13	13
APUs	117	16	77	12	15	15
Aircraft Run-Ups	1	0	56	2	0	0
GSE	**194**	**6**	**13**	**0**	**1**	**1**
Tenant-Owned GSE	191	6	9	0	0	0
Port-Owned Airfield Vehicles and Equipment	3	0	4	0	0	0
Stationary Sources	**16**	**11**	**27**	**37**	**1**	**1**
Natural Gas Boilers and Heaters	13	1	16	0	0	0
Diesel Generators	2	0	11	37	0	0
Fuel Farm Tanks	0	10	0	0	0	0
Motor Vehicles	**1,682**	**14**	**72**	**2**	**2**	**2**
Parking Facilities	27	1	2	0	0	0
On and Off-Airport Roadways (includes Airside Deliveries)	1,655	13	71	2	2	2
Total	**3,982**	**268**	**3,088**	**281**	**32**	**32**

Note: Totals may not sum due to rounding. CO = carbon monoxide, VOC = Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x = sulfur oxides, PM_{10} = coarse particulate matter, $PM_{2.5}$ = fine particulate matter, ST = short tons.
Source: Port of Seattle and L&B, 2024.

12. Future (2037) Proposed Action

12.1 Aircraft

12.1.1 Aircraft Fleet Mix and Activity Levels

There would be a total of 509,892 aircraft operations forecast for the Future (2037) Proposed Action. This would be an increase of 35,018 annual operations more than the Future (2037) No Action Alternative. Table 1-5 in Attachment 1 presents the average annual operations for the specific airframe type with the AEDT engine code modeled in AEDT for the Future (2037) Proposed Action.

12.1.2 Aircraft Taxi Time

The same airfield configuration used for the Future (2032) Proposed Action was used for the Future (2037) Proposed Action. The average taxi in and taxi out time for the Future (2037) Proposed Action was determined by using the delay analysis developed with the TAAM tool normalized to the ASPM data.[44,45] The average taxi in time was nine minutes and 45 seconds and the average taxi out time was 23 minutes and 32 seconds for the Future (2037) Proposed Action, for a total of 33 minutes and 17 seconds. These taxi in and taxi out times were applied to each operation in AEDT to develop the emissions inventory. The overall average taxi time increased one minute and 54 seconds for the Future (2037) Proposed Action as compared to the Future (2037) No Action Alternative. While the Proposed Action includes proposed facility improvements which would increase the Airport's ability to accommodate an increase in operations in 2037, airfield constraints would result in the Airport still experiencing increases in taxi times due to the higher number of total aircraft operating on the runways and taxiways, as well as the location of the proposed gates in relationship to the end of the runways. A summary of the taxi times for each scenario is provided in Table 1-6 in Attachment 1.

12.1.3 APUs

The APU durations per aircraft type identified for the Future (2037) No Action Alternative would remain the same for the Future (2037) Proposed Action. As previously discussed, regional and narrow body aircraft were considered Code C aircraft and assigned a total APU duration of 22 minutes per operation and wide body aircraft were considered Code D or above and assigned a total APU duration of 32 minutes per operation. The AEDT database was used to assign the specific types of APU equipment used for each aircraft type. General Aviation operations were assigned the AEDT default APU equipment and usage per operation because data on specific general aviation equipment and usage were not available. The Future (2037) Proposed Action would have greater APU usage as compared to the Future (2037) No Action Alternative because of the increase in overall aircraft operations. See Table 2-5 in Attachment 2 for the estimated annual APU usage for the Future (2037) Proposed Action.

12.1.4 Aircraft Run-Ups

The increase in overall aircraft operations in the Future (2037) Proposed Action from the Future (2037) No Action Alternative is anticipated to result in an increase in the number of run-ups. The number of aircraft run-ups was increased proportional to the forecast increase in aircraft operations. Therefore, a total of 606 aircraft run-up operations are estimated for the Future (2037) Proposed Action. This is an increase of 42 additional run-up operations over the Future (2037) No Action Alternative.

---

44 Leigh Fisher. Environmental Review Airside Modeling, June 2020.
45 Kandice Krull, FAA, Email to Sarah Potter, L&B, RE: SAMP NTP Env Review Normalized Taxi Times, July 10, 2023.

12.2 Ground Support Equipment

12.2.1 Tenant-Owned GSE

The analysis assumed that tenant-owned GSE usage would increase commensurate with the forecast in aircraft activity and that the same types of vehicles would be used.[46] Therefore, the type of tenant-owned GSE identified for the Existing (2022) Condition would remain the same for the Future (2037) Proposed Action Alternative. As such, no new pieces of equipment were added for the analysis; it was estimated that there would only be an increase in usage in those same pieces of equipment. Table 3-9 in Attachment 3 provides the tenant-owned GSE and estimated hours of annual usage modeled for the Future (2037) Proposed Action.

12.2.2 Port-Owned Airfield Vehicles and Equipment

The analysis assumed that Port-owned airfield vehicles and equipment usage would increase commensurate with the forecast in aircraft activity and that the same types of vehicles would be used. [47] The annual usage was increased proportional to the forecasted increase in aircraft operations. This includes Port vehicles and equipment used for airfield maintenance purposes and to support hardstand operations at the Airport. Table 3-10 in Attachment 3 provides the Port-owned airfield vehicles and equipment and estimated annual usage for the Future (2037) Proposed Action.

12.3 Stationary Sources

12.3.1 Natural Gas Boilers and Heaters

The location, equipment type, and usage of natural gas boilers and heaters identified for the Future (2032) Proposed Action would remain the same for the Future (2037) Proposed Action. There would be no change in square footage of new facilities from 2032 to 2037 with the Proposed Action. While the total number of passengers would increase, natural gas usage is based on the area of the facility not the number of passengers.

12.3.2 Diesel Generators

The location, description, horsepower, and estimated annual usage of diesel-powered generators identified for the Future (2032) Proposed Action would remain the same for the Future (2037) Proposed Action.

12.3.3 Fuel Farm Tanks

The potential increase in Jet A fuel throughput for the Future (2037) Proposed Action was based on the forecast increase in aircraft operations. It is estimated that the total volume of aviation fuel (Jet A) that would be supplied to aircraft would be 756,795,661 gallons for the Future (2037) Proposed Action. This is an increase of 51,974,674 gallons of fuel throughput compared to the Future (2037) No Action Alternative. The total volume of aviation fuel (Jet A) would be stored among 12 fuel tanks, including eight existing fuel tanks and four new fuel tanks to be located at the Airport's fuel farm as part of the Proposed Action.

---

46 No future assumptions could be made on potential new equipment purchased by the tenants operating at the Airport. While these tenants would need to buy new equipment as older equipment reaches its end-of-life cycle, there are no known existing agreements or contracts for the purchase of any future equipment.

47 No future assumptions could be made on potential new equipment purchased by the Port. While the Port would need to buy new equipment as older equipment reaches its end-of-life cycle, there are no existing agreements or contracts for the purchase of any future Port equipment.

12.4 Motor Vehicles

12.4.1 Motor Vehicles (On- and Off-Airport Roadways)

The roadway segment identifier, segment length, vehicle classification, vehicle distribution, and speed for each roadway segment identified for the Future (2032) Proposed Action would remain the same for the Future (2037) Proposed Action. The emission factors identified for the Future (2037) No Action Alternative would remain the same for the Future (2037) Proposed Action as emission factors are based upon the year/vehicle age and vehicle classification and would not be changed by the Proposed Action. Traffic volumes would be anticipated to change as described in the following section.

12.4.1.1 Traffic Volumes

The forecasted traffic volume on each roadway segment and the annual VMT per roadway segment are provided in Table 5-8 in Attachment 5. Traffic volumes were provided by the Port for this scenario to account for employee and cargo growth. Roadways for which only WSDOT data was available, traffic volumes were increased proportional to the forecast increase in passengers. For the Future (2037) Proposed Action there are anticipated to be 1,377,374,995 annual VMTs, an increase of 82,308,275 annual VMTs as compared to the Future (2037) No Action Alternative.

12.4.2 Motor Vehicles (Parking Facilities)

The parking lots identified for the Future (2032) Proposed Action would remain the same for the Future (2037) Proposed Action. The potential increase in passenger traffic in the parking lots for the Future (2037) Proposed Action was based on the forecast increase in passengers as parking lot use was increased in proportion to the change in passengers. The total forecast passengers were used to represent the potential increase in traffic volumes.

12.5 Future (2037) Proposed Action Criteria Pollutant Emissions Inventory

The criteria pollutant emissions inventory provides the total annual pollutant emissions as short tons per year. The emissions inventory for the Future (2037) Proposed Action is shown in **Table 13**. The Future (2037) Proposed Action emissions inventory shows the pollutants with the greatest emissions are CO and NOx. There were approximately 4,245 tons of CO and 3,314 tons of NO_x potentially emitted for the Future (2037) Proposed Action. Aircraft produce the greatest contribution to CO emissions (52.6 percent) and NO_x emissions (96.1 percent). A summary comparison of the Future (2037) No Action Alternative and the Future (2037) Proposed Action is provided in Section 14.1 of this technical report.

TABLE 13: ANNUAL OPERATIONAL EMISSIONS INVENTORY - FUTURE (2037) PROPOSED ACTION

Emission Source	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)
Aircraft	**2,231**	**252**	**3,184**	**259**	**31**	**31**
LTO (includes Start-Up, Approach, Climb, and Taxiing)	2,104	235	3,041	243	14	14
APUs	126	17	82	13	16	16
Aircraft Run-Ups	1	0	60	2	0	0
GSE	**208**	**6**	**14**	**0**	**1**	**1**
Tenant-Owned GSE	204	6	10	0	1	0
Port-Owned Airfield Vehicles and Equipment	3	0	5	0	0	0
Stationary Sources	**23**	**15**	**39**	**54**	**1**	**1**
Natural Gas Boilers and Heaters	19	1	23	0	0	0
Diesel Generators	4	0	16	54	0	0
Fuel Farm Tanks	0	13	0	0	0	0
Motor Vehicles	**1,784**	**14**	**76**	**2**	**2**	**2**
Parking Facilities	32	1	2	0	0	0
On and Off-Airport Roadways (includes Airside Deliveries)	1,752	14	74	2	2	2
Total	**4,245**	**288**	**3,314**	**315**	**35**	**34**

Note: Totals may not sum due to rounding. CO =carbon monoxide, VOC=Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x= sulfur oxides, PM_{10} = coarse particulate matter, $PM_{2.5}$ = fine particulate matter, ST = short tons.
Source: Port of Seattle and L&B, 2024.

13. Future (2037) Hybrid Option

The Future (2037) Hybrid Terminal Option would have the same operational impacts as Future (2037) Proposed Action because the only differences in the two alternatives would be related to the location of passenger loading bridges and aircraft hardstands. The number of future aircraft operations would be the same. Therefore, the criteria pollutant emissions inventory for the Future (2037) Hybrid Terminal Option would be the same as the Future (2037) Proposed Action.

14. Comparison of 2037 Alternatives

The results of the emission inventories prepared for the Future (2037) Proposed Action and the Future (2037) Hybrid Terminal Option were compared to the results of the emission inventories prepared for the Future (2037) No Action Alternative to disclose the potential increase in emissions.

14.1 Future (2037) Proposed Action

The results of the comparison between the Future (2037) Proposed Action and the Future (2037) No Action Alternative are shown in **Table 14**.

TABLE 14: SUMMARY OF ANNUAL CRITERIA POLLUTANT EMISSIONS, PROPOSED ACTION COMPARED TO THE NO ACTION ALTERNATIVE IN 2037

Emission Source	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)
2037 No Action Alternative	3,982	268	3,088	281	32	32
2037 Proposed Action (Operational Only)	4,245	288	3,314	315	35	34
2037 Increase in Emissions	***263***	***20***	***225***	***34***	***3***	***2***

Note: Totals may not sum due to rounding. CO =carbon monoxide, VOC=Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x= sulfur oxides, PM_{10}=coarse particulate matter, $PM_{2.5}$= fine particulate matter, ST = short tons.
Source: Port of Seattle and L&B, 2024.

Emissions of all pollutants are expected to be greater with the Proposed Action than the No Action Alternative, mainly due to the higher level of airport activity that the Proposed Action would serve. Implementation of the NTPs would increase the Airport's ability to accommodate increased aircraft operations and passenger activity by adding aircraft gates and passenger processing facilities. Annual aircraft operations for the Future Proposed Action are forecast to increase to 509,892 in 2037. The Proposed Action would serve 35,018 more operations in 2037 (7.4 percent) than the No Action Alternative, which would result in a potential increase in emissions. While operational efficiencies would be achieved with the Proposed Action, emissions would be greater due to the higher level of operations.

The largest change to emissions with the Proposed Action would occur in 2037 when the activity difference is the greatest relative to the No Action. CO emissions would increase from 3,982 tons (No Action) to 4,245 tons (Proposed Action) or 263 tons (a 6.6 percent change). VOC emissions in 2037 would be 7.3 percent higher with the Proposed Action, NO_x emissions would be 7.3 percent higher, SO_x emissions would be 12.3 percent higher, and PM_{10} and $PM_{2.5}$ emissions would be 7.8 percent higher due to the Proposed Action.[48]

14.2 Future (2037) Hybrid Option

The results of the comparison between the Hybrid Terminal Option and the No Action Alternative are shown in **Table 15**.

TABLE 15: SUMMARY OF ANNUAL CRITERIA POLLUTANT EMISSIONS, HYBRID TERMINAL OPTION COMPARED TO THE NO ACTION ALTERNATIVE IN 2037

Emission Source	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)
2037 No Action Alternative	3,982	268	3,088	281	32	32
2037 Hybrid Terminal Option (Operational Only)	4,245	288	3,314	315	35	34
2037 Increase in Emissions	**263**	**20**	**225**	**34**	**3**	**2**

Note: Totals may not sum due to rounding. CO =carbon monoxide, VOC=Volatile Organic Compounds, NO_x = nitrogen oxides, SO_x= sulfur oxides, PM_{10}=coarse particulate matter, $PM_{2.5}$= fine particulate matter, ST = short tons.
Source: Port of Seattle and L&B, 2024.

The Hybrid Terminal Option would have the same operational impacts as the Proposed Action because the only differences in the two alternatives would be related to the location of passenger loading bridges and aircraft hardstands.

[48] The reported percent increases were estimated using derived results prior to rounding.

15. Air Quality Significance Determination

An emissions inventory is a summary in tons per year of the total pollutants generated by an alternative. Pollutant concentrations in the NAAQS are measured in micrograms per cubic meter or parts per million/billion and describe concentrations of the pollutants in the air. An emissions inventory is not directly comparable to the NAAQS.

Of the projected pollutant increases, the largest increase would be to CO and NOx. The Port worked with PSCAA in developing the region's most recent air quality plan and prior SIPs and has kept the region abreast of activity levels at the Airport as the region came into attainment. The Washington State Department of Ecology has established an air monitoring network around the state that measures air pollution. The air quality monitoring stations in King County are maintained by the PSCAA. The air quality monitoring stations closest to the Airport are Seattle South Park, Kent, Allentown, and Beacon Hill. CO levels have decreased significantly in the Puget Sound region primarily due to emissions controls on car engines. The most recent publicly available data on CO and NO_x from the air quality monitors indicate that not only the air quality complies with the NAAQS but concentrations are below the NAAQS for CO and NOx.[49] Therefore, the potential increase in criteria pollutant emissions, as shown in the emissions inventory for the Proposed Action or the Hybrid Terminal Option as compared to the No Action Alternative, would not be expected to create any new violation of the NAAQS.[50]

16. Federal Regulatory Setting for GHG

On January 9, 2023, Council on Environmental Quality (CEQ) issued the *National Environmental Policy Act Guidance on Consideration of Greenhouse Gas Emissions and Climate Change*, which is interim guidance to assist agencies in analyzing greenhouse gas and climate change effects of their proposed actions under NEPA. Per FAA Order 1050.1F Desk Reference, there are no federal significance thresholds for greenhouse gas (GHG) emissions, nor has the FAA identified specific factors to consider in making a significance determination for GHG emissions. After the publication of the Draft EA, Executive Order (EO) 13990, which was relied upon for the January 2023 CEQ draft GHG guidance, was revoked. In addition, CEQ revoked its regulations (40 CFR parts 1500-1508) implementing NEPA, 42 U.S.C. 4321 *et seq.,* as amended, in response to EO 14154. As a result of these changes, all references to climate and the qualitative climate evaluation that discussed the level of preparedness with respect to the impacts of climate change, the extent to which the alternatives could be affected by future climate conditions, and if the alternatives are consistent with national, state, and local climate goals has been removed from this Technical Report.

17. Overall Approach to GHG Assessment

Per FAA Order 1050.1F, the discussion of potential GHG emissions should be documented in a separate section of the NEPA document, distinct from air quality.[51] FAA guidance notes that if a project might increase criteria pollutants and/or fuel use, it could increase GHG emissions, warranting an emissions inventory.

---

49 Puget Sound Clean Air Agency. 2022 Air Quality Data Summary, December 2023.
50 Erik Saganić, PSCAA, Email to Kandice Krull, FAA, RE: Sea-Tac International Airport Preliminary Air Results, December 14, 2023.
51 FAA, April 2015, Order 1050.1F Paragraph 4-1. Climate is considered a separate section from Air Quality.

GHG emissions inventories were conducted to provide the estimate of the annual rate (metric tons per year) of GHG emissions attributable to airport sources for the No Action Alternative and the Proposed Action. The GHG emissions inventories were conducted in accordance with the guidelines provided in FAA Order 1050.1F, *Environmental Impacts: Policies and Procedures (including the Desk Reference);* FAA Order 5050.4B, *National Environmental Policy Act (NEPA) Implementing Instructions for Airport Actions*; FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1;* and the CEQ's *National Environmental Policy Act Guidance on Consideration of Greenhouse Gas Emissions and Climate Change.* Per these guidelines, the GHG assessment was developed to include a NEPA GHG emissions inventory and disclosure of estimated GHG emissions as detailed below.

18. GHG Methodology

18.1 Pollutants

GHGs are gases that trap heat in the earth's atmosphere. GHGs include carbon dioxide (CO_2), methane (CH_4), nitrous oxide (N_2O), sulfur hexafluoride (SF_6), hydrofluorocarbons (HFC), and perfluorocarbons (PFCs). Of these GHGs, only CO_2, CH_4 and N_2O are potentially emitted directly or indirectly as a consequence of the Proposed Action and are included in this analysis.[52]

18.2 Global Warming Potential

GHGs differ from each other in their ability to absorb energy and how long they stay in the atmosphere. The Global Warming Potential (GWP) was developed to allow comparisons of global warming impacts of different gases by converting each gas amount to a carbon dioxide equivalent (CO_2e).[53] GWPs provide a common unit of measure, which allows for one emission estimate of these different gases.

For this analysis, GWPs were based on a 100-year period (GWP 100) provided in the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1* and based on the Intergovernmental Panel on Climate Change (IPCC), Fifth Assessment Report (AR5).[54] CO_2 has a GWP of one (1) because it is the gas used as the reference point. Methane does not last as long in the atmosphere as CO_2 however it absorbs much more energy. Therefore, one ton of methane has 34 times more heat capturing potential than one ton of carbon dioxide. The amount of methane emissions would be multiplied by 34 to determine its CO_2e value. Nitrous oxides last in the atmosphere far longer than CO_2. The amount of nitrous oxides emissions would be multiplied by 298 to determine its CO_2e value.

---

52 Per EPA, fluorinated gases are generally emitted as refrigerants and through industrial processes such as aluminum and semiconductor manufacturing. Additional information from the EPA on fluorinated gases can be found at https://www.epa.gov/ghgemissions/overview-greenhouse-gases

53 EPA, 2017, Understanding Global Warming Potentials. https://www.epa.gov/ghgemissions/understanding-global-warming-potentials, Accessed August 2017.

54 There are also 20-year GWP values which prioritizes gases with shorter lifetimes. For example, the GWP 20 value for methane is 86, according to IPCC AR5, as compared to the GWP 100 value of 34. There is no difference between GWP 100 and GWP 20 for CO_2 and only a minor difference for nitrous oxides (GWP 100 is 298 and GWP 20 is 268). It is acknowledged that GHG emissions, especially for methane, would be higher using the GWP 20 instead of the GWP 100. However, methane emissions represent a small fraction of the total GHG emissions at SEA. This analysis used FAA guidance specifically provided in the FAA's Aviation Emissions and Air Quality Handbook to determine potential GHG emissions.

18.3 Scope/Categories of Emissions

GHG emissions inventories are presented in a different manner than air quality criteria pollutant emissions inventories. GHG emissions inventories are categorized into three groups, Scope 1, 2, and 3 emissions, as described below.

- Scope 1 – GHG emissions from sources owned or controlled by the Port at the Airport, including Port-owned vehicles, equipment, and stationary sources such as natural gas boilers and diesel generators. These GHGs are primarily limited to the project site.
- Scope 2 – GHG emissions from off-Airport generation of electricity purchased by the Port and consumed at the Airport. It is recognized that the estimation of GHG emissions from electricity generation is a widely accepted methodology according to international and FAA guidelines on preparing GHG emissions inventories.
- Scope 3 –GHG emissions caused by airport operations that are not under the direct control of the Port, including sources like aircraft and passenger-related motor vehicle emissions.

Furthermore, GHG emissions are categorized by the degrees of control that an airport operator may have over them. These categories are defined as follows:

- Category 1 – GHG emissions from sources that are controlled by the reporting entity, such as Port-owned GSE or vehicles and electrical consumption by the Port. In the case of an airport operator these include Scope 1 emissions but can also include some Scope 2 and Scope 3 sources over which the entity can exert some control. Examples of the latter can include personal vehicle use for business purposes that is reimbursed by the airport operator.
- Category 2 – This category comprises Scope 3 emissions associated with sources owned and controlled by airlines and airport tenants. Examples include aircraft, APUs, tenant-owned GSE, electrical consumption, and other stationary sources controlled by tenants.
- Category 3 – This category generally comprises Scope 3 emissions associated with public sources associated with the airport. Examples include private automobiles, taxis used for drop-off, limousines, buses, and shuttle vans traveling to and from the airport.

18.4 Scope 1

Port-owned vehicles used primarily on the airfield, including GSE, are considered Scope 1, Category 1.[55,56] Stationary sources used by the Port are located on Airport property and are also included in Scope 1, Category 1.

18.4.1 Port-Owned Airfield Vehicles and Equipment

The same Port-owned airfield vehicles and equipment data and assumptions developed for the air quality criteria pollutant emissions inventory was used to prepare the GHG emissions inventory. The annual GHG emissions were estimated using the following formula from the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*.

[55] The use of Port-owned vehicles that primarily operate on roadways, such as cars and trucks, are considered Scope 3

[56] It is acknowledged that this results in fewer Scope 1 emissions and more Scope 3 emissions; however, all of the potential Port-owned vehicle GHG emissions are included in the analysis. GHG emissions from motor vehicles operating on roadways were based on vehicle miles traveled. For reference, the Port's 2022 GHG emissions inventory for mobile sources, which is based on specific gasoline or diesel usage, accounted for approximately 1,300 tons of CO_2.

- *Equipment Emission Rate (tons/year) = Full Throttle Emission Factor (grams/hp-hour) x size (hp) x hours per year x Load Factor x Usage Factor x (1 pound/453.59 grams) x (1 ton/2,000 pounds)*

The full throttle emission factors for diesel, gasoline, and propane equipment used to estimate GHG emissions from Port-owned airfield vehicles and equipment were developed from MOVES4 and are provided in Table 3-11 in Attachment 3.[57]

The Port-owned airfield vehicles and equipment for the Existing (2022) Condition and each of the alternatives are provided in **Table 16.** Attachment 3 provides the annual usage in hours by each Port-owned GSE for the Existing (2022) Condition and each of the alternatives. As stated in Section 12.2, the annual usage was increased proportional to the forecasted increase in aircraft operations. Energy usage from Port-owned electric vehicles are discussed in Section 18.5.1.

TABLE 16: PORT-OWNED GSE – SUMMARY COMPARISON OF ANNUAL USAGE

Scenario	Fuel Type	Annual Usage (gallons)
Existing Condition	Diesel	29,608
Existing Condition	Gasoline	57,224
Existing Condition	Propane	24
Future (2032) No Action	Diesel	34,443
Future (2032) No Action	Gasoline	66,570
Future (2032) No Action	Propane	27
Future (2032) Proposed Action	Diesel	35,089
Future (2032) Proposed Action	Gasoline	67,818
Future (2032) Proposed Action	Propane	28
Future (2037) No Action	Diesel	35,031
Future (2037) No Action	Gasoline	67,707
Future (2037) No Action	Propane	28
Future (2037) Proposed Action	Diesel	37,615
Future (2037) Proposed Action	Gasoline	72,700
Future (2037) Proposed Action	Propane	30

Source: Port of Seattle and L&B, 2023.

18.4.2 Stationary Sources

GHGs for stationary sources are determined by multiplying the emission factor by the annual usage. In order to determine GHG emissions, the emission factors shown in **Table 17** were used.

TABLE 17: GHG EMISSION FACTORS FOR STATIONARY SOURCES

Fuel	CO_2	N_2O	CH_4
Natural Gas	0.05444 kg/ standard cubic foot (scf)	0.00010 g/scf	0.00103 g/scf
Diesel	10.21 kg/gallon	0.08 g/gallon	0.41 g/gallon

Note: tonnes denotes metric tons, kg denotes kilogram, g denotes gram, mmBtu denotes million British thermal units; GHG emission factors presented in the table were converted to tonnes/therm: 0.005306 tonnes CO_2/therm, 0.0000001 tonnes CH_4 /therm, and 0.00000001 tonnes N_2O/therm
Source: US EPA, Emission Factors for Greenhouse Gas Inventories, Center for Corporate Climate Leadership, April 2022, https://www.epa.gov/system/files/documents/2022-04/ghg_emission_factors_hub.pdf

[57] The Airport Support Equipment available in MOVES4 was be used for Ground Support Equipment

Natural Gas Boilers

Table 18 provides the total natural gas usage by scenario for the boilers and heaters. Specific boilers and heaters with their annual consumption are provided in Attachment 4.

TABLE 18: NATURAL GAS BOILERS AND HEATERS – SUMMARY COMPARISON OF ANNUAL USAGE

Scenario	Annual Consumption (Therms)
Existing (2022) Condition	3,170,725
2032 & 2037 No Action Alternative	3,322,066
2032 & 2037 Proposed Action	4,686,321

Source: Port of Seattle and L&B, 2024.

The No Action Alternative is anticipated to consume more natural gas than the Existing (2022) Condition because the No Action Alternative includes projects that have recently been constructed or will be constructed by 2032, including: Terminal Renovation, A Concourse Building Expansion, and C Concourse Expansion that were not included in the Existing (2022) Condition. These facilities are also included in the Proposed Action. The Proposed Action is anticipated to consume more natural gas than the No Action Alternative because the Proposed Action includes potential new facilities that would use new natural gas boilers and heaters.

Diesel Generators

In order to determine GHG emissions from generators, hours of use were converted to an annual amount of consumption in gallons. The fuel rate in gallons per hour was provided by the Port for each of the generators depending on the horsepower and the type of generator. The fuel rate was used to develop the total annual amount of diesel fuel consumed. **Table 19** provides the total diesel generators usage by scenario. Table 4-8 in Attachment 4 provides the fuel rate per generator.

The No Action Alternative is anticipated to consume more gallons of diesel than the Existing (2022) Condition because the No Action includes projects that have recently been constructed or will be constructed by 2032 that will include new diesel-powered backup generators. The Proposed Action is anticipated to consume more diesel from generators than the No Action Alternative because the Proposed Action includes potential new facilities that would require additional generators.

TABLE 19: DIESEL GENERATORS – SUMMARY COMPARISON OF ANNUAL USAGE

Scenario	Annual Usage (Hours)
Existing (2022) Condition	509.2
2032 & 2037 No Action Alternative	554.2
2032 & 2037 Proposed Action	772.4

Source: Port of Seattle and L&B, 2024.

Fuel Tanks

No GHG emissions were estimated for Jet A fuel throughput due to storage in the fuel tanks. While the storage of fuel is a potential source of evaporative hydrocarbon emissions, it does not produce the type of hydrocarbon emissions from the combustion of fuel that contribute directly to global climate change.

18.5 Scope 2

Scope 2 includes GHG emissions associated with the off-Airport generation of electricity purchased and consumed at the Airport by the Port.

18.5.1 Port of Seattle Electricity Consumption

Scope 2 GHG emissions are created as a result of electricity use in Airport buildings (e.g., Airport terminals, distribution center, bus maintenance facility, and other miscellaneous sources) and the airfield lighting which are generated from off-site power plant locations. Port electricity consumption is considered Category 2. This does not include GHG emissions associated with the generation of electricity that was provided by the Port directly to tenants. GHG emissions associated with tenant electricity consumption are considered Scope 3 and are disclosed in Section 18.6.5. GHG emissions are calculated by multiplying the emission factors and the total electrical consumption on an annual basis.

Electricity is provided to the Port by Bonneville Power Administration (BPA), Puget Sound Energy (PSE), and Seattle City Light (SCL). Emission factors per kilowatt-hour of electricity consumption are provided in **Table 20**.

TABLE 20: GHG EMISSION FACTORS FOR OFF-SITE (PURCHASED) ELECTRICITY GENERATION

Fuel	CO_2 (tonnes/kWh)
BPA Electricity Purchased	0.00001250
PSE Electricity Purchased	0.00041594
SCL Electricity Purchased	0.00000891

Note: Tonnes refers to metric tons. KWh denotes kilowatt-hour.
Source: Port of Seattle, 2023.

Table 21 provides the total electricity usage by the Port for the Existing (2022) Condition and each future scenario. The No Action Alternative includes projects that have recently been constructed or will be constructed by 2032. It is assumed that there would be no other projects that would change electricity usage between the Future (2032) No Action Alternative and the Future (2037) No Action Alternative; therefore, those projections are the same. The Future (2032) Proposed Action and the Future (2037) Proposed Action GHG emissions inventory for Port electricity consumption was based on anticipated energy use per square foot. Average electricity use per square foot for baseline conditions by each provider were used to determine the potential increase in electricity consumption that would correlate with the potential increase in square footage with the proposed new facilities. It is assumed for purposes of modeling GHG emissions that all elements of the Proposed Action would be completed by 2032.[58] There would be no known additional square footage that would change electricity usage between the Future (2032) Proposed Action and the Future (2037) Proposed Action, therefore those projections are the same.

[58] The Proposed Action could begin construction as soon as 2025 and if started then, be complete by 2032.

TABLE 21: PORT OF SEATTLE ELECTRICITY CONSUMPTION – SUMMARY COMPARISON OF ANNUAL CONSUMPTION

Scenario	Total BPA Electricity Consumption (MWH):	Total SCL Electricity Consumption (MWH):	Total PSE Electricity Consumption (MWH):	Total Electricity Consumption (MWH):
Existing (2022) Condition	117,000	2,100	2,207	121,307
2032 & 2037 No Action Alternative	122,121	2,100	2,207	126,428
2032 & 2037 Proposed Action	166,273	2,900	3,083	172,256

Note: MWh denotes megawatt-hour
Source: Port of Seattle, 2024.

18.6 Scope 3

Scope 3 includes indirect GHG emissions caused by airport operations that are not under the direct control of the Port, including sources like aircraft and motor vehicle emissions.

18.6.1 Aircraft Landing and Take-off (Includes Start-Up, Approach, Climb, and Taxiing), APUs, and Aircraft Run-Up Activity

Aircraft landing and take-off, including start-up, approach, climb, and taxiing, APUs, and aircraft run-up activity are considered Scope 3, Category 2. For all scenarios, the GHG emissions inventory was prepared by estimating the emission related to the consumption of the total fuel that was dispensed, or supplied, to aircraft at the Airport. The emission factors for Jet A LTO shown in **Table 22** will be used to determine GHG emissions from the fuel dispensed at the Airport.

TABLE 22: GHG EMISSION FACTORS FOR AIRCRAFT ENGINE FUEL

Fuel	CO_2	N_2O	CH_4
Jet A	9.75 kg/gallon	0.30 g/gallon	0.0 g/gallon

Note: CO_2 = carbon dioxide, N_2O = nitrous oxides, CH_4 = methane, kg = kilogram, g = gram.
Source: US EPA, Emission Factors for Greenhouse Gas Inventories, Center for Corporate Climate Leadership, April 2022, https://www.epa.gov/system/files/documents/2022-04/ghg_emission_factors_hub.pdf

Because aircraft operations, the use of APUs, and aircraft run-ups are expected to increase each year, the amount of fuel dispensed for the Future (2032) No Action and the Future (2037) No Action, and the Future (2032) Proposed Action and the Future (2037) Proposed Action, will be higher as compared to the Existing (2022) Condition.

18.6.2 Tenant-Owned GSE

Tenant-owned GSE are considered Scope 3, Category 2. For tenant-owned GSEs, the same data and assumptions for GSE equipment, number of operations, and operating time as developed for the criteria emissions inventory were used. Horsepower, operating time per unit and number of operations, and load factor were obtained from AEDT.

Emission factors developed in MOVES4 by fuel type and horsepower group are provided in Table 3-11 in Attachment 3. Emissions for GSEs assigned to aircraft operations were determined using the following formula.

- *Equipment Emission Rate (tons/year) = Size (hp) x Load Factor x Hours per Year x Emission Factor (g/hp-hr) x (1 pound/453.59 grams) x (1 ton/2,000 pounds)*

The tenant-owned airfield vehicles and equipment for the Existing (2022) Condition and each of the alternatives are provided in **Table 23.** Attachment 3 provides the annual usage in hours by each tenant-owned GSE for the Existing (2022) Condition and each of the alternatives.

TABLE 23: TENANT-OWNED GSE – SUMMARY COMPARISON OF ANNUAL USAGE

Scenario	Annual Usage (hours)
Existing Condition	755,174
Future (2032) No Action	893,153
Future (2032) Proposed Action	909,451
Future (2037) No Action	910,188
Future (2037) Proposed Action	975,374

Source: Port of Seattle and L&B, 2024.

18.6.3 Tenant Electricity Consumption

Tenant electricity consumption is considered Scope 3, Category 2. The GHG emissions inventory includes emissions associated with the generation of electricity provided by the Port directly to tenants, which are considered Scope 3. Electricity is used by tenant facilities including electricity for charging electrified GSE. Electricity provided by the Port and consumed by tenants is only provided by BPA. **Table 24** provides the tenant electricity usage for the Existing (2022) Condition and the future conditions.

TABLE 24: TENANT ELECTRICITY CONSUMPTION–SUMMARY COMPARISON OF ANNUAL USAGE

Scenario	Tenant BPA Electricity Consumption (MWH):
Existing (2022) Condition	26,637
No Action Alternative (2032 and 2037)	26,637
Proposed Action (2032 and 2037)	36,967

Note: MWh denotes megawatt-hour
Source: Port of Seattle, 2023.

The Proposed Action tenant electricity consumption was based on anticipated energy use per square foot. Average electricity use for baseline conditions was used to determine the potential increase in electricity consumption with the potential increase in square footage with the proposed new facilities. The Future (2032) Proposed Action and the Future (2037) Proposed Action are estimated to consume higher electricity due to the increased electricity usage to support the additional square footage in the Proposed Action scenarios.

Emission factors per kilowatt-hour of electricity were previously provided in Table 22. Emissions are calculated by multiplying the emission factors by the total annual electrical consumption by tenants and then converted using the GWP 100 values.

18.6.4 Motor Vehicles on- and off-Airport Roadways and Parking Lots (Including Airside Deliveries)

GHG emissions from motor vehicles operating on- and off-airport roadways and within select parking lots are considered Scope 3, Category 3. The GHG emissions inventory was prepared based on the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*. The GHG emissions inventory for motor vehicles was prepared using the same data and assumptions including number and type of vehicles by roadway segment, VMTs by vehicle type, and average speed as developed for the criteria emissions inventory. The EPA's MOVES4 was used to develop emission factors for use with the VMTs to determine the GHG emissions inventory provided in Attachment 5.

19. GHG Construction Emissions Inventories

The GHG construction emissions inventories were prepared using the same data and assumptions as developed for the criteria pollutant construction emissions inventories. The detailed construction phasing schedule, the assumptions of on-road and non-road construction vehicles, and the emission factors for the Proposed Action and the Hybrid Terminal Option are provided in Attachment 6.

19.1 Proposed Action - GHG Construction Emissions Inventory

The construction emissions inventory for the Proposed Action is shown in **Table 25**. As the table shows, peak construction GHG emissions are expected to occur in 2028 and produce 44,111 metric tons of CO_2e.

TABLE 25: CONSTRUCTION GHG EMISSIONS INVENTORY - PROPOSED ACTION

Year	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
2025	6,055	2	16	6,073
2026	25,761	14	79	25,854
2027	40,154	22	114	40,290
2028	43,967	23	121	44,111
2029	41,593	25	105	41,722
2030	29,633	19	73	29,725
2031	22,899	15	58	22,972
2032	8,458	5	20	8,482

Note: Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle and L&B, 2024.

19.2 Hybrid Terminal Option - GHG Construction Emissions Inventory

The construction emissions inventory for the Hybrid Terminal Option is shown in **Table 26**. Peak construction GHG emissions are expected to occur in 2029 and produce 48,347 metric tons of CO_2e. In 2025 and 2026, there is no difference in GHG construction emissions between the Hybrid Terminal Option and the Proposed Action. From 2027 through 2032, the Hybrid Terminal Option results in greater GHG emissions than the Proposed Action due to the change in construction phasing and the additional elements that must be constructed such as the connection to Concourse D.

TABLE 26: CONSTRUCTION GHG EMISSIONS INVENTORY - HYBRID TERMINAL OPTION

Year	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
2025	6,055	2	16	6,073
2026	25,761	14	79	25,854
2027	41,730	22	111	41,862
2028	48,048	24	118	48,191
2029	48,211	26	109	48,347
2030	39,235	21	81	39,337
2031	32,633	17	65	32,715
2032	12,362	5	22	12,390

Note: Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle and L&B, 2024.

20. GHG Operational Emissions Inventories

20.1 Existing (2022) Condition

The estimated annual rate (metric tons per year) of GHG emissions is provided in **Table 27**.

TABLE 27: ANNUAL OPERATIONAL GHG EMISSIONS INVENTORY – EXISTING (2022) CONDITION

Emissions Source	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
Scope 1				
Port-Owned Airfield Vehicles/Equipment	3,717	5	0	3,722
Natural Gas Boilers and Heaters	16,824	11	9	16,844
Diesel Generators	279	0	1	281
Fuel Farm Tanks[1]	0	0	0	0
Total - Scope 1	20,820	16	10	20,846
Scope 2				
Port of Seattle Electricity Consumption	2,399	0	0	2,399
Total – Scope 2	2,399	0	0	2,399
Scope 3				
Aircraft LTOs (includes Start-Up, Approach, Climb, and Taxiing), APUs, and Aircraft Run-Ups[2]	5,700,743	6,275	0	5,707,018
Tenant-Owned GSE	27,891	4	0	27,895
Tenant Electricity Consumption	330	0	0	330
Airside Deliveries	512	1	10	523
Roadways	391,333	406	3,668	395,406
Parking Facilities	6,547	10	66	6,623
Total - Scope 3	6,127,355	6,695	3,744	6,137,795
Total	**6,150,575**	**6,712**	**3,754**	**6,161,040**
			CO_2e Total	**6,161,040**

1 CO_2, CH_4, and N_2O, are by-products of fuel combustion. Per the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*, the storage of fuel is a potential source of evaporative hydrocarbons but does not produce the type of hydrocarbons that contribute directly to global climate change.

2 Based on FAA guidance, the estimated GHG emissions for aircraft operations, APUs, and aircraft engine ground run-ups were developed using the approximate fuel dispensed at the Airport to calculate emissions for the full flight.

Note: Totals may not sum due to rounding. Zeros may not indicate an absolute zero value. Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle, L&B, 2024.

20.2 Future (2032) No Action Alternative

The estimated annual rate (metric tons per year) of operational GHG emissions for the Future (2032) No Action Alternative is provided in **Table 28**.

TABLE 28: ANNUAL OPERATIONAL GHG EMISSIONS INVENTORY – FUTURE (2032) NO ACTION ALTERNATIVE

Emissions Source	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
Scope 1				
Port-Owned Airfield Vehicles/Equipment	4,324	5	0	4,330
Natural Gas Boilers and Heaters	17,627	11	10	17,648
Diesel Generators	327	0	1	328
Fuel Farm Tanks[1]	0	0	0	0
Total - Scope 1	*22,278*	*17*	*11*	*22,306*
Scope 2				
Port of Seattle Electricity Consumption	2,463	0	0	2,463
Total – Scope 2	*2,463*	*0*	*0*	*2,463*
Scope 3				
Aircraft LTOs (includes Start-Up, Approach, Climb, and Taxiing), APUs, and Aircraft Run-Ups[2]	6,631,793	0	63,977	6,695,771
Tenant-Owned GSE	32,691	47	0	32,737
Tenant Electricity Consumption	330	0	0	330
Airside Deliveries	496	0	12	509
Roadways	408,362	222	4,339	412,923
Parking Facilities	6,786	6	66	6,858
Total - Scope 3	*7,080,457*	*276*	*68,394*	*7,149,127*
Total	***7,105,199***	***293***	***68,405***	***7,173,897***
			CO_2e Total	**7,173,897**

[1] CO_2, CH_4, and N_2O, are by-products of fuel combustion. Per the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*, the storage of fuel is a potential source of evaporative hydrocarbons but does not produce the type of hydrocarbons that contribute directly to global climate change.

[2] Based on FAA guidance, the estimated GHG emissions for aircraft operations, APUs, and aircraft engine ground run-ups were developed using the approximate fuel dispensed at the Airport to calculate emissions for the full flight.

Note: Totals may not sum due to rounding. Zeros may not indicate an absolute zero value. Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle, L&B, 2024.

20.3 Future (2032) Proposed Action

The estimated annual rate (metric tons per year) of GHG emissions for the Future (2032) Proposed Action is provided in **Table 29**. A summary comparison of the Future (2032) No Action Alternative and the Future (2032) Proposed Action GHG emissions is provided in Section 20.5.1 of this technical report.

TABLE 29: ANNUAL OPERATIONAL GHG EMISSIONS INVENTORY – FUTURE (2032) PROPOSED ACTION

Emissions Source	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
Scope 1				
Port-Owned Airfield Vehicles/Equipment	4,405	6	0	4,411
Natural Gas Boilers and Heaters	24,866	16	14	24,896
Diesel Generators	550	1	1	552
Fuel Farm Tanks[1]	0	0	0	0
Total - Scope 1	29,821	22	*15*	*29,859*
Scope 2				
Port of Seattle Electricity Consumption	3,386	48	0	3,434
Total – Scope 2	*3,386*	*48*	*0*	*3,434*
Scope 3				
Aircraft LTOs (includes Start-Up, Approach, Climb, and Taxiing), APUs, and Aircraft Run-Ups[2]	6,756,148	0	65,177	6,821,325
Tenant-Owned GSE	33,291	48	0	33,338
Tenant Electricity Consumption	462	6		468
Airside Deliveries	505	0	12	518
Roadways	416,812	227	4,422	421,461
Parking Facilities	7,634	7	74	7,714
Total - Scope 3	*7,214,852*	*287*	*69,685*	*7,284,825*
Total	***7,248,060***	***357***	***69,700***	***7,318,118***
			CO_2eTotal	**7,318,118**

1 CO_2, CH_4, and N_2O, are by-products of fuel combustion. Per the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*, the storage of fuel is a potential source of evaporative hydrocarbons but does not produce the type of hydrocarbons that contribute directly to global climate change.

2 Based on FAA guidance, the estimated GHG emissions for aircraft operations, APUs, and aircraft engine ground run-ups were developed using the approximate fuel dispensed at the Airport to calculate emissions for the full flight.

Note: Totals may not sum due to rounding. Zeros may not indicate an absolute zero value. Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle, L&B, 2024.

20.4 Future (2032) Hybrid Terminal Option

The Future (2032) Hybrid Terminal Option would have the same operational GHG emissions as the Future (2032) Proposed Action because the only differences in the two alternatives would be related to the location of passenger loading bridges and aircraft hardstands. The number of future aircraft operations would be the same.

20.5 Comparison of 2032 Alternatives

The results of the GHG emission inventories prepared for the Future (2032) Proposed Action and the Future (2032) Hybrid Terminal Option were compared to the results of the emission inventories prepared for the Future (2032) No Action Alternative to disclose the potential increase in GHG emissions.

20.5.1 Future (2032) Proposed Action

The results of the comparison between the Future (2032) Proposed Action and the Future (2032) No Action Alternative are shown in **Table 30**. Relative to the No Action, the Proposed Action would increase operational GHG emissions by 2.1 percent in 2032. As noted earlier in this technical report, the Future (2032) Proposed Action is expected to serve more aircraft operations relative to the Future (2032) No Action. The Future (2032) Proposed Action would serve 8,755 more operations (1.9 percent) than the Future (2032) No Action Alternative. Thus, the increase in GHG emissions with the Future (2032) Proposed Action relative to the Future (2032) No Action is largely due to the higher level of airport activity that the Future (2032) Proposed Action would serve.

TABLE 30: SUMMARY OF GHG EMISSIONS, PROPOSED ACTION COMPARED TO THE NO ACTION ALTERNATIVE IN 2032

Emissions Source	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
2032 No Action Alternative	7,105,199	293	68,405	7,173,897
2032 Proposed Action	7,256,518	362	69,720	7,326,600
Construction	*8,458*	*5*	*20*	*8,482*
Operational	*7,248,060*	*357*	*69,700*	*7,318,118*
2032 Increase in Emissions	*151,319*	*69*	*1,316*	*152,703*

Note: Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle and L&B, 2024.

20.5.2 Future (2032) Hybrid Terminal Option

The results of the comparison between the Future (2032) Hybrid Terminal Option and the Future (2032) No Action Alternative are shown in **Table 31**. The Future (2032) Hybrid Terminal Option would have the same operational GHG emissions as the Future (2032) Proposed Action in the same years because the only differences in the two alternatives would be related to the location of passenger loading bridges and aircraft hardstands. The number of future aircraft operations would be the same. Minor differences in construction activities for Future (2032) Hybrid Terminal Option would result in the Future (2032) Hybrid Terminal Option having slightly greater overall GHG emissions as compared to those for the Future (2032) Proposed Action.

TABLE 31: SUMMARY OF GHG EMISSIONS, HYBRID TERMINAL OPTION COMPARED TO THE NO ACTION ALTERNATIVE IN 2032

Emissions Source	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
2032 No Action Alternative	7,105,199	293	68,405	7,173,897
2032 Hybrid Terminal Option	7,260,422	363	69,723	7,330,507
Construction	*12,362*	*5*	*22*	*12,390*
Operational	*7,248,060*	*357*	*69,700*	*7,318,118*
2032 Increase in Emissions	*155,223*	*70*	*1,318*	*156,611*

Note: Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle and L&B, 2024.

20.6 Future (2037) No Action Alternative

The estimated annual rate (metric tons per year) of GHG emissions for the Future (2037) No Action Alternative is provided in **Table 32**.

TABLE 32: ANNUAL OPERATIONAL GHG EMISSIONS INVENTORY – FUTURE (2037) NO ACTION ALTERNATIVE

Emissions Source	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
Scope 1				
Port-Owned Airfield Vehicles/Equipment	4,398	6	0	4,404
Natural Gas Boilers and Heaters	17,627	11	10	17,648
Diesel Generators	327	0	1	328
Fuel Farm Tanks[1]	0	0	0	0
Total - Scope 1	*22,352*	*17*	*11*	*22,380*
Scope 2				
Port of Seattle Electricity Consumption	2,463	0	0	2,463
Total – Scope 2	*2,463*	*0*	*0*	*2,463*
Scope 3				
Aircraft LTOs (includes Start-Up, Approach, Climb, and Taxiing), APUs, and Aircraft Run-Ups[2]	6,745,055	0	65,070	6,810,125
Tenant-Owned GSE	33,300	48	0	33,347
Tenant Electricity Consumption	330	0	0	330
Airside Deliveries	480	0	12	492
Roadways	412,215	211	4,394	416,820
Parking Facilities	6,669	6	67	6,742
Total - Scope 3	*7,198,049*	*265*	*69,543*	*7,267,857*
Total	***7,222,864***	***283***	***69,554***	***7,292,700***
			CO_2eTotal	**7,292,700**

[1] CO_2, CH_4, and N_2O, are by-products of fuel combustion. Per the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*, the storage of fuel is a potential source of evaporative hydrocarbons but does not produce the type of hydrocarbons that contribute directly to global climate change.

[2] Based on FAA guidance, the estimated GHG emissions for aircraft operations, APUs, and aircraft engine ground run-ups were developed using the approximate fuel dispensed at the Airport to calculate emissions for the full flight.

Note: Totals may not sum due to rounding. Zeros may not indicate an absolute zero value. Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle, L&B, 2024.

20.7 Future (2037) Proposed Action Alternative

The estimated annual rate (metric tons per year) of GHG emissions for the Future (2037) Proposed Action is provided in **Table 33**. A summary comparison of the Future (2037) No Action Alternative and the Future (2037) Proposed Action GHG emissions is provided in Section 20.9.1 of this technical report.

TABLE 33: ANNUAL OPERATIONAL GHG EMISSIONS INVENTORY – FUTURE (2037) PROPOSED ACTION

Emissions Source	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
Scope 1				
Port-Owned Airfield Vehicles/Equipment	4,722	6	0	4,728
Natural Gas Boilers and Heaters	24,866	16	14	24,896
Diesel Generators	550	1	1	552
Fuel Farm Tanks[1]	0	0	0	0
Total - Scope 1	*30,138*	*23*	*15*	*30,176*
Scope 2				
Port of Seattle Electricity Consumption	3,386	48	0	3,434
Total – Scope 2	*3,386*	*48*	*0*	*3,434*
Scope 3				
Aircraft LTOs (includes Start-Up, Approach, Climb, and Taxiing), APUs, and Aircraft Run-Ups[2]	7,242,447	0	69,868	7,312,315
Tenant-Owned GSE	35,700	51	0	35,751
Tenant Electricity Consumption	462	6	0	468
Airside Deliveries	515	0	13	529
Roadways	436,738	223	4,644	441,606
Parking Facilities	7,904	7	79	7,990
Total - Scope 3	*7,723,767*	*287*	*74,605*	*7,798,659*
Total	***7,757,291***	***358***	***74,620***	***7,832,269***
			CO_2eTotal	**7,832,269**

[1] CO_2, CH_4, and N_2O, are by-products of fuel combustion. Per the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*, the storage of fuel is a potential source of evaporative hydrocarbons but does not produce the type of hydrocarbons that contribute directly to global climate change.

[2] Based on FAA guidance, the estimated GHG emissions for aircraft operations, APUs, and aircraft engine ground run-ups were developed using the approximate fuel dispensed at the Airport to calculate emissions for the full flight.

Note: Totals may not sum due to rounding. Zeros may not indicate an absolute zero value. Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle, L&B, 2024.

20.8 Future (2037) Hybrid Terminal Option

As previously discussed, the Future (2037) Hybrid Terminal Option would have the same operational GHG emissions as the Future (2037) Proposed Action because the only differences in the two alternatives would be related to the location of passenger loading bridges and aircraft hardstands. The number of future aircraft operations would be the same.

20.9 Comparison of 2037 Alternatives

The results of the GHG emission inventories prepared for the Future (2037) Proposed Action and the Future (2037) Hybrid Terminal Option were compared to the results of the emission inventories prepared for the Future (2037) No Action Alternative to disclose the potential increase in GHG emissions.

20.9.1 Future (2037) Proposed Action

The results of the comparison between the Future (2037) Proposed Action and the Future (2037) No Action Alternative are shown in **Table 34**. Relative to the Future (2037) No Action, the Future (2037) Proposed Action would increase operational GHG emissions by 7.4 percent. As noted earlier in this technical report, the Proposed Action is expected to serve more aircraft operations relative to the No Action. The Future (2037) Proposed Action would serve 35,018 more operations (7.4 percent) than the Future (2037) No Action Alternative. Thus, the increase in GHG emissions with the Future (2037) Proposed Action relative to the Future (2037) No Action Alternative is largely due to the higher level of airport activity that the Proposed Action would serve.

TABLE 34: SUMMARY OF GHG EMISSIONS, PROPOSED ACTION COMPARED TO THE NO ACTION ALTERNATIVE IN 2037

Emissions Source	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
2037 No Action Alternative	7,222,864	283	69,554	7,292,700
2037 Proposed Action	7,757,291	358	74,620	7,832,269
2037 Increase in Emissions	*534,427*	*75*	*5,066*	*539,569*

Note: Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle and L&B, 2024.

20.9.2 Future (2037) Hybrid Terminal Option

The results of the comparison between the Future (2037) Hybrid Terminal Option and the Future (2037) No Action Alternative are shown in **Table 35**. The Future (2037) Hybrid Terminal Option would have the same operational GHG emissions as the Future (2037) Proposed Action because the only differences in the two alternatives would be related to the location of passenger loading bridges and aircraft hardstands. The number of future aircraft operations would be the same.

TABLE 35:SUMMARY OF GHG EMISSIONS, HYBRID TERMINAL OPTION COMPARED TO THE NO ACTION ALTERNATIVE IN 2037

Emissions Source	CO_2 (CO_2e MT)	CH_4 (CO_2e MT)	N_2O (CO_2e MT)	Total CO_2e (MT)
2037 No Action Alternative	7,222,864	283	69,554	7,292,700
2037 Hybrid Terminal Option	7,757,291	358	74,620	7,832,269
2037 Increase in Emissions	*534,427*	*75*	*5,066*	*539,569*

Note: Totals may not sum due to rounding. CO_2 = carbon dioxide, CH_4 = methane, N_2O = nitrous oxide, CO_2e = carbon dioxide equivalent, MT = metric tons.
Source: Port of Seattle and L&B, 2024.

Air Quality and Greenhouse Gas Technical Report Attachment 1 Aircraft

This attachment contains the following tables:

Existing (2022) Condition

- Table 1-1 Annual Operations – Existing (2022) Condition

Future (2032) No Action Alternative

- Table 1-2 Annual Operations – Future (2032) No Action Alternative

Future (2032) Proposed Action

- Table 1-3 Annual Operations – Future (2032) Proposed Action

Future (2037) No Action Alternative

- Table 1-4 Annual Operations – Future (2037) No Action Alternative

Future (2037) Proposed Action

- Table 1-5 Annual Operations – Future (2037) Proposed Action

Comparison of Taxi Times (Minutes Seconds)

- Table 1-6 Comparison of Taxi Times (Minutes Seconds)

TABLE 1-1: ANNUAL OPERATIONS – EXISTING (2022) CONDITION

Airframe	Engine Code	Annual Operations
Commercial Jets		
Airbus A319-100 Series	01P10IA020	10
Airbus A319-100 Series	3CM028	88
Airbus A319-100 Series	3IA006	1,977
Airbus A319-100 Series	3IA007	1,059
Airbus A319-100 Series	4CM035	79
Airbus A319-100 Series	8IA09	36
Airbus A320-200 Series	01P08CM105	13,637
Airbus A320-200 Series	01P10IA021	1,224
Airbus A320-200 Series	01P10IA022	264
Airbus A320-200 Series	1CM008	333
Airbus A320-200 Series	1CM009	1,351
Airbus A320-200 Series	1IA003	2,576
Airbus A320-200 Series	3CM026	1,466
Airbus A320-200 Series	8IA010	2
Airbus A320-NEO	01P20CM128	679
Airbus A320-NEO	01P22PW163	1,078
Airbus A321-200 Series	01P08CM104	994
Airbus A321-200 Series	01P10IA025	6,031
Airbus A321-200 Series	3CM025	1,026
Airbus A321-NEO	01P18PW157	1,613
Airbus A321-NEO	01P20CM132	4,784
Airbus A330-200 Series	2RR023	1,835
Airbus A330-200 Series	9PW094	26
Airbus A330-300 Series	2RR023	486
Airbus A330-300 Series	4GE080	494
Airbus A330-300 Series	7PW082	67
Airbus A330-300 Series	9PW094	1,394
Airbus A330-300 Series	9PW095	327
Airbus A330-900N Series (Neo)	02P23RR141	2,659
Airbus A340-300 Series	2CM015	53
Airbus A350-1000 Series	18RR080	4
Airbus A350-900 series	01P18RR124	764
Boeing 717-200 Series	4BR002	1
Boeing 737-300 Series	1CM004	6
Boeing 737-300 Series	1CM005	8
Boeing 737-700 Series	3CM030	425
Boeing 737-700 Series	3CM031	14,351
Boeing 737-700 Series	3CM032	2,612
Boeing 737-700 Series	8CM051	10
Boeing 737-700 Series	8CM062	104
Boeing 737-700 Series	8CM063	2,434
Boeing 737-8	01P20CM135	41
Boeing 737-8	01P20CM136	1,340
Boeing 737-8	01P20CM140	1,236
Boeing 737-800 Series	01P11CM114	400
Boeing 737-800 Series	01P11CM116	5,440
Boeing 737-800 Series	01P11CM122	2,968
Boeing 737-800 Series	01P11CM125	660
Boeing 737-800 Series	01P11CM126	63

TABLE 1-1: ANNUAL OPERATIONS– EXISTING (2022) CONDITION *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Boeing 737-800 Series	3CM032	16,653
Boeing 737-800 Series	3CM034	1,608
Boeing 737-800 Series	8CM051	22,796
Boeing 737-800 Series	8CM064	166
Boeing 737-800 Series	8CM065	2,129
Boeing 737-800 Series	8CM066	9,997
Boeing 737-800BCF	3CM034	137
Boeing 737-9	01P20CM136	518
Boeing 737-9	01P20CM140	20,410
Boeing 737-900 Series	01P11CM114	806
Boeing 737-900 Series	8CM051	9,115
Boeing 737-900-ER	01P11CM116	19,205
Boeing 737-900-ER	01P11CM121	54,527
Boeing 737-900-ER	01P11CM125	168
Boeing 737-900-ER	3CM034	773
Boeing 737-900-ER	8CM065	862
Boeing 737-900-ER_MA	01P11CM121_MA	1,555
Boeing 757-200 Series	4PW072	5,722
Boeing 757-200 Series	4PW073	198
Boeing 757-200 Series	5RR038	567
Boeing 757-200 Series	5RR039	37
Boeing 757-300 Series	3RR028	2
Boeing 757-300 Series	5RR039	10
Boeing 757-300 Series	XPW204	1,741
Boeing 767-300 ER	12PW102	12
Boeing 767-300 ER	1GE029	76
Boeing 767-300 ER	1GE030	753
Boeing 767-300 ER	1PW043	543
Boeing 767-300 ER	1RR011	1
Boeing 767-300 ER	2GE055	304
Boeing 767-400 ER	8GE101	263
Boeing 777-200-ER	10PW099	82
Boeing 777-200-ER	2RR027	288
Boeing 777-200-ER	3GE060	127
Boeing 777-200-ER	3GE064	2
Boeing 777-200-ER	8GE100	132
Boeing 777-200-LR	01P21GE216	50
Boeing 777-200-LR	01P21GE217	189
Boeing 777-300 ER	01P21GE217	1,390
Boeing 787-10 Dreamliner	01P17GE211	132
Boeing 787-10 Dreamliner	01P17GE213	286
Boeing 787-10 Dreamliner	02P23RR134	144
Boeing 787-8 Dreamliner	01P17GE206	120
Boeing 787-8 Dreamliner	01P17GE210	4
Boeing 787-8 Dreamliner	11GE137	190
Boeing 787-8 Dreamliner	11GE138	466
Boeing 787-9 Dreamliner	01P17GE211	890
Boeing 787-9 Dreamliner	01P17GE214	6
Boeing 787-9 Dreamliner	02P23RR131	201
Boeing 787-9 Dreamliner	12RR067	919
Boeing 787-9 Dreamliner	12RR068	388

TABLE 1-1: ANNUAL OPERATIONS– EXISTING (2022) CONDITION *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Bombardier CRJ-900-ER	01P08GE190	22
Bombardier CS100	04P20PW196	9,771
Bombardier CS300	04P20PW196	98
Bombardier CS300	04P20PW197	2,180
Bombardier Global Express	01P04BR013	4
Embraer ERJ175-LR	01P08GE197	67,694
Embraer ERJ175-LR_MA	01P08GE197_MA	839
	Sub-Total	***338,783***
Cargo Jets		
Airbus A300F4-600 Series	1GE020	3
Airbus A300F4-600 Series	1PW048	86
Airbus A300F4-600 Series	3GE056	155
Boeing 747-400 ERF	12PW102	89
Boeing 747-400 Series	1GE024	790
Boeing 747-400 Series Freighter	01P03GE187	77
Boeing 747-400 Series Freighter	1GE024	6
Boeing 747-400 Series Freighter	1PW041	7
Boeing 747-400 Series Freighter	4RR037	75
Boeing 747-400BCF	1GE024	249
Boeing 747-400BCF	1PW041	10
Boeing 747-8F	01P17GE215	281
Boeing 747-8F	13GE156	75
Boeing 747-8F	8GENX1	242
Boeing 757-200 Series Freighter	3RR028	102
Boeing 757-200 Series Freighter	4PW072	48
Boeing 757-200 Series Freighter	4PW073	49
Boeing 757-200 Series Freighter	5RR039	2
Boeing 767-200 Series Freighter	1GE010	259
Boeing 767-200 Series Freighter	1GE012	129
Boeing 767-200 Series Freighter	1PW026	23
Boeing 767-300 ER Freighter	1GE030	5,679
Boeing 767-300 ER Freighter	2GE055	559
Boeing 767-300BCF	2GE055	58
Boeing 777 Freighter	01P21GE216	1,016
Boeing 777 Freighter	01P21GE217	24
Boeing 777-200-LR_C	01P21GE216_C	40
Boeing MD-10-30	3GE074	65
Boeing MD-11 Freighter	12PW102	297
Boeing MD-11 Freighter	1GE031	1,490
Boeing MD-11 Freighter	1PW052	484
	Sub-Total	***12,470***
Regional Jets		
Bombardier CRJ-200-LR	01P05GE189	6
Bombardier CRJ-700	01P08GE192	6
Bombardier CRJ-700-ER	01P08GE190	12
Bombardier CRJ-700-ER	01P08GE192	95
Bombardier CRJ-700-ER	5GE083	47
	Sub-Total	***167***
Turboprops		
Bombardier de Havilland Dash 8 Q400	PW150A	44,588
Raytheon Beech 99	PT6A27	11

TABLE 1-1: ANNUAL OPERATIONS – EXISTING (2022) CONDITION *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Raytheon Beech 99	PT6A36	596
Raytheon C-12 Huron	PT660A	18
Raytheon Super King Air 200	PT6A42	2
	Sub-Total	***45,215***
Cargo Props		
Cessna 208 Caravan	P6114A	1,162
Cessna 208 Caravan	PT6A14	1,146
Raytheon Super King Air 300	PT660A	72
	Sub-Total	***2,381***
General Aviation Jets		
Bombardier Challenger 300	01P14HN011	37
Bombardier Challenger 300	11HN003	38
Bombardier Challenger 350	01P14HN011	142
Bombardier Challenger 600	01P05GE189	38
Bombardier Challenger 600	1GE034	26
Bombardier Global 5000	01P04BR013	28
Bombardier Global 5500	01P20BR015	2
Bombardier Learjet 35A/36A (C-21A)	1AS001	3
Bombardier Learjet 40	TFE731	5
Bombardier Learjet 45	1AS001	14
Bombardier Learjet 45	TFE731	37
Bombardier Learjet 60	7PW077	23
Bombardier Learjet 70	1AS002	2
Cessna 560 Citation Encore	PW530	11
Cessna 560 Citation Excel	PW530	37
Cessna 560 Citation Ultra	1PW038	9
Cessna 560 Citation XLS	PW530	60
Cessna 680 Citation Sovereign	03P14PW194	16
Cessna 680 Citation Sovereign	7PW078	32
Cessna 680-A Citation Latitude	7PW078	84
Cessna 700 Citation Longitude	01P18HN013	15
Cessna 750 Citation X	6AL024	83
Cessna CitationJet CJ2 (Cessna 525A)	1PW036	31
Cessna CitationJet CJ3 (Cessna 525B)	1PW038	67
Dassault Falcon 2000	CF700D	58
Dassault Falcon 50	1AS002	196
Embraer Legacy 450 (EMB-545)	01P14HN014	50
Embraer Phenom 300 (EMB-505)	PW530	82
Gulfstream G200	7PW077	25
Gulfstream G450	11RR048	29
Gulfstream G650	01P11BR016	24
Gulfstream G650ER	01P11BR016	15
Gulfstream IV-SP	11RR048	8
Gulfstream V-SP	01P06BR014	29
Honda HA-420 Hondajet	PW610F	19
Raytheon Beechjet 400	1PW037	24
Raytheon Hawker 800	1AS002	36
	Sub-Total	***1,431***
General Aviation Props		
Beechcraft Bonanza 35 (FAS)	TIO540	22
Cessna 150 Series	O200	18

TABLE 1-1: ANNUAL OPERATIONS – EXISTING (2022) CONDITION *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Cessna 152 (FAS)	O200	71
Cessna 172 Skyhawk	IO320	463
Cessna 182	IO360	97
Cessna 206	TIO540	15
Cirrus SR22 Turbo (FAS)	TIO540	69
Mooney M20-K	TSIO36	17
Pilatus PC-12	PT6A67	55
Piper PA-28 Cherokee Series	IO320	60
Raytheon Beech Bonanza 36	TIO540	19
	Sub-Total	***905***
	Grand Total:	**401,351**

*Missed approach operational totals are included in this table only.
Source: SEA EnvironmentalVue Monitoring System data, January 2022-December 2022; Landrum & Brown, 2024

TABLE 1-2: ANNUAL OPERATIONS – FUTURE (2032) NO ACTION ALTERNATIVE

Airframe	Engine Code	Annual Operations
Commercial Jets		
Airbus A220-100	16PW111	19,114
Airbus A220-300	16PW111	5,508
Airbus A220-300	16PW112	2,713
Airbus A319-100 Series	01P10IA020	4
Airbus A319-100 Series	3CM028	34
Airbus A319-100 Series	3IA006	760
Airbus A319-100 Series	3IA007	407
Airbus A319-100 Series	4CM035	30
Airbus A319-100 Series	8IA09	14
Airbus A320-200 Series	01P08CM105	5,826
Airbus A320-200 Series	01P10IA021	523
Airbus A320-200 Series	01P10IA022	113
Airbus A320-200 Series	1CM008	142
Airbus A320-200 Series	1CM009	577
Airbus A320-200 Series	1IA003	1,100
Airbus A320-200 Series	3CM026	627
Airbus A320-200 Series	8IA010	1
Airbus A320-NEO	01P20CM128	3,390
Airbus A320-NEO	01P22PW163	5,379
Airbus A321-200 Series	01P08CM104	1,035
Airbus A321-200 Series	01P10IA025	6,279
Airbus A321-200 Series	3CM025	1,069
Airbus A321-NEO	01P18PW157	5,185
Airbus A321-NEO	01P20CM132	15,380
Airbus A330-200 Series	2RR023	2,478
Airbus A330-200 Series	9PW094	35
Airbus A330-300 Series	2RR023	537
Airbus A330-300 Series	4GE080	545
Airbus A330-300 Series	7PW082	74
Airbus A330-300 Series	9PW094	1,538
Airbus A330-300 Series	9PW095	361
Airbus A330-900N Series (Neo)	02P23RR141	5,007
Airbus A350-900 series	01P18RR124	1,874
Boeing 737-7	01P20CM136	1,090

TABLE 1-2: ANNUAL OPERATIONS – FUTURE (2032) NO ACTION ALTERNATIVE

Airframe	Engine Code	Annual Operations
Boeing 737-700 Series	3CM030	95
Boeing 737-700 Series	3CM031	3,195
Boeing 737-700 Series	3CM032	582
Boeing 737-700 Series	8CM051	2
Boeing 737-700 Series	8CM062	23
Boeing 737-700 Series	8CM063	542
Boeing 737-8	01P20CM135	282
Boeing 737-8	01P20CM136	9,144
Boeing 737-8	01P20CM140	8,435
Boeing 737-800 Series	01P11CM114	425
Boeing 737-800 Series	01P11CM116	5,786
Boeing 737-800 Series	01P11CM122	3,157
Boeing 737-800 Series	01P11CM125	702
Boeing 737-800 Series	01P11CM126	67
Boeing 737-800 Series	3CM032	17,712
Boeing 737-800 Series	3CM034	1,710
Boeing 737-800 Series	8CM051	24,246
Boeing 737-800 Series	8CM064	176
Boeing 737-800 Series	8CM065	2,264
Boeing 737-800 Series	8CM066	10,633
Boeing 737-9	01P20CM136	441
Boeing 737-9	01P20CM140	17,383
Boeing 737-900-ER	01P11CM116	29,580
Boeing 737-900-ER	01P11CM121	84,572
Boeing 737-900-ER	01P11CM125	258
Boeing 737-900-ER	3CM034	1,191
Boeing 737-900-ER	8CM065	1,328
Boeing 737-900-ER_MA	01P11CM121_MA	1,808
Boeing 767-400ER	8GE101	358
Boeing 777-200-ER	10PW099	120
Boeing 777-200-ER	2RR027	423
Boeing 777-200-ER	3GE060	187
Boeing 777-200-ER	3GE064	3
Boeing 777-200-ER	8GE100	195
Boeing 777-300ER	01P21GE217	1,259
Boeing 787-10 Dreamliner	01P17GE211	334
Boeing 787-10 Dreamliner	01P17GE213	722
Boeing 787-10 Dreamliner	02P23RR134	365
Boeing 787-8 Dreamliner	01P17GE206	1,055
Boeing 787-8 Dreamliner	01P17GE210	35
Boeing 787-8 Dreamliner	11GE137	1,667
Boeing 787-8 Dreamliner	11GE138	4,096
Boeing 787-9 Dreamliner	01P17GE211	2,081
Boeing 787-9 Dreamliner	01P17GE214	14
Boeing 787-9 Dreamliner	02P23RR131	470
Boeing 787-9 Dreamliner	12RR067	2,150
Boeing 787-9 Dreamliner	12RR068	906
	Sub-Total	***330,927***
Cargo Jets		
Airbus A300F4-600 Series	1GE020	5
Airbus A300F4-600 Series	1PW048	133

TABLE 1-2: ANNUAL OPERATIONS – FUTURE (2032) NO ACTION ALTERNATIVE *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Airbus A300F4-600 Series	3GE056	241
Boeing 747-400 ERF	12PW102	590
Boeing 747-400 BCF	01P03GE187	590
Boeing 747-8F	01P17GE215	289
Boeing 747-8F	13GE156	77
Boeing 747-8F	8GENX1	249
Boeing 767-200 Series Freighter	1GE010	2,866
Boeing 767-200 Series Freighter	1GE012	1,427
Boeing 767-200 Series Freighter	1PW026	256
Boeing 767-300 ER Freighter	1GE030	4,142
Boeing 767-300 ER Freighter	2GE055	408
Boeing 777 Freighter	01P21GE216	2,415
Boeing 777 Freighter	01P21GE217	58
Boeing MD-11 Freighter	12PW102	249
Boeing MD-11 Freighter	1GE031	1,252
Boeing MD-11 Freighter	1PW052	407
	Sub-Total	***15,655***
Regional Jets		
Embraer ERJ175-LR	01P08GE197	113,895
Embraer ERJ175-LR_MA	01P08GE197_MA	977
	Sub-Total	***114,871***
Cargo Props		
ATR 72-600 Freighter	PW127F	204
Cessna 208 Caravan	P6114A	1,163
Cessna 208 Caravan	PT6A14	1,146
Cessna 408 SkyCourier	PT6A6B	204
Raytheon Beech 99	PT6A27	3
Raytheon Beech 99	PT6A36	182
	Sub-Total	***2,902***
General Aviation		
Bombardier Challenger 350	01P14HN011	554
Cessna 172 Skyhawk	IO320	132
Dassault Falcon 50	1AS002	554
Embraer Phenom 300 (EMB-505)	PW530	126
Piper PA-31 Navajo	TIO540	17
Raytheon C-12 Huron	PT660A	61
	Sub-Total	***1,445***
Other		
Boeing 737-900-ER_O1	01P11CM121_O1	436
Boeing 737-900-ER_O2	01P11CM125_O2	1
Boeing 737-900-ER_O3	3CM034_O3	6
Boeing 737-900-ER_O4	8CM065_O4	7
Boeing 737-900-ER_O7	01P11CM116_O7	149
Cessna 208 Caravan_O5	P6114A_O5	201
Cessna 208 Caravan_O6	PT6A14_O6	199
	Sub-Total	***1,000***

TABLE 1-2: ANNUAL OPERATIONS – FUTURE (2032) NO ACTION ALTERNATIVE *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Military		
Cessna 172 Skyhawk_M2	IO320_M2	2
Embraer Phenom 300 (EMB-505)_M1	PW530_M1	72
Raytheon C-12 Huron_M	PT660A_M	26
	Sub-Total	***100***
	Grand Total	**466,900**

Note: Day = 7:00 a.m. to 9:59 p.m., Night = 10:00 p.m. to 6:59 a.m.
Source: Aviation Forecast Update, prepared by Port of Seattle/LeighFisher, 2023;
Constrained Operating Growth Scenario, prepared by Port of Seattle/Landrum & Brown, 2023;
Environmental Review Airside Modeling Analysis, prepared by the Port of Seattle/LeighFisher, 2020.

TABLE 1-3: ANNUAL OPERATIONS – FUTURE (2032) PROPOSED ACTION

Airframe	Engine Code	Annual Operations
Commercial Jets		
Airbus A220-100	16PW111	19,489
Airbus A220-300	16PW111	5,616
Airbus A220-300	16PW112	2,766
Airbus A319-100 Series	01P10IA020	4
Airbus A319-100 Series	3CM028	34
Airbus A319-100 Series	3IA006	775
Airbus A319-100 Series	3IA007	415
Airbus A319-100 Series	4CM035	31
Airbus A319-100 Series	8IA09	14
Airbus A320-200 Series	01P08CM105	5,941
Airbus A320-200 Series	01P10IA021	533
Airbus A320-200 Series	01P10IA022	115
Airbus A320-200 Series	1CM008	145
Airbus A320-200 Series	1CM009	589
Airbus A320-200 Series	1IA003	1,122
Airbus A320-200 Series	3CM026	639
Airbus A320-200 Series	8IA010	1
Airbus A320-NEO	01P20CM128	3,456
Airbus A320-NEO	01P22PW163	5,485
Airbus A321-200 Series	01P08CM104	1,055
Airbus A321-200 Series	01P10IA025	6,402
Airbus A321-200 Series	3CM025	1,090
Airbus A321-NEO	01P18PW157	5,287
Airbus A321-NEO	01P20CM132	15,682
Airbus A330-200 Series	2RR023	2,527
Airbus A330-200 Series	9PW094	36
Airbus A330-300 Series	2RR023	547
Airbus A330-300 Series	4GE080	555
Airbus A330-300 Series	7PW082	75
Airbus A330-300 Series	9PW094	1,568
Airbus A330-300 Series	9PW095	368
Airbus A330-900N Series (Neo)	02P23RR141	5,106
Airbus A350-900 series	01P18RR124	1,911
Boeing 737-7	01P20CM136	1,111
Boeing 737-700 Series	3CM030	96
Boeing 737-700 Series	3CM031	3,258

TABLE 1-3: ANNUAL OPERATIONS – FUTURE (2032) PROPOSED ACTION *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Boeing 737-700 Series	3CM032	593
Boeing 737-700 Series	8CM051	2
Boeing 737-700 Series	8CM062	24
Boeing 737-700 Series	8CM063	553
Boeing 737-8	01P20CM135	288
Boeing 737-8	01P20CM136	9,323
Boeing 737-8	01P20CM140	8,600
Boeing 737-800 Series	01P11CM114	433
Boeing 737-800 Series	01P11CM116	5,900
Boeing 737-800 Series	01P11CM122	3,219
Boeing 737-800 Series	01P11CM125	716
Boeing 737-800 Series	01P11CM126	68
Boeing 737-800 Series	3CM032	18,060
Boeing 737-800 Series	3CM034	1,744
Boeing 737-800 Series	8CM051	24,723
Boeing 737-800 Series	8CM064	180
Boeing 737-800 Series	8CM065	2,308
Boeing 737-800 Series	8CM066	10,841
Boeing 737-9	01P20CM136	450
Boeing 737-9	01P20CM140	17,724
Boeing 737-900-ER	01P11CM116	30,161
Boeing 737-900-ER	01P11CM121	86,234
Boeing 737-900-ER	01P11CM125	263
Boeing 737-900-ER	3CM034	1,214
Boeing 737-900-ER	8CM065	1,354
Boeing 737-900-ER_MA	01P11CM121_MA	1,842
Boeing 767-400 ER	8GE101	365
Boeing 777-200-ER	10PW099	123
Boeing 777-200-ER	2RR027	431
Boeing 777-200-ER	3GE060	191
Boeing 777-200-ER	3GE064	3
Boeing 777-200-ER	8GE100	198
Boeing 777-300 ER	01P21GE217	1,284
Boeing 787-10 Dreamliner	01P17GE211	341
Boeing 787-10 Dreamliner	01P17GE213	736
Boeing 787-10 Dreamliner	02P23RR134	372
Boeing 787-8 Dreamliner	01P17GE206	1,076
Boeing 787-8 Dreamliner	01P17GE210	36
Boeing 787-8 Dreamliner	11GE137	1,700
Boeing 787-8 Dreamliner	11GE138	4,177
Boeing 787-9 Dreamliner	01P17GE211	2,122
Boeing 787-9 Dreamliner	01P17GE214	14
Boeing 787-9 Dreamliner	02P23RR131	479
Boeing 787-9 Dreamliner	12RR067	2,192
Boeing 787-9 Dreamliner	12RR068	924
	Sub-Total	***337,426***
Cargo Jets		
Airbus A300F4-600 Series	1GE020	5
Airbus A300F4-600 Series	1PW048	133
Airbus A300F4-600 Series	3GE056	241
Boeing 747-400 ERF	12PW102	590

TABLE 1-3: ANNUAL OPERATIONS – FUTURE (2032) PROPOSED ACTION *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Boeing 747-400BCF	01P03GE187	590
Boeing 747-8F	01P17GE215	289
Boeing 747-8F	13GE156	77
Boeing 747-8F	8GENX1	249
Boeing 767-200 Series Freighter	1GE010	2,866
Boeing 767-200 Series Freighter	1GE012	1,427
Boeing 767-200 Series Freighter	1PW026	256
Boeing 767-300 ER Freighter	1GE030	4,142
Boeing 767-300 ER Freighter	2GE055	408
Boeing 777 Freighter	01P21GE216	2,415
Boeing 777 Freighter	01P21GE217	58
Boeing MD-11 Freighter	12PW102	249
Boeing MD-11 Freighter	1GE031	1,252
Boeing MD-11 Freighter	1PW052	407
	Sub-Total	***15,655***
Regional Jets		
Embraer ERJ175-LR	01P08GE197	116,132
Embraer ERJ175-LR_MA	01P08GE197_MA	995
	Sub-Total	***117,127***
Cargo Props		
ATR 72-600 Freighter	PW127F	204
Cessna 208 Caravan	P6114A	1,163
Cessna 208 Caravan	PT6A14	1,146
Cessna 408 SkyCourier	PT6A6B	204
Raytheon Beech 99	PT6A27	3
Raytheon Beech 99	PT6A36	182
	Sub-Total	***2,902***
General Aviation		
Bombardier Challenger 350	01P14HN011	554
Cessna 172 Skyhawk	IO320	132
Dassault Falcon 50	1AS002	554
Embraer Phenom 300 (EMB-505)	PW530	126
Piper PA-31 Navajo	TIO540	17
Raytheon C-12 Huron	PT660A	61
	Sub-Total	***1,445***
Other		
Boeing 737-900-ER_O1	01P11CM121_O1	436
Boeing 737-900-ER_O2	01P11CM125_O2	1
Boeing 737-900-ER_O3	3CM034_O3	6
Boeing 737-900-ER_O4	8CM065_O4	7
Boeing 737-900-ER_O7	01P11CM116_O7	149
Cessna 208 Caravan_O5	P6114A_O5	201
Cessna 208 Caravan_O6	PT6A14_O6	199
	Sub-Total	***1,000***

TABLE 1-3: ANNUAL OPERATIONS – FUTURE (2032) PROPOSED ACTION *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Military		
Cessna 172 Skyhawk_M2	IO320_M2	2
Embraer Phenom 300 (EMB-505)_M1	PW530_M1	72
Raytheon C-12 Huron_M	PT660A_M	26
	Sub-Total	***100***
	Grand Total	**475,655**

Note: Day = 7:00 a.m. to 9:59 p.m., Night = 10:00 p.m. to 6:59 a.m.
Source: Aviation Forecast Update, prepared by Port of Seattle/LeighFisher, 2023;
Constrained Operating Growth Scenario, prepared by Port of Seattle/Landrum & Brown, 2023;
Environmental Review Airside Modeling Analysis, prepared by the Port of Seattle/LeighFisher, 2020.

TABLE 1-4: ANNUAL OPERATIONS – FUTURE (2037) NO ACTION ALTERNATIVE

Airframe	Engine Code	Annual Operations
Commercial Jets		
Airbus A220-100	16PW111	25,279
Airbus A220-300	16PW111	8,743
Airbus A220-300	16PW112	4,306
Airbus A320-200 Series	01P08CM105	2,009
Airbus A320-200 Series	01P10IA021	180
Airbus A320-200 Series	01P10IA022	39
Airbus A320-200 Series	1CM008	49
Airbus A320-200 Series	1CM009	199
Airbus A320-200 Series	1IA003	379
Airbus A320-200 Series	3CM026	216
Airbus A320-200 Series	8IA010	0
Airbus A320-NEO	01P20CM128	5,744
Airbus A320-NEO	01P22PW163	9,116
Airbus A321-200 Series	01P08CM104	324
Airbus A321-200 Series	01P10IA025	1,968
Airbus A321-200 Series	3CM025	335
Airbus A321-NEO	01P18PW157	7,082
Airbus A321-NEO	01P20CM132	21,007
Airbus A330-200 Series	2RR023	2,514
Airbus A330-200 Series	9PW094	36
Airbus A330-300 Series	2RR023	545
Airbus A330-300 Series	4GE080	552
Airbus A330-300 Series	7PW082	75
Airbus A330-300 Series	9PW094	1,560
Airbus A330-300 Series	9PW095	366
Airbus A330-900N Series (Neo)	02P23RR141	5,503
Airbus A350-900 series	01P18RR124	3,247
Boeing 737-7	01P20CM136	1,691
Boeing 737-700 Series	3CM030	19
Boeing 737-700 Series	3CM031	651
Boeing 737-700 Series	3CM032	118
Boeing 737-700 Series	8CM051	0
Boeing 737-700 Series	8CM062	5
Boeing 737-700 Series	8CM063	110
Boeing 737-8	01P20CM135	643
Boeing 737-8	01P20CM136	20,835

TABLE 1-4: ANNUAL OPERATIONS – FUTURE (2037) NO ACTION ALTERNATIVE *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Boeing 737-8	01P20CM140	19,219
Boeing 737-800 Series	01P11CM114	284
Boeing 737-800 Series	01P11CM116	3,861
Boeing 737-800 Series	01P11CM122	2,107
Boeing 737-800 Series	01P11CM125	468
Boeing 737-800 Series	01P11CM126	44
Boeing 737-800 Series	3CM032	11,820
Boeing 737-800 Series	3CM034	1,141
Boeing 737-800 Series	8CM051	16,180
Boeing 737-800 Series	8CM064	117
Boeing 737-800 Series	8CM065	1,511
Boeing 737-800 Series	8CM066	7,095
Boeing 737-9	01P20CM136	959
Boeing 737-9	01P20CM140	37,795
Boeing 737-900-ER	01P11CM116	25,142
Boeing 737-900-ER	01P11CM121	71,579
Boeing 737-900-ER	01P11CM125	219
Boeing 737-900-ER	3CM034	1,012
Boeing 737-900-ER	8CM065	1,128
Boeing 737-900-ER_MA	01P11CM121_MA	1,839
Boeing 787-10 Dreamliner	01P17GE211	445
Boeing 787-10 Dreamliner	01P17GE213	962
Boeing 787-10 Dreamliner	02P23RR134	486
Boeing 787-8 Dreamliner	01P17GE206	1,418
Boeing 787-8 Dreamliner	01P17GE210	48
Boeing 787-8 Dreamliner	11GE137	2,240
Boeing 787-8 Dreamliner	11GE138	5,506
Boeing 787-9 Dreamliner	01P17GE211	3,449
Boeing 787-9 Dreamliner	01P17GE214	23
Boeing 787-9 Dreamliner	02P23RR131	778
Boeing 787-9 Dreamliner	12RR067	3,563
Boeing 787-9 Dreamliner	12RR068	1,502
	Sub-Total	***349,389***
Cargo Jets		
Boeing 747-400 ERF	12PW102	577
Boeing 747-400BCF	01P03GE187	577
Boeing 747-8F	01P17GE215	315
Boeing 747-8F	13GE156	84
Boeing 747-8F	8GENX1	272
Boeing 767-200 Series Freighter	1GE010	3,719
Boeing 767-200 Series Freighter	1GE012	1,852
Boeing 767-200 Series Freighter	1PW026	333
Boeing 767-300 ER Freighter	1GE030	5,221
Boeing 767-300 ER Freighter	2GE055	514
Boeing 777 Freighter	01P21GE216	3,690
Boeing 777 Freighter	01P21GE217	88
	Sub-Total	***17,242***
Regional Jets		
Embraer ERJ175-LR	01P08GE197	101,506
Embraer ERJ175-LR_MA	01P08GE197_MA	993
	Sub-Total	***102,499***

TABLE 1-4: ANNUAL OPERATIONS – FUTURE (2037) NO ACTION ALTERNATIVE *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Cargo Props		
ATR 72-600 Freighter	PW127F	323
Cessna 208 Caravan	P6114A	1,147
Cessna 208 Caravan	PT6A14	1,131
Cessna 408 SkyCourier	PT6A6B	323
Raytheon Beech 99	PT6A27	4
Raytheon Beech 99	PT6A36	235
	Sub-Total	***3,163***
General Aviation		
Bombardier Challenger 350	01P14HN011	572
Cessna 172 Skyhawk	IO320	120
Dassault Falcon 50	1AS002	572
Embraer Phenom 300 (EMB-505)	PW530	136
Piper PA-31 Navajo	TIO540	14
Raytheon C-12 Huron	PT660A	67
	Sub-Total	***1,481***
Other		
Boeing 737-900-ER_O1	01P11CM121_O1	436
Boeing 737-900-ER_O2	01P11CM125_O2	1
Boeing 737-900-ER_O3	3CM034_O3	6
Boeing 737-900-ER_O4	8CM065_O4	7
Boeing 737-900-ER_O7	01P11CM116_O7	149
Cessna 208 Caravan_O5	P6114A_O5	201
Cessna 208 Caravan_O6	PT6A14_O6	199
	Sub-Total	***1,000***
Military		
Cessna 172 Skyhawk_M2	IO320_M2	2
Embraer Phenom 300 (EMB-505)_M1	PW530_M1	72
Raytheon C-12 Huron_M	PT660A_M	26
	Sub-Total	***100***
	Grand Total	**474,874**

Note: Day = 7:00 a.m. to 9:59 p.m., Night = 10:00 p.m. to 6:59 a.m.
Source: Aviation Forecast Update, prepared by Port of Seattle/LeighFisher, 2023; Constrained Operating Growth Scenario, prepared by Port of Seattle/Landrum & Brown, 2023; Environmental Review Airside Modeling Analysis, prepared by the Port of Seattle/LeighFisher, 2020.

TABLE 1-5: ANNUAL OPERATIONS – FUTURE (2037) PROPOSED ACTION

Airframe	Engine Code	Annual Operations
Commercial Jets		
Airbus A220-100	16PW111	27,238
Airbus A220-300	16PW111	9,421
Airbus A220-300	16PW112	4,640
Airbus A320-200 Series	01P08CM105	2,164
Airbus A320-200 Series	01P10IA021	194
Airbus A320-200 Series	01P10IA022	42
Airbus A320-200 Series	1CM008	53
Airbus A320-200 Series	1CM009	214
Airbus A320-200 Series	1IA003	409
Airbus A320-200 Series	3CM026	233
Airbus A320-200 Series	8IA010	0

TABLE 1-5: ANNUAL OPERATIONS – FUTURE (2037) PROPOSED ACTION *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Airbus A320-NEO	01P20CM128	6,189
Airbus A320-NEO	01P22PW163	9,822
Airbus A321-200 Series	01P08CM104	349
Airbus A321-200 Series	01P10IA025	2,120
Airbus A321-200 Series	3CM025	361
Airbus A321-NEO	01P18PW157	7,631
Airbus A321-NEO	01P20CM132	22,635
Airbus A330-200 Series	2RR023	2,709
Airbus A330-200 Series	9PW094	39
Airbus A330-300 Series	2RR023	587
Airbus A330-300 Series	4GE080	595
Airbus A330-300 Series	7PW082	80
Airbus A330-300 Series	9PW094	1,681
Airbus A330-300 Series	9PW095	394
Airbus A330-900N Series (Neo)	02P23RR141	5,930
Airbus A350-900 series	01P18RR124	3,499
Boeing 737-7	01P20CM136	1,822
Boeing 737-700 Series	3CM030	21
Boeing 737-700 Series	3CM031	701
Boeing 737-700 Series	3CM032	128
Boeing 737-700 Series	8CM051	0
Boeing 737-700 Series	8CM062	5
Boeing 737-700 Series	8CM063	119
Boeing 737-8	01P20CM135	693
Boeing 737-8	01P20CM136	22,449
Boeing 737-8	01P20CM140	20,708
Boeing 737-800 Series	01P11CM114	306
Boeing 737-800 Series	01P11CM116	4,160
Boeing 737-800 Series	01P11CM122	2,270
Boeing 737-800 Series	01P11CM125	505
Boeing 737-800 Series	01P11CM126	48
Boeing 737-800 Series	3CM032	12,736
Boeing 737-800 Series	3CM034	1,230
Boeing 737-800 Series	8CM051	17,434
Boeing 737-800 Series	8CM064	127
Boeing 737-800 Series	8CM065	1,628
Boeing 737-800 Series	8CM066	7,645
Boeing 737-9	01P20CM136	1,033
Boeing 737-9	01P20CM140	40,724
Boeing 737-900-ER	01P11CM116	27,090
Boeing 737-900-ER	01P11CM121	77,133
Boeing 737-900-ER	01P11CM125	236
Boeing 737-900-ER	3CM034	1,090
Boeing 737-900-ER	8CM065	1,216
Boeing 737-900-ER_MA	01P11CM121_MA	1,975
Boeing 787-10 Dreamliner	01P17GE211	480
Boeing 787-10 Dreamliner	01P17GE213	1,036
Boeing 787-10 Dreamliner	02P23RR134	524
Boeing 787-8 Dreamliner	01P17GE206	1,528
Boeing 787-8 Dreamliner	01P17GE210	51
Boeing 787-8 Dreamliner	11GE137	2,414

TABLE 1-5: ANNUAL OPERATIONS – FUTURE (2037) PROPOSED ACTION *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Boeing 787-8 Dreamliner	11GE138	5,933
Boeing 787-9 Dreamliner	01P17GE211	3,717
Boeing 787-9 Dreamliner	01P17GE214	25
Boeing 787-9 Dreamliner	02P23RR131	839
Boeing 787-9 Dreamliner	12RR067	3,839
Boeing 787-9 Dreamliner	12RR068	1,618
	Sub-Total	***376,465***
Cargo Jets		
Boeing 747-400 ERF	12PW102	577
Boeing 747-400BCF	01P03GE187	577
Boeing 747-8F	01P17GE215	315
Boeing 747-8F	13GE156	84
Boeing 747-8F	8GENX1	272
Boeing 767-200 Series Freighter	1GE010	3,719
Boeing 767-200 Series Freighter	1GE012	1,852
Boeing 767-200 Series Freighter	1PW026	333
Boeing 767-300 ER Freighter	1GE030	5,221
Boeing 767-300 ER Freighter	2GE055	514
Boeing 777 Freighter	01P21GE216	3,690
Boeing 777 Freighter	01P21GE217	88
	Sub-Total	***17,242***
Regional Jets		
Embraer ERJ175-LR	01P08GE197	109,375
Embraer ERJ175-LR_MA	01P08GE197_MA	1,066
	Sub-Total	***110,442***
Cargo Prop		
ATR 72-600 Freighter	PW127F	323
Cessna 208 Caravan	P6114A	1,147
Cessna 208 Caravan	PT6A14	1,131
Cessna 408 SkyCourier	PT6A6B	323
Raytheon Beech 99	PT6A27	4
Raytheon Beech 99	PT6A36	235
	Sub-Total	***3,163***
General Aviation		
Bombardier Challenger 350	01P14HN011	572
Cessna 172 Skyhawk	IO320	120
Dassault Falcon 50	1AS002	572
Embraer Phenom 300 (EMB-505)	PW530	136
Piper PA-31 Navajo	TIO540	14
Raytheon C-12 Huron	PT660A	67
	Sub-Total	***1,481***
Other		
Boeing 737-900-ER_O1	01P11CM121_O1	436
Boeing 737-900-ER_O2	01P11CM125_O2	1
Boeing 737-900-ER_O3	3CM034_O3	6
Boeing 737-900-ER_O4	8CM065_O4	7
Boeing 737-900-ER_O7	01P11CM116_O7	149
Cessna 208 Caravan_O5	P6114A_O5	201
Cessna 208 Caravan_O6	PT6A14_O6	199
	Sub-Total	***1,000***

TABLE 1-5: ANNUAL OPERATIONS – FUTURE (2037) PROPOSED ACTION *(CONTINUED)*

Airframe	Engine Code	Annual Operations
Military		
Cessna 172 Skyhawk_M2	IO320_M2	2
Embraer Phenom 300 (EMB-505)_M1	PW530_M1	72
Raytheon C-12 Huron_M	PT660A_M	26
	Sub-Total	***100***
	Grand Total	**509,892**

Note: Day = 7:00 a.m. to 9:59 p.m., Night = 10:00 p.m. to 6:59 a.m.
Source: Aviation Forecast Update, prepared by Port of Seattle/LeighFisher, 2023; Constrained Operating Growth Scenario, prepared by Port of Seattle/Landrum & Brown, 2023; Environmental Review Airside Modeling Analysis, prepared by the Port of Seattle/LeighFisher, 2020.

TABLE 1-6: COMPARISON OF TAXI TIMES (MINUTES SECONDS)

Year / Alternative	Taxi-in	Taxi-Out	Total
Existing (2022)	10 min, 16 sec	18 min, 53 sec	29 min, 9 sec
2032 No Action Alternative	9 min, 26 sec	21 min, 28 sec	30 min, 54 sec
2032 Proposed Action	9 min, 12 sec	21 min, 18 sec	30 min, 30 sec
2037 No Action Alternative	9 min, 41 sec	21 min, 42 sec	31 min, 23 sec
2037 Proposed Action	9 min, 45 sec	23 min, 32 sec	33 min, 17 sec

Source: FAA's Aviation System Performance Metrics (ASPM) for Existing (2022) Condition. Taxi times for the future conditions were estimated using LFA delay modeling data developed with the Total Airspace and Airport Modeler (TAAM) tool (June 2020) normalized to the ASPM data.

Attachment 2 Auxiliary Power Unit Usage

This attachment contains the following tables:

APU Annual Usage

- Table 2-1 Existing (2022) Condition APU Annual Usage
- Table 2-2 Future (2032) No Action Alternative APU Annual Usage
- Table 2-3 Future (2032) Proposed Action APU Annual Usage
- Table 2-4 Future (2037) No Action Alternative APU Annual Usage
- Table 2-5 Future (2037) Proposed Action APU Annual Usage

TABLE 2-1: EXISTING (2022) APU ANNUAL USAGE

APU Type	Annual Usage (Hours)
APU 131-9	2,849,478
APU GTC 85	3,633
APU GTCP 331 (143 HP)	50,233
APU GTCP 331-350	35,238
APU GTCP 36 (80HP)	1,882
APU GTCP 36-100	643
APU GTCP 36-150[]	209
APU GTCP 36-300 (80HP)	228,573
APU GTCP 85 (200 HP)	495
APU GTCP100-544 (400 HP)	956
APU GTCP331-200ER (143 HP)	82,744
APU GTCP331-500 (143 HP)	11,898
APU GTCP85-129 (200 HP)	10
APU PW901A	31,454
APU T-62T-27 (100 HP)	126,701
APU T-62T-47C1	136,060
APU TSCP700-4B (142 HP)	30
Total	**3,560,237**

Source: AEDT 3f; Port of Seattle and Landrum & Brown, 2024

TABLE 2-2: FUTURE (2032) NO ACTION ALTERNATIVE APU ANNUAL USAGE

APU Type	Annual Usage (Hours)
APU 131-9	3,938,697
APU GTC 85	461
APU GTCP 331 (143 HP)	30,210
APU GTCP 331-350	205,351
APU GTCP 36 (80HP)	3,404
APU GTCP 36-100	4
APU GTCP 36-300 (80HP)	611,869
APU GTCP100-544 (400 HP)	9,549
APU GTCP331-200ER (143 HP)	7,362
APU GTCP331-500 (143 HP)	12,775
APU PW901A	53,579
APU T-62T-27 (100 HP)	112
APU T-62T-47C1	593
Total	**4,873,967**

Source: AEDT 3f; Port of Seattle and Landrum & Brown, 2024

TABLE 2-3: FUTURE (2032) PROPOSED ACTION APU ANNUAL USAGE

APU Type	Annual Usage (Hours)
APU 131-9	4,013,427
APU GTC 85	465
APU GTCP 331 (143 HP)	30,589
APU GTCP 331-350	209,389
APU GTCP 36 (80HP)	3,404
APU GTCP 36-100	5
APU GTCP 36-300 (80HP)	623,884
APU GTCP100-544 (400 HP)	9,690
APU GTCP331-200ER (143 HP)	7,506
APU GTCP331-500 (143 HP)	13,005
APU PW901A	54,178
APU T-62T-27 (100 HP)	113
APU T-62T-47C1	604
Total	**4,966,256**

Source: AEDT 3f; Port of Seattle and Landrum & Brown, 2024

TABLE 2-4: FUTURE (2037) NO ACTION ALTERNATIVE APU ANNUAL USAGE

APU Type	Annual Usage (Hours)
APU 131-9	5,322,083
APU GTCP 331 (143 HP)	28,676
APU GTCP 331-350	71,596
APU GTCP 36 (80HP)	1,327
APU GTCP 36-100	41
APU GTCP 36-300 (80HP)	316,483
APU GTCP100-544 (400 HP)	2,639
APU GTCP331-500 (143 HP)	584
APU PW901A	44,053
APU T-62T-27 (100 HP)	101
APU T-62T-47C1	120
Total	**5,787,704**

Source: AEDT 3f; Port of Seattle and Landrum & Brown, 2024

TABLE 2-5: FUTURE (2037) PROPOSED ACTION APU ANNUAL USAGE

APU Type	Annual Usage (Hours)
APU 131-9	5,717,310
APU GTCP 331 (143 HP)	29,710
APU GTCP 331-350	77,016
APU GTCP 36 (80HP)	1,422
APU GTCP 36-100	44
APU GTCP 36-300 (80HP)	341,009
APU GTCP100-544 (400 HP)	2,836
APU GTCP331-500 (143 HP)	628
APU PW901A	46,612
APU T-62T-27 (100 HP)	102
APU T-62T-47C1	125
Total	**6,216,814**

Source: AEDT 3f; Port of Seattle and Landrum & Brown, 2024

Attachment 3 Ground Support Equipment

This attachment contains the following tables:

Existing (2022) Condition

- Table 3-1 Tenant-Owned GSE Annual Usage – Existing (2022) Condition
- Table 3-2 Port-Owned Airfield Vehicles and Equipment Fuel Consumption – Existing (2022) Condition

Future (2032) No Action Alternative

- Table 3-3 Tenant-Owned GSE Annual Usage – Future (2032) No Action Alternative
- Table 3-4 Port-Owned Airfield Vehicles and Equipment Fuel Consumption – Future (2032) No Action Alternative

Future (2032) Proposed Action

- Table 3-5 Tenant-Owned GSE Annual Usage – Future (2032) Proposed Action
- Table 3-6 Port-Owned Airfield Vehicles and Equipment Fuel Consumption – Future (2032) Proposed Action

Future (2037) No Action Alternative

- Table 3-7 Tenant-Owned GSE Annual Usage – Future (2037) No Action Alternative
- Table 3-8 Port-owned Airfield Vehicles and Equipment Fuel Consumption – Future (2037) No Action Alternative

Future (2037) Proposed Action

- Table 3-9 Tenant-Owned GSE Annual Usage – Future (2037) Proposed Action
- Table 3-10 Port-Owned Airfield Vehicles and Equipment Fuel Consumption – Future (2037) Proposed Action

Emission Factors

- Table 3-11 2022 Emission Factors for GSE
- Table 3-12 2032 Emission Factors for GSE
- Table 3-13 2037 Emission Factors for GSE

TABLE 3-1: TENANT-OWNED GSE ANNUAL USAGE - EXISTING (2022) CONDITION

General Description	AEDT Equipment Name	Annual Usage (Hours)
Aircraft Tractor	Diesel - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	11,018.3
Aircraft Tractor	Diesel - Stewart & Stevenson TUG MC - Aircraft Tractor	37.3
Aircraft Tractor	Electric - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	8,159.6
Aircraft Tractor	Gasoline - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	5,164.8
Baggage Tractor	Diesel - Stewart & Stevenson TUG MA 50 - Baggage Tractor	36,613.0
Baggage Tractor	Electric - Stewart & Stevenson TUG MA 50 - Baggage Tractor	111,509.5
Baggage Tractor	Gasoline - Stewart & Stevenson TUG MA 50 - Baggage Tractor	90,863.7
Belt Loader	Diesel - Stewart & Stevenson TUG 660 - Belt Loader	2,367.0
Belt Loader	Electric - Stewart & Stevenson TUG 660 - Belt Loader	78,062.0
Belt Loader	Gasoline - Stewart & Stevenson TUG 660 - Belt Loader	45,341.9
Cabin Service Truck	Diesel - Hi-Way F650 - Cabin Service Truck	946.0
Cabin Service Truck	Gasoline - Hi-Way F650 - Cabin Service Truck	80,841.0
Cargo Loader	Diesel - FMC Commander 30 - Cargo Loader	35,879.5
Catering Truck	Diesel - Hi-Way / TUG 660 chasis - Catering Truck	18.3
Catering Truck	Diesel - Hi-Way F650 - Catering Truck	76,956.7
Catering Truck	Gasoline - Hi-Way F650 - Catering Truck	4,788.8
Fuel Truck	Diesel - F750, Dukes Transportation Services, DART 3000 to 6000 gallon - Fuel Truck	9,726.2
Generator	Diesel - (None specified. EPA default data used.) - Generator	18.3
Ground Power Unit	Diesel - TLD, 28 VDC - Ground Power Unit	34,139.0
Ground Power Unit	Diesel - TLD, 400 Hz AC - Ground Power Unit	57.4
Ground Power Unit	Gasoline - TLD - Ground Power Unit	141.3
Hydrant Truck	Diesel - F250 / F350 - Hydrant Truck	28,896.3
Hydrant Truck	Gasoline - F250 / F350 - Hydrant Truck	3,580.4
Lavatory Truck	Diesel - TLD 1410 - Lavatory Truck	25,448.0
Lavatory Truck	Gasoline - TLD 1410 - Lavatory Truck	20,041.4
Lift	Diesel - (None specified. EPA default data used.) - Lift	1.5
Passenger Stand	Diesel - Wollard CMPS170 / CMPS228 - Passenger Stand	931.1
Service Truck	Diesel - F250 / F350 - Service Truck	5,820.3
Service Truck	Electric - F250 / F350 - Service Truck	2,037.2
Service Truck	Gasoline - F250 / F350 - Service Truck	35,768.3
	Total	**755,173.9**

Source: AEDT 3f; Port of Seattle and Landrum & Brown, 2024.

TABLE 3-2: PORT-OWNED AIRFIELD VEHICLES AND EQUIPMENT ANNUAL FUEL CONSUMPTION - EXISTING (2022) CONDITION

Category / Description	AEDT Equipment Name	Fuel Type	Total Annual Consumption Per Category (Gallons)
Airfield Maintenance			
Airfield Vehicles including Ford Escapes, Chevrolet pickup trucks, Ford 150 trucks, and vans	F250 / F350 - Service Truck	Gasoline	55,461
Trimmers, pressure washers, airfield lighting	Other[1]	Gasoline	1,684
Belt Loaders	Stewart & Stevenson TUG 660 - Belt Loader	Gasoline	44
Airfield Vehicles including Ford and International trucks	F250 / F350 - Service Truck	Diesel	19,178
Snowplows including Oshkosh and International trucks	F250 / F350 - Service Truck	Diesel	5,580
Mower and snow blower equipment	Other[2]	Diesel	990
Aircraft Tractors	Douglas TBL-400 - Aircraft Tractor	Diesel	223
Forklift	Toyota 5,000 lb - Fork Lift	Propane	24
Support Hardstand Operations			
Air Conditioners	ACE 802 - Air Conditioner	Diesel	834
Shuttle Buses	COBUS[3]	Diesel	1,762
Belt Loaders	Stewart & Stevenson TUG 660 - Belt Loader	Diesel	646
Ground Power Units	TLD, 400 Hz AC - Ground Power Unit	Diesel	394
Ford 550 Service Truck	F250 / F350 - Service Truck	Gasoline	35

1 Gasoline equipment which was not available in AEDT was grouped into AEDT's "Other" equipment type. This included trimmers, pressure washers, and airfield lighting equipment. An AEDT user specified equipment type was developed with a horsepower of 126 and load factor of 0.5.

2 Diesel equipment which was not available in AEDT was grouped into AEDT's "Other" equipment type. This included mower and snow blower equipment. An AEDT user specified equipment type was developed with a horsepower of 140 and load factor of 0.5.

3 This includes the Port of Seattle 45-foot COBUS 3000 activity. An AEDT user specified equipment type was developed with a horsepower of 300 and load factor of 0.5.

Note: Hz denotes Hertz; AC denotes Air Conditioner.

Source: Port of Seattle and Landrum & Brown, 2023.

TABLE 3-3: TENANT-OWNED GSE ANNUAL USAGE – FUTURE (2032) NO ACTION ALTERNATIVE

General Description	AEDT Equipment Name	Annual Usage (Hours)
Aircraft Tractor	Diesel - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	13,231.6
Aircraft Tractor	Diesel - Stewart & Stevenson TUG MC - Aircraft Tractor	30.8
Aircraft Tractor	Electric - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	9,523.8
Aircraft Tractor	Gasoline - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	6,078.6
Baggage Tractor	Diesel - Stewart & Stevenson TUG MA 50 - Baggage Tractor	43,915.3
Baggage Tractor	Electric - Stewart & Stevenson TUG MA 50 - Baggage Tractor	130,151.6
Baggage Tractor	Gasoline - Stewart & Stevenson TUG MA 50 - Baggage Tractor	109,556.0
Belt Loader	Diesel - Stewart & Stevenson TUG 660 - Belt Loader	2,762.7
Belt Loader	Electric - Stewart & Stevenson TUG 660 - Belt Loader	91,112.2
Belt Loader	Gasoline - Stewart & Stevenson TUG 660 - Belt Loader	54,647.4
Cabin Service Truck	Diesel - Hi-Way F650 - Cabin Service Truck	1,176.8
Cabin Service Truck	Gasoline - Hi-Way F650 - Cabin Service Truck	94,574.0
Cargo Loader	Diesel - FMC Commander 30 - Cargo Loader	43,411.5
Cart	Gasoline - Taylor Dunn - Cart	5.1
Catering Truck	Diesel - Hi-Way F650 - Catering Truck	90,728.6
Catering Truck	Gasoline - Hi-Way F650 - Catering Truck	5,788.3
Fuel Truck	Diesel - F750, Dukes Transportation Services, DART 3000 to 6000 gallon - Fuel Truck	123.2
Fuel Truck	Diesel - F750, Dukes Transportation Services, DART 3000 to 6000 gallon - Fuel Truck"	11,427.0
Generator	Diesel - (None specified. EPA default data used.) - Generator	61.0
Ground Power Unit	Diesel - TLD, 28 VDC - Ground Power Unit	246.5
Ground Power Unit	Diesel - TLD, 28 VDC - Ground Power Unit"	39,768.8
Hydrant Truck	Diesel - F250 / F350 - Hydrant Truck	34,216.9
Hydrant Truck	Gasoline - F250 / F350 - Hydrant Truck	4,239.5
Lavatory Truck	Diesel - TLD 1410 - Lavatory Truck	30,342.9
Lavatory Truck	Gasoline - TLD 1410 - Lavatory Truck	23,391.9
Lift	Diesel - (None specified. EPA default data used.) - Lift	5.1
Passenger Stand	Diesel - Wollard CMPS170 / CMPS228 - Passenger Stand	1,086.8
Service Truck	Diesel - F250 / F350 - Service Truck	6,784.0
Service Truck	Electric - F250 / F350 - Service Truck	2,377.8
Service Truck	Gasoline - F250 / F350 - Service Truck	42,387.1
	Total	**893,153.0**

Source: AEDT 3f; Port of Seattle and Landrum & Brown, 2024.

TABLE 3-4: PORT-OWNED AIRFIELD VEHICLES AND EQUIPMENT FUEL CONSUMPTION – FUTURE (2032) NO ACTION ALTERNATIVE

Category / Description	AEDT Equipment Name	Fuel Type	Total Annual Consumption Per Category (Gallons)
Airfield Maintenance			
Airfield Vehicles including Ford Escapes, Chevrolet pickup trucks, Ford 150 trucks, and vans	F250 / F350 - Service Truck	Gasoline	64,519
Trimmers, pressure washers, airfield lighting	Other[1]	Gasoline	1,959
Belt Loaders	Stewart & Stevenson TUG 660 - Belt Loader	Gasoline	51
Airfield Vehicles including Ford and International trucks	F250 / F350 - Service Truck	Diesel	22,310
Snowplows including Oshkosh and International trucks	F250 / F350 - Service Truck	Diesel	6,491
Mower and snow blower equipment	Other[2]	Diesel	1,152
Aircraft Tractors	Douglas TBL-400 - Aircraft Tractor	Diesel	260
Forklift	Toyota 5,000 lb - Fork Lift	Propane	27
Support Hardstand Operations			
Air Conditioners	ACE 802 - Air Conditioner	Diesel	970
Shuttle Buses	COBUS[3]	Diesel	2,050
Belt Loaders	Stewart & Stevenson TUG 660 - Belt Loader	Diesel	752
Ground Power Units	TLD, 400 Hz AC - Ground Power Unit	Diesel	458
Ford 550 Service Truck	F250 / F350 - Service Truck	Gasoline	41

1 Gasoline equipment which was not available in AEDT was grouped into AEDT's "Other" equipment type. This included trimmers, pressure washers, and airfield lighting equipment. An AEDT user specified equipment type was developed with a horsepower of 126 and load factor of 0.5.

2 Diesel equipment which was not available in AEDT was grouped into AEDT's "Other" equipment type. This included mower and snow blower equipment. An AEDT user specified equipment type was developed with a horsepower of 140 and load factor of 0.5.

3 This includes the Port of Seattle 45-foot COBUS 3000 activity. An AEDT user specified equipment type was developed with a horsepower of 300 and load factor of 0.5.

Note: Hz denotes Hertz; AC denotes Air Conditioner.

Source: Port of Seattle and Landrum & Brown, 2023.

TABLE 3-5: TENANT-OWNED GSE ANNUAL USAGE – FUTURE (2032) PROPOSED ACTION

General Description	AEDT Equipment Name	Annual Usage (Hours)
Aircraft Tractor	Diesel - Stewart & Stevenson TUG MC - Aircraft Tractor	30.8
Aircraft Tractor	Diesel - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	13,470.5
Aircraft Tractor	Electric - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	9,710.5
Aircraft Tractor	Gasoline - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	6,183.9
Baggage Tractor	Diesel - Stewart & Stevenson TUG MA 50 - Baggage Tractor	44,450.1
Baggage Tractor	Electric - Stewart & Stevenson TUG MA 50 - Baggage Tractor	132,703.1
Baggage Tractor	Gasoline - Stewart & Stevenson TUG MA 50 - Baggage Tractor	111,376.8
Belt Loader	Diesel - Stewart & Stevenson TUG 660 - Belt Loader	2,816.9
Belt Loader	Electric - Stewart & Stevenson TUG 660 - Belt Loader	92,898.3
Belt Loader	Gasoline - Stewart & Stevenson TUG 660 - Belt Loader	55,617.9
Cabin Service Truck	Diesel - Hi-Way F650 - Cabin Service Truck	1,199.9
Cabin Service Truck	Gasoline - Hi-Way F650 - Cabin Service Truck	96,428.0
Cargo Loader	Diesel - FMC Commander 30 - Cargo Loader	43,955.5
Cart	Gasoline - Taylor Dunn - Cart	5.1
Catering Truck	Diesel - Hi-Way F650 - Catering Truck	92,507.3
Catering Truck	Gasoline - Hi-Way F650 - Catering Truck	5,901.8
Fuel Truck	Diesel - F750, Dukes Transportation Services, DART 3000 to 6000 gallon - Fuel Truck	11,705.6
Generator	Diesel - (None specified. EPA default data used.) - Generator	61.0
Ground Power Unit	Diesel - TLD, 28 VDC - Ground Power Unit	40,794.9
Hydrant Truck	Diesel - F250 / F350 - Hydrant Truck	34,887.8
Hydrant Truck	Gasoline - F250 / F350 - Hydrant Truck	4,322.6
Lavatory Truck	Diesel - TLD 1410 - Lavatory Truck	30,937.8
Lavatory Truck	Gasoline - TLD 1410 - Lavatory Truck	23,850.5
Lift	Diesel - (None specified. EPA default data used.) - Lift	5.1
Passenger Stand	Diesel - Wollard CMPS170 / CMPS228 - Passenger Stand	1,108.1
Service Truck	Diesel - F250 / F350 - Service Truck	6,916.6
Service Truck	Electric - F250 / F350 - Service Truck	2,424.4
Service Truck	Gasoline - F250 / F350 - Service Truck	43,179.7
	Total	**909,450.5**

Source: AEDT 3f; Port of Seattle and Landrum & Brown, 2024.

TABLE 3-6: PORT-OWNED AIRFIELD VEHICLES AND EQUIPMENT FUEL CONSUMPTION – FUTURE (2032) PROPOSED ACTION

Category / Description	AEDT Equipment Name	Fuel Type	Total Annual Consumption Per Category (Gallons)
Airfield Maintenance			
Airfield Vehicles including Ford Escapes, Chevrolet pickup trucks, Ford 150 trucks, and vans	F250 / F350 - Service Truck	Gasoline	65,729
Trimmers, pressure washers, airfield lighting	Other[1]	Gasoline	1,996
Belt Loaders	Stewart & Stevenson TUG 660 - Belt Loader	Gasoline	52
Airfield Vehicles including Ford and International trucks	F250 / F350 - Service Truck	Diesel	22,729
Snowplows including Oshkosh and International trucks	F250 / F350 - Service Truck	Diesel	6,613
Mower and snow blower equipment	Other[2]	Diesel	1,173
Aircraft Tractors	Douglas TBL-400 - Aircraft Tractor	Diesel	265
Forklift	Toyota 5,000 lb - Fork Lift	Propane	28
Support Hardstand Operations			
Air Conditioners	ACE 802 - Air Conditioner	Diesel	988
Shuttle Buses	COBUS[3]	Diesel	2,088
Belt Loaders	Stewart & Stevenson TUG 660 - Belt Loader	Diesel	766
Ground Power Units	TLD, 400 Hz AC - Ground Power Unit	Diesel	467
Ford 550 Service Truck	F250 / F350 - Service Truck	Gasoline	41

1 Gasoline equipment which was not available in AEDT was grouped into AEDT's "Other" equipment type. This included trimmers, pressure washers, and airfield lighting equipment. An AEDT user specified equipment type was developed with a horsepower of 126 and load factor of 0.5.

2 Diesel equipment which was not available in AEDT was grouped into AEDT's "Other" equipment type. This included mower and snow blower equipment. An AEDT user specified equipment type was developed with a horsepower of 140 and load factor of 0.5.

3 This includes the Port of Seattle 45-foot COBUS 3000 activity. An AEDT user specified equipment type was developed with a horsepower of 300 and load factor of 0.5.

Note: Hz denotes Hertz; AC denotes Air Conditioner.

Source: Port of Seattle and Landrum & Brown, 2023.

TABLE 3-7: TENANT-OWNED GSE ANNUAL USAGE – FUTURE (2037) NO ACTION ALTERNATIVE

General Description	AEDT Equipment Name	Annual Usage (Hours)
Aircraft Tractor	Diesel - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	13,493.4
Aircraft Tractor	Diesel - Stewart & Stevenson TUG MC - Aircraft Tractor	33.8
Aircraft Tractor	Electric - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	9,654.8
Aircraft Tractor	Gasoline - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	6,216.3
Baggage Tractor	Diesel - Stewart & Stevenson TUG MA 50 - Baggage Tractor	45,791.1
Baggage Tractor	Electric - Stewart & Stevenson TUG MA 50 - Baggage Tractor	131,942.4
Baggage Tractor	Gasoline - Stewart & Stevenson TUG MA 50 - Baggage Tractor	112,349.7
Belt Loader	Diesel - Stewart & Stevenson TUG 660 - Belt Loader	2,800.7
Belt Loader	Electric - Stewart & Stevenson TUG 660 - Belt Loader	92,366.0
Belt Loader	Gasoline - Stewart & Stevenson TUG 660 - Belt Loader	55,792.7
Cabin Service Truck	Diesel - Hi-Way F650 - Cabin Service Truck	1,193.0
Cabin Service Truck	Gasoline - Hi-Way F650 - Cabin Service Truck	95,875.1
Cargo Loader	Diesel - FMC Commander 30 - Cargo Loader	45,206.4
Cart	Gasoline - Taylor Dunn - Cart	5.6
Catering Truck	Diesel - Hi-Way F650 - Catering Truck	91,976.8
Catering Truck	Gasoline - Hi-Way F650 - Catering Truck	5,868.0
Fuel Truck	Diesel - F750, Dukes Transportation Services, DART 3000 to 6000 gallon - Fuel Truck	11,987.4
Generator	Diesel - (None specified. EPA default data used.) - Generator	67.0
Ground Power Unit	Diesel - TLD, 28 VDC - Ground Power Unit	40,586.6
Hydrant Truck	Diesel - F250 / F350 - Hydrant Truck	34,687.5
Hydrant Truck	Gasoline - F250 / F350 - Hydrant Truck	4,297.8
Lavatory Truck	Diesel - TLD 1410 - Lavatory Truck	30,760.3
Lavatory Truck	Gasoline - TLD 1410 - Lavatory Truck	23,713.8
Lift	Diesel - (None specified. EPA default data used.) - Lift	5.6
Passenger Stand	Diesel - Wollard CMPS170 / CMPS228 - Passenger Stand	1,101.7
Service Truck	Diesel - F250 / F350 - Service Truck	6,883.7
Service Truck	Electric - F250 / F350 - Service Truck	2,410.5
Service Truck	Gasoline - F250 / F350 - Service Truck	43,120.0
	Total	**910,187.7**

Source: AEDT 3f; Port of Seattle and Landrum & Brown, 2024.

TABLE 3-8: PORT-OWNED AIRFIELD VEHICLES AND EQUIPMENT FUEL CONSUMPTION – FUTURE (2037) NO ACTION ALTERNATIVE

Category / Description	AEDT Equipment Name	Fuel Type	Total Annual Consumption Per Category (Gallons)
Airfield Maintenance			
Airfield Vehicles including Ford Escapes, Chevrolet pickup trucks, Ford 150 trucks, and vans	F250 / F350 - Service Truck	Gasoline	65,621
Trimmers, pressure washers, airfield lighting	Other[1]	Gasoline	1,993
Belt Loaders	Stewart & Stevenson TUG 660 - Belt Loader	Gasoline	52
Airfield Vehicles including Ford and International trucks	F250 / F350 - Service Truck	Diesel	22,691
Snowplows including Oshkosh and International trucks	F250 / F350 - Service Truck	Diesel	6,602
Mower and snow blower equipment	Other[2]	Diesel	1,171
Aircraft Tractors	Douglas TBL-400 - Aircraft Tractor	Diesel	264
Forklift	Toyota 5,000 lb - Fork Lift	Propane	28
Support Hardstand Operations			
Air Conditioners	ACE 802 - Air Conditioner	Diesel	987
Shuttle Buses	COBUS[3]	Diesel	2,085
Belt Loaders	Stewart & Stevenson TUG 660 - Belt Loader	Diesel	765
Ground Power Units	TLD, 400 Hz AC - Ground Power Unit	Diesel	466
Ford 550 Service Truck	F250 / F350 - Service Truck	Gasoline	41

1 Gasoline equipment which was not available in AEDT was grouped into AEDT's "Other" equipment type. This included trimmers, pressure washers, and airfield lighting equipment. An AEDT user specified equipment type was developed with a horsepower of 126 and load factor of 0.5.

2 Diesel equipment which was not available in AEDT was grouped into AEDT's "Other" equipment type. This included mower and snow blower equipment. An AEDT user specified equipment type was developed with a horsepower of 140 and load factor of 0.5.

3 This includes the Port of Seattle 45-foot COBUS 3000 activity. An AEDT user specified equipment type was developed with a horsepower of 300 and load factor of 0.5.

Note: Hz denotes Hertz; AC denotes Air Conditioner.

Source: Port of Seattle and Landrum & Brown, 2023.

TABLE 3-9: TENANT-OWNED GSE ANNUAL USAGE – FUTURE (2037) PROPOSED ACTION

General Description	AEDT Equipment Name	Annual Usage (Hours)
Aircraft Tractor	Diesel - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	14,449.1
Aircraft Tractor	Diesel - Stewart & Stevenson TUG MC - Aircraft Tractor	33.8
Aircraft Tractor	Electric - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	10,401.6
Aircraft Tractor	Gasoline - Stewart & Stevenson TUG GT-35, Douglas TBL-180 - Aircraft Tractor	6,637.5
Baggage Tractor	Diesel - Stewart & Stevenson TUG MA 50 - Baggage Tractor	47,930.4
Baggage Tractor	Electric - Stewart & Stevenson TUG MA 50 - Baggage Tractor	142,147.9
Baggage Tractor	Gasoline - Stewart & Stevenson TUG MA 50 - Baggage Tractor	119,632.2
Belt Loader	Diesel - Stewart & Stevenson TUG 660 - Belt Loader	3,017.4
Belt Loader	Electric - Stewart & Stevenson TUG 660 - Belt Loader	99,510.2
Belt Loader	Gasoline - Stewart & Stevenson TUG 660 - Belt Loader	59,674.3
Cabin Service Truck	Diesel - Hi-Way F650 - Cabin Service Truck	1,285.3
Cabin Service Truck	Gasoline - Hi-Way F650 - Cabin Service Truck	103,291.0
Cargo Loader	Diesel - FMC Commander 30 - Cargo Loader	47,382.1
Cart	Gasoline - Taylor Dunn - Cart	5.6
Catering Truck	Diesel - Hi-Way F650 - Catering Truck	99,091.3
Catering Truck	Gasoline - Hi-Way F650 - Catering Truck	6,321.9
Fuel Truck	Diesel - F750, Dukes Transportation Services, DART 3000 to 6000 gallon - Fuel Truck	12,608.5
Generator	Diesel - (None specified. EPA default data used.) - Generator	67.0
Ground Power Unit	Diesel - TLD, 28 VDC - Ground Power Unit	43,704.7
Hydrant Truck	Diesel - F250 / F350 - Hydrant Truck	37,370.8
Hydrant Truck	Gasoline - F250 / F350 - Hydrant Truck	4,630.3
Lavatory Truck	Diesel - TLD 1410 - Lavatory Truck	33,139.7
Lavatory Truck	Gasoline - TLD 1410 - Lavatory Truck	25,548.0
Lift	Diesel - (None specified. EPA default data used.) - Lift	5.6
Passenger Stand	Diesel - Wollard CMPS170 / CMPS228 - Passenger Stand	1,187.0
Service Truck	Diesel - F250 / F350 - Service Truck	7,413.9
Service Truck	Electric - F250 / F350 - Service Truck	2,597.0
Service Truck	Gasoline - F250 / F350 - Service Truck	46,290.2
	Total	**975,374.0**

Source: AEDT 3f; Port of Seattle and Landrum & Brown, 2024.

TABLE 3-10: PORT-OWNED AIRFIELD VEHICLES AND EQUIPMENT FUEL CONSUMPTION – FUTURE (2037) PROPOSED ACTION

Category / Description	AEDT Equipment Name	Fuel Type	Total Annual Consumption Per Category (Gallons)
Airfield Maintenance			
Airfield Vehicles including Ford Escapes, Chevrolet pickup trucks, Ford 150 trucks, and vans	F250 / F350 - Service Truck	Gasoline	70,460
Trimmers, pressure washers, airfield lighting	Other[1]	Gasoline	2,140
Belt Loaders	Stewart & Stevenson TUG 660 - Belt Loader	Gasoline	56
Airfield Vehicles including Ford and International trucks	F250 / F350 - Service Truck	Diesel	24,365
Snowplows including Oshkosh and International trucks	F250 / F350 - Service Truck	Diesel	7,089
Mower and snow blower equipment	Other[2]	Diesel	1,258
Aircraft Tractors	Douglas TBL-400 - Aircraft Tractor	Diesel	284
Forklift	Toyota 5,000 lb - Fork Lift	Propane	30
Support Hardstand Operations			
Air Conditioners	ACE 802 - Air Conditioner	Diesel	1,060
Shuttle Buses	COBUS[3]	Diesel	2,239
Belt Loaders	Stewart & Stevenson TUG 660 - Belt Loader	Diesel	821
Ground Power Units	TLD, 400 Hz AC - Ground Power Unit	Diesel	501
Ford 550 Service Truck	F250 / F350 - Service Truck	Gasoline	44

1 Gasoline equipment which was not available in AEDT was grouped into AEDT's "Other" equipment type. This included trimmers, pressure washers, and airfield lighting equipment. An AEDT user specified equipment type was developed with a horsepower of 126 and load factor of 0.5.

2 Diesel equipment which was not available in AEDT was grouped into AEDT's "Other" equipment type. This included mower and snow blower equipment. An AEDT user specified equipment type was developed with a horsepower of 140 and load factor of 0.5.

3 This includes the Port of Seattle 45-foot COBUS 3000 activity. An AEDT user specified equipment type was developed with a horsepower of 300 and load factor of 0.5.

Note: Hz denotes Hertz; AC denotes Air Conditioner.

Source: Port of Seattle and Landrum & Brown, 2023.

TABLE 3-11: 2022 EMISSION FACTORS FOR GSE

Fuel	Horsepower Group	CO_2 (g/hp-hr)	N_2O (g/hp-hr)	CH_4 (g/hp-hr)
Diesel	50 < hp <= 75	595.85	0.000	0.01263
Diesel	75 < hp <= 100	595.99	0.000	0.00508
Diesel	100 < hp <= 175	536.69	0.000	0.00417
Diesel	175 < hp <= 300	536.71	0.000	0.00353
Diesel	600 < hp <= 750	536.62	0.000	0.00602
Gasoline	16 < hp <= 25	1045.90	0.000	0.72560
Gasoline	75 < hp <= 100	699.14	0.000	0.04952
Gasoline	100 < hp <= 175	699.14	0.000	0.04952
LPG	50 < hp <= 75	551.27	0.000	0.02528

Note: hp denotes horsepower, g denotes grams, hr denotes hour, LPG denotes liquefied petroleum gas
Source: MOVES4. Landrum & Brown, 2024.

TABLE 3-12: 2032 EMISSION FACTORS FOR GSE

Fuel	Horsepower Group	CO_2 (g/hp-hr)	N_2O (g/hp-hr)	CH_4 (g/hp-hr)
Diesel	50 < hp <= 75	595.99	0.000	0.00904
Diesel	75 < hp <= 100	596.13	0.000	0.00074
Diesel	100 < hp <= 175	536.80	0.000	0.00074
Diesel	175 < hp <= 300	536.80	0.000	0.00048
Diesel	600 < hp <= 750	536.77	0.000	0.00132
Gasoline	16 < hp <= 25	1045.89	0.000	0.72595
Gasoline	75 < hp <= 100	699.16	0.000	0.04877
Gasoline	100 < hp <= 175	699.15	0.000	0.04877
LPG	50 < hp <= 75	551.27	0.000	0.02490

Note: hp denotes horsepower, g denotes grams, hr denotes hour, LPG denotes liquefied petroleum gas
Source: MOVES4. Landrum & Brown, 2024.

TABLE 3-13: 2037 EMISSION FACTORS FOR GSE

Fuel	Horsepower Group	CO_2 (g/hp-hr)	N_2O (g/hp-hr)	CH_4 (g/hp-hr)
Diesel	50 < hp <= 75	596.00	0.000	0.00889
Diesel	75 < hp <= 100	596.14	0.000	0.00054
Diesel	100 < hp <= 175	536.81	0.000	0.00058
Diesel	175 < hp <= 300	536.80	0.000	0.00037
Diesel	600 < hp <= 750	536.79	0.000	0.00066
Gasoline	16 < hp <= 25	1045.90	0.000	0.72594
Gasoline	75 < hp <= 100	699.15	0.000	0.04896
Gasoline	100 < hp <= 175	699.15	0.000	0.04896
LPG	50 < hp <= 75	551.27	0.000	0.02500

Note: hp denotes horsepower, g denotes grams, hr denotes hour, LPG denotes liquefied petroleum gas
Source: MOVES4. Landrum & Brown, 2024.

Attachment 4 Stationary Sources

This attachment contains the following tables:

Existing (2022) Condition

- Table 4-1 Natural Gas Boilers and Heaters – Existing (2022) Condition
- Table 4-2 Diesel Generators – Existing (2022) Condition

Future (2032) No Action Alternative

- Table 4-3 Natural Gas Boilers and Heaters – Future (2032) No Action Alternative
- Table 4-4 Diesel Generators – Future (2032) No Action Alternative

Future (2032) Proposed Action

- Table 4-5 Natural Gas Boilers and Heaters – Future (2032) Proposed Action
- Table 4-6 Diesel Generators – Future (2032) Proposed Action

Diesel Generators – Summary Comparison of Annual Usage (Hours)

- Table 4-7 Diesel Generators – Summary Comparison of Annual Usage (Hours)

Diesel Generator Fuel Rates

- Table 4-8 Diesel Generator Fuel Rate and Consumption

TABLE 4-1: NATURAL GAS BOILERS AND HEATERS – EXISTING (2022) CONDITION

Location	AEDT Equipment Type	Annual Consumption (Therms)
Central Plant Boiler	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	2,980,291
Pumphouse	Natural Gas: Residential Furnace, Uncontrolled	6,890
Fleet Maintenance (AC2 Bldg)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	15,087
Fire Department	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	27,354
Learning Center Building	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	6,882
Bus Maintenance Facility	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	36,771
Distribution Center	Natural Gas: Residential Furnace, Uncontrolled	9,448
Cargo Building 161E	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	8,981
Fire Station 2021	Natural Gas: Residential Furnace, Uncontrolled	1,840
Cargo Building 166B-2380 S 166th St	Natural Gas: Residential Furnace, Uncontrolled	75,214
Airfield Security Gate	Natural Gas: Residential Furnace, Uncontrolled	1,967
	Total	**3,170,725**

Note: BTU denotes British thermal units, hr denotes hour.
Source: Port of Seattle, and Landrum & Brown, 2023.

TABLE 4-2: DIESEL GENERATORS – EXISTING (2022) CONDITION

Location	Name	Horsepower	Annual Usage (Hours)
Building Lights Generators	Building Lights (1 & 2): Gen 1	2400	1.4
Building Lights Generators	Building Lights (1 & 2): Gen 2	2400	11.0
Concourse A	Concourse "A": Fire Pump	240	51.3
Concourse A	Concourse "A": Gen C-4	1341	39.0
Concourse A	Concourse "A": Gen Step	2012	9.0
South Parking Garage	Parking Garage: Gen	235	14.0
Toll Plaza	Toll Plaza: Gen 1	503	4.7
Pumphouse	Pumphouse: New Gen	1135	4.9
Pumphouse	Pumphouse: Pump 1	412	0.6
Pumphouse	Pumphouse: Pump 2	412	4.6
Pumphouse	Pumphouse: Pump 3	412	4.0
Pumphouse	Pumphouse: Pump 4	412	3.8
Pumphouse	Pumphouse: Pump 5	380	13.5
Pumphouse	Pumphouse: Pump 6	380	15.0
Pumphouse	Pumphouse: Pump 7	380	16.6
Pumphouse	Pumphouse: Pump 8	380	14.6
Third Runway Generator	Third Runway: Gen 1	2012	103.1
Third Runway Generator	Third Runway: Gen 2	2012	135.6
Waste Treatment Plant	Wastewater Treatment Plant: Lagoon 3 Gen	380	7.4
AUF Generator 1	Generator 1	4351	3.0
AUF Generator 2	Generator 2	4351	3.4
AUF Generator 3	Generator 3	4351	3.4
AUF Generator 4	Generator 4	4351	3.4
AUF Generator 5	Generator 5	4351	3.3
AUF Generator 6	Generator 6	4351	3.9
AUF Generator 7	Generator 7	4351	4.2
AUF Generator 8	Generator 8	4351	3.3
AUF Generator 9	Generator 9	4351	3.1
AUF Generator 10	Generator 10	4351	1.5
Fire Station 2021	Generator 550kW	738	1.6
North Satellite	NSAT Generator	1910	21.0

Source: Port of Seattle and Landrum & Brown, 2023.

TABLE 4-3: NATURAL GAS BOILERS AND HEATERS – FUTURE (2032) NO ACTION ALTERNATIVE

Location	AEDT Equipment Type	Annual Consumption (Therms)
Central Plant Boiler	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	2,980,291
Pumphouse	Natural Gas: Residential Furnace, Uncontrolled	6,890
Fleet Maintenance (AC2 Bldg)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	15,087
Fire Department	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	27,354
Learning Center Building	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	6,882
Bus Maintenance Facility	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	36,771
Distribution Center	Natural Gas: Residential Furnace, Uncontrolled	9,448
Cargo Building 161E	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	8,981
Fire Station 2021	Natural Gas: Residential Furnace, Uncontrolled	1,840
Cargo Building 166B-2380 S 166th St	Natural Gas: Residential Furnace, Uncontrolled	75,214
Airfield Security Gate	Natural Gas: Residential Furnace, Uncontrolled	1,967
Central Terminal Renovation Project	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	9,172
Concourse A Expansion Project For Lounges	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	43,109
C1 Building Expansion	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	99,060
	Total	**3,322,066**

Note: BTU denotes British thermal units, hr denotes hour.
Source: Port of Seattle, and Landrum & Brown, 2024.

TABLE 4-4: DIESEL GENERATORS – FUTURE (2032) NO ACTION ALTERNATIVE

Location	Name	Horsepower	Annual Usage (Hours)
Building Lights Generators	Building Lights (1 & 2): Gen 1	2400	1.4
Building Lights Generators	Building Lights (1 & 2): Gen 2	2400	11.0
Concourse A	Concourse "A": Fire Pump	240	51.3
Concourse A	Concourse "A": Gen C-4	1341	39.0
Concourse A	Concourse "A": Gen Step	2012	9.0
South Parking Garage	Parking Garage: Gen	235	14.0
Toll Plaza	Toll Plaza: Gen 1	503	4.7
Pumphouse	Pumphouse: New Gen	1135	4.9
Pumphouse	Pumphouse: Pump 1	412	0.6
Pumphouse	Pumphouse: Pump 2	412	4.6
Pumphouse	Pumphouse: Pump 3	412	4.0
Pumphouse	Pumphouse: Pump 4	412	3.8
Pumphouse	Pumphouse: Pump 5	380	13.5
Pumphouse	Pumphouse: Pump 6	380	15.0
Pumphouse	Pumphouse: Pump 7	380	16.6
Pumphouse	Pumphouse: Pump 8	380	14.6
Third Runway Generator	Third Runway: Gen 1	2012	103.1
Third Runway Generator	Third Runway: Gen 2	2012	135.6
Waste Treatment Plant	Wastewater Treatment Plant: Lagoon 3 Gen	380	7.4
AUF Generator 1	Generator 1	4351	3.0
AUF Generator 2	Generator 2	4351	3.4
AUF Generator 3	Generator 3	4351	3.4
AUF Generator 4	Generator 4	4351	3.4
AUF Generator 5	Generator 5	4351	3.3
AUF Generator 6	Generator 6	4351	3.9
AUF Generator 7	Generator 7	4351	4.2
AUF Generator 8	Generator 8	4351	3.3
AUF Generator 9	Generator 9	4351	3.1
AUF Generator 10	Generator 10	4351	1.5
Fire Station 2021	Generator 550kW	738	1.6
North Satellite	NSAT Generator	1910	21.0
Central Terminal Renovation Project	Generator	2012	15.0
Concourse A Expansion Project For Lounges	Generator	2012	15.0
C1 Building Expansion	Generator	2012	15.0

Source: Port of Seattle and Landrum & Brown, 2024.

TABLE 4-5: NATURAL GAS BOILERS - FUTURE (2032) PROPOSED ACTION

Location	AEDT Equipment Type	Annual Consumption (Therms)
Central Plant Boiler	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	2,980,291
Pumphouse	Natural Gas: Residential Furnace, Uncontrolled	6,890
Fleet Maintenance (AC2 Bldg)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	15,087
Fire Department	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	27,354
Learning Center Building	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	6,882
Bus Maintenance Facility	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	36,771
Distribution Center	Natural Gas: Residential Furnace, Uncontrolled	9,448
Cargo Building 161E	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	8,981
Fire Station 2021	Natural Gas: Residential Furnace, Uncontrolled	1,840
Cargo Building 166B-2380 S 166th St	Natural Gas: Residential Furnace, Uncontrolled	75,214
Airfield Security Gate	Natural Gas: Residential Furnace, Uncontrolled	1,967
Central Terminal Renovation Project	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	9,172
Concourse A Expansion Project For Lounges	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	43,109
C1 Building Expansion	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	99,060
North Gates (T1)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	558,587
Second Terminal and Parking (T2)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	527,401
Cargo 4 South Redevelopment (C01)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	14,644
Cargo Warehousing (C02)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	60,404
Cargo Warehousing (C03)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	16,474
Elevated Busway and Stations (L02)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	60,537
Main Terminal North GT Lot (L04)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	14,827
Primary ARFF (S02)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	21,233
Secondary ARFF (S03)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	1,830
Westside Maintenance Campus (S07)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	73,218
Airline Support North (S08)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	2,746
Airline Support West (S09)	Natural Gas: Wall Fired Boiler, <100 Million BTU/hr, Uncontrolled	2,288
	Total	**4,686,321**

Note: BTU denotes British thermal units, hr denotes hour.
Source: Port of Seattle and Landrum & Brown, 2024.

TABLE 4-6: DIESEL GENERATORS - FUTURE (2032) PROPOSED ACTION

Location	Name	Horsepower	Annual Usage (Hours)
Building Lights Generators	Building Lights (1 & 2): Gen 1	2400	1.4
Building Lights Generators	Building Lights (1 & 2): Gen 2	2400	11.0
Concourse A	Concourse "A": Fire Pump	240	51.3
Concourse A	Concourse "A": Gen C-4	1341	39.0
Concourse A	Concourse "A": Gen Step	2012	9.0
South Parking Garage	Parking Garage: Gen	235	14.0
Toll Plaza	Toll Plaza: Gen 1	503	4.7
Pumphouse	Pumphouse: New Gen	1135	4.9
Pumphouse	Pumphouse: Pump 1	412	0.6
Pumphouse	Pumphouse: Pump 2	412	4.6
Pumphouse	Pumphouse: Pump 3	412	4.0
Pumphouse	Pumphouse: Pump 4	412	3.8
Pumphouse	Pumphouse: Pump 5	380	13.5
Pumphouse	Pumphouse: Pump 6	380	15.0
Pumphouse	Pumphouse: Pump 7	380	16.6
Pumphouse	Pumphouse: Pump 8	380	14.6
Third Runway Generator	Third Runway: Gen 1	2012	103.1
Third Runway Generator	Third Runway: Gen 2	2012	135.6
Waste Treatment Plant	Wastewater Treatment Plant: Lagoon 3 Gen	380	7.4
AUF Generator 1	Generator 1	4351	3.0
AUF Generator 2	Generator 2	4351	3.4
AUF Generator 3	Generator 3	4351	3.4
AUF Generator 4	Generator 4	4351	3.4
AUF Generator 5	Generator 5	4351	3.3
AUF Generator 6	Generator 6	4351	3.9
AUF Generator 7	Generator 7	4351	4.2
AUF Generator 8	Generator 8	4351	3.3
AUF Generator 9	Generator 9	4351	3.1
AUF Generator 10	Generator 10	4351	1.5
Fire Station 2021	Generator 550kW	738	1.6
North Satellite	NSAT Generator	1910	21.0
Central Terminal Renovation Project	Generator	2012	15.0
Concourse A Expansion Project For Lounges	Generator	2012	15.0
C1 Building Expansion	Generator	2012	15.0
Employee Parking Structure (L07)	Generator	235	4.7
Westside Maintenance Campus (S07)	Generator	2012	15.0
Primary ARFF (S02)	Generator	738	4.5
North Gates (T1)	Generator	2012	74.5
Second Terminal and Parking (T2)	Generator	2012	74.5
Centralized Receiving and Distribution Center (S10)	Generator	2012	15.0
Cargo Warehousing (C02)	Generator	2012	15.0
Cargo Warehousing (C03)	Generator	2012	15.0

Source: Port of Seattle and Landrum & Brown, 2023.

TABLE 4-7: DIESEL GENERATORS – SUMMARY COMPARISON OF ANNUAL USAGE (HOURS)

Location	Name	HP	Existing (2022) Condition	2032 & 2037 No Action	2032 & 2037 Proposed Action
Building Lights Generators	Building Lights (1 & 2): Gen 1	2400	1.4	1.4	1.4
Building Lights Generators	Building Lights (1 & 2): Gen 2	2400	11.0	11.0	11.0
Concourse A	Concourse "A": Fire Pump	240	51.3	51.3	51.3
Concourse A	Concourse "A": Gen C-4	1341	39.0	39.0	39.0
Concourse A	Concourse "A": Gen Step	2012	9.0	9.0	9.0
South Parking Garage	Parking Garage: Gen	235	14.0	14.0	14.0
Toll Plaza	Toll Plaza: Gen 1	503	4.7	4.7	4.7
Pumphouse	Pumphouse: New Gen	1135	4.9	4.9	4.9
Pumphouse	Pumphouse: Pump 1	412	0.6	0.6	0.6
Pumphouse	Pumphouse: Pump 2	412	4.6	4.6	4.6
Pumphouse	Pumphouse: Pump 3	412	4.0	4.0	4.0
Pumphouse	Pumphouse: Pump 4	412	3.8	3.8	3.8
Pumphouse	Pumphouse: Pump 5	380	13.5	13.5	13.5
Pumphouse	Pumphouse: Pump 6	380	15.0	15.0	15.0
Pumphouse	Pumphouse: Pump 7	380	16.6	16.6	16.6
Pumphouse	Pumphouse: Pump 8	380	14.6	14.6	14.6
Third Runway Generator	Third Runway: Gen 1	2012	103.1	103.1	103.1
Third Runway Generator	Third Runway: Gen 2	2012	135.6	135.6	135.6
Waste Treatment Plant	Wastewater Treatment Plant: Lagoon 3 Gen	380	7.4	7.4	7.4
AUF Generator 1	Generator 1	4351	3.0	3.0	3.0
AUF Generator 2	Generator 2	4351	3.4	3.4	3.4
AUF Generator 3	Generator 3	4351	3.4	3.4	3.4
AUF Generator 4	Generator 4	4351	3.4	3.4	3.4
AUF Generator 5	Generator 5	4351	3.3	3.3	3.3
AUF Generator 6	Generator 6	4351	3.9	3.9	3.9
AUF Generator 7	Generator 7	4351	4.2	4.2	4.2
AUF Generator 8	Generator 8	4351	3.3	3.3	3.3
AUF Generator 9	Generator 9	4351	3.1	3.1	3.1
AUF Generator 10	Generator 10	4351	1.5	1.5	1.5
Fire Station 2021	Generator 550kW	738	1.6	1.6	1.6
North Satellite	NSAT Generator	1910	21.0	21.0	21.0
Central Terminal Renovation	Generator	2012	N/A	15.0	15.0
Concourse A Expansion	Generator	2012	N/A	15.0	15.0
C1 Building Expansion	Generator	2012	N/A	15.0	15.0

TABLE 4-7: DIESEL GENERATORS – SUMMARY COMPARISON OF ANNUAL USAGE (HOURS) *(CONTINUED)*

Location	Name	HP	Existing (2022) Condition	2032 & 2037 No Action	2032 & 2037 Proposed Action
Interim Fire Station	Generator	2012	N/A	15.0	15.0
Employee Parking Structure (L07)	Generator	235	N/A	N/A	4.7
Westside Maintenance Campus (S07)	Generator	2012	N/A	N/A	15.0
Primary ARFF (S02)	Generator	738	N/A	N/A	4.5
North Gates (T1)	Generator	2012	N/A	N/A	74.5
Second Terminal and Parking (T2)	Step Generator	2012	N/A	N/A	74.5
Centralized Receiving and Distribution Center (S10)	Generator	2012	N/A	N/A	15.0
Cargo Warehousing (C02)	Concourse A	2012	N/A	N/A	15.0
Cargo Warehousing (C03)	Generator	2012	N/A	N/A	15.0
		Total	**509.2**	**554.2**	**772.4**

Note: Totals may not sum due to rounding.
Source: Port of Seattle and Landrum & Brown, 2023.

TABLE 4-8: DIESEL GENERATOR FUEL RATE

Location	Name	Fuel Rate (gallons per hour)
Building Lights Generators	Building Lights (1 & 2): Gen 1	20
Building Lights Generators	Building Lights (1 & 2): Gen 2	20
Concourse A	Concourse "A": Fire Pump	10.3
Concourse A	Concourse "A": Gen C-4	73.1
Concourse A	Concourse "A": Gen Step	103.9
South Parking Garage	Parking Garage: Gen	13
Toll Plaza	Toll Plaza: Gen 1	25
Pumphouse	Pumphouse: New Gen	20
Pumphouse	Pumphouse: Pump 1	20
Pumphouse	Pumphouse: Pump 2	20
Pumphouse	Pumphouse: Pump 3	20
Pumphouse	Pumphouse: Pump 4	20
Pumphouse	Pumphouse: Pump 5	20
Pumphouse	Pumphouse: Pump 6	20
Pumphouse	Pumphouse: Pump 7	20
Pumphouse	Pumphouse: Pump 8	20
Third Runway Generator	Third Runway: Gen 1	50
Third Runway Generator	Third Runway: Gen 2	50
Waste Treatment Plant	Wastewater Treatment Plant: Lagoon 3 Gen	20
AUF Generator 1	Generator 1	205
AUF Generator 2	Generator 2	205
AUF Generator 3	Generator 3	205
AUF Generator 4	Generator 4	205
AUF Generator 5	Generator 5	205
AUF Generator 6	Generator 6	205
AUF Generator 7	Generator 7	205
AUF Generator 8	Generator 8	205
AUF Generator 9	Generator 9	205
AUF Generator 10	Generator 10	205
Fire Station 2021	Generator 550kW	20
North Satellite Modernization Phase 2	NSAT Generator	103.9
Central Terminal Renovation Project	Central Terminal Renovation Project	103.9
Concourse A Expansion Project for Lounges	Concourse A Expansion Project for Lounges	103.9
C1 Building Expansion	C1 Building Expansion	103.9
Employee Parking Structure (L07)	Employee Parking Structure (L07)	13
Westside Maintenance Campus (S07)	Westside Maintenance Campus (S07)	103.9
Primary ARFF (S02)	Primary ARFF (S02)	103.9
North Gates (T1)	North Gates (T1)	103.9
Second Terminal and Parking (T2)	Second Terminal and Parking (T2)	103.9
Centralized Receiving and Distribution Center (S10)	Centralized Receiving and Distribution Center (S10)	103.9
Cargo Warehousing (C02)	Cargo Warehousing (C02)	103.9
Cargo Warehousing (C03)	Cargo Warehousing (C03)	103.9

Source: Port of Seattle and Landrum & Brown, 2024.

Attachment 5 Mobile Sources

This attachment contains the following exhibits and tables:

Existing (2022) Condition

- Exhibit 5-1 Roadway Areas – Existing (2022) Condition
- Exhibit 5-2 Area 1 – Existing (2022) Condition
- Exhibit 5-3 Area 2 – Existing (2022) Condition
- Exhibit 5-4 Area 3 – Existing (2022) Condition
- Exhibit 5-5 Area 4 – Existing (2022) Condition
- Exhibit 5-6 Area 5 – Existing (2022) Condition
- Exhibit 5-7 Area 6 – Existing (2022) Condition
- Exhibit 5-8 Area 7 – Existing (2022) Condition
- Exhibit 5-9 Area 8 – Existing (2022) Condition
- Exhibit 5-10 Area 9 – Existing (2022) Condition
- Exhibit 5-11 Area 10 – Existing (2022) Condition
- Table 5-1 Roadway Segments – Existing (2022) Condition
- Table 5-2 2022 Emission Factors for Motor Vehicles

Future (2032) No Action Alternative

- Table 5-3 Roadway Segments – Future (2032) No Action Alternative
- Table 5-4 2032 Emission Factors for Motor Vehicles

Future (2032) Proposed Action

- Table 5-5 Roadway Segments – Future (2032) Proposed Action
- Exhibit 5-12 Roadway Areas – Proposed Action
- Exhibit 5-13 Area 1 – Proposed Action
- Exhibit 5-14 Area 2 – Proposed Action
- Exhibit 5-15 Area 3 – Proposed Action
- Exhibit 5-16 Area 4 – Proposed Action
- Exhibit 5-17 Area 5 – Proposed Action
- Exhibit 5-18 Area 6 – Proposed Action
- Exhibit 5-19 Area 7 – Proposed Action
- Exhibit 5-20 Area 8 – Proposed Action
- Exhibit 5-21 Area 9 – Proposed Action
- Exhibit 5-22 Area 10 – Proposed Action

Future (2037) No Action Alternative

- Table 5-6 Roadway Segments – Future (2037) No Action Alternative
- Table 5-7 2037 Emission Factors for Motor Vehicles

Future (2037) Proposed Action

- Table 5-8 Roadway Segments – Future (2037) Proposed Action

EXHIBIT 5-1: ROADWAY AREAS – EXISTING (2022) CONDITION

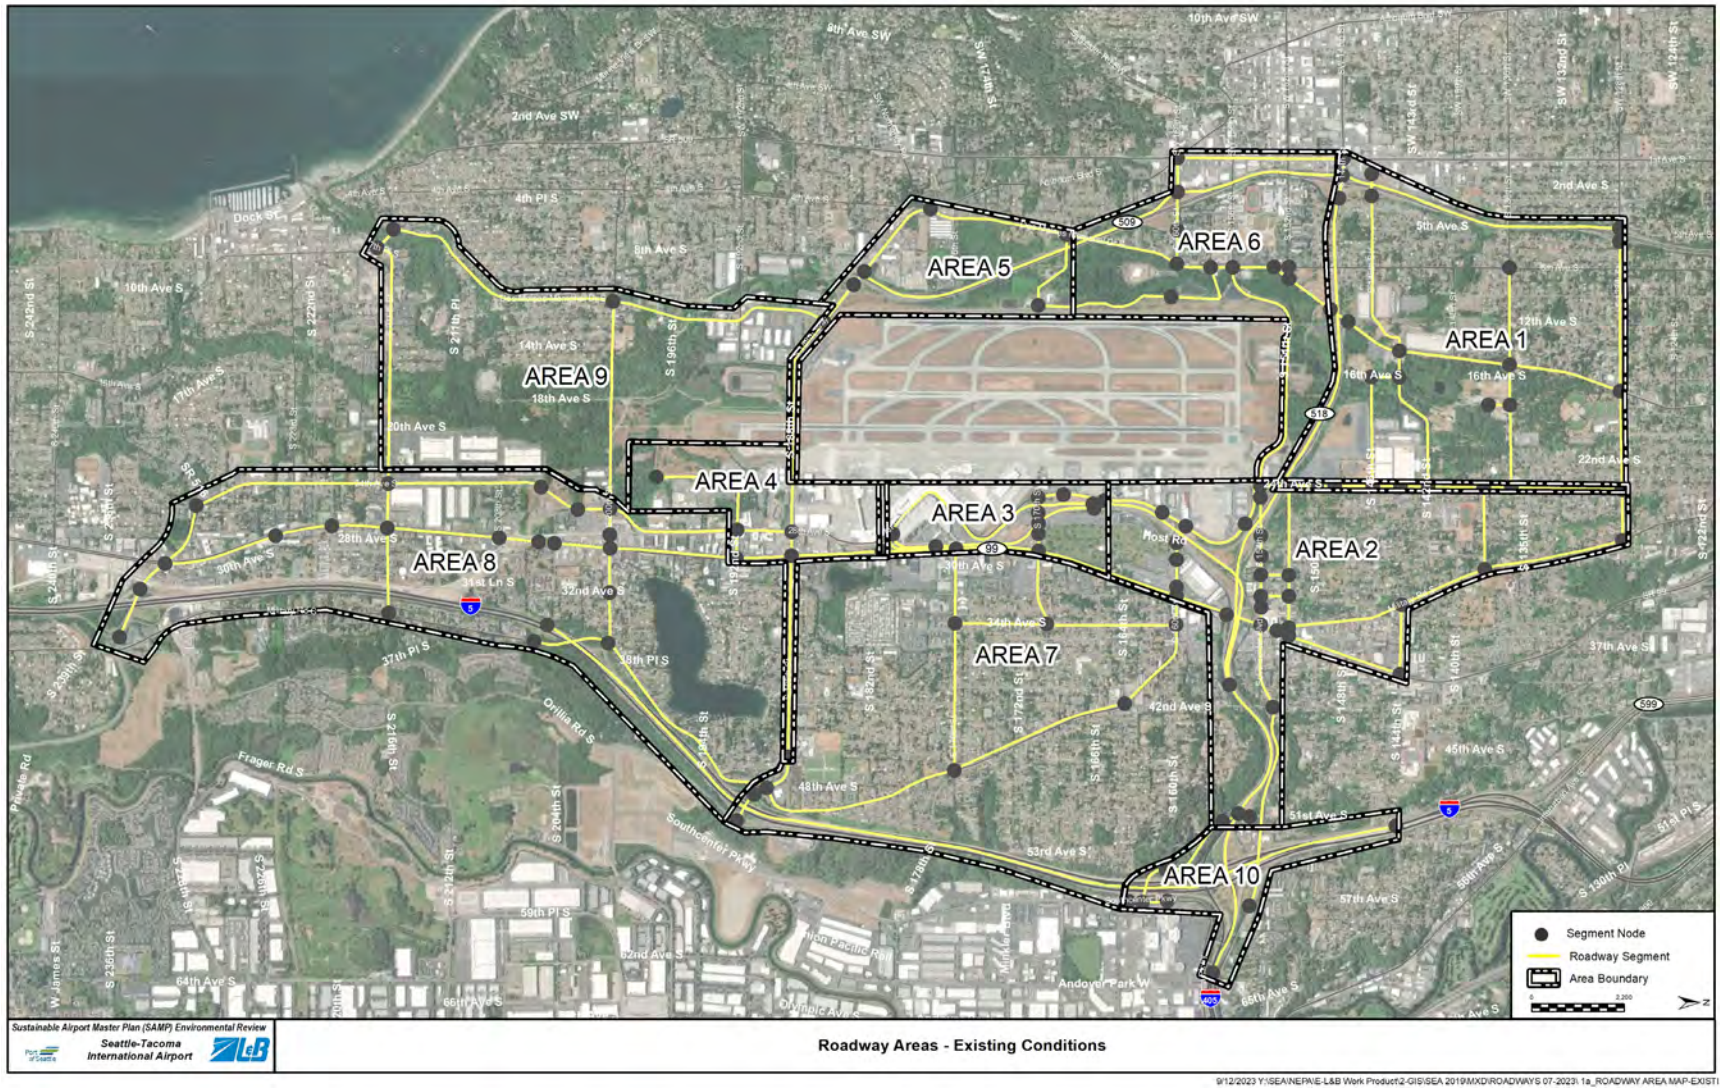

EXHIBIT 5-2: AREA 1 – EXISTING (2022) CONDITION

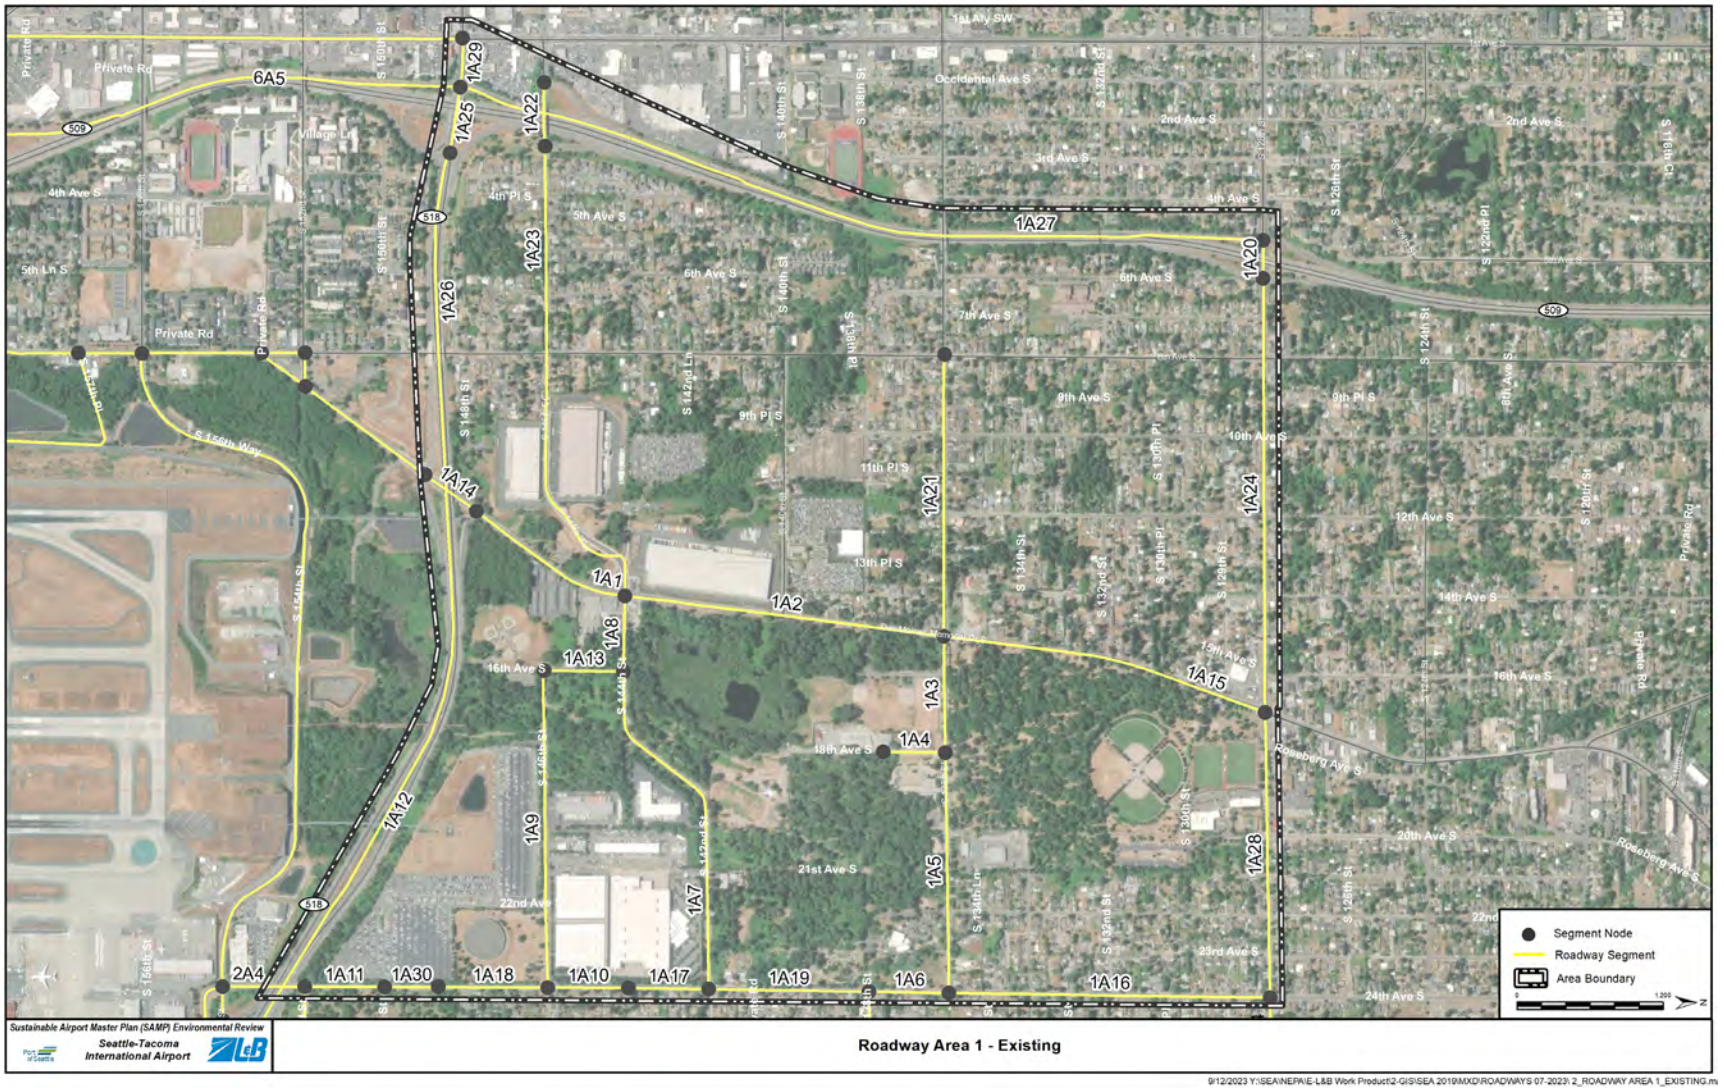

EXHIBIT 5-3: AREA 2 – EXISTING (2022) CONDITION

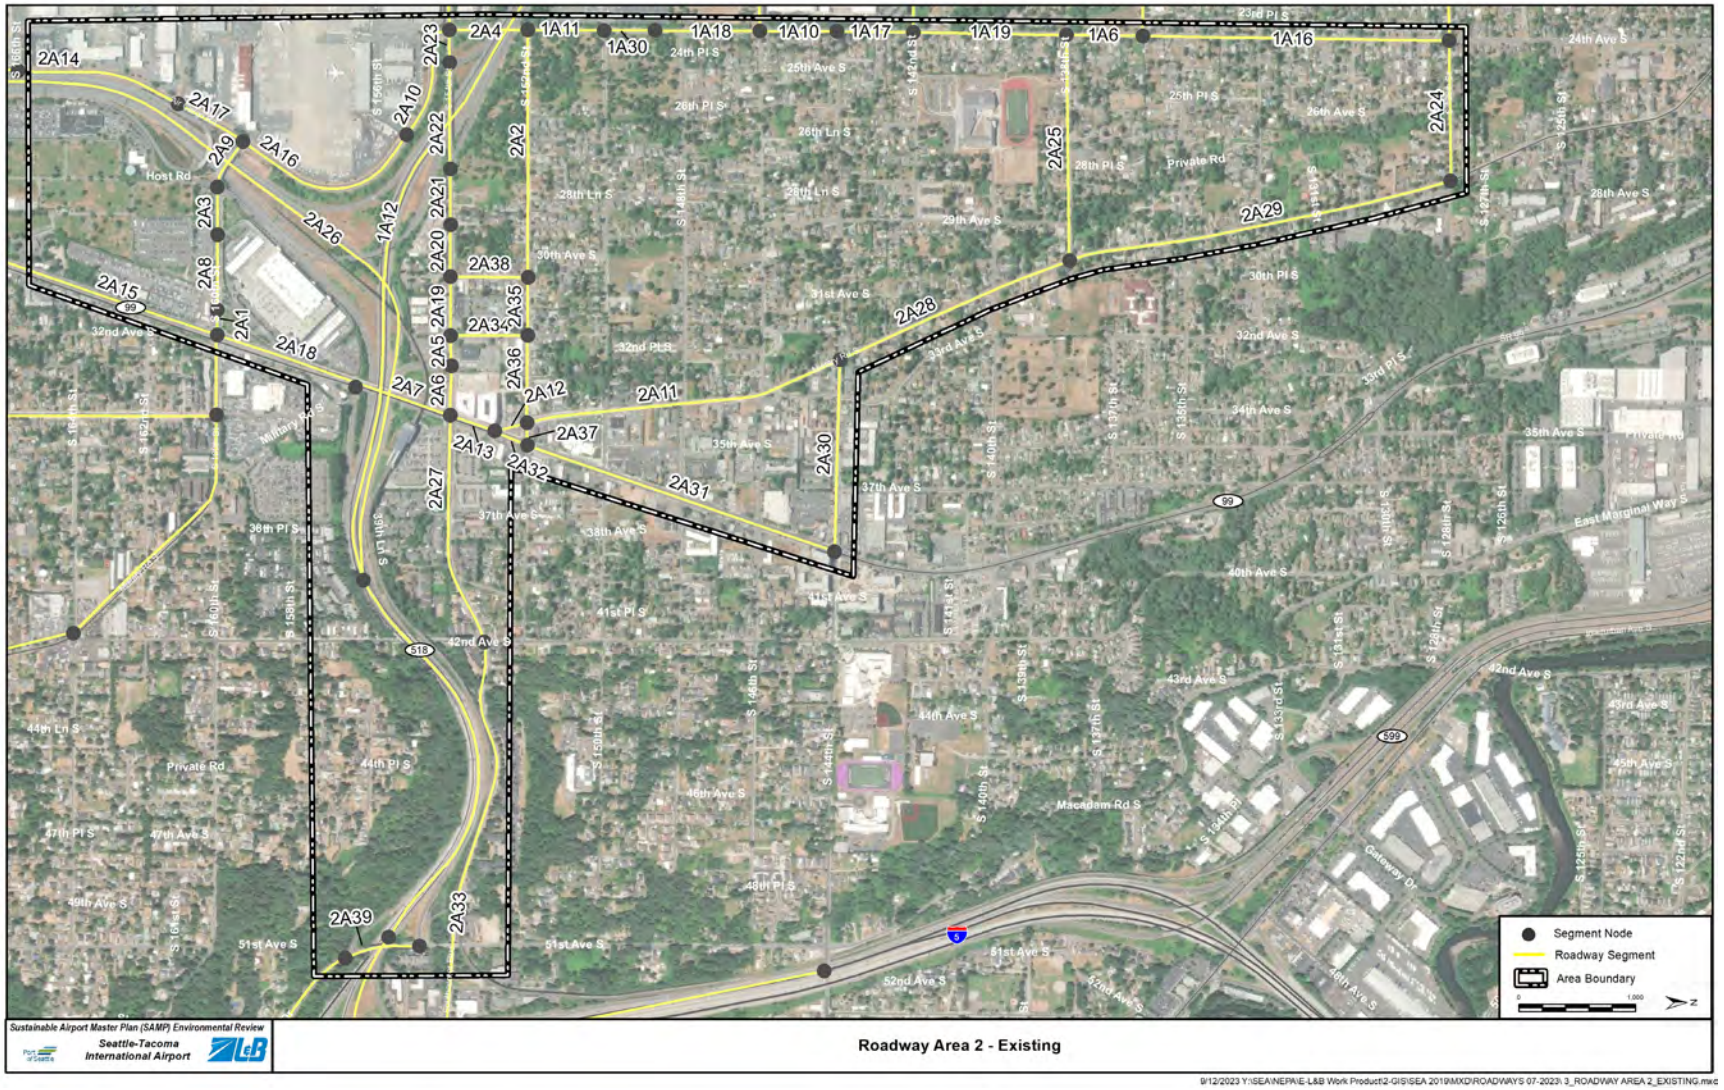

EXHIBIT 5-4: AREA 3 – EXISTING (2022) CONDITION

EXHIBIT 5-5: AREA 4 – EXISTING (2022) CONDITION

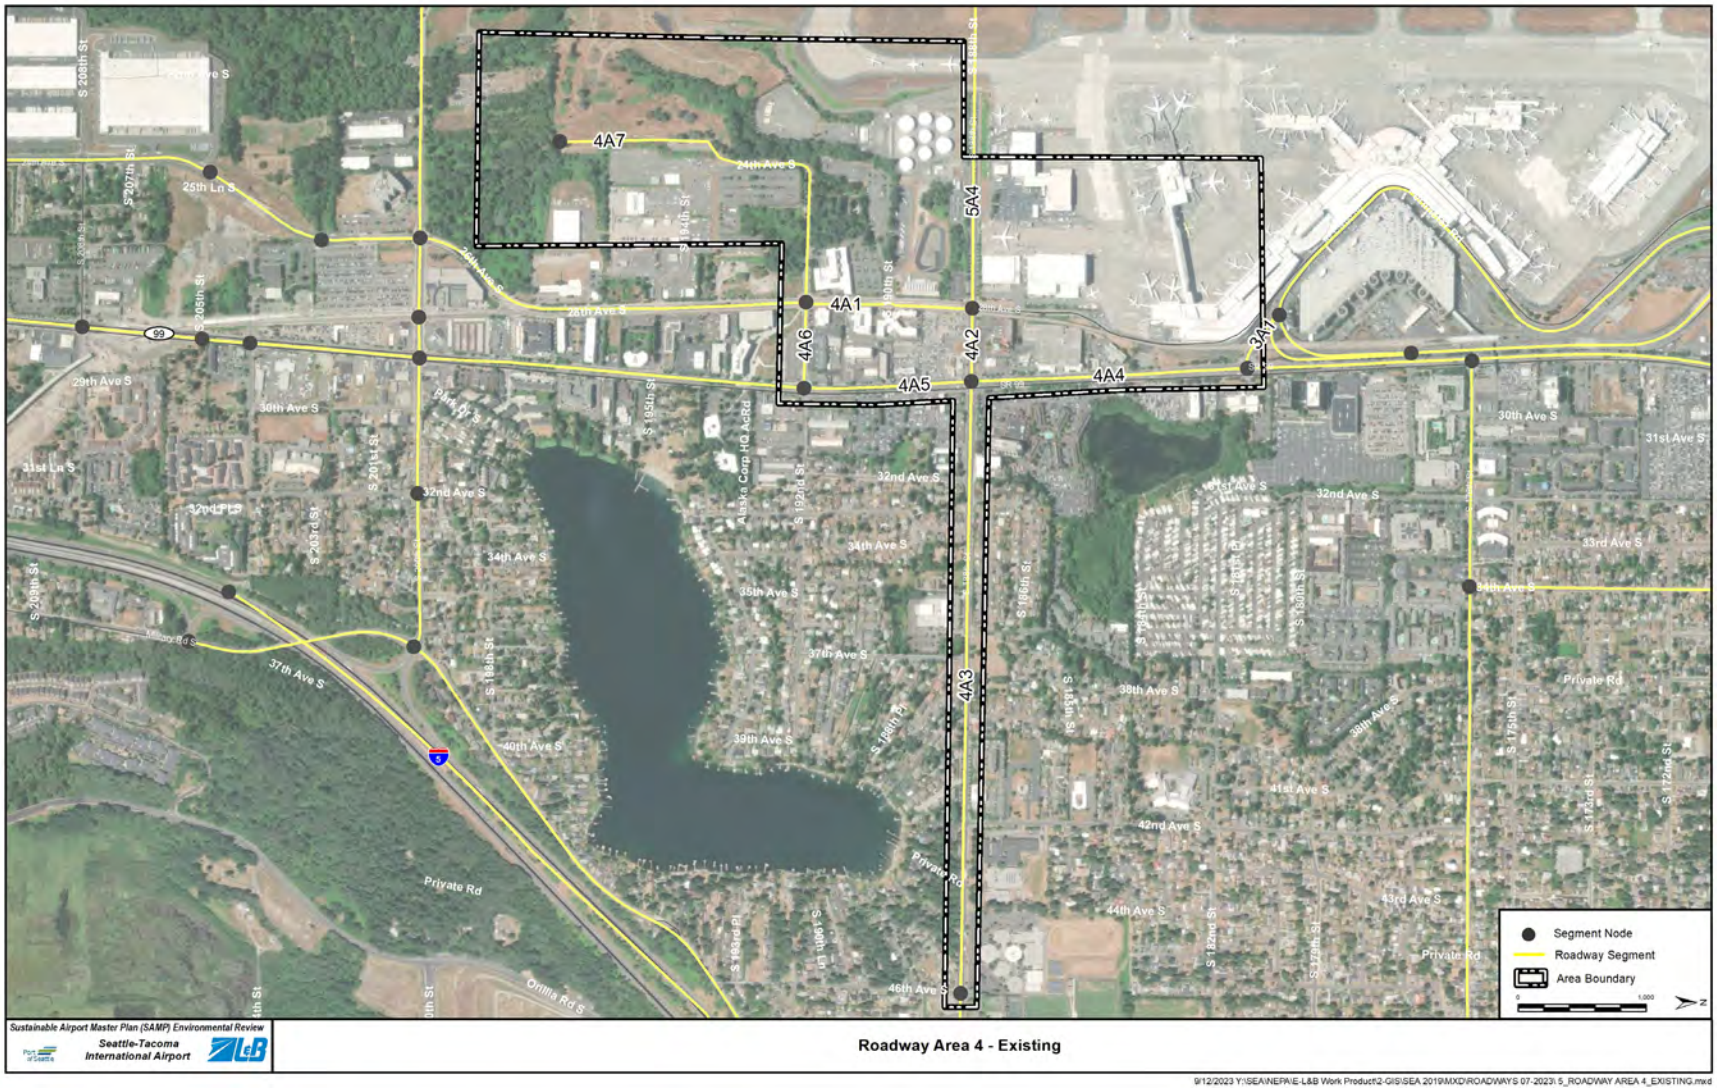

EXHIBIT 5-6: AREA 5 – EXISTING (2022) CONDITION

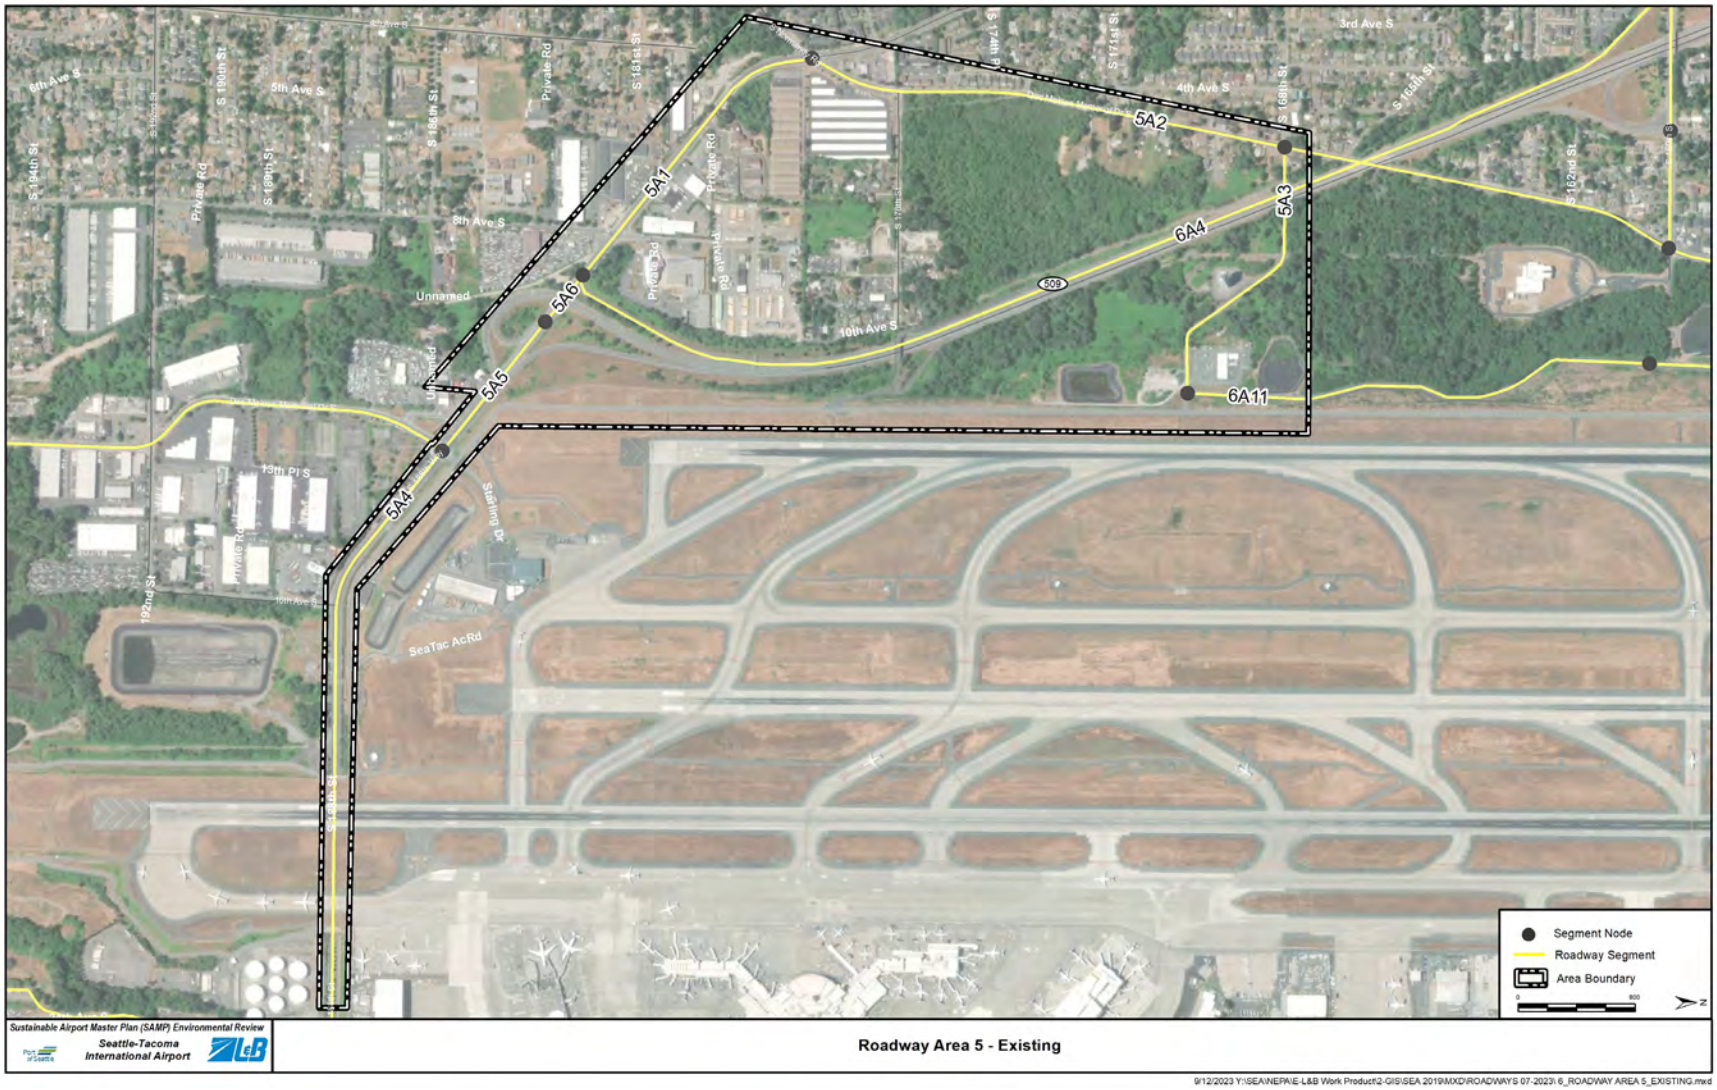

EXHIBIT 5-7: AREA 6 – EXISTING (2022) CONDITION

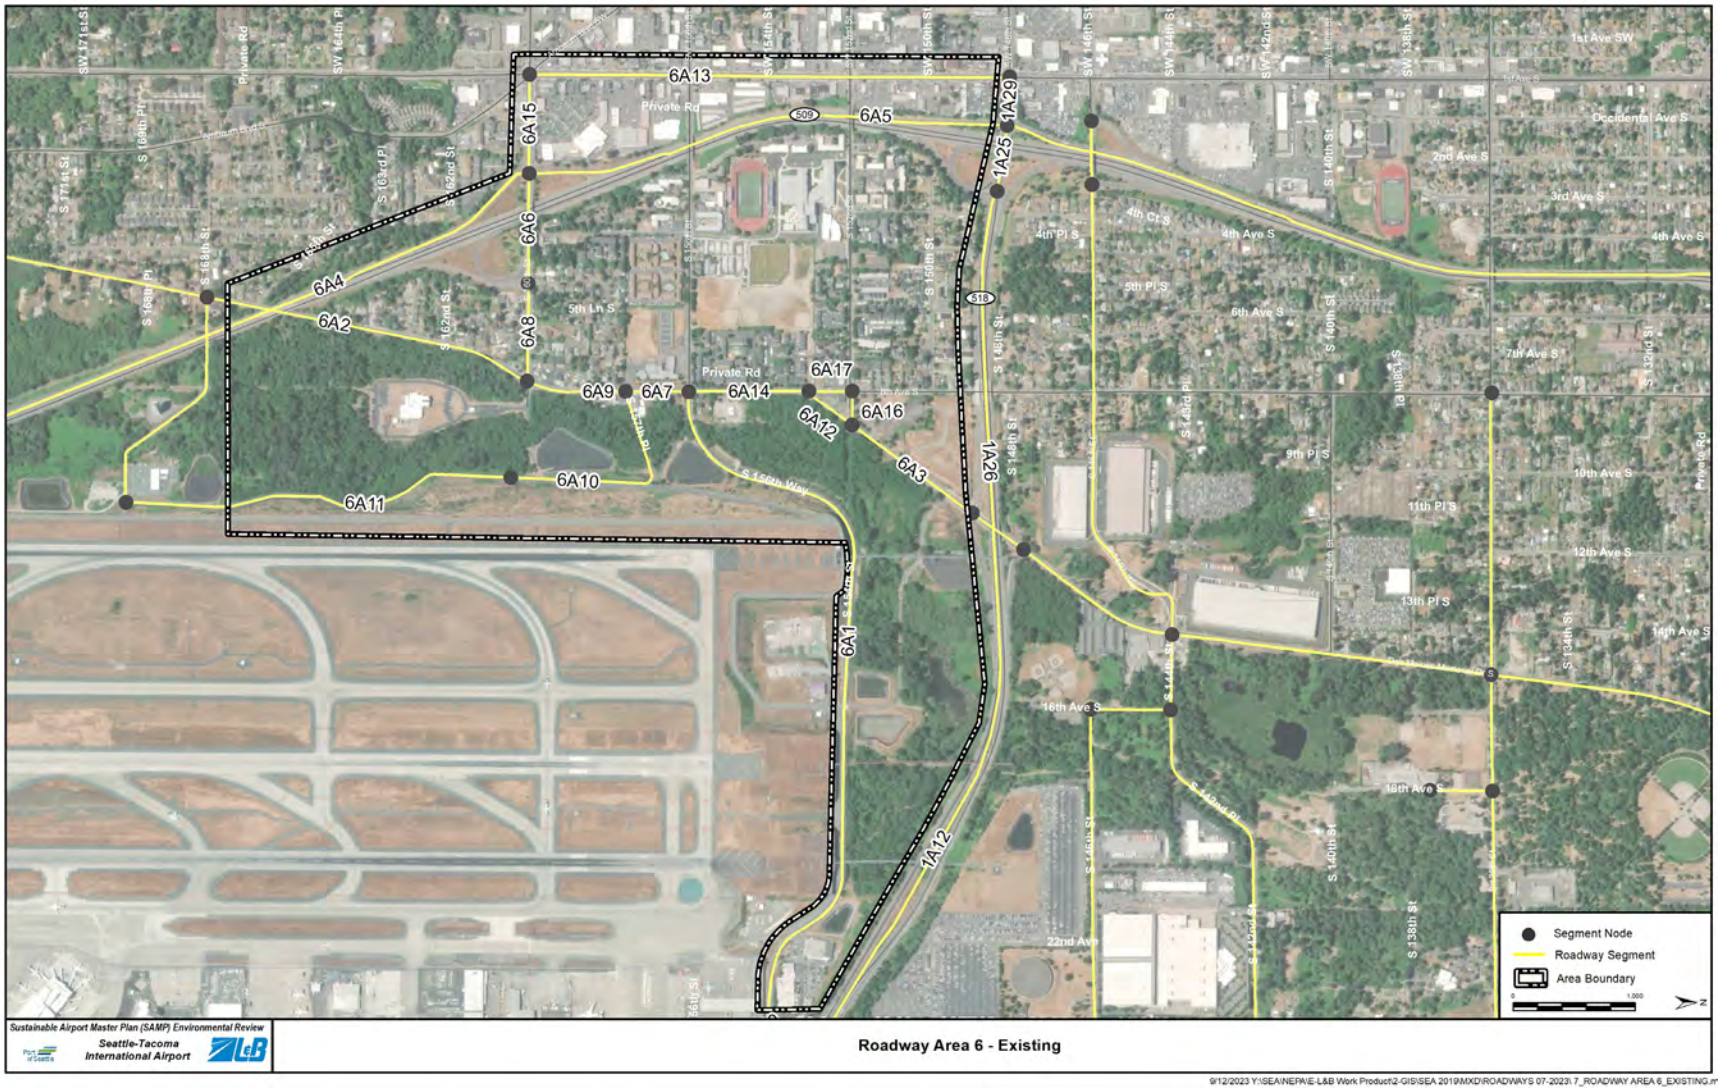

EXHIBIT 5-8: AREA 7 – EXISTING (2022) CONDITION

EXHIBIT 5-9: AREA 8 – EXISTING (2022) CONDITION

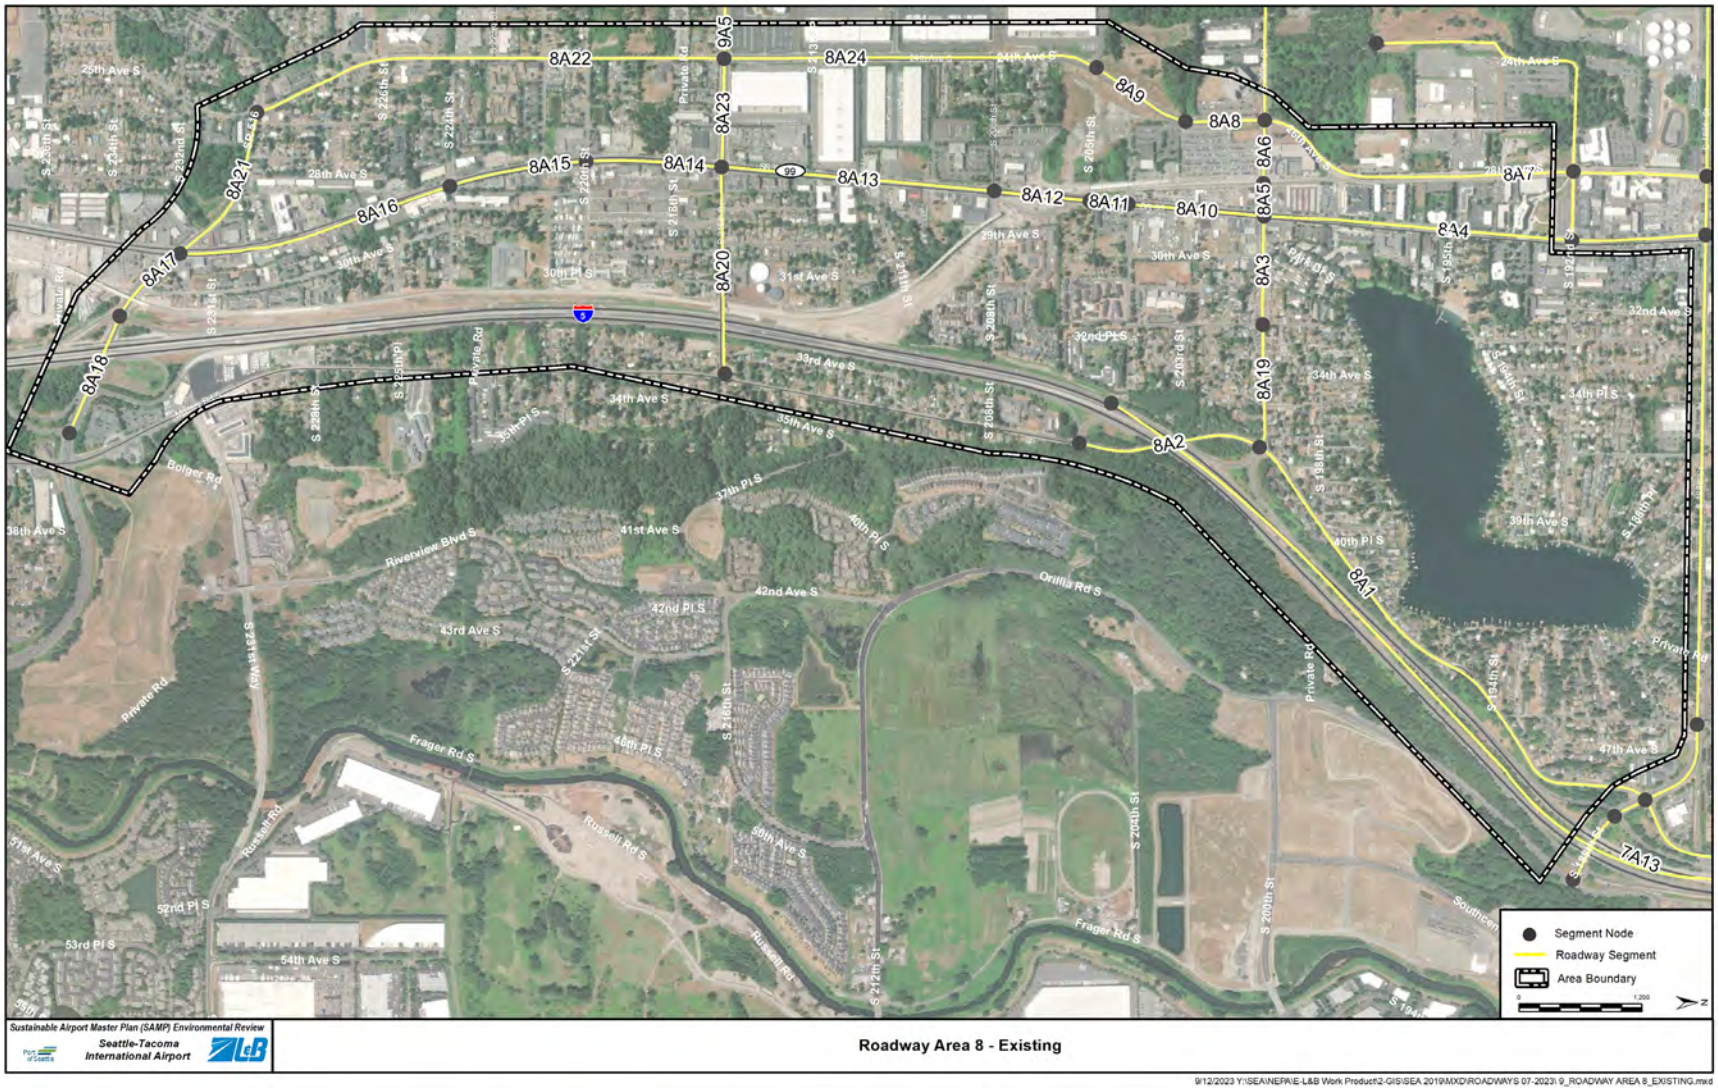

EXHIBIT 5-10: AREA 9 – EXISTING (2022) CONDITION

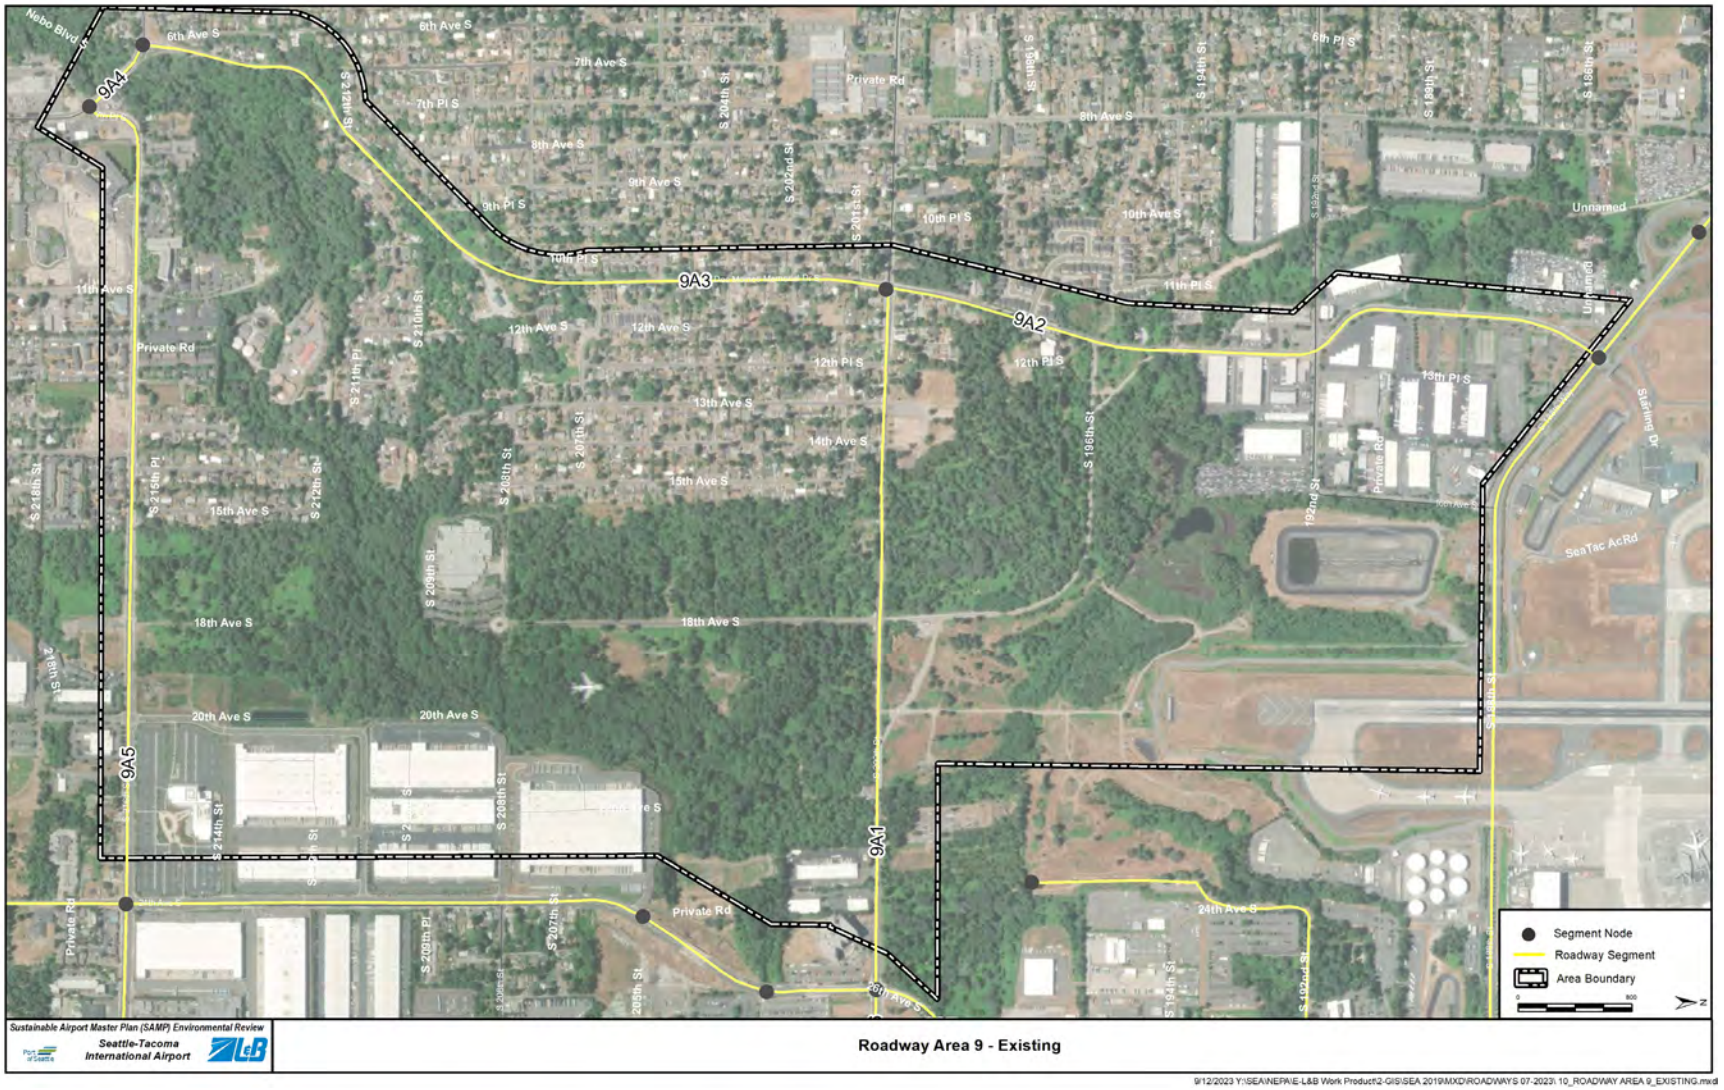

EXHIBIT 5-11: AREA 10 – EXISTING (2022) CONDITION

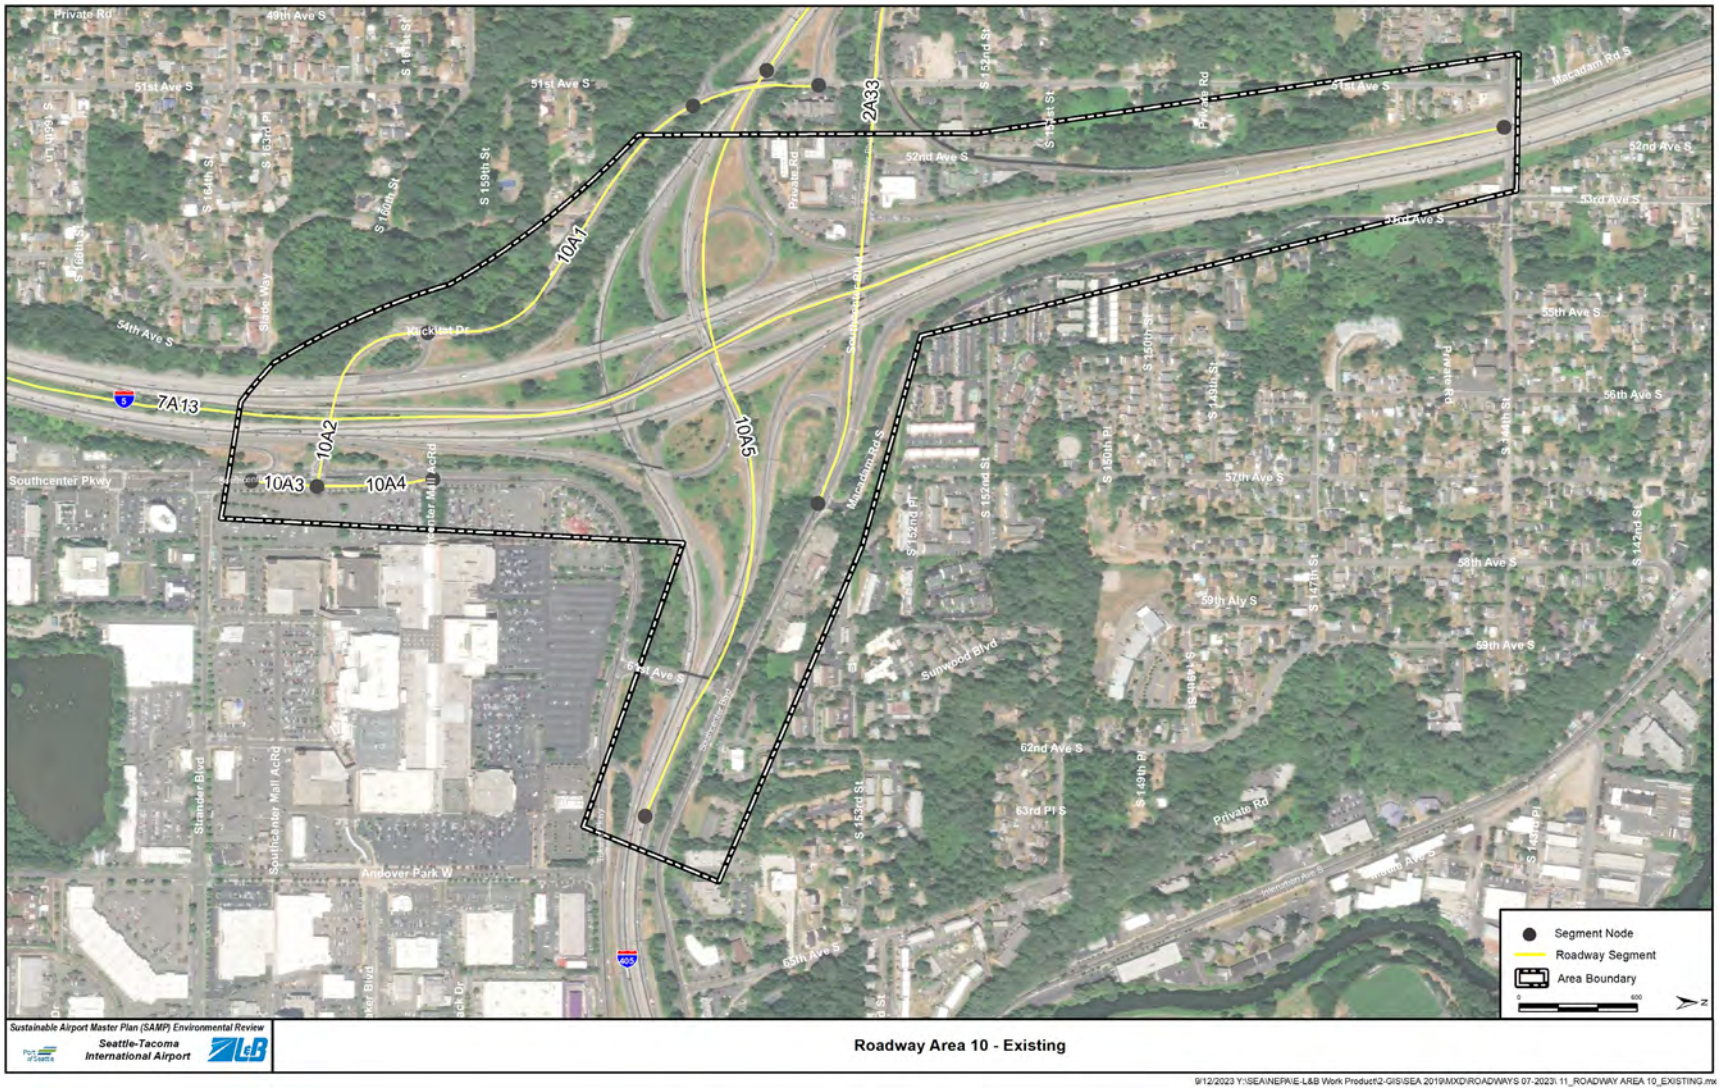

TABLE 5-1: ROADWAY SEGMENTS – EXISTING (2022) CONDITION

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
Airside Deliveries	2.000	876.662	0%	63%	36%	1%	15	639,963
1A1	0.362	19220	45%	45%	5%	5%	35	2,540,647
1A2	0.500	17560	45%	45%	5%	5%	35	3,206,001
1A3	0.181	8700	45%	45%	5%	5%	35	573,622
1A4	0.097	380	45%	45%	5%	5%	25	13,434
1A5	0.370	7350	45%	45%	5%	5%	35	992,996
1A6	0.124	11100	45%	45%	5%	5%	35	504,177
1A7	0.550	4980	45%	45%	5%	5%	30	999,895
1A8	0.118	7460	45%	45%	5%	5%	30	319,990
1A9	0.492	3340	45%	45%	5%	5%	25	600,314
1A10	0.126	10320	45%	45%	5%	5%	20	472,993
1A11	0.125	13540	45%	45%	5%	5%	20	616,250
1A12	2.486	121644	45%	45%	5%	5%	60	110,387,474
1A13	0.124	3340	45%	45%	5%	5%	25	150,711
1A14	0.096	18440	45%	45%	5%	5%	30	645,209
1A15	0.505	16220	45%	45%	5%	5%	35	2,991,326
1A16	0.499	7310	45%	45%	5%	5%	35	1,331,546
1A17	0.124	11550	45%	45%	5%	5%	20	524,772
1A18	0.170	13600	45%	45%	5%	5%	20	846,089
1A19	0.249	11150	45%	45%	5%	5%	35	1,015,207
1A20	0.061	30920	45%	45%	5%	5%	35	684,348
1A21	0.437	12130	45%	45%	5%	5%	35	1,936,562
1A22	0.097	12640	45%	45%	5%	5%	25	449,148
1A23	0.766	8490	45%	45%	5%	5%	25	2,372,291
1A24	0.676	18850	45%	45%	5%	5%	35	4,652,686
1A25	0.104	67040	45%	45%	5%	5%	10	2,536,029
1A26 (east)	0.522	60822	45%	45%	5%	5%	60	11,584,975
1A26 (west)	0.522	60822	45%	45%	5%	5%	55	11,584,975
1A27	1.286	75234	45%	45%	5%	5%	60	35,308,485
1A28	0.441	11280	45%	45%	5%	5%	35	1,817,126
1A29	0.076	48180	45%	45%	5%	5%	10	1,340,980
1A30	0.083	13100	45%	45%	5%	5%	20	397,687
2A1	0.041	17380	45%	45%	5%	5%	35	262,750
2A2	0.402	2090	45%	45%	5%	5%	25	306,861
2A3	0.081	17540	45%	45%	5%	5%	35	519,217
2A4	0.127	13360	45%	45%	5%	5%	25	620,512
2A5	0.049	23820	45%	45%	5%	5%	35	427,673
2A6	0.081	24080	45%	45%	5%	5%	35	709,455
2A7	0.160	41310	45%	45%	5%	5%	15	2,417,103
2A8	0.118	17800	45%	45%	5%	5%	35	767,653
2A9	0.086	15660	45%	45%	5%	5%	35	492,573
2A10	0.200	6690	45%	45%	5%	5%	30	487,349
2A11	0.525	9300	45%	45%	5%	5%	35	1,782,099
2A12	0.054	17470	45%	45%	5%	5%	35	345,635
2A13	0.077	34210	45%	45%	5%	5%	15	958,051
2A14	0.272	12560	41%	41%	17%	1%	30	1,249,148
2A15	0.654	34980	45%	45%	5%	5%	40	8,347,956
2A16	0.325	8770	45%	45%	5%	5%	30	1,039,768

TABLE 5-1: ROADWAY SEGMENTS – EXISTING (2022) CONDITION *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
2A17	0.122	12560	45%	45%	5%	5%	30	559,595
2A18	0.241	47050	45%	45%	5%	5%	40	4,138,204
2A19	0.095	22380	45%	45%	5%	5%	35	779,049
2A20	0.086	22120	45%	45%	5%	5%	35	692,240
2A21	0.090	22140	45%	45%	5%	5%	35	724,261
2A22	0.174	16540	45%	45%	5%	5%	25	1,049,248
2A23	0.053	15040	45%	45%	5%	5%	20	290,971
2A24	0.230	6080	45%	45%	5%	5%	35	509,821
2A25	0.367	1380	45%	45%	5%	5%	25	184,687
2A26	1.251	20213	46%	46%	7%	1%	60	9,229,758
2A27	0.384	18390	45%	45%	5%	5%	60	2,575,173
2A28	0.407	12410	45%	45%	5%	5%	35	1,844,256
2A29	0.635	11830	45%	45%	5%	5%	35	2,741,099
2A30	0.312	11700	45%	45%	5%	5%	35	1,332,622
2A31	0.531	26060	45%	45%	5%	5%	35	5,054,633
2A32	0.062	33480	45%	45%	5%	5%	35	760,096
2A33	0.985	37250	45%	45%	5%	5%	35	13,394,618
2A34	0.125	3690	45%	45%	5%	5%	25	168,861
2A35	0.096	2430	45%	45%	5%	5%	25	84,905
2A36	0.141	4320	45%	45%	5%	5%	25	221,739
2A37	0.037	9720	45%	45%	5%	5%	25	131,244
2A38	0.126	1430	45%	45%	5%	5%	25	65,882
3A1	0.093	20213	46%	46%	7%	1%	20	687,960
3A2	0.756	20213	46%	46%	7%	1%	40	5,579,346
3A3	1.151	20213	46%	46%	7%	1%	20	8,493,504
3A4	0.234	20213	46%	46%	7%	1%	30	1,727,772
3A5	0.263	20213	46%	46%	7%	1%	30	1,943,608
3A6	0.187	10740	41%	41%	17%	1%	30	732,157
3A7	0.115	17520	39%	39%	22%	1%	30	738,286
3A8	0.070	17140	39%	39%	21%	1%	35	437,508
3A9	0.046	19460	39%	39%	21%	1%	35	325,746
3A10	0.048	19260	39%	39%	21%	1%	35	335,319
3A11	0.079	21860	39%	39%	21%	1%	15	629,360
3A12	0.332	37100	45%	45%	5%	5%	15	4,495,643
3A13	0.377	38910	45%	45%	5%	5%	15	5,354,310
4A1	0.248	20740	45%	45%	5%	5%	35	1,875,008
4A2	0.108	41860	45%	45%	5%	5%	35	1,657,012
4A3	0.906	41190	45%	45%	5%	5%	35	13,625,872
4A4	0.409	43100	45%	45%	5%	5%	15	6,436,339
4A5	0.248	45750	45%	45%	5%	5%	40	4,139,386
4A6	0.127	5610	45%	45%	5%	5%	35	260,664
4A7	0.581	300	45%	45%	5%	5%	15	63,569
5A1	0.422	30340	45%	45%	5%	5%	40	4,676,393
5A2	0.629	14850	45%	45%	5%	5%	35	3,406,898
5A3	0.380	160	45%	45%	5%	5%	15	22,187
5A4	0.991	44670	45%	45%	5%	5%	40	16,154,157
5A5	0.216	41430	45%	45%	5%	5%	40	3,270,243
5A6	0.075	41430	45%	45%	5%	5%	40	1,134,192
6A1	1.180	14310	45%	45%	5%	5%	35	6,162,951

TABLE 5-1: ROADWAY SEGMENTS – EXISTING (2022) CONDITION *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
6A2	0.519	15450	45%	45%	5%	5%	35	2,923,996
6A3	0.231	19900	45%	45%	5%	5%	35	1,677,622
6A4	1.560	35130	45%	45%	5%	5%	60	20,002,791
6A5	0.759	35130	45%	45%	5%	5%	60	9,734,753
6A6	0.176	20640	45%	45%	5%	5%	15	1,328,490
6A7	0.099	20460	45%	45%	5%	5%	35	740,263
6A8	0.152	9260	45%	45%	5%	5%	15	514,113
6A9	0.155	20460	45%	45%	5%	5%	35	1,156,442
6A10	0.364	160	45%	45%	5%	5%	15	21,243
6A11	0.618	160	45%	45%	5%	5%	15	36,069
6A12	0.086	14110	45%	45%	5%	5%	35	442,985
6A13	0.750	32710	45%	45%	5%	5%	35	8,948,488
6A15	0.158	32570	45%	45%	5%	5%	15	1,873,509
6A16	0.053	6390	45%	45%	5%	5%	25	123,038
6A17	0.067	8310	45%	45%	5%	5%	35	202,008
6A18	0.186	21510	45%	45%	5%	5%	35	1,462,316
7A1	0.190	40700	45%	45%	5%	5%	35	2,827,061
7A2	0.066	29440	45%	45%	5%	5%	35	706,620
7A3	0.143	46780	45%	45%	5%	5%	35	2,444,721
7A4	0.934	23160	45%	45%	5%	5%	35	7,894,402
7A5	0.331	13540	45%	45%	5%	5%	30	1,634,550
7A6	0.664	13540	45%	45%	5%	5%	30	3,281,465
7A7	0.411	1710	45%	45%	5%	5%	25	256,648
7A8	0.826	23110	45%	45%	5%	5%	35	6,970,673
7A9	0.339	9050	39%	39%	22%	1%	30	1,121,120
7A10	0.451	12230	45%	45%	5%	5%	35	2,014,540
7A11	0.129	16120	45%	45%	5%	5%	35	760,516
7A12	0.584	2830	45%	45%	5%	5%	30	603,001
7A13 (north)	4.248	136339	45%	45%	5%	5%	60	211,375,645
7A13 (south)	4.248	111634	45%	45%	5%	5%	30	173,073,799
8A1	1.011	13810	45%	45%	5%	5%	35	5,094,540
8A2	0.342	19520	45%	45%	5%	5%	35	2,435,919
8A3	0.201	27860	45%	45%	5%	5%	25	2,039,963
8A4	0.570	43560	45%	45%	5%	5%	40	9,069,892
8A5	0.060	22540	45%	45%	5%	5%	35	495,239
8A6	0.118	21590	45%	45%	5%	5%	35	931,481
8A7	0.606	19480	45%	45%	5%	5%	35	4,308,340
8A8	0.149	21090	45%	45%	5%	5%	35	1,144,563
8A9	0.192	21090	45%	45%	5%	5%	35	1,481,343
8A10	0.251	41230	45%	45%	5%	5%	40	3,772,621
8A11	0.071	41620	45%	45%	5%	5%	40	1,076,288
8A12	0.178	41620	45%	45%	5%	5%	40	2,698,415
8A13	0.505	41910	45%	45%	5%	5%	40	7,725,290
8A14	0.252	47930	45%	45%	5%	5%	40	4,415,529
8A15	0.257	50410	45%	45%	5%	5%	40	4,723,632
8A16	0.518	51280	45%	45%	5%	5%	40	9,701,031
8A17	0.162	54240	45%	45%	5%	5%	10	3,209,132
8A18	0.236	54320	45%	45%	5%	5%	10	4,670,242

TABLE 5-1: ROADWAY SEGMENTS – EXISTING (2022) CONDITION *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
8A19	0.229	28020	45%	45%	5%	5%	25	2,342,011
8A20	0.383	22180	45%	45%	5%	5%	35	3,098,516
8A21	0.311	23450	45%	45%	5%	5%	35	2,660,335
8A22	0.886	17270	45%	45%	5%	5%	30	5,587,196
8A23	0.200	25550	45%	45%	5%	5%	35	1,861,849
8A24	0.689	21090	45%	45%	5%	5%	35	5,300,339
9A1	0.936	16790	45%	45%	5%	5%	35	5,739,077
9A2	0.991	21220	45%	45%	5%	5%	35	7,677,149
9A3	1.115	20840	45%	45%	5%	5%	35	8,481,511
9A4	0.109	32090	45%	45%	5%	5%	35	1,276,572
9A5	1.105	13770	45%	45%	5%	5%	35	5,556,288
10A1	0.355	33750	45%	45%	5%	5%	30	4,371,296
10A2	0.208	39820	45%	45%	5%	5%	30	3,024,559
10A3	0.063	21580	45%	45%	5%	5%	35	496,744
10A4	0.111	24680	45%	45%	5%	5%	35	1,001,171
10A5 (east)	0.758	83203	45%	45%	5%	5%	35	23,033,197
10A5 (west)	0.758	83203	45%	45%	5%	5%	35	23,033,197

Note: AADT: average annual daily traffic; PC: passenger car, PT passenger truck, SHT: single unit short-haul truck, LHT: single unit long-haul truck; mph denotes miles per hour; VMTs denotes vehicle-miles-traveled; the Airside Deliveries segment is not shown on the maps.

Source: Port of Seattle and WSDOT, 2023. Landrum & Brown, 2024

TABLE 5-2: 2022 EMISSION FACTORS FOR MOTOR VEHICLES

Vehicle Type	Speed (mph)	CO (g/VMT)	NO_X (g/VMT)	SO_X (g/VMT)	VOC (g/VMT)	$PM_{2.5}$ (g/VMT)	PM_{10} (g/VMT)	CO_2 (g/VMT)	CH_4 (g/VMT)	N_2O (g/VMT)
PC	5	7.79	0.24	0.00	0.12	0.01	0.01	949.05	0.03	0.01
PT	5	7.19	0.35	0.01	0.15	0.01	0.01	1,164.79	0.04	0.02
SHT	5	4.60	7.35	0.01	0.61	0.17	0.19	2,143.45	0.08	0.24
LHT	5	4.56	7.36	0.01	0.59	0.17	0.18	2,090.10	0.07	0.25
PC	10	5.74	0.22	0.00	0.08	0.00	0.00	580.32	0.02	0.01
PT	10	5.43	0.31	0.00	0.11	0.00	0.01	719.04	0.03	0.01
SHT	10	2.65	4.41	0.00	0.33	0.11	0.12	1,407.72	0.04	0.16
LHT	10	2.64	4.41	0.00	0.32	0.10	0.11	1,369.27	0.04	0.16
PC	15	5.06	0.21	0.00	0.07	0.00	0.00	457.41	0.02	0.00
PT	15	4.84	0.30	0.00	0.09	0.00	0.01	570.45	0.02	0.01
SHT	15	2.01	3.44	0.00	0.23	0.08	0.09	1,194.91	0.03	0.14
LHT	15	1.99	3.43	0.00	0.23	0.08	0.09	1,156.49	0.03	0.14
PC	20	4.51	0.20	0.00	0.06	0.00	0.00	393.47	0.02	0.00
PT	20	4.37	0.29	0.00	0.09	0.00	0.00	493.85	0.02	0.00
SHT	20	1.61	2.82	0.00	0.18	0.07	0.07	1,065.09	0.02	0.12
LHT	20	1.60	2.81	0.00	0.18	0.07	0.07	1,030.37	0.02	0.12
PC	25	1.32	2.39	0.00	0.14	0.06	0.06	350.09	0.02	0.00
PT	25	3.76	0.19	0.00	0.06	0.00	0.00	443.25	0.02	0.00
SHT	25	1.33	2.40	0.00	0.15	0.06	0.06	964.94	0.02	0.11
LHT	25	1.32	2.39	0.00	0.14	0.06	0.06	929.81	0.02	0.11
PC	30	3.56	0.17	0.00	0.05	0.00	0.00	313.08	0.01	0.00
PT	30	3.50	0.25	0.00	0.07	0.00	0.00	395.59	0.02	0.00
SHT	30	1.19	2.18	0.00	0.13	0.06	0.06	948.32	0.02	0.11
LHT	30	1.17	2.15	0.00	0.13	0.05	0.06	910.15	0.02	0.11
PC	35	3.15	0.17	0.00	0.04	0.00	0.00	295.22	0.01	0.00
PT	35	3.17	0.25	0.00	0.06	0.00	0.00	375.91	0.01	0.00
SHT	35	1.04	1.80	0.00	0.12	0.05	0.05	835.07	0.01	0.10
LHT	35	1.02	1.77	0.00	0.11	0.04	0.05	798.09	0.01	0.09
PC	40	2.78	0.16	0.00	0.04	0.00	0.00	283.89	0.01	0.00
PT	40	2.88	0.24	0.00	0.05	0.00	0.00	364.61	0.01	0.00
SHT	40	0.96	1.60	0.00	0.10	0.04	0.05	817.37	0.01	0.09
LHT	40	0.94	1.56	0.00	0.10	0.04	0.04	777.40	0.01	0.09
PC	55	2.39	0.16	0.00	0.03	0.00	0.00	266.46	0.01	0.00
PT	55	2.58	0.25	0.00	0.04	0.00	0.00	346.97	0.01	0.00
SHT	55	0.80	1.23	0.00	0.08	0.03	0.04	796.82	0.01	0.09
LHT	55	0.78	1.17	0.00	0.08	0.03	0.04	751.69	0.01	0.09
PC	60	2.41	0.17	0.00	0.03	0.00	0.00	265.28	0.01	0.00
PT	60	2.65	0.26	0.00	0.04	0.00	0.00	348.51	0.01	0.00
SHT	60	0.76	1.13	0.00	0.08	0.03	0.04	774.79	0.01	0.09
LHT	60	0.74	1.06	0.00	0.08	0.03	0.03	729.87	0.01	0.09

Note: mph denotes miles per hour; g/VMT denotes grams per vehicle-miles-traveled; PC denotes passenger car; PT denotes passenger truck; SHT denotes short-haul truck; LHT denotes long-haul truck; CO denotes carbon monoxide, NO_x denotes nitrogen oxides, SO_x denotes sulfur oxides, VOC denotes volatile organic compounds, $PM_{2.5}$ denotes fine particulate matter, PM_{10} denotes coarse particulate matter, CO_2 denotes carbon dioxide, CH_4 denotes methane, N_2O denotes nitrous oxide.

Source: MOVES4; Landrum & Brown, 2024.

TABLE 5-3: ROADWAY SEGMENTS – FUTURE (2032) NO ACTION ALTERNATIVE

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
Airside Deliveries	2.000	1,020	0%	63%	36%	1%	15	744,482
1A1	0.362	22,000	45%	45%	5%	5%	35	2,908,129
1A2	0.500	22,250	45%	45%	5%	5%	35	4,062,274
1A3	0.181	11,100	45%	45%	5%	5%	35	731,863
1A4	0.097	550	45%	45%	5%	5%	25	19,443
1A5	0.370	9,500	45%	45%	5%	5%	35	1,283,464
1A6	0.124	15,000	45%	45%	5%	5%	35	681,320
1A7	0.550	6,750	45%	45%	5%	5%	30	1,355,279
1A8	0.118	10,200	45%	45%	5%	5%	30	437,520
1A9	0.492	4,150	45%	45%	5%	5%	25	745,899
1A10	0.126	14,500	45%	45%	5%	5%	20	664,574
1A11	0.125	17,400	45%	45%	5%	5%	20	791,932
1A12	2.486	151,187	45%	45%	5%	5%	60	137,196,396
1A13	0.124	4,150	45%	45%	5%	5%	25	187,261
1A14	0.096	20,700	45%	45%	5%	5%	30	724,285
1A15	0.505	20,450	45%	45%	5%	5%	35	3,771,432
1A16	0.499	10,500	45%	45%	5%	5%	35	1,912,617
1A17	0.124	15,800	45%	45%	5%	5%	20	717,870
1A18	0.170	16,750	45%	45%	5%	5%	20	1,042,058
1A19	0.249	14,800	45%	45%	5%	5%	35	1,347,540
1A20	0.061	33,500	45%	45%	5%	5%	35	741,451
1A21	0.437	12,500	45%	45%	5%	5%	35	1,995,633
1A22	0.097	14,200	45%	45%	5%	5%	25	504,581
1A23	0.766	9,800	45%	45%	5%	5%	25	2,738,333
1A24	0.676	22,250	45%	45%	5%	5%	35	5,491,898
1A25	0.104	78,600	45%	45%	5%	5%	10	2,973,328
1A26 (east)	0.522	75,593	45%	45%	5%	5%	60	14,398,525
1A26 (west)	0.522	75,593	45%	45%	5%	5%	55	14,398,525
1A27	1.286	93,505	45%	45%	5%	5%	60	43,883,575
1A28	0.441	14,700	45%	45%	5%	5%	35	2,368,063
1A29	0.076	58,300	45%	45%	5%	5%	10	1,622,647
1A30	0.083	16,700	45%	45%	5%	5%	20	506,975
2A1	0.041	22,400	45%	45%	5%	5%	35	338,642
2A2	0.402	3,200	45%	45%	5%	5%	25	469,835
2A3	0.081	23,400	45%	45%	5%	5%	35	692,684
2A4	0.127	17,000	45%	45%	5%	5%	25	789,574
2A5	0.049	34,200	45%	45%	5%	5%	35	614,039
2A6	0.081	34,700	45%	45%	5%	5%	35	1,022,346
2A7	0.160	61,250	45%	45%	5%	5%	15	3,583,819
2A8	0.118	22,800	45%	45%	5%	5%	35	983,286
2A9	0.086	20,300	45%	45%	5%	5%	35	638,521
2A10	0.200	7,150	45%	45%	5%	5%	30	520,859
2A11	0.525	14,800	45%	45%	5%	5%	35	2,836,028
2A12	0.054	26,450	45%	45%	5%	5%	35	523,299
2A13	0.077	51,750	45%	45%	5%	5%	15	1,449,258
2A14	0.272	16,800	41%	41%	17%	1%	30	1,670,835

TABLE 5-3: ROADWAY SEGMENTS – FUTURE (2032) NO ACTION ALTERNATIVE *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
2A15	0.654	43,350	45%	45%	5%	5%	40	10,345,452
2A16	0.325	10,050	45%	45%	5%	5%	30	1,191,525
2A17	0.122	16,800	45%	45%	5%	5%	30	748,503
2A18	0.241	61,250	45%	45%	5%	5%	40	5,387,141
2A19	0.095	32,400	45%	45%	5%	5%	35	1,127,846
2A20	0.086	32,500	45%	45%	5%	5%	35	1,017,079
2A21	0.090	32,800	45%	45%	5%	5%	35	1,072,979
2A22	0.174	23,900	45%	45%	5%	5%	25	1,516,144
2A23	0.053	22,500	45%	45%	5%	5%	20	435,295
2A24	0.230	7,900	45%	45%	5%	5%	35	662,432
2A25	0.367	1,700	45%	45%	5%	5%	25	227,513
2A26	1.251	25,122	46%	46%	7%	1%	60	11,471,316
2A27	0.384	24,250	45%	45%	5%	5%	60	3,395,756
2A28	0.407	18,350	45%	45%	5%	5%	35	2,727,002
2A29	0.635	18,850	45%	45%	5%	5%	35	4,367,686
2A30	0.312	19,000	45%	45%	5%	5%	35	2,164,088
2A31	0.531	38,600	45%	45%	5%	5%	35	7,486,909
2A32	0.062	50,600	45%	45%	5%	5%	35	1,148,772
2A33	0.985	39,650	45%	45%	5%	5%	35	14,257,627
2A34	0.125	4,800	45%	45%	5%	5%	25	219,657
2A35	0.096	4,200	45%	45%	5%	5%	25	146,749
2A36	0.141	5,950	45%	45%	5%	5%	25	305,405
2A37	0.037	16,700	45%	45%	5%	5%	25	225,491
2A38	0.126	1,750	45%	45%	5%	5%	25	80,625
2A39	0.126	23,100	45%	45%	5%	5%	20	1,058,617
2A40	0.000	-	45%	45%	5%	5%	30	-
2A41	0.000	-	45%	45%	5%	5%	30	-
3A1	0.093	25,122	46%	46%	7%	1%	20	855,039
3A2	0.756	25,122	46%	46%	7%	1%	40	6,934,357
3A3	1.151	25,122	46%	46%	7%	1%	20	10,556,253
3A4	0.234	25,122	46%	46%	7%	1%	30	2,147,382
3A5	0.263	25,122	46%	46%	7%	1%	30	2,415,636
3A6	0.187	15,150	41%	41%	17%	1%	30	1,032,791
3A7	0.115	22,100	39%	39%	22%	1%	30	931,285
3A8	0.070	21,600	39%	39%	21%	1%	35	551,352
3A9	0.046	23,800	39%	39%	21%	1%	35	398,395
3A10	0.048	23,800	39%	39%	21%	1%	35	414,361
3A11	0.079	26,600	39%	39%	21%	1%	15	765,827
3A12	0.332	41,450	45%	45%	5%	5%	15	5,022,760
3A13	0.377	45,050	45%	45%	5%	5%	15	6,199,220
3A14	0.768	-	45%	45%	5%	5%	35	-
3A15	1.012	-	45%	45%	5%	5%	35	-
4A1	0.248	19,400	45%	45%	5%	5%	35	1,753,865
4A2	0.108	44,850	45%	45%	5%	5%	35	1,775,370
4A3	0.906	44,350	45%	45%	5%	5%	35	14,671,217
4A4	0.409	52,000	45%	45%	5%	5%	15	7,765,420
4A5	0.248	45,400	45%	45%	5%	5%	40	4,107,719
4A6	0.127	6,450	45%	45%	5%	5%	35	299,694
4A7	0.581	600	45%	45%	5%	5%	15	127,138

TABLE 5-3: ROADWAY SEGMENTS – FUTURE (2032) NO ACTION ALTERNATIVE *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
5A1	0.422	35,300	45%	45%	5%	5%	40	5,440,892
5A2	0.629	18,450	45%	45%	5%	5%	35	4,232,813
5A3	0.380	450	45%	45%	5%	5%	15	62,401
5A4	0.991	39,750	45%	45%	5%	5%	40	14,374,921
5A5	0.216	52,700	45%	45%	5%	5%	40	4,159,831
5A6	0.075	47,400	45%	45%	5%	5%	40	1,297,627
5A7	0.309	-	45%	45%	5%	5%	15	-
5A8	0.142	-	45%	45%	5%	5%	60	-
5A9	0.567	-	45%	45%	5%	5%	60	-
5A10	0.268	-	45%	45%	5%	5%	15	-
6A1	1.180	20,850	45%	45%	5%	5%	35	8,979,562
6A2	0.519	19,300	45%	45%	5%	5%	35	3,652,630
6A3	0.231	20,900	45%	45%	5%	5%	35	1,761,924
6A4	1.560	43,662	45%	45%	5%	5%	60	24,860,709
6A5	0.759	43,662	45%	45%	5%	5%	60	12,098,954
6A6	0.176	27,400	45%	45%	5%	5%	15	1,763,596
6A7	0.099	24,500	45%	45%	5%	5%	35	886,434
6A8	0.152	12,300	45%	45%	5%	5%	15	682,893
6A9	0.155	24,500	45%	45%	5%	5%	35	1,384,791
6A10	0.364	450	45%	45%	5%	5%	15	59,747
6A11	0.618	450	45%	45%	5%	5%	15	101,444
6A12	0.086	16,300	45%	45%	5%	5%	35	511,740
6A13	0.750	40,250	45%	45%	5%	5%	35	11,011,209
6A14	0.186	27,000	45%	45%	5%	5%	35	1,835,543
6A15	0.158	38,950	45%	45%	5%	5%	15	2,240,503
6A16	0.053	6,200	45%	45%	5%	5%	25	119,380
6A17	0.067	12,600	45%	45%	5%	5%	35	306,293
6A18	0.160	-	45%	45%	5%	5%	15	-
6A19	0.849	-	45%	45%	5%	5%	60	-
7A1	0.190	41,750	45%	45%	5%	5%	35	2,899,995
7A2	0.066	28,850	45%	45%	5%	5%	35	692,459
7A3	0.143	56,200	45%	45%	5%	5%	35	2,937,010
7A4	0.934	23,900	45%	45%	5%	5%	35	8,146,641
7A5	0.331	16,300	45%	45%	5%	5%	30	1,967,738
7A6	0.664	16,300	45%	45%	5%	5%	30	3,950,361
7A7	0.411	8,500	45%	45%	5%	5%	25	1,275,736
7A8	0.826	23,550	45%	45%	5%	5%	35	7,103,390
7A9	0.339	14,050	39%	39%	22%	1%	30	1,740,523
7A10	0.451	15,800	45%	45%	5%	5%	35	2,602,595
7A11	0.129	25,150	45%	45%	5%	5%	35	1,186,538
7A12	0.584	12,400	45%	45%	5%	5%	30	2,642,125
7A13 (north)	4.248	169,451	45%	45%	5%	5%	60	262,710,756
7A13 (south)	4.248	138,746	45%	45%	5%	5%	30	215,106,848
8A1	1.011	14,550	45%	45%	5%	5%	35	5,367,527
8A2	0.342	23,750	45%	45%	5%	5%	35	2,963,785
8A3	0.201	29,500	45%	45%	5%	5%	25	2,160,047
8A4	0.570	43,250	45%	45%	5%	5%	40	9,005,345

TABLE 5-3: ROADWAY SEGMENTS – FUTURE (2032) NO ACTION ALTERNATIVE *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
8A5	0.060	28,950	45%	45%	5%	5%	35	636,076
8A6	0.118	24,650	45%	45%	5%	5%	35	1,063,502
8A7	0.606	21,350	45%	45%	5%	5%	35	4,721,923
8A8	0.149	23,100	45%	45%	5%	5%	35	1,253,646
8A9	0.192	20,500	45%	45%	5%	5%	35	1,439,902
8A10	0.251	42,850	45%	45%	5%	5%	40	3,920,854
8A11	0.071	40,950	45%	45%	5%	5%	40	1,058,962
8A12	0.178	40,800	45%	45%	5%	5%	40	2,645,251
8A13	0.505	38,400	45%	45%	5%	5%	40	7,078,290
8A14	0.252	46,250	45%	45%	5%	5%	40	4,260,760
8A15	0.257	48,150	45%	45%	5%	5%	40	4,511,860
8A16	0.518	49,850	45%	45%	5%	5%	40	9,430,507
8A17	0.162	64,600	45%	45%	5%	5%	10	3,822,085
8A18	0.236	69,100	45%	45%	5%	5%	10	5,940,975
8A19	0.229	30,700	45%	45%	5%	5%	25	2,566,015
8A20	0.383	23,300	45%	45%	5%	5%	35	3,254,978
8A21	0.311	25,400	45%	45%	5%	5%	35	2,881,557
8A22	0.886	16,050	45%	45%	5%	5%	30	5,192,501
8A23	0.200	26,250	45%	45%	5%	5%	35	1,912,858
8A24	0.689	20,200	45%	45%	5%	5%	35	5,076,664
8A25	0.135	36,500	45%	45%	5%	5%	35	1,801,482
8A26	0.198	16,000	45%	45%	5%	5%	35	1,157,465
9A1	0.936	19,000	45%	45%	5%	5%	35	6,494,489
9A2	0.991	22,100	45%	45%	5%	5%	35	7,995,523
9A3	1.115	22,150	45%	45%	5%	5%	35	9,014,658
9A4	0.109	32,850	45%	45%	5%	5%	35	1,306,805
9A5	1.105	16,450	45%	45%	5%	5%	35	6,637,686
10A1	0.355	33,950	45%	45%	5%	5%	30	4,397,200
10A2	0.208	42,900	45%	45%	5%	5%	30	3,258,503
10A3	0.063	22,200	45%	45%	5%	5%	35	511,016
10A4	0.111	18,150	45%	45%	5%	5%	35	736,275
10A5 (east)	0.758	103,410	45%	45%	5%	5%	35	28,627,085
10A5 (west)	0.758	103,410	45%	45%	5%	5%	35	28,627,085

Note: AADT denotes average annual daily traffic; PC denotes passenger car; PT denotes passenger truck; SHT denotes single unit short-haul truck; LHT denotes single unit long-haul truck; mph denotes miles per hour; VMTs denotes vehicle-miles-traveled; the Airside Deliveries segment is not shown on the maps.

Source: Port of Seattle and WSDOT, 2023. Landrum & Brown, 2024

TABLE 5-4: 2032 EMISSION FACTORS FOR MOTOR VEHICLES

Vehicle Type	Speed (mph)	CO (g/VMT)	NO_X (g/VMT)	SO_X (g/VMT)	VOC (g/VMT)	$PM_{2.5}$ (g/VMT)	PM_{10} (g/VMT)	CO_2 (g/VMT)	CH_4 (g/VMT)	N_2O (g/VMT)
PC	5	4.46	0.03	0.004	0.026	0.00	0.00	826.61	0.01	0.01
PT	5	3.68	0.04	0.005	0.030	0.00	0.00	1,010.87	0.01	0.01
SHT	5	3.19	3.26	0.006	0.149	0.03	0.03	1,732.23	0.05	0.26
LHT	5	3.44	3.50	0.006	0.251	0.05	0.06	1,721.13	0.05	0.25
PC	10	3.28	0.03	0.00	0.02	0.00	0.00	504.77	0.01	0.00
PT	10	2.73	0.03	0.00	0.02	0.00	0.00	623.05	0.01	0.00
SHT	10	1.87	1.88	0.00	0.08	0.02	0.02	1135.12	0.03	0.17
LHT	10	2.00	2.03	0.00	0.13	0.03	0.04	1124.16	0.03	0.16
PC	15	2.89	0.03	0.00	0.02	0.00	0.00	397.49	0.01	0.00
PT	15	2.41	0.03	0.00	0.02	0.00	0.00	493.78	0.01	0.00
SHT	15	1.42	1.41	0.00	0.06	0.01	0.01	962.49	0.02	0.14
LHT	15	1.51	1.53	0.00	0.10	0.03	0.03	950.17	0.02	0.14
PC	20	2.57	0.02	0.00	0.01	0.00	0.00	341.75	0.01	0.00
PT	20	2.16	0.03	0.00	0.02	0.00	0.00	427.18	0.01	0.00
SHT	20	1.14	1.12	0.00	0.04	0.01	0.01	861.29	0.02	0.13
LHT	20	1.22	1.23	0.00	0.07	0.02	0.02	849.40	0.02	0.12
PC	25	2.12	0.02	0.00	0.01	0.00	0.00	304.09	0.01	0.00
PT	25	1.82	0.03	0.00	0.02	0.00	0.00	383.29	0.01	0.00
SHT	25	0.94	0.92	0.00	0.04	0.01	0.01	778.26	0.01	0.12
LHT	25	1.01	1.02	0.00	0.06	0.02	0.02	765.81	0.01	0.11
PC	30	2.02	0.02	0.00	0.01	0.00	0.00	271.99	0.01	0.00
PT	30	1.72	0.03	0.00	0.01	0.00	0.00	342.16	0.01	0.00
SHT	30	0.85	0.81	0.00	0.03	0.01	0.01	769.76	0.01	0.11
LHT	30	0.90	0.90	0.00	0.05	0.02	0.02	752.63	0.01	0.11
PC	35	1.79	0.02	0.00	0.01	0.00	0.00	256.63	0.01	0.00
PT	35	1.56	0.03	0.00	0.01	0.00	0.00	325.41	0.01	0.00
SHT	35	0.74	0.65	0.00	0.03	0.01	0.01	681.43	0.01	0.10
LHT	35	0.79	0.73	0.00	0.05	0.01	0.02	662.08	0.01	0.10
PC	40	1.59	0.02	0.00	0.01	0.00	0.00	246.92	0.00	0.00
PT	40	1.42	0.03	0.00	0.01	0.00	0.00	315.87	0.00	0.00
SHT	40	0.69	0.55	0.00	0.02	0.01	0.01	672.26	0.01	0.10
LHT	40	0.73	0.63	0.00	0.04	0.01	0.01	648.12	0.01	0.09
PC	55	1.39	0.02	0.00	0.01	0.00	0.00	231.92	0.00	0.00
PT	55	1.28	0.03	0.00	0.01	0.00	0.00	301.04	0.00	0.00
SHT	55	0.60	0.37	0.00	0.01	0.01	0.01	668.01	0.00	0.10
LHT	55	0.62	0.44	0.00	0.03	0.01	0.01	635.37	0.00	0.09
PC	60	1.41	0.02	0.00	0.01	0.00	0.00	230.92	0.00	0.00
PT	60	1.33	0.03	0.00	0.01	0.00	0.00	302.48	0.00	0.00
SHT	60	0.57	0.32	0.00	0.01	0.01	0.01	652.96	0.00	0.10
LHT	60	0.59	0.40	0.00	0.03	0.01	0.01	619.19	0.00	0.09

Note: mph denotes miles per hour; g/VMT denotes grams per vehicle-miles-traveled; PC denotes passenger car; PT denotes passenger truck; SHT denotes short-haul truck; LHT denotes long-haul truck, CO denotes carbon monoxide, NO_x denotes nitrogen oxides, SO_x denotes sulfur oxides, VOC denotes volatile organic compounds, $PM_{2.5}$ denotes fine particulate matter, PM_{10} denotes coarse particulate matter, CO_2 denotes carbon dioxide, CH_4 denotes methane, N_2O denotes nitrous oxide.

Source: MOVES4; Landrum & Brown, 2024.

TABLE 5-5: ROADWAY SEGMENTS – FUTURE (2032) PROPOSED ACTION

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
Airside Deliveries	2.000	1,039	0%	63%	36%	1%	15	758,442
1A1	0.362	31,250	45%	45%	5%	5%	35	4,130,865
1A2	0.500	22,550	45%	45%	5%	5%	35	4,117,046
1A3	0.181	11,100	45%	45%	5%	5%	35	731,863
1A4	0.097	550	45%	45%	5%	5%	25	19,443
1A5	0.370	9,500	45%	45%	5%	5%	35	1,283,464
1A6	0.124	14,900	45%	45%	5%	5%	35	676,778
1A7	0.550	6,900	45%	45%	5%	5%	30	1,385,397
1A8	0.118	21,950	45%	45%	5%	5%	30	941,525
1A9	0.492	13,350	45%	45%	5%	5%	25	2,399,459
1A10	0.126	14,600	45%	45%	5%	5%	20	669,157
1A11	0.125	22,000	45%	45%	5%	5%	20	1,001,293
1A12	2.486	154,156	45%	45%	5%	5%	60	139,890,657
1A13	0.124	13,350	45%	45%	5%	5%	25	602,394
1A14	0.096	24,800	45%	45%	5%	5%	30	867,743
1A15	0.505	20,650	45%	45%	5%	5%	35	3,808,316
1A16	0.499	10,400	45%	45%	5%	5%	35	1,894,401
1A17	0.124	15,700	45%	45%	5%	5%	20	713,327
1A18	0.170	23,400	45%	45%	5%	5%	20	1,455,771
1A19	0.249	14,700	45%	45%	5%	5%	35	1,338,435
1A20	0.061	33,700	45%	45%	5%	5%	35	745,878
1A21	0.437	12,600	45%	45%	5%	5%	35	2,011,598
1A22	0.097	15,600	45%	45%	5%	5%	25	554,328
1A23	0.766	11,900	45%	45%	5%	5%	25	3,325,119
1A24	0.676	22,300	45%	45%	5%	5%	35	5,504,239
1A25	0.104	81,400	45%	45%	5%	5%	10	3,079,248
1A26 (east)	0.522	77,078	45%	45%	5%	5%	60	14,681,283
1A26 (west)	0.522	77,078	45%	45%	5%	5%	55	14,681,283
1A27	1.286	95,342	45%	45%	5%	5%	60	44,745,360
1A28	0.441	14,600	45%	45%	5%	5%	35	2,351,954
1A29	0.076	59,300	45%	45%	5%	5%	10	1,650,480
1A30	0.083	23,300	45%	45%	5%	5%	20	707,336
2A1	0.041	21,300	45%	45%	5%	5%	35	322,012
2A2	0.402	5,450	45%	45%	5%	5%	25	800,188
2A3	0.081	20,600	45%	45%	5%	5%	35	609,798
2A4	0.127	23,400	45%	45%	5%	5%	25	1,086,825
2A5	0.049	35,100	45%	45%	5%	5%	35	630,198
2A6	0.081	35,000	45%	45%	5%	5%	35	1,031,185
2A7	0.160	61,650	45%	45%	5%	5%	15	3,607,223
2A8	0.118	21,900	45%	45%	5%	5%	35	944,472
2A9	0.086	18,600	45%	45%	5%	5%	35	585,049
2A10	0.200	9,500	45%	45%	5%	5%	30	692,051
2A11	0.525	14,850	45%	45%	5%	5%	35	2,845,610
2A12	0.054	27,050	45%	45%	5%	5%	35	535,170
2A13	0.077	52,950	45%	45%	5%	5%	15	1,482,864
2A14	0.272	-	41%	41%	17%	1%	30	-
2A15	0.654	43,100	45%	45%	5%	5%	40	10,285,790
2A16	0.325	-	45%	45%	5%	5%	30	-

TABLE 5-5: ROADWAY SEGMENTS – FUTURE (2032) PROPOSED ACTION *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
2A17	0.122	10,950	45%	45%	5%	5%	30	487,863
2A18	0.241	58,450	45%	45%	5%	5%	40	5,140,872
2A19	0.095	33,300	45%	45%	5%	5%	35	1,159,175
2A20	0.086	33,400	45%	45%	5%	5%	35	1,045,244
2A21	0.090	33,700	45%	45%	5%	5%	35	1,102,420
2A22	0.174	24,200	45%	45%	5%	5%	25	1,535,175
2A23	0.053	22,600	45%	45%	5%	5%	20	437,230
2A24	0.230	7,900	45%	45%	5%	5%	35	662,432
2A25	0.367	1,700	45%	45%	5%	5%	25	227,513
2A26	1.251	25,615	46%	46%	7%	1%	60	11,696,589
2A27	0.384	24,500	45%	45%	5%	5%	60	3,430,763
2A28	0.407	18,350	45%	45%	5%	5%	35	2,727,002
2A29	0.635	18,850	45%	45%	5%	5%	35	4,367,686
2A30	0.312	19,200	45%	45%	5%	5%	35	2,186,867
2A31	0.531	39,100	45%	45%	5%	5%	35	7,583,889
2A32	0.062	51,800	45%	45%	5%	5%	35	1,176,015
2A33	0.985	40,450	45%	45%	5%	5%	35	14,545,296
2A34	0.125	4,800	45%	45%	5%	5%	25	219,657
2A35	0.096	5,200	45%	45%	5%	5%	25	181,690
2A36	0.141	6,950	45%	45%	5%	5%	25	356,733
2A37	0.037	17,800	45%	45%	5%	5%	25	240,344
2A38	0.126	3,400	45%	45%	5%	5%	25	156,643
2A39	0.126	23,300	45%	45%	5%	5%	20	1,067,782
2A40	0.000	24,200	45%	45%	5%	5%	30	1,608,233
2A41	0.000	12,400	45%	45%	5%	5%	30	644,195
3A1	0.093	25,615	46%	46%	7%	1%	20	871,831
3A2	0.756	25,615	46%	46%	7%	1%	40	7,070,534
3A3	1.151	-	46%	46%	7%	1%	20	-
3A4	0.234	25,615	46%	46%	7%	1%	30	2,189,552
3A5	0.263	25,615	46%	46%	7%	1%	30	2,463,075
3A6	0.187	-	41%	41%	17%	1%	30	-
3A7	0.115	-	39%	39%	22%	1%	30	-
3A8	0.070	-	39%	39%	21%	1%	35	-
3A9	0.046	-	39%	39%	21%	1%	35	-
3A10	0.048	4,750	39%	39%	21%	1%	35	82,698
3A11	0.079	13,500	39%	39%	21%	1%	15	388,671
3A12	0.332	40,650	45%	45%	5%	5%	15	4,925,819
3A13	0.377	38,700	45%	45%	5%	5%	15	5,325,412
3A14	0.768	25,615	45%	45%	5%	5%	35	7,180,223
3A15	1.012	25,615	45%	45%	5%	5%	35	9,458,410
4A1	0.248	19,400	45%	45%	5%	5%	35	1,753,865
4A2	0.108	45,150	45%	45%	5%	5%	35	1,787,245
4A3	0.906	44,350	45%	45%	5%	5%	35	14,671,217
4A4	0.409	50,700	45%	45%	5%	5%	15	7,571,285
4A5	0.248	44,300	45%	45%	5%	5%	40	4,008,193
4A6	0.127	6,650	45%	45%	5%	5%	35	308,986
4A7	0.581	600	45%	45%	5%	5%	15	127,138
5A1	0.422	35,950	45%	45%	5%	5%	40	5,541,079
5A2	0.629	19,700	45%	45%	5%	5%	35	4,519,589
5A3	0.380	1,450	45%	45%	5%	5%	15	201,069

TABLE 5-5: ROADWAY SEGMENTS – FUTURE (2032) PROPOSED ACTION *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
5A4	0.991	40,050	45%	45%	5%	5%	40	14,483,411
5A5	0.216	53,400	45%	45%	5%	5%	40	4,215,085
5A6	0.075	47,900	45%	45%	5%	5%	40	1,311,315
5A7	0.309	1,450	45%	45%	5%	5%	15	163,397
5A8	0.142	44,519	45%	45%	5%	5%	60	2,303,789
5A9	0.567	44,519	45%	45%	5%	5%	60	9,215,480
5A10	0.268	1,450	45%	45%	5%	5%	15	141,771
6A1	1.180	20,900	45%	45%	5%	5%	35	9,001,096
6A2	0.519	21,250	45%	45%	5%	5%	35	4,021,678
6A3	0.231	23,900	45%	45%	5%	5%	35	2,014,832
6A4	1.560	-	45%	45%	5%	5%	60	-
6A5	0.759	44,519	45%	45%	5%	5%	60	12,336,553
6A6	0.176	29,700	45%	45%	5%	5%	15	1,911,635
6A7	0.099	27,700	45%	45%	5%	5%	35	1,002,213
6A8	0.152	14,800	45%	45%	5%	5%	15	821,693
6A9	0.155	27,700	45%	45%	5%	5%	35	1,565,661
6A10	0.364	-	45%	45%	5%	5%	15	-
6A11	0.618	1,450	45%	45%	5%	5%	15	326,874
6A12	0.086	19,300	45%	45%	5%	5%	35	605,926
6A13	0.750	40,250	45%	45%	5%	5%	35	11,011,209
6A14	0.186	30,050	45%	45%	5%	5%	35	2,042,891
6A15	0.158	39,450	45%	45%	5%	5%	15	2,269,264
6A16	0.053	6,200	45%	45%	5%	5%	25	119,380
6A17	0.067	12,700	45%	45%	5%	5%	35	308,724
6A18	0.160	1,450	45%	45%	5%	5%	15	84,864
6A19	0.849	44,519	45%	45%	5%	5%	60	13,802,583
7A1	0.190	41,250	45%	45%	5%	5%	35	2,865,265
7A2	0.066	29,000	45%	45%	5%	5%	35	696,059
7A3	0.143	56,500	45%	45%	5%	5%	35	2,952,688
7A4	0.934	24,250	45%	45%	5%	5%	35	8,265,943
7A5	0.331	16,800	45%	45%	5%	5%	30	2,028,098
7A6	0.664	16,800	45%	45%	5%	5%	30	4,071,538
7A7	0.411	7,950	45%	45%	5%	5%	25	1,193,188
7A8	0.826	25,000	45%	45%	5%	5%	35	7,540,754
7A9	0.339	13,550	39%	39%	22%	1%	30	1,678,583
7A10	0.451	16,850	45%	45%	5%	5%	35	2,775,552
7A11	0.129	26,250	45%	45%	5%	5%	35	1,238,434
7A12	0.584	12,400	45%	45%	5%	5%	30	2,642,125
7A13 (north)	4.248	172,778	45%	45%	5%	5%	60	267,869,866
7A13 (south)	4.248	141,470	45%	45%	5%	5%	30	219,331,113
8A1	1.011	14,600	45%	45%	5%	5%	35	5,385,972
8A2	0.342	20,450	45%	45%	5%	5%	35	2,551,975
8A3	0.201	30,150	45%	45%	5%	5%	25	2,207,641
8A4	0.570	43,000	45%	45%	5%	5%	40	8,953,291
8A5	0.060	28,950	45%	45%	5%	5%	35	636,076
8A6	0.118	24,650	45%	45%	5%	5%	35	1,063,502
8A7	0.606	21,950	45%	45%	5%	5%	35	4,854,624
8A8	0.149	24,100	45%	45%	5%	5%	35	1,307,916

TABLE 5-5: ROADWAY SEGMENTS – FUTURE (2032) PROPOSED ACTION *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
8A9	0.192	21,500	45%	45%	5%	5%	35	1,510,142
8A10	0.251	42,950	45%	45%	5%	5%	40	3,930,004
8A11	0.071	41,250	45%	45%	5%	5%	40	1,066,720
8A12	0.178	41,100	45%	45%	5%	5%	40	2,664,701
8A13	0.505	39,050	45%	45%	5%	5%	40	7,198,105
8A14	0.252	46,950	45%	45%	5%	5%	40	4,325,247
8A15	0.257	49,150	45%	45%	5%	5%	40	4,605,564
8A16	0.518	51,050	45%	45%	5%	5%	40	9,657,520
8A17	0.162	66,050	45%	45%	5%	5%	10	3,907,875
8A18	0.236	71,600	45%	45%	5%	5%	10	6,155,916
8A19	0.229	31,900	45%	45%	5%	5%	25	2,666,315
8A20	0.383	23,500	45%	45%	5%	5%	35	3,282,918
8A21	0.311	25,700	45%	45%	5%	5%	35	2,915,591
8A22	0.886	16,350	45%	45%	5%	5%	30	5,289,557
8A23	0.200	26,450	45%	45%	5%	5%	35	1,927,432
8A24	0.689	20,850	45%	45%	5%	5%	35	5,240,022
8A25	0.135	39,000	45%	45%	5%	5%	35	1,924,871
8A26	0.198	17,800	45%	45%	5%	5%	35	1,287,679
9A1	0.936	19,000	45%	45%	5%	5%	35	6,494,489
9A2	0.991	22,400	45%	45%	5%	5%	35	8,104,059
9A3	1.115	22,600	45%	45%	5%	5%	35	9,197,800
9A4	0.109	32,950	45%	45%	5%	5%	35	1,310,783
9A5	1.105	16,600	45%	45%	5%	5%	35	6,698,212
10A1	0.355	35,200	45%	45%	5%	5%	30	4,559,100
10A2	0.208	44,100	45%	45%	5%	5%	30	3,349,649
10A3	0.063	22,650	45%	45%	5%	5%	35	521,374
10A4	0.111	18,500	45%	45%	5%	5%	35	750,473
10A5 (east)	0.758	105,441	45%	45%	5%	5%	35	29,189,264
10A5 (west)	0.758	105,441	45%	45%	5%	5%	35	29,189,264

Note: mph denotes miles per hour; PC denotes passenger car; PT denotes passenger truck; SHT denotes short-haul truck; LHT denotes long-haul truck; VMT denotes vehicle-miles-traveled; the Airside Deliveries segment is not shown on the maps.

Source: Port of Seattle and WSDOT, 2023. Landrum & Brown, 2024

EXHIBIT 5-12: ROADWAY AREAS – PROPOSED ACTION

EXHIBIT 5-13: AREA 1 – PROPOSED ACTION

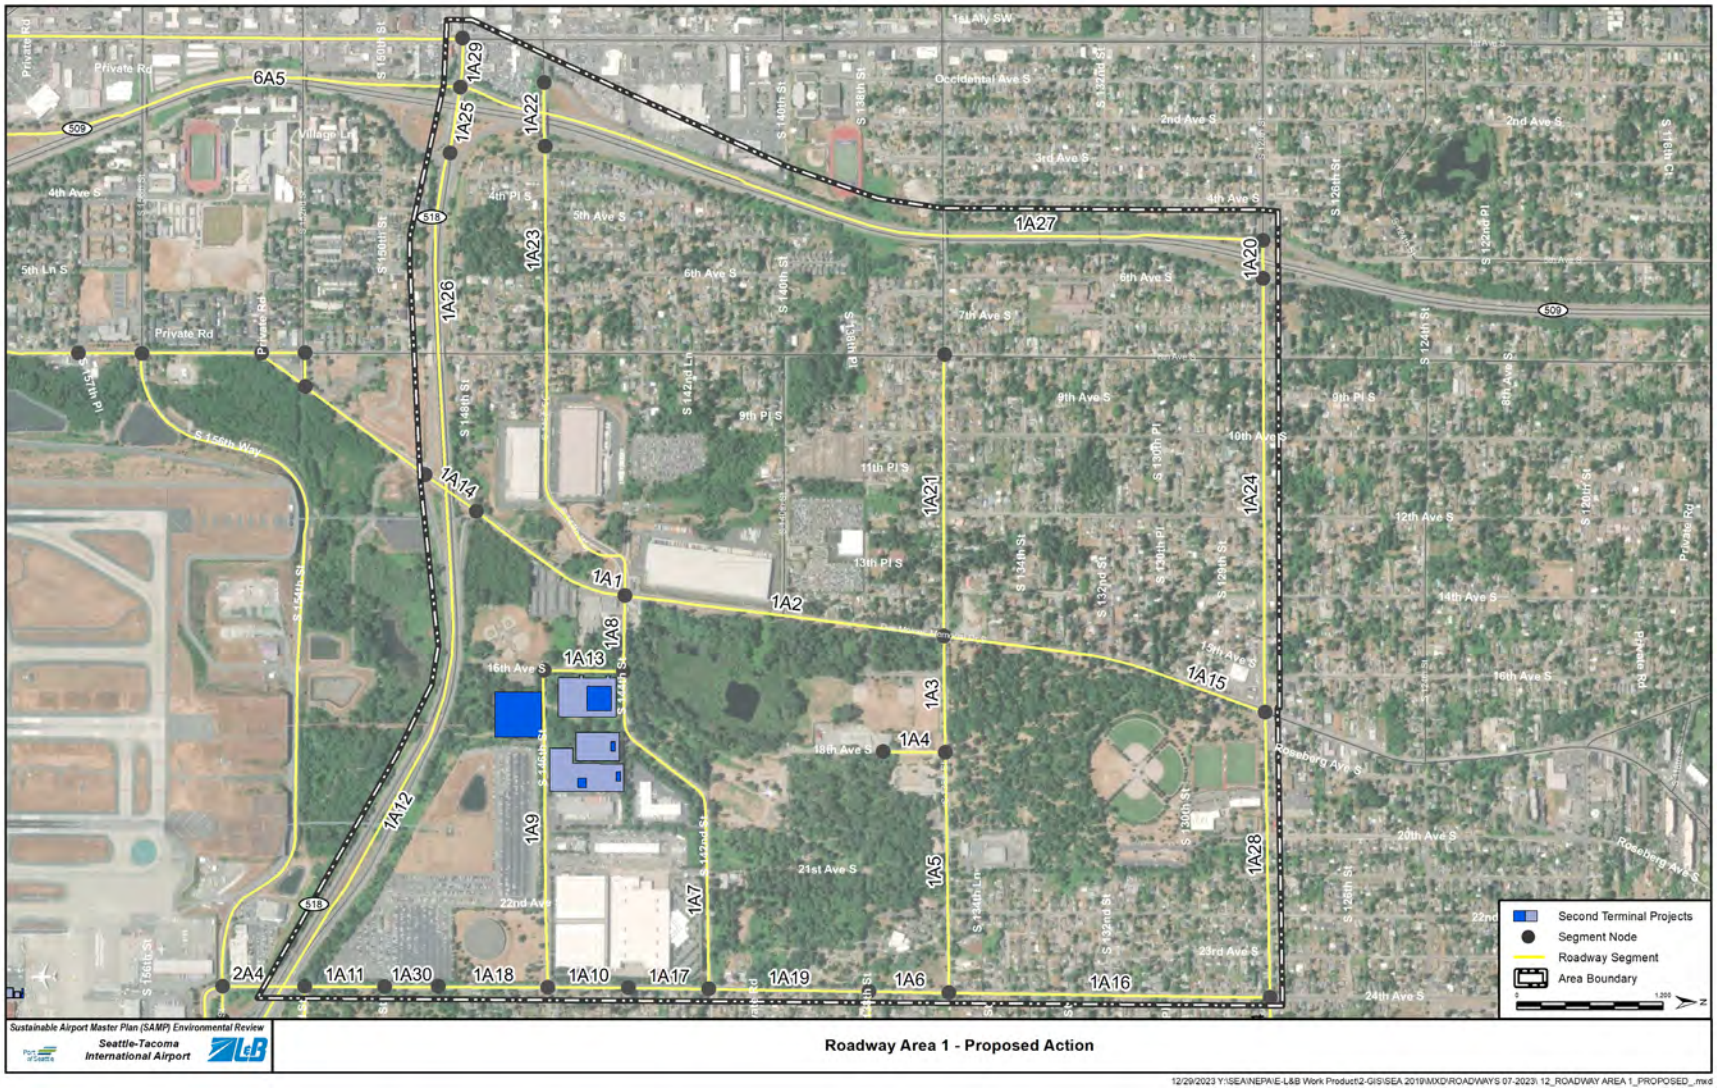

EXHIBIT 5-14: AREA 2 – PROPOSED ACTION

EXHIBIT 5-15: AREA 3 – PROPOSED ACTION

EXHIBIT 5-16: AREA 4 – PROPOSED ACTION

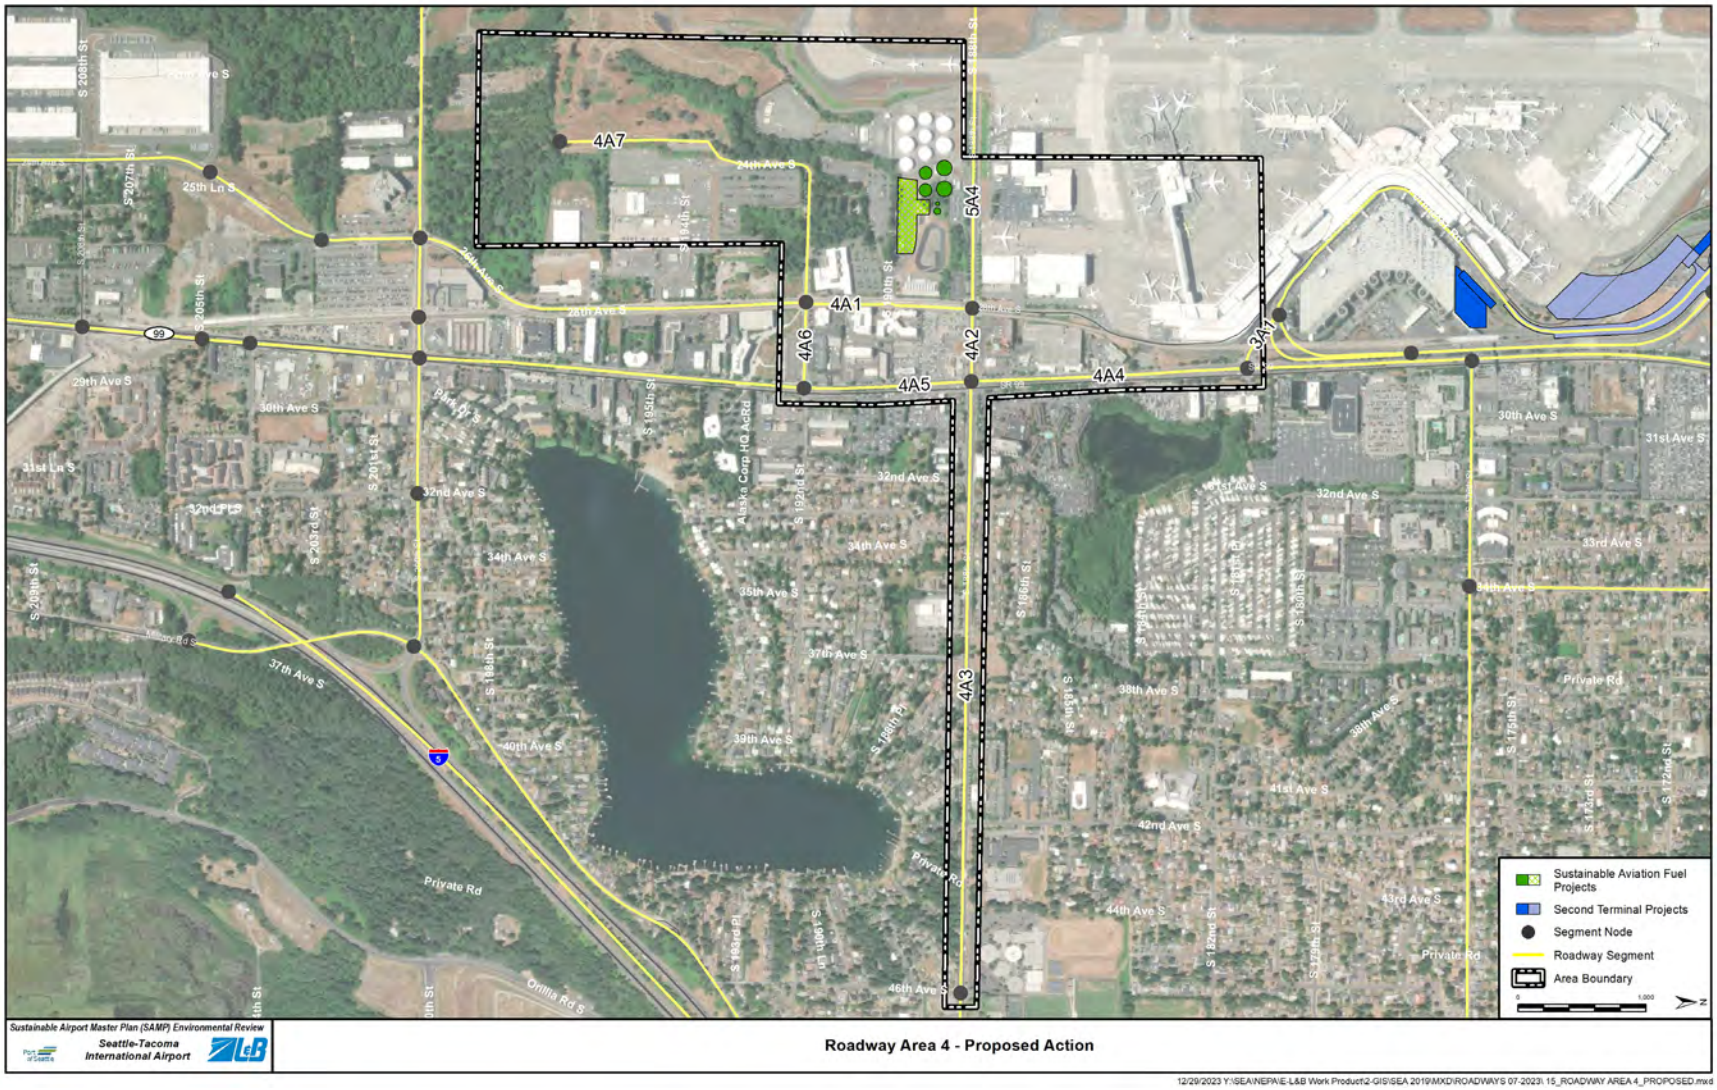

EXHIBIT 5-17: AREA 5 – PROPOSED ACTION

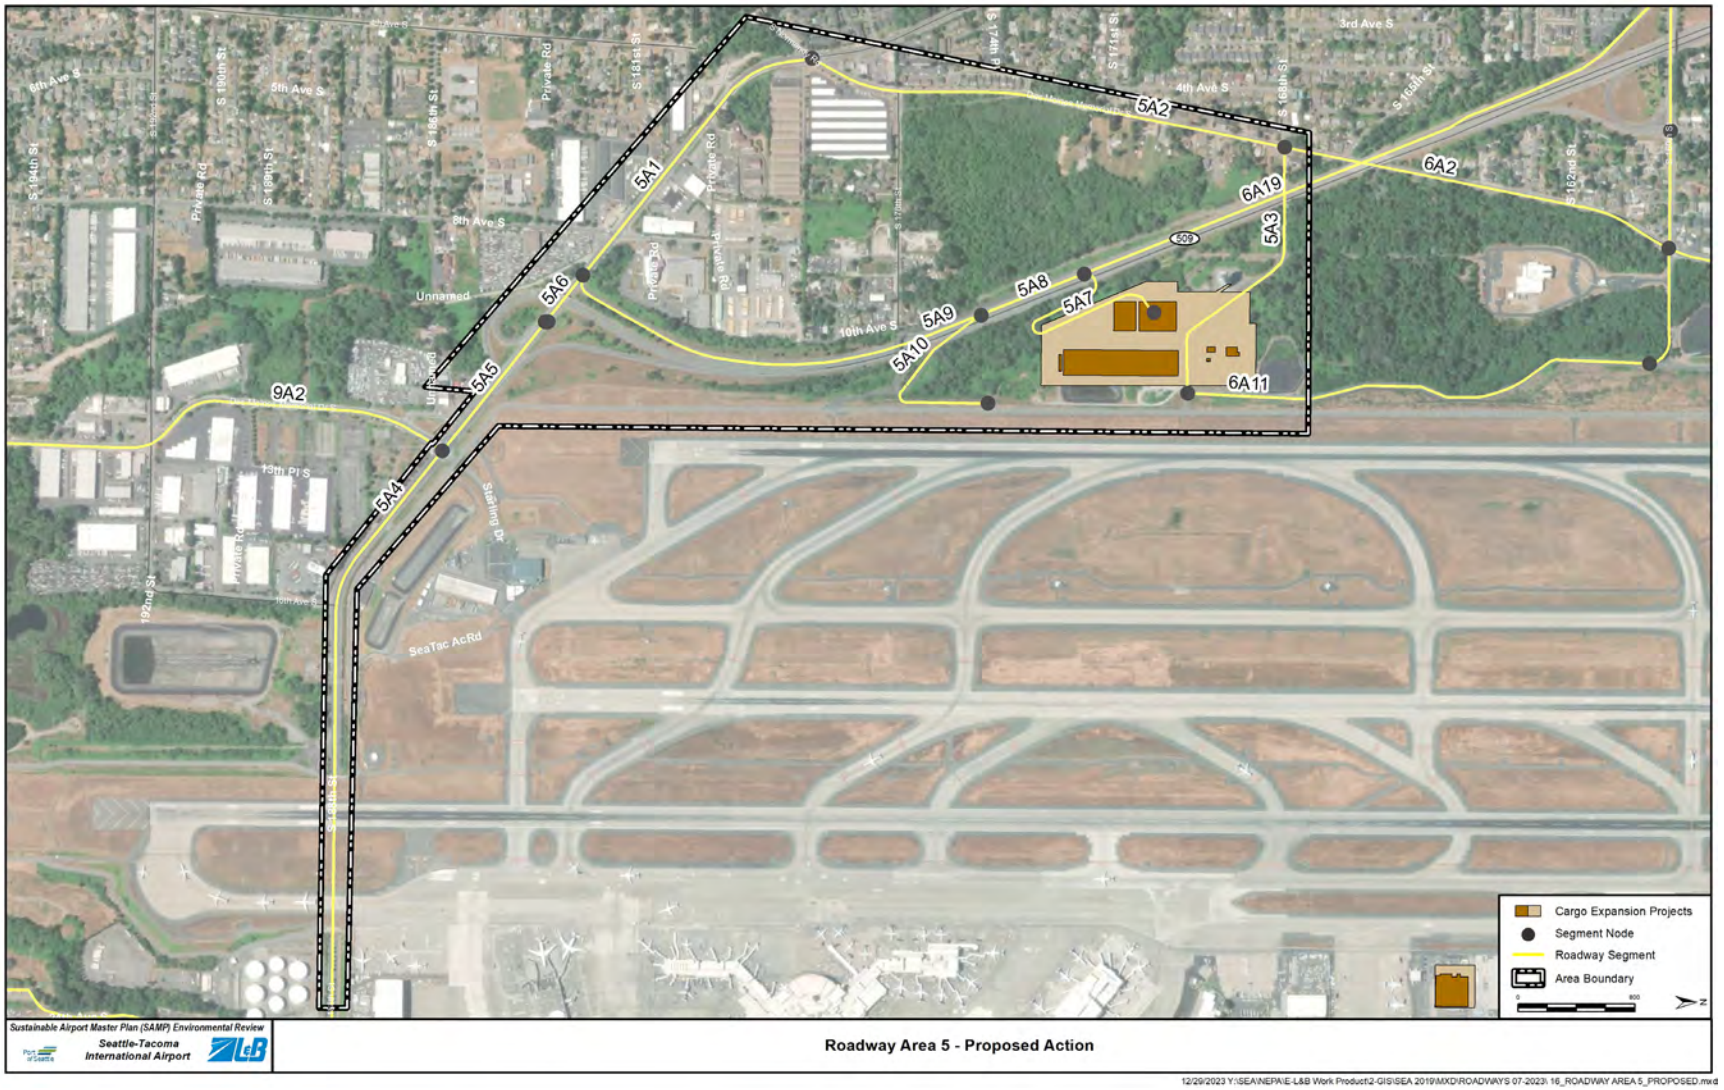

EXHIBIT 5-18: AREA 6 – PROPOSED ACTION

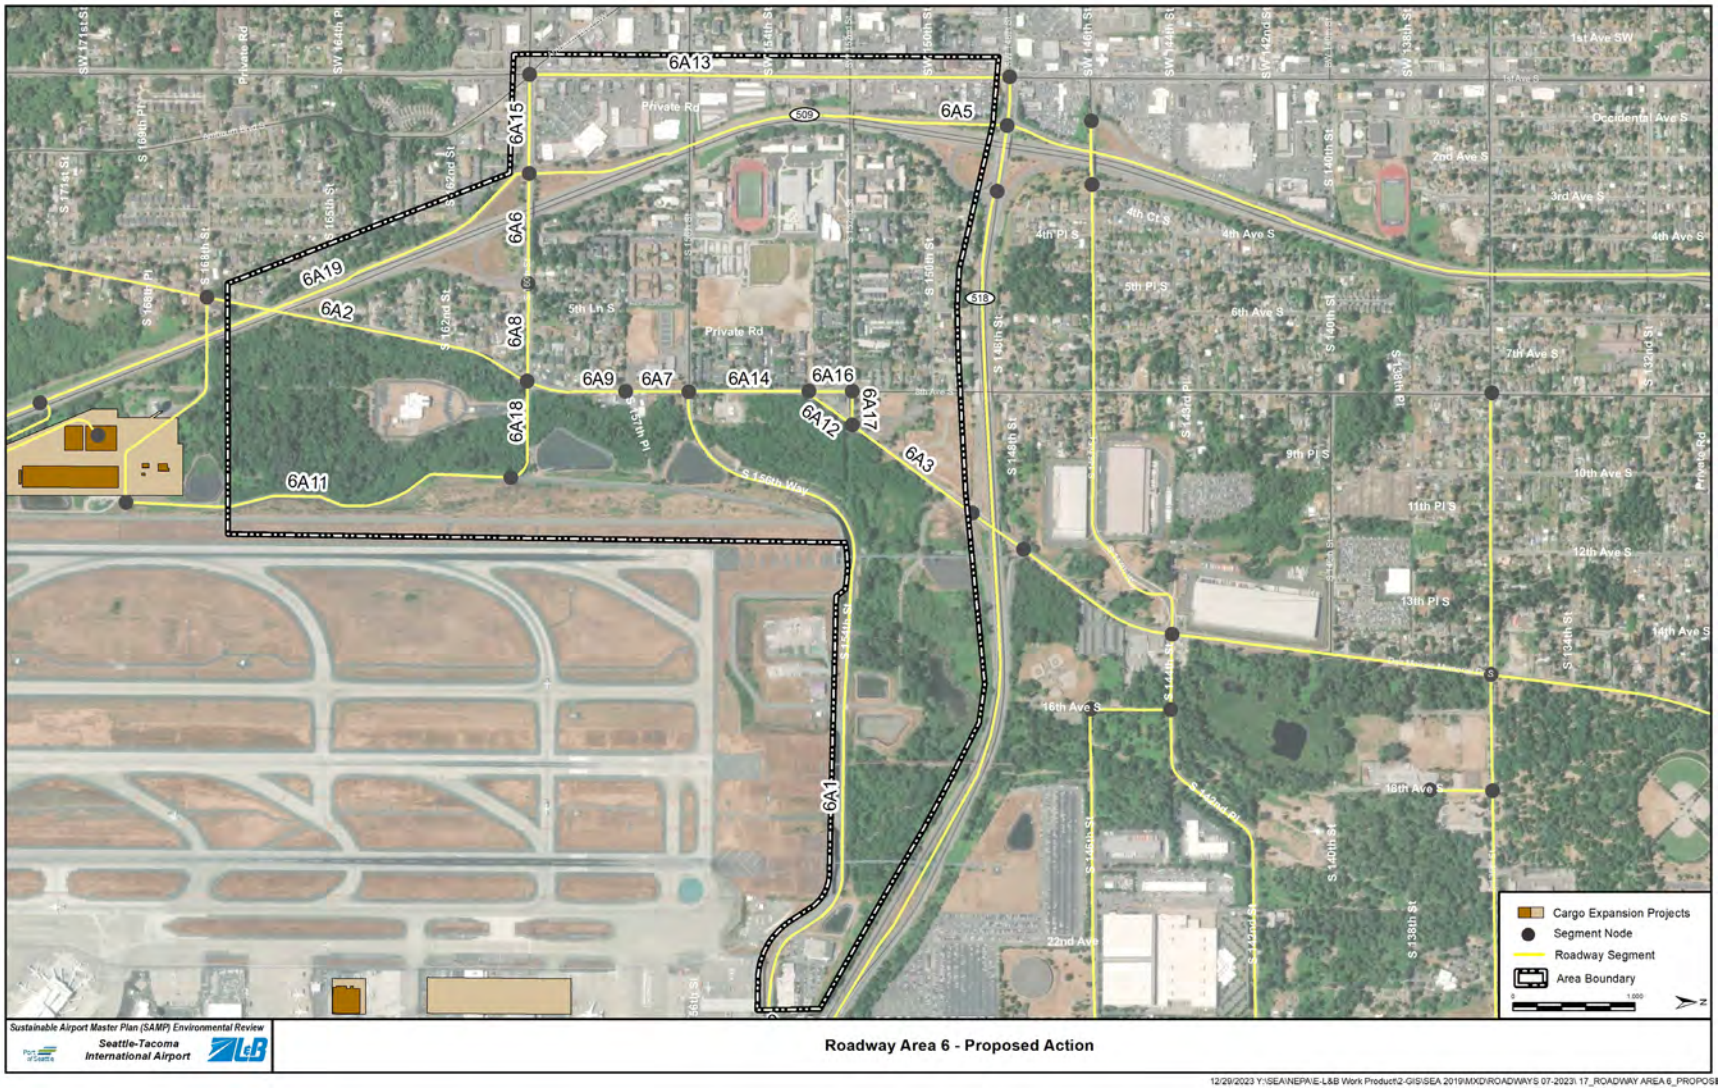

EXHIBIT 5-19: AREA 7 – PROPOSED ACTION

EXHIBIT 5-20: AREA 8 – PROPOSED ACTION

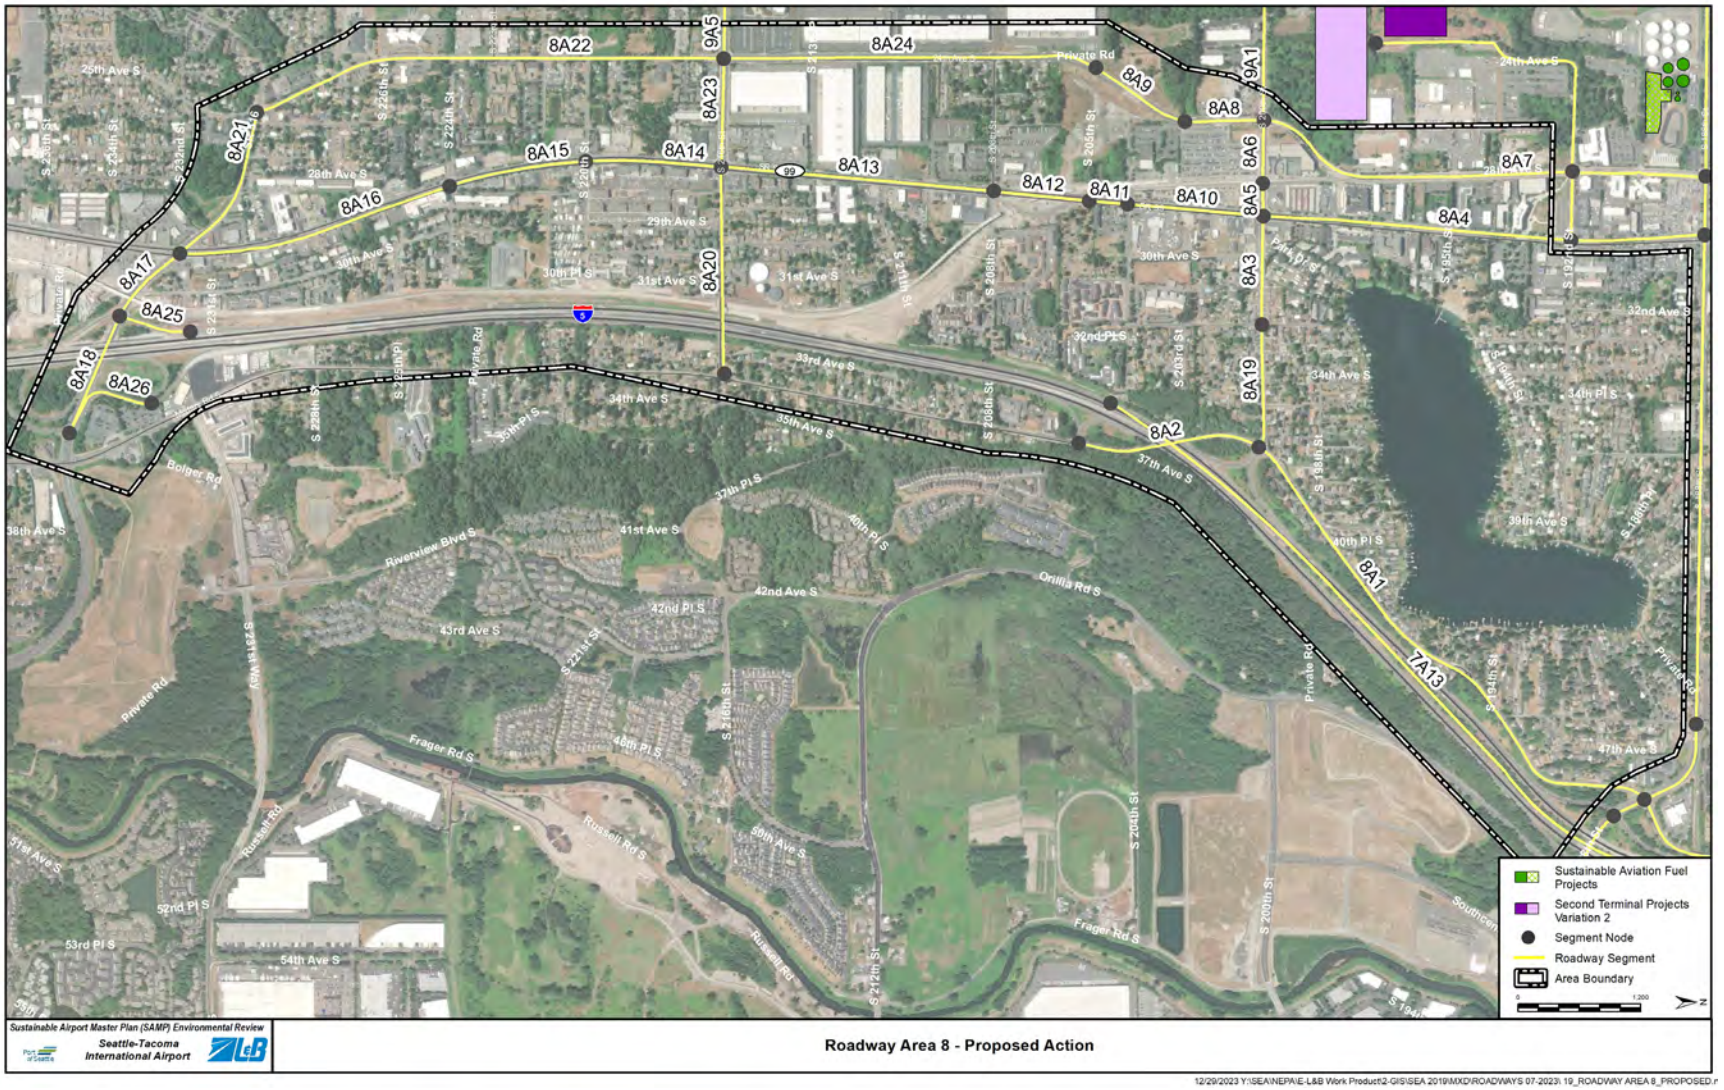

EXHIBIT 5-21: AREA 9 – PROPOSED ACTION

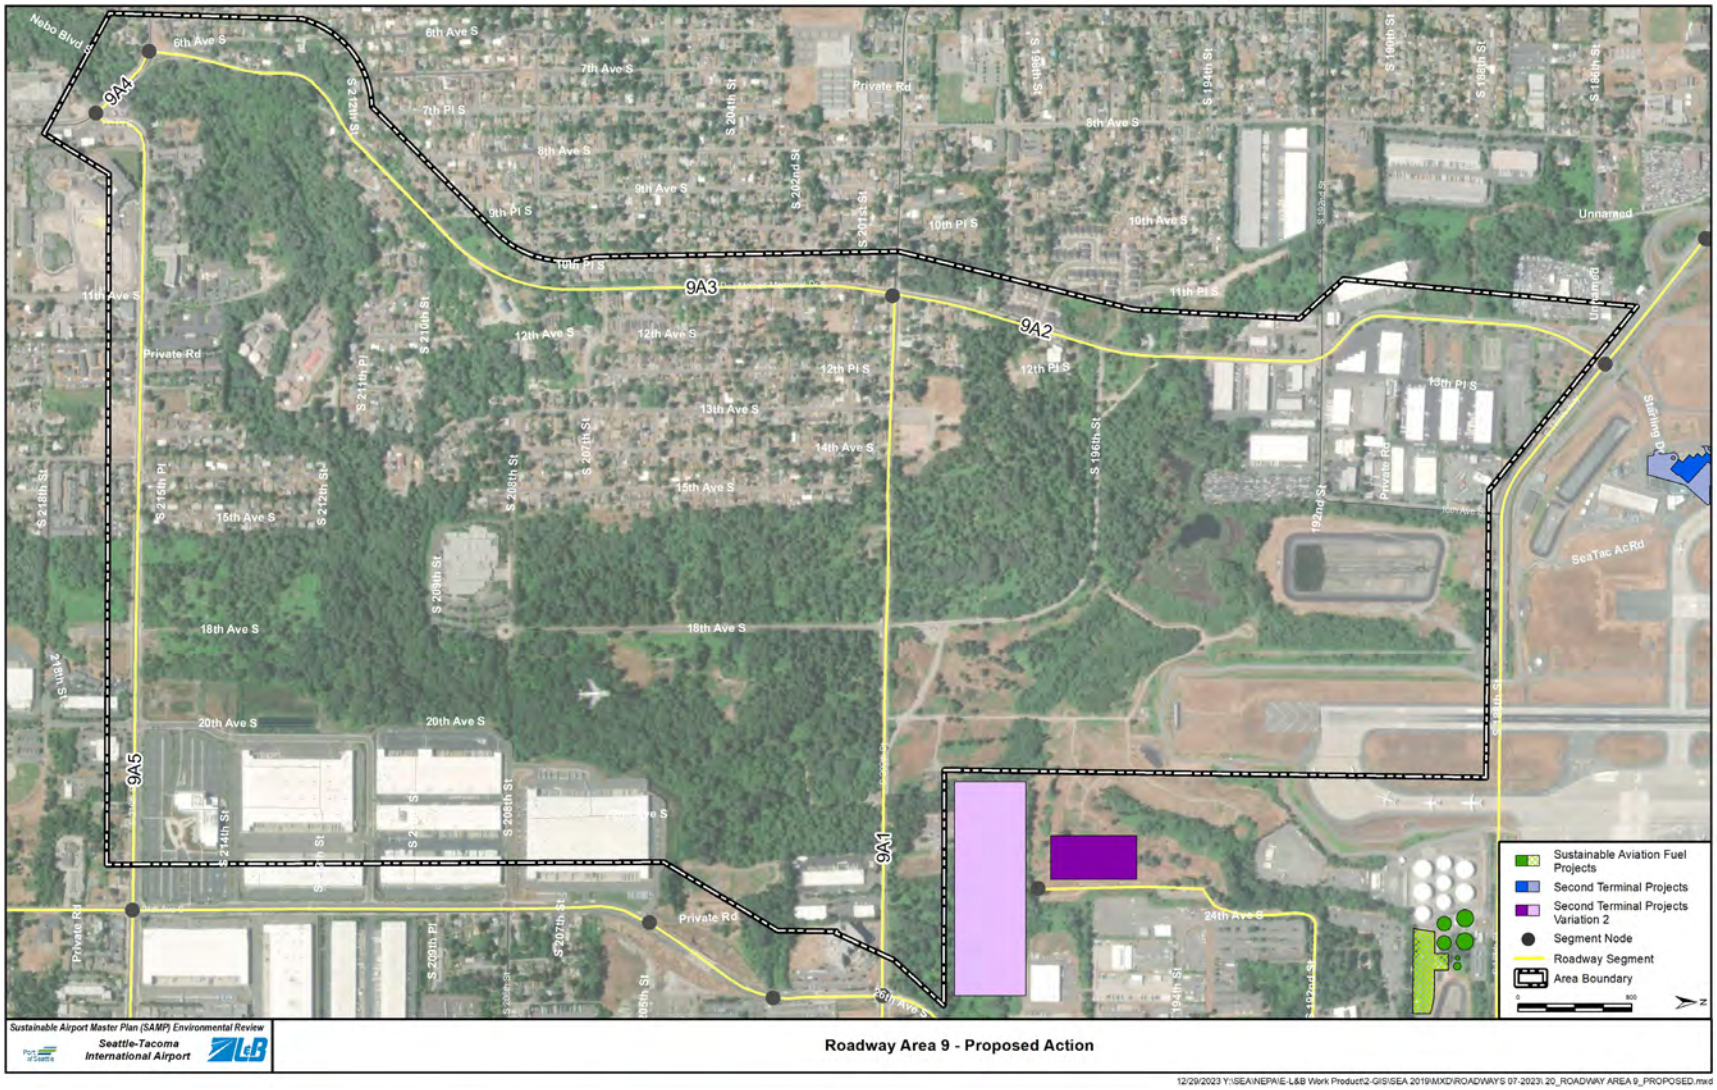

EXHIBIT 5-22: AREA 10 – PROPOSED ACTION

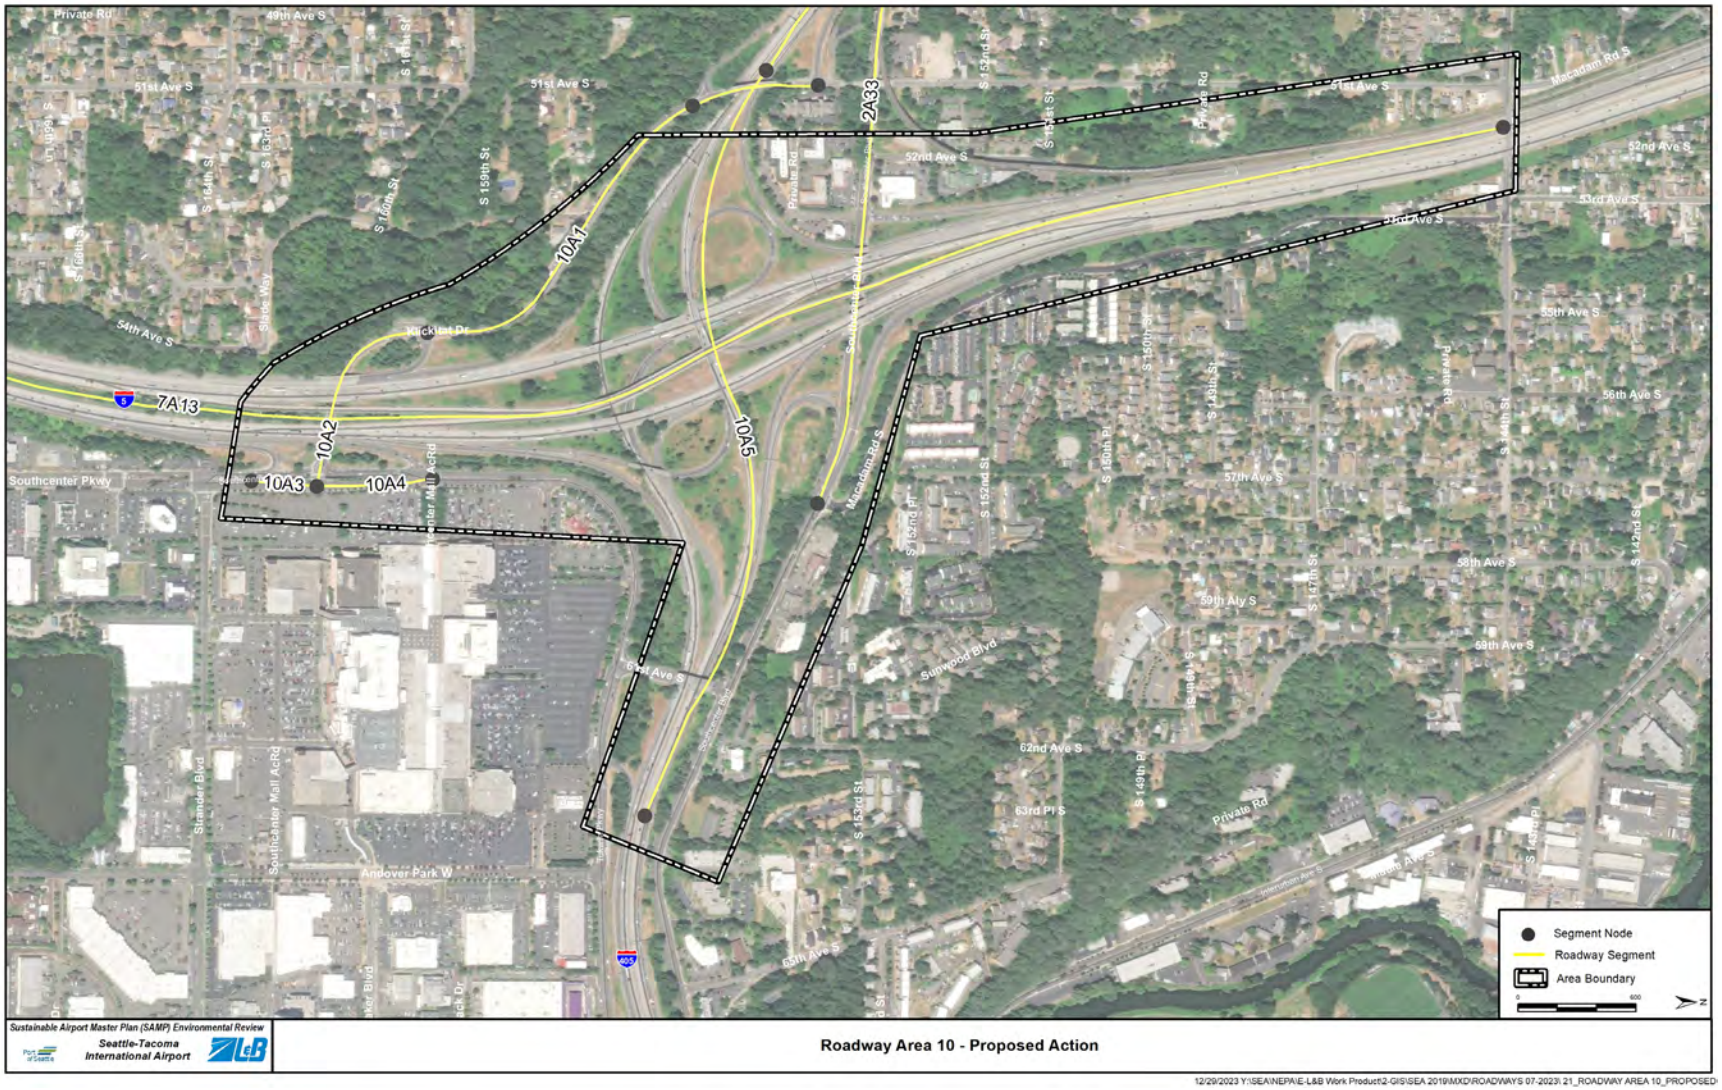

TABLE 5-6: ROADWAY SEGMENTS – FUTURE (2037) NO ACTION ALTERNATIVE

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
Airside Deliveries	2.000	1,037	0%	63%	36%	1%	15	757,197
1A1	0.362	24,450	45%	45%	5%	5%	35	3,231,989
1A2	0.500	24,700	45%	45%	5%	5%	35	4,509,580
1A3	0.181	12,400	45%	45%	5%	5%	35	817,577
1A4	0.097	550	45%	45%	5%	5%	25	19,443
1A5	0.370	10,550	45%	45%	5%	5%	35	1,425,320
1A6	0.124	16,700	45%	45%	5%	5%	35	758,536
1A7	0.550	7,450	45%	45%	5%	5%	30	1,495,827
1A8	0.118	11,350	45%	45%	5%	5%	30	486,848
1A9	0.492	4,550	45%	45%	5%	5%	25	817,793
1A10	0.126	16,100	45%	45%	5%	5%	20	737,906
1A11	0.125	19,400	45%	45%	5%	5%	20	882,958
1A12	2.486	157,301	45%	45%	5%	5%	60	142,744,963
1A13	0.124	4,550	45%	45%	5%	5%	25	205,310
1A14	0.096	23,000	45%	45%	5%	5%	30	804,761
1A15	0.505	22,700	45%	45%	5%	5%	35	4,186,381
1A16	0.499	11,750	45%	45%	5%	5%	35	2,140,309
1A17	0.124	17,500	45%	45%	5%	5%	20	795,110
1A18	0.170	18,600	45%	45%	5%	5%	20	1,157,151
1A19	0.249	16,400	45%	45%	5%	5%	35	1,493,220
1A20	0.061	37,200	45%	45%	5%	5%	35	823,343
1A21	0.437	13,900	45%	45%	5%	5%	35	2,219,144
1A22	0.097	15,800	45%	45%	5%	5%	25	561,435
1A23	0.766	10,900	45%	45%	5%	5%	25	3,045,697
1A24	0.676	24,700	45%	45%	5%	5%	35	6,096,624
1A25	0.104	86,400	45%	45%	5%	5%	10	3,268,391
1A26 (east)	0.522	78,651	45%	45%	5%	5%	60	14,980,837
1A26 (west)	0.522	78,651	45%	45%	5%	5%	55	14,980,837
1A27	1.286	97,287	45%	45%	5%	5%	60	45,658,337
1A28	0.441	16,300	45%	45%	5%	5%	35	2,625,812
1A29	0.076	64,400	45%	45%	5%	5%	10	1,792,427
1A30	0.083	18,500	45%	45%	5%	5%	20	561,619
2A1	0.041	24,800	45%	45%	5%	5%	35	374,925
2A2	0.402	3,600	45%	45%	5%	5%	25	528,564
2A3	0.081	25,900	45%	45%	5%	5%	35	766,688
2A4	0.127	18,900	45%	45%	5%	5%	25	877,820
2A5	0.049	38,100	45%	45%	5%	5%	35	684,061
2A6	0.081	38,600	45%	45%	5%	5%	35	1,137,250
2A7	0.160	67,700	45%	45%	5%	5%	15	3,961,217
2A8	0.118	25,100	45%	45%	5%	5%	35	1,082,477
2A9	0.086	22,600	45%	45%	5%	5%	35	710,866
2A10	0.200	7,950	45%	45%	5%	5%	30	579,137
2A11	0.525	16,450	45%	45%	5%	5%	35	3,152,207
2A12	0.054	29,250	45%	45%	5%	5%	35	578,695
2A13	0.077	57,250	45%	45%	5%	5%	15	1,603,286

TABLE 5-6: ROADWAY SEGMENTS – FUTURE (2037) NO ACTION ALTERNATIVE *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
2A14	0.272	18,800	41%	41%	17%	1%	30	1,869,744
2A15	0.654	47,850	45%	45%	5%	5%	40	11,419,374
2A16	0.325	11,200	45%	45%	5%	5%	30	1,327,868
2A17	0.122	18,800	45%	45%	5%	5%	30	837,610
2A18	0.241	67,800	45%	45%	5%	5%	40	5,963,235
2A19	0.095	36,000	45%	45%	5%	5%	35	1,253,162
2A20	0.086	36,100	45%	45%	5%	5%	35	1,129,740
2A21	0.090	36,400	45%	45%	5%	5%	35	1,190,744
2A22	0.174	26,500	45%	45%	5%	5%	25	1,681,081
2A23	0.053	25,000	45%	45%	5%	5%	20	483,662
2A24	0.230	8,800	45%	45%	5%	5%	35	737,899
2A25	0.367	1,900	45%	45%	5%	5%	25	254,279
2A26	1.251	26,138	46%	46%	7%	1%	60	11,935,245
2A27	0.384	26,800	45%	45%	5%	5%	60	3,752,835
2A28	0.407	20,400	45%	45%	5%	5%	35	3,031,654
2A29	0.635	20,950	45%	45%	5%	5%	35	4,854,272
2A30	0.312	21,100	45%	45%	5%	5%	35	2,403,276
2A31	0.531	42,750	45%	45%	5%	5%	35	8,291,848
2A32	0.062	56,000	45%	45%	5%	5%	35	1,271,368
2A33	0.985	43,800	45%	45%	5%	5%	35	15,749,913
2A34	0.125	5,350	45%	45%	5%	5%	25	244,826
2A35	0.096	4,650	45%	45%	5%	5%	25	162,473
2A36	0.141	6,600	45%	45%	5%	5%	25	338,768
2A37	0.037	18,600	45%	45%	5%	5%	25	251,145
2A38	0.126	1,950	45%	45%	5%	5%	25	89,839
2A39	0.126	25,600	45%	45%	5%	5%	20	1,173,186
2A40	0.000	-	45%	45%	5%	5%	30	-
2A41	0.000	-	45%	45%	5%	5%	30	-
3A1	0.093	26,138	46%	46%	7%	1%	20	889,619
3A2	0.756	26,138	46%	46%	7%	1%	40	7,214,800
3A3	1.151	26,138	46%	46%	7%	1%	20	10,983,174
3A4	0.234	26,138	46%	46%	7%	1%	30	2,234,228
3A5	0.263	26,138	46%	46%	7%	1%	30	2,513,331
3A6	0.187	17,000	41%	41%	17%	1%	30	1,158,908
3A7	0.115	24,000	39%	39%	22%	1%	30	1,011,351
3A8	0.070	23,400	39%	39%	21%	1%	35	597,298
3A9	0.046	25,900	39%	39%	21%	1%	35	433,547
3A10	0.048	25,900	39%	39%	21%	1%	35	450,922
3A11	0.079	28,900	39%	39%	21%	1%	15	832,045
3A12	0.332	45,600	45%	45%	5%	5%	15	5,525,642
3A13	0.377	49,650	45%	45%	5%	5%	15	6,832,215
3A14	0.768	-	45%	45%	5%	5%	35	-
3A15	1.012	-	45%	45%	5%	5%	35	-
4A1	0.248	21,400	45%	45%	5%	5%	35	1,934,675
4A2	0.108	49,750	45%	45%	5%	5%	35	1,969,335
4A3	0.906	49,050	45%	45%	5%	5%	35	16,226,002
4A4	0.409	56,300	45%	45%	5%	5%	15	8,407,561
4A5	0.248	49,150	45%	45%	5%	5%	40	4,447,013

TABLE 5-6: ROADWAY SEGMENTS – FUTURE (2037) NO ACTION ALTERNATIVE *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
4A6	0.127	7,050	45%	45%	5%	5%	35	327,572
4A7	0.581	600	45%	45%	5%	5%	15	127,138
5A1	0.422	39,200	45%	45%	5%	5%	40	6,042,011
5A2	0.629	20,500	45%	45%	5%	5%	35	4,703,125
5A3	0.380	450	45%	45%	5%	5%	15	62,401
5A4	0.991	44,000	45%	45%	5%	5%	40	15,911,863
5A5	0.216	58,400	45%	45%	5%	5%	40	4,609,756
5A6	0.075	52,600	45%	45%	5%	5%	40	1,439,983
5A7	0.309	-	45%	45%	5%	5%	15	-
5A8	0.142	-	45%	45%	5%	5%	60	-
5A9	0.567	-	45%	45%	5%	5%	60	-
5A10	0.268	-	45%	45%	5%	5%	15	-
6A1	1.180	23,100	45%	45%	5%	5%	35	9,948,580
6A2	0.519	21,450	45%	45%	5%	5%	35	4,059,529
6A3	0.231	23,150	45%	45%	5%	5%	35	1,951,605
6A4	1.560	45,428	45%	45%	5%	5%	60	25,866,138
6A5	0.759	45,428	45%	45%	5%	5%	60	12,588,266
6A6	0.176	30,200	45%	45%	5%	5%	15	1,943,818
6A7	0.099	27,200	45%	45%	5%	5%	35	984,123
6A8	0.152	13,600	45%	45%	5%	5%	15	755,069
6A9	0.155	27,200	45%	45%	5%	5%	35	1,537,400
6A10	0.364	450	45%	45%	5%	5%	15	59,747
6A11	0.618	450	45%	45%	5%	5%	15	101,444
6A12	0.086	18,100	45%	45%	5%	5%	35	568,251
6A13	0.750	44,700	45%	45%	5%	5%	35	12,228,598
6A14	0.186	30,000	45%	45%	5%	5%	35	2,039,492
6A15	0.158	43,050	45%	45%	5%	5%	15	2,476,345
6A16	0.053	6,700	45%	45%	5%	5%	25	129,007
6A17	0.067	14,000	45%	45%	5%	5%	35	340,326
6A18	0.160	-	45%	45%	5%	5%	15	-
6A19	0.849	-	45%	45%	5%	5%	60	-
7A1	0.190	46,100	45%	45%	5%	5%	35	3,202,150
7A2	0.066	31,950	45%	45%	5%	5%	35	766,865
7A3	0.143	62,200	45%	45%	5%	5%	35	3,250,570
7A4	0.934	26,450	45%	45%	5%	5%	35	9,015,843
7A5	0.331	17,800	45%	45%	5%	5%	30	2,148,818
7A6	0.664	17,800	45%	45%	5%	5%	30	4,313,891
7A7	0.411	9,350	45%	45%	5%	5%	25	1,403,309
7A8	0.826	26,350	45%	45%	5%	5%	35	7,947,955
7A9	0.339	15,400	39%	39%	22%	1%	30	1,907,762
7A10	0.451	17,900	45%	45%	5%	5%	35	2,948,510
7A11	0.129	27,700	45%	45%	5%	5%	35	1,306,843
7A12	0.584	13,650	45%	45%	5%	5%	30	2,908,468
7A13 (north)	4.248	176,304	45%	45%	5%	5%	60	273,335,438
7A13 (south)	4.248	144,357	45%	45%	5%	5%	30	223,806,309
8A1	1.011	16,150	45%	45%	5%	5%	35	5,957,771
8A2	0.342	26,450	45%	45%	5%	5%	35	3,300,720
8A3	0.201	32,500	45%	45%	5%	5%	25	2,379,712

TABLE 5-6: ROADWAY SEGMENTS – FUTURE (2037) NO ACTION ALTERNATIVE *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
8A4	0.570	47,100	45%	45%	5%	5%	40	9,806,977
8A5	0.060	32,000	45%	45%	5%	5%	35	703,089
8A6	0.118	27,250	45%	45%	5%	5%	35	1,175,677
8A7	0.606	23,600	45%	45%	5%	5%	35	5,219,550
8A8	0.149	25,600	45%	45%	5%	5%	35	1,389,322
8A9	0.192	22,750	45%	45%	5%	5%	35	1,597,940
8A10	0.251	46,900	45%	45%	5%	5%	40	4,291,437
8A11	0.071	44,950	45%	45%	5%	5%	40	1,162,402
8A12	0.178	44,700	45%	45%	5%	5%	40	2,898,106
8A13	0.505	42,300	45%	45%	5%	5%	40	7,797,179
8A14	0.252	50,900	45%	45%	5%	5%	40	4,689,139
8A15	0.257	53,050	45%	45%	5%	5%	40	4,971,011
8A16	0.518	54,950	45%	45%	5%	5%	40	10,395,313
8A17	0.162	71,600	45%	45%	5%	5%	10	4,236,243
8A18	0.236	76,700	45%	45%	5%	5%	10	6,594,396
8A19	0.229	33,850	45%	45%	5%	5%	25	2,829,303
8A20	0.383	25,850	45%	45%	5%	5%	35	3,611,210
8A21	0.311	28,150	45%	45%	5%	5%	35	3,193,536
8A22	0.886	17,800	45%	45%	5%	5%	30	5,758,661
8A23	0.200	29,200	45%	45%	5%	5%	35	2,127,827
8A24	0.689	22,500	45%	45%	5%	5%	35	5,654,700
8A25	0.135	40,500	45%	45%	5%	5%	35	1,998,904
8A26	0.198	17,700	45%	45%	5%	5%	35	1,280,445
9A1	0.936	21,050	45%	45%	5%	5%	35	7,195,210
9A2	0.991	24,550	45%	45%	5%	5%	35	8,881,904
9A3	1.115	24,600	45%	45%	5%	5%	35	10,011,765
9A4	0.109	36,450	45%	45%	5%	5%	35	1,450,017
9A5	1.105	18,400	45%	45%	5%	5%	35	7,424,525
10A1	0.355	36,900	45%	45%	5%	5%	30	4,779,284
10A2	0.208	46,950	45%	45%	5%	5%	30	3,566,123
10A3	0.063	24,350	45%	45%	5%	5%	35	560,506
10A4	0.111	20,200	45%	45%	5%	5%	35	819,435
10A5 (east)	0.758	107,592	45%	45%	5%	5%	35	29,784,837
10A5 (west)	0.758	107,592	45%	45%	5%	5%	35	29,784,837

Note: mph denotes miles per hour; PC denotes passenger car; PT denotes passenger truck; SHT denotes short-haul truck; LHT denotes long-haul truck; VMT denotes vehicle-miles-traveled; the Airside Deliveries segment is not shown on the maps.

Source: Port of Seattle and WSDOT, 2023. Landrum & Brown, 2024

TABLE 5-7: 2037 EMISSION FACTORS FOR MOTOR VEHICLES

Vehicle Type	Speed (mph)	CO (g/VMT)	NO_X (g/VMT)	SO_X (g/VMT)	VOC (g/VMT)	$PM_{2.5}$ (g/VMT)	PM_{10} (g/VMT)	CO_2 (g/VMT)	CH_4 (g/VMT)	N_2O (g/VMT)
PC	5	3.18	0.01	0.00	0.02	0.00	0.00	789.66	0.01	0.01
PT	5	2.89	0.02	0.00	0.03	0.00	0.00	965.76	0.01	0.01
SHT	5	2.92	2.41	0.01	0.08	0.01	0.01	1646.15	0.05	0.26
LHT	5	2.87	2.42	0.01	0.08	0.01	0.01	1641.73	0.06	0.25
PC	10	2.34	0.01	0.00	0.02	0.00	0.00	482.21	0.01	0.00
PT	10	2.14	0.01	0.00	0.02	0.00	0.00	595.18	0.01	0.00
SHT	10	1.71	1.32	0.00	0.04	0.01	0.01	1075.67	0.03	0.17
LHT	10	1.68	1.34	0.00	0.05	0.01	0.01	1069.10	0.03	0.16
PC	15	2.06	0.01	0.00	0.01	0.00	0.00	379.72	0.01	0.00
PT	15	1.89	0.01	0.00	0.02	0.00	0.00	471.65	0.01	0.00
SHT	15	1.30	0.95	0.00	0.03	0.00	0.01	911.55	0.02	0.14
LHT	15	1.27	0.96	0.00	0.03	0.01	0.01	903.85	0.02	0.14
PC	20	1.83	0.01	0.00	0.01	0.00	0.00	326.47	0.01	0.00
PT	20	1.69	0.01	0.00	0.01	0.00	0.00	408.01	0.01	0.00
SHT	20	1.05	0.75	0.00	0.02	0.00	0.00	816.53	0.02	0.13
LHT	20	1.02	0.77	0.00	0.02	0.00	0.00	808.37	0.02	0.12
PC	25	1.51	0.01	0.00	0.01	0.00	0.00	290.50	0.01	0.00
PT	25	1.43	0.01	0.00	0.01	0.00	0.00	366.07	0.01	0.00
SHT	25	0.86	0.61	0.00	0.02	0.00	0.00	737.74	0.01	0.11
LHT	25	0.84	0.63	0.00	0.02	0.00	0.00	728.93	0.01	0.11
PC	30	1.44	0.01	0.00	0.01	0.00	0.00	259.83	0.01	0.00
PT	30	1.35	0.01	0.00	0.01	0.00	0.00	326.79	0.01	0.00
SHT	30	0.78	0.53	0.00	0.02	0.00	0.00	731.00	0.01	0.11
LHT	30	0.76	0.55	0.00	0.02	0.00	0.00	717.44	0.01	0.11
PC	35	1.28	0.01	0.00	0.01	0.00	0.00	245.16	0.00	0.00
PT	35	1.22	0.01	0.00	0.01	0.00	0.00	310.81	0.00	0.00
SHT	35	0.68	0.42	0.00	0.01	0.00	0.00	648.84	0.01	0.10
LHT	35	0.66	0.44	0.00	0.01	0.00	0.00	632.72	0.01	0.10
PC	40	1.14	0.01	0.00	0.01	0.00	0.00	235.88	0.00	0.00
PT	40	1.11	0.01	0.00	0.01	0.00	0.00	301.72	0.00	0.00
SHT	40	0.64	0.36	0.00	0.01	0.00	0.00	641.67	0.01	0.10
LHT	40	0.61	0.37	0.00	0.01	0.00	0.00	620.76	0.01	0.09
PC	55	1.00	0.01	0.00	0.01	0.00	0.00	221.55	0.00	0.00
PT	55	1.01	0.01	0.00	0.01	0.00	0.00	287.61	0.00	0.00
SHT	55	0.56	0.22	0.00	0.01	0.00	0.00	641.06	0.00	0.10
LHT	55	0.53	0.24	0.00	0.01	0.00	0.00	611.70	0.00	0.09
PC	60	1.01	0.01	0.00	0.01	0.00	0.00	220.60	0.00	0.00
PT	60	1.04	0.01	0.00	0.01	0.00	0.00	289.00	0.00	0.00
SHT	60	0.54	0.19	0.00	0.00	0.00	0.00	627.81	0.00	0.10
LHT	60	0.51	0.21	0.00	0.00	0.00	0.00	597.24	0.00	0.09

Note: mph denotes miles per hour; g/VMT denotes grams per vehicle miles traveled; PC denotes passenger car; PT denotes passenger truck; SHT denotes short-haul truck; LHT denotes long-haul truck; CO denotes carbon monoxide, NO_x denotes nitrogen oxides, SO_x denotes sulfur oxides, VOC denotes volatile organic compounds, $PM_{2.5}$ denotes fine particulate matter, PM_{10} denotes coarse particulate matter, CO_2 denotes carbon dioxide, CH_4 denotes methane, N_2O denotes nitrous oxide.

Source: MOVES4; Landrum & Brown, 2024.

TABLE 5-8: ROADWAY SEGMENTS – FUTURE (2037) PROPOSED ACTION

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
Airside Deliveries	2.000	1,114	0%	63%	36%	1%	15	813,034
1A1	0.362	35,050	45%	45%	5%	5%	35	4,633,178
1A2	0.500	25,000	45%	45%	5%	5%	35	4,564,352
1A3	0.181	12,400	45%	45%	5%	5%	35	817,577
1A4	0.097	550	45%	45%	5%	5%	25	19,443
1A5	0.370	10,550	45%	45%	5%	5%	35	1,425,320
1A6	0.124	16,700	45%	45%	5%	5%	35	758,536
1A7	0.550	7,600	45%	45%	5%	5%	30	1,525,944
1A8	0.118	24,650	45%	45%	5%	5%	30	1,057,339
1A9	0.492	14,850	45%	45%	5%	5%	25	2,669,061
1A10	0.126	16,300	45%	45%	5%	5%	20	747,073
1A11	0.125	24,800	45%	45%	5%	5%	20	1,128,730
1A12	2.486	169,491	45%	45%	5%	5%	60	153,806,735
1A13	0.124	14,850	45%	45%	5%	5%	25	670,078
1A14	0.096	28,000	45%	45%	5%	5%	30	979,710
1A15	0.505	22,900	45%	45%	5%	5%	35	4,223,266
1A16	0.499	11,750	45%	45%	5%	5%	35	2,140,309
1A17	0.124	17,500	45%	45%	5%	5%	20	795,110
1A18	0.170	25,900	45%	45%	5%	5%	20	1,611,302
1A19	0.249	16,400	45%	45%	5%	5%	35	1,493,220
1A20	0.061	37,500	45%	45%	5%	5%	35	829,983
1A21	0.437	14,000	45%	45%	5%	5%	35	2,235,109
1A22	0.097	17,400	45%	45%	5%	5%	25	618,289
1A23	0.766	13,250	45%	45%	5%	5%	25	3,702,338
1A24	0.676	24,800	45%	45%	5%	5%	35	6,121,306
1A25	0.104	90,300	45%	45%	5%	5%	10	3,415,923
1A26 (east)	0.522	84,745	45%	45%	5%	5%	60	16,141,751
1A26 (west)	0.522	84,745	45%	45%	5%	5%	55	16,141,751
1A27	1.286	104,826	45%	45%	5%	5%	60	49,196,550
1A28	0.441	16,250	45%	45%	5%	5%	35	2,617,757
1A29	0.076	66,000	45%	45%	5%	5%	10	1,836,959
1A30	0.083	25,900	45%	45%	5%	5%	20	786,267
2A1	0.041	24,500	45%	45%	5%	5%	35	370,389
2A2	0.402	5,800	45%	45%	5%	5%	25	851,576
2A3	0.081	23,700	45%	45%	5%	5%	35	701,564
2A4	0.127	26,000	45%	45%	5%	5%	25	1,207,584
2A5	0.049	39,100	45%	45%	5%	5%	35	702,015
2A6	0.081	39,000	45%	45%	5%	5%	35	1,149,035
2A7	0.160	68,500	45%	45%	5%	5%	15	4,008,026
2A8	0.118	25,100	45%	45%	5%	5%	35	1,082,477
2A9	0.086	21,600	45%	45%	5%	5%	35	679,412
2A10	0.200	10,700	45%	45%	5%	5%	30	779,468
2A11	0.525	16,500	45%	45%	5%	5%	35	3,161,788
2A12	0.054	30,000	45%	45%	5%	5%	35	593,534
2A13	0.077	58,750	45%	45%	5%	5%	15	1,645,293
2A14	0.272	-	41%	41%	17%	1%	30	-
2A15	0.654	47,900	45%	45%	5%	5%	40	11,431,307

TABLE 5-8: ROADWAY SEGMENTS – FUTURE (2037) PROPOSED ACTION *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
2A16	0.325	-	45%	45%	5%	5%	30	-
2A17	0.122	13,400	45%	45%	5%	5%	30	597,020
2A18	0.241	65,500	45%	45%	5%	5%	40	5,760,942
2A19	0.095	36,900	45%	45%	5%	5%	35	1,284,491
2A20	0.086	37,100	45%	45%	5%	5%	35	1,161,035
2A21	0.090	37,400	45%	45%	5%	5%	35	1,223,457
2A22	0.174	26,800	45%	45%	5%	5%	25	1,700,112
2A23	0.053	25,000	45%	45%	5%	5%	20	483,662
2A24	0.230	8,800	45%	45%	5%	5%	35	737,899
2A25	0.367	1,850	45%	45%	5%	5%	25	247,588
2A26	1.251	28,163	46%	46%	7%	1%	60	12,860,146
2A27	0.384	27,250	45%	45%	5%	5%	60	3,815,849
2A28	0.407	20,400	45%	45%	5%	5%	35	3,031,654
2A29	0.635	20,950	45%	45%	5%	5%	35	4,854,272
2A30	0.312	21,300	45%	45%	5%	5%	35	2,426,056
2A31	0.531	43,450	45%	45%	5%	5%	35	8,427,621
2A32	0.062	57,500	45%	45%	5%	5%	35	1,305,423
2A33	0.985	44,900	45%	45%	5%	5%	35	16,145,459
2A34	0.125	5,300	45%	45%	5%	5%	25	242,538
2A35	0.096	5,650	45%	45%	5%	5%	25	197,413
2A36	0.141	7,600	45%	45%	5%	5%	25	390,097
2A37	0.037	19,700	45%	45%	5%	5%	25	265,998
2A38	0.126	3,600	45%	45%	5%	5%	25	165,857
2A39	0.126	25,800	45%	45%	5%	5%	20	1,182,351
2A40	0.000	24,200	45%	45%	5%	5%	30	1,608,233
2A41	0.000	12,400	45%	45%	5%	5%	30	644,195
3A1	0.093	28,163	46%	46%	7%	1%	20	958,559
3A2	0.756	28,163	46%	46%	7%	1%	40	7,773,898
3A3	1.151	-	46%	46%	7%	1%	20	-
3A4	0.234	28,163	46%	46%	7%	1%	30	2,407,365
3A5	0.263	28,163	46%	46%	7%	1%	30	2,708,097
3A6	0.187	-	41%	41%	17%	1%	30	-
3A7	0.115	-	39%	39%	22%	1%	30	-
3A8	0.070	-	39%	39%	21%	1%	35	-
3A9	0.046	-	39%	39%	21%	1%	35	-
3A10	0.048	5,300	39%	39%	21%	1%	35	92,274
3A11	0.079	15,200	39%	39%	21%	1%	15	437,615
3A12	0.332	45,050	45%	45%	5%	5%	15	5,458,995
3A13	0.377	43,400	45%	45%	5%	5%	15	5,972,168
3A14	0.768	28,163	45%	45%	5%	5%	35	7,894,499
3A15	1.012	28,163	45%	45%	5%	5%	35	10,399,316
4A1	0.248	21,500	45%	45%	5%	5%	35	1,943,716
4A2	0.108	50,300	45%	45%	5%	5%	35	1,991,106
4A3	0.906	49,500	45%	45%	5%	5%	35	16,374,864
4A4	0.409	56,250	45%	45%	5%	5%	15	8,400,094
4A5	0.248	49,000	45%	45%	5%	5%	40	4,433,441
4A6	0.127	7,350	45%	45%	5%	5%	35	341,511
4A7	0.581	600	45%	45%	5%	5%	15	127,138
5A1	0.422	40,050	45%	45%	5%	5%	40	6,173,024
5A2	0.629	53,300	45%	45%	5%	5%	40	1,459,146

TABLE 5-8: ROADWAY SEGMENTS – FUTURE (2037) PROPOSED ACTION *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
5A3	0.380	22,300	45%	45%	5%	5%	35	5,116,083
5A4	0.991	1,850	45%	45%	5%	5%	15	256,537
5A5	0.216	44,800	45%	45%	5%	5%	40	16,201,169
5A6	0.075	59,500	45%	45%	5%	5%	40	4,696,583
5A7	0.309	1,850	45%	45%	5%	5%	15	208,472
5A8	0.142	48,948	45%	45%	5%	5%	60	2,532,966
5A9	0.567	48,948	45%	45%	5%	5%	60	10,132,220
5A10	0.268	1,850	45%	45%	5%	5%	15	180,881
6A1	1.180	23,300	45%	45%	5%	5%	35	10,034,715
6A2	0.519	24,000	45%	45%	5%	5%	35	4,542,130
6A3	0.231	26,850	45%	45%	5%	5%	35	2,263,525
6A4	1.560	-	45%	45%	5%	5%	60	-
6A5	0.759	48,948	45%	45%	5%	5%	60	13,563,772
6A6	0.176	33,200	45%	45%	5%	5%	15	2,136,912
6A7	0.099	31,200	45%	45%	5%	5%	35	1,128,847
6A8	0.152	16,600	45%	45%	5%	5%	15	921,628
6A9	0.155	31,200	45%	45%	5%	5%	35	1,763,489
6A10	0.364	-	45%	45%	5%	5%	15	-
6A11	0.618	1,850	45%	45%	5%	5%	15	417,046
6A12	0.086	21,800	45%	45%	5%	5%	35	684,413
6A13	0.750	44,650	45%	45%	5%	5%	35	12,214,919
6A14	0.186	44,150	45%	45%	5%	5%	15	2,539,620
6A15	0.158	6,800	45%	45%	5%	5%	25	130,933
6A16	0.053	14,100	45%	45%	5%	5%	35	342,757
6A17	0.067	33,800	45%	45%	5%	5%	35	2,297,828
6A18	0.160	1,850	45%	45%	5%	5%	15	108,275
6A19	0.849	48,948	45%	45%	5%	5%	60	15,175,640
7A1	0.190	45,900	45%	45%	5%	5%	35	3,188,258
7A2	0.066	32,250	45%	45%	5%	5%	35	774,066
7A3	0.143	62,800	45%	45%	5%	5%	35	3,281,926
7A4	0.934	26,850	45%	45%	5%	5%	35	9,152,189
7A5	0.331	18,650	45%	45%	5%	5%	30	2,251,430
7A6	0.664	18,650	45%	45%	5%	5%	30	4,519,891
7A7	0.411	8,800	45%	45%	5%	5%	25	1,320,762
7A8	0.826	27,750	45%	45%	5%	5%	35	8,370,237
7A9	0.339	14,950	39%	39%	22%	1%	30	1,852,015
7A10	0.451	19,000	45%	45%	5%	5%	35	3,129,703
7A11	0.129	28,900	45%	45%	5%	5%	35	1,363,457
7A12	0.584	13,650	45%	45%	5%	5%	30	2,908,468
7A13 (north)	4.248	155,544	45%	45%	5%	5%	30	241,149,789
7A13 (south)	4.248	189,966	45%	45%	5%	5%	60	294,517,093
8A1	1.011	16,300	45%	45%	5%	5%	35	6,013,106
8A2	0.342	23,200	45%	45%	5%	5%	35	2,895,150
8A3	0.201	33,400	45%	45%	5%	5%	25	2,445,612
8A4	0.570	47,700	45%	45%	5%	5%	40	9,931,907
8A5	0.060	32,100	45%	45%	5%	5%	35	705,286
8A6	0.118	27,350	45%	45%	5%	5%	35	1,179,991
8A7	0.606	24,450	45%	45%	5%	5%	35	5,407,542

TABLE 5-8: ROADWAY SEGMENTS – FUTURE (2037) PROPOSED ACTION *(CONTINUED)*

Segment ID	Length (miles)	AADT	PC (%)	PT (%)	SHT (%)	LHT (%)	Speed (mph)	Annual VMTs
8A8	0.149	26,900	45%	45%	5%	5%	35	1,459,873
8A9	0.192	23,950	45%	45%	5%	5%	35	1,682,227
8A10	0.251	47,550	45%	45%	5%	5%	40	4,350,913
8A11	0.071	45,750	45%	45%	5%	5%	40	1,183,090
8A12	0.178	45,500	45%	45%	5%	5%	40	2,949,974
8A13	0.505	43,400	45%	45%	5%	5%	40	7,999,943
8A14	0.252	52,000	45%	45%	5%	5%	40	4,790,476
8A15	0.257	54,450	45%	45%	5%	5%	40	5,102,197
8A16	0.518	56,450	45%	45%	5%	5%	40	10,679,080
8A17	0.162	73,400	45%	45%	5%	5%	10	4,342,741
8A18	0.236	79,600	45%	45%	5%	5%	10	6,843,728
8A19	0.229	35,300	45%	45%	5%	5%	25	2,950,499
8A20	0.383	26,050	45%	45%	5%	5%	35	3,639,150
8A21	0.311	28,600	45%	45%	5%	5%	35	3,244,587
8A22	0.886	18,100	45%	45%	5%	5%	30	5,855,718
8A23	0.200	29,450	45%	45%	5%	5%	35	2,146,045
8A24	0.689	23,250	45%	45%	5%	5%	35	5,843,190
8A25	0.135	43,400	45%	45%	5%	5%	35	2,142,036
8A26	0.198	19,700	45%	45%	5%	5%	35	1,425,128
9A1	0.936	21,050	45%	45%	5%	5%	35	7,195,210
9A2	0.991	24,900	45%	45%	5%	5%	35	9,008,530
9A3	1.115	25,050	45%	45%	5%	5%	35	10,194,907
9A4	0.109	36,550	45%	45%	5%	5%	35	1,453,995
9A5	1.105	18,550	45%	45%	5%	5%	35	7,485,051
10A1	0.355	38,450	45%	45%	5%	5%	30	4,980,040
10A2	0.208	48,650	45%	45%	5%	5%	30	3,695,248
10A3	0.063	25,050	45%	45%	5%	5%	35	576,619
10A4	0.111	20,700	45%	45%	5%	5%	35	839,718
10A5 (east)	0.758	115,930	45%	45%	5%	5%	35	32,092,961
10A5 (west)	0.758	115,930	45%	45%	5%	5%	35	32,092,961

Note: mph denotes miles per hour; PC denotes passenger car; PT denotes passenger truck; SHT denotes short-haul truck; LHT denotes long-haul truck; VMT denotes vehicle-miles-traveled; the Airside Deliveries segment is not shown on the maps.

Source: Port of Seattle and WSDOT, 2023. Landrum & Brown, 2024

Attachment 6 Construction

This attachment contains the following exhibits and tables:

Proposed Action

- Exhibit 6-1 Construction Schedule – Proposed Action
- Table 6-1 On-Road Construction Equipment Emission Factors
- Table 6-2 Non-Road Construction Equipment Emission Factors
- Table 6-3 On-Road Construction Emissions Inventory – Proposed Action
- Table 6-4 Non-Road Construction Emissions Inventory – Proposed Action

Hybrid Terminal Option

- Exhibit 6-2 Construction Schedule – Hybrid Terminal Option
- Table 6-5 On-Road Construction Emissions Inventory – Hybrid Terminal Option
- Table 6-6 Non-Road Construction Emissions Inventory – Hybrid Terminal Option

EXHIBIT 6-1: CONSTRUCTION SCHEDULE - PROPOSED ACTION

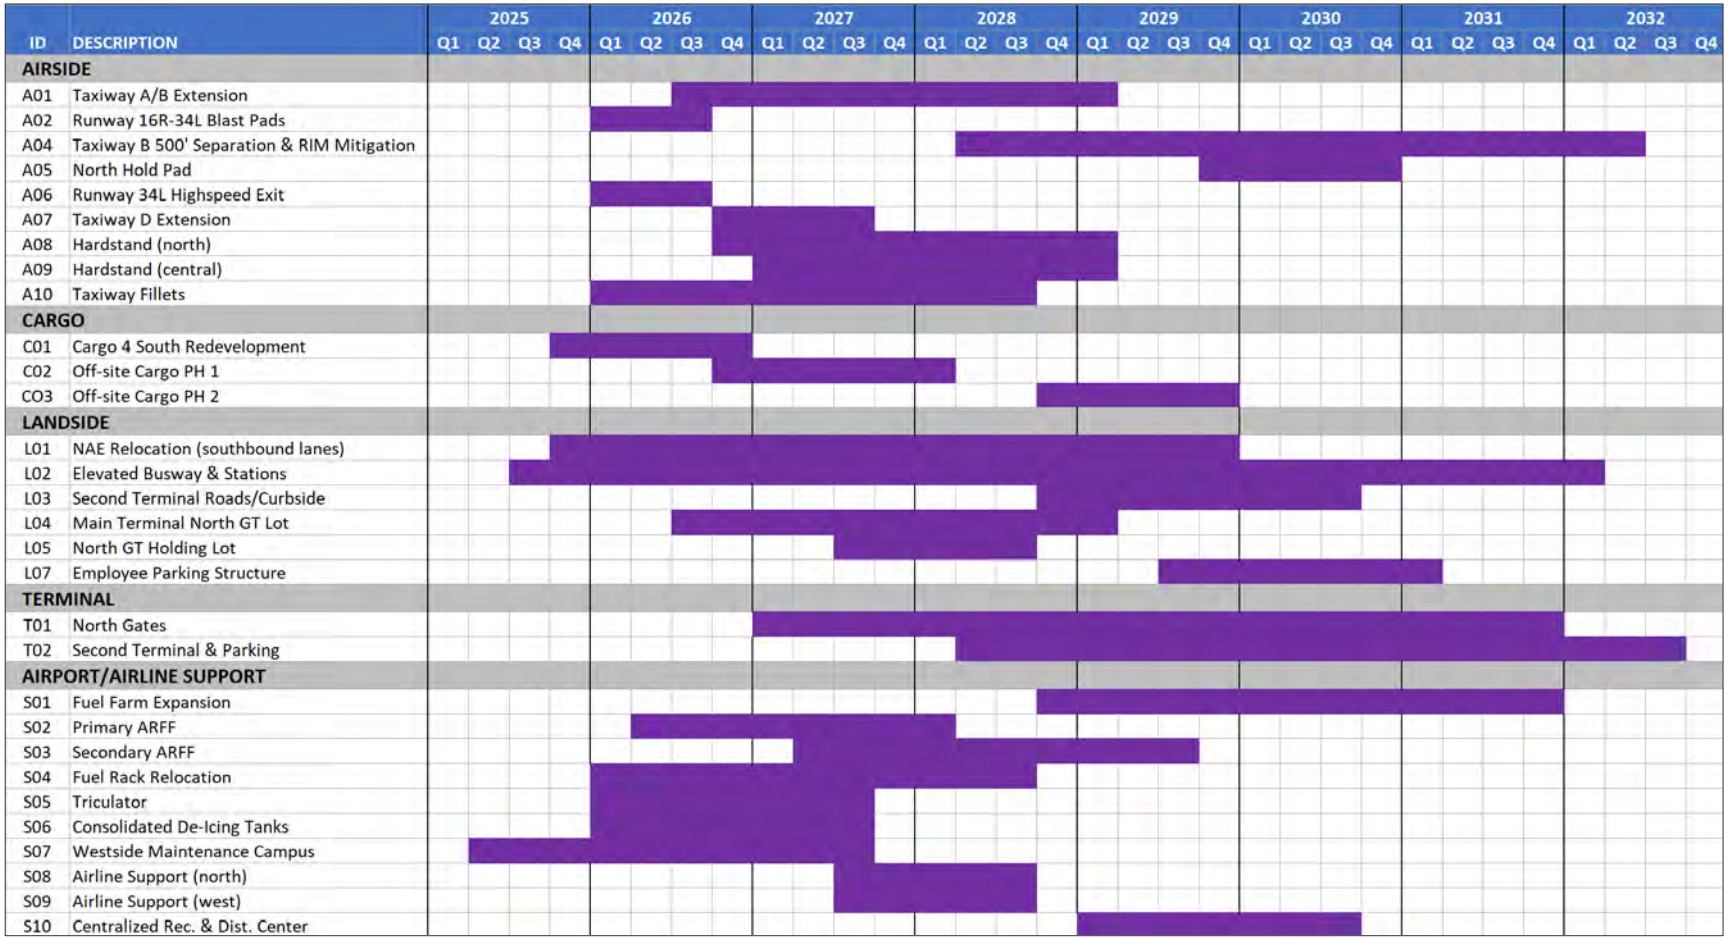

TABLE 6-1: ON-ROAD CONSTRUCTION EQUIPMENT EMISSIONS FACTORS

Activity	CO (g/VMT)	VO (g/VMT)	NO_x (g/VMT)	SO_x (g/VMT)	PM_{10} (g/VMT)	$PM_{2.5}$ (g/VMT)	CO_2 (g/VMT)	CH_4 (g/VMT)	N_2O (g/VMT)
Employee Commute	3.20	0.0309	0.112	0.00160	0.00241	0.00213	319	0.00988	0.00174
Material Delivery	2.00	0.0835	3.63	0.00548	0.0478	0.0440	1,636	0.0178	0.219

Note: Construction would start in 2025 and would continue through 2032 for the Proposed Action and the Hybrid Terminal Option. For the purpose of this analysis, emission factors for the first year of construction (2025) were used. g/VMT denotes grams per vehicle-miles-traveled; CO denotes carbon monoxide, NO_x denotes nitrogen oxides, SO_x denotes sulfur oxides, VOC denotes volatile organic compounds, $PM_{2.5}$ denotes fine particulate matter, PM_{10} denotes coarse particulate matter, CO_2 denotes carbon dioxide, CH_4 denotes methane, N_2O denotes nitrous oxide.
Source: MOVES4, Landrum & Brown 2024

TABLE 6-2: NON-ROAD CONSTRUCTION EQUIPMENT EMISSIONS FACTORS

Equipment Type	HP	Load Factor	CO (g/hp-hr)	VOC (g/hp-hr)	NO_x (g/hp-hr)	SO_x (g/hp-hr)	PM_{10} (g/hp-hr)	$PM_{2.5}$ (g/hp-hr)	CO_2 (g/hp-hr)	CH_4 (g/hp-hr)
Aerial Lifts	50 < hp <= 75	0.21	2.195	0.418	3.653	0.00212	0.260	0.253	694.77	0.0250
Aerial Lifts	75 < hp <= 100	0.59	2.500	0.395	2.714	0.00210	0.317	0.307	694.84	0.0203
Air Compressors	100 < hp <= 175	0.43	0.179	0.043	0.733	0.00147	0.044	0.043	530.92	0.0035
Air Compressors	75 < hp <= 100	0.43	0.433	0.053	1.395	0.00164	0.073	0.070	590.22	0.0042
Bore/Drill Rigs	100 < hp <= 175	0.43	1.146	0.385	4.491	0.00191	0.262	0.254	529.92	0.0225
Cement & Mortar Mixers	300 < hp <= 600	0.59	1.225	0.262	4.617	0.00194	0.168	0.163	530.28	0.0136
Chain Saws > 6 HP	6 < hp <= 11	0.70	133.015	30.771	0.764	0.00207	4.874	4.484	343.00	0.0000
Chippers/Stump Grinders	75 < hp <= 100	0.43	1.234	0.229	2.739	0.00181	0.217	0.211	589.70	0.0100
Concrete/Industrial Saws	25 < hp <= 40	0.59	0.311	0.095	2.556	0.00158	0.028	0.027	595.87	0.0126
Concrete/Industrial Saws	6 < hp <= 11	0.70	2.467	0.837	4.183	0.00218	0.239	0.232	593.76	0.0738
Cranes	175 < hp <= 300	0.43	0.070	0.024	0.297	0.00143	0.016	0.016	530.97	0.0016
Crawler Tractor/Dozers	100 < hp <= 175	0.59	0.097	0.015	0.276	0.00143	0.024	0.023	536.79	0.0012
Excavators	100 < hp <= 175	0.59	0.078	0.012	0.259	0.00142	0.019	0.018	536.79	0.0010
Forklifts	75 < hp <= 100	0.59	0.052	0.008	0.857	0.00157	0.012	0.012	596.14	0.0005
Generator Sets	25 < hp <= 40	0.43	0.688	0.192	3.067	0.00173	0.112	0.109	589.81	0.0179
Graders	175 < hp <= 300	0.59	0.049	0.014	0.171	0.00143	0.012	0.012	536.79	0.0008
Graders	40 < hp <= 50	0.59	0.280	0.093	2.529	0.00157	0.021	0.020	595.88	0.0124
Irrigation Sets	300 < hp <= 600	0.59	0.745	0.160	2.663	0.00179	0.125	0.122	530.58	0.0114
Off-highway Trucks	175 < hp <= 300	0.43	0.021	0.010	0.115	0.00141	0.007	0.007	536.80	0.0004
Off-highway Trucks	300 < hp <= 600	0.59	0.042	0.012	0.160	0.00142	0.010	0.010	536.79	0.0007
Other Construction Equipment	100 < hp <= 175	0.43	0.231	0.054	0.656	0.00148	0.051	0.049	536.67	0.0040
Other Construction Equipment	300 < hp <= 600	0.59	0.997	0.136	2.292	0.00172	0.148	0.143	536.43	0.0083

TABLE 6-2: NON-ROAD CONSTRUCTION EQUIPMENT EMISSIONS FACTORS *(CONTINUED)*

Equipment Type	HP	LF	CO (g/hp-hr)	VOC (g/hp-hr)	NO_x (g/hp-hr)	SO_x (g/hp-hr)	PM_{10} (g/hp-hr)	$PM_{2.5}$ (g/hp-hr)	CO_2 (g/hp-hr)	CH_4 (g/hp-hr)
Pavers	100 < hp <= 175	0.59	0.128	0.020	0.300	0.00144	0.033	0.032	536.77	0.0016
Paving Equipment	100 < hp <= 175	0.59	0.211	0.049	0.598	0.00148	0.046	0.045	536.69	0.0036
Plate Compactors	3 < hp <= 6	0.43	2.612	0.827	4.238	0.00216	0.270	0.261	588.00	0.0712
Pumps	6 < hp <= 11	0.43	2.580	0.821	4.237	0.00216	0.265	0.257	588.01	0.0706
Rollers	75 < hp <= 100	0.59	0.265	0.025	1.052	0.00160	0.040	0.038	596.09	0.0019
Rubber Tire Loaders	75 < hp <= 100	0.21	0.266	0.025	1.053	0.00160	0.040	0.039	596.09	0.0019
Scrapers	300 < hp <= 600	0.59	0.208	0.033	0.565	0.00148	0.034	0.033	536.73	0.0024
Skid Steer Loaders	50 < hp <= 75	0.21	7.134	1.332	6.018	0.00254	0.987	0.957	692.09	0.0539
Surfacing Equipment	16 < hp <= 25	0.59	1.491	0.352	3.763	0.00219	0.170	0.165	595.15	0.0310
Surfacing Equipment	300 < hp <= 600	0.59	1.373	0.187	3.197	0.00183	0.198	0.192	536.29	0.0111
Surfacing Equipment	75 < hp <= 100	0.43	0.724	0.092	1.536	0.00168	0.097	0.094	595.89	0.0054
Tractors/Loaders/Backhoes	100 < hp <= 175	0.21	1.642	0.495	2.878	0.00201	0.341	0.331	625.11	0.0308
Tractors/Loaders/Backhoes	100 < hp <= 175	0.59	1.642	0.495	2.878	0.00201	0.341	0.331	625.11	0.0308
Tractors/Loaders/Backhoes	50 < hp <= 75	0.21	4.009	0.703	4.358	0.00223	0.527	0.511	693.94	0.0380
Tractors/Loaders/Backhoes	75 < hp <= 100	0.21	3.953	0.684	3.614	0.00223	0.525	0.510	694.00	0.0344
Trenchers	50 < hp <= 75	0.59	0.714	0.112	2.857	0.00166	0.084	0.081	595.82	0.0118

Note: Construction would start in 2025 and would continue through 2032 for the Proposed Action and the Hybrid Terminal Option. For the purpose of this analysis, emission factors for the first year of construction (2025) were used. Note, MOVES4 does not model N_2O for nonroad equipment; as such, emission factors for N_2O were not included in this analysis. HP denotes horsepower; LF denotes load factor; g/hp-hr denotes grams per horsepower-hour. CO denotes carbon monoxide, NO_x denotes nitrogen oxides, SO_x denotes sulfur oxides, VOC denotes volatile organic compounds, $PM_{2.5}$ denotes fine particulate matter, PM_{10} denotes coarse particulate matter, CO_2 denotes carbon dioxide, CH_4 denotes methane.

Source: MOVES4, Landrum & Brown 2024

TABLE 6-3: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2025	C01	Employee Commute	109,825	0.4	0.00	0.01	0.0002	0.0003	0.0003	35.0	0.001	0.000
2025	C01	Material Delivery	76,293	0.2	0.01	0.31	0.0005	0.0040	0.0037	124.8	0.001	0.017
2025	L01	Employee Commute	250,770	0.9	0.01	0.03	0.0004	0.0007	0.0006	79.9	0.002	0.000
2025	L01	Material Delivery	9,812	0.0	0.00	0.04	0.0001	0.0005	0.0005	16.0	0.000	0.002
2025	L02	Employee Commute	491,394	1.7	0.02	0.06	0.0009	0.0013	0.0012	156.5	0.005	0.001
2025	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2025	S07	Employee Commute	3,248,191	11.5	0.11	0.40	0.0057	0.0086	0.0076	1034.6	0.032	0.006
2025	S07	Material Delivery	85,324	0.2	0.01	0.34	0.0005	0.0045	0.0041	139.6	0.002	0.019
2026	A01	Employee Commute	1,651,716	5.8	0.06	0.20	0.0029	0.0044	0.0039	526.1	0.016	0.003
2026	A01	Material Delivery	66,908	0.1	0.01	0.27	0.0004	0.0035	0.0032	109.4	0.001	0.015
2026	A02	Employee Commute	1,936,176	6.8	0.07	0.24	0.0034	0.0051	0.0046	616.7	0.019	0.003
2026	A02	Material Delivery	16,204	0.0	0.00	0.06	0.0001	0.0009	0.0008	26.5	0.000	0.004
2026	A06	Employee Commute	1,936,176	6.8	0.07	0.24	0.0034	0.0051	0.0046	616.7	0.019	0.003
2026	A06	Material Delivery	103,397	0.2	0.01	0.41	0.0006	0.0054	0.0050	169.1	0.002	0.023
2026	A07	Employee Commute	163,020	0.6	0.01	0.02	0.0003	0.0004	0.0004	51.9	0.002	0.000
2026	A07	Material Delivery	13,924	0.0	0.00	0.06	0.0001	0.0007	0.0007	22.8	0.000	0.003
2026	A08	Employee Commute	148,590	0.5	0.01	0.02	0.0003	0.0004	0.0003	47.3	0.001	0.000
2026	A08	Material Delivery	100,765	0.2	0.01	0.40	0.0006	0.0053	0.0049	164.8	0.002	0.022
2026	A10	Employee Commute	936,540	3.3	0.03	0.12	0.0017	0.0025	0.0022	298.3	0.009	0.002
2026	A10	Material Delivery	2,394	0.0	0.00	0.01	0.0000	0.0001	0.0001	3.9	0.000	0.001
2026	C01	Employee Commute	1,736,856	6.1	0.06	0.21	0.0031	0.0046	0.0041	553.2	0.017	0.003
2026	C01	Material Delivery	268,684	0.6	0.02	1.07	0.0016	0.0142	0.0130	439.5	0.005	0.059
2026	C02	Employee Commute	181,253	0.6	0.01	0.02	0.0003	0.0005	0.0004	57.7	0.002	0.000
2026	C02	Material Delivery	41,244	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.5	0.001	0.009
2026	L01	Employee Commute	3,116,124	11.0	0.11	0.38	0.0055	0.0083	0.0073	992.5	0.031	0.005
2026	L01	Material Delivery	39,630	0.1	0.00	0.16	0.0002	0.0021	0.0019	64.8	0.001	0.009
2026	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2026	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2026	L04	Employee Commute	1,204,731	4.3	0.04	0.15	0.0021	0.0032	0.0028	383.7	0.012	0.002
2026	L04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2026	S02	Employee Commute	1,273,800	4.5	0.04	0.16	0.0022	0.0034	0.0030	405.7	0.013	0.002
2026	S02	Material Delivery	113,948	0.3	0.01	0.46	0.0007	0.0060	0.0055	186.4	0.002	0.025
2026	S04	Employee Commute	4,282,542	15.1	0.15	0.53	0.0076	0.0114	0.0101	1364.0	0.042	0.007

TABLE 6-3: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2026	S04	Material Delivery	4,319	0.0	0.00	0.02	0.0000	0.0002	0.0002	7.1	0.000	0.001
2026	S05	Employee Commute	3,392,297	12.0	0.12	0.42	0.0060	0.0090	0.0080	1080.5	0.034	0.006
2026	S05	Material Delivery	3,297	0.0	0.00	0.01	0.0000	0.0002	0.0002	5.4	0.000	0.001
2026	S06	Employee Commute	3,154,437	11.1	0.11	0.39	0.0056	0.0084	0.0074	1004.7	0.031	0.005
2026	S06	Material Delivery	4,519	0.0	0.00	0.02	0.0000	0.0002	0.0002	7.4	0.000	0.001
2026	S07	Employee Commute	5,789,520	20.4	0.20	0.71	0.0102	0.0154	0.0136	1844.0	0.057	0.010
2026	S07	Material Delivery	100,695	0.2	0.01	0.40	0.0006	0.0053	0.0049	164.7	0.002	0.022
2027	A01	Employee Commute	6,589,836	23.3	0.22	0.81	0.0116	0.0175	0.0155	2098.9	0.065	0.011
2027	A01	Material Delivery	129,672	0.3	0.01	0.52	0.0008	0.0068	0.0063	212.1	0.002	0.028
2027	A07	Employee Commute	1,452,132	5.1	0.05	0.18	0.0026	0.0039	0.0034	462.5	0.014	0.003
2027	A07	Material Delivery	40,954	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.0	0.001	0.009
2027	A08	Employee Commute	1,047,222	3.7	0.04	0.13	0.0018	0.0028	0.0025	333.5	0.010	0.002
2027	A08	Material Delivery	371,148	0.8	0.03	1.48	0.0022	0.0196	0.0180	607.1	0.007	0.081
2027	A09	Employee Commute	1,149,390	4.1	0.04	0.14	0.0020	0.0031	0.0027	366.1	0.011	0.002
2027	A09	Material Delivery	46,273	0.1	0.00	0.19	0.0003	0.0024	0.0022	75.7	0.001	0.010
2027	A10	Employee Commute	936,540	3.3	0.03	0.12	0.0017	0.0025	0.0022	298.3	0.009	0.002
2027	A10	Material Delivery	2,394	0.0	0.00	0.01	0.0000	0.0001	0.0001	3.9	0.000	0.001
2027	C02	Employee Commute	2,894,760	10.2	0.10	0.36	0.0051	0.0077	0.0068	922.0	0.029	0.005
2027	C02	Material Delivery	41,244	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.5	0.001	0.009
2027	L01	Employee Commute	3,116,124	11.0	0.11	0.38	0.0055	0.0083	0.0073	992.5	0.031	0.005
2027	L01	Material Delivery	39,630	0.1	0.00	0.16	0.0002	0.0021	0.0019	64.8	0.001	0.009
2027	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2027	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2027	L04	Employee Commute	4,827,438	17.0	0.16	0.59	0.0085	0.0128	0.0114	1537.6	0.048	0.008
2027	L04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2027	L05	Employee Commute	2,652,111	9.4	0.09	0.33	0.0047	0.0071	0.0062	844.7	0.026	0.005
2027	L05	Material Delivery	1,353	0.0	0.00	0.01	0.0000	0.0001	0.0001	2.2	0.000	0.000
2027	S02	Employee Commute	2,281,752	8.1	0.08	0.28	0.0040	0.0061	0.0054	726.8	0.023	0.004
2027	S02	Material Delivery	150,059	0.3	0.01	0.60	0.0009	0.0079	0.0073	245.4	0.003	0.033
2027	S03	Employee Commute	1,019,040	3.6	0.03	0.13	0.0018	0.0027	0.0024	324.6	0.010	0.002
2027	S03	Material Delivery	5,059	0.0	0.00	0.02	0.0000	0.0003	0.0002	8.3	0.000	0.001
2027	S04	Employee Commute	4,282,542	15.1	0.15	0.53	0.0076	0.0114	0.0101	1364.0	0.042	0.007
2027	S04	Material Delivery	4,319	0.0	0.00	0.02	0.0000	0.0002	0.0002	7.1	0.000	0.001

TABLE 6-3: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2027	S05	Employee Commute	845,883	3.0	0.03	0.10	0.0015	0.0022	0.0020	269.4	0.008	0.001
2027	S05	Material Delivery	2,853	0.0	0.00	0.01	0.0000	0.0002	0.0001	4.7	0.000	0.001
2027	S06	Employee Commute	4,407,348	15.6	0.15	0.54	0.0078	0.0117	0.0104	1403.8	0.044	0.008
2027	S06	Material Delivery	3,853	0.0	0.00	0.02	0.0000	0.0002	0.0002	6.3	0.000	0.001
2027	S07	Employee Commute	3,248,191	11.5	0.11	0.40	0.0057	0.0086	0.0076	1034.6	0.032	0.006
2027	S07	Material Delivery	85,324	0.2	0.01	0.34	0.0005	0.0045	0.0041	139.6	0.002	0.019
2027	S08	Employee Commute	904,613	3.2	0.03	0.11	0.0016	0.0024	0.0021	288.1	0.009	0.002
2027	S08	Material Delivery	40,058	0.1	0.00	0.16	0.0002	0.0021	0.0019	65.5	0.001	0.009
2027	S09	Employee Commute	904,613	3.2	0.03	0.11	0.0016	0.0024	0.0021	288.1	0.009	0.002
2027	S09	Material Delivery	40,058	0.1	0.00	0.16	0.0002	0.0021	0.0019	65.5	0.001	0.009
2027	T01	Employee Commute	10,131,66	35.8	0.34	1.25	0.0179	0.0269	0.0238	3227.0	0.100	0.018
2027	T01	Material Delivery	239,615	0.5	0.02	0.96	0.0014	0.0126	0.0116	391.9	0.004	0.052
2028	A01	Employee Commute	6,589,836	23.3	0.22	0.81	0.0116	0.0175	0.0155	2098.9	0.065	0.011
2028	A01	Material Delivery	129,672	0.3	0.01	0.52	0.0008	0.0068	0.0063	212.1	0.002	0.028
2028	A04	Employee Commute	2,394,744	8.5	0.08	0.30	0.0042	0.0064	0.0056	762.7	0.024	0.004
2028	A04	Material Delivery	100,575	0.2	0.01	0.40	0.0006	0.0053	0.0049	164.5	0.002	0.022
2028	A08	Employee Commute	1,047,222	3.7	0.04	0.13	0.0018	0.0028	0.0025	333.5	0.010	0.002
2028	A08	Material Delivery	403,060	0.9	0.04	1.61	0.0024	0.0212	0.0195	659.3	0.007	0.088
2028	A09	Employee Commute	1,149,390	4.1	0.04	0.14	0.0020	0.0031	0.0027	366.1	0.011	0.002
2028	A09	Material Delivery	46,273	0.1	0.00	0.19	0.0003	0.0024	0.0022	75.7	0.001	0.010
2028	A10	Employee Commute	528,627	1.9	0.02	0.07	0.0009	0.0014	0.0012	168.4	0.005	0.001
2028	A10	Material Delivery	1,862	0.0	0.00	0.01	0.0000	0.0001	0.0001	3.0	0.000	0.000
2028	C02	Employee Commute	116,903	0.4	0.00	0.01	0.0002	0.0003	0.0003	37.2	0.001	0.000
2028	C02	Material Delivery	41,244	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.5	0.001	0.009
2028	C03	Employee Commute	216,645	0.8	0.01	0.03	0.0004	0.0006	0.0005	69.0	0.002	0.000
2028	C03	Material Delivery	41,244	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.5	0.001	0.009
2028	L01	Employee Commute	3,116,124	11.0	0.11	0.38	0.0055	0.0083	0.0073	992.5	0.031	0.005
2028	L01	Material Delivery	39,630	0.1	0.00	0.16	0.0002	0.0021	0.0019	64.8	0.001	0.009
2028	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2028	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2028	L03	Employee Commute	418,275	1.5	0.01	0.05	0.0007	0.0011	0.0010	133.2	0.004	0.001
2028	L03	Material Delivery	12,176	0.0	0.00	0.05	0.0001	0.0006	0.0006	19.9	0.000	0.003
2028	L04	Employee Commute	4,827,438	17.0	0.16	0.59	0.0085	0.0128	0.0114	1537.6	0.048	0.008

TABLE 6-3: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2028	L04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2028	L05	Employee Commute	5,955,015	21.0	0.20	0.73	0.0105	0.0158	0.0140	1896.7	0.059	0.010
2028	L05	Material Delivery	1,353	0.0	0.00	0.01	0.0000	0.0001	0.0001	2.2	0.000	0.000
2028	S01	Employee Commute	386,685	1.4	0.01	0.05	0.0007	0.0010	0.0009	123.2	0.004	0.001
2028	S01	Material Delivery	13,537	0.0	0.00	0.05	0.0001	0.0007	0.0007	22.1	0.000	0.003
2028	S02	Employee Commute	145,860	0.5	0.00	0.02	0.0003	0.0004	0.0003	46.5	0.001	0.000
2028	S02	Material Delivery	41,309	0.1	0.00	0.17	0.0002	0.0022	0.0020	67.6	0.001	0.009
2028	S03	Employee Commute	1,813,482	6.4	0.06	0.22	0.0032	0.0048	0.0043	577.6	0.018	0.003
2028	S03	Material Delivery	5,059	0.0	0.00	0.02	0.0000	0.0003	0.0002	8.3	0.000	0.001
2028	S04	Employee Commute	2,401,113	8.5	0.08	0.30	0.0042	0.0064	0.0056	764.8	0.024	0.004
2028	S04	Material Delivery	3,608	0.0	0.00	0.01	0.0000	0.0002	0.0002	5.9	0.000	0.001
2028	S08	Employee Commute	2,034,896	7.2	0.07	0.25	0.0036	0.0054	0.0048	648.1	0.020	0.004
2028	S08	Material Delivery	41,525	0.1	0.00	0.17	0.0003	0.0022	0.0020	67.9	0.001	0.009
2028	S09	Employee Commute	2,034,896	7.2	0.07	0.25	0.0036	0.0054	0.0048	648.1	0.020	0.004
2028	S09	Material Delivery	41,525	0.1	0.00	0.17	0.0003	0.0022	0.0020	67.9	0.001	0.009
2028	T01	Employee Commute	10,131,66	35.8	0.34	1.25	0.0179	0.0269	0.0238	3227.0	0.100	0.018
2028	T01	Material Delivery	239,615	0.5	0.02	0.96	0.0014	0.0126	0.0116	391.9	0.004	0.052
2028	T02	Employee Commute	9,508,917	33.6	0.32	1.17	0.0168	0.0253	0.0224	3028.7	0.094	0.017
2028	T02	Material Delivery	117,474	0.3	0.01	0.47	0.0007	0.0062	0.0057	192.1	0.002	0.026
2029	A01	Employee Commute	416,130	1.5	0.01	0.05	0.0007	0.0011	0.0010	132.5	0.004	0.001
2029	A01	Material Delivery	33,493	0.1	0.00	0.13	0.0002	0.0018	0.0016	54.8	0.001	0.007
2029	A04	Employee Commute	4,257,000	15.0	0.14	0.52	0.0075	0.0113	0.0100	1355.9	0.042	0.007
2029	A04	Material Delivery	134,544	0.3	0.01	0.54	0.0008	0.0071	0.0065	220.1	0.002	0.029
2029	A05	Employee Commute	130,845	0.5	0.00	0.02	0.0002	0.0003	0.0003	41.7	0.001	0.000
2029	A05	Material Delivery	2,220	0.0	0.00	0.01	0.0000	0.0001	0.0001	3.6	0.000	0.000
2029	A08	Employee Commute	148,590	0.5	0.01	0.02	0.0003	0.0004	0.0003	47.3	0.001	0.000
2029	A08	Material Delivery	100,765	0.2	0.01	0.40	0.0006	0.0053	0.0049	164.8	0.002	0.022
2029	A09	Employee Commute	122,850	0.4	0.00	0.02	0.0002	0.0003	0.0003	39.1	0.001	0.000
2029	A09	Material Delivery	11,968	0.0	0.00	0.05	0.0001	0.0006	0.0006	19.6	0.000	0.003
2029	C03	Employee Commute	3,473,712	12.3	0.12	0.43	0.0061	0.0092	0.0082	1106.4	0.034	0.006
2029	C03	Material Delivery	41,244	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.5	0.001	0.009
2029	L01	Employee Commute	3,116,124	11.0	0.11	0.38	0.0055	0.0083	0.0073	992.5	0.031	0.005
2029	L01	Material Delivery	39,630	0.1	0.00	0.16	0.0002	0.0021	0.0019	64.8	0.001	0.009

TABLE 6-3: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2029	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2029	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2029	L03	Employee Commute	6,632,406	23.4	0.23	0.82	0.0117	0.0176	0.0156	2112.5	0.066	0.012
2029	L03	Material Delivery	48,706	0.1	0.00	0.19	0.0003	0.0026	0.0024	79.7	0.001	0.011
2029	L04	Employee Commute	304,590	1.1	0.01	0.04	0.0005	0.0008	0.0007	97.0	0.003	0.001
2029	L04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2029	L07	Employee Commute	1,894,365	6.7	0.06	0.23	0.0033	0.0050	0.0045	603.4	0.019	0.003
2029	L07	Material Delivery	87,092	0.2	0.01	0.35	0.0005	0.0046	0.0042	142.5	0.002	0.019
2029	S01	Employee Commute	5,585,184	19.7	0.19	0.69	0.0098	0.0148	0.0131	1778.9	0.055	0.010
2029	S01	Material Delivery	48,368	0.1	0.00	0.19	0.0003	0.0025	0.0023	79.1	0.001	0.011
2029	S03	Employee Commute	1,019,040	3.6	0.03	0.13	0.0018	0.0027	0.0024	324.6	0.010	0.002
2029	S03	Material Delivery	5,059	0.0	0.00	0.02	0.0000	0.0003	0.0002	8.3	0.000	0.001
2029	S10	Employee Commute	8,275,608	29.2	0.28	1.02	0.0146	0.0220	0.0195	2635.8	0.082	0.014
2029	S10	Material Delivery	98,224	0.2	0.01	0.39	0.0006	0.0052	0.0048	160.7	0.002	0.022
2029	T01	Employee Commute	10,131,66	35.8	0.34	1.25	0.0179	0.0269	0.0238	3227.0	0.100	0.018
2029	T01	Material Delivery	239,615	0.5	0.02	0.96	0.0014	0.0126	0.0116	391.9	0.004	0.052
2029	T02	Employee Commute	17,028,00	60.1	0.58	2.10	0.0300	0.0453	0.0400	5423.5	0.168	0.030
2029	T02	Material Delivery	124,124	0.3	0.01	0.50	0.0007	0.0065	0.0060	203.0	0.002	0.027
2030	A04	Employee Commute	4,257,000	15.0	0.14	0.52	0.0075	0.0113	0.0100	1355.9	0.042	0.007
2030	A04	Material Delivery	134,544	0.3	0.01	0.54	0.0008	0.0071	0.0065	220.1	0.002	0.029
2030	A05	Employee Commute	2,068,902	7.3	0.07	0.25	0.0036	0.0055	0.0049	659.0	0.020	0.004
2030	A05	Material Delivery	8,880	0.0	0.00	0.04	0.0001	0.0005	0.0004	14.5	0.000	0.002
2030	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2030	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2030	L03	Employee Commute	3,725,865	13.2	0.13	0.46	0.0066	0.0099	0.0088	1186.7	0.037	0.006
2030	L03	Material Delivery	36,530	0.1	0.00	0.15	0.0002	0.0019	0.0018	59.8	0.001	0.008
2030	L07	Employee Commute	7,577,460	26.8	0.26	0.93	0.0134	0.0201	0.0178	2413.5	0.075	0.013
2030	L07	Material Delivery	87,092	0.2	0.01	0.35	0.0005	0.0046	0.0042	142.5	0.002	0.019
2030	S01	Employee Commute	5,585,184	19.7	0.19	0.69	0.0098	0.0148	0.0131	1778.9	0.055	0.010
2030	S01	Material Delivery	48,368	0.1	0.00	0.19	0.0003	0.0025	0.0023	79.1	0.001	0.011
2030	S10	Employee Commute	4,643,001	16.4	0.16	0.57	0.0082	0.0123	0.0109	1478.8	0.046	0.008
2030	S10	Material Delivery	98,224	0.2	0.01	0.39	0.0006	0.0052	0.0048	160.7	0.002	0.022
2030	T01	Employee Commute	10,131,66	35.8	0.34	1.25	0.0179	0.0269	0.0238	3227.0	0.100	0.018

TABLE 6-3: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2030	T01	Material Delivery	239,615	0.5	0.02	0.96	0.0014	0.0126	0.0116	391.9	0.004	0.052
2030	T02	Employee Commute	17,028,00	60.1	0.58	2.10	0.0300	0.0453	0.0400	5423.5	0.168	0.030
2030	T02	Material Delivery	124,124	0.3	0.01	0.50	0.0007	0.0065	0.0060	203.0	0.002	0.027
2031	A04	Employee Commute	4,257,000	15.0	0.14	0.52	0.0075	0.0113	0.0100	1355.9	0.042	0.007
2031	A04	Material Delivery	134,544	0.3	0.01	0.54	0.0008	0.0071	0.0065	220.1	0.002	0.029
2031	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2031	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2031	L07	Employee Commute	478,335	1.7	0.02	0.06	0.0008	0.0013	0.0011	152.4	0.005	0.001
2031	L07	Material Delivery	87,092	0.2	0.01	0.35	0.0005	0.0046	0.0042	142.5	0.002	0.019
2031	S01	Employee Commute	5,585,184	19.7	0.19	0.69	0.0098	0.0148	0.0131	1778.9	0.055	0.010
2031	S01	Material Delivery	48,368	0.1	0.00	0.19	0.0003	0.0025	0.0023	79.1	0.001	0.011
2031	T01	Employee Commute	10,131,66	35.8	0.34	1.25	0.0179	0.0269	0.0238	3227.0	0.100	0.018
2031	T01	Material Delivery	239,615	0.5	0.02	0.96	0.0014	0.0126	0.0116	391.9	0.004	0.052
2031	T02	Employee Commute	17,028,00	60.1	0.58	2.10	0.0300	0.0453	0.0400	5423.5	0.168	0.030
2031	T02	Material Delivery	124,124	0.3	0.01	0.50	0.0007	0.0065	0.0060	203.0	0.002	0.027
2032	A04	Employee Commute	1,064,250	3.8	0.04	0.13	0.0019	0.0028	0.0025	339.0	0.011	0.002
2032	A04	Material Delivery	67,115	0.1	0.01	0.27	0.0004	0.0035	0.0033	109.8	0.001	0.015
2032	L02	Employee Commute	123,801	0.4	0.00	0.02	0.0002	0.0003	0.0003	39.4	0.001	0.000
2032	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2032	T02	Employee Commute	9,470,703	33.4	0.32	1.17	0.0167	0.0252	0.0223	3016.5	0.094	0.016
2032	T02	Material Delivery	117,474	0.3	0.01	0.47	0.0007	0.0062	0.0057	192.1	0.002	0.026

Note: VMT denotes vehicle miles traveled; ST denotes short tons; CO denotes carbon monoxide, NO_x denotes nitrogen oxides, SO_x denotes sulfur oxides, VOC denotes volatile organic compounds, $PM_{2.5}$ denotes fine particulate matter, PM_{10} denotes coarse particulate matter, CO_2 denotes carbon dioxide, CH_4 denotes methane, N_2O denotes nitrous oxide.
Source: MOVES4, Landrum & Brown 2024

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2025	C01	Aerial Lifts	50 < hp <= 75	0.21	3,024.0	0.1152	0.0219	0.1918	0.0001	0.0137	0.0133	33.1	0.00119
2025	C01	Aerial Lifts	75 < hp <= 100	0.59	936.1	0.1522	0.0241	0.1652	0.0001	0.0193	0.0187	38.4	0.00112
2025	C01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2025	C01	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2025	C01	Chippers/Stump Grinders	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2025	C01	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2025	C01	Cranes	175 < hp <= 300	0.43	336.1	0.0033	0.0012	0.0142	0.0001	0.0008	0.0007	23.0	0.00007
2025	C01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	22.6	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.3	0.00000
2025	C01	Excavators	100 < hp <= 175	0.59	119.4	0.0011	0.0002	0.0035	0.0000	0.0003	0.0002	6.6	0.00001
2025	C01	Forklifts	75 < hp <= 100	0.59	3,424.2	0.0115	0.0017	0.1909	0.0003	0.0027	0.0026	120.4	0.00011
2025	C01	Generator Sets	25 < hp <= 40	0.43	412.8	0.0054	0.0015	0.0240	0.0000	0.0009	0.0009	4.2	0.00013
2025	C01	Off-highway Trucks	300 < hp <= 600	0.59	2,240.3	0.0365	0.0106	0.1396	0.0012	0.0088	0.0086	425.7	0.00053
2025	C01	Other Construction Equipment	300 < hp <= 600	0.59	12.0	0.0047	0.0006	0.0107	0.0000	0.0007	0.0007	2.3	0.00004
2025	C01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2025	C01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2025	C01	Pumps	6 < hp <= 11	0.43	12.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2025	C01	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2025	C01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2025	C01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2025	C01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	249.6	0.0174	0.0030	0.0189	0.0000	0.0023	0.0022	2.7	0.00015

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2025	C01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.1	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2025	L01	Chippers/Stump Grinders	75 < hp <= 100	0.43	4.8	0.0003	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00000
2025	L01	Concrete/Industrial Saws	6 < hp <= 11	0.7	4.8	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2025	L01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	51.7	0.0006	0.0001	0.0016	0.0000	0.0001	0.0001	2.9	0.00001
2025	L01	Excavators	100 < hp <= 175	0.59	28.3	0.0003	0.0000	0.0008	0.0000	0.0001	0.0001	1.6	0.00000
2025	L01	Graders	175 < hp <= 300	0.59	2.0	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.2	0.00000
2025	L01	Irrigation Sets	300 < hp <= 600	0.59	1.8	0.0005	0.0001	0.0019	0.0000	0.0001	0.0001	0.3	0.00001
2025	L01	Off-highway Trucks	300 < hp <= 600	0.59	1,014.0	0.0165	0.0048	0.0632	0.0006	0.0040	0.0039	192.7	0.00024
2025	L01	Other Construction Equipment	100 < hp <= 175	0.43	65.5	0.0013	0.0003	0.0036	0.0000	0.0003	0.0003	2.6	0.00002
2025	L01	Pavers	100 < hp <= 175	0.59	8.2	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2025	L01	Plate Compactors	3 < hp <= 6	0.43	12.2	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2025	L01	Pumps	6 < hp <= 11	0.43	1.6	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0	0.00000
2025	L01	Rollers	75 < hp <= 100	0.59	22.7	0.0004	0.0000	0.0016	0.0000	0.0001	0.0001	0.8	0.00000
2025	L01	Scrapers	300 < hp <= 600	0.59	7.0	0.0006	0.0001	0.0015	0.0000	0.0001	0.0001	1.3	0.00001
2025	L01	Skid Steer Loaders	50 < hp <= 75	0.21	12.9	0.0016	0.0003	0.0013	0.0000	0.0002	0.0002	0.1	0.00001
2025	L01	Surfacing Equipment	16 < hp <= 25	0.59	2.7	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2025	L01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	12.1	0.0023	0.0007	0.0040	0.0000	0.0005	0.0005	0.8	0.00004
2025	L01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	27.4	0.0025	0.0004	0.0023	0.0000	0.0003	0.0003	0.4	0.00002
2025	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2025	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2025	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2025	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2025	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2025	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2025	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2025	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2025	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2025	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2025	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2025	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2025	S07	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2025	S07	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2025	S07	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2025	S07	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2025	S07	Chippers/Stump Grinders	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2025	S07	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2025	S07	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2025	S07	Crawler Tractor/Dozers	100 < hp <= 175	0.59	61.5	0.0007	0.0001	0.0019	0.0000	0.0002	0.0002	3.4	0.00001
2025	S07	Excavators	100 < hp <= 175	0.59	270.3	0.0024	0.0004	0.0080	0.0000	0.0006	0.0006	15.0	0.00003

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2025	S07	Forklifts	75 < hp <= 100	0.59	3,584.0	0.0121	0.0018	0.1998	0.0004	0.0028	0.0027	126.1	0.00012
2025	S07	Generator Sets	25 < hp <= 40	0.43	144.8	0.0019	0.0005	0.0084	0.0000	0.0003	0.0003	1.5	0.00004
2025	S07	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2025	S07	Off-highway Trucks	300 < hp <= 600	0.59	6,930.2	0.1129	0.0328	0.4318	0.0038	0.0273	0.0265	1,316.9	0.00164
2025	S07	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2025	S07	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2025	S07	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2025	S07	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2025	S07	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2025	S07	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2025	S07	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2025	S07	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	153.6	0.0107	0.0019	0.0116	0.0000	0.0014	0.0014	1.7	0.00009
2025	S07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	600.0	0.0549	0.0095	0.0502	0.0000	0.0073	0.0071	8.7	0.00043
2026	A01	Air Compressors	75 < hp <= 100	0.43	58.3	0.0012	0.0001	0.0039	0.0000	0.0002	0.0002	1.5	0.00001
2026	A01	Chippers/Stump Grinders	75 < hp <= 100	0.43	50.4	0.0029	0.0005	0.0065	0.0000	0.0005	0.0005	1.3	0.00002
2026	A01	Concrete/Industrial Saws	25 < hp <= 40	0.59	58.3	0.0005	0.0001	0.0039	0.0000	0.0000	0.0000	0.8	0.00002
2026	A01	Concrete/Industrial Saws	6 < hp <= 11	0.7	50.4	0.0011	0.0004	0.0018	0.0000	0.0001	0.0001	0.2	0.00003
2026	A01	Cranes	175 < hp <= 300	0.43	-	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	-	0.00000
2026	A01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	386.6	0.0043	0.0007	0.0121	0.0001	0.0011	0.0010	21.4	0.00005
2026	A01	Excavators	100 < hp <= 175	0.59	476.0	0.0042	0.0007	0.0140	0.0001	0.0010	0.0010	26.4	0.00005

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A01	Graders	175 < hp <= 300	0.59	20.1	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.9	0.00000
2026	A01	Irrigation Sets	300 < hp <= 600	0.59	18.1	0.0053	0.0011	0.0188	0.0000	0.0009	0.0009	3.4	0.00007
2026	A01	Off-highway Trucks	300 < hp <= 600	0.59	4,176.0	0.0680	0.0198	0.2602	0.0023	0.0165	0.0160	793.5	0.00099
2026	A01	Other Construction Equipment	100 < hp <= 175	0.43	636.8	0.0122	0.0029	0.0346	0.0001	0.0027	0.0026	25.7	0.00019
2026	A01	Pavers	100 < hp <= 175	0.59	58.3	0.0009	0.0001	0.0020	0.0000	0.0002	0.0002	3.2	0.00001
2026	A01	Pumps	6 < hp <= 11	0.43	16.8	0.0002	0.0001	0.0004	0.0000	0.0000	0.0000	0.0	0.00001
2026	A01	Rollers	75 < hp <= 100	0.59	231.4	0.0040	0.0004	0.0158	0.0000	0.0006	0.0006	8.1	0.00003
2026	A01	Scrapers	300 < hp <= 600	0.59	72.8	0.0059	0.0010	0.0160	0.0000	0.0010	0.0009	13.8	0.00006
2026	A01	Skid Steer Loaders	50 < hp <= 75	0.21	30.9	0.0038	0.0007	0.0032	0.0000	0.0005	0.0005	0.3	0.00003
2026	A01	Surfacing Equipment	16 < hp <= 25	0.59	58.3	0.0014	0.0003	0.0036	0.0000	0.0002	0.0002	0.5	0.00003
2026	A01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	201.7	0.0377	0.0114	0.0661	0.0000	0.0078	0.0076	13.0	0.00064
2026	A01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	87.9	0.0080	0.0014	0.0074	0.0000	0.0011	0.0010	1.3	0.00006
2026	A02	Chippers/Stump Grinders	75 < hp <= 100	0.43	30.0	0.0018	0.0003	0.0039	0.0000	0.0003	0.0003	0.8	0.00001
2026	A02	Concrete/Industrial Saws	6 < hp <= 11	0.7	30.0	0.0006	0.0002	0.0011	0.0000	0.0001	0.0001	0.1	0.00002
2026	A02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	206.4	0.0023	0.0004	0.0065	0.0000	0.0006	0.0005	11.4	0.00003
2026	A02	Excavators	100 < hp <= 175	0.59	53.1	0.0005	0.0001	0.0016	0.0000	0.0001	0.0001	2.9	0.00001
2026	A02	Graders	175 < hp <= 300	0.59	12.1	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.2	0.00000
2026	A02	Irrigation Sets	300 < hp <= 600	0.59	10.9	0.0032	0.0007	0.0114	0.0000	0.0005	0.0005	2.1	0.00004
2026	A02	Off-highway Trucks	300 < hp <= 600	0.59	3,365.7	0.0548	0.0159	0.2097	0.0019	0.0133	0.0129	639.6	0.00080

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A02	Other Construction Equipment	100 < hp <= 175	0.43	305.0	0.0058	0.0014	0.0166	0.0000	0.0013	0.0012	12.3	0.00009
2026	A02	Pavers	100 < hp <= 175	0.59	14.2	0.0002	0.0000	0.0005	0.0000	0.0001	0.0001	0.8	0.00000
2026	A02	Pumps	6 < hp <= 11	0.43	10.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	A02	Rollers	75 < hp <= 100	0.59	131.8	0.0023	0.0002	0.0090	0.0000	0.0003	0.0003	4.6	0.00002
2026	A02	Scrapers	300 < hp <= 600	0.59	47.3	0.0038	0.0006	0.0104	0.0000	0.0006	0.0006	9.0	0.00004
2026	A02	Skid Steer Loaders	50 < hp <= 75	0.21	23.3	0.0029	0.0005	0.0024	0.0000	0.0004	0.0004	0.3	0.00002
2026	A02	Surfacing Equipment	16 < hp <= 25	0.59	18.2	0.0004	0.0001	0.0011	0.0000	0.0001	0.0000	0.2	0.00001
2026	A02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	32.8	0.0061	0.0018	0.0107	0.0000	0.0013	0.0012	2.1	0.00010
2026	A02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	27.6	0.0025	0.0004	0.0023	0.0000	0.0003	0.0003	0.4	0.00002
2026	A06	Air Compressors	75 < hp <= 100	0.43	107.9	0.0022	0.0003	0.0071	0.0000	0.0004	0.0004	2.7	0.00002
2026	A06	Chippers/Stump Grinders	75 < hp <= 100	0.43	86.4	0.0051	0.0009	0.0112	0.0000	0.0009	0.0009	2.2	0.00004
2026	A06	Concrete/Industrial Saws	25 < hp <= 40	0.59	107.9	0.0009	0.0003	0.0072	0.0000	0.0001	0.0001	1.5	0.00003
2026	A06	Concrete/Industrial Saws	6 < hp <= 11	0.7	86.4	0.0018	0.0006	0.0031	0.0000	0.0002	0.0002	0.4	0.00005
2026	A06	Crawler Tractor/Dozers	100 < hp <= 175	0.59	602.9	0.0067	0.0010	0.0189	0.0001	0.0017	0.0016	33.4	0.00007
2026	A06	Excavators	100 < hp <= 175	0.59	165.8	0.0015	0.0002	0.0049	0.0000	0.0004	0.0003	9.2	0.00002
2026	A06	Graders	175 < hp <= 300	0.59	34.6	0.0003	0.0001	0.0012	0.0000	0.0001	0.0001	3.3	0.00000
2026	A06	Irrigation Sets	300 < hp <= 600	0.59	31.1	0.0091	0.0019	0.0324	0.0000	0.0015	0.0015	5.8	0.00013
2026	A06	Off-highway Trucks	300 < hp <= 600	0.59	6,231.1	0.1015	0.0295	0.3882	0.0035	0.0246	0.0238	1,184.1	0.00147
2026	A06	Other Construction Equipment	100 < hp <= 175	0.43	1,027.4	0.0197	0.0046	0.0559	0.0001	0.0043	0.0042	41.5	0.00031

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A06	Pavers	100 < hp <= 175	0.59	107.9	0.0016	0.0002	0.0037	0.0000	0.0004	0.0004	6.0	0.00002
2026	A06	Pumps	6 < hp <= 11	0.43	28.8	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2026	A06	Rollers	75 < hp <= 100	0.59	349.8	0.0060	0.0006	0.0239	0.0000	0.0009	0.0009	12.3	0.00004
2026	A06	Scrapers	300 < hp <= 600	0.59	134.9	0.0110	0.0018	0.0297	0.0001	0.0018	0.0017	25.6	0.00011
2026	A06	Skid Steer Loaders	50 < hp <= 75	0.21	26.2	0.0032	0.0006	0.0027	0.0000	0.0004	0.0004	0.3	0.00002
2026	A06	Surfacing Equipment	16 < hp <= 25	0.59	107.9	0.0026	0.0006	0.0066	0.0000	0.0003	0.0003	0.9	0.00005
2026	A06	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	224.1	0.0419	0.0126	0.0734	0.0001	0.0087	0.0084	14.5	0.00071
2026	A06	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	87.1	0.0080	0.0014	0.0073	0.0000	0.0011	0.0010	1.3	0.00006
2026	A07	Air Compressors	75 < hp <= 100	0.43	14.5	0.0003	0.0000	0.0010	0.0000	0.0001	0.0000	0.4	0.00000
2026	A07	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	12.0	0.0007	0.0001	0.0016	0.0000	0.0001	0.0001	0.3	0.00001
2026	A07	Concrete/Industrial Saws	25 < hp <= 40	0.59	14.5	0.0001	0.0000	0.0010	0.0000	0.0000	0.0000	0.2	0.00000
2026	A07	Concrete/Industrial Saws	6 < hp <= 11	0.7	12.0	0.0003	0.0001	0.0004	0.0000	0.0000	0.0000	0.1	0.00001
2026	A07	Crawler Tractor/Dozers	100 < hp <= 175	0.59	79.7	0.0009	0.0001	0.0025	0.0000	0.0002	0.0002	4.4	0.00001
2026	A07	Excavators	100 < hp <= 175	0.59	20.3	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.1	0.00000
2026	A07	Graders	175 < hp <= 300	0.59	4.8	0.0000	0.0000	0.0002	0.0000	0.0000	0.0000	0.5	0.00000
2026	A07	Irrigation Sets	300 < hp <= 600	0.59	4.3	0.0013	0.0003	0.0045	0.0000	0.0002	0.0002	0.8	0.00002
2026	A07	Off-highway Trucks	300 < hp <= 600	0.59	1,267.1	0.0206	0.0060	0.0790	0.0007	0.0050	0.0048	240.8	0.00030
2026	A07	Other Construction Equipment	100 < hp <= 175	0.43	137.1	0.0026	0.0006	0.0075	0.0000	0.0006	0.0006	5.5	0.00004
2026	A07	Pavers	100 < hp <= 175	0.59	14.5	0.0002	0.0000	0.0005	0.0000	0.0001	0.0001	0.8	0.00000
2026	A07	Pumps	6 < hp <= 11	0.43	4.0	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A07	Rollers	75 < hp <= 100	0.59	45.2	0.0008	0.0001	0.0031	0.0000	0.0001	0.0001	1.6	0.00001
2026	A07	Scrapers	300 < hp <= 600	0.59	18.2	0.0015	0.0002	0.0040	0.0000	0.0002	0.0002	3.5	0.00002
2026	A07	Skid Steer Loaders	50 < hp <= 75	0.21	5.3	0.0007	0.0001	0.0006	0.0000	0.0001	0.0001	0.1	0.00000
2026	A07	Surfacing Equipment	16 < hp <= 25	0.59	14.5	0.0004	0.0001	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2026	A07	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	28.8	0.0054	0.0016	0.0094	0.0000	0.0011	0.0011	1.9	0.00009
2026	A07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	12.5	0.0011	0.0002	0.0010	0.0000	0.0002	0.0001	0.2	0.00001
2026	A08	Air Compressors	75 < hp <= 100	0.43	13.3	0.0003	0.0000	0.0009	0.0000	0.0000	0.0000	0.3	0.00000
2026	A08	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	10.8	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.3	0.00000
2026	A08	Concrete/Industrial Saws	25 < hp <= 40	0.59	13.3	0.0001	0.0000	0.0009	0.0000	0.0000	0.0000	0.2	0.00000
2026	A08	Concrete/Industrial Saws	6 < hp <= 11	0.7	10.8	0.0002	0.0001	0.0004	0.0000	0.0000	0.0000	0.0	0.00001
2026	A08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	108.1	0.0012	0.0002	0.0034	0.0000	0.0003	0.0003	6.0	0.00001
2026	A08	Excavators	100 < hp <= 175	0.59	197.5	0.0017	0.0003	0.0058	0.0000	0.0004	0.0004	10.9	0.00002
2026	A08	Generator Sets	25 < hp <= 40	0.43	144.0	0.0019	0.0005	0.0084	0.0000	0.0003	0.0003	1.5	0.00004
2026	A08	Graders	175 < hp <= 300	0.59	4.5	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.4	0.00000
2026	A08	Irrigation Sets	300 < hp <= 600	0.59	4.0	0.0012	0.0003	0.0042	0.0000	0.0002	0.0002	0.8	0.00002
2026	A08	Off-highway Trucks	300 < hp <= 600	0.59	1,768.7	0.0288	0.0084	0.1102	0.0010	0.0070	0.0068	336.1	0.00042
2026	A08	Other Construction Equipment	100 < hp <= 175	0.43	135.3	0.0026	0.0006	0.0074	0.0000	0.0006	0.0006	5.5	0.00004
2026	A08	Pavers	100 < hp <= 175	0.59	13.3	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.7	0.00000
2026	A08	Pumps	6 < hp <= 11	0.43	3.6	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A08	Rollers	75 < hp <= 100	0.59	40.4	0.0007	0.0001	0.0028	0.0000	0.0001	0.0001	1.4	0.00000
2026	A08	Scrapers	300 < hp <= 600	0.59	16.7	0.0014	0.0002	0.0037	0.0000	0.0002	0.0002	3.2	0.00001
2026	A08	Skid Steer Loaders	50 < hp <= 75	0.21	5.6	0.0007	0.0001	0.0006	0.0000	0.0001	0.0001	0.1	0.00000
2026	A08	Surfacing Equipment	16 < hp <= 25	0.59	13.3	0.0003	0.0001	0.0008	0.0000	0.0000	0.0000	0.1	0.00001
2026	A08	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	25.4	0.0047	0.0014	0.0083	0.0000	0.0010	0.0010	1.6	0.00008
2026	A08	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	288.0	0.0200	0.0035	0.0218	0.0000	0.0026	0.0026	3.1	0.00017
2026	A08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	11.5	0.0011	0.0002	0.0010	0.0000	0.0001	0.0001	0.2	0.00001
2026	A10	Air Compressors	75 < hp <= 100	0.43	2.5	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.1	0.00000
2026	A10	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	3.6	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.1	0.00000
2026	A10	Concrete/Industrial Saws	25 < hp <= 40	0.59	2.5	0.0000	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	A10	Concrete/Industrial Saws	6 < hp <= 11	0.7	3.6	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2026	A10	Crawler Tractor/Dozers	100 < hp <= 175	0.59	28.9	0.0003	0.0000	0.0009	0.0000	0.0001	0.0001	1.6	0.00000
2026	A10	Excavators	100 < hp <= 175	0.59	17.2	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	1.0	0.00000
2026	A10	Graders	175 < hp <= 300	0.59	1.3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1	0.00000
2026	A10	Irrigation Sets	300 < hp <= 600	0.59	1.2	0.0003	0.0001	0.0012	0.0000	0.0001	0.0001	0.2	0.00000
2026	A10	Off-highway Trucks	300 < hp <= 600	0.59	3,032.8	0.0494	0.0143	0.1890	0.0017	0.0120	0.0116	576.3	0.00072
2026	A10	Other Construction Equipment	100 < hp <= 175	0.43	50.7	0.0010	0.0002	0.0028	0.0000	0.0002	0.0002	2.0	0.00002
2026	A10	Pavers	100 < hp <= 175	0.59	2.5	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.1	0.00000
2026	A10	Pumps	6 < hp <= 11	0.43	1.2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A10	Rollers	75 < hp <= 100	0.59	22.0	0.0004	0.0000	0.0015	0.0000	0.0001	0.0001	0.8	0.00000
2026	A10	Scrapers	300 < hp <= 600	0.59	3.1	0.0003	0.0000	0.0007	0.0000	0.0000	0.0000	0.6	0.00000
2026	A10	Skid Steer Loaders	50 < hp <= 75	0.21	6.2	0.0008	0.0001	0.0006	0.0000	0.0001	0.0001	0.1	0.00001
2026	A10	Surfacing Equipment	16 < hp <= 25	0.59	2.5	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	A10	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	31.6	0.0059	0.0018	0.0104	0.0000	0.0012	0.0012	2.0	0.00010
2026	A10	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	15.6	0.0014	0.0002	0.0013	0.0000	0.0002	0.0002	0.2	0.00001
2026	C01	Aerial Lifts	50 < hp <= 75	0.21	3,024.0	0.1152	0.0219	0.1918	0.0001	0.0137	0.0133	33.1	0.00119
2026	C01	Aerial Lifts	75 < hp <= 100	0.59	936.1	0.1522	0.0241	0.1652	0.0001	0.0193	0.0187	38.4	0.00112
2026	C01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2026	C01	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2026	C01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2026	C01	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2026	C01	Cranes	175 < hp <= 300	0.43	336.1	0.0033	0.0012	0.0142	0.0001	0.0008	0.0007	23.0	0.00007
2026	C01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	42.4	0.0005	0.0001	0.0013	0.0000	0.0001	0.0001	2.3	0.00001
2026	C01	Excavators	100 < hp <= 175	0.59	477.6	0.0042	0.0007	0.0141	0.0001	0.0010	0.0010	26.5	0.00005
2026	C01	Forklifts	75 < hp <= 100	0.59	3,424.2	0.0115	0.0017	0.1909	0.0003	0.0027	0.0026	120.4	0.00011
2026	C01	Generator Sets	25 < hp <= 40	0.43	751.2	0.0098	0.0027	0.0437	0.0000	0.0016	0.0016	7.6	0.00023
2026	C01	Off-highway Trucks	300 < hp <= 600	0.59	3,351.4	0.0546	0.0159	0.2088	0.0019	0.0132	0.0128	636.9	0.00079
2026	C01	Other Construction Equipment	300 < hp <= 600	0.59	12.0	0.0047	0.0006	0.0107	0.0000	0.0007	0.0007	2.3	0.00004

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	C01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2026	C01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	C01	Pumps	6 < hp <= 11	0.43	12.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2026	C01	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2026	C01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2026	C01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2026	C01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	926.4	0.0645	0.0113	0.0701	0.0000	0.0085	0.0082	10.1	0.00055
2026	C01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.1	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2026	C02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2026	C02	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2026	C02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2026	C02	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2026	C02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	64.0	0.0037	0.0007	0.0083	0.0000	0.0007	0.0006	1.6	0.00003
2026	C02	Concrete/Industrial Saws	6 < hp <= 11	0.7	64.0	0.0013	0.0005	0.0023	0.0000	0.0001	0.0001	0.3	0.00004
2026	C02	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2026	C02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	40.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	2.2	0.00000
2026	C02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2026	C02	Forklifts	75 < hp <= 100	0.59	3,724.0	0.0125	0.0018	0.2076	0.0004	0.0029	0.0029	131.0	0.00012
2026	C02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2026	C02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	C02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2026	C02	Off-highway Trucks	300 < hp <= 600	0.59	6,864.0	0.1118	0.0325	0.4277	0.0038	0.0271	0.0263	1,304.3	0.00162
2026	C02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2026	C02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2026	C02	Plate Compactors	3 < hp <= 6	0.43	40.0	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2026	C02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2026	C02	Rollers	75 < hp <= 100	0.59	56.0	0.0010	0.0001	0.0038	0.0000	0.0001	0.0001	2.0	0.00001
2026	C02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2026	C02	Surfacing Equipment	75 < hp <= 100	0.43	64.0	0.0022	0.0003	0.0047	0.0000	0.0003	0.0003	1.6	0.00001
2026	C02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2026	C02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2026	C02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	840.0	0.0769	0.0133	0.0703	0.0000	0.0102	0.0099	12.2	0.00061
2026	L01	Air Compressors	75 < hp <= 100	0.43	22.8	0.0005	0.0001	0.0015	0.0000	0.0001	0.0001	0.6	0.00000
2026	L01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	19.2	0.0011	0.0002	0.0025	0.0000	0.0002	0.0002	0.5	0.00001
2026	L01	Concrete/Industrial Saws	25 < hp <= 40	0.59	22.8	0.0002	0.0001	0.0015	0.0000	0.0000	0.0000	0.3	0.00001
2026	L01	Concrete/Industrial Saws	6 < hp <= 11	0.7	19.2	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2026	L01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	206.5	0.0023	0.0004	0.0065	0.0000	0.0006	0.0005	11.4	0.00003
2026	L01	Excavators	100 < hp <= 175	0.59	113.3	0.0010	0.0002	0.0033	0.0000	0.0002	0.0002	6.3	0.00001
2026	L01	Graders	175 < hp <= 300	0.59	7.6	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.7	0.00000
2026	L01	Irrigation Sets	300 < hp <= 600	0.59	6.9	0.0020	0.0004	0.0071	0.0000	0.0003	0.0003	1.3	0.00003

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	L01	Off-highway Trucks	300 < hp <= 600	0.59	4,227.2	0.0688	0.0200	0.2634	0.0023	0.0167	0.0162	803.3	0.00100
2026	L01	Other Construction Equipment	100 < hp <= 175	0.43	309.1	0.0059	0.0014	0.0168	0.0000	0.0013	0.0013	12.5	0.00009
2026	L01	Pavers	100 < hp <= 175	0.59	55.9	0.0008	0.0001	0.0019	0.0000	0.0002	0.0002	3.1	0.00001
2026	L01	Plate Compactors	3 < hp <= 6	0.43	49.2	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2026	L01	Pumps	6 < hp <= 11	0.43	6.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2026	L01	Rollers	75 < hp <= 100	0.59	90.4	0.0016	0.0001	0.0062	0.0000	0.0002	0.0002	3.2	0.00001
2026	L01	Scrapers	300 < hp <= 600	0.59	28.4	0.0023	0.0004	0.0063	0.0000	0.0004	0.0004	5.4	0.00002
2026	L01	Skid Steer Loaders	50 < hp <= 75	0.21	52.4	0.0065	0.0012	0.0055	0.0000	0.0009	0.0009	0.6	0.00004
2026	L01	Surfacing Equipment	16 < hp <= 25	0.59	33.7	0.0008	0.0002	0.0021	0.0000	0.0001	0.0001	0.3	0.00002
2026	L01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	70.4	0.0132	0.0040	0.0231	0.0000	0.0027	0.0027	4.5	0.00022
2026	L01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	110.6	0.0101	0.0018	0.0093	0.0000	0.0013	0.0013	1.6	0.00008
2026	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2026	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2026	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2026	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2026	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2026	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2026	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2026	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2026	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2026	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2026	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2026	L04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2026	L04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2026	L04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2026	L04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2026	L04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2026	L04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2026	L04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2026	L04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2026	L04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2026	L04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2026	L04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2026	L04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2026	S02	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2026	S02	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2026	S02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	S02	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2026	S02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2026	S02	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2026	S02	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2026	S02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	78.5	0.0009	0.0001	0.0025	0.0000	0.0002	0.0002	4.4	0.00001
2026	S02	Excavators	100 < hp <= 175	0.59	233.5	0.0021	0.0003	0.0069	0.0000	0.0005	0.0005	12.9	0.00002
2026	S02	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2026	S02	Generator Sets	25 < hp <= 40	0.43	171.0	0.0022	0.0006	0.0099	0.0000	0.0004	0.0004	1.7	0.00005
2026	S02	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2026	S02	Off-highway Trucks	300 < hp <= 600	0.59	1,268.5	0.0207	0.0060	0.0790	0.0007	0.0050	0.0049	241.0	0.00030
2026	S02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2026	S02	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	S02	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2026	S02	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2026	S02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2026	S02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	366.0	0.0255	0.0045	0.0277	0.0000	0.0034	0.0033	4.0	0.00022
2026	S02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2026	S04	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2026	S04	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	S04	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2026	S04	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2026	S04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	13.6	0.0002	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2026	S04	Excavators	100 < hp <= 175	0.59	13.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2026	S04	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2026	S04	Off-highway Trucks	300 < hp <= 600	0.59	323.2	0.0053	0.0015	0.0201	0.0002	0.0013	0.0012	61.4	0.00008
2026	S04	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2026	S04	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2026	S04		75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2026	S05	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2026	S05	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2026	S05	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2026	S05	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2026	S05	Crawler Tractor/Dozers	100 < hp <= 175	0.59	9.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2026	S05	Excavators	100 < hp <= 175	0.59	9.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2026	S05	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2026	S05	Off-highway Trucks	300 < hp <= 600	0.59	314.0	0.0051	0.0015	0.0196	0.0002	0.0012	0.0012	59.7	0.00007
2026	S05	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	S05	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2026	S05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2026	S06	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2026	S06	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2026	S06	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2026	S06	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2026	S06	Crawler Tractor/Dozers	100 < hp <= 175	0.59	14.5	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.8	0.00000
2026	S06	Excavators	100 < hp <= 175	0.59	14.5	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2026	S06	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2026	S06	Off-highway Trucks	300 < hp <= 600	0.59	325.0	0.0053	0.0015	0.0202	0.0002	0.0013	0.0012	61.8	0.00008
2026	S06	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2026	S06	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2026	S06	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2026	S07	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2026	S07	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2026	S07	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2026	S07	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2026	S07	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2026	S07	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	S07	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2026	S07	Crawler Tractor/Dozers	100 < hp <= 175	0.59	76.7	0.0009	0.0001	0.0024	0.0000	0.0002	0.0002	4.2	0.00001
2026	S07	Excavators	100 < hp <= 175	0.59	307.1	0.0027	0.0004	0.0091	0.0000	0.0007	0.0006	17.0	0.00003
2026	S07	Forklifts	75 < hp <= 100	0.59	3,584.0	0.0121	0.0018	0.1998	0.0004	0.0028	0.0027	126.1	0.00012
2026	S07	Generator Sets	25 < hp <= 40	0.43	166.4	0.0022	0.0006	0.0097	0.0000	0.0004	0.0003	1.7	0.00005
2026	S07	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2026	S07	Off-highway Trucks	300 < hp <= 600	0.59	7,029.0	0.1145	0.0333	0.4379	0.0039	0.0277	0.0269	1,335.7	0.00166
2026	S07	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2026	S07	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2026	S07	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	S07	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2026	S07	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2026	S07	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2026	S07	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2026	S07	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	196.8	0.0137	0.0024	0.0149	0.0000	0.0018	0.0017	2.2	0.00012
2026	S07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	600.0	0.0549	0.0095	0.0502	0.0000	0.0073	0.0071	8.7	0.00043
2027	A01	Air Compressors	75 < hp <= 100	0.43	120.4	0.0025	0.0003	0.0080	0.0000	0.0004	0.0004	3.1	0.00002
2027	A01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	90.0	0.0053	0.0010	0.0117	0.0000	0.0009	0.0009	2.3	0.00004
2027	A01	Concrete/Industrial Saws	25 < hp <= 40	0.59	112.4	0.0009	0.0003	0.0075	0.0000	0.0001	0.0001	1.6	0.00003
2027	A01	Concrete/Industrial Saws	6 < hp <= 11	0.7	90.0	0.0019	0.0006	0.0032	0.0000	0.0002	0.0002	0.4	0.00005

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	A01	Cranes	175 < hp <= 300	0.43	8.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2027	A01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	687.3	0.0076	0.0012	0.0216	0.0001	0.0019	0.0018	38.1	0.00009
2027	A01	Excavators	100 < hp <= 175	0.59	882.8	0.0078	0.0012	0.0260	0.0001	0.0019	0.0018	48.9	0.00009
2027	A01	Graders	175 < hp <= 300	0.59	36.4	0.0003	0.0001	0.0012	0.0000	0.0001	0.0001	3.5	0.00001
2027	A01	Irrigation Sets	300 < hp <= 600	0.59	32.8	0.0095	0.0020	0.0341	0.0000	0.0016	0.0016	6.2	0.00013
2027	A01	Off-highway Trucks	300 < hp <= 600	0.59	7,913.4	0.1289	0.0374	0.4930	0.0044	0.0312	0.0303	1,503.7	0.00187
2027	A01	Other Construction Equipment	100 < hp <= 175	0.43	1,117.4	0.0214	0.0050	0.0608	0.0001	0.0047	0.0046	45.1	0.00033
2027	A01	Pavers	100 < hp <= 175	0.59	112.4	0.0016	0.0003	0.0038	0.0000	0.0004	0.0004	6.2	0.00002
2027	A01	Pumps	6 < hp <= 11	0.43	30.0	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2027	A01	Rollers	75 < hp <= 100	0.59	376.7	0.0065	0.0006	0.0258	0.0000	0.0010	0.0009	13.2	0.00004
2027	A01	Scrapers	300 < hp <= 600	0.59	140.5	0.0114	0.0018	0.0310	0.0001	0.0019	0.0018	26.7	0.00012
2027	A01	Skid Steer Loaders	50 < hp <= 75	0.21	55.8	0.0069	0.0013	0.0058	0.0000	0.0010	0.0009	0.6	0.00005
2027	A01	Surfacing Equipment	16 < hp <= 25	0.59	112.4	0.0027	0.0006	0.0069	0.0000	0.0003	0.0003	1.0	0.00005
2027	A01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	256.7	0.0480	0.0145	0.0841	0.0001	0.0100	0.0097	16.6	0.00082
2027	A01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	126.0	0.0115	0.0020	0.0105	0.0000	0.0015	0.0015	1.8	0.00009
2027	A07	Air Compressors	75 < hp <= 100	0.43	42.7	0.0009	0.0001	0.0028	0.0000	0.0001	0.0001	1.1	0.00001
2027	A07	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	33.6	0.0020	0.0004	0.0044	0.0000	0.0003	0.0003	0.9	0.00001
2027	A07	Concrete/Industrial Saws	25 < hp <= 40	0.59	42.7	0.0003	0.0001	0.0028	0.0000	0.0000	0.0000	0.6	0.00001
2027	A07	Concrete/Industrial Saws	6 < hp <= 11	0.7	33.6	0.0007	0.0002	0.0012	0.0000	0.0001	0.0001	0.2	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	A07	Crawler Tractor/Dozers	100 < hp <= 175	0.59	232.0	0.0026	0.0004	0.0073	0.0000	0.0006	0.0006	12.9	0.00003
2027	A07	Excavators	100 < hp <= 175	0.59	59.1	0.0005	0.0001	0.0017	0.0000	0.0001	0.0001	3.3	0.00001
2027	A07	Graders	175 < hp <= 300	0.59	13.6	0.0001	0.0000	0.0005	0.0000	0.0000	0.0000	1.3	0.00000
2027	A07	Irrigation Sets	300 < hp <= 600	0.59	12.3	0.0036	0.0008	0.0128	0.0000	0.0006	0.0006	2.3	0.00005
2027	A07	Off-highway Trucks	300 < hp <= 600	0.59	3,749.2	0.0611	0.0177	0.2336	0.0021	0.0148	0.0143	712.4	0.00089
2027	A07	Other Construction Equipment	100 < hp <= 175	0.43	395.8	0.0076	0.0018	0.0215	0.0000	0.0017	0.0016	16.0	0.00012
2027	A07	Pavers	100 < hp <= 175	0.59	42.7	0.0006	0.0001	0.0015	0.0000	0.0002	0.0002	2.4	0.00001
2027	A07	Pumps	6 < hp <= 11	0.43	11.2	0.0002	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	A07	Rollers	75 < hp <= 100	0.59	131.9	0.0023	0.0002	0.0090	0.0000	0.0003	0.0003	4.6	0.00002
2027	A07	Scrapers	300 < hp <= 600	0.59	53.4	0.0043	0.0007	0.0118	0.0000	0.0007	0.0007	10.1	0.00004
2027	A07	Skid Steer Loaders	50 < hp <= 75	0.21	9.7	0.0012	0.0002	0.0010	0.0000	0.0002	0.0002	0.1	0.00001
2027	A07	Surfacing Equipment	16 < hp <= 25	0.59	42.7	0.0010	0.0002	0.0026	0.0000	0.0001	0.0001	0.4	0.00002
2027	A07	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	77.9	0.0146	0.0044	0.0255	0.0000	0.0030	0.0029	5.0	0.00025
2027	A07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	30.0	0.0027	0.0005	0.0025	0.0000	0.0004	0.0004	0.4	0.00002
2027	A08	Air Compressors	75 < hp <= 100	0.43	20.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	0.5	0.00000
2027	A08	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	16.8	0.0010	0.0002	0.0022	0.0000	0.0002	0.0002	0.4	0.00001
2027	A08	Concrete/Industrial Saws	25 < hp <= 40	0.59	20.0	0.0002	0.0000	0.0013	0.0000	0.0000	0.0000	0.3	0.00001
2027	A08	Concrete/Industrial Saws	6 < hp <= 11	0.7	16.8	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2027	A08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	251.4	0.0028	0.0004	0.0079	0.0000	0.0007	0.0007	13.9	0.00003

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	A08	Excavators	100 < hp <= 175	0.59	746.1	0.0066	0.0010	0.0220	0.0001	0.0016	0.0015	41.3	0.00007
2027	A08	Generator Sets	25 < hp <= 40	0.43	576.0	0.0075	0.0021	0.0335	0.0000	0.0012	0.0012	5.8	0.00018
2027	A08	Graders	175 < hp <= 300	0.59	6.5	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.6	0.00000
2027	A08	Irrigation Sets	300 < hp <= 600	0.59	5.9	0.0017	0.0004	0.0061	0.0000	0.0003	0.0003	1.1	0.00002
2027	A08	Off-highway Trucks	300 < hp <= 600	0.59	5,768.9	0.0939	0.0273	0.3594	0.0032	0.0227	0.0221	1,096.2	0.00136
2027	A08	Other Construction Equipment	100 < hp <= 175	0.43	200.8	0.0038	0.0009	0.0109	0.0000	0.0008	0.0008	8.1	0.00006
2027	A08	Pavers	100 < hp <= 175	0.59	20.0	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.1	0.00000
2027	A08	Pumps	6 < hp <= 11	0.43	5.6	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2027	A08	Rollers	75 < hp <= 100	0.59	60.3	0.0010	0.0001	0.0041	0.0000	0.0002	0.0002	2.1	0.00001
2027	A08	Scrapers	300 < hp <= 600	0.59	25.0	0.0020	0.0003	0.0055	0.0000	0.0003	0.0003	4.7	0.00002
2027	A08	Skid Steer Loaders	50 < hp <= 75	0.21	6.4	0.0008	0.0001	0.0007	0.0000	0.0001	0.0001	0.1	0.00001
2027	A08	Surfacing Equipment	16 < hp <= 25	0.59	20.0	0.0005	0.0001	0.0012	0.0000	0.0001	0.0001	0.2	0.00001
2027	A08	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	35.8	0.0067	0.0020	0.0117	0.0000	0.0014	0.0013	2.3	0.00011
2027	A08	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	1,152.0	0.0802	0.0141	0.0872	0.0000	0.0105	0.0102	12.6	0.00069
2027	A08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	15.4	0.0014	0.0002	0.0013	0.0000	0.0002	0.0002	0.2	0.00001
2027	A09	Air Compressors	75 < hp <= 100	0.43	48.3	0.0010	0.0001	0.0032	0.0000	0.0002	0.0002	1.2	0.00001
2027	A09	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	38.4	0.0022	0.0004	0.0050	0.0000	0.0004	0.0004	1.0	0.00002
2027	A09	Concrete/Industrial Saws	25 < hp <= 40	0.59	48.3	0.0004	0.0001	0.0032	0.0000	0.0000	0.0000	0.7	0.00001
2027	A09	Concrete/Industrial Saws	6 < hp <= 11	0.7	38.4	0.0008	0.0003	0.0014	0.0000	0.0001	0.0001	0.2	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	A09	Crawler Tractor/Dozers	100 < hp <= 175	0.59	253.0	0.0028	0.0004	0.0079	0.0000	0.0007	0.0007	14.0	0.00003
2027	A09	Excavators	100 < hp <= 175	0.59	57.9	0.0005	0.0001	0.0017	0.0000	0.0001	0.0001	3.2	0.00001
2027	A09	Graders	175 < hp <= 300	0.59	15.3	0.0001	0.0000	0.0005	0.0000	0.0000	0.0000	1.5	0.00000
2027	A09	Irrigation Sets	300 < hp <= 600	0.59	13.8	0.0040	0.0009	0.0143	0.0000	0.0007	0.0007	2.6	0.00006
2027	A09	Off-highway Trucks	300 < hp <= 600	0.59	4,723.4	0.0769	0.0223	0.2943	0.0026	0.0186	0.0181	897.6	0.00112
2027	A09	Other Construction Equipment	100 < hp <= 175	0.43	471.1	0.0090	0.0021	0.0256	0.0001	0.0020	0.0019	19.0	0.00014
2027	A09	Pavers	100 < hp <= 175	0.59	48.3	0.0007	0.0001	0.0017	0.0000	0.0002	0.0002	2.7	0.00001
2027	A09	Pumps	6 < hp <= 11	0.43	12.8	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2027	A09	Rollers	75 < hp <= 100	0.59	140.1	0.0024	0.0002	0.0096	0.0000	0.0004	0.0003	4.9	0.00002
2027	A09	Scrapers	300 < hp <= 600	0.59	60.4	0.0049	0.0008	0.0133	0.0000	0.0008	0.0008	11.5	0.00005
2027	A09	Skid Steer Loaders	50 < hp <= 75	0.21	9.9	0.0012	0.0002	0.0010	0.0000	0.0002	0.0002	0.1	0.00001
2027	A09	Surfacing Equipment	16 < hp <= 25	0.59	48.3	0.0012	0.0003	0.0030	0.0000	0.0001	0.0001	0.4	0.00002
2027	A09	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	73.1	0.0137	0.0041	0.0239	0.0000	0.0028	0.0028	4.7	0.00023
2027	A09	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	28.0	0.0026	0.0004	0.0023	0.0000	0.0003	0.0003	0.4	0.00002
2027	A10	Air Compressors	75 < hp <= 100	0.43	2.5	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.1	0.00000
2027	A10	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	3.6	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.1	0.00000
2027	A10	Concrete/Industrial Saws	25 < hp <= 40	0.59	2.5	0.0000	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	A10	Concrete/Industrial Saws	6 < hp <= 11	0.7	3.6	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2027	A10	Crawler Tractor/Dozers	100 < hp <= 175	0.59	28.9	0.0003	0.0000	0.0009	0.0000	0.0001	0.0001	1.6	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	A10	Excavators	100 < hp <= 175	0.59	17.2	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	1.0	0.00000
2027	A10	Graders	175 < hp <= 300	0.59	1.3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1	0.00000
2027	A10	Irrigation Sets	300 < hp <= 600	0.59	1.2	0.0003	0.0001	0.0012	0.0000	0.0001	0.0001	0.2	0.00000
2027	A10	Off-highway Trucks	300 < hp <= 600	0.59	3,032.8	0.0494	0.0143	0.1890	0.0017	0.0120	0.0116	576.3	0.00072
2027	A10	Other Construction Equipment	100 < hp <= 175	0.43	50.7	0.0010	0.0002	0.0028	0.0000	0.0002	0.0002	2.0	0.00002
2027	A10	Pavers	100 < hp <= 175	0.59	2.5	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.1	0.00000
2027	A10	Pumps	6 < hp <= 11	0.43	1.2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0	0.00000
2027	A10	Rollers	75 < hp <= 100	0.59	22.0	0.0004	0.0000	0.0015	0.0000	0.0001	0.0001	0.8	0.00000
2027	A10	Scrapers	300 < hp <= 600	0.59	3.1	0.0003	0.0000	0.0007	0.0000	0.0000	0.0000	0.6	0.00000
2027	A10	Skid Steer Loaders	50 < hp <= 75	0.21	6.2	0.0008	0.0001	0.0006	0.0000	0.0001	0.0001	0.1	0.00001
2027	A10	Surfacing Equipment	16 < hp <= 25	0.59	2.5	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	A10	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	31.6	0.0059	0.0018	0.0104	0.0000	0.0012	0.0012	2.0	0.00010
2027	A10	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	15.6	0.0014	0.0002	0.0013	0.0000	0.0002	0.0002	0.2	0.00001
2027	C02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	C02	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2027	C02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2027	C02	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2027	C02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	64.0	0.0037	0.0007	0.0083	0.0000	0.0007	0.0006	1.6	0.00003
2027	C02	Concrete/Industrial Saws	6 < hp <= 11	0.7	64.0	0.0013	0.0005	0.0023	0.0000	0.0001	0.0001	0.3	0.00004

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	C02	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2027	C02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	40.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	2.2	0.00000
2027	C02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2027	C02	Forklifts	75 < hp <= 100	0.59	3,724.0	0.0125	0.0018	0.2076	0.0004	0.0029	0.0029	131.0	0.00012
2027	C02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2027	C02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2027	C02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	C02	Off-highway Trucks	300 < hp <= 600	0.59	6,864.0	0.1118	0.0325	0.4277	0.0038	0.0271	0.0263	1,304.3	0.00162
2027	C02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	C02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2027	C02	Plate Compactors	3 < hp <= 6	0.43	40.0	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2027	C02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	C02	Rollers	75 < hp <= 100	0.59	56.0	0.0010	0.0001	0.0038	0.0000	0.0001	0.0001	2.0	0.00001
2027	C02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2027	C02	Surfacing Equipment	75 < hp <= 100	0.43	64.0	0.0022	0.0003	0.0047	0.0000	0.0003	0.0003	1.6	0.00001
2027	C02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2027	C02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2027	C02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	840.0	0.0769	0.0133	0.0703	0.0000	0.0102	0.0099	12.2	0.00061
2027	L01	Air Compressors	75 < hp <= 100	0.43	22.8	0.0005	0.0001	0.0015	0.0000	0.0001	0.0001	0.6	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	L01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	19.2	0.0011	0.0002	0.0025	0.0000	0.0002	0.0002	0.5	0.00001
2027	L01	Concrete/Industrial Saws	25 < hp <= 40	0.59	22.8	0.0002	0.0001	0.0015	0.0000	0.0000	0.0000	0.3	0.00001
2027	L01	Concrete/Industrial Saws	6 < hp <= 11	0.7	19.2	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2027	L01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	206.5	0.0023	0.0004	0.0065	0.0000	0.0006	0.0005	11.4	0.00003
2027	L01	Excavators	100 < hp <= 175	0.59	113.3	0.0010	0.0002	0.0033	0.0000	0.0002	0.0002	6.3	0.00001
2027	L01	Graders	175 < hp <= 300	0.59	7.6	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.7	0.00000
2027	L01	Irrigation Sets	300 < hp <= 600	0.59	6.9	0.0020	0.0004	0.0071	0.0000	0.0003	0.0003	1.3	0.00003
2027	L01	Off-highway Trucks	300 < hp <= 600	0.59	4,227.2	0.0688	0.0200	0.2634	0.0023	0.0167	0.0162	803.3	0.00100
2027	L01	Other Construction Equipment	100 < hp <= 175	0.43	309.1	0.0059	0.0014	0.0168	0.0000	0.0013	0.0013	12.5	0.00009
2027	L01	Pavers	100 < hp <= 175	0.59	55.9	0.0008	0.0001	0.0019	0.0000	0.0002	0.0002	3.1	0.00001
2027	L01	Plate Compactors	3 < hp <= 6	0.43	49.2	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2027	L01	Pumps	6 < hp <= 11	0.43	6.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2027	L01	Rollers	75 < hp <= 100	0.59	90.4	0.0016	0.0001	0.0062	0.0000	0.0002	0.0002	3.2	0.00001
2027	L01	Scrapers	300 < hp <= 600	0.59	28.4	0.0023	0.0004	0.0063	0.0000	0.0004	0.0004	5.4	0.00002
2027	L01	Skid Steer Loaders	50 < hp <= 75	0.21	52.4	0.0065	0.0012	0.0055	0.0000	0.0009	0.0009	0.6	0.00004
2027	L01	Surfacing Equipment	16 < hp <= 25	0.59	33.7	0.0008	0.0002	0.0021	0.0000	0.0001	0.0001	0.3	0.00002
2027	L01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	70.4	0.0132	0.0040	0.0231	0.0000	0.0027	0.0027	4.5	0.00022
2027	L01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	110.6	0.0101	0.0018	0.0093	0.0000	0.0013	0.0013	1.6	0.00008
2027	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2027	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2027	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2027	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2027	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2027	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2027	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2027	L04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	L04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2027	L04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2027	L04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2027	L04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2027	L04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2027	L04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2027	L04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	L04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	L04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	L04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	L04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2027	L05	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2027	L05	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2027	L05	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2027	L05	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2027	L05	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2027	L05	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2027	L05	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2027	L05	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2027	L05	Off-highway Trucks	300 < hp <= 600	0.59	164.0	0.0027	0.0008	0.0102	0.0001	0.0006	0.0006	31.2	0.00004
2027	L05	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2027	L05	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	L05	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2027	L05	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2027	L05	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2027	L05	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2027	L05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	120.0	0.0110	0.0019	0.0100	0.0000	0.0015	0.0014	1.7	0.00009
2027	S02	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S02	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2027	S02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2027	S02	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2027	S02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2027	S02	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2027	S02	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2027	S02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	98.5	0.0011	0.0002	0.0031	0.0000	0.0003	0.0003	5.5	0.00001
2027	S02	Excavators	100 < hp <= 175	0.59	310.5	0.0027	0.0004	0.0092	0.0001	0.0007	0.0006	17.2	0.00003
2027	S02	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2027	S02	Generator Sets	25 < hp <= 40	0.43	228.0	0.0030	0.0008	0.0133	0.0000	0.0005	0.0005	2.3	0.00007
2027	S02	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2027	S02	Off-highway Trucks	300 < hp <= 600	0.59	1,489.0	0.0242	0.0070	0.0928	0.0008	0.0059	0.0057	282.9	0.00035
2027	S02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2027	S02	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	S02	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2027	S02	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2027	S02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2027	S02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	480.0	0.0334	0.0059	0.0363	0.0000	0.0044	0.0043	5.2	0.00029
2027	S02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S03	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2027	S03	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2027	S03	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2027	S03	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2027	S03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2027	S03	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2027	S03	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2027	S03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2027	S03	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2027	S03	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2027	S03	Off-highway Trucks	300 < hp <= 600	0.59	602.0	0.0098	0.0028	0.0375	0.0003	0.0024	0.0023	114.4	0.00014
2027	S03	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2027	S03	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	S03	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2027	S03	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2027	S03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2027	S03	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2027	S03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2027	S04	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S04	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2027	S04	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2027	S04	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2027	S04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	13.6	0.0002	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2027	S04	Excavators	100 < hp <= 175	0.59	13.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2027	S04	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2027	S04	Off-highway Trucks	300 < hp <= 600	0.59	323.2	0.0053	0.0015	0.0201	0.0002	0.0013	0.0012	61.4	0.00008
2027	S04	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2027	S04	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2027	S04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2027	S05	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2027	S05	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2027	S05	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2027	S05	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2027	S05	Crawler Tractor/Dozers	100 < hp <= 175	0.59	7.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.4	0.00000
2027	S05	Excavators	100 < hp <= 175	0.59	7.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.4	0.00000
2027	S05	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2027	S05	Off-highway Trucks	300 < hp <= 600	0.59	310.0	0.0050	0.0015	0.0193	0.0002	0.0012	0.0012	58.9	0.00007

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S05	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2027	S05	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2027	S05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2027	S06	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2027	S06	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2027	S06	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2027	S06	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2027	S06	Crawler Tractor/Dozers	100 < hp <= 175	0.59	11.5	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.6	0.00000
2027	S06	Excavators	100 < hp <= 175	0.59	11.5	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.6	0.00000
2027	S06	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2027	S06	Off-highway Trucks	300 < hp <= 600	0.59	319.0	0.0052	0.0015	0.0199	0.0002	0.0013	0.0012	60.6	0.00008
2027	S06	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2027	S06	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2027	S06	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2027	S07	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	S07	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2027	S07	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2027	S07	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S07	Chippers/Stump Grinders	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2027	S07	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2027	S07	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2027	S07	Crawler Tractor/Dozers	100 < hp <= 175	0.59	61.5	0.0007	0.0001	0.0019	0.0000	0.0002	0.0002	3.4	0.00001
2027	S07	Excavators	100 < hp <= 175	0.59	270.3	0.0024	0.0004	0.0080	0.0000	0.0006	0.0006	15.0	0.00003
2027	S07	Forklifts	75 < hp <= 100	0.59	3,584.0	0.0121	0.0018	0.1998	0.0004	0.0028	0.0027	126.1	0.00012
2027	S07	Generator Sets	25 < hp <= 40	0.43	144.8	0.0019	0.0005	0.0084	0.0000	0.0003	0.0003	1.5	0.00004
2027	S07	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	S07	Off-highway Trucks	300 < hp <= 600	0.59	6,930.2	0.1129	0.0328	0.4318	0.0038	0.0273	0.0265	1,316.9	0.00164
2027	S07	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	S07	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2027	S07	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	S07	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	S07	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2027	S07	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2027	S07	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2027	S07	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	153.6	0.0107	0.0019	0.0116	0.0000	0.0014	0.0014	1.7	0.00009
2027	S07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	600.0	0.0549	0.0095	0.0502	0.0000	0.0073	0.0071	8.7	0.00043
2027	S08	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	S08	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S08	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2027	S08	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2027	S08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	9.9	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2027	S08	Excavators	100 < hp <= 175	0.59	169.9	0.0015	0.0002	0.0050	0.0000	0.0004	0.0003	9.4	0.00002
2027	S08	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2027	S08	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2027	S08	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	S08	Off-highway Trucks	300 < hp <= 600	0.59	6,493.8	0.1057	0.0307	0.4046	0.0036	0.0256	0.0248	1,234.0	0.00154
2027	S08	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	S08	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	S08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2027	S09	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	S09	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2027	S09	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2027	S09	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2027	S09	Crawler Tractor/Dozers	100 < hp <= 175	0.59	9.9	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2027	S09	Excavators	100 < hp <= 175	0.59	169.9	0.0015	0.0002	0.0050	0.0000	0.0004	0.0003	9.4	0.00002
2027	S09	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2027	S09	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S09	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	S09	Off-highway Trucks	300 < hp <= 600	0.59	6,493.8	0.1057	0.0307	0.4046	0.0036	0.0256	0.0248	1,234.0	0.00154
2027	S09	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	S09	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	S09	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2027	T01	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	T01	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2027	T01	Air Compressors	75 < hp <= 100	0.43	51.8	0.0011	0.0001	0.0034	0.0000	0.0002	0.0002	1.3	0.00001
2027	T01	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2027	T01	Chain Saws > 6 HP	6 < hp <= 11	0.7	82.0	0.0926	0.0214	0.0005	0.0000	0.0034	0.0031	0.2	0.00000
2027	T01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	82.0	0.0048	0.0009	0.0106	0.0000	0.0008	0.0008	2.1	0.00004
2027	T01	Concrete/Industrial Saws	25 < hp <= 40	0.59	51.8	0.0004	0.0001	0.0034	0.0000	0.0000	0.0000	0.7	0.00002
2027	T01	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2027	T01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	412.7	0.0046	0.0007	0.0130	0.0001	0.0011	0.0011	22.9	0.00005
2027	T01	Excavators	100 < hp <= 175	0.59	558.8	0.0049	0.0008	0.0165	0.0001	0.0012	0.0011	31.0	0.00006
2027	T01	Forklifts	75 < hp <= 100	0.59	3,700.0	0.0125	0.0018	0.2062	0.0004	0.0029	0.0028	130.1	0.00012
2027	T01	Generator Sets	25 < hp <= 40	0.43	301.0	0.0039	0.0011	0.0175	0.0000	0.0006	0.0006	3.1	0.00009
2027	T01	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2027	T01	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	T01	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2027	T01	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	T01	Off-highway Trucks	300 < hp <= 600	0.59	12,536.6	0.2042	0.0593	0.7811	0.0070	0.0494	0.0480	2,382.3	0.00297
2027	T01	Other Construction Equipment	100 < hp <= 175	0.43	516.6	0.0099	0.0023	0.0281	0.0001	0.0022	0.0021	20.9	0.00015
2027	T01	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	T01	Pavers	100 < hp <= 175	0.59	51.8	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	2.9	0.00001
2027	T01	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2027	T01	Pumps	6 < hp <= 11	0.43	254.0	0.0034	0.0011	0.0056	0.0000	0.0004	0.0003	0.7	0.00008
2027	T01	Rollers	75 < hp <= 100	0.59	194.3	0.0033	0.0003	0.0133	0.0000	0.0005	0.0005	6.8	0.00002
2027	T01	Scrapers	300 < hp <= 600	0.59	64.8	0.0053	0.0008	0.0143	0.0000	0.0009	0.0008	12.3	0.00005
2027	T01	Skid Steer Loaders	50 < hp <= 75	0.21	15.9	0.0020	0.0004	0.0017	0.0000	0.0003	0.0003	0.2	0.00001
2027	T01	Surfacing Equipment	16 < hp <= 25	0.59	51.8	0.0013	0.0003	0.0032	0.0000	0.0001	0.0001	0.5	0.00002
2027	T01	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2027	T01	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2027	T01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	129.1	0.0241	0.0073	0.0423	0.0000	0.0050	0.0049	8.3	0.00041
2027	T01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	466.1	0.0324	0.0057	0.0353	0.0000	0.0043	0.0041	5.1	0.00028
2027	T01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	757.5	0.0693	0.0120	0.0634	0.0000	0.0092	0.0089	11.0	0.00055
2028	A01	Air Compressors	75 < hp <= 100	0.43	120.4	0.0025	0.0003	0.0080	0.0000	0.0004	0.0004	3.1	0.00002
2028	A01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	90.0	0.0053	0.0010	0.0117	0.0000	0.0009	0.0009	2.3	0.00004

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	A01	Concrete/Industrial Saws	25 < hp <= 40	0.59	112.4	0.0009	0.0003	0.0075	0.0000	0.0001	0.0001	1.6	0.00003
2028	A01	Concrete/Industrial Saws	6 < hp <= 11	0.7	90.0	0.0019	0.0006	0.0032	0.0000	0.0002	0.0002	0.4	0.00005
2028	A01	Cranes	175 < hp <= 300	0.43	8.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2028	A01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	687.3	0.0076	0.0012	0.0216	0.0001	0.0019	0.0018	38.1	0.00009
2028	A01	Excavators	100 < hp <= 175	0.59	882.8	0.0078	0.0012	0.0260	0.0001	0.0019	0.0018	48.9	0.00009
2028	A01	Graders	175 < hp <= 300	0.59	36.4	0.0003	0.0001	0.0012	0.0000	0.0001	0.0001	3.5	0.00001
2028	A01	Irrigation Sets	300 < hp <= 600	0.59	32.8	0.0095	0.0020	0.0341	0.0000	0.0016	0.0016	6.2	0.00013
2028	A01	Off-highway Trucks	300 < hp <= 600	0.59	7,913.4	0.1289	0.0374	0.4930	0.0044	0.0312	0.0303	1,503.7	0.00187
2028	A01	Other Construction Equipment	100 < hp <= 175	0.43	1,117.4	0.0214	0.0050	0.0608	0.0001	0.0047	0.0046	45.1	0.00033
2028	A01	Pavers	100 < hp <= 175	0.59	112.4	0.0016	0.0003	0.0038	0.0000	0.0004	0.0004	6.2	0.00002
2028	A01	Pumps	6 < hp <= 11	0.43	30.0	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2028	A01	Rollers	75 < hp <= 100	0.59	376.7	0.0065	0.0006	0.0258	0.0000	0.0010	0.0009	13.2	0.00004
2028	A01	Scrapers	300 < hp <= 600	0.59	140.5	0.0114	0.0018	0.0310	0.0001	0.0019	0.0018	26.7	0.00012
2028	A01	Skid Steer Loaders	50 < hp <= 75	0.21	55.8	0.0069	0.0013	0.0058	0.0000	0.0010	0.0009	0.6	0.00005
2028	A01	Surfacing Equipment	16 < hp <= 25	0.59	112.4	0.0027	0.0006	0.0069	0.0000	0.0003	0.0003	1.0	0.00005
2028	A01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	256.7	0.0480	0.0145	0.0841	0.0001	0.0100	0.0097	16.6	0.00082
2028	A01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	126.0	0.0115	0.0020	0.0105	0.0000	0.0015	0.0015	1.8	0.00009
2028	A04	Air Compressors	75 < hp <= 100	0.43	22.8	0.0005	0.0001	0.0015	0.0000	0.0001	0.0001	0.6	0.00000
2028	A04	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	20.4	0.0012	0.0002	0.0026	0.0000	0.0002	0.0002	0.5	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	A04	Concrete/Industrial Saws	25 < hp <= 40	0.59	22.8	0.0002	0.0001	0.0015	0.0000	0.0000	0.0000	0.3	0.00001
2028	A04	Concrete/Industrial Saws	6 < hp <= 11	0.7	20.4	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2028	A04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	147.7	0.0016	0.0003	0.0046	0.0000	0.0004	0.0004	8.2	0.00002
2028	A04	Excavators	100 < hp <= 175	0.59	375.7	0.0033	0.0005	0.0111	0.0001	0.0008	0.0008	20.8	0.00004
2028	A04	Graders	175 < hp <= 300	0.59	8.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.8	0.00000
2028	A04	Irrigation Sets	300 < hp <= 600	0.59	7.2	0.0021	0.0004	0.0075	0.0000	0.0004	0.0003	1.3	0.00003
2028	A04	Off-highway Trucks	300 < hp <= 600	0.59	5,798.9	0.0944	0.0274	0.3613	0.0032	0.0229	0.0222	1,101.9	0.00137
2028	A04	Other Construction Equipment	100 < hp <= 175	0.43	1,441.6	0.0276	0.0065	0.0784	0.0002	0.0061	0.0059	58.2	0.00043
2028	A04	Pavers	100 < hp <= 175	0.59	22.8	0.0003	0.0001	0.0008	0.0000	0.0001	0.0001	1.3	0.00000
2028	A04	Pumps	6 < hp <= 11	0.43	6.8	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	A04	Rollers	75 < hp <= 100	0.59	92.7	0.0016	0.0001	0.0063	0.0000	0.0002	0.0002	3.3	0.00001
2028	A04	Scrapers	300 < hp <= 600	0.59	28.5	0.0023	0.0004	0.0063	0.0000	0.0004	0.0004	5.4	0.00002
2028	A04	Skid Steer Loaders	50 < hp <= 75	0.21	22.1	0.0027	0.0005	0.0023	0.0000	0.0004	0.0004	0.2	0.00002
2028	A04	Surfacing Equipment	16 < hp <= 25	0.59	22.8	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.2	0.00001
2028	A04	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	91.9	0.0172	0.0052	0.0301	0.0000	0.0036	0.0035	5.9	0.00029
2028	A04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	45.7	0.0042	0.0007	0.0038	0.0000	0.0006	0.0005	0.7	0.00003
2028	A08	Air Compressors	75 < hp <= 100	0.43	53.3	0.0011	0.0001	0.0035	0.0000	0.0002	0.0002	1.4	0.00001
2028	A08	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	42.0	0.0025	0.0005	0.0055	0.0000	0.0004	0.0004	1.1	0.00002
2028	A08	Concrete/Industrial Saws	25 < hp <= 40	0.59	53.3	0.0004	0.0001	0.0035	0.0000	0.0000	0.0000	0.7	0.00002
2028	A08	Concrete/Industrial Saws	6 < hp <= 11	0.7	42.0	0.0009	0.0003	0.0015	0.0000	0.0001	0.0001	0.2	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	A08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	428.1	0.0048	0.0007	0.0134	0.0001	0.0012	0.0011	23.7	0.00005
2028	A08	Excavators	100 < hp <= 175	0.59	789.0	0.0070	0.0011	0.0233	0.0001	0.0017	0.0016	43.7	0.00008
2028	A08	Generator Sets	25 < hp <= 40	0.43	576.0	0.0075	0.0021	0.0335	0.0000	0.0012	0.0012	5.8	0.00018
2028	A08	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2028	A08	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2028	A08	Off-highway Trucks	300 < hp <= 600	0.59	7,040.0	0.1146	0.0333	0.4386	0.0039	0.0278	0.0269	1,337.8	0.00167
2028	A08	Other Construction Equipment	100 < hp <= 175	0.43	527.1	0.0101	0.0024	0.0287	0.0001	0.0022	0.0021	21.3	0.00016
2028	A08	Pavers	100 < hp <= 175	0.59	53.3	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	3.0	0.00001
2028	A08	Pumps	6 < hp <= 11	0.43	14.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2028	A08	Rollers	75 < hp <= 100	0.59	159.6	0.0028	0.0003	0.0109	0.0000	0.0004	0.0004	5.6	0.00002
2028	A08	Scrapers	300 < hp <= 600	0.59	66.6	0.0054	0.0009	0.0147	0.0000	0.0009	0.0009	12.7	0.00006
2028	A08	Skid Steer Loaders	50 < hp <= 75	0.21	10.4	0.0013	0.0002	0.0011	0.0000	0.0002	0.0002	0.1	0.00001
2028	A08	Surfacing Equipment	16 < hp <= 25	0.59	53.3	0.0013	0.0003	0.0033	0.0000	0.0001	0.0001	0.5	0.00002
2028	A08	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	88.1	0.0165	0.0050	0.0289	0.0000	0.0034	0.0033	5.7	0.00028
2028	A08	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	1,152.0	0.0802	0.0141	0.0872	0.0000	0.0105	0.0102	12.6	0.00069
2028	A08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	33.1	0.0030	0.0005	0.0028	0.0000	0.0004	0.0004	0.5	0.00002
2028	A09	Air Compressors	75 < hp <= 100	0.43	48.3	0.0010	0.0001	0.0032	0.0000	0.0002	0.0002	1.2	0.00001
2028	A09	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	38.4	0.0022	0.0004	0.0050	0.0000	0.0004	0.0004	1.0	0.00002
2028	A09	Concrete/Industrial Saws	25 < hp <= 40	0.59	48.3	0.0004	0.0001	0.0032	0.0000	0.0000	0.0000	0.7	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	A09	Concrete/Industrial Saws	6 < hp <= 11	0.7	38.4	0.0008	0.0003	0.0014	0.0000	0.0001	0.0001	0.2	0.00002
2028	A09	Crawler Tractor/Dozers	100 < hp <= 175	0.59	253.0	0.0028	0.0004	0.0079	0.0000	0.0007	0.0007	14.0	0.00003
2028	A09	Excavators	100 < hp <= 175	0.59	57.9	0.0005	0.0001	0.0017	0.0000	0.0001	0.0001	3.2	0.00001
2028	A09	Graders	175 < hp <= 300	0.59	15.3	0.0001	0.0000	0.0005	0.0000	0.0000	0.0000	1.5	0.00000
2028	A09	Irrigation Sets	300 < hp <= 600	0.59	13.8	0.0040	0.0009	0.0143	0.0000	0.0007	0.0007	2.6	0.00006
2028	A09	Off-highway Trucks	300 < hp <= 600	0.59	4,723.4	0.0769	0.0223	0.2943	0.0026	0.0186	0.0181	897.6	0.00112
2028	A09	Other Construction Equipment	100 < hp <= 175	0.43	471.1	0.0090	0.0021	0.0256	0.0001	0.0020	0.0019	19.0	0.00014
2028	A09	Pavers	100 < hp <= 175	0.59	48.3	0.0007	0.0001	0.0017	0.0000	0.0002	0.0002	2.7	0.00001
2028	A09	Pumps	6 < hp <= 11	0.43	12.8	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2028	A09	Rollers	75 < hp <= 100	0.59	140.1	0.0024	0.0002	0.0096	0.0000	0.0004	0.0003	4.9	0.00002
2028	A09	Scrapers	300 < hp <= 600	0.59	60.4	0.0049	0.0008	0.0133	0.0000	0.0008	0.0008	11.5	0.00005
2028	A09	Skid Steer Loaders	50 < hp <= 75	0.21	9.9	0.0012	0.0002	0.0010	0.0000	0.0002	0.0002	0.1	0.00001
2028	A09	Surfacing Equipment	16 < hp <= 25	0.59	48.3	0.0012	0.0003	0.0030	0.0000	0.0001	0.0001	0.4	0.00002
2028	A09	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	73.1	0.0137	0.0041	0.0239	0.0000	0.0028	0.0028	4.7	0.00023
2028	A09	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	28.0	0.0026	0.0004	0.0023	0.0000	0.0003	0.0003	0.4	0.00002
2028	A10	Air Compressors	75 < hp <= 100	0.43	1.9	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	A10	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	2.4	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2028	A10	Concrete/Industrial Saws	25 < hp <= 40	0.59	1.9	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	A10	Concrete/Industrial Saws	6 < hp <= 11	0.7	2.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	A10	Crawler Tractor/Dozers	100 < hp <= 175	0.59	22.5	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.2	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	A10	Excavators	100 < hp <= 175	0.59	13.5	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.7	0.00000
2028	A10	Graders	175 < hp <= 300	0.59	1.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1	0.00000
2028	A10	Irrigation Sets	300 < hp <= 600	0.59	0.9	0.0003	0.0001	0.0009	0.0000	0.0000	0.0000	0.2	0.00000
2028	A10	Off-highway Trucks	300 < hp <= 600	0.59	2,278.4	0.0371	0.0108	0.1420	0.0013	0.0090	0.0087	433.0	0.00054
2028	A10	Other Construction Equipment	100 < hp <= 175	0.43	39.5	0.0008	0.0002	0.0021	0.0000	0.0002	0.0002	1.6	0.00001
2028	A10	Pavers	100 < hp <= 175	0.59	1.9	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.1	0.00000
2028	A10	Pumps	6 < hp <= 11	0.43	0.8	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0	0.00000
2028	A10	Rollers	75 < hp <= 100	0.59	17.2	0.0003	0.0000	0.0012	0.0000	0.0000	0.0000	0.6	0.00000
2028	A10	Scrapers	300 < hp <= 600	0.59	2.4	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.5	0.00000
2028	A10	Skid Steer Loaders	50 < hp <= 75	0.21	4.9	0.0006	0.0001	0.0005	0.0000	0.0001	0.0001	0.1	0.00000
2028	A10	Surfacing Equipment	16 < hp <= 25	0.59	1.9	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	A10	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	24.7	0.0046	0.0014	0.0081	0.0000	0.0010	0.0009	1.6	0.00008
2028	A10	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	12.1	0.0011	0.0002	0.0010	0.0000	0.0001	0.0001	0.2	0.00001
2028	C02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	C02	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2028	C02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	C02	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2028	C02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	64.0	0.0037	0.0007	0.0083	0.0000	0.0007	0.0006	1.6	0.00003
2028	C02	Concrete/Industrial Saws	6 < hp <= 11	0.7	64.0	0.0013	0.0005	0.0023	0.0000	0.0001	0.0001	0.3	0.00004

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	C02	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2028	C02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	40.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	2.2	0.00000
2028	C02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2028	C02	Forklifts	75 < hp <= 100	0.59	3,724.0	0.0125	0.0018	0.2076	0.0004	0.0029	0.0029	131.0	0.00012
2028	C02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	C02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2028	C02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	C02	Off-highway Trucks	300 < hp <= 600	0.59	6,864.0	0.1118	0.0325	0.4277	0.0038	0.0271	0.0263	1,304.3	0.00162
2028	C02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	C02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	C02	Plate Compactors	3 < hp <= 6	0.43	40.0	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2028	C02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	C02	Rollers	75 < hp <= 100	0.59	56.0	0.0010	0.0001	0.0038	0.0000	0.0001	0.0001	2.0	0.00001
2028	C02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2028	C02	Surfacing Equipment	75 < hp <= 100	0.43	64.0	0.0022	0.0003	0.0047	0.0000	0.0003	0.0003	1.6	0.00001
2028	C02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2028	C02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2028	C02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	840.0	0.0769	0.0133	0.0703	0.0000	0.0102	0.0099	12.2	0.00061
2028	C03	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	C03	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2028	C03	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	C03	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2028	C03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	64.0	0.0037	0.0007	0.0083	0.0000	0.0007	0.0006	1.6	0.00003
2028	C03	Concrete/Industrial Saws	6 < hp <= 11	0.7	64.0	0.0013	0.0005	0.0023	0.0000	0.0001	0.0001	0.3	0.00004
2028	C03	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2028	C03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	40.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	2.2	0.00000
2028	C03	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2028	C03	Forklifts	75 < hp <= 100	0.59	3,724.0	0.0125	0.0018	0.2076	0.0004	0.0029	0.0029	131.0	0.00012
2028	C03	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	C03	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2028	C03	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	C03	Off-highway Trucks	300 < hp <= 600	0.59	6,864.0	0.1118	0.0325	0.4277	0.0038	0.0271	0.0263	1,304.3	0.00162
2028	C03	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	C03	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	C03	Plate Compactors	3 < hp <= 6	0.43	40.0	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2028	C03	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	C03	Rollers	75 < hp <= 100	0.59	56.0	0.0010	0.0001	0.0038	0.0000	0.0001	0.0001	2.0	0.00001
2028	C03	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2028	C03	Surfacing Equipment	75 < hp <= 100	0.43	64.0	0.0022	0.0003	0.0047	0.0000	0.0003	0.0003	1.6	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	C03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2028	C03	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2028	C03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	840.0	0.0769	0.0133	0.0703	0.0000	0.0102	0.0099	12.2	0.00061
2028	L01	Air Compressors	75 < hp <= 100	0.43	22.8	0.0005	0.0001	0.0015	0.0000	0.0001	0.0001	0.6	0.00000
2028	L01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	19.2	0.0011	0.0002	0.0025	0.0000	0.0002	0.0002	0.5	0.00001
2028	L01	Concrete/Industrial Saws	25 < hp <= 40	0.59	22.8	0.0002	0.0001	0.0015	0.0000	0.0000	0.0000	0.3	0.00001
2028	L01	Concrete/Industrial Saws	6 < hp <= 11	0.7	19.2	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2028	L01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	206.5	0.0023	0.0004	0.0065	0.0000	0.0006	0.0005	11.4	0.00003
2028	L01	Excavators	100 < hp <= 175	0.59	113.3	0.0010	0.0002	0.0033	0.0000	0.0002	0.0002	6.3	0.00001
2028	L01	Graders	175 < hp <= 300	0.59	7.6	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.7	0.00000
2028	L01	Irrigation Sets	300 < hp <= 600	0.59	6.9	0.0020	0.0004	0.0071	0.0000	0.0003	0.0003	1.3	0.00003
2028	L01	Off-highway Trucks	300 < hp <= 600	0.59	4,227.2	0.0688	0.0200	0.2634	0.0023	0.0167	0.0162	803.3	0.00100
2028	L01	Other Construction Equipment	100 < hp <= 175	0.43	309.1	0.0059	0.0014	0.0168	0.0000	0.0013	0.0013	12.5	0.00009
2028	L01	Pavers	100 < hp <= 175	0.59	55.9	0.0008	0.0001	0.0019	0.0000	0.0002	0.0002	3.1	0.00001
2028	L01	Plate Compactors	3 < hp <= 6	0.43	49.2	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2028	L01	Pumps	6 < hp <= 11	0.43	6.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	L01	Rollers	75 < hp <= 100	0.59	90.4	0.0016	0.0001	0.0062	0.0000	0.0002	0.0002	3.2	0.00001
2028	L01	Scrapers	300 < hp <= 600	0.59	28.4	0.0023	0.0004	0.0063	0.0000	0.0004	0.0004	5.4	0.00002
2028	L01	Skid Steer Loaders	50 < hp <= 75	0.21	52.4	0.0065	0.0012	0.0055	0.0000	0.0009	0.0009	0.6	0.00004
2028	L01	Surfacing Equipment	16 < hp <= 25	0.59	33.7	0.0008	0.0002	0.0021	0.0000	0.0001	0.0001	0.3	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	L01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	70.4	0.0132	0.0040	0.0231	0.0000	0.0027	0.0027	4.5	0.00022
2028	L01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	110.6	0.0101	0.0018	0.0093	0.0000	0.0013	0.0013	1.6	0.00008
2028	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2028	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2028	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2028	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2028	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2028	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2028	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2028	L03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	10.8	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.3	0.00000
2028	L03	Concrete/Industrial Saws	6 < hp <= 11	0.7	10.8	0.0002	0.0001	0.0004	0.0000	0.0000	0.0000	0.0	0.00001
2028	L03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	80.4	0.0009	0.0001	0.0025	0.0000	0.0002	0.0002	4.5	0.00001
2028	L03	Excavators	100 < hp <= 175	0.59	31.9	0.0003	0.0000	0.0009	0.0000	0.0001	0.0001	1.8	0.00000
2028	L03	Graders	175 < hp <= 300	0.59	4.2	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.4	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	L03	Irrigation Sets	300 < hp <= 600	0.59	3.8	0.0011	0.0002	0.0040	0.0000	0.0002	0.0002	0.7	0.00002
2028	L03	Off-highway Trucks	300 < hp <= 600	0.59	1,433.7	0.0233	0.0068	0.0893	0.0008	0.0057	0.0055	272.4	0.00034
2028	L03	Other Construction Equipment	100 < hp <= 175	0.43	184.9	0.0035	0.0008	0.0101	0.0000	0.0008	0.0008	7.5	0.00006
2028	L03	Pavers	100 < hp <= 175	0.59	29.3	0.0004	0.0001	0.0010	0.0000	0.0001	0.0001	1.6	0.00000
2028	L03	Plate Compactors	3 < hp <= 6	0.43	50.0	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2028	L03	Pumps	6 < hp <= 11	0.43	3.6	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	L03	Rollers	75 < hp <= 100	0.59	56.5	0.0010	0.0001	0.0039	0.0000	0.0001	0.0001	2.0	0.00001
2028	L03	Scrapers	300 < hp <= 600	0.59	14.5	0.0012	0.0002	0.0032	0.0000	0.0002	0.0002	2.7	0.00001
2028	L03	Skid Steer Loaders	50 < hp <= 75	0.21	48.9	0.0061	0.0011	0.0051	0.0000	0.0008	0.0008	0.5	0.00004
2028	L03	Surfacing Equipment	16 < hp <= 25	0.59	5.6	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2028	L03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	48.4	0.0090	0.0027	0.0159	0.0000	0.0019	0.0018	3.1	0.00015
2028	L03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	109.5	0.0100	0.0017	0.0092	0.0000	0.0013	0.0013	1.6	0.00008
2028	L04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	L04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2028	L04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2028	L04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2028	L04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2028	L04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2028	L04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	L04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	L04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2028	L04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	L04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	L04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2028	L05	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2028	L05	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	L05	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2028	L05	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2028	L05	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2028	L05	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2028	L05	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2028	L05	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2028	L05	Off-highway Trucks	300 < hp <= 600	0.59	164.0	0.0027	0.0008	0.0102	0.0001	0.0006	0.0006	31.2	0.00004
2028	L05	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	L05	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	L05	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2028	L05	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2028	L05	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2028	L05	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	L05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	120.0	0.0110	0.0019	0.0100	0.0000	0.0015	0.0014	1.7	0.00009
2028	S01	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2028	S01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	S01	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2028	S01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	28.8	0.0017	0.0003	0.0037	0.0000	0.0003	0.0003	0.7	0.00001
2028	S01	Concrete/Industrial Saws	6 < hp <= 11	0.7	28.8	0.0006	0.0002	0.0010	0.0000	0.0001	0.0001	0.1	0.00002
2028	S01	Cranes	175 < hp <= 300	0.43	19.0	0.0002	0.0001	0.0008	0.0000	0.0000	0.0000	1.3	0.00000
2028	S01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	158.8	0.0018	0.0003	0.0050	0.0000	0.0004	0.0004	8.8	0.00002
2028	S01	Excavators	100 < hp <= 175	0.59	72.1	0.0006	0.0001	0.0021	0.0000	0.0002	0.0001	4.0	0.00001
2028	S01	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2028	S01	Generator Sets	25 < hp <= 40	0.43	7.4	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.1	0.00000
2028	S01	Graders	175 < hp <= 300	0.59	1.8	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.2	0.00000
2028	S01	Irrigation Sets	300 < hp <= 600	0.59	1.6	0.0005	0.0001	0.0017	0.0000	0.0001	0.0001	0.3	0.00001
2028	S01	Off-highway Trucks	300 < hp <= 600	0.59	1,353.5	0.0220	0.0064	0.0843	0.0008	0.0053	0.0052	257.2	0.00032
2028	S01	Other Construction Equipment	100 < hp <= 175	0.43	74.0	0.0014	0.0003	0.0040	0.0000	0.0003	0.0003	3.0	0.00002
2028	S01	Pavers	100 < hp <= 175	0.59	1.6	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.1	0.00000
2028	S01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	S01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	S01	Pumps	6 < hp <= 11	0.43	1.6	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0	0.00000
2028	S01	Rollers	75 < hp <= 100	0.59	95.5	0.0016	0.0002	0.0065	0.0000	0.0002	0.0002	3.4	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S01	Scrapers	300 < hp <= 600	0.59	41.6	0.0034	0.0005	0.0092	0.0000	0.0006	0.0005	7.9	0.00003
2028	S01	Skid Steer Loaders	50 < hp <= 75	0.21	22.4	0.0028	0.0005	0.0023	0.0000	0.0004	0.0004	0.2	0.00002
2028	S01	Surfacing Equipment	16 < hp <= 25	0.59	2.0	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	S01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2028	S01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	71.5	0.0134	0.0040	0.0234	0.0000	0.0028	0.0027	4.6	0.00023
2028	S01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	38.8	0.0027	0.0005	0.0029	0.0000	0.0004	0.0003	0.4	0.00002
2028	S01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	142.4	0.0130	0.0023	0.0119	0.0000	0.0017	0.0017	2.1	0.00010
2028	S02	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2028	S02	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2028	S02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	S02	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2028	S02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2028	S02	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2028	S02	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2028	S02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	36.6	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	2.0	0.00000
2028	S02	Excavators	100 < hp <= 175	0.59	77.6	0.0007	0.0001	0.0023	0.0000	0.0002	0.0002	4.3	0.00001
2028	S02	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2028	S02	Generator Sets	25 < hp <= 40	0.43	57.0	0.0007	0.0002	0.0033	0.0000	0.0001	0.0001	0.6	0.00002
2028	S02	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S02	Off-highway Trucks	300 < hp <= 600	0.59	823.8	0.0134	0.0039	0.0513	0.0005	0.0032	0.0032	156.5	0.00019
2028	S02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	S02	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	S02	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2028	S02	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2028	S02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2028	S02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	138.0	0.0096	0.0017	0.0104	0.0000	0.0013	0.0012	1.5	0.00008
2028	S02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2028	S03	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2028	S03	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2028	S03	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	S03	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2028	S03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2028	S03	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2028	S03	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2028	S03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2028	S03	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2028	S03	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2028	S03	Off-highway Trucks	300 < hp <= 600	0.59	602.0	0.0098	0.0028	0.0375	0.0003	0.0024	0.0023	114.4	0.00014

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S03	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	S03	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	S03	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2028	S03	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2028	S03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2028	S03	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2028	S03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2028	S04	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2028	S04	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2028	S04	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2028	S04	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2028	S04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	10.4	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.6	0.00000
2028	S04	Excavators	100 < hp <= 175	0.59	10.4	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.6	0.00000
2028	S04	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2028	S04	Off-highway Trucks	300 < hp <= 600	0.59	316.8	0.0052	0.0015	0.0197	0.0002	0.0012	0.0012	60.2	0.00007
2028	S04	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2028	S04	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2028	S04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2028	S08	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S08	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2028	S08	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2028	S08	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2028	S08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.5	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2028	S08	Excavators	100 < hp <= 175	0.59	176.5	0.0016	0.0002	0.0052	0.0000	0.0004	0.0004	9.8	0.00002
2028	S08	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2028	S08	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	S08	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	S08	Off-highway Trucks	300 < hp <= 600	0.59	6,507.0	0.1060	0.0308	0.4054	0.0036	0.0257	0.0249	1,236.5	0.00154
2028	S08	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	S08	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	S08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2028	S09	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	S09	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2028	S09	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2028	S09	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2028	S09	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.5	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2028	S09	Excavators	100 < hp <= 175	0.59	176.5	0.0016	0.0002	0.0052	0.0000	0.0004	0.0004	9.8	0.00002
2028	S09	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S09	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	S09	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	S09	Off-highway Trucks	300 < hp <= 600	0.59	6,507.0	0.1060	0.0308	0.4054	0.0036	0.0257	0.0249	1,236.5	0.00154
2028	S09	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	S09	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	S09	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2028	T01	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	T01	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2028	T01	Air Compressors	75 < hp <= 100	0.43	51.8	0.0011	0.0001	0.0034	0.0000	0.0002	0.0002	1.3	0.00001
2028	T01	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2028	T01	Chain Saws > 6 HP	6 < hp <= 11	0.7	82.0	0.0926	0.0214	0.0005	0.0000	0.0034	0.0031	0.2	0.00000
2028	T01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	82.0	0.0048	0.0009	0.0106	0.0000	0.0008	0.0008	2.1	0.00004
2028	T01	Concrete/Industrial Saws	25 < hp <= 40	0.59	51.8	0.0004	0.0001	0.0034	0.0000	0.0000	0.0000	0.7	0.00002
2028	T01	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2028	T01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	412.7	0.0046	0.0007	0.0130	0.0001	0.0011	0.0011	22.9	0.00005
2028	T01	Excavators	100 < hp <= 175	0.59	558.8	0.0049	0.0008	0.0165	0.0001	0.0012	0.0011	31.0	0.00006
2028	T01	Forklifts	75 < hp <= 100	0.59	3,700.0	0.0125	0.0018	0.2062	0.0004	0.0029	0.0028	130.1	0.00012
2028	T01	Generator Sets	25 < hp <= 40	0.43	301.0	0.0039	0.0011	0.0175	0.0000	0.0006	0.0006	3.1	0.00009
2028	T01	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	T01	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2028	T01	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2028	T01	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	T01	Off-highway Trucks	300 < hp <= 600	0.59	12,536.6	0.2042	0.0593	0.7811	0.0070	0.0494	0.0480	2,382.3	0.00297
2028	T01	Other Construction Equipment	100 < hp <= 175	0.43	516.6	0.0099	0.0023	0.0281	0.0001	0.0022	0.0021	20.9	0.00015
2028	T01	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	T01	Pavers	100 < hp <= 175	0.59	51.8	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	2.9	0.00001
2028	T01	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2028	T01	Pumps	6 < hp <= 11	0.43	254.0	0.0034	0.0011	0.0056	0.0000	0.0004	0.0003	0.7	0.00008
2028	T01	Rollers	75 < hp <= 100	0.59	194.3	0.0033	0.0003	0.0133	0.0000	0.0005	0.0005	6.8	0.00002
2028	T01	Scrapers	300 < hp <= 600	0.59	64.8	0.0053	0.0008	0.0143	0.0000	0.0009	0.0008	12.3	0.00005
2028	T01	Skid Steer Loaders	50 < hp <= 75	0.21	15.9	0.0020	0.0004	0.0017	0.0000	0.0003	0.0003	0.2	0.00001
2028	T01	Surfacing Equipment	16 < hp <= 25	0.59	51.8	0.0013	0.0003	0.0032	0.0000	0.0001	0.0001	0.5	0.00002
2028	T01	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2028	T01	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2028	T01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	129.1	0.0241	0.0073	0.0423	0.0000	0.0050	0.0049	8.3	0.00041
2028	T01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	466.1	0.0324	0.0057	0.0353	0.0000	0.0043	0.0041	5.1	0.00028
2028	T01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	757.5	0.0693	0.0120	0.0634	0.0000	0.0092	0.0089	11.0	0.00055
2028	T02	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	T02	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2028	T02	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2028	T02	Chain Saws > 6 HP	6 < hp <= 11	0.7	40.0	0.0452	0.0104	0.0003	0.0000	0.0017	0.0015	0.1	0.00000
2028	T02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2028	T02	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2028	T02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	110.6	0.0012	0.0002	0.0035	0.0000	0.0003	0.0003	6.1	0.00001
2028	T02	Excavators	100 < hp <= 175	0.59	246.6	0.0022	0.0003	0.0073	0.0000	0.0005	0.0005	13.7	0.00002
2028	T02	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2028	T02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	T02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2028	T02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	T02	Off-highway Trucks	300 < hp <= 600	0.59	8,061.3	0.1313	0.0381	0.5023	0.0045	0.0318	0.0308	1,531.8	0.00191
2028	T02	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2028	T02	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2028	T02	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2028	T02	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2028	T02	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2028	T02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2028	T02	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2028	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.21	80.0	0.0030	0.0009	0.0053	0.0000	0.0006	0.0006	1.1	0.00005

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2028	T02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2028	T02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2028	T02	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2029	A01	Air Compressors	75 < hp <= 100	0.43	29.1	0.0006	0.0001	0.0019	0.0000	0.0001	0.0001	0.7	0.00001
2029	A01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	27.6	0.0016	0.0003	0.0036	0.0000	0.0003	0.0003	0.7	0.00001
2029	A01	Concrete/Industrial Saws	25 < hp <= 40	0.59	29.1	0.0002	0.0001	0.0019	0.0000	0.0000	0.0000	0.4	0.00001
2029	A01	Concrete/Industrial Saws	6 < hp <= 11	0.7	27.6	0.0006	0.0002	0.0010	0.0000	0.0001	0.0001	0.1	0.00002
2029	A01	Cranes	175 < hp <= 300	0.43	-	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	-	0.00000
2029	A01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	233.4	0.0026	0.0004	0.0073	0.0000	0.0006	0.0006	12.9	0.00003
2029	A01	Excavators	100 < hp <= 175	0.59	277.0	0.0025	0.0004	0.0082	0.0000	0.0006	0.0006	15.4	0.00003
2029	A01	Graders	175 < hp <= 300	0.59	11.3	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.1	0.00000
2029	A01	Irrigation Sets	300 < hp <= 600	0.59	10.2	0.0030	0.0006	0.0106	0.0000	0.0005	0.0005	1.9	0.00004
2029	A01	Off-highway Trucks	300 < hp <= 600	0.59	2,244.7	0.0366	0.0106	0.1399	0.0012	0.0089	0.0086	426.6	0.00053
2029	A01	Other Construction Equipment	100 < hp <= 175	0.43	390.4	0.0075	0.0017	0.0212	0.0000	0.0016	0.0016	15.8	0.00012
2029	A01	Pavers	100 < hp <= 175	0.59	29.1	0.0004	0.0001	0.0010	0.0000	0.0001	0.0001	1.6	0.00000
2029	A01	Pumps	6 < hp <= 11	0.43	9.2	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2029	A01	Rollers	75 < hp <= 100	0.59	153.1	0.0026	0.0002	0.0105	0.0000	0.0004	0.0004	5.4	0.00002
2029	A01	Scrapers	300 < hp <= 600	0.59	36.4	0.0030	0.0005	0.0080	0.0000	0.0005	0.0005	6.9	0.00003

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	A01	Skid Steer Loaders	50 < hp <= 75	0.21	30.5	0.0038	0.0007	0.0032	0.0000	0.0005	0.0005	0.3	0.00003
2029	A01	Surfacing Equipment	16 < hp <= 25	0.59	29.1	0.0007	0.0002	0.0018	0.0000	0.0001	0.0001	0.3	0.00001
2029	A01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	172.1	0.0322	0.0097	0.0564	0.0000	0.0067	0.0065	11.1	0.00055
2029	A01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	79.8	0.0073	0.0013	0.0067	0.0000	0.0010	0.0009	1.2	0.00006
2029	A04	Air Compressors	75 < hp <= 100	0.43	30.5	0.0006	0.0001	0.0020	0.0000	0.0001	0.0001	0.8	0.00001
2029	A04	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	26.4	0.0015	0.0003	0.0034	0.0000	0.0003	0.0003	0.7	0.00001
2029	A04	Concrete/Industrial Saws	25 < hp <= 40	0.59	30.5	0.0002	0.0001	0.0020	0.0000	0.0000	0.0000	0.4	0.00001
2029	A04	Concrete/Industrial Saws	6 < hp <= 11	0.7	26.4	0.0006	0.0002	0.0009	0.0000	0.0001	0.0001	0.1	0.00001
2029	A04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	196.8	0.0022	0.0003	0.0062	0.0000	0.0005	0.0005	10.9	0.00002
2029	A04	Excavators	100 < hp <= 175	0.59	493.1	0.0044	0.0007	0.0145	0.0001	0.0010	0.0010	27.3	0.00005
2029	A04	Graders	175 < hp <= 300	0.59	10.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.0	0.00000
2029	A04	Irrigation Sets	300 < hp <= 600	0.59	9.6	0.0028	0.0006	0.0099	0.0000	0.0005	0.0005	1.8	0.00004
2029	A04	Off-highway Trucks	300 < hp <= 600	0.59	7,740.8	0.1261	0.0366	0.4823	0.0043	0.0305	0.0296	1,471.0	0.00183
2029	A04	Other Construction Equipment	100 < hp <= 175	0.43	1,931.0	0.0370	0.0086	0.1050	0.0002	0.0081	0.0079	78.0	0.00058
2029	A04	Pavers	100 < hp <= 175	0.59	30.5	0.0004	0.0001	0.0010	0.0000	0.0001	0.0001	1.7	0.00000
2029	A04	Pumps	6 < hp <= 11	0.43	8.8	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2029	A04	Rollers	75 < hp <= 100	0.59	123.4	0.0021	0.0002	0.0084	0.0000	0.0003	0.0003	4.3	0.00001
2029	A04	Scrapers	300 < hp <= 600	0.59	38.1	0.0031	0.0005	0.0084	0.0000	0.0005	0.0005	7.2	0.00003
2029	A04	Skid Steer Loaders	50 < hp <= 75	0.21	27.3	0.0034	0.0006	0.0029	0.0000	0.0005	0.0005	0.3	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	A04	Surfacing Equipment	16 < hp <= 25	0.59	30.5	0.0007	0.0002	0.0019	0.0000	0.0001	0.0001	0.3	0.00001
2029	A04	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	120.4	0.0225	0.0068	0.0394	0.0000	0.0047	0.0045	7.8	0.00038
2029	A04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	58.5	0.0054	0.0009	0.0049	0.0000	0.0007	0.0007	0.9	0.00004
2029	A05	Off-highway Trucks	300 < hp <= 600	0.59	95.4	0.0016	0.0005	0.0059	0.0001	0.0004	0.0004	18.1	0.00002
2029	A05	Other Construction Equipment	100 < hp <= 175	0.43	47.7	0.0009	0.0002	0.0026	0.0000	0.0002	0.0002	1.9	0.00001
2029	A05	Skid Steer Loaders	50 < hp <= 75	0.21	6.5	0.0008	0.0002	0.0007	0.0000	0.0001	0.0001	0.1	0.00001
2029	A05	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	6.5	0.0012	0.0004	0.0021	0.0000	0.0003	0.0002	0.4	0.00002
2029	A05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	6.5	0.0006	0.0001	0.0005	0.0000	0.0001	0.0001	0.1	0.00000
2029	A08	Air Compressors	75 < hp <= 100	0.43	13.3	0.0003	0.0000	0.0009	0.0000	0.0000	0.0000	0.3	0.00000
2029	A08	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	10.8	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.3	0.00000
2029	A08	Concrete/Industrial Saws	25 < hp <= 40	0.59	13.3	0.0001	0.0000	0.0009	0.0000	0.0000	0.0000	0.2	0.00000
2029	A08	Concrete/Industrial Saws	6 < hp <= 11	0.7	10.8	0.0002	0.0001	0.0004	0.0000	0.0000	0.0000	0.0	0.00001
2029	A08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	108.1	0.0012	0.0002	0.0034	0.0000	0.0003	0.0003	6.0	0.00001
2029	A08	Excavators	100 < hp <= 175	0.59	197.5	0.0017	0.0003	0.0058	0.0000	0.0004	0.0004	10.9	0.00002
2029	A08	Generator Sets	25 < hp <= 40	0.43	144.0	0.0019	0.0005	0.0084	0.0000	0.0003	0.0003	1.5	0.00004
2029	A08	Graders	175 < hp <= 300	0.59	4.5	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.4	0.00000
2029	A08	Irrigation Sets	300 < hp <= 600	0.59	4.0	0.0012	0.0003	0.0042	0.0000	0.0002	0.0002	0.8	0.00002
2029	A08	Off-highway Trucks	300 < hp <= 600	0.59	1,768.7	0.0288	0.0084	0.1102	0.0010	0.0070	0.0068	336.1	0.00042
2029	A08	Other Construction Equipment	100 < hp <= 175	0.43	135.3	0.0026	0.0006	0.0074	0.0000	0.0006	0.0006	5.5	0.00004

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	A08	Pavers	100 < hp <= 175	0.59	13.3	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.7	0.00000
2029	A08	Pumps	6 < hp <= 11	0.43	3.6	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2029	A08	Rollers	75 < hp <= 100	0.59	40.4	0.0007	0.0001	0.0028	0.0000	0.0001	0.0001	1.4	0.00000
2029	A08	Scrapers	300 < hp <= 600	0.59	16.7	0.0014	0.0002	0.0037	0.0000	0.0002	0.0002	3.2	0.00001
2029	A08	Skid Steer Loaders	50 < hp <= 75	0.21	5.6	0.0007	0.0001	0.0006	0.0000	0.0001	0.0001	0.1	0.00000
2029	A08	Surfacing Equipment	16 < hp <= 25	0.59	13.3	0.0003	0.0001	0.0008	0.0000	0.0000	0.0000	0.1	0.00001
2029	A08	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	25.4	0.0047	0.0014	0.0083	0.0000	0.0010	0.0010	1.6	0.00008
2029	A08	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	288.0	0.0200	0.0035	0.0218	0.0000	0.0026	0.0026	3.1	0.00017
2029	A08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	11.5	0.0011	0.0002	0.0010	0.0000	0.0001	0.0001	0.2	0.00001
2029	A09	Air Compressors	75 < hp <= 100	0.43	12.5	0.0003	0.0000	0.0008	0.0000	0.0000	0.0000	0.3	0.00000
2029	A09	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	10.8	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.3	0.00000
2029	A09	Concrete/Industrial Saws	25 < hp <= 40	0.59	12.5	0.0001	0.0000	0.0008	0.0000	0.0000	0.0000	0.2	0.00000
2029	A09	Concrete/Industrial Saws	6 < hp <= 11	0.7	10.8	0.0002	0.0001	0.0004	0.0000	0.0000	0.0000	0.0	0.00001
2029	A09	Crawler Tractor/Dozers	100 < hp <= 175	0.59	66.9	0.0007	0.0001	0.0021	0.0000	0.0002	0.0002	3.7	0.00001
2029	A09	Excavators	100 < hp <= 175	0.59	15.2	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2029	A09	Graders	175 < hp <= 300	0.59	4.3	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.4	0.00000
2029	A09	Irrigation Sets	300 < hp <= 600	0.59	3.9	0.0011	0.0002	0.0041	0.0000	0.0002	0.0002	0.7	0.00002
2029	A09	Off-highway Trucks	300 < hp <= 600	0.59	1,210.1	0.0197	0.0057	0.0754	0.0007	0.0048	0.0046	230.0	0.00029
2029	A09	Other Construction Equipment	100 < hp <= 175	0.43	126.9	0.0024	0.0006	0.0069	0.0000	0.0005	0.0005	5.1	0.00004

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	A09	Pavers	100 < hp <= 175	0.59	12.5	0.0002	0.0000	0.0004	0.0000	0.0000	0.0000	0.7	0.00000
2029	A09	Pumps	6 < hp <= 11	0.43	3.6	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2029	A09	Rollers	75 < hp <= 100	0.59	36.8	0.0006	0.0001	0.0025	0.0000	0.0001	0.0001	1.3	0.00000
2029	A09	Scrapers	300 < hp <= 600	0.59	15.6	0.0013	0.0002	0.0034	0.0000	0.0002	0.0002	3.0	0.00001
2029	A09	Skid Steer Loaders	50 < hp <= 75	0.21	7.0	0.0009	0.0002	0.0007	0.0000	0.0001	0.0001	0.1	0.00001
2029	A09	Surfacing Equipment	16 < hp <= 25	0.59	12.5	0.0003	0.0001	0.0008	0.0000	0.0000	0.0000	0.1	0.00001
2029	A09	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	23.7	0.0044	0.0013	0.0078	0.0000	0.0009	0.0009	1.5	0.00008
2029	A09	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	12.1	0.0011	0.0002	0.0010	0.0000	0.0001	0.0001	0.2	0.00001
2029	C03	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2029	C03	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2029	C03	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2029	C03	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2029	C03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	64.0	0.0037	0.0007	0.0083	0.0000	0.0007	0.0006	1.6	0.00003
2029	C03	Concrete/Industrial Saws	6 < hp <= 11	0.7	64.0	0.0013	0.0005	0.0023	0.0000	0.0001	0.0001	0.3	0.00004
2029	C03	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2029	C03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	40.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	2.2	0.00000
2029	C03	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2029	C03	Forklifts	75 < hp <= 100	0.59	3,724.0	0.0125	0.0018	0.2076	0.0004	0.0029	0.0029	131.0	0.00012
2029	C03	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	C03	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2029	C03	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	C03	Off-highway Trucks	300 < hp <= 600	0.59	6,864.0	0.1118	0.0325	0.4277	0.0038	0.0271	0.0263	1,304.3	0.00162
2029	C03	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2029	C03	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2029	C03	Plate Compactors	3 < hp <= 6	0.43	40.0	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2029	C03	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2029	C03	Rollers	75 < hp <= 100	0.59	56.0	0.0010	0.0001	0.0038	0.0000	0.0001	0.0001	2.0	0.00001
2029	C03	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2029	C03	Surfacing Equipment	75 < hp <= 100	0.43	64.0	0.0022	0.0003	0.0047	0.0000	0.0003	0.0003	1.6	0.00001
2029	C03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2029	C03	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2029	C03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	840.0	0.0769	0.0133	0.0703	0.0000	0.0102	0.0099	12.2	0.00061
2029	L01	Air Compressors	75 < hp <= 100	0.43	22.8	0.0005	0.0001	0.0015	0.0000	0.0001	0.0001	0.6	0.00000
2029	L01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	19.2	0.0011	0.0002	0.0025	0.0000	0.0002	0.0002	0.5	0.00001
2029	L01	Concrete/Industrial Saws	25 < hp <= 40	0.59	22.8	0.0002	0.0001	0.0015	0.0000	0.0000	0.0000	0.3	0.00001
2029	L01	Concrete/Industrial Saws	6 < hp <= 11	0.7	19.2	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2029	L01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	206.5	0.0023	0.0004	0.0065	0.0000	0.0006	0.0005	11.4	0.00003
2029	L01	Excavators	100 < hp <= 175	0.59	113.3	0.0010	0.0002	0.0033	0.0000	0.0002	0.0002	6.3	0.00001
2029	L01	Graders	175 < hp <= 300	0.59	7.6	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.7	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	L01	Irrigation Sets	300 < hp <= 600	0.59	6.9	0.0020	0.0004	0.0071	0.0000	0.0003	0.0003	1.3	0.00003
2029	L01	Off-highway Trucks	300 < hp <= 600	0.59	4,227.2	0.0688	0.0200	0.2634	0.0023	0.0167	0.0162	803.3	0.00100
2029	L01	Other Construction Equipment	100 < hp <= 175	0.43	309.1	0.0059	0.0014	0.0168	0.0000	0.0013	0.0013	12.5	0.00009
2029	L01	Pavers	100 < hp <= 175	0.59	55.9	0.0008	0.0001	0.0019	0.0000	0.0002	0.0002	3.1	0.00001
2029	L01	Plate Compactors	3 < hp <= 6	0.43	49.2	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2029	L01	Pumps	6 < hp <= 11	0.43	6.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2029	L01	Rollers	75 < hp <= 100	0.59	90.4	0.0016	0.0001	0.0062	0.0000	0.0002	0.0002	3.2	0.00001
2029	L01	Scrapers	300 < hp <= 600	0.59	28.4	0.0023	0.0004	0.0063	0.0000	0.0004	0.0004	5.4	0.00002
2029	L01	Skid Steer Loaders	50 < hp <= 75	0.21	52.4	0.0065	0.0012	0.0055	0.0000	0.0009	0.0009	0.6	0.00004
2029	L01	Surfacing Equipment	16 < hp <= 25	0.59	33.7	0.0008	0.0002	0.0021	0.0000	0.0001	0.0001	0.3	0.00002
2029	L01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	70.4	0.0132	0.0040	0.0231	0.0000	0.0027	0.0027	4.5	0.00022
2029	L01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	110.6	0.0101	0.0018	0.0093	0.0000	0.0013	0.0013	1.6	0.00008
2029	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2029	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2029	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2029	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2029	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2029	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2029	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2029	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2029	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2029	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2029	L03	Air Compressors	75 < hp <= 100	0.43	46.3	0.0009	0.0001	0.0031	0.0000	0.0002	0.0002	1.2	0.00001
2029	L03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	42.0	0.0025	0.0005	0.0055	0.0000	0.0004	0.0004	1.1	0.00002
2029	L03	Concrete/Industrial Saws	25 < hp <= 40	0.59	46.3	0.0004	0.0001	0.0031	0.0000	0.0000	0.0000	0.7	0.00001
2029	L03	Concrete/Industrial Saws	6 < hp <= 11	0.7	42.0	0.0009	0.0003	0.0015	0.0000	0.0001	0.0001	0.2	0.00002
2029	L03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	320.1	0.0036	0.0005	0.0100	0.0001	0.0009	0.0009	17.7	0.00004
2029	L03	Excavators	100 < hp <= 175	0.59	126.6	0.0011	0.0002	0.0037	0.0000	0.0003	0.0003	7.0	0.00001
2029	L03	Graders	175 < hp <= 300	0.59	16.7	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2029	L03	Irrigation Sets	300 < hp <= 600	0.59	15.1	0.0044	0.0009	0.0157	0.0000	0.0007	0.0007	2.8	0.00006
2029	L03	Off-highway Trucks	300 < hp <= 600	0.59	6,058.6	0.0987	0.0287	0.3775	0.0034	0.0239	0.0232	1,151.3	0.00143
2029	L03	Other Construction Equipment	100 < hp <= 175	0.43	829.6	0.0159	0.0037	0.0451	0.0001	0.0035	0.0034	33.5	0.00025
2029	L03	Pavers	100 < hp <= 175	0.59	163.6	0.0024	0.0004	0.0056	0.0000	0.0006	0.0006	9.1	0.00003
2029	L03	Plate Compactors	3 < hp <= 6	0.43	200.0	0.0015	0.0005	0.0024	0.0000	0.0002	0.0001	0.3	0.00004
2029	L03	Pumps	6 < hp <= 11	0.43	14.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2029	L03	Rollers	75 < hp <= 100	0.59	224.7	0.0039	0.0004	0.0154	0.0000	0.0006	0.0006	7.9	0.00003
2029	L03	Scrapers	300 < hp <= 600	0.59	57.8	0.0047	0.0008	0.0127	0.0000	0.0008	0.0007	11.0	0.00005

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	L03	Skid Steer Loaders	50 < hp <= 75	0.21	195.1	0.0242	0.0045	0.0204	0.0000	0.0033	0.0032	2.1	0.00017
2029	L03	Surfacing Equipment	16 < hp <= 25	0.59	68.5	0.0017	0.0004	0.0042	0.0000	0.0002	0.0002	0.6	0.00003
2029	L03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	237.9	0.0445	0.0134	0.0779	0.0001	0.0092	0.0090	15.4	0.00076
2029	L03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	436.4	0.0399	0.0069	0.0365	0.0000	0.0053	0.0051	6.4	0.00032
2029	L04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2029	L04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2029	L04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2029	L04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2029	L04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2029	L04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2029	L04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2029	L04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	L04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2029	L04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2029	L04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2029	L04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2029	L07	Aerial Lifts	75 < hp <= 100	0.59	400.8	0.0652	0.0103	0.0707	0.0001	0.0083	0.0080	16.4	0.00048
2029	L07	Bore/Drill Rigs	100 < hp <= 175	0.43	120.0	0.0114	0.0038	0.0447	0.0000	0.0026	0.0025	4.8	0.00020
2029	L07	Cement & Mortar Mixers	300 < hp <= 600	0.59	660.0	0.3154	0.0674	1.1890	0.0005	0.0432	0.0419	123.9	0.00317

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	L07	Cranes	175 < hp <= 300	0.43	600.0	0.0060	0.0021	0.0253	0.0001	0.0014	0.0013	41.1	0.00012
2029	L07	Excavators	100 < hp <= 175	0.59	160.8	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2029	L07	Forklifts	75 < hp <= 100	0.59	801.6	0.0027	0.0004	0.0447	0.0001	0.0006	0.0006	28.2	0.00003
2029	L07	Off-highway Trucks	175 < hp <= 300	0.43	160.8	0.0005	0.0002	0.0026	0.0000	0.0002	0.0001	11.1	0.00001
2029	L07	Off-highway Trucks	300 < hp <= 600	0.59	1,536.0	0.0250	0.0073	0.0957	0.0009	0.0061	0.0059	291.9	0.00036
2029	L07	Pavers	100 < hp <= 175	0.59	79.2	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2029	L07	Pumps	6 < hp <= 11	0.43	450.0	0.0061	0.0019	0.0099	0.0000	0.0006	0.0006	1.3	0.00015
2029	L07	Rubber Tire Loaders	75 < hp <= 100	0.21	79.2	0.0005	0.0000	0.0019	0.0000	0.0001	0.0001	1.0	0.00000
2029	L07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	679.2	0.0621	0.0108	0.0568	0.0000	0.0083	0.0080	9.9	0.00049
2029	L07	Trenchers	50 < hp <= 75	0.59	319.2	0.0111	0.0017	0.0445	0.0000	0.0013	0.0013	8.4	0.00017
2029	S01	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2029	S01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2029	S01	Air Compressors	75 < hp <= 100	0.43	15.8	0.0003	0.0000	0.0010	0.0000	0.0001	0.0001	0.4	0.00000
2029	S01	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2029	S01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	37.2	0.0022	0.0004	0.0048	0.0000	0.0004	0.0004	0.9	0.00002
2029	S01	Concrete/Industrial Saws	25 < hp <= 40	0.59	15.8	0.0001	0.0000	0.0011	0.0000	0.0000	0.0000	0.2	0.00000
2029	S01	Concrete/Industrial Saws	6 < hp <= 11	0.7	37.2	0.0008	0.0003	0.0013	0.0000	0.0001	0.0001	0.2	0.00002
2029	S01	Cranes	175 < hp <= 300	0.43	19.0	0.0002	0.0001	0.0008	0.0000	0.0000	0.0000	1.3	0.00000
2029	S01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	508.0	0.0056	0.0009	0.0159	0.0001	0.0014	0.0014	28.2	0.00006

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	S01	Excavators	100 < hp <= 175	0.59	232.9	0.0021	0.0003	0.0069	0.0000	0.0005	0.0005	12.9	0.00002
2029	S01	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2029	S01	Generator Sets	25 < hp <= 40	0.43	30.0	0.0004	0.0001	0.0017	0.0000	0.0001	0.0001	0.3	0.00001
2029	S01	Graders	175 < hp <= 300	0.59	5.4	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.5	0.00000
2029	S01	Irrigation Sets	300 < hp <= 600	0.59	4.8	0.0014	0.0003	0.0050	0.0000	0.0002	0.0002	0.9	0.00002
2029	S01	Off-highway Trucks	300 < hp <= 600	0.59	4,815.9	0.0784	0.0228	0.3001	0.0027	0.0190	0.0184	915.1	0.00114
2029	S01	Other Construction Equipment	100 < hp <= 175	0.43	191.3	0.0037	0.0009	0.0104	0.0000	0.0008	0.0008	7.7	0.00006
2029	S01	Pavers	100 < hp <= 175	0.59	21.7	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.2	0.00000
2029	S01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2029	S01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2029	S01	Pumps	6 < hp <= 11	0.43	4.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2029	S01	Rollers	75 < hp <= 100	0.59	275.6	0.0048	0.0004	0.0189	0.0000	0.0007	0.0007	9.7	0.00003
2029	S01	Scrapers	300 < hp <= 600	0.59	158.2	0.0129	0.0021	0.0348	0.0001	0.0021	0.0020	30.1	0.00013
2029	S01	Skid Steer Loaders	50 < hp <= 75	0.21	28.9	0.0036	0.0007	0.0030	0.0000	0.0005	0.0005	0.3	0.00002
2029	S01	Surfacing Equipment	16 < hp <= 25	0.59	23.4	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.2	0.00001
2029	S01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2029	S01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	89.5	0.0167	0.0050	0.0293	0.0000	0.0035	0.0034	5.8	0.00028
2029	S01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	84.0	0.0058	0.0010	0.0064	0.0000	0.0008	0.0007	0.9	0.00005
2029	S01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	147.3	0.0135	0.0023	0.0123	0.0000	0.0018	0.0017	2.1	0.00011

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	S03	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2029	S03	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2029	S03	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2029	S03	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2029	S03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2029	S03	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2029	S03	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2029	S03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2029	S03	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2029	S03	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2029	S03	Off-highway Trucks	300 < hp <= 600	0.59	602.0	0.0098	0.0028	0.0375	0.0003	0.0024	0.0023	114.4	0.00014
2029	S03	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2029	S03	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2029	S03	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2029	S03	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2029	S03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2029	S03	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2029	S03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2029	S10	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	S10	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2029	S10	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2029	S10	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2029	S10	Concrete/Industrial Saws	6 < hp <= 11	0.7	40.0	0.0008	0.0003	0.0014	0.0000	0.0001	0.0001	0.2	0.00002
2029	S10	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2029	S10	Crawler Tractor/Dozers	100 < hp <= 175	0.59	24.0	0.0003	0.0000	0.0008	0.0000	0.0001	0.0001	1.3	0.00000
2029	S10	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2029	S10	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2029	S10	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2029	S10	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2029	S10	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	S10	Off-highway Trucks	300 < hp <= 600	0.59	7,888.0	0.1285	0.0373	0.4915	0.0044	0.0311	0.0302	1,498.9	0.00187
2029	S10	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2029	S10	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2029	S10	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2029	S10	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2029	S10	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2029	S10	Rubber Tire Loaders	75 < hp <= 100	0.21	80.0	0.0005	0.0000	0.0019	0.0000	0.0001	0.0001	1.0	0.00000
2029	S10	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2029	S10	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	S10	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2029	S10	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2029	S10	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2029	S10	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2029	T01	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2029	T01	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2029	T01	Air Compressors	75 < hp <= 100	0.43	51.8	0.0011	0.0001	0.0034	0.0000	0.0002	0.0002	1.3	0.00001
2029	T01	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2029	T01	Chain Saws > 6 HP	6 < hp <= 11	0.7	82.0	0.0926	0.0214	0.0005	0.0000	0.0034	0.0031	0.2	0.00000
2029	T01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	82.0	0.0048	0.0009	0.0106	0.0000	0.0008	0.0008	2.1	0.00004
2029	T01	Concrete/Industrial Saws	25 < hp <= 40	0.59	51.8	0.0004	0.0001	0.0034	0.0000	0.0000	0.0000	0.7	0.00002
2029	T01	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2029	T01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	412.7	0.0046	0.0007	0.0130	0.0001	0.0011	0.0011	22.9	0.00005
2029	T01	Excavators	100 < hp <= 175	0.59	558.8	0.0049	0.0008	0.0165	0.0001	0.0012	0.0011	31.0	0.00006
2029	T01	Forklifts	75 < hp <= 100	0.59	3,700.0	0.0125	0.0018	0.2062	0.0004	0.0029	0.0028	130.1	0.00012
2029	T01	Generator Sets	25 < hp <= 40	0.43	301.0	0.0039	0.0011	0.0175	0.0000	0.0006	0.0006	3.1	0.00009
2029	T01	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2029	T01	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2029	T01	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	T01	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	T01	Off-highway Trucks	300 < hp <= 600	0.59	12,536.6	0.2042	0.0593	0.7811	0.0070	0.0494	0.0480	2,382.3	0.00297
2029	T01	Other Construction Equipment	100 < hp <= 175	0.43	516.6	0.0099	0.0023	0.0281	0.0001	0.0022	0.0021	20.9	0.00015
2029	T01	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2029	T01	Pavers	100 < hp <= 175	0.59	51.8	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	2.9	0.00001
2029	T01	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2029	T01	Pumps	6 < hp <= 11	0.43	254.0	0.0034	0.0011	0.0056	0.0000	0.0004	0.0003	0.7	0.00008
2029	T01	Rollers	75 < hp <= 100	0.59	194.3	0.0033	0.0003	0.0133	0.0000	0.0005	0.0005	6.8	0.00002
2029	T01	Scrapers	300 < hp <= 600	0.59	64.8	0.0053	0.0008	0.0143	0.0000	0.0009	0.0008	12.3	0.00005
2029	T01	Skid Steer Loaders	50 < hp <= 75	0.21	15.9	0.0020	0.0004	0.0017	0.0000	0.0003	0.0003	0.2	0.00001
2029	T01	Surfacing Equipment	16 < hp <= 25	0.59	51.8	0.0013	0.0003	0.0032	0.0000	0.0001	0.0001	0.5	0.00002
2029	T01	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2029	T01	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2029	T01	Tractors/Loaders/Backhoes	100 < hp <= 175	0.59	129.1	0.0241	0.0073	0.0423	0.0000	0.0050	0.0049	8.3	0.00041
2029	T01	Tractors/Loaders/Backhoes	50 < hp <= 75	0.21	466.1	0.0324	0.0057	0.0353	0.0000	0.0043	0.0041	5.1	0.00028
2029	T01	Tractors/Loaders/Backhoes	75 < hp <= 100	0.21	757.5	0.0693	0.0120	0.0634	0.0000	0.0092	0.0089	11.0	0.00055
2029	T02	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198
2029	T02	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2029	T02	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2029	T02	Chain Saws > 6 HP	6 < hp <= 11	0.7	40.0	0.0452	0.0104	0.0003	0.0000	0.0017	0.0015	0.1	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	T02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2029	T02	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2029	T02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	140.6	0.0016	0.0002	0.0044	0.0000	0.0004	0.0004	7.8	0.00002
2029	T02	Excavators	100 < hp <= 175	0.59	276.6	0.0024	0.0004	0.0082	0.0000	0.0006	0.0006	15.3	0.00003
2029	T02	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2029	T02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2029	T02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2029	T02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	T02	Off-highway Trucks	300 < hp <= 600	0.59	8,121.1	0.1322	0.0384	0.5060	0.0045	0.0320	0.0311	1,543.2	0.00192
2029	T02	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2029	T02	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2029	T02	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2029	T02	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2029	T02	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2029	T02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2029	T02	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2029	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.21	80.0	0.0030	0.0009	0.0053	0.0000	0.0006	0.0006	1.1	0.00005
2029	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2029	T02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	T02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2029	T02	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2030	A04	Air Compressors	75 < hp <= 100	0.43	30.5	0.0006	0.0001	0.0020	0.0000	0.0001	0.0001	0.8	0.00001
2030	A04	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	26.4	0.0015	0.0003	0.0034	0.0000	0.0003	0.0003	0.7	0.00001
2030	A04	Concrete/Industrial Saws	25 < hp <= 40	0.59	30.5	0.0002	0.0001	0.0020	0.0000	0.0000	0.0000	0.4	0.00001
2030	A04	Concrete/Industrial Saws	6 < hp <= 11	0.7	26.4	0.0006	0.0002	0.0009	0.0000	0.0001	0.0001	0.1	0.00001
2030	A04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	196.8	0.0022	0.0003	0.0062	0.0000	0.0005	0.0005	10.9	0.00002
2030	A04	Excavators	100 < hp <= 175	0.59	493.1	0.0044	0.0007	0.0145	0.0001	0.0010	0.0010	27.3	0.00005
2030	A04	Graders	175 < hp <= 300	0.59	10.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.0	0.00000
2030	A04	Irrigation Sets	300 < hp <= 600	0.59	9.6	0.0028	0.0006	0.0099	0.0000	0.0005	0.0005	1.8	0.00004
2030	A04	Off-highway Trucks	300 < hp <= 600	0.59	7,740.8	0.1261	0.0366	0.4823	0.0043	0.0305	0.0296	1,471.0	0.00183
2030	A04	Other Construction Equipment	100 < hp <= 175	0.43	1,931.0	0.0370	0.0086	0.1050	0.0002	0.0081	0.0079	78.0	0.00058
2030	A04	Pavers	100 < hp <= 175	0.59	30.5	0.0004	0.0001	0.0010	0.0000	0.0001	0.0001	1.7	0.00000
2030	A04	Pumps	6 < hp <= 11	0.43	8.8	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2030	A04	Rollers	75 < hp <= 100	0.59	123.4	0.0021	0.0002	0.0084	0.0000	0.0003	0.0003	4.3	0.00001
2030	A04	Scrapers	300 < hp <= 600	0.59	38.1	0.0031	0.0005	0.0084	0.0000	0.0005	0.0005	7.2	0.00003
2030	A04	Skid Steer Loaders	50 < hp <= 75	0.21	27.3	0.0034	0.0006	0.0029	0.0000	0.0005	0.0005	0.3	0.00002
2030	A04	Surfacing Equipment	16 < hp <= 25	0.59	30.5	0.0007	0.0002	0.0019	0.0000	0.0001	0.0001	0.3	0.00001
2030	A04	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	120.4	0.0225	0.0068	0.0394	0.0000	0.0047	0.0045	7.8	0.00038

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	A04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	58.5	0.0054	0.0009	0.0049	0.0000	0.0007	0.0007	0.9	0.00004
2030	A05	Off-highway Trucks	300 < hp <= 600	0.59	345.4	0.0056	0.0016	0.0215	0.0002	0.0014	0.0013	65.6	0.00008
2030	A05	Other Construction Equipment	100 < hp <= 175	0.43	172.7	0.0033	0.0008	0.0094	0.0000	0.0007	0.0007	7.0	0.00005
2030	A05	Skid Steer Loaders	50 < hp <= 75	0.21	8.1	0.0010	0.0002	0.0008	0.0000	0.0001	0.0001	0.1	0.00001
2030	A05	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	8.1	0.0015	0.0005	0.0027	0.0000	0.0003	0.0003	0.5	0.00003
2030	A05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	8.1	0.0007	0.0001	0.0007	0.0000	0.0001	0.0001	0.1	0.00001
2030	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2030	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2030	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2030	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2030	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2030	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2030	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2030	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2030	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2030	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2030	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2030	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2030	L03	Air Compressors	75 < hp <= 100	0.43	34.7	0.0007	0.0001	0.0023	0.0000	0.0001	0.0001	0.9	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	L03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	31.2	0.0018	0.0003	0.0041	0.0000	0.0003	0.0003	0.8	0.00001
2030	L03	Concrete/Industrial Saws	25 < hp <= 40	0.59	34.7	0.0003	0.0001	0.0023	0.0000	0.0000	0.0000	0.5	0.00001
2030	L03	Concrete/Industrial Saws	6 < hp <= 11	0.7	31.2	0.0007	0.0002	0.0011	0.0000	0.0001	0.0001	0.1	0.00002
2030	L03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	240.2	0.0027	0.0004	0.0075	0.0000	0.0007	0.0006	13.3	0.00003
2030	L03	Excavators	100 < hp <= 175	0.59	95.0	0.0008	0.0001	0.0028	0.0000	0.0002	0.0002	5.3	0.00001
2030	L03	Graders	175 < hp <= 300	0.59	12.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.2	0.00000
2030	L03	Irrigation Sets	300 < hp <= 600	0.59	11.3	0.0033	0.0007	0.0118	0.0000	0.0006	0.0005	2.1	0.00005
2030	L03	Off-highway Trucks	300 < hp <= 600	0.59	4,544.0	0.0740	0.0215	0.2831	0.0025	0.0179	0.0174	863.5	0.00107
2030	L03	Other Construction Equipment	100 < hp <= 175	0.43	622.4	0.0119	0.0028	0.0338	0.0001	0.0026	0.0025	25.1	0.00019
2030	L03	Pavers	100 < hp <= 175	0.59	122.7	0.0018	0.0003	0.0042	0.0000	0.0005	0.0004	6.8	0.00002
2030	L03	Plate Compactors	3 < hp <= 6	0.43	150.0	0.0011	0.0004	0.0018	0.0000	0.0001	0.0001	0.2	0.00003
2030	L03	Pumps	6 < hp <= 11	0.43	10.4	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2030	L03	Rollers	75 < hp <= 100	0.59	168.6	0.0029	0.0003	0.0115	0.0000	0.0004	0.0004	5.9	0.00002
2030	L03	Scrapers	300 < hp <= 600	0.59	43.4	0.0035	0.0006	0.0096	0.0000	0.0006	0.0006	8.2	0.00004
2030	L03	Skid Steer Loaders	50 < hp <= 75	0.21	146.5	0.0181	0.0034	0.0153	0.0000	0.0025	0.0024	1.6	0.00012
2030	L03	Surfacing Equipment	16 < hp <= 25	0.59	51.3	0.0012	0.0003	0.0031	0.0000	0.0001	0.0001	0.5	0.00002
2030	L03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	178.7	0.0334	0.0101	0.0585	0.0000	0.0069	0.0067	11.5	0.00057
2030	L03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	327.4	0.0300	0.0052	0.0274	0.0000	0.0040	0.0039	4.8	0.00024
2030	L07	Aerial Lifts	75 < hp <= 100	0.59	400.8	0.0652	0.0103	0.0707	0.0001	0.0083	0.0080	16.4	0.00048
2030	L07	Bore/Drill Rigs	100 < hp <= 175	0.43	120.0	0.0114	0.0038	0.0447	0.0000	0.0026	0.0025	4.8	0.00020

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	L07	Cement & Mortar Mixers	300 < hp <= 600	0.59	660.0	0.3154	0.0674	1.1890	0.0005	0.0432	0.0419	123.9	0.00317
2030	L07	Cranes	175 < hp <= 300	0.43	600.0	0.0060	0.0021	0.0253	0.0001	0.0014	0.0013	41.1	0.00012
2030	L07	Excavators	100 < hp <= 175	0.59	160.8	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2030	L07	Forklifts	75 < hp <= 100	0.59	801.6	0.0027	0.0004	0.0447	0.0001	0.0006	0.0006	28.2	0.00003
2030	L07	Off-highway Trucks	175 < hp <= 300	0.43	160.8	0.0005	0.0002	0.0026	0.0000	0.0002	0.0001	11.1	0.00001
2030	L07	Off-highway Trucks	300 < hp <= 600	0.59	1,536.0	0.0250	0.0073	0.0957	0.0009	0.0061	0.0059	291.9	0.00036
2030	L07	Pavers	100 < hp <= 175	0.59	79.2	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2030	L07	Pumps	6 < hp <= 11	0.43	450.0	0.0061	0.0019	0.0099	0.0000	0.0006	0.0006	1.3	0.00015
2030	L07	Rubber Tire Loaders	75 < hp <= 100	0.21	79.2	0.0005	0.0000	0.0019	0.0000	0.0001	0.0001	1.0	0.00000
2030	L07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	679.2	0.0621	0.0108	0.0568	0.0000	0.0083	0.0080	9.9	0.00049
2030	L07	Trenchers	50 < hp <= 75	0.59	319.2	0.0111	0.0017	0.0445	0.0000	0.0013	0.0013	8.4	0.00017
2030	S01	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2030	S01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2030	S01	Air Compressors	75 < hp <= 100	0.43	15.8	0.0003	0.0000	0.0010	0.0000	0.0001	0.0001	0.4	0.00000
2030	S01	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2030	S01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	37.2	0.0022	0.0004	0.0048	0.0000	0.0004	0.0004	0.9	0.00002
2030	S01	Concrete/Industrial Saws	25 < hp <= 40	0.59	15.8	0.0001	0.0000	0.0011	0.0000	0.0000	0.0000	0.2	0.00000
2030	S01	Concrete/Industrial Saws	6 < hp <= 11	0.7	37.2	0.0008	0.0003	0.0013	0.0000	0.0001	0.0001	0.2	0.00002
2030	S01	Cranes	175 < hp <= 300	0.43	19.0	0.0002	0.0001	0.0008	0.0000	0.0000	0.0000	1.3	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	S01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	508.0	0.0056	0.0009	0.0159	0.0001	0.0014	0.0014	28.2	0.00006
2030	S01	Excavators	100 < hp <= 175	0.59	232.9	0.0021	0.0003	0.0069	0.0000	0.0005	0.0005	12.9	0.00002
2030	S01	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2030	S01	Generator Sets	25 < hp <= 40	0.43	30.0	0.0004	0.0001	0.0017	0.0000	0.0001	0.0001	0.3	0.00001
2030	S01	Graders	175 < hp <= 300	0.59	5.4	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.5	0.00000
2030	S01	Irrigation Sets	300 < hp <= 600	0.59	4.8	0.0014	0.0003	0.0050	0.0000	0.0002	0.0002	0.9	0.00002
2030	S01	Off-highway Trucks	300 < hp <= 600	0.59	4,815.9	0.0784	0.0228	0.3001	0.0027	0.0190	0.0184	915.1	0.00114
2030	S01	Other Construction Equipment	100 < hp <= 175	0.43	191.3	0.0037	0.0009	0.0104	0.0000	0.0008	0.0008	7.7	0.00006
2030	S01	Pavers	100 < hp <= 175	0.59	21.7	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.2	0.00000
2030	S01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2030	S01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2030	S01	Pumps	6 < hp <= 11	0.43	4.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2030	S01	Rollers	75 < hp <= 100	0.59	275.6	0.0048	0.0004	0.0189	0.0000	0.0007	0.0007	9.7	0.00003
2030	S01	Scrapers	300 < hp <= 600	0.59	158.2	0.0129	0.0021	0.0348	0.0001	0.0021	0.0020	30.1	0.00013
2030	S01	Skid Steer Loaders	50 < hp <= 75	0.21	28.9	0.0036	0.0007	0.0030	0.0000	0.0005	0.0005	0.3	0.00002
2030	S01	Surfacing Equipment	16 < hp <= 25	0.59	23.4	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.2	0.00001
2030	S01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2030	S01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	89.5	0.0167	0.0050	0.0293	0.0000	0.0035	0.0034	5.8	0.00028
2030	S01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	84.0	0.0058	0.0010	0.0064	0.0000	0.0008	0.0007	0.9	0.00005

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	S01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	147.3	0.0135	0.0023	0.0123	0.0000	0.0018	0.0017	2.1	0.00011
2030	S10	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198
2030	S10	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2030	S10	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2030	S10	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2030	S10	Concrete/Industrial Saws	6 < hp <= 11	0.7	40.0	0.0008	0.0003	0.0014	0.0000	0.0001	0.0001	0.2	0.00002
2030	S10	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2030	S10	Crawler Tractor/Dozers	100 < hp <= 175	0.59	24.0	0.0003	0.0000	0.0008	0.0000	0.0001	0.0001	1.3	0.00000
2030	S10	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2030	S10	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2030	S10	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2030	S10	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2030	S10	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2030	S10	Off-highway Trucks	300 < hp <= 600	0.59	7,888.0	0.1285	0.0373	0.4915	0.0044	0.0311	0.0302	1,498.9	0.00187
2030	S10	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2030	S10	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2030	S10	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2030	S10	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2030	S10	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2030	S10	Rubber Tire Loaders	75 < hp <= 100	0.21	80.0	0.0005	0.0000	0.0019	0.0000	0.0001	0.0001	1.0	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	S10	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2030	S10	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2030	S10	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2030	S10	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2030	S10	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2030	S10	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2030	T01	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2030	T01	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2030	T01	Air Compressors	75 < hp <= 100	0.43	51.8	0.0011	0.0001	0.0034	0.0000	0.0002	0.0002	1.3	0.00001
2030	T01	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2030	T01	Chain Saws > 6 HP	6 < hp <= 11	0.7	82.0	0.0926	0.0214	0.0005	0.0000	0.0034	0.0031	0.2	0.00000
2030	T01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	82.0	0.0048	0.0009	0.0106	0.0000	0.0008	0.0008	2.1	0.00004
2030	T01	Concrete/Industrial Saws	25 < hp <= 40	0.59	51.8	0.0004	0.0001	0.0034	0.0000	0.0000	0.0000	0.7	0.00002
2030	T01	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2030	T01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	412.7	0.0046	0.0007	0.0130	0.0001	0.0011	0.0011	22.9	0.00005
2030	T01	Excavators	100 < hp <= 175	0.59	558.8	0.0049	0.0008	0.0165	0.0001	0.0012	0.0011	31.0	0.00006
2030	T01	Forklifts	75 < hp <= 100	0.59	3,700.0	0.0125	0.0018	0.2062	0.0004	0.0029	0.0028	130.1	0.00012
2030	T01	Generator Sets	25 < hp <= 40	0.43	301.0	0.0039	0.0011	0.0175	0.0000	0.0006	0.0006	3.1	0.00009
2030	T01	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	T01	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2030	T01	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2030	T01	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2030	T01	Off-highway Trucks	300 < hp <= 600	0.59	12,536.6	0.2042	0.0593	0.7811	0.0070	0.0494	0.0480	2,382.3	0.00297
2030	T01	Other Construction Equipment	100 < hp <= 175	0.43	516.6	0.0099	0.0023	0.0281	0.0001	0.0022	0.0021	20.9	0.00015
2030	T01	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2030	T01	Pavers	100 < hp <= 175	0.59	51.8	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	2.9	0.00001
2030	T01	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2030	T01	Pumps	6 < hp <= 11	0.43	254.0	0.0034	0.0011	0.0056	0.0000	0.0004	0.0003	0.7	0.00008
2030	T01	Rollers	75 < hp <= 100	0.59	194.3	0.0033	0.0003	0.0133	0.0000	0.0005	0.0005	6.8	0.00002
2030	T01	Scrapers	300 < hp <= 600	0.59	64.8	0.0053	0.0008	0.0143	0.0000	0.0009	0.0008	12.3	0.00005
2030	T01	Skid Steer Loaders	50 < hp <= 75	0.21	15.9	0.0020	0.0004	0.0017	0.0000	0.0003	0.0003	0.2	0.00001
2030	T01	Surfacing Equipment	16 < hp <= 25	0.59	51.8	0.0013	0.0003	0.0032	0.0000	0.0001	0.0001	0.5	0.00002
2030	T01	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2030	T01	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2030	T01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	129.1	0.0241	0.0073	0.0423	0.0000	0.0050	0.0049	8.3	0.00041
2030	T01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	466.1	0.0324	0.0057	0.0353	0.0000	0.0043	0.0041	5.1	0.00028
2030	T01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	757.5	0.0693	0.0120	0.0634	0.0000	0.0092	0.0089	11.0	0.00055
2030	T02	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	T02	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2030	T02	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2030	T02	Chain Saws > 6 HP	6 < hp <= 11	0.7	40.0	0.0452	0.0104	0.0003	0.0000	0.0017	0.0015	0.1	0.00000
2030	T02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2030	T02	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2030	T02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	140.6	0.0016	0.0002	0.0044	0.0000	0.0004	0.0004	7.8	0.00002
2030	T02	Excavators	100 < hp <= 175	0.59	276.6	0.0024	0.0004	0.0082	0.0000	0.0006	0.0006	15.3	0.00003
2030	T02	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2030	T02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2030	T02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2030	T02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2030	T02	Off-highway Trucks	300 < hp <= 600	0.59	8,121.1	0.1322	0.0384	0.5060	0.0045	0.0320	0.0311	1,543.2	0.00192
2030	T02	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2030	T02	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2030	T02	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2030	T02	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2030	T02	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2030	T02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2030	T02	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2030	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.21	80.0	0.0030	0.0009	0.0053	0.0000	0.0006	0.0006	1.1	0.00005

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2030	T02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2030	T02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2030	T02	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2031	A04	Air Compressors	75 < hp <= 100	0.43	30.5	0.0006	0.0001	0.0020	0.0000	0.0001	0.0001	0.8	0.00001
2031	A04	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	26.4	0.0015	0.0003	0.0034	0.0000	0.0003	0.0003	0.7	0.00001
2031	A04	Concrete/Industrial Saws	25 < hp <= 40	0.59	30.5	0.0002	0.0001	0.0020	0.0000	0.0000	0.0000	0.4	0.00001
2031	A04	Concrete/Industrial Saws	6 < hp <= 11	0.7	26.4	0.0006	0.0002	0.0009	0.0000	0.0001	0.0001	0.1	0.00001
2031	A04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	196.8	0.0022	0.0003	0.0062	0.0000	0.0005	0.0005	10.9	0.00002
2031	A04	Excavators	100 < hp <= 175	0.59	493.1	0.0044	0.0007	0.0145	0.0001	0.0010	0.0010	27.3	0.00005
2031	A04	Graders	175 < hp <= 300	0.59	10.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.0	0.00000
2031	A04	Irrigation Sets	300 < hp <= 600	0.59	9.6	0.0028	0.0006	0.0099	0.0000	0.0005	0.0005	1.8	0.00004
2031	A04	Off-highway Trucks	300 < hp <= 600	0.59	7,740.8	0.1261	0.0366	0.4823	0.0043	0.0305	0.0296	1,471.0	0.00183
2031	A04	Other Construction Equipment	100 < hp <= 175	0.43	1,931.0	0.0370	0.0086	0.1050	0.0002	0.0081	0.0079	78.0	0.00058
2031	A04	Pavers	100 < hp <= 175	0.59	30.5	0.0004	0.0001	0.0010	0.0000	0.0001	0.0001	1.7	0.00000
2031	A04	Pumps	6 < hp <= 11	0.43	8.8	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2031	A04	Rollers	75 < hp <= 100	0.59	123.4	0.0021	0.0002	0.0084	0.0000	0.0003	0.0003	4.3	0.00001
2031	A04	Scrapers	300 < hp <= 600	0.59	38.1	0.0031	0.0005	0.0084	0.0000	0.0005	0.0005	7.2	0.00003
2031	A04	Skid Steer Loaders	50 < hp <= 75	0.21	27.3	0.0034	0.0006	0.0029	0.0000	0.0005	0.0005	0.3	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	A04	Surfacing Equipment	16 < hp <= 25	0.59	30.5	0.0007	0.0002	0.0019	0.0000	0.0001	0.0001	0.3	0.00001
2031	A04	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	120.4	0.0225	0.0068	0.0394	0.0000	0.0047	0.0045	7.8	0.00038
2031	A04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	58.5	0.0054	0.0009	0.0049	0.0000	0.0007	0.0007	0.9	0.00004
2031	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2031	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2031	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2031	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2031	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2031	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2031	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2031	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2031	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2031	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2031	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2031	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2031	L07	Aerial Lifts	75 < hp <= 100	0.59	400.8	0.0652	0.0103	0.0707	0.0001	0.0083	0.0080	16.4	0.00048
2031	L07	Bore/Drill Rigs	100 < hp <= 175	0.43	120.0	0.0114	0.0038	0.0447	0.0000	0.0026	0.0025	4.8	0.00020
2031	L07	Cement & Mortar Mixers	300 < hp <= 600	0.59	660.0	0.3154	0.0674	1.1890	0.0005	0.0432	0.0419	123.9	0.00317
2031	L07	Cranes	175 < hp <= 300	0.43	600.0	0.0060	0.0021	0.0253	0.0001	0.0014	0.0013	41.1	0.00012

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	L07	Excavators	100 < hp <= 175	0.59	160.8	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2031	L07	Forklifts	75 < hp <= 100	0.59	801.6	0.0027	0.0004	0.0447	0.0001	0.0006	0.0006	28.2	0.00003
2031	L07	Off-highway Trucks	175 < hp <= 300	0.43	160.8	0.0005	0.0002	0.0026	0.0000	0.0002	0.0001	11.1	0.00001
2031	L07	Off-highway Trucks	300 < hp <= 600	0.59	1,536.0	0.0250	0.0073	0.0957	0.0009	0.0061	0.0059	291.9	0.00036
2031	L07	Pavers	100 < hp <= 175	0.59	79.2	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2031	L07	Pumps	6 < hp <= 11	0.43	450.0	0.0061	0.0019	0.0099	0.0000	0.0006	0.0006	1.3	0.00015
2031	L07	Rubber Tire Loaders	75 < hp <= 100	0.21	79.2	0.0005	0.0000	0.0019	0.0000	0.0001	0.0001	1.0	0.00000
2031	L07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	679.2	0.0621	0.0108	0.0568	0.0000	0.0083	0.0080	9.9	0.00049
2031	L07	Trenchers	50 < hp <= 75	0.59	319.2	0.0111	0.0017	0.0445	0.0000	0.0013	0.0013	8.4	0.00017
2031	S01	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2031	S01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2031	S01	Air Compressors	75 < hp <= 100	0.43	15.8	0.0003	0.0000	0.0010	0.0000	0.0001	0.0001	0.4	0.00000
2031	S01	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2031	S01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	37.2	0.0022	0.0004	0.0048	0.0000	0.0004	0.0004	0.9	0.00002
2031	S01	Concrete/Industrial Saws	25 < hp <= 40	0.59	15.8	0.0001	0.0000	0.0011	0.0000	0.0000	0.0000	0.2	0.00000
2031	S01	Concrete/Industrial Saws	6 < hp <= 11	0.7	37.2	0.0008	0.0003	0.0013	0.0000	0.0001	0.0001	0.2	0.00002
2031	S01	Cranes	175 < hp <= 300	0.43	19.0	0.0002	0.0001	0.0008	0.0000	0.0000	0.0000	1.3	0.00000
2031	S01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	508.0	0.0056	0.0009	0.0159	0.0001	0.0014	0.0014	28.2	0.00006
2031	S01	Excavators	100 < hp <= 175	0.59	232.9	0.0021	0.0003	0.0069	0.0000	0.0005	0.0005	12.9	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	S01	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2031	S01	Generator Sets	25 < hp <= 40	0.43	30.0	0.0004	0.0001	0.0017	0.0000	0.0001	0.0001	0.3	0.00001
2031	S01	Graders	175 < hp <= 300	0.59	5.4	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.5	0.00000
2031	S01	Irrigation Sets	300 < hp <= 600	0.59	4.8	0.0014	0.0003	0.0050	0.0000	0.0002	0.0002	0.9	0.00002
2031	S01	Off-highway Trucks	300 < hp <= 600	0.59	4,815.9	0.0784	0.0228	0.3001	0.0027	0.0190	0.0184	915.1	0.00114
2031	S01	Other Construction Equipment	100 < hp <= 175	0.43	191.3	0.0037	0.0009	0.0104	0.0000	0.0008	0.0008	7.7	0.00006
2031	S01	Pavers	100 < hp <= 175	0.59	21.7	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.2	0.00000
2031	S01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2031	S01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2031	S01	Pumps	6 < hp <= 11	0.43	4.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2031	S01	Rollers	75 < hp <= 100	0.59	275.6	0.0048	0.0004	0.0189	0.0000	0.0007	0.0007	9.7	0.00003
2031	S01	Scrapers	300 < hp <= 600	0.59	158.2	0.0129	0.0021	0.0348	0.0001	0.0021	0.0020	30.1	0.00013
2031	S01	Skid Steer Loaders	50 < hp <= 75	0.21	28.9	0.0036	0.0007	0.0030	0.0000	0.0005	0.0005	0.3	0.00002
2031	S01	Surfacing Equipment	16 < hp <= 25	0.59	23.4	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.2	0.00001
2031	S01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2031	S01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	89.5	0.0167	0.0050	0.0293	0.0000	0.0035	0.0034	5.8	0.00028
2031	S01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	84.0	0.0058	0.0010	0.0064	0.0000	0.0008	0.0007	0.9	0.00005
2031	S01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	147.3	0.0135	0.0023	0.0123	0.0000	0.0018	0.0017	2.1	0.00011
2031	T01	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	T01	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2031	T01	Air Compressors	75 < hp <= 100	0.43	51.8	0.0011	0.0001	0.0034	0.0000	0.0002	0.0002	1.3	0.00001
2031	T01	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2031	T01	Chain Saws > 6 HP	6 < hp <= 11	0.7	82.0	0.0926	0.0214	0.0005	0.0000	0.0034	0.0031	0.2	0.00000
2031	T01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	82.0	0.0048	0.0009	0.0106	0.0000	0.0008	0.0008	2.1	0.00004
2031	T01	Concrete/Industrial Saws	25 < hp <= 40	0.59	51.8	0.0004	0.0001	0.0034	0.0000	0.0000	0.0000	0.7	0.00002
2031	T01	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2031	T01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	412.7	0.0046	0.0007	0.0130	0.0001	0.0011	0.0011	22.9	0.00005
2031	T01	Excavators	100 < hp <= 175	0.59	558.8	0.0049	0.0008	0.0165	0.0001	0.0012	0.0011	31.0	0.00006
2031	T01	Forklifts	75 < hp <= 100	0.59	3,700.0	0.0125	0.0018	0.2062	0.0004	0.0029	0.0028	130.1	0.00012
2031	T01	Generator Sets	25 < hp <= 40	0.43	301.0	0.0039	0.0011	0.0175	0.0000	0.0006	0.0006	3.1	0.00009
2031	T01	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2031	T01	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2031	T01	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2031	T01	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2031	T01	Off-highway Trucks	300 < hp <= 600	0.59	12,536.6	0.2042	0.0593	0.7811	0.0070	0.0494	0.0480	2,382.3	0.00297
2031	T01	Other Construction Equipment	100 < hp <= 175	0.43	516.6	0.0099	0.0023	0.0281	0.0001	0.0022	0.0021	20.9	0.00015
2031	T01	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2031	T01	Pavers	100 < hp <= 175	0.59	51.8	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	2.9	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	T01	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2031	T01	Pumps	6 < hp <= 11	0.43	254.0	0.0034	0.0011	0.0056	0.0000	0.0004	0.0003	0.7	0.00008
2031	T01	Rollers	75 < hp <= 100	0.59	194.3	0.0033	0.0003	0.0133	0.0000	0.0005	0.0005	6.8	0.00002
2031	T01	Scrapers	300 < hp <= 600	0.59	64.8	0.0053	0.0008	0.0143	0.0000	0.0009	0.0008	12.3	0.00005
2031	T01	Skid Steer Loaders	50 < hp <= 75	0.21	15.9	0.0020	0.0004	0.0017	0.0000	0.0003	0.0003	0.2	0.00001
2031	T01	Surfacing Equipment	16 < hp <= 25	0.59	51.8	0.0013	0.0003	0.0032	0.0000	0.0001	0.0001	0.5	0.00002
2031	T01	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2031	T01	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2031	T01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	129.1	0.0241	0.0073	0.0423	0.0000	0.0050	0.0049	8.3	0.00041
2031	T01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	466.1	0.0324	0.0057	0.0353	0.0000	0.0043	0.0041	5.1	0.00028
2031	T01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	757.5	0.0693	0.0120	0.0634	0.0000	0.0092	0.0089	11.0	0.00055
2031	T02	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198
2031	T02	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2031	T02	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2031	T02	Chain Saws > 6 HP	6 < hp <= 11	0.7	40.0	0.0452	0.0104	0.0003	0.0000	0.0017	0.0015	0.1	0.00000
2031	T02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2031	T02	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2031	T02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	140.6	0.0016	0.0002	0.0044	0.0000	0.0004	0.0004	7.8	0.00002
2031	T02	Excavators	100 < hp <= 175	0.59	276.6	0.0024	0.0004	0.0082	0.0000	0.0006	0.0006	15.3	0.00003
2031	T02	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	T02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2031	T02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2031	T02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2031	T02	Off-highway Trucks	300 < hp <= 600	0.59	8,121.1	0.1322	0.0384	0.5060	0.0045	0.0320	0.0311	1,543.2	0.00192
2031	T02	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2031	T02	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2031	T02	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2031	T02	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2031	T02	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2031	T02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2031	T02	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2031	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.21	80.0	0.0030	0.0009	0.0053	0.0000	0.0006	0.0006	1.1	0.00005
2031	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2031	T02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2031	T02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2031	T02	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2032	A04	Air Compressors	75 < hp <= 100	0.43	15.4	0.0003	0.0000	0.0010	0.0000	0.0001	0.0001	0.4	0.00000
2032	A04	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	13.2	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.3	0.00001
2032	A04	Concrete/Industrial Saws	25 < hp <= 40	0.59	15.4	0.0001	0.0000	0.0010	0.0000	0.0000	0.0000	0.2	0.00000
2032	A04	Concrete/Industrial Saws	6 < hp <= 11	0.7	13.2	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2032	A04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	99.7	0.0011	0.0002	0.0031	0.0000	0.0003	0.0003	5.5	0.00001
2032	A04	Excavators	100 < hp <= 175	0.59	247.1	0.0022	0.0003	0.0073	0.0000	0.0005	0.0005	13.7	0.00002
2032	A04	Graders	175 < hp <= 300	0.59	5.4	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.5	0.00000
2032	A04	Irrigation Sets	300 < hp <= 600	0.59	4.9	0.0014	0.0003	0.0051	0.0000	0.0002	0.0002	0.9	0.00002
2032	A04	Off-highway Trucks	300 < hp <= 600	0.59	3,870.3	0.0630	0.0183	0.2411	0.0021	0.0153	0.0148	735.5	0.00092
2032	A04	Other Construction Equipment	100 < hp <= 175	0.43	964.0	0.0185	0.0043	0.0524	0.0001	0.0040	0.0039	38.9	0.00029
2032	A04	Pavers	100 < hp <= 175	0.59	15.4	0.0002	0.0000	0.0005	0.0000	0.0001	0.0001	0.9	0.00000
2032	A04	Pumps	6 < hp <= 11	0.43	4.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2032	A04	Rollers	75 < hp <= 100	0.59	62.6	0.0011	0.0001	0.0043	0.0000	0.0002	0.0002	2.2	0.00001
2032	A04	Scrapers	300 < hp <= 600	0.59	19.2	0.0016	0.0003	0.0042	0.0000	0.0003	0.0002	3.7	0.00002
2032	A04	Skid Steer Loaders	50 < hp <= 75	0.21	16.9	0.0021	0.0004	0.0018	0.0000	0.0003	0.0003	0.2	0.00001
2032	A04	Surfacing Equipment	16 < hp <= 25	0.59	15.4	0.0004	0.0001	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2032	A04	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	64.2	0.0120	0.0036	0.0210	0.0000	0.0025	0.0024	4.1	0.00020
2032	A04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	32.7	0.0030	0.0005	0.0027	0.0000	0.0004	0.0004	0.5	0.00002
2032	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2032	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2032	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2032	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2032	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2032	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2032	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2032	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2032	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2032	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2032	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2032	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2032	T02	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198
2032	T02	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2032	T02	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2032	T02	Chain Saws > 6 HP	6 < hp <= 11	0.7	40.0	0.0452	0.0104	0.0003	0.0000	0.0017	0.0015	0.1	0.00000
2032	T02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2032	T02	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2032	T02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	110.6	0.0012	0.0002	0.0035	0.0000	0.0003	0.0003	6.1	0.00001
2032	T02	Excavators	100 < hp <= 175	0.59	246.6	0.0022	0.0003	0.0073	0.0000	0.0005	0.0005	13.7	0.00002
2032	T02	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2032	T02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2032	T02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2032	T02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005

TABLE 6-4: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – PROPOSED ACTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2032	T02	Off-highway Trucks	300 < hp <= 600	0.59	8,061.3	0.1313	0.0381	0.5023	0.0045	0.0318	0.0308	1,531.8	0.00191
2032	T02	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2032	T02	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2032	T02	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2032	T02	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2032	T02	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2032	T02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2032	T02	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2032	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.21	80.0	0.0030	0.0009	0.0053	0.0000	0.0006	0.0006	1.1	0.00005
2032	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2032	T02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2032	T02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2032	T02	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021

Note: HP denotes horsepower; LF denotes load factor; hrs denotes hours; ST denotes short tons; MT denotes metric tons; CO denotes carbon monoxide, NO_x denotes nitrogen oxides, SO_x denotes sulfur oxides, VOC denotes volatile organic compounds, $PM_{2.5}$ denotes fine particulate matter, PM_{10} denotes coarse particulate matter, CO_2 denotes carbon dioxide, CH_4 denotes methane, N_2O denotes nitrous oxide.
Source: MOVES 4, Landrum & Brown 2024

EXHIBIT 6-2: CONSTRUCTION SCHEDULE - HYBRID TERMINAL OPTION

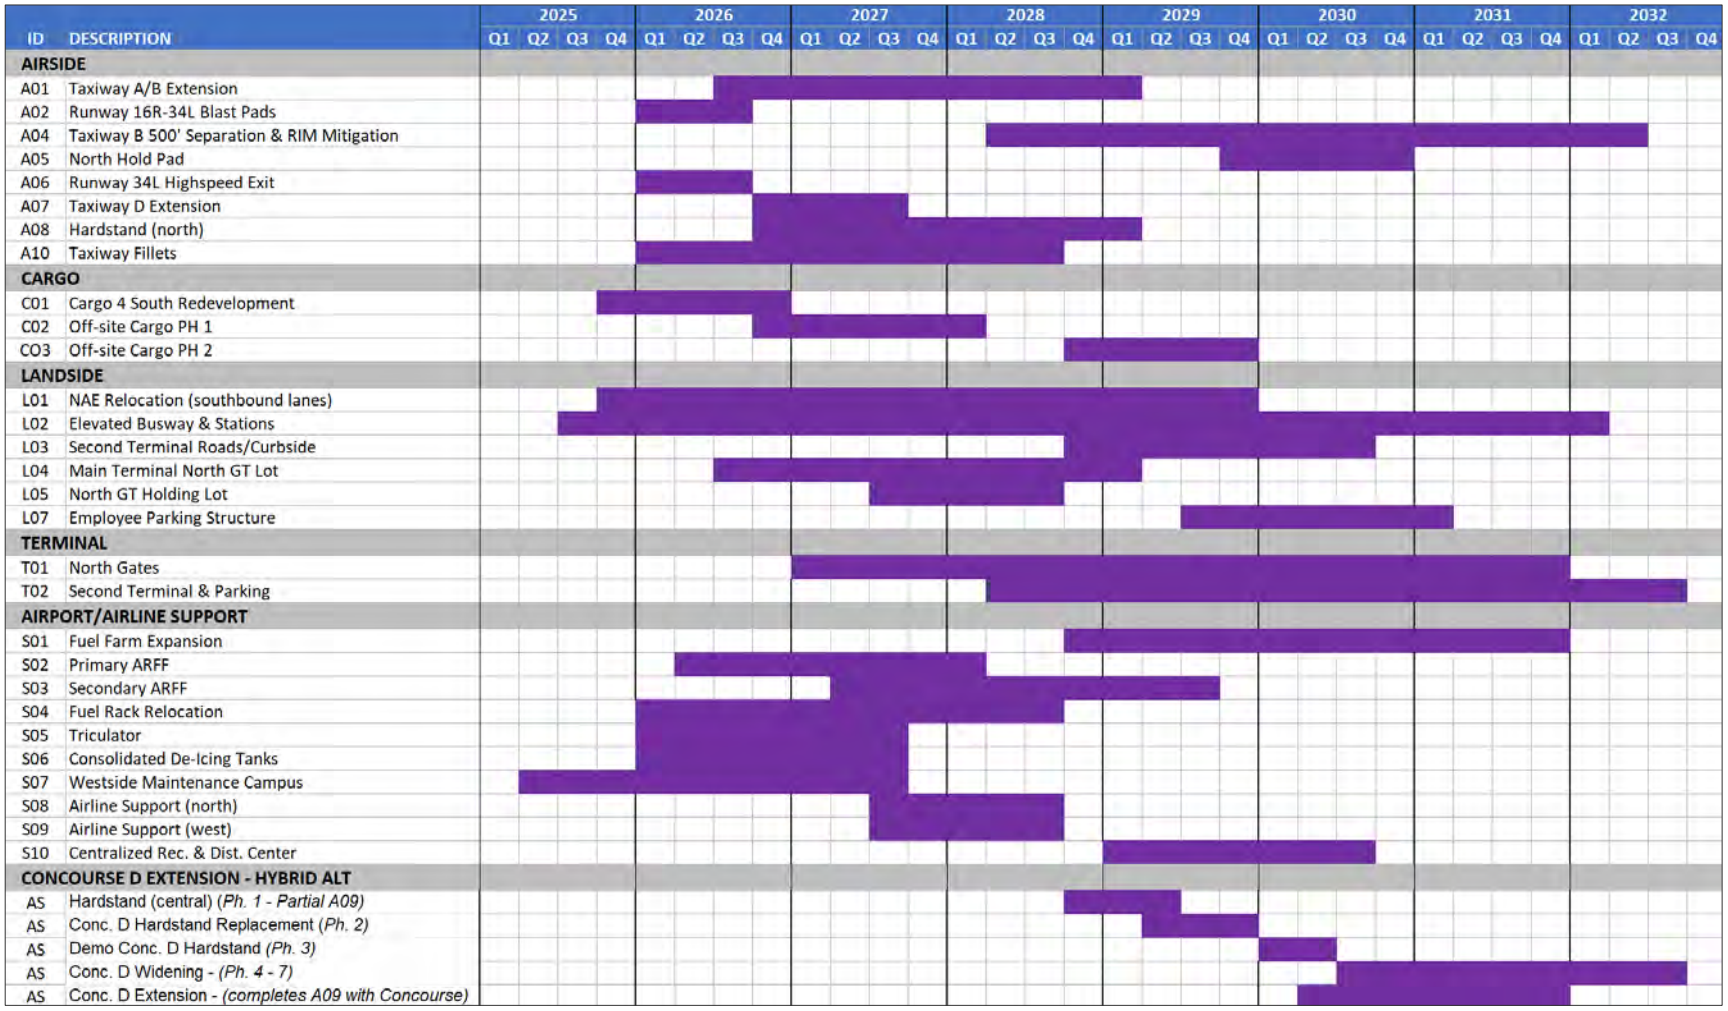

TABLE 6-5: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2025	C01	Employee Commute	109,825	0.4	0.00	0.01	0.0002	0.0003	0.0003	35.0	0.001	0.000
2025	C01	Material Delivery	76,293	0.2	0.01	0.31	0.0005	0.0040	0.0037	124.8	0.001	0.017
2025	L01	Employee Commute	250,770	0.9	0.01	0.03	0.0004	0.0007	0.0006	79.9	0.002	0.000
2025	L01	Material Delivery	9,812	0.0	0.00	0.04	0.0001	0.0005	0.0005	16.0	0.000	0.002
2025	L02	Employee Commute	491,394	1.7	0.02	0.06	0.0009	0.0013	0.0012	156.5	0.005	0.001
2025	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2025	S07	Employee Commute	3,248,191	11.5	0.11	0.40	0.0057	0.0086	0.0076	1034.6	0.032	0.006
2025	S07	Material Delivery	85,324	0.2	0.01	0.34	0.0005	0.0045	0.0041	139.6	0.002	0.019
2026	A01	Employee Commute	1,651,716	5.8	0.06	0.20	0.0029	0.0044	0.0039	526.1	0.016	0.003
2026	A01	Material Delivery	66,908	0.1	0.01	0.27	0.0004	0.0035	0.0032	109.4	0.001	0.015
2026	A02	Employee Commute	1,936,176	6.8	0.07	0.24	0.0034	0.0051	0.0046	616.7	0.019	0.003
2026	A02	Material Delivery	16,204	0.0	0.00	0.06	0.0001	0.0009	0.0008	26.5	0.000	0.004
2026	A06	Employee Commute	1,936,176	6.8	0.07	0.24	0.0034	0.0051	0.0046	616.7	0.019	0.003
2026	A06	Material Delivery	103,397	0.2	0.01	0.41	0.0006	0.0054	0.0050	169.1	0.002	0.023
2026	A07	Employee Commute	163,020	0.6	0.01	0.02	0.0003	0.0004	0.0004	51.9	0.002	0.000
2026	A07	Material Delivery	13,924	0.0	0.00	0.06	0.0001	0.0007	0.0007	22.8	0.000	0.003
2026	A08	Employee Commute	148,590	0.5	0.01	0.02	0.0003	0.0004	0.0003	47.3	0.001	0.000
2026	A08	Material Delivery	100,765	0.2	0.01	0.40	0.0006	0.0053	0.0049	164.8	0.002	0.022
2026	A10	Employee Commute	936,540	3.3	0.03	0.12	0.0017	0.0025	0.0022	298.3	0.009	0.002
2026	A10	Material Delivery	2,394	0.0	0.00	0.01	0.0000	0.0001	0.0001	3.9	0.000	0.001
2026	C01	Employee Commute	1,736,856	6.1	0.06	0.21	0.0031	0.0046	0.0041	553.2	0.017	0.003
2026	C01	Material Delivery	268,684	0.6	0.02	1.07	0.0016	0.0142	0.0130	439.5	0.005	0.059
2026	C02	Employee Commute	181,253	0.6	0.01	0.02	0.0003	0.0005	0.0004	57.7	0.002	0.000
2026	C02	Material Delivery	41,244	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.5	0.001	0.009
2026	L01	Employee Commute	3,116,124	11.0	0.11	0.38	0.0055	0.0083	0.0073	992.5	0.031	0.005
2026	L01	Material Delivery	39,630	0.1	0.00	0.16	0.0002	0.0021	0.0019	64.8	0.001	0.009
2026	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2026	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2026	L04	Employee Commute	1,204,731	4.3	0.04	0.15	0.0021	0.0032	0.0028	383.7	0.012	0.002
2026	L04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2026	S02	Employee Commute	1,273,800	4.5	0.04	0.16	0.0022	0.0034	0.0030	405.7	0.013	0.002
2026	S02	Material Delivery	113,948	0.3	0.01	0.46	0.0007	0.0060	0.0055	186.4	0.002	0.025
2026	S04	Employee Commute	4,282,542	15.1	0.15	0.53	0.0076	0.0114	0.0101	1364.0	0.042	0.007
2026	S04	Material Delivery	4,319	0.0	0.00	0.02	0.0000	0.0002	0.0002	7.1	0.000	0.001
2026	S05	Employee Commute	3,392,297	12.0	0.12	0.42	0.0060	0.0090	0.0080	1080.5	0.034	0.006
2026	S05	Material Delivery	3,297	0.0	0.00	0.01	0.0000	0.0002	0.0002	5.4	0.000	0.001

TABLE 6-5: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2026	S06	Employee Commute	3,154,437	11.1	0.11	0.39	0.0056	0.0084	0.0074	1004.7	0.031	0.005
2026	S06	Material Delivery	4,519	0.0	0.00	0.02	0.0000	0.0002	0.0002	7.4	0.000	0.001
2026	S07	Employee Commute	5,789,520	20.4	0.20	0.71	0.0102	0.0154	0.0136	1844.0	0.057	0.010
2026	S07	Material Delivery	100,695	0.2	0.01	0.40	0.0006	0.0053	0.0049	164.7	0.002	0.022
2027	A01	Employee Commute	6,589,836	23.3	0.22	0.81	0.0116	0.0175	0.0155	2098.9	0.065	0.011
2027	A01	Material Delivery	129,672	0.3	0.01	0.52	0.0008	0.0068	0.0063	212.1	0.002	0.028
2027	A07	Employee Commute	1,452,132	5.1	0.05	0.18	0.0026	0.0039	0.0034	462.5	0.014	0.003
2027	A07	Material Delivery	40,954	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.0	0.001	0.009
2027	A08	Employee Commute	1,047,222	3.7	0.04	0.13	0.0018	0.0028	0.0025	333.5	0.010	0.002
2027	A08	Material Delivery	371,148	0.8	0.03	1.48	0.0022	0.0196	0.0180	607.1	0.007	0.081
2027	A10	Employee Commute	936,540	3.3	0.03	0.12	0.0017	0.0025	0.0022	298.3	0.009	0.002
2027	A10	Material Delivery	2,394	0.0	0.00	0.01	0.0000	0.0001	0.0001	3.9	0.000	0.001
2027	C02	Employee Commute	2,894,760	10.2	0.10	0.36	0.0051	0.0077	0.0068	922.0	0.029	0.005
2027	C02	Material Delivery	41,244	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.5	0.001	0.009
2027	L01	Employee Commute	3,116,124	11.0	0.11	0.38	0.0055	0.0083	0.0073	992.5	0.031	0.005
2027	L01	Material Delivery	39,630	0.1	0.00	0.16	0.0002	0.0021	0.0019	64.8	0.001	0.009
2027	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2027	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2027	L04	Employee Commute	4,827,438	17.0	0.16	0.59	0.0085	0.0128	0.0114	1537.6	0.048	0.008
2027	L04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2027	L05	Employee Commute	2,652,111	9.4	0.09	0.33	0.0047	0.0071	0.0062	844.7	0.026	0.005
2027	L05	Material Delivery	1,353	0.0	0.00	0.01	0.0000	0.0001	0.0001	2.2	0.000	0.000
2027	S02	Employee Commute	2,281,752	8.1	0.08	0.28	0.0040	0.0061	0.0054	726.8	0.023	0.004
2027	S02	Material Delivery	150,059	0.3	0.01	0.60	0.0009	0.0079	0.0073	245.4	0.003	0.033
2027	S03	Employee Commute	1,019,040	3.6	0.03	0.13	0.0018	0.0027	0.0024	324.6	0.010	0.002
2027	S03	Material Delivery	5,059	0.0	0.00	0.02	0.0000	0.0003	0.0002	8.3	0.000	0.001
2027	S04	Employee Commute	4,282,542	15.1	0.15	0.53	0.0076	0.0114	0.0101	1364.0	0.042	0.007
2027	S04	Material Delivery	4,319	0.0	0.00	0.02	0.0000	0.0002	0.0002	7.1	0.000	0.001
2027	S05	Employee Commute	845,883	3.0	0.03	0.10	0.0015	0.0022	0.0020	269.4	0.008	0.001
2027	S05	Material Delivery	2,853	0.0	0.00	0.01	0.0000	0.0002	0.0001	4.7	0.000	0.001
2027	S06	Employee Commute	4,407,348	15.6	0.15	0.54	0.0078	0.0117	0.0104	1403.8	0.044	0.008
2027	S06	Material Delivery	3,853	0.0	0.00	0.02	0.0000	0.0002	0.0002	6.3	0.000	0.001
2027	S07	Employee Commute	3,248,191	11.5	0.11	0.40	0.0057	0.0086	0.0076	1034.6	0.032	0.006
2027	S07	Material Delivery	85,324	0.2	0.01	0.34	0.0005	0.0045	0.0041	139.6	0.002	0.019
2027	S08	Employee Commute	904,613	3.2	0.03	0.11	0.0016	0.0024	0.0021	288.1	0.009	0.002
2027	S08	Material Delivery	40,058	0.1	0.00	0.16	0.0002	0.0021	0.0019	65.5	0.001	0.009

TABLE 6-5: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2027	S09	Employee Commute	904,613	3.2	0.03	0.11	0.0016	0.0024	0.0021	288.1	0.009	0.002
2027	S09	Material Delivery	40,058	0.1	0.00	0.16	0.0002	0.0021	0.0019	65.5	0.001	0.009
2027	T01	Employee Commute	10,131,660	35.8	0.34	1.25	0.0179	0.0269	0.0238	3227.0	0.100	0.018
2027	T01	Material Delivery	239,615	0.5	0.02	0.96	0.0014	0.0126	0.0116	391.9	0.004	0.052
2028	A01	Employee Commute	6,589,836	23.3	0.22	0.81	0.0116	0.0175	0.0155	2098.9	0.065	0.011
2028	A01	Material Delivery	129,672	0.3	0.01	0.52	0.0008	0.0068	0.0063	212.1	0.002	0.028
2028	A04	Employee Commute	2,394,744	8.5	0.08	0.30	0.0042	0.0064	0.0056	762.7	0.024	0.004
2028	A04	Material Delivery	100,575	0.2	0.01	0.40	0.0006	0.0053	0.0049	164.5	0.002	0.022
2028	A08	Employee Commute	1,047,222	3.7	0.04	0.13	0.0018	0.0028	0.0025	333.5	0.010	0.002
2028	A08	Material Delivery	403,060	0.9	0.04	1.61	0.0024	0.0212	0.0195	659.3	0.007	0.088
2028	A10	Employee Commute	528,627	1.9	0.02	0.07	0.0009	0.0014	0.0012	168.4	0.005	0.001
2028	A10	Material Delivery	1,862	0.0	0.00	0.01	0.0000	0.0001	0.0001	3.0	0.000	0.000
2028	C02	Employee Commute	116,903	0.4	0.00	0.01	0.0002	0.0003	0.0003	37.2	0.001	0.000
2028	C02	Material Delivery	41,244	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.5	0.001	0.009
2028	C03	Employee Commute	216,645	0.8	0.01	0.03	0.0004	0.0006	0.0005	69.0	0.002	0.000
2028	C03	Material Delivery	41,244	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.5	0.001	0.009
2028	H01	Employee Commute	134,550	0.5	0.00	0.02	0.0002	0.0004	0.0003	42.9	0.001	0.000
2028	H01	Material Delivery	25,929	0.1	0.00	0.10	0.0002	0.0014	0.0013	42.4	0.000	0.006
2028	L01	Employee Commute	3,116,124	11.0	0.11	0.38	0.0055	0.0083	0.0073	992.5	0.031	0.005
2028	L01	Material Delivery	39,630	0.1	0.00	0.16	0.0002	0.0021	0.0019	64.8	0.001	0.009
2028	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2028	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2028	L03	Employee Commute	418,275	1.5	0.01	0.05	0.0007	0.0011	0.0010	133.2	0.004	0.001
2028	L03	Material Delivery	12,176	0.0	0.00	0.05	0.0001	0.0006	0.0006	19.9	0.000	0.003
2028	L04	Employee Commute	4,827,438	17.0	0.16	0.59	0.0085	0.0128	0.0114	1537.6	0.048	0.008
2028	L04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2028	L05	Employee Commute	5,955,015	21.0	0.20	0.73	0.0105	0.0158	0.0140	1896.7	0.059	0.010
2028	L05	Material Delivery	1,353	0.0	0.00	0.01	0.0000	0.0001	0.0001	2.2	0.000	0.000
2028	S01	Employee Commute	386,685	1.4	0.01	0.05	0.0007	0.0010	0.0009	123.2	0.004	0.001
2028	S01	Material Delivery	13,537	0.0	0.00	0.05	0.0001	0.0007	0.0007	22.1	0.000	0.003
2028	S02	Employee Commute	145,860	0.5	0.00	0.02	0.0003	0.0004	0.0003	46.5	0.001	0.000
2028	S02	Material Delivery	41,309	0.1	0.00	0.17	0.0002	0.0022	0.0020	67.6	0.001	0.009
2028	S03	Employee Commute	1,813,482	6.4	0.06	0.22	0.0032	0.0048	0.0043	577.6	0.018	0.003
2028	S03	Material Delivery	5,059	0.0	0.00	0.02	0.0000	0.0003	0.0002	8.3	0.000	0.001
2028	S04	Employee Commute	2,401,113	8.5	0.08	0.30	0.0042	0.0064	0.0056	764.8	0.024	0.004
2028	S04	Material Delivery	3,608	0.0	0.00	0.01	0.0000	0.0002	0.0002	5.9	0.000	0.001

TABLE 6-5: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2028	S08	Employee Commute	2,034,896	7.2	0.07	0.25	0.0036	0.0054	0.0048	648.1	0.020	0.004
2028	S08	Material Delivery	41,525	0.1	0.00	0.17	0.0003	0.0022	0.0020	67.9	0.001	0.009
2028	S09	Employee Commute	2,034,896	7.2	0.07	0.25	0.0036	0.0054	0.0048	648.1	0.020	0.004
2028	S09	Material Delivery	41,525	0.1	0.00	0.17	0.0003	0.0022	0.0020	67.9	0.001	0.009
2028	T01	Employee Commute	10,131,660	35.8	0.34	1.25	0.0179	0.0269	0.0238	3227.0	0.100	0.018
2028	T01	Material Delivery	239,615	0.5	0.02	0.96	0.0014	0.0126	0.0116	391.9	0.004	0.052
2028	T02	Employee Commute	9,000,176	31.8	0.31	1.11	0.0159	0.0239	0.0212	2866.6	0.089	0.016
2028	T02	Material Delivery	117,474	0.3	0.01	0.47	0.0007	0.0062	0.0057	192.1	0.002	0.026
2029	A01	Employee Commute	416,130	1.5	0.01	0.05	0.0007	0.0011	0.0010	132.5	0.004	0.001
2029	A01	Material Delivery	33,493	0.1	0.00	0.13	0.0002	0.0018	0.0016	54.8	0.001	0.007
2029	A04	Employee Commute	4,257,000	15.0	0.14	0.52	0.0075	0.0113	0.0100	1355.9	0.042	0.007
2029	A04	Material Delivery	134,544	0.3	0.01	0.54	0.0008	0.0071	0.0065	220.1	0.002	0.029
2029	A05	Employee Commute	130,845	0.5	0.00	0.02	0.0002	0.0003	0.0003	41.7	0.001	0.000
2029	A05	Material Delivery	2,220	0.0	0.00	0.01	0.0000	0.0001	0.0001	3.6	0.000	0.000
2029	A08	Employee Commute	148,590	0.5	0.01	0.02	0.0003	0.0004	0.0003	47.3	0.001	0.000
2029	A08	Material Delivery	100,765	0.2	0.01	0.40	0.0006	0.0053	0.0049	164.8	0.002	0.022
2029	C03	Employee Commute	3,473,712	12.3	0.12	0.43	0.0061	0.0092	0.0082	1106.4	0.034	0.006
2029	C03	Material Delivery	41,244	0.1	0.00	0.16	0.0002	0.0022	0.0020	67.5	0.001	0.009
2029	H01	Employee Commute	430,854	1.5	0.01	0.05	0.0008	0.0011	0.0010	137.2	0.004	0.001
2029	H01	Material Delivery	25,929	0.1	0.00	0.10	0.0002	0.0014	0.0013	42.4	0.000	0.006
2029	H02	Employee Commute	948,599	3.3	0.03	0.12	0.0017	0.0025	0.0022	302.1	0.009	0.002
2029	H02	Material Delivery	56,259	0.1	0.01	0.23	0.0003	0.0030	0.0027	92.0	0.001	0.012
2029	L01	Employee Commute	3,116,124	11.0	0.11	0.38	0.0055	0.0083	0.0073	992.5	0.031	0.005
2029	L01	Material Delivery	39,630	0.1	0.00	0.16	0.0002	0.0021	0.0019	64.8	0.001	0.009
2029	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2029	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2029	L03	Employee Commute	6,632,406	23.4	0.23	0.82	0.0117	0.0176	0.0156	2112.5	0.066	0.012
2029	L03	Material Delivery	48,706	0.1	0.00	0.19	0.0003	0.0026	0.0024	79.7	0.001	0.011
2029	L04	Employee Commute	304,590	1.1	0.01	0.04	0.0005	0.0008	0.0007	97.0	0.003	0.001
2029	L04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2029	L07	Employee Commute	1,894,365	6.7	0.06	0.23	0.0033	0.0050	0.0045	603.4	0.019	0.003
2029	L07	Material Delivery	87,092	0.2	0.01	0.35	0.0005	0.0046	0.0042	142.5	0.002	0.019
2029	S01	Employee Commute	5,585,184	19.7	0.19	0.69	0.0098	0.0148	0.0131	1778.9	0.055	0.010
2029	S01	Material Delivery	48,368	0.1	0.00	0.19	0.0003	0.0025	0.0023	79.1	0.001	0.011
2029	S03	Employee Commute	1,019,040	3.6	0.03	0.13	0.0018	0.0027	0.0024	324.6	0.010	0.002
2029	S03	Material Delivery	5,059	0.0	0.00	0.02	0.0000	0.0003	0.0002	8.3	0.000	0.001

TABLE 6-5: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2029	S10	Employee Commute	8,275,608	29.2	0.28	1.02	0.0146	0.0220	0.0195	2635.8	0.082	0.014
2029	S10	Material Delivery	98,224	0.2	0.01	0.39	0.0006	0.0052	0.0048	160.7	0.002	0.022
2029	T01	Employee Commute	10,131,660	35.8	0.34	1.25	0.0179	0.0269	0.0238	3227.0	0.100	0.018
2029	T01	Material Delivery	239,615	0.5	0.02	0.96	0.0014	0.0126	0.0116	391.9	0.004	0.052
2029	T02	Employee Commute	16,041,705	56.6	0.55	1.98	0.0283	0.0426	0.0377	5109.4	0.158	0.028
2029	T02	Material Delivery	124,124	0.3	0.01	0.50	0.0007	0.0065	0.0060	203.0	0.002	0.027
2030	A04	Employee Commute	4,257,000	15.0	0.14	0.52	0.0075	0.0113	0.0100	1355.9	0.042	0.007
2030	A04	Material Delivery	134,544	0.3	0.01	0.54	0.0008	0.0071	0.0065	220.1	0.002	0.029
2030	A05	Employee Commute	2,068,902	7.3	0.07	0.25	0.0036	0.0055	0.0049	659.0	0.020	0.004
2030	A05	Material Delivery	8,880	0.0	0.00	0.04	0.0001	0.0005	0.0004	14.5	0.000	0.002
2030	H03	Employee Commute	633,229	2.2	0.02	0.08	0.0011	0.0017	0.0015	201.7	0.006	0.001
2030	H03	Material Delivery	11,110	0.0	0.00	0.04	0.0001	0.0006	0.0005	18.2	0.000	0.002
2030	H04	Employee Commute	140,718	0.5	0.00	0.02	0.0002	0.0004	0.0003	44.8	0.001	0.000
2030	H04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2030	H05	Employee Commute	648,146	2.3	0.02	0.08	0.0011	0.0017	0.0015	206.4	0.006	0.001
2030	H05	Material Delivery	63,787	0.1	0.01	0.26	0.0004	0.0034	0.0031	104.3	0.001	0.014
2030	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2030	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2030	L03	Employee Commute	3,725,865	13.2	0.13	0.46	0.0066	0.0099	0.0088	1186.7	0.037	0.006
2030	L03	Material Delivery	36,530	0.1	0.00	0.15	0.0002	0.0019	0.0018	59.8	0.001	0.008
2030	L07	Employee Commute	7,577,460	26.8	0.26	0.93	0.0134	0.0201	0.0178	2413.5	0.075	0.013
2030	L07	Material Delivery	87,092	0.2	0.01	0.35	0.0005	0.0046	0.0042	142.5	0.002	0.019
2030	S01	Employee Commute	5,585,184	19.7	0.19	0.69	0.0098	0.0148	0.0131	1778.9	0.055	0.010
2030	S01	Material Delivery	48,368	0.1	0.00	0.19	0.0003	0.0025	0.0023	79.1	0.001	0.011
2030	S10	Employee Commute	4,643,001	16.4	0.16	0.57	0.0082	0.0123	0.0109	1478.8	0.046	0.008
2030	S10	Material Delivery	98,224	0.2	0.01	0.39	0.0006	0.0052	0.0048	160.7	0.002	0.022
2030	T01	Employee Commute	10,131,660	35.8	0.34	1.25	0.0179	0.0269	0.0238	3227.0	0.100	0.018
2030	T01	Material Delivery	239,615	0.5	0.02	0.96	0.0014	0.0126	0.0116	391.9	0.004	0.052
2030	T02	Employee Commute	16,041,705	56.6	0.55	1.98	0.0283	0.0426	0.0377	5109.4	0.158	0.028
2030	T02	Material Delivery	124,124	0.3	0.01	0.50	0.0007	0.0065	0.0060	203.0	0.002	0.027
2031	A04	Employee Commute	4,257,000	15.0	0.14	0.52	0.0075	0.0113	0.0100	1355.9	0.042	0.007
2031	A04	Material Delivery	134,544	0.3	0.01	0.54	0.0008	0.0071	0.0065	220.1	0.002	0.029
2031	H04	Employee Commute	562,870	2.0	0.02	0.07	0.0010	0.0015	0.0013	179.3	0.006	0.001
2031	H04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2031	H05	Employee Commute	977,224	3.4	0.03	0.12	0.0017	0.0026	0.0023	311.3	0.010	0.002
2031	H05	Material Delivery	63,787	0.1	0.01	0.26	0.0004	0.0034	0.0031	104.3	0.001	0.014

TABLE 6-5: ON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Activity	Annual VMT	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (ST)	CH_4 (ST)	N_2O (ST)
2031	L02	Employee Commute	1,965,578	6.9	0.07	0.24	0.0035	0.0052	0.0046	626.1	0.019	0.003
2031	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2031	L07	Employee Commute	478,335	1.7	0.02	0.06	0.0008	0.0013	0.0011	152.4	0.005	0.001
2031	L07	Material Delivery	87,092	0.2	0.01	0.35	0.0005	0.0046	0.0042	142.5	0.002	0.019
2031	S01	Employee Commute	5,585,184	19.7	0.19	0.69	0.0098	0.0148	0.0131	1778.9	0.055	0.010
2031	S01	Material Delivery	48,368	0.1	0.00	0.19	0.0003	0.0025	0.0023	79.1	0.001	0.011
2031	T01	Employee Commute	10,131,660	35.8	0.34	1.25	0.0179	0.0269	0.0238	3227.0	0.100	0.018
2031	T01	Material Delivery	239,615	0.5	0.02	0.96	0.0014	0.0126	0.0116	391.9	0.004	0.052
2031	T02	Employee Commute	16,041,705	56.6	0.55	1.98	0.0283	0.0426	0.0377	5109.4	0.158	0.028
2031	T02	Material Delivery	124,124	0.3	0.01	0.50	0.0007	0.0065	0.0060	203.0	0.002	0.027
2032	A04	Employee Commute	1,064,250	3.8	0.04	0.13	0.0019	0.0028	0.0025	339.0	0.011	0.002
2032	A04	Material Delivery	67,115	0.1	0.01	0.27	0.0004	0.0035	0.0033	109.8	0.001	0.015
2032	H04	Employee Commute	315,796	1.1	0.01	0.04	0.0006	0.0008	0.0007	100.6	0.003	0.001
2032	H04	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2032	L02	Employee Commute	123,801	0.4	0.00	0.02	0.0002	0.0003	0.0003	39.4	0.001	0.000
2032	L02	Material Delivery	37,858	0.1	0.00	0.15	0.0002	0.0020	0.0018	61.9	0.001	0.008
2032	T02	Employee Commute	9,000,160	31.8	0.31	1.11	0.0159	0.0239	0.0212	2866.6	0.089	0.016
2032	T02	Material Delivery	117,474	0.3	0.01	0.47	0.0007	0.0062	0.0057	192.1	0.002	0.026

Note: VMT denotes vehicle miles traveled; ST denotes short tons; CO denotes carbon monoxide, NO_x denotes nitrogen oxides, SO_x denotes sulfur oxides, VOC denotes volatile organic compounds, $PM_{2.5}$ denotes fine particulate matter, PM_{10} denotes coarse particulate matter, CO_2 denotes carbon dioxide, CH_4 denotes methane, N_2O denotes nitrous oxide.

Source: MOVES 4, Landrum & Brown 2024

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2025	C01	Aerial Lifts	50 < hp <= 75	0.21	3,024.0	0.1152	0.0219	0.1918	0.0001	0.0137	0.0133	33.1	0.00119
2025	C01	Aerial Lifts	75 < hp <= 100	0.59	936.1	0.1522	0.0241	0.1652	0.0001	0.0193	0.0187	38.4	0.00112
2025	C01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2025	C01	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2025	C01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2025	C01	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2025	C01	Cranes	175 < hp <= 300	0.43	336.1	0.0033	0.0012	0.0142	0.0001	0.0008	0.0007	23.0	0.00007
2025	C01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	22.6	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.3	0.00000
2025	C01	Excavators	100 < hp <= 175	0.59	119.4	0.0011	0.0002	0.0035	0.0000	0.0003	0.0002	6.6	0.00001
2025	C01	Forklifts	75 < hp <= 100	0.59	3,424.2	0.0115	0.0017	0.1909	0.0003	0.0027	0.0026	120.4	0.00011
2025	C01	Generator Sets	25 < hp <= 40	0.43	412.8	0.0054	0.0015	0.0240	0.0000	0.0009	0.0009	4.2	0.00013
2025	C01	Off-highway Trucks	300 < hp <= 600	0.59	2,240.3	0.0365	0.0106	0.1396	0.0012	0.0088	0.0086	425.7	0.00053
2025	C01	Other Construction Equipment	300 < hp <= 600	0.59	12.0	0.0047	0.0006	0.0107	0.0000	0.0007	0.0007	2.3	0.00004
2025	C01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2025	C01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2025	C01	Pumps	6 < hp <= 11	0.43	12.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2025	C01	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2025	C01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2025	C01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTIONN *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2025	C01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	249.6	0.0174	0.0030	0.0189	0.0000	0.0023	0.0022	2.7	0.00015
2025	C01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.1	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2025	L01	Chippers/Stump Grinders	75 < hp <= 100	0.43	4.8	0.0003	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00000
2025	L01	Concrete/Industrial Saws	6 < hp <= 11	0.7	4.8	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2025	L01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	51.7	0.0006	0.0001	0.0016	0.0000	0.0001	0.0001	2.9	0.00001
2025	L01	Excavators	100 < hp <= 175	0.59	28.3	0.0003	0.0000	0.0008	0.0000	0.0001	0.0001	1.6	0.00000
2025	L01	Graders	175 < hp <= 300	0.59	2.0	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.2	0.00000
2025	L01	Irrigation Sets	300 < hp <= 600	0.59	1.8	0.0005	0.0001	0.0019	0.0000	0.0001	0.0001	0.3	0.00001
2025	L01	Off-highway Trucks	300 < hp <= 600	0.59	1,014.0	0.0165	0.0048	0.0632	0.0006	0.0040	0.0039	192.7	0.00024
2025	L01	Other Construction Equipment	100 < hp <= 175	0.43	65.5	0.0013	0.0003	0.0036	0.0000	0.0003	0.0003	2.6	0.00002
2025	L01	Pavers	100 < hp <= 175	0.59	8.2	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2025	L01	Plate Compactors	3 < hp <= 6	0.43	12.2	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2025	L01	Pumps	6 < hp <= 11	0.43	1.6	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0	0.00000
2025	L01	Rollers	75 < hp <= 100	0.59	22.7	0.0004	0.0000	0.0016	0.0000	0.0001	0.0001	0.8	0.00000
2025	L01	Scrapers	300 < hp <= 600	0.59	7.0	0.0006	0.0001	0.0015	0.0000	0.0001	0.0001	1.3	0.00001
2025	L01	Skid Steer Loaders	50 < hp <= 75	0.21	12.9	0.0016	0.0003	0.0013	0.0000	0.0002	0.0002	0.1	0.00001
2025	L01	Surfacing Equipment	16 < hp <= 25	0.59	2.7	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2025	L01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	12.1	0.0023	0.0007	0.0040	0.0000	0.0005	0.0005	0.8	0.00004
2025	L01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	27.4	0.0025	0.0004	0.0023	0.0000	0.0003	0.0003	0.4	0.00002

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2025	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2025	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2025	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2025	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2025	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2025	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2025	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2025	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2025	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2025	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2025	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2025	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2025	S07	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2025	S07	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2025	S07	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2025	S07	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2025	S07	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2025	S07	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2025	S07	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2025	S07	Crawler Tractor/Dozers	100 < hp <= 175	0.59	61.5	0.0007	0.0001	0.0019	0.0000	0.0002	0.0002	3.4	0.00001
2025	S07	Excavators	100 < hp <= 175	0.59	270.3	0.0024	0.0004	0.0080	0.0000	0.0006	0.0006	15.0	0.00003
2025	S07	Forklifts	75 < hp <= 100	0.59	3,584.0	0.0121	0.0018	0.1998	0.0004	0.0028	0.0027	126.1	0.00012
2025	S07	Generator Sets	25 < hp <= 40	0.43	144.8	0.0019	0.0005	0.0084	0.0000	0.0003	0.0003	1.5	0.00004
2025	S07	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2025	S07	Off-highway Trucks	300 < hp <= 600	0.59	6,930.2	0.1129	0.0328	0.4318	0.0038	0.0273	0.0265	1,316.9	0.00164
2025	S07	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2025	S07	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2025	S07	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2025	S07	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2025	S07	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2025	S07	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2025	S07	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2025	S07	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	153.6	0.0107	0.0019	0.0116	0.0000	0.0014	0.0014	1.7	0.00009
2025	S07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	600.0	0.0549	0.0095	0.0502	0.0000	0.0073	0.0071	8.7	0.00043
2026	A01	Air Compressors	75 < hp <= 100	0.43	58.3	0.0012	0.0001	0.0039	0.0000	0.0002	0.0002	1.5	0.00001
2026	A01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	50.4	0.0029	0.0005	0.0065	0.0000	0.0005	0.0005	1.3	0.00002
2026	A01	Concrete/Industrial Saws	25 < hp <= 40	0.59	58.3	0.0005	0.0001	0.0039	0.0000	0.0000	0.0000	0.8	0.00002
2026	A01	Concrete/Industrial Saws	6 < hp <= 11	0.7	50.4	0.0011	0.0004	0.0018	0.0000	0.0001	0.0001	0.2	0.00003

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A01	Cranes	175 < hp <= 300	0.43	-	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	-	0.00000
2026	A01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	386.6	0.0043	0.0007	0.0121	0.0001	0.0011	0.0010	21.4	0.00005
2026	A01	Excavators	100 < hp <= 175	0.59	476.0	0.0042	0.0007	0.0140	0.0001	0.0010	0.0010	26.4	0.00005
2026	A01	Graders	175 < hp <= 300	0.59	20.1	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.9	0.00000
2026	A01	Irrigation Sets	300 < hp <= 600	0.59	18.1	0.0053	0.0011	0.0188	0.0000	0.0009	0.0009	3.4	0.00007
2026	A01	Off-highway Trucks	300 < hp <= 600	0.59	4,176.0	0.0680	0.0198	0.2602	0.0023	0.0165	0.0160	793.5	0.00099
2026	A01	Other Construction Equipment	100 < hp <= 175	0.43	636.8	0.0122	0.0029	0.0346	0.0001	0.0027	0.0026	25.7	0.00019
2026	A01	Pavers	100 < hp <= 175	0.59	58.3	0.0009	0.0001	0.0020	0.0000	0.0002	0.0002	3.2	0.00001
2026	A01	Pumps	6 < hp <= 11	0.43	16.8	0.0002	0.0001	0.0004	0.0000	0.0000	0.0000	0.0	0.00001
2026	A01	Rollers	75 < hp <= 100	0.59	231.4	0.0040	0.0004	0.0158	0.0000	0.0006	0.0006	8.1	0.00003
2026	A01	Scrapers	300 < hp <= 600	0.59	72.8	0.0059	0.0010	0.0160	0.0000	0.0010	0.0009	13.8	0.00006
2026	A01	Skid Steer Loaders	50 < hp <= 75	0.21	30.9	0.0038	0.0007	0.0032	0.0000	0.0005	0.0005	0.3	0.00003
2026	A01	Surfacing Equipment	16 < hp <= 25	0.59	58.3	0.0014	0.0003	0.0036	0.0000	0.0002	0.0002	0.5	0.00003
2026	A01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	201.7	0.0377	0.0114	0.0661	0.0000	0.0078	0.0076	13.0	0.00064
2026	A01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	87.9	0.0080	0.0014	0.0074	0.0000	0.0011	0.0010	1.3	0.00006
2026	A02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	30.0	0.0018	0.0003	0.0039	0.0000	0.0003	0.0003	0.8	0.00001
2026	A02	Concrete/Industrial Saws	6 < hp <= 11	0.7	30.0	0.0006	0.0002	0.0011	0.0000	0.0001	0.0001	0.1	0.00002
2026	A02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	206.4	0.0023	0.0004	0.0065	0.0000	0.0006	0.0005	11.4	0.00003
2026	A02	Excavators	100 < hp <= 175	0.59	53.1	0.0005	0.0001	0.0016	0.0000	0.0001	0.0001	2.9	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A02	Graders	175 < hp <= 300	0.59	12.1	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.2	0.00000
2026	A02	Irrigation Sets	300 < hp <= 600	0.59	10.9	0.0032	0.0007	0.0114	0.0000	0.0005	0.0005	2.1	0.00004
2026	A02	Off-highway Trucks	300 < hp <= 600	0.59	3,365.7	0.0548	0.0159	0.2097	0.0019	0.0133	0.0129	639.6	0.00080
2026	A02	Other Construction Equipment	100 < hp <= 175	0.43	305.0	0.0058	0.0014	0.0166	0.0000	0.0013	0.0012	12.3	0.00009
2026	A02	Pavers	100 < hp <= 175	0.59	14.2	0.0002	0.0000	0.0005	0.0000	0.0001	0.0001	0.8	0.00000
2026	A02	Pumps	6 < hp <= 11	0.43	10.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	A02	Rollers	75 < hp <= 100	0.59	131.8	0.0023	0.0002	0.0090	0.0000	0.0003	0.0003	4.6	0.00002
2026	A02	Scrapers	300 < hp <= 600	0.59	47.3	0.0038	0.0006	0.0104	0.0000	0.0006	0.0006	9.0	0.00004
2026	A02	Skid Steer Loaders	50 < hp <= 75	0.21	23.3	0.0029	0.0005	0.0024	0.0000	0.0004	0.0004	0.3	0.00002
2026	A02	Surfacing Equipment	16 < hp <= 25	0.59	18.2	0.0004	0.0001	0.0011	0.0000	0.0001	0.0000	0.2	0.00001
2026	A02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	32.8	0.0061	0.0018	0.0107	0.0000	0.0013	0.0012	2.1	0.00010
2026	A02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	27.6	0.0025	0.0004	0.0023	0.0000	0.0003	0.0003	0.4	0.00002
2026	A06	Air Compressors	75 < hp <= 100	0.43	107.9	0.0022	0.0003	0.0071	0.0000	0.0004	0.0004	2.7	0.00002
2026	A06	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	86.4	0.0051	0.0009	0.0112	0.0000	0.0009	0.0009	2.2	0.00004
2026	A06	Concrete/Industrial Saws	25 < hp <= 40	0.59	107.9	0.0009	0.0003	0.0072	0.0000	0.0001	0.0001	1.5	0.00003
2026	A06	Concrete/Industrial Saws	6 < hp <= 11	0.7	86.4	0.0018	0.0006	0.0031	0.0000	0.0002	0.0002	0.4	0.00005
2026	A06	Crawler Tractor/Dozers	100 < hp <= 175	0.59	602.9	0.0067	0.0010	0.0189	0.0001	0.0017	0.0016	33.4	0.00007
2026	A06	Excavators	100 < hp <= 175	0.59	165.8	0.0015	0.0002	0.0049	0.0000	0.0004	0.0003	9.2	0.00002
2026	A06	Graders	175 < hp <= 300	0.59	34.6	0.0003	0.0001	0.0012	0.0000	0.0001	0.0001	3.3	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A06	Irrigation Sets	300 < hp <= 600	0.59	31.1	0.0091	0.0019	0.0324	0.0000	0.0015	0.0015	5.8	0.00013
2026	A06	Off-highway Trucks	300 < hp <= 600	0.59	6,231.1	0.1015	0.0295	0.3882	0.0035	0.0246	0.0238	1,184.1	0.00147
2026	A06	Other Construction Equipment	100 < hp <= 175	0.43	1,027.4	0.0197	0.0046	0.0559	0.0001	0.0043	0.0042	41.5	0.00031
2026	A06	Pavers	100 < hp <= 175	0.59	107.9	0.0016	0.0002	0.0037	0.0000	0.0004	0.0004	6.0	0.00002
2026	A06	Pumps	6 < hp <= 11	0.43	28.8	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2026	A06	Rollers	75 < hp <= 100	0.59	349.8	0.0060	0.0006	0.0239	0.0000	0.0009	0.0009	12.3	0.00004
2026	A06	Scrapers	300 < hp <= 600	0.59	134.9	0.0110	0.0018	0.0297	0.0001	0.0018	0.0017	25.6	0.00011
2026	A06	Skid Steer Loaders	50 < hp <= 75	0.21	26.2	0.0032	0.0006	0.0027	0.0000	0.0004	0.0004	0.3	0.00002
2026	A06	Surfacing Equipment	16 < hp <= 25	0.59	107.9	0.0026	0.0006	0.0066	0.0000	0.0003	0.0003	0.9	0.00005
2026	A06	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	224.1	0.0419	0.0126	0.0734	0.0001	0.0087	0.0084	14.5	0.00071
2026	A06	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	87.1	0.0080	0.0014	0.0073	0.0000	0.0011	0.0010	1.3	0.00006
2026	A07	Air Compressors	75 < hp <= 100	0.43	14.5	0.0003	0.0000	0.0010	0.0000	0.0001	0.0000	0.4	0.00000
2026	A07	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	12.0	0.0007	0.0001	0.0016	0.0000	0.0001	0.0001	0.3	0.00001
2026	A07	Concrete/Industrial Saws	25 < hp <= 40	0.59	14.5	0.0001	0.0000	0.0010	0.0000	0.0000	0.0000	0.2	0.00000
2026	A07	Concrete/Industrial Saws	6 < hp <= 11	0.7	12.0	0.0003	0.0001	0.0004	0.0000	0.0000	0.0000	0.1	0.00001
2026	A07	Crawler Tractor/Dozers	100 < hp <= 175	0.59	79.7	0.0009	0.0001	0.0025	0.0000	0.0002	0.0002	4.4	0.00001
2026	A07	Excavators	100 < hp <= 175	0.59	20.3	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.1	0.00000
2026	A07	Graders	175 < hp <= 300	0.59	4.8	0.0000	0.0000	0.0002	0.0000	0.0000	0.0000	0.5	0.00000
2026	A07	Irrigation Sets	300 < hp <= 600	0.59	4.3	0.0013	0.0003	0.0045	0.0000	0.0002	0.0002	0.8	0.00002

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A07	Off-highway Trucks	300 < hp <= 600	0.59	1,267.1	0.0206	0.0060	0.0790	0.0007	0.0050	0.0048	240.8	0.00030
2026	A07	Other Construction Equipment	100 < hp <= 175	0.43	137.1	0.0026	0.0006	0.0075	0.0000	0.0006	0.0006	5.5	0.00004
2026	A07	Pavers	100 < hp <= 175	0.59	14.5	0.0002	0.0000	0.0005	0.0000	0.0001	0.0001	0.8	0.00000
2026	A07	Pumps	6 < hp <= 11	0.43	4.0	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2026	A07	Rollers	75 < hp <= 100	0.59	45.2	0.0008	0.0001	0.0031	0.0000	0.0001	0.0001	1.6	0.00001
2026	A07	Scrapers	300 < hp <= 600	0.59	18.2	0.0015	0.0002	0.0040	0.0000	0.0002	0.0002	3.5	0.00002
2026	A07	Skid Steer Loaders	50 < hp <= 75	0.21	5.3	0.0007	0.0001	0.0006	0.0000	0.0001	0.0001	0.1	0.00000
2026	A07	Surfacing Equipment	16 < hp <= 25	0.59	14.5	0.0004	0.0001	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2026	A07	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	28.8	0.0054	0.0016	0.0094	0.0000	0.0011	0.0011	1.9	0.00009
2026	A07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	12.5	0.0011	0.0002	0.0010	0.0000	0.0002	0.0001	0.2	0.00001
2026	A08	Air Compressors	75 < hp <= 100	0.43	13.3	0.0003	0.0000	0.0009	0.0000	0.0000	0.0000	0.3	0.00000
2026	A08	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	10.8	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.3	0.00000
2026	A08	Concrete/Industrial Saws	25 < hp <= 40	0.59	13.3	0.0001	0.0000	0.0009	0.0000	0.0000	0.0000	0.2	0.00000
2026	A08	Concrete/Industrial Saws	6 < hp <= 11	0.7	10.8	0.0002	0.0001	0.0004	0.0000	0.0000	0.0000	0.0	0.00001
2026	A08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	108.1	0.0012	0.0002	0.0034	0.0000	0.0003	0.0003	6.0	0.00001
2026	A08	Excavators	100 < hp <= 175	0.59	197.5	0.0017	0.0003	0.0058	0.0000	0.0004	0.0004	10.9	0.00002
2026	A08	Generator Sets	25 < hp <= 40	0.43	144.0	0.0019	0.0005	0.0084	0.0000	0.0003	0.0003	1.5	0.00004
2026	A08	Graders	175 < hp <= 300	0.59	4.5	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.4	0.00000
2026	A08	Irrigation Sets	300 < hp <= 600	0.59	4.0	0.0012	0.0003	0.0042	0.0000	0.0002	0.0002	0.8	0.00002

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A08	Off-highway Trucks	300 < hp <= 600	0.59	1,768.7	0.0288	0.0084	0.1102	0.0010	0.0070	0.0068	336.1	0.00042
2026	A08	Other Construction Equipment	100 < hp <= 175	0.43	135.3	0.0026	0.0006	0.0074	0.0000	0.0006	0.0006	5.5	0.00004
2026	A08	Pavers	100 < hp <= 175	0.59	13.3	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.7	0.00000
2026	A08	Pumps	6 < hp <= 11	0.43	3.6	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2026	A08	Rollers	75 < hp <= 100	0.59	40.4	0.0007	0.0001	0.0028	0.0000	0.0001	0.0001	1.4	0.00000
2026	A08	Scrapers	300 < hp <= 600	0.59	16.7	0.0014	0.0002	0.0037	0.0000	0.0002	0.0002	3.2	0.00001
2026	A08	Skid Steer Loaders	50 < hp <= 75	0.21	5.6	0.0007	0.0001	0.0006	0.0000	0.0001	0.0001	0.1	0.00000
2026	A08	Surfacing Equipment	16 < hp <= 25	0.59	13.3	0.0003	0.0001	0.0008	0.0000	0.0000	0.0000	0.1	0.00001
2026	A08	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	25.4	0.0047	0.0014	0.0083	0.0000	0.0010	0.0010	1.6	0.00008
2026	A08	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	288.0	0.0200	0.0035	0.0218	0.0000	0.0026	0.0026	3.1	0.00017
2026	A08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	11.5	0.0011	0.0002	0.0010	0.0000	0.0001	0.0001	0.2	0.00001
2026	A10	Air Compressors	75 < hp <= 100	0.43	2.5	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.1	0.00000
2026	A10	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	3.6	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.1	0.00000
2026	A10	Concrete/Industrial Saws	25 < hp <= 40	0.59	2.5	0.0000	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	A10	Concrete/Industrial Saws	6 < hp <= 11	0.7	3.6	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2026	A10	Crawler Tractor/Dozers	100 < hp <= 175	0.59	28.9	0.0003	0.0000	0.0009	0.0000	0.0001	0.0001	1.6	0.00000
2026	A10	Excavators	100 < hp <= 175	0.59	17.2	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	1.0	0.00000
2026	A10	Graders	175 < hp <= 300	0.59	1.3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1	0.00000
2026	A10	Irrigation Sets	300 < hp <= 600	0.59	1.2	0.0003	0.0001	0.0012	0.0000	0.0001	0.0001	0.2	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	A10	Off-highway Trucks	300 < hp <= 600	0.59	3,032.8	0.0494	0.0143	0.1890	0.0017	0.0120	0.0116	576.3	0.00072
2026	A10	Other Construction Equipment	100 < hp <= 175	0.43	50.7	0.0010	0.0002	0.0028	0.0000	0.0002	0.0002	2.0	0.00002
2026	A10	Pavers	100 < hp <= 175	0.59	2.5	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.1	0.00000
2026	A10	Pumps	6 < hp <= 11	0.43	1.2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0	0.00000
2026	A10	Rollers	75 < hp <= 100	0.59	22.0	0.0004	0.0000	0.0015	0.0000	0.0001	0.0001	0.8	0.00000
2026	A10	Scrapers	300 < hp <= 600	0.59	3.1	0.0003	0.0000	0.0007	0.0000	0.0000	0.0000	0.6	0.00000
2026	A10	Skid Steer Loaders	50 < hp <= 75	0.21	6.2	0.0008	0.0001	0.0006	0.0000	0.0001	0.0001	0.1	0.00001
2026	A10	Surfacing Equipment	16 < hp <= 25	0.59	2.5	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	A10	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	31.6	0.0059	0.0018	0.0104	0.0000	0.0012	0.0012	2.0	0.00010
2026	A10	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	15.6	0.0014	0.0002	0.0013	0.0000	0.0002	0.0002	0.2	0.00001
2026	C01	Aerial Lifts	50 < hp <= 75	0.21	3,024.0	0.1152	0.0219	0.1918	0.0001	0.0137	0.0133	33.1	0.00119
2026	C01	Aerial Lifts	75 < hp <= 100	0.59	936.1	0.1522	0.0241	0.1652	0.0001	0.0193	0.0187	38.4	0.00112
2026	C01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2026	C01	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2026	C01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2026	C01	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2026	C01	Cranes	175 < hp <= 300	0.43	336.1	0.0033	0.0012	0.0142	0.0001	0.0008	0.0007	23.0	0.00007
2026	C01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	42.4	0.0005	0.0001	0.0013	0.0000	0.0001	0.0001	2.3	0.00001
2026	C01	Excavators	100 < hp <= 175	0.59	477.6	0.0042	0.0007	0.0141	0.0001	0.0010	0.0010	26.5	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	C01	Forklifts	75 < hp <= 100	0.59	3,424.2	0.0115	0.0017	0.1909	0.0003	0.0027	0.0026	120.4	0.00011
2026	C01	Generator Sets	25 < hp <= 40	0.43	751.2	0.0098	0.0027	0.0437	0.0000	0.0016	0.0016	7.6	0.00023
2026	C01	Off-highway Trucks	300 < hp <= 600	0.59	3,351.4	0.0546	0.0159	0.2088	0.0019	0.0132	0.0128	636.9	0.00079
2026	C01	Other Construction Equipment	300 < hp <= 600	0.59	12.0	0.0047	0.0006	0.0107	0.0000	0.0007	0.0007	2.3	0.00004
2026	C01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2026	C01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	C01	Pumps	6 < hp <= 11	0.43	12.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2026	C01	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2026	C01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2026	C01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2026	C01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	926.4	0.0645	0.0113	0.0701	0.0000	0.0085	0.0082	10.1	0.00055
2026	C01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.1	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2026	C02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2026	C02	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2026	C02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2026	C02	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2026	C02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	64.0	0.0037	0.0007	0.0083	0.0000	0.0007	0.0006	1.6	0.00003
2026	C02	Concrete/Industrial Saws	6 < hp <= 11	0.7	64.0	0.0013	0.0005	0.0023	0.0000	0.0001	0.0001	0.3	0.00004
2026	C02	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	C02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	40.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	2.2	0.00000
2026	C02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2026	C02	Forklifts	75 < hp <= 100	0.59	3,724.0	0.0125	0.0018	0.2076	0.0004	0.0029	0.0029	131.0	0.00012
2026	C02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2026	C02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2026	C02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2026	C02	Off-highway Trucks	300 < hp <= 600	0.59	6,864.0	0.1118	0.0325	0.4277	0.0038	0.0271	0.0263	1,304.3	0.00162
2026	C02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2026	C02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2026	C02	Plate Compactors	3 < hp <= 6	0.43	40.0	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2026	C02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2026	C02	Rollers	75 < hp <= 100	0.59	56.0	0.0010	0.0001	0.0038	0.0000	0.0001	0.0001	2.0	0.00001
2026	C02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2026	C02	Surfacing Equipment	75 < hp <= 100	0.43	64.0	0.0022	0.0003	0.0047	0.0000	0.0003	0.0003	1.6	0.00001
2026	C02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2026	C02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2026	C02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	840.0	0.0769	0.0133	0.0703	0.0000	0.0102	0.0099	12.2	0.00061
2026	L01	Air Compressors	75 < hp <= 100	0.43	22.8	0.0005	0.0001	0.0015	0.0000	0.0001	0.0001	0.6	0.00000
2026	L01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	19.2	0.0011	0.0002	0.0025	0.0000	0.0002	0.0002	0.5	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	L01	Concrete/Industrial Saws	25 < hp <= 40	0.59	22.8	0.0002	0.0001	0.0015	0.0000	0.0000	0.0000	0.3	0.00001
2026	L01	Concrete/Industrial Saws	6 < hp <= 11	0.7	19.2	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2026	L01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	206.5	0.0023	0.0004	0.0065	0.0000	0.0006	0.0005	11.4	0.00003
2026	L01	Excavators	100 < hp <= 175	0.59	113.3	0.0010	0.0002	0.0033	0.0000	0.0002	0.0002	6.3	0.00001
2026	L01	Graders	175 < hp <= 300	0.59	7.6	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.7	0.00000
2026	L01	Irrigation Sets	300 < hp <= 600	0.59	6.9	0.0020	0.0004	0.0071	0.0000	0.0003	0.0003	1.3	0.00003
2026	L01	Off-highway Trucks	300 < hp <= 600	0.59	4,227.2	0.0688	0.0200	0.2634	0.0023	0.0167	0.0162	803.3	0.00100
2026	L01	Other Construction Equipment	100 < hp <= 175	0.43	309.1	0.0059	0.0014	0.0168	0.0000	0.0013	0.0013	12.5	0.00009
2026	L01	Pavers	100 < hp <= 175	0.59	55.9	0.0008	0.0001	0.0019	0.0000	0.0002	0.0002	3.1	0.00001
2026	L01	Plate Compactors	3 < hp <= 6	0.43	49.2	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2026	L01	Pumps	6 < hp <= 11	0.43	6.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2026	L01	Rollers	75 < hp <= 100	0.59	90.4	0.0016	0.0001	0.0062	0.0000	0.0002	0.0002	3.2	0.00001
2026	L01	Scrapers	300 < hp <= 600	0.59	28.4	0.0023	0.0004	0.0063	0.0000	0.0004	0.0004	5.4	0.00002
2026	L01	Skid Steer Loaders	50 < hp <= 75	0.21	52.4	0.0065	0.0012	0.0055	0.0000	0.0009	0.0009	0.6	0.00004
2026	L01	Surfacing Equipment	16 < hp <= 25	0.59	33.7	0.0008	0.0002	0.0021	0.0000	0.0001	0.0001	0.3	0.00002
2026	L01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	70.4	0.0132	0.0040	0.0231	0.0000	0.0027	0.0027	4.5	0.00022
2026	L01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	110.6	0.0101	0.0018	0.0093	0.0000	0.0013	0.0013	1.6	0.00008
2026	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2026	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2026	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2026	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2026	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2026	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2026	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2026	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2026	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2026	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2026	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2026	L04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2026	L04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2026	L04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2026	L04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2026	L04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2026	L04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2026	L04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2026	L04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2026	L04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	L04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2026	L04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2026	L04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2026	S02	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2026	S02	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2026	S02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2026	S02	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2026	S02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2026	S02	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2026	S02	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2026	S02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	78.5	0.0009	0.0001	0.0025	0.0000	0.0002	0.0002	4.4	0.00001
2026	S02	Excavators	100 < hp <= 175	0.59	233.5	0.0021	0.0003	0.0069	0.0000	0.0005	0.0005	12.9	0.00002
2026	S02	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2026	S02	Generator Sets	25 < hp <= 40	0.43	171.0	0.0022	0.0006	0.0099	0.0000	0.0004	0.0004	1.7	0.00005
2026	S02	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2026	S02	Off-highway Trucks	300 < hp <= 600	0.59	1,268.5	0.0207	0.0060	0.0790	0.0007	0.0050	0.0049	241.0	0.00030
2026	S02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2026	S02	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	S02	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	S02	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2026	S02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2026	S02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	366.0	0.0255	0.0045	0.0277	0.0000	0.0034	0.0033	4.0	0.00022
2026	S02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2026	S04	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2026	S04	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2026	S04	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2026	S04	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2026	S04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	13.6	0.0002	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2026	S04	Excavators	100 < hp <= 175	0.59	13.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2026	S04	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2026	S04	Off-highway Trucks	300 < hp <= 600	0.59	323.2	0.0053	0.0015	0.0201	0.0002	0.0013	0.0012	61.4	0.00008
2026	S04	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2026	S04	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2026	S04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2026	S05	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2026	S05	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2026	S05	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	S05	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2026	S05	Crawler Tractor/Dozers	100 < hp <= 175	0.59	9.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2026	S05	Excavators	100 < hp <= 175	0.59	9.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2026	S05	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2026	S05	Off-highway Trucks	300 < hp <= 600	0.59	314.0	0.0051	0.0015	0.0196	0.0002	0.0012	0.0012	59.7	0.00007
2026	S05	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2026	S05	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2026	S05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2026	S06	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2026	S06	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2026	S06	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2026	S06	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2026	S06	Crawler Tractor/Dozers	100 < hp <= 175	0.59	14.5	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.8	0.00000
2026	S06	Excavators	100 < hp <= 175	0.59	14.5	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2026	S06	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2026	S06	Off-highway Trucks	300 < hp <= 600	0.59	325.0	0.0053	0.0015	0.0202	0.0002	0.0013	0.0012	61.8	0.00008
2026	S06	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2026	S06	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	S06	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2026	S07	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2026	S07	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2026	S07	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2026	S07	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2026	S07	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2026	S07	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2026	S07	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2026	S07	Crawler Tractor/Dozers	100 < hp <= 175	0.59	76.7	0.0009	0.0001	0.0024	0.0000	0.0002	0.0002	4.2	0.00001
2026	S07	Excavators	100 < hp <= 175	0.59	307.1	0.0027	0.0004	0.0091	0.0000	0.0007	0.0006	17.0	0.00003
2026	S07	Forklifts	75 < hp <= 100	0.59	3,584.0	0.0121	0.0018	0.1998	0.0004	0.0028	0.0027	126.1	0.00012
2026	S07	Generator Sets	25 < hp <= 40	0.43	166.4	0.0022	0.0006	0.0097	0.0000	0.0004	0.0003	1.7	0.00005
2026	S07	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2026	S07	Off-highway Trucks	300 < hp <= 600	0.59	7,029.0	0.1145	0.0333	0.4379	0.0039	0.0277	0.0269	1,335.7	0.00166
2026	S07	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2026	S07	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2026	S07	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2026	S07	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2026	S07	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2026	S07	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2026	S07	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2026	S07	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	196.8	0.0137	0.0024	0.0149	0.0000	0.0018	0.0017	2.2	0.00012
2026	S07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	600.0	0.0549	0.0095	0.0502	0.0000	0.0073	0.0071	8.7	0.00043
2027	A01	Air Compressors	75 < hp <= 100	0.43	120.4	0.0025	0.0003	0.0080	0.0000	0.0004	0.0004	3.1	0.00002
2027	A01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	90.0	0.0053	0.0010	0.0117	0.0000	0.0009	0.0009	2.3	0.00004
2027	A01	Concrete/Industrial Saws	25 < hp <= 40	0.59	112.4	0.0009	0.0003	0.0075	0.0000	0.0001	0.0001	1.6	0.00003
2027	A01	Concrete/Industrial Saws	6 < hp <= 11	0.7	90.0	0.0019	0.0006	0.0032	0.0000	0.0002	0.0002	0.4	0.00005
2027	A01	Cranes	175 < hp <= 300	0.43	8.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2027	A01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	687.3	0.0076	0.0012	0.0216	0.0001	0.0019	0.0018	38.1	0.00009
2027	A01	Excavators	100 < hp <= 175	0.59	882.8	0.0078	0.0012	0.0260	0.0001	0.0019	0.0018	48.9	0.00009
2027	A01	Graders	175 < hp <= 300	0.59	36.4	0.0003	0.0001	0.0012	0.0000	0.0001	0.0001	3.5	0.00001
2027	A01	Irrigation Sets	300 < hp <= 600	0.59	32.8	0.0095	0.0020	0.0341	0.0000	0.0016	0.0016	6.2	0.00013
2027	A01	Off-highway Trucks	300 < hp <= 600	0.59	7,913.4	0.1289	0.0374	0.4930	0.0044	0.0312	0.0303	1,503.7	0.00187
2027	A01	Other Construction Equipment	100 < hp <= 175	0.43	1,117.4	0.0214	0.0050	0.0608	0.0001	0.0047	0.0046	45.1	0.00033
2027	A01	Pavers	100 < hp <= 175	0.59	112.4	0.0016	0.0003	0.0038	0.0000	0.0004	0.0004	6.2	0.00002
2027	A01	Pumps	6 < hp <= 11	0.43	30.0	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2027	A01	Rollers	75 < hp <= 100	0.59	376.7	0.0065	0.0006	0.0258	0.0000	0.0010	0.0009	13.2	0.00004
2027	A01	Scrapers	300 < hp <= 600	0.59	140.5	0.0114	0.0018	0.0310	0.0001	0.0019	0.0018	26.7	0.00012

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	A01	Skid Steer Loaders	50 < hp <= 75	0.21	55.8	0.0069	0.0013	0.0058	0.0000	0.0010	0.0009	0.6	0.00005
2027	A01	Surfacing Equipment	16 < hp <= 25	0.59	112.4	0.0027	0.0006	0.0069	0.0000	0.0003	0.0003	1.0	0.00005
2027	A01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	256.7	0.0480	0.0145	0.0841	0.0001	0.0100	0.0097	16.6	0.00082
2027	A01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	126.0	0.0115	0.0020	0.0105	0.0000	0.0015	0.0015	1.8	0.00009
2027	A07	Air Compressors	75 < hp <= 100	0.43	42.7	0.0009	0.0001	0.0028	0.0000	0.0001	0.0001	1.1	0.00001
2027	A07	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	33.6	0.0020	0.0004	0.0044	0.0000	0.0003	0.0003	0.9	0.00001
2027	A07	Concrete/Industrial Saws	25 < hp <= 40	0.59	42.7	0.0003	0.0001	0.0028	0.0000	0.0000	0.0000	0.6	0.00001
2027	A07	Concrete/Industrial Saws	6 < hp <= 11	0.7	33.6	0.0007	0.0002	0.0012	0.0000	0.0001	0.0001	0.2	0.00002
2027	A07	Crawler Tractor/Dozers	100 < hp <= 175	0.59	232.0	0.0026	0.0004	0.0073	0.0000	0.0006	0.0006	12.9	0.00003
2027	A07	Excavators	100 < hp <= 175	0.59	59.1	0.0005	0.0001	0.0017	0.0000	0.0001	0.0001	3.3	0.00001
2027	A07	Graders	175 < hp <= 300	0.59	13.6	0.0001	0.0000	0.0005	0.0000	0.0000	0.0000	1.3	0.00000
2027	A07	Irrigation Sets	300 < hp <= 600	0.59	12.3	0.0036	0.0008	0.0128	0.0000	0.0006	0.0006	2.3	0.00005
2027	A07	Off-highway Trucks	300 < hp <= 600	0.59	3,749.2	0.0611	0.0177	0.2336	0.0021	0.0148	0.0143	712.4	0.00089
2027	A07	Other Construction Equipment	100 < hp <= 175	0.43	395.8	0.0076	0.0018	0.0215	0.0000	0.0017	0.0016	16.0	0.00012
2027	A07	Pavers	100 < hp <= 175	0.59	42.7	0.0006	0.0001	0.0015	0.0000	0.0002	0.0002	2.4	0.00001
2027	A07	Pumps	6 < hp <= 11	0.43	11.2	0.0002	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	A07	Rollers	75 < hp <= 100	0.59	131.9	0.0023	0.0002	0.0090	0.0000	0.0003	0.0003	4.6	0.00002
2027	A07	Scrapers	300 < hp <= 600	0.59	53.4	0.0043	0.0007	0.0118	0.0000	0.0007	0.0007	10.1	0.00004
2027	A07	Skid Steer Loaders	50 < hp <= 75	0.21	9.7	0.0012	0.0002	0.0010	0.0000	0.0002	0.0002	0.1	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	A07	Surfacing Equipment	16 < hp <= 25	0.59	42.7	0.0010	0.0002	0.0026	0.0000	0.0001	0.0001	0.4	0.00002
2027	A07	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	77.9	0.0146	0.0044	0.0255	0.0000	0.0030	0.0029	5.0	0.00025
2027	A07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	30.0	0.0027	0.0005	0.0025	0.0000	0.0004	0.0004	0.4	0.00002
2027	A08	Air Compressors	75 < hp <= 100	0.43	20.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	0.5	0.00000
2027	A08	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	16.8	0.0010	0.0002	0.0022	0.0000	0.0002	0.0002	0.4	0.00001
2027	A08	Concrete/Industrial Saws	25 < hp <= 40	0.59	20.0	0.0002	0.0000	0.0013	0.0000	0.0000	0.0000	0.3	0.00001
2027	A08	Concrete/Industrial Saws	6 < hp <= 11	0.7	16.8	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2027	A08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	251.4	0.0028	0.0004	0.0079	0.0000	0.0007	0.0007	13.9	0.00003
2027	A08	Excavators	100 < hp <= 175	0.59	746.1	0.0066	0.0010	0.0220	0.0001	0.0016	0.0015	41.3	0.00007
2027	A08	Generator Sets	25 < hp <= 40	0.43	576.0	0.0075	0.0021	0.0335	0.0000	0.0012	0.0012	5.8	0.00018
2027	A08	Graders	175 < hp <= 300	0.59	6.5	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.6	0.00000
2027	A08	Irrigation Sets	300 < hp <= 600	0.59	5.9	0.0017	0.0004	0.0061	0.0000	0.0003	0.0003	1.1	0.00002
2027	A08	Off-highway Trucks	300 < hp <= 600	0.59	5,768.9	0.0939	0.0273	0.3594	0.0032	0.0227	0.0221	1,096.2	0.00136
2027	A08	Other Construction Equipment	100 < hp <= 175	0.43	200.8	0.0038	0.0009	0.0109	0.0000	0.0008	0.0008	8.1	0.00006
2027	A08	Pavers	100 < hp <= 175	0.59	20.0	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.1	0.00000
2027	A08	Pumps	6 < hp <= 11	0.43	5.6	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2027	A08	Rollers	75 < hp <= 100	0.59	60.3	0.0010	0.0001	0.0041	0.0000	0.0002	0.0002	2.1	0.00001
2027	A08	Scrapers	300 < hp <= 600	0.59	25.0	0.0020	0.0003	0.0055	0.0000	0.0003	0.0003	4.7	0.00002
2027	A08	Skid Steer Loaders	50 < hp <= 75	0.21	6.4	0.0008	0.0001	0.0007	0.0000	0.0001	0.0001	0.1	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	A08	Surfacing Equipment	16 < hp <= 25	0.59	20.0	0.0005	0.0001	0.0012	0.0000	0.0001	0.0001	0.2	0.00001
2027	A08	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	35.8	0.0067	0.0020	0.0117	0.0000	0.0014	0.0013	2.3	0.00011
2027	A08	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	1,152.0	0.0802	0.0141	0.0872	0.0000	0.0105	0.0102	12.6	0.00069
2027	A08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	15.4	0.0014	0.0002	0.0013	0.0000	0.0002	0.0002	0.2	0.00001
2027	A10	Air Compressors	75 < hp <= 100	0.43	2.5	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.1	0.00000
2027	A10	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	3.6	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.1	0.00000
2027	A10	Concrete/Industrial Saws	25 < hp <= 40	0.59	2.5	0.0000	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	A10	Concrete/Industrial Saws	6 < hp <= 11	0.7	3.6	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2027	A10	Crawler Tractor/Dozers	100 < hp <= 175	0.59	28.9	0.0003	0.0000	0.0009	0.0000	0.0001	0.0001	1.6	0.00000
2027	A10	Excavators	100 < hp <= 175	0.59	17.2	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	1.0	0.00000
2027	A10	Graders	175 < hp <= 300	0.59	1.3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1	0.00000
2027	A10	Irrigation Sets	300 < hp <= 600	0.59	1.2	0.0003	0.0001	0.0012	0.0000	0.0001	0.0001	0.2	0.00000
2027	A10	Off-highway Trucks	300 < hp <= 600	0.59	3,032.8	0.0494	0.0143	0.1890	0.0017	0.0120	0.0116	576.3	0.00072
2027	A10	Other Construction Equipment	100 < hp <= 175	0.43	50.7	0.0010	0.0002	0.0028	0.0000	0.0002	0.0002	2.0	0.00002
2027	A10	Pavers	100 < hp <= 175	0.59	2.5	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.1	0.00000
2027	A10	Pumps	6 < hp <= 11	0.43	1.2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0	0.00000
2027	A10	Rollers	75 < hp <= 100	0.59	22.0	0.0004	0.0000	0.0015	0.0000	0.0001	0.0001	0.8	0.00000
2027	A10	Scrapers	300 < hp <= 600	0.59	3.1	0.0003	0.0000	0.0007	0.0000	0.0000	0.0000	0.6	0.00000
2027	A10	Skid Steer Loaders	50 < hp <= 75	0.21	6.2	0.0008	0.0001	0.0006	0.0000	0.0001	0.0001	0.1	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	A10	Surfacing Equipment	16 < hp <= 25	0.59	2.5	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	A10	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	31.6	0.0059	0.0018	0.0104	0.0000	0.0012	0.0012	2.0	0.00010
2027	A10	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	15.6	0.0014	0.0002	0.0013	0.0000	0.0002	0.0002	0.2	0.00001
2027	C02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	C02	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2027	C02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2027	C02	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2027	C02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	64.0	0.0037	0.0007	0.0083	0.0000	0.0007	0.0006	1.6	0.00003
2027	C02	Concrete/Industrial Saws	6 < hp <= 11	0.7	64.0	0.0013	0.0005	0.0023	0.0000	0.0001	0.0001	0.3	0.00004
2027	C02	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2027	C02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	40.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	2.2	0.00000
2027	C02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2027	C02	Forklifts	75 < hp <= 100	0.59	3,724.0	0.0125	0.0018	0.2076	0.0004	0.0029	0.0029	131.0	0.00012
2027	C02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2027	C02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2027	C02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	C02	Off-highway Trucks	300 < hp <= 600	0.59	6,864.0	0.1118	0.0325	0.4277	0.0038	0.0271	0.0263	1,304.3	0.00162
2027	C02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	C02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2027	C02	Plate Compactors	3 < hp <= 6	0.43	40.0	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2027	C02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	C02	Rollers	75 < hp <= 100	0.59	56.0	0.0010	0.0001	0.0038	0.0000	0.0001	0.0001	2.0	0.00001
2027	C02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2027	C02	Surfacing Equipment	75 < hp <= 100	0.43	64.0	0.0022	0.0003	0.0047	0.0000	0.0003	0.0003	1.6	0.00001
2027	C02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2027	C02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2027	C02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	840.0	0.0769	0.0133	0.0703	0.0000	0.0102	0.0099	12.2	0.00061
2027	L01	Air Compressors	75 < hp <= 100	0.43	22.8	0.0005	0.0001	0.0015	0.0000	0.0001	0.0001	0.6	0.00000
2027	L01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	19.2	0.0011	0.0002	0.0025	0.0000	0.0002	0.0002	0.5	0.00001
2027	L01	Concrete/Industrial Saws	25 < hp <= 40	0.59	22.8	0.0002	0.0001	0.0015	0.0000	0.0000	0.0000	0.3	0.00001
2027	L01	Concrete/Industrial Saws	6 < hp <= 11	0.7	19.2	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2027	L01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	206.5	0.0023	0.0004	0.0065	0.0000	0.0006	0.0005	11.4	0.00003
2027	L01	Excavators	100 < hp <= 175	0.59	113.3	0.0010	0.0002	0.0033	0.0000	0.0002	0.0002	6.3	0.00001
2027	L01	Graders	175 < hp <= 300	0.59	7.6	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.7	0.00000
2027	L01	Irrigation Sets	300 < hp <= 600	0.59	6.9	0.0020	0.0004	0.0071	0.0000	0.0003	0.0003	1.3	0.00003
2027	L01	Off-highway Trucks	300 < hp <= 600	0.59	4,227.2	0.0688	0.0200	0.2634	0.0023	0.0167	0.0162	803.3	0.00100
2027	L01	Other Construction Equipment	100 < hp <= 175	0.43	309.1	0.0059	0.0014	0.0168	0.0000	0.0013	0.0013	12.5	0.00009

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	L01	Pavers	100 < hp <= 175	0.59	55.9	0.0008	0.0001	0.0019	0.0000	0.0002	0.0002	3.1	0.00001
2027	L01	Plate Compactors	3 < hp <= 6	0.43	49.2	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2027	L01	Pumps	6 < hp <= 11	0.43	6.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2027	L01	Rollers	75 < hp <= 100	0.59	90.4	0.0016	0.0001	0.0062	0.0000	0.0002	0.0002	3.2	0.00001
2027	L01	Scrapers	300 < hp <= 600	0.59	28.4	0.0023	0.0004	0.0063	0.0000	0.0004	0.0004	5.4	0.00002
2027	L01	Skid Steer Loaders	50 < hp <= 75	0.21	52.4	0.0065	0.0012	0.0055	0.0000	0.0009	0.0009	0.6	0.00004
2027	L01	Surfacing Equipment	16 < hp <= 25	0.59	33.7	0.0008	0.0002	0.0021	0.0000	0.0001	0.0001	0.3	0.00002
2027	L01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	70.4	0.0132	0.0040	0.0231	0.0000	0.0027	0.0027	4.5	0.00022
2027	L01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	110.6	0.0101	0.0018	0.0093	0.0000	0.0013	0.0013	1.6	0.00008
2027	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2027	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2027	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2027	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2027	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2027	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2027	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2027	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2027	L04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	L04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2027	L04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2027	L04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2027	L04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2027	L04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2027	L04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2027	L04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	L04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2027	L04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	L04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	L04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2027	L05	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2027	L05	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2027	L05	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2027	L05	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2027	L05	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2027	L05	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	L05	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2027	L05	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2027	L05	Off-highway Trucks	300 < hp <= 600	0.59	164.0	0.0027	0.0008	0.0102	0.0001	0.0006	0.0006	31.2	0.00004
2027	L05	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2027	L05	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	L05	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2027	L05	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2027	L05	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2027	L05	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2027	L05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	120.0	0.0110	0.0019	0.0100	0.0000	0.0015	0.0014	1.7	0.00009
2027	S02	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2027	S02	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2027	S02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2027	S02	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2027	S02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2027	S02	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2027	S02	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2027	S02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	98.5	0.0011	0.0002	0.0031	0.0000	0.0003	0.0003	5.5	0.00001
2027	S02	Excavators	100 < hp <= 175	0.59	310.5	0.0027	0.0004	0.0092	0.0001	0.0007	0.0006	17.2	0.00003

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S02	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2027	S02	Generator Sets	25 < hp <= 40	0.43	228.0	0.0030	0.0008	0.0133	0.0000	0.0005	0.0005	2.3	0.00007
2027	S02	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2027	S02	Off-highway Trucks	300 < hp <= 600	0.59	1,489.0	0.0242	0.0070	0.0928	0.0008	0.0059	0.0057	282.9	0.00035
2027	S02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2027	S02	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	S02	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2027	S02	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2027	S02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2027	S02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	480.0	0.0334	0.0059	0.0363	0.0000	0.0044	0.0043	5.2	0.00029
2027	S02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2027	S03	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2027	S03	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2027	S03	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2027	S03	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2027	S03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2027	S03	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2027	S03	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2027	S03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S03	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2027	S03	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2027	S03	Off-highway Trucks	300 < hp <= 600	0.59	602.0	0.0098	0.0028	0.0375	0.0003	0.0024	0.0023	114.4	0.00014
2027	S03	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2027	S03	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	S03	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2027	S03	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2027	S03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2027	S03	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2027	S03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2027	S04	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2027	S04	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2027	S04	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2027	S04	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2027	S04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	13.6	0.0002	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2027	S04	Excavators	100 < hp <= 175	0.59	13.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.8	0.00000
2027	S04	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2027	S04	Off-highway Trucks	300 < hp <= 600	0.59	323.2	0.0053	0.0015	0.0201	0.0002	0.0013	0.0012	61.4	0.00008
2027	S04	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S04	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2027	S04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2027	S05	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2027	S05	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2027	S05	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2027	S05	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2027	S05	Crawler Tractor/Dozers	100 < hp <= 175	0.59	7.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.4	0.00000
2027	S05	Excavators	100 < hp <= 175	0.59	7.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.4	0.00000
2027	S05	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2027	S05	Off-highway Trucks	300 < hp <= 600	0.59	310.0	0.0050	0.0015	0.0193	0.0002	0.0012	0.0012	58.9	0.00007
2027	S05	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2027	S05	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2027	S05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2027	S06	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2027	S06	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2027	S06	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2027	S06	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2027	S06	Crawler Tractor/Dozers	100 < hp <= 175	0.59	11.5	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.6	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S06	Excavators	100 < hp <= 175	0.59	11.5	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.6	0.00000
2027	S06	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2027	S06	Off-highway Trucks	300 < hp <= 600	0.59	319.0	0.0052	0.0015	0.0199	0.0002	0.0013	0.0012	60.6	0.00008
2027	S06	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2027	S06	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2027	S06	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2027	S07	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	S07	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2027	S07	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2027	S07	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2027	S07	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2027	S07	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2027	S07	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2027	S07	Crawler Tractor/Dozers	100 < hp <= 175	0.59	61.5	0.0007	0.0001	0.0019	0.0000	0.0002	0.0002	3.4	0.00001
2027	S07	Excavators	100 < hp <= 175	0.59	270.3	0.0024	0.0004	0.0080	0.0000	0.0006	0.0006	15.0	0.00003
2027	S07	Forklifts	75 < hp <= 100	0.59	3,584.0	0.0121	0.0018	0.1998	0.0004	0.0028	0.0027	126.1	0.00012
2027	S07	Generator Sets	25 < hp <= 40	0.43	144.8	0.0019	0.0005	0.0084	0.0000	0.0003	0.0003	1.5	0.00004
2027	S07	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S07	Off-highway Trucks	300 < hp <= 600	0.59	6,930.2	0.1129	0.0328	0.4318	0.0038	0.0273	0.0265	1,316.9	0.00164
2027	S07	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	S07	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2027	S07	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2027	S07	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	S07	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2027	S07	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2027	S07	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2027	S07	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	153.6	0.0107	0.0019	0.0116	0.0000	0.0014	0.0014	1.7	0.00009
2027	S07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	600.0	0.0549	0.0095	0.0502	0.0000	0.0073	0.0071	8.7	0.00043
2027	S08	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	S08	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2027	S08	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2027	S08	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2027	S08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	9.9	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2027	S08	Excavators	100 < hp <= 175	0.59	169.9	0.0015	0.0002	0.0050	0.0000	0.0004	0.0003	9.4	0.00002
2027	S08	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2027	S08	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2027	S08	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	S08	Off-highway Trucks	300 < hp <= 600	0.59	6,493.8	0.1057	0.0307	0.4046	0.0036	0.0256	0.0248	1,234.0	0.00154
2027	S08	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	S08	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	S08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2027	S09	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	S09	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2027	S09	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2027	S09	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2027	S09	Crawler Tractor/Dozers	100 < hp <= 175	0.59	9.9	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2027	S09	Excavators	100 < hp <= 175	0.59	169.9	0.0015	0.0002	0.0050	0.0000	0.0004	0.0003	9.4	0.00002
2027	S09	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2027	S09	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2027	S09	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	S09	Off-highway Trucks	300 < hp <= 600	0.59	6,493.8	0.1057	0.0307	0.4046	0.0036	0.0256	0.0248	1,234.0	0.00154
2027	S09	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	S09	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2027	S09	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2027	T01	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2027	T01	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	T01	Air Compressors	75 < hp <= 100	0.43	51.8	0.0011	0.0001	0.0034	0.0000	0.0002	0.0002	1.3	0.00001
2027	T01	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2027	T01	Chain Saws > 6 HP	6 < hp <= 11	0.7	82.0	0.0926	0.0214	0.0005	0.0000	0.0034	0.0031	0.2	0.00000
2027	T01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	82.0	0.0048	0.0009	0.0106	0.0000	0.0008	0.0008	2.1	0.00004
2027	T01	Concrete/Industrial Saws	25 < hp <= 40	0.59	51.8	0.0004	0.0001	0.0034	0.0000	0.0000	0.0000	0.7	0.00002
2027	T01	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2027	T01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	412.7	0.0046	0.0007	0.0130	0.0001	0.0011	0.0011	22.9	0.00005
2027	T01	Excavators	100 < hp <= 175	0.59	558.8	0.0049	0.0008	0.0165	0.0001	0.0012	0.0011	31.0	0.00006
2027	T01	Forklifts	75 < hp <= 100	0.59	3,700.0	0.0125	0.0018	0.2062	0.0004	0.0029	0.0028	130.1	0.00012
2027	T01	Generator Sets	25 < hp <= 40	0.43	301.0	0.0039	0.0011	0.0175	0.0000	0.0006	0.0006	3.1	0.00009
2027	T01	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2027	T01	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2027	T01	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2027	T01	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2027	T01	Off-highway Trucks	300 < hp <= 600	0.59	12,536.6	0.2042	0.0593	0.7811	0.0070	0.0494	0.0480	2,382.3	0.00297
2027	T01	Other Construction Equipment	100 < hp <= 175	0.43	516.6	0.0099	0.0023	0.0281	0.0001	0.0022	0.0021	20.9	0.00015
2027	T01	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2027	T01	Pavers	100 < hp <= 175	0.59	51.8	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	2.9	0.00001
2027	T01	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2027	T01	Pumps	6 < hp <= 11	0.43	254.0	0.0034	0.0011	0.0056	0.0000	0.0004	0.0003	0.7	0.00008

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2027	T01	Rollers	75 < hp <= 100	0.59	194.3	0.0033	0.0003	0.0133	0.0000	0.0005	0.0005	6.8	0.00002
2027	T01	Scrapers	300 < hp <= 600	0.59	64.8	0.0053	0.0008	0.0143	0.0000	0.0009	0.0008	12.3	0.00005
2027	T01	Skid Steer Loaders	50 < hp <= 75	0.21	15.9	0.0020	0.0004	0.0017	0.0000	0.0003	0.0003	0.2	0.00001
2027	T01	Surfacing Equipment	16 < hp <= 25	0.59	51.8	0.0013	0.0003	0.0032	0.0000	0.0001	0.0001	0.5	0.00002
2027	T01	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2027	T01	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2027	T01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	129.1	0.0241	0.0073	0.0423	0.0000	0.0050	0.0049	8.3	0.00041
2027	T01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	466.1	0.0324	0.0057	0.0353	0.0000	0.0043	0.0041	5.1	0.00028
2027	T01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	757.5	0.0693	0.0120	0.0634	0.0000	0.0092	0.0089	11.0	0.00055
2028	A01	Air Compressors	75 < hp <= 100	0.43	120.4	0.0025	0.0003	0.0080	0.0000	0.0004	0.0004	3.1	0.00002
2028	A01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	90.0	0.0053	0.0010	0.0117	0.0000	0.0009	0.0009	2.3	0.00004
2028	A01	Concrete/Industrial Saws	25 < hp <= 40	0.59	112.4	0.0009	0.0003	0.0075	0.0000	0.0001	0.0001	1.6	0.00003
2028	A01	Concrete/Industrial Saws	6 < hp <= 11	0.7	90.0	0.0019	0.0006	0.0032	0.0000	0.0002	0.0002	0.4	0.00005
2028	A01	Cranes	175 < hp <= 300	0.43	8.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.5	0.00000
2028	A01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	687.3	0.0076	0.0012	0.0216	0.0001	0.0019	0.0018	38.1	0.00009
2028	A01	Excavators	100 < hp <= 175	0.59	882.8	0.0078	0.0012	0.0260	0.0001	0.0019	0.0018	48.9	0.00009
2028	A01	Graders	175 < hp <= 300	0.59	36.4	0.0003	0.0001	0.0012	0.0000	0.0001	0.0001	3.5	0.00001
2028	A01	Irrigation Sets	300 < hp <= 600	0.59	32.8	0.0095	0.0020	0.0341	0.0000	0.0016	0.0016	6.2	0.00013

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	A01	Off-highway Trucks	300 < hp <= 600	0.59	7,913.4	0.1289	0.0374	0.4930	0.0044	0.0312	0.0303	1,503.7	0.00187
2028	A01	Other Construction Equipment	100 < hp <= 175	0.43	1,117.4	0.0214	0.0050	0.0608	0.0001	0.0047	0.0046	45.1	0.00033
2028	A01	Pavers	100 < hp <= 175	0.59	112.4	0.0016	0.0003	0.0038	0.0000	0.0004	0.0004	6.2	0.00002
2028	A01	Pumps	6 < hp <= 11	0.43	30.0	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2028	A01	Rollers	75 < hp <= 100	0.59	376.7	0.0065	0.0006	0.0258	0.0000	0.0010	0.0009	13.2	0.00004
2028	A01	Scrapers	300 < hp <= 600	0.59	140.5	0.0114	0.0018	0.0310	0.0001	0.0019	0.0018	26.7	0.00012
2028	A01	Skid Steer Loaders	50 < hp <= 75	0.21	55.8	0.0069	0.0013	0.0058	0.0000	0.0010	0.0009	0.6	0.00005
2028	A01	Surfacing Equipment	16 < hp <= 25	0.59	112.4	0.0027	0.0006	0.0069	0.0000	0.0003	0.0003	1.0	0.00005
2028	A01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	256.7	0.0480	0.0145	0.0841	0.0001	0.0100	0.0097	16.6	0.00082
2028	A01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	126.0	0.0115	0.0020	0.0105	0.0000	0.0015	0.0015	1.8	0.00009
2028	A04	Air Compressors	75 < hp <= 100	0.43	22.8	0.0005	0.0001	0.0015	0.0000	0.0001	0.0001	0.6	0.00000
2028	A04	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	20.4	0.0012	0.0002	0.0026	0.0000	0.0002	0.0002	0.5	0.00001
2028	A04	Concrete/Industrial Saws	25 < hp <= 40	0.59	22.8	0.0002	0.0001	0.0015	0.0000	0.0000	0.0000	0.3	0.00001
2028	A04	Concrete/Industrial Saws	6 < hp <= 11	0.7	20.4	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2028	A04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	147.7	0.0016	0.0003	0.0046	0.0000	0.0004	0.0004	8.2	0.00002
2028	A04	Excavators	100 < hp <= 175	0.59	375.7	0.0033	0.0005	0.0111	0.0001	0.0008	0.0008	20.8	0.00004
2028	A04	Graders	175 < hp <= 300	0.59	8.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.8	0.00000
2028	A04	Irrigation Sets	300 < hp <= 600	0.59	7.2	0.0021	0.0004	0.0075	0.0000	0.0004	0.0003	1.3	0.00003
2028	A04	Off-highway Trucks	300 < hp <= 600	0.59	5,798.9	0.0944	0.0274	0.3613	0.0032	0.0229	0.0222	1,101.9	0.00137

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	A04	Other Construction Equipment	100 < hp <= 175	0.43	1,441.6	0.0276	0.0065	0.0784	0.0002	0.0061	0.0059	58.2	0.00043
2028	A04	Pavers	100 < hp <= 175	0.59	22.8	0.0003	0.0001	0.0008	0.0000	0.0001	0.0001	1.3	0.00000
2028	A04	Pumps	6 < hp <= 11	0.43	6.8	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	A04	Rollers	75 < hp <= 100	0.59	92.7	0.0016	0.0001	0.0063	0.0000	0.0002	0.0002	3.3	0.00001
2028	A04	Scrapers	300 < hp <= 600	0.59	28.5	0.0023	0.0004	0.0063	0.0000	0.0004	0.0004	5.4	0.00002
2028	A04	Skid Steer Loaders	50 < hp <= 75	0.21	22.1	0.0027	0.0005	0.0023	0.0000	0.0004	0.0004	0.2	0.00002
2028	A04	Surfacing Equipment	16 < hp <= 25	0.59	22.8	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.2	0.00001
2028	A04	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	91.9	0.0172	0.0052	0.0301	0.0000	0.0036	0.0035	5.9	0.00029
2028	A04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	45.7	0.0042	0.0007	0.0038	0.0000	0.0006	0.0005	0.7	0.00003
2028	A08	Air Compressors	75 < hp <= 100	0.43	53.3	0.0011	0.0001	0.0035	0.0000	0.0002	0.0002	1.4	0.00001
2028	A08	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	42.0	0.0025	0.0005	0.0055	0.0000	0.0004	0.0004	1.1	0.00002
2028	A08	Concrete/Industrial Saws	25 < hp <= 40	0.59	53.3	0.0004	0.0001	0.0035	0.0000	0.0000	0.0000	0.7	0.00002
2028	A08	Concrete/Industrial Saws	6 < hp <= 11	0.7	42.0	0.0009	0.0003	0.0015	0.0000	0.0001	0.0001	0.2	0.00002
2028	A08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	428.1	0.0048	0.0007	0.0134	0.0001	0.0012	0.0011	23.7	0.00005
2028	A08	Excavators	100 < hp <= 175	0.59	789.0	0.0070	0.0011	0.0233	0.0001	0.0017	0.0016	43.7	0.00008
2028	A08	Generator Sets	25 < hp <= 40	0.43	576.0	0.0075	0.0021	0.0335	0.0000	0.0012	0.0012	5.8	0.00018
2028	A08	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2028	A08	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2028	A08	Off-highway Trucks	300 < hp <= 600	0.59	7,040.0	0.1146	0.0333	0.4386	0.0039	0.0278	0.0269	1,337.8	0.00167

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	A08	Other Construction Equipment	100 < hp <= 175	0.43	527.1	0.0101	0.0024	0.0287	0.0001	0.0022	0.0021	21.3	0.00016
2028	A08	Pavers	100 < hp <= 175	0.59	53.3	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	3.0	0.00001
2028	A08	Pumps	6 < hp <= 11	0.43	14.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2028	A08	Rollers	75 < hp <= 100	0.59	159.6	0.0028	0.0003	0.0109	0.0000	0.0004	0.0004	5.6	0.00002
2028	A08	Scrapers	300 < hp <= 600	0.59	66.6	0.0054	0.0009	0.0147	0.0000	0.0009	0.0009	12.7	0.00006
2028	A08	Skid Steer Loaders	50 < hp <= 75	0.21	10.4	0.0013	0.0002	0.0011	0.0000	0.0002	0.0002	0.1	0.00001
2028	A08	Surfacing Equipment	16 < hp <= 25	0.59	53.3	0.0013	0.0003	0.0033	0.0000	0.0001	0.0001	0.5	0.00002
2028	A08	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	88.1	0.0165	0.0050	0.0289	0.0000	0.0034	0.0033	5.7	0.00028
2028	A08	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	1,152.0	0.0802	0.0141	0.0872	0.0000	0.0105	0.0102	12.6	0.00069
2028	A08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	33.1	0.0030	0.0005	0.0028	0.0000	0.0004	0.0004	0.5	0.00002
2028	A10	Air Compressors	75 < hp <= 100	0.43	1.9	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	A10	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	2.4	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2028	A10	Concrete/Industrial Saws	25 < hp <= 40	0.59	1.9	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	A10	Concrete/Industrial Saws	6 < hp <= 11	0.7	2.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	A10	Crawler Tractor/Dozers	100 < hp <= 175	0.59	22.5	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.2	0.00000
2028	A10	Excavators	100 < hp <= 175	0.59	13.5	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.7	0.00000
2028	A10	Graders	175 < hp <= 300	0.59	1.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1	0.00000
2028	A10	Irrigation Sets	300 < hp <= 600	0.59	0.9	0.0003	0.0001	0.0009	0.0000	0.0000	0.0000	0.2	0.00000
2028	A10	Off-highway Trucks	300 < hp <= 600	0.59	2,278.4	0.0371	0.0108	0.1420	0.0013	0.0090	0.0087	433.0	0.00054

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	A10	Other Construction Equipment	100 < hp <= 175	0.43	39.5	0.0008	0.0002	0.0021	0.0000	0.0002	0.0002	1.6	0.00001
2028	A10	Pavers	100 < hp <= 175	0.59	1.9	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.1	0.00000
2028	A10	Pumps	6 < hp <= 11	0.43	0.8	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0	0.00000
2028	A10	Rollers	75 < hp <= 100	0.59	17.2	0.0003	0.0000	0.0012	0.0000	0.0000	0.0000	0.6	0.00000
2028	A10	Scrapers	300 < hp <= 600	0.59	2.4	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.5	0.00000
2028	A10	Skid Steer Loaders	50 < hp <= 75	0.21	4.9	0.0006	0.0001	0.0005	0.0000	0.0001	0.0001	0.1	0.00000
2028	A10	Surfacing Equipment	16 < hp <= 25	0.59	1.9	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	A10	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	24.7	0.0046	0.0014	0.0081	0.0000	0.0010	0.0009	1.6	0.00008
2028	A10	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	12.1	0.0011	0.0002	0.0010	0.0000	0.0001	0.0001	0.2	0.00001
2028	C02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	C02	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2028	C02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	C02	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2028	C02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	64.0	0.0037	0.0007	0.0083	0.0000	0.0007	0.0006	1.6	0.00003
2028	C02	Concrete/Industrial Saws	6 < hp <= 11	0.7	64.0	0.0013	0.0005	0.0023	0.0000	0.0001	0.0001	0.3	0.00004
2028	C02	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2028	C02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	40.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	2.2	0.00000
2028	C02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2028	C02	Forklifts	75 < hp <= 100	0.59	3,724.0	0.0125	0.0018	0.2076	0.0004	0.0029	0.0029	131.0	0.00012

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	C02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	C02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2028	C02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	C02	Off-highway Trucks	300 < hp <= 600	0.59	6,864.0	0.1118	0.0325	0.4277	0.0038	0.0271	0.0263	1,304.3	0.00162
2028	C02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	C02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	C02	Plate Compactors	3 < hp <= 6	0.43	40.0	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2028	C02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	C02	Rollers	75 < hp <= 100	0.59	56.0	0.0010	0.0001	0.0038	0.0000	0.0001	0.0001	2.0	0.00001
2028	C02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2028	C02	Surfacing Equipment	75 < hp <= 100	0.43	64.0	0.0022	0.0003	0.0047	0.0000	0.0003	0.0003	1.6	0.00001
2028	C02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2028	C02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2028	C02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	840.0	0.0769	0.0133	0.0703	0.0000	0.0102	0.0099	12.2	0.00061
2028	C03	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	C03	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2028	C03	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	C03	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2028	C03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	64.0	0.0037	0.0007	0.0083	0.0000	0.0007	0.0006	1.6	0.00003

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	C03	Concrete/Industrial Saws	6 < hp <= 11	0.7	64.0	0.0013	0.0005	0.0023	0.0000	0.0001	0.0001	0.3	0.00004
2028	C03	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2028	C03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	40.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	2.2	0.00000
2028	C03	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2028	C03	Forklifts	75 < hp <= 100	0.59	3,724.0	0.0125	0.0018	0.2076	0.0004	0.0029	0.0029	131.0	0.00012
2028	C03	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	C03	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2028	C03	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	C03	Off-highway Trucks	300 < hp <= 600	0.59	6,864.0	0.1118	0.0325	0.4277	0.0038	0.0271	0.0263	1,304.3	0.00162
2028	C03	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	C03	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	C03	Plate Compactors	3 < hp <= 6	0.43	40.0	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2028	C03	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	C03	Rollers	75 < hp <= 100	0.59	56.0	0.0010	0.0001	0.0038	0.0000	0.0001	0.0001	2.0	0.00001
2028	C03	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2028	C03	Surfacing Equipment	75 < hp <= 100	0.43	64.0	0.0022	0.0003	0.0047	0.0000	0.0003	0.0003	1.6	0.00001
2028	C03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2028	C03	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2028	C03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	840.0	0.0769	0.0133	0.0703	0.0000	0.0102	0.0099	12.2	0.00061

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	H01	Air Compressors	75 < hp <= 100	0.43	27.1	0.0006	0.0001	0.0018	0.0000	0.0001	0.0001	0.7	0.00000
2028	H01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	21.6	0.0013	0.0002	0.0028	0.0000	0.0002	0.0002	0.5	0.00001
2028	H01	Concrete/Industrial Saws	25 < hp <= 40	0.59	27.1	0.0002	0.0001	0.0018	0.0000	0.0000	0.0000	0.4	0.00001
2028	H01	Concrete/Industrial Saws	6 < hp <= 11	0.7	21.6	0.0005	0.0002	0.0008	0.0000	0.0000	0.0000	0.1	0.00001
2028	H01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	151.8	0.0017	0.0003	0.0048	0.0000	0.0004	0.0004	8.4	0.00002
2028	H01	Excavators	100 < hp <= 175	0.59	41.8	0.0004	0.0001	0.0012	0.0000	0.0001	0.0001	2.3	0.00000
2028	H01	Graders	175 < hp <= 300	0.59	8.8	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.8	0.00000
2028	H01	Irrigation Sets	300 < hp <= 600	0.59	7.9	0.0023	0.0005	0.0082	0.0000	0.0004	0.0004	1.5	0.00003
2028	H01	Off-highway Trucks	300 < hp <= 600	0.59	1,833.7	0.0299	0.0087	0.1142	0.0010	0.0072	0.0070	348.4	0.00043
2028	H01	Other Construction Equipment	100 < hp <= 175	0.43	301.2	0.0058	0.0013	0.0164	0.0000	0.0013	0.0012	12.2	0.00009
2028	H01	Pavers	100 < hp <= 175	0.59	27.1	0.0004	0.0001	0.0009	0.0000	0.0001	0.0001	1.5	0.00000
2028	H01	Pumps	6 < hp <= 11	0.43	7.2	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	H01	Rollers	75 < hp <= 100	0.59	88.0	0.0015	0.0001	0.0060	0.0000	0.0002	0.0002	3.1	0.00001
2028	H01	Scrapers	300 < hp <= 600	0.59	33.8	0.0028	0.0004	0.0075	0.0000	0.0004	0.0004	6.4	0.00003
2028	H01	Skid Steer Loaders	50 < hp <= 75	0.21	28.2	0.0035	0.0007	0.0029	0.0000	0.0005	0.0005	0.3	0.00002
2028	H01	Surfacing Equipment	16 < hp <= 25	0.59	27.1	0.0007	0.0002	0.0017	0.0000	0.0001	0.0001	0.2	0.00001
2028	H01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	58.1	0.0109	0.0033	0.0190	0.0000	0.0023	0.0022	3.8	0.00018
2028	H01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	43.5	0.0040	0.0007	0.0036	0.0000	0.0005	0.0005	0.6	0.00003
2028	L01	Air Compressors	75 < hp <= 100	0.43	22.8	0.0005	0.0001	0.0015	0.0000	0.0001	0.0001	0.6	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	L01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	19.2	0.0011	0.0002	0.0025	0.0000	0.0002	0.0002	0.5	0.00001
2028	L01	Concrete/Industrial Saws	25 < hp <= 40	0.59	22.8	0.0002	0.0001	0.0015	0.0000	0.0000	0.0000	0.3	0.00001
2028	L01	Concrete/Industrial Saws	6 < hp <= 11	0.7	19.2	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2028	L01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	206.5	0.0023	0.0004	0.0065	0.0000	0.0006	0.0005	11.4	0.00003
2028	L01	Excavators	100 < hp <= 175	0.59	113.3	0.0010	0.0002	0.0033	0.0000	0.0002	0.0002	6.3	0.00001
2028	L01	Graders	175 < hp <= 300	0.59	7.6	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.7	0.00000
2028	L01	Irrigation Sets	300 < hp <= 600	0.59	6.9	0.0020	0.0004	0.0071	0.0000	0.0003	0.0003	1.3	0.00003
2028	L01	Off-highway Trucks	300 < hp <= 600	0.59	4,227.2	0.0688	0.0200	0.2634	0.0023	0.0167	0.0162	803.3	0.00100
2028	L01	Other Construction Equipment	100 < hp <= 175	0.43	309.1	0.0059	0.0014	0.0168	0.0000	0.0013	0.0013	12.5	0.00009
2028	L01	Pavers	100 < hp <= 175	0.59	55.9	0.0008	0.0001	0.0019	0.0000	0.0002	0.0002	3.1	0.00001
2028	L01	Plate Compactors	3 < hp <= 6	0.43	49.2	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2028	L01	Pumps	6 < hp <= 11	0.43	6.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	L01	Rollers	75 < hp <= 100	0.59	90.4	0.0016	0.0001	0.0062	0.0000	0.0002	0.0002	3.2	0.00001
2028	L01	Scrapers	300 < hp <= 600	0.59	28.4	0.0023	0.0004	0.0063	0.0000	0.0004	0.0004	5.4	0.00002
2028	L01	Skid Steer Loaders	50 < hp <= 75	0.21	52.4	0.0065	0.0012	0.0055	0.0000	0.0009	0.0009	0.6	0.00004
2028	L01	Surfacing Equipment	16 < hp <= 25	0.59	33.7	0.0008	0.0002	0.0021	0.0000	0.0001	0.0001	0.3	0.00002
2028	L01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	70.4	0.0132	0.0040	0.0231	0.0000	0.0027	0.0027	4.5	0.00022
2028	L01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	110.6	0.0101	0.0018	0.0093	0.0000	0.0013	0.0013	1.6	0.00008
2028	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2028	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2028	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2028	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2028	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2028	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2028	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2028	L03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	10.8	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.3	0.00000
2028	L03	Concrete/Industrial Saws	6 < hp <= 11	0.7	10.8	0.0002	0.0001	0.0004	0.0000	0.0000	0.0000	0.0	0.00001
2028	L03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	80.4	0.0009	0.0001	0.0025	0.0000	0.0002	0.0002	4.5	0.00001
2028	L03	Excavators	100 < hp <= 175	0.59	31.9	0.0003	0.0000	0.0009	0.0000	0.0001	0.0001	1.8	0.00000
2028	L03	Graders	175 < hp <= 300	0.59	4.2	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.4	0.00000
2028	L03	Irrigation Sets	300 < hp <= 600	0.59	3.8	0.0011	0.0002	0.0040	0.0000	0.0002	0.0002	0.7	0.00002
2028	L03	Off-highway Trucks	300 < hp <= 600	0.59	1,433.7	0.0233	0.0068	0.0893	0.0008	0.0057	0.0055	272.4	0.00034
2028	L03	Other Construction Equipment	100 < hp <= 175	0.43	184.9	0.0035	0.0008	0.0101	0.0000	0.0008	0.0008	7.5	0.00006

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	L03	Pavers	100 < hp <= 175	0.59	29.3	0.0004	0.0001	0.0010	0.0000	0.0001	0.0001	1.6	0.00000
2028	L03	Plate Compactors	3 < hp <= 6	0.43	50.0	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2028	L03	Pumps	6 < hp <= 11	0.43	3.6	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	L03	Rollers	75 < hp <= 100	0.59	56.5	0.0010	0.0001	0.0039	0.0000	0.0001	0.0001	2.0	0.00001
2028	L03	Scrapers	300 < hp <= 600	0.59	14.5	0.0012	0.0002	0.0032	0.0000	0.0002	0.0002	2.7	0.00001
2028	L03	Skid Steer Loaders	50 < hp <= 75	0.21	48.9	0.0061	0.0011	0.0051	0.0000	0.0008	0.0008	0.5	0.00004
2028	L03	Surfacing Equipment	16 < hp <= 25	0.59	5.6	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2028	L03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	48.4	0.0090	0.0027	0.0159	0.0000	0.0019	0.0018	3.1	0.00015
2028	L03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	109.5	0.0100	0.0017	0.0092	0.0000	0.0013	0.0013	1.6	0.00008
2028	L04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	L04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2028	L04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2028	L04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2028	L04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2028	L04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2028	L04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	L04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	L04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2028	L04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	L04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	L04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2028	L05	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2028	L05	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	L05	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2028	L05	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2028	L05	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2028	L05	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2028	L05	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2028	L05	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2028	L05	Off-highway Trucks	300 < hp <= 600	0.59	164.0	0.0027	0.0008	0.0102	0.0001	0.0006	0.0006	31.2	0.00004
2028	L05	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	L05	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	L05	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2028	L05	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2028	L05	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2028	L05	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2028	L05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	120.0	0.0110	0.0019	0.0100	0.0000	0.0015	0.0014	1.7	0.00009
2028	S01	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2028	S01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S01	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2028	S01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	28.8	0.0017	0.0003	0.0037	0.0000	0.0003	0.0003	0.7	0.00001
2028	S01	Concrete/Industrial Saws	6 < hp <= 11	0.7	28.8	0.0006	0.0002	0.0010	0.0000	0.0001	0.0001	0.1	0.00002
2028	S01	Cranes	175 < hp <= 300	0.43	19.0	0.0002	0.0001	0.0008	0.0000	0.0000	0.0000	1.3	0.00000
2028	S01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	158.8	0.0018	0.0003	0.0050	0.0000	0.0004	0.0004	8.8	0.00002
2028	S01	Excavators	100 < hp <= 175	0.59	72.1	0.0006	0.0001	0.0021	0.0000	0.0002	0.0001	4.0	0.00001
2028	S01	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2028	S01	Generator Sets	25 < hp <= 40	0.43	7.4	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	0.1	0.00000
2028	S01	Graders	175 < hp <= 300	0.59	1.8	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.2	0.00000
2028	S01	Irrigation Sets	300 < hp <= 600	0.59	1.6	0.0005	0.0001	0.0017	0.0000	0.0001	0.0001	0.3	0.00001
2028	S01	Off-highway Trucks	300 < hp <= 600	0.59	1,353.5	0.0220	0.0064	0.0843	0.0008	0.0053	0.0052	257.2	0.00032
2028	S01	Other Construction Equipment	100 < hp <= 175	0.43	74.0	0.0014	0.0003	0.0040	0.0000	0.0003	0.0003	3.0	0.00002
2028	S01	Pavers	100 < hp <= 175	0.59	1.6	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.1	0.00000
2028	S01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	S01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	S01	Pumps	6 < hp <= 11	0.43	1.6	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0	0.00000
2028	S01	Rollers	75 < hp <= 100	0.59	95.5	0.0016	0.0002	0.0065	0.0000	0.0002	0.0002	3.4	0.00001
2028	S01	Scrapers	300 < hp <= 600	0.59	41.6	0.0034	0.0005	0.0092	0.0000	0.0006	0.0005	7.9	0.00003
2028	S01	Skid Steer Loaders	50 < hp <= 75	0.21	22.4	0.0028	0.0005	0.0023	0.0000	0.0004	0.0004	0.2	0.00002

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S01	Surfacing Equipment	16 < hp <= 25	0.59	2.0	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2028	S01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2028	S01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	71.5	0.0134	0.0040	0.0234	0.0000	0.0028	0.0027	4.6	0.00023
2028	S01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	38.8	0.0027	0.0005	0.0029	0.0000	0.0004	0.0003	0.4	0.00002
2028	S01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	142.4	0.0130	0.0023	0.0119	0.0000	0.0017	0.0017	2.1	0.00010
2028	S02	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2028	S02	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2028	S02	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	S02	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2028	S02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2028	S02	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2028	S02	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2028	S02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	36.6	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	2.0	0.00000
2028	S02	Excavators	100 < hp <= 175	0.59	77.6	0.0007	0.0001	0.0023	0.0000	0.0002	0.0002	4.3	0.00001
2028	S02	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2028	S02	Generator Sets	25 < hp <= 40	0.43	57.0	0.0007	0.0002	0.0033	0.0000	0.0001	0.0001	0.6	0.00002
2028	S02	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2028	S02	Off-highway Trucks	300 < hp <= 600	0.59	823.8	0.0134	0.0039	0.0513	0.0005	0.0032	0.0032	156.5	0.00019

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S02	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2028	S02	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	S02	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2028	S02	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2028	S02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2028	S02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	138.0	0.0096	0.0017	0.0104	0.0000	0.0013	0.0012	1.5	0.00008
2028	S02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2028	S03	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2028	S03	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2028	S03	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2028	S03	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2028	S03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2028	S03	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2028	S03	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2028	S03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2028	S03	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2028	S03	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2028	S03	Off-highway Trucks	300 < hp <= 600	0.59	602.0	0.0098	0.0028	0.0375	0.0003	0.0024	0.0023	114.4	0.00014
2028	S03	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S03	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2028	S03	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2028	S03	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2028	S03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2028	S03	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2028	S03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2028	S04	Aerial Lifts	50 < hp <= 75	0.21	20.0	0.0008	0.0001	0.0013	0.0000	0.0001	0.0001	0.2	0.00001
2028	S04	Aerial Lifts	75 < hp <= 100	0.59	80.0	0.0130	0.0021	0.0141	0.0000	0.0016	0.0016	3.3	0.00010
2028	S04	Cement & Mortar Mixers	300 < hp <= 600	0.59	160.0	0.0765	0.0163	0.2883	0.0001	0.0105	0.0102	30.0	0.00077
2028	S04	Cranes	175 < hp <= 300	0.43	6.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.4	0.00000
2028	S04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	10.4	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.6	0.00000
2028	S04	Excavators	100 < hp <= 175	0.59	10.4	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.6	0.00000
2028	S04	Forklifts	75 < hp <= 100	0.59	250.0	0.0008	0.0001	0.0139	0.0000	0.0002	0.0002	8.8	0.00001
2028	S04	Off-highway Trucks	300 < hp <= 600	0.59	316.8	0.0052	0.0015	0.0197	0.0002	0.0012	0.0012	60.2	0.00007
2028	S04	Paving Equipment	100 < hp <= 175	0.59	8.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.4	0.00000
2028	S04	Rollers	75 < hp <= 100	0.59	4.0	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.1	0.00000
2028	S04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	176.0	0.0161	0.0028	0.0147	0.0000	0.0021	0.0021	2.6	0.00013
2028	S08	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	S08	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S08	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2028	S08	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2028	S08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.5	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2028	S08	Excavators	100 < hp <= 175	0.59	176.5	0.0016	0.0002	0.0052	0.0000	0.0004	0.0004	9.8	0.00002
2028	S08	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2028	S08	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	S08	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	S08	Off-highway Trucks	300 < hp <= 600	0.59	6,507.0	0.1060	0.0308	0.4054	0.0036	0.0257	0.0249	1,236.5	0.00154
2028	S08	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	S08	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	S08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2028	S09	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	S09	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2028	S09	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2028	S09	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2028	S09	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.5	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2028	S09	Excavators	100 < hp <= 175	0.59	176.5	0.0016	0.0002	0.0052	0.0000	0.0004	0.0004	9.8	0.00002
2028	S09	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2028	S09	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	S09	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	S09	Off-highway Trucks	300 < hp <= 600	0.59	6,507.0	0.1060	0.0308	0.4054	0.0036	0.0257	0.0249	1,236.5	0.00154
2028	S09	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	S09	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2028	S09	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2028	T01	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2028	T01	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2028	T01	Air Compressors	75 < hp <= 100	0.43	51.8	0.0011	0.0001	0.0034	0.0000	0.0002	0.0002	1.3	0.00001
2028	T01	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2028	T01	Chain Saws > 6 HP	6 < hp <= 11	0.7	82.0	0.0926	0.0214	0.0005	0.0000	0.0034	0.0031	0.2	0.00000
2028	T01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	82.0	0.0048	0.0009	0.0106	0.0000	0.0008	0.0008	2.1	0.00004
2028	T01	Concrete/Industrial Saws	25 < hp <= 40	0.59	51.8	0.0004	0.0001	0.0034	0.0000	0.0000	0.0000	0.7	0.00002
2028	T01	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2028	T01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	412.7	0.0046	0.0007	0.0130	0.0001	0.0011	0.0011	22.9	0.00005
2028	T01	Excavators	100 < hp <= 175	0.59	558.8	0.0049	0.0008	0.0165	0.0001	0.0012	0.0011	31.0	0.00006
2028	T01	Forklifts	75 < hp <= 100	0.59	3,700.0	0.0125	0.0018	0.2062	0.0004	0.0029	0.0028	130.1	0.00012
2028	T01	Generator Sets	25 < hp <= 40	0.43	301.0	0.0039	0.0011	0.0175	0.0000	0.0006	0.0006	3.1	0.00009
2028	T01	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2028	T01	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	T01	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2028	T01	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	T01	Off-highway Trucks	300 < hp <= 600	0.59	12,536.6	0.2042	0.0593	0.7811	0.0070	0.0494	0.0480	2,382.3	0.00297
2028	T01	Other Construction Equipment	100 < hp <= 175	0.43	516.6	0.0099	0.0023	0.0281	0.0001	0.0022	0.0021	20.9	0.00015
2028	T01	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2028	T01	Pavers	100 < hp <= 175	0.59	51.8	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	2.9	0.00001
2028	T01	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2028	T01	Pumps	6 < hp <= 11	0.43	254.0	0.0034	0.0011	0.0056	0.0000	0.0004	0.0003	0.7	0.00008
2028	T01	Rollers	75 < hp <= 100	0.59	194.3	0.0033	0.0003	0.0133	0.0000	0.0005	0.0005	6.8	0.00002
2028	T01	Scrapers	300 < hp <= 600	0.59	64.8	0.0053	0.0008	0.0143	0.0000	0.0009	0.0008	12.3	0.00005
2028	T01	Skid Steer Loaders	50 < hp <= 75	0.21	15.9	0.0020	0.0004	0.0017	0.0000	0.0003	0.0003	0.2	0.00001
2028	T01	Surfacing Equipment	16 < hp <= 25	0.59	51.8	0.0013	0.0003	0.0032	0.0000	0.0001	0.0001	0.5	0.00002
2028	T01	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2028	T01	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2028	T01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	129.1	0.0241	0.0073	0.0423	0.0000	0.0050	0.0049	8.3	0.00041
2028	T01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	466.1	0.0324	0.0057	0.0353	0.0000	0.0043	0.0041	5.1	0.00028
2028	T01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	757.5	0.0693	0.0120	0.0634	0.0000	0.0092	0.0089	11.0	0.00055
2028	T02	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198
2028	T02	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	T02	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2028	T02	Chain Saws > 6 HP	6 < hp <= 11	0.7	40.0	0.0452	0.0104	0.0003	0.0000	0.0017	0.0015	0.1	0.00000
2028	T02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2028	T02	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2028	T02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	110.6	0.0012	0.0002	0.0035	0.0000	0.0003	0.0003	6.1	0.00001
2028	T02	Excavators	100 < hp <= 175	0.59	246.6	0.0022	0.0003	0.0073	0.0000	0.0005	0.0005	13.7	0.00002
2028	T02	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2028	T02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2028	T02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2028	T02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2028	T02	Off-highway Trucks	300 < hp <= 600	0.59	8,061.3	0.1313	0.0381	0.5023	0.0045	0.0318	0.0308	1,531.8	0.00191
2028	T02	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2028	T02	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2028	T02	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2028	T02	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2028	T02	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2028	T02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2028	T02	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2028	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.21	80.0	0.0030	0.0009	0.0053	0.0000	0.0006	0.0006	1.1	0.00005
2028	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2028	T02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2028	T02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2028	T02	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2029	A01	Air Compressors	75 < hp <= 100	0.43	29.1	0.0006	0.0001	0.0019	0.0000	0.0001	0.0001	0.7	0.00001
2029	A01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	27.6	0.0016	0.0003	0.0036	0.0000	0.0003	0.0003	0.7	0.00001
2029	A01	Concrete/Industrial Saws	25 < hp <= 40	0.59	29.1	0.0002	0.0001	0.0019	0.0000	0.0000	0.0000	0.4	0.00001
2029	A01	Concrete/Industrial Saws	6 < hp <= 11	0.7	27.6	0.0006	0.0002	0.0010	0.0000	0.0001	0.0001	0.1	0.00002
2029	A01	Cranes	175 < hp <= 300	0.43	-	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	-	0.00000
2029	A01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	233.4	0.0026	0.0004	0.0073	0.0000	0.0006	0.0006	12.9	0.00003
2029	A01	Excavators	100 < hp <= 175	0.59	277.0	0.0025	0.0004	0.0082	0.0000	0.0006	0.0006	15.4	0.00003
2029	A01	Graders	175 < hp <= 300	0.59	11.3	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.1	0.00000
2029	A01	Irrigation Sets	300 < hp <= 600	0.59	10.2	0.0030	0.0006	0.0106	0.0000	0.0005	0.0005	1.9	0.00004
2029	A01	Off-highway Trucks	300 < hp <= 600	0.59	2,244.7	0.0366	0.0106	0.1399	0.0012	0.0089	0.0086	426.6	0.00053
2029	A01	Other Construction Equipment	100 < hp <= 175	0.43	390.4	0.0075	0.0017	0.0212	0.0000	0.0016	0.0016	15.8	0.00012
2029	A01	Pavers	100 < hp <= 175	0.59	29.1	0.0004	0.0001	0.0010	0.0000	0.0001	0.0001	1.6	0.00000
2029	A01	Pumps	6 < hp <= 11	0.43	9.2	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2029	A01	Rollers	75 < hp <= 100	0.59	153.1	0.0026	0.0002	0.0105	0.0000	0.0004	0.0004	5.4	0.00002
2029	A01	Scrapers	300 < hp <= 600	0.59	36.4	0.0030	0.0005	0.0080	0.0000	0.0005	0.0005	6.9	0.00003
2029	A01	Skid Steer Loaders	50 < hp <= 75	0.21	30.5	0.0038	0.0007	0.0032	0.0000	0.0005	0.0005	0.3	0.00003

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	A01	Surfacing Equipment	16 < hp <= 25	0.59	29.1	0.0007	0.0002	0.0018	0.0000	0.0001	0.0001	0.3	0.00001
2029	A01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	172.1	0.0322	0.0097	0.0564	0.0000	0.0067	0.0065	11.1	0.00055
2029	A01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	79.8	0.0073	0.0013	0.0067	0.0000	0.0010	0.0009	1.2	0.00006
2029	A04	Air Compressors	75 < hp <= 100	0.43	30.5	0.0006	0.0001	0.0020	0.0000	0.0001	0.0001	0.8	0.00001
2029	A04	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	26.4	0.0015	0.0003	0.0034	0.0000	0.0003	0.0003	0.7	0.00001
2029	A04	Concrete/Industrial Saws	25 < hp <= 40	0.59	30.5	0.0002	0.0001	0.0020	0.0000	0.0000	0.0000	0.4	0.00001
2029	A04	Concrete/Industrial Saws	6 < hp <= 11	0.7	26.4	0.0006	0.0002	0.0009	0.0000	0.0001	0.0001	0.1	0.00001
2029	A04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	196.8	0.0022	0.0003	0.0062	0.0000	0.0005	0.0005	10.9	0.00002
2029	A04	Excavators	100 < hp <= 175	0.59	493.1	0.0044	0.0007	0.0145	0.0001	0.0010	0.0010	27.3	0.00005
2029	A04	Graders	175 < hp <= 300	0.59	10.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.0	0.00000
2029	A04	Irrigation Sets	300 < hp <= 600	0.59	9.6	0.0028	0.0006	0.0099	0.0000	0.0005	0.0005	1.8	0.00004
2029	A04	Off-highway Trucks	300 < hp <= 600	0.59	7,740.8	0.1261	0.0366	0.4823	0.0043	0.0305	0.0296	1,471.0	0.00183
2029	A04	Other Construction Equipment	100 < hp <= 175	0.43	1,931.0	0.0370	0.0086	0.1050	0.0002	0.0081	0.0079	78.0	0.00058
2029	A04	Pavers	100 < hp <= 175	0.59	30.5	0.0004	0.0001	0.0010	0.0000	0.0001	0.0001	1.7	0.00000
2029	A04	Pumps	6 < hp <= 11	0.43	8.8	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2029	A04	Rollers	75 < hp <= 100	0.59	123.4	0.0021	0.0002	0.0084	0.0000	0.0003	0.0003	4.3	0.00001
2029	A04	Scrapers	300 < hp <= 600	0.59	38.1	0.0031	0.0005	0.0084	0.0000	0.0005	0.0005	7.2	0.00003
2029	A04	Skid Steer Loaders	50 < hp <= 75	0.21	27.3	0.0034	0.0006	0.0029	0.0000	0.0005	0.0005	0.3	0.00002
2029	A04	Surfacing Equipment	16 < hp <= 25	0.59	30.5	0.0007	0.0002	0.0019	0.0000	0.0001	0.0001	0.3	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	A04	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	120.4	0.0225	0.0068	0.0394	0.0000	0.0047	0.0045	7.8	0.00038
2029	A04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	58.5	0.0054	0.0009	0.0049	0.0000	0.0007	0.0007	0.9	0.00004
2029	A05	Off-highway Trucks	300 < hp <= 600	0.59	95.4	0.0016	0.0005	0.0059	0.0001	0.0004	0.0004	18.1	0.00002
2029	A05	Other Construction Equipment	100 < hp <= 175	0.43	47.7	0.0009	0.0002	0.0026	0.0000	0.0002	0.0002	1.9	0.00001
2029	A05	Skid Steer Loaders	50 < hp <= 75	0.21	6.5	0.0008	0.0002	0.0007	0.0000	0.0001	0.0001	0.1	0.00001
2029	A05	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	6.5	0.0012	0.0004	0.0021	0.0000	0.0003	0.0002	0.4	0.00002
2029	A05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	6.5	0.0006	0.0001	0.0005	0.0000	0.0001	0.0001	0.1	0.00000
2029	A08	Air Compressors	75 < hp <= 100	0.43	13.3	0.0003	0.0000	0.0009	0.0000	0.0000	0.0000	0.3	0.00000
2029	A08	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	10.8	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.3	0.00000
2029	A08	Concrete/Industrial Saws	25 < hp <= 40	0.59	13.3	0.0001	0.0000	0.0009	0.0000	0.0000	0.0000	0.2	0.00000
2029	A08	Concrete/Industrial Saws	6 < hp <= 11	0.7	10.8	0.0002	0.0001	0.0004	0.0000	0.0000	0.0000	0.0	0.00001
2029	A08	Crawler Tractor/Dozers	100 < hp <= 175	0.59	108.1	0.0012	0.0002	0.0034	0.0000	0.0003	0.0003	6.0	0.00001
2029	A08	Excavators	100 < hp <= 175	0.59	197.5	0.0017	0.0003	0.0058	0.0000	0.0004	0.0004	10.9	0.00002
2029	A08	Generator Sets	25 < hp <= 40	0.43	144.0	0.0019	0.0005	0.0084	0.0000	0.0003	0.0003	1.5	0.00004
2029	A08	Graders	175 < hp <= 300	0.59	4.5	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.4	0.00000
2029	A08	Irrigation Sets	300 < hp <= 600	0.59	4.0	0.0012	0.0003	0.0042	0.0000	0.0002	0.0002	0.8	0.00002
2029	A08	Off-highway Trucks	300 < hp <= 600	0.59	1,768.7	0.0288	0.0084	0.1102	0.0010	0.0070	0.0068	336.1	0.00042
2029	A08	Other Construction Equipment	100 < hp <= 175	0.43	135.3	0.0026	0.0006	0.0074	0.0000	0.0006	0.0006	5.5	0.00004

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	A08	Pavers	100 < hp <= 175	0.59	13.3	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.7	0.00000
2029	A08	Pumps	6 < hp <= 11	0.43	3.6	0.0000	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2029	A08	Rollers	75 < hp <= 100	0.59	40.4	0.0007	0.0001	0.0028	0.0000	0.0001	0.0001	1.4	0.00000
2029	A08	Scrapers	300 < hp <= 600	0.59	16.7	0.0014	0.0002	0.0037	0.0000	0.0002	0.0002	3.2	0.00001
2029	A08	Skid Steer Loaders	50 < hp <= 75	0.21	5.6	0.0007	0.0001	0.0006	0.0000	0.0001	0.0001	0.1	0.00000
2029	A08	Surfacing Equipment	16 < hp <= 25	0.59	13.3	0.0003	0.0001	0.0008	0.0000	0.0000	0.0000	0.1	0.00001
2029	A08	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	25.4	0.0047	0.0014	0.0083	0.0000	0.0010	0.0010	1.6	0.00008
2029	A08	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	288.0	0.0200	0.0035	0.0218	0.0000	0.0026	0.0026	3.1	0.00017
2029	A08	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	11.5	0.0011	0.0002	0.0010	0.0000	0.0001	0.0001	0.2	0.00001
2029	C03	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2029	C03	Aerial Lifts	75 < hp <= 100	0.59	976.0	0.1587	0.0251	0.1723	0.0001	0.0201	0.0195	40.0	0.00117
2029	C03	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2029	C03	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2029	C03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	64.0	0.0037	0.0007	0.0083	0.0000	0.0007	0.0006	1.6	0.00003
2029	C03	Concrete/Industrial Saws	6 < hp <= 11	0.7	64.0	0.0013	0.0005	0.0023	0.0000	0.0001	0.0001	0.3	0.00004
2029	C03	Cranes	175 < hp <= 300	0.43	256.0	0.0025	0.0009	0.0108	0.0001	0.0006	0.0006	17.5	0.00005
2029	C03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	40.0	0.0004	0.0001	0.0013	0.0000	0.0001	0.0001	2.2	0.00000
2029	C03	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2029	C03	Forklifts	75 < hp <= 100	0.59	3,724.0	0.0125	0.0018	0.2076	0.0004	0.0029	0.0029	131.0	0.00012

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	C03	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2029	C03	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2029	C03	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	C03	Off-highway Trucks	300 < hp <= 600	0.59	6,864.0	0.1118	0.0325	0.4277	0.0038	0.0271	0.0263	1,304.3	0.00162
2029	C03	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2029	C03	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2029	C03	Plate Compactors	3 < hp <= 6	0.43	40.0	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2029	C03	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2029	C03	Rollers	75 < hp <= 100	0.59	56.0	0.0010	0.0001	0.0038	0.0000	0.0001	0.0001	2.0	0.00001
2029	C03	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2029	C03	Surfacing Equipment	75 < hp <= 100	0.43	64.0	0.0022	0.0003	0.0047	0.0000	0.0003	0.0003	1.6	0.00001
2029	C03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2029	C03	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2029	C03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	840.0	0.0769	0.0133	0.0703	0.0000	0.0102	0.0099	12.2	0.00061
2029	H01	Air Compressors	75 < hp <= 100	0.43	27.1	0.0006	0.0001	0.0018	0.0000	0.0001	0.0001	0.7	0.00000
2029	H01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	21.6	0.0013	0.0002	0.0028	0.0000	0.0002	0.0002	0.5	0.00001
2029	H01	Concrete/Industrial Saws	25 < hp <= 40	0.59	27.1	0.0002	0.0001	0.0018	0.0000	0.0000	0.0000	0.4	0.00001
2029	H01	Concrete/Industrial Saws	6 < hp <= 11	0.7	21.6	0.0005	0.0002	0.0008	0.0000	0.0000	0.0000	0.1	0.00001
2029	H01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	151.8	0.0017	0.0003	0.0048	0.0000	0.0004	0.0004	8.4	0.00002

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	H01	Excavators	100 < hp <= 175	0.59	41.8	0.0004	0.0001	0.0012	0.0000	0.0001	0.0001	2.3	0.00000
2029	H01	Graders	175 < hp <= 300	0.59	8.8	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.8	0.00000
2029	H01	Irrigation Sets	300 < hp <= 600	0.59	7.9	0.0023	0.0005	0.0082	0.0000	0.0004	0.0004	1.5	0.00003
2029	H01	Off-highway Trucks	300 < hp <= 600	0.59	2,553.7	0.0416	0.0121	0.1591	0.0014	0.0101	0.0098	485.3	0.00060
2029	H01	Other Construction Equipment	100 < hp <= 175	0.43	301.2	0.0058	0.0013	0.0164	0.0000	0.0013	0.0012	12.2	0.00009
2029	H01	Pavers	100 < hp <= 175	0.59	27.1	0.0004	0.0001	0.0009	0.0000	0.0001	0.0001	1.5	0.00000
2029	H01	Pumps	6 < hp <= 11	0.43	7.2	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2029	H01	Rollers	75 < hp <= 100	0.59	88.0	0.0015	0.0001	0.0060	0.0000	0.0002	0.0002	3.1	0.00001
2029	H01	Scrapers	300 < hp <= 600	0.59	33.8	0.0028	0.0004	0.0075	0.0000	0.0004	0.0004	6.4	0.00003
2029	H01	Skid Steer Loaders	50 < hp <= 75	0.21	28.2	0.0035	0.0007	0.0029	0.0000	0.0005	0.0005	0.3	0.00002
2029	H01	Surfacing Equipment	16 < hp <= 25	0.59	27.1	0.0007	0.0002	0.0017	0.0000	0.0001	0.0001	0.2	0.00001
2029	H01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	58.1	0.0109	0.0033	0.0190	0.0000	0.0023	0.0022	3.8	0.00018
2029	H01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	43.5	0.0040	0.0007	0.0036	0.0000	0.0005	0.0005	0.6	0.00003
2029	H02	Air Compressors	75 < hp <= 100	0.43	50.0	0.0010	0.0001	0.0033	0.0000	0.0002	0.0002	1.3	0.00001
2029	H02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	39.6	0.0023	0.0004	0.0051	0.0000	0.0004	0.0004	1.0	0.00002
2029	H02	Concrete/Industrial Saws	25 < hp <= 40	0.59	50.0	0.0004	0.0001	0.0033	0.0000	0.0000	0.0000	0.7	0.00001
2029	H02	Concrete/Industrial Saws	6 < hp <= 11	0.7	39.6	0.0008	0.0003	0.0014	0.0000	0.0001	0.0001	0.2	0.00002
2029	H02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	268.2	0.0030	0.0005	0.0084	0.0000	0.0007	0.0007	14.9	0.00003
2029	H02	Excavators	100 < hp <= 175	0.59	426.5	0.0038	0.0006	0.0126	0.0001	0.0009	0.0009	23.6	0.00004

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	H02	Graders	175 < hp <= 300	0.59	15.9	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	1.5	0.00000
2029	H02	Irrigation Sets	300 < hp <= 600	0.59	14.3	0.0042	0.0009	0.0149	0.0000	0.0007	0.0007	2.7	0.00006
2029	H02	Off-highway Trucks	300 < hp <= 600	0.59	4,497.8	0.0732	0.0213	0.2802	0.0025	0.0177	0.0172	854.7	0.00106
2029	H02	Other Construction Equipment	100 < hp <= 175	0.43	519.5	0.0099	0.0023	0.0282	0.0001	0.0022	0.0021	21.0	0.00016
2029	H02	Pavers	100 < hp <= 175	0.59	50.0	0.0007	0.0001	0.0017	0.0000	0.0002	0.0002	2.8	0.00001
2029	H02	Pumps	6 < hp <= 11	0.43	13.2	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2029	H02	Rollers	75 < hp <= 100	0.59	151.3	0.0026	0.0002	0.0103	0.0000	0.0004	0.0004	5.3	0.00002
2029	H02	Scrapers	300 < hp <= 600	0.59	62.5	0.0051	0.0008	0.0138	0.0000	0.0008	0.0008	11.9	0.00005
2029	H02	Skid Steer Loaders	50 < hp <= 75	0.21	32.2	0.0040	0.0007	0.0034	0.0000	0.0006	0.0005	0.4	0.00003
2029	H02	Surfacing Equipment	16 < hp <= 25	0.59	50.0	0.0012	0.0003	0.0031	0.0000	0.0001	0.0001	0.4	0.00002
2029	H02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	85.4	0.0160	0.0048	0.0280	0.0000	0.0033	0.0032	5.5	0.00027
2029	H02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	54.4	0.0050	0.0009	0.0046	0.0000	0.0007	0.0006	0.8	0.00004
2029	L01	Air Compressors	75 < hp <= 100	0.43	22.8	0.0005	0.0001	0.0015	0.0000	0.0001	0.0001	0.6	0.00000
2029	L01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	19.2	0.0011	0.0002	0.0025	0.0000	0.0002	0.0002	0.5	0.00001
2029	L01	Concrete/Industrial Saws	25 < hp <= 40	0.59	22.8	0.0002	0.0001	0.0015	0.0000	0.0000	0.0000	0.3	0.00001
2029	L01	Concrete/Industrial Saws	6 < hp <= 11	0.7	19.2	0.0004	0.0001	0.0007	0.0000	0.0000	0.0000	0.1	0.00001
2029	L01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	206.5	0.0023	0.0004	0.0065	0.0000	0.0006	0.0005	11.4	0.00003
2029	L01	Excavators	100 < hp <= 175	0.59	113.3	0.0010	0.0002	0.0033	0.0000	0.0002	0.0002	6.3	0.00001
2029	L01	Graders	175 < hp <= 300	0.59	7.6	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.7	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	L01	Irrigation Sets	300 < hp <= 600	0.59	6.9	0.0020	0.0004	0.0071	0.0000	0.0003	0.0003	1.3	0.00003
2029	L01	Off-highway Trucks	300 < hp <= 600	0.59	4,227.2	0.0688	0.0200	0.2634	0.0023	0.0167	0.0162	803.3	0.00100
2029	L01	Other Construction Equipment	100 < hp <= 175	0.43	309.1	0.0059	0.0014	0.0168	0.0000	0.0013	0.0013	12.5	0.00009
2029	L01	Pavers	100 < hp <= 175	0.59	55.9	0.0008	0.0001	0.0019	0.0000	0.0002	0.0002	3.1	0.00001
2029	L01	Plate Compactors	3 < hp <= 6	0.43	49.2	0.0004	0.0001	0.0006	0.0000	0.0000	0.0000	0.1	0.00001
2029	L01	Pumps	6 < hp <= 11	0.43	6.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2029	L01	Rollers	75 < hp <= 100	0.59	90.4	0.0016	0.0001	0.0062	0.0000	0.0002	0.0002	3.2	0.00001
2029	L01	Scrapers	300 < hp <= 600	0.59	28.4	0.0023	0.0004	0.0063	0.0000	0.0004	0.0004	5.4	0.00002
2029	L01	Skid Steer Loaders	50 < hp <= 75	0.21	52.4	0.0065	0.0012	0.0055	0.0000	0.0009	0.0009	0.6	0.00004
2029	L01	Surfacing Equipment	16 < hp <= 25	0.59	33.7	0.0008	0.0002	0.0021	0.0000	0.0001	0.0001	0.3	0.00002
2029	L01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	70.4	0.0132	0.0040	0.0231	0.0000	0.0027	0.0027	4.5	0.00022
2029	L01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	110.6	0.0101	0.0018	0.0093	0.0000	0.0013	0.0013	1.6	0.00008
2029	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2029	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2029	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2029	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2029	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2029	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2029	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2029	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2029	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2029	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2029	L03	Air Compressors	75 < hp <= 100	0.43	46.3	0.0009	0.0001	0.0031	0.0000	0.0002	0.0002	1.2	0.00001
2029	L03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	42.0	0.0025	0.0005	0.0055	0.0000	0.0004	0.0004	1.1	0.00002
2029	L03	Concrete/Industrial Saws	25 < hp <= 40	0.59	46.3	0.0004	0.0001	0.0031	0.0000	0.0000	0.0000	0.7	0.00001
2029	L03	Concrete/Industrial Saws	6 < hp <= 11	0.7	42.0	0.0009	0.0003	0.0015	0.0000	0.0001	0.0001	0.2	0.00002
2029	L03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	320.1	0.0036	0.0005	0.0100	0.0001	0.0009	0.0009	17.7	0.00004
2029	L03	Excavators	100 < hp <= 175	0.59	126.6	0.0011	0.0002	0.0037	0.0000	0.0003	0.0003	7.0	0.00001
2029	L03	Graders	175 < hp <= 300	0.59	16.7	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2029	L03	Irrigation Sets	300 < hp <= 600	0.59	15.1	0.0044	0.0009	0.0157	0.0000	0.0007	0.0007	2.8	0.00006
2029	L03	Off-highway Trucks	300 < hp <= 600	0.59	6,058.6	0.0987	0.0287	0.3775	0.0034	0.0239	0.0232	1,151.3	0.00143
2029	L03	Other Construction Equipment	100 < hp <= 175	0.43	829.6	0.0159	0.0037	0.0451	0.0001	0.0035	0.0034	33.5	0.00025
2029	L03	Pavers	100 < hp <= 175	0.59	163.6	0.0024	0.0004	0.0056	0.0000	0.0006	0.0006	9.1	0.00003
2029	L03	Plate Compactors	3 < hp <= 6	0.43	200.0	0.0015	0.0005	0.0024	0.0000	0.0002	0.0001	0.3	0.00004
2029	L03	Pumps	6 < hp <= 11	0.43	14.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2029	L03	Rollers	75 < hp <= 100	0.59	224.7	0.0039	0.0004	0.0154	0.0000	0.0006	0.0006	7.9	0.00003
2029	L03	Scrapers	300 < hp <= 600	0.59	57.8	0.0047	0.0008	0.0127	0.0000	0.0008	0.0007	11.0	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	L03	Skid Steer Loaders	50 < hp <= 75	0.21	195.1	0.0242	0.0045	0.0204	0.0000	0.0033	0.0032	2.1	0.00017
2029	L03	Surfacing Equipment	16 < hp <= 25	0.59	68.5	0.0017	0.0004	0.0042	0.0000	0.0002	0.0002	0.6	0.00003
2029	L03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	237.9	0.0445	0.0134	0.0779	0.0001	0.0092	0.0090	15.4	0.00076
2029	L03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	436.4	0.0399	0.0069	0.0365	0.0000	0.0053	0.0051	6.4	0.00032
2029	L04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2029	L04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2029	L04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2029	L04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2029	L04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2029	L04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2029	L04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2029	L04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	L04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2029	L04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2029	L04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2029	L04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2029	L07	Aerial Lifts	75 < hp <= 100	0.59	400.8	0.0652	0.0103	0.0707	0.0001	0.0083	0.0080	16.4	0.00048
2029	L07	Bore/Drill Rigs	100 < hp <= 175	0.43	120.0	0.0114	0.0038	0.0447	0.0000	0.0026	0.0025	4.8	0.00020
2029	L07	Cement & Mortar Mixers	300 < hp <= 600	0.59	660.0	0.3154	0.0674	1.1890	0.0005	0.0432	0.0419	123.9	0.00317

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	L07	Cranes	175 < hp <= 300	0.43	600.0	0.0060	0.0021	0.0253	0.0001	0.0014	0.0013	41.1	0.00012
2029	L07	Excavators	100 < hp <= 175	0.59	160.8	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2029	L07	Forklifts	75 < hp <= 100	0.59	801.6	0.0027	0.0004	0.0447	0.0001	0.0006	0.0006	28.2	0.00003
2029	L07	Off-highway Trucks	175 < hp <= 300	0.43	160.8	0.0005	0.0002	0.0026	0.0000	0.0002	0.0001	11.1	0.00001
2029	L07	Off-highway Trucks	300 < hp <= 600	0.59	1,536.0	0.0250	0.0073	0.0957	0.0009	0.0061	0.0059	291.9	0.00036
2029	L07	Pavers	100 < hp <= 175	0.59	79.2	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2029	L07	Pumps	6 < hp <= 11	0.43	450.0	0.0061	0.0019	0.0099	0.0000	0.0006	0.0006	1.3	0.00015
2029	L07	Rubber Tire Loaders	75 < hp <= 100	0.21	79.2	0.0005	0.0000	0.0019	0.0000	0.0001	0.0001	1.0	0.00000
2029	L07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	679.2	0.0621	0.0108	0.0568	0.0000	0.0083	0.0080	9.9	0.00049
2029	L07	Trenchers	50 < hp <= 75	0.59	319.2	0.0111	0.0017	0.0445	0.0000	0.0013	0.0013	8.4	0.00017
2029	S01	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2029	S01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2029	S01	Air Compressors	75 < hp <= 100	0.43	15.8	0.0003	0.0000	0.0010	0.0000	0.0001	0.0001	0.4	0.00000
2029	S01	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2029	S01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	37.2	0.0022	0.0004	0.0048	0.0000	0.0004	0.0004	0.9	0.00002
2029	S01	Concrete/Industrial Saws	25 < hp <= 40	0.59	15.8	0.0001	0.0000	0.0011	0.0000	0.0000	0.0000	0.2	0.00000
2029	S01	Concrete/Industrial Saws	6 < hp <= 11	0.7	37.2	0.0008	0.0003	0.0013	0.0000	0.0001	0.0001	0.2	0.00002
2029	S01	Cranes	175 < hp <= 300	0.43	19.0	0.0002	0.0001	0.0008	0.0000	0.0000	0.0000	1.3	0.00000
2029	S01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	508.0	0.0056	0.0009	0.0159	0.0001	0.0014	0.0014	28.2	0.00006

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	S01	Excavators	100 < hp <= 175	0.59	232.9	0.0021	0.0003	0.0069	0.0000	0.0005	0.0005	12.9	0.00002
2029	S01	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2029	S01	Generator Sets	25 < hp <= 40	0.43	30.0	0.0004	0.0001	0.0017	0.0000	0.0001	0.0001	0.3	0.00001
2029	S01	Graders	175 < hp <= 300	0.59	5.4	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.5	0.00000
2029	S01	Irrigation Sets	300 < hp <= 600	0.59	4.8	0.0014	0.0003	0.0050	0.0000	0.0002	0.0002	0.9	0.00002
2029	S01	Off-highway Trucks	300 < hp <= 600	0.59	4,815.9	0.0784	0.0228	0.3001	0.0027	0.0190	0.0184	915.1	0.00114
2029	S01	Other Construction Equipment	100 < hp <= 175	0.43	191.3	0.0037	0.0009	0.0104	0.0000	0.0008	0.0008	7.7	0.00006
2029	S01	Pavers	100 < hp <= 175	0.59	21.7	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.2	0.00000
2029	S01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2029	S01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2029	S01	Pumps	6 < hp <= 11	0.43	4.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2029	S01	Rollers	75 < hp <= 100	0.59	275.6	0.0048	0.0004	0.0189	0.0000	0.0007	0.0007	9.7	0.00003
2029	S01	Scrapers	300 < hp <= 600	0.59	158.2	0.0129	0.0021	0.0348	0.0001	0.0021	0.0020	30.1	0.00013
2029	S01	Skid Steer Loaders	50 < hp <= 75	0.21	28.9	0.0036	0.0007	0.0030	0.0000	0.0005	0.0005	0.3	0.00002
2029	S01	Surfacing Equipment	16 < hp <= 25	0.59	23.4	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.2	0.00001
2029	S01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2029	S01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	89.5	0.0167	0.0050	0.0293	0.0000	0.0035	0.0034	5.8	0.00028
2029	S01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	84.0	0.0058	0.0010	0.0064	0.0000	0.0008	0.0007	0.9	0.00005
2029	S01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	147.3	0.0135	0.0023	0.0123	0.0000	0.0018	0.0017	2.1	0.00011

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	S03	Aerial Lifts	50 < hp <= 75	0.21	1,320.0	0.0503	0.0096	0.0837	0.0000	0.0060	0.0058	14.4	0.00052
2029	S03	Aerial Lifts	75 < hp <= 100	0.59	456.0	0.0742	0.0117	0.0805	0.0001	0.0094	0.0091	18.7	0.00055
2029	S03	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2029	S03	Cement & Mortar Mixers	300 < hp <= 600	0.59	84.0	0.0401	0.0086	0.1513	0.0001	0.0055	0.0053	15.8	0.00040
2029	S03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	24.0	0.0014	0.0003	0.0031	0.0000	0.0002	0.0002	0.6	0.00001
2029	S03	Concrete/Industrial Saws	6 < hp <= 11	0.7	24.0	0.0005	0.0002	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2029	S03	Cranes	175 < hp <= 300	0.43	16.0	0.0002	0.0001	0.0007	0.0000	0.0000	0.0000	1.1	0.00000
2029	S03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	16.0	0.0002	0.0000	0.0005	0.0000	0.0000	0.0000	0.9	0.00000
2029	S03	Forklifts	75 < hp <= 100	0.59	1,664.0	0.0056	0.0008	0.0928	0.0002	0.0013	0.0013	58.5	0.00005
2029	S03	Off-highway Trucks	175 < hp <= 300	0.43	240.0	0.0007	0.0003	0.0039	0.0000	0.0002	0.0002	16.6	0.00001
2029	S03	Off-highway Trucks	300 < hp <= 600	0.59	602.0	0.0098	0.0028	0.0375	0.0003	0.0024	0.0023	114.4	0.00014
2029	S03	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2029	S03	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2029	S03	Rollers	75 < hp <= 100	0.59	16.0	0.0003	0.0000	0.0011	0.0000	0.0000	0.0000	0.6	0.00000
2029	S03	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2029	S03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	56.0	0.0105	0.0032	0.0183	0.0000	0.0022	0.0021	3.6	0.00018
2029	S03	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2029	S03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	440.0	0.0403	0.0070	0.0368	0.0000	0.0054	0.0052	6.4	0.00032
2029	S10	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	S10	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2029	S10	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2029	S10	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2029	S10	Concrete/Industrial Saws	6 < hp <= 11	0.7	40.0	0.0008	0.0003	0.0014	0.0000	0.0001	0.0001	0.2	0.00002
2029	S10	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2029	S10	Crawler Tractor/Dozers	100 < hp <= 175	0.59	24.0	0.0003	0.0000	0.0008	0.0000	0.0001	0.0001	1.3	0.00000
2029	S10	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2029	S10	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2029	S10	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2029	S10	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2029	S10	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	S10	Off-highway Trucks	300 < hp <= 600	0.59	7,888.0	0.1285	0.0373	0.4915	0.0044	0.0311	0.0302	1,498.9	0.00187
2029	S10	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2029	S10	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2029	S10	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2029	S10	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2029	S10	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2029	S10	Rubber Tire Loaders	75 < hp <= 100	0.21	80.0	0.0005	0.0000	0.0019	0.0000	0.0001	0.0001	1.0	0.00000
2029	S10	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	S10	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2029	S10	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2029	S10	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2029	S10	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2029	S10	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2029	T01	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2029	T01	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2029	T01	Air Compressors	75 < hp <= 100	0.43	51.8	0.0011	0.0001	0.0034	0.0000	0.0002	0.0002	1.3	0.00001
2029	T01	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2029	T01	Chain Saws > 6 HP	6 < hp <= 11	0.7	82.0	0.0926	0.0214	0.0005	0.0000	0.0034	0.0031	0.2	0.00000
2029	T01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	82.0	0.0048	0.0009	0.0106	0.0000	0.0008	0.0008	2.1	0.00004
2029	T01	Concrete/Industrial Saws	25 < hp <= 40	0.59	51.8	0.0004	0.0001	0.0034	0.0000	0.0000	0.0000	0.7	0.00002
2029	T01	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2029	T01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	412.7	0.0046	0.0007	0.0130	0.0001	0.0011	0.0011	22.9	0.00005
2029	T01	Excavators	100 < hp <= 175	0.59	558.8	0.0049	0.0008	0.0165	0.0001	0.0012	0.0011	31.0	0.00006
2029	T01	Forklifts	75 < hp <= 100	0.59	3,700.0	0.0125	0.0018	0.2062	0.0004	0.0029	0.0028	130.1	0.00012
2029	T01	Generator Sets	25 < hp <= 40	0.43	301.0	0.0039	0.0011	0.0175	0.0000	0.0006	0.0006	3.1	0.00009
2029	T01	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2029	T01	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	T01	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2029	T01	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	T01	Off-highway Trucks	300 < hp <= 600	0.59	12,536.6	0.2042	0.0593	0.7811	0.0070	0.0494	0.0480	2,382.3	0.00297
2029	T01	Other Construction Equipment	100 < hp <= 175	0.43	516.6	0.0099	0.0023	0.0281	0.0001	0.0022	0.0021	20.9	0.00015
2029	T01	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2029	T01	Pavers	100 < hp <= 175	0.59	51.8	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	2.9	0.00001
2029	T01	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2029	T01	Pumps	6 < hp <= 11	0.43	254.0	0.0034	0.0011	0.0056	0.0000	0.0004	0.0003	0.7	0.00008
2029	T01	Rollers	75 < hp <= 100	0.59	194.3	0.0033	0.0003	0.0133	0.0000	0.0005	0.0005	6.8	0.00002
2029	T01	Scrapers	300 < hp <= 600	0.59	64.8	0.0053	0.0008	0.0143	0.0000	0.0009	0.0008	12.3	0.00005
2029	T01	Skid Steer Loaders	50 < hp <= 75	0.21	15.9	0.0020	0.0004	0.0017	0.0000	0.0003	0.0003	0.2	0.00001
2029	T01	Surfacing Equipment	16 < hp <= 25	0.59	51.8	0.0013	0.0003	0.0032	0.0000	0.0001	0.0001	0.5	0.00002
2029	T01	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2029	T01	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2029	T01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	129.1	0.0241	0.0073	0.0423	0.0000	0.0050	0.0049	8.3	0.00041
2029	T01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	466.1	0.0324	0.0057	0.0353	0.0000	0.0043	0.0041	5.1	0.00028
2029	T01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	757.5	0.0693	0.0120	0.0634	0.0000	0.0092	0.0089	11.0	0.00055
2029	T02	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198
2029	T02	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	T02	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2029	T02	Chain Saws > 6 HP	6 < hp <= 11	0.7	40.0	0.0452	0.0104	0.0003	0.0000	0.0017	0.0015	0.1	0.00000
2029	T02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2029	T02	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2029	T02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	140.6	0.0016	0.0002	0.0044	0.0000	0.0004	0.0004	7.8	0.00002
2029	T02	Excavators	100 < hp <= 175	0.59	276.6	0.0024	0.0004	0.0082	0.0000	0.0006	0.0006	15.3	0.00003
2029	T02	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2029	T02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2029	T02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2029	T02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2029	T02	Off-highway Trucks	300 < hp <= 600	0.59	8,121.1	0.1322	0.0384	0.5060	0.0045	0.0320	0.0311	1,543.2	0.00192
2029	T02	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2029	T02	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2029	T02	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2029	T02	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2029	T02	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2029	T02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2029	T02	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2029	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.21	80.0	0.0030	0.0009	0.0053	0.0000	0.0006	0.0006	1.1	0.00005
2029	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2029	T02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2029	T02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2029	T02	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2030	A04	Air Compressors	75 < hp <= 100	0.43	30.5	0.0006	0.0001	0.0020	0.0000	0.0001	0.0001	0.8	0.00001
2030	A04	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	26.4	0.0015	0.0003	0.0034	0.0000	0.0003	0.0003	0.7	0.00001
2030	A04	Concrete/Industrial Saws	25 < hp <= 40	0.59	30.5	0.0002	0.0001	0.0020	0.0000	0.0000	0.0000	0.4	0.00001
2030	A04	Concrete/Industrial Saws	6 < hp <= 11	0.7	26.4	0.0006	0.0002	0.0009	0.0000	0.0001	0.0001	0.1	0.00001
2030	A04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	196.8	0.0022	0.0003	0.0062	0.0000	0.0005	0.0005	10.9	0.00002
2030	A04	Excavators	100 < hp <= 175	0.59	493.1	0.0044	0.0007	0.0145	0.0001	0.0010	0.0010	27.3	0.00005
2030	A04	Graders	175 < hp <= 300	0.59	10.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.0	0.00000
2030	A04	Irrigation Sets	300 < hp <= 600	0.59	9.6	0.0028	0.0006	0.0099	0.0000	0.0005	0.0005	1.8	0.00004
2030	A04	Off-highway Trucks	300 < hp <= 600	0.59	7,740.8	0.1261	0.0366	0.4823	0.0043	0.0305	0.0296	1,471.0	0.00183
2030	A04	Other Construction Equipment	100 < hp <= 175	0.43	1,931.0	0.0370	0.0086	0.1050	0.0002	0.0081	0.0079	78.0	0.00058
2030	A04	Pavers	100 < hp <= 175	0.59	30.5	0.0004	0.0001	0.0010	0.0000	0.0001	0.0001	1.7	0.00000
2030	A04	Pumps	6 < hp <= 11	0.43	8.8	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2030	A04	Rollers	75 < hp <= 100	0.59	123.4	0.0021	0.0002	0.0084	0.0000	0.0003	0.0003	4.3	0.00001
2030	A04	Scrapers	300 < hp <= 600	0.59	38.1	0.0031	0.0005	0.0084	0.0000	0.0005	0.0005	7.2	0.00003
2030	A04	Skid Steer Loaders	50 < hp <= 75	0.21	27.3	0.0034	0.0006	0.0029	0.0000	0.0005	0.0005	0.3	0.00002
2030	A04	Surfacing Equipment	16 < hp <= 25	0.59	30.5	0.0007	0.0002	0.0019	0.0000	0.0001	0.0001	0.3	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	A04	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	120.4	0.0225	0.0068	0.0394	0.0000	0.0047	0.0045	7.8	0.00038
2030	A04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	58.5	0.0054	0.0009	0.0049	0.0000	0.0007	0.0007	0.9	0.00004
2030	A05	Off-highway Trucks	300 < hp <= 600	0.59	345.4	0.0056	0.0016	0.0215	0.0002	0.0014	0.0013	65.6	0.00008
2030	A05	Other Construction Equipment	100 < hp <= 175	0.43	172.7	0.0033	0.0008	0.0094	0.0000	0.0007	0.0007	7.0	0.00005
2030	A05	Skid Steer Loaders	50 < hp <= 75	0.21	8.1	0.0010	0.0002	0.0008	0.0000	0.0001	0.0001	0.1	0.00001
2030	A05	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	8.1	0.0015	0.0005	0.0027	0.0000	0.0003	0.0003	0.5	0.00003
2030	A05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	8.1	0.0007	0.0001	0.0007	0.0000	0.0001	0.0001	0.1	0.00001
2030	H03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	50.0	0.0006	0.0001	0.0016	0.0000	0.0001	0.0001	2.8	0.00001
2030	H03	Excavators	100 < hp <= 175	0.59	50.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	2.8	0.00000
2030	H03	Off-highway Trucks	300 < hp <= 600	0.59	100.0	0.0016	0.0005	0.0062	0.0001	0.0004	0.0004	19.0	0.00002
2030	H04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2030	H04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2030	H04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2030	H04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2030	H04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2030	H04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2030	H04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2030	H04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	H04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2030	H04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2030	H04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2030	H04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2030	H05	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2030	H05	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2030	H05	Air Compressors	75 < hp <= 100	0.43	27.1	0.0006	0.0001	0.0018	0.0000	0.0001	0.0001	0.7	0.00000
2030	H05	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2030	H05	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	21.6	0.0013	0.0002	0.0028	0.0000	0.0002	0.0002	0.5	0.00001
2030	H05	Concrete/Industrial Saws	25 < hp <= 40	0.59	27.1	0.0002	0.0001	0.0018	0.0000	0.0000	0.0000	0.4	0.00001
2030	H05	Concrete/Industrial Saws	6 < hp <= 11	0.7	21.6	0.0005	0.0002	0.0008	0.0000	0.0000	0.0000	0.1	0.00001
2030	H05	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2030	H05	Crawler Tractor/Dozers	100 < hp <= 175	0.59	151.8	0.0017	0.0003	0.0048	0.0000	0.0004	0.0004	8.4	0.00002
2030	H05	Excavators	100 < hp <= 175	0.59	201.8	0.0018	0.0003	0.0059	0.0000	0.0004	0.0004	11.2	0.00002
2030	H05	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2030	H05	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2030	H05	Graders	175 < hp <= 300	0.59	8.8	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.8	0.00000
2030	H05	Irrigation Sets	300 < hp <= 600	0.59	7.9	0.0023	0.0005	0.0082	0.0000	0.0004	0.0004	1.5	0.00003
2030	H05	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	H05	Off-highway Trucks	300 < hp <= 600	0.59	9,747.7	0.1587	0.0461	0.6073	0.0054	0.0384	0.0373	1,852.3	0.00231
2030	H05	Other Construction Equipment	100 < hp <= 175	0.43	301.2	0.0058	0.0013	0.0164	0.0000	0.0013	0.0012	12.2	0.00009
2030	H05	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2030	H05	Pavers	100 < hp <= 175	0.59	27.1	0.0004	0.0001	0.0009	0.0000	0.0001	0.0001	1.5	0.00000
2030	H05	Pumps	6 < hp <= 11	0.43	247.2	0.0033	0.0011	0.0055	0.0000	0.0003	0.0003	0.7	0.00008
2030	H05	Rollers	75 < hp <= 100	0.59	88.0	0.0015	0.0001	0.0060	0.0000	0.0002	0.0002	3.1	0.00001
2030	H05	Scrapers	300 < hp <= 600	0.59	33.8	0.0028	0.0004	0.0075	0.0000	0.0004	0.0004	6.4	0.00003
2030	H05	Skid Steer Loaders	50 < hp <= 75	0.21	28.2	0.0035	0.0007	0.0029	0.0000	0.0005	0.0005	0.3	0.00002
2030	H05	Surfacing Equipment	16 < hp <= 25	0.59	27.1	0.0007	0.0002	0.0017	0.0000	0.0001	0.0001	0.2	0.00001
2030	H05	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	58.1	0.0109	0.0033	0.0190	0.0000	0.0023	0.0022	3.8	0.00018
2030	H05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	523.5	0.0479	0.0083	0.0438	0.0000	0.0064	0.0062	7.6	0.00038
2030	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2030	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2030	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2030	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2030	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2030	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2030	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2030	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2030	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2030	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2030	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2030	L03	Air Compressors	75 < hp <= 100	0.43	34.7	0.0007	0.0001	0.0023	0.0000	0.0001	0.0001	0.9	0.00001
2030	L03	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	31.2	0.0018	0.0003	0.0041	0.0000	0.0003	0.0003	0.8	0.00001
2030	L03	Concrete/Industrial Saws	25 < hp <= 40	0.59	34.7	0.0003	0.0001	0.0023	0.0000	0.0000	0.0000	0.5	0.00001
2030	L03	Concrete/Industrial Saws	6 < hp <= 11	0.7	31.2	0.0007	0.0002	0.0011	0.0000	0.0001	0.0001	0.1	0.00002
2030	L03	Crawler Tractor/Dozers	100 < hp <= 175	0.59	240.2	0.0027	0.0004	0.0075	0.0000	0.0007	0.0006	13.3	0.00003
2030	L03	Excavators	100 < hp <= 175	0.59	95.0	0.0008	0.0001	0.0028	0.0000	0.0002	0.0002	5.3	0.00001
2030	L03	Graders	175 < hp <= 300	0.59	12.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.2	0.00000
2030	L03	Irrigation Sets	300 < hp <= 600	0.59	11.3	0.0033	0.0007	0.0118	0.0000	0.0006	0.0005	2.1	0.00005
2030	L03	Off-highway Trucks	300 < hp <= 600	0.59	4,544.0	0.0740	0.0215	0.2831	0.0025	0.0179	0.0174	863.5	0.00107
2030	L03	Other Construction Equipment	100 < hp <= 175	0.43	622.4	0.0119	0.0028	0.0338	0.0001	0.0026	0.0025	25.1	0.00019
2030	L03	Pavers	100 < hp <= 175	0.59	122.7	0.0018	0.0003	0.0042	0.0000	0.0005	0.0004	6.8	0.00002
2030	L03	Plate Compactors	3 < hp <= 6	0.43	150.0	0.0011	0.0004	0.0018	0.0000	0.0001	0.0001	0.2	0.00003
2030	L03	Pumps	6 < hp <= 11	0.43	10.4	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2030	L03	Rollers	75 < hp <= 100	0.59	168.6	0.0029	0.0003	0.0115	0.0000	0.0004	0.0004	5.9	0.00002
2030	L03	Scrapers	300 < hp <= 600	0.59	43.4	0.0035	0.0006	0.0096	0.0000	0.0006	0.0006	8.2	0.00004
2030	L03	Skid Steer Loaders	50 < hp <= 75	0.21	146.5	0.0181	0.0034	0.0153	0.0000	0.0025	0.0024	1.6	0.00012

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	L03	Surfacing Equipment	16 < hp <= 25	0.59	51.3	0.0012	0.0003	0.0031	0.0000	0.0001	0.0001	0.5	0.00002
2030	L03	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	178.7	0.0334	0.0101	0.0585	0.0000	0.0069	0.0067	11.5	0.00057
2030	L03	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	327.4	0.0300	0.0052	0.0274	0.0000	0.0040	0.0039	4.8	0.00024
2030	L07	Aerial Lifts	75 < hp <= 100	0.59	400.8	0.0652	0.0103	0.0707	0.0001	0.0083	0.0080	16.4	0.00048
2030	L07	Bore/Drill Rigs	100 < hp <= 175	0.43	120.0	0.0114	0.0038	0.0447	0.0000	0.0026	0.0025	4.8	0.00020
2030	L07	Cement & Mortar Mixers	300 < hp <= 600	0.59	660.0	0.3154	0.0674	1.1890	0.0005	0.0432	0.0419	123.9	0.00317
2030	L07	Cranes	175 < hp <= 300	0.43	600.0	0.0060	0.0021	0.0253	0.0001	0.0014	0.0013	41.1	0.00012
2030	L07	Excavators	100 < hp <= 175	0.59	160.8	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2030	L07	Forklifts	75 < hp <= 100	0.59	801.6	0.0027	0.0004	0.0447	0.0001	0.0006	0.0006	28.2	0.00003
2030	L07	Off-highway Trucks	175 < hp <= 300	0.43	160.8	0.0005	0.0002	0.0026	0.0000	0.0002	0.0001	11.1	0.00001
2030	L07	Off-highway Trucks	300 < hp <= 600	0.59	1,536.0	0.0250	0.0073	0.0957	0.0009	0.0061	0.0059	291.9	0.00036
2030	L07	Pavers	100 < hp <= 175	0.59	79.2	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2030	L07	Pumps	6 < hp <= 11	0.43	450.0	0.0061	0.0019	0.0099	0.0000	0.0006	0.0006	1.3	0.00015
2030	L07	Rubber Tire Loaders	75 < hp <= 100	0.21	79.2	0.0005	0.0000	0.0019	0.0000	0.0001	0.0001	1.0	0.00000
2030	L07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	679.2	0.0621	0.0108	0.0568	0.0000	0.0083	0.0080	9.9	0.00049
2030	L07	Trenchers	50 < hp <= 75	0.59	319.2	0.0111	0.0017	0.0445	0.0000	0.0013	0.0013	8.4	0.00017
2030	S01	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2030	S01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2030	S01	Air Compressors	75 < hp <= 100	0.43	15.8	0.0003	0.0000	0.0010	0.0000	0.0001	0.0001	0.4	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	S01	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2030	S01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	37.2	0.0022	0.0004	0.0048	0.0000	0.0004	0.0004	0.9	0.00002
2030	S01	Concrete/Industrial Saws	25 < hp <= 40	0.59	15.8	0.0001	0.0000	0.0011	0.0000	0.0000	0.0000	0.2	0.00000
2030	S01	Concrete/Industrial Saws	6 < hp <= 11	0.7	37.2	0.0008	0.0003	0.0013	0.0000	0.0001	0.0001	0.2	0.00002
2030	S01	Cranes	175 < hp <= 300	0.43	19.0	0.0002	0.0001	0.0008	0.0000	0.0000	0.0000	1.3	0.00000
2030	S01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	508.0	0.0056	0.0009	0.0159	0.0001	0.0014	0.0014	28.2	0.00006
2030	S01	Excavators	100 < hp <= 175	0.59	232.9	0.0021	0.0003	0.0069	0.0000	0.0005	0.0005	12.9	0.00002
2030	S01	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2030	S01	Generator Sets	25 < hp <= 40	0.43	30.0	0.0004	0.0001	0.0017	0.0000	0.0001	0.0001	0.3	0.00001
2030	S01	Graders	175 < hp <= 300	0.59	5.4	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.5	0.00000
2030	S01	Irrigation Sets	300 < hp <= 600	0.59	4.8	0.0014	0.0003	0.0050	0.0000	0.0002	0.0002	0.9	0.00002
2030	S01	Off-highway Trucks	300 < hp <= 600	0.59	4,815.9	0.0784	0.0228	0.3001	0.0027	0.0190	0.0184	915.1	0.00114
2030	S01	Other Construction Equipment	100 < hp <= 175	0.43	191.3	0.0037	0.0009	0.0104	0.0000	0.0008	0.0008	7.7	0.00006
2030	S01	Pavers	100 < hp <= 175	0.59	21.7	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.2	0.00000
2030	S01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2030	S01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2030	S01	Pumps	6 < hp <= 11	0.43	4.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2030	S01	Rollers	75 < hp <= 100	0.59	275.6	0.0048	0.0004	0.0189	0.0000	0.0007	0.0007	9.7	0.00003
2030	S01	Scrapers	300 < hp <= 600	0.59	158.2	0.0129	0.0021	0.0348	0.0001	0.0021	0.0020	30.1	0.00013

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	S01	Skid Steer Loaders	50 < hp <= 75	0.21	28.9	0.0036	0.0007	0.0030	0.0000	0.0005	0.0005	0.3	0.00002
2030	S01	Surfacing Equipment	16 < hp <= 25	0.59	23.4	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.2	0.00001
2030	S01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2030	S01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	89.5	0.0167	0.0050	0.0293	0.0000	0.0035	0.0034	5.8	0.00028
2030	S01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	84.0	0.0058	0.0010	0.0064	0.0000	0.0008	0.0007	0.9	0.00005
2030	S01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	147.3	0.0135	0.0023	0.0123	0.0000	0.0018	0.0017	2.1	0.00011
2030	S10	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198
2030	S10	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2030	S10	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2030	S10	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2030	S10	Concrete/Industrial Saws	6 < hp <= 11	0.7	40.0	0.0008	0.0003	0.0014	0.0000	0.0001	0.0001	0.2	0.00002
2030	S10	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2030	S10	Crawler Tractor/Dozers	100 < hp <= 175	0.59	24.0	0.0003	0.0000	0.0008	0.0000	0.0001	0.0001	1.3	0.00000
2030	S10	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2030	S10	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2030	S10	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2030	S10	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2030	S10	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	S10	Off-highway Trucks	300 < hp <= 600	0.59	7,888.0	0.1285	0.0373	0.4915	0.0044	0.0311	0.0302	1,498.9	0.00187
2030	S10	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2030	S10	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2030	S10	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2030	S10	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2030	S10	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2030	S10	Rubber Tire Loaders	75 < hp <= 100	0.21	80.0	0.0005	0.0000	0.0019	0.0000	0.0001	0.0001	1.0	0.00000
2030	S10	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2030	S10	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2030	S10	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2030	S10	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2030	S10	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2030	S10	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2030	T01	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2030	T01	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2030	T01	Air Compressors	75 < hp <= 100	0.43	51.8	0.0011	0.0001	0.0034	0.0000	0.0002	0.0002	1.3	0.00001
2030	T01	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2030	T01	Chain Saws > 6 HP	6 < hp <= 11	0.7	82.0	0.0926	0.0214	0.0005	0.0000	0.0034	0.0031	0.2	0.00000
2030	T01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	82.0	0.0048	0.0009	0.0106	0.0000	0.0008	0.0008	2.1	0.00004
2030	T01	Concrete/Industrial Saws	25 < hp <= 40	0.59	51.8	0.0004	0.0001	0.0034	0.0000	0.0000	0.0000	0.7	0.00002

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	T01	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2030	T01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	412.7	0.0046	0.0007	0.0130	0.0001	0.0011	0.0011	22.9	0.00005
2030	T01	Excavators	100 < hp <= 175	0.59	558.8	0.0049	0.0008	0.0165	0.0001	0.0012	0.0011	31.0	0.00006
2030	T01	Forklifts	75 < hp <= 100	0.59	3,700.0	0.0125	0.0018	0.2062	0.0004	0.0029	0.0028	130.1	0.00012
2030	T01	Generator Sets	25 < hp <= 40	0.43	301.0	0.0039	0.0011	0.0175	0.0000	0.0006	0.0006	3.1	0.00009
2030	T01	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000
2030	T01	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2030	T01	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2030	T01	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2030	T01	Off-highway Trucks	300 < hp <= 600	0.59	12,536.6	0.2042	0.0593	0.7811	0.0070	0.0494	0.0480	2,382.3	0.00297
2030	T01	Other Construction Equipment	100 < hp <= 175	0.43	516.6	0.0099	0.0023	0.0281	0.0001	0.0022	0.0021	20.9	0.00015
2030	T01	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2030	T01	Pavers	100 < hp <= 175	0.59	51.8	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	2.9	0.00001
2030	T01	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2030	T01	Pumps	6 < hp <= 11	0.43	254.0	0.0034	0.0011	0.0056	0.0000	0.0004	0.0003	0.7	0.00008
2030	T01	Rollers	75 < hp <= 100	0.59	194.3	0.0033	0.0003	0.0133	0.0000	0.0005	0.0005	6.8	0.00002
2030	T01	Scrapers	300 < hp <= 600	0.59	64.8	0.0053	0.0008	0.0143	0.0000	0.0009	0.0008	12.3	0.00005
2030	T01	Skid Steer Loaders	50 < hp <= 75	0.21	15.9	0.0020	0.0004	0.0017	0.0000	0.0003	0.0003	0.2	0.00001
2030	T01	Surfacing Equipment	16 < hp <= 25	0.59	51.8	0.0013	0.0003	0.0032	0.0000	0.0001	0.0001	0.5	0.00002

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	T01	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2030	T01	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2030	T01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	129.1	0.0241	0.0073	0.0423	0.0000	0.0050	0.0049	8.3	0.00041
2030	T01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	466.1	0.0324	0.0057	0.0353	0.0000	0.0043	0.0041	5.1	0.00028
2030	T01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	757.5	0.0693	0.0120	0.0634	0.0000	0.0092	0.0089	11.0	0.00055
2030	T02	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198
2030	T02	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2030	T02	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2030	T02	Chain Saws > 6 HP	6 < hp <= 11	0.7	40.0	0.0452	0.0104	0.0003	0.0000	0.0017	0.0015	0.1	0.00000
2030	T02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2030	T02	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2030	T02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	140.6	0.0016	0.0002	0.0044	0.0000	0.0004	0.0004	7.8	0.00002
2030	T02	Excavators	100 < hp <= 175	0.59	276.6	0.0024	0.0004	0.0082	0.0000	0.0006	0.0006	15.3	0.00003
2030	T02	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2030	T02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2030	T02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2030	T02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2030	T02	Off-highway Trucks	300 < hp <= 600	0.59	8,121.1	0.1322	0.0384	0.5060	0.0045	0.0320	0.0311	1,543.2	0.00192
2030	T02	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2030	T02	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2030	T02	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2030	T02	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2030	T02	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2030	T02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2030	T02	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2030	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.21	80.0	0.0030	0.0009	0.0053	0.0000	0.0006	0.0006	1.1	0.00005
2030	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2030	T02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2030	T02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2030	T02	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2031	A04	Air Compressors	75 < hp <= 100	0.43	30.5	0.0006	0.0001	0.0020	0.0000	0.0001	0.0001	0.8	0.00001
2031	A04	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	26.4	0.0015	0.0003	0.0034	0.0000	0.0003	0.0003	0.7	0.00001
2031	A04	Concrete/Industrial Saws	25 < hp <= 40	0.59	30.5	0.0002	0.0001	0.0020	0.0000	0.0000	0.0000	0.4	0.00001
2031	A04	Concrete/Industrial Saws	6 < hp <= 11	0.7	26.4	0.0006	0.0002	0.0009	0.0000	0.0001	0.0001	0.1	0.00001
2031	A04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	196.8	0.0022	0.0003	0.0062	0.0000	0.0005	0.0005	10.9	0.00002
2031	A04	Excavators	100 < hp <= 175	0.59	493.1	0.0044	0.0007	0.0145	0.0001	0.0010	0.0010	27.3	0.00005
2031	A04	Graders	175 < hp <= 300	0.59	10.6	0.0001	0.0000	0.0004	0.0000	0.0000	0.0000	1.0	0.00000
2031	A04	Irrigation Sets	300 < hp <= 600	0.59	9.6	0.0028	0.0006	0.0099	0.0000	0.0005	0.0005	1.8	0.00004

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	A04	Off-highway Trucks	300 < hp <= 600	0.59	7,740.8	0.1261	0.0366	0.4823	0.0043	0.0305	0.0296	1,471.0	0.00183
2031	A04	Other Construction Equipment	100 < hp <= 175	0.43	1,931.0	0.0370	0.0086	0.1050	0.0002	0.0081	0.0079	78.0	0.00058
2031	A04	Pavers	100 < hp <= 175	0.59	30.5	0.0004	0.0001	0.0010	0.0000	0.0001	0.0001	1.7	0.00000
2031	A04	Pumps	6 < hp <= 11	0.43	8.8	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2031	A04	Rollers	75 < hp <= 100	0.59	123.4	0.0021	0.0002	0.0084	0.0000	0.0003	0.0003	4.3	0.00001
2031	A04	Scrapers	300 < hp <= 600	0.59	38.1	0.0031	0.0005	0.0084	0.0000	0.0005	0.0005	7.2	0.00003
2031	A04	Skid Steer Loaders	50 < hp <= 75	0.21	27.3	0.0034	0.0006	0.0029	0.0000	0.0005	0.0005	0.3	0.00002
2031	A04	Surfacing Equipment	16 < hp <= 25	0.59	30.5	0.0007	0.0002	0.0019	0.0000	0.0001	0.0001	0.3	0.00001
2031	A04	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	120.4	0.0225	0.0068	0.0394	0.0000	0.0047	0.0045	7.8	0.00038
2031	A04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	58.5	0.0054	0.0009	0.0049	0.0000	0.0007	0.0007	0.9	0.00004
2031	H04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2031	H04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2031	H04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2031	H04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2031	H04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2031	H04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2031	H04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2031	H04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2031	H04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	H04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2031	H04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2031	H04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2031	H05	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2031	H05	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2031	H05	Air Compressors	75 < hp <= 100	0.43	27.1	0.0006	0.0001	0.0018	0.0000	0.0001	0.0001	0.7	0.00000
2031	H05	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2031	H05	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	21.6	0.0013	0.0002	0.0028	0.0000	0.0002	0.0002	0.5	0.00001
2031	H05	Concrete/Industrial Saws	25 < hp <= 40	0.59	27.1	0.0002	0.0001	0.0018	0.0000	0.0000	0.0000	0.4	0.00001
2031	H05	Concrete/Industrial Saws	6 < hp <= 11	0.7	21.6	0.0005	0.0002	0.0008	0.0000	0.0000	0.0000	0.1	0.00001
2031	H05	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2031	H05	Crawler Tractor/Dozers	100 < hp <= 175	0.59	151.8	0.0017	0.0003	0.0048	0.0000	0.0004	0.0004	8.4	0.00002
2031	H05	Excavators	100 < hp <= 175	0.59	201.8	0.0018	0.0003	0.0059	0.0000	0.0004	0.0004	11.2	0.00002
2031	H05	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2031	H05	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2031	H05	Graders	175 < hp <= 300	0.59	8.8	0.0001	0.0000	0.0003	0.0000	0.0000	0.0000	0.8	0.00000
2031	H05	Irrigation Sets	300 < hp <= 600	0.59	7.9	0.0023	0.0005	0.0082	0.0000	0.0004	0.0004	1.5	0.00003
2031	H05	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2031	H05	Off-highway Trucks	300 < hp <= 600	0.59	10,467.7	0.1705	0.0495	0.6522	0.0058	0.0413	0.0400	1,989.1	0.00248

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	H05	Other Construction Equipment	100 < hp <= 175	0.43	301.2	0.0058	0.0013	0.0164	0.0000	0.0013	0.0012	12.2	0.00009
2031	H05	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2031	H05	Pavers	100 < hp <= 175	0.59	27.1	0.0004	0.0001	0.0009	0.0000	0.0001	0.0001	1.5	0.00000
2031	H05	Pumps	6 < hp <= 11	0.43	247.2	0.0033	0.0011	0.0055	0.0000	0.0003	0.0003	0.7	0.00008
2031	H05	Rollers	75 < hp <= 100	0.59	88.0	0.0015	0.0001	0.0060	0.0000	0.0002	0.0002	3.1	0.00001
2031	H05	Scrapers	300 < hp <= 600	0.59	33.8	0.0028	0.0004	0.0075	0.0000	0.0004	0.0004	6.4	0.00003
2031	H05	Skid Steer Loaders	50 < hp <= 75	0.21	28.2	0.0035	0.0007	0.0029	0.0000	0.0005	0.0005	0.3	0.00002
2031	H05	Surfacing Equipment	16 < hp <= 25	0.59	27.1	0.0007	0.0002	0.0017	0.0000	0.0001	0.0001	0.2	0.00001
2031	H05	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	58.1	0.0109	0.0033	0.0190	0.0000	0.0023	0.0022	3.8	0.00018
2031	H05	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	523.5	0.0479	0.0083	0.0438	0.0000	0.0064	0.0062	7.6	0.00038
2031	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2031	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2031	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2031	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2031	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2031	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2031	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2031	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2031	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2031	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2031	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2031	L07	Aerial Lifts	75 < hp <= 100	0.59	400.8	0.0652	0.0103	0.0707	0.0001	0.0083	0.0080	16.4	0.00048
2031	L07	Bore/Drill Rigs	100 < hp <= 175	0.43	120.0	0.0114	0.0038	0.0447	0.0000	0.0026	0.0025	4.8	0.00020
2031	L07	Cement & Mortar Mixers	300 < hp <= 600	0.59	660.0	0.3154	0.0674	1.1890	0.0005	0.0432	0.0419	123.9	0.00317
2031	L07	Cranes	175 < hp <= 300	0.43	600.0	0.0060	0.0021	0.0253	0.0001	0.0014	0.0013	41.1	0.00012
2031	L07	Excavators	100 < hp <= 175	0.59	160.8	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2031	L07	Forklifts	75 < hp <= 100	0.59	801.6	0.0027	0.0004	0.0447	0.0001	0.0006	0.0006	28.2	0.00003
2031	L07	Off-highway Trucks	175 < hp <= 300	0.43	160.8	0.0005	0.0002	0.0026	0.0000	0.0002	0.0001	11.1	0.00001
2031	L07	Off-highway Trucks	300 < hp <= 600	0.59	1,536.0	0.0250	0.0073	0.0957	0.0009	0.0061	0.0059	291.9	0.00036
2031	L07	Pavers	100 < hp <= 175	0.59	79.2	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2031	L07	Pumps	6 < hp <= 11	0.43	450.0	0.0061	0.0019	0.0099	0.0000	0.0006	0.0006	1.3	0.00015
2031	L07	Rubber Tire Loaders	75 < hp <= 100	0.21	79.2	0.0005	0.0000	0.0019	0.0000	0.0001	0.0001	1.0	0.00000
2031	L07	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	679.2	0.0621	0.0108	0.0568	0.0000	0.0083	0.0080	9.9	0.00049
2031	L07	Trenchers	50 < hp <= 75	0.59	319.2	0.0111	0.0017	0.0445	0.0000	0.0013	0.0013	8.4	0.00017
2031	S01	Aerial Lifts	75 < hp <= 100	0.59	16.0	0.0026	0.0004	0.0028	0.0000	0.0003	0.0003	0.7	0.00002
2031	S01	Air Compressors	100 < hp <= 175	0.43	24.0	0.0004	0.0001	0.0015	0.0000	0.0001	0.0001	1.0	0.00001
2031	S01	Air Compressors	75 < hp <= 100	0.43	15.8	0.0003	0.0000	0.0010	0.0000	0.0001	0.0001	0.4	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	S01	Cement & Mortar Mixers	300 < hp <= 600	0.59	24.0	0.0115	0.0024	0.0432	0.0000	0.0016	0.0015	4.5	0.00012
2031	S01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	37.2	0.0022	0.0004	0.0048	0.0000	0.0004	0.0004	0.9	0.00002
2031	S01	Concrete/Industrial Saws	25 < hp <= 40	0.59	15.8	0.0001	0.0000	0.0011	0.0000	0.0000	0.0000	0.2	0.00000
2031	S01	Concrete/Industrial Saws	6 < hp <= 11	0.7	37.2	0.0008	0.0003	0.0013	0.0000	0.0001	0.0001	0.2	0.00002
2031	S01	Cranes	175 < hp <= 300	0.43	19.0	0.0002	0.0001	0.0008	0.0000	0.0000	0.0000	1.3	0.00000
2031	S01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	508.0	0.0056	0.0009	0.0159	0.0001	0.0014	0.0014	28.2	0.00006
2031	S01	Excavators	100 < hp <= 175	0.59	232.9	0.0021	0.0003	0.0069	0.0000	0.0005	0.0005	12.9	0.00002
2031	S01	Forklifts	75 < hp <= 100	0.59	24.0	0.0001	0.0000	0.0013	0.0000	0.0000	0.0000	0.8	0.00000
2031	S01	Generator Sets	25 < hp <= 40	0.43	30.0	0.0004	0.0001	0.0017	0.0000	0.0001	0.0001	0.3	0.00001
2031	S01	Graders	175 < hp <= 300	0.59	5.4	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.5	0.00000
2031	S01	Irrigation Sets	300 < hp <= 600	0.59	4.8	0.0014	0.0003	0.0050	0.0000	0.0002	0.0002	0.9	0.00002
2031	S01	Off-highway Trucks	300 < hp <= 600	0.59	4,815.9	0.0784	0.0228	0.3001	0.0027	0.0190	0.0184	915.1	0.00114
2031	S01	Other Construction Equipment	100 < hp <= 175	0.43	191.3	0.0037	0.0009	0.0104	0.0000	0.0008	0.0008	7.7	0.00006
2031	S01	Pavers	100 < hp <= 175	0.59	21.7	0.0003	0.0000	0.0007	0.0000	0.0001	0.0001	1.2	0.00000
2031	S01	Paving Equipment	100 < hp <= 175	0.59	16.0	0.0004	0.0001	0.0011	0.0000	0.0001	0.0001	0.9	0.00001
2031	S01	Plate Compactors	3 < hp <= 6	0.43	16.0	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.0	0.00000
2031	S01	Pumps	6 < hp <= 11	0.43	4.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2031	S01	Rollers	75 < hp <= 100	0.59	275.6	0.0048	0.0004	0.0189	0.0000	0.0007	0.0007	9.7	0.00003
2031	S01	Scrapers	300 < hp <= 600	0.59	158.2	0.0129	0.0021	0.0348	0.0001	0.0021	0.0020	30.1	0.00013

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	S01	Skid Steer Loaders	50 < hp <= 75	0.21	28.9	0.0036	0.0007	0.0030	0.0000	0.0005	0.0005	0.3	0.00002
2031	S01	Surfacing Equipment	16 < hp <= 25	0.59	23.4	0.0006	0.0001	0.0014	0.0000	0.0001	0.0001	0.2	0.00001
2031	S01	Surfacing Equipment	75 < hp <= 100	0.43	24.0	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.6	0.00001
2031	S01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	89.5	0.0167	0.0050	0.0293	0.0000	0.0035	0.0034	5.8	0.00028
2031	S01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	84.0	0.0058	0.0010	0.0064	0.0000	0.0008	0.0007	0.9	0.00005
2031	S01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	147.3	0.0135	0.0023	0.0123	0.0000	0.0018	0.0017	2.1	0.00011
2031	T01	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2031	T01	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2031	T01	Air Compressors	75 < hp <= 100	0.43	51.8	0.0011	0.0001	0.0034	0.0000	0.0002	0.0002	1.3	0.00001
2031	T01	Cement & Mortar Mixers	300 < hp <= 600	0.59	804.0	0.3843	0.0821	1.4484	0.0006	0.0526	0.0510	150.9	0.00387
2031	T01	Chain Saws > 6 HP	6 < hp <= 11	0.7	82.0	0.0926	0.0214	0.0005	0.0000	0.0034	0.0031	0.2	0.00000
2031	T01	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	82.0	0.0048	0.0009	0.0106	0.0000	0.0008	0.0008	2.1	0.00004
2031	T01	Concrete/Industrial Saws	25 < hp <= 40	0.59	51.8	0.0004	0.0001	0.0034	0.0000	0.0000	0.0000	0.7	0.00002
2031	T01	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2031	T01	Crawler Tractor/Dozers	100 < hp <= 175	0.59	412.7	0.0046	0.0007	0.0130	0.0001	0.0011	0.0011	22.9	0.00005
2031	T01	Excavators	100 < hp <= 175	0.59	558.8	0.0049	0.0008	0.0165	0.0001	0.0012	0.0011	31.0	0.00006
2031	T01	Forklifts	75 < hp <= 100	0.59	3,700.0	0.0125	0.0018	0.2062	0.0004	0.0029	0.0028	130.1	0.00012
2031	T01	Generator Sets	25 < hp <= 40	0.43	301.0	0.0039	0.0011	0.0175	0.0000	0.0006	0.0006	3.1	0.00009
2031	T01	Graders	175 < hp <= 300	0.59	16.9	0.0002	0.0000	0.0006	0.0000	0.0000	0.0000	1.6	0.00000

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	T01	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2031	T01	Irrigation Sets	300 < hp <= 600	0.59	15.2	0.0044	0.0009	0.0158	0.0000	0.0007	0.0007	2.9	0.00006
2031	T01	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2031	T01	Off-highway Trucks	300 < hp <= 600	0.59	12,536.6	0.2042	0.0593	0.7811	0.0070	0.0494	0.0480	2,382.3	0.00297
2031	T01	Other Construction Equipment	100 < hp <= 175	0.43	516.6	0.0099	0.0023	0.0281	0.0001	0.0022	0.0021	20.9	0.00015
2031	T01	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2031	T01	Pavers	100 < hp <= 175	0.59	51.8	0.0008	0.0001	0.0018	0.0000	0.0002	0.0002	2.9	0.00001
2031	T01	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2031	T01	Pumps	6 < hp <= 11	0.43	254.0	0.0034	0.0011	0.0056	0.0000	0.0004	0.0003	0.7	0.00008
2031	T01	Rollers	75 < hp <= 100	0.59	194.3	0.0033	0.0003	0.0133	0.0000	0.0005	0.0005	6.8	0.00002
2031	T01	Scrapers	300 < hp <= 600	0.59	64.8	0.0053	0.0008	0.0143	0.0000	0.0009	0.0008	12.3	0.00005
2031	T01	Skid Steer Loaders	50 < hp <= 75	0.21	15.9	0.0020	0.0004	0.0017	0.0000	0.0003	0.0003	0.2	0.00001
2031	T01	Surfacing Equipment	16 < hp <= 25	0.59	51.8	0.0013	0.0003	0.0032	0.0000	0.0001	0.0001	0.5	0.00002
2031	T01	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2031	T01	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2031	T01	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	129.1	0.0241	0.0073	0.0423	0.0000	0.0050	0.0049	8.3	0.00041
2031	T01	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	466.1	0.0324	0.0057	0.0353	0.0000	0.0043	0.0041	5.1	0.00028
2031	T01	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	757.5	0.0693	0.0120	0.0634	0.0000	0.0092	0.0089	11.0	0.00055
2031	T02	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	T02	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2031	T02	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2031	T02	Chain Saws > 6 HP	6 < hp <= 11	0.7	40.0	0.0452	0.0104	0.0003	0.0000	0.0017	0.0015	0.1	0.00000
2031	T02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2031	T02	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2031	T02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	140.6	0.0016	0.0002	0.0044	0.0000	0.0004	0.0004	7.8	0.00002
2031	T02	Excavators	100 < hp <= 175	0.59	276.6	0.0024	0.0004	0.0082	0.0000	0.0006	0.0006	15.3	0.00003
2031	T02	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2031	T02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2031	T02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001
2031	T02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2031	T02	Off-highway Trucks	300 < hp <= 600	0.59	8,121.1	0.1322	0.0384	0.5060	0.0045	0.0320	0.0311	1,543.2	0.00192
2031	T02	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2031	T02	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2031	T02	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2031	T02	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2031	T02	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2031	T02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2031	T02	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2031	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.21	80.0	0.0030	0.0009	0.0053	0.0000	0.0006	0.0006	1.1	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2031	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2031	T02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2031	T02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2031	T02	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021
2032	A04	Air Compressors	75 < hp <= 100	0.43	15.4	0.0003	0.0000	0.0010	0.0000	0.0001	0.0001	0.4	0.00000
2032	A04	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	13.2	0.0008	0.0001	0.0017	0.0000	0.0001	0.0001	0.3	0.00001
2032	A04	Concrete/Industrial Saws	25 < hp <= 40	0.59	15.4	0.0001	0.0000	0.0010	0.0000	0.0000	0.0000	0.2	0.00000
2032	A04	Concrete/Industrial Saws	6 < hp <= 11	0.7	13.2	0.0003	0.0001	0.0005	0.0000	0.0000	0.0000	0.1	0.00001
2032	A04	Crawler Tractor/Dozers	100 < hp <= 175	0.59	99.7	0.0011	0.0002	0.0031	0.0000	0.0003	0.0003	5.5	0.00001
2032	A04	Excavators	100 < hp <= 175	0.59	247.1	0.0022	0.0003	0.0073	0.0000	0.0005	0.0005	13.7	0.00002
2032	A04	Graders	175 < hp <= 300	0.59	5.4	0.0001	0.0000	0.0002	0.0000	0.0000	0.0000	0.5	0.00000
2032	A04	Irrigation Sets	300 < hp <= 600	0.59	4.9	0.0014	0.0003	0.0051	0.0000	0.0002	0.0002	0.9	0.00002
2032	A04	Off-highway Trucks	300 < hp <= 600	0.59	3,870.3	0.0630	0.0183	0.2411	0.0021	0.0153	0.0148	735.5	0.00092
2032	A04	Other Construction Equipment	100 < hp <= 175	0.43	964.0	0.0185	0.0043	0.0524	0.0001	0.0040	0.0039	38.9	0.00029
2032	A04	Pavers	100 < hp <= 175	0.59	15.4	0.0002	0.0000	0.0005	0.0000	0.0001	0.0001	0.9	0.00000
2032	A04	Pumps	6 < hp <= 11	0.43	4.4	0.0001	0.0000	0.0001	0.0000	0.0000	0.0000	0.0	0.00000
2032	A04	Rollers	75 < hp <= 100	0.59	62.6	0.0011	0.0001	0.0043	0.0000	0.0002	0.0002	2.2	0.00001
2032	A04	Scrapers	300 < hp <= 600	0.59	19.2	0.0016	0.0003	0.0042	0.0000	0.0003	0.0002	3.7	0.00002
2032	A04	Skid Steer Loaders	50 < hp <= 75	0.21	16.9	0.0021	0.0004	0.0018	0.0000	0.0003	0.0003	0.2	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2032	A04	Surfacing Equipment	16 < hp <= 25	0.59	15.4	0.0004	0.0001	0.0009	0.0000	0.0000	0.0000	0.1	0.00001
2032	A04	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	64.2	0.0120	0.0036	0.0210	0.0000	0.0025	0.0024	4.1	0.00020
2032	A04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	32.7	0.0030	0.0005	0.0027	0.0000	0.0004	0.0004	0.5	0.00002
2032	H04	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2032	H04	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2032	H04	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2032	H04	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005
2032	H04	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2032	H04	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2032	H04	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2032	H04	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2032	H04	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2032	H04	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2032	H04	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2032	H04	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2032	L02	Aerial Lifts	50 < hp <= 75	0.21	4,920.0	0.1875	0.0357	0.3120	0.0002	0.0222	0.0216	53.8	0.00194
2032	L02	Aerial Lifts	75 < hp <= 100	0.59	960.0	0.1561	0.0247	0.1694	0.0001	0.0198	0.0192	39.4	0.00115
2032	L02	Cement & Mortar Mixers	300 < hp <= 600	0.59	780.0	0.3728	0.0796	1.4052	0.0006	0.0510	0.0495	146.4	0.00375
2032	L02	Cranes	175 < hp <= 300	0.43	240.0	0.0024	0.0008	0.0101	0.0000	0.0006	0.0005	16.4	0.00005

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2032	L02	Excavators	100 < hp <= 175	0.59	160.0	0.0014	0.0002	0.0047	0.0000	0.0003	0.0003	8.9	0.00002
2032	L02	Forklifts	75 < hp <= 100	0.59	3,560.0	0.0120	0.0018	0.1984	0.0004	0.0028	0.0027	125.2	0.00012
2032	L02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2032	L02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2032	L02	Off-highway Trucks	300 < hp <= 600	0.59	6,474.0	0.1054	0.0306	0.4034	0.0036	0.0255	0.0248	1,230.2	0.00153
2032	L02	Other Construction Equipment	300 < hp <= 600	0.59	40.0	0.0156	0.0021	0.0358	0.0000	0.0023	0.0022	7.6	0.00012
2032	L02	Pumps	6 < hp <= 11	0.43	240.0	0.0032	0.0010	0.0053	0.0000	0.0003	0.0003	0.7	0.00008
2032	L02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	480.0	0.0439	0.0076	0.0402	0.0000	0.0058	0.0057	7.0	0.00035
2032	T02	Aerial Lifts	50 < hp <= 75	0.21	5,040.0	0.1920	0.0366	0.3196	0.0002	0.0228	0.0221	55.2	0.00198
2032	T02	Aerial Lifts	75 < hp <= 100	0.59	1,200.0	0.1951	0.0308	0.2118	0.0002	0.0247	0.0240	49.2	0.00144
2032	T02	Cement & Mortar Mixers	300 < hp <= 600	0.59	1,164.0	0.5563	0.1188	2.0970	0.0009	0.0762	0.0739	218.5	0.00560
2032	T02	Chain Saws > 6 HP	6 < hp <= 11	0.7	40.0	0.0452	0.0104	0.0003	0.0000	0.0017	0.0015	0.1	0.00000
2032	T02	Chippers/Stump Grinders (com)	75 < hp <= 100	0.43	40.0	0.0023	0.0004	0.0052	0.0000	0.0004	0.0004	1.0	0.00002
2032	T02	Cranes	175 < hp <= 300	0.43	524.0	0.0052	0.0018	0.0221	0.0001	0.0012	0.0012	35.9	0.00011
2032	T02	Crawler Tractor/Dozers	100 < hp <= 175	0.59	110.6	0.0012	0.0002	0.0035	0.0000	0.0003	0.0003	6.1	0.00001
2032	T02	Excavators	100 < hp <= 175	0.59	246.6	0.0022	0.0003	0.0073	0.0000	0.0005	0.0005	13.7	0.00002
2032	T02	Forklifts	75 < hp <= 100	0.59	4,444.0	0.0150	0.0022	0.2477	0.0005	0.0035	0.0034	156.3	0.00014
2032	T02	Generator Sets	25 < hp <= 40	0.43	80.0	0.0010	0.0003	0.0047	0.0000	0.0002	0.0002	0.8	0.00002
2032	T02	Graders	40 < hp <= 50	0.59	40.0	0.0003	0.0001	0.0026	0.0000	0.0000	0.0000	0.6	0.00001

TABLE 6-6: NON-ROAD CONSTRUCTION EMISSIONS INVENTORY – HYBRID TERMINAL OPTION *(CONTINUED)*

Year	Task ID	Equipment Type	HP	LF	Usage (hrs)	CO (ST)	VOC (ST)	NO_x (ST)	SO_x (ST)	PM_{10} (ST)	$PM_{2.5}$ (ST)	CO_2 (MT)	CH_4 (MT)
2032	T02	Off-highway Trucks	175 < hp <= 300	0.43	920.0	0.0027	0.0013	0.0150	0.0002	0.0009	0.0009	63.7	0.00005
2032	T02	Off-highway Trucks	300 < hp <= 600	0.59	8,061.3	0.1313	0.0381	0.5023	0.0045	0.0318	0.0308	1,531.8	0.00191
2032	T02	Other Construction Equipment	300 < hp <= 600	0.59	72.0	0.0280	0.0038	0.0644	0.0000	0.0042	0.0040	13.7	0.00021
2032	T02	Pavers	100 < hp <= 175	0.59	80.0	0.0012	0.0002	0.0027	0.0000	0.0003	0.0003	4.4	0.00001
2032	T02	Plate Compactors	3 < hp <= 6	0.43	24.0	0.0002	0.0001	0.0003	0.0000	0.0000	0.0000	0.0	0.00000
2032	T02	Pumps	6 < hp <= 11	0.43	610.0	0.0082	0.0026	0.0135	0.0000	0.0008	0.0008	1.7	0.00020
2032	T02	Rollers	75 < hp <= 100	0.59	40.0	0.0007	0.0001	0.0027	0.0000	0.0001	0.0001	1.4	0.00000
2032	T02	Surfacing Equipment	300 < hp <= 600	0.59	16.0	0.0086	0.0012	0.0200	0.0000	0.0012	0.0012	3.0	0.00006
2032	T02	Surfacing Equipment	75 < hp <= 100	0.43	40.0	0.0014	0.0002	0.0029	0.0000	0.0002	0.0002	1.0	0.00001
2032	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.21	80.0	0.0030	0.0009	0.0053	0.0000	0.0006	0.0006	1.1	0.00005
2032	T02	Tractors/Loaders/ Backhoes	100 < hp <= 175	0.59	40.0	0.0075	0.0023	0.0131	0.0000	0.0016	0.0015	2.6	0.00013
2032	T02	Tractors/Loaders/ Backhoes	50 < hp <= 75	0.21	24.0	0.0017	0.0003	0.0018	0.0000	0.0002	0.0002	0.3	0.00001
2032	T02	Tractors/Loaders/ Backhoes	75 < hp <= 100	0.21	1,280.0	0.1171	0.0203	0.1071	0.0001	0.0156	0.0151	18.7	0.00092
2032	T02	Trenchers	50 < hp <= 75	0.59	400.0	0.0139	0.0022	0.0558	0.0000	0.0016	0.0016	10.5	0.00021

Note: HP denotes horsepower; LF denotes load factor; hrs denotes hours; ST denotes short tons; MT denotes metric tons; CO denotes carbon monoxide, NO_x denotes nitrogen oxides, SO_x denotes sulfur oxides, VOC denotes volatile organic compounds, $PM_{2.5}$ denotes fine particulate matter, PM_{10} denotes coarse particulate matter, CO_2 denotes carbon dioxide, CH_4 denotes methane, N_2O denotes nitrous oxide.
Source: MOVES 4, Landrum & Brown 2024

Attachment 7 NEPA Air Quality Protocol and NEPA Greenhouse Gas Protocol

This attachment contains the NEPA Air Quality Protocol and NEPA Greenhouse Gas Protocol.

After the publication of the Draft EA, Executive Order 13990, which was relied upon for the January 2023 CEQ draft GHG guidance, was revoked and CEQ revoked its regulations (40 CFR parts 1500-1508) implementing NEPA, 42 U.S.C. 4321 et seq., as amended, in response to Executive Order 14154. In addition, the Supreme Court issued the Seven County Infrastructure Coalition v. Eagle County, 605 U. S. 975 (2025) ruling on May 29, 2025. As a result of these changes, the references to climate, qualitative climate evaluation that discussed the level of preparedness with respect to the impacts of climate change, the extent to which the alternatives could be affected by future climate conditions, and if the alternatives are consistent with national, state, and local climate goals, and the cumulative impact analysis were removed from the Final EA. Though the NEPA Climate Protocol included methodology for both a climate change and cumulative impact analysis, FAA's final decision will only rely upon the GHG emissions disclosed in the Final EA.

National Environmental Policy Act Environmental Assessment

Air Quality Assessment Protocol

Seattle-Tacoma International Airport

August 2023

PREPARED FOR
Port of Seattle

Contents Page

1 Protocol for Air Quality Assessment (NEPA) 1

1.1 Purpose of this Document 1
1.2 Agency Coordination 1
1.3 Description of the Proposed Action 2
1.4 Overall Approach (NEPA) 4
1.4.1 Clean Air Act 4
1.4.2 King County Air Quality Status 6
1.4.3 Lead 7
1.4.4 Hazardous Air Pollutants (NEPA) 7
1.4.5 Ultrafine Particles (NEPA) 7
1.5 Prepare Emissions Inventories for Criteria Pollutants (NEPA) 8
1.5.1 Analysis Years 8
1.5.2 Aircraft Operational Emissions Inventory 12
1.5.3 Auxiliary Power Units Emissions Inventory 14
1.5.4 Ground Support Equipment Emissions Inventory. 14
1.5.5 Motor Vehicle Emissions Inventory 15
1.5.6 Stationary Source Emissions Inventory 18
1.5.7 Construction Emissions Inventory 18

2 Protocol for Cumulative Impact Analysis for Air Quality (NEPA) 19

2.1 Review the List of Past, Present, and Reasonably Foreseeable Future Projects 19
2.2 Identify Air Quality Impacts of the Proposed Action 20

List of Tables

		Page
TABLE 1	NATIONAL AMBIENT AIR QUALITY STANDARDS	5
TABLE 2	NEPA APPROACH FOR EMISSIONS INVENTORIES	9

List of Exhibits

	Page
EXHIBIT 1 PROPOSED ACTION	3
EXHIBIT 2 RADAR DATA AND AEDT ARRIVAL PROFILE COMPARISON	13
EXHIBIT 3 SURFACE TRANSPORTATION STUDY INTERSECTIONS	16
EXHIBIT 4 AIR QUALITY STUDY AREA	17

1 Protocol for Air Quality Assessment (NEPA)

The National Environmental Policy Act (NEPA) provides for an environmental review process to disclose the potential impacts, including air quality, from a proposed federal action on the human environment.

1.1 Purpose of this Document

This document describes the overall approach and methods to conduct an air quality assessment to demonstrate compliance to the NEPA.

The Port of Seattle, as the owner and operator of the Seattle-Tacoma International Airport (SEA or Airport), evaluated airport operations and facilities during the Sustainable Airport Master Plan (SAMP) planning process and identified a set of Near-Term Projects (NTPs) designed to help the Airport maintain its essential airport function in the future. The NTPs (as a whole) are referred to as the Proposed Action in this document.

The NEPA documentation will be prepared to investigate, analyze, and disclose the potential environmental impacts of the Proposed Action and the reasonable alternatives in compliance with the NEPA.

1.2 Agency Coordination

The Port of Seattle and the FAA have coordinated with PSCAA in the past on an earlier version of this protocol document, which received concurrence from PSCAA in June 2020. In coordination with the FAA, this air quality protocol document has been updated to reflect updated analysis years, an updated methodology for air quality, and the use of newer software. The climate discussion will be included in a separate protocol document with respect to updated guidance from the Council on Environmental Quality. It is intended that this air quality protocol document be coordinated with Puget Sound Clean Air Agency in an effort to:

- Familiarize the agency with the scope of the Proposed Action and identify any issues of concern early in the process;
- Engage in data exchange of information necessary to complete the air quality assessment; and,
- Obtain concurrence on procedure and methodology prior to the publication of the anticipated NEPA Environmental Assessment (EA).

1.3 Description of the Proposed Action

The Port identified a set of NTPs to address the near-term activity levels projected to occur at the Airport. The NTPs include more than 30 projects that would improve efficiency, safety, access to the Airport, and support facilities for airlines and the Airport.

The NTPs include the following primary elements:

- Second terminal concourse
- New passenger terminal and parking
- North Airport Expressway relocation
- North hold pad
- Central hardstand
- Elevated busway and stations
- Second terminal roads and curbside
- Main Terminal north ground transportation lot
- North cargo hardstand
- Cargo 4 south redevelopment
- Cargo warehousing
- Runway 16R/34L blast pads
- Relocated Taxiways A and B
- Extension of Taxiways C and D
- Taxiway infrastructure reconfiguration (south of Taxiway O)
- Runway 34L highspeed exit
- Taxiway D extension
- Fuel farm expansion

The elements of the Proposed Action are shown on **Exhibit 1**.

Exhibit 1 Proposed Action

1.4 Overall Approach (NEPA)

The impacts to air quality due to the Proposed Action for NEPA will be determined in accordance with the guidelines provided in FAA Order 1050.1F, *Environmental Impacts: Policies and Procedures;* FAA Order 5050.4B, *National Environmental Policy Act (NEPA) Implementing Instructions for Airport Actions*; and FAA's Aviation Emissions and Air Quality Handbook Version 3 Update 1. Potential air quality impacts are categories that are required to be analyzed per these orders and guidance.

FAA 1050.1F, Exhibit 4-1 defines the significance threshold for air quality as when "[t]he action would cause pollutant concentrations to exceed one or more of the National Ambient Air Quality Standards (NAAQS), as established by the United States Environmental Protection Agency (USEPA) under the Clean Air Act, for any of the time period analyzed, or to increase the frequency or severity of any such existing violations." FAA guidance requests that Air Quality focus on the NAAQS criteria pollutants.

1.4.1 Clean Air Act

The Clean Air Act (CAA), including the 1990 Amendments, provides the establishment of standards and programs to evaluate, achieve, and maintain acceptable air quality in the United States. Under the CAA, the USEPA established a set of standards, or criteria, for six pollutants determined to be potentially harmful to human health and welfare.[1]

The USEPA considers the presence of the following six criteria pollutants to be indicators of air quality:

- Carbon monoxide (CO);
- Ozone (O_3);
- Nitrogen dioxide (NO_2);
- Sulfur dioxide (SO_2).
- Particulate matter (PM_{10} and $PM_{2.5}$); and,
- Lead (Pb).

For each of the criteria pollutants, the USEPA established primary standards intended to protect public health, and secondary standards for the protection of public welfare, which captures factors such as preventing materials damage, preventing crop and vegetation damage, and assuring good visibility. The NAAQS are summarized in **Table 1**. Areas of the country where air pollution levels consistently exceed these standards may be designated nonattainment by the USEPA.

[1] USEPA, Code of Federal Regulations, Title 40, Part 50 (40 CFR Part 50) National Primary and Secondary Ambient Air Quality Standards (NAAQS), July 2011.

Table 1 National Ambient Air Quality Standards

POLLUTANT	PRIMARY/ SECONDARY	AVERAGING TIME	LEVEL	FORM OF MEASUREMENT
Carbon Monoxide	Primary	8 hour	9 ppm	Not to be exceeded more than once per year
Carbon Monoxide	Primary	1 hour	35 ppm	Not to be exceeded more than once per year
Lead	primary and secondary	Rolling 3-month average	0.15 µg/m3 (1)	Not to be exceeded
Nitrogen Dioxide	Primary	1 hour	100 ppb	98th percentile of 1-hour daily maximum concentrations, averaged over 3 years
Nitrogen Dioxide	primary and secondary	1 year	53 ppb (2)	Annual Mean
Ozone	primary and secondary	8 hour	0.070 ppm (3)	Annual fourth-highest daily maximum 8-hr concentration, averaged over 3 years
Fine Particulate Matter ($PM_{2.5}$)	Primary	1 year	12.0 µg/m^3	Annual mean, averaged over 3 years
Fine Particulate Matter ($PM_{2.5}$)	Secondary	1 year	15.0 µg/m^3	Annual mean, averaged over 3 years
Fine Particulate Matter ($PM_{2.5}$)	primary and secondary	24 hour	35 µg/m^3	98th percentile, averaged over 3 years
Coarse Particulate Matter (PM_{10})	primary and secondary	24 hour	150 µg/m^3	Not to be exceeded more than once per year on average over 3 years
Sulfur Dioxide	Primary	1 hour	75 ppb (4)	99th percentile of 1-hour daily maximum concentrations, averaged over 3 years
Sulfur Dioxide	Secondary	3 hour	0.5 ppm	Not to be exceeded more than once per year

(1) In areas designated nonattainment for the Pb standards prior to the promulgation of the current (2008) standards, and for which implementation plans to attain or maintain the current (2008) standards have not been submitted and approved, the previous standards (1.5 µg/m3 as a calendar quarter average) also remain in effect.

(2) The level of the annual NO2 standard is 0.053 ppm. It is shown here in terms of ppb for the purposes of clearer comparison to the 1-hour standard level.

(3) Final rule signed October 1, 2015, and effective December 28, 2015. The previous (2008) O3 standards are not revoked and remain in effect for designated areas. Additionally, some areas may have certain continuing implementation obligations under the prior revoked 1-hour (1979) and 8-hour (1997) O3 standards.

(4) The previous SO2 standards (0.14 ppm 24-hour and 0.03 ppm annual) will additionally remain in effect in certain areas: (1) any area for which it is not yet 1 year since the effective date of designation under the current (2010) standards, and (2)any area for which an implementation plan providing for attainment of the current (2010) standard has not been submitted and approved and which is designated nonattainment under the previous SO2 standards or is not meeting the requirements of a SIP call under the previous SO2 standards (40 CFR 50.4(3)). A SIP call is an EPA action requiring a state to resubmit all or part of its State Implementation Plan to demonstrate attainment of the required NAAQS.

Notes: ppm is parts per million; ppb is parts per billion, and µg/m3 is micrograms per cubic meter.

Source: EPA, https://www.epa.gov/criteria-air-pollutants/naaqs-table, Accessed December 2022.

A nonattainment area is a homogeneous geographical area (usually referred to as an air quality control region or airshed) that is in violation of one or more NAAQS and has been designated as nonattainment by the USEPA as provided for under the CAA. Each nonattainment area is required to have a State Implementation Plan (SIP), developed by the state that quantifies current conditions, projects future conditions through the date of prescribed attainment, and then identifies mitigation measures that are to be used to bring the area back into attainment.

A maintenance area describes the air quality designation of an area previously designated nonattainment by the USEPA and subsequently redesignated attainment after emissions are reduced. Such an area remains designated as maintenance for a period up to 20 years at which time the state can apply for redesignation to attainment, provided that the NAAQS were sufficiently maintained throughout the maintenance period.

1.4.2 King County Air Quality Status

SEA is located within King County, Washington, which is included in the Puget Sound Intrastate Air Quality Control Region. The area was previously designated maintenance for ozone under the 1-hour 1979 ozone standard; however, the 1-hour standard was revoked by USEPA effective June 15, 2005. The maintenance period for ozone ended on November 25, 2016.[2] The region is currently designated as in attainment for both the 2015 and 2008 8-hour ozone standard. The region is not subject to a maintenance plan for ozone, although ozone has been considered an important pollutant tracked by the state and local agencies.

In the past, King County was also designated as nonattainment for carbon monoxide (CO); however, on October 11, 1996, the USEPA determined the area had attained the standard and the region was redesignated to attainment of the 1971 standard. The maintenance period for CO ended on October 11, 2016.[3] Several areas within King County are classified as maintenance for the PM_{10} (coarse particles) standard, including Kent, Duwamish and Tacoma. Neither the Proposed Action nor any part of the Airport is within any of these areas. Therefore, the Proposed Action will occur in an area considered in attainment for all criteria pollutants.

1.4.2.1 Conformity

General Conformity

The General Conformity Rule under the CAA is conducted in three phases, depending on the extent of the proposed Federal action: (1) applicability, (2) evaluation, and (3) determination. The applicability phase has two parts. The first part is to determine if the Proposed Action is located in a USEPA-designated nonattainment or maintenance area for one or more of the regulated criteria pollutants. If it is not, then the general conformity rule does not apply. Since the Proposed Action is not located in a USEPA-designated nonattainment or maintenance area for one or more of the regulated criteria pollutants, the general conformity rule does not apply.

Transportation Conformity

Transportation conformity does not apply to the Proposed Action because it does not include actions funded through U.S.C. Title 23 or the Federal Transit Act.

[2] State of Washington's Department of Ecology. Plans for Maintaining Air Quality. Website accessed December 2022 at https://ecology.wa.gov/Regulations-Permits/Plans-policies/State-implementation-plans/Maintenance-SIPs

[3] State of Washington's Department of Ecology. Plans for Maintaining Air Quality. Website accessed December 2022 at https://ecology.wa.gov/Regulations-Permits/Plans-policies/State-implementation-plans/Maintenance-SIPs

1.4.3 Lead

In general, an analysis of lead is limited to projects that emit significant quantities of the pollutant (i.e. lead smelters). While some active general aviation airports prepare lead emissions inventories due to the large quantity of leaded Avgas used, this is not warranted for SEA because the area is attainment for lead, Avgas fueling at SEA ceased in 2018, and because there are no development project elements in the Proposed Action that would affect or change Avgas-based aircraft.

1.4.4 Hazardous Air Pollutants (NEPA)

Per FAA guidance provided in the Aviation Emissions and Air Quality Handbook, a Hazardous Air Pollutants (HAPs) emissions inventory should be considered if the Proposed Action is considered “major” (e.g., new airport, new runway, major runway extension, new terminal or major terminal expansion or major construction activity); if the Proposed Action is located in a nonattainment or maintenance area; and/or if a criteria air pollutant emissions inventory is also prepared. A HAPs inventory analysis will not be conducted as part of the NEPA assessment because the Proposed Action is not located in a nonattainment or maintenance area.

1.4.5 Ultrafine Particles (NEPA)

UFPs are defined as particles with a diameter less than 0.1 micrometers ($PM_{0.1}$). The existing science is not fully mature, and the measurement and understanding of UFPs and their related health risks has not been clearly defined. Currently UFPs are not regulated by the USEPA or the state either through rate of emissions or concentrations (other than being a subset component of $PM_{2.5}$) and are therefore not typically considered in formal environmental assessments or reviews.

Furthermore, since UFPs are not specifically listed as a criteria pollutant, air toxic, or HAP, an analysis of UFPs will not be considered a requirement of NEPA or the CAA. Therefore, no analysis or discussion of UFPs will be included in the NEPA evaluation.

1.5 Prepare Emissions Inventories for Criteria Pollutants (NEPA)

An emissions inventory is a summary of the total pollutants generated by all active emissions sources that may be affected by the Proposed Action. The emissions inventory provides the total annual pollutant emissions as tons per year.

The elements of the Proposed Action would be anticipated to cause direct and indirect emissions from construction and operational activities. For NEPA purposes, construction refers to the process of building or putting in place the proposed airport improvements. Operational emissions refer to the emissions that are emitted once the proposed improvements are put in place and are operating.

Therefore, an air quality analysis incorporating separate evaluations will be conducted including:

- Preparation of an Aircraft Emissions Inventory including Auxiliary Power Unit (APU) emissions;
- Preparation of a Motor Vehicle and Ground Support Equipment Emissions Inventory;
- Preparation of a Stationary Source Emissions Inventory; and,
- Preparation of a Construction Emissions Inventory.

The emissions results for all inventories will be summed and will be provided in tabular form for each analysis year.

As previously stated, a separate climate protocol document will be developed. The methodology to evaluate impacts to climate due to the Proposed Action for NEPA will be developed in accordance with the guidelines provided in FAA Order 1050.1F, *Environmental Impacts: Policies and Procedures*; FAA Order 5050.4B, *National Environmental Policy Act (NEPA) Implementing Instructions for Airport Actions*; FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*; and the CEQ's *National Environmental Policy Act Guidance on Consideration of Greenhouse Gas Emissions and Climate Change*.

1.5.1 Analysis Years

The air quality analysis will disclose emissions for existing conditions, which will represent calendar year 2022. The analysis will also disclose the emissions and potential air quality impacts due to operation of the Proposed Action, No Action, and any identified alternatives for the projected future conditions in 2032 and 2037. The year 2032 will be used as a basis for analysis because 2032 is the projected opening year of the Proposed Action. In addition, 2037 will be used as a basis for analysis, because it represents a condition five years beyond the opening year.[4] The air quality analysis will also disclose the potential air quality impacts due to construction activities during the years 2025 to 2032. Because the area of the Proposed Action is in attainment and conformity does not apply, no potential SIP milestone years will be analyzed.

The overall criteria pollutant assessment approach to prepare the emissions inventories is summarized in **Table 2**.

4 The FAA's Desk Reference Section 11.3 states "The environmental consequences section of the NEPA document will include the analysis of the potential noise impacts of the proposed action and alternative(s) for each timeframe evaluated… Timeframes usually selected are the year of anticipated project implementation and 5 to 10 years after implementation." The FAA's Desk Reference Section 1.3.2 for air quality states, "the emissions inventory usually is calculated for the year(s) of project implementation, the planning horizon year(s) in the EA or EIS, and sometimes for intermediate years, if appropriate due to project phasing or if requested by a reviewing agency." The air quality analysis would be conducted consistent with the noise analysis and therefore include an assessment of the implementation year and of the project five years after implementation.

Table 2 NEPA Approach for Emissions Inventories

Emissions Source	Data / Conditions	Data Source	Models to be Used
Aircraft	Number of operations, Fleet Mix, and Engine Types	For existing conditions, FAA's Air Traffic Activity Data System and the Port's EnvironmentalVue Flight Track Monitoring System. For future conditions, Port aircraft statistics and forecast of operations.	FAA AEDT
Aircraft	Taxi Time and other Aircraft Times in Modes	For existing conditions, the Port of Seattle will use FAA's Aviation System Performance Metrics (ASPM). For future conditions, the Port of Seattle will use the delay analysis developed with the Total Airspace and Airport Modeler (TAAM) tool normalized to the ASPM data.[5]	FAA AEDT
Aircraft	Auxiliary Power Unit (APU) Operating Times	For existing and future conditions, the AEDT database will be used to assign the APU type and the Port of Seattle's Rules and Regulations will be used to assign APU usage.	FAA AEDT
Aircraft	Aircraft Run-Ups	For existing conditions, Port of Seattle records will be used. For the future conditions, usage would be based on the increases in aircraft levels.	FAA AEDT

[5] Leigh Fisher. Environmental Review Airside Modeling, June 2020.

Emissions Source	Data / Conditions	Data Source	Models to be Used
Ground Support Equipment (GSE)	GSE equipment types, Fuel types, and Operating Times	*Tenant-Owned* For existing conditions, a GSE survey (i.e., field verification and Port of Seattle data) will be used to identify equipment types and usage. Usage for future conditions would be increased based on the increases in aircraft levels. *Port-Owned* Additionally, for existing conditions, Port-owned airfield vehicles and equipment usage would be obtained from the Port. Usage for future conditions would be adjusted based on the increases in aircraft levels.	FAA AEDT
Motor Vehicles	Number of vehicles by roadway segment, Vehicle Miles Travelled (VMTs) by vehicle type and average speed	*Off-Airport Roadways* For existing and future conditions, information from the surface transportation study developed for the NEPA EA will be used. Where data is not being collected for roadway segments within the study area, WSDOT data will be utilized. *On-Airport Roadways* For existing conditions, Port of Seattle information on the number and types of airside delivery vehicles accessing the airfield through security gates. For future conditions, the increase would be based on the increase in passenger levels. *Parking Facilities* For existing conditions, information from the Port of Seattle would be used. For future conditions, the increase would be based on the increase in passenger levels and aircraft operations.	USEPA's MOVES3

Emissions Source	Data / Conditions	Data Source	Models to be Used
Stationary Sources	Number, type, and usage for emergency generators, boilers, and fuel tanks, the usage of which may be affected by the Proposed Action	For existing conditions, Port of Seattle records will be used. For future conditions, estimates will be based on increases in aircraft and passenger levels and anticipated new facilities.	FAA AEDT and USEPA AP-42 and other regional Puget Sound Clean Air Agency guidance documents, spreadsheet calculations.
Construction Equipment	Number and type of vehicles, duration of use	Port of Seattle construction phasing schedule, ACEIT database for types and usage of construction equipment, MOVES3 emission factors for King County, WA.	ACEIT and USEPA's MOVES3

Source: Port of Seattle and L&B, 2022.

1.5.2 Aircraft Operational Emissions Inventory

The number and type of aircraft operations directly affect emissions. The emission inventory for aircraft operations will be developed using the AEDT model Version 3e. AEDT models aircraft performance in space and time to estimate fuel consumption, air quality emissions, and noise consequences at airports. Aircraft emissions depend partly on the physical characteristics and performance parameters of each unique aircraft type. These include the airframe type, the type and number of engines, takeoff weight, and approach angle.

In addition to the physical characteristics of the aircraft operating at the Airport, emissions further depend on the number of times that each aircraft type operates in the various modes that define a landing and takeoff cycle (LTO). An LTO consists of the approach, taxi in, startup, taxi out, takeoff, and climb out. In AEDT, these modes are reported as time below mixing height and climb below mixing height.

For the NEPA EA, emissions from aircraft will only be calculated when aircraft are operating in these modes within the atmospheric mixing layer, below the mixing height, where the emissions may influence ground-based pollutant concentrations. The mixing height, by definition, is the height below which emissions will be readily mixed to the surface in a time frame of a few minutes to an hour. Thus, the pollutants emitted within this mixing layer are the most important. The mixing height, combined with the angle of approach and the departure angle, determines the total time an aircraft operates in the mixing layer during approach and climb out, and thus potentially impacts human health. The mixing height used in this assessment will be defined as 3,084 feet in altitude above field elevation, which is the recommendation by the FAA based on the USPEA's *Mixing Heights, Wind Speeds, and Potential for Urban Air Pollution Throughout the Contiguous United States*.[6]

Information on the number and type of aircraft operations for the existing conditions will be obtained from the Port of Seattle and by FAA's Air Traffic Activity Data System (ATADS) radar data. The radar data will be used to develop flight tracks in the AEDT. Additional data including aircraft types and engine combinations will then be researched and downloaded from the Port's EnvironmentalVue Flight Track Monitoring System. The assigning of aircraft engines will be based on the specific airframe and the operator. This information will be used to develop a representative aircraft fleet for input into the AEDT model. A review of radar data and the AEDT database confirmed the standard profiles included in AEDT are representative of actual aircraft performance (altitude, speed, thrust) at SEA. See **Exhibit 2** for an example of the comparison of an arrival aircraft altitude with the AEDT arrival standard profile conducted for the purpose of the NEPA EA.

With or without the Proposed Action, aircraft operations are expected to increase each year and by 2037, the number of annual aircraft operations will be higher as compared to the existing condition. Information on the number and type of aircraft operations for the future Proposed Action, No Action, and any identified alternatives will be based on the Port of Seattle's future aircraft activity forecasts and operational analysis. It is anticipated that the Proposed Action alternative will include a higher number of aircraft operations than the No Action alternative in both the 2032 and 2037 timeframes. The resulting emissions from these conditions will be disclosed as part of the analysis. Aircraft operational emissions inventories will be prepared for the existing condition, Proposed Action (2032 and 2037), No Action (2032 and 2037), and any identified alternatives. A qualitative discussion on the FAA's Continuous Lower Energy, Emissions, and Noise (CLEEN) Program and the Port of Seattle's sustainable fuel goals and how they could reduce future emissions will also be included.

[6] USEPA. Mixing Heights, Wind Speeds, and Potential for Urban Air Pollution Throughout the Contiguous United States, January 1972. Page 110. Seattle, Washington has a reported diurnal variation of mixing heights between 705 meters (2,313 feet) and 1,175 meters (3,855 feet), with the daily average being 940 meters (3,084 feet).

Exhibit 2 Radar Data and AEDT Arrival Profile Comparison

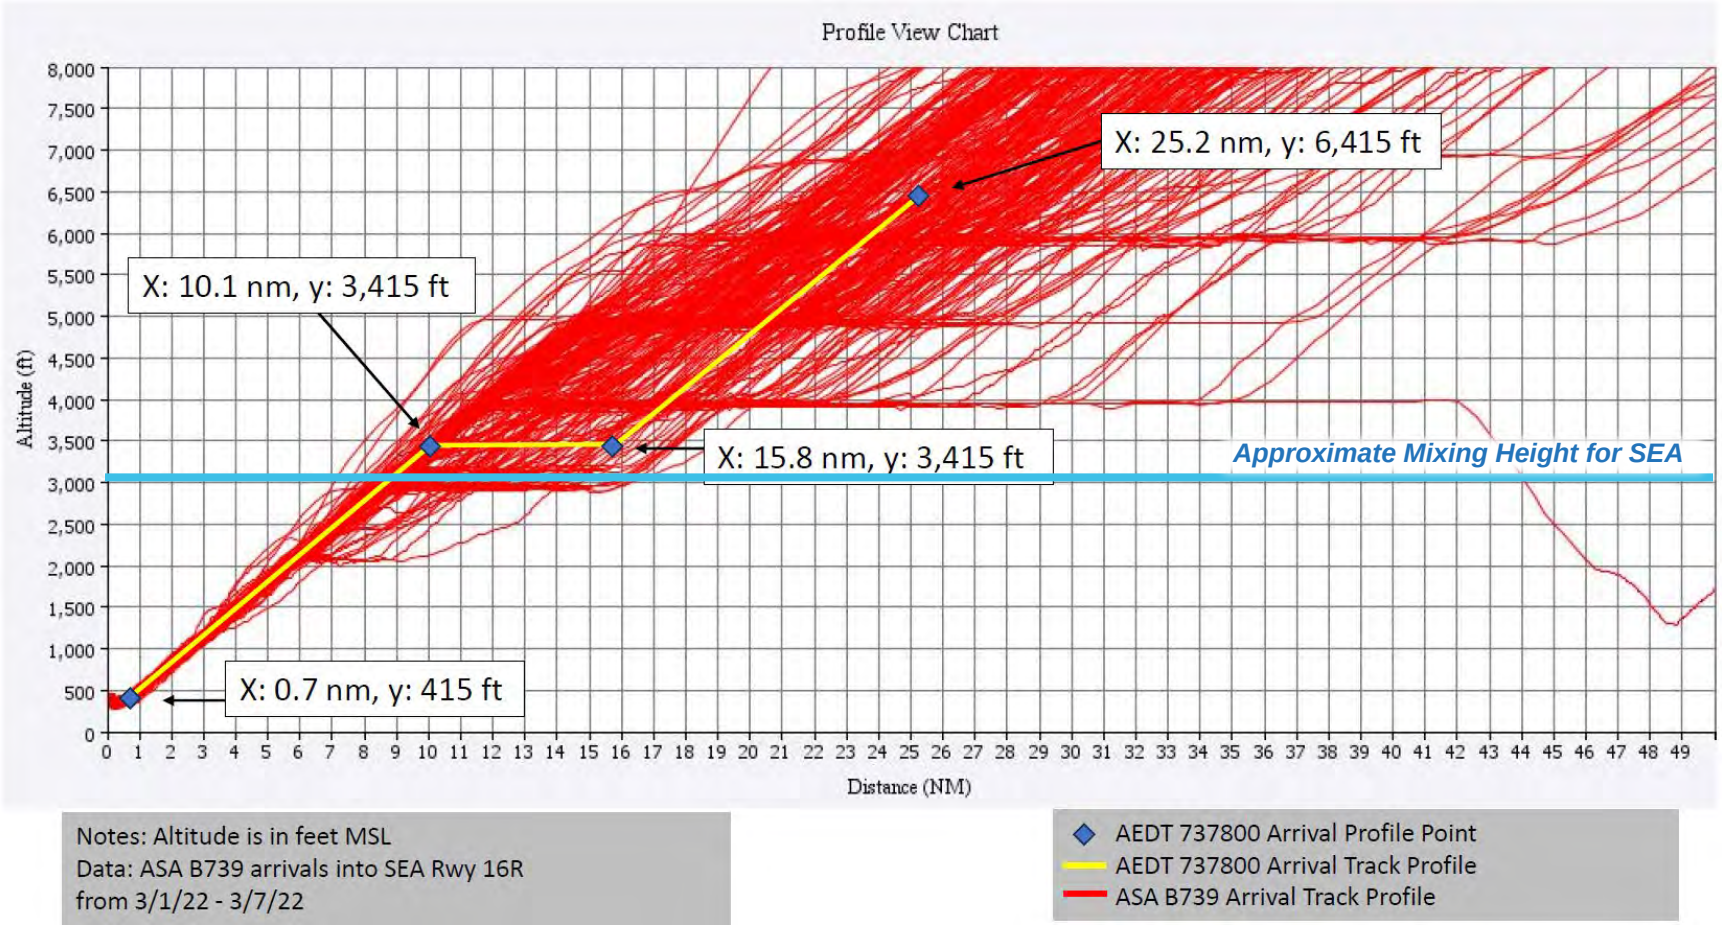

1.5.2.1 Taxi Time and other Aircraft Times in Mode

The Proposed Action includes various elements that would have the potential to change average aircraft taxi time (delay time) at the Airport. The average taxi in and taxi out time is dependent on the airfield configuration, annual operating levels, and available facilities. The average taxi in and taxi out time for the existing conditions will be based on the FAA's operations and performance data for SEA including Aviation System Performance Metrics (ASPM).

The average taxi in and taxi out time for the future conditions will be determined by delay modeling developed with the Total Airspace and Airport Modeler (TAAM) tool normalized to ASPM. This information will be provided by the Port of Seattle.[7]

1.5.2.2 Aircraft Run-Ups

Aircraft engine ground run-ups are routine aircraft engine maintenance tests performed to test engines and diagnose engine issues. Aircraft run-up activity logs will be provided by the Port of Seattle to determine the amount of run-up operations, the location of the run-up, average duration, and the associated airframe and engine in the existing conditions. Run-up activity in the future conditions will be based on the Port of Seattle's future aircraft activity forecasts and operational analysis.

1.5.3 Auxiliary Power Units Emissions Inventory

Most of the larger jet aircraft use auxiliary power units (APUs) while at the gate to operate the heating, air conditioning, and electric systems. The APU is also used to 'start up' or restart the aircraft engines before departing from the gate or cargo area. APU usage is within the control of the pilot; therefore, APU use and emissions can vary greatly from one airline/operator to another and even one aircraft to another. Most of the smaller general aviation aircraft in the SEA aircraft fleet do not have APUs. Additionally, the use of hardstand and cargo operations (when aircraft are not using gates and jet bridges) impacts the amount of APU emissions. For the existing and future conditions analysis, the AEDT database will be used to assign the specific types of APU used for each aircraft type and the Port of Seattle's Rules and Regulations will be used to determine APU usage.

1.5.4 Ground Support Equipment Emissions Inventory.

Typical ground support equipment (GSE) includes baggage tractors, belt loaders, and catering vehicles that support airport operations.

1.5.4.1 Tenant-Owned

A GSE survey (i.e., field verification and Port of Seattle data) will be used in AEDT modeling of tenant-owned GSE. The survey will be used to identify the most commonly used GSE types and duration of usage for a select group of representative aircraft by airline operating at the Airport. The results of the survey will be used to develop the AEDT inputs for GSE by aircraft operation. Usage for future conditions would be increased based on the increases in aircraft levels. Operational emissions from vehicles such as catering trucks that operate on airport roadways beyond the immediate vicinity of the aircraft will be quantified in the motor vehicle emissions inventory (see Section 1.5.5).

1.5.4.2 Port-Owned GSE

The airport maintains a fleet of GSE vehicles such as sweepers, and other portable equipment such as pressure washers and lighting trailers. GSE owned by the Port of Seattle that are determined not to be included in the GSE for each aircraft operation, will be modeled in AEDT as a separate population.

[7] Leigh Fisher. Environmental Review Airside Modeling, June 2020.

1.5.5 Motor Vehicle Emissions Inventory

1.5.5.1 Off-Airport Roadways

Motor vehicles operating on off-airport roadways include passenger cars, light duty and heavy-duty trucks, and buses. These vehicles are also referred to as Ground Access Vehicles (GAVs). The study area to be used for this air quality analysis will be the same as that used for the surface transportation study developed for the NEPA EA. The surface transportation study intersections are shown in **Exhibit 3** and the resulting air quality study area is shown in **Exhibit 4**. The USEPA's Motor Vehicle Emissions Simulator version 3 (MOVES3) will be used to develop the emissions inventory for GAVs on roadways that may be directly affected by the Proposed Action.

The Proposed Action includes roadway changes that will offer a greater level of efficiency for GAVs than the No Action, resulting in less idling of engines:

- Construct approximately 7,300 linear feet of new Airport roadways to access the new Second Terminal.
- New Vehicle Service Road bridge over S 188 Street.
- Elevated Busway: Construct a 6,000 linear foot elevated busway to provide a landside connection for non-secure passengers to transfer among the Main Terminal, New Second Terminal, and Rental Car Facility.
- Charter/Cruise Ground Transportation Lot: Expand the existing ground transportation lot on the north side of the existing parking garage.

The Proposed Action also includes relocation of facilities including employee parking lots and cargo facilities that may cause GAVs to travel a further distance.

Each roadway segment to be analyzed for the No Action and Proposed Action scenarios will be measured to define the distance. Data pertaining to the existing number of vehicles traveling on each roadway will be obtained from the surface transportation study being conducted for this project. Where data is not being collected for roadway segments within the study area, WSDOT data will be utilized. MOVES3 will be used to assign the type of vehicles distribution, fuel efficiency, etc. applicable to King County. The Port of Seattle is preparing a surface transportation study to forecast the potential number of vehicles on future roadways included in the Proposed Action. The results of the surface transportation study will be used to determine the motor vehicle emissions for the existing, Proposed Action (2032 and 2037), and No Action (2032 and 2037) conditions.

1.5.5.2 On-Airport Roadways

Additionally, motor vehicles operate on airport roadways related to airside deliveries, which include light duty and heavy-duty trucks, and buses. Information on the number and types of airside delivery vehicles accessing the airfield through security gates will be obtained from the Port. The NEPA emissions inventory for mobile sources will include vehicle activity related to airside deliveries.

1.5.5.3 Parking Facilities

Additionally, motor vehicles operate on airport parking facilities, which include passenger cars, light duty and heavy-duty trucks, and buses. Only emissions for vehicles in parking facilities where it is reasonable to anticipate changes in vehicle traffic due to the Proposed Action would be estimated. The NEPA emissions inventory for mobile sources will include vehicle activity related to parking facilities.

Exhibit 3 Surface Transportation Study Intersections

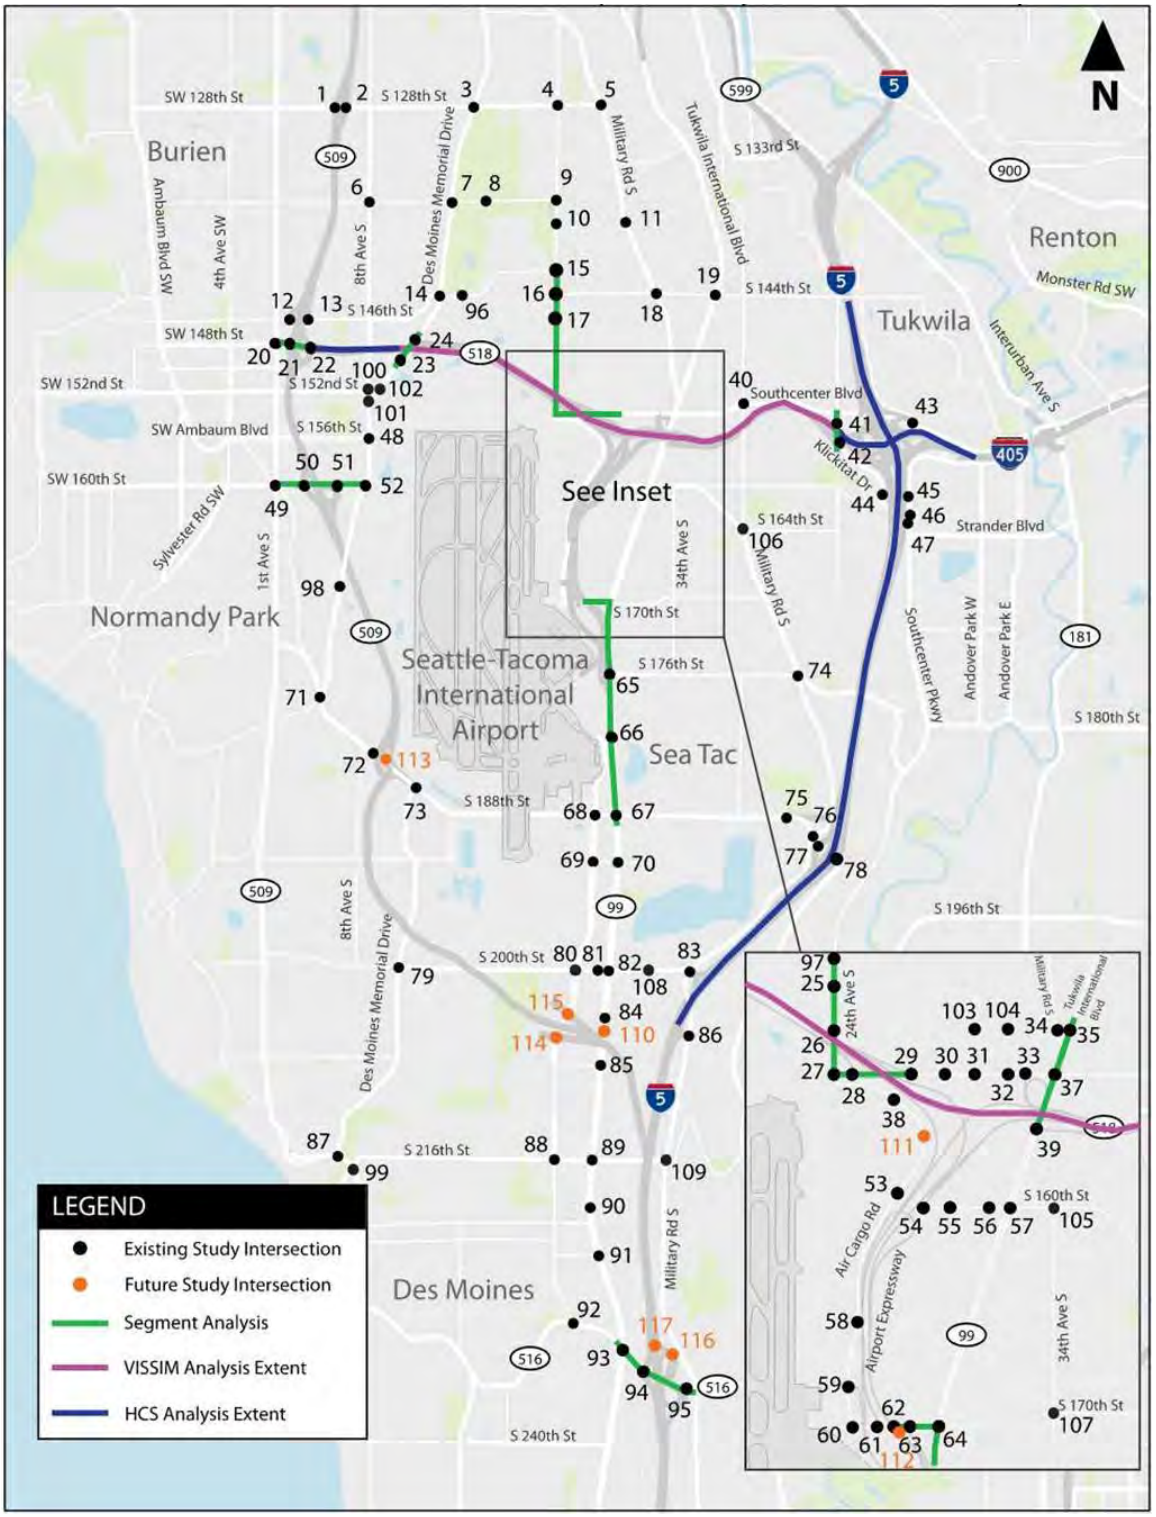

Exhibit 4 Air Quality Study Area

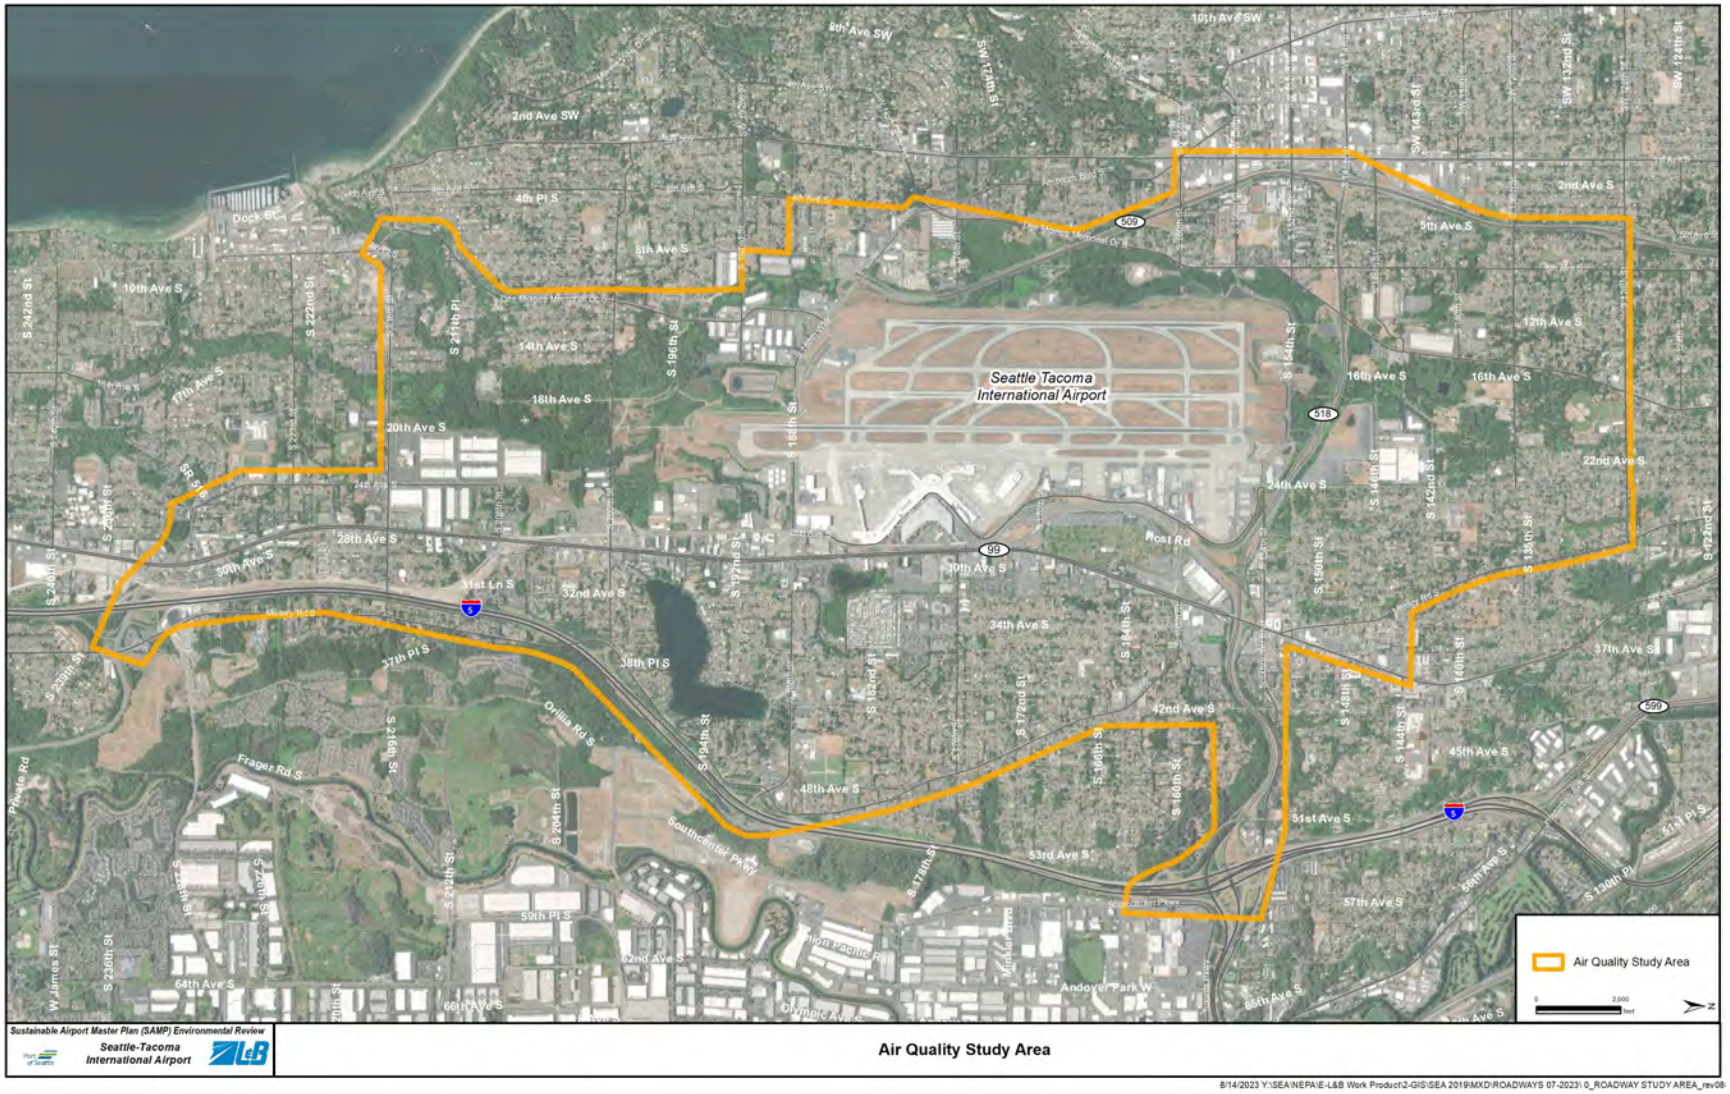

1.5.6 Stationary Source Emissions Inventory

Stationary sources of air pollution include generators, boilers, and fuel tanks located on airport property which may be directly affected by the Proposed Action. The emission inventory for stationary sources will be developed using FAA's AEDT based on the type of stationary source equipment and the duration of its usage. The Proposed Action includes construction and use of additional fuel tanks. Inputs to estimate fuel tank emissions include the size of the tank, type of fuel, and the fuel throughput. Assumptions and emission factors will be based on USEPA AP-42 and other regional Air Quality Management District guidance documents, should a particular equipment type not exist within the AEDT model.

Data will be obtained from the Port of Seattle on the existing use of stationary sources, on an annual basis, which will be projected for 2032 and 2037 for the No Action scenario based on increases of aircraft and passenger levels where applicable. Data will also be obtained from the Port of Seattle for the estimated number and type of stationary sources including anticipated heating and cooling systems and backup generators associated with the proposed new facilities that would be used for the Proposed Action scenario in 2032 and 2037.

1.5.7 Construction Emissions Inventory

Temporary air quality impacts would result from construction activities associated with the Proposed Action. Air pollutants would be emitted by construction equipment and fugitive dust generated during demolition and construction of the proposed development. Construction activities associated with the Proposed Action are set to begin in 2025 and all projects being in construction by 2032. A detailed construction phasing schedule will be used to identify which projects will occur between 2025 and 2032. Potential sources of construction emissions include construction vehicles and equipment. Emissions for on-road and non-road construction equipment will be estimated separately following standard industry practices.

Non-Road Construction Equipment

Potential non-road construction emissions will be estimated using the following formula as provided in the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*.

Equipment Emission Rate (tons/year) = Full Throttle Emission Factor (grams/hp-hour) x size (hp) x hours per year x Load Factor x usage Factor x (1 pound/453.59 grams) x (1 ton/2,000 pounds)

Data will be obtained from the Port of Seattle concerning each phase of construction, the duration of the phase, the tasks to be completed, and other additional information for input into the Airport Construction Emissions Inventory Tool (ACEIT) to estimate the type of construction equipment, horsepower, load factor, and operating hours for each project element and phase. The ACEIT was developed by the Airport Cooperative Research Program (ACRP) and the equipment and assumptions used in the program are drawn from ACRP Report 102, Guidance for Estimating Airport Construction Emissions. The USEPA's MOVES3 model will be used to identify the emission factor of each criteria air pollutant for each equipment type. Non-road construction equipment emissions will be calculated based on the number of operating hours of equipment use and the emission factors.

Evaporative VOC emissions associated with the application of hot mix asphalt will be estimated using the formula provided in the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1.*

Asphalt VOCs Emissions Rate (tons/year) = 0.053 tons/acre of asphalt placed x acres of asphalt placed per year

The emissions results for all equipment will be summed and will be provided in tabular form for each year of construction.

On-Road Construction Vehicles

Potential on-road construction emissions will be estimated using the following formula as provided in the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*.

> *Emission Rate (tons/year) for on-road vehicles = Emission Factor (grams/mile) x miles per day x # of days/year x (1 pound/453.59 grams) x (1 ton/2,000 pounds)*

Emission factors for on-road construction vehicles will be developed using the MOVES3 model. For employee vehicle trips related to construction activities, the model will be run using gasoline passenger vehicles including cars and light duty pickup trucks. For material delivery and off-site haul vehicle trips, diesel combination long-haul trucks will be assumed in order to estimate maximum potential emissions.

Total vehicle miles traveled (VMT) for vehicles operating during each Proposed Action element and for each type of on-road construction activity during each construction year will be estimated. This includes construction employee vehicle trips to and from the job site using model default distances. The analysis will also include material delivery trips and off-site hauling trips using heavy duty trucks using model default distances. Potential on-road construction emissions will be estimated by multiplying the VMT data by the appropriate emission factors and the necessary conversion factors to present the criteria air pollutant emissions in tons. The results will be provided in tabular form for each year of construction.

2 Protocol for Cumulative Impact Analysis for Air Quality (NEPA)

The Council on Environmental Quality (CEQ) Regulations define a cumulative impact as "the impact on the environment which results from the incremental impact of the action when added to other past, present, and reasonably foreseeable future actions regardless of what agency (Federal or non-Federal) or person undertakes such other actions" (see 40 CFR § 1508.7). The analysis of cumulative impacts recognizes that while the impacts of individual actions may be small, when combined with the impacts of past, present, and reasonably foreseeable future actions on populations or resources in and around SEA, the impacts could be potentially significant.

Pursuant to FAA guidance, past, present, and reasonably foreseeable future actions must be considered in determining whether there are potential cumulative impacts. Based on the guidance from 1050.1F Desk Reference, "[t]he significance of cumulative impacts should be determined in the same manner as the significance of direct and indirect impacts." FAA Order 1050.1F uses the same threshold of significance for project significant impacts as it does for cumulative impacts.

2.1 Review the List of Past, Present, and Reasonably Foreseeable Future Projects

Past Projects

CEQ NEPA regulations require analysis of past actions to the extent they are relevant and useful in analyzing whether the reasonably foreseeable effects of the current action combined with the past action would create cumulative effects. It is important to note that according to the CEQ's memorandum, *Guidance on the Consideration of Past Actions in Cumulative Effects Analysis*, focus should be on whether the information from past projects is "relevant to reasonably foreseeable significant adverse impacts," is "essential to a reasoned choice among alternatives," and can be obtained without exorbitant cost. Furthermore, present impacts of past actions that are relevant and useful are those that may have a significant cause-and-effect relationship with the

direct and indirect impacts of the proposed action and alternative(s). Only information that is useful to decision-makers and the public should be included, and the CEQ warns against including extraneous background data.

For this analysis, past projects are defined as those which occurred within the past seven years (between 2015 and 2022). This timeframe goes back far enough to provide a reasonable historical context about the current state of the resource.[8]

Present Projects

Present projects are any actions occurring within the same study area as the existing conditions for the Proposed Action.

Reasonably Foreseeable Future Projects

Reasonably foreseeable future projects are defined as actions that are likely to be completed within the time period from 2022 through 2032 and that have been developed with enough specificity to provide meaningful data for analysis. No projects past 2032 are included because there is a lack of adequate detail about those later projects to enable meaningful review; any analysis of those projects or their impacts would be speculative.

2.2 Identify Air Quality Impacts of the Proposed Action

A review will be conducted of the air quality analyses that have been undertaken for the cumulative projects identified (past, present, and reasonably foreseeable future projects). A qualitative evaluation of the air quality cumulative impacts with consideration of the cumulative projects' will be developed.

Note, the NEPA EA will evaluate the potential air quality impacts on environmental justice communities (areas where minority and low-income populations represent a higher fraction of the population compared with the general population) independent of the air quality analysis. As such, an environmental justice impact analysis will not be included in the air quality analysis.

[8] The FAA has discretion to determine whether, and to what extent, information about the specific nature, design, or present impacts of a past action are useful for the analysis of the impacts of the proposed action and alternative(s).

National Environmental Policy Act Environmental Assessment

Climate Assessment Protocol

Seattle-Tacoma International Airport

August 2023

Revised August 17, 2023

PREPARED FOR

Port of Seattle

After the publication of the Draft EA, Executive Order 13990, which was relied upon for the January 2023 CEQ draft GHG guidance, was revoked and CEQ revoked its regulations (40 CFR parts 1500-1508) implementing NEPA, 42 U.S.C. 4321 et seq., as amended, in response to Executive Order 14154. In addition, the Supreme Court issued the Seven County Infrastructure Coalition v. Eagle County, 605 U. S. 975 (2025) ruling on May 29, 2025. As a result of these changes, the references to climate, qualitative climate evaluation that discussed the level of preparedness with respect to the impacts of climate change, the extent to which the alternatives could be affected by future climate conditions, and if the alternatives are consistent with national, state, and local climate goals, and the cumulative impact analysis were removed from the Final EA. Though this protocol included methodology for both a climate change and cumulative impact analysis, FAA's final decision will only rely upon the GHG emissions disclosed in the Final EA.

Contents Page

1 Protocol for Climate Assessment (NEPA) 1

1.1 Purpose of this Document 1
1.2 Agency Coordination 1
1.3 Description of the Proposed Action 1

2 Prepare Climate Assessment (NEPA) 4

2.1 Develop Greenhouse Gas (GHG) Emissions Inventory (NEPA) 4

2.1.1 Short Term and Long-Term Effects 4
2.1.2 Greenhouse Gases and Global Warming Potential 5
2.1.3 Scope/Categories of Emissions 6
2.1.4 Operational Emissions Sources 6
2.1.5 Aircraft 10
2.1.6 Auxiliary Power Units 10
2.1.7 Ground Support Equipment 11
2.1.8 Stationary Source 11
2.1.9 Motor Vehicles 12
2.1.10 Electricity Consumption 13
2.1.11 Construction 13

2.2 Conduct Qualitative Climate Evaluation (NEPA) 14

2.2.1 Level of Preparedness 14
2.2.2 Climate Adaptation 15

3 Protocol for Cumulative GHG Impact Analysis (NEPA) 16

3.1 Review the List of Past, Present, and Reasonably Foreseeable Future Projects 16
3.2 Identify Climate Impacts of the Proposed Action 17

List of Tables

		Page
TABLE 1	NEPA APPROACH FOR GHG EMISSIONS INVENTORIES	7
TABLE 2	GHG EMISSION FACTORS FOR AIRCRAFT FUEL	10
TABLE 3	GHG EMISSION FACTORS FOR STATIONARY SOURCES	12

List of Exhibits

	Page
EXHIBIT 1 PROPOSED ACTION	3

1 Protocol for Climate Assessment (NEPA)

The National Environmental Policy Act (NEPA) provides for an environmental review process to disclose the potential impacts, including climate, from a proposed federal action on the human environment. Additionally, the Council on Environmental Quality (CEQ) issued guidance for agencies in January 2023 to guide the quantification of reasonably foreseeable GHG emission for the proposed action, no action alternative, and any reasonable alternatives, using available information and data.

1.1 Purpose of this Document

This document describes the overall approach and methods to conduct a climate assessment to demonstrate compliance to the NEPA, including the January 2023 CEQ guidance.

The Port of Seattle, as the owner and operator of the Seattle-Tacoma International Airport (SEA or Airport), evaluated airport operations and facilities during the Sustainable Airport Master Plan (SAMP) planning process and identified a set of Near-Term Projects (NTPs) designed to help the Airport maintain its essential airport function in the future. The NTPs (as a whole) are referred to as the Proposed Action in this document.

The NEPA documentation will be prepared to investigate, analyze, and disclose the potential environmental impacts of the Proposed Action and any identified alternatives in compliance with the NEPA.

1.2 Agency Coordination

The Port of Seattle and the FAA coordinated an air quality protocol with the Puget Sound Clean Air Agency (PSCAA) in 2020 that included the proposed climate assessment methodology. The air quality protocol was updated in 2023 to reflect changes in the analysis years and the use of newer software. During this update, the Port of Seattle and the FAA decided to create a separate climate assessment protocol. It is intended that this climate assessment protocol document be coordinated with the PSCAA in an effort to:

- Familiarize the agency with the scope of the Proposed Action and identify any issues of concern early in the process;
- Engage in data exchange of information necessary to complete the climate assessment; and,
- Obtain concurrence on procedure and methodology prior to the publication of the anticipated NEPA Environmental Assessment (EA).

1.3 Description of the Proposed Action

The Port identified a set of NTPs to address the near-term activity levels projected to occur at the Airport. The NTPs include more than 30 projects that would improve efficiency, safety, access to the Airport, and support facilities for airlines and the Airport.

The NTPs include the following primary elements:

- Second terminal concourse
- New passenger terminal and parking
- North Airport Expressway relocation
- North hold pad
- Central hardstand

- Elevated busway and stations
- Second terminal roads and curbside
- Main Terminal north ground transportation lot
- North ground transportation holding lot
- North cargo hardstand
- Cargo 4 south redevelopment
- Cargo warehousing
- Runway 16R/34L blast pads
- Relocated Taxiways A and B
- Extension of Taxiways C and D
- Taxiway infrastructure reconfiguration (south of Taxiway O)
- Runway 34L highspeed exit
- Taxiway D extension
- Fuel farm expansion
- Employee parking structure

The elements of the Proposed Action are shown on **Exhibit 1**.

Exhibit 1 Proposed Action

2 Prepare Climate Assessment (NEPA)

The impacts to climate due to the Proposed Action for NEPA will be determined in accordance with the guidelines provided in FAA Order 1050.1F, *Environmental Impacts: Policies and Procedures;* FAA Order 5050.4B, *National Environmental Policy Act (NEPA) Implementing Instructions for Airport Actions*; FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*; and the CEQ's *National Environmental Policy Act Guidance on Consideration of Greenhouse Gas Emissions and Climate Change.* Per these guidelines, the climate assessment will include the development of a NEPA greenhouse gas (GHG) emissions inventory, disclosure of estimated GHG emissions, and a qualitative climate evaluation for the proposed action, no action alternative, and any reasonable alternatives as detailed below.

2.1 Develop Greenhouse Gas (GHG) Emissions Inventory (NEPA)

A GHG emissions inventory is a summary of the GHG pollutants generated by all active emissions sources that may be affected by the Proposed Action. The GHG emissions inventories are prepared based on actual and/or estimated energy or fuel consumption or vehicle miles travelled (VMTs) and an appropriate emission factor.

The elements of the Proposed Action would be anticipated to cause direct and indirect GHG emissions from construction and operational activities. For NEPA purposes, construction refers to the process of building or putting in place the proposed airport improvements. Operational emissions refer to the emissions that are emitted once the proposed improvements are put in place and are operating.

Therefore, a climate analysis incorporating separate evaluations will be conducted including the preparation of:

- Aircraft GHG Emissions Inventory including Auxiliary Power Unit (APU) GHG emissions;
- Motor Vehicle and Ground Support Equipment (GSE) GHG Emissions Inventory;
- Stationary Source GHG Emissions Inventory;
- Electricity Consumption GHG Emissions Inventory; and,
- Construction GHG Emissions Inventory.

2.1.1 Short Term and Long-Term Effects

According to CEQ's *National Environmental Policy Act Guidance on Consideration of Greenhouse Gas Emissions and Climate Change*, "[w]hen considering effects, agencies should take into account both the short and long-term adverse and beneficial effects using a temporal scope that is grounded in the concept of reasonable foreseeability. Agencies should identify an appropriate lifetime for the proposed action using available indicators and guided by the concept of reasonable foreseeability."

The GHG emissions will be disclosed for existing conditions, which will represent calendar year 2022. The GHG emissions and potential climate impacts due to the operation of the Proposed Action, No Action, and any identified alternatives for the projected future conditions in 2032 and 2037 will be estimated and disclosed. The year 2032 will be used as a basis for analysis because 2032 is the projected opening year of the Proposed Action. In addition, 2037 will be used as a basis for analysis, because it represents a condition five years beyond the opening year, and is consistent with the analysis years used for noise and air quality (criteria pollutant) analysis.[1] The climate assessment will also disclose the potential climate impacts due to construction activities during the years 2025 to 2032.

1 The FAA's Desk Reference Section 11.3 states "The environmental consequences section of the NEPA document will include the analysis of the potential noise impacts of the proposed action and alternative(s) for each timeframe

A qualitative discussion will be included in the NEPA EA regarding the potential emissions over the projected lifetime of the Proposed Action and any identified alternatives past 2037.[2]

2.1.2 Greenhouse Gases and Global Warming Potential

GHGs are gases that trap heat in the earth's atmosphere. The primary GHGs which will be the focus of this assessment include the following:

- **Carbon dioxide (CO_2)**, which enters the atmosphere through the burning of fossil fuels (oil, natural gas, and coal), agriculture, irrigation, and deforestation, as well as the manufacturing of cement.
- **Methane (CH_4)**, which is emitted through the production and transportation of coal, natural gas, and oil, as well as from livestock. Other major human-caused sources of methane emissions include agricultural activities, and the decay of waste in landfills and wastewater treatment plants.
- **Nitrous oxide (N_2O)**, which at airports is released most often during the burning of fuel at high temperatures. This greenhouse gas is caused mostly by agricultural soil management, but also by motor vehicles, which also include non-road vehicles, such as those used for agriculture.

Two key ways in which these GHGs differ from each other are their ability to absorb energy and how long they stay in the atmosphere. The Global Warming Potential (GWP) was developed to allow comparisons of the global warming impacts of different gases by converting each gas amount to a carbon dioxide equivalent (CO_2E).[3] GWPs provide a common unit of measure, which allows for one emission estimate of the different GHGs. CO_2 has a GWP of one because it is the gas used as the reference point. For this analysis, GWPs would be based on a 100-year period provided in the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1* and based on the Intergovernmental Panel on Climate Change (IPCC), Fifth Assessment Report (AR5).[4] Methane does not last as long in the atmosphere as CO_2 , however, it absorbs much more energy. Therefore, one ton of methane has 34 times more heat capturing potential than one ton of carbon dioxide. The amount of methane emissions will be multiplied by 34 to determine its CO_2E value. Nitrous oxide lasts in the atmosphere far longer than CO_2. The amount of nitrous oxide emissions will be multiplied by 298 to determine its CO_2E value.

The NEPA GHG emissions inventory will be conducted to provide the estimate of the annual rate (metric tons per year) of GHG emissions attributable to airport sources for each analysis year.

evaluated… Timeframes usually selected are the year of anticipated project implementation and 5 to 10 years after implementation." The FAA's Desk Reference Section 1.3.2 for air quality states, "the emissions inventory usually is calculated for the year(s) of project implementation, the planning horizon year(s) in the EA or EIS, and sometimes for intermediate years, if appropriate due to project phasing or if requested by a reviewing agency." The air quality analysis would be conducted consistent with the noise analysis and therefore include an assessment of the implementation year and of the project five years after implementation.

2 Because the lifetime of airport projects are virtually unlimited if well maintained, decommissioning of the airport is not included as part of this analysis.

3 EPA, 2017, Understanding Global Warming Potentials. https://www.epa.gov/ghgemissions/understanding-global-warming-potentials, Accessed August 2017.

4 There are also 20-year GWP values which prioritizes gases with shorter lifetimes. For example, the GWP 20 value for methane is 86, according to IPCC AR5, as compared to the GWP 100 value of 34. There is no difference between GWP 100 and GWP 20 for CO_2 and only a minor difference for nitrous oxide (GWP 100 is 298 and GWP 20 is 268). It is acknowledged that GHG emissions, especially for methane, would be higher using the GWP 20 instead of the GWP 100. This analysis used FAA guidance specifically provided in the FAA's Aviation Emissions and Air Quality Handbook to determine potential GHG emissions.

2.1.3 Scope/Categories of Emissions

GHG emissions inventories are presented in a different manner than air quality criteria pollutant emissions inventories. GHG emissions inventories are categorized into three groups, Scope 1, 2, and 3 emissions, as described below.

- Scope 1 – GHG emissions from sources owned or controlled by the Port at the Airport, including Port-owned vehicles, equipment, and stationary sources such as natural gas boilers and diesel generators. These GHGs are primarily limited to the project site.
- Scope 2 – GHG emissions from off-Airport generation of electricity purchased by the Port and consumed at the Airport. It is recognized that the estimation of GHG emissions from electricity generation is a widely accepted methodology according to international and FAA guidelines on preparing GHG emissions inventories.
- Scope 3 –GHG emissions caused by airport operations that are not under the direct control of the Port, including sources like aircraft and passenger-related motor vehicle emissions.

Furthermore, GHG emissions are categorized by the degrees of control that an airport operator may have over them. These categories are defined as follows:

- Category 1 – GHG emissions from sources that are controlled by the reporting entity, such as Port-owned ground support equipment (GSE) or vehicles and electrical consumption by the Port. In the case of an airport operator these include Scope 1 emissions but can also include some Scope 2 and Scope 3 sources over which the entity can exert some control. Examples of the latter can include personal vehicle use for business purposes that is reimbursed by the airport operator.
- Category 2 – This category comprises Scope 3 emissions associated with sources owned and controlled by airlines and airport tenants. Examples include aircraft, APUs, tenant-owned GSE, electrical consumption, and other stationary sources controlled by tenants.
- Category 3 – This category generally comprises Scope 3 emissions associated with public sources associated with the airport. Examples include private automobiles, taxis used for drop-off, limousines, buses, and shuttle vans traveling to and from the airport.

2.1.4 Operational Emissions Sources

The overall GHG assessment approach to develop the operational emissions inventories for NEPA is summarized in **Table 1**, with further details following.

Table 1 NEPA Approach for GHG Emissions Inventories

Emissions Source	Data / Conditions	Data Source	Models to be Used	Scope and Category
Aircraft	Fuel Dispensed	For existing conditions, fuel dispensed will be used to estimate emissions from aircraft fuel consumption. For future conditions, the fuel consumption would be based on the increases in aircraft levels.	Fuel Emission Factors from FAA *Aviation Emissions and Air Quality Handbook Version 3 Update 1*	Scope 3, Category 2
Aircraft	Auxiliary Power Unit (APU) Operating Times	For existing and future conditions, the AEDT database will be used to assign the APU type and the Port of Seattle's Rules and Regulations will be used to assign APU usage. The AEDT output will be used to determine hours of APU run time per type/model.	Fuel flow rates and Emission Factors from FAA *Aviation Emissions and Air Quality Handbook Version 3 Update 1.* Number of APU, fuel type, operating time from AEDT.	Scope 3, Category 2
Ground Support Equipment (GSE)	GSE equipment types, Fuel types, and Operating Times	*Tenant-Owned* For existing conditions, a GSE survey (i.e., field verification and Port of Seattle data) will be used to identify equipment types and usage. Usage for future conditions would be increased based on the increases in aircraft levels.	Emission factors from USEPA's MOVES3 and FAA *Aviation Emissions and Air Quality Handbook Version 3 Update 1.* Number of GSE, fuel type, operating time from AEDT.	Scope 3, Category 2

Emissions Source	Data / Conditions	Data Source	Models to be Used	Scope and Category
Ground Support Equipment (GSE)	GSE equipment types, Fuel types, and Operating Times	*Port-Owned* For existing conditions, Port-owned airfield vehicles and equipment usage would be obtained from the Port. Usage for future conditions would be based on the increases in aircraft levels. The AEDT output will be used to determine hours of GSE run time per type/model.	Emission factors from USEPA's MOVES3 and FAA *Aviation Emissions and Air Quality Handbook Version 3 Update 1.* Number of GSE, fuel type, operating time from AEDT.	Scope 1, Category 1
Motor Vehicles	Number of vehicles by roadway segment, Vehicle Miles Travelled (VMTs) by vehicle type and average speed	*Off-Airport Roadways* For existing and future conditions, information from the surface transportation study developed for the NEPA EA will be used. Where data is not being collected for roadway segments within the study area, WSDOT data will be utilized. *On-Airport Roadways* For existing conditions, Port of Seattle information on the number and types of airside delivery vehicles accessing the airfield through security gates. For future conditions, the increase would be based on the increase in passenger levels. *Parking Facilities* For existing conditions, information from the Port of Seattle would be used. For future conditions, the increase would be based on the increase in passenger levels and aircraft operations.	USEPA's MOVES3	Scope 3, Category 3

Emissions Source	Data / Conditions	Data Source	Models to be Used	Scope and Category
Stationary Sources	Number, type, and usage for emergency generators, boilers, and fuel tanks, the usage of which may be affected by the Proposed Action	For existing conditions, Port of Seattle records will be used. For future conditions, estimates will be based on increases in aircraft and passenger levels and anticipated new facilities.	Fuel consumption from Port records and Emission Factors from USEPA.	Scope 1, Category 1
Electricity Consumption	*Port of Seattle Electricity Consumption* Electricity use in Airport buildings, airfield lighting	For existing conditions, Port of Seattle records will be used. For the future conditions, electricity consumption would be based on the change in new facility square footage for each scenario.	Port to provide emission factors	Scope 2, Category 1
Electricity Consumption	*Tenant Electricity Consumption* Electricity provided by the Port directly to tenants	For existing conditions, Port of Seattle records will be used. For the future conditions, electricity consumption would be based on the change in square footage for each scenario.	Port to provide emission factors	Scope 3, Category 2

Port of Seattle and L&B, 2023.

2.1.5 Aircraft

Aircraft activity at the Airport are considered Scope 3, Category 2. The existing GHG emission inventory for aircraft operations, APU use, and aircraft engine ground run-ups will be developed using the fuel dispensed at the Airport to estimate emissions from aircraft activity. With or without the Proposed Action, aircraft operations and aircraft engine ground run-ups are expected to increase each year and by 2037, the number of annual aircraft operations will be higher as compared to the existing condition. For future conditions, the fuel consumption would be based on the increases in aircraft levels. The resulting operational emissions from these conditions will be disclosed as part of the analysis for the existing condition, Proposed Action (2032 and 2037), No Action (2032 and 2037), and any identified alternatives.

The emission factors for Jet A LTO shown in **Table 2** will be used to determine GHG emissions from the fuel dispensed at the Airport.

Table 2 GHG Emission Factors for Aircraft Fuel

Fuel	CO_2	N_2O	CH_4
Jet A- LTO	9.75 kg/gallon	0.30 g/gallon	0.0 g/gallon
Jet A- Startup mode	9.75 kg/gallon	0.30 g/gallon	0.0 g/gallon
Avgas LTO/Startup	8.31 kg/gallon	0.11 g/gallon	7.06 g/gallon

Source: US EPA, Emission Factors for Greenhouse Gas Inventories, Center for Corporate Climate Leadership, April 2022, https://www.epa.gov/system/files/documents/2022-04/ghg_emission_factors_hub.pdf

2.1.6 Auxiliary Power Units

Most of the larger jet aircraft use auxiliary power units (APUs) while at the gate to operate the heating, air conditioning, and electric systems. The APU is also used to 'start up' or restart the aircraft engines before departing from the gate or cargo area. APU usage is within the control of the pilot; therefore, APU use and emissions can vary greatly from one airline/operator to another and even one aircraft to another.

APUs are considered Scope 3, Category 2. Most of the smaller general aviation aircraft in the SEA aircraft fleet do not have APUs. Additionally, the use of hardstand and cargo operations (when aircraft are not using gates and jet bridges) impacts the amount of APU emissions. For the existing and future conditions analysis, the AEDT database will be used to assign the specific types of APU used for each aircraft type. The Port of Seattle's Rules and Regulations will be used to determine existing and future APU usage.

The AEDT will be used to estimate the hours of usage and type of APU equipment. Fuel usage will be determined using the following formula from the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*.

> *Fuel Usage (gallons) = Fuel Flow Rate (pounds per hour) x Operating Time (minutes) x number of operations x 1 hour per 60 minutes / 6.84 pounds per gallon*

Fuel flow rates (pounds per hour) will be taken from the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1 Table C-2*. Operating time will come from the Port of Seattle's Rules and Regulations and number of operations will be based on aircraft operations as developed through AEDT modeling. Once the number of gallons is determined, the emission factors for Jet A Startup mode shown in **Table 2** will be used to determine GHG emissions.

2.1.7 Ground Support Equipment

Typical ground support equipment (GSE) includes baggage tractors, belt loaders, and catering vehicles that support airport operations. Annual GHG emissions will be determined using the following formula from the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*.

> *Equipment Emission Rate (tons/year) = Full Throttle Emission Factor (grams/hp-hour) x size (hp) x hours per year x Load Factor x Usage Factor x (1 pound/453.59 grams) x (1 ton/2,000 pounds)*

The full throttle emission factor will be developed from MOVES3.[5] Horsepower, operating time per unit and number of operations, and load factor will be obtained from the AEDT outputs as detailed below.

2.1.7.1 Tenant-Owned

Tenant-owned GSE are considered Scope 3, Category 2. A GSE survey (i.e., field verification and Port of Seattle data) will be used in AEDT modeling of tenant-owned GSE. The survey will be used to identify the most commonly used GSE types and duration of usage for a select group of representative aircraft by airline operating at the Airport. The results of the survey will be used to develop the AEDT inputs for GSE by aircraft operation. The AEDT will provide the estimated annual usage for each GSE type and the FAA's equipment emission rate equation identified in Section 2.1.7 will be used to estimate the annual tenant-owned GSE emissions. Usage for future conditions would be increased based on the increases in aircraft levels. Operational emissions from vehicles such as catering trucks that operate on airport roadways beyond the immediate vicinity of the aircraft will be quantified in the motor vehicles NEPA GHG emissions inventory.

2.1.7.2 Port-Owned GSE

The airport maintains a fleet of GSE vehicles such as sweepers, and other portable equipment such as pressure washers and lighting trailers used on the airfield. Port-owned GSE vehicles are considered Scope 1, Category 1. GSE owned by the Port of Seattle that are determined not to be included in the GSE for each aircraft operation, will be modeled in AEDT as a separate population.

2.1.8 Stationary Source

Stationary sources of air pollution include generators, boilers, and fuel tanks located on airport property which may be directly affected by the Proposed Action. Stationary sources used by the Port are also included in Scope 1, Category 1. The emission inventory for stationary sources will be developed using FAA's AEDT based on the type of stationary source equipment and the duration of its usage. The Proposed Action includes construction and use of additional fuel tanks. Inputs to estimate fuel tank emissions include the size of the tank, type of fuel, and the fuel throughput. Assumptions and emission factors will be based on USEPA AP-42 and other regional air quality regulatory agency guidance documents, should a particular equipment type not exist within the AEDT model.

Data will be obtained from the Port of Seattle on the existing fuel or run-time use of stationary sources, on an annual basis, which will be projected for 2032 and 2037 for the No Action scenario based on projected increases of aircraft and passenger levels where applicable. Data will also be obtained from the Port of Seattle for the estimated number and type of stationary sources including anticipated heating and cooling systems and backup generators associated with the proposed new facilities that would be used for the Proposed Action scenario in 2032 and 2037.

In order to determine GHG emissions, the emission factors shown in **Table 3** will be used.

[5] The Airport Support Equipment available in MOVES3 will be used for Ground Support Equipment

Table 3 GHG Emission Factors for Stationary Sources

Fuel	CO_2	N_2O	CH_4
Natural Gas	0.05444 kg/ standard cubic foot (scf)	0.00010 g/scf	0.00103 g/scf
No. 2 Oil (Diesel)	10.21 kg/gallon	0.08 g/gallon	0.41 g/gallon

Source: US EPA, Emission Factors for Greenhouse Gas Inventories, Center for Corporate Climate Leadership, April 2022, https://www.epa.gov/system/files/documents/2022-04/ghg_emission_factors_hub.pdf

2.1.9 Motor Vehicles

GHG emissions from motor vehicles operating on on- and off-airport roadways and within select parking lots are considered Scope 3, Category 3.

2.1.9.1 Off-Airport Roadways

Motor vehicles operating on off-airport roadways include passenger cars, light duty and heavy-duty trucks, and buses. These vehicles are also referred to as Ground Access Vehicles (GAVs). The study area to be used for this analysis will be the same as that used for the surface transportation study developed for the NEPA EA. The USEPA's Motor Vehicle Emissions Simulator version 3 (MOVES3) will be used to develop the NEPA GHG emissions inventory for GAVs on roadways that may be directly affected by the Proposed Action.

The Proposed Action includes roadway changes that will offer a greater level of efficiency for GAVs than the No Action:

- Construct approximately 7,300 linear feet of new Airport roadways to access the new Second Terminal.
- New Vehicle Service Road bridge over S 188 Street.
- Elevated Busway: Construct a 6,000 linear foot elevated busway to provide a landside connection for non-secure passengers to transfer among the Main Terminal, New Second Terminal, and Rental Car Facility.
- Charter/Cruise Ground Transportation Lot: Expand the existing ground transportation lot on the north side of the existing parking garage.

The Proposed Action also includes relocation of facilities including employee parking lots and cargo facilities that may cause GAVs to travel a further distance.

Each roadway segment to be analyzed for the No Action and Proposed Action scenarios will be measured to define the distance. Data will be obtained from the Port of Seattle and WSDOT pertaining to the existing number of vehicles traveling on each roadway. Within King County, MOVES3 will be used to assign the distribution of vehicle types, fuel efficiency, etc. to the respective roadways. The Port of Seattle is preparing a surface transportation study to forecast the potential number of vehicles on future roadways included in the Proposed Action. The results of the surface transportation study will be used to determine the motor vehicle emissions for the existing, Proposed Action (2032 and 2037), and No Action (2032 and 2037) conditions.

2.1.9.2 On-Airport Roadways

Additionally, motor vehicles operate on airport roadways related to airside deliveries, which include light duty and heavy-duty trucks, and buses. Information on the number and types of airside delivery vehicles accessing the airfield through security gates will be obtained from the Port, and average trip distances on the airfield calculated. The NEPA GHG emissions inventory for mobile sources will include vehicle activity related to airside deliveries.

2.1.9.3 Parking Facilities

Additionally, motor vehicles operate on airport parking facilities, which include passenger cars, light duty and heavy-duty trucks, and buses. Only emissions for vehicles in parking facilities where it is reasonable to anticipate changes in vehicle traffic due to the Proposed Action would be estimated. The NEPA GHG emissions inventory for mobile sources will include vehicle activity related to parking facilities.

2.1.10 Electricity Consumption

GHG emissions are created as a result of the generation of electricity used in Airport buildings (e.g., Airport terminals, distribution center, bus maintenance facility, and other miscellaneous sources), airfield lighting, and provided from the Port directly to tenants.

2.1.10.1 Port of Seattle Electricity Consumption

Port of Seattle electricity consumption is a result of electricity use in Airport buildings (e.g., Airport terminals, distribution center, bus maintenance facility, and other miscellaneous sources) and the airfield lighting which are generated from offsite power plant locations. This is considered Scope 2, Category 1.

GHG emissions from the consumption of electricity are calculated by multiplying the total annual electrical consumption by the emission factor of the electricity provider. The total annual electrical consumption and the appropriate emission factors will be provided by the Port.

2.1.10.2 Tenant Electricity Consumption

Tenant electricity consumption includes electricity used by tenant facilities including electricity for charging electrified GSE. This is considered Scope 3, Category 2.

GHG emissions from the consumption of electricity are calculated by multiplying the total annual electrical consumption by the emission factor of the electricity provider. The total annual electrical consumption and the appropriate emission factors will be provided by the Port.

2.1.11 Construction

Temporary increase in GHG emissions would result from construction activities associated with the Proposed Action. GHG pollutants would be emitted by construction equipment during demolition and construction of the proposed development.[6] Construction activities associated with the Proposed Action are set to begin in 2025 and all projects being in construction by 2032. A detailed construction phasing schedule will be used to identify which projects will occur between 2025 and 2032. Potential sources of construction emissions include construction vehicles and equipment. Emissions for on-road and non-road construction equipment will be estimated separately following standard industry practices.

The USEPA's MOVES3 model will be used to identify the emission factor for each equipment type. Non-road construction equipment GHG emissions will be calculated based on the number of operating hours and the emission factors. The GHG emissions results for all equipment will be summed and provided in tabular form for each year of construction.

Emission factors for on-road construction vehicles will also be developed using MOVES3. Potential on-road construction GHG emissions will be estimated by multiplying the VMT data by the appropriate emission factors and the necessary conversion factors to present the GHG emissions in metric tons. The results will be provided in tabular form for each year of construction.

[6] Embodied carbon associated with building materials used in the construction of the Proposed Action will not be included in this analysis.

Non-Road Construction Equipment

Potential non-road construction emissions will be estimated using the following formula as provided in the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*.

> *Equipment Emission Rate (tons/year) = Full Throttle Emission Factor (grams/hp-hour) x size (hp) x hours per year x Load Factor x usage Factor x (1 pound/453.59 grams) x (1 ton/2,000 pounds)*

Data will be obtained from the Port of Seattle concerning each phase of construction, the duration of the phase, the tasks to be completed, and other additional information for input into the Airport Construction Emissions Inventory Tool (ACEIT) to estimate the type of construction equipment, horsepower, load factor, and operating hours for each project element and phase. The ACEIT was developed by the Airport Cooperative Research Program (ACRP) and the equipment and assumptions used in the program are drawn from ACRP Report 102, Guidance for Estimating Airport Construction Emissions. The USEPA's MOVES3 model will be used to identify the emission factor of each GHG pollutant for each equipment type. Non-road construction equipment emissions will be calculated based on the number of operating hours of equipment use and the emission factors.

The GHG emissions results for all equipment will be summed and will be provided in tabular form for each year of construction.

On-Road Construction Vehicles

Potential on-road construction emissions will be estimated using the following formula as provided in the FAA's *Aviation Emissions and Air Quality Handbook Version 3 Update 1*.

> *Emission Rate (tons/year) for on-road vehicles = Emission Factor (grams/mile) x miles per day x # of days/year x (1 pound/453.59 grams) x (1 ton/2,000 pounds)*

Emission factors for on-road construction vehicles will be developed using the MOVES3 model. For employee vehicle trips related to construction activities, the model will be run using gasoline passenger vehicles including cars and light duty pickup trucks. For material delivery and off-site haul vehicle trips, diesel combination long-haul trucks will be assumed in order to estimate maximum potential emissions.

Total vehicle miles traveled (VMT) for vehicles operating during each Proposed Action element and for each type of on-road construction activity during each construction year will be estimated. This includes construction employee vehicle trips to and from the job site using model default distances. The analysis will also include material delivery trips and off-site hauling trips using heavy duty trucks using model default distances. Potential on-road construction emissions will be estimated by multiplying the VMT data by the appropriate emission factors and the necessary conversion factors to present the GHG emissions in tons. The results will be provided in tabular form for each year of construction.

2.2 Conduct Qualitative Climate Evaluation (NEPA)

Per CEQ and FAA guidance, the NEPA EA will include a discussion on the level of preparedness with respect to the impacts of climate change and a discussion of the extent to which the Proposed Action and any identified alternatives could be affected by future climate conditions.

2.2.1 Level of Preparedness

FAA 1050.1F Desk Reference states that the affected environment should discuss the current level of preparedness in the study area with respect to the impacts of climate change. This involves describing current

measures in place within the study area to adapt to the impacts of climate change.[7] As such, the following items will be qualitatively discussed in the NEPA EA.

1. Review the Port sustainability initiatives, opportunities, and actions to aid with achieving climate adaptation in its SAMP Planning Technical Memorandum.8
2. Identify additional GHG reduction programs which the Port may implement independent of the Proposed Action. This would include, for example, a qualitative discussion of the implementation of SAF consumption at the Airport, further electrification of GSE, and the usage of renewable natural gas for future boilers.
3. Discussion of the Port's vulnerability assessment that identifies the existing and future vulnerabilities of the Airport related to climate change.

2.2.2 Climate Adaptation

The NEPA EA will include a discussion of the extent to which the Proposed Action and any identified alternatives could be affected by future climate conditions. This discussion will include the following items:

1. Identify potential long-term effects of climate on the Airport's infrastructure, based on the Port's vulnerability assessment.
2. Search for other climate change assessments in the local area to discuss potential climate change impacts that may occur in the short term (through 2037) and beyond. This includes outreach to state agencies, city government and local universities for existing studies. One piece will include a review of the most recent State of Knowledge reports from the University of Washington's Climate Impacts Research Group.
3. Review National Climate Assessment (NCA)9 section for the region for a high-level overview of key messages related to expected climate changes and their impacts in the region that may occur in the short term (through 2037) and beyond. For example, the Northwest may be susceptible to changes in relative amounts and timing of snow and rainfall which can post threats to reliable hydropower production.
4. Review existing climate action plans and goals, as available, for the county and state, and how the Proposed Action and any identified alternatives will meet or retract from achieving these goals.
5. Conduct a desktop review to identify and discuss additional climate action plans and goals of stakeholders at SEA, including but not limited to, the FAA's Aviation Climate Action Plan, and that of the airlines operating at SEA, where available.
6. Use the ACRP Airport Climate Risk Operational Screening Tool to conduct a screening level assessment that identifies potential long-term climate risks, including:
   - Potential changes in climate in various periods based on specific climate vectors (e.g. higher temperatures, increased storm frequency, etc.) in years 2040 and 2070.
   - Impacts to airport infrastructure and operations.

In addition, this discussion will also include any considerations for the Proposed Action to adapt to forecasted climate change conditions.

Note, the NEPA EA will evaluate the potential climate impacts on the local environmental justice communities (areas where minority and low-income populations represent a higher fraction of the population compared with the general population) independent of the climate assessment. As such, an environmental justice impact analysis will not be included in the climate assessment.

---

7 FAA, 1050.1F Desk Reference, Section 3.2, July 2015.
8 Port of Seattle, Sustainability Planning and Management Strategy, Technical Memorandum No. 9 Final, May 2018.
9 U.S. Global Change Research Program. Fourth National Climate Assessment. Volume II: Impacts, Risks, and Adaptation in the United States. Available online: https://nca2018.globalchange.gov/

3 Protocol for Cumulative GHG Impact Analysis (NEPA)

The Council on Environmental Quality (CEQ) Regulations define a cumulative impact as "the impact on the environment which results from the incremental impact of the action when added to other past, present, and reasonably foreseeable future actions regardless of what agency (Federal or non-Federal) or person undertakes such other actions" (see 40 CFR § 1508.7).

The analysis of cumulative impacts recognizes that while the impacts of individual actions may be small, when combined with the impacts of past, present, and reasonably foreseeable future actions on populations or resources in and around SEA, the impacts could be potentially significant.

Pursuant to FAA guidance, past, present, and reasonably foreseeable future actions must be considered in determining whether there are potential cumulative impacts. Based on the guidance from 1050.1F Desk Reference, "[t]he significance of cumulative impacts should be determined in the same manner as the significance of direct and indirect impacts." FAA Order 1050.1F uses the same threshold of significance for project significant impacts as it does for cumulative impacts.

3.1 Review the List of Past, Present, and Reasonably Foreseeable Future Projects

Past Projects

CEQ NEPA regulations require analysis of past actions to the extent they are relevant and useful in analyzing whether the reasonably foreseeable effects of the current action combined with the past action would create cumulative effects. It is important to note that according to the CEQ's memorandum, *Guidance on the Consideration of Past Actions in Cumulative Effects Analysis*, focus should be on whether the information from past projects is "relevant to reasonably foreseeable significant adverse impacts," is "essential to a reasoned choice among alternatives," and can be obtained without exorbitant cost. Furthermore, present impacts of past actions that are relevant and useful are those that may have a significant cause-and-effect relationship with the direct and indirect impacts of the proposed action and alternative(s). Only information that is useful to decision-makers and the public should be included, and the CEQ warns against including extraneous background data.

For this analysis, past projects are defined as those which occurred within the past seven years (between 2015 and 2022). This timeframe goes back far enough to provide a reasonable historical context about the current state of the resource.[10]

Present Projects

Present projects are any actions occurring within the same study area as the existing conditions for the Proposed Action.

Reasonably Foreseeable Future Projects

Reasonably foreseeable future projects are defined as actions that are likely to be completed within the time period from 2022 through 2032 and that have been developed with enough specificity to provide meaningful data

[10] The FAA has discretion to determine whether, and to what extent, information about the specific nature, design, or present impacts of a past action are useful for the analysis of the impacts of the proposed action and alternative(s).

for analysis. No projects past 2032 are included because there is a lack of adequate detail about those later projects to enable meaningful review; any analysis of those projects or their impacts would be speculative.

3.2 Identify Climate Impacts of the Proposed Action

A review will be conducted of the climate analyses that have been undertaken for the cumulative projects identified (past, present, and reasonably foreseeable future projects). A qualitative evaluation of the climate cumulative impacts with consideration of the cumulative projects' will be developed.

Note, the NEPA EA will evaluate the potential climate impacts on environmental justice communities (areas where minority and low-income populations represent a higher fraction of the population compared with the general population) independent of the climate assessment. As such, an environmental justice impact analysis will not be included in the climate assessment.

APPENDIX C

Air Quality & Greenhouse Gas Emissions

References

Erik Saganić, PSCAA, Email to Kandice Krull, FAA, RE: SEA SAMP NTP EA NEPA AQ Protocol, July 26, 2023
Erik Saganić, PSCAA, Email to Kandice Krull, FAA, RE: Sea-Tac Int'l Airport: Sustainable Airport Master Plan Near-Term Projects Environmental Review - Climate Assessment Protocol - November 21, 2023
USEPA NAAQA Table
Erik Saganić, PSCAA, Email to Kandice Krull, FAA, RE: Sea-Tac International Airport Preliminary Air Results, December 14, 2023
Emission Factors for Greenhouse Gas Inventories

From:	Sarah Potter
To:	Gaby Elizondo
Subject:	FW: SEA SAMP NTP EA NEPA AQ Protocol
Date:	Saturday, July 29, 2023 6:06:44 AM

FYI

Sarah Potter
Executive Vice President

Landrum & Brown
Global Aviation Planning & Development

T +1 513 530 1271 M +1 513 658 6325

landrumbrown.com

The content of this email is confidential and intended for the recipient specified in message only. It is strictly forbidden to share any part of this message with any third party, without written consent of the sender. If you received this message by mistake, please reply to this message and follow with its deletion, so that we can ensure such a mistake does not occur in the future.

From: Erik Saganić <ErikS@pscleanair.gov>
Sent: Wednesday, July 26, 2023 4:43 PM
To: Krull, Kandice (FAA) <Kandice.Krull@faa.gov>; Phil Swartzendruber <PhilS@pscleanair.gov>; Kathy Strange <KathyS@pscleanair.gov>
Cc: Rybolt, Steve (Rybolt.S@portseattle.org) <Rybolt.S@portseattle.org>; Sarah Potter <Sarah.Potter@landrumbrown.com>
Subject: RE: SEA SAMP NTP EA NEPA AQ Protocol

Hi Kandice and all,

Thanks so much for taking the time to meet and after review, we have no further comments, thanks again, Erik

---

From: Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Sent: Thursday, July 13, 2023 9:27 AM
To: Phil Swartzendruber <PhilS@pscleanair.gov>; Erik Saganić <ErikS@pscleanair.gov>; Kathy Strange <KathyS@pscleanair.gov>
Cc: Rybolt, Steve (Rybolt.S@portseattle.org) <Rybolt.S@portseattle.org>; Sarah Potter <Sarah.Potter@landrumbrown.com>
Subject: SEA SAMP NTP EA NEPA AQ Protocol

Good morning everyone,

Thank you again for taking the time yesterday to discuss the AQ Protocol. Attached is the updated AQ Protocol for the NTP NEPA EA. Changes were made utilizing track changes to make it easier for you to track. Included below are the links to the resource materials the FAA agreed to provide. Please let me know if you would prefer attachments instead of links.

We would greatly appreciate any comments or concurrence with the Air Quality Protocol by Friday July 28.

Thanks so much
Kandice

Kandice Krull
Environmental Protection Specialist
FAA - Denver Airports District Office
303-342-1261

From: Majeed, Mohammed (FAA) <Mohammed.Majeed@faa.gov>
Sent: Wednesday, July 12, 2023 4:12 PM
To: Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Cc: Iovinelli, Ralph (FAA) <Ralph.Iovinelli@faa.gov>; Strasser, Alan (FAA) <Alan.Strasser@faa.gov>
Subject: RE: AEDT Tech and User Manual documents

Kandice,

PS: You may want to share the URL links to these documents rather than the documents as attachments; see URL links below.

AEDT: Product Information (faa.gov). You can find all AEDT 3e documentation including the User and Tech Manuals.

Aviation Emissions and Air Quality Handbook | Federal Aviation Administration (faa.gov)

Let me know if you have any questions.

Thanks,

Mohammed

From: Majeed, Mohammed (FAA)
Sent: Wednesday, July 12, 2023 5:59 PM
To: Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Cc: Iovinelli, Ralph (FAA) <Ralph.Iovinelli@faa.gov>; Strasser, Alan (FAA) <Alan.Strasser@faa.gov>
Subject: AEDT Tech and User Manual documents

Kandice,

Per our discussion, see attached two AEDT documents – the Tech and User Manuals. See below the relevant sections in these documents for discussion on the mixing height and how to modify it in the

tool. The Air Quality Handbook cannot be attached because of its size. I will send it in a separate message.

AEDT Tech Manual: Section 5.1.1 Airborne Emissions
AEDT User Manual: Appendix B.1.16 Preferences – Study

Regards,

Mohammed

Mohammed A Majeed, Ph.D., P.E.
General Engineer, Federal Aviation Administration
Office of Environment and Energy
Emissions Division (AEE-300)
800 Independence Ave SW
Building 10A Room 902
Washington, DC 20591
Office: (202) 267-3703
Mobile: (302) 766-3239

From:	Sarah Potter
To:	Gaby Elizondo
Subject:	FW: [EXTERNAL] RE: Sea-Tac Int"l Airport: Sustainable Airport Master Plan Near-Term Projects Environmental Review - Climate Assessment Protocol - PLEASE REVIEW
Date:	Monday, November 27, 2023 8:30:20 AM

Sarah Potter
Executive Vice President

Landrum & Brown
Global Aviation Planning & Development

T +1 513 530 1271 M +1 513 658 6325

landrumbrown.com

The content of this email is confidential and intended for the recipient specified in message only. It is strictly forbidden to share any part of this message with any third party, without written consent of the sender. If you received this message by mistake, please reply to this message and follow with its deletion, so that we can ensure such a mistake does not occur in the future.

From: Erik Saganić <ErikS@pscleanair.gov>
Sent: Tuesday, November 21, 2023 5:07 PM
To: Krull, Kandice (FAA) <Kandice.Krull@faa.gov>; 'Rybolt, Steve' <Rybolt.S@portseattle.org>
Cc: Phil Swartzendruber <PhilS@pscleanair.gov>; Kathy Strange <KathyS@pscleanair.gov>; Sarah Potter <sarah.potter@landrumbrown.com>
Subject: RE: [EXTERNAL] RE: Sea-Tac Int'l Airport: Sustainable Airport Master Plan Near-Term Projects Environmental Review - Climate Assessment Protocol - PLEASE REVIEW

You don't often get email from eriks@pscleanair.gov. Learn why this is important

No further comment at this time, thanks for checking in, Erik

From: Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Sent: Tuesday, November 21, 2023 12:23 PM
To: Erik Saganić <ErikS@pscleanair.gov>; 'Rybolt, Steve' <Rybolt.S@portseattle.org>
Cc: Phil Swartzendruber <PhilS@pscleanair.gov>; Kathy Strange <KathyS@pscleanair.gov>; 'Sarah Potter' <sarah.potter@landrumbrown.com>
Subject: RE: [EXTERNAL] RE: Sea-Tac Int'l Airport: Sustainable Airport Master Plan Near-Term Projects Environmental Review - Climate Assessment Protocol - PLEASE REVIEW

Good afternoon Eric,

I was following up to see if you had any additional comments or concerns given the additional information I provided. We are ready to start on the analysis but wanted to confirm that there were no outstanding issues before we got too far.

Please let me know by the end of the month if there are any additional comments or questions.

Thanks so much,
Kandice

Kandice Krull
Environmental Protection Specialist
FAA - Denver Airports District Office
303-342-1261

From: Krull, Kandice (FAA)
Sent: Thursday, November 2, 2023 8:52 AM
To: Erik Saganic <ErikS@pscleanair.gov>; Rybolt, Steve <Rybolt.S@portseattle.org>
Cc: Phil Swartzendruber <PhilS@pscleanair.gov>; Kathy Strange <KathyS@pscleanair.gov>; Sarah Potter <sarah.potter@landrumbrown.com>
Subject: RE: [EXTERNAL] RE: Sea-Tac Int'l Airport: Sustainable Airport Master Plan Near-Term Projects Environmental Review - Climate Assessment Protocol - PLEASE REVIEW

Good morning Eric,

I realized after I received you email that some of our responses were not included with the submittal of the revised Climate Assessment Protocol. The following were the responses for the comments that did not result in changes to the Protocol:

- **PSCAA Comment:** Black carbon, as a pollutant category, also has a significant CO2e for many sources. This discussion suggests that it's not included, is that correct, if so, why?
    - **FAA Response:** While black carbon aerosols play a role in climate impacts, the contribution of black carbon to current climate change remains highly uncertain. The FAA is currently studying how to measure and predict non-volatile particulate matter emissions (a.k.a. soot or black carbon) from sustainable and conventional aviation fuels. The EA will likely include a qualitative discussion on how advances in engine combustion designs are yielding reductions in emissions of non-volatile particulate matter.
- **PSCAA Comment:** So, this implies that APUs use Jet-A? Is this correct? Naively, I find this surprising as most other types of generators don't use Jet-A, and I'd think other fuels would be cheaper.
    - **FAA Response:** APUs are engine-driven generators contained in the aircraft (usually in the tail) that provide the aircraft with necessary energy during the time the aircraft is at the gate. Part of the generated energy is used for air conditioning. As an alternative, the required energy can be supplied by ground-based equipment that delivers electrical power at 400 Hz and preconditioned air to the aircraft. The use of fuel dispensed metric will capture APU usage and therefore APUs will be removed as a separate source. Port owned ground power units (GPUs) and preconditioned air units (PCAs) will be captured under Ground Support Equipment.
- **PSCAA Comment:** GSE electrification is a known GHG reduction pathway, and so the (lack of) infrastructure could be a key limiting (non)Action. Not clear this is in the proposed Action or Alternative, but it could be. It's quantifiable and should be discussed. Directly its Scope 3, but it actually seems like a Scope1-Scope 3 split incentive/responsibility problem. A plausible

alternative could include full electrification of GSE. So this section would need mention of a model or calculation method for electric GSE.
    - **FAA Respon**se: The Port has installed over 400 charging points/stations for electric ground support equipment (eGSE) throughout the Airport across all terminals. While there is no requirement by the Port for airlines to utilize eGSE, several airlines have opted to utilize eGSE. The eGSE will be captured in the GSE survey and accounted for in the AEDT modeling for the existing conditions. Since there are no requirements for the implementation of additional electric GSE in the future by the Port or by the Proposed Action, any additional use of eGSE in the future than what is accounted for in the existing conditions would be speculative for both the No Action and Proposed Action. As such, no further alternatives, such as those including full electrification of GSE, as recommended for the purpose of this analysis.
- **PSCAA Comment:** The proposed Action includes SAF tanks and infrastructure, correct? So, there should be some semi-quantitative discussion (relative emission factor * fuel volume) of the potential GHG reduction that would be enabled. And, that the enabled (potential) SAF fuel volume is in excess (it is?) of the projected demand/use, such that the proposed tanks aren't the limiting factor (and thus GHG emission causing).
    - **FAA Response:** While SAF tanks and infrastructure are included in the Proposed Action, there is no requirement for the Port or tenants to utilize SAF. In addition, there are supply chain issues with obtaining SAF and isn't clear when these issues will be resolved. As such, any use of SAF in the future would be speculative for both the No Action and Proposed Action. As such, no quantitative discussion is recommended for the purpose of this analysis. Qualitative discussions on the FAA's CLEEN program and the Port's sustainable fuel goals and how they could reduce future emissions will be included--see Section 2.2.
- **PSCAA Comment:** Are these then all "Full Throttle" emission factors, when most of the use isn't at "full throttle"? The issue being that the fuel-use/hp-hour (fuel efficiency) is probably fairly different across the range of "throttle settings". Same note applies to all the full throttle references above
    - **FAA Response:** Yes--the use of the "full throttle emission factor" is based on FAA guidance.

I hope these responses help explain why changes were or were not made in the Protocol. Please let me know if you have any questions or comments.

Kandice

Kandice Krull
Environmental Protection Specialist
FAA - Denver Airports District Office
303-342-1261

From: Erik Saganić <ErikS@pscleanair.gov>
Sent: Monday, October 16, 2023 2:14 PM

To: Rybolt, Steve <Rybolt.S@portseattle.org>
Cc: Phil Swartzendruber <PhilS@pscleanair.gov>; Kathy Strange <KathyS@pscleanair.gov>; Sarah Potter <sarah.potter@landrumbrown.com>; Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Subject: RE: [EXTERNAL] RE: Sea-Tac Int'l Airport: Sustainable Airport Master Plan Near-Term Projects Environmental Review - Climate Assessment Protocol - PLEASE REVIEW

Thanks so much for the follow up and edits.

I do have one more comment regarding the black carbon estimates that we provided earlier that do not seem included in the revisions.

As black carbon is one of the largest positive contributors to radiative forcing to the atmosphere (https://www.ipcc.ch/apps/njlite/ar5wg2/njlite_download2.php?id=9465#page=72), we request that you revisit including estimated black carbon emissions through available data from model outputs. Although you likely won't be able to put emissions in equivalent CO_2 units, cataloguing the emissions would help track the potential impact in different modeled scenarios. From the MOVES model output, we would request including elemental carbon be reported. And from the AEDT model, we request the non-volatile particulate matter be reported.

We appreciate you again for all of your time and energy in this process, Erik Saganić

From: Rybolt, Steve <Rybolt.S@portseattle.org>
Sent: Monday, October 9, 2023 4:19 PM
To: Erik Saganić <ErikS@pscleanair.gov>
Cc: Phil Swartzendruber <PhilS@pscleanair.gov>; Kathy Strange <KathyS@pscleanair.gov>; Sarah Potter <sarah.potter@landrumbrown.com>; Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Subject: RE: [EXTERNAL] RE: Sea-Tac Int'l Airport: Sustainable Airport Master Plan Near-Term Projects Environmental Review - Climate Assessment Protocol - PLEASE REVIEW

Hi Erik,

Attached is an updated Climate Assessment Protocol that we've updated with the Federal Aviation Administration (I have also included your original comments). We believe it addresses all of the Puget Sound Clear Air Agency's (PSCAA) comments.

I am looking for the PSCAA's concurrence on this protocol by Friday, October 20, 2023.

Please let Kandice or I know if you have any questions.

We have also just started the modeling of the Proposed Action (i.e. future conditions with projects) and will reach out when we have initial results later this Fall.

Thank you,

Steve Rybolt
Senior Environmental Program Manager
Port of Seattle | Sea-Tac International Airport
C: 206.554.1235
F: 206.787.6617

From: Erik Saganić <ErikS@pscleanair.gov>
Sent: Thursday, August 10, 2023 4:49 PM
To: Rybolt, Steve <Rybolt.S@portseattle.org>
Cc: Phil Swartzendruber <PhilS@pscleanair.gov>; Kathy Strange <KathyS@pscleanair.gov>; Sarah Potter <sarah.potter@landrumbrown.com>; Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Subject: [EXTERNAL] RE: Sea-Tac Int'l Airport: Sustainable Airport Master Plan Near-Term Projects Environmental Review - Climate Assessment Protocol - PLEASE REVIEW

WARNING: External email. Links or attachments may be unsafe.

Hi Steve,

Please see the attached notes and some minor edits to the NEPA Climate Assessment Protocol, thanks for the chance to review, Erik

---

From: Rybolt, Steve <Rybolt.S@portseattle.org>
Sent: Monday, July 31, 2023 1:28 PM
To: Erik Saganić <ErikS@pscleanair.gov>
Cc: Phil Swartzendruber <PhilS@pscleanair.gov>; Kathy Strange <KathyS@pscleanair.gov>; Sarah Potter <sarah.potter@landrumbrown.com>; Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Subject: Sea-Tac Int'l Airport: Sustainable Airport Master Plan Near-Term Projects Environmental Review - Climate Assessment Protocol - PLEASE REVIEW

Hi Erik,

Thanks to you and the PSCAA Team for reviewing our NEPA Air Quality Protocol. We have begun our analyses and once we have initial data, we will be sharing that with you to determine if dispersion modeling may be warranted to support the analysis.

As we identified in the NEPA Air Quality Protocol, we have drafted a separate Climate Assessment Protocol.

Attached you will find the NEPA Climate Assessment Protocol. We are seeking any comments to the document no later than August 11, 2023.

I'm happy to set up a time to discuss and if you need more time, please let us know.

Please let Kandice or I know if you have any questions.

Thank you,

Steve Rybolt
Senior Environmental Program Manager
Port of Seattle | Sea-Tac International Airport
C: 206.554.1235
F: 206.787.6617

An official website of the United States government

NAAQS Table

The Clean Air Act <https://epa.gov/clean-air-act-overview>, which was last amended in 1990, requires EPA to set National Ambient Air Quality Standards (40 CFR part 50) for six principal pollutants ("criteria" air pollutants <https://epa.gov/criteria-air-pollutants>) which can be harmful to public health and the environment. The Clean Air Act identifies two types of national ambient air quality standards. ***Primary standards*** provide public health protection, including protecting the health of "sensitive" populations such as asthmatics, children, and the elderly. ***Secondary standards*** provide public welfare protection, including protection against decreased visibility and damage to animals, crops, vegetation, and buildings.

Periodically, the standards are reviewed and sometimes may be revised, establishing new standards. The most recently established standards are listed below. In some areas of the U.S., certain regulatory requirements may also remain for implementation of previously established standards <https://epa.gov/ground-level-ozone-pollution/ozone-implementation-regulatory-actions>.

Units of measure for the standards are parts per million (ppm) by volume, parts per billion (ppb) by volume, and micrograms per cubic meter of air ($\mu g/m^3$).

Pollutant [links to historical tables of NAAQS reviews]	**Primary/ Secondary**	**Averaging Time**	**Level**	**Form**
Carbon Monoxide (CO) <https://epa.gov/co-pollution/timeline-carbon-monoxide-co-national-ambient-air-quality-standards-naaqs>	primary	8 hours	9 ppm	Not to be exceeded more than once per year
		1 hour	35 ppm	

Pollutant [links to historical tables of NAAQS reviews]	**Primary/ Secondary**	**Averaging Time**	**Level**	**Form**
Lead (Pb) <https://epa.gov/lead-air-pollution/timeline-lead-pb-national-ambient-air-quality-standards-naaqs>	primary and secondary	Rolling 3 month average	0.15 µg/m^3 (1)	Not to be exceeded
Nitrogen Dioxide (NO_2) <https://epa.gov/no2-pollution/timeline-nitrogen-dioxide-no2-national-ambient-air-quality-standards-naaqs>	primary	1 hour	100 ppb	98th percentile of 1-hour daily maximum concentrations, averaged over 3 years
	primary and secondary	1 year	53 ppb (2)	Annual Mean
Ozone (O_3) <https://epa.gov/ground-level-ozone-pollution/timeline-ozone-national-ambient-air-quality-standards-naaqs>	primary and secondary	8 hours	0.070 ppm (3)	Annual fourth-highest daily maximum 8-hour concentration, averaged over 3 years

Pollutant [links to historical tables of NAAQS reviews]		**Primary/ Secondary**	**Averaging Time**	**Level**	**Form**
Particle Pollution (PM) <https://epa.gov/pm-pollution/timeline-particulate-matter-pm-national-ambient-air-quality-standards-naaqs>	$PM_{2.5}$	primary	1 year	9.0 µg/m^3	annual mean, averaged over 3 years
		secondary	1 year	15.0 µg/m^3	annual mean, averaged over 3 years
		primary and secondary	24 hours	35 µg/m^3	98th percentile, averaged over 3 years
	PM_{10}	primary and secondary	24 hours	150 µg/m^3	Not to be exceeded more than once per year on average over 3 years
Sulfur Dioxide (SO_2) <https://epa.gov/so2-pollution/timeline-sulfur-dioxide-national-ambient-air-quality-standards-naaqs>		primary	1 hour	75 ppb (4)	99th percentile of 1-hour daily maximum concentrations, averaged over 3 years
		secondary	3 hours	0.5 ppm	Not to be exceeded more than once per year

(1) In areas designated nonattainment for the Pb standards prior to the promulgation of the current (2008) standards, and for which implementation plans to attain or maintain the current (2008) standards have not been submitted and approved, the previous standards (1.5 µg/m3 as a calendar quarter average) also remain in effect.

(2) The level of the annual NO_2 standard is 0.053 ppm. It is shown here in terms of ppb for the purposes of clearer comparison to the 1-hour standard level.

(3) Final rule signed October 1, 2015, and effective December 28, 2015. The previous (2008) O_3 standards are not revoked and remain in effect for designated areas. Additionally, some areas may have certain continuing implementation obligations under the prior revoked 1-hour (1979) and 8-hour (1997) O_3 standards.

(4) The previous SO_2 standards (0.14 ppm 24-hour and 0.03 ppm annual) will additionally remain in effect in certain areas: (1) any area for which it is not yet 1 year since the effective date of designation under the current (2010) standards, and (2)any area for which an implementation plan providing for attainment of the current (2010) standard has not been submitted and approved and which is designated nonattainment under the previous SO_2 standards or is not meeting the requirements of a SIP call under the previous SO_2 standards (40 CFR 50.4(3)). A SIP call is an EPA action requiring a state to resubmit all or part of its State Implementation Plan to demonstrate attainment of the required NAAQS.

Menu of Control Measures for NAAQS Implementation

The Menu of Control Measures (MCM) provides state, local and tribal air agencies with the existing emission reduction measures as well as relevant information concerning the efficiency and cost effectiveness of the measures. State, local and tribal agencies will be able to use this information in developing emission reduction strategies, plans and programs to assure they attain and maintain the National Ambient Air Quality Standards (NAAQS). The MCM is a living document that can be updated with newly available or more current data as it becomes available.

- Menu of Control Measures <https://epa.gov/criteria-air-pollutants/menu-control-measures-naaqs-implementation>

Criteria Air Pollutants Home <https://epa.gov/criteria-air-pollutants>

Information by Pollutant <https://epa.gov/criteria-air-pollutants/information-pollutant>

NAAQS Review Process <https://epa.gov/criteria-air-pollutants/process-reviewing-national-ambient-air-quality-standards>

NAAQS Designations Process <https://epa.gov/criteria-air-pollutants/process-determine-whether-areas-meet-naaqs-designations-process>

NAAQS Implementation Process <https://epa.gov/criteria-air-pollutants/process-working-areas-attain-and-maintain-naaqs-implementation-process>

Current NAAQS Table

Contact Us <https://epa.gov/criteria-air-pollutants/forms/contact-us-about-criteria-air-pollutants> to ask a question, provide feedback, or report a problem.

LAST UPDATED ON FEBRUARY 7, 2024

Discover.

Accessibility Statement
<https://epa.gov/accessibility/epa-accessibility-statement>

Budget & Performance
<https://epa.gov/planandbudget>

Contracting
<https://epa.gov/contracts>

EPA www Web Snapshot
<https://epa.gov/utilities/wwwepagov-snapshots>

Grants
<https://epa.gov/grants>

No FEAR Act Data
<https://epa.gov/ocr/whistleblower-protections-epa-and-how-they-relate-non-disclosure-agreements-signed-epa>

Plain Writing
<https://epa.gov/web-policies-and-procedures/plain-writing>

Privacy
<https://epa.gov/privacy>

Privacy and Security Notice
<https://epa.gov/privacy/privacy-and-security-notice>

Connect.

Data
<https://epa.gov/data>

Inspector General
<https://www.epaoig.gov/>

Jobs
<https://epa.gov/careers>

Newsroom
<https://epa.gov/newsroom>

Regulations.gov
<https://www.regulations.gov/>

Subscribe
<https://epa.gov/newsroom/email-subscriptions-epa-news-releases>

USA.gov
<https://www.usa.gov/>

White House
<https://www.whitehouse.gov/>

Ask.

Contact EPA
<https://epa.gov/home/forms/contact-epa>

EPA Disclaimers
<https://epa.gov/web-policies-and-procedures/epa-disclaimers>

Hotlines
<https://epa.gov/aboutepa/epa-hotlines>

FOIA Requests
<https://epa.gov/foia>

Frequent Questions
<https://epa.gov/home/frequent-questions-specific-epa-programstopics>

Follow.

FW: Sea-Tac International Airport Preliminary Air Results

Sarah Potter <sarah.potter@landrumbrown.com>

Fri 12/15/2023 8:11 AM

To:Gaby Elizondo <Gaby.Elizondo@landrumbrown.com>

See below.

Sarah Potter

Executive Vice President

Landrum & Brown

Global Aviation Planning & Development

T +1 513 530 1271 M +1 513 658 6325

landrumbrown.com

The content of this email is confidential and intended for the recipient specified in message only. It is strictly forbidden to share any part of this message with any third party, without written consent of the sender. If you received this message by mistake, please reply to this message and follow with its deletion, so that we can ensure such a mistake does not occur in the future.

From: Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Sent: Thursday, December 14, 2023 1:10 PM
To: Erik Saganić <ErikS@pscleanair.gov>
Cc: Rybolt, Steve (Rybolt.S@portseattle.org) <Rybolt.S@portseattle.org>; Sarah Potter <sarah.potter@landrumbrown.com>; Kathy Strange <KathyS@pscleanair.gov>; Phil Swartzendruber <PhilS@pscleanair.gov>
Subject: RE: Sea-Tac International Airport Preliminary Air Results

You don't often get email from kandice.krull@faa.gov. Learn why this is important

Thanks for the quick response Erik. We really appreciate all of your help with this project.

We will share the entire air quality analysis, including the climate analysis, once it is completed.

Happy holidays

Kandice

Kandice Krull

Environmental Protection Specialist

FAA - Denver Airports District Office

303-342-1261

From: Erik Saganić <ErikS@pscleanair.gov>
Sent: Thursday, December 14, 2023 10:19 AM
To: Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Cc: Rybolt, Steve (Rybolt.S@portseattle.org) <Rybolt.S@portseattle.org>; Sarah Potter <sarah.potter@landrumbrown.com>; Kathy Strange <KathyS@pscleanair.gov>; Phil Swartzendruber <PhilS@pscleanair.gov>
Subject: RE: Sea-Tac International Airport Preliminary Air Results

Thanks Kandice,

I have no further comments on the table below. I would not expect these numbers to result in an exceedance of the NAAQS.

Erik

From: Krull, Kandice (FAA)
Sent: Thursday, December 7, 2023 2:55 PM
To: ericS@pscleanair.gov
Cc: Rybolt, Steve (Rybolt.S@portseattle.org) <Rybolt.S@portseattle.org>; Phil Swartzendruber <PhilS@pscleanair.gov>; Kathy Strange <KathyS@pscleanair.gov>; Sarah Potter <sarah.potter@landrumbrown.com>
Subject: Sea-Tac International Airport Preliminary Air Results

Hi Eric,

We have preliminary results from the air quality analysis for the SEA SAMP NTP EA ready for PSCAA review. We are hoping to get input from the PSCAA on the potential for the project to cause an exceedance of the NAAQS within the region. We are more than willing to have a call to discuss the results and get feedback if that would be easier.

We are requesting a response by Friday January 12, 2024.

Thanks so much,

Kandice

Kandice Krull

Environmental Protection Specialist

FAA - Denver Airports District Office

303-342-1261

From: Sarah Potter <Sarah.Potter@landrumbrown.com>
Sent: Wednesday, December 6, 2023 4:13 PM
To: Krull, Kandice (FAA) <Kandice.Krull@faa.gov>
Cc: Rybolt, Steve <Rybolt.S@portseattle.org>
Subject: FW: SEA SAMP - Preliminary AQ Operational Emissions Inventories

HI Kandice – The following are the results that were prepared using AEDT version 3e.

Sarah Potter

Executive Vice President

Landrum & Brown

Global Aviation Planning & Development

T +1 513 530 1271 M +1 513 658 6325

landrumbrown.com

The content of this email is confidential and intended for the recipient specified in message only. It is strictly forbidden to share any part of this message with any third party, without written consent of the sender. If you received this message by mistake, please reply to this message and follow with its deletion, so that we can ensure such a mistake does not occur in the future.

From: Gaby Elizondo <Gaby.Elizondo@landrumbrown.com>
Sent: Wednesday, December 6, 2023 6:07 PM
To: Sarah Potter <Sarah.Potter@landrumbrown.com>
Subject: SEA SAMP - Preliminary AQ Operational Emissions Inventories

Hey Sarah,

See below for the SEA SAMP preliminary air quality operational emissions inventories for 2032 and 2037. Let me know if you need anything else.

Table 1: 2032 No Action and 2032 Proposed Action Operational Emissions Inventory

	Annual Emissions (tons per year)					
	CO	VOC	NOx	SOx	PM 10	PM 2·5

2032 No Action

Aircraft	2,587	282	2,857	259	28	28
GSE	314	11	22	0	2	2
Stationary Sources	19	12	34	1	1	1
Motor Vehicles	1,916	15	176	2	3	3
2032 No Action Subtotal	*4,837*	*320*	*3,089*	*263*	*35*	*35*

2032 Proposed Action

Aircraft	2,603	284	2,904	262	29	29
GSE	320	12	23	0	3	2
Stationary Sources	26	16	47	2	2	2
Motor Vehicles	1,961	15	179	3	3	3
2032 Proposed Action Subtotal	*4,910*	*327*	*3,153*	*267*	*37*	*36*
2032 Net Emissions	***73***	***7***	***64***	***4***	***1***	***1***

Table 2: 2037 No Action and 2037 Proposed Action Operational Emissions Inventory

	Annual Emissions (tons per year)					
	CO	VOC	NOx	SOx	PM 10	PM 2·5

2037 No Action

Aircraft	2,511	267	3,076	266	30	30
GSE	320	12	22	0	3	2
Stationary Sources	19	12	34	1	1	1
Motor Vehicles	1,620	12	160	3	2	2
2037 No Action Subtotal	*4,470*	*302*	*3,292*	*270*	*36*	*36*

2037 Proposed Action

Aircraft	2,819	292	3,324	293	32	32
GSE	343	12	24	0	3	2
Stationary Sources	26	16	47	2	2	2
Motor Vehicles	1,720	12	168	3	2	2
2037 Proposed Action Subtotal	*4,908*	*333*	*3,564*	*298*	*39*	*39*
2037 Net Emissions	***438***	***31***	***272***	***27***	***3***	***3***

Thanks,

Gaby Elizondo, AICP

Senior Consultant

Landrum & Brown

Global Aviation Planning & Development

T +1 513 530 1205 M +1 956 357 2778

landrumbrown.com

The content of this email is confidential and intended for the recipient specified in message only. It is strictly forbidden to share any part of this message with any third party, without written consent of the sender. If you received this message by mistake, please reply to this message and follow with its deletion, so that we can ensure such a mistake does not occur in the future.

Last Modified: 1 April 2022

Gas	100-Year GWP
CH_4	25

Source: Intergovernmental Panel on Climate Change (IPCC), Fourth Assessment Report (AR4), 2007. See the source note to Table 11 for further explanation.

Table 1

Fuel Type	Heat Content (HHV)	CO_2 Factor	CH_4 Factor	N_2O Factor	CO_2 Factor	CH_4 Factor	N_2O Factor
	mmBtu per short ton	kg CO_2 per mmBtu	g CH_4 per mmBtu	g N_2O per mmBtu	kg CO_2 per short ton	g CH_4 per short ton	g N_2O per short ton
Coal and Coke							
Anthracite Coal	25.09	103.69	11	1.6	2,602	276	40
Bituminous Coal	24.93	93.28	11	1.6	2,325	274	40
Sub-bituminous Coal	17.25	97.17	11	1.6	1,676	190	28
Lignite Coal	14.21	97.72	11	1.6	1,389	156	23
Mixed (Commercial Sector)	21.39	94.27	11	1.6	2,016	235	34
Mixed (Electric Power Sector)	19.73	95.52	11	1.6	1,885	217	32
Mixed (Industrial Coking)	26.28	93.90	11	1.6	2,468	289	42
Mixed (Industrial Sector)	22.35	94.67	11	1.6	2,116	246	36
Coal Coke	24.80	113.67	11	1.6	2,819	273	40
Other Fuels - Solid							
Municipal Solid Waste	9.95	90.70	32	4.2	902	318	42
Petroleum Coke (Solid)	30.00	102.41	32	4.2	3,072	960	126
Plastics	38.00	75.00	32	4.2	2,850	1,216	160
Tires	28.00	85.97	32	4.2	2,407	896	118
Biomass Fuels - Solid							
Agricultural Byproducts	8.25	118.17	32	4.2	975	264	35
Peat	8.00	111.84	32	4.2	895	256	34
Solid Byproducts	10.39	105.51	32	4.2	1,096	332	44
Wood and Wood Residuals	17.48	93.80	7.2	3.6	1,640	126	63
	mmBtu per scf	kg CO_2 per mmBtu	g CH_4 per mmBtu	g N_2O per mmBtu	kg CO_2 per scf	g CH_4 per scf	g N_2O per scf
Natural Gas							
Natural Gas	0.001026	53.06	1.0	0.10	0.05444	0.00103	0.00010
Other Fuels - Gaseous							
Blast Furnace Gas	0.000092	274.32	0.022	0.10	0.02524	0.000002	0.000009
Coke Oven Gas	0.000599	46.85	0.48	0.10	0.02806	0.000288	0.000060
Fuel Gas	0.001388	59.00	3.0	0.60	0.08189	0.004164	0.000833
Propane Gas	0.002516	61.46	3.0	0.60	0.15463	0.007548	0.001510
Biomass Fuels - Gaseous							
Landfill Gas	0.000485	52.07	3.2	0.63	0.025254	0.001552	0.000306
Other Biomass Gases	0.000655	52.07	3.2	0.63	0.034106	0.002096	0.000413
	mmBtu per gallon	kg CO_2 per mmBtu	g CH_4 per mmBtu	g N_2O per mmBtu	kg CO_2 per gallon	g CH_4 per gallon	g N_2O per gallon
Petroleum Products							
Asphalt and Road Oil	0.158	75.36	3.0	0.60	11.91	0.47	0.09
Aviation Gasoline	0.120	69.25	3.0	0.60	8.31	0.36	0.07
Butane	0.103	64.77	3.0	0.60	6.67	0.31	0.06
Butylene	0.105	68.72	3.0	0.60	7.22	0.32	0.06
Crude Oil	0.138	74.54	3.0	0.60	10.29	0.41	0.08
Distillate Fuel Oil No. 1	0.139	73.25	3.0	0.60	10.18	0.42	0.08
Distillate Fuel Oil No. 2	0.138	73.96	3.0	0.60	10.21	0.41	0.08
Distillate Fuel Oil No. 4	0.146	75.04	3.0	0.60	10.96	0.44	0.09
Ethane	0.068	59.60	3.0	0.60	4.05	0.20	0.04
Ethylene	0.058	65.96	3.0	0.60	3.83	0.17	0.03
Heavy Gas Oils	0.148	74.92	3.0	0.60	11.09	0.44	0.09
Isobutane	0.099	64.94	3.0	0.60	6.43	0.30	0.06
Isobutylene	0.103	68.86	3.0	0.60	7.09	0.31	0.06
Kerosene	0.135	75.20	3.0	0.60	10.15	0.41	0.08
Kerosene-Type Jet Fuel	0.135	72.22	3.0	0.60	9.75	0.41	0.08
Liquefied Petroleum Gases (LPG)	0.092	61.71	3.0	0.60	5.68	0.28	0.06
Lubricants	0.144	74.27	3.0	0.60	10.69	0.43	0.09
Motor Gasoline	0.125	70.22	3.0	0.60	8.78	0.38	0.08
Naphtha (<401 deg F)	0.125	68.02	3.0	0.60	8.50	0.38	0.08
Natural Gasoline	0.110	66.88	3.0	0.60	7.36	0.33	0.07
Other Oil (>401 deg F)	0.139	76.22	3.0	0.60	10.59	0.42	0.08
Pentanes Plus	0.110	70.02	3.0	0.60	7.70	0.33	0.07
Petrochemical Feedstocks	0.125	71.02	3.0	0.60	8.88	0.38	0.08
Propane	0.091	62.87	3.0	0.60	5.72	0.27	0.05
Propylene	0.091	67.77	3.0	0.60	6.17	0.27	0.05
Residual Fuel Oil No. 5	0.140	72.93	3.0	0.60	10.21	0.42	0.08
Residual Fuel Oil No. 6	0.150	75.10	3.0	0.60	11.27	0.45	0.09
Special Naphtha	0.125	72.34	3.0	0.60	9.04	0.38	0.08
Unfinished Oils	0.139	74.54	3.0	0.60	10.36	0.42	0.08
Used Oil	0.138	74.00	3.0	0.60	10.21	0.41	0.08
Biomass Fuels - Liquid							
Biodiesel (100%)	0.128	73.84	1.1	0.11	9.45	0.14	0.01
Ethanol (100%)	0.084	68.44	1.1	0.11	5.75	0.09	0.01
Rendered Animal Fat	0.125	71.06	1.1	0.11	8.88	0.14	0.01
Vegetable Oil	0.120	81.55	1.1	0.11	9.79	0.13	0.01
Biomass Fuels - Kraft Pulping Liquor, by Wood Furnish							
North American Softwood		94.4	1.9	0.42			
North American Hardwood		93.7	1.9	0.42			
Bagasse		95.5	1.9	0.42			
Bamboo		93.7	1.9	0.42			
Straw		95.1	1.9	0.42			

Table 2 Mobile Combustion CO_2

Fuel Type	kg CO_2 per unit	Unit
Aviation Gasoline	8.31	gallon
Biodiesel (100%)	9.45	gallon
Compressed Natural Gas (CNG)	0.05444	scf
Diesel Fuel	10.21	gallon
Ethanol (100%)	5.75	gallon
Kerosene-Type Jet Fuel	9.75	gallon
Liquefied Natural Gas (LNG)	4.50	gallon
Liquefied Petroleum Gases (LPG)	5.68	gallon
Motor Gasoline	8.78	gallon
Residual Fuel Oil	11.27	gallon

Source:
Federal Register EPA; 40 CFR Part 98; e-CFR, (see link below). Table C-1 (as amended at 81 FR 89252, Dec. 9, 2016).
https://www.ecfr.gov/cgi-bin/text-idx?SID=ae265d7d6f98ec86fcd8640b9793a3f6&mc=true&node=pt40.23.98&rgn=div5#ap40.23.98_19.1
LNG: The factor was developed based on the CO_2 factor for Natural Gas factor and LNG fuel density from GREET1_2021.xlsx Model, Argonne National Laboratory (Fuel_Specs worksheet).

Table 3 Mobile Combustion CH_4 and N_2O for On-Road Gasoline Vehicles

Vehicle Type	Year	CH_4 Factor (g / mile)	N_2O Factor (g / mile)
Gasoline Passenger Cars	1973-1974	0.1696	0.0197
	1975	0.1423	0.0443
	1976-1977	0.1406	0.0458
	1978-1979	0.1389	0.0473
	1980	0.1326	0.0499
	1981	0.0802	0.0626
	1982	0.0795	0.0627
	1983	0.0782	0.0630
	1984-1993	0.0704	0.0647
	1994	0.0617	0.0603
	1995	0.0531	0.0560
	1996	0.0434	0.0503
	1997	0.0337	0.0446
	1998	0.0240	0.0389
	1999	0.0215	0.0355
	2000	0.0175	0.0304
	2001	0.0105	0.0212
	2002	0.0102	0.0207
	2003	0.0095	0.0181
	2004	0.0078	0.0085
	2005	0.0075	0.0067
	2006	0.0076	0.0075
	2007	0.0072	0.0052
	2008	0.0072	0.0049
	2009	0.0071	0.0046
	2010	0.0071	0.0046
	2011	0.0071	0.0046
	2012	0.0071	0.0046
	2013	0.0071	0.0046
	2014	0.0071	0.0046
	2015	0.0068	0.0042
	2016	0.0065	0.0038
	2017	0.0054	0.0018
	2018	0.0052	0.0016
	2019	0.0051	0.0015
Gasoline Light-Duty Trucks (Vans, Pickup Trucks, SUVs)	1973-1974	0.1908	0.0218
	1975	0.1634	0.0513
	1976	0.1594	0.0555
	1977-1978	0.1614	0.0534
	1979-1980	0.1594	0.0555
	1981	0.1479	0.0660
	1982	0.1442	0.0681
	1983	0.1368	0.0722
	1984	0.1294	0.0764
	1985	0.1220	0.0806
	1986	0.1146	0.0848
	1987-1993	0.0813	0.1035
	1994	0.0646	0.0982
	1995	0.0517	0.0908
	1996	0.0452	0.0871
	1997	0.0452	0.0871
	1998	0.0412	0.0787
	1999	0.0333	0.0618
	2000	0.0340	0.0631
	2001	0.0221	0.0379
	2002	0.0242	0.0424
	2003	0.0221	0.0373
	2004	0.0115	0.0088
	2005	0.0105	0.0064
	2006	0.0108	0.0080
	2007	0.0103	0.0061
	2008	0.0095	0.0036
	2009	0.0095	0.0036
	2010	0.0095	0.0035
	2011	0.0096	0.0034
	2012	0.0096	0.0033
	2013	0.0095	0.0035
	2014	0.0095	0.0033
	2015	0.0094	0.0031
	2016	0.0091	0.0029
	2017	0.0084	0.0018
	2018	0.0081	0.0015
	2019	0.0080	0.0013
Gasoline Heavy-Duty Vehicles	≤1980	0.4604	0.0497
	1981-1984	0.4492	0.0538
	1985-1986	0.4090	0.0515
	1987	0.3675	0.0849
	1988-1989	0.3492	0.0933
	1990-1995	0.3246	0.1142
	1996	0.1278	0.1680
	1997	0.0924	0.1726
	1998	0.0655	0.1750
	1999	0.0648	0.1724
	2000	0.0630	0.1660
	2001	0.0577	0.1468
	2002	0.0634	0.1673
	2003	0.0602	0.1553
	2004	0.0298	0.0164
	2005	0.0297	0.0083
	2006	0.0299	0.0241
	2007	0.0322	0.0015
	2008	0.0340	0.0015
	2009	0.0339	0.0015
	2010	0.0320	0.0015
	2011	0.0304	0.0015
	2012	0.0313	0.0015
	2013	0.0313	0.0015
	2014	0.0315	0.0015
	2015	0.0332	0.0021
	2016	0.0321	0.0061
	2017	0.0329	0.0084
	2018	0.0326	0.0082
	2019	0.0330	0.0091
Gasoline Motorcycles	1960-1995	0.0899	0.0087
	1996-2019	0.0672	0.0069

Source: EPA (2021) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2019 (Annexes). All values are calculated from Tables A-90 through A-94.

Table 4 Mobile Combustion CH_4 and N_2O for On-Road Diesel and Alternative Fuel Vehicles

Vehicle Type	Fuel Type	Vehicle Year	CH_4 Factor (g / mile)	N_2O Factor (g / mile)
Passenger Cars	Diesel	1960-1982	0.0006	0.0012
		1983-2006	0.0005	0.0010
		2007-2019	0.0302	0.0192
Light-Duty Trucks	Diesel	1960-1982	0.0011	0.0017
		1983-2006	0.0009	0.0014
		2007-2019	0.0290	0.0214
Medium- and Heavy-Duty Vehicles	Diesel	1960-2006	0.0051	0.0048
		2007-2019	0.0095	0.0431
Light-Duty Cars	Methanol		0.0080	0.0050
	Ethanol		0.0080	0.0050
	CNG		0.0810	0.0050
	LPG		0.0080	0.0050
	Biodiesel		0.0300	0.0190
Light-Duty Trucks	Ethanol		0.0120	0.0090
	CNG		0.1210	0.0090
	LPG		0.0120	0.0120
	LNG		0.1210	0.0090
	Biodiesel		0.0290	0.0210
Medium-Duty Trucks	CNG		4.200	0.0010
	LPG		0.0140	0.0340
	LNG		4.200	0.0010
	Biodiesel		0.0090	0.0430
Heavy-Duty Trucks	Methanol		0.0750	0.0280
	Ethanol		0.0750	0.0280
	CNG		3.70	0.0010
	LPG		0.0130	0.0260
	LNG		3.70	0.0010
	Biodiesel		0.0090	0.0430
Buses	Methanol		0.0160	0.0320
	Ethanol		0.0160	0.0320
	CNG		10.00	0.0010
	LPG		0.0340	0.0170
	LNG		10.00	0.0010
	Biodiesel		0.0090	0.0430

Source: EPA (2021) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2019 (Annexes). All values are calculated from Tables A-93 through A-96.

Table 5 Mobile Combustion CH_4 and N_2O for Non-Road Vehicles

Vehicle Type	Fuel Type	CH_4 Factor (g / gallon)	N_2O Factor (g / gallon)
Ships and Boats	Residual Fuel Oil	1.11	0.32
	Gasoline (2 stroke)	4.58	0.08
	Gasoline (4 stroke)	2.24	0.01
	Diesel	6.41	0.17
Locomotives	Diesel	0.80	0.26
Aircraft	Jet Fuel	-	0.30
	Aviation Gasoline	7.06	0.11
Agricultural Equipment[A]	Gasoline (2 stroke)	9.19	0.26
	Gasoline (4 stroke)	3.33	1.83
	Diesel	0.97	0.90
	LPG	0.42	0.60
Agricultural Offroad Trucks	Gasoline	3.33	1.84
	Diesel	0.99	0.92
Construction/Mining Equipment[B]	Gasoline (2 stroke)	12.11	0.34
	Gasoline (4 stroke)	3.03	1.67
	Diesel	0.94	0.87
	LPG	0.44	0.63
Construction/Mining Offroad Trucks	Gasoline	3.03	1.67
	Diesel	0.99	0.92
Lawn and Garden Equipment	Gasoline (2 stroke)	10.21	0.28
	Gasoline (4 stroke)	2.85	1.56
	Diesel	0.93	0.86
	LPG	0.45	0.64
Airport Equipment	Gasoline	3.88	2.13
	Diesel	0.99	0.91
	LPG	0.45	0.64
Industrial/Commercial Equipment	Gasoline (2 stroke)	9.21	0.26
	Gasoline (4 stroke)	3.04	1.67
	Diesel	0.93	0.87
	LPG	0.45	0.64
Logging Equipment	Gasoline (2 stroke)	12.48	0.35
	Gasoline (4 stroke)	2.85	1.57
	Diesel	0.99	0.92
Railroad Equipment	Gasoline	2.87	1.59
	Diesel	0.83	0.78
	LPG	0.43	0.63
Recreational Equipment	Gasoline (2 stroke)	4.27	0.20
	Gasoline (4 stroke)	4.30	2.22
	Diesel	0.80	0.75
	LPG	0.41	0.58

Source: EPA (2021) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2019 (Annexes). All values are calculated from Tables A-97 through A-98.

Notes:
CH_4 and N_2O Emission Factors: Updates due to a methodology change.
[A] Includes equipment, such as tractors and combines, as well as fuel consumption from trucks that are used off-road in agriculture.
[B] Includes equipment, such as cranes, dumpers, and excavators, as well as fuel consumption from trucks that are used off-road in construction.

Table 6 Electricity

eGRID Subregion	Total Output Emission Factors			Non-Baseload Emission Factors		
	CO_2 Factor (lb / MWh)	CH_4 Factor (lb / MWh)	N_2O Factor (lb / MWh)	CO_2 Factor (lb / MWh)	CH_4 Factor (lb / MWh)	N_2O Factor (lb / MWh)
AKGD (ASCC Alaska Grid)	1,097.6	0.100	0.014	1,315.1	0.126	0.017
AKMS (ASCC Miscellaneous)	534.1	0.027	0.005	1,517.7	0.066	0.012
AZNM (WECC Southwest)	846.6	0.054	0.007	1,368.6	0.090	0.013
CAMX (WECC California)	513.5	0.032	0.004	1,006.5	0.053	0.007
ERCT (ERCOT All)	818.6	0.052	0.007	1,296.6	0.086	0.012
FRCC (FRCC All)	835.1	0.049	0.006	1,011.0	0.052	0.007
HIMS (HICC Miscellaneous)	1,143.2	0.110	0.017	1,542.1	0.134	0.022
HIOA (HICC Oahu)	1,653.0	0.178	0.027	1,753.5	0.175	0.027
MROE (MRO East)	1,526.4	0.139	0.020	1,628.9	0.143	0.021
MROW (MRO West)	979.5	0.104	0.015	1,810.0	0.185	0.027
NEWE (NPCC New England)	528.2	0.074	0.010	882.5	0.070	0.009
NWPP (WECC Northwest)	600.0	0.056	0.008	1,653.0	0.159	0.023
NYCW (NPCC NYC/Westchester)	634.6	0.022	0.003	970.2	0.021	0.002
NYLI (NPCC Long Island)	1,203.9	0.138	0.018	1,260.6	0.034	0.004
NYUP (NPCC Upstate NY)	233.5	0.016	0.002	877.9	0.042	0.005
PRMS (Puerto Rico Miscellaneous)	1,602.2	0.085	0.014	1,673.3	0.070	0.013
RFCE (RFC East)	652.5	0.045	0.006	1,233.4	0.085	0.012
RFCM (RFC Michigan)	1,153.1	0.101	0.014	1,725.7	0.163	0.023
RFCW (RFC West)	985.0	0.086	0.012	1,810.4	0.173	0.025
RMPA (WECC Rockies)	1,144.8	0.101	0.014	1,651.9	0.131	0.019
SPNO (SPP North)	954.0	0.100	0.014	1,969.9	0.205	0.030
SPSO (SPP South)	931.8	0.060	0.009	1,514.1	0.100	0.014
SRMV (SERC Mississippi Valley)	740.4	0.032	0.004	1,137.4	0.055	0.008
SRMW (SERC Midwest)	1,480.7	0.156	0.023	1,866.5	0.194	0.028
SRSO (SERC South)	860.2	0.060	0.009	1,336.9	0.094	0.013
SRTV (SERC Tennessee Valley)	834.2	0.075	0.011	1,511.8	0.135	0.019
SRVC (SERC Virginia/Carolina)	623.1	0.050	0.007	1,323.9	0.114	0.016
US Average	818.3	0.065	0.009	1,399.6	0.109	0.015

Source: EPA eGRID2020, February 2022

Note: Total output emission factors can be used as default factors for estimating GHG emissions from electricity use when developing a carbon footprint or emissions inventory. Annual non-baseload output emission factors should not be used for those purposes, but can be used to estimate GHG emissions reductions from reductions in electricity use.

Table 7 Steam and Heat

	CO_2 Factor (kg / mmBtu)	CH_4 Factor (g / mmBtu)	N_2O Factor (g / mmBtu)
Steam and Heat	66.33	1.250	0.125

Note: Emission factors are per mmBtu of steam or heat purchased. These factors assume natural gas fuel is used to generate steam or heat at 80 percent thermal efficiency.

Scope 3 Emission Factors

Scope 3 emission factors provided below are aligned with the Greenhouse Gas Protocol Technical Guidance for Calculating Scope 3 Emissions, version 1.0 (Scope 3 Calculation Guidance). Where applicable, the specific calculation method is referenced. Refer to the Scope 3 Calculation Guidance for more information (http://www.ghgprotocol.org/scope-3-technical-calculation-guidance).

Table 8 Scope 3 Category 4: Upstream Transportation and Distribution and Category 9: Downstream Transportation and Distribution

These factors are intended for use in the distance-based method defined in the Scope 3 Calculation Guidance. If fuel data are available, then the fuel-based method should be used, with factors from Tables 2 through 5.

Vehicle Type	CO_2 Factor (kg / unit)	CH_4 Factor (g / unit)	N_2O Factor (g / unit)	Units
Medium- and Heavy-Duty Truck	1.450	0.013	0.034	vehicle-mile
Passenger Car [A]	0.332	0.007	0.007	vehicle-mile
Light-Duty Truck [B]	0.454	0.012	0.009	vehicle-mile
Medium- and Heavy-Duty Truck	0.211	0.0020	0.0049	ton-mile
Rail	0.022	0.0017	0.0006	ton-mile
Waterborne Craft	0.041	0.0183	0.0008	ton-mile
Aircraft[C]	1.165	-	0.0359	ton-mile

Source:
CO_2, CH_4, and N_2O emissions data for road vehicles are from Table 2-13 of the EPA (2021) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2019.
Vehicle-miles and passenger-miles data for road vehicles are from Table VM-1 of the Federal Highway Administration Highway Statistics 2019.
CO_2e emissions data for non-road vehicles are based on Table A-107 of the EPA (2021) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2019, which are distributed into CO_2, CH_4, and N_2O emissions based on fuel/vehicle emission factors.
Freight ton-mile data are from Table 1-50 of the Bureau of Transportation Statistics, National Transportation Statistics for 2021 (Data based on 2019 for rail, waterborne craft and aircraft; medium- and heavy-duty truck based on 2018, due to data availability).

Notes:
Vehicle-mile factors are appropriate to use when the entire vehicle is dedicated to transporting the reporting company's product. Ton-mile factors are appropriate when the vehicle is shared with products from other companies.
[A] Passenger car: includes passenger cars, minivans, SUVs, and small pickup trucks (vehicles with wheelbase less than 121 inches).
[B] Light-duty truck: includes full-size pickup trucks, full-size vans, and extended-length SUVs (vehicles with wheelbase greater than 121 inches).
[C] Medium- and Heavy-Duty Truck: includes Combination Trucks and single frame trucks that have 2-Axles and at least 6 tires or a gross vehicle weight rating exceeding 10,000 lbs.

Table 9 Scope 3 Category 5: Waste Generated in Operations and Category 12: End-of-Life Treatment of Sold Products

These factors are intended for use in the waste-type-specific method or the average-data method defined in the Scope 3 Calculation Guidance for category 5 and category 12. Choose the appropriate material and disposal method from the table below. For the average-data method, use one of the mixed material types, such as mixed MSW.

	Metric Tons CO_2e / Short Ton Material					
Material	**Recycled[A]**	**Landfilled[B]**	**Combusted[C]**	**Composted[D]**	**Anaerobically Digested (Dry Digestate with Curing)**	**Anaerobically Digested (Wet Digestate with Curing)**
Aluminum Cans	0.06	0.02	0.01	NA	NA	NA
Aluminum Ingot	0.04	0.02	0.01	NA	NA	NA
Steel Cans	0.32	0.02	0.01	NA	NA	NA
Copper Wire	0.18	0.02	0.01	NA	NA	NA
Glass	0.05	0.02	0.01	NA	NA	NA
HDPE	0.21	0.02	2.80	NA	NA	NA
LDPE	NA	0.02	2.80	NA	NA	NA
PET	0.23	0.02	2.05	NA	NA	NA
LLDPE	NA	0.02	2.80	NA	NA	NA
PP	NA	0.02	2.80	NA	NA	NA
PS	NA	0.02	3.02	NA	NA	NA
PVC	NA	0.02	1.26	NA	NA	NA
PLA	NA	0.02	0.01	0.17	NA	NA
Corrugated Containers	0.11	0.90	0.05	NA	NA	NA
Magazines/Third-class mail	0.02	0.42	0.05	NA	NA	NA
Newspaper	0.02	0.35	0.05	NA	NA	NA
Office Paper	0.02	1.25	0.05	NA	NA	NA
Phonebooks	0.04	0.35	0.05	NA	NA	NA
Textbooks	0.04	1.25	0.05	NA	NA	NA
Dimensional Lumber	0.09	0.17	0.05	NA	NA	NA
Medium-density Fiberboard	0.15	0.07	0.05	NA	NA	NA
Food Waste (non-meat)	NA	0.58	0.05	0.15	0.14	0.11
Food Waste (meat only)	NA	0.58	0.05	NA	0.14	0.11
Beef	NA	0.58	0.05	0.15	0.14	0.11
Poultry	NA	0.58	0.05	0.15	0.14	0.11
Grains	NA	0.58	0.05	0.15	0.14	0.11
Bread	NA	0.58	0.05	0.15	0.14	0.11
Fruits and Vegetables	NA	0.58	0.05	0.15	0.14	0.11
Dairy Products	NA	0.58	0.05	0.15	0.14	0.11
Yard Trimmings	NA	0.33	0.05	0.19	0.11	NA
Grass	NA	0.26	0.05	0.19	0.09	NA
Leaves	NA	0.26	0.05	0.19	0.13	NA
Branches	NA	0.53	0.05	0.19	0.16	NA
Mixed Paper (general)	0.07	0.80	0.05	NA	NA	NA
Mixed Paper (primarily residential)	0.07	0.77	0.05	NA	NA	NA
Mixed Paper (primarily from offices)	0.03	0.75	0.05	NA	NA	NA
Mixed Metals	0.23	0.02	0.01	NA	NA	NA
Mixed Plastics	0.22	0.02	2.34	NA	NA	NA
Mixed Recyclables	0.09	0.68	0.11	NA	NA	NA
Food Waste	NA	0.58	0.05	0.15	NA	NA
Mixed Organics	NA	0.48	0.05	0.17	NA	NA
Mixed MSW	NA	0.52	0.43	NA	NA	NA
Carpet	NA	0.02	1.68	NA	NA	NA
Desktop CPUs	NA	0.02	0.40	NA	NA	NA
Portable Electronic Devices	NA	0.02	0.89	NA	NA	NA
Flat-panel Displays	NA	0.02	0.74	NA	NA	NA
CRT Displays	NA	0.02	0.64	NA	NA	NA
Electronic Peripherals	NA	0.02	2.23	NA	NA	NA
Hard-copy Devices	NA	0.02	1.92	NA	NA	NA
Mixed Electronics	NA	0.02	0.87	NA	NA	NA
Clay Bricks	NA	0.02	NA	NA	NA	NA
Concrete	0.01	0.02	NA	NA	NA	NA
Fly Ash	0.01	0.02	NA	NA	NA	NA
Tires	0.10	0.02	2.21	NA	NA	NA
Asphalt Concrete	-	0.02	NA	NA	NA	NA
Asphalt Shingles	0.03	0.02	0.70	NA	NA	NA
Drywall	NA	0.02	NA	NA	NA	NA
Fiberglass Insulation	0.05	0.02	NA	NA	NA	NA
Vinyl Flooring	NA	0.02	0.29	NA	NA	NA
Wood Flooring	NA	0.18	0.08	NA	NA	NA

Source: EPA, Office of Resource Conservation and Recovery (February 2016) Documentation for Greenhouse Gas Emission and Energy Factors used in the Waste Reduction Model (WARM). Factors from tables provided in the Management Practices Chapters and Background Chapters. WARM Version 15, November 2020 Update. Additional data provided by EPA, WARM-15 Background Data.

Notes: These factors do not include any avoided emissions impact from any of the disposal methods. All the factors presented here include transportation emissions, which are optional in the Scope 3 Calculation Guidance, with an assumed average distance traveled to the processing facility. AR4 GWPs are used to convert all waste emission factors into CO_2e.

[A] Recycling emissions include transport to recycling facility and sorting of recycled materials at material recovery facility.
[B] Landfilling emissions include transport to landfill, equipment use at landfill and fugitive landfill CH_4 emissions. Landfill CH_4 is based on typical landfill gas collection practices and average landfill moisture conditions.
[C] Combustion emissions include transport to combustion facility and combustion-related non-biogenic CO_2 and N_2O
[D] Composting emissions include transport to composting facility, equipment use at composting facility and CH_4 and N_2O emissions during composting.

Table 10 Scope 3 Category 6: Business Travel and Category 7: Employee Commuting

These factors are intended for use in the distance-based method defined in the Scope 3 Calculation Guidance. If fuel data are available, then the fuel-based method should be used, with factors from Tables 2 through 5.

Vehicle Type	CO_2 Factor (kg / unit)	CH_4 Factor (g / unit)	N_2O Factor (g / unit)	Units
Passenger Car [A]	0.332	0.007	0.007	vehicle-mile
Light-Duty Truck [B]	0.454	0.012	0.009	vehicle-mile
Motorcycle	0.183	0.070	0.007	vehicle-mile
Intercity Rail - Northeast Corridor [C]	0.058	0.0055	0.0007	passenger-mile
Intercity Rail - Other Routes [C]	0.150	0.0117	0.0038	passenger-mile
Intercity Rail - National Average [C]	0.113	0.0092	0.0026	passenger-mile
Commuter Rail [D]	0.139	0.0112	0.0028	passenger-mile
Transit Rail (i.e. Subway, Tram) [E]	0.099	0.0084	0.0012	passenger-mile
Bus	0.056	0.0210	0.0009	passenger-mile
Air Travel - Short Haul (< 300 miles)	0.207	0.0064	0.0066	passenger-mile
Air Travel - Medium Haul (>= 300 miles, < 2300 miles)	0.129	0.0006	0.0041	passenger-mile
Air Travel - Long Haul (>= 2300 miles	0.163	0.0006	0.0052	passenger-mile

Source:
CO_2, CH_4, and N_2O emissions data for highway vehicles are from Table 2-13 of the EPA (2021) Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990–2019.
Vehicle-miles and passenger-miles data for highway vehicles are from Table VM-1 of the Federal Highway Administration Highway Statistics 2019.
Fuel consumption data and passenger-miles data for rail are from Tables A.14 to A.16 and C.9 to C.11 of the Transportation Energy Data Book: Edition 39. Fuel consumption was converted to emissions by using fuel and electricity emission factors presented in the tables above.
Intercity Rail factors from communication with Amtrak (Laura Fotiou), March 2020. These are based on 2019 values.
Air Travel factors from 2021 Guidelines to Defra / DECC's GHG Conversion Factors for Company Reporting. Version 1.0 June 2021.

Notes:
[A] Passenger car: includes passenger cars, minivans, SUVs, and small pickup trucks (vehicles with wheelbase less than 121 inches).
[B] Light-duty truck: includes full-size pickup trucks, full-size vans, and extended-length SUVs (vehicles with wheelbase greater than 121 inches).
[C] Intercity rail: Amtrak long-distance rail between major cities. Northeast Corridor extends from Boston to Washington D.C. Other Routes are all routes outside the Northeast Corridor.
[D] Commuter rail: rail service between a central city and adjacent suburbs (also called regional rail or suburban rail).
[E] Transit rail: rail typically within an urban center, such as subways, elevated railways, metropolitan railways (metro), streetcars, trolley cars, and tramways.

Global Warming Potentials

Table 11 Global Warming Potentials (GWPs)

Gas	100-Year GWP
CO_2	1
CH_4	25
N_2O	298
HFC-23	14,800
HFC-32	675
HFC-41	92
HFC-125	3,500
HFC-134	1,100
HFC-134a	1,430
HFC-143	353
HFC-143a	4,470
HFC-152	53
HFC-152a	124
HFC-161	12
HFC-227ea	3,220
HFC-236cb	1,340
HFC-236ea	1,370
HFC-236fa	9,810
HFC-245ca	693
HFC-245fa	1,030
HFC-365mfc	794
HFC-43-10mee	1,640
SF_6	22,800
NF_3	17,200
CF_4	7,390
C_2F_6	12,200
C_3F_8	8,830
c-C_4F_8	10,300
C_4F_{10}	8,860
C_5F_{12}	9,160
C_6F_{14}	9,300
$C_{10}F_{18}$	>7,500

Source:
100-year GWPs from IPCC Fourth Assessment Report (AR4), 2007. IPCC AR4 was published in 2007 and is among the most current and comprehensive peer-reviewed assessments of climate change. AR4 provides revised GWPs of several GHGs relative to the values provided in previous assessment reports, following advances in scientific knowledge on the radiative efficiencies and atmospheric lifetimes of these GHGs and of CO_2. Because the GWPs provided in AR4 reflect an improved scientific understanding of the radiative effects of these gases in the atmosphere, the values provided are more appropriate for supporting the overall goal of organizational GHG reporting than the Second Assessment Report (SAR) GWP values previously used in the Emission Factors Hub.
While EPA recognizes that Fifth Assessment Report (AR5) GWPs have been published, in an effort to ensure consistency and comparability of GHG data between EPA's voluntary and non-voluntary GHG reporting programs (e.g. GHG Reporting Program and National Inventory), EPA recommends the use of AR4 GWPs. The United States and other developed countries to the UNFCCC have agreed to submit annual inventories in 2015 and future years to the UNFCCC using GWP values from AR4, which will replace the current use of SAR GWP values. Utilizing AR4 GWPs improves EPA's ability to analyze corporate, national, and sub-national GHG data consistently, enhances communication of GHG information between programs, and gives outside stakeholders a consistent, predictable set of GWPs to avoid confusion and additional burden.

Table 12 Global Warming Potentials (GWPs) for Blended Refrigerants

ASHRAE #	100-year GWP	Blend Composition
R-401A	16	53% HCFC-22 , 34% HCFC-124 , 13% HFC-152a
R-401B	14	61% HCFC-22 , 28% HCFC-124 , 11% HFC-152a
R-401C	19	33% HCFC-22 , 52% HCFC-124 , 15% HFC-152a
R-402A	2,100	38% HCFC-22 , 6% HFC-125 , 2% propane
R-402B	1,330	6% HCFC-22 , 38% HFC-125 , 2% propane
R-403B	3,444	56% HCFC-22 , 39% PFC-218 , 5% propane
R-404A	3,922	44% HFC-125 , 4% HFC-134a , 52% HFC 143a
R-406A	0	55% HCFC-22 , 41% HCFC-142b , 4% isobutane
R-407A	2,107	20% HFC-32 , 40% HFC-125 , 40% HFC-134a
R-407B	2,804	10% HFC-32 , 70% HFC-125 , 20% HFC-134a
R-407C	1,774	23% HFC-32 , 25% HFC-125 , 52% HFC-134a
R-407D	1,627	15% HFC-32 , 15% HFC-125 , 70% HFC-134a
R-407E	1,552	25% HFC-32 , 15% HFC-125 , 60% HFC-134a
R-408A	2,301	47% HCFC-22 , 7% HFC-125 , 46% HFC 143a
R-409A	0	60% HCFC-22 , 25% HCFC-124 , 15% HCFC-142b
R-410A	2,088	50% HFC-32 , 50% HFC-125
R-410B	2,229	45% HFC-32 , 55% HFC-125
R-411A	14	87.5% HCFC-22 , 11 HFC-152a , 1.5% propylene
R-411B	4	94% HCFC-22 , 3% HFC-152a , 3% propylene
R-413A	2,053	88% HFC-134a , 9% PFC-218 , 3% isobutane
R-414A	0	51% HCFC-22 , 28.5% HCFC-124 , 16.5% HCFC-142b
R-414B	0	5% HCFC-22 , 39% HCFC-124 , 9.5% HCFC-142b
R-417A	2,346	46.6% HFC-125 , 5% HFC-134a , 3.4% butane
R-422A	3,143	85.1% HFC-125 , 11.5% HFC-134a , 3.4% isobutane
R-422D	2,729	65.1% HFC-125 , 31.5% HFC-134a , 3.4% isobutane
R-423A	2,280	47.5% HFC-227ea , 52.5% HFC-134a ,
R-424A	2,440	50.5% HFC-125, 47% HFC-134a, 2.5% butane/pentane
R-426A	1,508	5.1% HFC-125, 93% HFC-134a, 1.9% butane/pentane
R-428A	3,607	77.5% HFC-125 , 2% HFC-143a , 1.9% isobutane
R-434A	3,245	63.2% HFC-125, 16% HFC-134a, 18% HFC-143a, 2.8% isobutane
R-500	32	73.8% CFC-12 , 26.2% HFC-152a , 48.8% HCFC-22
R-502	0	48.8% HCFC-22 , 51.2% CFC-115
R-504	325	48.2% HFC-32 , 51.8% CFC-115
R-507	3,985	5% HFC-125 , 5% HFC143a
R-508A	13,214	39% HFC-23 , 61% PFC-116
R-508B	13,396	46% HFC-23 , 54% PFC-116

Source:
100-year GWPs from IPCC Fourth Assessment Report (AR4), 2007. See the source note to Table 11 for further explanation. GWPs of blended refrigerants are based on their HFC and PFC constituents, which are based on data from http://www.epa.gov/ozone/snap/refrigerants/refblend.html.

REPORT

APRIL 2026

Seattle-Tacoma International Airport
Sustainable Airport Master Plan
Near-Term Projects
Final Air Quality and Human Health Risk Assessment Technical Report

Prepared for:

The Port of Seattle

CDM Smith

Contents

Acronyms and Abbreviations i

1.0 Introduction 1-1

1.1 Project Background 1-1

1.2 Project Location 1-1

1.3 Proposed Action 1-3

1.4 Scope of Analysis 1-4

1.4.1 Construction 1-5

1.4.2 Operations 1-6

2.0 Air Quality 2-1

2.1 Methodology 2-1

2.1.1 Criteria Pollutants 2-1

2.1.2 Additional Pollutants of Interest 2-3

2.1.3 Airport Emission Source Estimation Methodologies 2-4

2.1.4 Air Dispersion Analysis 2-7

2.1.5 Benchmarks 2-20

2.2 Affected Environment 2-22

2.2.1 Existing Ambient Air Quality 2-22

2.2.2 Fine Particulate Matter Ambient Levels 2-24

2.3 Emissions Inventory Results 2-25

2.3.1 Construction 2-25

2.3.2 Operations 2-26

2.4 Dispersion Modeling Results 2-31

2.4.1 Construction 2-31

2.4.2 Operations 2-32

2.5 Scenario Comparison 2-33

2.6 Conclusions 2-34

3.0 Human Health Risk Assessment 3-1

3.1 Methodology 3-1

3.1.1 Exposure Assessment 3-1

3.1.2 Selection of Toxic Air Pollutants of Concern 3-3

3.1.3 Evaluation of Toxic Air Pollutant Exposures 3-5

3.1.4 Toxicity Assessment 3-8

3.1.5 Risk Characterization 3-11

3.2 Results 3-14

3.2.1 Non-Cancer 3-14

3.2.2 Cancer Risk 3-16

3.3 Uncertainty Analysis 3-18
3.3.1 Toxicity Criteria Uncertainty 3-18
3.3.2 Selection of Toxicity Values 3-18
3.3.3 Exposure Uncertainty 3-19
3.3.4 Concentration Estimate Uncertainty 3-20
3.3.5 Risk Characterization 3-21
3.3.6 Lead Toxicity 3-21
3.4 Conclusions 3-21
4.0 References 4-1

Figures

Figure 1.1 Location of Near-Term Projects 1-2
Figure 1.2 Proposed Action 1-4
Figure 2.1 Wind Rose for Seattle-Tacoma International Airport 2-11
Figure 2.2 Receptor Locations 2-17
Figure 2.3 Monitoring Station Locations 2-23
Figure 2.4 $PM_{2.5}$ 24-Hour Average Frequency - Sunset Park Monitoring Station in the City of SeaTac 2-25
Figure 3.1 Acute and Chronic Incremental Hazards and Chronic Incremental Risks to Maximally Exposed Individuals from Exposures to Toxic Air Pollutants of Concern 3-15
Figure 3.2 Risks to Adult Off-Site Workers from Exposures to Toxic Air Pollutants of Concern 3-17

Tables

Table 2.1 Initial List of Toxic Air Pollutants of Concern for the Sustainable Airport Master Plan 2-3
Table 2.2 Average Taxi Times 2-6
Table 2.3 Method to Calculate Background Concentration for National Ambient Air Quality Standard Evaluation 2-20
Table 2.4 National Ambient Air Quality Standards 2-21
Table 2.5 List of Acceptable Source Impact Level, Small Quantity Emission Rate, and De Minimis Values for Toxic Air Pollutants 2-22
Table 2.6 Background Air Quality Data for National Ambient Air Quality Standard Comparison 2-24
Table 2.7 Construction Emissions Inventory – Proposed Action 2-26
Table 2.8 Emissions Inventory – Future (2032) No Action Alternative 2-27
Table 2.9 Emissions Inventory – Future (2037) No Action Alternative 2-28
Table 2.10 Emissions Inventory – Future (2032) Proposed Action 2-29
Table 2.11 Emissions Inventory – Future (2037) Proposed Action 2-29

Table 2.12 Summary of Emissions – Future (2032) Proposed Action and Future (2032) No Action Alternative Total Emissions 2-30
Table 2.13 Summary of Emissions – Future (2037) Proposed Action and Future (2037) No Action Alternative Total Emissions 2-31
Table 2.14 Maximum Construction Concentrations and Comparison to National Ambient Air Quality Standard 2-32
Table 2.15 Operational Concentrations – Peak Increment of 2032 Proposed Action Concentrations Compared to 2032 No Action Alternative Concentrations 2-32
Table 2.16 Operational Concentrations – Peak Increment of 2037 Proposed Action Concentrations Compared to 2037 No Action Alternative Concentrations 2-33
Table 3.1 Selection of Toxic Air Pollutants of Concern 3-4
Table 3.2 Chronic Exposure Parameters for Each Human Health Receptor Population 3-7
Table 3.3 Previous Cancer Effects System 3-9
Table 3.4 Inhalation Toxicity Values 3-11
Table 3.5 Maximum Acute Hazard Indices for Human Health Receptors 3-14
Table 3.6 Maximum Chronic Hazard Indices for Human Health Receptors 3-16
Table 3.7 Maximum Cumulative Cancer Risks for Human Health Receptors 3-16

Appendices

Appendix A Air Quality Figures

Appendix B Air Quality Calculations

Appendix C Human Health Risk Assessment Calculations

Acronyms and Abbreviations

<	Less Than
≤	Less Than or Equal to
≥	Greater Than or Equal to
µg/m^3	Micrograms per Cubic Meter
100LL	100 Low Lead
AADT	Annual Average Daily Trips
ACEIT	Airport Construction Emissions Inventory Tool
ADAF	Age-Dependent Adjustment Factor
AEDT	Aviation Environmental Design Tool
AERMAP	AERMOD Terrain Preprocessor
AERMET	AERMOD Meteorological Preprocessor
AERMINUTE	AERMOD 1-Minute Automated Surface Observing Systems [ASOS] Wind Data Processor
AERMOD	American Meteorological Society/Environmental Protection Agency Regulatory Model
AERSURFACE	Land Cover Data Preprocessor
ANOMS	Aviation Noise and Operations Monitoring System
APU	Auxiliary Power Units
ARFF	Aircraft Rescue and Firefighting
ARM2	Ambient Ratio Method, Version 2
ASIL	Acceptable Source Impact Level
ASOS	Automated Surface Observing System
AT	Averaging Time
ATSDR	Agency for Toxic Substances and Disease Registry
BADA	Base of Aircraft Data
CA	Concentration of chemical in air (µg/m^3) to which the person is exposed under an acute scenario
CAA	Clean Air Act
CAS	Chemical Abstract Service

CFR	Code of Federal Regulations
CO	Carbon Monoxide
CTE	Central Tendency Exposure
Cy,s	Concentration of the chemical in air ($\mu g/m^3$) to which the person is exposed for year "y" and scenario "s"
EA	Environmental Assessment
EC	Exposure Concentration
ECy,s	Chronic exposure concentration ($\mu g/m^3$). This is the annual time-weighted concentration for year "y" and scenario "s" based on the characteristics of the exposure scenario being evaluated.
EF	Exposure Frequency
EPA	U.S. Environmental Protection Agency
ET	Exposure Time
FAA	U.S. Department of Transportation, Federal Aviation Administration
FOA	First-Order Approximation
GMT	Greenwich Mean Time
GSE	Ground Support Equipment
HHRA	Human Health Risk Assessment
HI	Hazard Index
HQ	Hazard Quotient
IATA	International Air Transport Association
ICAO	International Civil Aviation Organization
IRIS	Integrated Risk Information System
ISD	Integrated Surface Data
ISR	In-Stack Ratio
IUR	Inhalation Unit Risk
km	Kilometer
KSEA	Seattle-Tacoma International Airport (ICAO code for international flights)
KUIL	Quillayute Airport (ICAO code for international flights)
LAX	Los Angeles International Airport
lb/avg	Pounds per Average

lidar	light detection and ranging
LOAEL	Lowest-Observed-Adverse-Effect Level
LTO	Landing and Take-Off (LTO) Cycle
LTV	Long-Term Vision
m	Meter
m/s	Meters per Second
MEEM	Mission Emissions Estimation Methodology
MEI	Maximally Exposed Individual
MF	Modifying Factor
mg/m^3	Milligrams per Cubic Meter
MOVES	Motor Vehicle Emissions Simulator
NAAQS	National Ambient Air Quality Standard
NCEA	National Center for Environmental Assessment
NED	National Elevation Dataset
NEPA	National Environmental Policy Act
NLCD	National Land Use Cover
NO	Nitric Oxide
NO_2	Nitrogen Dioxide
NOAA	National Centers for Environmental Information National Oceanic and Atmospheric Administration
NOAEL	No-Observed-Adverse-Effect Level
NOx	Nitrogen Oxides
NTPs	Near-Term Projects
nvPM	Nonvolatile Particulate Matter
NWS	National Weather Service
O_3	Ozone
OEHHA	Office of Environmental Health Hazard Assessment
OLM	Ozone Limiting Method
PAH	Polycyclic Aromatic Hydrocarbons
Pb	Lead

PM	Particulate Matter
PM_{10}	particulate Matter with Diameter Less Than or Equal to 10 micrometers
$PM_{2.5}$	particulate Matter with Diameter Less Than or Equal to 2.5 micrometers
ppb	Parts Per Billion
ppm	Parts Per Million
PPRTV	Provisional Peer-Reviewed Toxicity Values
PSCAA	Puget Sound Clean Air Agency
PST	Pacific Standard Time
PVMRM	Plume Volume Molar Ratio Method
RAGS	Risk Assessment Guidance for Superfund
REL	Reference Level
RfC	Reference Concentration
RIM	Runway Incursion Mitigation
RME	Reasonable Maximum Exposure
RSL	Regional Screening Level
SAMP	Sustainable Airport Master Plan
SCAQMD	South Coast Air Quality Management District
SEA	Seattle-Tacoma International Airport (IATA code for domestic flights)
SEPA	State Environmental Protection Act
SIP	State Implementation Plan
SO_2	Sulfur Dioxide
SOx	Sulfur Oxides
SQER	Small Quantity Emission Rate
SR	State Route
TAP	Toxic Air Pollutant
TIM	Time-in-Mode
TOG	Total Organic Gas
TSD	Technical Support Document
TWF	Annual Time-Weighting Factor
UCL	Upper Confidence Level

UF	Uncertainty Factors
USGS	U.S. Geological Survey
UTM	Universal Transverse Mercator
VMT	Vehicle Miles Traveled
VOC	Volatile Organic Compound
WAC	Washington Administrative Code
WADOE	Washington Department of Ecology
WADOT	Washington Department of Transportation
WBAN	Weather Bureau Army Navy
WOE	Weight of Evidence

1.0 Introduction

CDM Smith completed this Air Quality and Human Health Risk Assessment (HHRA) technical document to support the environmental review under Washington State Environmental Policy Act (SEPA) for the Seattle-Tacoma International Airport (SEA) Sustainable Airport Master Plan (SAMP) Near-Term Projects (NTPs). The U.S. Department of Transportation, Federal Aviation Administration (FAA) approved the SEA SAMP NTPs as described in the Final Environmental Assessment (EA) on September 24, 2025.

1.1 Project Background

The Port of Seattle owns and operates SEA. In 2015, the Port of Seattle launched the SAMP to create a Long-Term Vision (LTV) aimed at accommodating future passenger growth and addressing the evolving needs of SEA over a 20-year planning period, extending through 2034.

One of the primary goals identified in the SAMP was to enhance the overall passenger experience at SEA. Current passenger processing function, including on-site parking, the check-in hall, security screening areas, holdrooms, and the number of available gates, were found to be insufficient or undersized for the airport's current and projected passenger volumes. These limitations result in crowded conditions, extended wait times, and flight delays. As passenger demand continues to grow, these challenges are expected to intensify.

The SAMP's analysis ultimately indicated that, even with the implementation of the LTV, unconstrained demand over the 20-year horizon would lead to significant airfield congestion and delays. These issues are attributed primarily to constraints within the airfield and airspace system. Both the Port of Seattle and the FAA concluded that resolving these long-term airfield and airspace limitations would require a more comprehensive planning effort, separate from the SAMP. As such, they determined that a dedicated airfield and airspace planning study was necessary to assess whether additional actions are warranted before the LTV can be fully realized. Consequently, the FAA determined that the LTV was not yet ready for environmental review.

To address more immediate operational needs, the Port of Seattle developed the NTPs. These NTPs comprise 31 individual projects designed to enhance the efficiency and safety of SEA, improve airport access, and provide better support facilities for both airlines and airport operations. Because the NTPs address near-term objectives and are distinct from the broader goals of the LTV, they are considered independent initiatives. The FAA determined that these NTPs were sufficiently defined and ready to proceed to environmental review. The NTPs collectively constitute the Proposed Action.

1.2 Project Location

SEA is an approximately 2,800-acre commercial airport in SeaTac, Washington, approximately 12 miles south of downtown Seattle and 20 miles north of the City of Tacoma. SEA is generally bounded by State Route (SR) 99 to the east, SR 509 to the west, South 142nd Place to the north, and South 200th Street to the south. Additional land owned by the Port and used for runway protection and noise compatibility extends northward to South 136th Street and southward to South 216th Street.

Cities nearest to SEA include Burien, Des Moines, Normandy Park, SeaTac, and Tukwila, as well as portions of unincorporated King County. Other nearby cities include Federal Way, Kent, and Seattle. The predominant land use nearest to SEA is residential, with local commercial and some industrial areas. Land uses directly adjacent to SEA property include park land, residential, industrial, and commercial. **Figure 1.1** shows SEA and the general pattern of nearby development.

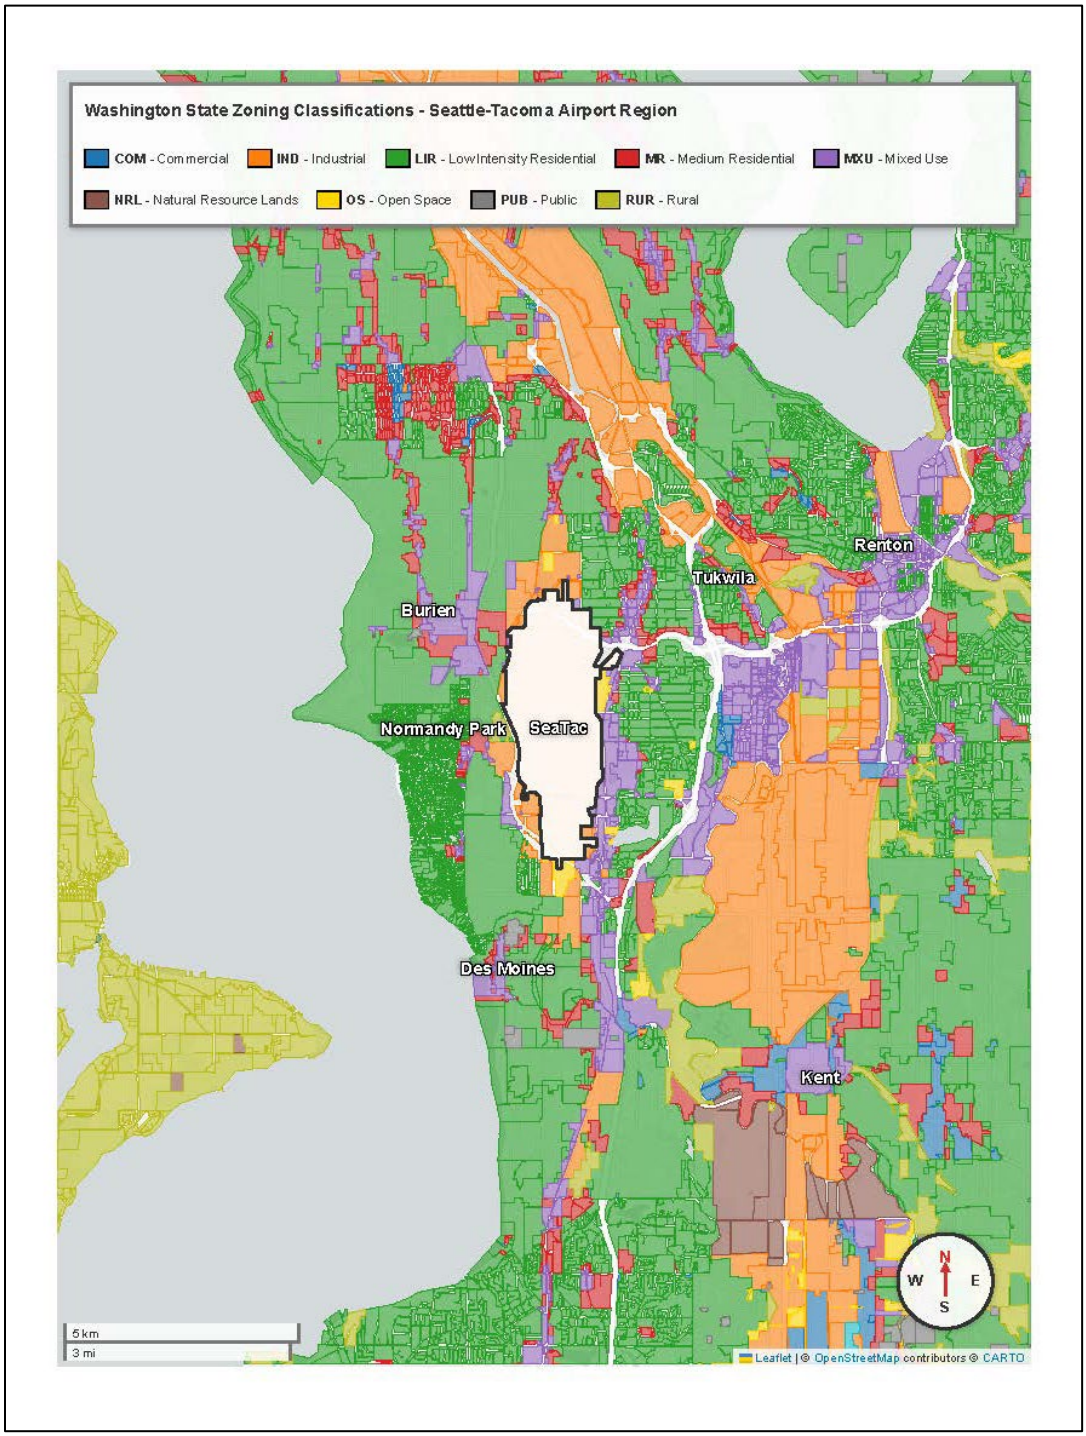

Source: Landrum & Brown 2025

Figure 1.1 Location of Near-Term Projects

1.3 Proposed Action

In addition to construction and operation of the NTPs, the Proposed Action also includes the construction and operation of associated program support projects, operational infrastructure improvements, and stormwater drainage system and industrial wastewater system improvements necessary for the implementation of the NTPs. The Proposed Action includes the following NTPs (**Figure 1.2**):

- A01 – Extension of parallel Taxiways A and B by approximately 1800 feet
- A02 – Construction of Runway 16R/34L blast pads
- A03 – Taxiway C/D reconfiguration and Runway Incursion Mitigation (RIM)
- A04 – Relocation of a portion of Taxiway B to meet standards
- A05 – Construction of a north holding pad (approximately 90,000 square feet)
- A06 – Construction of a new high-speed exit for Runway 34L arrivals between Taxiways J and E
- A07 – Taxiway D extension of approximately 500 from Runway 16C/34C west to Taxiway T
- A08 – North cargo hardstand construction (approximately 360,000 square feet)
- A09 – Construction of a central hardstand (approximately 292,000 square feet)
- A10 – Taxiway fillets construction
- T01 – Construction of a multilevel terminal concourse and aircraft apron (up to 19 gates)
- T02 – Construction of an additional multilevel passenger terminal and parking garage
- C01 – Cargo 4 warehouse construction to replace Cargo 6 warehouse demolished for T01
- C02 – Construction of a cargo warehouse north of SR 518
- C03 – Cargo warehouse construction north of SR 518
- L01 – Relocation of North Airport Expressway southbound lanes for the construction of A09 and T01
- L02 – Elevated busway and stations at the Main Terminal, Second Terminal, and Rental Car Facility
- L03 – Construction of a loop ramp and split-level curbsides for the Second Terminal
- L04 – Northeast ground transportation center construction on north side of existing parking garage
- L05 – Relocation of the ground transportation holding lot displaced by L02 north of SR 518
- L07 – Construction of employee parking garage north of SR 518
- S01 – Fuel farm expansion (four new settling tanks and one blending tank)
- S02 – Relocation of aircraft rescue and firefighting (ARFF) facility for construction of T01
- S03 – Construction of secondary ARFF facility

- S04 – Relocation of the fuel rack from Cargo 6 to Cargo 3 for construction of T01
- S05 – Triculator relocation to north cargo area for construction of A09
- S06 – Relocation of deicing tanks to a northern and southern location
- S07 – Construction of westside maintenance campus
- S08 – Airline support building construction in north cargo for construction of T01 and A08
- S09 – Expansion of the AMB/AFCO III building to replace displaced airline support facilities
- S10 – Construction of centralized receiving and distribution center north of SR 518
- Expansion of stormwater/industrial wastewater infrastructure
- Construction of stormwater management facilities and storm drainage vaults
- Installation of utilities (sewer, water, natural gas, fuel, and information technology)
- Central mechanical plant upgrades

Source: Landrum & Brown 2025
Figure 1.2 Proposed Action

1.4 Scope of Analysis

The air quality impact analysis characterizes the affected environment, identifies and quantifies emission sources, and evaluates the dispersion of emissions, cumulative with background concentrations, within the extents of the Proposed Action's meaningful air quality influence to determine the likelihood of significant adverse impacts, such as an exceedance of an applicable air

quality or HHRA threshold. The analysis evaluates several scenarios across multiple years to comprehensively assess the effects of the Proposed Action on air quality and human health. The primary scenarios analyzed include both the construction and operation periods for two alternatives: (i) the Proposed Action and (ii) the No Action Alternative.

For the construction period, the analysis considers all years from 2025 through 2032 to capture the full anticipated eight-year timeline of construction activities. The operational, or future forecast, analysis focuses on two key time frames: the first year following final project buildout (2032) and five years after buildout (2037). This approach enables both immediate and longer-term operational impacts to be assessed.

Generally, there are no specific air quality or human health regulations established solely for SEPA review regarding mobile source emissions. SEPA requires disclosing and evaluating likely significant adverse environmental impacts of proposed actions, but it does not set independent emission limits, concentration standards, or health-based thresholds for mobile sources. As a result, environmental analyses relies on existing regulatory standards, health-based screening levels, and risk benchmarks from other regulatory programs as practical substitutes for assessing significance.

For this SEPA analysis, established air quality standards, acceptable source impact levels (ASILs), screening thresholds, and risk benchmarks serve as reliable proxies to evaluate potential air quality and human health impacts associated with the Proposed Action. Although these thresholds were originally designed for regulatory purposes such as Clean Air Act compliance, air permitting, or toxic air pollutant control, they are commonly used in environmental reviews to provide a consistent, protective, and technically sound framework for determining significance. Using these benchmarks enables evaluation of potential impacts transparently, conservatively, and according to accepted scientific and regulatory practices, while remaining appropriate for SEPA's disclosure-based focus instead of regulatory compliance.

With respect to criteria pollutants, modeled project-related concentrations (including cumulative effects with representative background) are compared against the National Ambient Air Quality Standards (NAAQS), outlined in Section 2.1.5 (Benchmarks) and Table 2.4. For toxic air pollutants and human health evaluations, screening and decision benchmarks are explained in Section 2.1.5.2 and Table 2.5, and applied within HHRA methods and interpretation described in **Section 3.0** (including the discussion on hazard index and cancer risk thresholds). These comparisons collectively help determine whether predicted impacts are likely to be significant under SEPA.

Using these benchmarks offers a well-established and health-protective means of measuring potential impacts and presenting results in a way that aligns with other air quality and health analyses. When benchmarks are based on screening, they are applied conservatively to prioritize quantitative evaluation on pollutants most likely to affect health outcomes, in keeping with the tiered evaluation framework detailed later in this report.

1.4.1 Construction

The construction analysis identifies and quantifies construction-related emissions sources for each year of construction, which was analyzed over eight years, between 2025 and 2032, in the Final EA. While the

actual construction dates are currently unknown, these years were retained in this analysis because they provide a conservative assessment of potential impacts. Exhaust emissions from construction equipment tend to decrease in future years because of equipment turnover and improvements in engine technology; therefore, by retaining the original assessment years, emissions would not be unintentionally reduced by adjusting the analysis to different years. The annual construction emission inventories developed in the Proposed Action's Final EA, conducted pursuant to the National Environmental Policy Act (NEPA), were used for this analysis. Concentrations were estimated using dispersion modeling of the annual construction emissions inventories for the identified sources for each pollutant over the project schedule.

1.4.2 Operations

Operational emissions were quantified for first year after final project buildout (2032) and five years after buildout (2037). The annual emission inventories developed in the Proposed Action's Final EA were used in this analysis for certain sources; however, the aircraft study was upgraded to the most current version of the FAA's Aviation Environmental Design Tool (AEDT), available at the time of the analysis, version 3g. Dispersion modeling of Proposed Action–related operational emissions was then completed.

2.0 Air Quality

2.1 Methodology

2.1.1 Criteria Pollutants

Six criteria pollutants, defined in the U.S. Environmental Protection Agency's (EPA's) Title 40, Code of Federal Regulations, Part 50 implementing regulations for the Clean Air Act (CAA), were evaluated for the Proposed Action's construction and operational activities. These pollutants include:

- Carbon monoxide (CO)
- Nitrogen dioxide (NO_2)
- Particulate Matter
  - With diameter less than or equal to 10 micrometers (PM_{10})
  - With diameter less than or equal to 2.5 micrometers ($PM_{2.5}$)
- Sulfur dioxide (SO_2)
- Lead (Pb)

Ozone (O_3), while also being a criteria pollutant, was not individually modeled because it is a secondary pollutant that is not emitted directly from sources associated with the Proposed Action.[1] The following subsections provide information regarding the health effects of the six criteria pollutants that were evaluated in the air quality analysis.

2.1.1.1 Carbon Monoxide

CO is an odorless, colorless gas that is toxic. It is formed by the incomplete combustion of fuels. The primary sources of this pollutant in King County are automobiles and other sources that burn fossil fuels. Breathing air with high concentrations of CO reduces the amount of oxygen in the blood, causing heart difficulties in people with chronic diseases, reduced lung capacity, and impaired mental abilities (EPA 2025a).

2.1.1.2 Nitrogen Dioxide

NO_2 is a reddish-brown to dark brown gas with an irritating odor. NO_2 forms when nitric oxide (NO) reacts with atmospheric oxygen. The primary source of NO_2 is the combustion of fuel. Significant sources of NO_2 at airports are boilers, aircraft operations, and vehicle movements. NO_2 emissions from these sources are highest during high-temperature combustion, such as aircraft takeoff mode. NO_2 may produce adverse health effects, such as nose and throat irritation, coughing, choking, headaches, nausea, stomach or chest pains, and lung inflammation (e.g., bronchitis, pneumonia) (EPA 2026a).

[1] Ground-level O_3 forms in the atmosphere through complex photochemical reactions involving precursor pollutants—primarily nitrogen oxides (NO_x) and volatile organic compounds (VOCs)—in the presence of sunlight. This process is applicable at the regional scale at which ozone chemistry occurs; therefore, project-level modeling is not an appropriate, reliable, or informative method for predicting indirect changes to regional or localized O_3 concentrations.

2.1.1.3 Particulate Matter and Fine Particulate Matter

Particulate matter consists of solid and liquid particles of dust, soot, aerosols, and other matter small enough to remain suspended in the air for a long period of time. Particles smaller than 10 micrometers (i.e., PM_{10} and $PM_{2.5}$) represent that portion of particulate matter thought to signify the greatest hazard to public health (EPA 2010a). PM_{10} and $PM_{2.5}$ can accumulate in the respiratory system and are associated with a variety of negative health effects. Exposure to particulate matter can aggravate existing respiratory conditions, increase respiratory symptoms and disease, decrease long-term lung function, and possibly cause premature death. Segments of the population that are most sensitive to the negative effects of particulate matter in the air are older adults, individuals with cardiopulmonary disease, and children (EPA 2025b).

A portion of the particulate matter in the air comes from natural sources, such as windblown dust and pollen. Human-made sources of particulate matter include fuel combustion, automobile exhaust, field burning, cooking, tobacco smoking, factories, and vehicle movement, or other human-made disturbances on unpaved areas. Fugitive dust generated by construction activities is a major source of suspended particulate matter. Secondary formation of particulate matter may occur in some cases where gases, such as sulfur oxides (SO_x) and NO_x, interact with other compounds in the air to form particulate matter. In the Puget Sound area, both volatile organic compounds (VOCs) and ammonia are also considered precursors to $PM_{2.5}$.

Secondary sources of particulate matter, SO_x and NO_x, are also major precursors to acidic deposition (acid rain). Human health concerns from acid rain include effects on breathing and the respiratory system, damage to lung tissue, and premature death. Small particles can penetrate sensitive parts of the lungs and can cause or worsen respiratory disease. NO_x has the potential to change the composition of some species of vegetation in wetland and terrestrial systems, create the acidification of freshwater bodies, impair aquatic visibility, create eutrophication of estuarine and coastal waters, and increase the levels of toxins harmful to aquatic life.

2.1.1.4 Sulfur Dioxide

SO_x are formed when fuel containing sulfur (typically coal and oil) is burned, as well as during other industrial processes. The term “sulfur oxides” accounts for distinct but related compounds, primarily SO_2 and sulfur trioxide. As a conservative assumption for this analysis, it was assumed that all SO_x are emitted as SO_2; therefore, SO_x and SO_2 are considered equivalent in this document. Higher SO_2 concentrations are usually found near large industrial facilities.

Physical effects of SO_2 include temporary breathing impairment, respiratory illness, and aggravation of existing cardiovascular disease. Children and older adults are most susceptible to the negative effects of exposure to SO_2 (EPA 2026b).

2.1.1.5 Lead

Pb is a naturally occurring and an industrial contaminant metal that is present in the air primarily as fine particulate matter. Airborne Pb is emitted from sources such as the combustion of Pb-containing fuels, metal processing and smelting operations, waste incineration, and the resuspension of contaminated soil and dust. Although the use of leaded motor vehicle gasoline has been phased out in the United States, legacy emissions remain an important source of airborne Pb, particularly near industrial areas.

Sources of Pb emissions associated with airport activity include combustion of leaded aviation gasoline used in piston-engine aircraft and trace fractions of Pb present in Jet A aircraft fuel.

Exposure to Pb in air can result in a wide range of adverse health effects, even at low concentrations. Pb affects multiple organ systems and is particularly harmful to children, because it can interfere with neurological development, resulting in reduced intelligence, learning difficulties, behavioral problems, and impaired growth. In adults, Pb exposure is associated with increased blood pressure, cardiovascular disease, kidney damage, and reproductive effects. There is no known safe level of Pb exposure, and children, pregnant women, and older adults are the populations most sensitive to the health effects of airborne Pb.

2.1.2 Additional Pollutants of Interest

Additional pollutants of interest include total organic gases (TOG) and VOC. Modeled ground-level concentrations of these pollutants were used to determine individual organic toxic air pollutant (TAP) concentrations, essential to the HHRA.

2.1.2.1 Toxic Air Pollutants of Concern

The selection of TAPs of concern was based on FAA and EPA guidance (FAA 2009; EPA & FAA 2009a, 2009b), including the TAPs that are in the AEDT database. In addition, the Washington Department of Ecology (WADOE) identifies 21 priority TAPs for the State of Washington (WADOE 2008). Finally, specific inorganic TAPs have been identified as trace constituents of Jet A fuel (Shumway 2000).

The list of TAPs of concern identified was developed using these lists, modified to address those pollutants likely to be emitted from the project sources. Common TAPs not likely to be emitted from project sources include wood smoke, chlorinated compounds, and ethylene oxide. This initial list of TAPs was further refined to include only TAPs with WADOE ASILs, de minimis emissions, or small quantity emission rates (SQERs) (Washington Administrative Code [WAC] 2019a). **Table 2.1** provides the resulting list of TAPs of concern evaluated in this HHRA.

Table 2.1 Initial List of Toxic Air Pollutants of Concern for the Sustainable Airport Master Plan

TAP	Type	TAP	Type
Acetaldehyde	VOC	1,2,4-Trimethylbenzene	VOC
Acrolein	VOC	Xylene (total)	VOC
Benzene	VOC	Naphthalene	PAH
1,3-Butadiene	VOC	Diesel PM	Diesel Exhaust
Ethylbenzene	VOC	Arsenic	PM-Metal
Formaldehyde	VOC	Chromium VI	PM-Metal
Isopropylbenzene (Cumene)	VOC	Copper	PM-Metal
Methyl alcohol	VOC	Lead	PM-Metal
Phenol	VOC	Manganese	PM-Metal
Propionaldehyde	VOC	Nickel	PM-Metal
Propylene	VOC	Selenium	PM-Metal

TAP	Type	TAP	Type
Styrene	VOC	Vanadium[1]	PM-Metal
Toluene	VOC	Sulfates	PM-Inorganics

Note:
[1] Although vanadium is included in the initial TAPs list, the speciation profiles used for the emission sources do not contain vanadium; therefore, vanadium was not considered further in this analysis.
Key: PAH = polycyclic aromatic hydrocarbons

2.1.3 Airport Emission Source Estimation Methodologies

Analysis of criteria pollutant emissions for this study began with the information and assumptions used to develop the emissions inventories presented in the Final EA for the SEA SAMP NTPs (Landrum & Brown 2024a). Emission sources used as inputs in the dispersion modeling include:

- Aircraft engines during landing and takeoff cycle (LTO), and during engine runups
- Auxiliary power units (APUs)
- Ground support equipment (GSE)
- Ground access vehicles (on-road motor vehicles), travel on roads and in parking lots
- Stationary sources (boilers, heaters, diesel generators, and fuel farm tankage)
- Construction activities

No changes were made to the emissions estimation methodologies, data sources, or resultant inventories prepared for and presented in the Final EA except for aircraft, APUs, and stationary sources, which were influenced by the modeling refinements between the prior version of FAA's AEDT model used in the Final EA and the updated version used in this analysis.

2.1.3.1 Aviation Environmental Design Tool Version Changes

AEDT 3f was used to estimate emissions for the Final EA and was the current version of the model available at the time its analysis was started. For this assessment, the model was updated to AEDT 3g because it represented the most current and scientifically accurate model version when the analysis was started.[2]

AEDT 3g includes a set of targeted technical updates that refine emissions inventory development and dispersion modeling relative to version 3f. These updates improve consistency with current FAA-accepted data sources and EPA-approved methods, while maintaining the same overall regulatory framework and impact determination approach used in environmental analyses. Compared to AEDT 3f, AEDT 3g incorporates the following specific aircraft-related emissions updates (FAA 2024a):

- Refined fuel burn calculations driven by updated aircraft performance modeling inputs (including expanded use of Base of Aircraft Data [BADA] Version 4 where available) that directly affect emission rates for NO_x, CO, VOC, SO_2, particulate matter, and carbon dioxide.

[2] Although the FAA has since released AEDT 4a, because the air quality analysis was substantially completed prior to its release, model results produced using AEDT 3g were retained and used throughout this analysis (FAA 2026).

- Updated emissions indices and processing for particulate matter, including explicit calculation of non-volatile particulate matter (nvPM) mass and number, using First-Order Approximation (FOA) Version 4.0 and the mission emissions estimation methodology (MEEM), replacing older or less detailed PM representations in AEDT 3f.
- Updated default fuel sulfur content assumptions for aircraft and airport stationary sources, aligned with more recent EPA and FAA reference data.
- Explicit sulfur-to-sulfate conversion factors used in $PM_{2.5}$ calculations, improving representation of secondary particulate formation compared to the simpler treatment in AEDT 3f.
- Revised emissions modeling for stationary sources (e.g., boilers/heaters, fuel tanks, solvent degreasers, training fires), based on updated EPA-approved methodologies documented in the AEDT 3g Technical Manual.
- Enhanced treatment of GSE emissions, including deterioration effects based on equipment age and updated fuel-specific emission factors, providing more realistic annual inventories than AEDT 3f for airports with significant ground operations.
- New plume-rise modeling option for aircraft sources (American Meteorological Society/Environmental Protection Agency Regulatory Model [AERMOD] ALPHA option), allowing buoyancy and momentum effects to be represented more explicitly for aircraft exhaust where appropriate. AEDT 3f did not include this aircraft-specific plume-rise capability.
- More flexible source characterization, including improved treatment of aircraft emissions as volume sources along curved flight tracks, improving spatial allocation of emissions compared to AEDT 3f.

2.1.3.2 Aircraft Engines

Aircraft engine emissions were estimated using FAA's AEDT (version 3g). Aircraft emissions are primarily dependent on the following parameters:

- Aircraft airframe and engine combinations, including the number of engines for each airframe (aircraft fleet).
- Number of operations by each airframe/engine combination for a given scenario (scenario fleet mix).
- Time spent in each operational mode (approach, landing, taxi-in, taxi-out, takeoff, climb out) for each aircraft/engine combination. In AEDT, the operating modes are defined somewhat differently than in previous airport air quality models. Furthermore, in the emissions inventory produced by AEDT, emissions are cumulative and to isolate emissions from a particular mode, it is necessary to subtract the previous mode from the cumulative emissions. The modes of interest for air quality impacts include:
  - Startup (only used to determine VOC emissions for initial 60 seconds of engine on time).
  - Taxi Out (the increment of this mode was previously referred to as Climb Taxi).

- Climb Ground and Climb Below 1,000 feet (the combined increment of these two modes was previously referred to as Takeoff).
- Climb Below Mixing Height (the increment of this mode was previously referred to as Climbout).
- Descend Below Mixing Height and Descend Below 1,000 feet (the combined increment of these two modes was previously referred to as Approach).
- Descend Ground (the increment of this mode was previously referred to as the Landing Roll and includes Reverse Thrust).
- Taxi In (the increment of this mode was previously referred to as Descend Taxi).

- Aircraft engine emissions for each operational mode.
- Number of aircraft operations for each airframe/engine combination (operations per scenario).

The Final EA for the SEA SAMP NTP summarizes the aircraft fleet, scenario fleet mix, and operations, as well as taxi times (Landrum & Brown 2024b).

Time-in-Mode

The modeling includes the primary modes of local operation, such as engine startup, taxiing, takeoff, climb out, and landing. The time spent in each operational mode is calculated using AEDT with the modeled airport layout, scenario fleet mix, and total operations for each scenario. The takeoff/climb out and approach time-in-mode are based on a mixing height at SEA of 3,084 feet and aircraft-specific AEDT 3g operating profiles.

Consistent with the SEA SAMP NTP Final EA, average aircraft taxi-in and taxi-out times used in the air quality analysis are presented in **Table 2.2**.

Table 2.2 Average Taxi Times

Year/Alternative	Taxi-In	Taxi-Out
2032 No Action Alternative	9 minutes, 26 seconds	21 minutes, 28 seconds
2032 Proposed Action	9 minutes, 12 seconds	21 minutes, 18 seconds
2037 No Action Alternative	9 minutes, 41 seconds	21 minutes, 42 seconds
2037 Proposed Action	9 minutes, 45 seconds	23 minutes, 32 seconds

Source: Landrum & Brown 2024b

Aircraft Engine Emission Factors

The AEDT databases include the aircraft engine emission factors for each engine in the scenario fleet mix. As such, the AEDT emission factors are incorporated into the modeling. The AEDT emission factors are based primarily on the International Civil Aviation Organization (ICAO) Engine Emissions Databank. Once an aircraft engine has been assigned to an airframe in the scenario aircraft fleet, AEDT uses the ICAO engine emission factors for that engine to develop emission estimates for that aircraft's operations.

2.1.3.3 Auxiliary Power Units

Total operating time (hours per year) for aircraft APUs were previously estimated using the AEDT APU assignments to aircraft type (airframes) and are presented in the Final EA for the SEA SAMP NTPs (Landrum & Brown 2024c). As noted in the Final EA, APU usage was based on the Port of Seattle's Rules and Regulations.

2.1.3.4 Ground Support Equipment

Tenant-owned GSE was previously determined by conducting a GSE survey (i.e., field verification and Port of Seattle data) to identify equipment types and usage for passenger and cargo aircraft. The information includes the equipment type, fuel type, and annual fuel consumptions for each scenario. The AEDT model's default GSE were used to assign GSE defaults for general aviation aircraft operations. Port-owned GSE were also included in the GSE inventory for each scenario. The Final EA for the SEA SAMP NTPs presents the results (Landrum & Brown 2024d).

2.1.3.5 Ground Access Vehicles

The roadway (on- and off-airport) motor vehicle annual average daily trips (AADT), roadway segment lengths, average speed per segment, surrogate fleet mix, and annual vehicle miles traveled (VMT) for each scenario are included in the Final EA for the SEA SAMP NTPs (Landrum & Brown 2024f). This information was developed from the transportation study conducted for the Final EA and from Washington Department of Transportation (WADOT) data. The Final EA also presents other parameters that influence vehicular emissions, such as travel distances within airport parking lots.

2.1.3.6 Stationary Sources

Stationary sources at the airport include boilers, heaters, diesel generator engines, and fuel farm tanks. Boiler and heater annual fuel consumption, diesel generator engine size, annual operating hours, hourly fuel consumption rate, and annual aircraft Jet A fuel usage are presented in the Final EA for the SEA SAMP NTPs (Landrum & Brown 2024e).

2.1.3.7 Construction Activities

Construction activities for the Proposed Action were developed for each phase of construction in the Final EA for the SEA SAMP NTPs. The Airport Construction Emissions Inventory Tool (ACEIT) was used in the Final EA to determine construction equipment type, horsepower, load factor, and operating hours for each element and phase. EPA's Motor Vehicle Emission Simulator (MOVES) Version 3 was used to determine the emission factor for each construction equipment type. The Final EA for the SEA SAMP NTPs includes the on-road and non-road construction equipment emission factors and emissions inventories (Landrum & Brown 2024g).

2.1.4 Air Dispersion Analysis

Air dispersion modeling was used to estimate ambient criteria pollutant concentrations for the scenarios described in **Section 1.4** for comparison to applicable concentration thresholds. The predicted incremental difference in concentrations between the Proposed Action and No Action scenarios for each modeled year represents the Proposed Action–related contribution to ambient concentrations. Because the No Action Alternative would not require construction, Proposed Action–related incremental concentrations from construction would be equivalent to the modeled concentrations of the

construction needed to implement the Proposed Action minus zero, effectively equaling the full Proposed Action–modeled construction concentrations.

The air dispersion analysis is performed following FAA, EPA, and WADOE modeling guidelines (FAA 2024b, 2026; EPA 2026d; WADOE 2015). The air dispersion analysis requires the following: 1) selection of the dispersion model, 2) evaluation of potential terrain considerations, 3) selection of appropriate dispersion coefficients based on land use, 4) selection and preparation of meteorological data, 5) identification of emission sources, 6) identification of modeling parameters, 7) selection of receptor locations, and 8) selection of appropriate averaging periods. The following sections provide greater details.

2.1.4.1 Model Selection

The first step in an air dispersion analysis is selecting an applicable model. The required air dispersion model to analyze air quality impacts at airports is the FAA's AEDT program, which uses the EPA's AERMOD modeling system for conducting the dispersion analysis (FAA 2015, 2026). As discussed, AEDT 3g was the current version available when the environmental analysis for SEPA began and the current version of AERMOD is 24142; therefore, these are the versions used for this study's air dispersion analysis.

2.1.4.2 Terrain

Terrain data are used to set the base elevation for each source and each receptor incorporated into the model. Terrain data are incorporated in the analysis using National Elevation Dataset (NED) one-third arc-second data, which is available from the U.S. Geological Survey (USGS n.d.). Receptor elevations are determined using the EPA's AERMAP terrain preprocessor. The coordinate system used in the dispersion modeling analysis was the Universal Transverse Mercator (UTM) system, Zone 10 North, referenced to the World Geodetic System 1984 datum.

2.1.4.3 Land Use

Another important consideration in an air dispersion modeling analysis is the selection of rural or urban dispersion coefficients. Consistent with EPA's preferred procedure for determining coefficients between urban or rural, Auer's method of classifying land use was used to analyze the surrounding region. As recommended in the current modeling guidance in EPA's Guideline on Air Quality Models (40 Code of Federal Regulations [CFR] 51, Appendix W), this method calls for the analysis of a 3-kilometer (km) radius around a study location to determine whether most of the land can be classified as either rural (i.e., undeveloped) or urban (EPA 2026d). EPA guidance indicates that if the land use types within the 3 km radius are composed of 50 percent or more of light or heavy industrial (I1 or I2), small-scale commercial (C1), two-family or multifamily zones (R2 or R3), then urban coefficients are to be used. A 50 percent or more combination of these land use types is more likely to cause a heat island effect, making stricter urban coefficients necessary. If the area is composed of less than 50 percent of the indicated land use types, appropriate rural coefficients are the best choice (EPA 2026d). The area in and around SEA is predominantly suburban. As shown in Figure 1.1, the land use types in the area surrounding SEA are primarily single-family residences (R1) and mixed use (MU). There is some industrial areas (I1/I2); however, it makes up less than 50 percent. Therefore, the rural dispersion coefficients are most suited for use in this study's dispersion modeling and are used throughout the analysis.

2.1.4.4 Meteorological Preprocessing

Meteorological data are a critical input to AERMOD because dispersion of aircraft- and airport-related emissions is strongly influenced by wind speed and direction, atmospheric stability, and vertical mixing conditions. Surface meteorological data are used to characterize near-ground wind fields and turbulence that control plume transport and horizontal dispersion, while upper-air meteorological data are used to define temperature profiles, atmospheric stability, and mixing heights that govern vertical dispersion and plume rise. Together, surface- and upper-air data allow AERMOD to represent the three-dimensional structure of the atmosphere and to simulate worst-case dispersion conditions that are relevant for regulatory compliance and air quality impact assessments.

For SEA, use of airport-specific and regionally representative meteorological data is particularly important because of the complex coastal influences, terrain effects, and seasonal wind patterns that can affect pollutant dispersion and concentration patterns near the airport. Accordingly, surface meteorological data from the SEA Automated Surface Observing System (ASOS), paired with upper-air data from Quillayute, Washington, provide a representative characterization of boundary-layer and regional atmospheric conditions consistent with EPA AERMOD and AERMET guidance for coastal and Pacific Northwest applications. Quillayute is the nearest long-term National Weather Service upper-air station with complete, quality-assured data suitable for regulatory dispersion modeling in western Washington, and its use is consistent with EPA guidance when site-specific upper-air observations are not available. Other available upper-air stations, such as Salem, Oregon, or Spokane, Washington, were not selected because their inland locations and differing terrain influences are less representative of the coastal and marine-influenced atmospheric conditions that govern dispersion in the study area.

The analysis uses five years of meteorological data. January 1, 2020 through December 31, 2024 was the five-year period chosen since it is the most recent five-year period that complies with dispersion modeling data completeness requirements. These data were used as inputs in the AERMET preprocessor along with AERMINUTE and AERSURFACE to produce the intermediate and final meteorological data files for use in the AERMOD dispersion analysis.

AERMET/Meteorological Preprocessing Data Inputs

AERMET is AERMOD's meteorological preprocessor. To perform the meteorological preprocessing, published surface and upper-air data were obtained from National Oceanic and Atmospheric Administration (NOAA). These data include the January 1, 2020 through December 31, 2024 surface dataset from SEA and upper-air dataset from Quillayute Airport for the same period:

- Surface Data:
  - Hourly Integrated Surface Data (ISD): Seattle-Tacoma International Airport (KSEA; Weather Bureau Army Navy [WBAN] Station Number 24233) (NOAA n.d.a)
  - 1-Minute ASOS Data: KSEA; WBAN Station Number 24233 (NOAA n.d.b)
- Upper-Air Data:
  - Quillayute Airport, Forks, Washington (KUIL; USM00072797) (NOAA 2026)

As reported in the AEDT database files, a surface station elevation of 131.98 meters is used for SEA. Additionally, an anemometer height of 10 meters is assumed. Because both the surface- and upper-air data are reported in Greenwich Mean Time (GMT), the time zones for both were adjusted by 8 hours for Pacific Standard Time (PST).

AERMINUTE

AERMINUTE is AERMOD's 1-minute ASOS wind data processor. The AERMINUTE preprocessor was developed to reduce the number of missing and calm hours in AERMET processing by substituting standard hourly observations with winds calculated with ASOS wind data. The current version of AERMINUTE (version 15272) was used in the analysis. While 5-minute ASOS data can be used to supplement the 1-minute data when 1-minute data are missing, this substitution is generally only required for 253 stations with missing 1-minute files from June through December 2013 (EPA 2023). Because SEA is not one of the stations with missing data, 5-minute ASOS data were not used in the analysis. EPA recommends using a minimum wind threshold of 0.5 meters per second (m/s) when processing the 1-minute ASOS data (EPA 2013).

AERSURFACE

AERSURFACE is a land cover data preprocessor tool designed to help determine the surface characteristic values required by AERMET. It calculates the following surface characteristics necessary to run AERMET (Lakes Environmental Software 2020):

1) Albedo (r) is a measure of the reflectivity of incoming solar radiation.
2) Bowen ratio (B_0) is a measure of dryness at the surface, which impacts atmospheric turbulence and dispersion.
3) Surface roughness (z_0) is a mechanical feature that determines the height aboveground where the wind is zero, which has implications for mechanical turbulence.

Recommendations provided in a EPA webinar presentation on AERSURFACE were applied (EPA 2024b). This study uses the current version of AERSURFACE (version 24142). Land use data files, including tree canopy and impervious percentage data inputs, from the USGS's National Land Cover Database (NLCD) were used as inputs. Annual NLCD datafiles that match the meteorological year being processed (or the most recent NLCD datafile available) were used.

The approximate anemometer location was used as the station location within AERSURFACE. The default method for determining surface roughness, ZORAD, was used within a 1 km radius of the anemometer. ZORAD is a setting used in AERMET that tells the model how far away it should look for land-use and surface characteristics, such as vegetation, pavement, or water, when estimating how air mixes near the ground. In simple terms, it defines the size of the area around the weather station that best represents local surface conditions affecting wind and pollutant dispersion.

Other Considerations

The low-wind option to adjust surface friction velocity (ADJ_U*) was used, as recommended in the current modeling guidance in EPA's *Guideline on Air Quality Models* (40 Code of Federal Regulations [CFR] 51, Appendix W), as well as substitutions for missing cloud cover and ambient temperature data (EPA 2026d). **Figure 2.1** shows the wind rose for the preprocessed meteorological data for 2024.

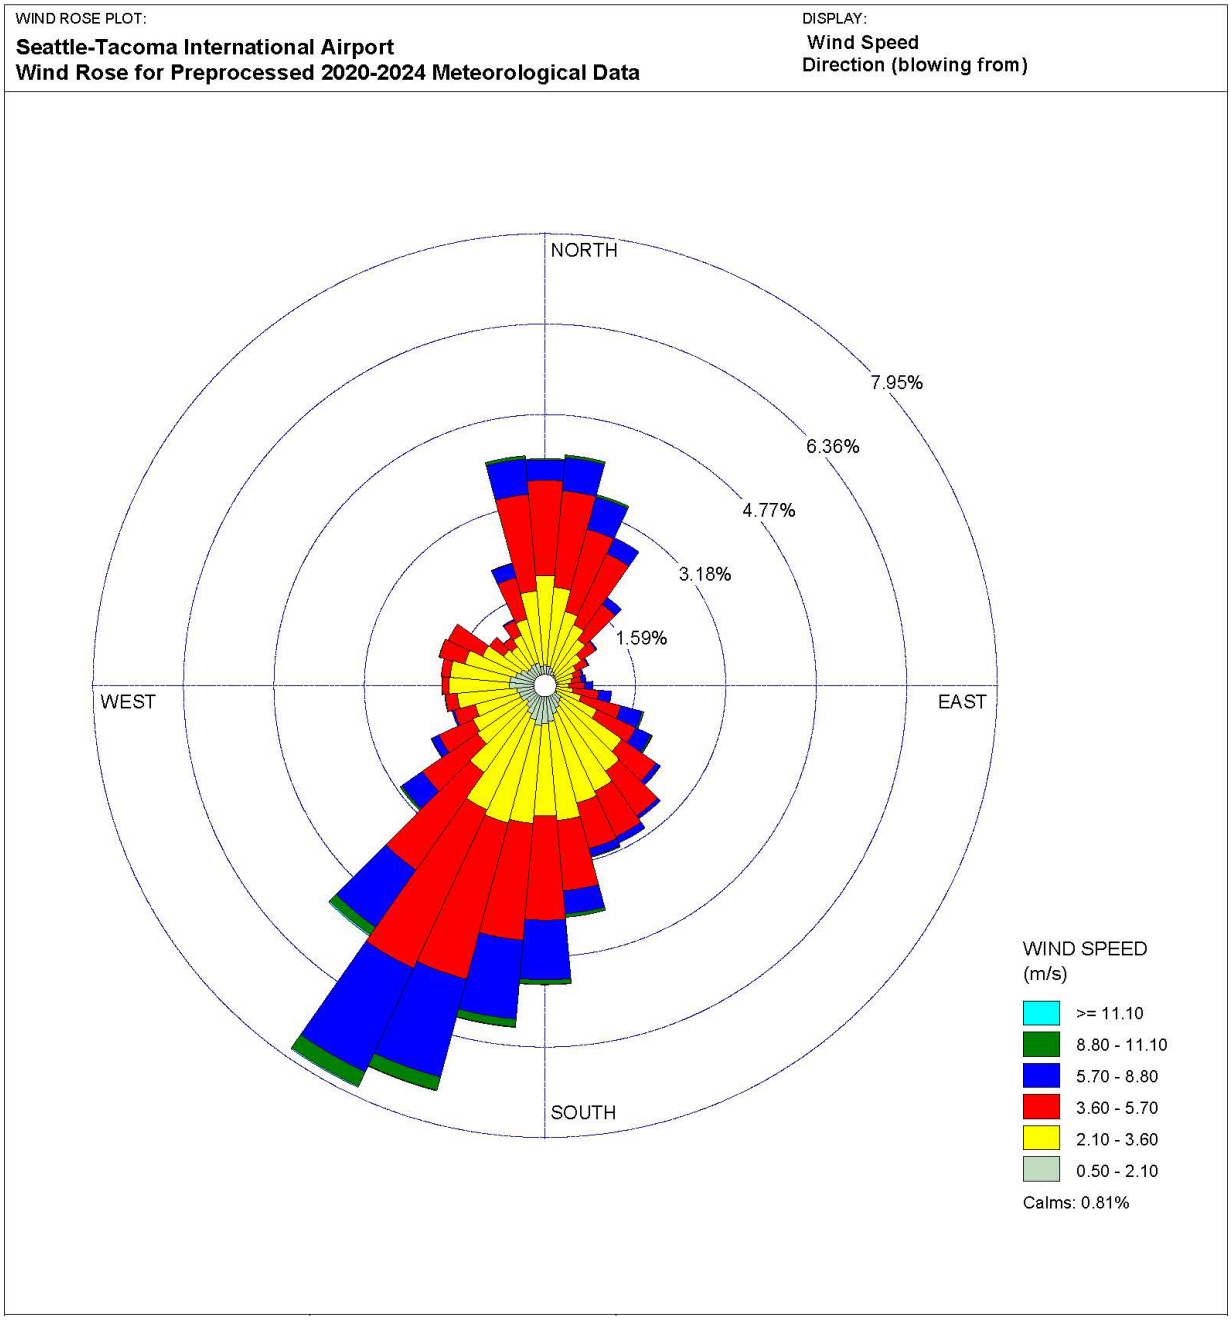

Note: *Figure created using WRPLOT View by Lakes Environmental Software for SEA using 2020–2024 meteorological data.*

Figure 2.1 Wind Rose for Seattle-Tacoma International Airport

2.1.4.5 Additional Model Parameters

Physical and Temporal Distributions

A critical step to enabling the accurate modeling of local concentrations is preparing a representative model of the airport's layout and activity under each scenario.

Construction

For the dispersion modeling of construction emissions, AERMOD area sources were positioned at locations and in polygon geometries consistent with the NTP areas presented in Figure 1.2. Consistent with standard conventions for dispersion modeling of construction sources, fugitive construction dust was modeled using a surface release height (0 meters) and initial vertical dimension of 1 meter, while vehicle exhaust was modeled using a 5-meter release height and initial vertical dimension of 1.4 meters (South Coast Air Quality Management District [SCAQMD] 2008).

Temporally, the total annual construction emissions associated with each NTP were distributed evenly across their respective phasing schedule, presented in Exhibit 6-1 of the Final EA for the SAMP SEA NTP (Landrum & Brown 2024g). Construction shifts of 12 working hours per day for 5 days each week were assumed.

Operations – Aircraft and Auxiliary Power Units

Aircraft engine emissions occur in operating modes as described in **Section 2.1.3.2**. AEDT 3g was used to simulate the physical movement of aircraft on the airfield and along flight tracks. This simulation generates physical and temporal sources across the airfield representing aircraft operation along runways and taxiways, at gates, or at various stages of the takeoff, climb out, descent, and landing modes, emitting pollutants at distinct positions and heights that strongly control near-field concentration gradients and downwind impacts.

AEDT 3g allows the user to supply specific airfield geometries, including taxi paths and flight tracks, to be used in dispersion modeling. For this air quality analysis, AEDT airfield layouts were assembled to enable AEDT to use the taxi flow patterns presented in Figures 9 through 12 of Appendix A, Forecast and Airport Operational Assumptions, of the SEA SAMP NTP Final EA (Landrum & Brown 2024h). All flight tracks included in the noise modeling performed for the SEA SAMP NTP Final EA that included at least one full aircraft operation were also used (Landrum & Brown 2024i).

To assign the appropriate spatial and temporal distribution of aircraft activity on the airfield, each aircraft operation (arrival or departure) was grouped into combinations that represent the aircraft's class (e.g., passenger air carrier, cargo air carrier, or other). Quarter-hour-of-day, day-of-week, and month-of-year temporal profiles for each of the aircraft groups were developed from Aviation Noise and Operations Monitoring System (ANOMS) aircraft operational data for the SEA SAMP NTP Final EA's existing conditions in 2022. These group temporal profiles were applied to all modeling scenarios. The distribution of aircraft utilization of specific runways for arrivals and departures was carried forward from the noise modeling performed for the SEA SAMP NTP Final EA, consistent with the flight track utilizations.

The dispersion of emissions from aircraft operations at the airport are modeled as AERMOD volume source types generated by AEDT 3g. While on the ground, the release height is set to the FAA default of 12 meters, consistent with light detection and ranging (lidar) data from studies conducted to assess plume rise from aircraft prior to takeoff (Wayson et al. 2004). Takeoff, climb out, and approach sources are modeled at higher elevations aboveground, based on aircraft-specific operating parameters for each aircraft and the aircraft's simulated elevation within 200-meter length and width and 20-meter elevation spaced volumes along all defined aircraft flight tracks. Flight track sources further than 5 km

from the airport property boundary were filtered out of the dispersion analysis because of their high release heights and corresponding negligible influence on local concentrations.

AEDT 3g assumes APU operations occur at aircraft gates. APU activity was assumed to occur prior to taxi-out or following taxi-in for each operation.

Operations – Ground Support Equipment and Ground Access Vehicles

Emissions associated with GSE were distributed evenly across modeled gate locations using AERMOD polygon area sources. GSE activity was assumed to correspond to aircraft activity; thus, aircraft temporal profiles were also assigned to GSE dispersion sources. GSE were modeled using release heights of 4.92 meters and initial vertical dimensions of 3 meters.

Emissions associated with ground access vehicles were distributed evenly using volume sources across the roadway segments and in area source parking locations from the SEA SAMP NTP EA Surface Transportation analysis (Landrum & Brown 2024j). Ground access vehicle activity was assumed to correspond to aircraft activity; thus, aircraft temporal profiles were also assigned to ground access vehicle dispersion sources. Ground access vehicles were modeled using release heights of 1.3 meters and initial vertical dimensions of 1.21 meters for gasoline-fueled light-duty vehicles and release heights of 3.4 meters and initial vertical dimensions of 3.16 meters for diesel-fueled medium- and heavy-duty vehicles. The heights used in the modeling are consistent with the parameters described in the EPA's PM Hot-Spot Guidance (EPA 2021) for light- and heavy-duty vehicles and provide the best current guidance for modeling roadways.

Operations – Stationary Sources

Stationary sources were positioned on the airfield at their specific locations, with annual emissions distributed evenly across the operating year.

Atmospheric Nitrogen Oxides Chemistry

NO_2 concentrations from construction activities were evaluated using the ozone limiting method (OLM) within AERMOD. OLM is an EPA-approved Tier 3 approach that estimates the conversion of NO_x to NO_2 by explicitly accounting for the availability of ambient O_3. OLM provides a more realistic yet conservative representation of short-term NO_2 impacts compared to methods that use fixed conversion ratios, such as the Tier 2 Ambient Ratio Method, Version 2 (ARM2), because it directly incorporates ambient O_3 levels to determine the extent of NO_x-to-NO_2 conversion. This approach is preferred over ARM2 when background O_3 data are available, because it considers the actual chemical environment and yields a more accurate estimate of NO_2 concentrations in situations where O_3 availability is a limiting factor.

OLM and the plume volume molar ratio method (PVMRM) are both EPA-approved Tier 3 screening techniques for estimating NO_2 concentrations from NO_x emissions in AERMOD. OLM is generally preferred for modeling low-level, nonpoint sources such as construction equipment, area sources, and mobile sources, where emissions occur near ground level and lack defined stack parameters. In contrast, PVMRM is designed for elevated point sources with well-characterized stack emissions, where entrainment of ambient O_3 into the plume can be more accurately estimated. EPA's *Technical Support Document (TSD) for NO_2-related AERMOD modifications* notes that while both methods assume instantaneous and irreversible conversion of NO to NO_2 via reaction with O_3, PVMRM attempts to model

O_3 entrainment within the plume volume, whereas OLM assumes full mixing with ambient O_3 (EPA 2015). For construction projects involving diesel equipment and diffuse emissions, OLM provides a more appropriate and conservative approach consistent with EPA's *Guideline on Air Quality Models* (40 CFR 51, Appendix W) (EPA 2026d).

Hourly background O_3 concentrations used in the OLM analysis were obtained from the Seattle – Beacon Hill monitoring station. This site provides long-term, regulatory-grade O_3 data representative of regional oxidant conditions affecting SEA. Use of Beacon Hill data is appropriate for evaluating construction emissions at SEA because O_3 concentrations are regionally homogeneous at the scale relevant to plume transport and chemical conversion.

Construction Equipment Assumptions

Construction emissions were assumed to originate exclusively from diesel-fueled construction equipment, consistent with anticipated airport construction practices. Diesel engines emit NO_x primarily as NO, with a smaller fraction emitted directly as NO_2. This emission profile supports the application of OLM, as NO_2 formation is driven largely by atmospheric chemistry rather than direct emissions.

Construction equipment emissions were developed using ACEIT, which is documented in Airport Cooperative Research Program Report 102 (Transportation Research Board 2014) and was designed to provide consistent airport construction emissions inventories using EPA-recognized non-road emission factor frameworks (e.g., MOVES/NONROAD lineage). ACEIT generates total NO_x emissions for diesel construction equipment rather than speciated NO and NO_2. As a result, application of a single fleet-average in-stack NO_2/NO_x ratio is necessary and appropriate when using Tier 3 NO_2 chemistry options in AERMOD. EPA's Support Center for Regulatory Atmospheric Modeling guidance explicitly recognizes this need and states that in-stack ratio (ISR) values should be selected and documented on a case-by-case basis for the modeled source category (EPA 2026c). This approach is suitable for SEPA assessments, because there is no prescriptive method specified for implementing ISR in these analyses; instead, a reasonable approach is one that is transparent, scientifically supported, and justified based on the characteristics of the emission sources and the best available regulatory guidance.

In-Stack Ratio Selection

The conversion of NO_x to NO_2 from construction activities was evaluated using EPA-approved Tier 3 screening concepts implemented in AERMOD. Consistent with EPA's NO_2 modeling framework, an upper-bound equilibrium NO_2/NO_x ratio of 0.9 was applied to represent the maximum fraction of NO_x that may exist as NO_2 under favorable atmospheric conditions. EPA's TSD for NO_2-related AERMOD modifications explains that the ARM2 response curve explicitly applies a maximum limit of 0.9 on the NO_2/NO_x ratio and discusses this value as a conservative upper bound within EPA's screening methodology, including for Tier 3 methods like OLM (EPA 2015).

Directly emitted NO_2 was represented using a single fleet–average in-stack NO_2/NO_x ratio of 0.15 for all construction equipment. EPA guidance requires that Tier 3 methods such as the OLM specify an in-stack ratio and emphasizes that there is no universal default value; instead, the selected ratio is justified based on source characteristics and the specific application. The EPA NO_2 TSD further documents that early OLM screening formulations commonly assumed approximately 0.10 of NO_x is emitted directly as NO_2 for combustion sources, indicating that values on the order of 10 percent are reasonable for diesel

combustion exhaust. Selection of 0.15 therefore represents a conservative fleet-average assumption that remains within the range supported by EPA's historical screening concepts while accounting for variability in engine technologies and operating conditions. Additionally, a review of the EPA's in-stack ratio database (EPA 2026c) for diesel-fueled internal combustion engines shows an average in-stack ratio of less than 0.1 for diesel internal combustion engine sources, further supporting the use of 0.15 as a reasonable estimate.

Taken together, the use of a 0.9 equilibrium ratio and a 0.15 single fleet–average in-stack ratio, in combination with ACEIT-based diesel construction emissions, provides a technically consistent and conservative representation of NO_2 formation, consistent with EPA's NO_2 modeling guidance and accepted regulatory practice.

Aircraft Plume Rise

AERMOD's aircraft plume-rise implementation was developed to better represent dispersion from aircraft exhaust by accounting for the physical processes that drive how these plumes behave after release. Pandey et al. (2023) developed the aircraft plume-rise formulation to support FAA's use of AERMOD for airport studies, and EPA subsequently incorporated that work into AERMOD through an EPA–FAA collaboration (Porter 2023, 2024). As Pandey et al. describe in their formulation, "aircraft emissions have horizontal momentum corresponding to the forward thrust of the aircraft. In addition, they have buoyancy corresponding to the heat rejected from the aircraft engine" (Pandey et al. 2023). These plume behaviors are well documented in lidar studies and technical reports of aircraft exhaust at major international airports (Wayson et al. 2003, 2004). Without use of the plume-rise implementation, Pandey et al. caution that model predictions "are likely to lead to overestimates of ground-level concentrations because they do not account for the increase of plume height with distance from the source" (Pandey et al. 2023).

AERMOD's current aircraft plume-rise capability is implemented as an ALPHA option flag and therefore not currently approved for federal regulatory use (EPA 2024a). However, the use of the plume-rise function is appropriate for other technical analyses, like SEPA, because if is more scientifically accurate than if plume rise was not considered and designed for the type of analysis included in this report. EPA describes the implementation as an effort to "improv[e] AERMOD performance by including plume rise for area and volume aircraft emission sources" and to support "potential refined source characterizations for $PM_{2.5}$ and NO_2 modeling with AERMOD for airports" (Porter 2024, 2023). EPA specifically lists CAA General Conformity, State Implementation Plan (SIP) planning, attainment demonstrations, and similar assessments as areas of analysis where this refined source characterization would be applicable (Porter 2024, 2023).

The current AERMOD aircraft plume-rise approach has been evaluated against measured air quality data from Los Angeles International Airport (LAX) (Pandey et al. 2024). In their 2024 peer-reviewed study, Pandey et al. (2024) evaluated the current AERMOD implementation and reported composite performance statistic improvements of 71% for NO_x in summertime conditions, with more modest improvements of 12% for NO_x in winter conditions; similar improvements were also identified for SO_2—19% in summer and 6% in winter. Pandey et al. (2024) concluded that use of plume rise "is likely to improve AERMOD's ability to estimate the impact of airport emissions on surrounding air quality."

Lead Concentrations

The version of AEDT (version 3g) used in the analysis does not natively support dispersion modeling for ground-level Pb concentrations. Therefore, ground-level Pb concentrations were estimated using SO_2 as a proxy for Pb, and the ratio of Pb emissions to SO_2 emissions from piston-engine aircraft was used to convert SO_2 concentrations to Pb concentrations.

Pb emissions from aircraft operations were estimated using a fuel-based approach. Pb emissions originate almost exclusively from the combustion of leaded aviation gasoline (100 low lead [100LL]) used in piston-engine aircraft and, therefore, scale directly with fuel consumption. Trace fractions of Pb are also present in Jet A; thus, Pb emissions from jets exhaust are also directly proportional with fuel consumption. SO_2 emissions are calculated in AEDT as a direct function of fuel burn and fuel sulfur content and, accordingly, SO_2 emission can serve as a surrogate to estimate Pb concentrations though application of a Pb-to-SO_2 mass ratio to modeled SO_2 concentrations. For piston aircraft, a ratio of 0.56 reflects the relative Pb-to-sulfur content of 100LL aviation gasoline under AEDT 3g default fuel property assumptions. For jet aircraft, a trace fuel fraction of 11 parts per billion (ppb) Pb in fuel was used (Shumway 2000).

2.1.4.6 Receptor Locations

Locations of receptors are determined such that peak ambient air pollutant impacts associated with each scenario are identified. SEA property line receptors and community receptors around SEA are included in the analysis. A receptor grid was developed under the following stepwise approach:

1) Outward from the Airport's center in 100-meter spacings, receptors were placed out to a maximum radius from the airport of 3,000 meters. Because the modeling did not show that maximum concentrations could occur beyond this radius, additional receptor placement was not required.
2) For each modeled emission source, receptors were placed radially in incrementally increasing spacings:
    a) From meters 0 to 150 from the source, 25-meter spacings were used.
    b) From meters 150 to 400 from the source, 50-meter spacings were used.
    c) From meters 400 to 1,000 from the source, 100-meter spacings were used.
3) Receptors that fall within the exclusion zone of an AERMOD volume source (e.g., roadway) were shifted directly away from the applicable source for the minimum possible distance to be outside of the exclusion zone.[3]
4) Those receptors generated by Steps 1 through 3, which fall within the radial grids of more closely spaced grids, and any receptors falling on airport property, are filtered out.

[3] Volume source exclusion zones in AERMOD are a defined radius around a volume source where the model suppresses near-field concentrations to avoid unrealistic plume overlap or double-counting of emissions. They help ensure that dispersion is calculated only outside a defined buffer where the model's assumptions about plume spread are considered valid.

5) Receptors with no greater than 100-meter spacing were placed along the airport's property boundary; the spacing is generally lower than 100 meters to preserve property boundary geometry.

6) Discrete sensitive receptors for identified sensitive land uses, including hospitals, schools, day care centers, and convalescent homes, are added at their precise locations.

7) Discrete sensitive receptors that fall within the exclusion zone of an AERMOD volume source (e.g., roadway) were shifted directly away from the applicable source for the minimum possible distance to be outside of the exclusion zone.

Figure 2.2 shows the identified receptors in this study. The property boundary is consistent with that used in the Final EA. Flagpole receptors, or receptors at the height of 1.8 meters, were not used. Instead, ground-level concentrations were modeled.

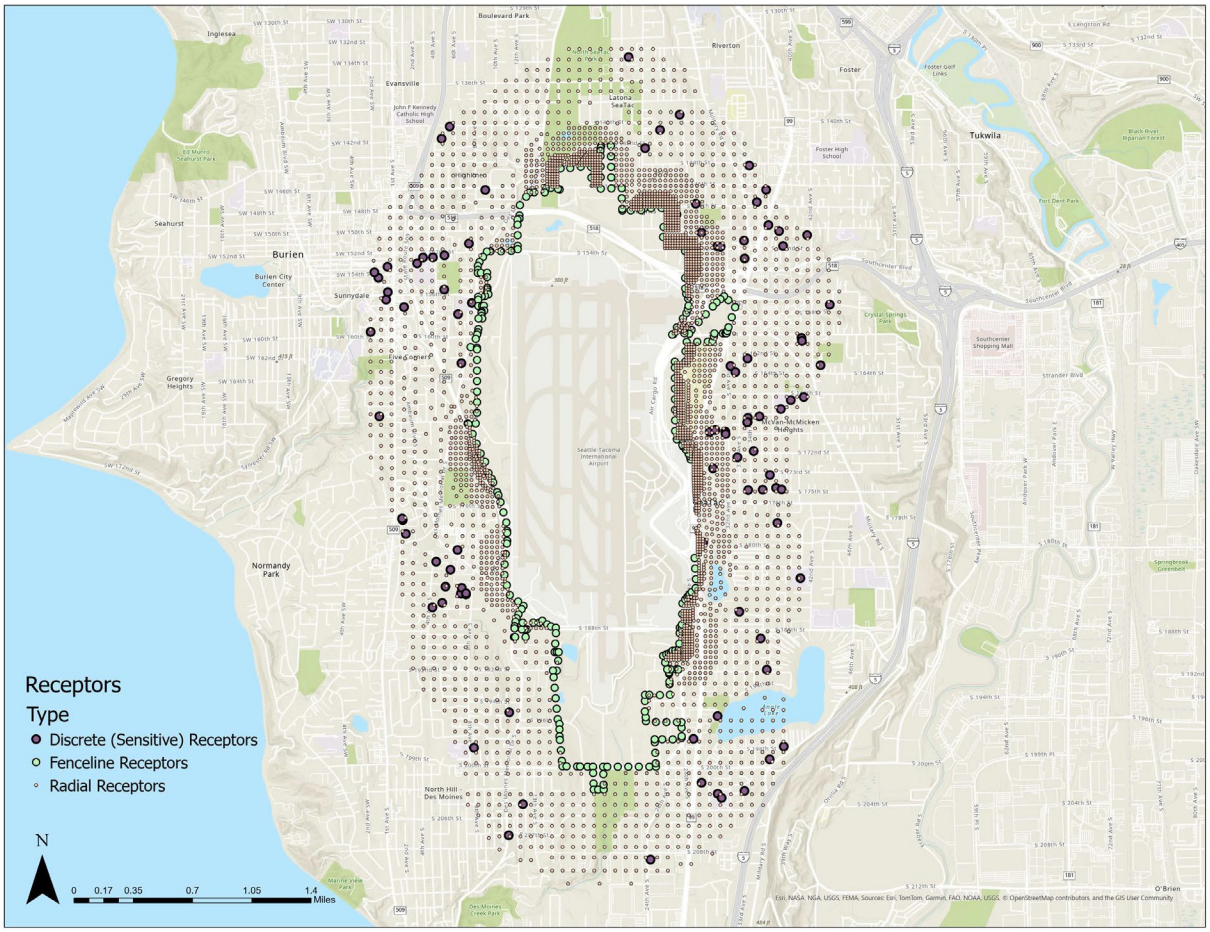

Figure 2.2 Receptor Locations

2.1.4.7 Averaging Periods

Calculation of criteria pollutant concentrations is based on specific averaging periods that are assigned in the AERMOD model. Modeled averaging periods include those corresponding to the NAAQS for each criteria pollutant, and to 1-hour, 24-hour, and annual averaging periods for VOC and TOG, as well as for

PM_{10} and SO_2 in addition to their NAAQS averaging periods. **Table 2.4** in **Section 2.1.5.1** provides these averaging periods.

The specific way in which the background data used in the analysis and the resulting concentrations at each averaging period are evaluated is referred to as the design value, which is specific for each pollutant and averaging period included in the NAAQS. The following paragraphs describe how these data requirements are addressed in the analysis.

NO_2 Guidance

For the 1-hour NO_2 averaging period, modeled concentrations were processed to reflect the form of the NAAQS, defined as the 3-year average of the annual 98th percentile of the daily maximum 1-hour NO_2 concentrations. Consistent with the Appendix W guidelines, dispersion modeling was conducted using five years of representative National Weather Service (NWS) meteorological data (or at least one year of site-specific data), and the resulting annual 98th percentile 1-hour concentrations was averaged across all modeled years. The 5-year average of modeled concentrations (based on 5 years of representative meteorological data) serves as an unbiased estimate of the 3-year average, as defined by the NAAQS; therefore, EPA does not recommend a "rolling average" of 3 years of modeled results. The method used in this analysis is consistent with the recommendations in the guidance document.

For cumulative impact assessments, EPA guidance (EPA 2010b) recommends a first-tier approach in which the highest observed 1-hour NO_2 design value concentration from a representative ambient monitor is added to the modeled design value. This approach is preferred over combining modeled and monitored percentiles, which could understate the true cumulative distribution. Additional refinements, such as temporal pairing of modeled and monitored values, may be considered on a case-by-case basis with adequate justification and approval by the reviewing authority.

$PM_{2.5}$ Guidance

EPA recommends that the representative monitored $PM_{2.5}$ 24-hour design value, rather than the overall maximum monitored background concentration, be used when determining the $PM_{2.5}$ background concentration in its *Guidance for $PM_{2.5}$ Permit Modeling* (EPA 2014a). As such, the 3-year average of the annual average monitored $PM_{2.5}$ concentrations was used for the annual average background concentration. Additionally, the 3-year average of the annual 98th percentile 24-hour value was used for the 24-hour average background concentration. As previously described for NO_2, the 5-year average modeled concentration from 5 years of representative meteorological data was used in the analysis.

When evaluating compliance with the NAAQS, EPA describes a tiered approach, with the first tier being "that the modeled design value be added to the monitored design value from a representative monitor." This means that the 5-year average of the 98th percentile of modeled annual 24-hour concentrations would be added to the monitored background values. The second tier involves combining the monitored and modeled $PM_{2.5}$ concentrations on a seasonal or quarterly basis; however, the first tier provides a conservative assessment and the second tier is not recommended for this analysis.

Therefore, to demonstrate compliance with the $PM_{2.5}$ NAAQS, the 5-year average of the 24-hour and annual average modeled concentrations were added to the respective 3-year averages of the monitored background concentrations (i.e., modeled design value added to monitored design value).

SO_2 Guidance

For the 1-hour SO_2 NAAQS, modeled concentrations were evaluated consistent with the standard's form, defined as the 3-year average of the annual 99th percentile of the daily maximum 1-hour SO_2 concentrations, with a level of 75 ppb. In accordance with the Appendix W guidelines, dispersion modeling used five years of NWS meteorological data (or a minimum of one year of site-specific data), and the resulting annual 99th percentile concentrations were averaged across the modeled years to approximate the 3-year monitored design value.

For cumulative analyses, EPA recommends a conservative first-tier background approach whereby the single-highest monitored, 1-hour SO_2 background concentration from a representative monitor is added to the modeled design value, consistent with the form of the NAAQS (EPA 2010c). This approach avoids potential underestimation that could result from percentile-based combinations of modeled and monitored data. More refined background treatments, including limited temporal pairing, may be applied with appropriate justification and concurrence from the reviewing authority.

Background Data Approach Summary

For this analysis, background represents existing concentrations of criteria pollutants in the ambient environment that are not attributed to the Proposed Action or No Action Alternative. Including this information is essential for a comprehensive assessment of cumulative impacts, as it enables total pollutant concentrations predicted by dispersion modeling reflect both project-related emissions and existing environmental conditions.

Table 2.3 summarizes the methods for calculating the monitored background concentrations that were used to evaluate the project's compliance with the NAAQS. The calculated background levels are consistent with how the design values for each pollutant are calculated, which are summarized as follows:

- CO, NO_2, SO_2, and PM_{10}: Maximum background concentration from the past 3 years of monitoring data for each averaging period
- $PM_{2.5}$: Maximum of the 3-year average for each averaging period

In the case of PM_{10}, the NAAQS allows one exceedance over the past 3 years, thereby allowing the second highest monitored value to be used for the background concentration. However, to be conservative, the highest value was used instead.

Table 2.3 Method to Calculate Background Concentration for National Ambient Air Quality Standard Evaluation

Pollutant	Averaging Period	NAAQS Form Description	Calculated Background Concentration[1]	Modeled Concentration[2]
CO	1-hour	Not to be exceeded more than once per year	Highest recorded hourly concentration from the most recent 3 years of data	1st Highest High (H1H)
	8-hour	Not to be exceeded more than once per year	Highest recorded 8-hour concentration from the most recent 3 years of data	1st Highest High (H1H)
NO_2	1-hour	Annual 98th percentile of 1-hour daily maximum concentrations, averaged over 3 years	Maximum of the 8th highest hourly concentrations for the most recent 3 years of data	8th Highest High (H8H)
	Annual	Annual mean	Maximum average annual concentration over 3 years of data	1st Highest High (H1H)
$PM_{2.5}$	24-hour	98th percentile, averaged over 3 years	Average of the 8th highest hourly concentrations for the most recent 3 years of data	8th Highest High (H8H)
	Annual	Annual mean, averaged over 3 years	Maximum average annual concentration over 3 years of data	1st Highest High (H1H)
PM_{10}	24-hour	Not to be exceeded more than once per year on average over 3 years	Maximum average annual concentration from the most recent 3 years of data	1st Highest High (H1H)
SO_2	1-Hour	Annual 99th percentile of 1-hour daily maximum concentrations, averaged over 3 years	Maximum of the 4th highest hourly concentrations for the most recent 3 years of data	4th Highest High (H4H)
	Annual	Annual mean, averaged over 3 years	Maximum average annual concentration over 3 years of data	1st Highest High (H1H)

Source: EPA 2025c

Note:

1. The calculated background value is based on the most recent three years of complete monitoring data (i.e., 2023 to 2025).
2. The modeled concentration is based on the estimated concentration from the past 5 years of meteorological data (i.e., 2020 to 2024). Because the modeling analysis started in 2025, a complete year of 2025 meteorological data was not available at the time; therefore, 2024 was used as the most recent available year of meteorological data.

2.1.5 Benchmarks

2.1.5.1 Criteria Air Pollutant Significance Thresholds

For the criteria air pollutants CO, NO_2, PM_{10}, $PM_{2.5}$, and SO_2, the modeled Proposed Action–related contribution is added to the background, and the results are compared to the NAAQS to assess compliance and the potential for significant impacts. If the modeled Proposed Action–related contribution pollutant level plus its applicable background level is below the applicable primary or secondary NAAQS, it indicates compliance with the air quality standard for that pollutant and no probable significant impact.

Table 2.4 summarizes the NAAQS for the criteria air pollutants included in this study.

Table 2.4 National Ambient Air Quality Standards

Pollutant	Averaging Period	Primary Standard	Secondary Standard	Form
CO	8 hours	9 ppm	None	Not to be exceeded more than once per year
	1 hour	35 ppm		
Pb	Rolling 3-month average[1]	0.15 µg/m^3	Same as primary	Maximum arithmetic mean of 3 consecutive monthly means in a 3-year period
NO_2	1 hour	100 ppb	None	Annual 98th percentile of 1-hour daily maximum concentrations, averaged over 3 years
	1 year	53 ppb	Same as primary	Annual mean
$PM_{2.5}$	1 year	9.0 µg/m^3	15.0 µg/m^3	Annual mean, averaged over 3 years
	24 hours	35 µg/m^3	Same as primary	98th percentile, averaged over 3 years
PM_{10}	24 hours	150 µg/m^3	Same as primary	Not to be exceeded more than once per year on average over 3 years
SO_2	1 hour	75 ppb	None	Annual 99th percentile of 1-hour daily maximum concentrations, averaged over 3 years
	1 year	None	10 ppb	Annual mean, averaged over 3 years

Source: EPA 2025c.

Note:

[1] The Pb NAAQS is based on a 3-month rolling average, which is not calculated in AERMOD for SO_2; therefore, for project modeling, a one-month averaging period is used to provide a conservative evaluation of the Pb NAAQS.

Key: µg/m^3 = micrograms per cubic meter

2.1.5.2 Toxic Air Pollutant Screening Criteria

WADOE Chapter 173-460 WAC "Controls for New Sources of Toxic Air Pollutants" was developed specifically for new stationary sources of TAPs subject to air quality permitting. While there are smaller elements of the SAMP NTPs that focus on stationary infrastructure, the primary focus is on infrastructure that are mobile, such as planes. Therefore, requirements of this regulation are not directly applicable to this study. However, the de minimis emissions and SQER thresholds, as well as ASIL, may be used to screen out those TAPs that would not pose a significant impact to human health from the SAMP NTP.

Table 2.1 lists the TAPs that were analyzed for potential health risk impacts. Emissions of those contaminants were estimated following the methodology described in **Section 2.1.3** of this study. Those TAPs on this list that have Proposed Action–related emission rates above the de minimis value or above the SQER value (whichever value is lower) were carried into the dispersion modeling analysis described in **Section 2.1.4** of this study. Finally, those TAPs estimated to have project concentration levels above the ASIL value were carried into the health risk assessment described in Section 3.0 of this study.

The de minimis, SQER, and ASIL values listed in WAC 173-460-150 for the TAPs listed in Table 2.1 are presented in **Table 2.5**.

Table 2.5 List of Acceptable Source Impact Level, Small Quantity Emission Rate, and De Minimis Values for Toxic Air Pollutants

TAP Common Name	CAS No.	Averaging Period	ASIL µg/m³	SQER lb/avg period	De Minimis lb/avg period
Acetaldehyde	75-07-0	Yearly	3.7E-01	6.0E+01	3.0E+00
Acrolein	107.02-8	24 hours	3.5E-01	2.6E-02	3.8E-03
Benzene	71-43-2	Yearly	1.3E-01	2.1E+01	1.0E+00
1,3-Butadiene	106-99-0	Yearly	3.3E-02	5.4E+00	2.7E-01
Ethylbenzene	100-41-4	Yearly	4.0E-01	6.5E+01	3.2E+00
Formaldehyde	50-00-0	Yearly	1.7E-01	2.7E+01	1.4E+00
Isopropylbenzene (Cumene)	98-82-8	24 hours	4.0E+02	3.0E+01	1.5E+00
Methyl alcohol	67-56-1	24 hours	2.0E+04	1.5E+03	7.4E+01
Phenol	108-95-2	24 hours	2.0E+02	1.5E+01	7.4E-01
Propionaldehyde	123-38-6	24 hours	8.0E+00	5.9E-01	3.0E-02
Propylene	115-07-1	24 hours	3.0E+03	2.2E+02	1.1E+01
Styrene	100-42-5	24 hours	8.7E+02	6.5E+01	3.2E+00
Toluene	108-88-3	24 hours	5.0E+03	3.7E+02	1.9E+01
1,2,4-Trimethylbenzene	95-63-6	24 hours	6.0E+01	4.4E+00	2.2E-01
Xylenes	1330-20-7	24 hours	2.2E+02	1.6E+01	8.2E-01
Naphthalene	91-20-3	Yearly	2.9E-02	4.8E+00	2.4E-01
Diesel Exhaust	--	Yearly	3.3E-03	5.4E-01	2.7E-02
Arsenic	7440-38-2	Yearly	3.0E-04	4.9E-02	2.5E-03
Chromium VI	18540-29-9	Yearly	4.0E-06	6.5E-04	3.3E-05
Copper	7440-50-8	1 hour	1.0E+02	1.9E-01	9.3E-03
Lead	7439-92-1	Yearly	8.3E-02	1.4E+01	1.0E+01
Manganese	7439-96-5	24 hours	3.0E-01	2.2E-02	1.1E-03
Nickel	7440-02-0	Yearly	3.8E-03	6.2E-01	3.1E-02
Selenium	7782-49-2	24 hours	2.0E+01	1.5E+00	7.4E-02
Vanadium	7440-62-2	24 hours	1.0E-01	7.4E-03	3.7E-04
Sulfates	7446-11-9	1 hour	1.2E+02	2.2E-01	1.1E-02

Source: *WAC 2019a*
Key: CAS = Chemical Abstract Service; lb/avg = pound per average

2.2 Affected Environment

2.2.1 Existing Ambient Air Quality

In any location, there are existing pollution levels from automobiles, industry, and other sources unrelated to SEA. Estimated background concentrations, which are assumed to be unaffected by emissions associated with SEA, were added to the modeled results from the airport before comparing them to the NAAQS.

Background criteria air pollutant concentrations were obtained from monitoring stations in the Seattle area. Specifically, concentrations of CO, NO_2, SO_2, $PM_{2.5}$, PM_{10}, and Pb were estimated from the most recent three years of monitoring data collected at the Beacon Hill Station in the City of Seattle.

Additionally, $PM_{2.5}$ concentrations from the Sunset Park Station in the City of SeaTac are summarized for informational purposes but are not used for background concentrations because three complete years of data are not available.

Figure 2.3 illustrates the monitoring station locations used for background pollutant concentrations in relation to SEA, and **Table 2.6** summarizes the background concentrations used in the analysis.

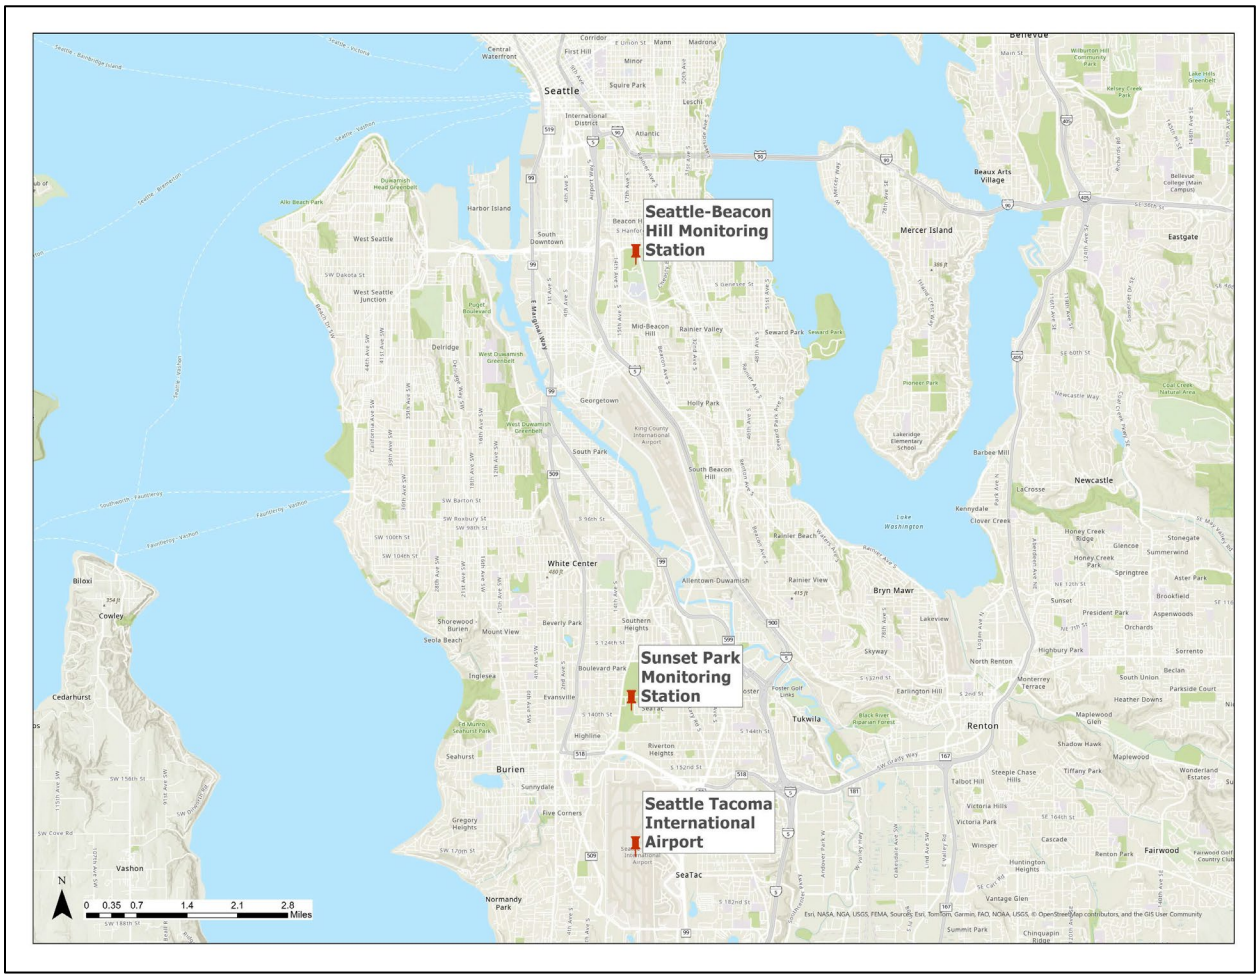

Source: WADOE Washington Air Quality Map https://airqualitymap.ecology.wa.gov

Figure 2.3 Monitoring Station Locations

Table 2.6 Background Air Quality Data for National Ambient Air Quality Standard Comparison

Pollutant	Averaging Period	Unit	Monitored Pollutant Concentration			Background Concentration
			2023	2024	2025	
CO	1 hour	ppm	0.949	0.892	0.639	0.949
	8 hours	ppm	0.8	0.7	0.5	0.8
NO_2	1 hour	ppb	42	40.3	38	42
	Annually	ppb	9.34	8.76	8.57	8.89
$PM_{2.5}$	24 hours	µg/m^3	9.6	13.7	9.2	10.8
	Annually	µg/m^3	4.29	4.84	4.55	4.56
PM_{10}	24 hours	µg/m^3	17	34	25	34
SO_2	1 hour	ppb	2.6	2	2.9	2.9
	Annually	ppb	0.508	0.143	0.099	0.250
Pb	3-month rolling average	µg/m^3	0.016	0.022	0.017	0.022

Source: EPA 2026g
Key: ppm = parts per million

2.2.2 Fine Particulate Matter Ambient Levels

The Sunset Park $PM_{2.5}$ monitoring station in the city of SeaTac, operated by the Puget Sound Clean Air Agency, was installed in 2024 and became fully operational in spring 2025 following commissioning and quality assurance procedures. The air monitoring station was established to characterize $PM_{2.5}$ concentrations in communities located immediately north of SEA, an area influenced by a combination of airport operations, major roadway traffic (including State Route [SR]-99 and Interstate 5), and nearby industrial and urban sources. Operated as part of the regional ambient air quality monitoring network, the station provides continuous, quality-assured $PM_{2.5}$ data used to assess compliance with NAAQS and to track long-term air quality trends in a location representative of population exposure near the airport environment.

Because the station was only established in 2024, it did not contain enough background data to be used in the analysis. A review of the hourly monitoring data available from April 7, 2025 (first date of available data) and February 3, 2026 (last date of available data when downloaded) shows a maximum 24-hour average concentration of 16.3 micrograms per cubic meter (µg/m^3), which is substantially below the NAAQS of 35 µg/m^3.

Figure 2.4 shows the frequency of daily $PM_{2.5}$ concentration values from the Sunset Park monitoring station in the City of SeaTac. To interpret the histogram chart, the bracketed values show a range of concentration values. For example, the first bracket shows the frequency of all concentration values between 1.1 and 2.5 µg/m^3 from the analyzed data. As shown, there were 57 data points that had concentration values within this range. The data show that most concentrations are below 9.5 µg/m^3.

Annual averages are not provided because of incomplete annual data. The presented 24-hour average values are not regulatory design values because of the lack of sufficient data and the likely inclusion of data from exceptional events like wildfires or wood burning during winter.[4]

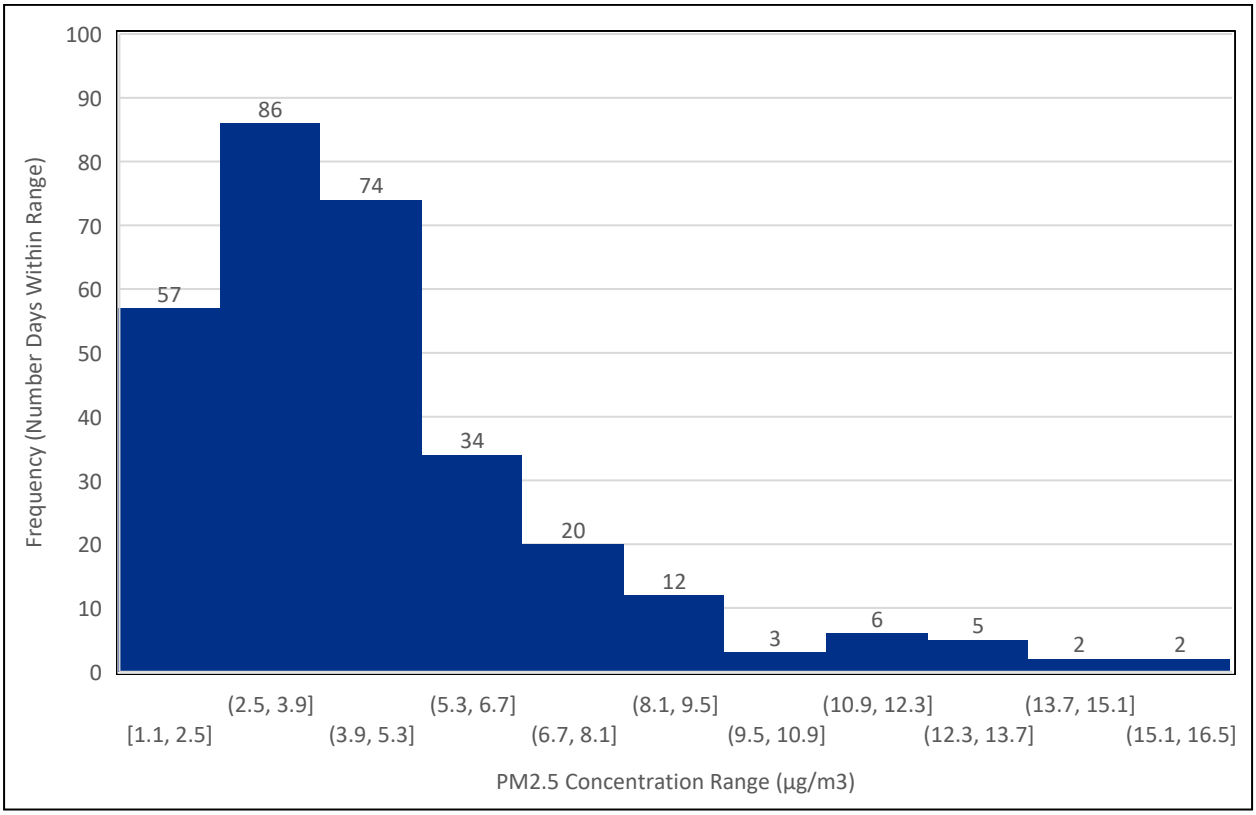

Source: WADOE Washington Air Quality Map https://airqualitymap.ecology.wa.gov/

Figure 2.4 $PM_{2.5}$ 24-Hour Average Frequency - Sunset Park Monitoring Station in the City of SeaTac

2.3 Emissions Inventory Results

The emissions inventory provides a comprehensive overview of the annual criteria pollutant emissions associated with the Proposed Action and No Action Alternatives in each analysis year, including construction phases and future operations. By comparing year-to-year variations in emissions, this section discloses how project development time frames and operational demands influence overall pollutant emissions.

2.3.1 Construction

Table 2.7 presents the annual criteria for pollutant emissions directly associated with construction activities for each year of construction (i.e., 2025 to 2032). The year-to-year variations between the different years are largely attributable to the differences in the near-term project development time

[4] Exceptional events are rare, uncontrollable occurrences—such as wildfire smoke—that are not reasonably preventable and can be excluded by EPA from air quality design value calculations when they are demonstrated to have caused exceedances beyond normal anthropogenic conditions.

frames and construction needs. There were no changes to construction emissions between the current analysis and that completed for the SEA SAMP NTP Final EA.

Table 2.7 Construction Emissions Inventory – Proposed Action

Year	CO (tons)	VOC (tons)	NO_x (tons)	SO_x (tons)	PM_{10} (tons)	$PM_{2.5}$ (tons)
2025	17	1	8	<1	8	1
2026	124	3	24	<1	8	2
2027	204	4	36	<1	9	2
2028	214	5	40	<1	9	2
2029	239	5	36	<1	9	2
2030	181	3	24	<1	8	2
2031	143	2	18	<1	8	1
2032	40	1	9	<1	8	1

Source: Landrum & Brown 2024a
Key: < = less than

2.3.2 Operations

The operations analysis identified shows small increases in the emissions inventory from those found in the Final EA. While the underlying source data are unchanged between the current analysis and that of the Final EA, the upgrade to AEDT 3g resulted in changes to the aircraft and stationary source emission associated with changes in the model assumptions and calculation methods. However, the changes in the analysis can be seen in both the No Action emissions inventory and the Proposed Action. Therefore, the overall difference between the No Action and the Proposed Action to be presented in the SEA SAMP NTP remains similar to that presented in the Final EA and there are no differences in the conclusions.

2.3.2.1 No Action Alternative

2032 No Action Alternative Emissions Inventory

Table 2.8 summarizes the 2032 No Action Alternative emissions inventory.

Overall, the revised inventory for this report shows modest increases in CO, NO_x, VOC, and SO_x relative to the Final EA, primarily driven by updated aircraft fuel burn algorithms, revised emissions indices, and improved representation of sulfur content and secondary particulate formation in AEDT 3g. Particulate matter emissions remain generally comparable between the two inventories, with small shifts attributable to enhanced particulate matter chemistry and explicit calculation of nvPM in the updated model. These trends are consistent with the use of a more current, scientifically refined emissions modeling framework and do not indicate a substantive change in future conditions.

Table 2.8 Emissions Inventory – Future (2032) No Action Alternative

Emission Source	CO (tons)	VOC (tons)	NO_x (tons)	SO_x (tons)	PM_{10} (tons)	PM2.5 (tons)
Aircraft	**2,763**	**289**	**2,887**	**303**	**28**	**28**
LTO (includes startup, approach, climbout, and taxiing)	2,701	283	2,774	292	17	17
APUs	61	6	60	9	10	10
Aircraft Runups	1	<1	53	2	<1	<1
GSE	**190**	**6**	**14**	**<1**	**1**	**1**
Tenant-Owned GSE	187	6	9	<1	1	<1
Port-Owned Airfield Vehicles and Equipment	3	<1	4	<1	<1	<1
Stationary Sources	**19**	**11**	**31**	**39**	**1**	**1**
Natural Gas Boilers and Heaters	16	1	19	<1	<1	<1
Diesel Generators	3	<1	12	39	<1	<1
Fuel Farm Tanks	<1	10	<1	<1	<1	<1
Motor Vehicles	**2,089**	**18**	**122**	**2**	**4**	**3**
Parking Facilities	35	1	3	<1	<1	<1
On and Off-Airport Roadways (includes Airside Deliveries)	2,054	17	119	2	4	3
Total	**5,060**	**323**	**3,053**	**345**	**33**	**32**

Source: CDM Smith 2026; Landrum & Brown 2024a
Key: LTO = The landing and take-off (LTO) cycle

2037 No Action Alternative Emissions Inventory

Table 2.9 summarizes the 2037 No Action Alternative emissions inventory. As described previously, no changes were made to the aircraft fleet mix or other data sources, but there are observable changes in the emissions inventory from the revised model's algorithms and assumptions. Like the 2032 No Action Alternative, modest increases in gaseous pollutant emissions are observed when compared to the Final EA, while negligible changes are found for particulate matter emissions.

Table 2.9 Emissions Inventory – Future (2037) No Action Alternative

Emission Source	CO (tons)	VOC (tons)	NO_x (tons)	SO_x (tons)	PM_{10} (tons)	PM2.5 (tons)
Aircraft	**2,676**	**273**	**3,099**	**311**	**29**	**29**
LTO (includes startup, approach, climbout, and taxiing)	2,602	265	2,986	298	17	17
APUs	74	7	62	10	13	13
Aircraft Runups	1	<1	52	2	<1	<1
GSE	**194**	**6**	**13**	**<1**	**1**	**1**
Tenant-Owned GSE	191	6	9	<1	<1	<1
Port-Owned Airfield Vehicles and Equipment	3	<1	4	<1	<1	<1
Stationary Sources	**19**	**11**	**31**	**39**	**1**	**1**
Natural Gas Boilers and Heaters	16	1	19	<1	<1	<1
Diesel Generators	3	<1	12	39	<1	<1
Fuel Farm Tanks	<1	10	<1	<1	<1	<1
Motor Vehicles	**1,682**	**14**	**72**	**2**	**2**	**2**
Parking Facilities	27	1	2	<1	<1	<1
On and Off-Airport Roadways (includes Airside Deliveries)	1,655	13	71	2	2	2
Total	**4,571**	**303**	**3,216**	**352**	**33**	**33**

Source: CDM Smith 2026; Landrum & Brown 2024a

2.3.2.2 Proposed Action

2032 Proposed Action Emissions Inventory

Based on the preliminary construction schedule for the individual Proposed Action components, the improvements associated with the Proposed Action would be completed in 2032; therefore, operational impacts associated with those improvements were analyzed for the first year of operations, or 2032. Like the No Action alternatives, because of the upgrade to AEDT 3g, modest increases in gaseous pollutant emissions were observed when compared to the Final EA, while negligible changes were found for particulate matter emissions. **Table 2.10** provides the 2032 Proposed Action emissions summary.

Table 2.10 Emissions Inventory – Future (2032) Proposed Action

Emission Source	CO (tons)	VOC (tons)	NO_x (tons)	SO_x (tons)	PM_{10} (tons)	$PM_{2.5}$ (tons)
Aircraft	**2,778**	**291**	**2,933**	**307**	**28**	**28**
LTO (includes startup, approach, climbout, and taxiing)	2,716	285	2,819	295	18	18
APUs	62	6	61	9	11	11
Aircraft Runups	1	<1	54	3	<1	<1
GSE	**194**	**6**	**14**	**<1**	**1**	**1**
Tenant-Owned GSE	191	6	9	<1	1	<1
Port-Owned Airfield Vehicles and Equipment	3	<1	4	<1	<1	<1
Stationary Sources	**25**	**15**	**43**	**57**	**1**	**1**
Natural Gas Boilers and Heaters	22	1	26	<1	<1	<1
Diesel Generators	4	<1	17	56	<1	<1
Fuel Farm Tanks	<1	13	<1	<1	<1	<1
Motor Vehicles	**2,135**	**18**	**124**	**2**	**4**	**3**
Parking Facilities	39	1	3	<1	<1	<1
On and Off-Airport Roadways (includes Airside Deliveries)	2,096	17	121	2	4	3
Total	**5,132**	**330**	**3,113**	**366**	**34**	**33**

Source: CDM Smith 2026; Landrum & Brown 2024a

2037 Proposed Action Emissions Inventory

Emission inventories were also prepared for five years after the completion of construction, or 2037. As with the other alternatives, because of the upgrade to AEDT 3g, modest increases in gaseous pollutant emissions were observed when compared to the Final EA, while negligible changes were found for particulate matter emissions. **Table 2.11** provides the 2037 Proposed Action emissions summary.

Table 2.11 Emissions Inventory – Future (2037) Proposed Action

Emission Source	CO (tons)	VOC (tons)	NO_x (tons)	SO_x (tons)	PM_{10} (tons)	$PM_{2.5}$ (tons)
Aircraft	**3,008**	**299**	**3,353**	**343**	**32**	**32**
LTO (includes startup, approach, climbout, and taxiing)	2,928	291	3,230	329	18	18
APUs	79	8	66	11	14	14
Aircraft Runups	1	<1	57	3	<1	<1
GSE	**208**	**6**	**14**	**<1**	**1**	**1**
Tenant-Owned GSE	204	6	10	<1	1	<1
Port-Owned Airfield Vehicles and Equipment	3	<1	5	<1	<1	<1

Emission Source	CO (tons)	VOC (tons)	NO_x (tons)	SO_x (tons)	PM_{10} (tons)	$PM_{2.5}$ (tons)
Stationary Sources	**25**	**15**	**43**	**57**	**1**	**1**
Natural Gas Boilers and Heaters	22	1	26	<1	<1	<1
Diesel Generators	4	<1	17	56	<1	<1
Fuel Farm Tanks	<1	13	<1	<1	<1	<1
Motor Vehicles	**1,784**	**14**	**76**	**2**	**2**	**<1**
Parking Facilities	32	1	2	<1	<1	<1
On and Off-Airport Roadways (includes Airside Deliveries)	1,752	14	74	2	2	<1
Total	**5,025**	**335**	**3,486**	**401**	**36**	**34**

Source: CDM Smith 2026; Landrum & Brown 2024a

2.3.2.3 Comparison of Alternatives

Results of the emission inventories prepared for the 2032 and 2037 Proposed Action scenarios were compared to the results of the emission inventories prepared for the 2032 and 2037 No Action Alternative scenarios, respectively, to disclose the reasonably foreseeable project-related changes in emissions.

2032 Proposed Action Compared to 2032 No Action Alternative

The comparison of Future (2032) Proposed Action and Future (2032) No Action Alternative emissions are shown in **Table 2.12**.

Table 2.12 Summary of Emissions – Future (2032) Proposed Action and Future (2032) No Action Alternative Total Emissions

Emission Source	CO (tons)	VOC (tons)	NO_x (tons)	SO_x (tons)	PM_{10} (tons)	$PM_{2.5}$ (tons)
Future (2032) No Action Alternative	5,060	323	3,053	345	33	32
Future (2032) Proposed Action	5,173	330	3,122	366	42	34
Construction	*40*	*1*	*9*	*<1*	*8*	*1*
Operations	*5,132*	*330*	*3,113*	*366*	*34*	*33*
Future (2032) Increase in Emissions	**113**	**7**	**69**	**21**	**9**	**2**

Source: CDM Smith 2026

Emissions of all criteria air pollutants would be greater under the Proposed Action than the No Action Alternative in 2032. Although model formulation changes between AEDT versions 3f and 3g would result in increased emissions, as discussed, the absolute difference in emissions between the Proposed Action and No Action Alternative would be comparable to those disclosed in the SEA SAMP NTP EA.

Annual aircraft operations are forecast to increase to 475,655 aircraft operations in the Future (2032) Proposed Action scenario from 466,900 aircraft operations in the Future (2032) No Action Alternative scenario, an increase of 1.9 percent. As shown in Table 2.12, operations-related emissions increases would range from a 1.4 percent (CO) to 2.2 percent ($PM_{2.5}$) for all criteria pollutants except for SO_x, which would increase by 6.0 percent owing to increased project-related stationary source SO_x emissions.

2037 Proposed Action Compared to 2037 No Action Alternative

The comparison of Future (2037) Proposed Action and Future (2037) No Action Alternative emissions are shown in **Table 2.13**.

Table 2.13 Summary of Emissions – Future (2037) Proposed Action and Future (2037) No Action Alternative Total Emissions

Emission Source	CO (tons)	VOC (tons)	NO_x (tons)	SO_x (tons)	PM_{10} (tons)	$PM_{2.5}$ (tons)
Future (2037) No Action Alternative	4,571	303	3,216	352	33	33
Future (2037) Proposed Action	5,025	335	3,486	401	36	34
Future (2037) Increase in Emissions	**454**	**32**	**270**	**49**	**3**	**1**

Source: CDM Smith 2026

Emissions of all criteria air pollutants would be greater under the Proposed Action than the No Action Alternative in 2037. Although model formulation changes between AEDT versions 3f and 3g would result in increased emissions, the absolute difference in emissions between the Proposed Action and No Action Alternative would be similar to those disclosed in the SEA SAMP NTP EA.

Annual aircraft operations are forecast to increase to 509,892 aircraft operations in the Future (2037) Proposed Action scenario from 474,874 aircraft operations in the Future (2037) No Action Alternative scenario, an increase of 7.4 percent. As shown in Table 2.13, operations-related emissions increases would generally be greater than the direct proportional emissions increase because of, in part, to increased aircraft taxi times and AEDT 3f and 3g model formulation changes. These increases range from 2.8 percent ($PM_{2.5}$) to 10.5 percent (VOC) for all criteria pollutants, except for SO_x, which would increase by 13.9 percent because of the increased project-related stationary source SO_x emissions.

2.4 Dispersion Modeling Results

The dispersion modeling results provide a comprehensive assessment of air pollutant concentrations resulting from constructing and operating the Proposed Action as compared to the No Action Alternative. These findings detail levels of criteria pollutants, which are compared against the NAAQS when evaluating compliance.

2.4.1 Construction

Table 2.14 summarizes the results of air dispersion modeling of the Proposed Action construction sources. As shown in the table, local construction concentrations would be less than the NAAQS for all pollutants. **Appendix A** provides the figures showing the impacts of the construction activities.

Table 2.14 Maximum Construction Concentrations and Comparison to National Ambient Air Quality Standard

Pollutant	Averaging Period	Maximum Concentration (µg/m³)	Background Concentration (µg/m³)	Peak Total Concentration (µg/m³)[a]	NAAQS (µg/m³)	Exceed NAAQS?
CO	1 hour	243	1,087	1,330	40,000	No
	8 hours	52	916	968	10,000	No
NO_2[b]	1 hour	106	79	185	188	No
	Annually	8	18	25	100	No
$PM_{2.5}$	24 hours	6	11	16	35	No
	Annually	1.4	4.6	6.0	9.0	No
PM_{10}	24 hours	27	34	61	150	No
SO_2	1 hour	1	8	9	198	No
	Annually	<1	1	1	26	No

Source: CDM Smith 2026

Notes:

[a] Totals may not add exactly because of rounding.

[b] NO_2 concentrations include OLM processing with an NO_x/NO_2 ISR of 0.15.

2.4.2 Operations

2.4.2.1 2032 Proposed Action Compared to 2032 No Action Alternative

Table 2.15 summarizes the 2032 Proposed Action incremental increases in peak concentrations relative to the 2032 No Action Alternative. The incremental concentration increases, which isolate the environmental impact that would occur from implementation of the Proposed Action, were then added to the pollutants' respective background concentrations for each applicable averaging period. The total concentrations (increment plus background) were then compared to the NAAQS to determine whether an impact could occur. As shown in the table, the incremental change in pollutant concentrations resulting from operational activities would not exceed the NAAQS. **Appendix A** provides the geographic extent of the ground-level pollutant concentrations.

Table 2.15 Operational Concentrations – Peak Increment of 2032 Proposed Action Concentrations Compared to 2032 No Action Alternative Concentrations

Pollutant	Averaging Period	Incremental Peak (µg/m³)	Background (µg/m³)	Total (µg/m³)[a]	NAAQS (µg/m³)	Exceed NAAQS?
CO	1 hour	218	1,087	1,305	40,000	No
	8 hours	83	916	999	10,000	No
Pb	Rolling 3-month average	0.000022	0.022	0.022	0.15	No
NO_2[b]	1 hour	21	79	100	188	No
	Annually	5	18	23	100	No
$PM_{2.5}$	24 hours	1	11	12	35	No
	Annually	0.3	4.6	4.9	9.0	No
PM_{10}	24 hours	3	34	37	150	No

Pollutant	Averaging Period	Incremental Peak (µg/m³)	Background (µg/m³)	Total (µg/m³)[a]	NAAQS (µg/m³)	Exceed NAAQS?
SO_2	1 hour	118	8	126	197	No
	Annually	17	1	18	26	No

Source: CDM Smith 2026
Notes:
[a] Totals may not add exactly because of rounding.
[b] NO_2 concentrations include special processing to account for the plume rise from aircraft exhaust.

2.4.2.2 2037 Proposed Action Compared to 2037 No Action Alternative

Table 2.16 presents the incremental increases in pollutant concentrations for the Proposed Action compared to the No Action Alternative. These increases, combined with background levels, were assessed against the NAAQS, showing no exceedances. **Appendix A** details the spatial distribution of ground-level pollutant concentrations.

Table 2.16 Operational Concentrations – Peak Increment of 2037 Proposed Action Concentrations Compared to 2037 No Action Alternative Concentrations

Pollutant	Averaging Period	Incremental Peak (µg/m³)	Background (µg/m³)	Total (µg/m³)[a]	NAAQS (µg/m³)	Exceed NAAQS?
CO	1 hour	341	1,087	1,428	40,000	No
	8 hours	88	916	1,005	10,000	No
Pb	Rolling 3-month average	0.000025	0.022	0.022	0.15	No
NO_2[b]	1 hour	22	79	101	188	No
	Annually	6	18	24	100	No
$PM_{2.5}$	24 hours	2	11	13	35	No
	Annually	0.5	4.6	5.0	9.0	No
PM_{10}	24 hours	4	34	38	150	No
SO_2	1 hour	120	8	127	197	No
	Annually	17	1	18	26	No

Source: CDM Smith 2026
Notes:
[a] Totals may not add exactly because of rounding.
[b] NO_2 concentrations include special processing to account for the plume rise from aircraft exhaust.

2.5 Scenario Comparison

Section 2.4.2 presents a comparative analysis of air pollutant concentrations and associated impacts under the Proposed Action and No Action Alternatives for 2032 and 2037, as summarized in the provided tables. Results indicate that, overall, the Proposed Action scenario exhibits small increases in certain pollutant concentrations compared to the No Action scenario. Notably, NO_2 concentrations, which include adjustments for plume rise from aircraft exhaust, show slight concentration increases in areas immediately adjacent to aircraft ground operations. However, these increases remain below the NAAQS.

Further comparison of the scenarios highlights that particulate matter ($PM_{2.5}$ and PM_{10}) and VOCs either remain relatively stable or experience minimal increases. These changes are primarily attributable to incremental growth in aircraft activity. The differences observed between scenarios are minor, indicating that implementation of the Proposed Action would not substantially alter the air quality in the area.

Additionally, the data suggest that the highest modeled concentrations are localized near operational hotspots, such as taxiways and idling zones, but decrease with distance from the airport boundaries. Sensitive receptors, such as schools and residential areas, are expected to experience only marginal changes in pollution levels.

2.6 Conclusions

In conclusion, the comparative evaluation of air pollutant concentrations under both the Proposed Action and No Action scenarios for 2032 and 2037 confirms that the anticipated changes resulting from the Proposed Action are minor and localized. While slight increases in certain pollutants, particularly NO_2, are projected in areas immediately adjacent to aircraft ground operations, these concentrations remain below the NAAQS. Other pollutants, such as particulate matter ($PM_{2.5}$ and PM_{10}) and VOCs, are expected to remain stable or show only minimal increases due to incremental growth in aircraft activity.

As discussed in the Final EA, the Port of Seattle has been in coordination with the Puget Sound Clean Air Agency (PSCAA) about the potential emission increases and their relationship to the NAAQS. The Final EA states that PSCAA does not believe the emission increases could cause a violation of the NAAQS. While there are some slight differences in the emissions inventory between this analysis and the Final EA, largely attributable to the change from AEDT 3f to AEDT 3g, the change in emissions between the 2032 and 2037 Proposed Action and No Action Alternatives are on par with the Final EA. Furthermore, the dispersion modeling indicates that no localized exceedances of the NAAQS would be expected to occur during construction or after implementing the Proposed Action. Therefore, no significant impacts are expected to occur.

3.0 Human Health Risk Assessment

The purpose of the SEA HHRA is to assess the potential impacts to human health in surrounding communities associated with air pollutant emissions from SeaTac aircraft ground operations (i.e., taxiing and idling) and construction associated with the Proposed Action. For toxic air pollutants and human health evaluation, screening and decision benchmarks are explained in Section 2.1.5.2 and Table 2.5, and applied within HHRA methods. These comparisons collectively help determine whether predicted impacts are likely to be significant under SEPA. Methodologies used in this risk evaluation are reasonable and technically consistent with standard risk assessment practices and are appropriate under the SEPA.

3.1 Methodology

This section outlines the approach and methodologies used to perform the HHRA analysis. The HHRA focuses on human health cancer risks and acute and chronic hazards associated with airborne releases of TAPs during SEA's incremental changes in operation after completion of the Proposed Action. The HHRA methodologies are consistent with EPA risk assessment guidance (EPA 2009).

Identification of TAPs follows the same process outlined in **Section 2.1.2.1**. TAPs (listed in Table 2.1) for this HHRA are based on pollutants identified by the FAA and EPA guidance (FAA 2009; EPA & FAA 2009a, EPA & FAA 2009b) as found in jet aircraft exhaust, WADOE priority TAPs, inorganics/metals found in Jet A fuel, or Pb in aviation gasoline. Additionally, the identified TAPs also have ASILs, de minimis emissions, and/or SQERs published by WADOE (WAC 2019a). Finally, PSCAA published the findings of the Tacoma and Seattle Air Toxics Trends Technical Report in December 2023 (PSCAA 2023), which documents the results of monitoring for approximately 20 TAPs and associated potential cancer risks.

3.1.1 Exposure Assessment

Exposure is the process by which humans encounter chemicals in the environment. In general, humans can be exposed to chemicals through a variety of environmental media (e.g., soil, sediment, water, air, or food), and these exposures can occur through several routes (i.e., ingestion, dermal contact, or inhalation).

3.1.1.1 Exposure Populations of Interest

Exposure assessment begins by identifying and evaluating the off-airport exposure populations such as workers, residents (adults and children), and students. Potentially sensitive locations, such as hospitals and daycare facilities, are treated as either residential or school sites, respectively. Each receptor location represents a unique exposure population and sets of exposure conditions. They encompass a range of exposure scenarios for people who may be affected by SEA emissions to the greatest extent. Receptor location exposure scenarios were selected to provide risks and hazards estimates for the maximally exposed individuals (MEI) and to demonstrate the range of risks and hazards near SEA.

Risks for people recreating near the airport would be lower than those for workers, residents, and students at any given location because of much shorter times spent recreating. No risks were calculated for recreational receptors.

3.1.1.2 Relevant Exposure Pathways

Several exposure pathways could expose different human health receptors (e.g., off-site workers and school children) to TAPs of concern. Exposure scenarios are developed for each receptor considering various pathways through which each receptor may be exposed to TAPs of concern.

An exposure pathway consists of four parts:

- TAP source (e.g., fuel combustion)
- Release mechanism (e.g., aircraft engine exhaust)
- Means of transport from point of release to point of exposure (e.g., local winds)
- Route of exposure (e.g., inhalation)

Numerous possibly complete exposure pathways exist for receptors at or near SEA, but most make minimal to negligible contributions to total risks and hazards. For instance, if any of the four parts of the exposure pathway are absent, the pathway was considered incomplete and was not evaluated in the HHRA. Other exposure pathways may be complete but result in little or negligible risk. Finally, non-inhalation exposure pathways, such as dermal contact, incidental ingestion, and vegetable uptake, are generally found to be negligible compared to the contributions from the inhalation pathway and were not evaluated in the HHRA.

3.1.1.3 Contaminant Air Concentrations

Analyses of contaminant air concentrations are included in the exposure assessment for the receptor locations identified in **Section 2.1.4.6**. Acute and chronic exposure to TAPs from the construction associated with the Proposed Action and airport-related operations were estimated by:

- Estimating construction source emissions for peak annual and peak day averaging periods.
- Dispersion modeling of construction emissions over an area consisting of the airport property and proximal communities.
- Dispersion modeling of the Proposed Action incremental operational emissions over the same receptor locations as for the construction sources. The Proposed Action incremental operational emissions are the difference in emissions between the Proposed Action and the No Action condition emissions for a given year for each TAP.

Section 2.0 describes the methodologies for calculating emissions and dispersion of TAPs. Because the TAPs associated with construction and airport operations are generally subsets of PM_{10} and TOG emissions, the concentrations of TAPs were determined from concentrations of PM_{10} and TOG for each specific source type at each receptor location. The source types include the following:

- Turbofan, turboprop, and turboshaft aircraft engine and APU exhaust for aircrafts fueled with Jet A
- Piston aircraft engine exhaust for aircrafts fueled with aviation gasoline
- Diesel-fueled non-road GSE and construction equipment engine exhaust
- Gasoline-fueled non-road GSE and construction equipment engine exhaust

- Diesel-fueled on-road motor vehicle
- Gasoline-fueled on-road motor vehicles
- Construction dust emissions

Turbine aircraft and APU engine exhaust TOG were speciated into organic TAPs based on joint FAA/EPA studies conducted on aircraft engine exhaust measurements (EPA and FAA 2009b). The speciation profiles obtained from these studies are included in the EPA SPECIATE database as TOG Profile No. 5565. Turbine aircraft and APU engine exhaust are speciated into particulate matter TAPs based on data collected on Jet A engine exhaust by the U.S. Navy (Shumway 2000).

The on-road and non-road PM_{10} and TOG TAP speciation for both diesel-fueled and gasoline-fueled engines were developed from the MOVES model (Section 2.1.3 provides additional information on the modeling assumptions).

Once a given TAP concentration has been developed for each source type at each receptor location, the total TAP concentration at each receptor location was estimated by summing all the source type concentrations of that TAP. Resulting totals for a given TAP at each receptor location were used to determine the contaminant air concentrations for use in the exposure assessment.

In this HHRA, modeled air concentrations were evaluated for two exposure durations: acute and chronic. Acute exposure refers to exposures that occur over a duration of less than one hour up to a few days. Chronic exposure refers to exposures that occur over durations of one or more years. For risk calculations, acute contaminant air concentrations were computed based on a 1-hour averaging period, and chronic contaminant air concentrations were computed based on a 1-year averaging period.

Assessing risk from both acute and chronic perspectives is standard practice in HHRAs, consistent with established methodologies used by federal and state regulatory agencies, including EPA. This dual-pathway approach evaluates short-term exposures with immediate or rapid-onset health effects alongside long-term, cumulative exposures that may result in chronic health impacts such as cancer, organ toxicity, or systemic illness. Under SEPA, lead agencies are required to analyze the probable significant adverse impacts of a proposed action on human health, which necessarily includes consideration of both acute and chronic risk pathways to ensure a complete and accurate disclosure of potential effects.

3.1.2 Selection of Toxic Air Pollutants of Concern

TAPs of concern are chemicals that exist in the environment at concentrations that might be of potential health concern to humans, as identified based on a comparison to conservative health-based screening levels. TAPs of concern were identified for further evaluation in a quantitative risk assessment.

The TAP of concern selection process compared the maximum computed air concentration for each analyte across all receptor locations, all years (i.e., 2025 through 2037), and all scenarios (i.e., construction and operational years) to a conservative risk-based screening level. If the maximum air concentration exceeded the screening level, the chemical was selected as a TAP of concern. If the maximum air concentration did not exceed the screening level, the chemical is unlikely to pose any health risk, even to maximally exposed individuals (MEI), and it was not selected as a TAP of concern.

The screening levels used in the TAP of concern selection were obtained from Washington State ASILs (which are based on a target cancer risk of 1E-06 for carcinogenic ASILs and reference concentrations and reference exposure levels for non-cancer ASILs) (WAC 2019a). For each TAP, the maximum concentration across all years (i.e., 2025 through 2037) and scenarios (i.e., construction and operational years) for the appropriate averaging period was compared to its respective ASIL. This initial screen is similar to a first-tier review evaluation for toxic air pollution sources (WAC 2019b; WADOE 2015) and is technically consistent with standard practices. **Table 3.1** presents the results of the TAP of concern selection.

Table 3.1 Selection of Toxic Air Pollutants of Concern

TAP Common Name	CAS No.	Averaging Period	ASIL (µg/m³)	Maximum Concentration (µg/m³)	TAP of Concern?
Acetaldehyde	75-07-0	Yearly	0.37	0.044	No
Acrolein	107.02-8	24 hours	0.35	0.29	No
Benzene	71-43-2	Yearly	0.13	0.058	No
1,3-Butadiene	106-99-0	Yearly	0.033	0.056	**Yes**
Ethylbenzene	100-41-4	Yearly	0.4	0.0062	No
Formaldehyde	50-00-0	Yearly	0.17	0.40	**Yes**
Isopropylbenzene (Cumene)	98-82-8	24 hours	400	0.00036	No
Methyl alcohol (Methanol)	67-56-1	24 hours	20,000	0.22	No
Phenol	108-95-2	24 hours	200	0.087	No
Propionaldehyde	123-38-6	24 hours	8	0.094	No
Propylene	115-07-1	24 hours	3,000	0.56	No
Styrene	100-42-5	24 hours	870	0.037	No
Toluene	108-88-3	24 hours	5,000	0.10	No
1,2,4-Trimethylbenzene	95-63-6	24 hours	60	0.044	No
Xylenes	1330-20-7	24 hours	220	0.055	No
Naphthalene	91-20-3	Yearly	0.029	0.017	No
Diesel Particulate Matter	---	Yearly	0.0033	0.56	**Yes**
Arsenic	7440-38-2	Yearly	0.0003	0.00002	No
Chromium VI	18540-29-9	Yearly	4.0E-06	5.1E-08	No
Copper	7440-50-8	1 hour	100	0.018	No
Lead	7439-92-1	Yearly	0.083	0.0002	No
Manganese	7439-96-5	24 hours	0.3	0.026	No
Nickel	7440-02-0	Yearly	0.0038	0.000034	No
Selenium	7782-49-2	24 hours	20	0.000078	No
Vanadium[1]	7440-62-2	24 hours	1.0E-01	—	—
Sulfates	7446-11-9	1 hour	120	0.018	No

Key: — not available; µg/m³ – micrograms per cubic meter
Source: *WAC 2019a*
Note:
[1] Vanadium is not one of the chemicals in the speciation profile for emissions.

As seen, three TAPs were retained as TAPs of concern, including 1,3-butadiene, diesel particulate matter, and formaldehyde. Potential risks from TAPs not retained as TAPs of concern are likely to be small enough that they would not alter overall risk conclusions.

3.1.3 Evaluation of Toxic Air Pollutant Exposures

This section presents the basic equations used to estimate acute and chronic exposures from TAPs of concern for use in determining cancer risks and non-cancer hazards in the HHRA. This section also provides the exposure parameters for each receptor population.

Inhalation exposures were evaluated in accordance with the inhalation dosimetry methodology presented in EPA's *Methods for Derivation of Inhalation Reference Concentrations and Application of Inhalation Dosimetry* and *Risk Assessment Guidance for Superfund (RAGS), Part F: Inhalation Risk Assessment* (EPA 1994, 2009). In accordance with EPA, the human intake equation does not include an inhalation rate or body weight because the amount of the chemical that reaches the target site is not a simple function of these factors.

3.1.3.1 Exposure Concentrations

Acute Exposure Equations

Acute exposure refers to exposures that occur over a duration of less than 1 hour up to a few days. The inhaled exposure concentration (EC) for acute exposures is calculated as:

$$\mathbf{EC_{ac} = CA}$$

where EC_{ac} = acute exposure concentration (µg/m^3); and CA = concentration of chemical in air (µg/m^3) to which the person is exposed under an acute scenario.

The peak modeled 1-hour air incremental concentrations are used to estimate the acute ECs for TAPs of concern.

Chronic Exposure Concentrations

Chronic exposure refers to exposures that occur over durations of one or more years. Because the modeled air concentrations change each year, and differ by scenario, the chronic EC is calculated separately for each year and scenario. Total exposures averaged across the entire chronic exposure duration are calculated in the risk characterization. The inhaled EC for 1 year of chronic exposure is calculated as:

$$\mathbf{EC_{y,s} = C_{y,s} \times (ET \times EF \times 1 / AT)}$$

where $EC_{y,s}$ = chronic exposure concentration (µg/m^3), which is the annual time-weighted concentration for year "y" and scenario "s" based on the characteristics of the exposure scenario being evaluated; $C_{y,s}$ = concentration of the chemical in air (µg/m^3) to which the person is exposed for year "y" and scenario "s"; ET = exposure time (hours per day), which describes how long a person is likely to be exposed to the contaminated medium over the course of a typical day; EF = exposure frequency (days per year), which describes how often a person is likely to be exposed to the contaminated medium over the course of a typical year; AT = averaging time (hours), which specifies the length of time over which the time-

weighted average concentration is calculated (For non-cancer exposures, AT is equal to the receptor-specific exposure duration, expressed in hours; for cancer exposures, AT is equal to 70 years, expressed in hours [i.e., 613,200 hours]).

For mathematical convenience, the general equation for the annual time-weighted chronic exposure concentration can be written as follows:

$$\mathbf{EC_{y,s} = C_{y,s} \times TWF}$$

where TWF = annual time-weighting factor (unitless). The value of TWF is given by:

$$\mathbf{TWF = (ET \times EF \times 1 / AT)}$$

The peak annual average modeled air incremental concentrations are used to estimate the chronic exposure concentrations for TAPs of concern. Because the AT differs for cancer and non-cancer effects, the annual time-weighted chronic exposure concentration differs for cancer and non-cancer.

3.1.3.2 Exposure Parameters

For every human health receptor population of interest, it is expected there are differences between different individuals in the level of exposure at a specific receptor location because of the differences in exposure times, exposure frequencies, and exposure durations. Therefore, there is normally a wide range of average daily intakes between different members of an exposed population. For this reason, all daily intake calculations must specify what part of the range of doses is being estimated. Typically, attention is focused on intakes that are "average" or are otherwise near the central part of the range, and on intakes that are near the upper end of the range (e.g., the 95th percentile). These two exposure estimates are referred to as central tendency exposure (CTE) and reasonable maximum exposure (RME), respectively. For conservatism, RME receptors were evaluated in the HHRA.

For HHRAs, EPA defines a child receptor as an individual aged 0 to 6 years and an adult receptor as an individual aged 7 years and older, consistent with the standard default exposure factors established in EPA's *Human Health Evaluation Manual, Supplemental Guidance: Update of Standard Default Exposure Factors* (EPA 2014b) and applied throughout EPA's *Risk Assessment Guidance for Superfund* framework (EPA 1989). Because exposure parameters (e.g., exposure duration) may change as a function of age, residential exposure parameter values were selected separately for children (0 to 6 years) and adults (7+ years). **Table 3.2** lists the exposure parameters and resultant annual TWF values for each human health receptor population based on RME. Most of these values are based on EPA default guidelines, but some are based on professional judgment, or are estimated from exposure studies in the literature (EPA 1989, 2014b). The footnotes in the tables provide the basis and supporting rationale for each selected exposure parameter.

Table 3.2 Chronic Exposure Parameters for Each Human Health Receptor Population

Exposure Parameter		Units	Resident						School Child			Adult Off-Site Worker		
			Child			Adult								
			Value	Source	Notes	Value	Source	Notes	Value	Source	Notes	Value	Source	Notes
Inhalation of Air														
Exposure Time	ET	hours/day	24	1	a	24	1	a	8	3	c	8	1	a
Exposure Frequency	EF	days/year	350	1	a	350	1	a	165	3	c	250	1	a
Exposure Duration	ED	years	6	1	a	20	1	a	12	3	c	25	1	a
Averaging Time, non-cancer	AT_{nc}	hours	52,560	2	b	175,200	2	b	105,120	2	b	219,000	2	b
Averaging Time, cancer	AT_c	hours	613,200	2	b	613,200	2	b	613,200	2	b	613,200	2	b
Annual $TWF_{chronic\text{-}non\text{-}cancer}$		**unitless**	**1.60E-01**			**4.79E-02**			**1.26E-02**			**9.13E-03**		
Annual $TWF_{chronic,\ cancer}$		**unitless**	**1.37E-02**			**1.37E-02**			**2.15E-03**			**3.26E-03**		

Sources:
1. EPA 2014b.
2. EPA 1989.
3. Assumption
Notes:
a. Standard default value for residential exposure.
b. AT (hours) = ED x 365 days/year x 24 hours/day, where ED for non-cancer is set equal to the receptor-specific duration and ED for cancer is 70 years.
c. School child is at school for approximately 8 hours/day for 12 years (assumes Grades 1 through 12 are located at the same school). Exposure frequency assumes the school is open from August through May, excluding weekends and holidays.

3.1.4 Toxicity Assessment

The objective of a toxicity assessment is to identify the types of adverse health effects caused by a particular chemical and how the appearance of these adverse effects depends on exposure level. The toxic effects of a chemical frequently depend on the route of exposure (oral, inhalation, dermal) and the duration of exposure. Thus, a full description of the toxic effects of a chemical includes a listing of what adverse health effects the chemical may cause, and how the occurrence of these effects depends upon dose, route, and duration of exposure.

The toxicity assessment process is usually divided into two parts. The first characterizes and quantifies the non-cancer effects of the chemical, while the second addresses the cancer effects of the chemical. This two-part approach is used because there are typically major differences in the time course of action and the shape of the dose–response curve for cancer and non-cancer effects.

This section provides information on how non-cancer and cancer toxicity values were derived. It also presents the toxicity values used to quantify potential human health risks in the HHRA.

3.1.4.1 Non-Cancer Effects

Essentially, all chemicals can cause adverse health effects at a sufficient dose. However, when the dose is sufficiently low, typically no adverse effect is observed. Thus, in characterizing the non-cancer effects of a chemical, the key parameter is the threshold dose at which an adverse effect first becomes evident. Doses below the threshold are considered safe, while doses above the threshold have the potential to cause an effect.

The threshold dose is typically estimated from toxicological data (derived from studies of humans and/or animals) by finding the highest dose that does not produce an observable adverse effect and the lowest dose that does produce an effect. These are referred to as the no-observed-adverse-effect level (NOAEL) and the lowest-observed-adverse-effect level (LOAEL), respectively. The threshold is presumed to lie in the interval between the NOAEL and the LOAEL.

Separate effects thresholds are developed based on short-term (acute) and long-term (chronic) exposure durations. When evaluating chronic exposures, to be conservative (protective), non-cancer risk evaluations are not based directly on the threshold exposure level but on a value referred to as the reference concentration (RfC). The RfC is used to evaluate inhalation exposures and has units of mg/m^3. The RfC is an estimate (with uncertainty spanning potentially an order of magnitude) of a daily exposure to the human population (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects during a lifetime.

The RfC values are derived from the threshold dose by dividing by uncertainty factors (UF) and a modifying factor (MF) to account for limitations in the underlying toxicity data. UFs are assigned to account for variations in population sensitivity, uncertainty arising from extrapolation of animal data to humans, the use of a LOAEL instead of a NOAEL, the use of less than chronic exposure, and other limitations in the available data (e.g., lack of reproductive data). The combined UF is normally at least 10 but can be much higher if the data are limited. The MF is an additional adjustment factor that depends upon the professional assessment of scientific uncertainties of the study and database not explicitly

accounted for in the UFs (e.g., the completeness of the overall database and the number of species tested). The default value for the MF is 1.

The effect of dividing the threshold dose by the UFs/MF is to ensure that the RfC is not higher than the threshold level for adverse effects. Therefore, there is a "margin of safety" built into an RfC. Exposures equal to or less than the RfC are nearly certain to be without any risk of adverse effect. Exposures higher than the RfC may result in some risk, but because of the margin of safety, an exposure above the RfC does not mean that an effect will necessarily occur.

Similarly, when evaluating acute exposures, non-cancer risk evaluations are based on a reference level (REL). The acute REL is an exposure that is not likely to cause adverse health effects in a human population, including sensitive subgroups, exposed to that concentration for the specified exposure duration on an intermittent basis. Different RELs can be developed specific to the exposure duration period of interest (e.g., 1 hour, 8 hours). For this evaluation, the 1-hour acute RELs are most useful for evaluating short-term emissions.

3.1.4.2 Cancer Effects

For cancer effects, the toxicity assessment process has two components. The first component is a qualitative evaluation of the weight of evidence (WOE) about whether the chemical does or does not cause cancer in humans. Previously, EPA performed this evaluation using the following system in **Table 3.3**:

Table 3.3 Previous Cancer Effects System

WOE Group	Meaning	Description
A	Known human carcinogen	Sufficient evidence of cancer in humans.
B1	Probable human carcinogen	Suggestive evidence of cancer incidence in humans.
B2	Probable human carcinogen	Sufficient evidence of cancer in animals, but lack of data or insufficient data in humans.
C	Possible human carcinogen	Suggestive evidence of carcinogenicity in animals.
D	Cannot be evaluated	No evidence or inadequate evidence of cancer in animals or humans.
E	Not carcinogenic to humans	Strong evidence that it does not cause cancer in humans.

EPA developed a revised classification system for characterizing the WOE for carcinogens (EPA 2005). However, this system has not yet been implemented for a number of chemicals, so the older classification scheme was retained for use in this assessment.

For chemicals that are classified in Groups A, B1, B2, or C using EPA guidelines, the second component of the toxicity assessment is to describe the carcinogenic potency of the chemical (EPA 1986). This is done by quantifying how the number of cancers observed in exposed animals or humans increases as the dose increases. Typically, it is assumed that the dose–response curve for cancer has no threshold, arising from the origin and increasing linearly until high doses are reached.

For inhalation exposures, cancer risk is characterized by an inhalation unit risk (IUR) value. This value represents the upper-bound excess lifetime cancer risk estimated to result from continuous lifetime exposure to a chemical at a concentration of 1 µg/m^3 in air.

3.1.4.3 Toxicity Values for Inhalation Exposures

Acute Values

The California Environmental Protection Agency's Office of Environmental Health Hazard Assessment (OEHHA) has developed various acute and chronic RELs. The 1-hour RELs were used to evaluate acute exposures (OEHHA 2023).

Chronic Values

Toxicity values (RfC and IUR values) established by EPA are listed in the Integrated Risk Information System (IRIS) (EPA 2026e). Other toxicity values are available as interim recommendations from EPA's Superfund Technical Assistance Center operated by the National Center for Environmental Assessment (NCEA). EPA developed a toxicity value hierarchy for use in site-specific risk assessments (EPA 2003). This hierarchy provides an order of preference of toxicity values, with Tier 1 being the preferred source of toxicity information, if available, then Tier 2, followed by Tier 3. The recommended hierarchy of toxicity values is as follows:

- Tier 1 – EPA's IRIS: IRIS assessments have undergone external peer review in accordance with EPA peer review guidance at the time of the assessment. IRIS health assessments contain EPA consensus toxicity values.
- Tier 2 – EPA's Provisional Peer-Reviewed Toxicity Values (PPRTVs): The Office of Research and Development/NCEA/Superfund Health Risk Technical Support Center develops PPRTVs on a chemical-specific basis when requested by EPA's Superfund program.
- Tier 3 – Other Toxicity Values: Tier 3 includes additional EPA and non-EPA sources of toxicity information, such as the California Environmental Protection Agency and the Agency for Toxic Substances and Disease Registry (ATSDR). Priority should be given to those sources of information that are the most current, values that are publicly available and are transparent in their derivation process, and that have been peer-reviewed.

The EPA regional screening level (RSL) tables include a summary of toxicity values derived from these sources using this tiered system. EPA maintains and updates these tables biannually (EPA 2026f). All toxicity values used in this assessment were taken from the most recent version of the RSL tables (November 2024). For diesel particulate matter, EPA does not provide non-cancer or cancer toxicity values; therefore, the OEHHA IUR value was used (OEHHA 2026). **Table 3.4** presents the toxicity values used in this risk evaluation.

Table 3.4 Inhalation Toxicity Values

Toxic Air Pollutant	Acute	Chronic							
		Non-Cancer Toxicity Values				Cancer Toxicity Values			
	REL (1 hour) (mg/m^3)	Inhalation RfC (mg/m^3)	Composite UF	Target Organ	Source	IUR $(\mu g/m^3)^{-1}$		Source	WOE Description
1,3-Butadiene	6.6E-01	2.0E-03	1,000	Reproductive	I	3.0E05		I	Carcinogenic to humans
Diesel Particulate Matter	—	5.0E-03	30	Respiratory	C	3.0E-04		C	Likely to be carcinogenic to humans
Formaldehyde	5.5E-02	7.0E-03	—	Respiratory	I	7.4E-06	M	I	Carcinogenic to humans

Key: — not available; C – California Environmental Protection Agency; I – IRIS; M – mutagenic

3.1.5 Risk Characterization

This section provides a summary of the equations used to compute non-cancer hazards and cancer risks for TAPs of concern in the HHRA and describes how these results were interpreted.

3.1.5.1 Non-Cancer Effects

The potential for non-cancer effects from acute or chronic exposure to a TAP of concern is evaluated by comparing the estimated site-related exposure for a human health receptor over a specified time period to the effects threshold for that TAP of concern. This ratio of site-related exposure to the safe exposure level is called the hazard quotient (HQ). If an individual is exposed to more than one chemical, a screening-level estimate of the total non-cancer hazard is derived by summing the HQ values across individual chemicals and exposure pathways. This total is referred to as the hazard index (HI). If the HI value is less than or equal to (≤) 1, non-cancer hazards are not expected from any chemical, alone or in combination with others. The hazard evaluation performed herein is similar to a second-tier review evaluation for toxic air pollution sources (WAC 2019c). Thus, non-cancer HIs were interpreted based on a decision threshold of 1 when establishing the boundaries associated with SEA's TAP emissions.

The potential for acute non-cancer effects from inhalation exposures was evaluated by comparing the acute-specific EC to the 1-hour REL for that chemical, as shown:

$$\textbf{Acute HQ} = \textbf{EC}_{ac} / \textbf{REL}$$

where EC_{ac} = exposure concentration for acute exposure (mg/m^3); and REL = acute 1-hour reference exposure level (mg/m^3).

The acute HI at each receptor location was calculated by summing the acute HQs across all chemicals.

The potential for chronic non-cancer effects from inhalation exposures was evaluated by comparing the annual time-weighted chronic EC for non-cancer exposures to the RfC for that chemical, as shown:

$$\textbf{Chronic HQ}_{y,s} = \textbf{Non-Cancer EC}_{y,s} / \textbf{RfC}$$

where Non-cancer $EC_{y,s}$ = annual time-weighted chronic exposure concentration (mg/m^3) for non-cancer exposures for year "y" and scenario "s"; and RfC = inhalation reference concentration (mg/m^3).

The chronic HI for a given year and scenario was calculated by summing the chronic HQs across all chemicals at each receptor location. This chronic HI provides the hazard estimate for 1 year of exposure. To understand the total chronic non-cancer hazard for each human health receptor (e.g., child resident, adult resident, school child, and adult worker), chronic HIs at each receptor location were summed across their respective exposure duration (Table 3.2). For example, the exposure duration for a child resident is 6 years; thus, the total chronic HI for a child resident is estimated by summing across the chronic HIs for 6 contiguous years (e.g., 2025 to 2030, 2026 to 2031). If the exposure duration extends past 2037 (i.e., the last year that has modeled operations data), all subsequent years are assumed to have the same non-cancer HI as year 2037. Whichever contiguous exposure duration window for each receptor that results in the maximum total chronic non-cancer HI is presented to represent the MEI scenario. If the screening-level total chronic non-cancer HI is greater than 1, a refined HI is calculated, summing only across those chemicals that affect the same target organ system in the body.

3.1.5.2 Cancer Effects

The excess risk of cancer[5] from exposure to a chemical is described in terms of the probability that an exposed individual will develop cancer because of that exposure. Excess cancer risks are summed across all carcinogenic chemicals that contribute to exposure of an individual for a given population. The risk evaluation performed herein is similar to a second-tier review evaluation for toxic air pollution sources (WAC 2019c). As such, any individual TAPs with cancer risks greater than 1E-06 were identified as risk drivers, but cumulative cancer risks were interpreted based on a decision threshold of 1E-05 (i.e., 1 in 100,000) when establishing the boundaries associated with SEA's TAP emissions.

Cancer risks for each carcinogenic chemical are calculated as shown:

$$\textbf{Excess Cancer Risk}_{y,s} = \textbf{Cancer EC}_{y,s} \times \textbf{IUR}$$

where Cancer $EC_{y,s}$ = annual time-weighted chronic exposure concentration ($\mu g/m^3$) for cancer exposures for year "y" and scenario "s"; and IUR = inhalation unit risk $(\mu g/m^3)^{-1}$.

The cancer risk for a given year and scenario was calculated by summing across all carcinogenic chemicals at each receptor location. This cancer risk estimate represents 1 year of exposure. To understand the total cancer risk for each human health receptor (e.g., resident, school child, and worker), cancer risks at each receptor location were summed across their respective exposure duration (Table 3.2). For example, the exposure duration for a residential exposure scenario is 26 years (6 years as a child and 20 years as an adult); thus, the total cancer risk for a resident is estimated by summing across the child resident cancer risks for 6 contiguous years and adult resident cancer risks for 20 contiguous years (e.g., child from 2025 to 2030 and adult from 2031 to 2050). If the exposure duration extends past 2037 (i.e., the last year that has modeled operations data), all subsequent years are assumed to have the same cancer risk as year 2037. Whichever contiguous exposure duration window

[5] Excess cancer risk can be expressed in several formats. A cancer risk expressed in a scientific notation format as 1E-06 is equivalent to 1 in 1,000,000, or 10-6. Similarly, a cancer risk of 1E-04 is equivalent to 1 in 10,000, or 10-4. For this document, all cancer risks are presented in a scientific notation format.

for each receptor that results in the maximum total cancer risk is presented to represent the MEI scenario.

Toxic Air Pollutants with Mutagenic Modes of Action

For chemicals identified as having a mutagenic mode of action for carcinogenesis, cancer risks were estimated in accordance with the *Supplemental Guidance for Assessing Susceptibility from Early-Life Exposure to Carcinogens* (EPA 2005). When evaluating exposures to mutagenic chemicals, the default age-dependent adjustment factors (ADAFs) were applied to the cancer IUR to account for differences in potency that may occur from exposure during early life (up to age 16), as follows:

- 0 to <2 years: ADAF = 10
- 2 to <16 years: ADAF = 3
- Greater than or equal to (≥) 16 years: ADAF = 1 (i.e., no adjustment necessary)

EPA further indicates that any grouping of ages in the exposure assessment will need to be integrated with the ADAF age groupings to derive age group–specific risk estimates. For each year of exposure, the cancer risk by the inhalation pathway is computed as:

$$\textbf{Excess Cancer Risk}_{y,s} = \textbf{Cancer EC}_{y,s} \times \textbf{IUR} \times \textbf{ADAF}_i$$

where $Risk_{y,s}$ = excess cancer risk for year "y" and scenario "s"; Cancer $EC_{y,s}$ = annual time-weighted chronic exposure concentration ($\mu g/m^3$) for cancer exposures for year "y" and scenario "s"; IUR = inhalation unit risk $(\mu g/m^3)^{-1}$; and $ADAF_i$ = age-dependent adjustment factor for age interval "I" (unitless).

For example, for the 26-year residential exposure scenario, the first 2 years of childhood exposure are adjusted by a factor of 10, the next 14 years of child and adolescent exposure are adjusted by a factor of 3, and the last 10 years of exposure are not adjusted. Formaldehyde is the only TAP retained for quantitative risk characterization that is mutagenic.

3.1.5.3 Maximally Exposed Individuals

For the Proposed Action, grid points were analyzed within the study area. Concentrations of each TAP of concern at these receptor locations were used to calculate acute non-cancer HIs, total chronic non-cancer HIs, and cumulative cancer risks. These calculations were used to identify locations with maximum non-cancer health hazards and maximum cancer risks and serve as the basis for significance determinations.

MEI estimates were based on the land use for each receptor location. **Section 2.1.4.3** provides a detailed discussion of the systematic land use classification process. In brief, off-airport locations were identified based on available geographic information system data and internet web searches and reviews of receptor locations in Google Earth Pro, and land uses are designated as either residential, school (including day care and preschool), hospital (including older adult care), and commercial/industrial. These land use identifications were used to determine appropriate receptors (e.g., workers at commercial/industrial locations; adults and children at residential properties; students at schools). Locations of schools, hospitals, nursing homes, day cares, etc., were identified as sensitive

receptor locations, and these grid points were evaluated for both workers (teachers and staff) and residents (adults and children), and, when appropriate, school children.

3.2 Results

Appendix C presents the summaries of hazard/risk from acute and chronic exposure to TAPs of concern for residential children, residential adults, school children, and adult workers during construction conditions (2025 through 2032) and operation conditions (2032 through 2037).

3.2.1 Non-Cancer

3.2.1.1 Acute

Table 3.5 summarizes the maximum acute non-cancer HIs associated with inhalation exposure for each year and scenario (construction and/or operations) across all human health receptors.

Figure 3.1 shows the MEI locations for each receptor based on acute hazards, chronic hazards, and chronic risks, indicated by the blue, orange, and green markers, respectively. Table insets in the figure detail the corresponding locations for each human health receptor, presents respective maximum hazards and risks for each human health receptor and scenario, and details the corresponding time frame for each maximum calculated hazard or risk.

Table 3.5 Maximum Acute Hazard Indices for Human Health Receptors

Year/Scenario	Maximum Acute HI	Maximum Location
2025 Construction	0.02	3592
2026 Construction	0.03	110
2027 Construction	0.03	3355
2028 Construction	0.04	3593
2029 Construction	0.07	3386
2030 Construction	0.08	3386
2031 Construction	0.04	3596
2032 Construction and Operations	0.08	156
2033 Operations	0.1	156
2034 Operations	0.1	156
2035 Operations	0.2	156
2036 Operations	0.2	156
2037 Operations	0.2	156

An acute HI greater than 1 indicates the potential for acute adverse health effects. As shown, no acute HIs exceed 1 (for any human health receptor), indicating that short-term exposures to TAPs of concern would not result in adverse health effects.

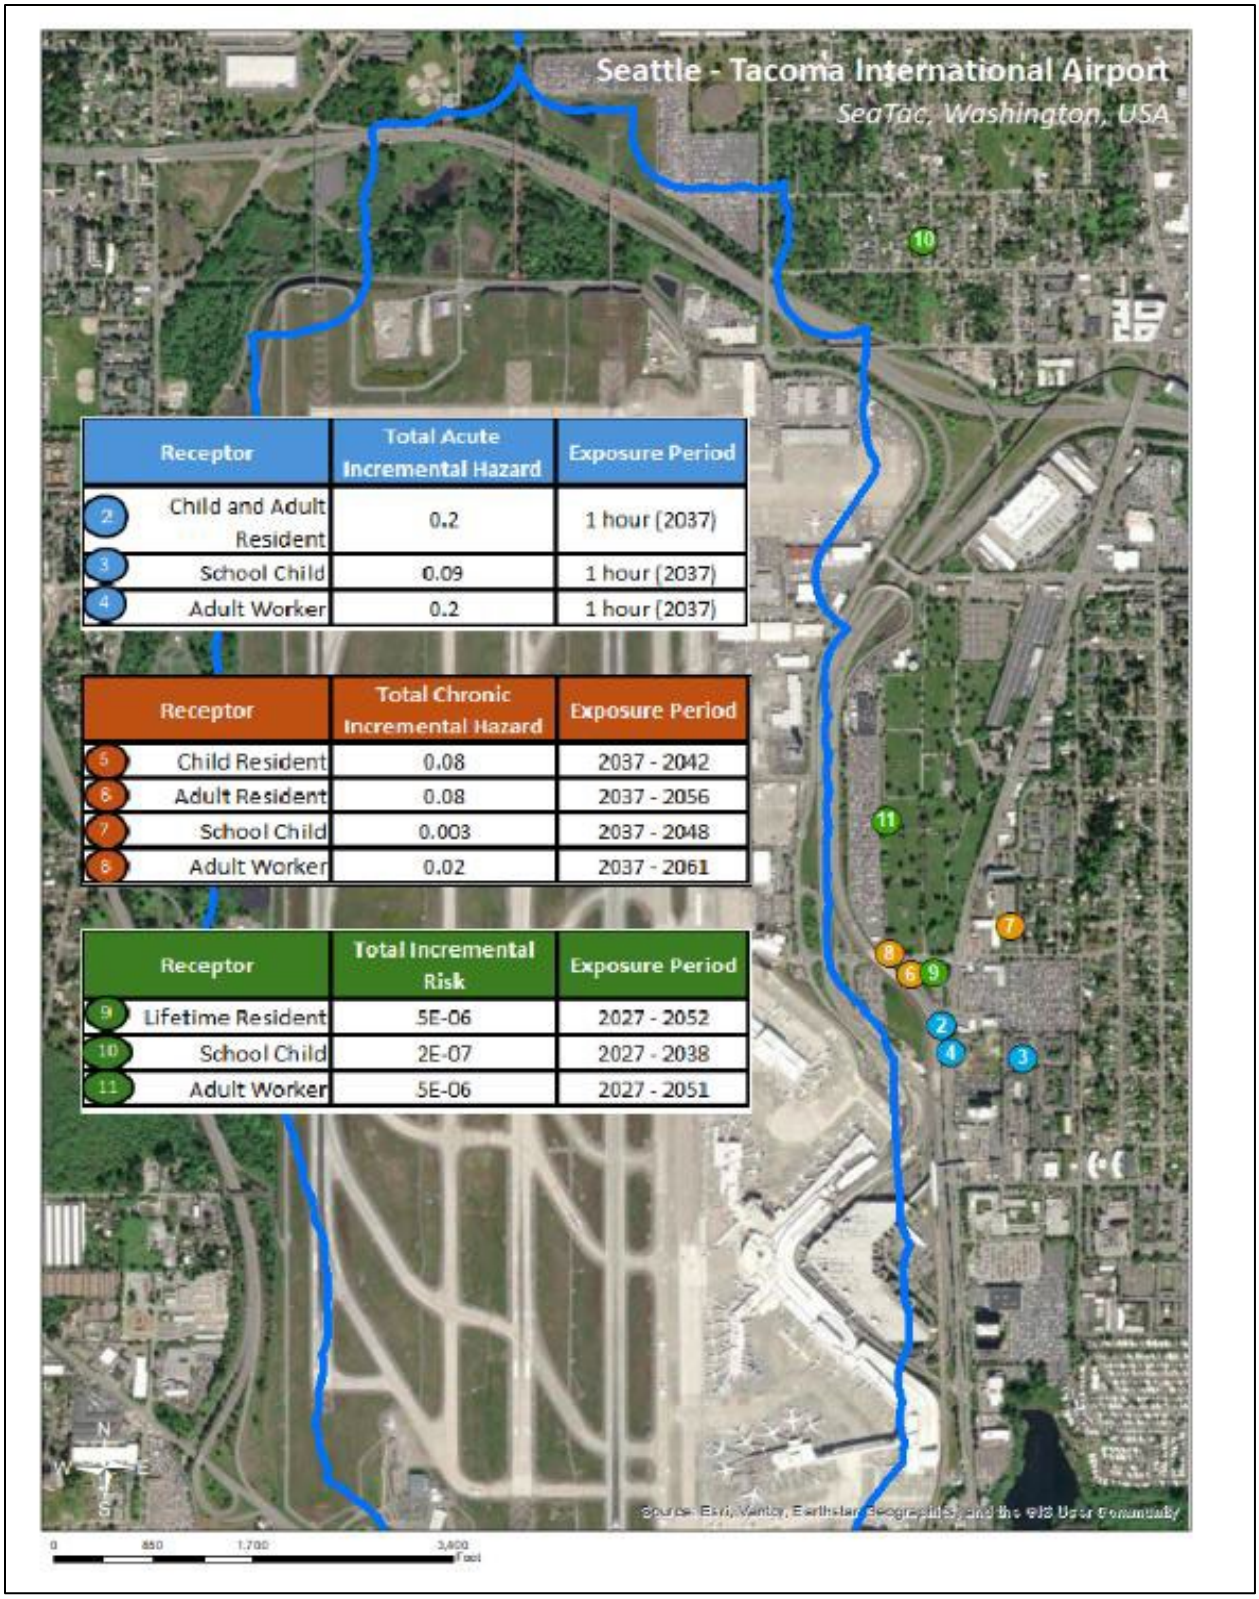

Note: Locations 5 and 6 are identical and are depicted by one orange marker denoted as "6."

Figure 3.1 Acute and Chronic Incremental Hazards and Chronic Incremental Risks to Maximally Exposed Individuals from Exposures to Toxic Air Pollutants of Concern

3.2.1.2 Chronic

Table 3.6 summarizes the maximum chronic non-cancer HIs associated with inhalation exposure for each receptor. Figure 3.1 shows the MEI locations for each receptor based on chronic non-cancer hazards, indicated by the orange markers.

Table 3.6 Maximum Chronic Hazard Indices for Human Health Receptors

Human Health Receptor	Exposure Duration (years)	Maximum Chronic HI	Maximum Location	Maximum Span of Years
Child Resident	6	0.08	3589	2037–2042
Adult Resident	20	0.08	3589	2037–2056
School Child	12	0.003	3	2037–2048
Adult Off-Site Worker	25	0.02	3591	2037–2061

A chronic non-cancer HI greater than 1 indicates the potential for chronic adverse health effects. Maximum incremental chronic non-cancer health hazards under the presented scenarios have no receptor locations where the chronic non-cancer HI exceeds 1, indicating that long-term exposures to TAPs of concern would not result in adverse non-cancer health effects.

3.2.2 Cancer Risk

Table 3.7 summarizes the maximum cumulative cancer risks associated with inhalation exposure for each receptor. Figure 3.1 shows the MEI locations for each receptor based on cancer risks, indicated by the green markers.

Table 3.7 Maximum Cumulative Cancer Risks for Human Health Receptors

Human Health Receptor	Exposure Duration (years)	Maximum Cancer Risk	Maximum Location	Maximum Span of Years
Lifetime Resident	26	5E-06	3589	2027–2052
School Child	12	2E-07	15	2027–2038
Adult Off-Site Worker	25	5E-06	266	2027–2051

A cumulative cancer risk greater than 1E-05 indicates the potential for chronic adverse health effects. Maximum cancer risks under the presented scenarios have no receptor locations where the cancer risks exceed the 1E-05 threshold, which indicates that exposures to TAPs of concern would not result in unacceptable lifetime cancer risks. The primary contributor to cumulative cancer risks is diesel particulate matter.

As shown in Table 3-6, the highest cancer risks were for the adult off-site worker during the 2027 to 2051 exposure period. **Figure 3.2** depicts the maximum cancer risks for the adult off-site worker at all receptor locations for the 2027 to 2051 exposure period to illustrate the spatial variability of estimated cancer risks.

Figure 3.2 Risks to Adult Off-Site Workers from Exposures to Toxic Air Pollutants of Concern

3.3 Uncertainty Analysis

An integral part of any risk assessment is the evaluation of uncertainties in the analysis, where major uncertainties associated with determining the nature and extent of the risk are identified and discussed. Uncertainties are inherent to all risk assessments because of the procedures used to obtain risk/hazard estimates. In general, exposure parameters, air concentration estimates, and toxicity values are intentionally selected to be overly conservative (i.e., using maximum concentrations for TAP of concern selection, using toxicity values with a built-in margin of safety). In using this conservative approach, it is likely that risk estimates presented herein are overestimating exposure potential and actual risks are likely to be lower.

The following section provides a detailed discussion of uncertainties (e.g., dataset gaps, TAP selection, exposure routes, modeling, and exposure parameters) and their potential impacts on the risk characterization.

3.3.1 Toxicity Criteria Uncertainty

Toxicity values are not available for acute exposures to diesel particulate matter. Although no strong conclusions can be reached regarding the potential for risk from chemicals without toxicity values, the magnitude of the error that results from excluding these chemicals is likely to be low. This is because the absence of toxicity information for a chemical is most often because toxicological concern over that chemical is low.

Toxicity information for many chemicals is often limited. Consequently, there are varying degrees of uncertainty associated with toxicity values. For example, uncertainties can arise from the following sources:

- Extrapolation from animal studies to humans
- Extrapolation from high dose to low dose
- Extrapolation from continuous exposure to intermittent exposure
- Limited or inconsistent toxicity studies

In general, uncertainty in toxicity factors is one of the largest sources of uncertainty in risk estimates at a site. Because of the conservative methods EPA and OEHHA use in dealing with these uncertainties, it is much more likely that the uncertainty will result in an overestimation rather than an underestimation of risk. For example, toxicity values like an IUR are conservatively derived using an upper confidence limit on dose–response data rather than an average to ensure the value reflects a health-protective estimate of risk even under uncertainty.

3.3.2 Selection of Toxicity Values

Washington State ASIL values were used for the TAP of concern selection but were not used in estimating acute hazards, chronic non-cancer hazards, and cancer risks. For the three TAPs of concern, Washington State ASIL values are based on the 1-year averaging period, which corresponds to chronic exposures and focuses on cancer risk effects, and there are no available ASIL values applicable to acute and chronic non-cancer hazard calculations. For this reason, the REL values were used for the acute

hazard calculations, and the EPA RfC and IUR values were used for the chronic non-cancer hazard and cancer risk calculations.

The Washington State ASILs for the three carcinogenic TAPs (established under WAC 173-460-150) are derived based on a target cancer risk level of 1E-06 and assume 24-hour exposures occur every day across the 1-year averaging period (i.e., a TWF of 1), consistent with the continuous exposure assumptions embedded in the IUR methodology. The ASILs do not specify the IUR used in their derivation. Therefore, the IUR used in the derivation of the ASIL can be established as:

$$\mathbf{IUR = TCR / ASIL_{annual}}$$

where IUR = inhalation unit risk $(\mu g/m^3)^{-1}$; TCR = target cancer risk (unitless; equivalent to 1E-06); and $ASIL_{annual}$ = 1-year averaging period ASIL value ($\mu g/m^3$).

For 1,3-butadiene, the Washington State ASIL of 0.033 µg/m³ (annual) implies an IUR of 3.03E-05 $(\mu g/m^3)^{-1}$, which is effectively equivalent to the EPA IRIS IUR of 3E-05 $(\mu g/m^3)^{-1}$, which was used in this HHRA.

The Washington State ASIL for diesel exhaust of 3.3E-03 µg/m³ (annual) implies an IUR of 3.03E-04 $(\mu g/m^3)^{-1}$, which is effectively equivalent to the OEHHA IUR of 3E-04 $(\mu g/m^3)^{-1}$, which was used in this HHRA.

For formaldehyde, the Washington State ASIL of 0.17 µg/m³ (annual) implies an IUR of 5.9E-06 $(\mu g/m^3)^{-1}$. The EPA IRIS IUR for formaldehyde was updated in 2024 and is 1.1E-05 $(\mu g/m^3)^{-1}$. The EPA IRIS IUR, which was used in this HHRA, is approximately 1.9 times more conservative than the IUR value underlying the ASIL.

In all instances, the IURs used in this HHRA are equivalent to or more conservative than the toxicity values underlying the applicable ASILs. The IURs used in this HHRA are technically appropriate, consistent with standard risk assessment practice, and sufficiently protective to satisfy the human health review standards applicable under SEPA.

3.3.3 Exposure Uncertainty

3.3.3.1 Exposure Pathways Not Evaluated

Humans may be exposed to chemicals by several pathways, but not all pathways were evaluated quantitatively in this risk assessment. In most cases, this is because the contribution of the pathway omitted is believed to be minor compared to one or more other pathways that were evaluated.

Omission of these minor pathways will result in a small underestimation of exposure and risk, but the magnitude of this underestimation is not expected to be significant. For example, this HHRA did not evaluate the deposition of TAP onto soils and subsequent exposure via incidental ingestion of this soil, uptake from soil into homegrown vegetables, and other indirect pathways. However, these were addressed quantitatively in HHRAs developed for other airports, including LAX and Oakland International Airport (CDM Smith 2023, CDM Smith 2012). In these HHRAs, screening-level studies for a large number

of TAPs were conducted to assess potential contributions to health risks for the following exposure media and routes: deposition onto soils and surfaces leading to exposure via dermal contact, incidental ingestion, and vegetable uptake; deposition and runoff to surface waters leading to exposure via ingestion; and airborne TAPs leading to exposure via inhalation. The screening level contributions for the non-inhalation pathways were found to be negligible compared to the contributions from the inhalation pathway, and the non-inhalation pathway risks would not change soil or water concentrations of the TAPs to levels above the typical background concentrations found in the western United States (CDM Smith 2023, CDM Smith 2012).

3.3.3.2 Human Exposure Parameters

Accurate calculation of risk values requires accurate estimates of the level of human exposure that is occurring. However, many of the required exposure parameters are not known with certainty and must be estimated from limited data or knowledge. The values used in the calculations are based mainly on standard default values used in Superfund HHRAs. In general, when exposure data were limited or absent, the exposure parameters were chosen in a way that was intended to be conservative. Because of this, the values selected are more likely to overestimate than underestimate actual exposure and risk.

3.3.4 Concentration Estimate Uncertainty

Inhalation exposures for populations of interest were evaluated using estimated air concentrations derived from air dispersion modeling. AERMOD is widely considered a scientifically credible and generally accurate air dispersion model for regulatory purposes when used correctly with high-quality input data, but its accuracy can vary depending on specific environmental conditions. AERMOD's performance is highly sensitive to the quality and resolution of meteorological data (wind speed, direction, temperature, cloud cover, etc.), land use parameters, and emission source data. When calculating the chronic EC estimates for each year, the annual average concentrations are used. Use of the average potentially masks short-term peaks or seasonal variations, which is why a separate short-term acute exposure scenario was also evaluated.

In typical risk assessments, exposure point concentrations are conservatively set equal to the 95% upper confidence limit (95UCL) on the mean to account for uncertainty and variability in the underlying data. Exposure concentrations in this HHRA are based on modeled values, which are averaged across either a 1-hour (acute) or 1-year (chronic) exposure period. Use of the simple arithmetic mean provides a best estimate of the true mean but exposures could be underestimated if there is a high variability in the underlying dataset.

When determining the MEI (Figure 3.1), the grid point with the highest hazards/risks was selected, which may not represent broader community exposure. In many instances, the maximum grid point may not represent a current exposure scenario (e.g., residential exposure scenarios were evaluated at all locations zoned for residential use, even if no residences are currently present). Additionally, the risk evaluation assumes the entire exposure duration occurs at a single grid point, which is unlikely to be a realistic assumption for the chronic exposure scenarios.

3.3.5 Risk Characterization

Because risk estimates for a chemical are derived by combining uncertain estimates of exposure and toxicity, the risk estimates for each chemical are more uncertain than either the exposure estimate or the toxicity estimate alone. Additional uncertainty arises from the issue of how to combine risk estimates across different chemicals. In some cases, effects caused by one chemical do not influence effects caused by other chemicals. In other cases, effects of one chemical may interact with effects of other chemicals, causing responses that are approximately additive, greater than additive (synergistic), or less than additive (antagonistic). In most cases, available toxicity data are insufficient to define what type of interaction is expected, so it is generally assumed that effects are additive for noncarcinogens that act on the same target tissue and for carcinogens (all target tissues). Because documented cases of synergistic interactions between chemicals are relatively uncommon, this approach is likely to be reasonable for most chemicals.

For noncarcinogens, summing HQ values across different chemicals is properly applied only to compounds that induce the same effect by the same mechanism of action. Consequently, summation of HQ values for compounds that are not expected to include the same type of effects or that do not act by the same mechanisms could overestimate the potential for effects. Thus, all the HI values in **Section 3.2.1** that sum HQ values across multiple TAPs of concern without regard to the target tissue are likely to overestimate the true level of human health non-cancer hazard.

3.3.6 Lead Toxicity

Risks from lead are evaluated using a somewhat different approach than for most other chemicals. First, because lead is widespread in the environment, exposure can occur from many different sources. Thus, lead risks are usually based on consideration of total exposure (all sources) rather than just site-related sources. Second, because studies of lead exposures and resultant health effects in humans have traditionally been described in terms of blood lead level, lead exposures and risks are typically assessed by modeling the levels of lead that may occur in the blood of exposed populations and comparing these to blood lead levels of potential health concern. For simplicity, and to keep focus on potential airborne exposures from SEA, estimated air concentrations for lead were directly compared to the NAAQS (**Section 2.1.5**) (i.e., lead risk estimates based on modeled blood lead levels were not derived).

3.4 Conclusions

Use of conservative modeling protocols and the compounding effect of combining exposure and toxicity uncertainty estimates likely result in an overestimation of the human health risk, potentially placing all modeled SEA maximum incremental risks below the decision thresholds. The calculated maximum incremental risks are considered conservative because they assume worst-case scenarios, such as high exposure concentrations (e.g., annual average concentrations), prolonged exposure durations (i.e., residents are assumed to be exposed for 24 hours a day for 350 days a year for 26 years), and direct proximity to the source of risk (e.g., receptor is breathing the air at one modeled grid location for the entire exposure period). Additionally, when deriving toxicity criteria, UFs are incorporated to account for limitations in the data, such as the uncertainty in extrapolating data obtained from a study with less-than-lifetime exposure or extrapolating from a low-effect level rather than from a no-effect level. These default factors are used to ensure a protective exposure level for the general human population,

resulting in a “health-protective” approach designed so that calculated hazards and risks are not underestimated, even if the assumption is not necessarily realistic.

The overall conclusions of the HHRA are as follows:

- **Acute Hazards:** Incremental acute non-cancer health hazards for all receptors are well below 1, indicating that short-term exposures to TAPs of concern would not result in adverse health effects.
- **Chronic Hazards:** Maximum incremental chronic non-cancer health hazards for all receptors are well below 1, indicating that long-term exposures to TAPs of concern would not result in adverse non-cancer health effects.
- **Cancer Risks:** Incremental cancer risks for all receptors are below the 1E-05 cancer risk threshold, which indicates that lifetime exposures to TAPs of concern would not result in unacceptable cancer risks.
- **Risk Overestimation:** Because of the combination of uncertainties in exposure and toxicity estimates and conservative modeling approaches, the calculated hazards/risks presented are likely to overestimate actual risks.
- **MEI Determination:** MEI is based on a receptor breathing air at one modeled grid location for their entire exposure period, which is unlikely for long-term (multiyear) exposure scenarios.

4.0 References

CDM Smith. 2023. *Terminal Modernization and Development Appendix E: Human health risk assessment technical report* (Draft EIR). Prepared for Oakland International Airport. https://www.iflyoak.com/wp-content/uploads/2024/03/Appendix-E_Human-Health-Risk-Assessment.pdf.

CDM Smith. 2012. *LAX Specific Plan Amendment Study – Draft EIR Appendix G1: Human Health Risk Assessment*. Prepared for Los Angeles World Airports. https://www.lawa.org/media/30420.

Lakes Environmental Software. 2020. "Lakes Environmental Software Webinar – AERSURFACE 20060 Part 1 – Intro." March 1, 2026. https://www.youtube.com/watch?v=BTb4-ORnZYg.

Landrum & Brown. 2025. Seattle-Tacoma International Airport Environmental Assessment for the Sustainable Airport Master Plan Near-Term Projects. March 3, 2026, Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/materials-2/.

Landrum & Brown. 2024a. *SEA SAMP NTPs Final EA, Appendix C: Air Quality and Greenhouse Gas Technical Report*. Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/wp-content/uploads/sites/45/2025/09/Appendix-C-Air-Quaity-GHG-Emissions_reduced.pdf.

Landrum & Brown. 2024b. SEA SAMP NTPs Final EA, Appendix C: Air Quality and Greenhouse Gas Technical Report, Attachment 1, Aircraft Annual Operations per scenario. Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/wp-content/uploads/sites/45/2025/09/Appendix-C-Air-Quaity-GHG-Emissions_reduced.pdf.

Landrum & Brown. 2024c. SEA SAMP NTPs Final EA, Appendix C: Air Quality and Greenhouse Gas Technical Report, Attachment 2, Auxiliary Power Unit Usage per scenario. Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/wp-content/uploads/sites/45/2025/09/Appendix-C-Air-Quaity-GHG-Emissions_reduced.pdf.

Landrum & Brown. 2024d. SEA SAMP NTPs Final EA, Appendix C: Air Quality and Greenhouse Gas Technical Report, Attachment 3, Ground Support Equipment Usage per scenario. Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/wp-content/uploads/sites/45/2025/09/Appendix-C-Air-Quaity-GHG-Emissions_reduced.pdf.

Landrum & Brown. 2024e. *SEA SAMP NTPs Final EA, Appendix C: Air Quality and Greenhouse Gas Technical Report, Attachment 4, Stationary Sources*. Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/wp-content/uploads/sites/45/2025/09/Appendix-C-Air-Quaity-GHG-Emissions_reduced.pdf.

Landrum & Brown. 2024f. *SEA SAMP NTPs Final EA, Appendix C: Air Quality and Greenhouse Gas Technical Report, Attachment 5, Mobile Sources per scenario*. Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/wp-content/uploads/sites/45/2025/09/Appendix-C-Air-Quaity-GHG-Emissions_reduced.pdf.

Landrum & Brown. 2024g. SEA SAMP NTPs Final EA, Appendix C: Air Quality and Greenhouse Gas Technical Report, Attachment 6, Construction for the Proposed Action and the Hybrid Terminal Option. Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/wp-content/uploads/sites/45/2025/09/Appendix-C-Air-Quaity-GHG-Emissions_reduced.pdf.

Landrum & Brown. 2024h. *SEA SAMP NTPs Final EA, Appendix A: Forecast and Airport Operational Assumptions*. Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/wp-content/uploads/sites/45/2025/09/Appendix-A-Forecast-and-Operational-Assumptions.pdf.

Landrum & Brown. 2024i. *SEA SAMP NTPs Final EA, Appendix J: Noise and Noise-Compatible Land Use*. Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/wp-content/uploads/sites/45/2025/09/Appendix-J-Noise-and-Noise-Compatible-Land-Use_new.pdf.

Landrum & Brown. 2024j. *SEA SAMP NTPs Final EA, Appendix L: Surface Transportation*. Prepared for Port of Seattle. https://www.airportprojects.net/sampntpenvironmentalreview/wp-content/uploads/sites/45/2025/09/Appendix-L-Surface-Transportation.pdf.

National Centers for Environmental Information National Oceanic and Atmospheric Administration (NOAA). 2026. "NOAA/Global Systems Laboratory (GSL) Radiosonde Database." March 1, 2026. https://www.ncei.noaa.gov/data/integrated-global-radiosonde-archive/access/data-por/.

National Centers for Environmental Information National Oceanic and Atmospheric Administration (NOAA). n.d.a. "Global Hourly – Integrated Surface Database (ISD)." March 1, 2026. https://www.ncei.noaa.gov/products/land-based-station/integrated-surface-database.

National Centers for Environmental Information National Oceanic and Atmospheric Administration (NOAA). n.d.b. "Automated Surface/Weather Observing Systems (ASOS/AWOS), 1-Minute ASOS Data." March 1, 2026. https://www.ncei.noaa.gov/products/land-based-station/automated-surface-weather-observing-systems.

Office of Environmental Health Hazard Assessment (California Environmental Protection Agency) (OEHHA). 2023. "OEHHA Acute, 8-hour and Chronic Reference Exposure Level (REL) Summary." March 2, 2026. https://oehha.ca.gov/air/general-info/oehha-acute-8-hour-and-chronic-reference-exposure-level-rel-summary.

Office of Environmental Health Hazard Assessment (California Environmental Protection Agency) (OEHHA). 2026. "Diesel Exhaust Particulate, Chemical Database." March 2, 2026. https://oehha.ca.gov/chemicals/diesel-exhaust-particulate.

Pandey, Gavendra, Akula Venkatram, and Saravanan Arunachalam. 2024. "Accounting for Plume Rise of Aircraft Emissions and Shoreline Meteorology Enhances AERMOD's Description of Concentrations Measured around Los Angeles Airport." *Journal of the Air & Waste Management Association*, 74 (10): 726–742. https://doi.org/10.1080/10962247.2024.2394104.

Pandey, Gavendra, Akula Venkatram, and Saravanan Arunachalam. 2023. "Accounting for Plume Rise of Aircraft Emissions in AERMOD." *Atmospheric Environment*, 314 (1): 120106. https://doi.org/10.1016/j.atmosenv.2023.120106.

Porter, Matt. 2024. "Plume Rise for Aircraft Emissions in AERMOD." PowerPoint presentation, 2024 Regional, State, and Local Dispersion Modelers' Workshop, July 30, 2024. U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards, Air Quality Modeling Group. https://gaftp.epa.gov/Air/aqmg/SCRAM/workshops/2024_RSL_Modelers_Workshop/Presentations/1-7_2024_RSL_Aircraft_Plume_Rise.pdf.

Porter, Matt. 2023. "FAA Plume Rise for Aircraft Emissions in AERMOD." PowerPoint presentation, 13th Conference on Air Quality Modeling, November 14, 2023. U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards, Air Quality Modeling Group. https://gaftp.epa.gov/aqmg/SCRAM/conferences/2023_13th_Conference_On_Air_Quality_Modeling/Presentations/1-10_porter_plume_rise_aircraft_faa_20231113.pdf.

Puget Sound Clean Air Agency (PSCAA). 2023. *Tacoma and Seattle Air Toxics Trends Technical Report* (December). http://dl.pscleanair.org/2023TacomaSeattleAirToxicsReport.pdf

South Coast Air Quality Management District (SCAQMD). 2008. *Final Localized Significance Threshold Methodology* (July). https://www.aqmd.gov/docs/default-source/ceqa/handbook/localized-significance-thresholds/final-lst-methodology-document.pdf.

Shumway, L.A., 2000. *Trace Element and Polycyclic Hydrocarbon Analyses of Jet Engine Fuels: Jet A, JP5, and JP8. U.S. Navy Technical Report 1845* (December). https://apps.dtic.mil/sti/tr/pdf/ADA396143.pdf.

Transportation Research Board (TRB). 2014. *Guidance for Estimating Airport Construction Emissions*. Washington, DC: The National Academies Press. https://www.nationalacademies.org/publications/22437.

U.S. Department of Transportation Federal Aviation Administration (FAA). 2026. "Aviation Environmental Design Tool (AEDT)." March 1, 2026. https://aedt.faa.gov/.

U.S. Department of Transportation Federal Aviation Administration (FAA). 2024a. *Aviation Environmental Design Tool (AEDT) Version 3g Technical Manual*. https://www.researchgate.net/publication/386868562_Aviation_Environmental_Design_Tool_AEDT_3g_Technical_Manual.

U.S. Department of Transportation Federal Aviation Administration (FAA). 2024b. *Aviation Emissions and Air Quality Handbook, Version 4*. https://www.faa.gov/regulations_policies/policy_guidance/envir_policy/airquality_handbook/files/airquality_handbook_version_4.pdf.

U.S. Department of Transportation Federal Aviation Administration (FAA). 2015. Federal Register (FR) 27853, Volume 80, Number 94: 14 Code of Federal Regulations (CFR) Chapter I Noise, Fuel Burn, and Emissions Modeling Using the Aviation Environmental Design Tool Version 2b (May 15). https://www.govinfo.gov/content/pkg/FR-2015-05-15/pdf/2015-11803.pdf.

U.S. Department of Transportation Federal Aviation Administration (FAA). 2009. *Guidance for Quantifying Speciated Organic Gas Emissions from Airport Sources, Version 1* (September 2).

U.S. Environmental Protection Agency (EPA). 2026a. "Nitrogen Dioxide (NO_2) Pollution – Basic Information about NO_2." February 23, 2026. https://www.epa.gov/no2-pollution/basic-information-about-no2.

U.S. Environmental Protection Agency (EPA). 2026b. "Sulfur Dioxide (SO_2) Pollution – Sulfur Dioxide Basics." February 23, 2026. https://www.epa.gov/so2-pollution/sulfur-dioxide-basics.

U.S. Environmental Protection Agency (EPA). 2026c. "Nitrogen Dioxide/Nitrogen Oxide In-Stack Ratio (ISR) Database." March 1, 2026. https://www.epa.gov/scram/nitrogen-dioxidenitrogen-oxide-stack-ratio-isr-database.

U.S. Environmental Protection Agency (EPA). 2026d. "Code of Federal Regulations (CFR) Appendix W to 40 CFR Part 51 – Guideline on Air Quality Models." March 1, 2026. https://www.ecfr.gov/current/title-40/chapter-I/subchapter-C/part-51/appendix-Appendix%20W%20to%20Part%2051.

U.S. Environmental Protection Agency (EPA). 2026e. "Integrated Risk Information System (IRIS)." March 2, 2026. https://www.epa.gov/iris.

U.S. Environmental Protection Agency (EPA). 2026f. "Regional Screening Levels (RSLs) - User's Guide." March 2, 2026. https://www.epa.gov/risk/regional-screening-levels-rsls-users-guide.

U.S. Environmental Protection Agency (EPA). 2026g. "Air Data Pre-Generated Data Files, Annual Summary Data." March 2, 2026. https://aqs.epa.gov/aqsweb/airdata/download_files.html#Annual.

U.S. Environmental Protection Agency (EPA). 2025a. "Ozone Basics." February 23, 2026. https://www.epa.gov/ozone-pollution/ozone-basics.

U.S. Environmental Protection Agency (EPA). 2025b. "Particulate Matter (PM) Pollution – Particulate Matter (PM) Basics." February 23, 2026. https://www.epa.gov/pm-pollution/particulate-matter-pm-basics.

U.S. Environmental Protection Agency (EPA). 2025c. "NAAQS Table." February 16, 2026. https://www.epa.gov/criteria-air-pollutants/naaqs-table.

U.S. Environmental Protection Agency (EPA). 2024a. *Quick Reference for AERMOD—Version 24142 (AERMOD Quick Reference Guide)*. Support Center for Regulatory Atmospheric Modeling (SCRAM). https://gaftp.epa.gov/Air/aqmg/SCRAM/models/preferred/aermod/aermod_quick-reference-guide.pdf.

U.S. Environmental Protection Agency (EPA). 2024b. *User's Guide for AERSURFACE Tool, EPA-454/B-24-003* (November). https://gaftp.epa.gov/Air/aqmg/SCRAM/models/related/aersurface/aersurface_ug_v24142.pdf.

U. S. Environmental Protection Agency (EPA). 2023. *AERMINUTE User's Guide, EPA-454/B-23-007* (October). https://gaftp.epa.gov/Air/aqmg/SCRAM/models/met/aerminute/aerminute_userguide.pdf.

U.S. Environmental Protection Agency (EPA). 2021. *PM Hot-spot Guidance: Transportation Conformity Guidance for Quantitative Hot-spot Analyses in $PM_{2.5}$ and PM_{10} Nonattainment and Maintenance Areas*. https://nepis.epa.gov/Exe/ZyPDF.cgi?Dockey=P1013C6A.pdf.

U.S. Environmental Protection Agency (EPA). 2015. *Technical support document (TSD) for NO_2-related AERMOD modifications*. https://nepis.epa.gov/Exe/ZyPDF.cgi/P100OI4T.PDF?Dockey=P100OI4T.PDF.

U.S. Environmental Protection Agency (EPA). 2014a. *Guidance for $PM_{2.5}$ Permit Modeling, EPA-454/B-14-001*. https://www.epa.gov/sites/default/files/2020-09/documents/guidance_for_pm25_permit_modeling.pdf.

U.S. Environmental Protection Agency (EPA). 2014b. *Human Health Evaluation Manual, Supplemental Guidance: Update of Standard Default Exposure Factors*. OSWER Directive 9200.1-120. Office of Superfund Remediation and Technology Innovation, Washington, DC (February).

U.S. Environmental Protection Agency (EPA). 2013. *Use of ASOS meteorological data in AERMOD dispersion modeling*. https://www.epa.gov/sites/default/files/2020-10/documents/20130308_met_data_clarification.pdf.

U.S. Environmental Protection Agency (EPA). 2010a. "Particle Pollution and Your Health." February 17, 2026. https://nepis.epa.gov/Exe/ZyPDF.cgi/P100RQ5N.PDF?Dockey=P100RQ5N.PDF.

U.S. Environmental Protection Agency (EPA). 2010b. *Applicability of Appendix W Modeling Guidance for the 1-hour NO_2 National Ambient Air Quality Standard*. https://www.epa.gov/sites/default/files/2020-10/documents/clarificationmemo_appendixw_hourly-no2-naaqs_final_06-28-2010.pdf.

U.S. Environmental Protection Agency (EPA). 2010c. *Applicability of Appendix W Modeling Guidance for the 1-hour SO_2 National Ambient Air Quality Standard*. https://www.epa.gov/sites/default/files/2020-10/documents/clarificationmemo_appendixw_hourly-so2-naaqs_final_08-23-2010.pdf.

U.S. Environmental Protection Agency (EPA). 2009. Risk Assessment Guidance for Superfund, Volume I: Human Health Evaluation Manual (Part F, Supplemental Guidance for Inhalation Risk Assessment), Final. https://www.epa.gov/risk/risk-assessment-guidance-superfund-rags-part-f (main landing page). https://semspub.epa.gov/work/HQ/140530.pdf.

U.S. Environmental Protection Agency (EPA). 2005. Supplemental Guidance for Assessing Susceptibility from Early-Life Exposure to Carcinogens. EPA Risk Assessment Forum, EPA/630/R-03/003F. https://www.epa.gov/sites/default/files/2013-09/documents/childrens_supplement_final.pdf.

U.S. Environmental Protection Agency (EPA). 2003. *Human Health Toxicity Values in Superfund Risk Assessments. OSWER Directive 9285.7-53*. https://www.epa.gov/sites/default/files/2015-11/documents/hhmemo.pdf.

U.S. Environmental Protection Agency (EPA). 1994. *Methods for Derivation of Inhalation Reference Concentrations and Application of Inhalation Dosimetry, EPA/600/8-90/066F*. Office of Research and Development. https://www.epa.gov/sites/default/files/2014-11/documents/rfc_methodology.pdf.

U.S. Environmental Protection Agency (EPA). 1989. *Risk Assessment Guidance for Superfund (RAGS), Volume I, Human Health Evaluation Manual (Part A), EPA/540/1-89/002*. Office of Emergency and Remedial Response. https://semspub.epa.gov/work/05/207135.pdf.

U.S. Environmental Protection Agency (EPA). 1986. *Guidelines for Carcinogen Risk Assessment, EPA/630/R-00/004*. Office of Research and Development. https://archive.epa.gov/osa/raf/web/pdf/ca_guidelines_1986.pdf.

U.S. Environmental Protection Agency and Federal Aviation Administration (EPA & FAA). 2009a. *Aircraft Engine Speciated Organic Gases – Speciation of Unburned Organic Gases in Aircraft Exhaust, EPA-420-R-09-902* (May). https://nepis.epa.gov/Exe/ZyPDF.cgi/P1003YXT.PDF?Dockey=P1003YXT.PDF.

U.S. Environmental Protection Agency and Federal Aviation Administration (EPA & FAA). 2009b. Recommended Best Practice for Quantifying Speciated Organic Gas Emissions from Aircraft Equipped with Turbofan, Turbojet, and Turboprop Engines, EPA-420-R-09-901 (May). https://nepis.epa.gov/Exe/ZyPDF.cgi/P1003YX3.PDF?Dockey=P1003YX3.PDF.

U.S. Geological Survey (USGS). n.d. "The National Map Viewer." March 1, 2026. https://apps.nationalmap.gov/viewer/.

Washington Administrative Code (WAC). 2019a. "Chapter 173-460: Controls of New Sources of Toxic Air Pollutants, Section 173-460-150 Table of ASIL, SQER and *de minimis* emission values (November 22)." March 1, 2026. https://app.leg.wa.gov/WAC/default.aspx?cite=173-460&full=true.

Washington Administrative Code (WAC). 2019b. "Chapter 173-460: Controls of New Sources of Toxic Air Pollutants, Section 173-460-080 First tier review. (November 22)." March 2, 2026. https://app.leg.wa.gov/WAC/default.aspx?cite=173-460&full=true.

Washington Administrative Code (WAC). 2019c. "Chapter 173-460: Controls of New Sources of Toxic Air Pollutants, Section 173-460-090 Second tier review. (November 22)." March 27, 2026. https://app.leg.wa.gov/WAC/default.aspx?cite=173-460&full=true.

Washington Department of Ecology (WADOE). 2026. "Washington Air Quality Map. Hourly Data Report." March 2, 2026. https://airqualitymap.ecology.wa.gov/.

Washington Department of Ecology (WADOE). 2015. Guidance Document – First, Second, and Third Tier Review of Toxic Air Pollutant Sources (Chapter 173-460 Washington Administrative Code [WAC]) (August). https://apps.ecology.wa.gov/publications/documents/0802025.pdf.

Washington Department of Ecology (WADOE). 2008. *Washington State Toxic Air Pollutants Priority Study*. https://apps.ecology.wa.gov/publications/documents/0802030.pdf.

Wayson, Roger L., Gregg G. Fleming, Brian Kim, Wynn L. Eberhard, and W. Alan Brewe. 2004. Final Report: The Use of LIDAR to Characterize Aircraft Initial Plume Characteristics. Report No. FAA-AEE-04-01 (also listed as DTS-34-FA34T-LR3). John A. Volpe National Transportation Systems Center; prepared with NOAA; sponsored by FAA Office of Environment and Energy (February). https://rosap.ntl.bts.gov/view/dot/9916.

Wayson, Roger L., Gregg G. Fleming, Brian Kim, Wynn L. Eberhard, W. Alan Brewer, Julie A. Draper, John Pehrson, and Roger Johnson. 2003. *The Use of LIDAR to Characterize Aircraft Exhaust Plumes.* Proceedings paper (Paper No. 69965), June 22, 2003. https://rosap.ntl.bts.gov/view/dot/10032.

Appendix A Air Quality Figures

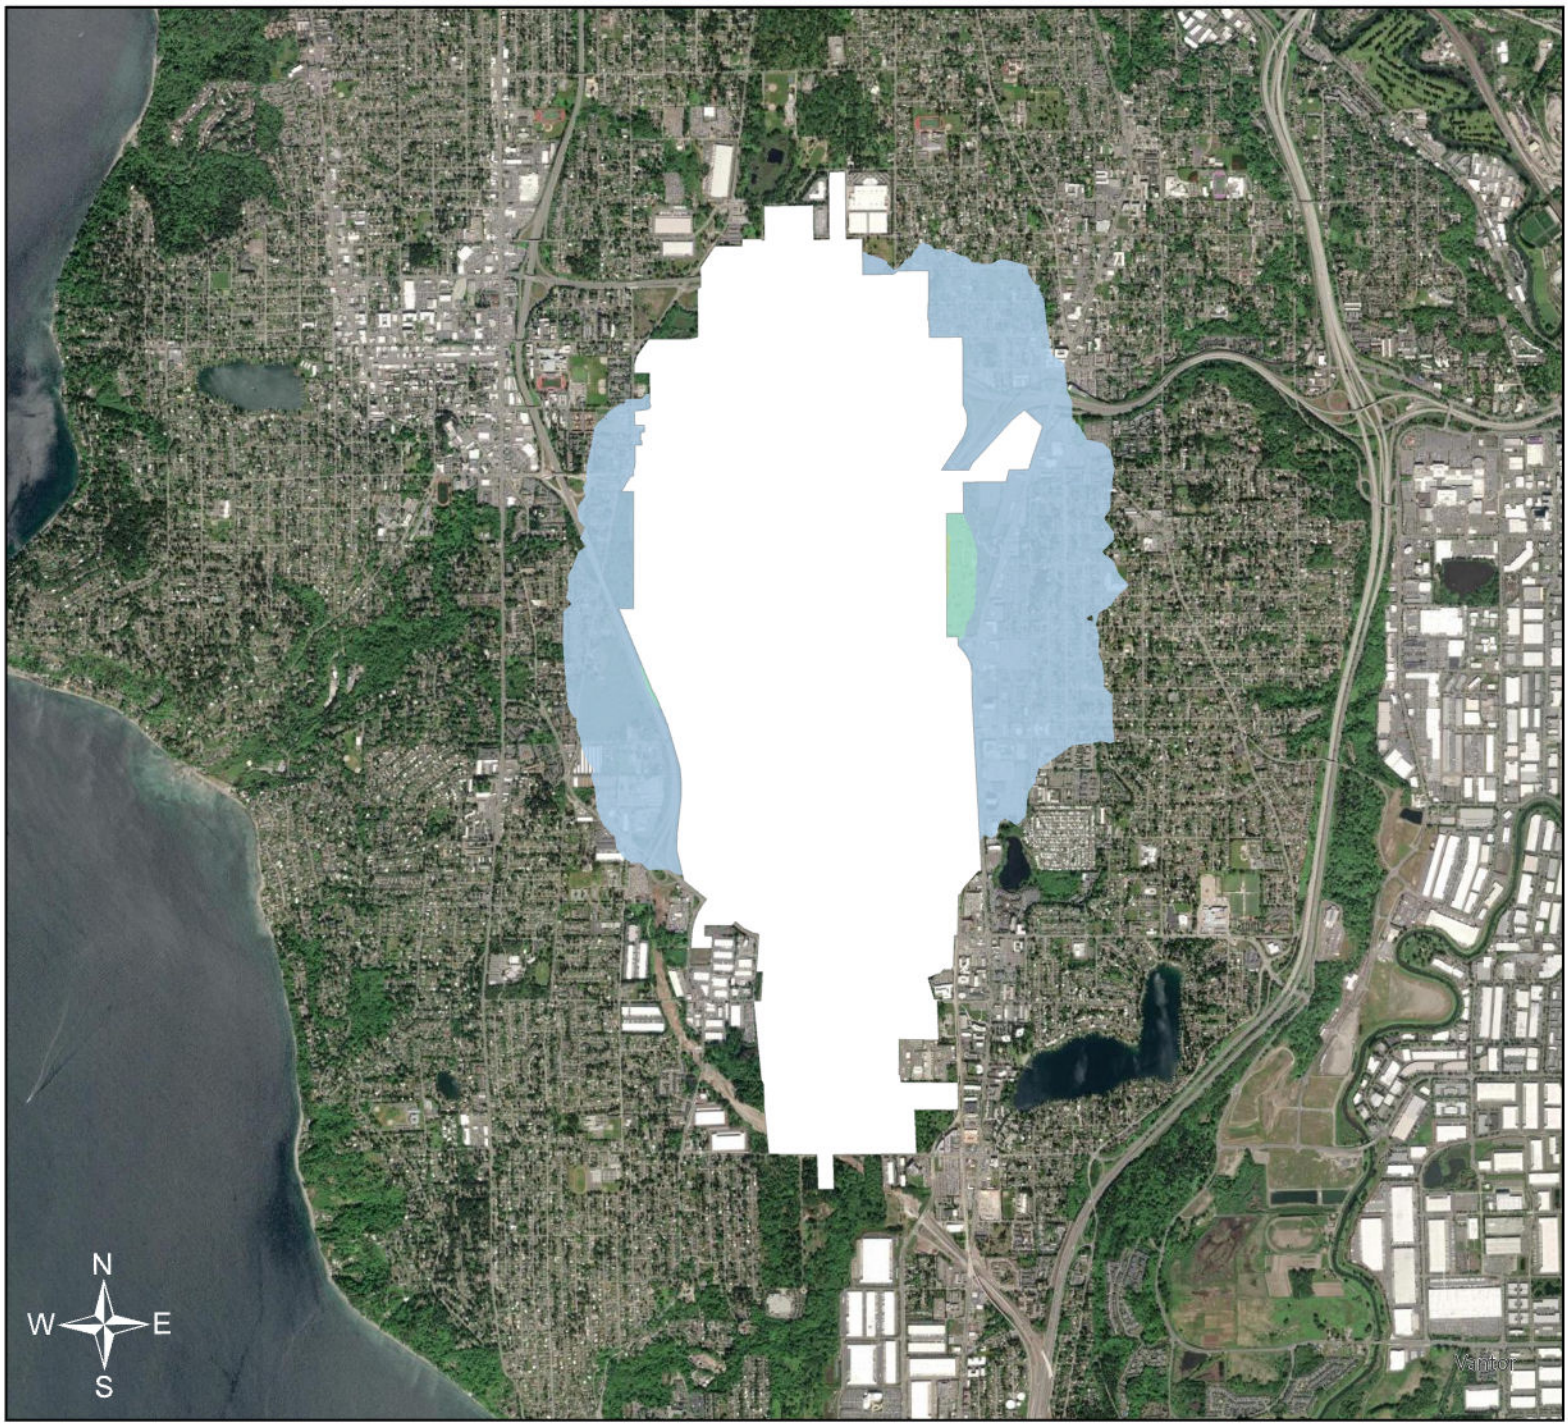

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 79 - 81 (<1% above background)
- 81 - 93
- 93 - 112
- 112 - 122

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2025 Construction

NO_2

1-hour, 8th high

NAAQS: 188 µg/m³

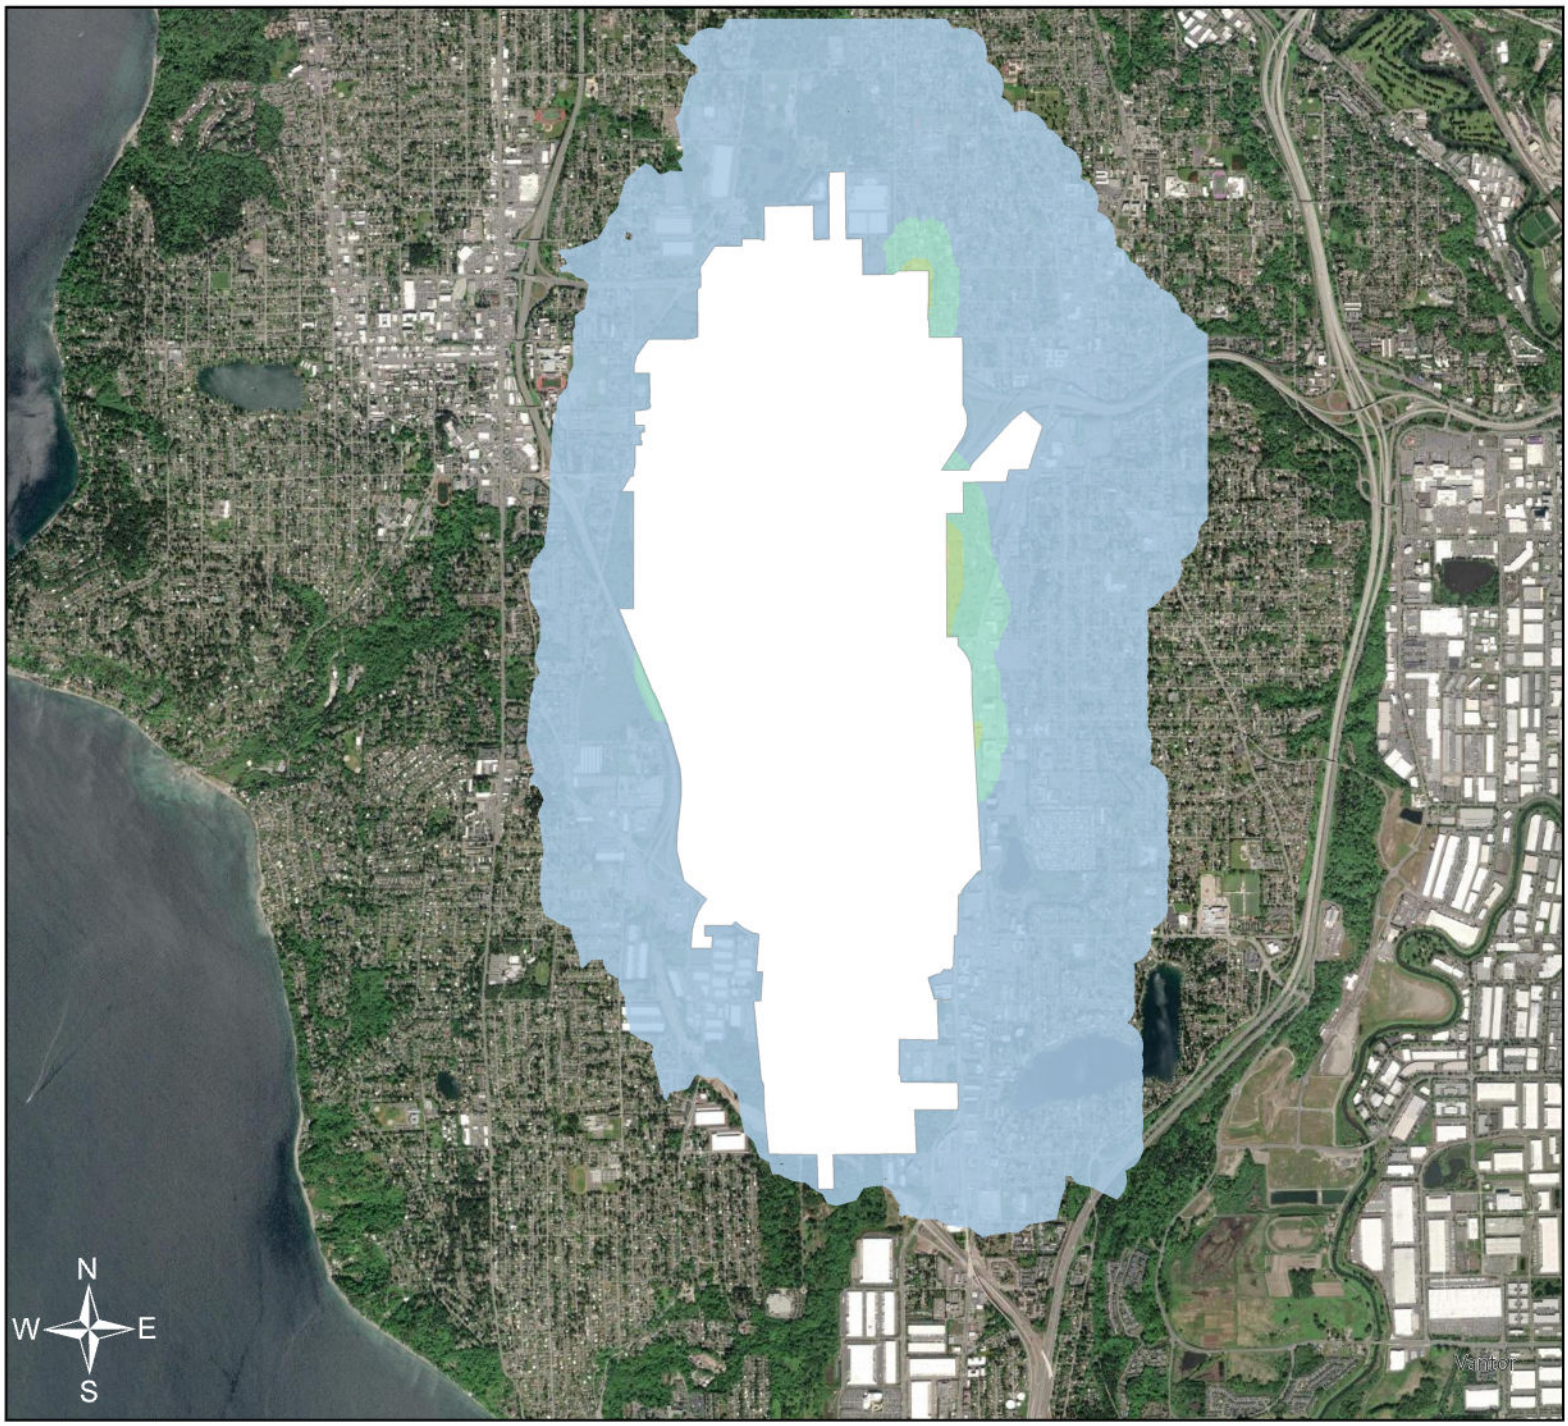

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 79 - 81 (<1% above background)
- 81 - 93
- 93 - 112
- 112 - 131
- 131 - 138

NAAQS: 188 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2026 Construction

NO_2

1-hour, 8th high

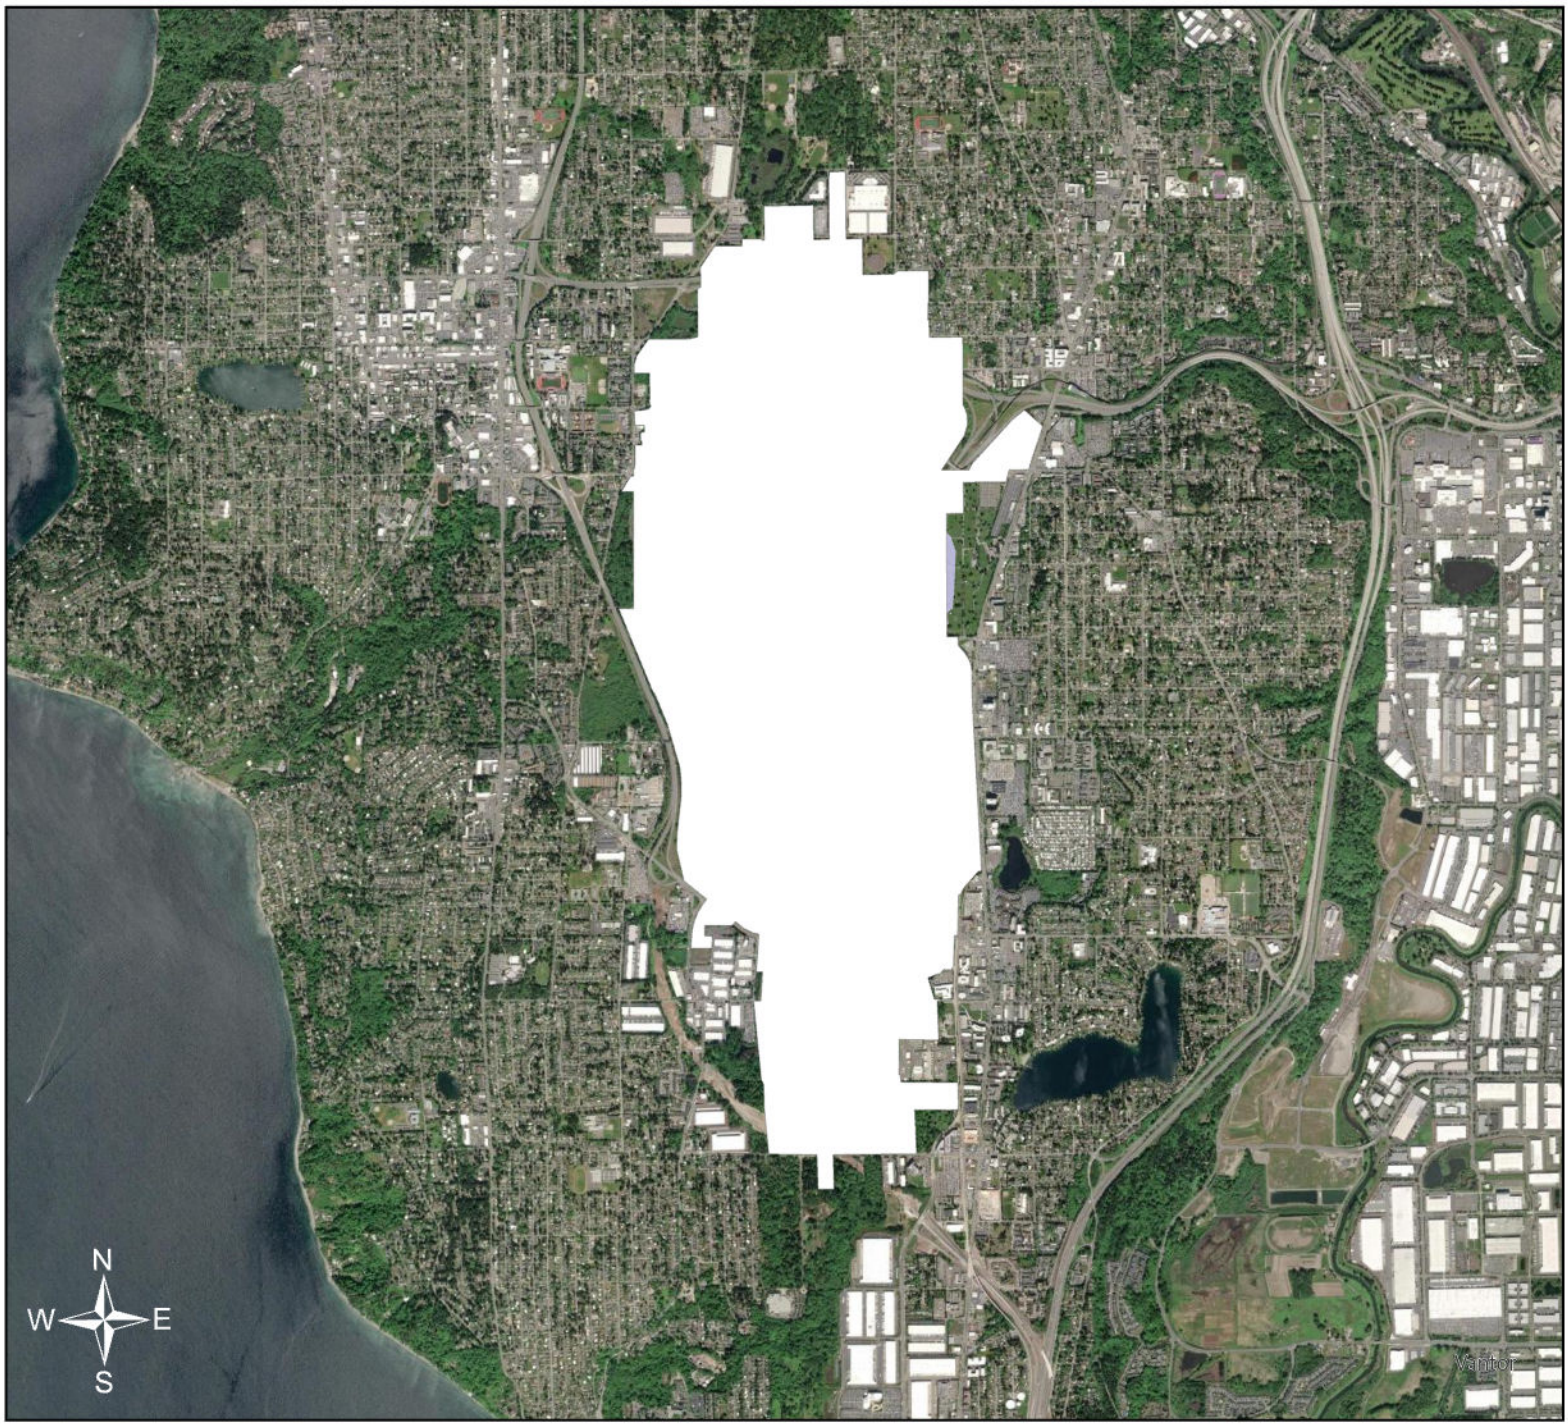

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 17 - 18 (<1% above background)
- 18 - 19

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2026 Construction

NO_2

Annual

NAAQS: 100 µg/m³

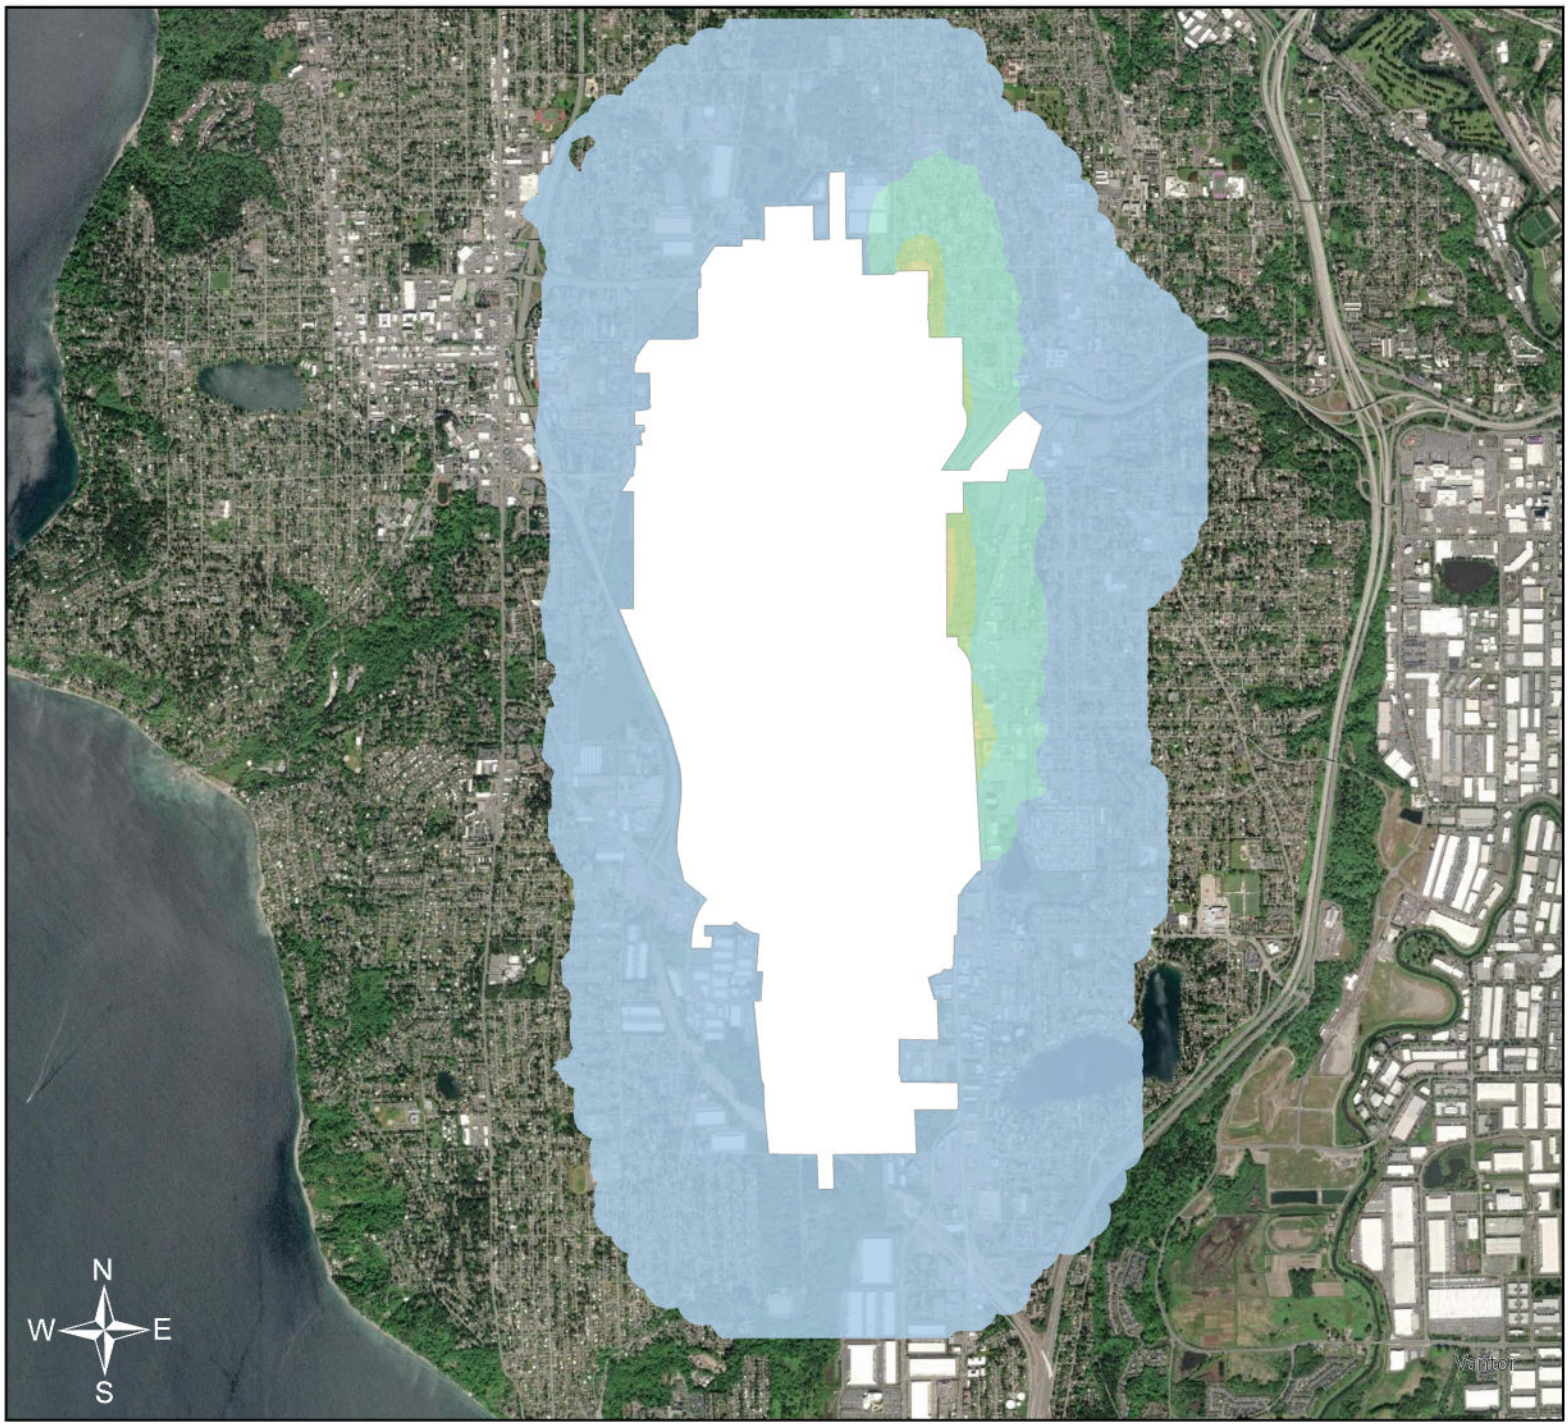

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 79 - 81 (<1% above background)
- 81 - 93
- 93 - 112
- 112 - 131
- 131 - 138

NAAQS: 188 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2027 Construction

NO_2

1-hour, 8th high

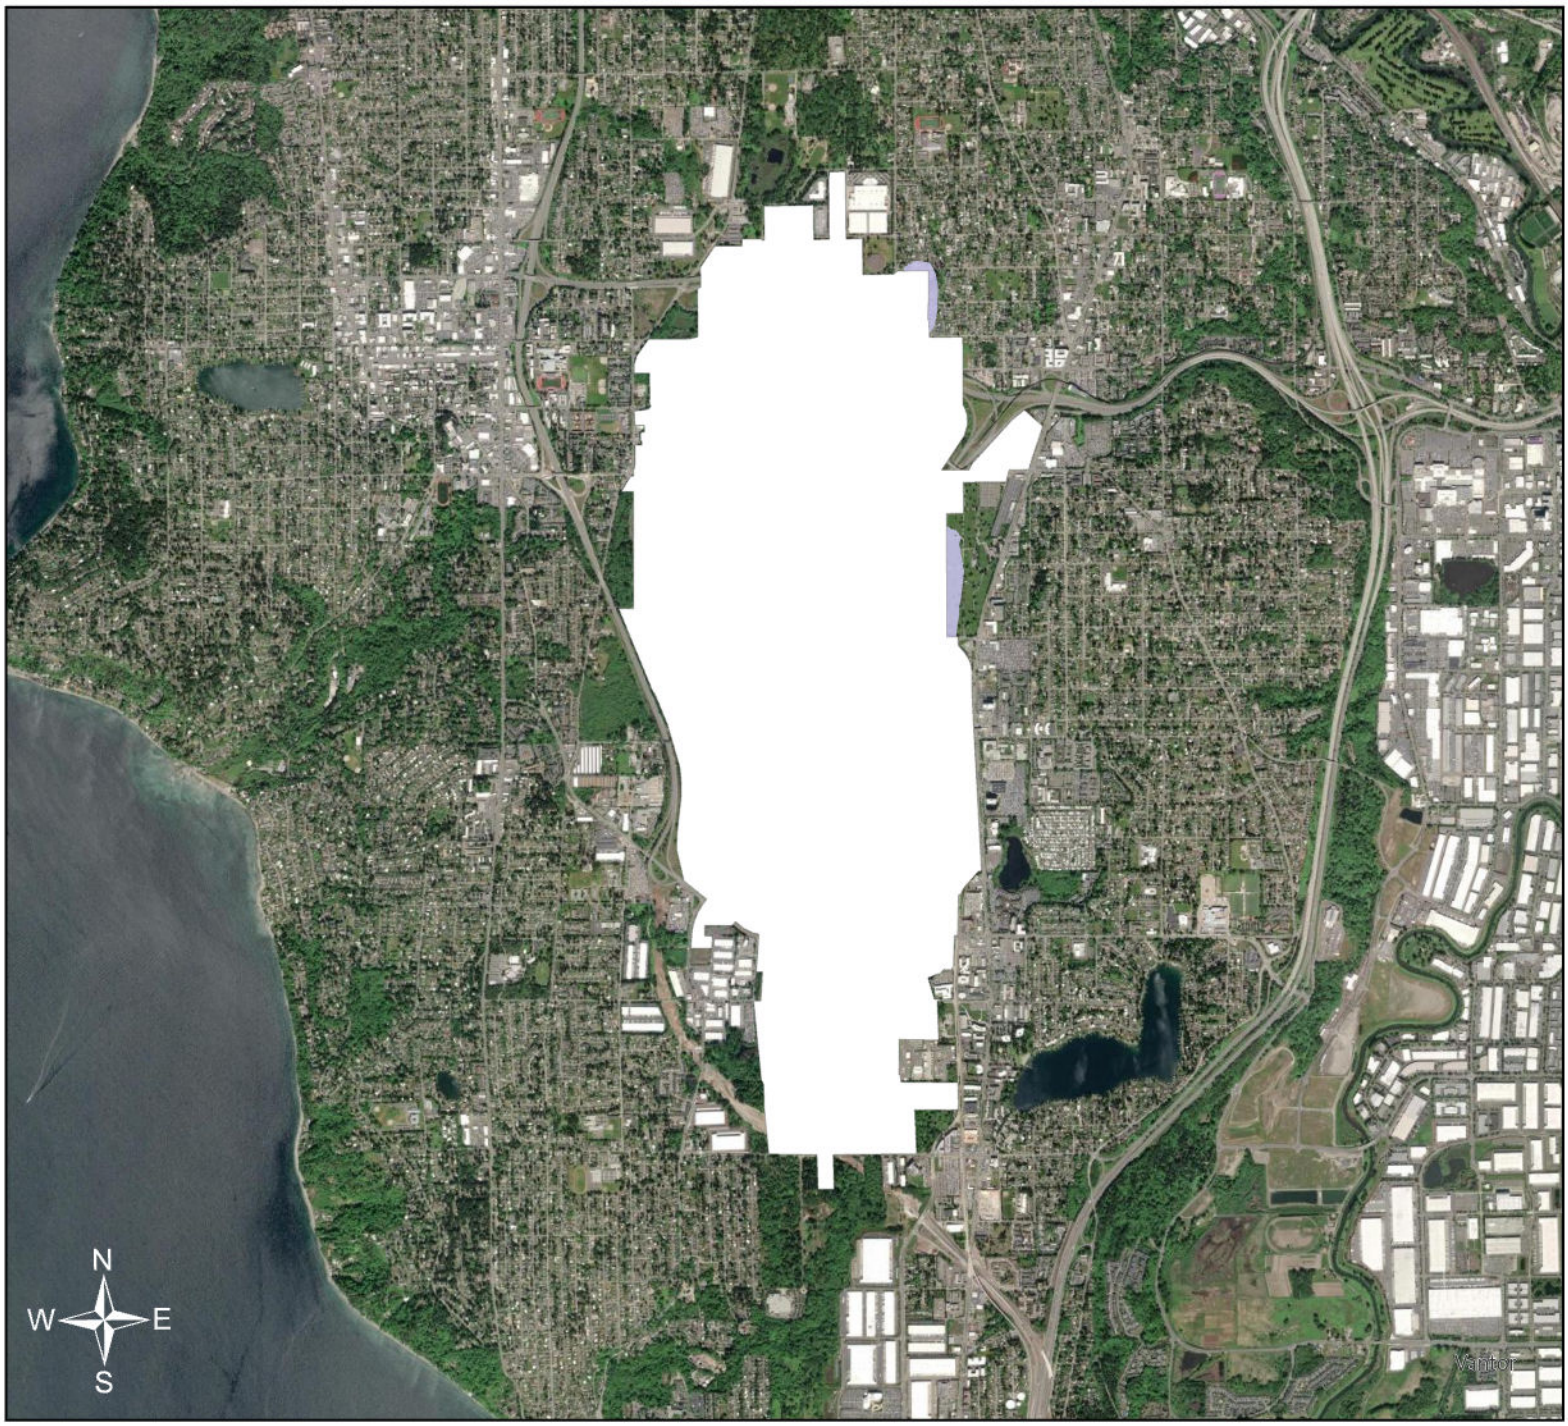

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 17 - 18 (<1% above background)
- 18 - 20

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2027 Construction

NO_2

Annual

NAAQS: 100 µg/m³

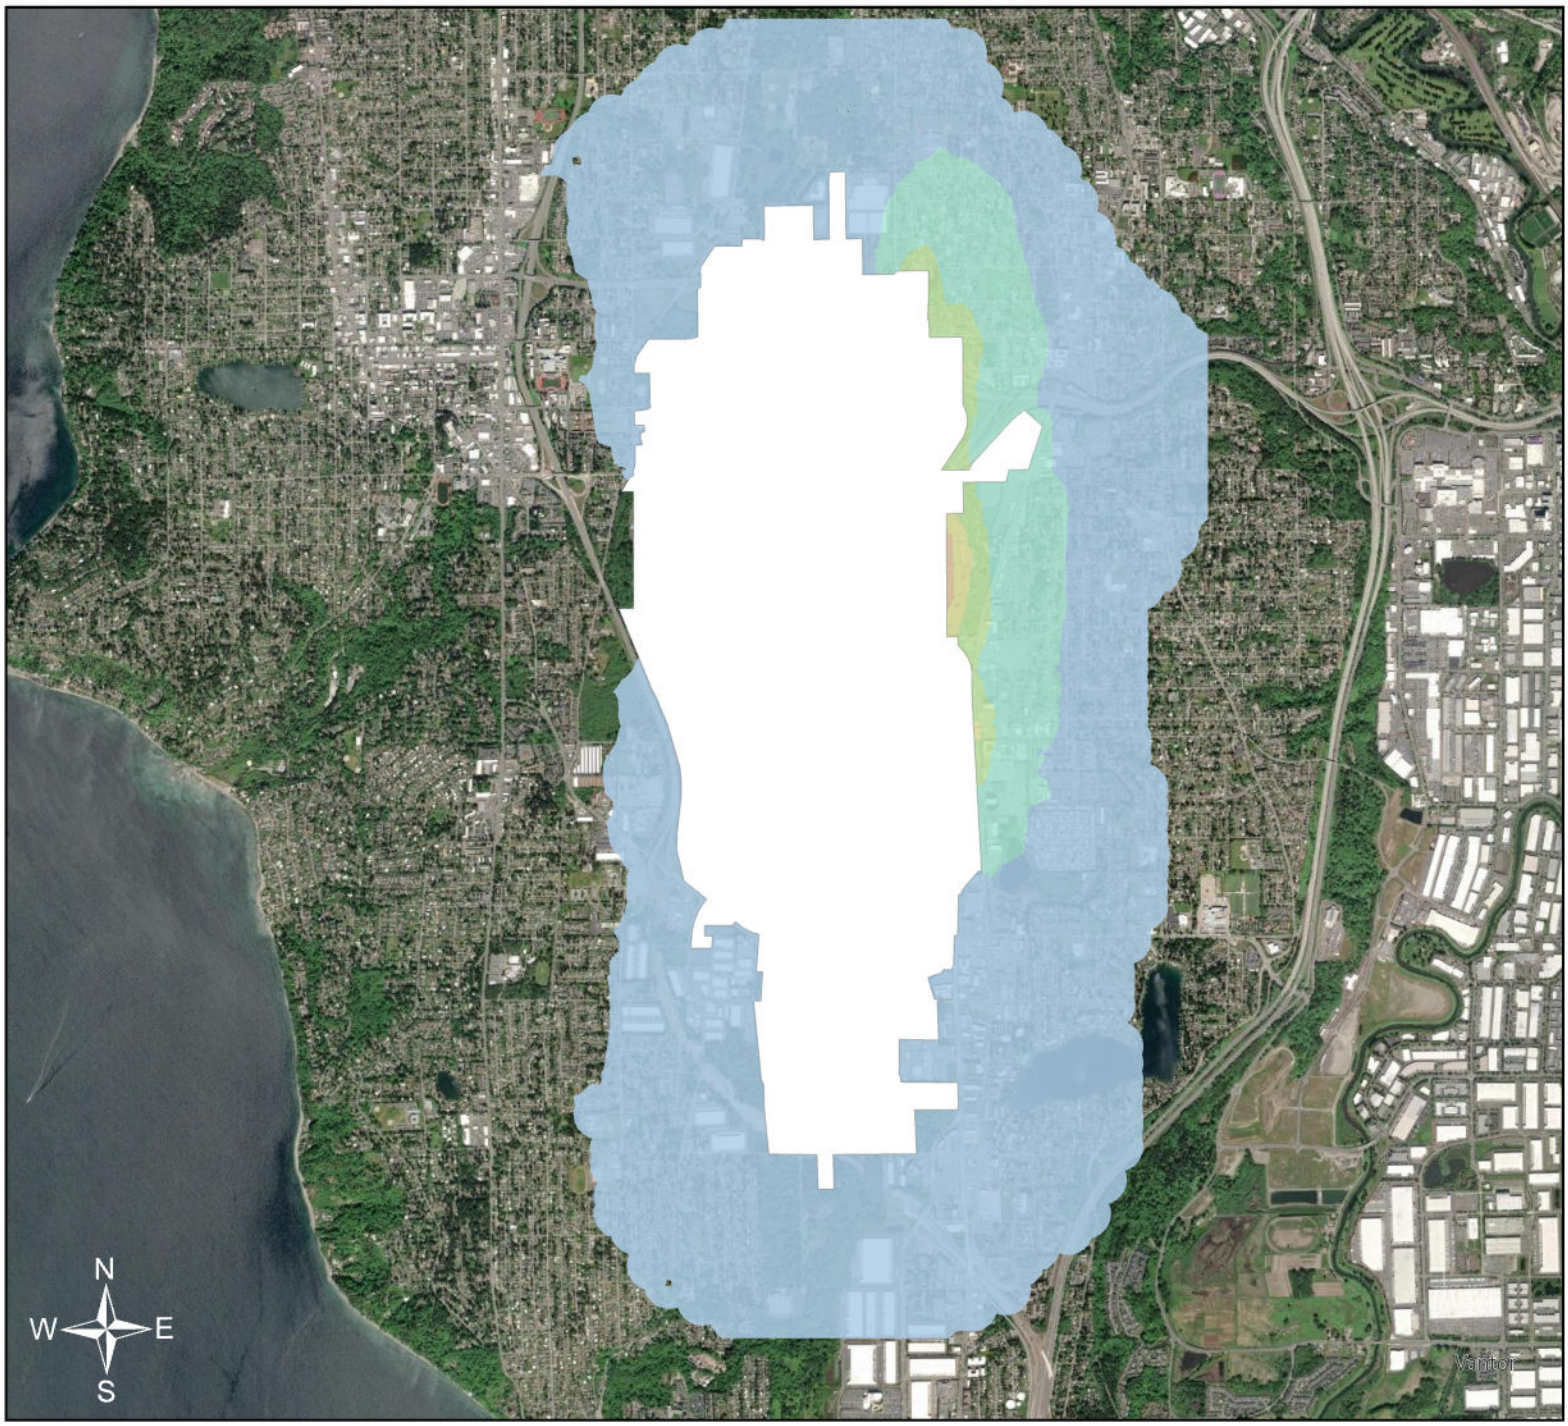

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 79 - 81 (<1% above background)
- 81 - 93
- 93 - 112
- 112 - 131
- 131 - 150
- 150 - 163

NAAQS: 188 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2028 Construction

NO_2

1-hour, 8th high

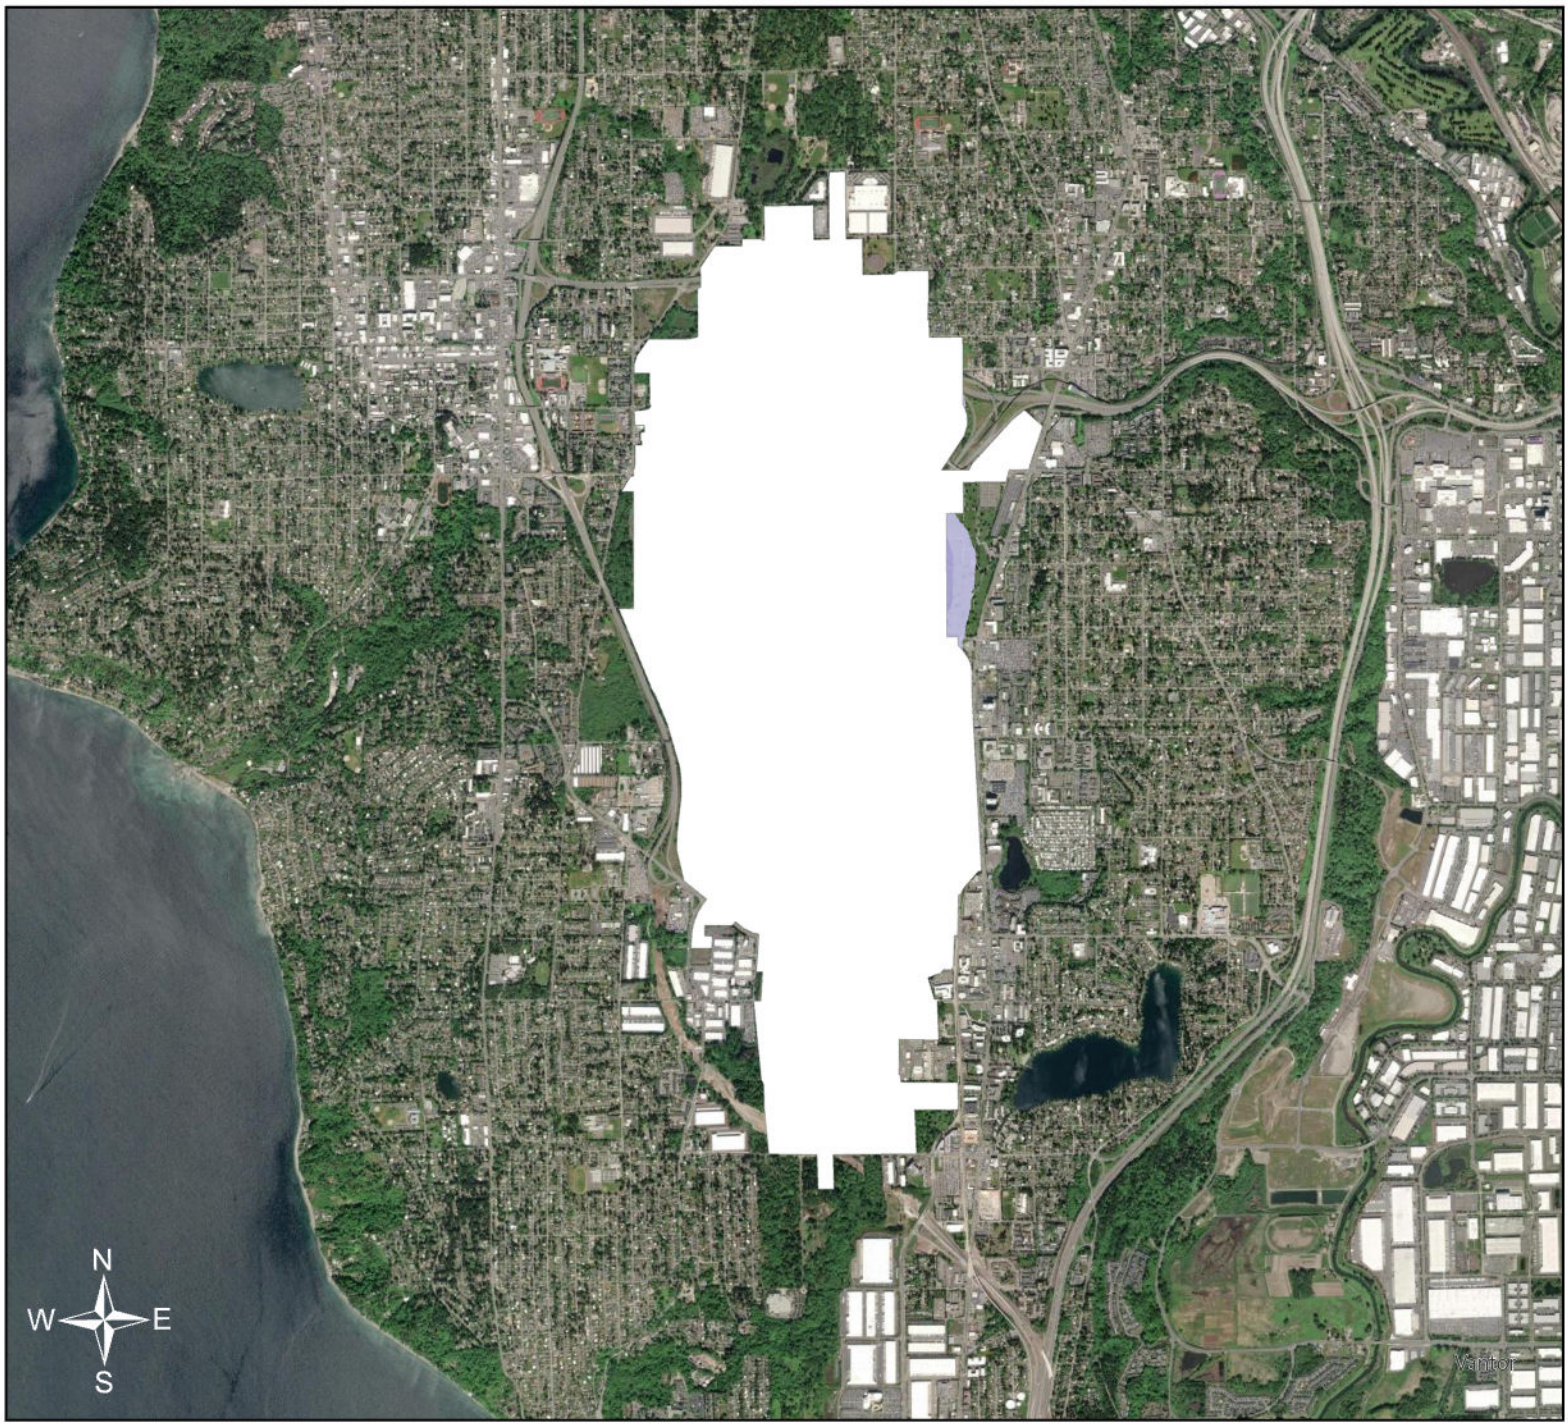

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 17 - 18 (<1% above background)
- 18 - 20
- 20 - 22

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2028 Construction

NO_2

Annual

NAAQS: 100 µg/m³

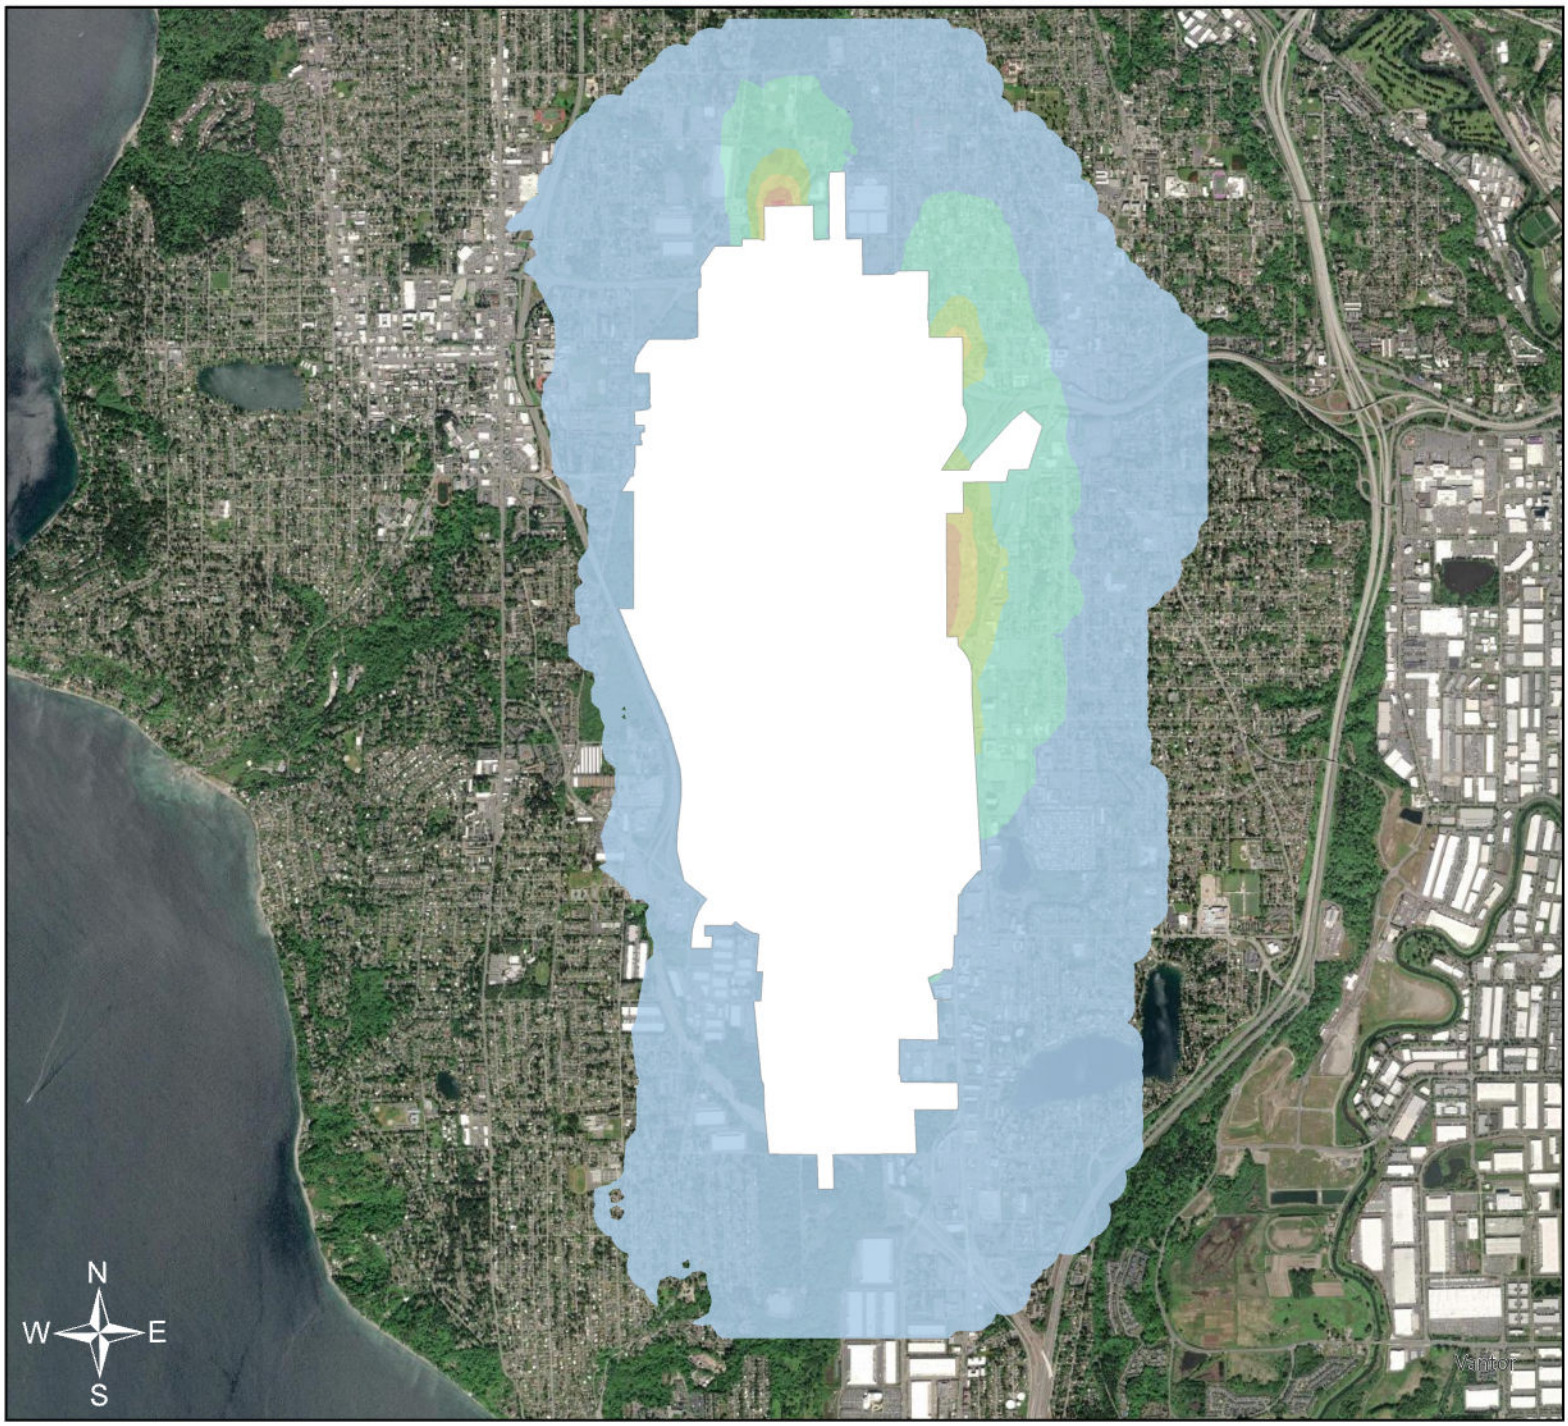

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 79 - 81 (<1% above background)
- 81 - 93
- 93 - 112
- 112 - 131
- 131 - 150
- 150 - 169
- 169-185

NAAQS: 188 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2029 Construction

NO_2

1-hour, 8th high

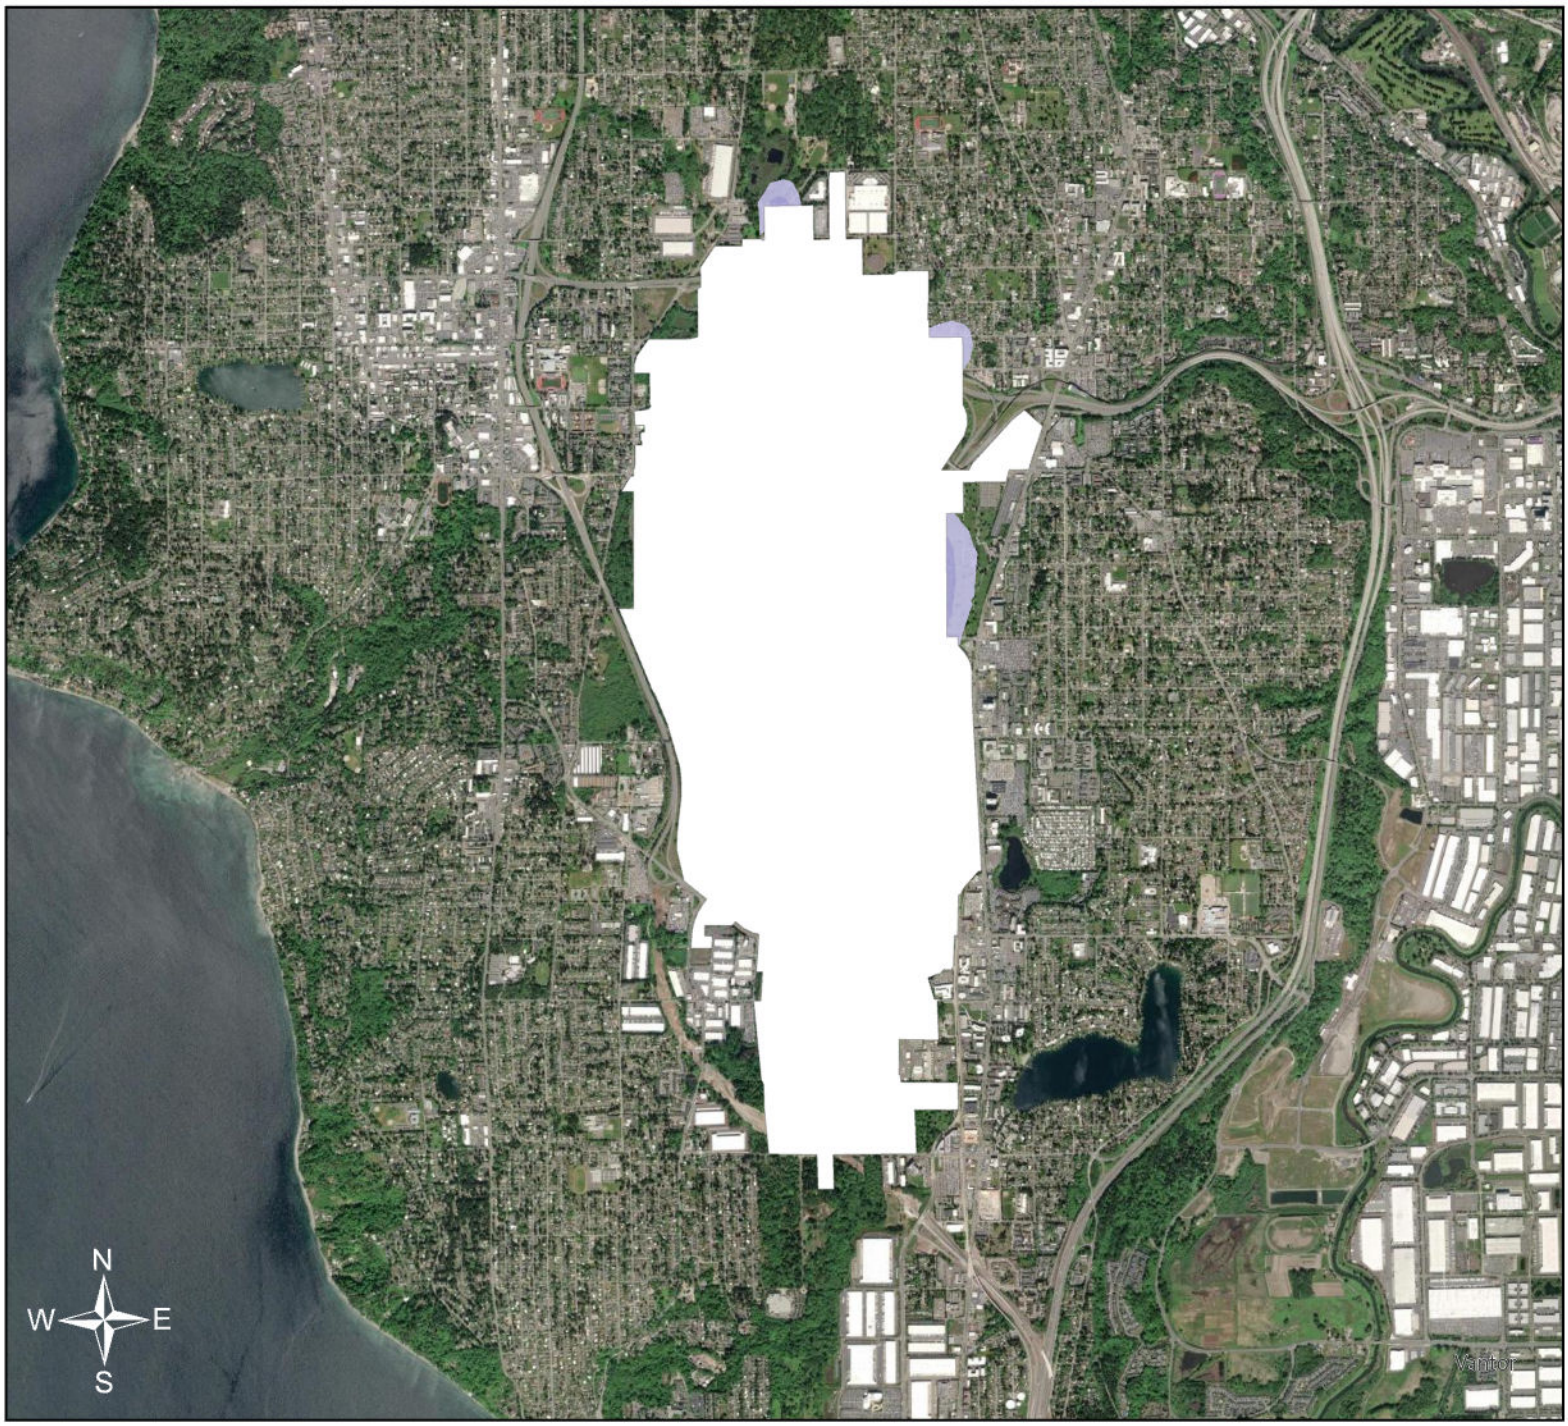

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 17 - 18 (<1% above background)
- 18 - 20
- 20 - 25

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2029 Construction

NO_2

Annual

NAAQS: 100 µg/m³

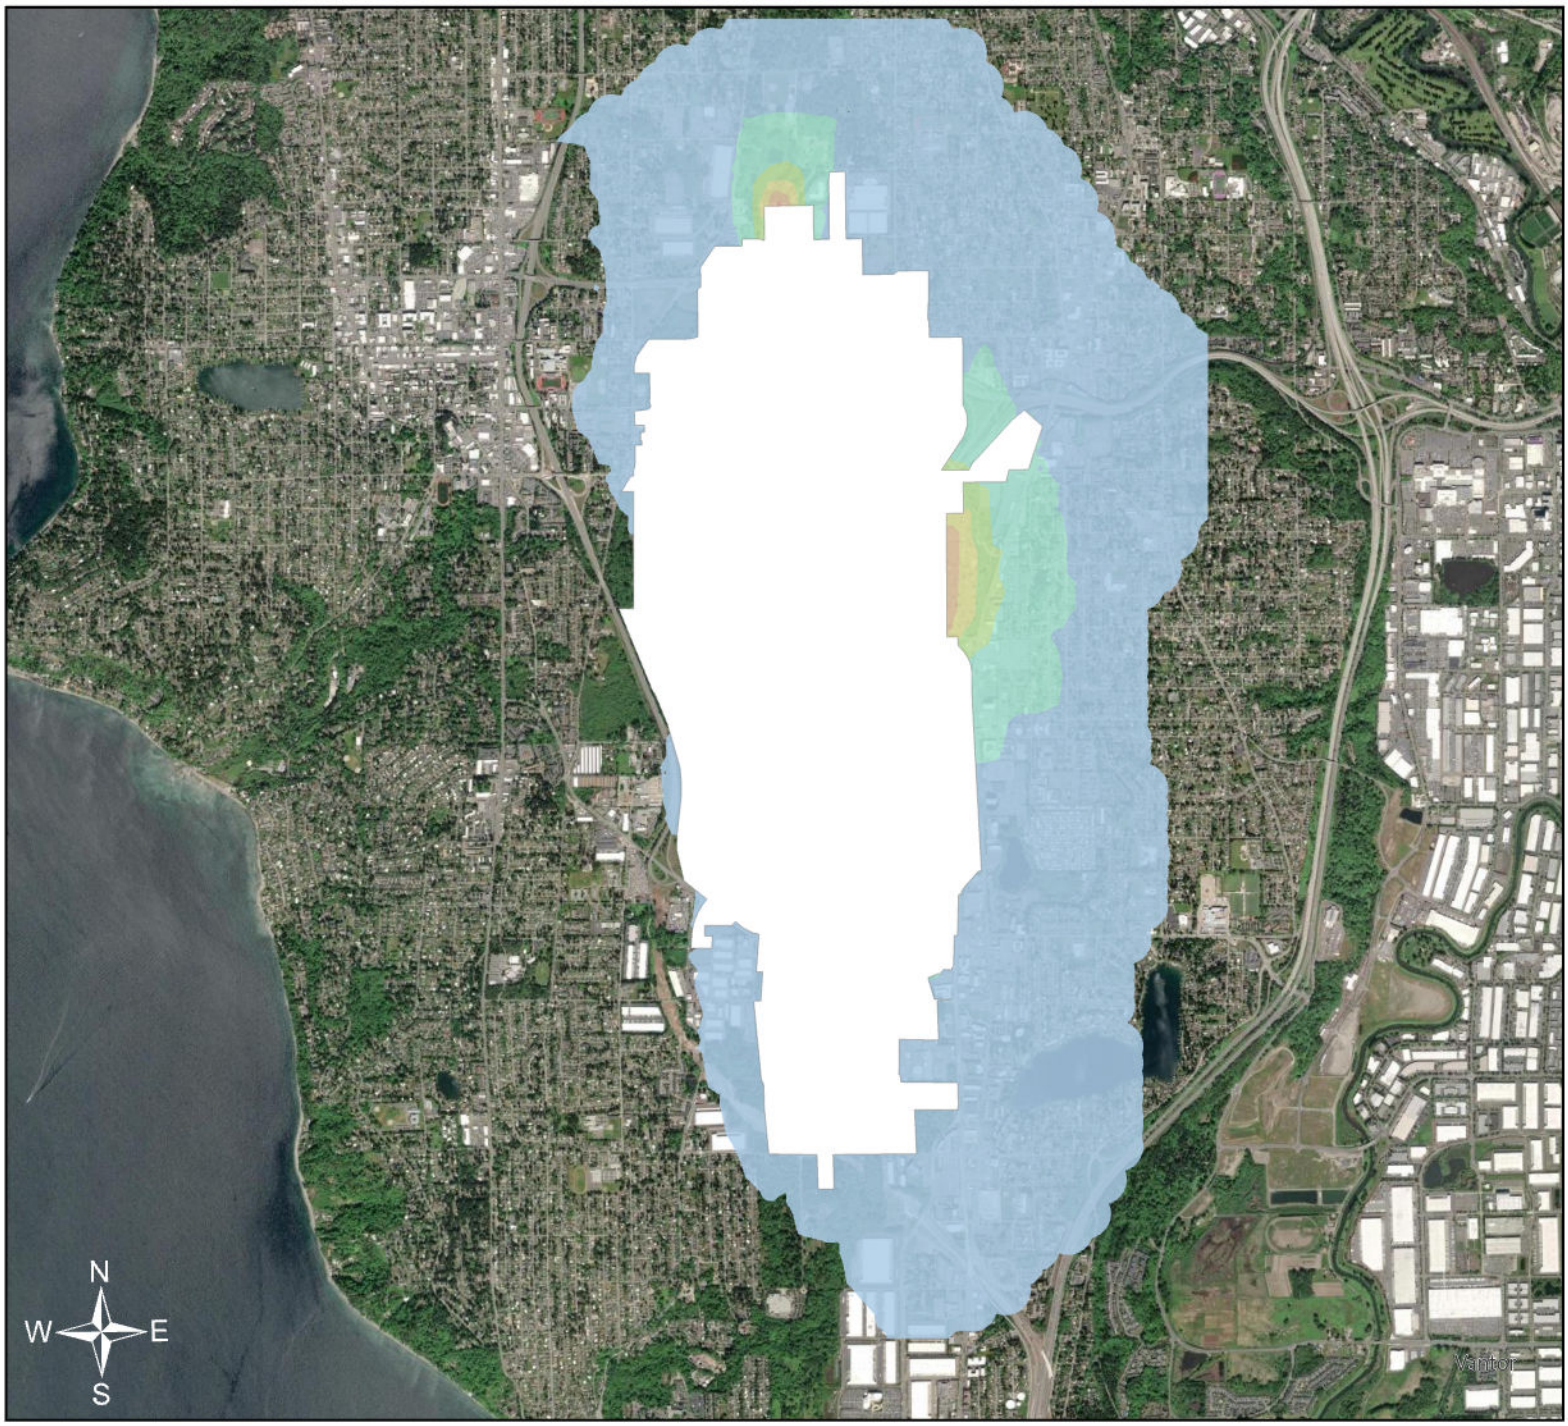

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 79 - 81 (<1% above background)
- 81 - 93
- 93 - 112
- 112 - 131
- 131 - 150
- 150 - 169
- 169 - 180

NAAQS: 188 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2030 Construction

NO_2

1-hour, 8th high

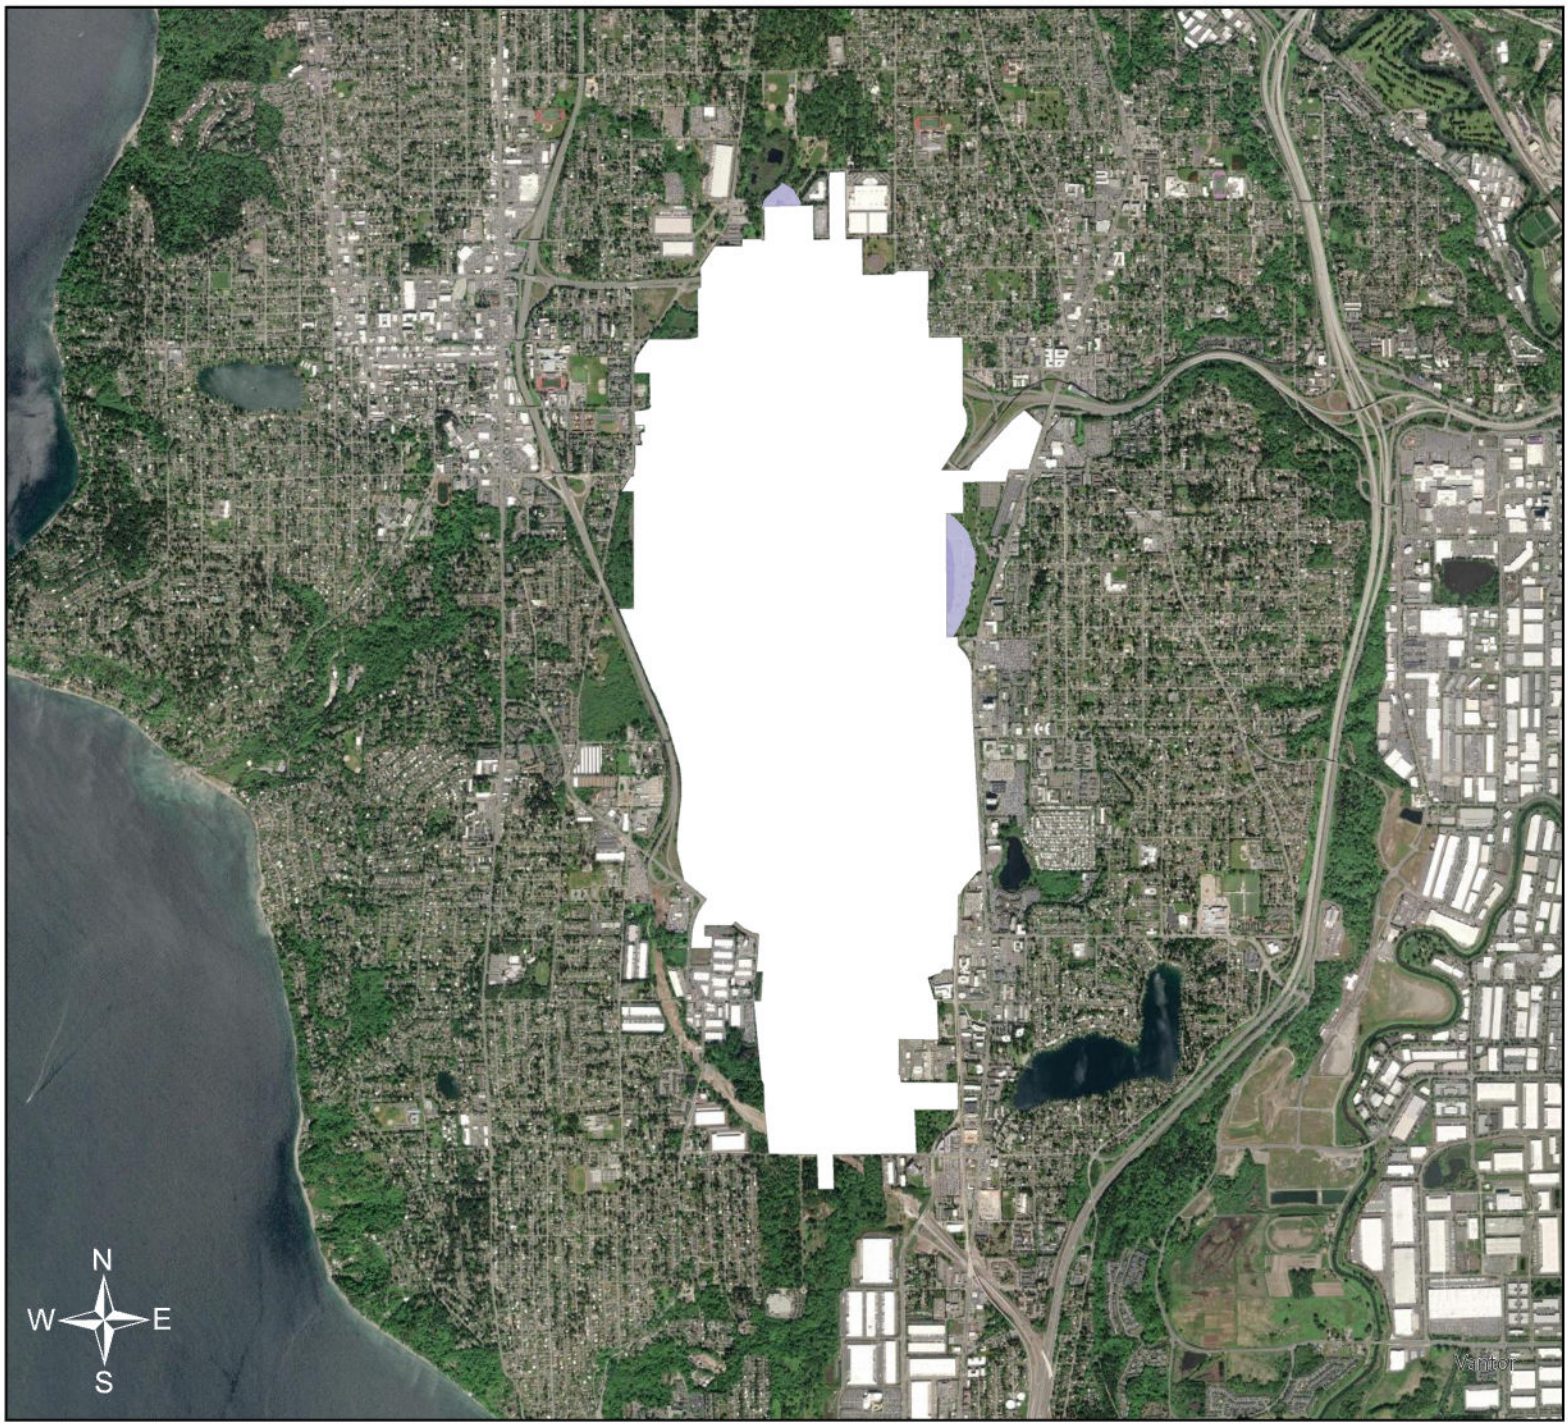

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 17 - 18 (<1% above background)
- 18 - 20
- 20 - 23

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2030 Construction

NO_2

Annual

NAAQS: 100 µg/m³

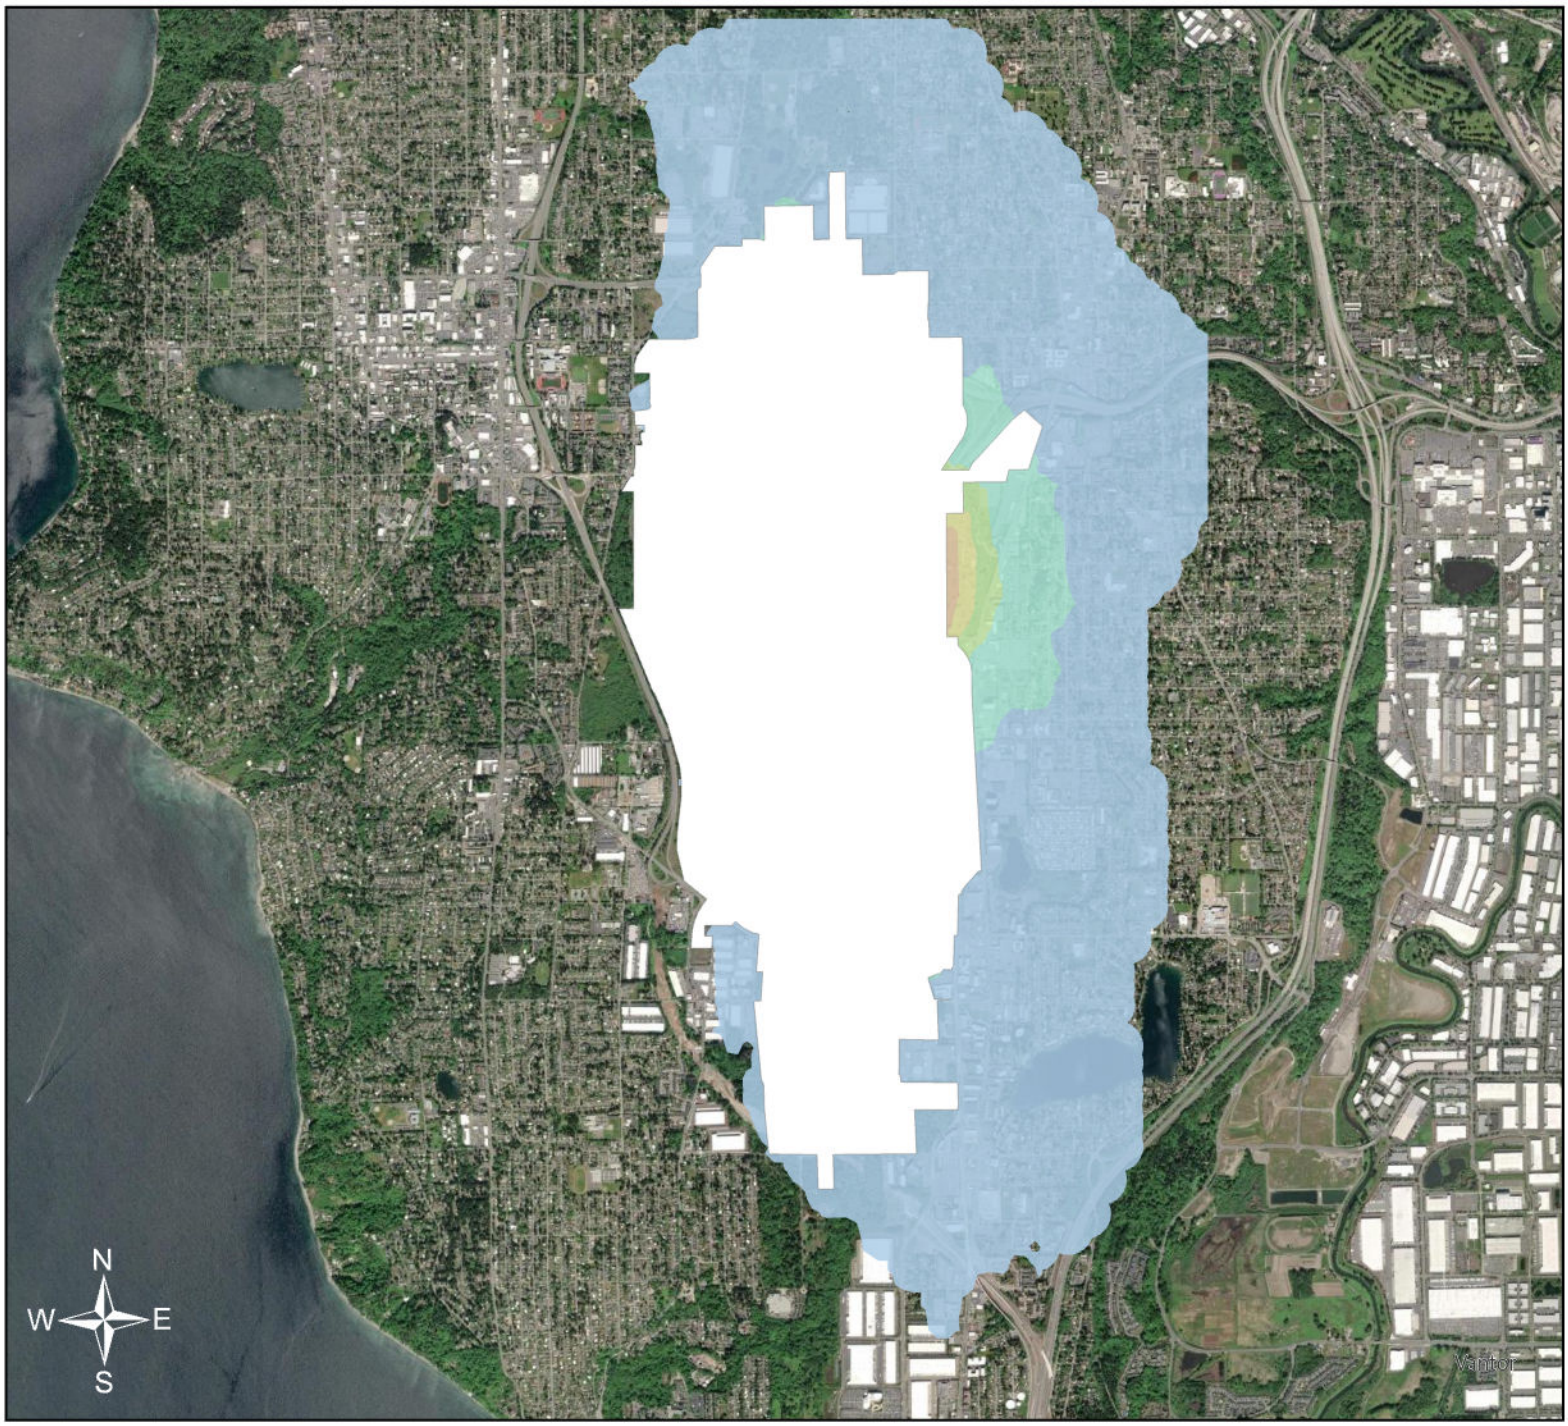

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 79 - 81 (<1% above background)
- 81 - 93
- 93 - 112
- 112 - 131
- 131 - 150
- 150 - 168

NAAQS: 188 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2031 Construction

NO_2

1-hour, 8th high

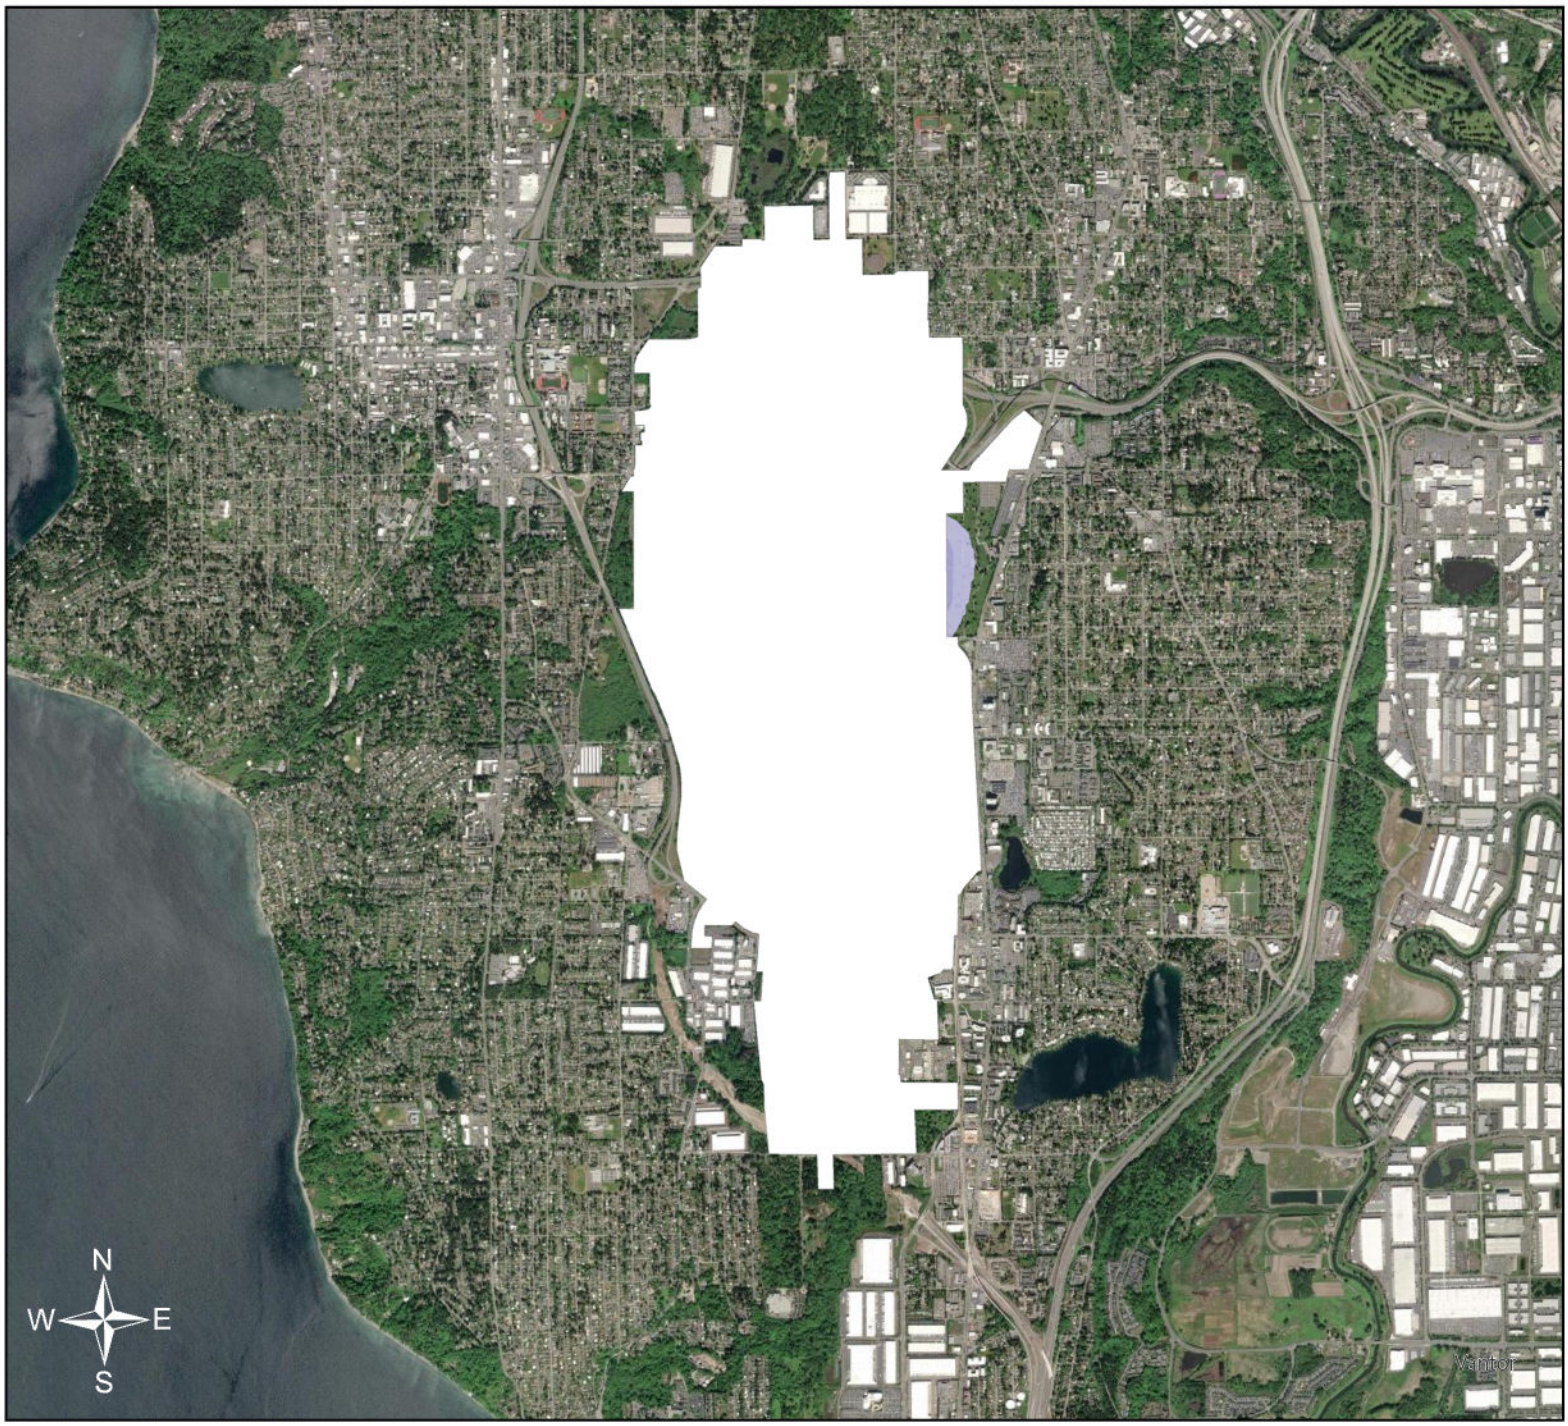

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 17 - 18 (<1% above background)
- 18 - 20
- 20 - 23

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2031 Construction

NO_2

Annual

NAAQS: 100 µg/m³

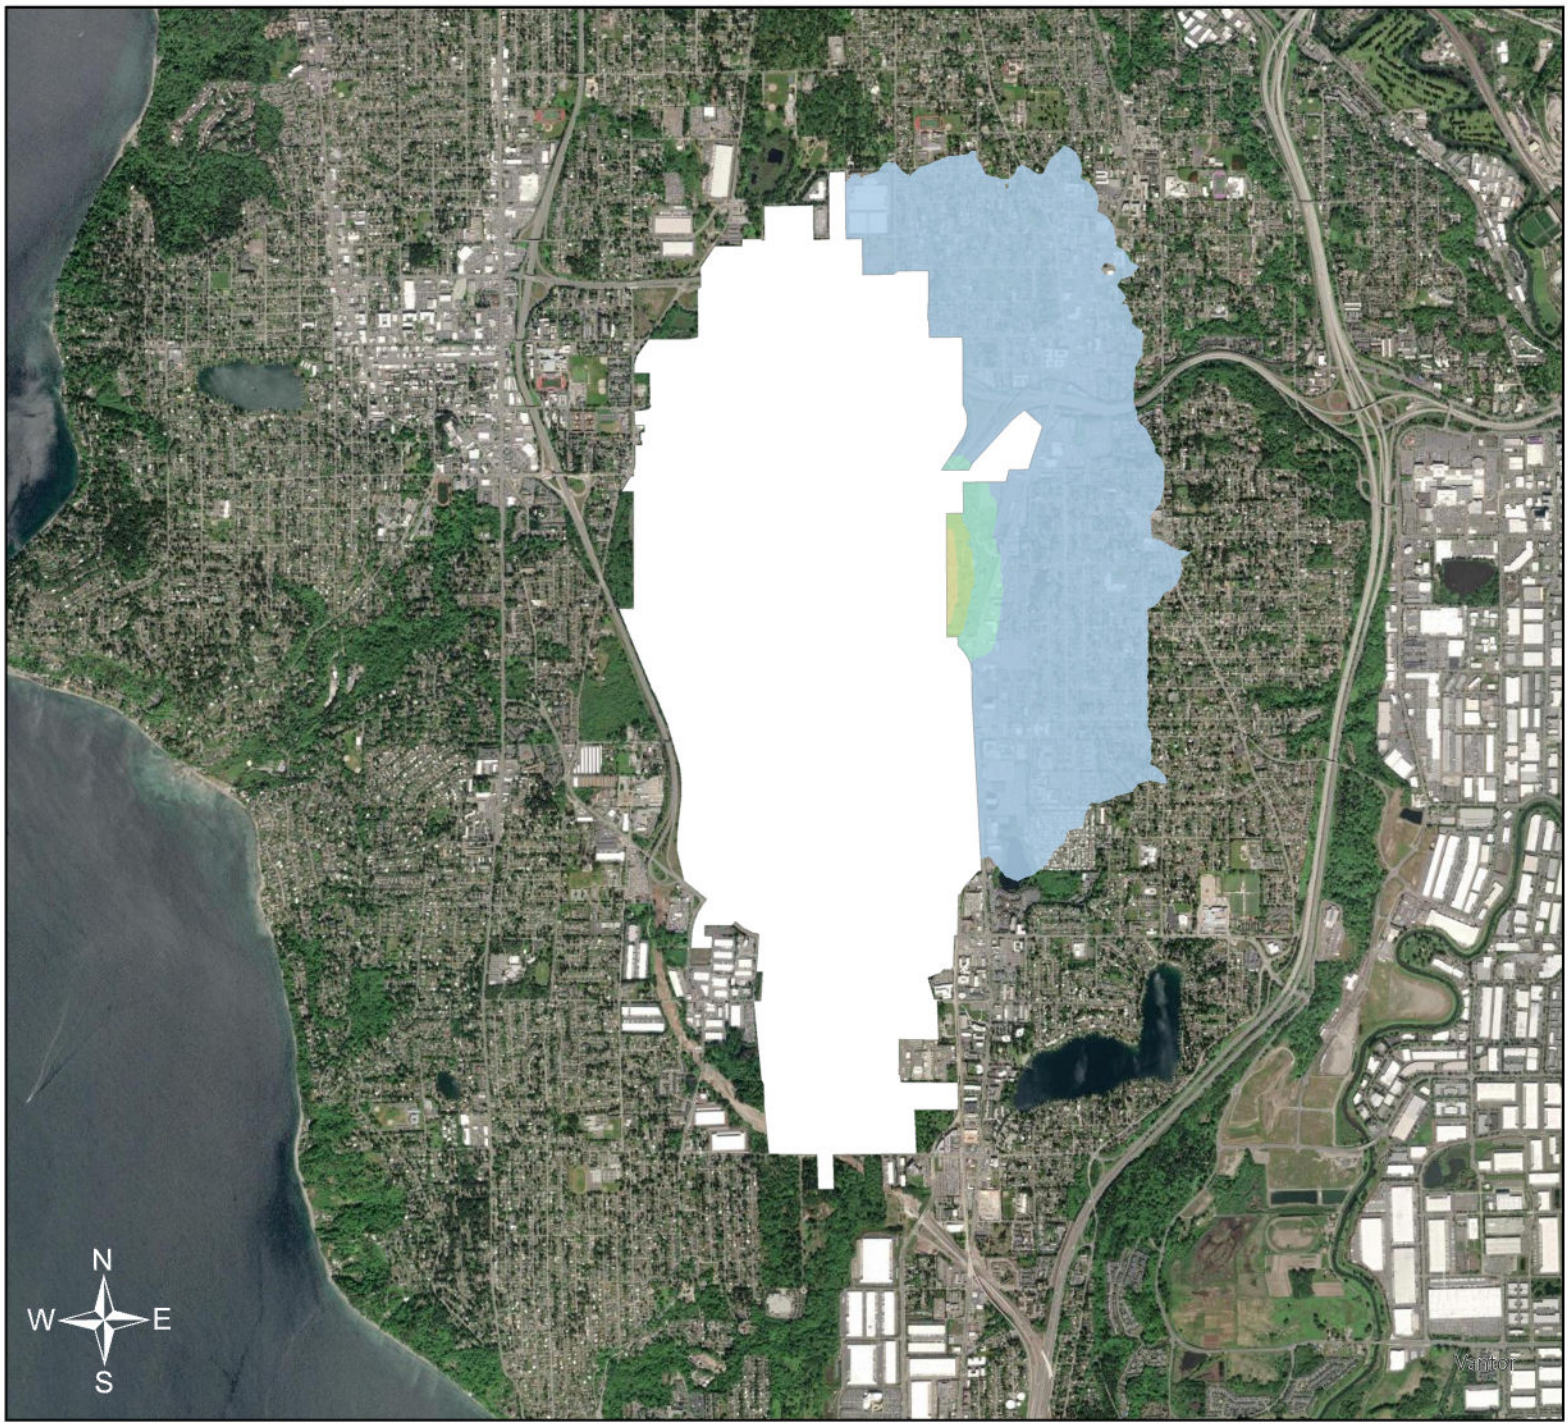

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 79 - 81 (<1% above background)
- 81 - 93
- 93 - 112
- 112 - 131
- 131 - 150
- 150 - 153

NAAQS: 188 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Construction

NO_2

1-hour, 8th high

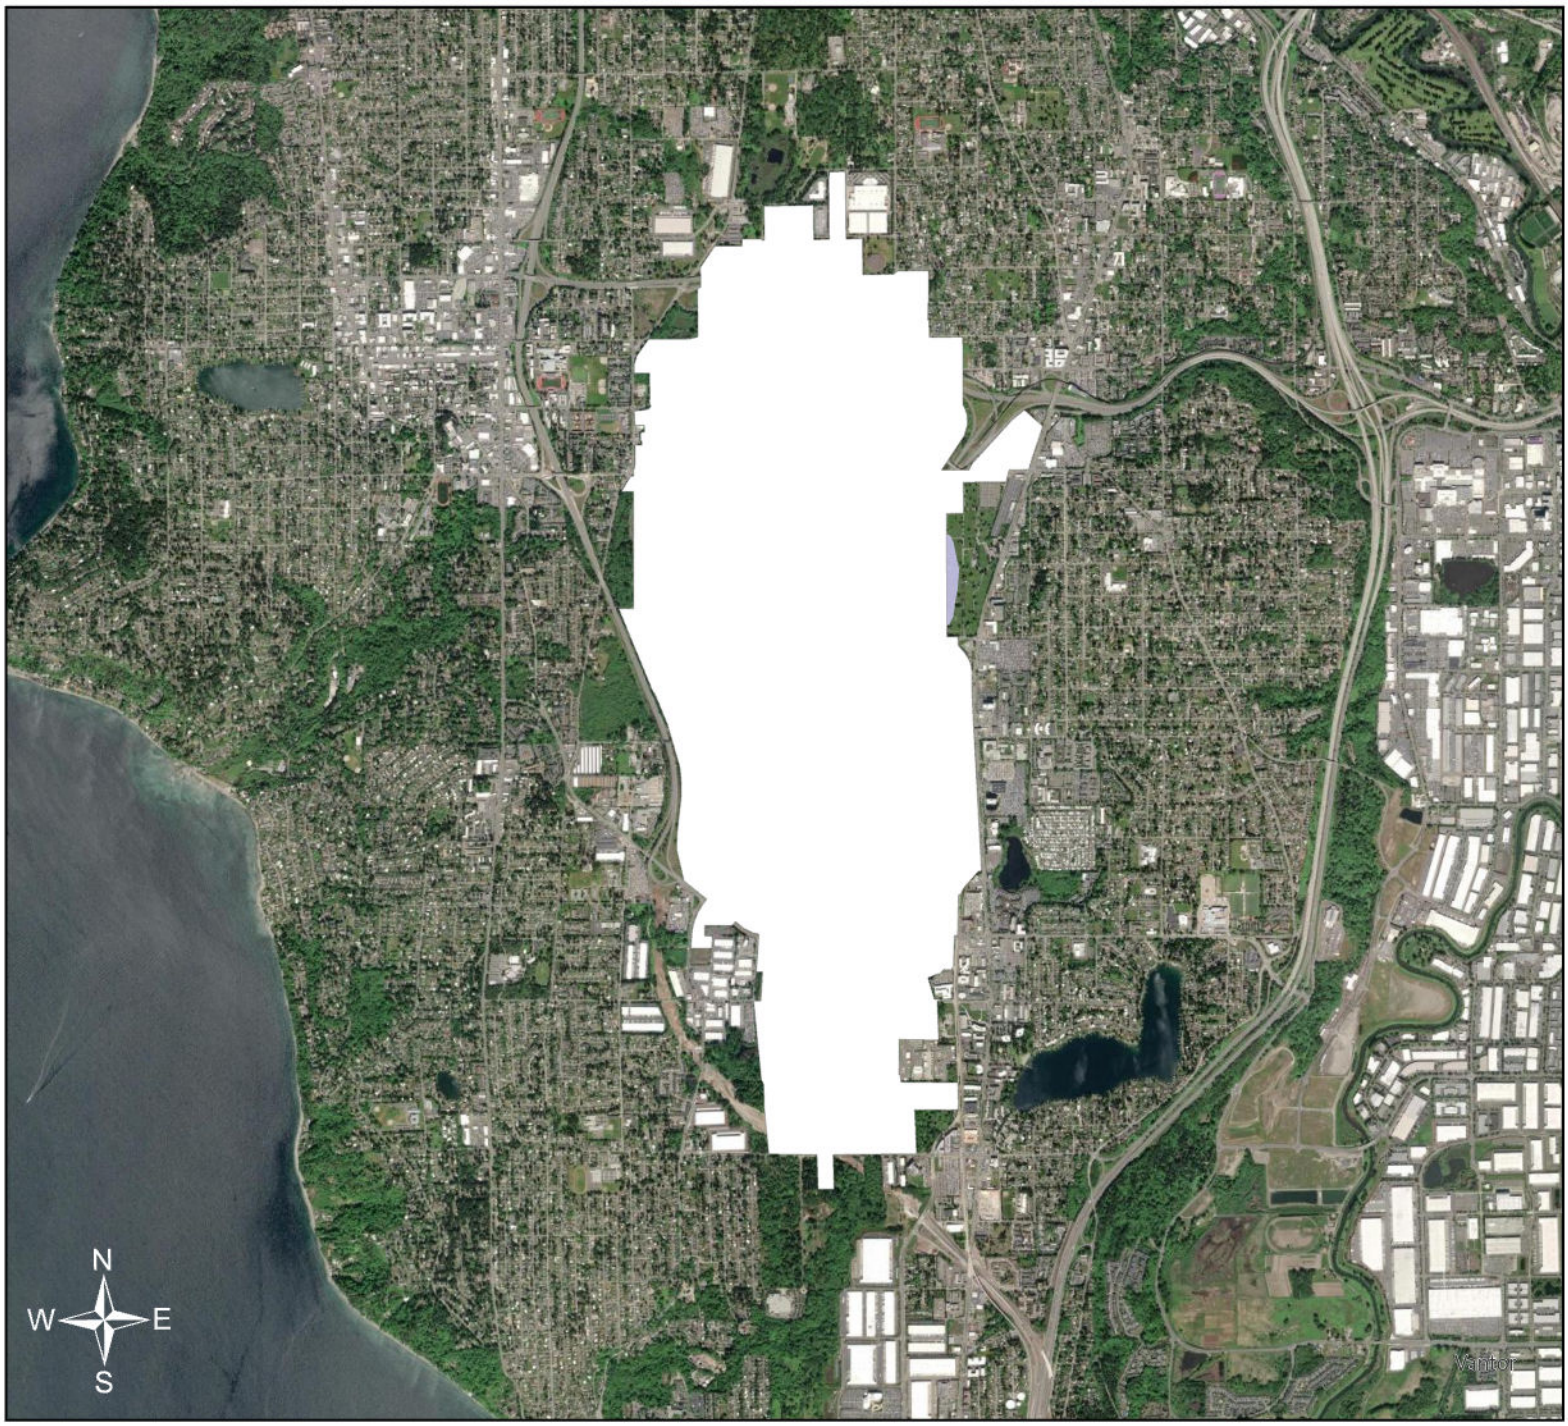

0 0.23 0.45 0.9 1.35 1.8
Miles

NO_2 Concentrations (µg/m³)

- SEA Property
- 17 - 18 (<1% above background)
- 18 - 20

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Construction

NO_2

Annual

NAAQS: 100 µg/m³

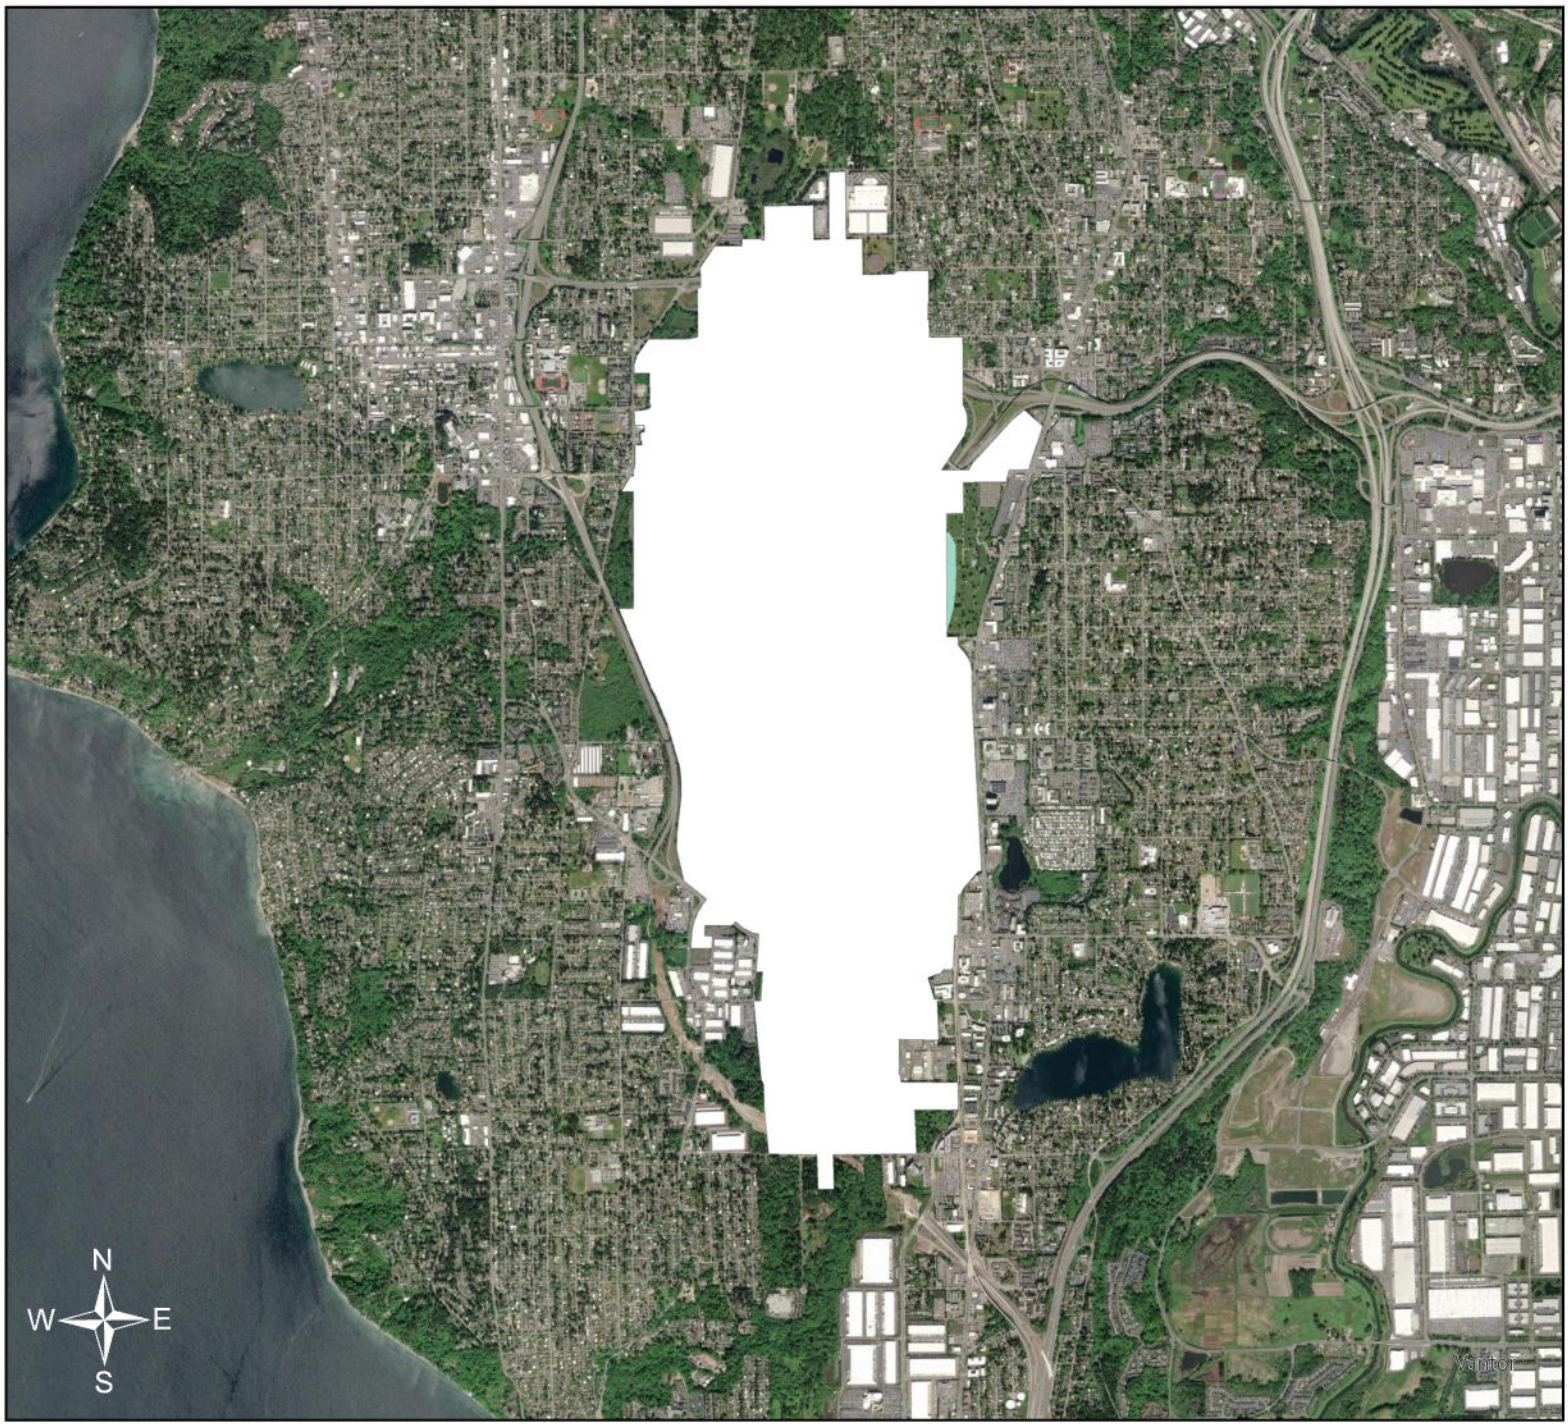

0 0.23 0.45 0.9 1.35 1.8
Miles

PM2.5 Concentrations (µg/m³)

- SEA_Property_NAD
- 4.6 - 4.7 (<1% above background)
- 4.7 - 4.9

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2026 Construction

PM2.5

Annual

NAAQS: 9.0 µg/m³

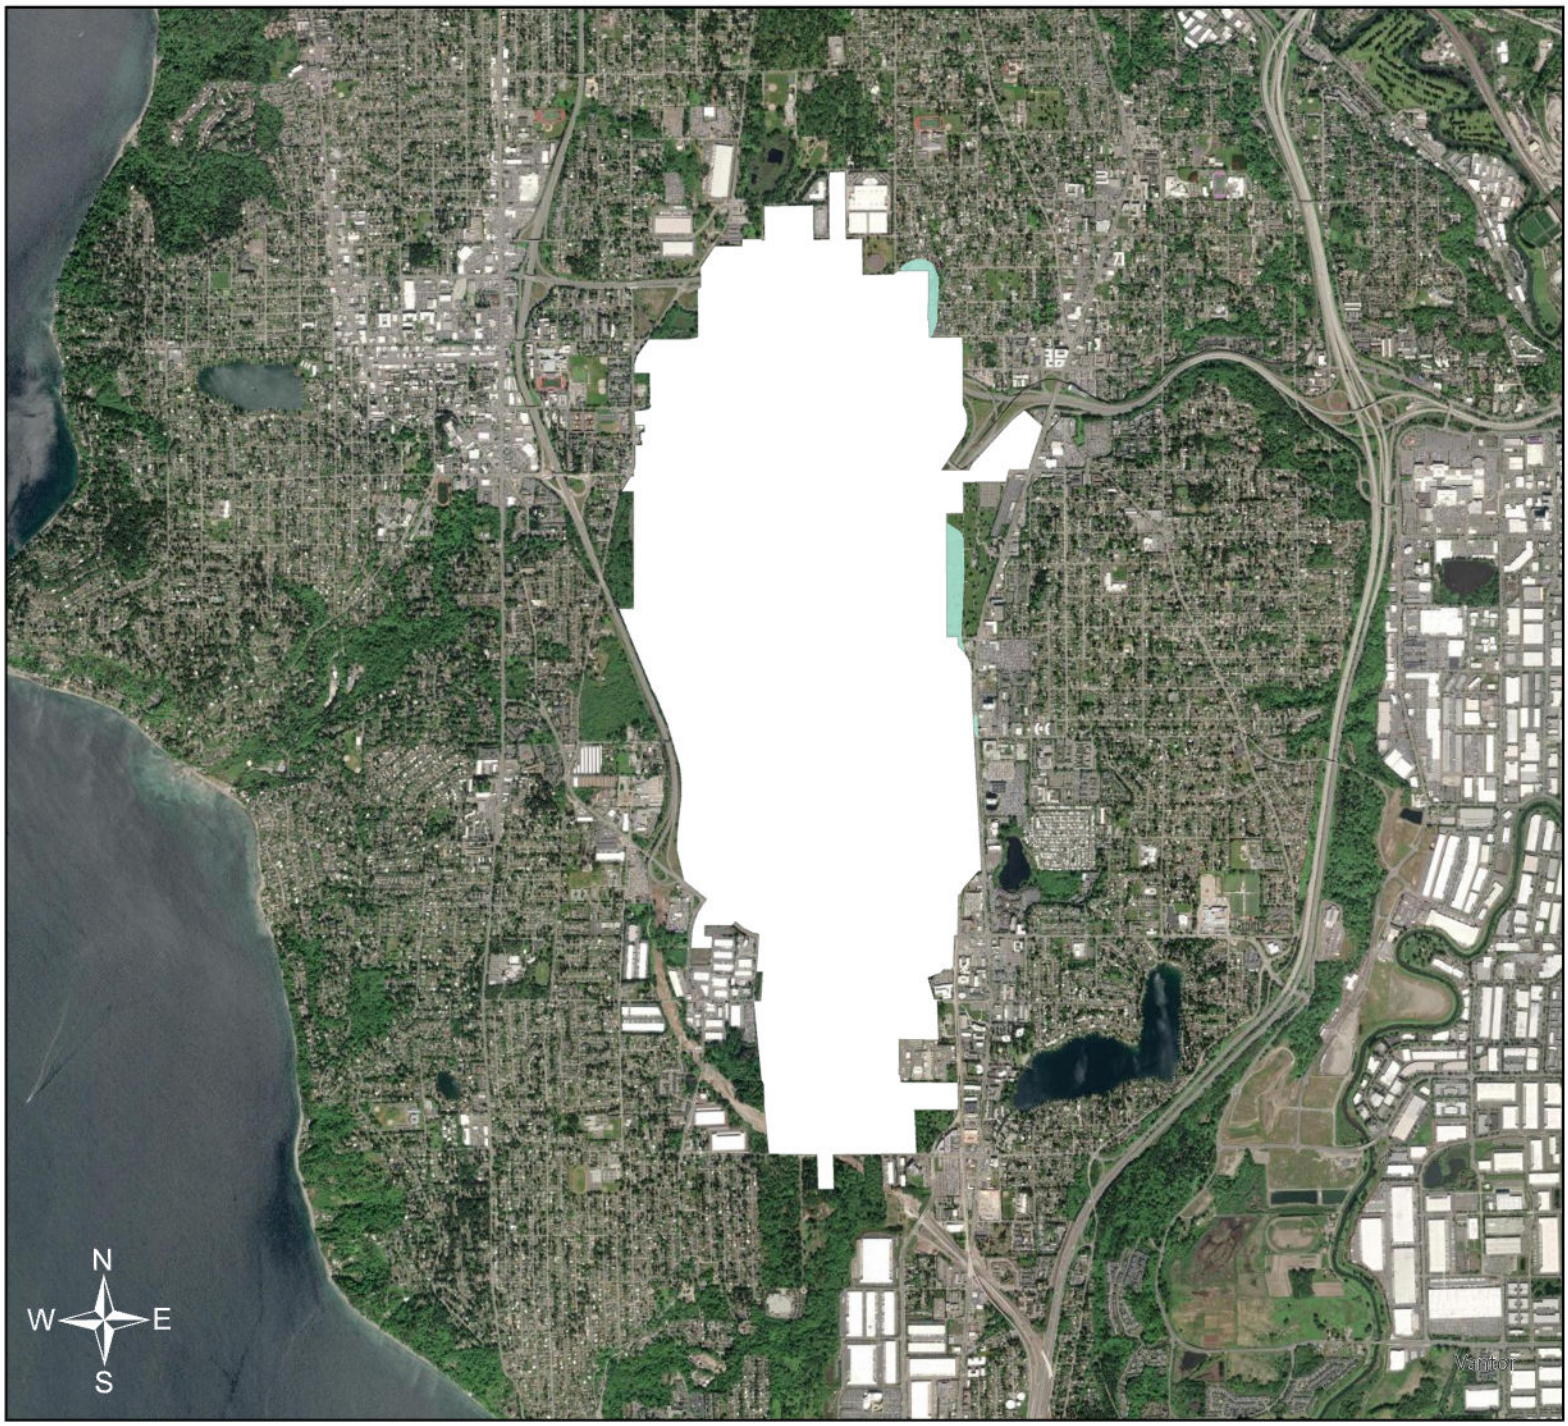

0 0.23 0.45 0.9 1.35 1.8
Miles

PM2.5 Concentrations (µg/m³)

- SEA Property
- 4.6 - 4.7 (<1% above background)
- 4.7 - 5.0

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2027 Construction

PM2.5

Annual

NAAQS: 9.0 µg/m³

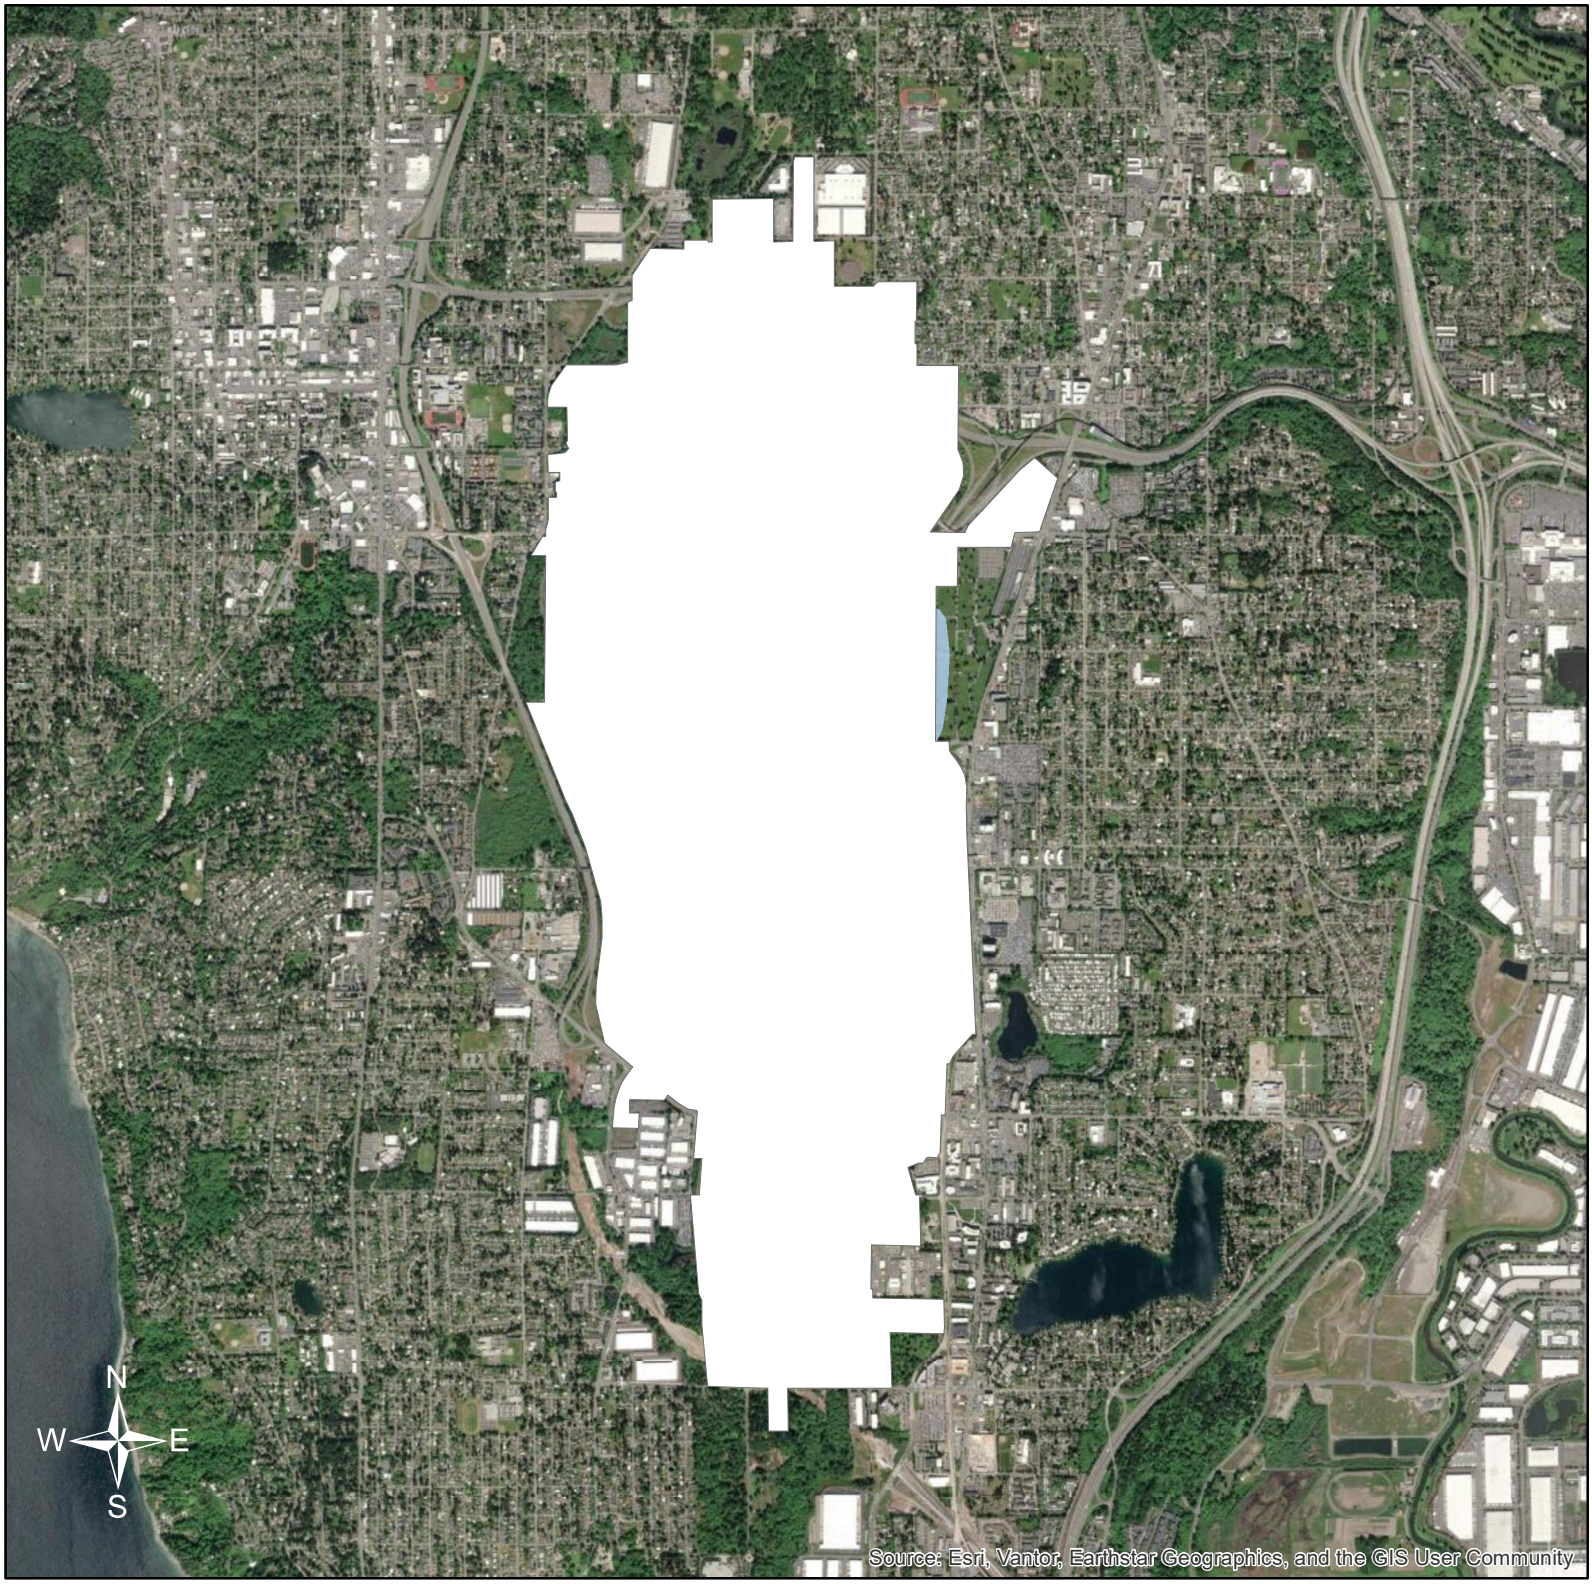

PM2.5 Concentrations (µg/m³)

SEA Property

11 - 12 (< 1% above background)

12 - 13

NAAQS: 35 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2028 Construction

PM2.5

24-hour, 8th high

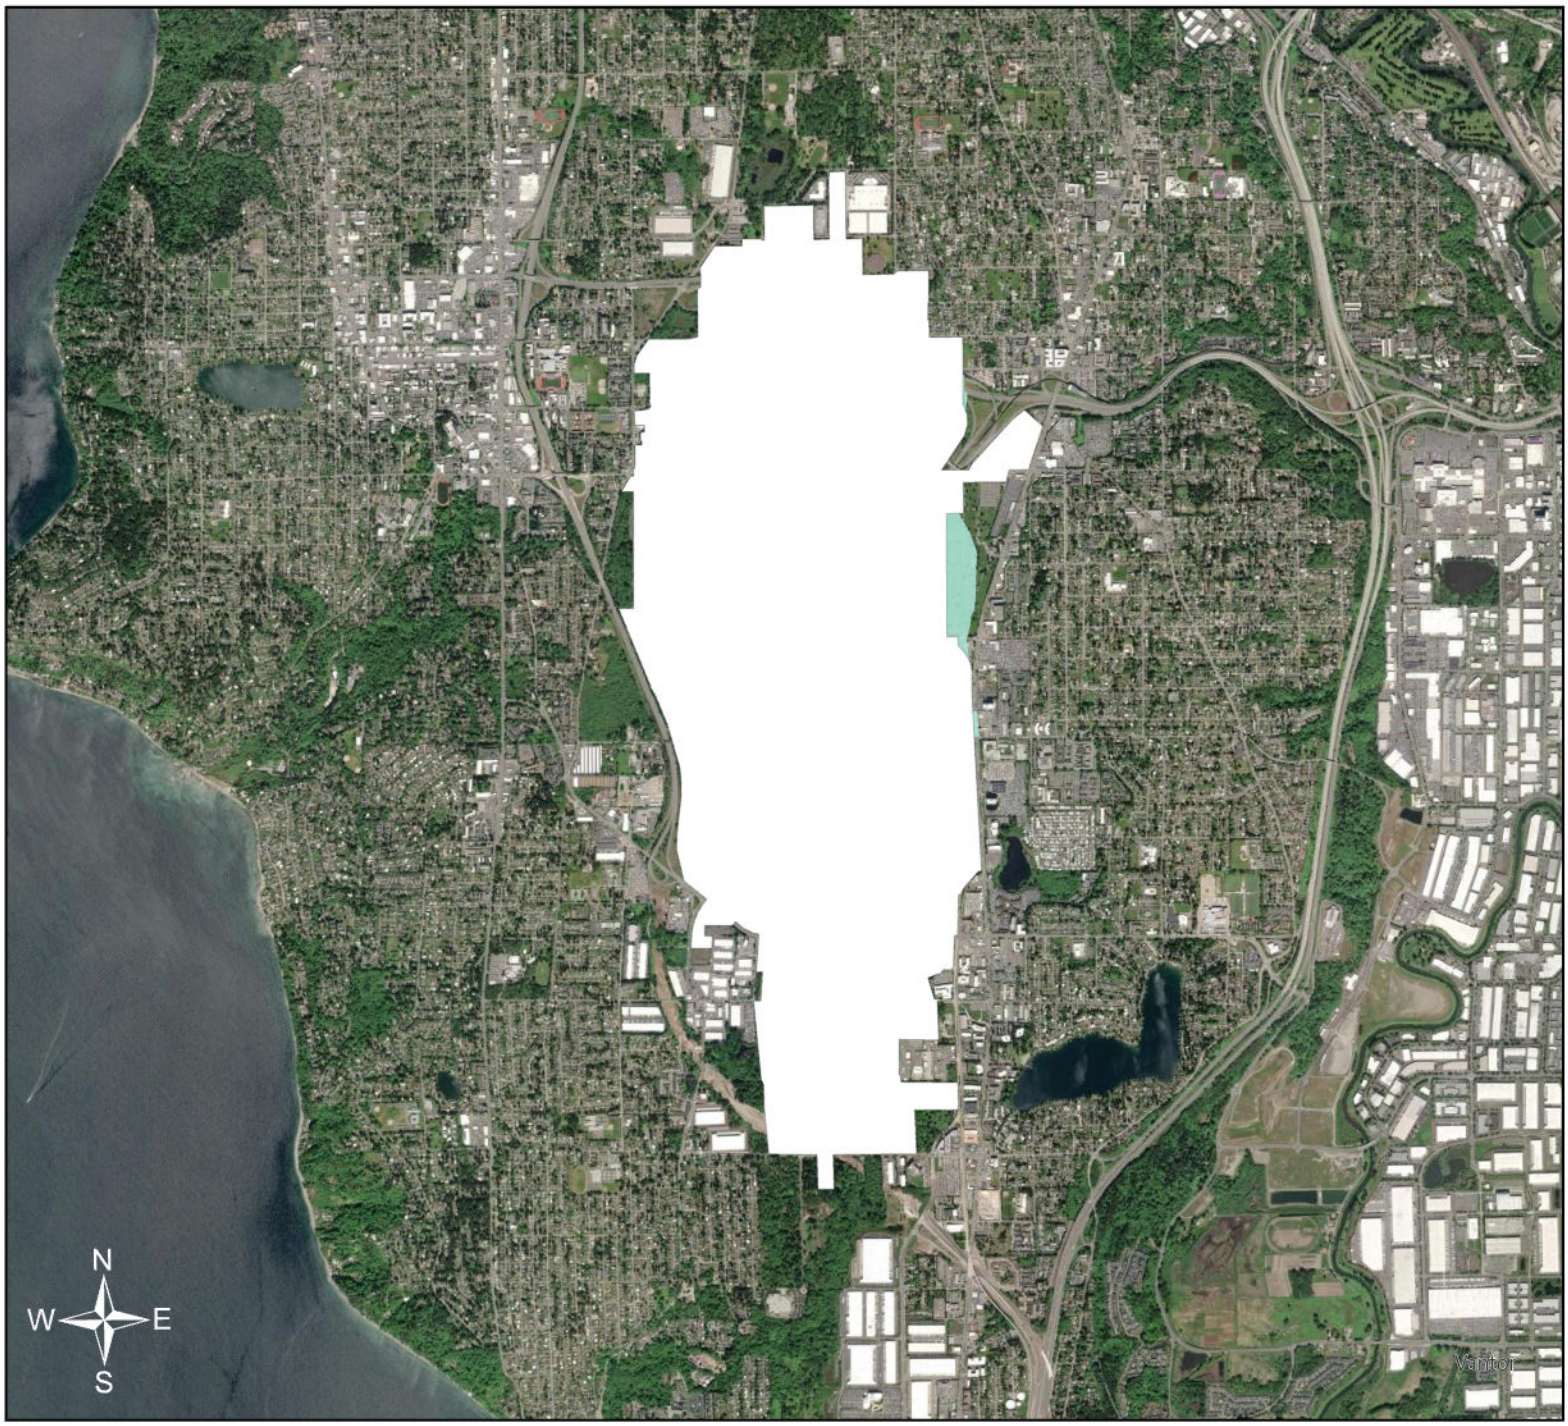

0 0.23 0.45 0.9 1.35 1.8
Miles

PM2.5 Concentrations (µg/m³)

- SEA Property
- 4.6 - 4.7 (<1% above background)
- 4.7 - 5.3

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2028 Construction

PM2.5

Annual

NAAQS: 9.0 µg/m³

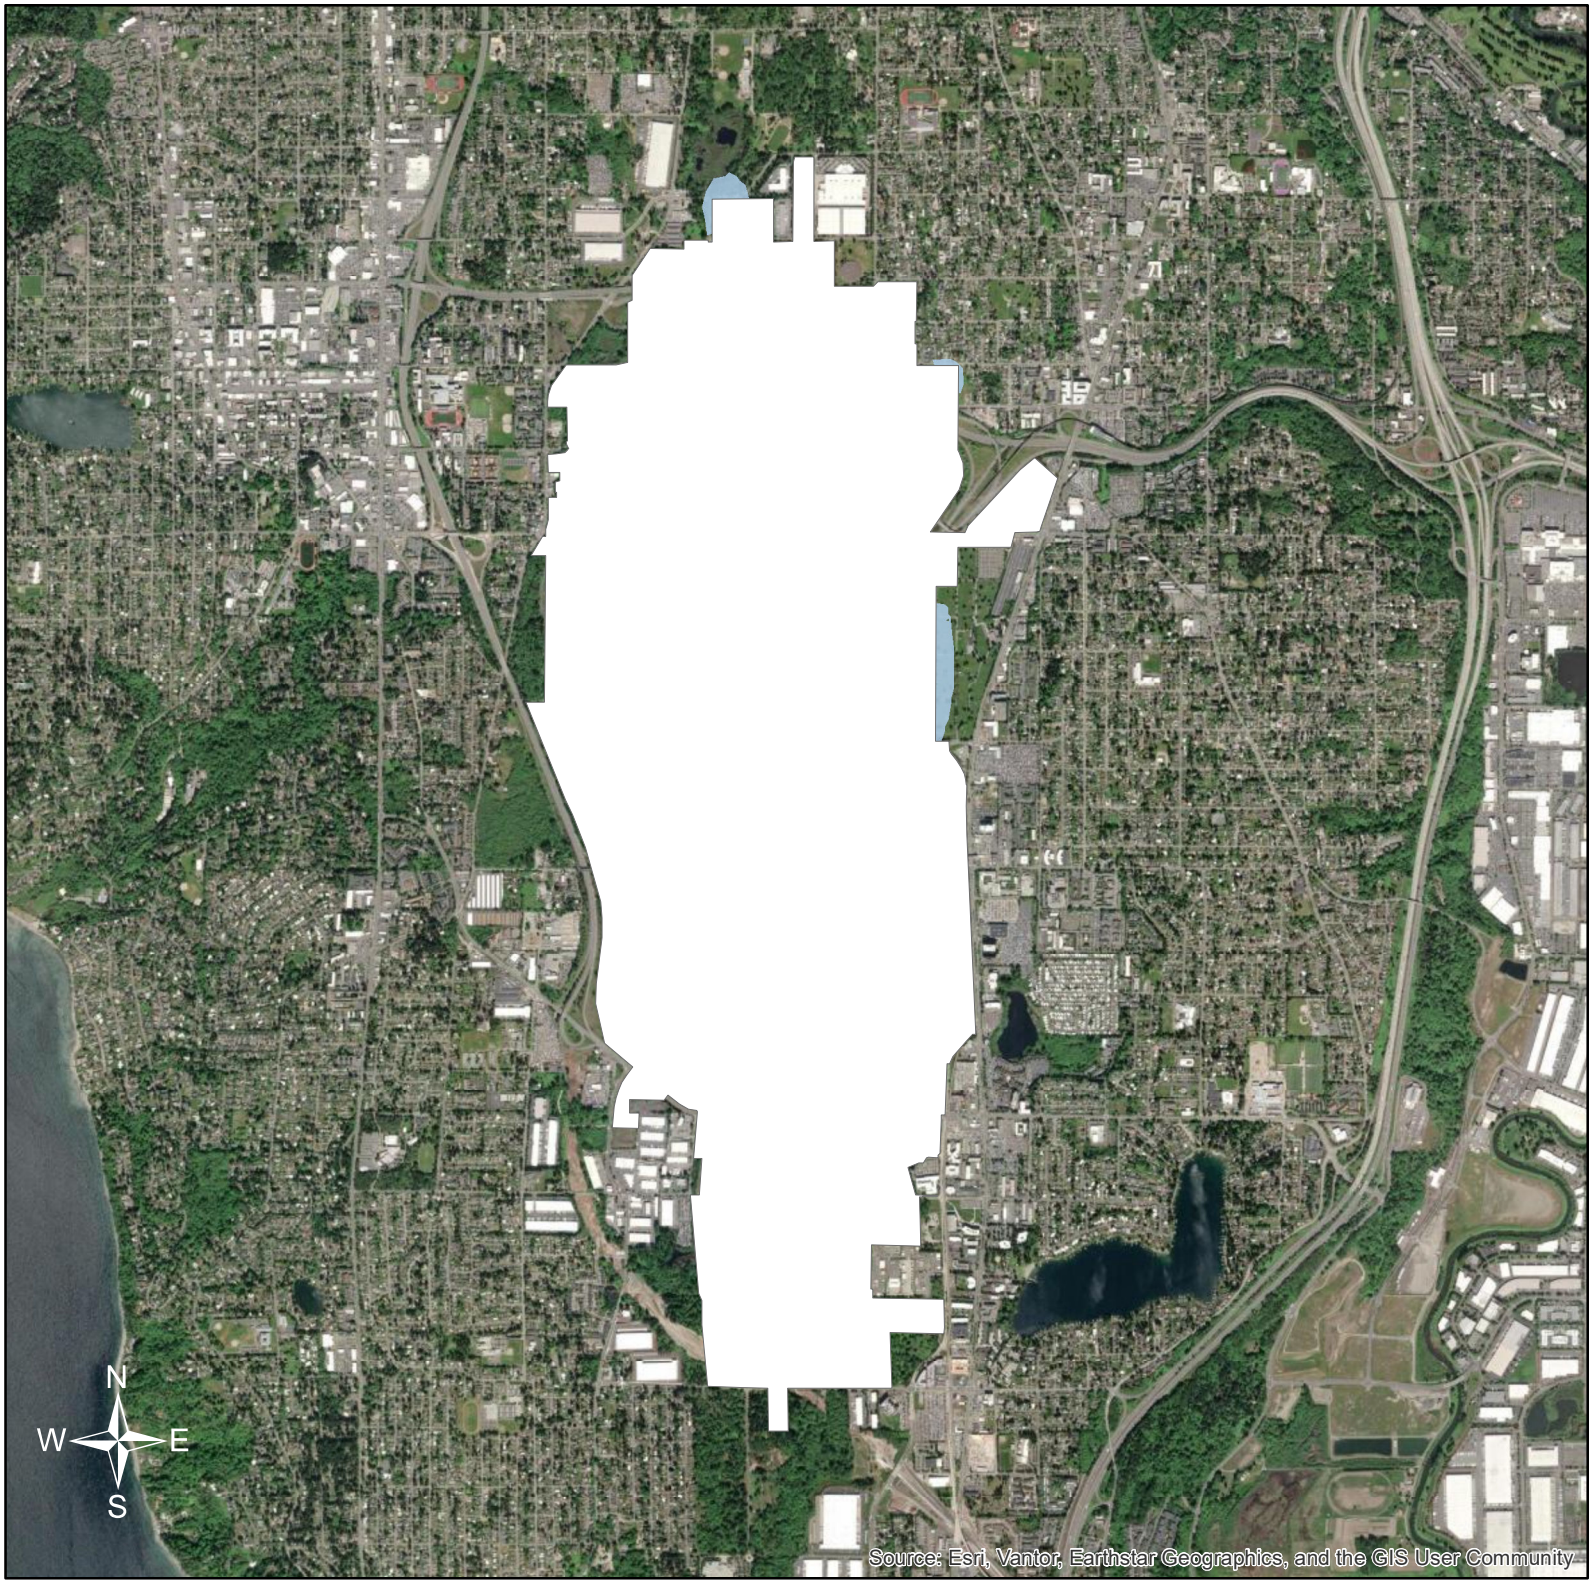

0 0.75 1.5 3 Miles

PM2.5 Concentrations (µg/m³)

- SEA Property
- 11 - 12 (< 1% above background)
- 12 - 15
- 15 - 16

NAAQS: 35 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2029 Construction

PM2.5

24-hour, 8th high

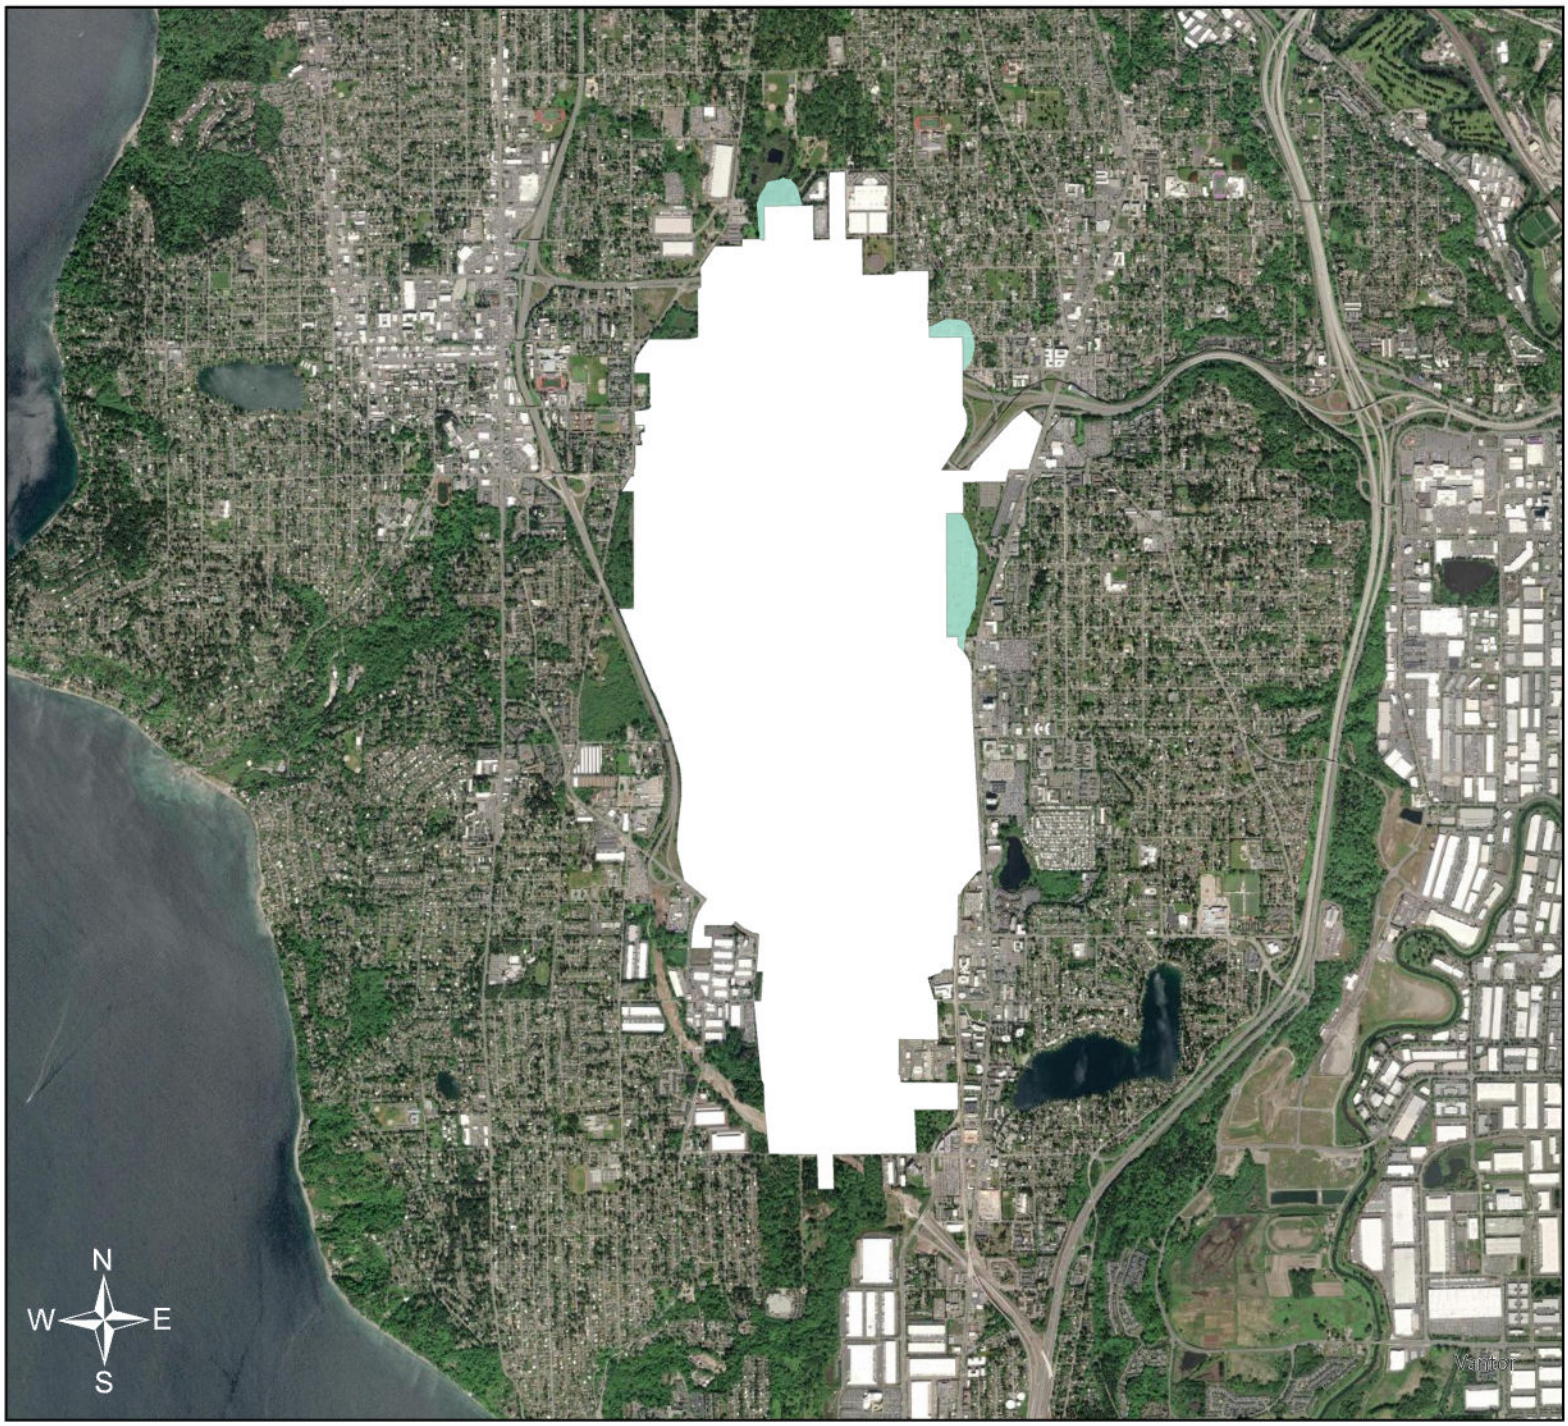

0 0.23 0.45 0.9 1.35 1.8
Miles

PM2.5 Concentrations (µg/m³)

- SEA_Property_NAD
- 4.6 - 4.7 (<1% above background)
- 4.7 - 5.4
- 5.4 - 6.0

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2029 Construction

PM2.5

Annual

NAAQS: 9.0 µg/m³

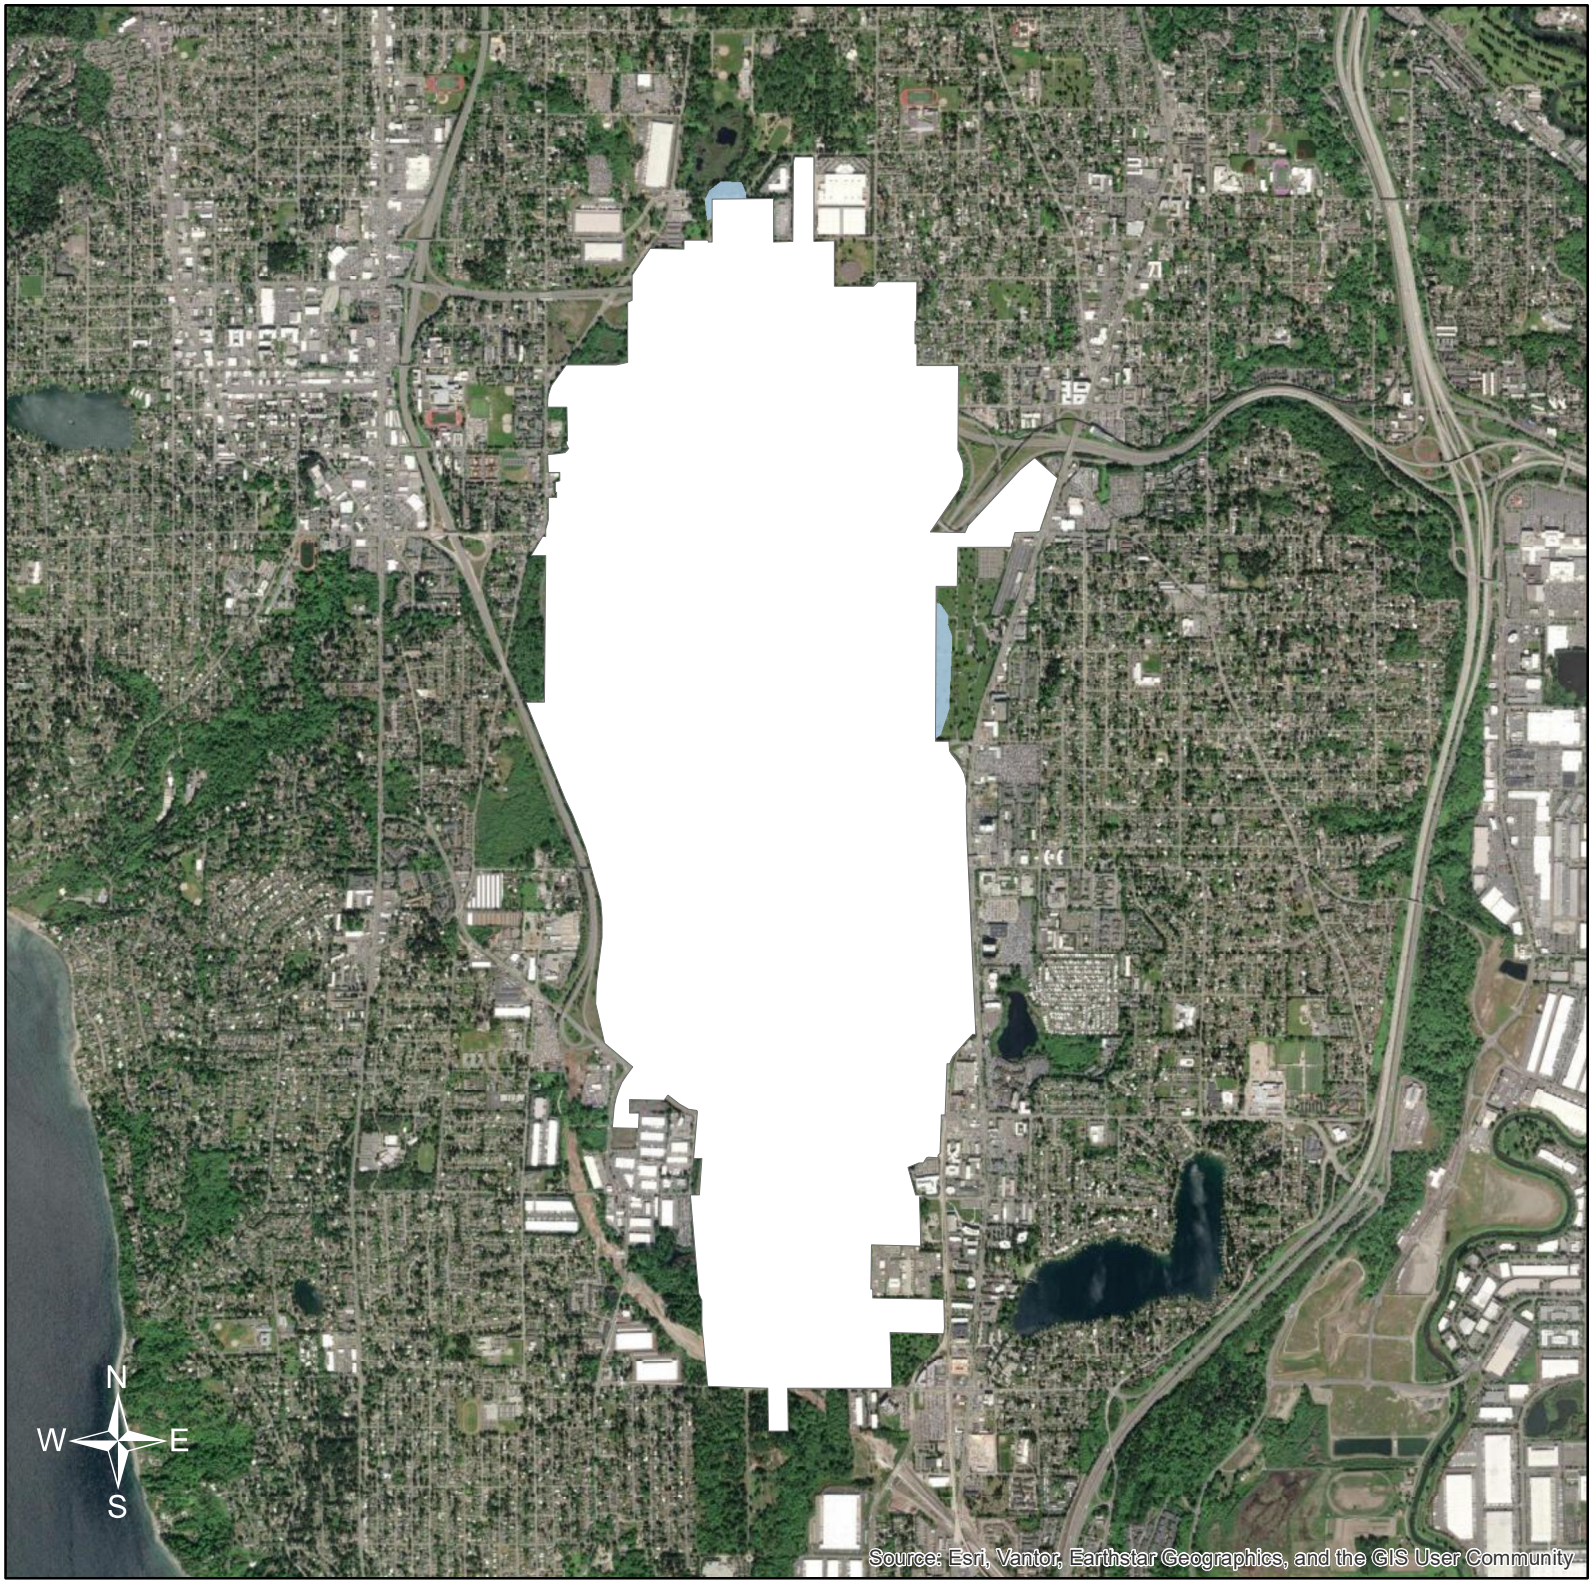

0 0.75 1.5 3 Miles

PM2.5 Concentrations (µg/m³)

SEA Property

11 - 12 (< 1% above background)

12 - 15

NAAQS: 35 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2030 Construction

PM2.5

24-hour, 8th high

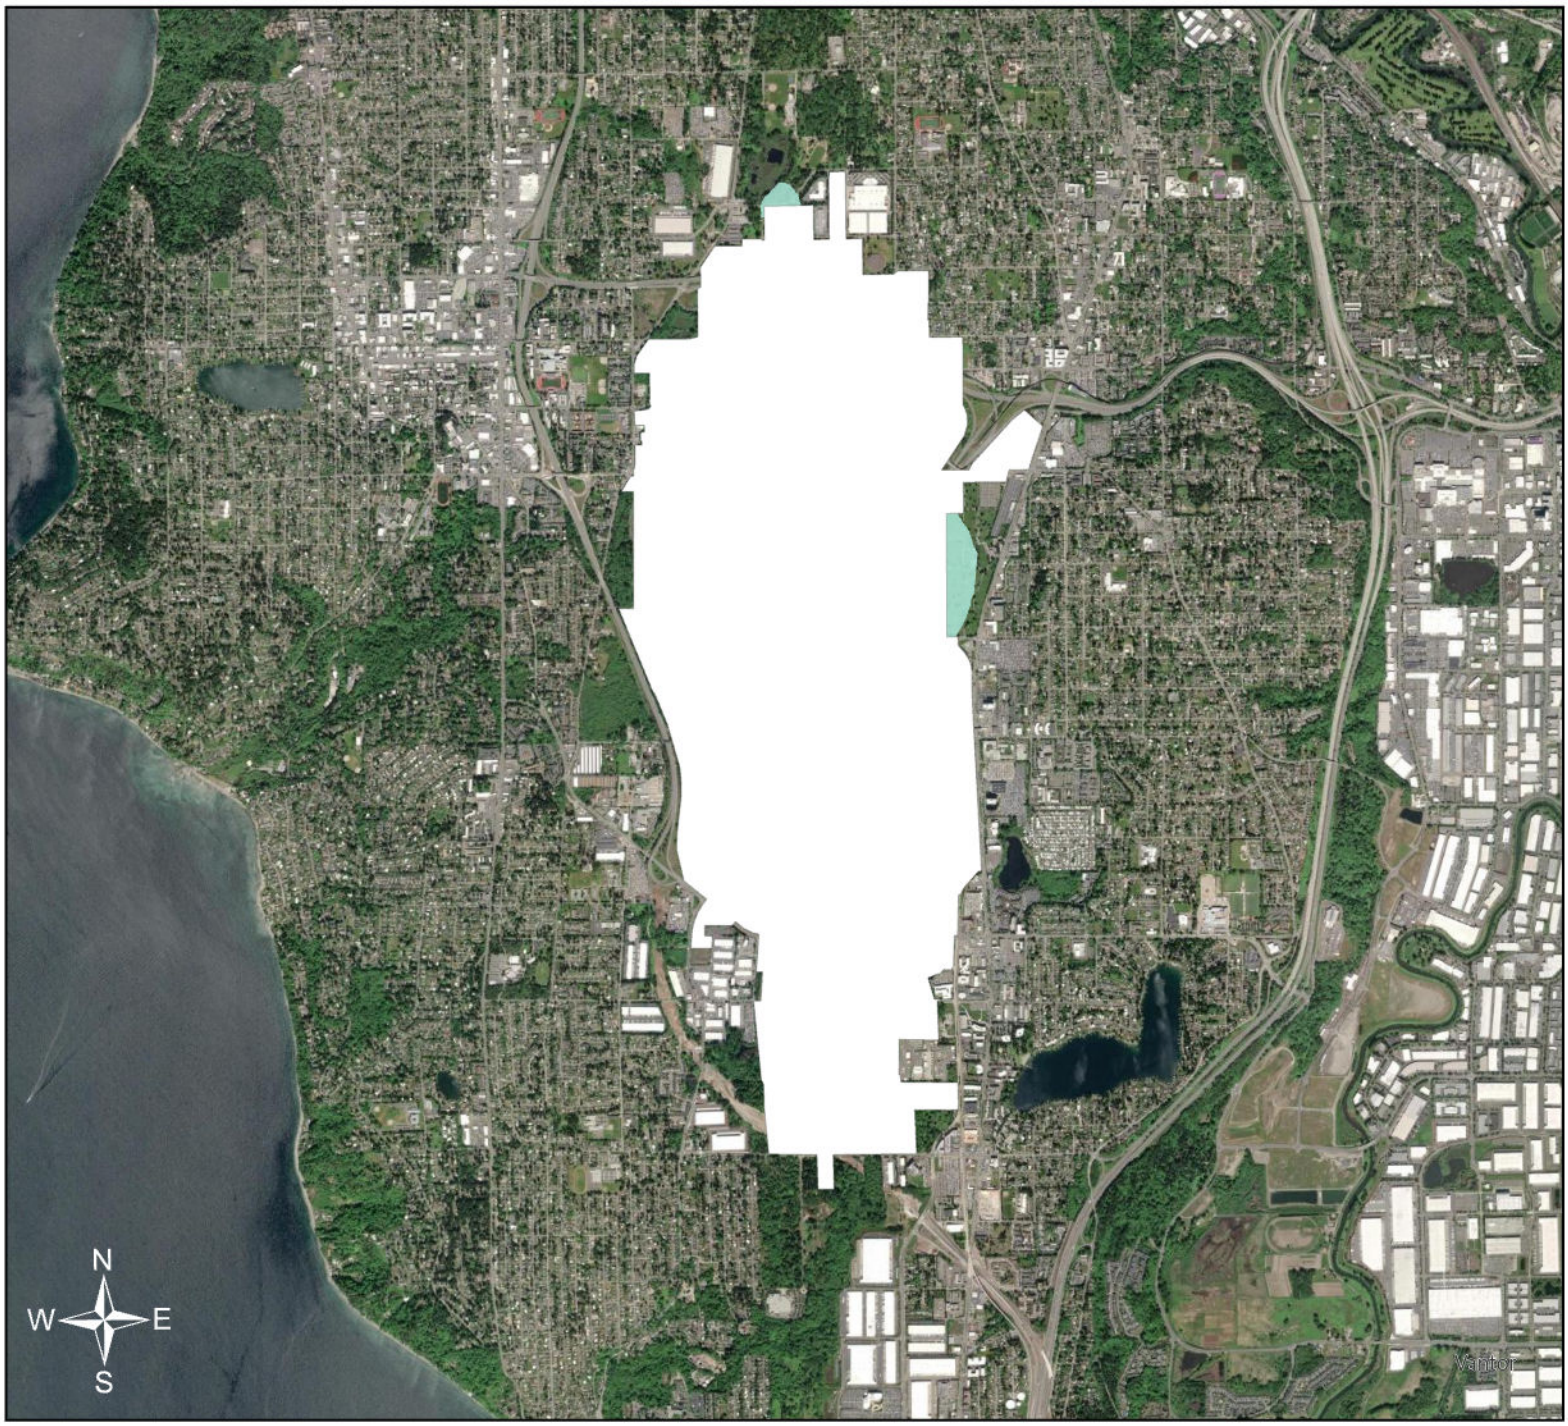

0 0.23 0.45 0.9 1.35 1.8
Miles

PM2.5 Concentrations (µg/m³)

- SEA_Property_NAD
- 4.6 - 4.7 (<1% above background)
- 4.7 - 5.4
- 5.4 - 5.6

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2030 Construction

PM2.5

Annual

NAAQS: 9.0 µg/m³

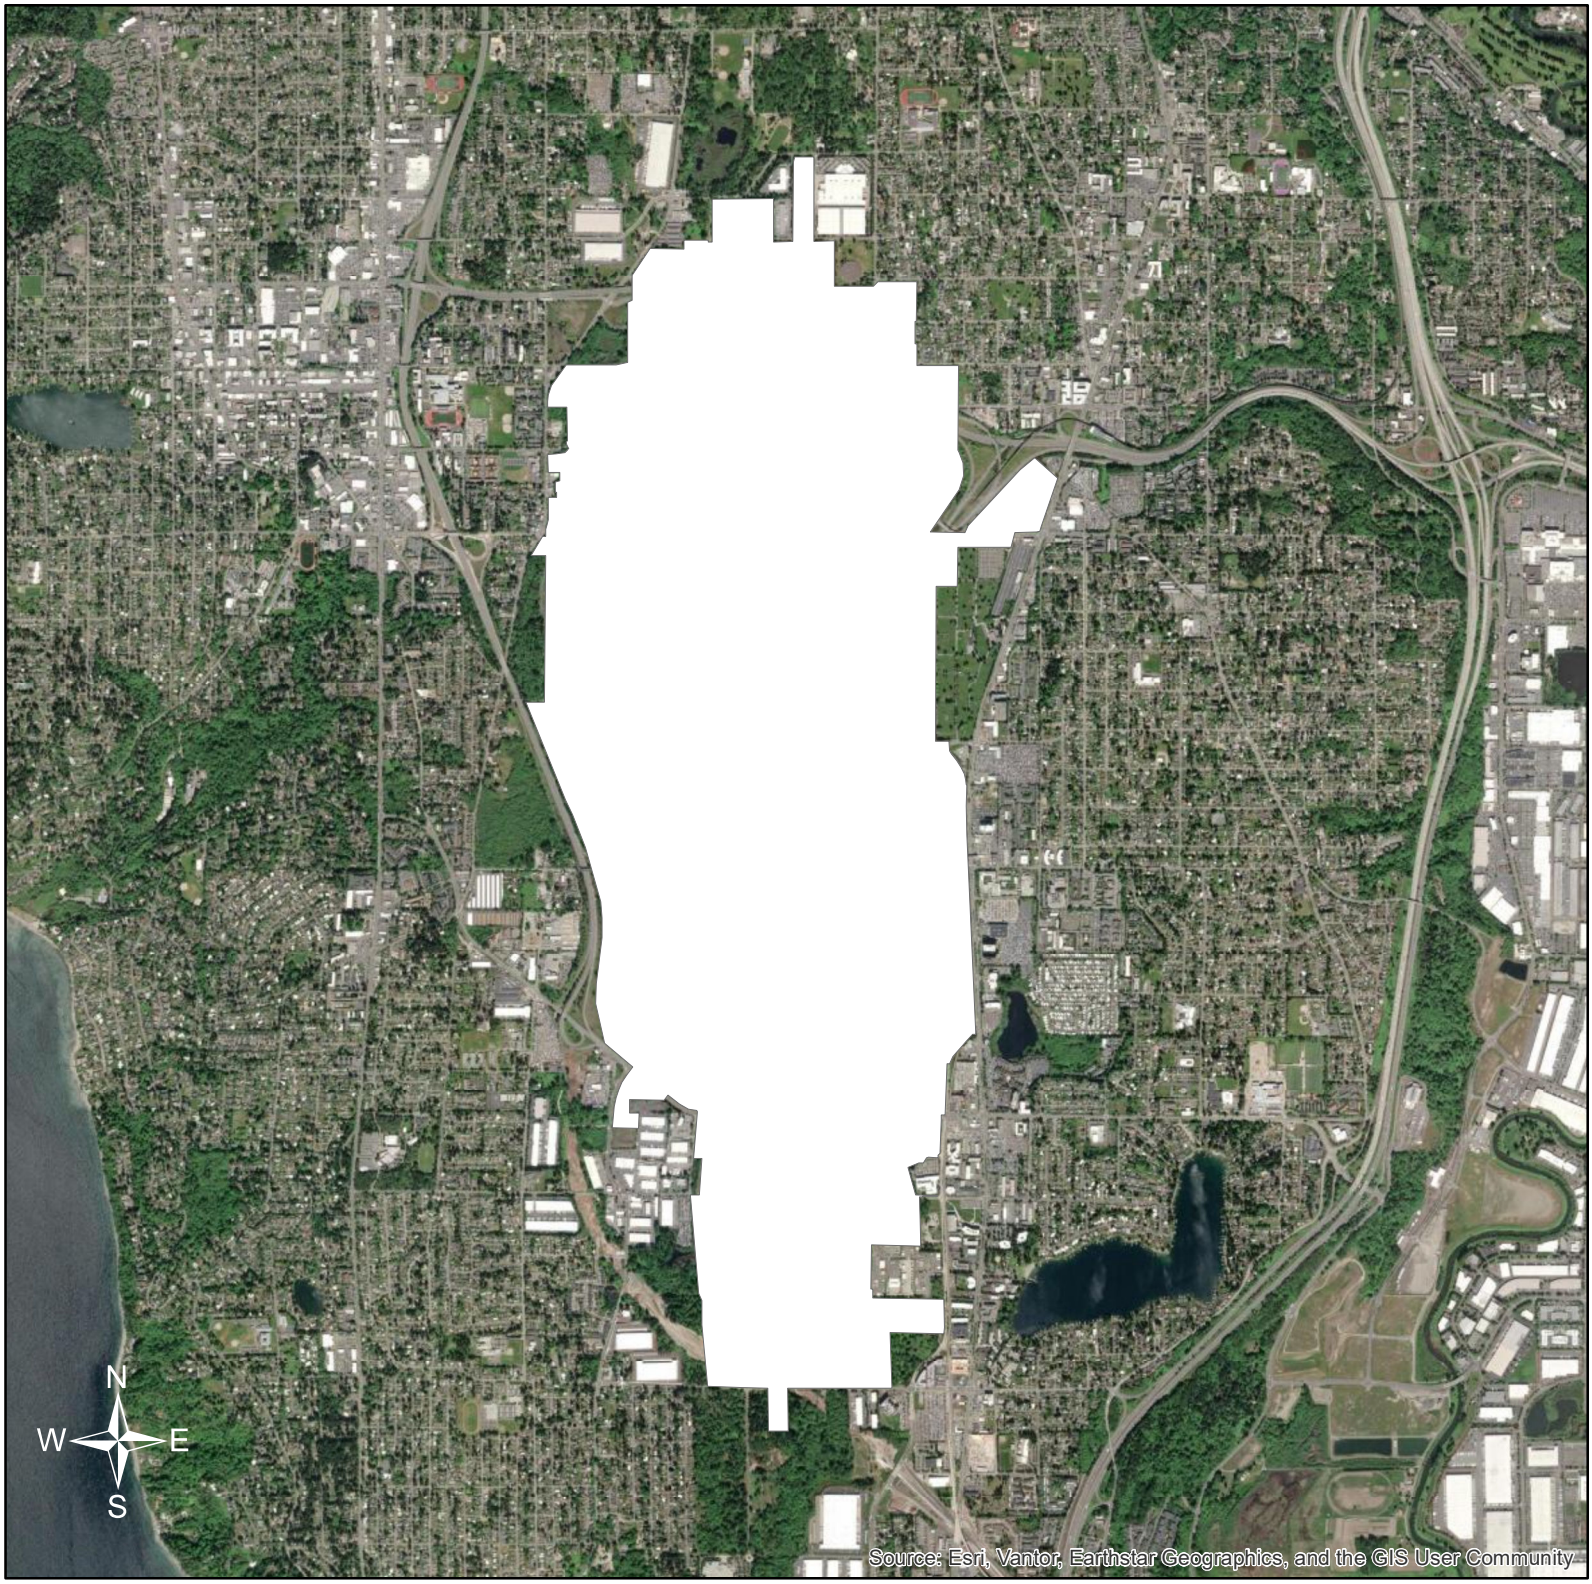

0 0.75 1.5 3 Miles

PM2.5 Concentrations (µg/m³)

SEA Property

11 - 12 (< 1% above background)

12 - 14

NAAQS: 35 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2031 Construction

PM2.5

24-hour, 8th high

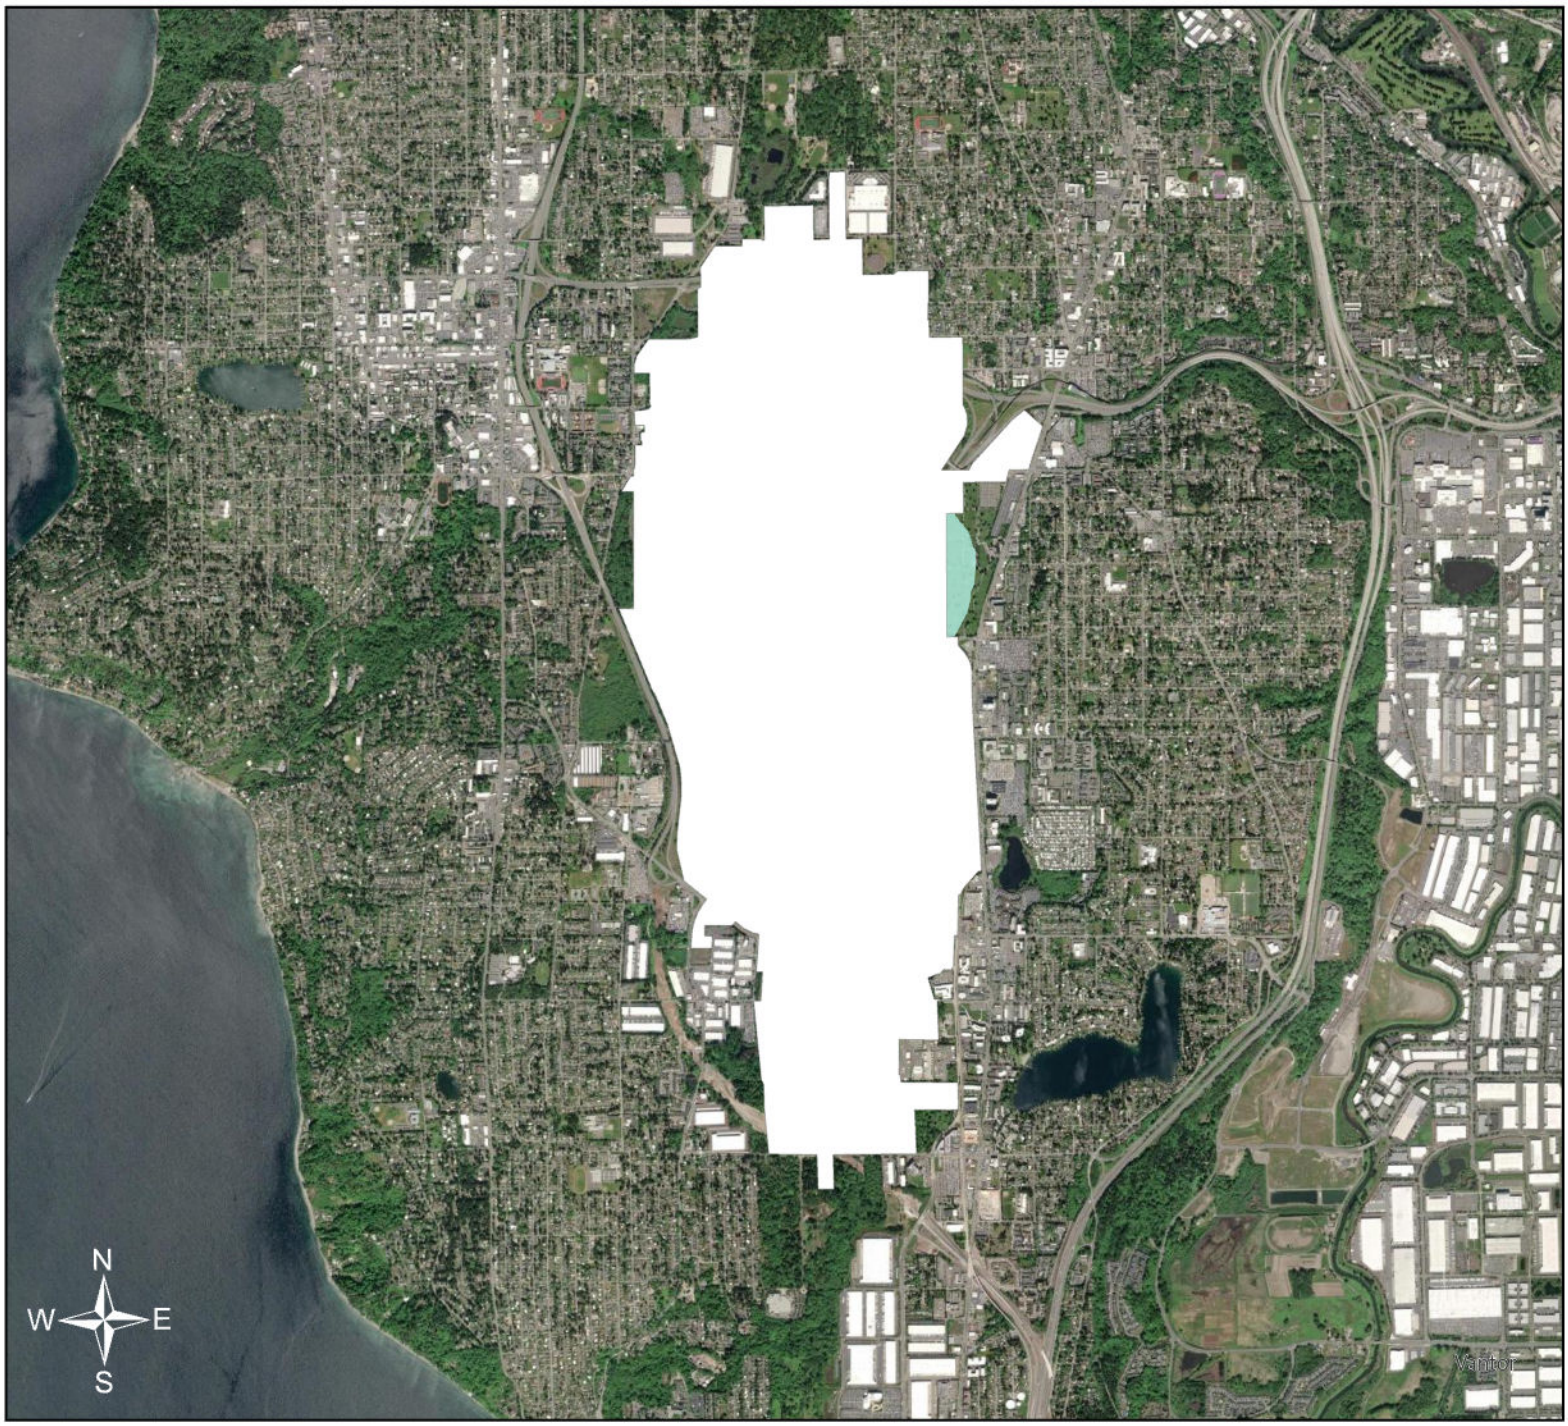

0 0.23 0.45 0.9 1.35 1.8
Miles

PM2.5 Concentrations (µg/m³)

- SEA_Property_NAD
- 4.6 - 4.7 (<1% above background)
- 4.7 - 5.4

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2031 Construction

PM2.5

Annual

NAAQS: 9.0 µg/m³

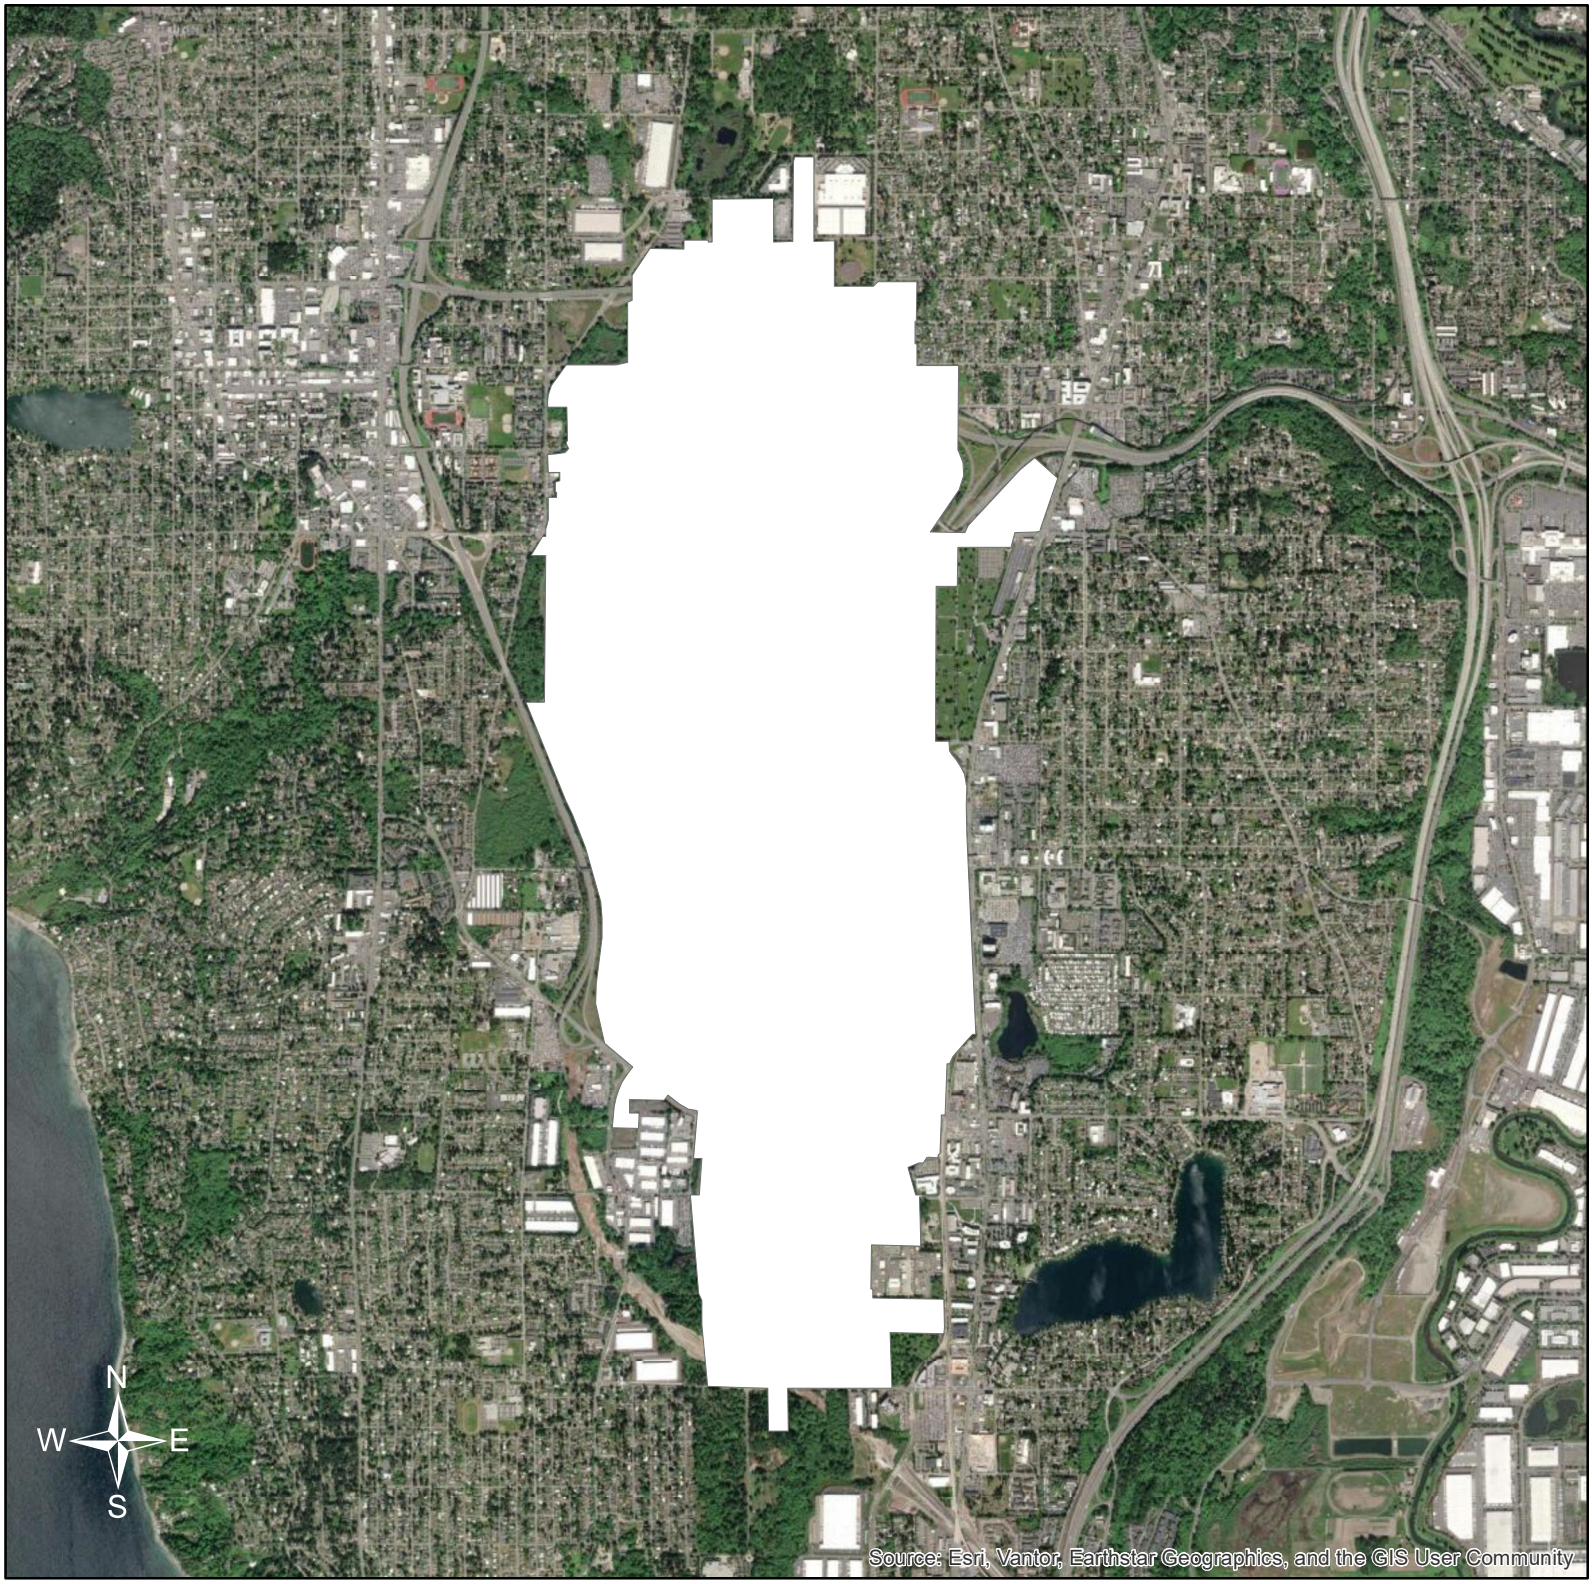

0 0.75 1.5 3 Miles

PM2.5 Concentrations (µg/m³)

SEA Property

11 - 12 (< 1% above background)

12 - 13

NAAQS: 35 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Construction

PM2.5

24-hour, 8th high

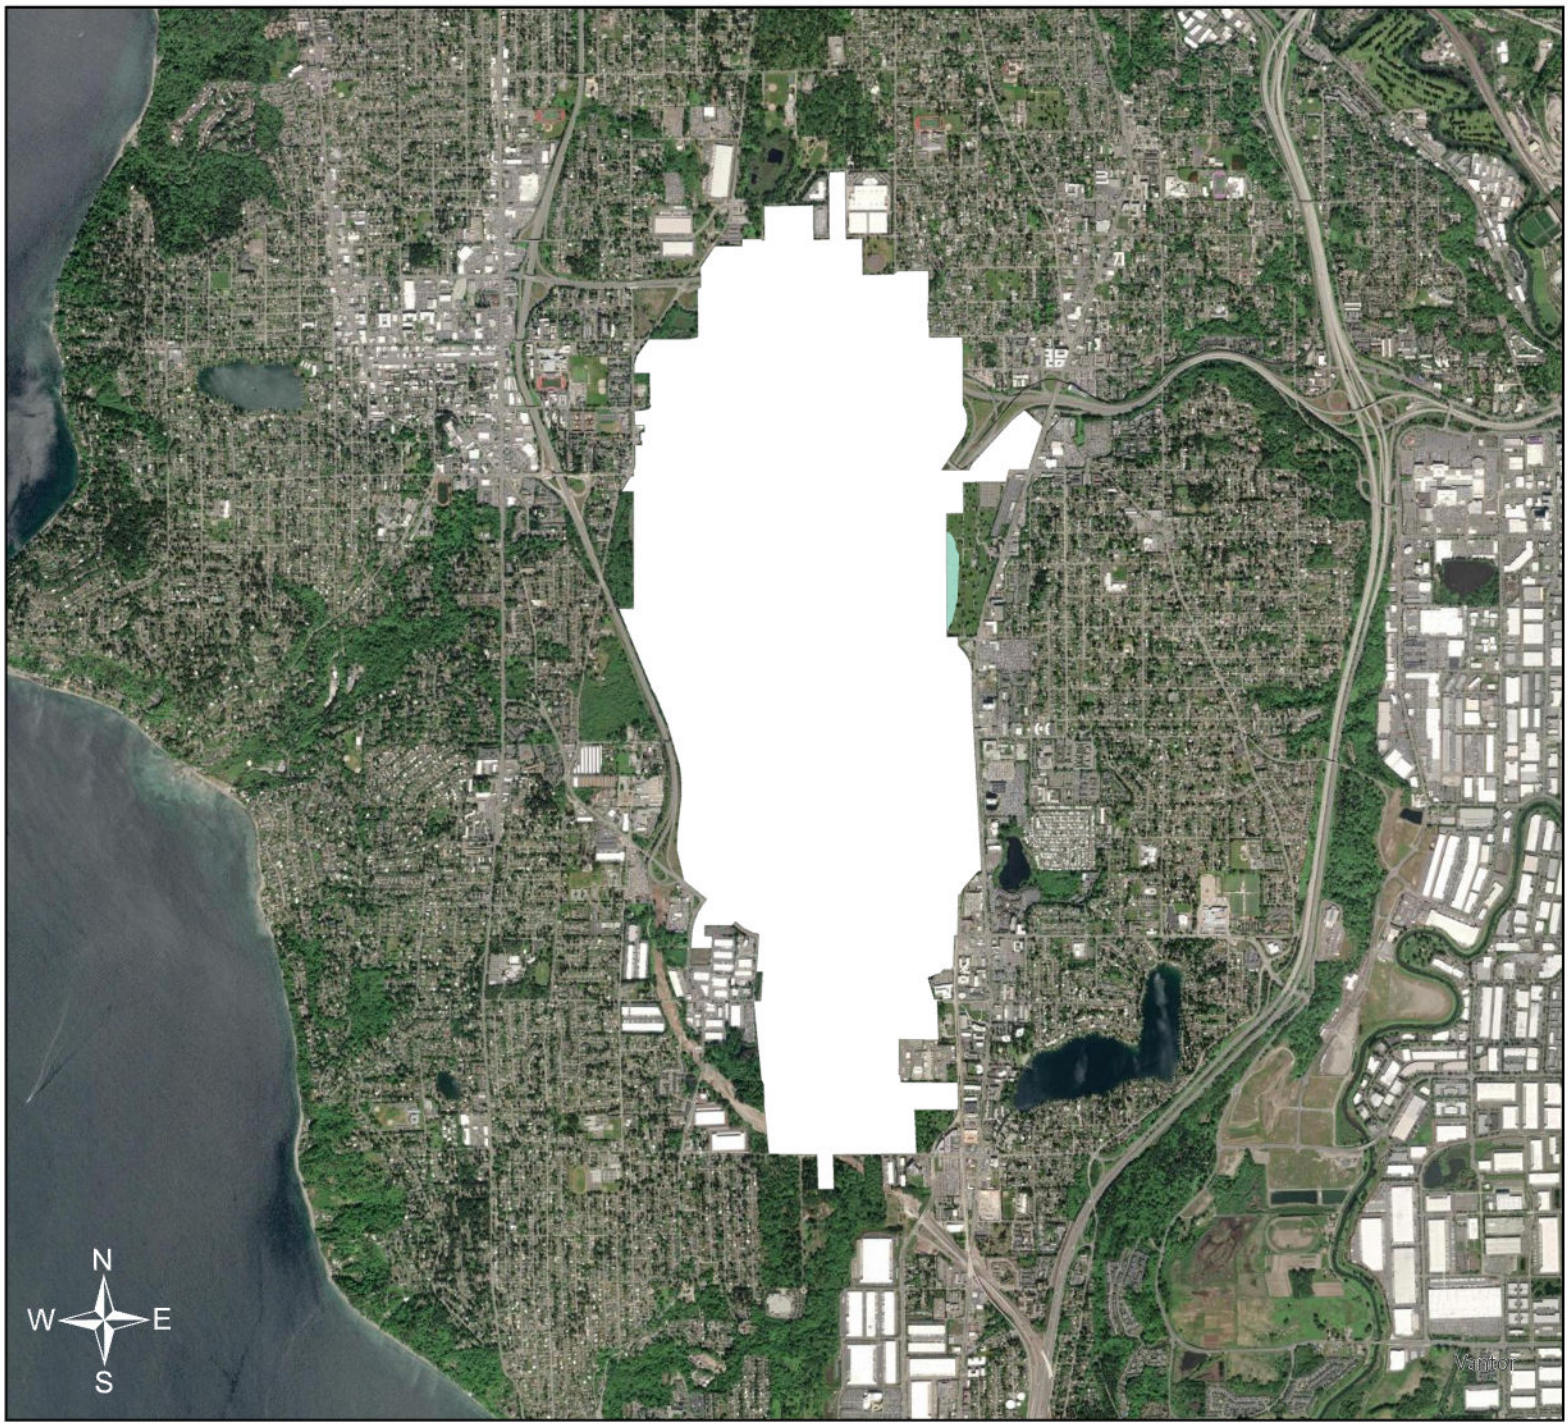

0 0.23 0.45 0.9 1.35 1.8
Miles

PM2.5 Concentrations (µg/m³)

- SEA_Property_NAD
- 4.6 - 4.7 (<1% above background)
- 4.7 - 5.0

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Construction

PM2.5

Annual

NAAQS: 9.0 µg/m³

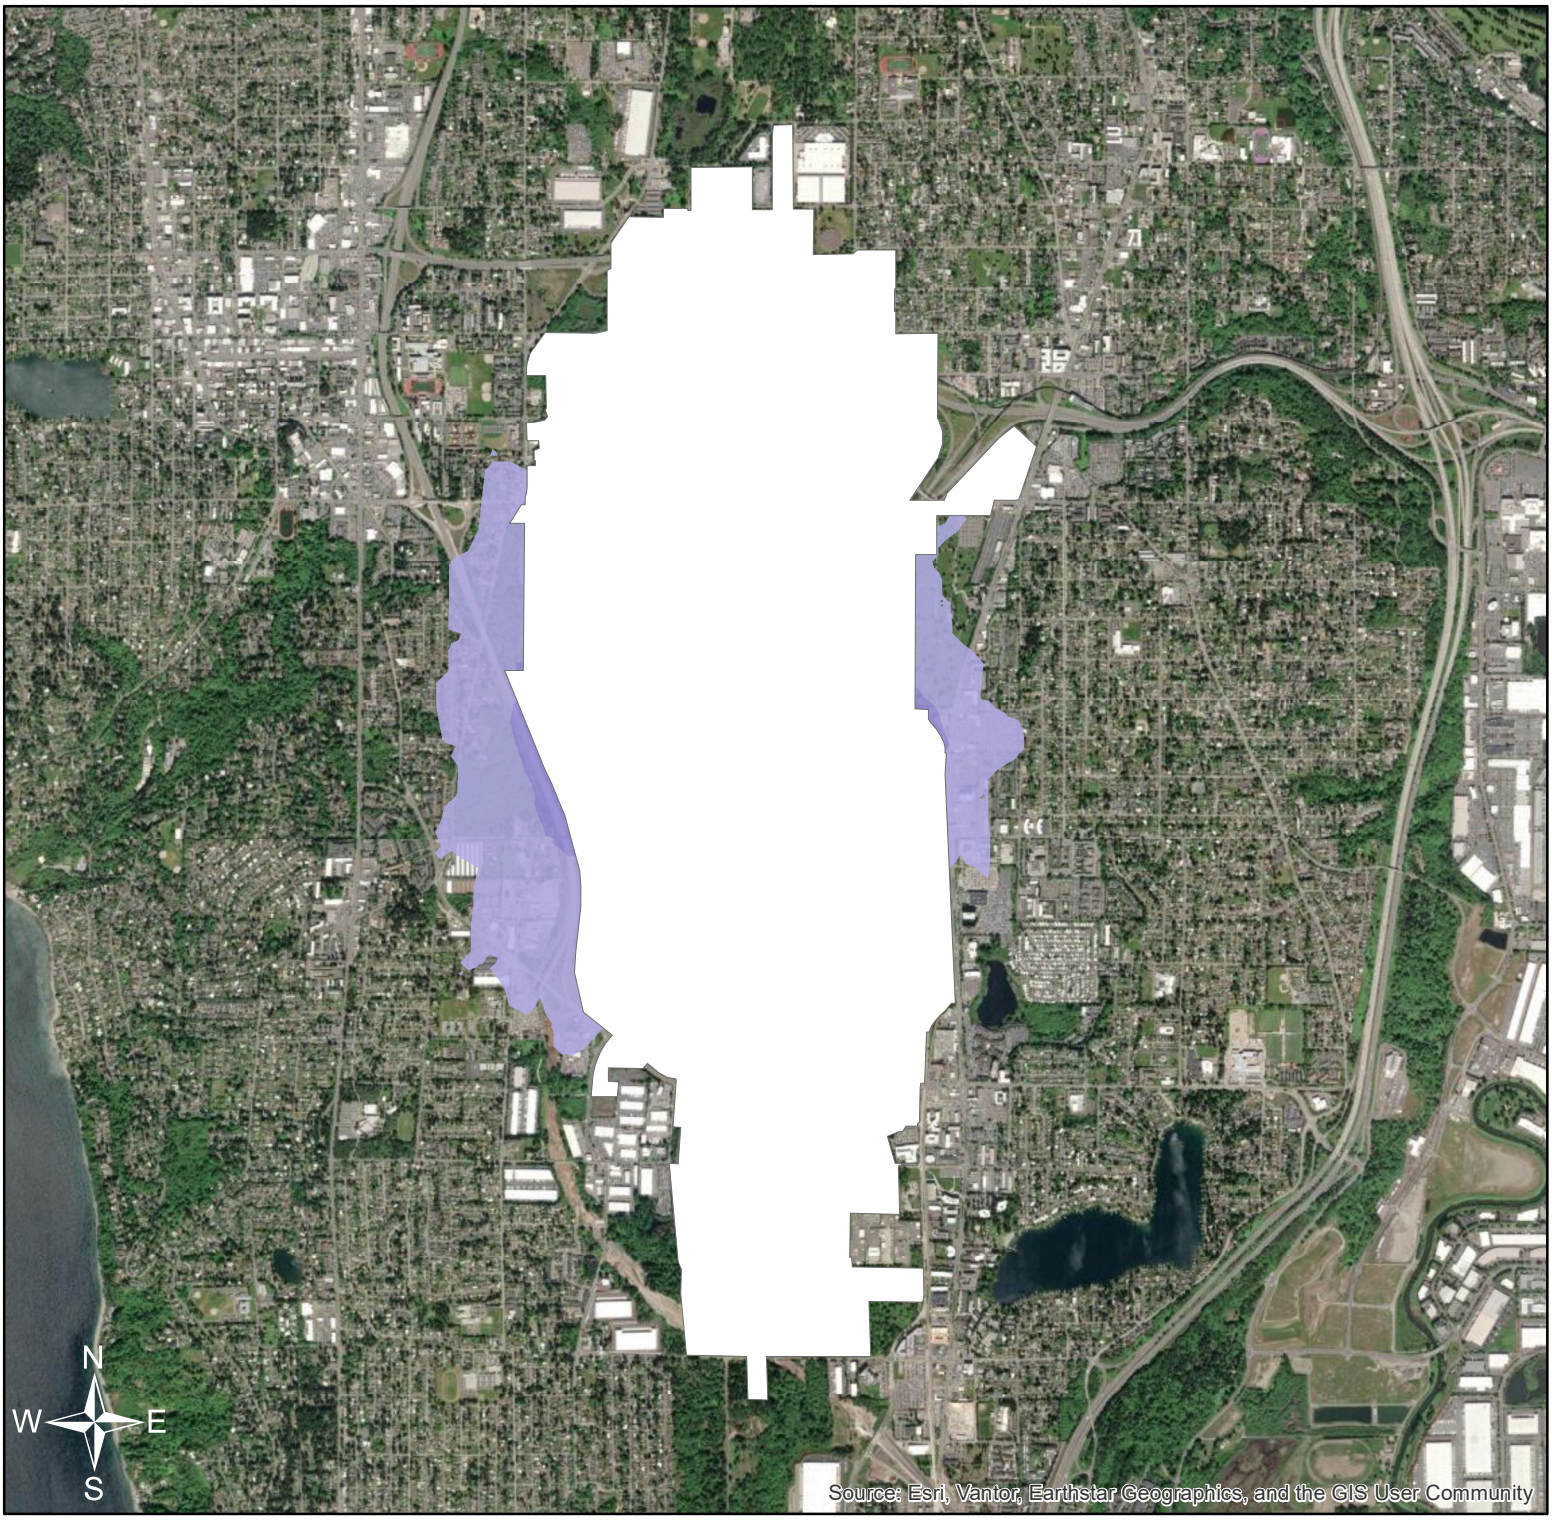

PM 10 Concentrations (µg/m³)

- SEA Property
- 34 - 36 (< 1% above background)
- 36 - 45
- 45 - 60
- 60 - 61

NAAQS: 150 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2025 Construction

PM10

24-hour, 1st high

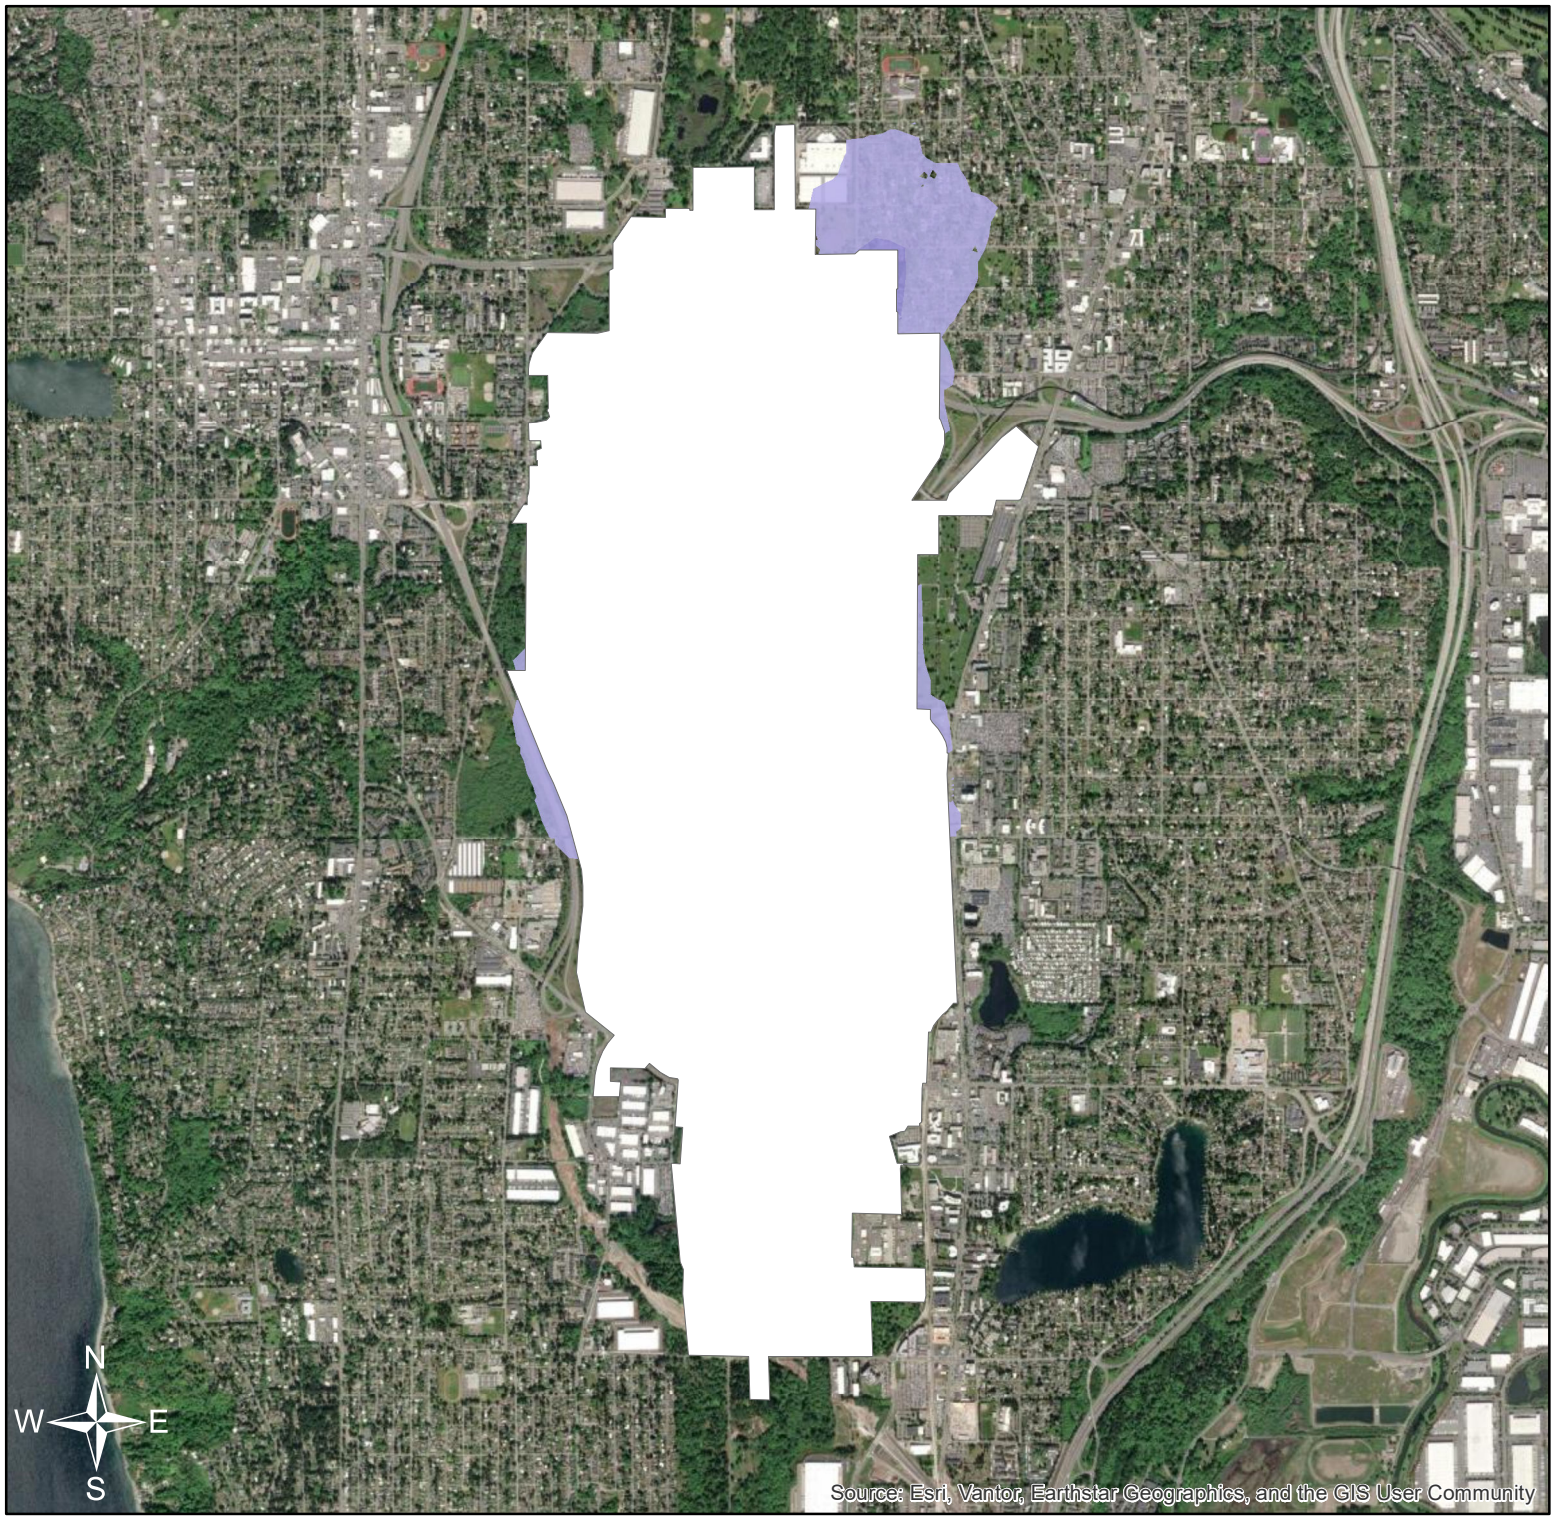

PM 10 Concentrations (µg/m³)

- SEA Property
- 34 - 36 (< 1% above background)
- 36 - 45
- 45 - 54

NAAQS: 150 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2026 Construction

PM10

24-hour, 1st high

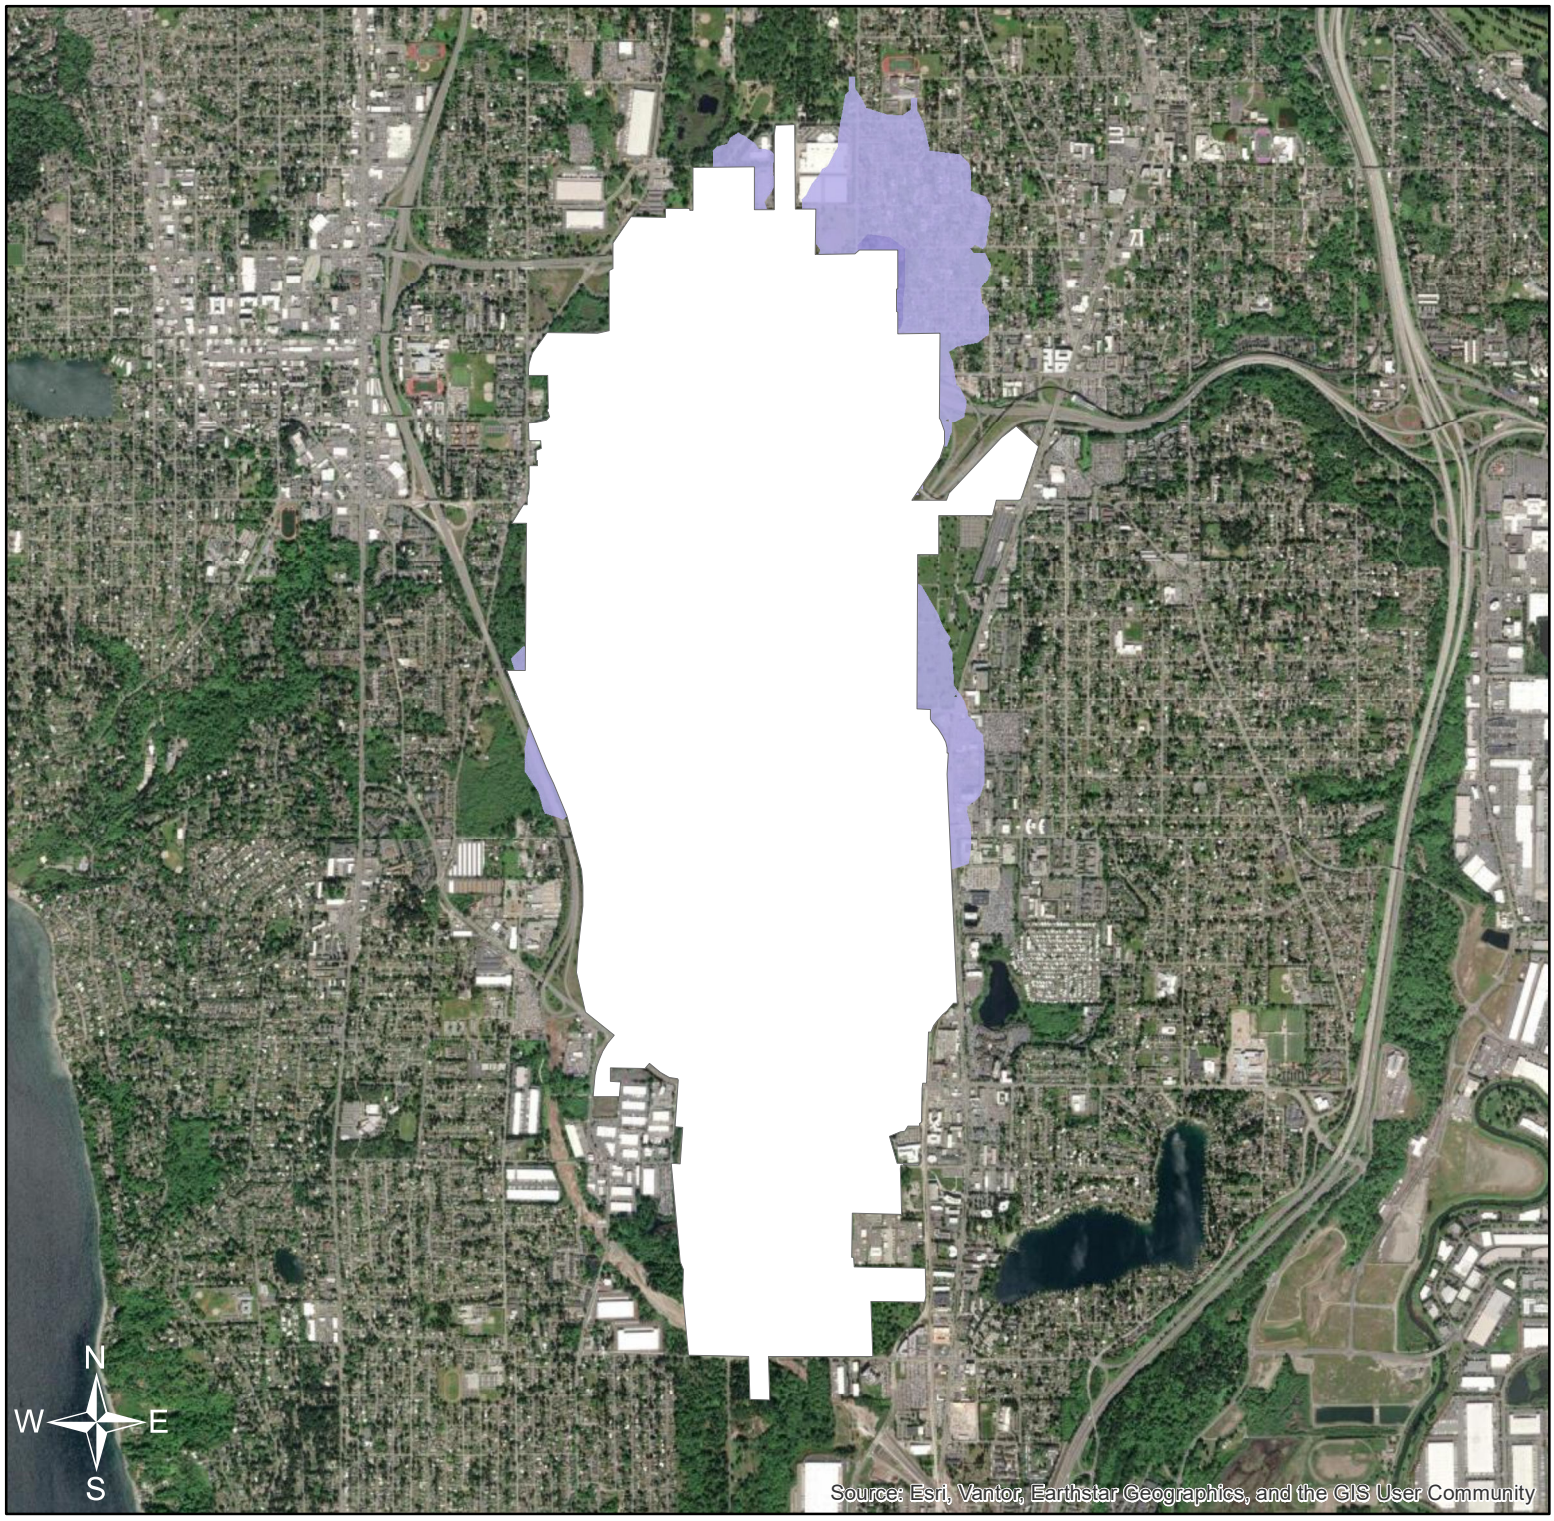

0 0.75 1.5 3 Miles

PM 10 Concentrations (µg/m³)

- SEA Property
- 34 - 36 (< 1% above background)
- 36 - 45
- 45 - 56

NAAQS: 150 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2027 Construction

PM10

24-hour, 1st high

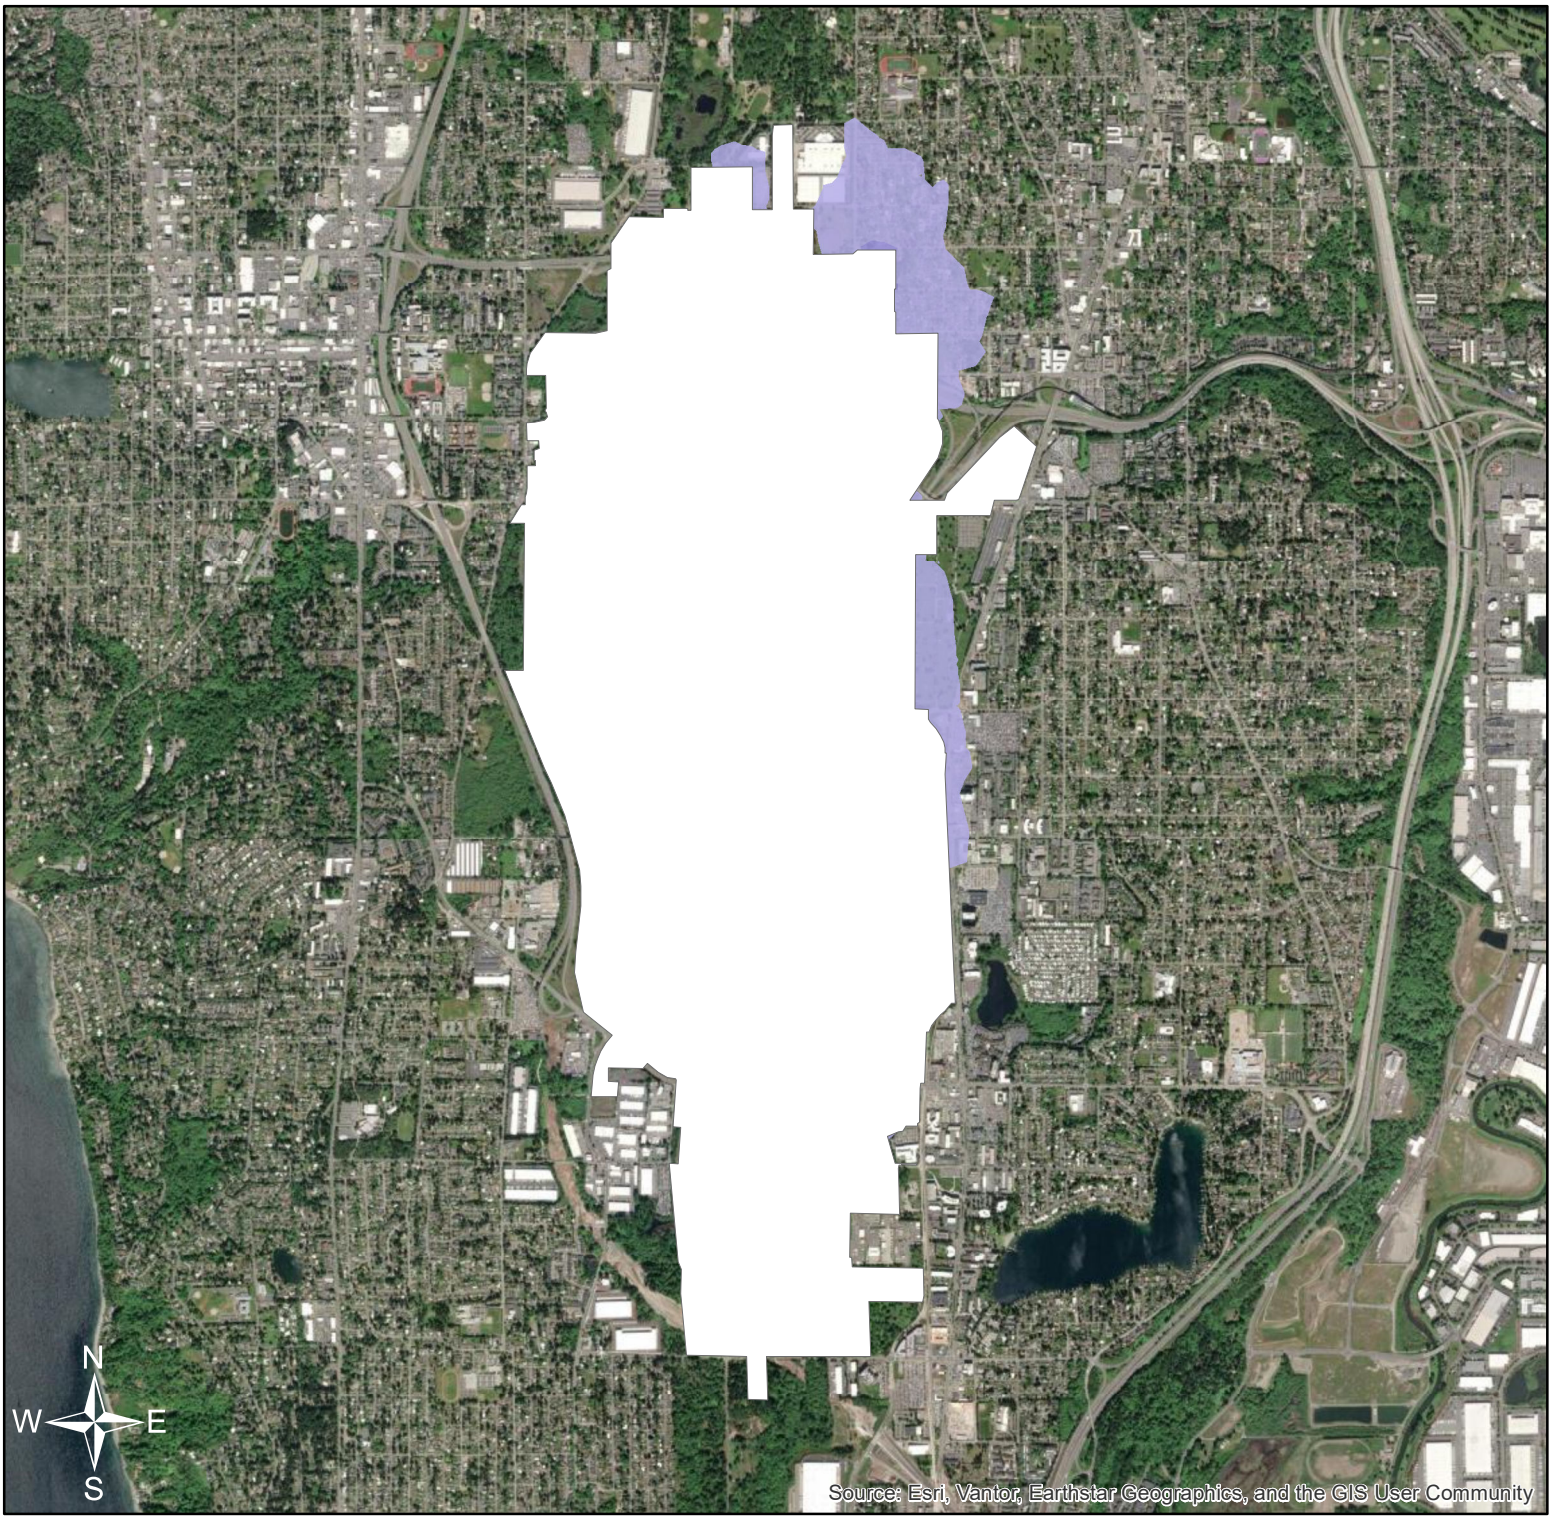

0 0.75 1.5 3 Miles

PM 10 Concentrations (µg/m³)

- SEA Property
- 34 - 36 (< 1% above background)
- 36 - 45
- 45 - 51

NAAQS: 150 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2028 Construction

PM10

24-hour, 1st high

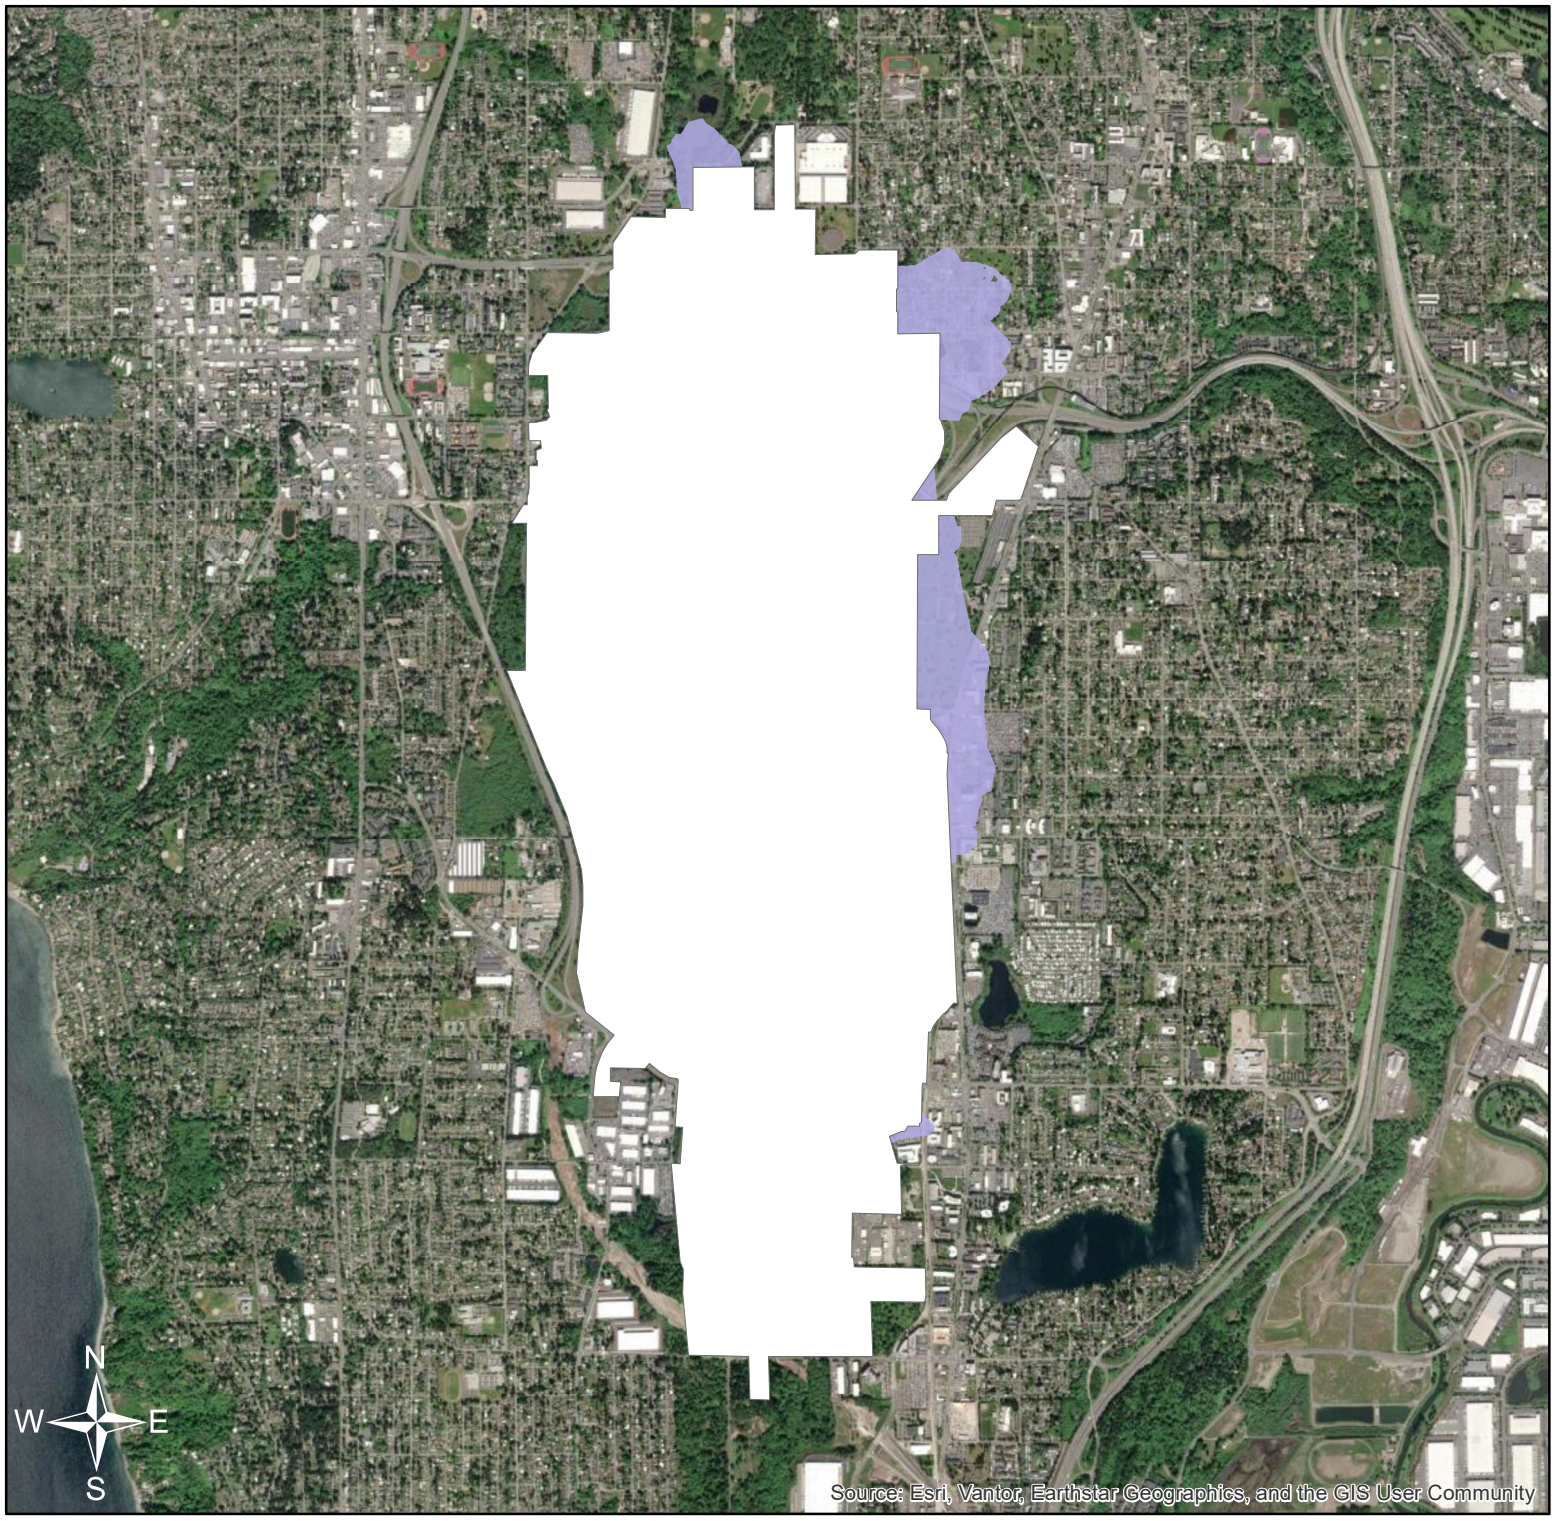

0 0.75 1.5 3 Miles

PM 10 Concentrations (µg/m³)

- SEA Property
- 34 - 36 (< 1% above background)
- 36 - 45
- 45 - 49

NAAQS: 150 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2029 Construction

PM10

24-hour, 1st high

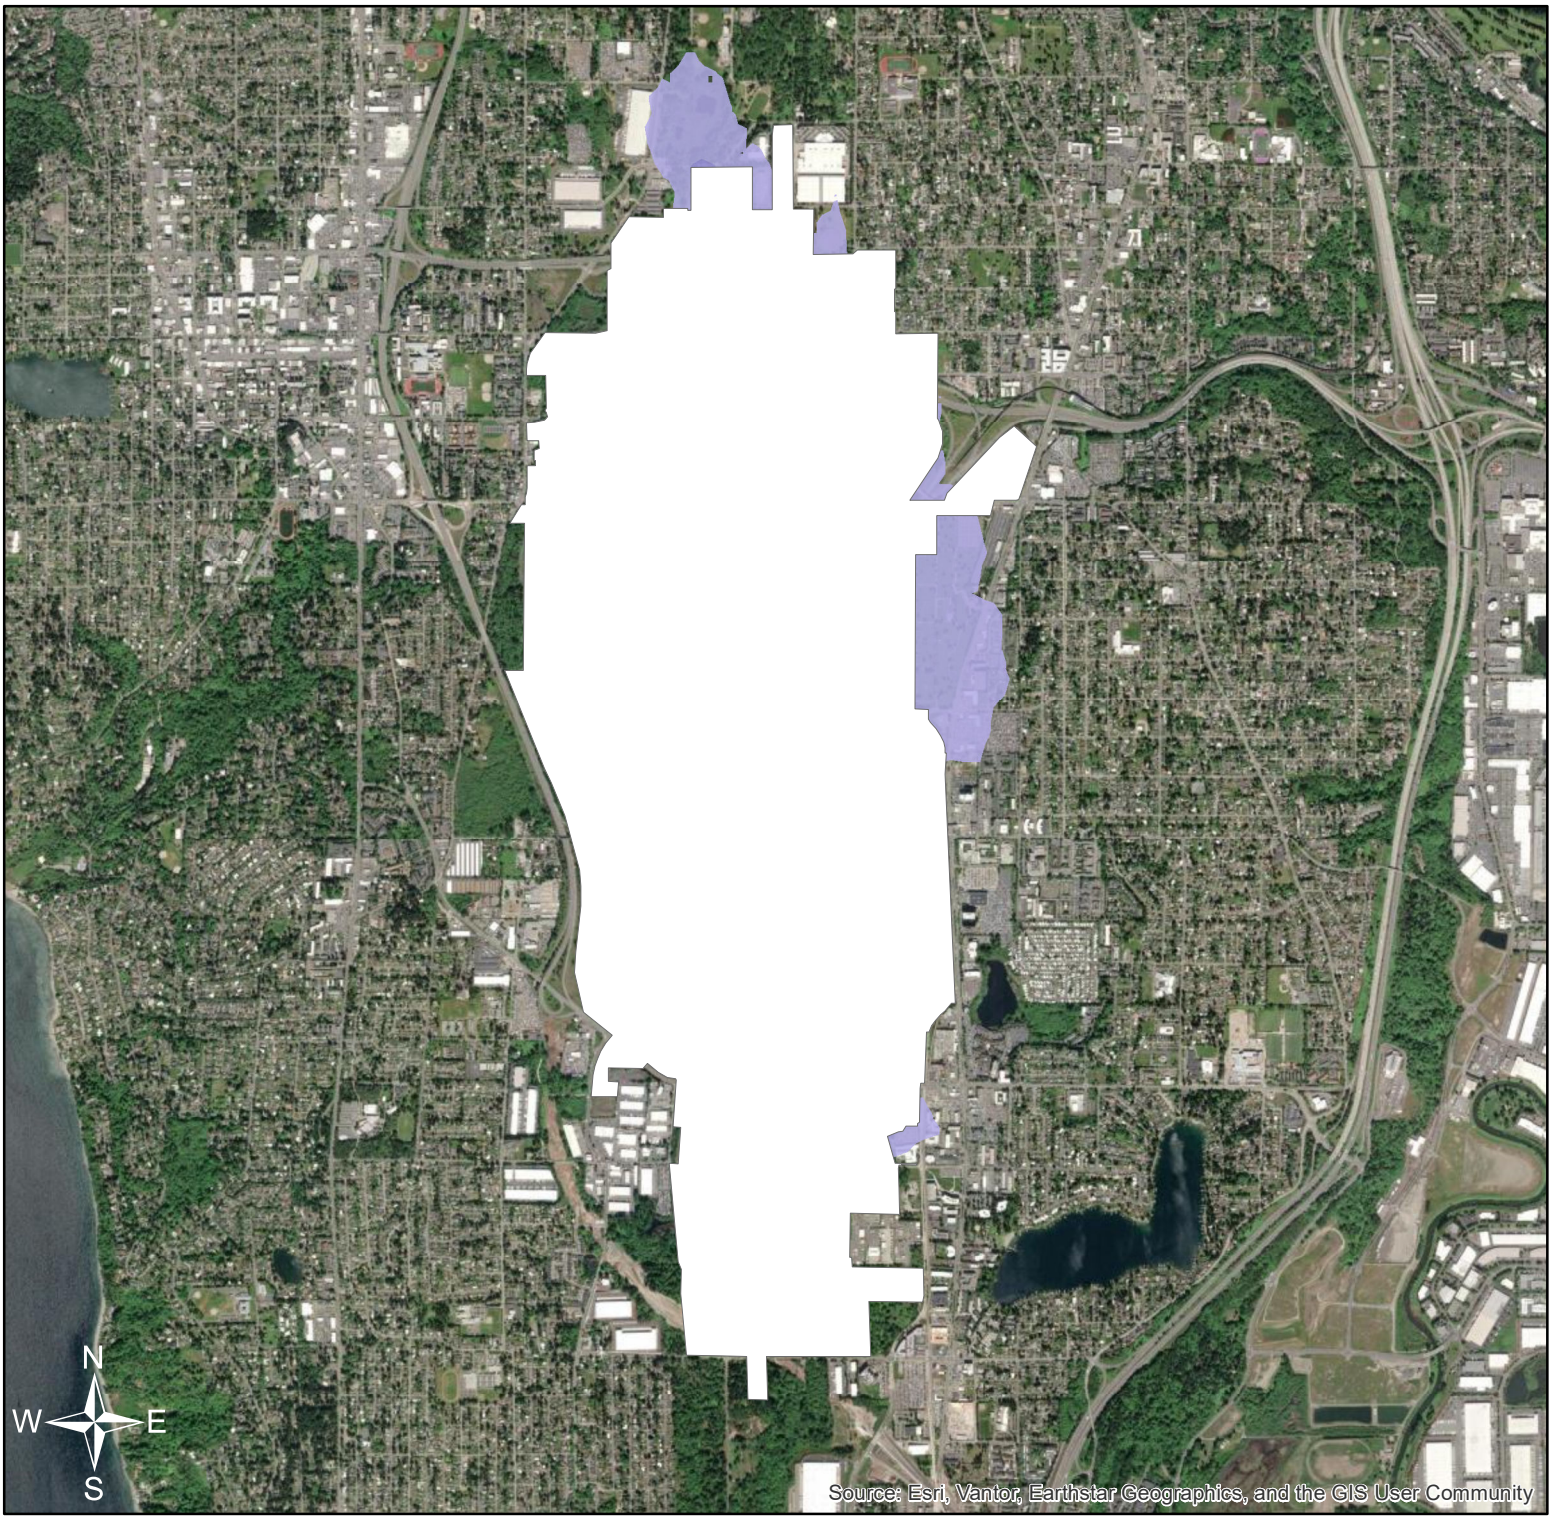

0 0.75 1.5 3 Miles

PM 10 Concentrations (µg/m³)

- SEA Property
- 34 - 36 (< 1% above background)
- 36 - 45
- 45 - 53

NAAQS: 150 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2030 Construction

PM10

24-hour, 1st high

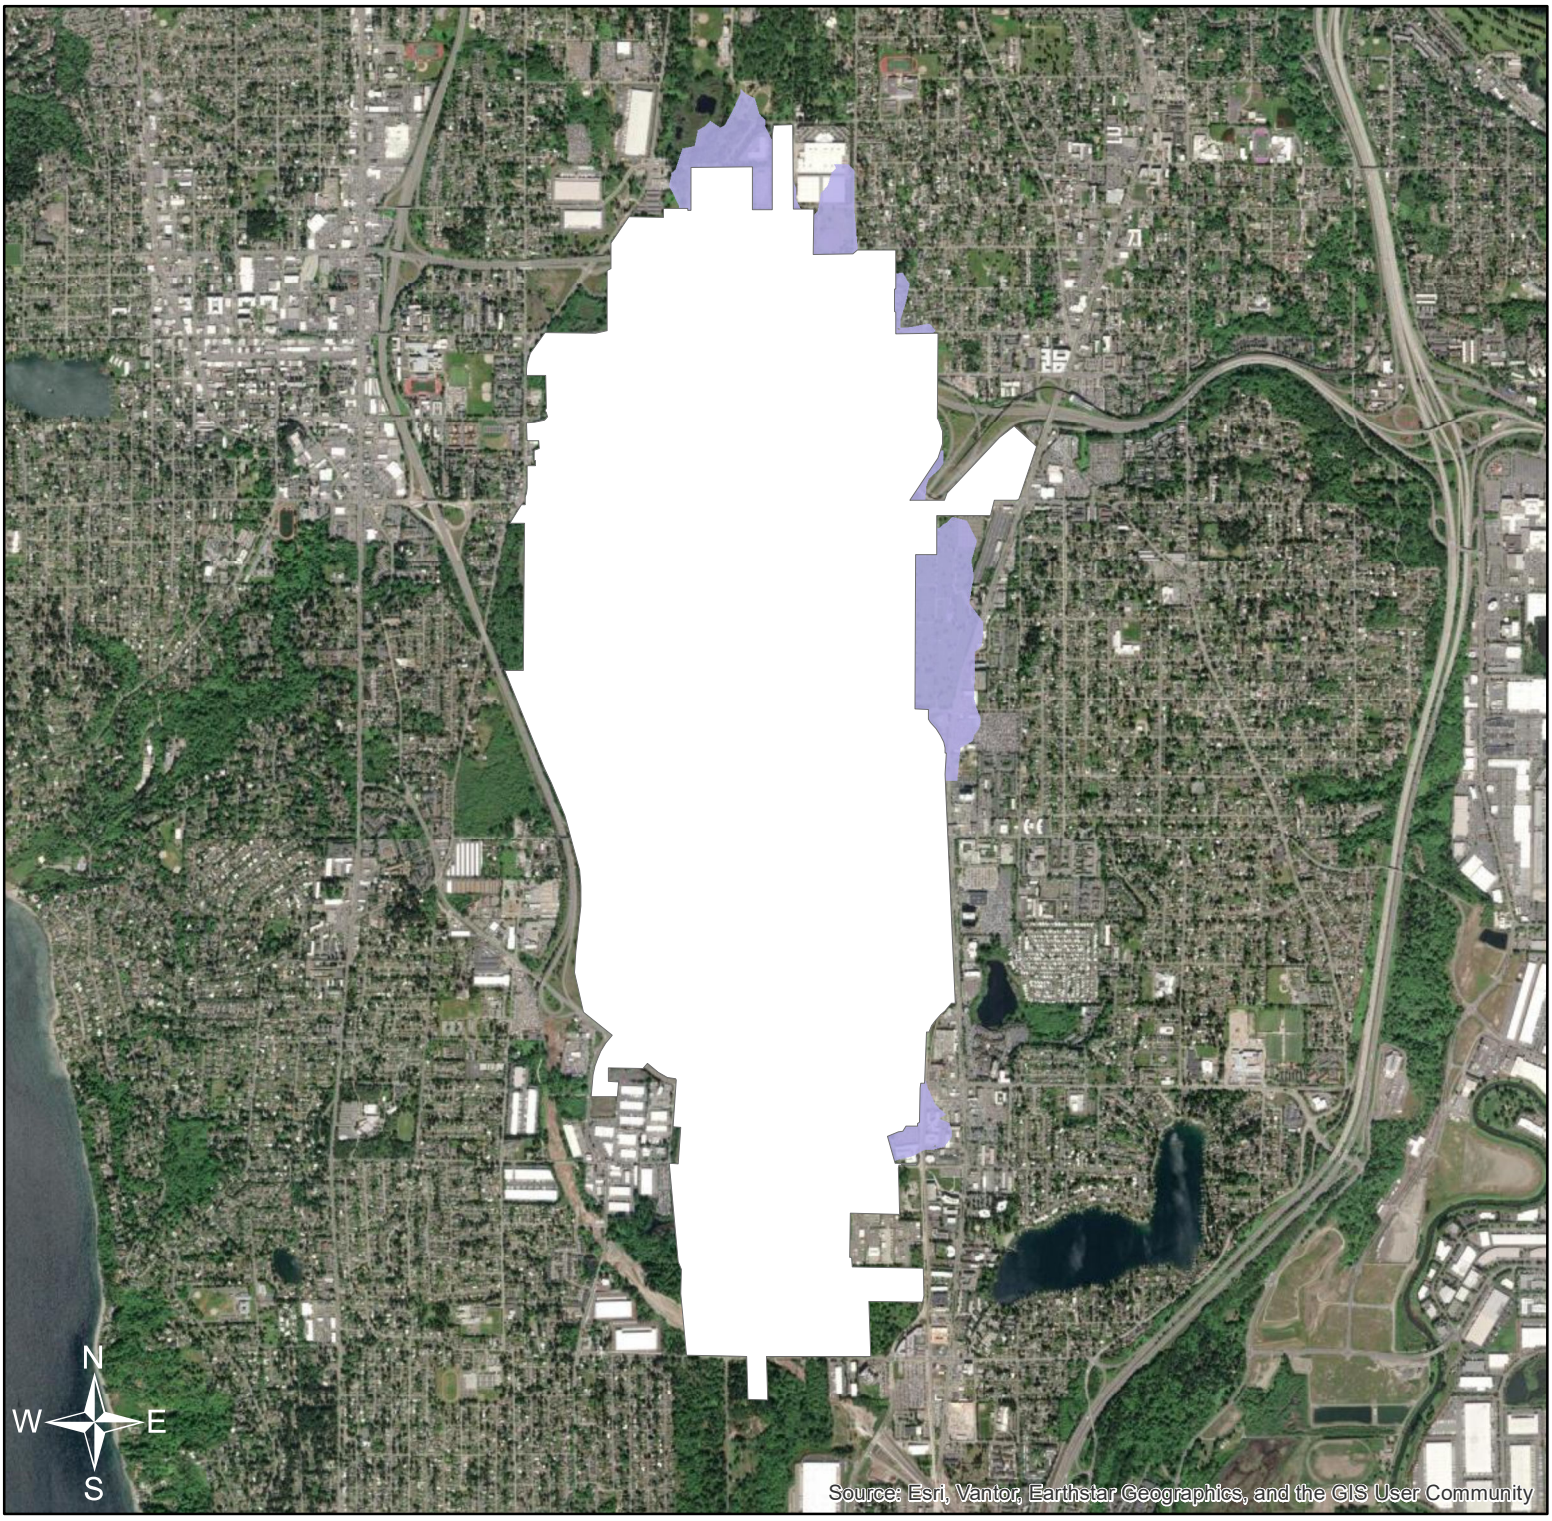

PM 10 Concentrations (µg/m³)

- SEA Property
- 34 - 36 (< 1% above background)
- 36 - 42

NAAQS: 150 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2031 Construction

PM10

24-hour, 1st high

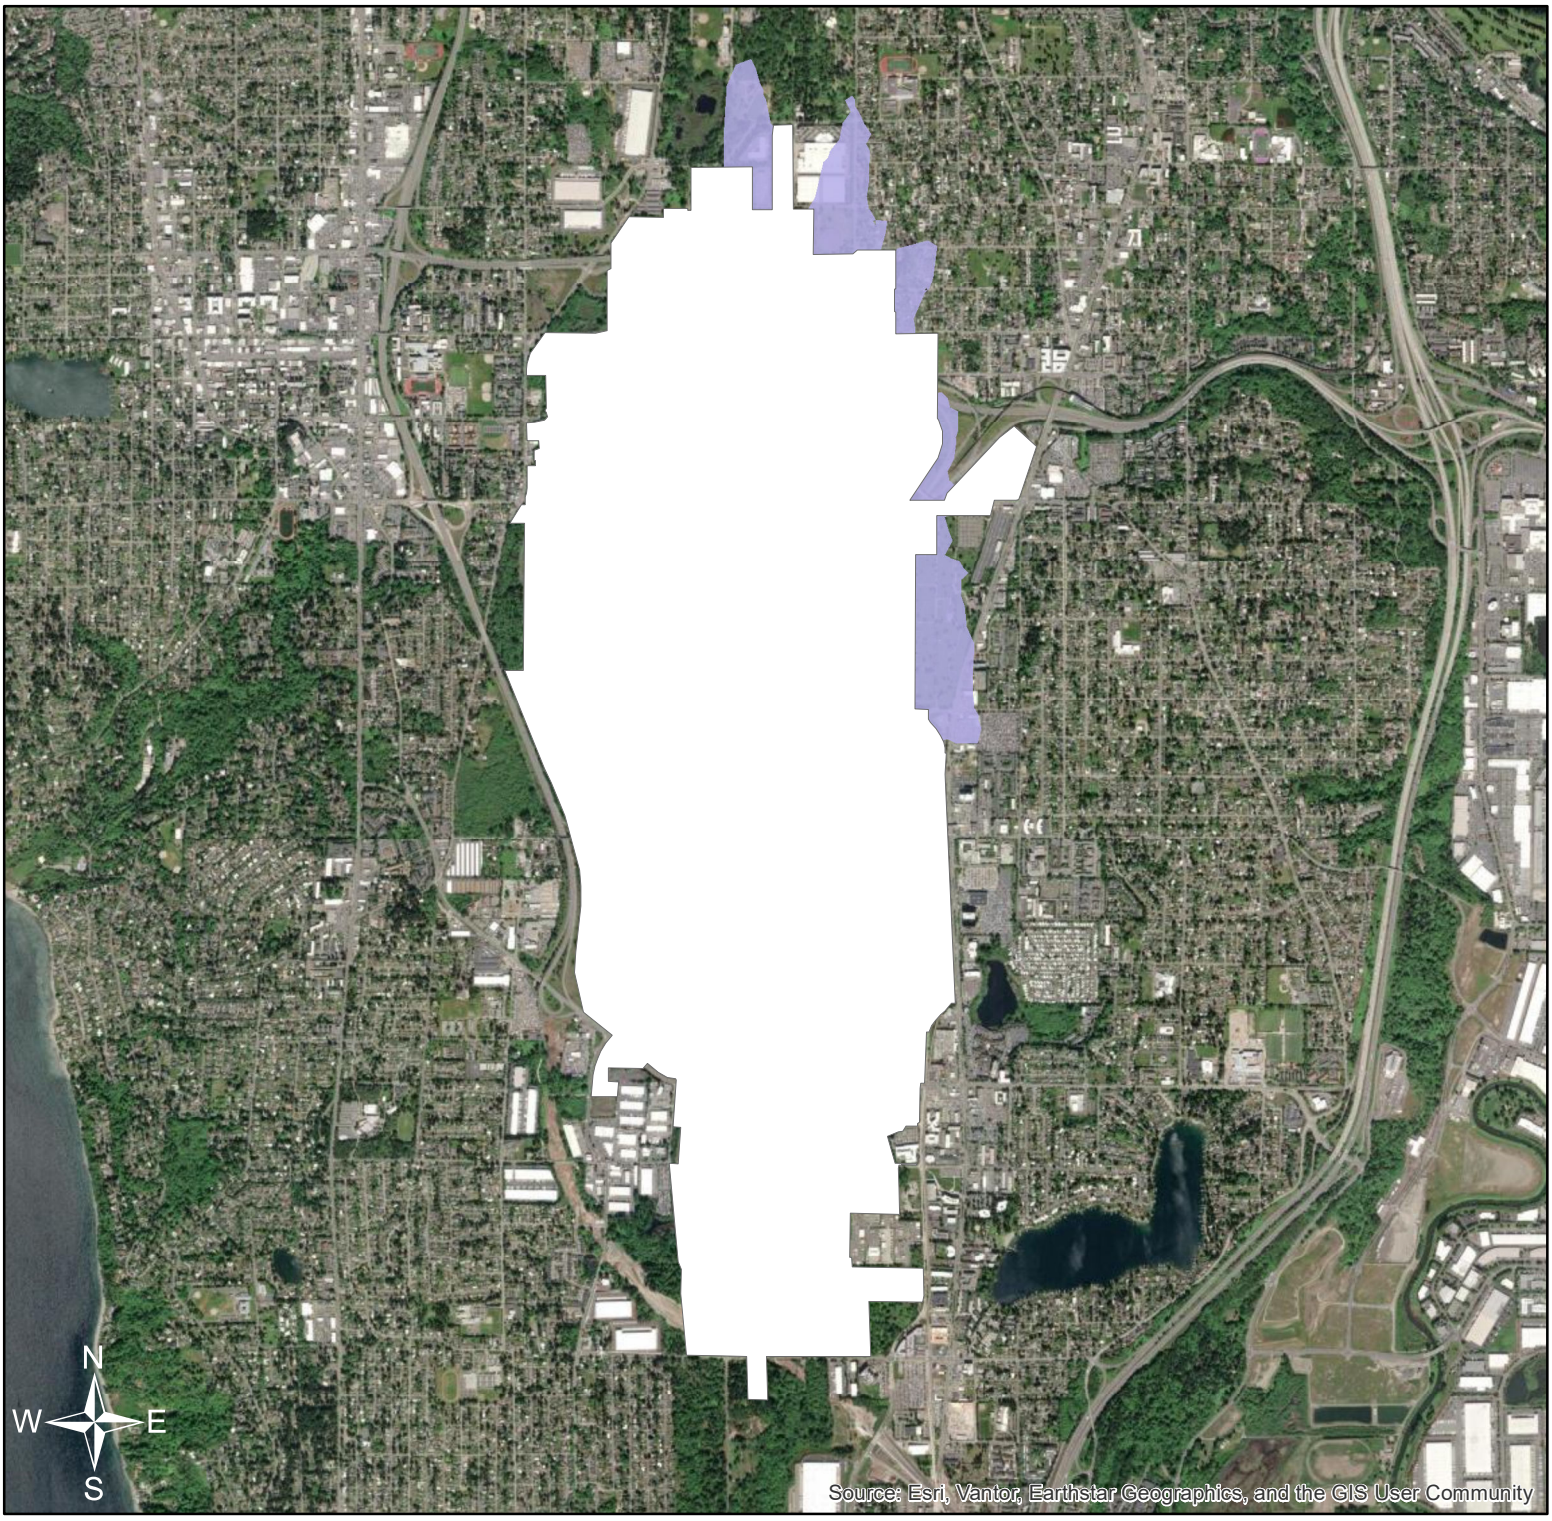

PM 10 Concentrations (µg/m³)

- SEA Property
- 34 - 36 (< 1% above background)
- 36 - 42

NAAQS: 150 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Construction

PM10

24-hour, 1st high

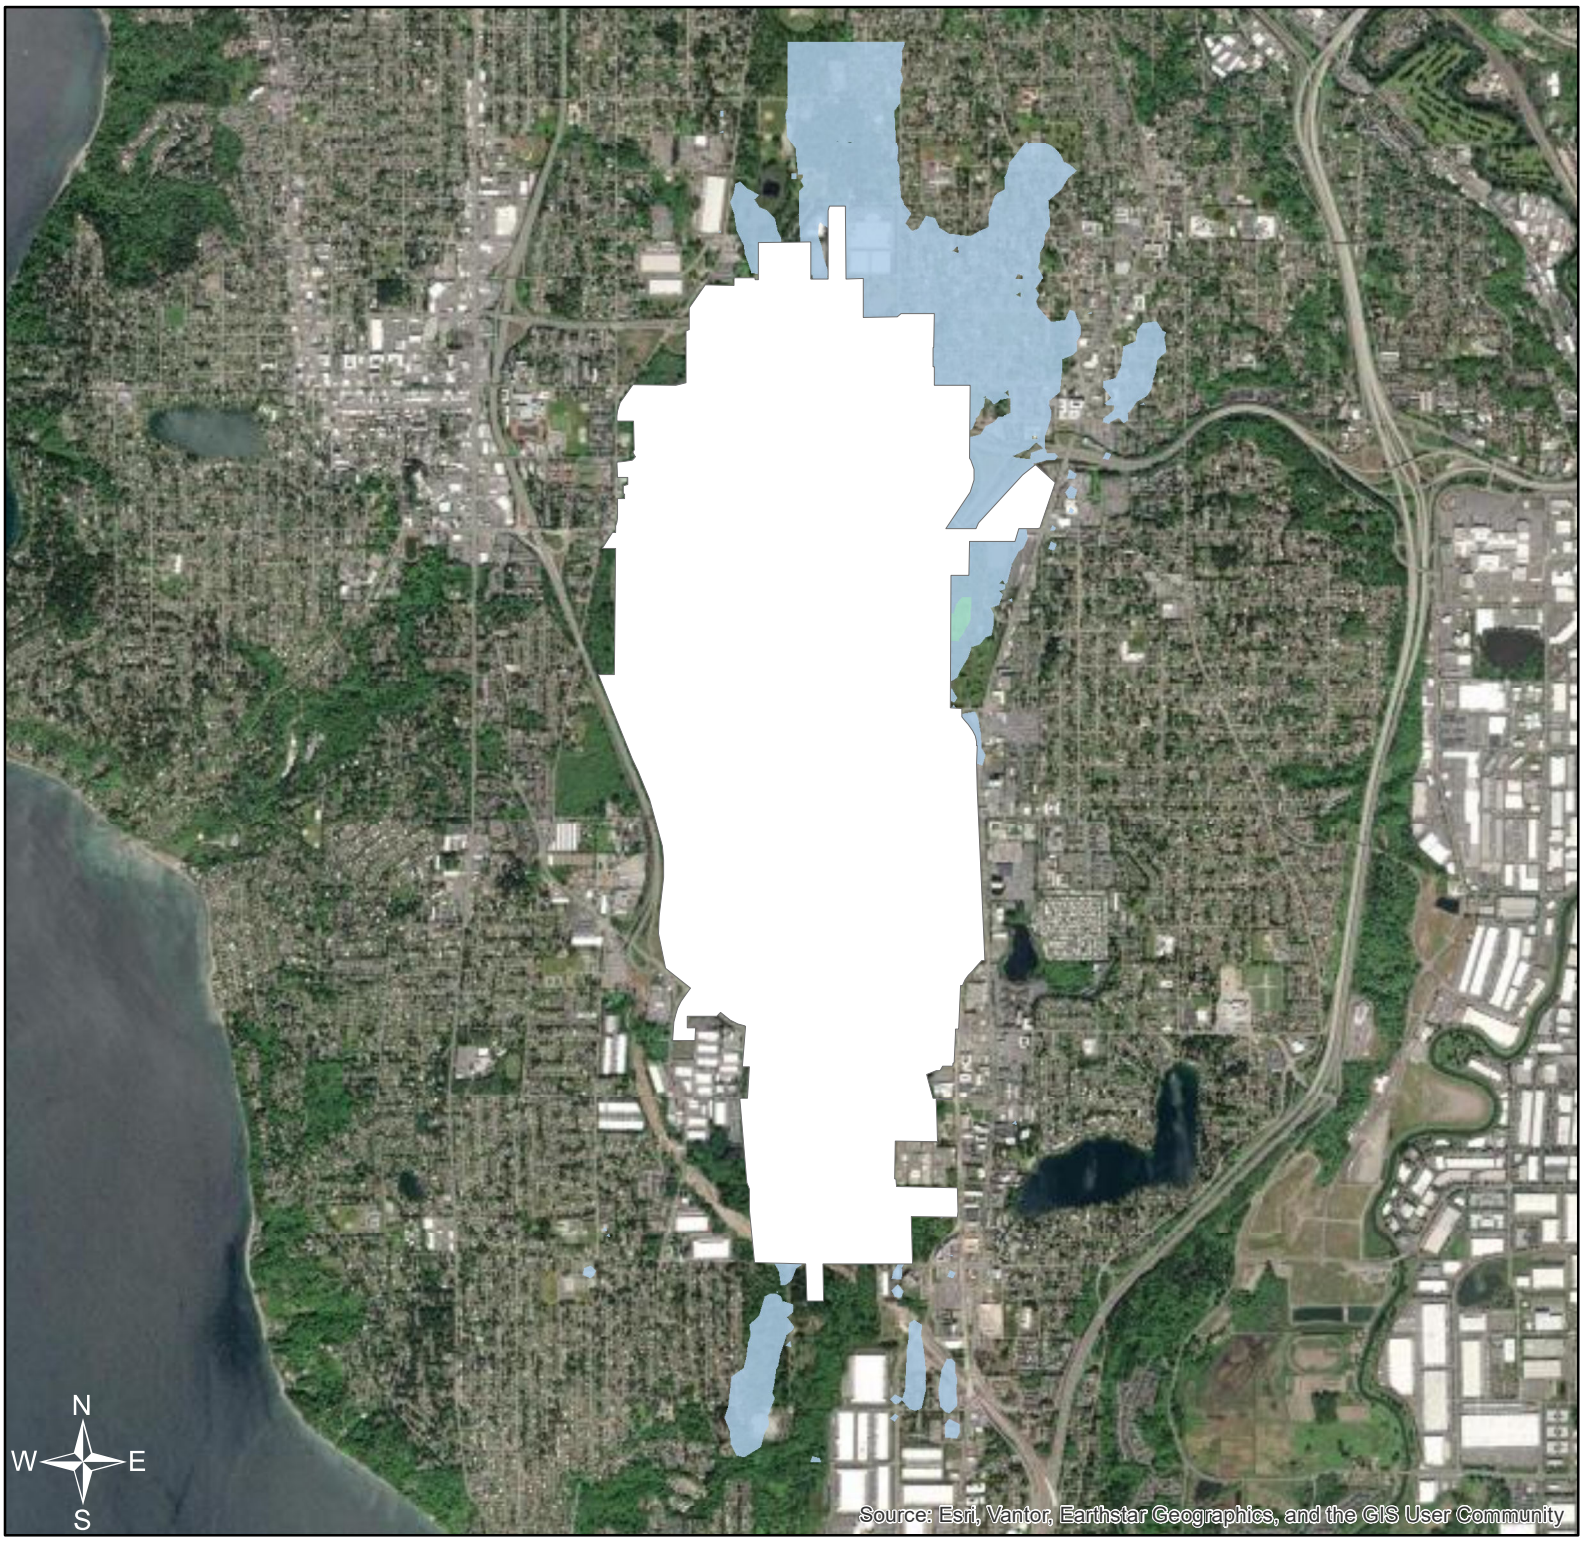

NO_2 Concentrations (µg/m³)

- SEA Property
- 79 - 81 (< 1% above background)
- 81 - 93
- 93 - 100

NAAQS: 188 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Operations

NO_2

1-hour, 8th high

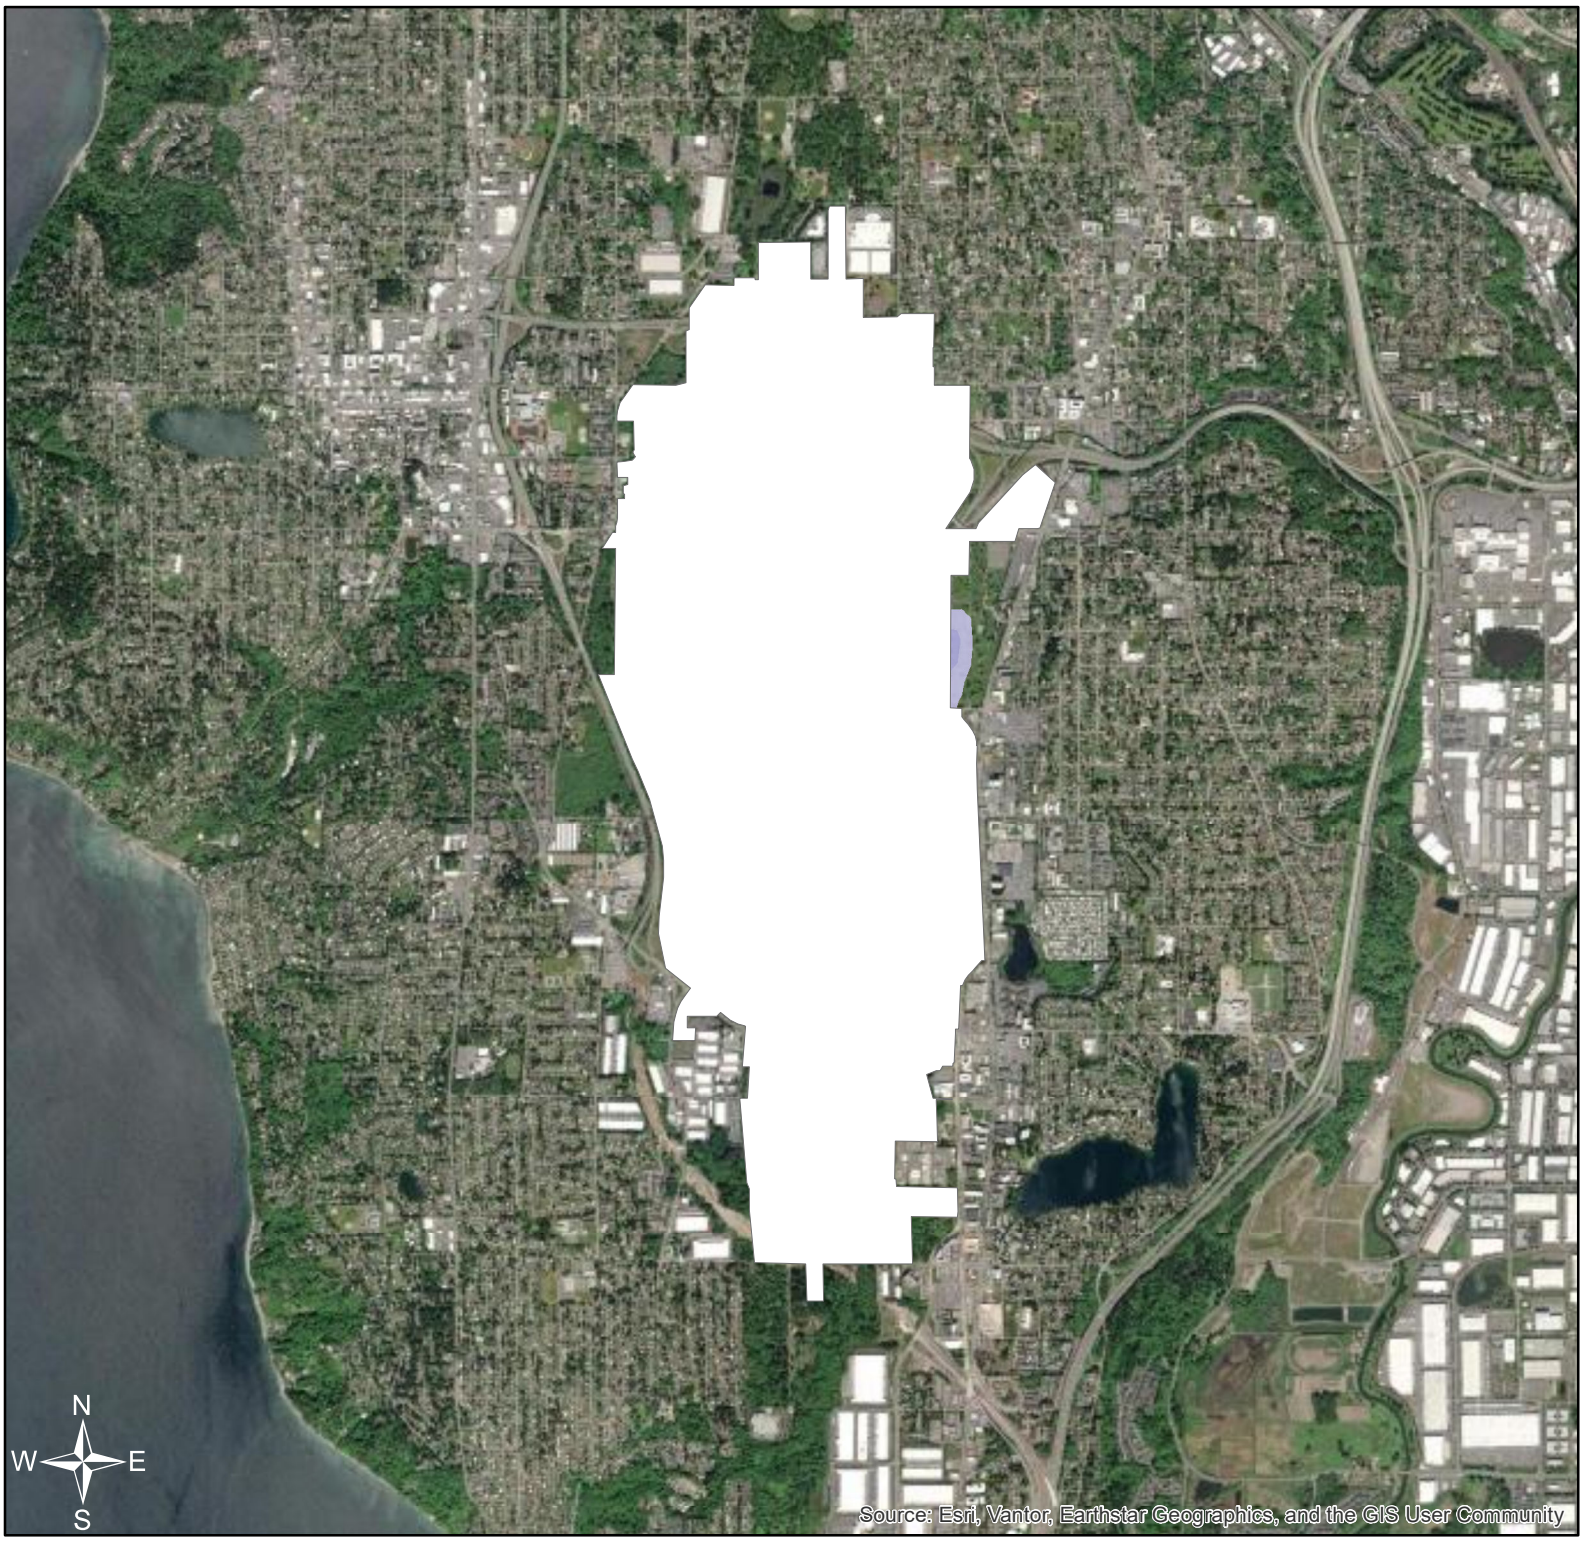

NO_2 Concentrations (µg/m³)

- SEA Property
- 18 - 19 (< 1% above background)
- 19 - 20
- 20 - 23

NAAQS: 100 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Operations

NO_2

Annual

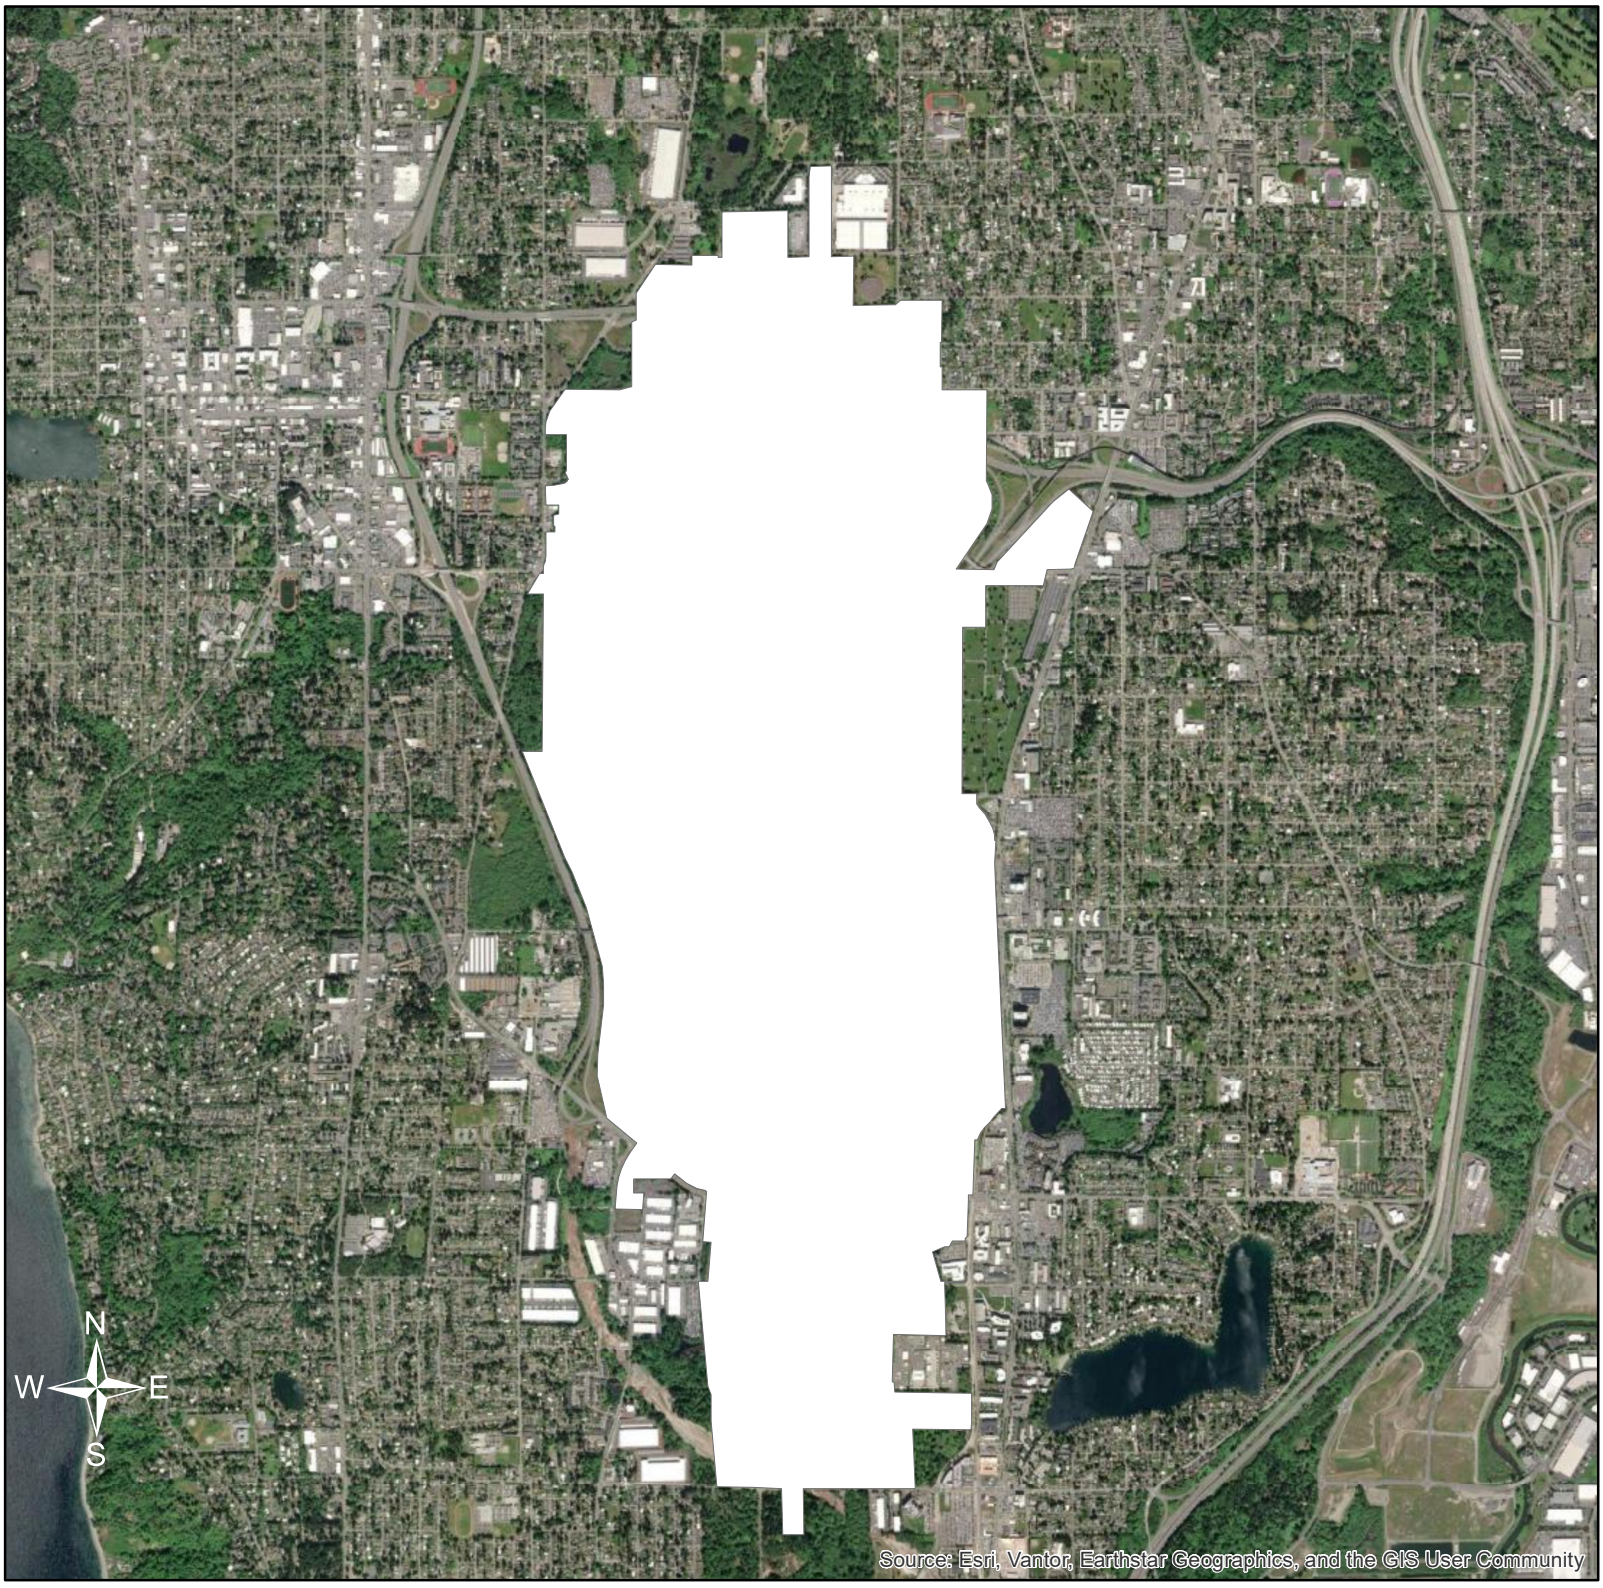

PM2.5 Concentrations (µg/m³)

SEA Property

4.6 - 4.7 (< 1% above background)

4.7 - 4.9

NAAQS: 9 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Operations

PM2.5

Annual

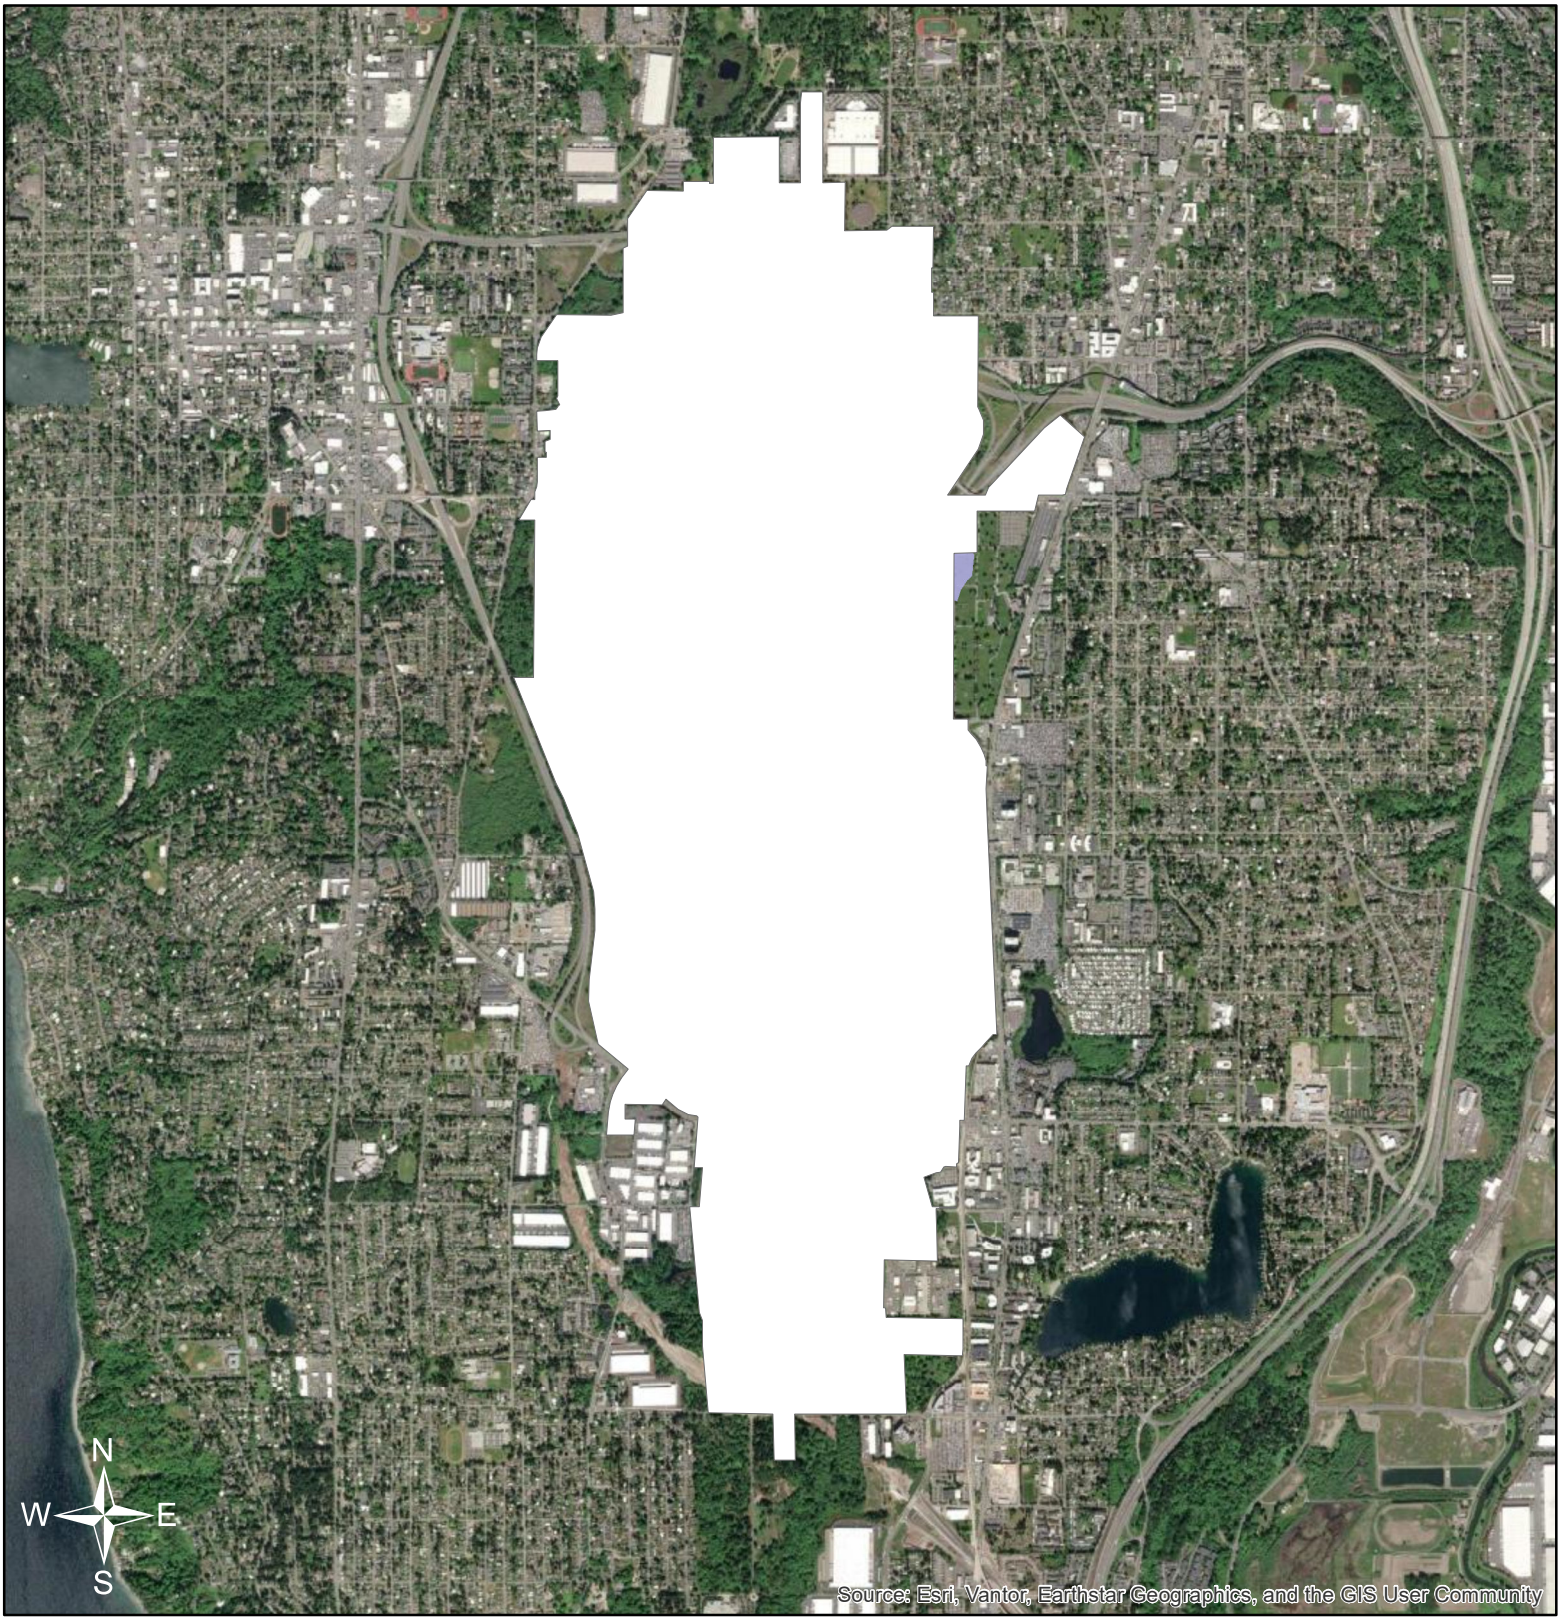

0 0.5 1 2 Miles

PM 10 Concentrations (µg/m³)

SEA Property

34 - 36 (< 1% above background)

36 - 37

NAAQS: 150 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Operations

PM10

24-hour, 1st high

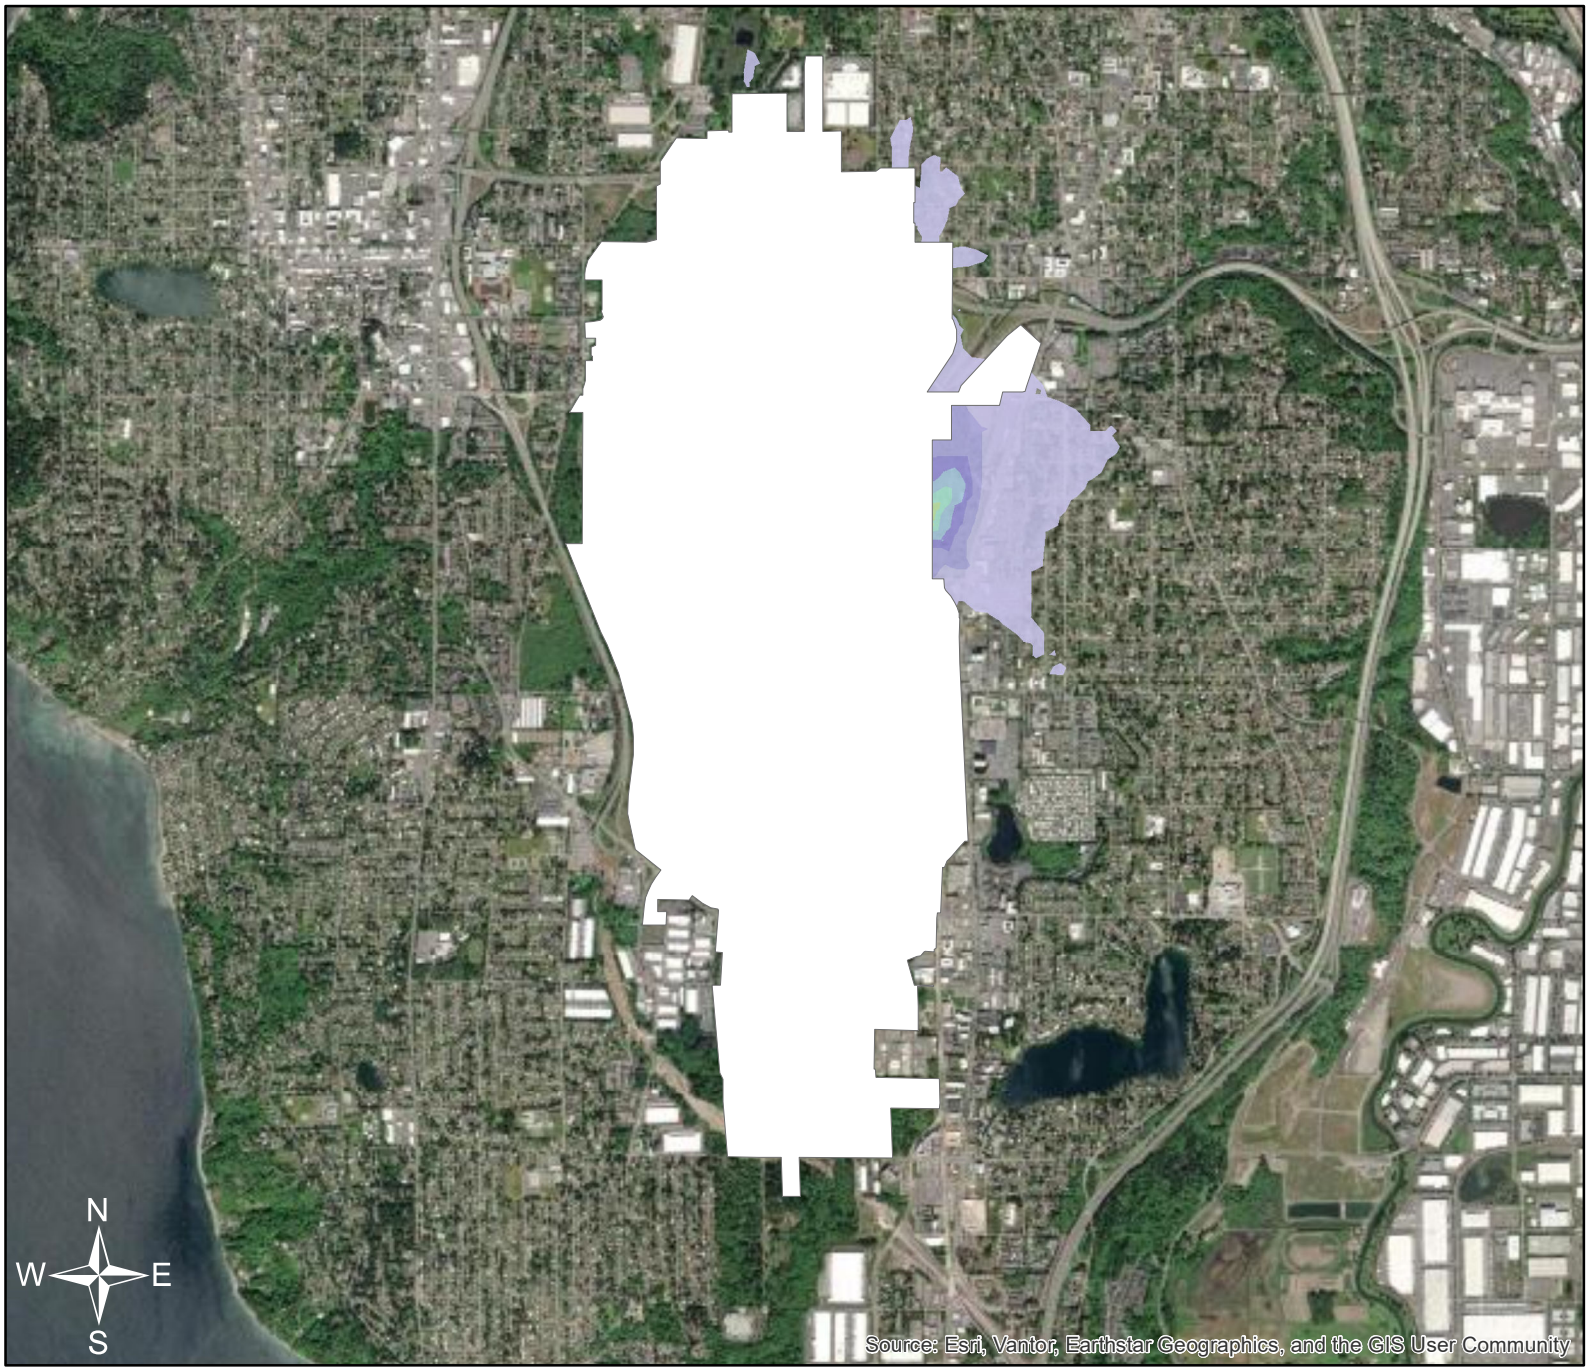

0 0.75 1.5 3 Miles

SO_2 Concentrations (µg/m³)

- SEA Property
- 8 - 17 (< 1% above background)
- 17 - 37
- 37 - 57
- 57 - 77
- 77 - 97
- 97 - 117
- 117 - 126

NAAQS: 197 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Operations

SO_2

1-hour, 4th high

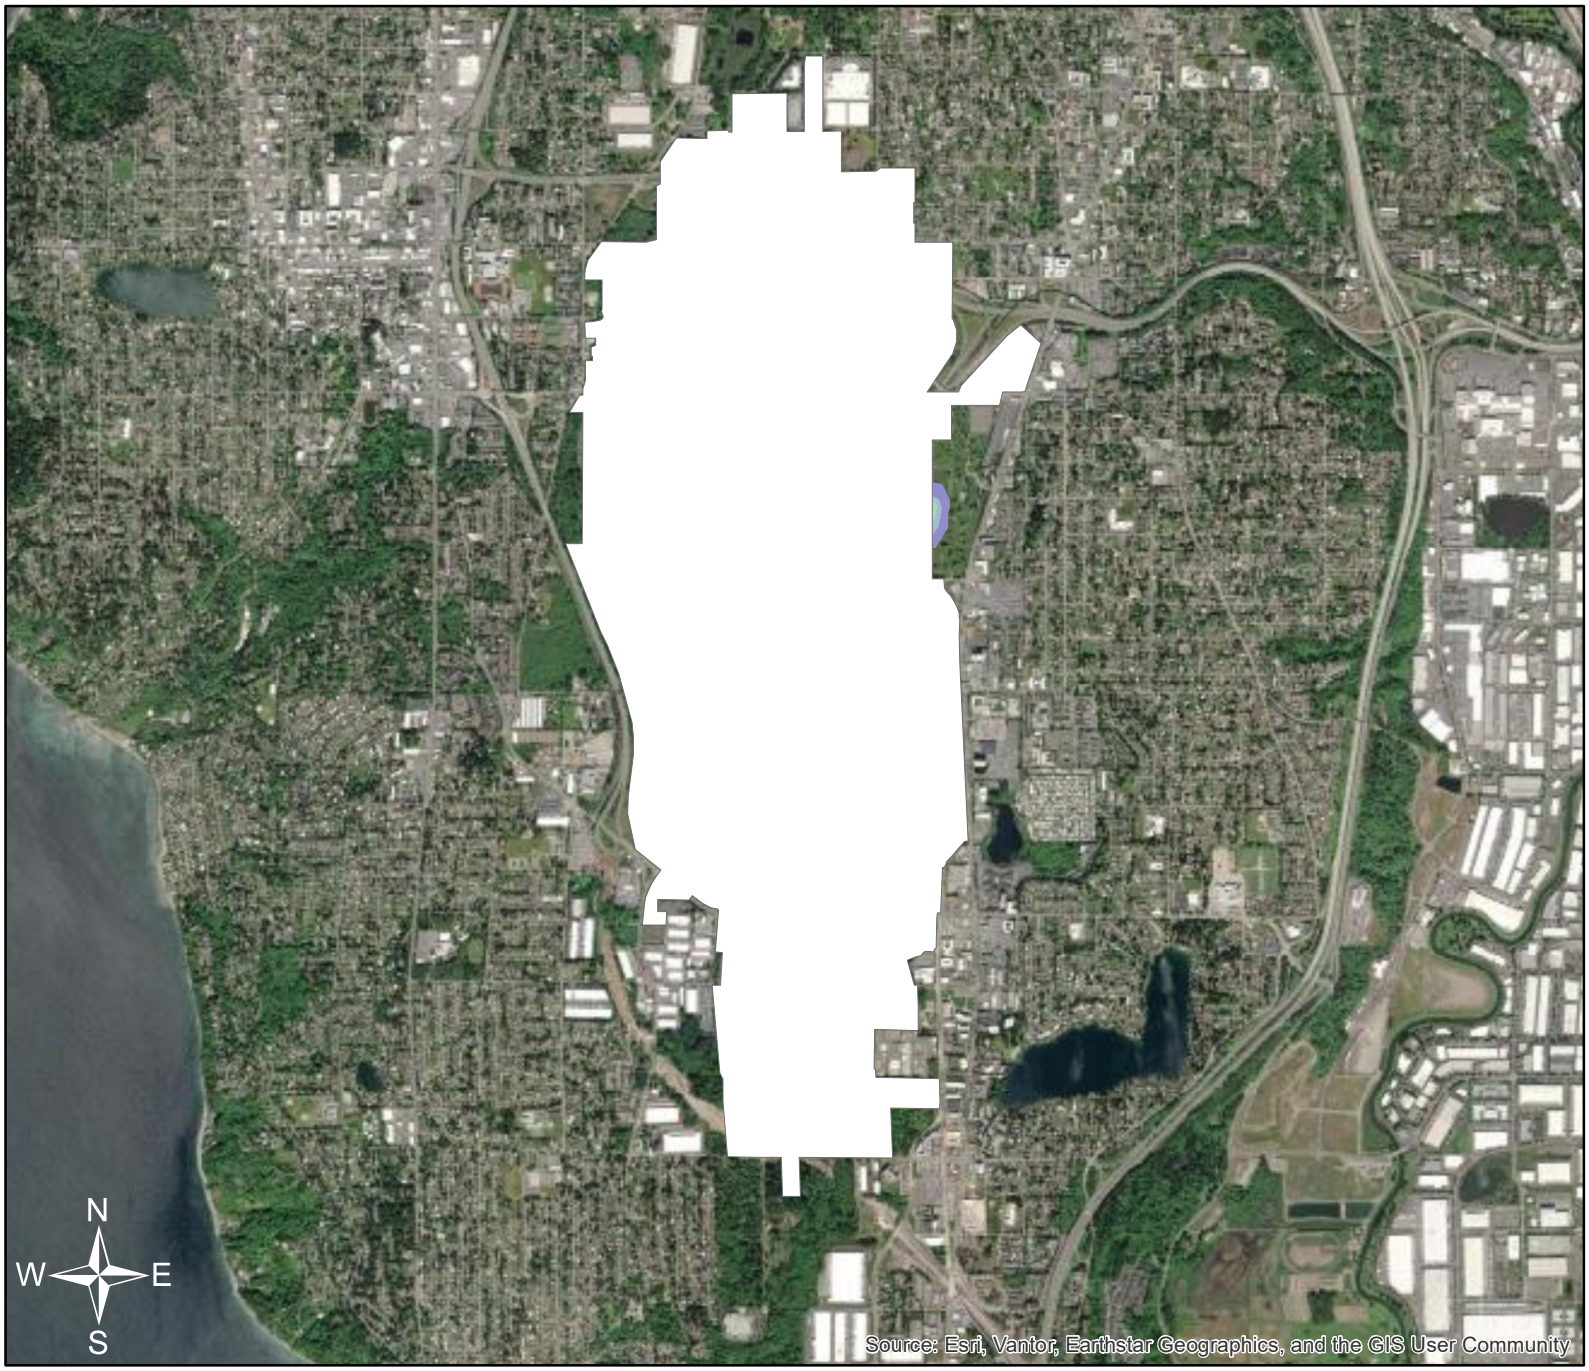

SO_2 Concentrations (µg/m³)

- SEA Property
- 1 - 5 (< 1% above background)
- 5 - 8
- 8 - 11
- 11 - 14
- 14 - 17
- 17 - 18

NAAQS: 26 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2032 Operations

SO_2

Annual

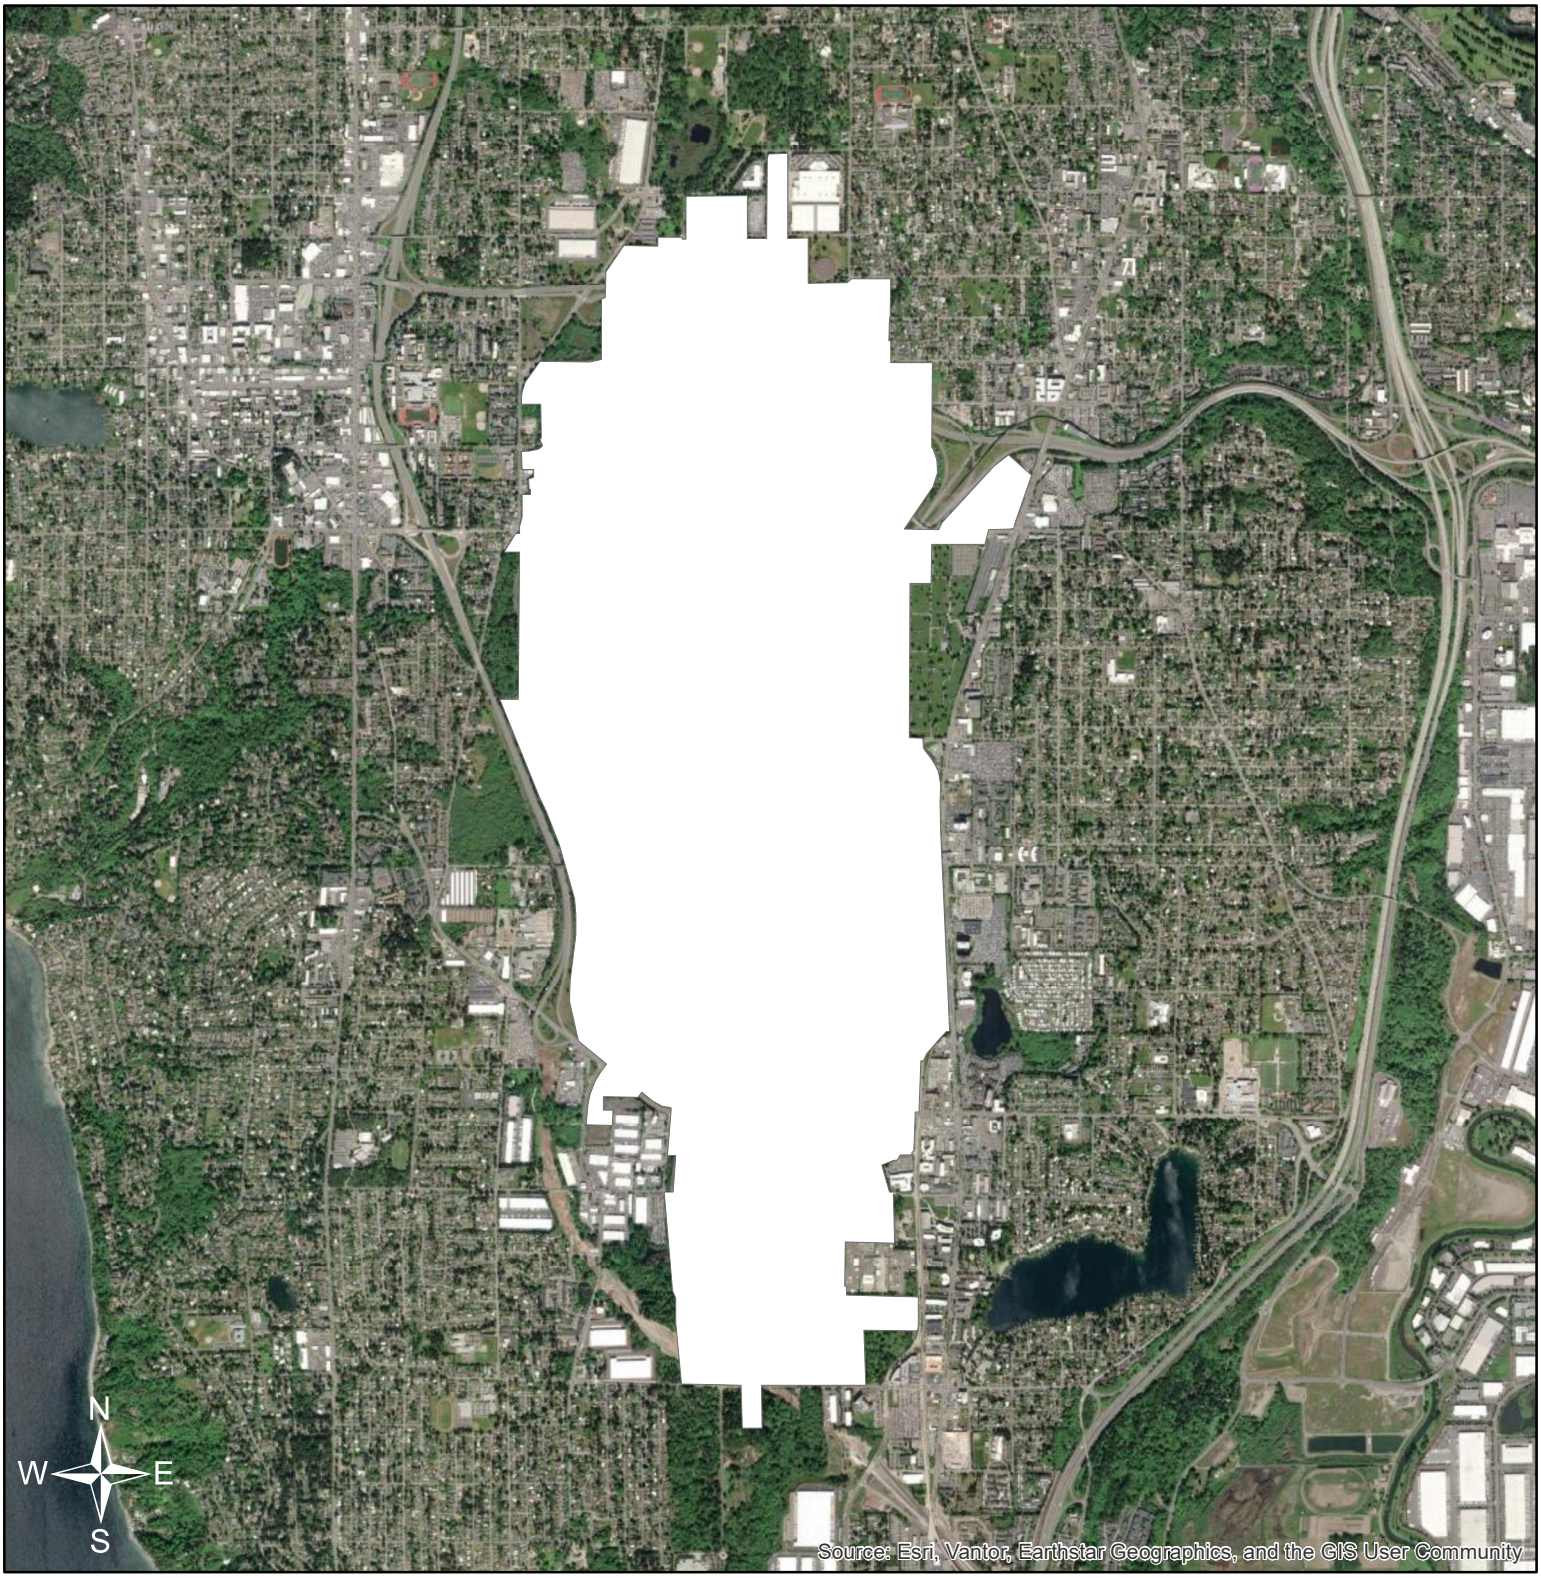

CO Concentrations (µg/m³)

SEA Property

916 - 1,000 (< 1% above background)

1,000 - 1,005

NAAQS: 10,000 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2037 Operations

CO

8-hour, 1st high

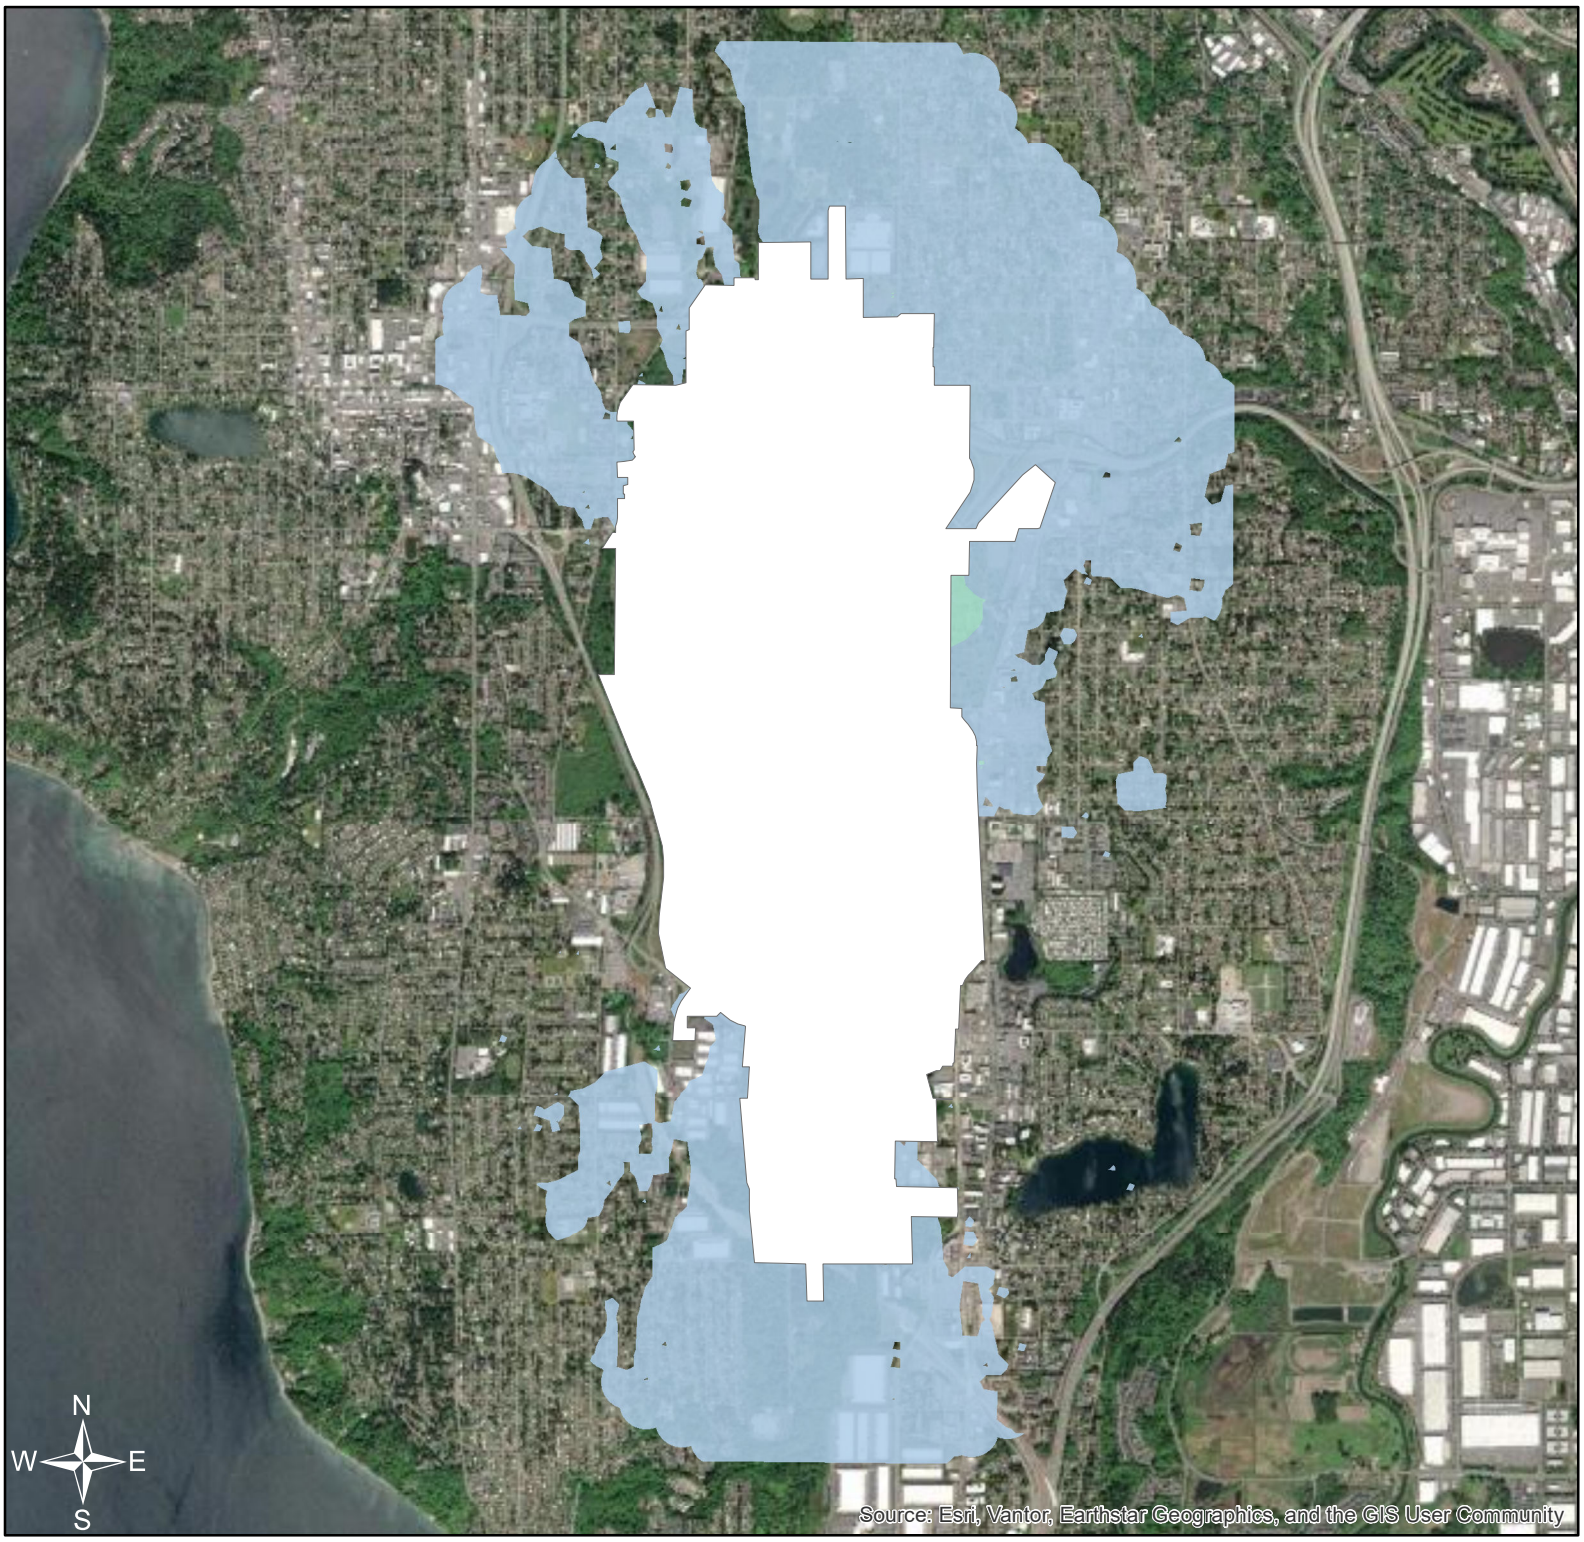

NO_2 Concentrations (µg/m³)

- SEA Property
- 79 - 81 (< 1% above background)
- 81 - 93
- 93 - 101

NAAQS: 188 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2037 Operations

NO_2

1-hour, 8th high

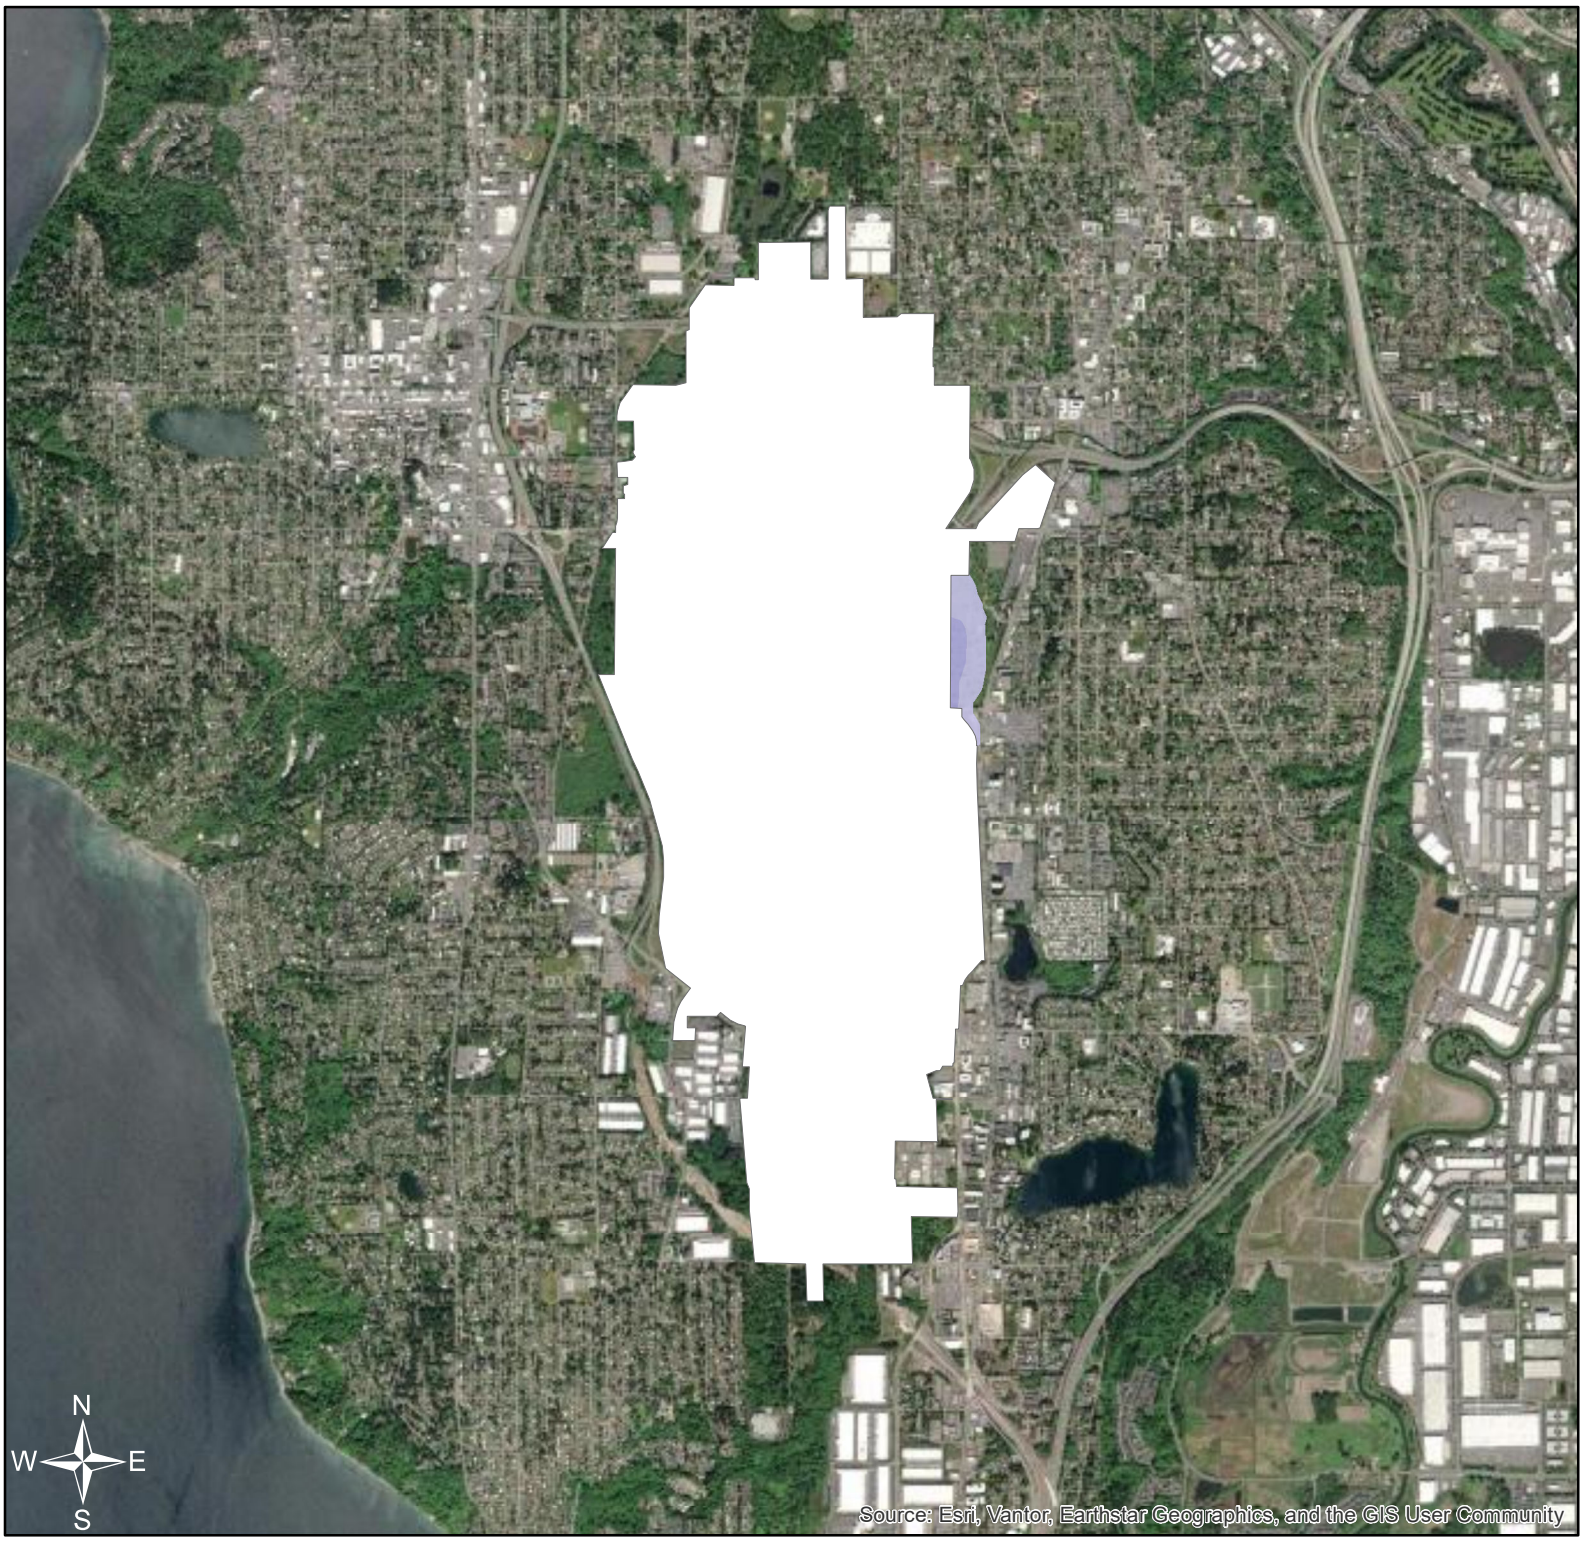

NO_2 Concentrations (µg/m³)

- SEA Property
- 18 - 19 (< 1% above background)
- 19 - 20
- 20 - 24

NAAQS: 100 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2037 Operations

NO_2

Annual

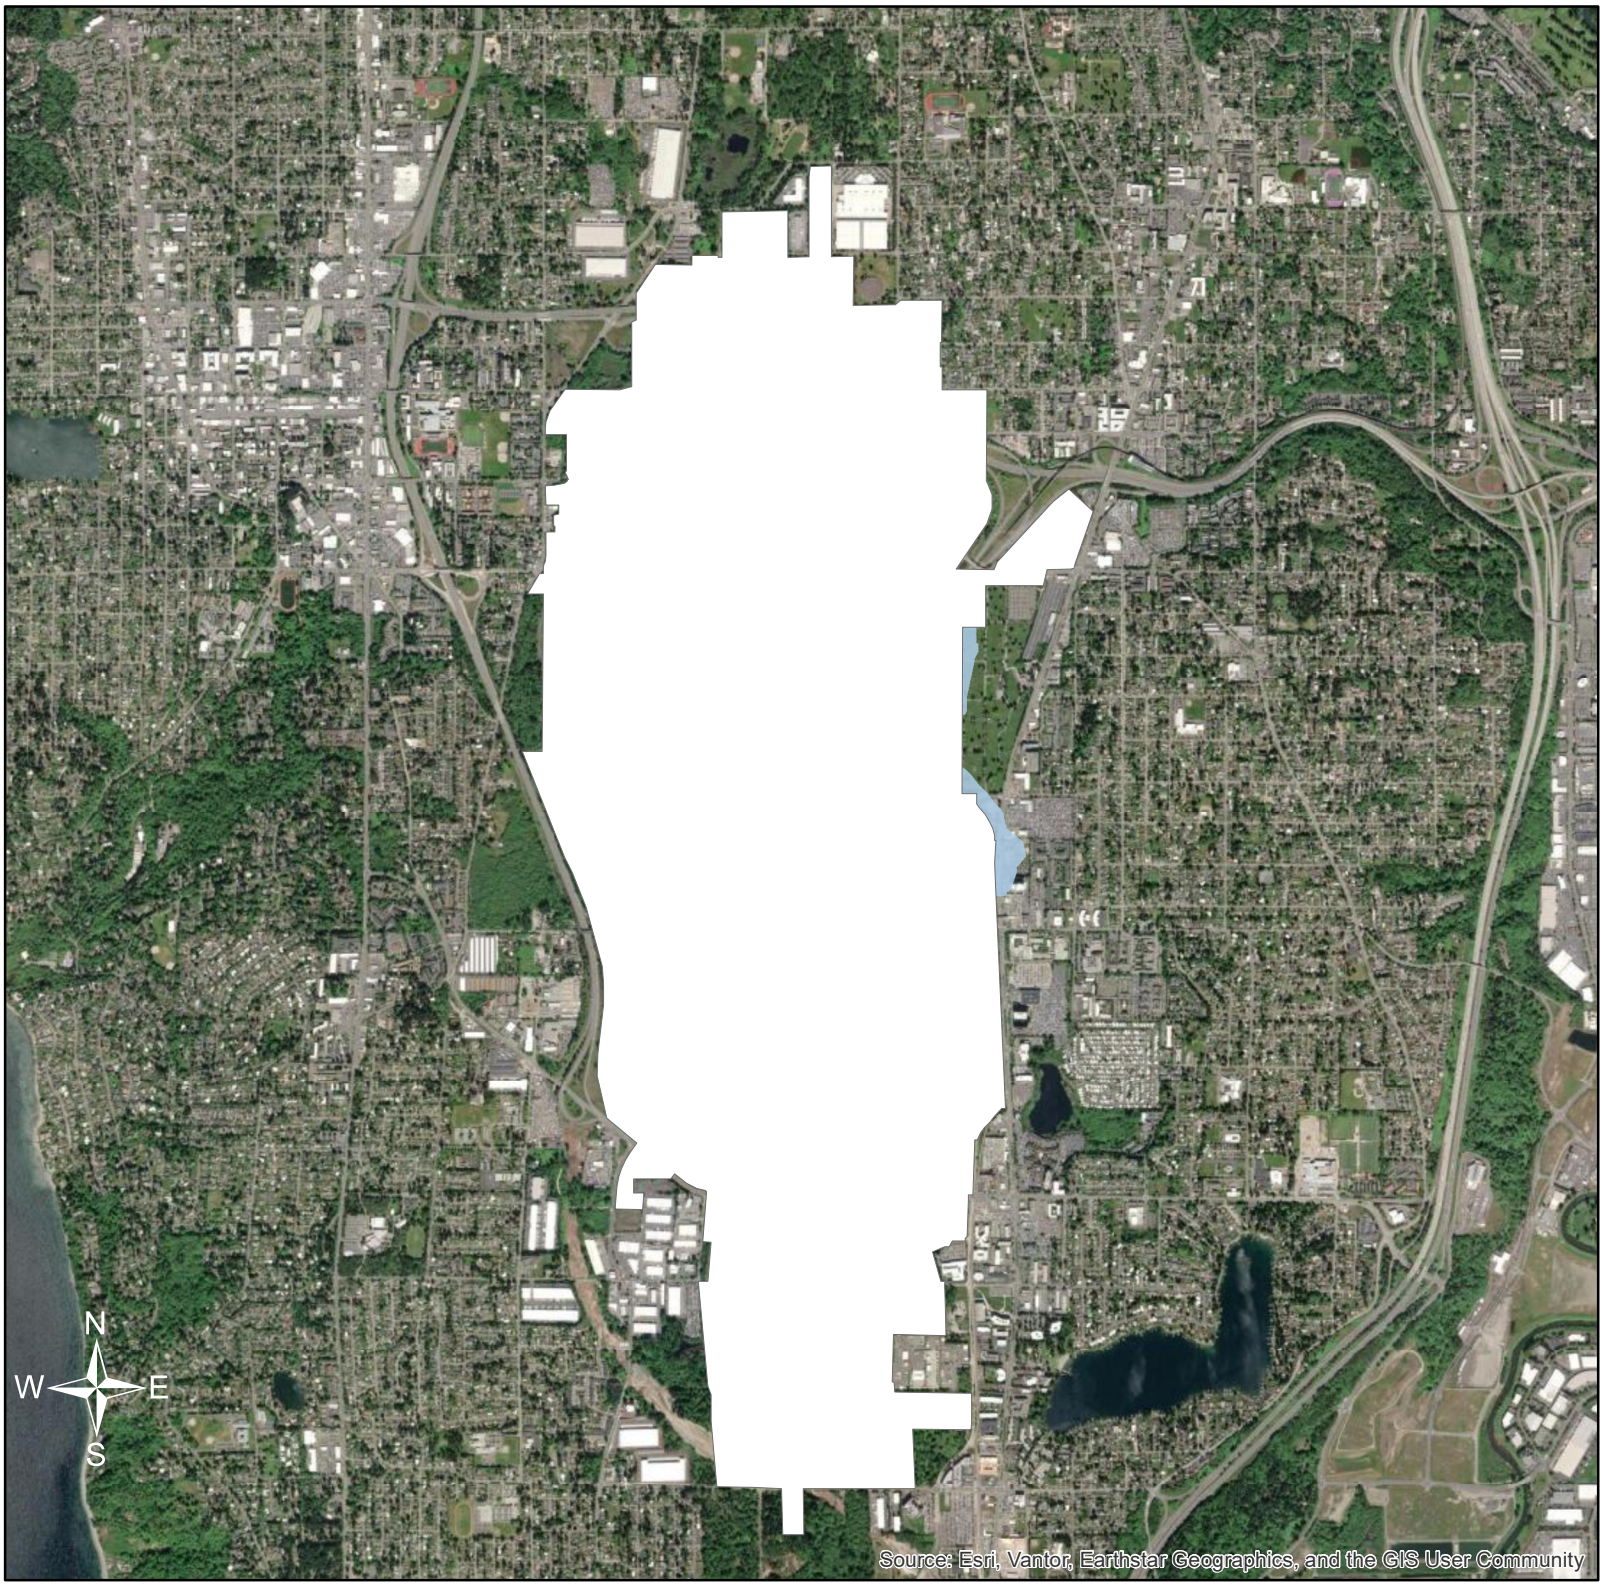

PM2.5 Concentrations (µg/m³)

SEA Property

11 - 12 (< 1% above background)

12 - 13

NAAQS: 35 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2037 Operations

PM2.5

24-hour, 8th high

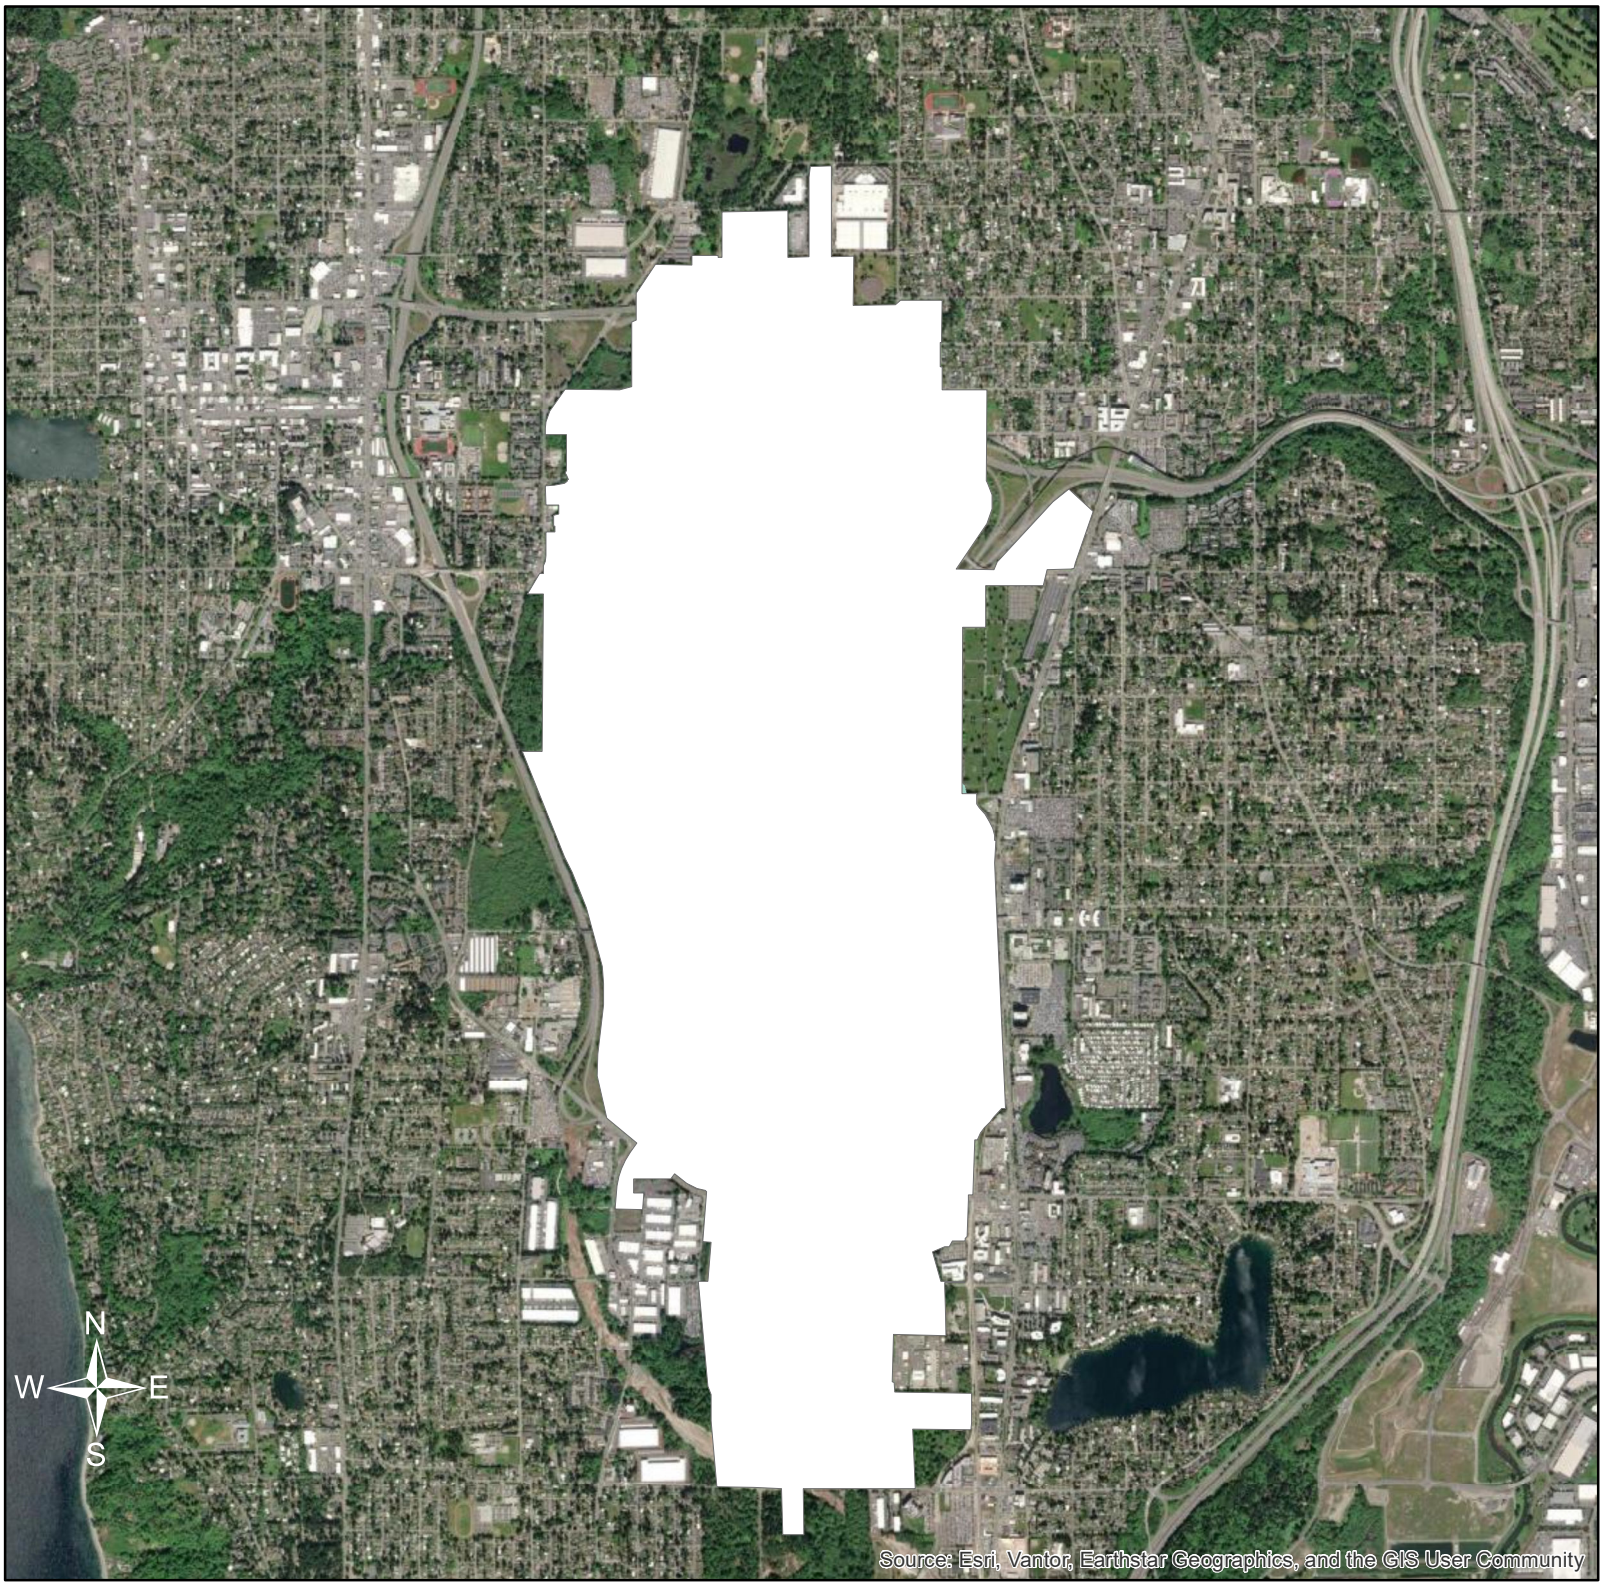

PM2.5 Concentrations (µg/m³)

SEA Property

4.6 - 4.7 (< 1% above background)

4.7 - 5

NAAQS: 9 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2037 Operations

PM2.5

Annual

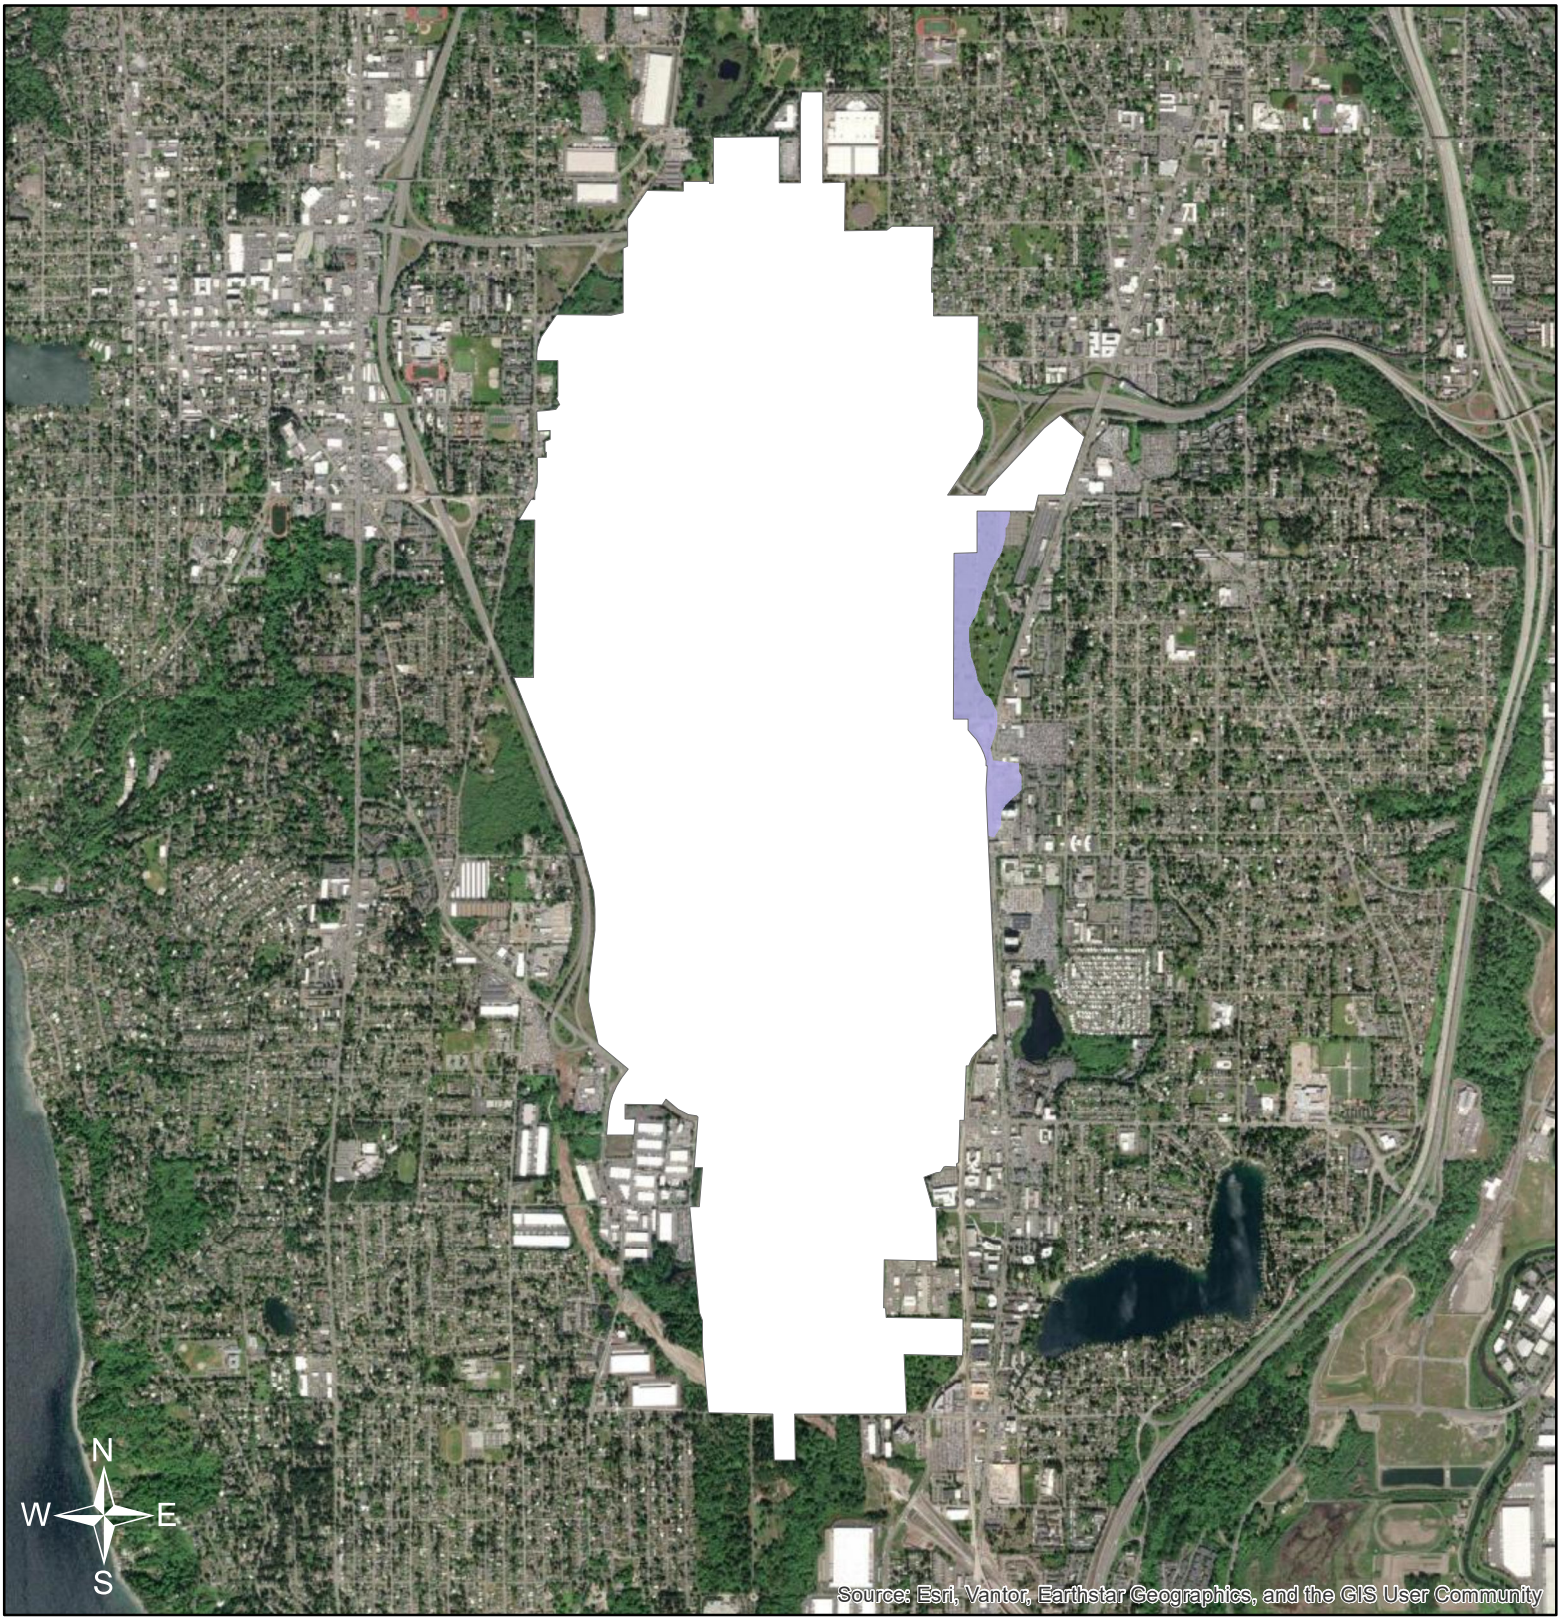

0 0.5 1 2 Miles

PM 10 Concentrations (µg/m³)

SEA Property

34 - 36 (< 1% above background)

36 - 38

NAAQS: 150 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2037 Operations

PM10

24-hour, 1st high

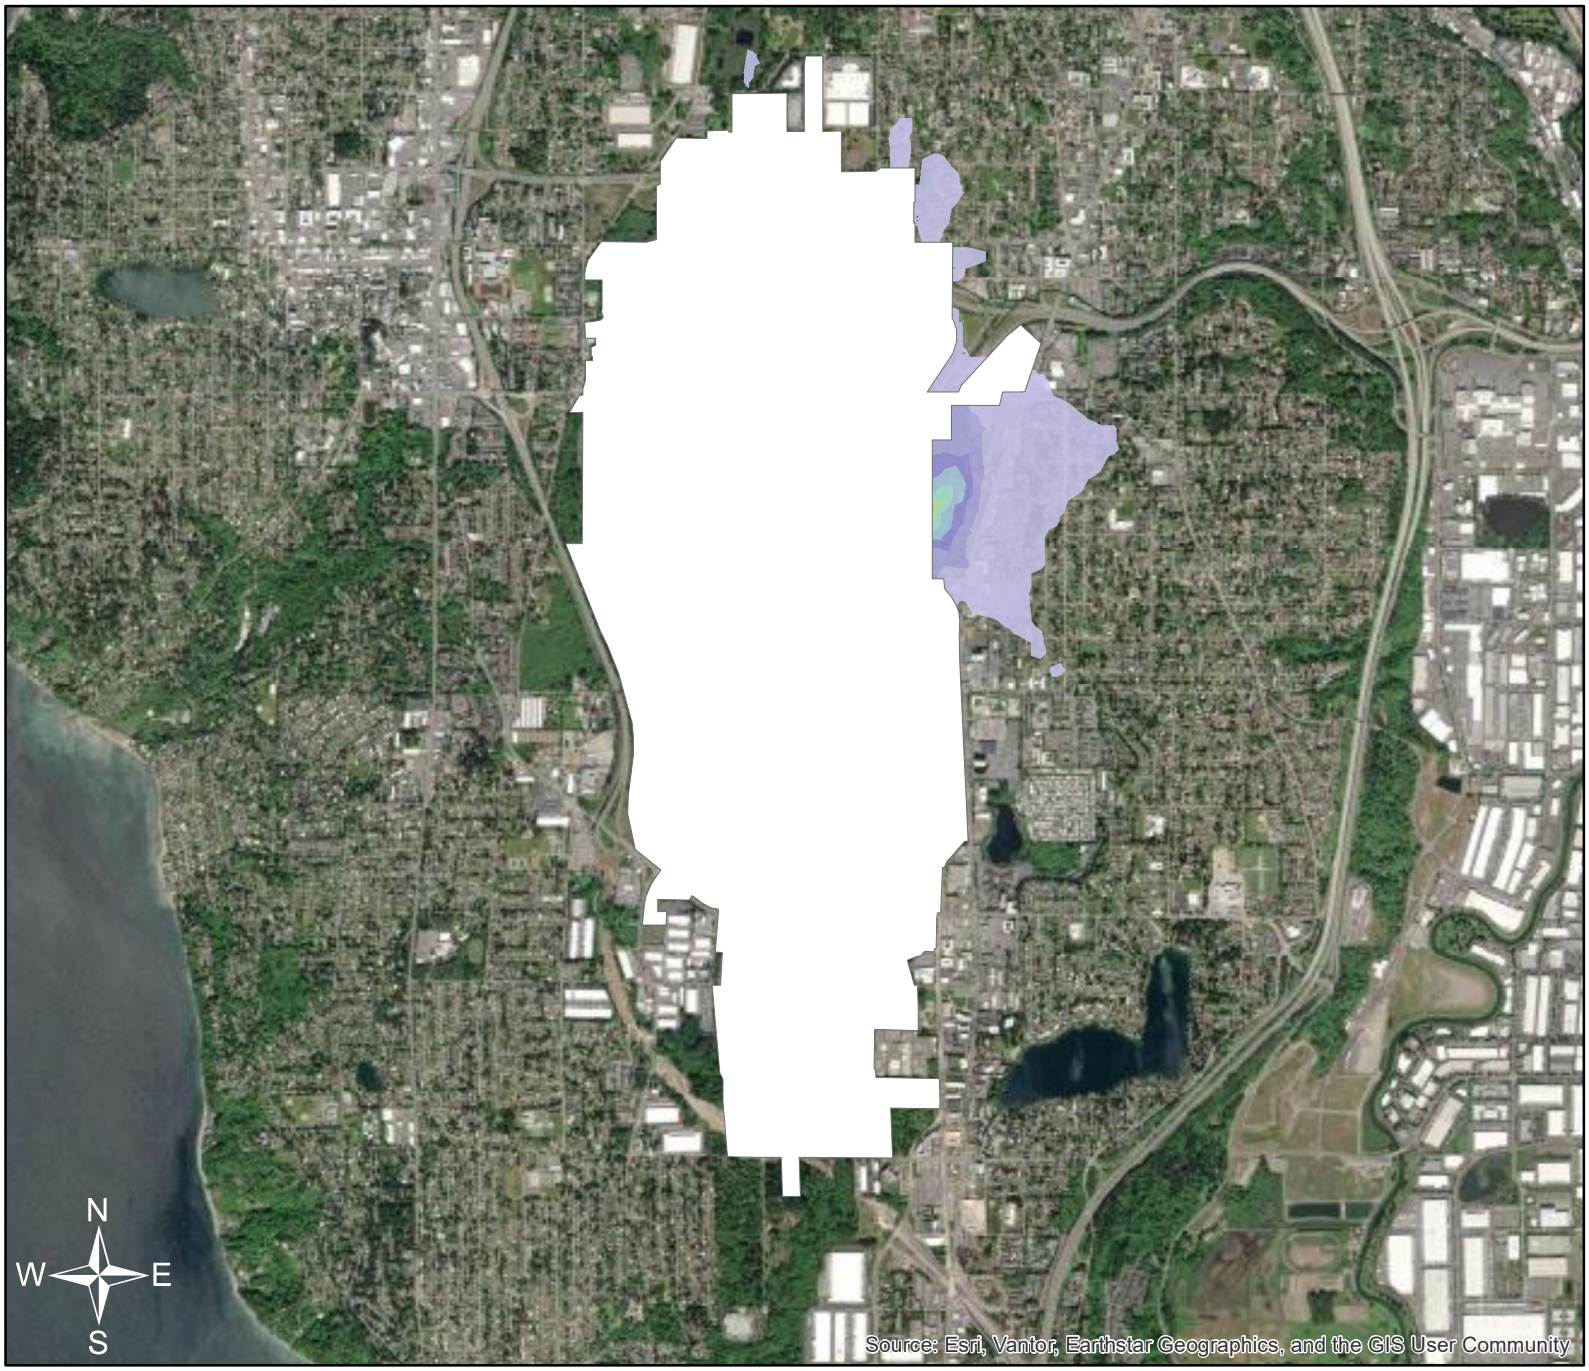

0 0.75 1.5 3 Miles

SO_2 Concentrations (µg/m³)

- SEA Property
- 8 - 17 (< 1% above background)
- 17 - 37
- 37 - 57
- 57 - 77
- 77 - 97
- 97 - 117
- 117 - 127

NAAQS: 197 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2037 Operations

SO_2

1-hour, 4th high

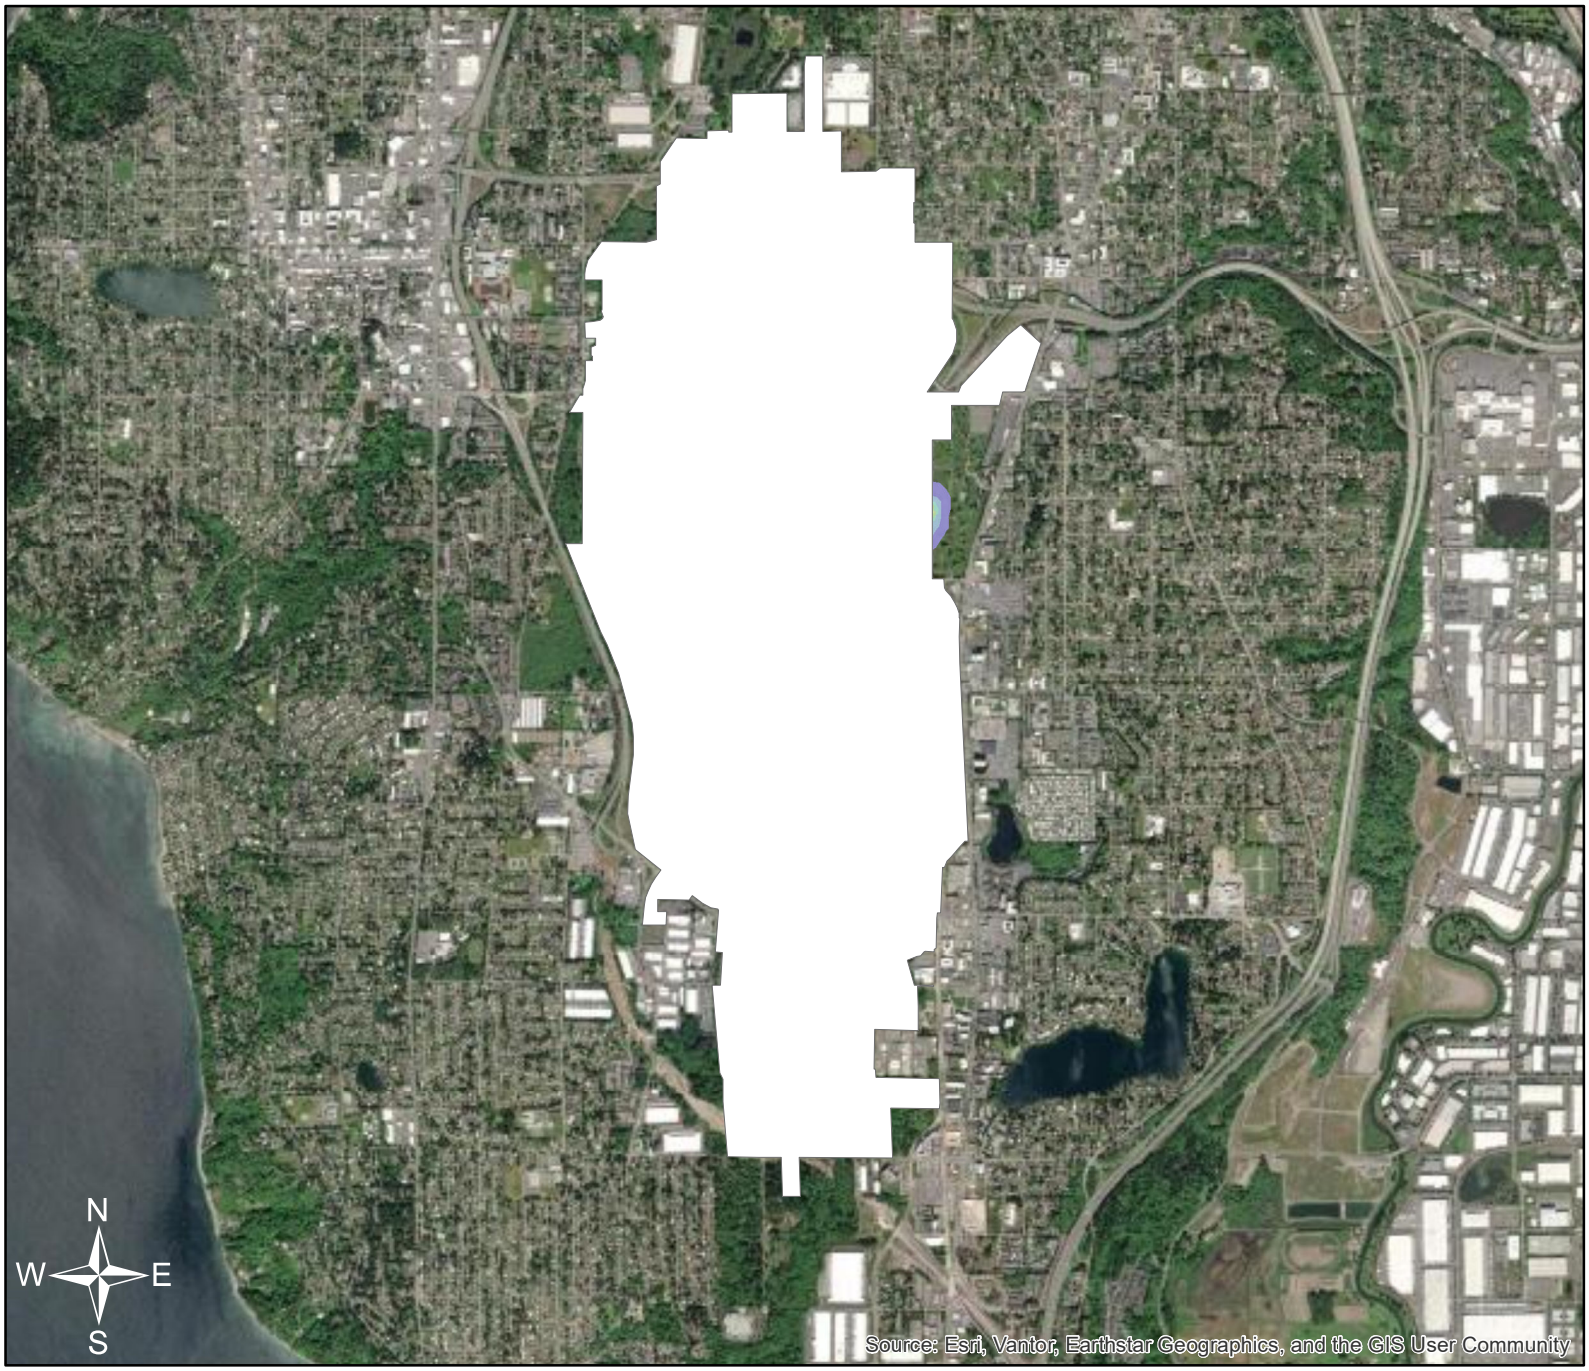

SO_2 Concentrations (µg/m³)

- SEA Property
- 1 - 5 (< 1% above background)
- 5 - 8
- 8 - 11
- 11 - 14
- 14 - 17
- 17 - 18

NAAQS: 26 µg/m³

Seattle-Tacoma International Airport

SeaTac, Washington, USA

2037 Operations

SO_2

Annual

Appendix B Air Quality Calculations

No Action Alternative Airport Layout and Airfield Taxipaths for Dispersion Modeling

- No Action Alternative Overall Airport Layout
- No Action Alternative Runway End 16C, 16L, and 16R Inbound Taxipaths to Cargo North
- No Action Alternative Runway End 16C, 16L, and 16R Inbound Taxipaths to Cargo South
- No Action Alternative Runway End 16C, 16L, and 16R Inbound Taxipaths to Passenger Terminal
- No Action Alternative Runway End 34C, 34L, and 34R Inbound Taxipaths to Cargo North
- No Action Alternative Runway End 34C, 34L, and 34R Inbound Taxipaths to Cargo South
- No Action Alternative Runway End 34C, 34L, and 34R Inbound Taxipaths to Passenger Terminal
- No Action Alternative Cargo North Outbound Taxipaths to Runway End 34C, 34L, and 34R
- No Action Alternative Cargo North Outbound Taxipaths to Runway End 16C, 16L, and 16R
- No Action Alternative Cargo South Outbound Taxipaths to Runway End 34C, 34L, and 34R
- No Action Alternative Cargo South Outbound Taxipaths to Runway End 16C, 16L, and 16R
- No Action Alternative Passenger Terminal Outbound Taxipaths to Runway End 34C, 34L, and 34R
- No Action Alternative Passenger Terminal Outbound Taxipaths to Runway End 16C, 16L, and 16R

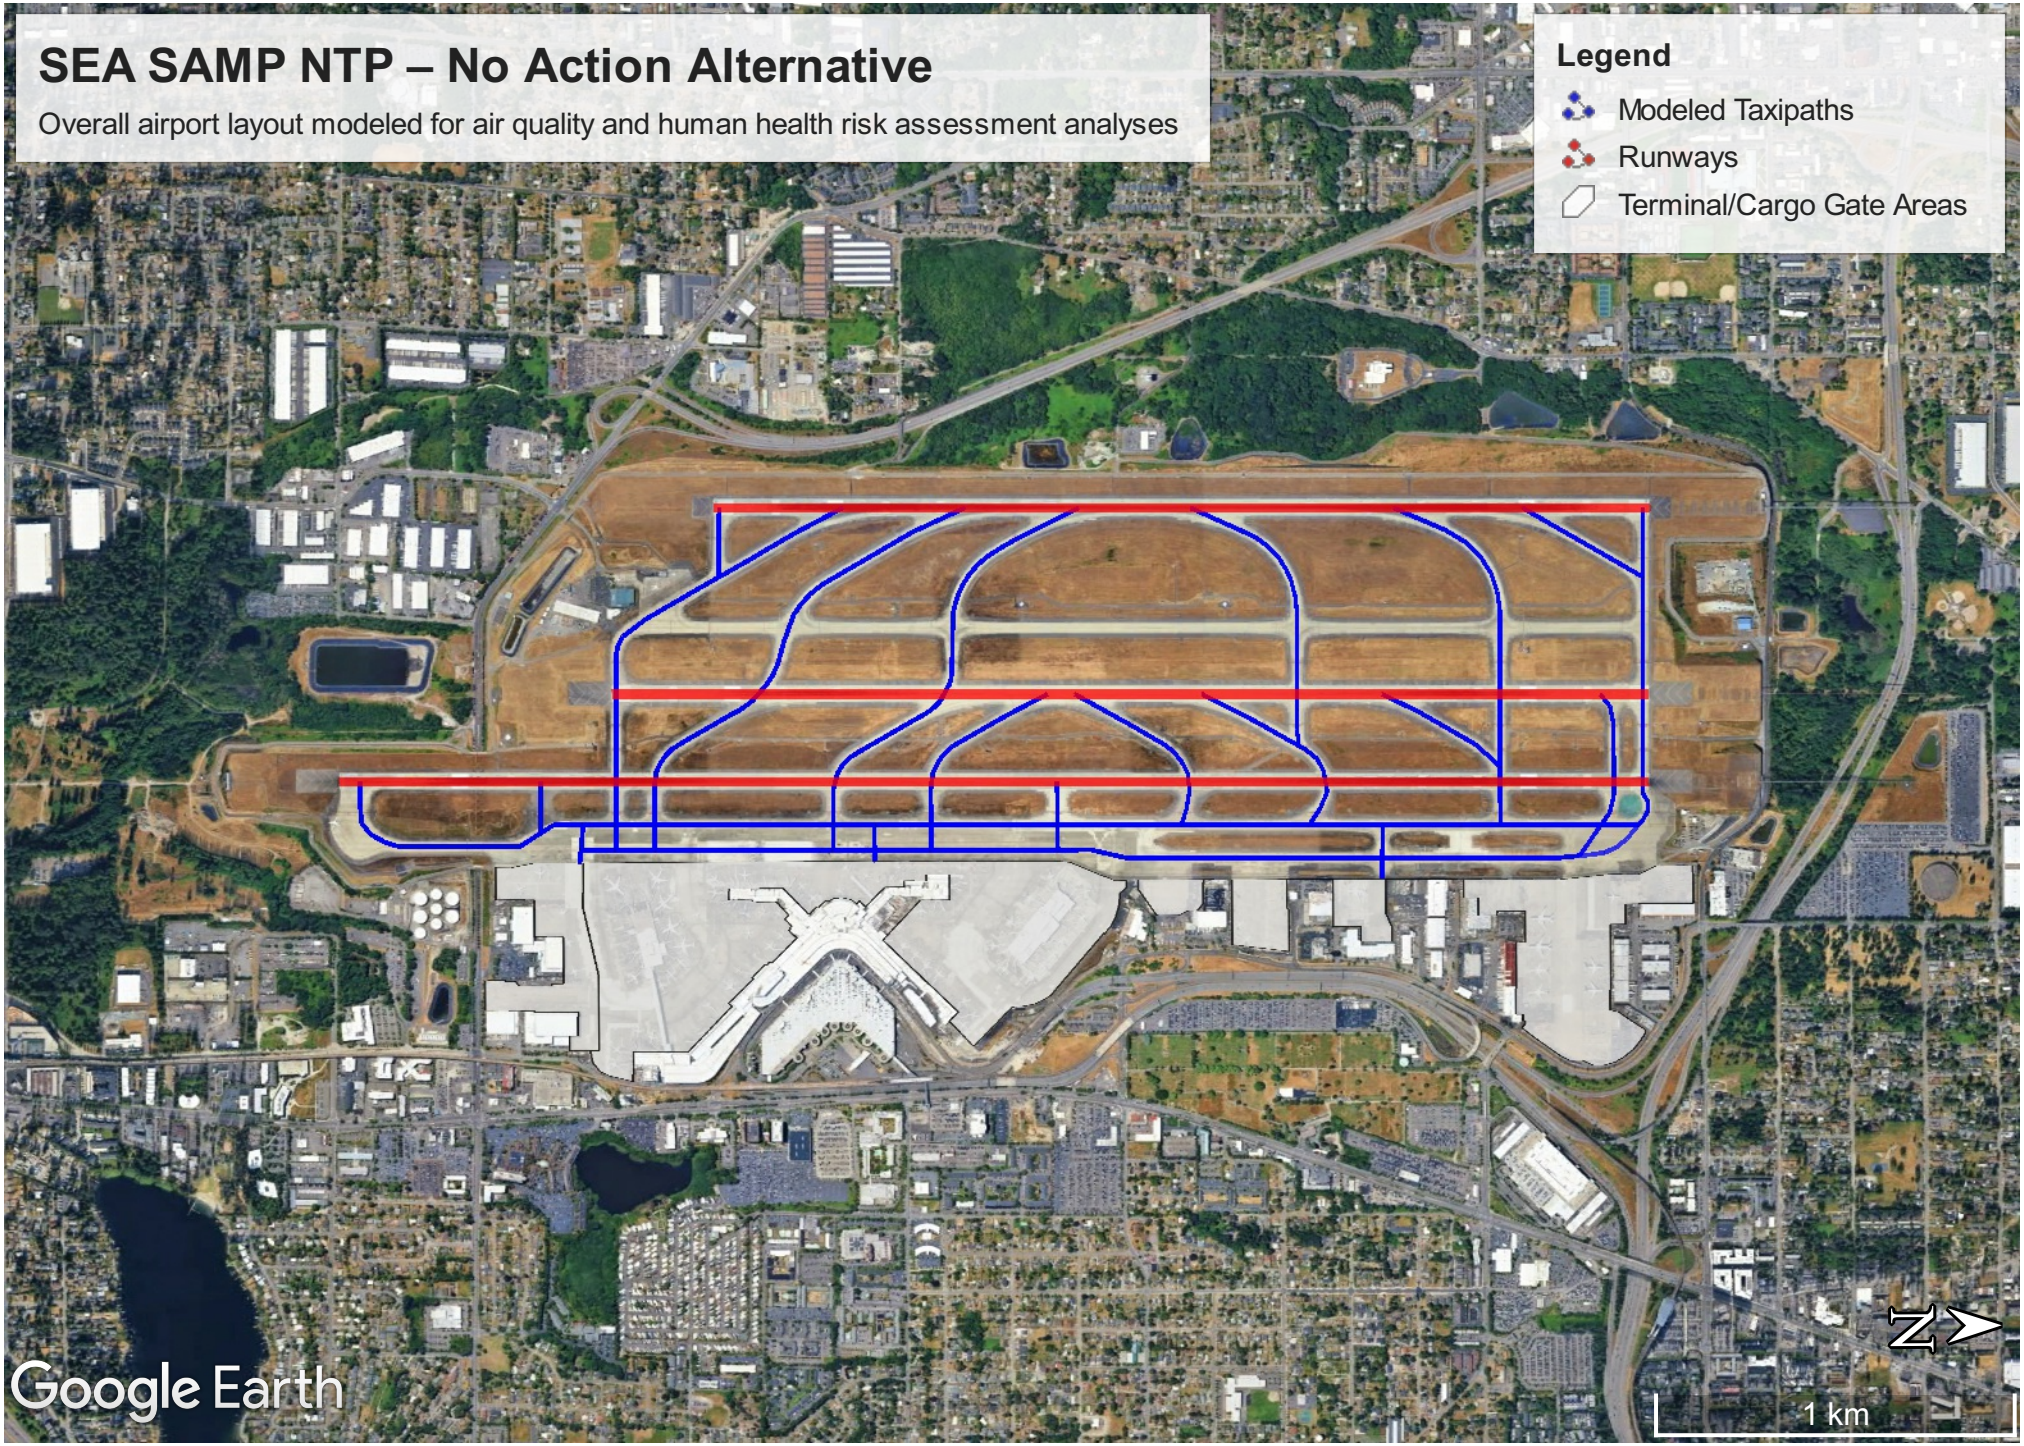
SEA SAMP NTP – No Action Alternative
Overall airport layout modeled for air quality and human health risk assessment analyses
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
N
1 km

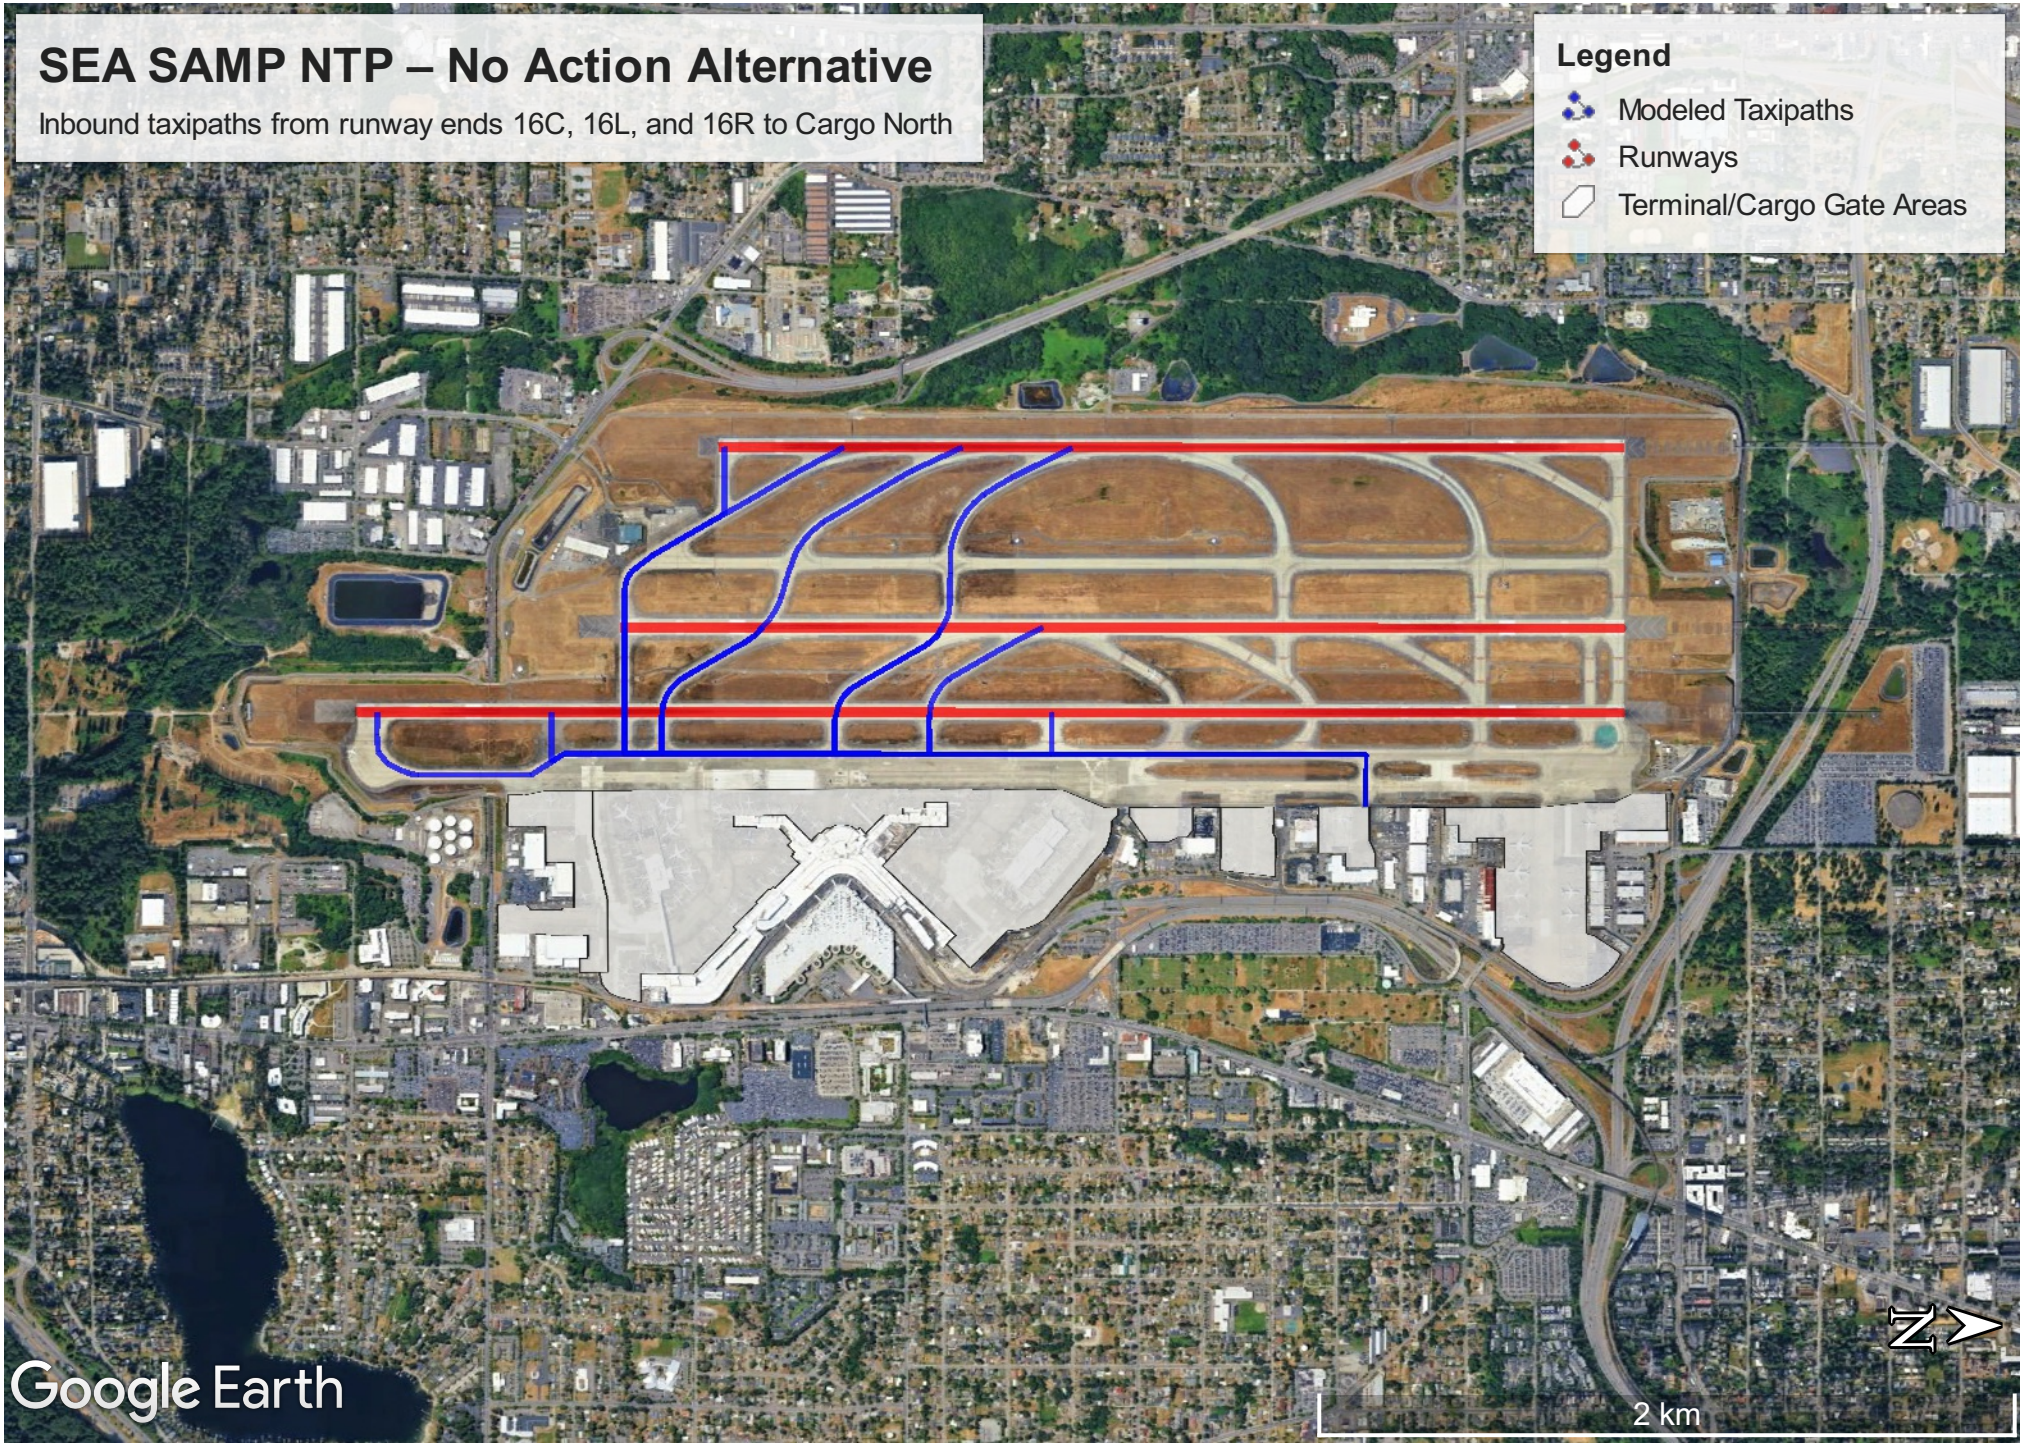
SEA SAMP NTP – No Action Alternative
Inbound taxipaths from runway ends 16C, 16L, and 16R to Cargo North
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

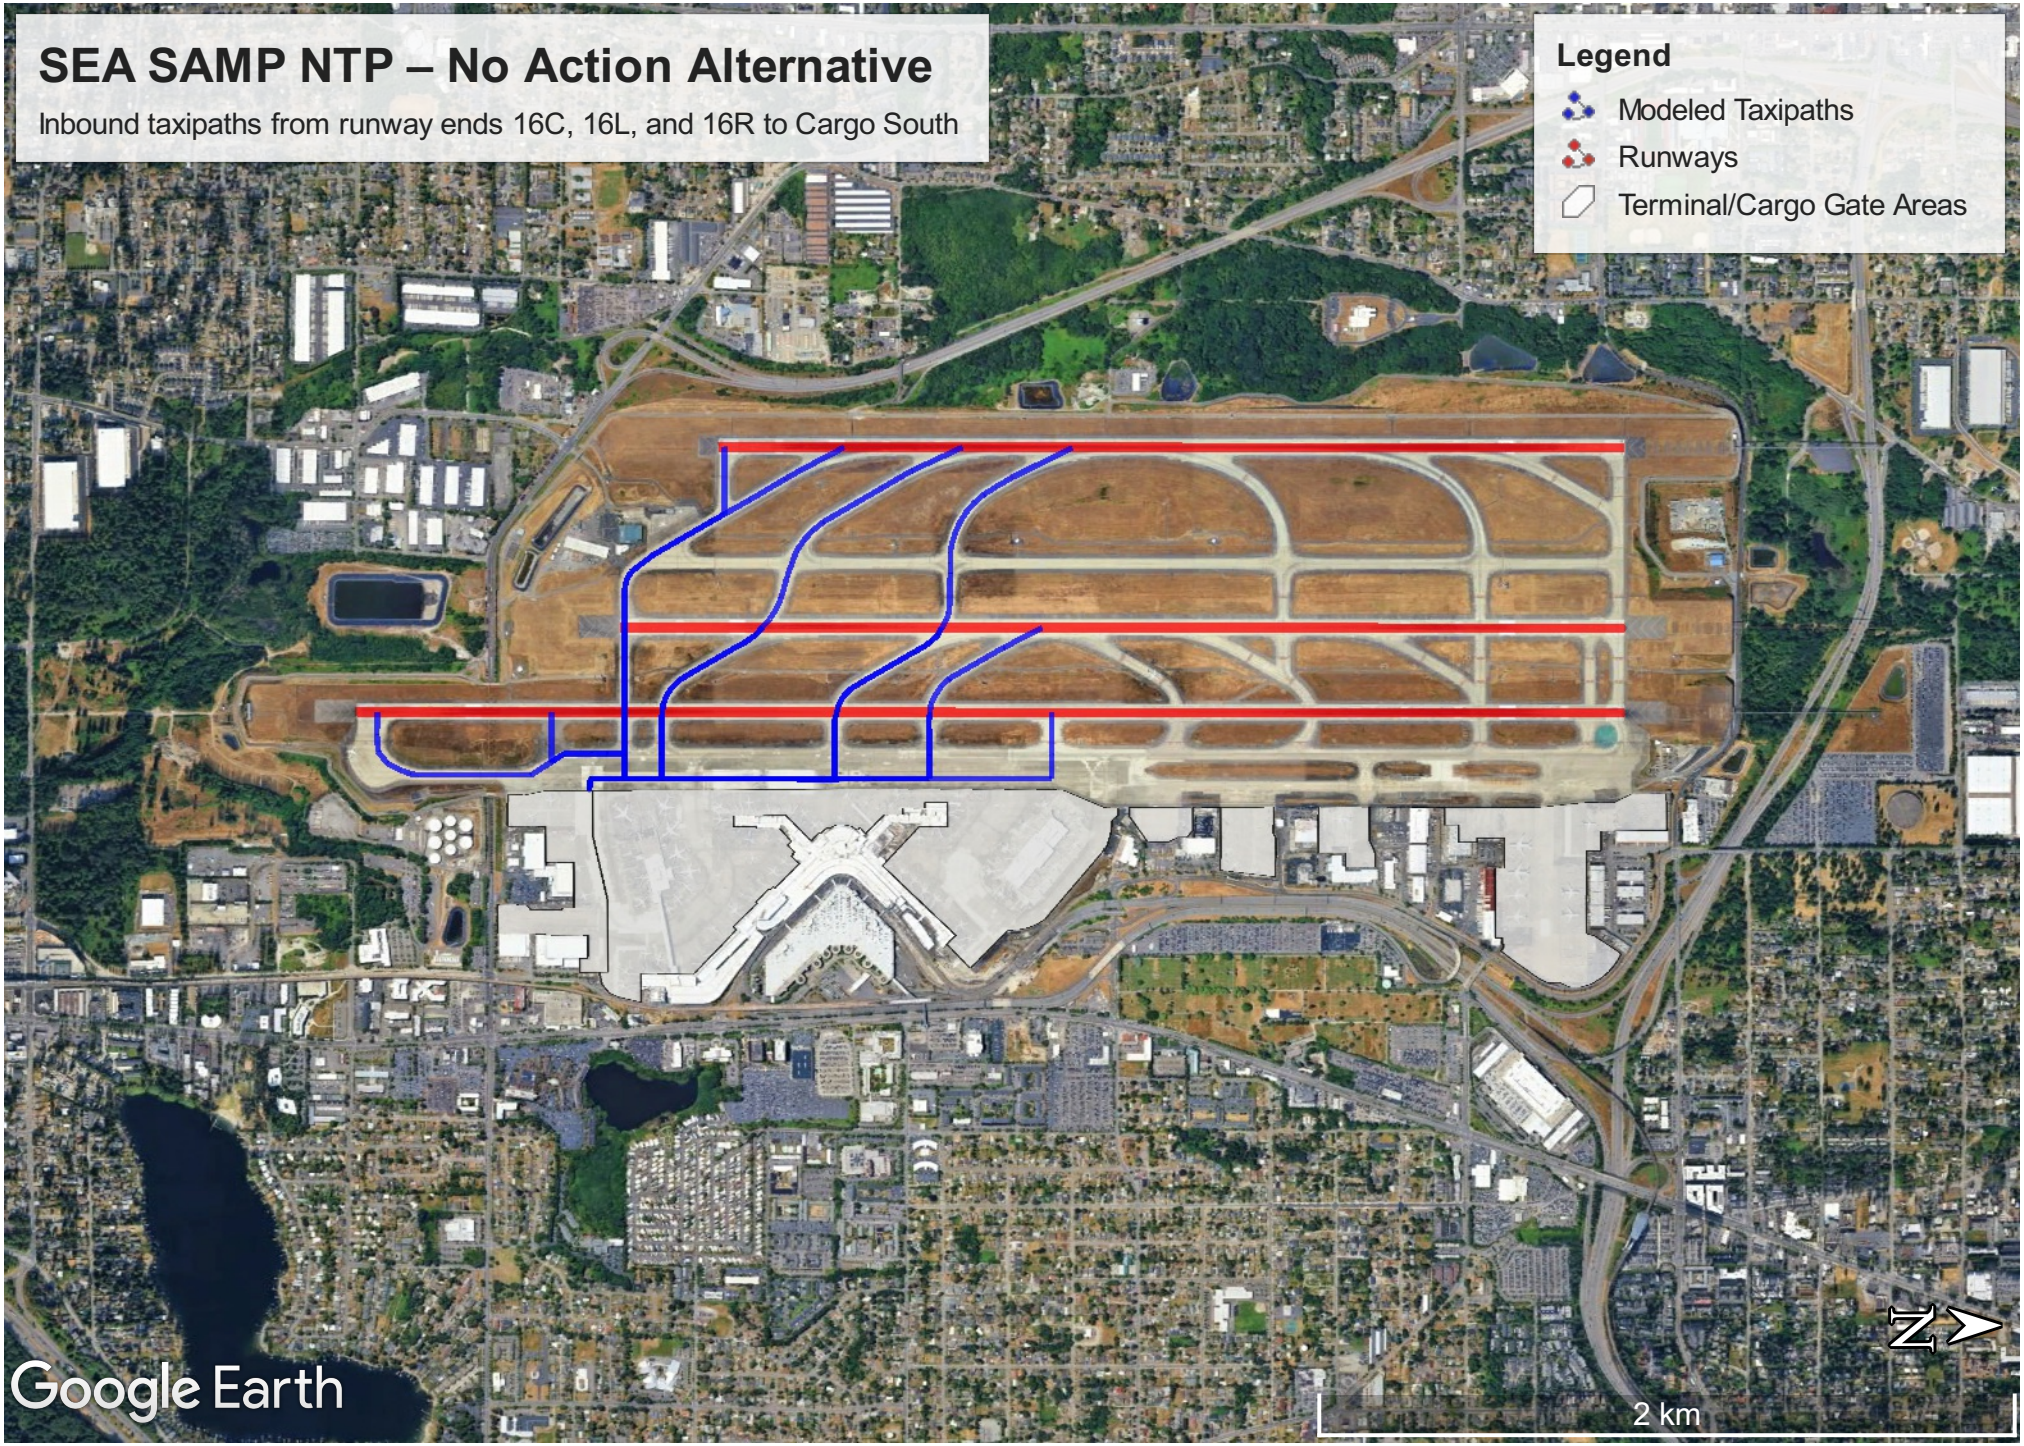
SEA SAMP NTP – No Action Alternative
Inbound taxipaths from runway ends 16C, 16L, and 16R to Cargo South
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

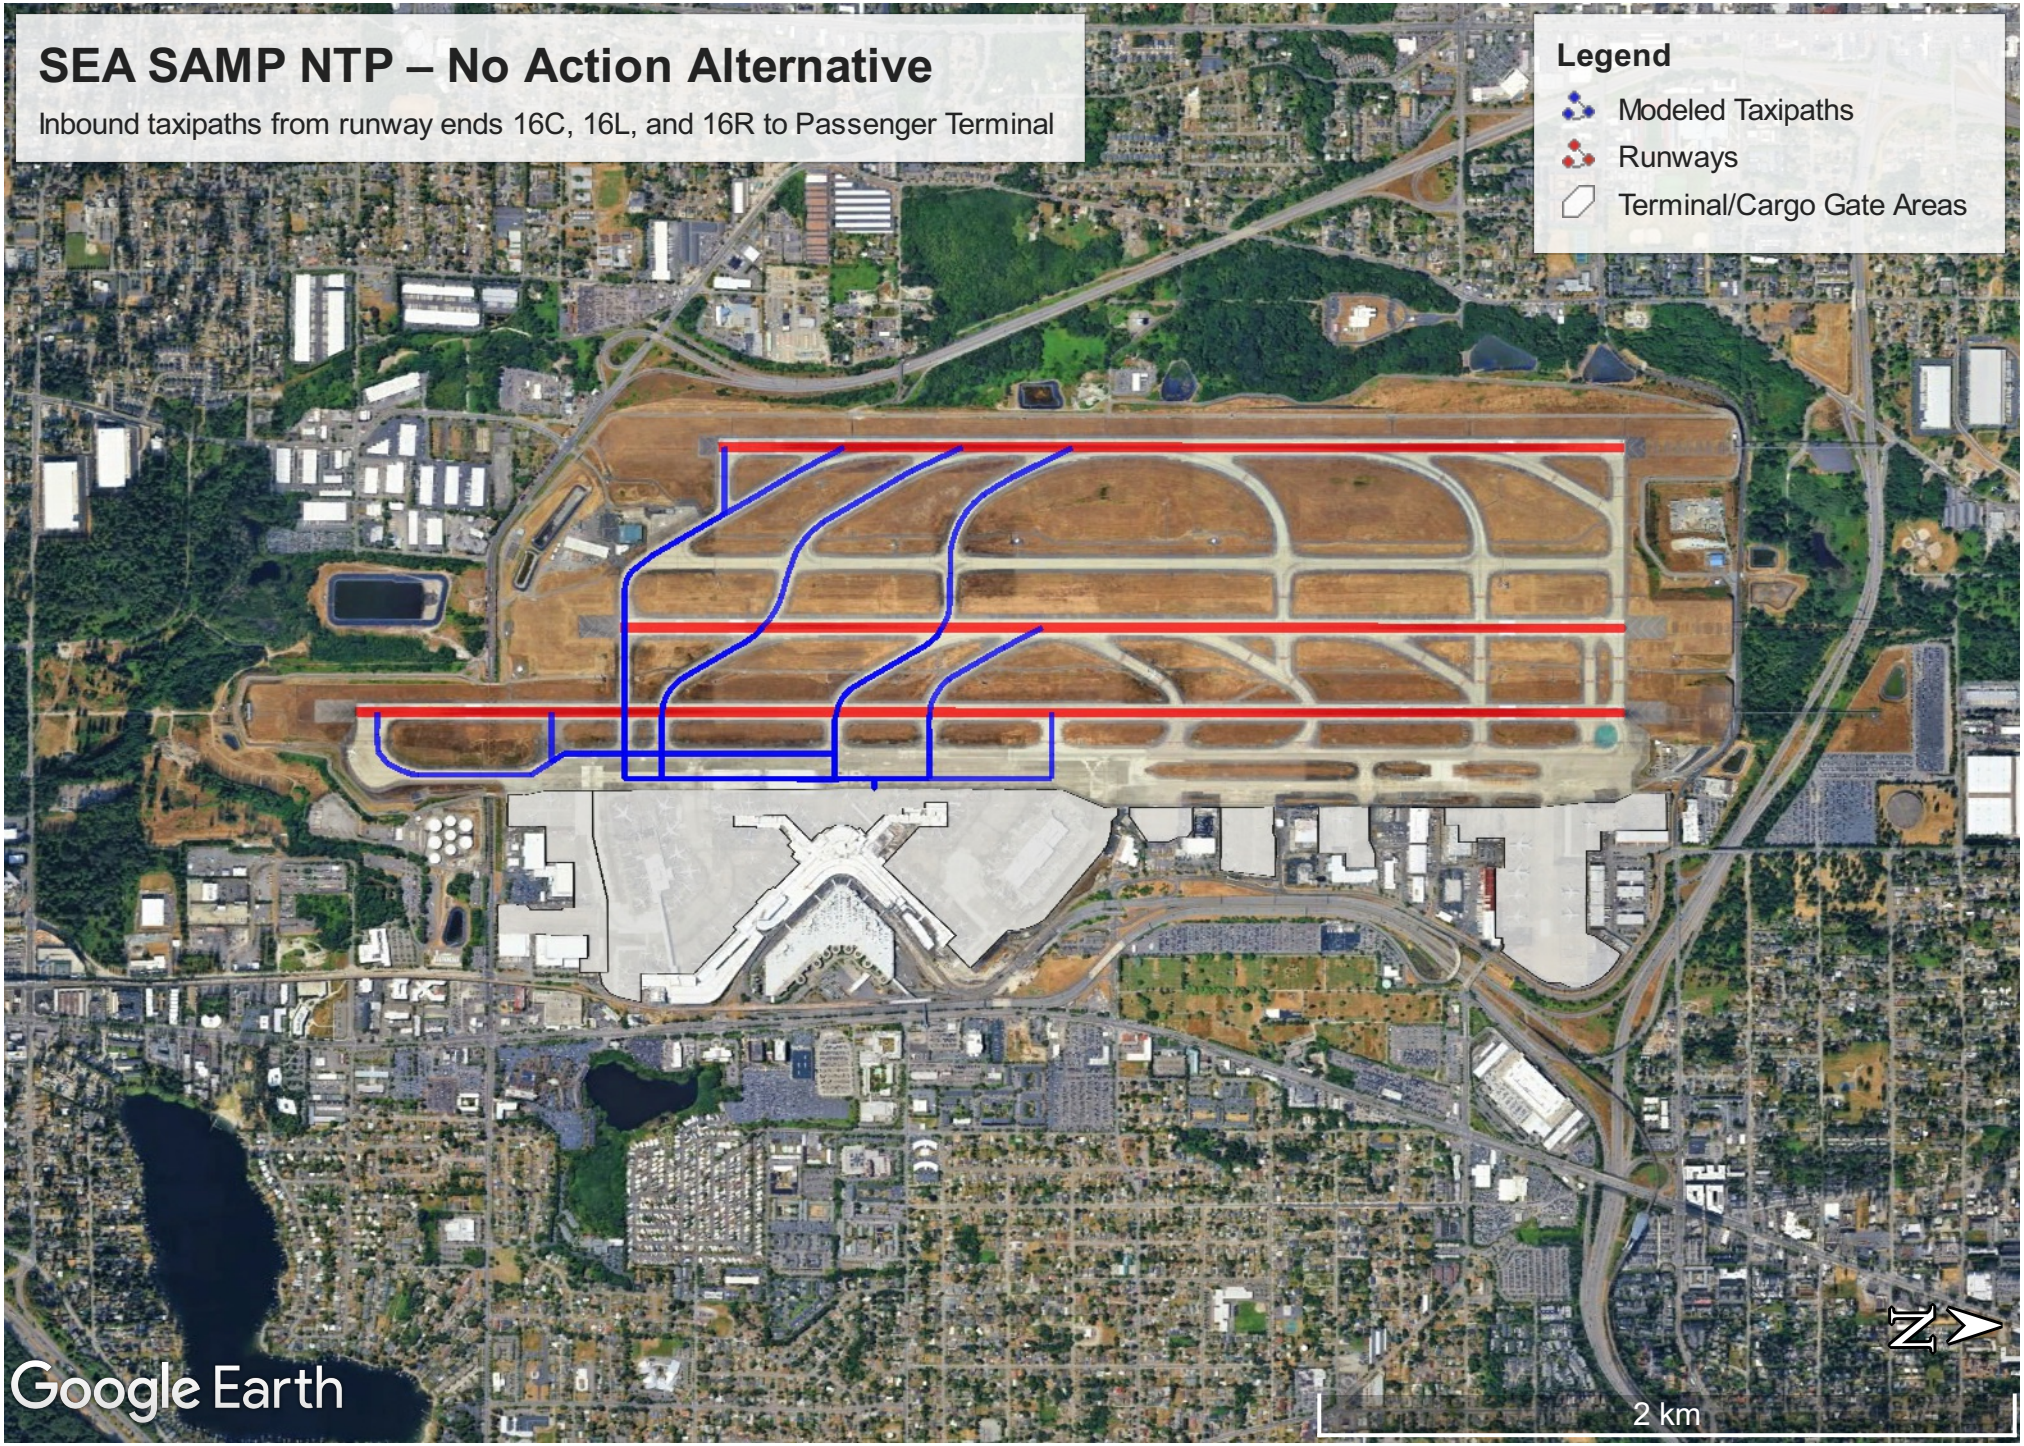
SEA SAMP NTP – No Action Alternative
Inbound taxipaths from runway ends 16C, 16L, and 16R to Passenger Terminal
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

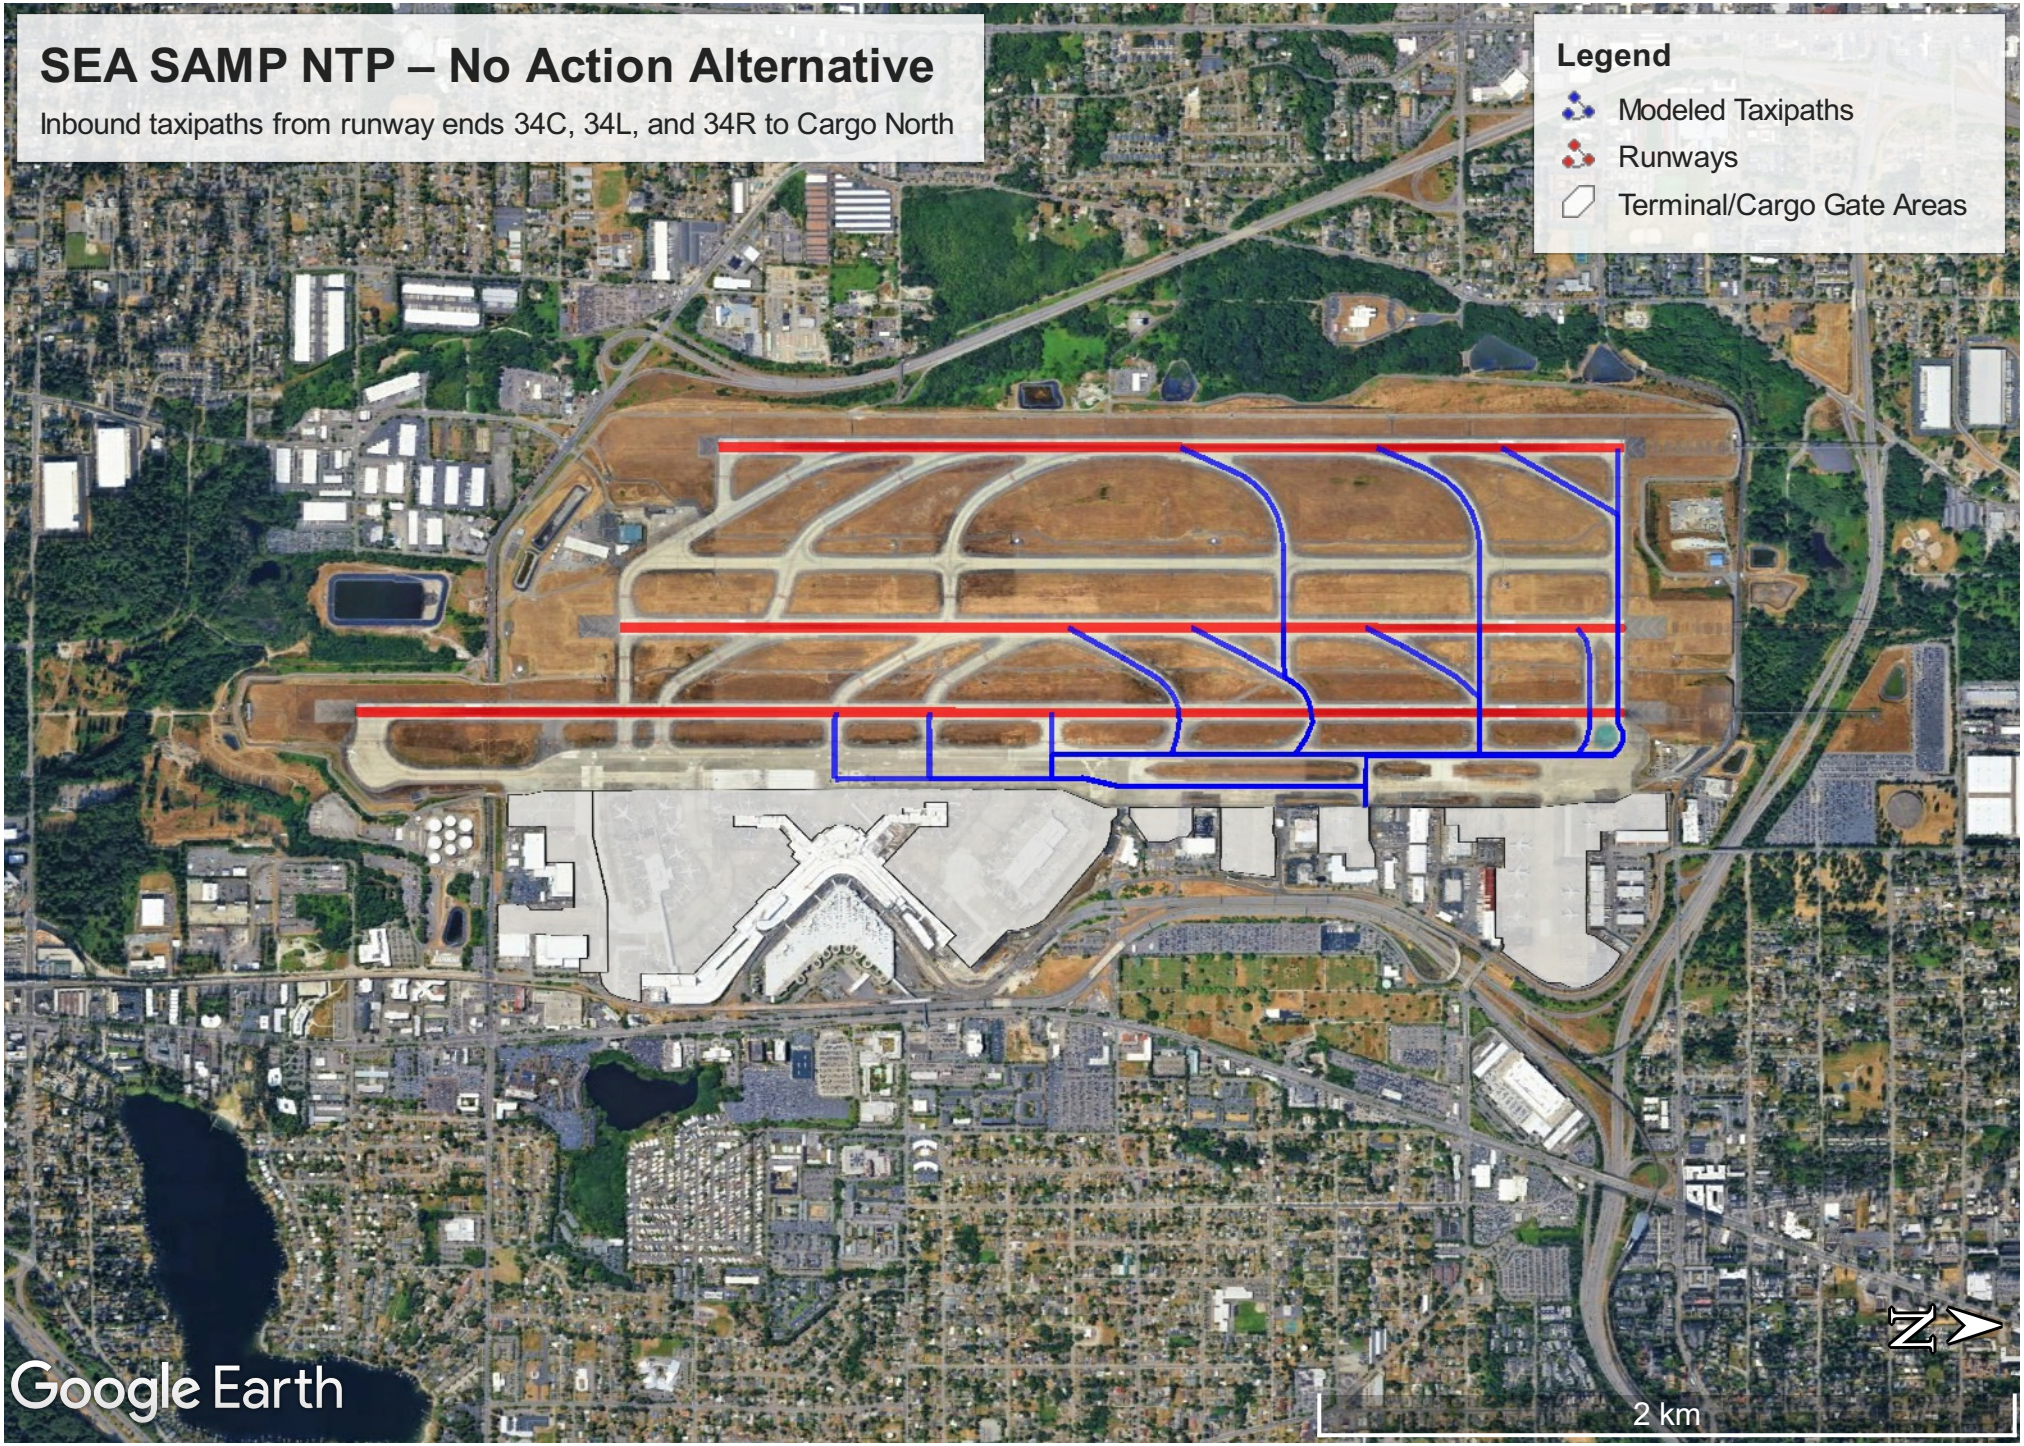
SEA SAMP NTP – No Action Alternative
Inbound taxipaths from runway ends 34C, 34L, and 34R to Cargo North
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

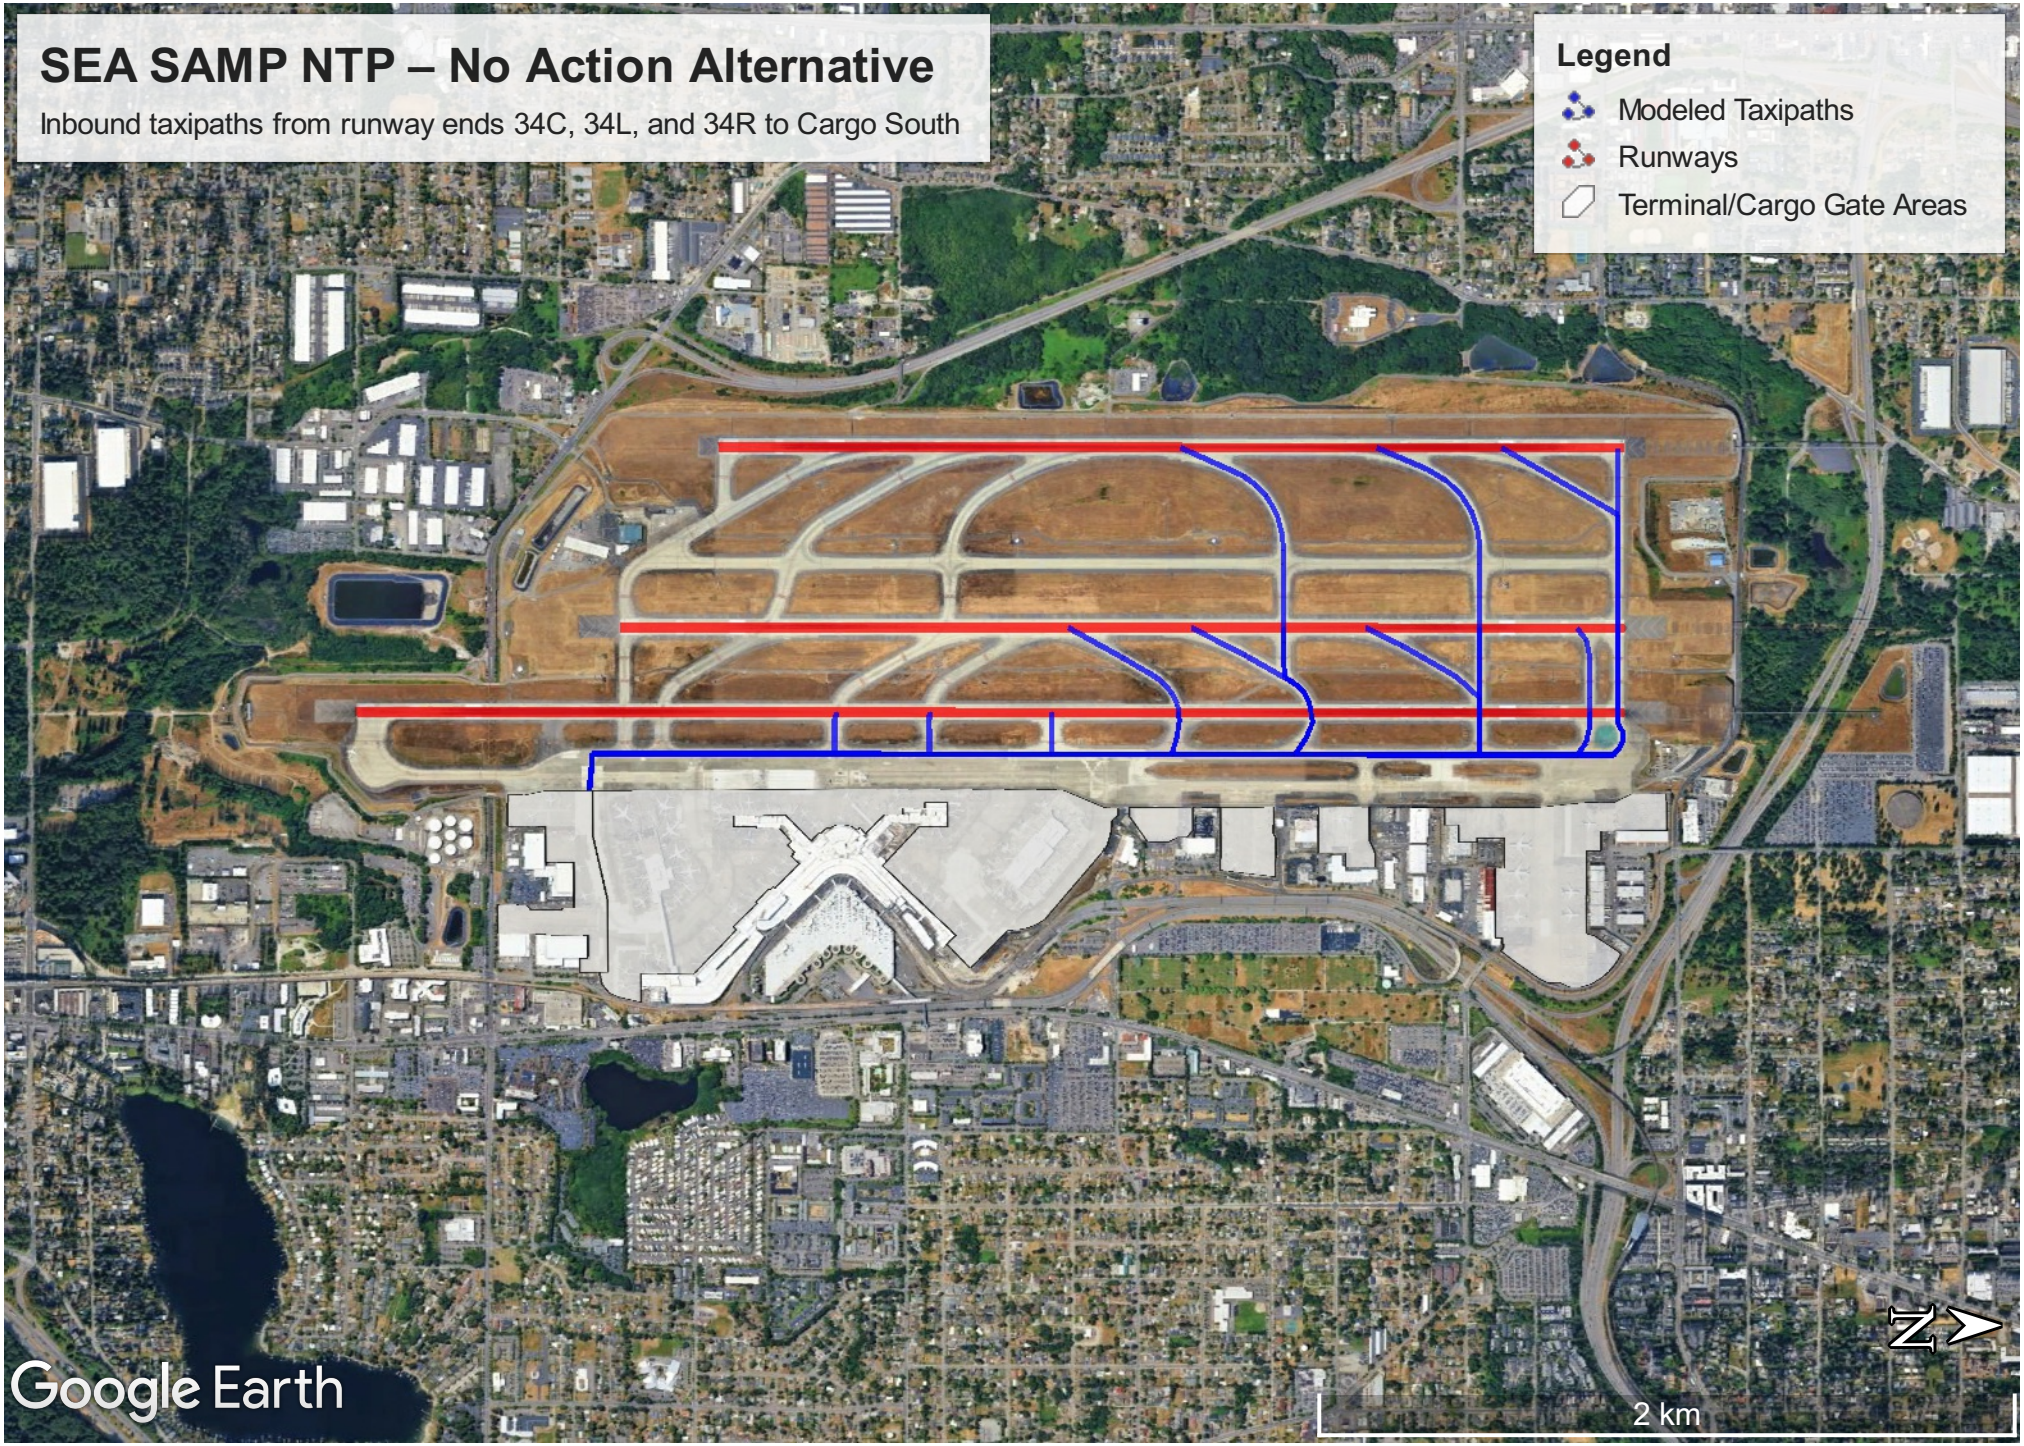
SEA SAMP NTP – No Action Alternative
Inbound taxipaths from runway ends 34C, 34L, and 34R to Cargo South
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

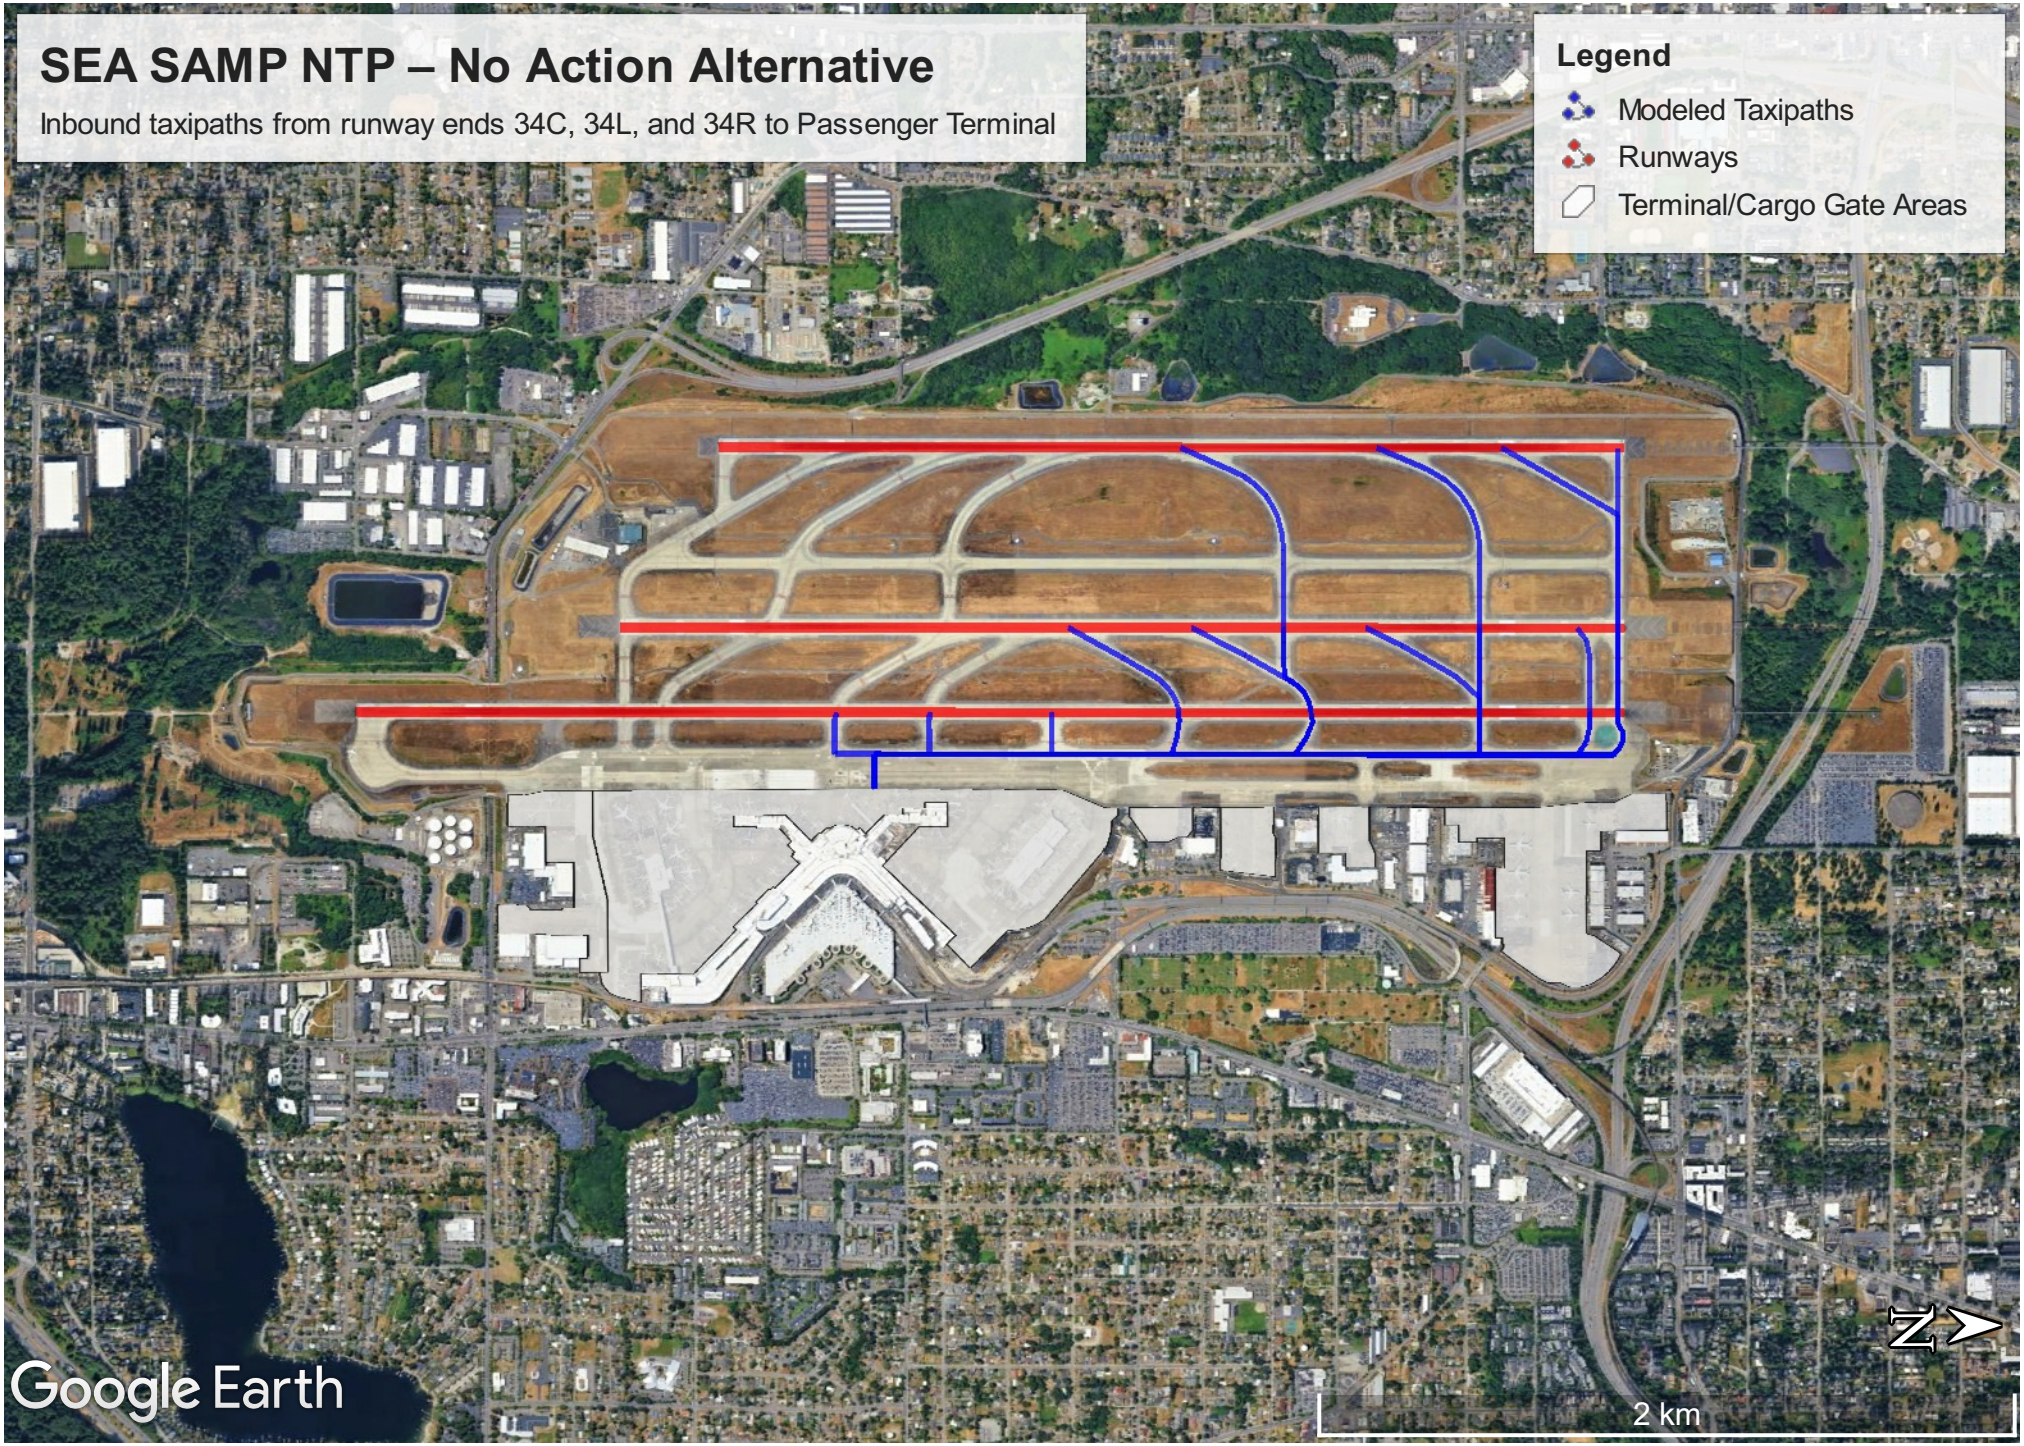
SEA SAMP NTP – No Action Alternative
Inbound taxipaths from runway ends 34C, 34L, and 34R to Passenger Terminal
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

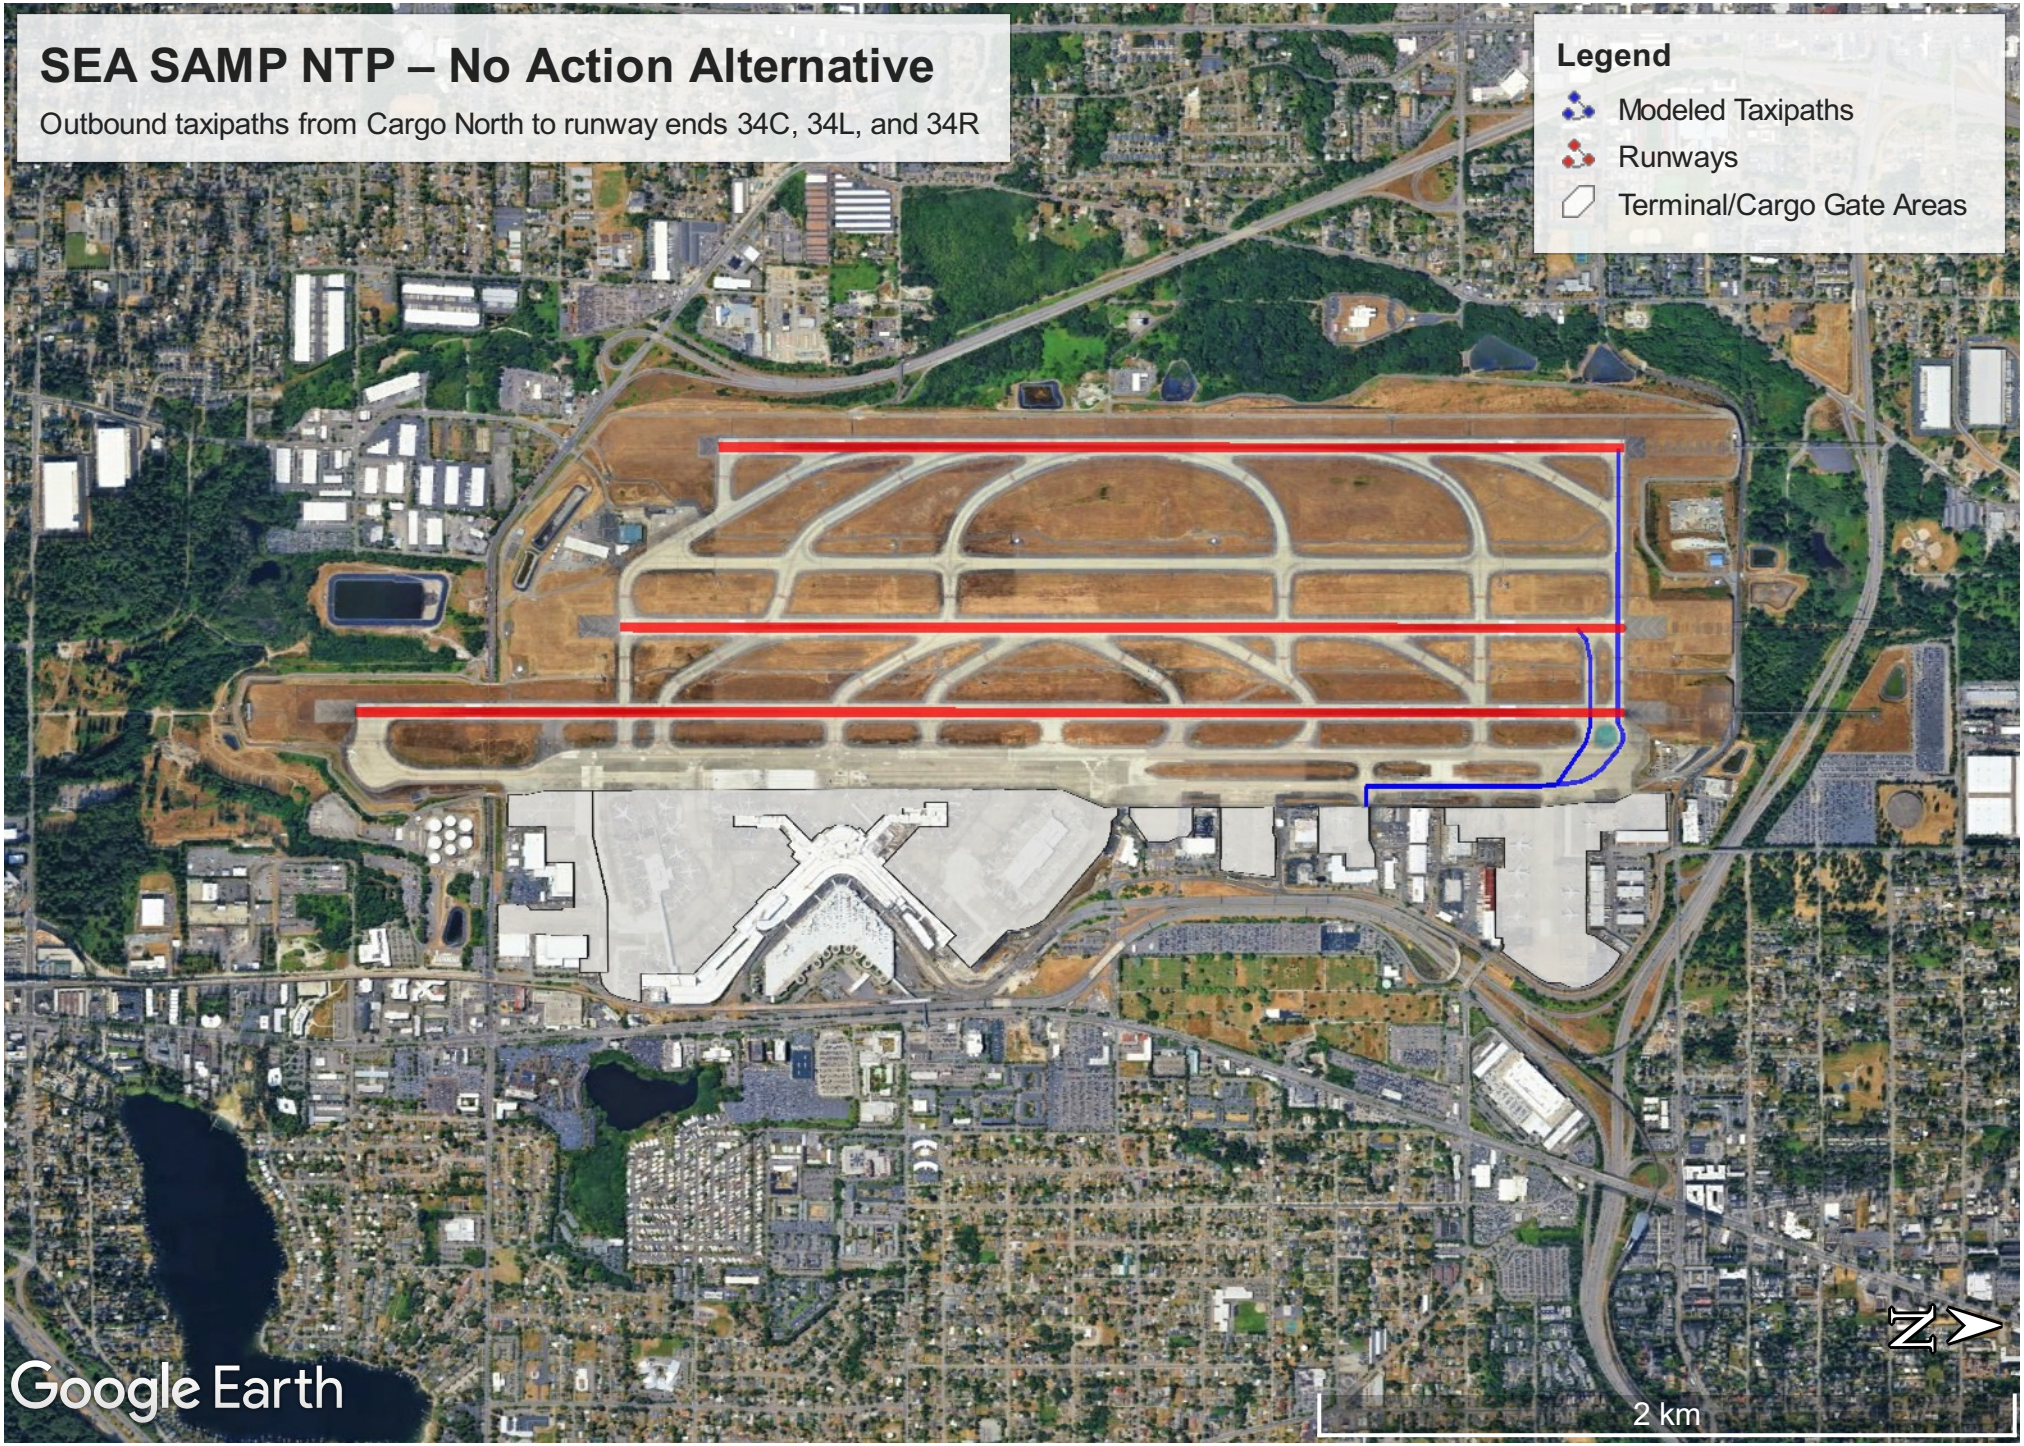
SEA SAMP NTP – No Action Alternative
Outbound taxipaths from Cargo North to runway ends 34C, 34L, and 34R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

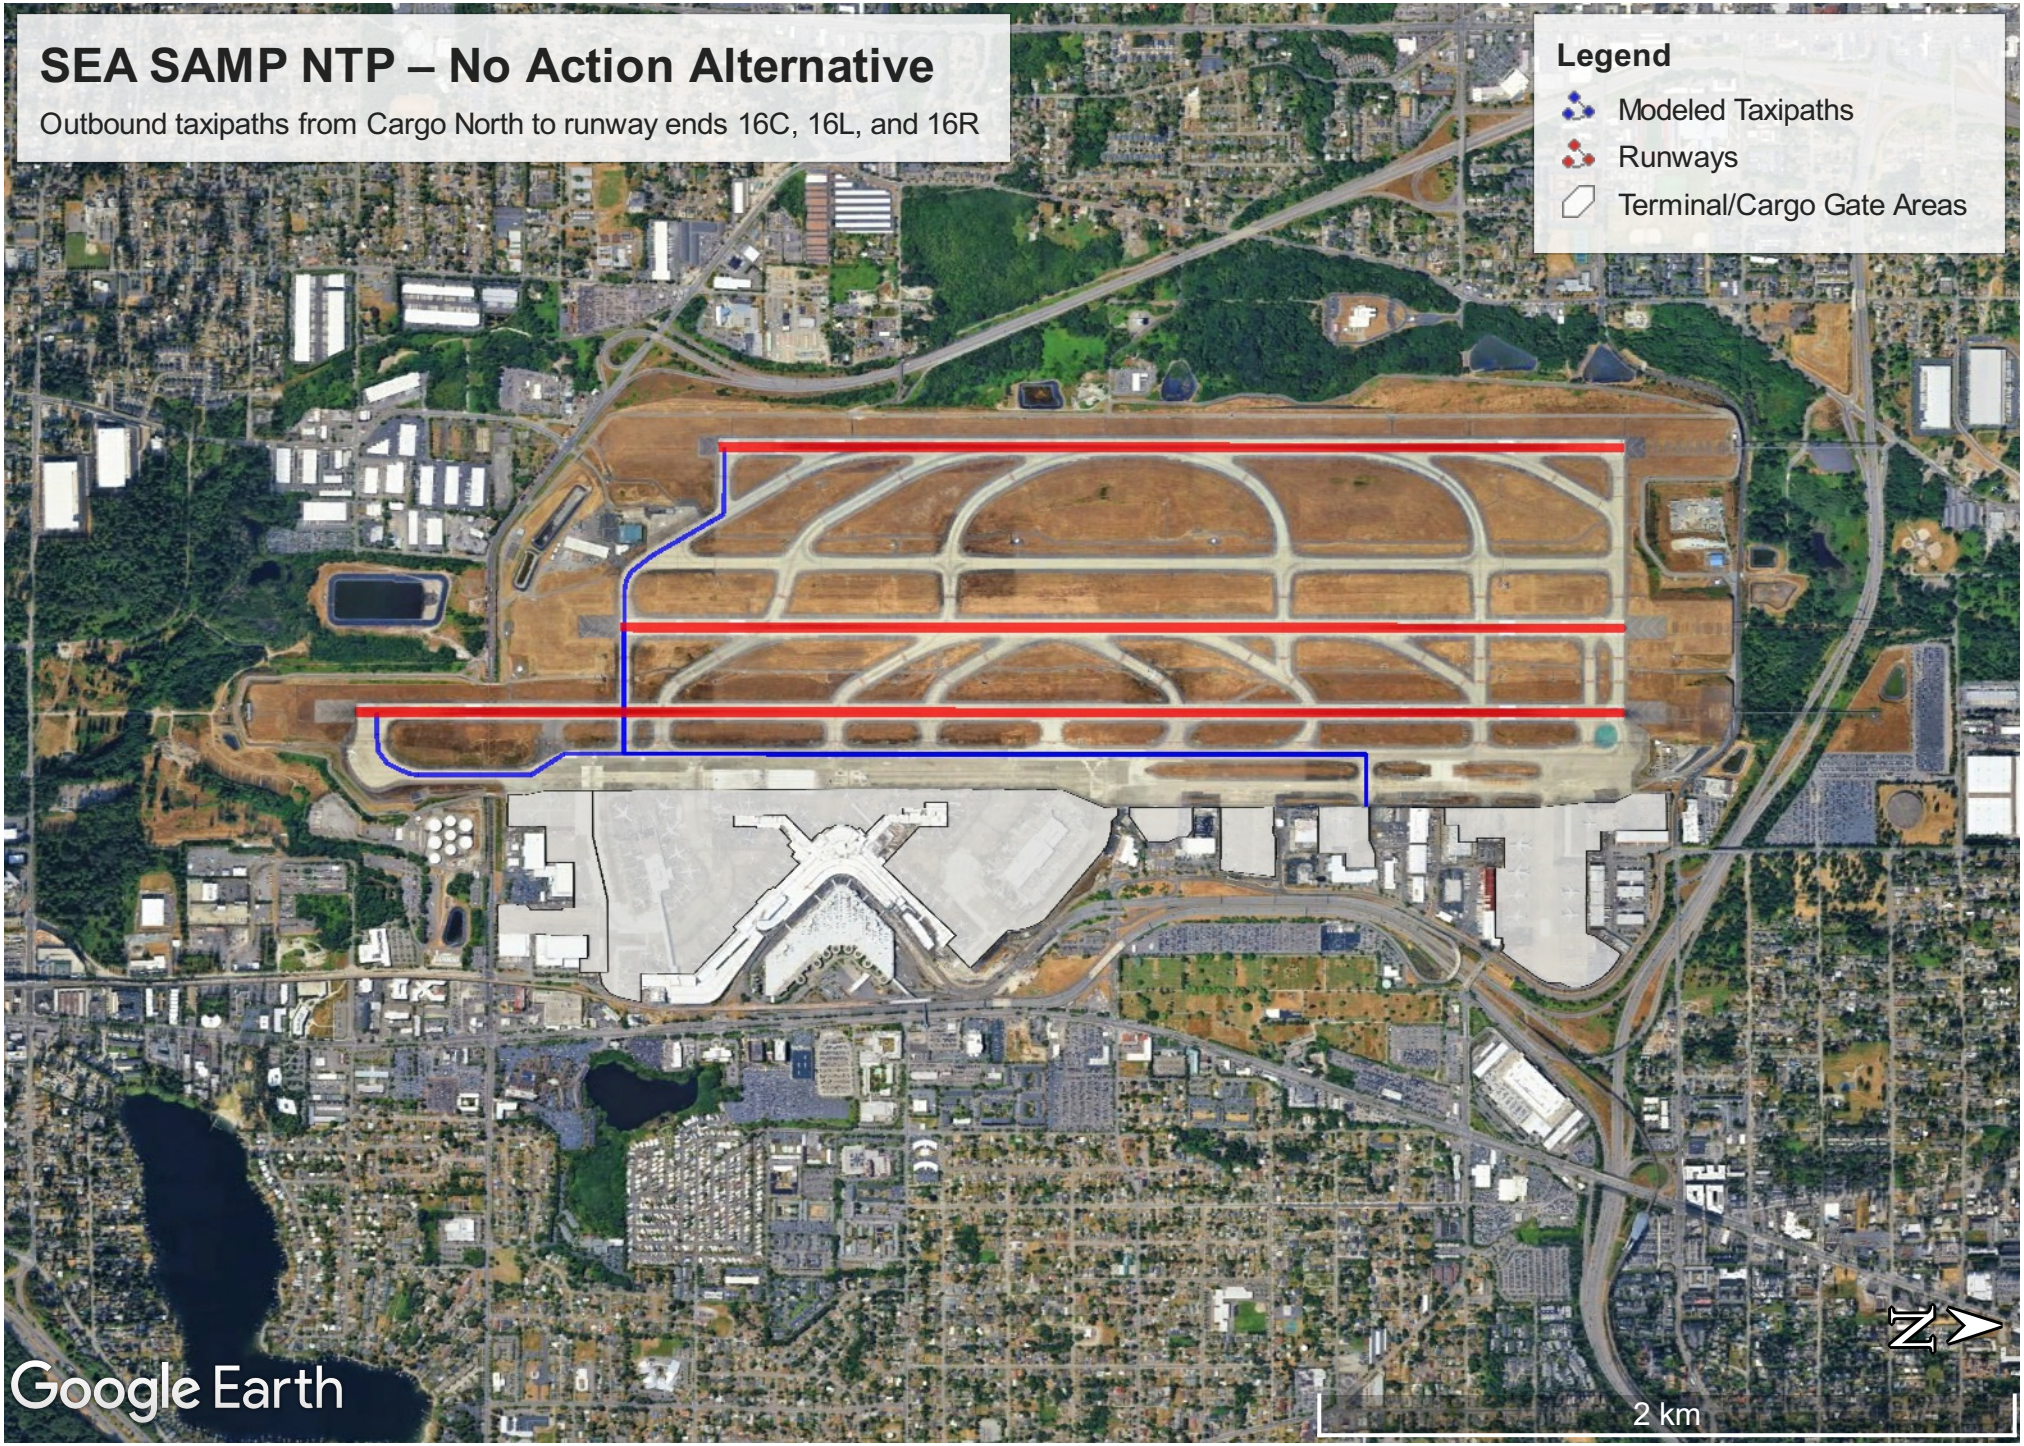
SEA SAMP NTP – No Action Alternative
Outbound taxipaths from Cargo North to runway ends 16C, 16L, and 16R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

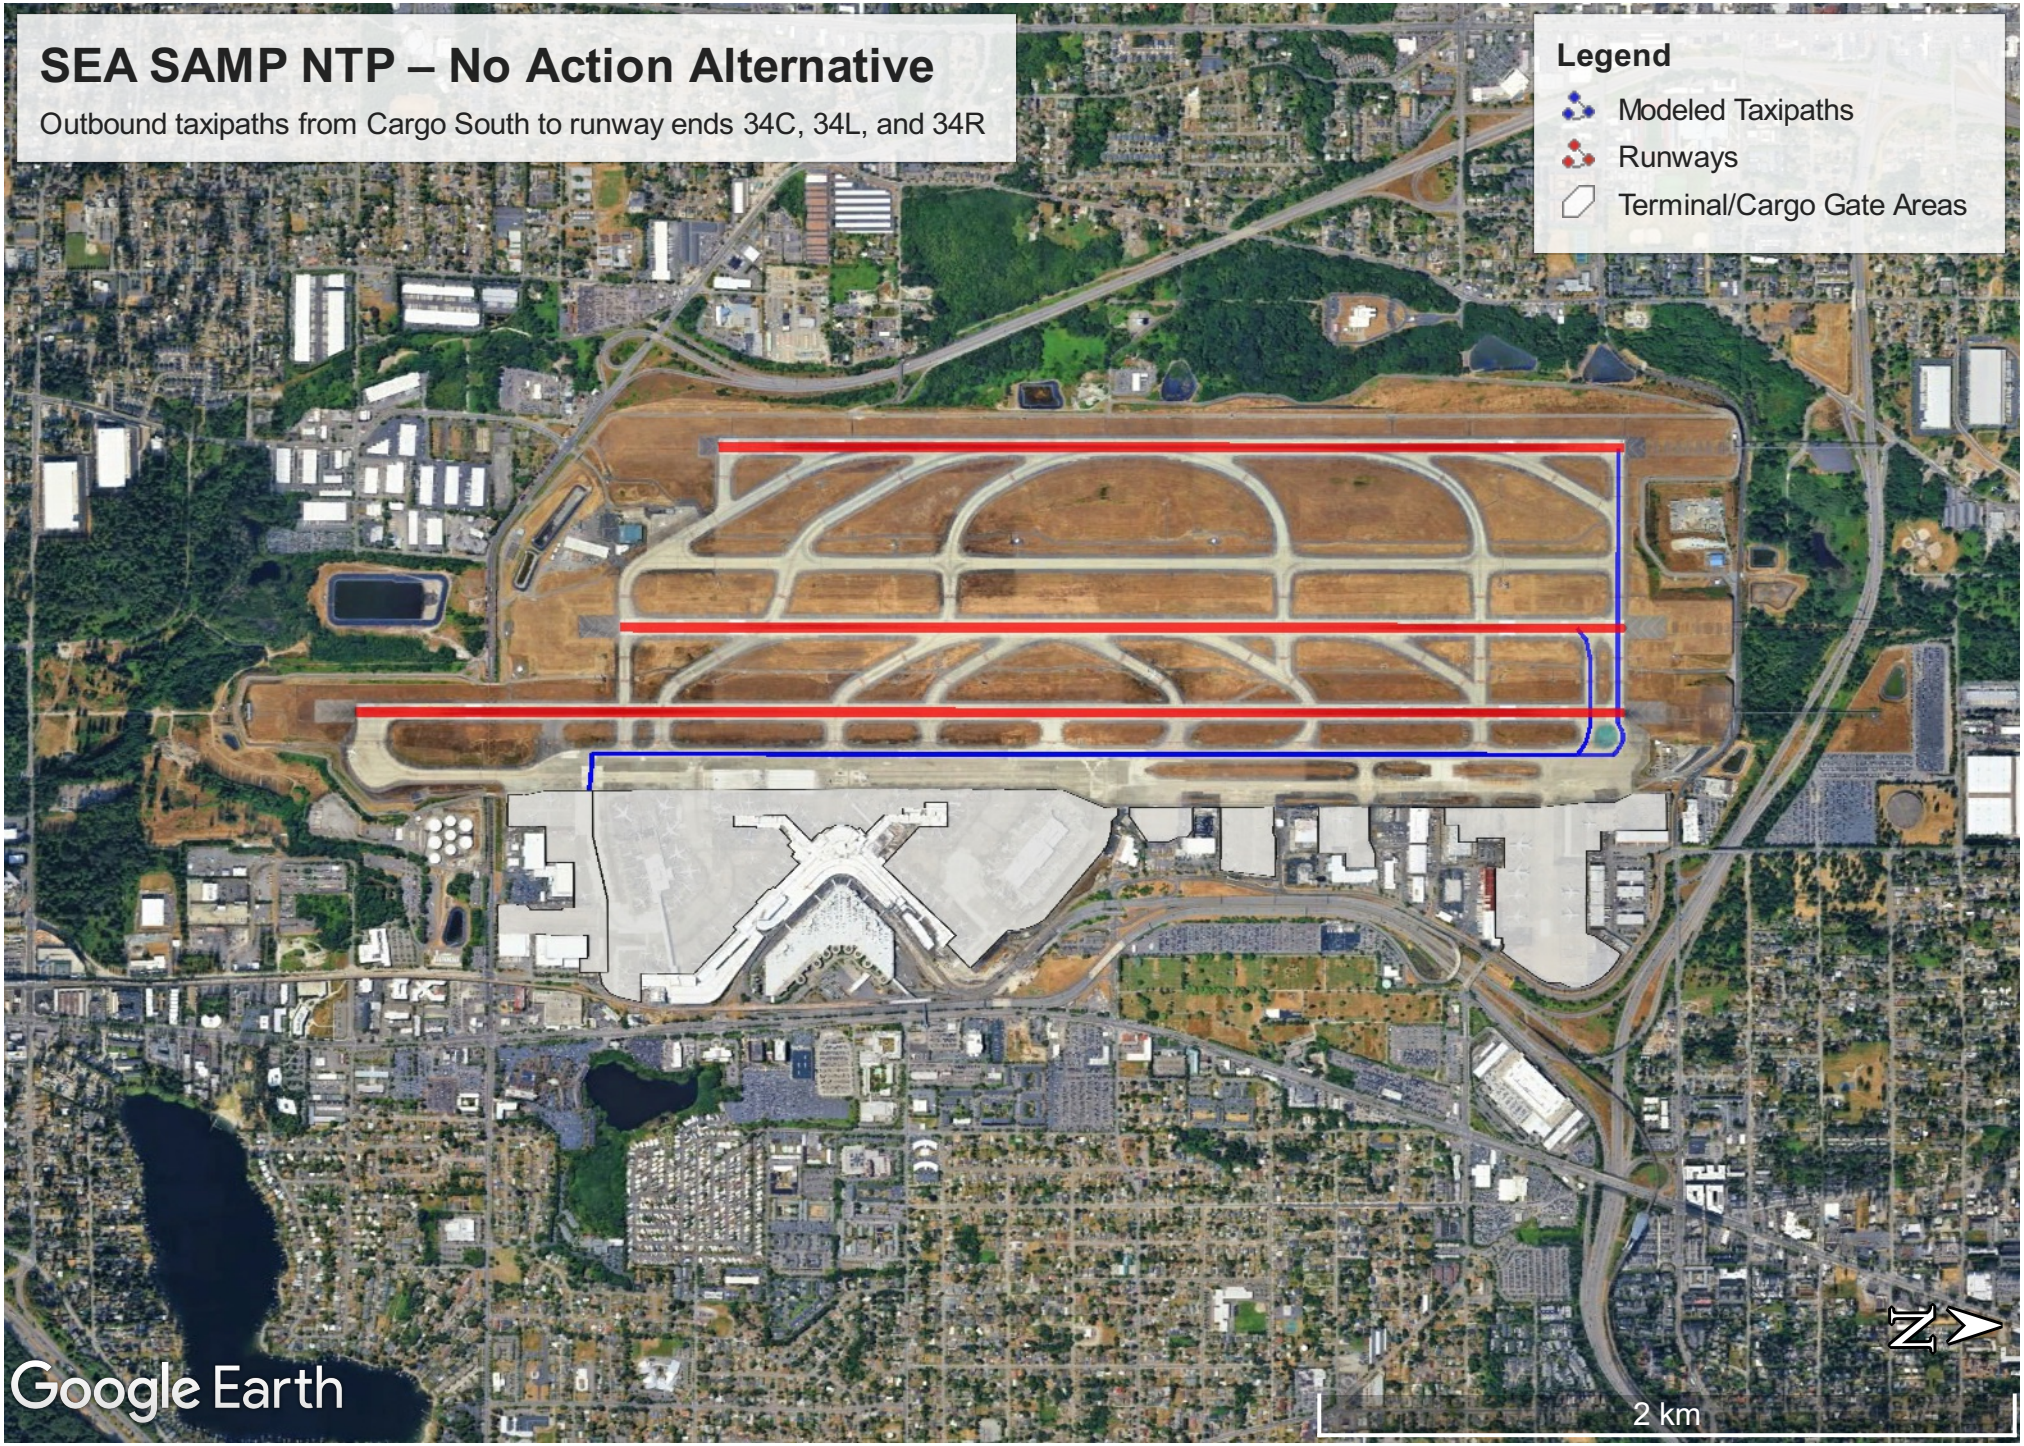
SEA SAMP NTP – No Action Alternative
Outbound taxipaths from Cargo South to runway ends 34C, 34L, and 34R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

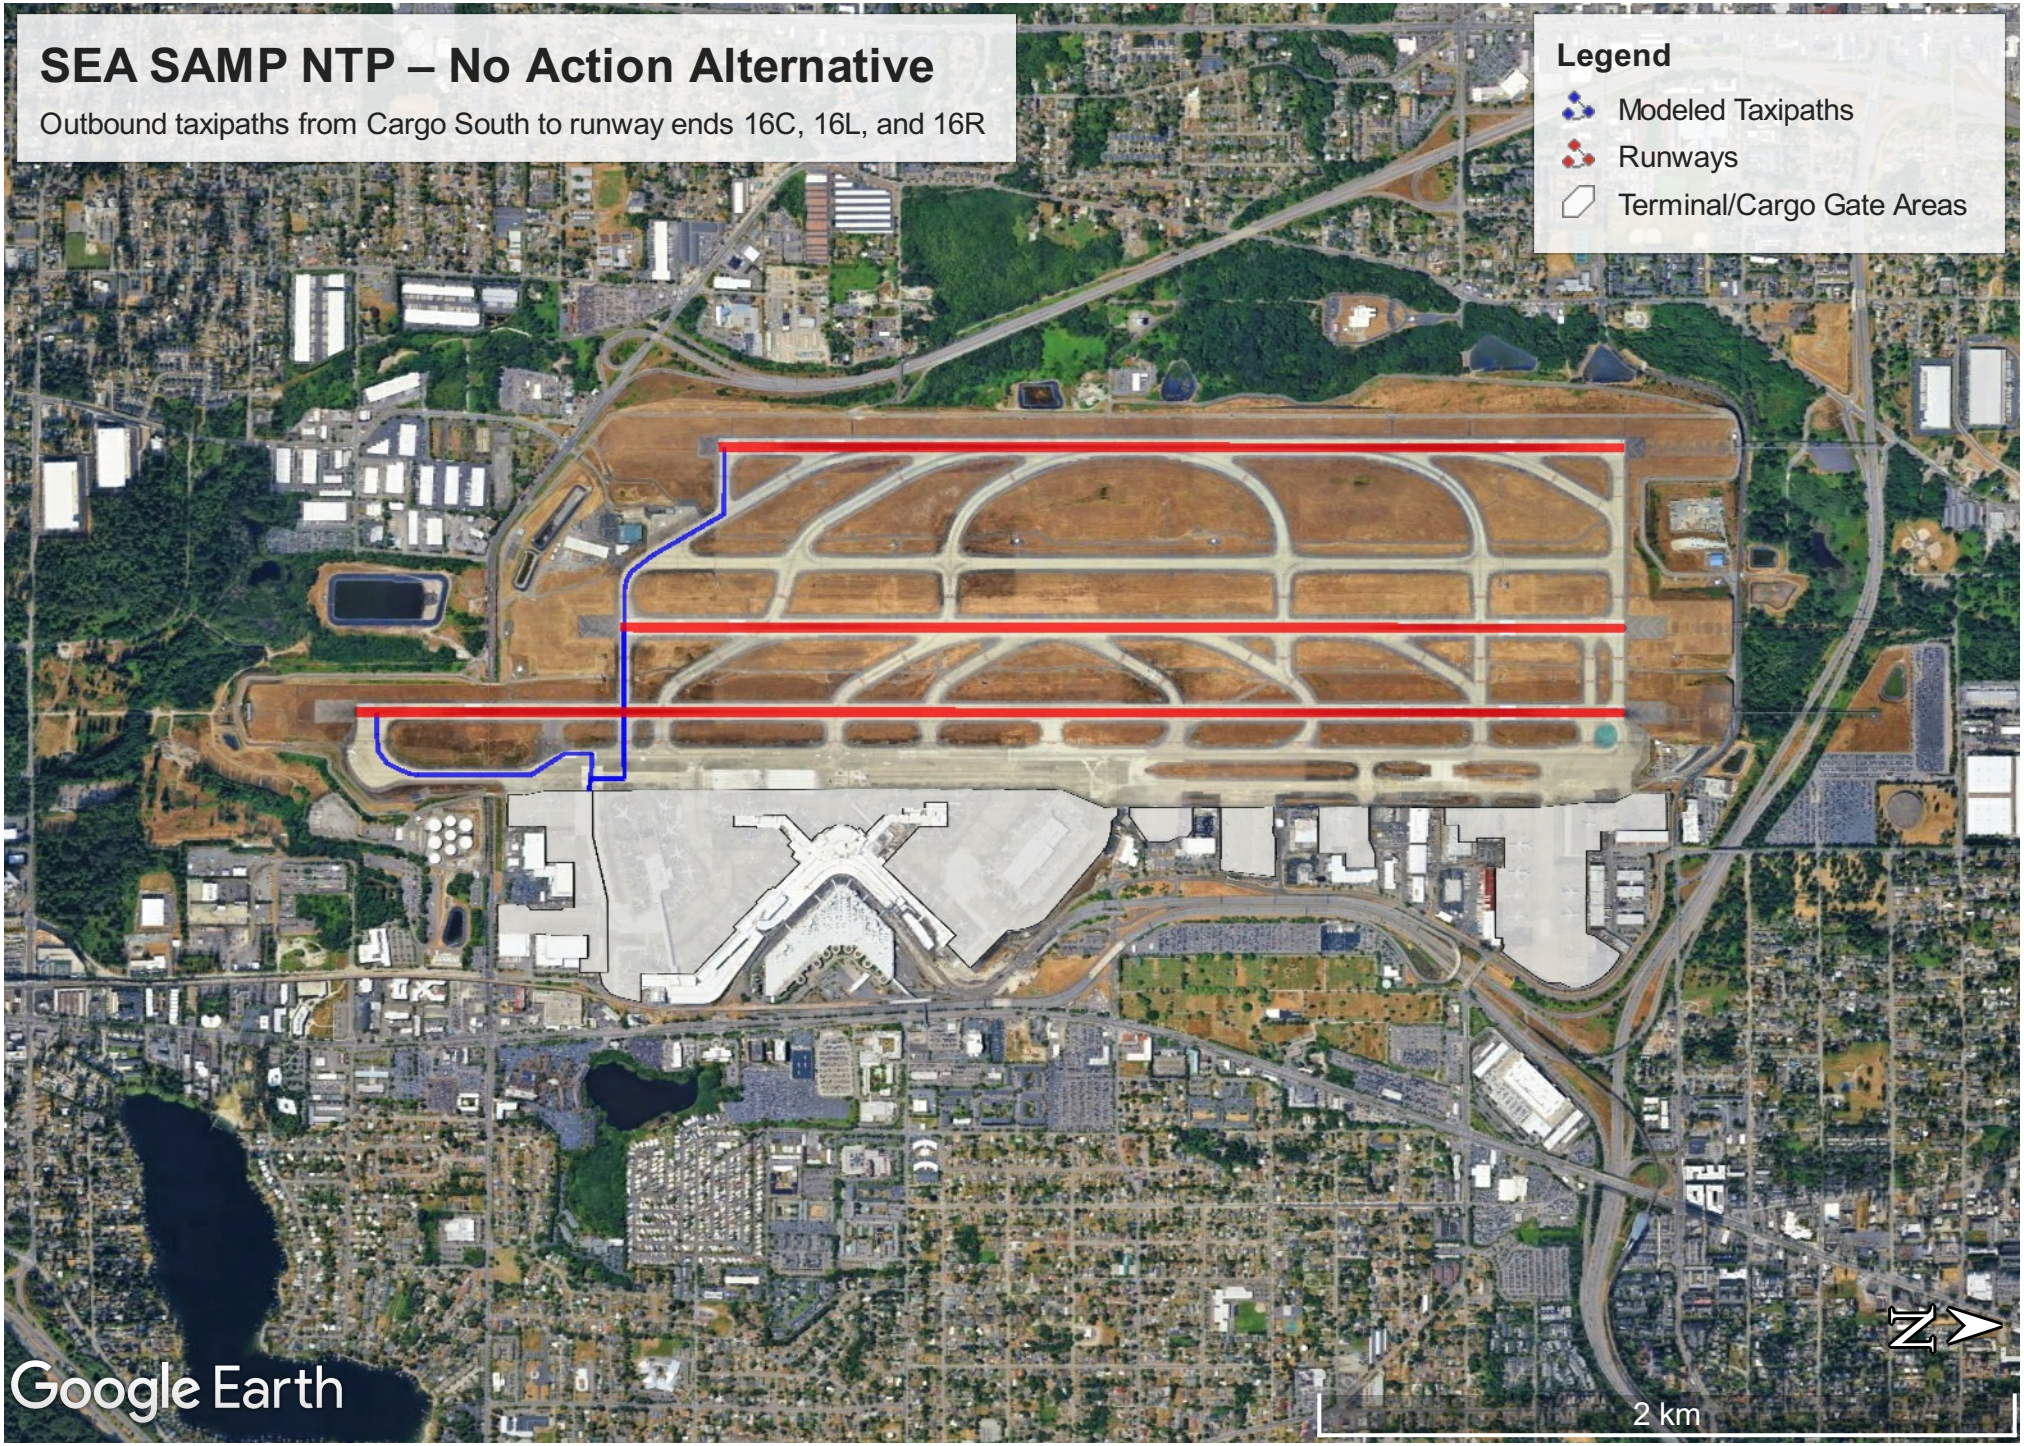
SEA SAMP NTP – No Action Alternative
Outbound taxipaths from Cargo South to runway ends 16C, 16L, and 16R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

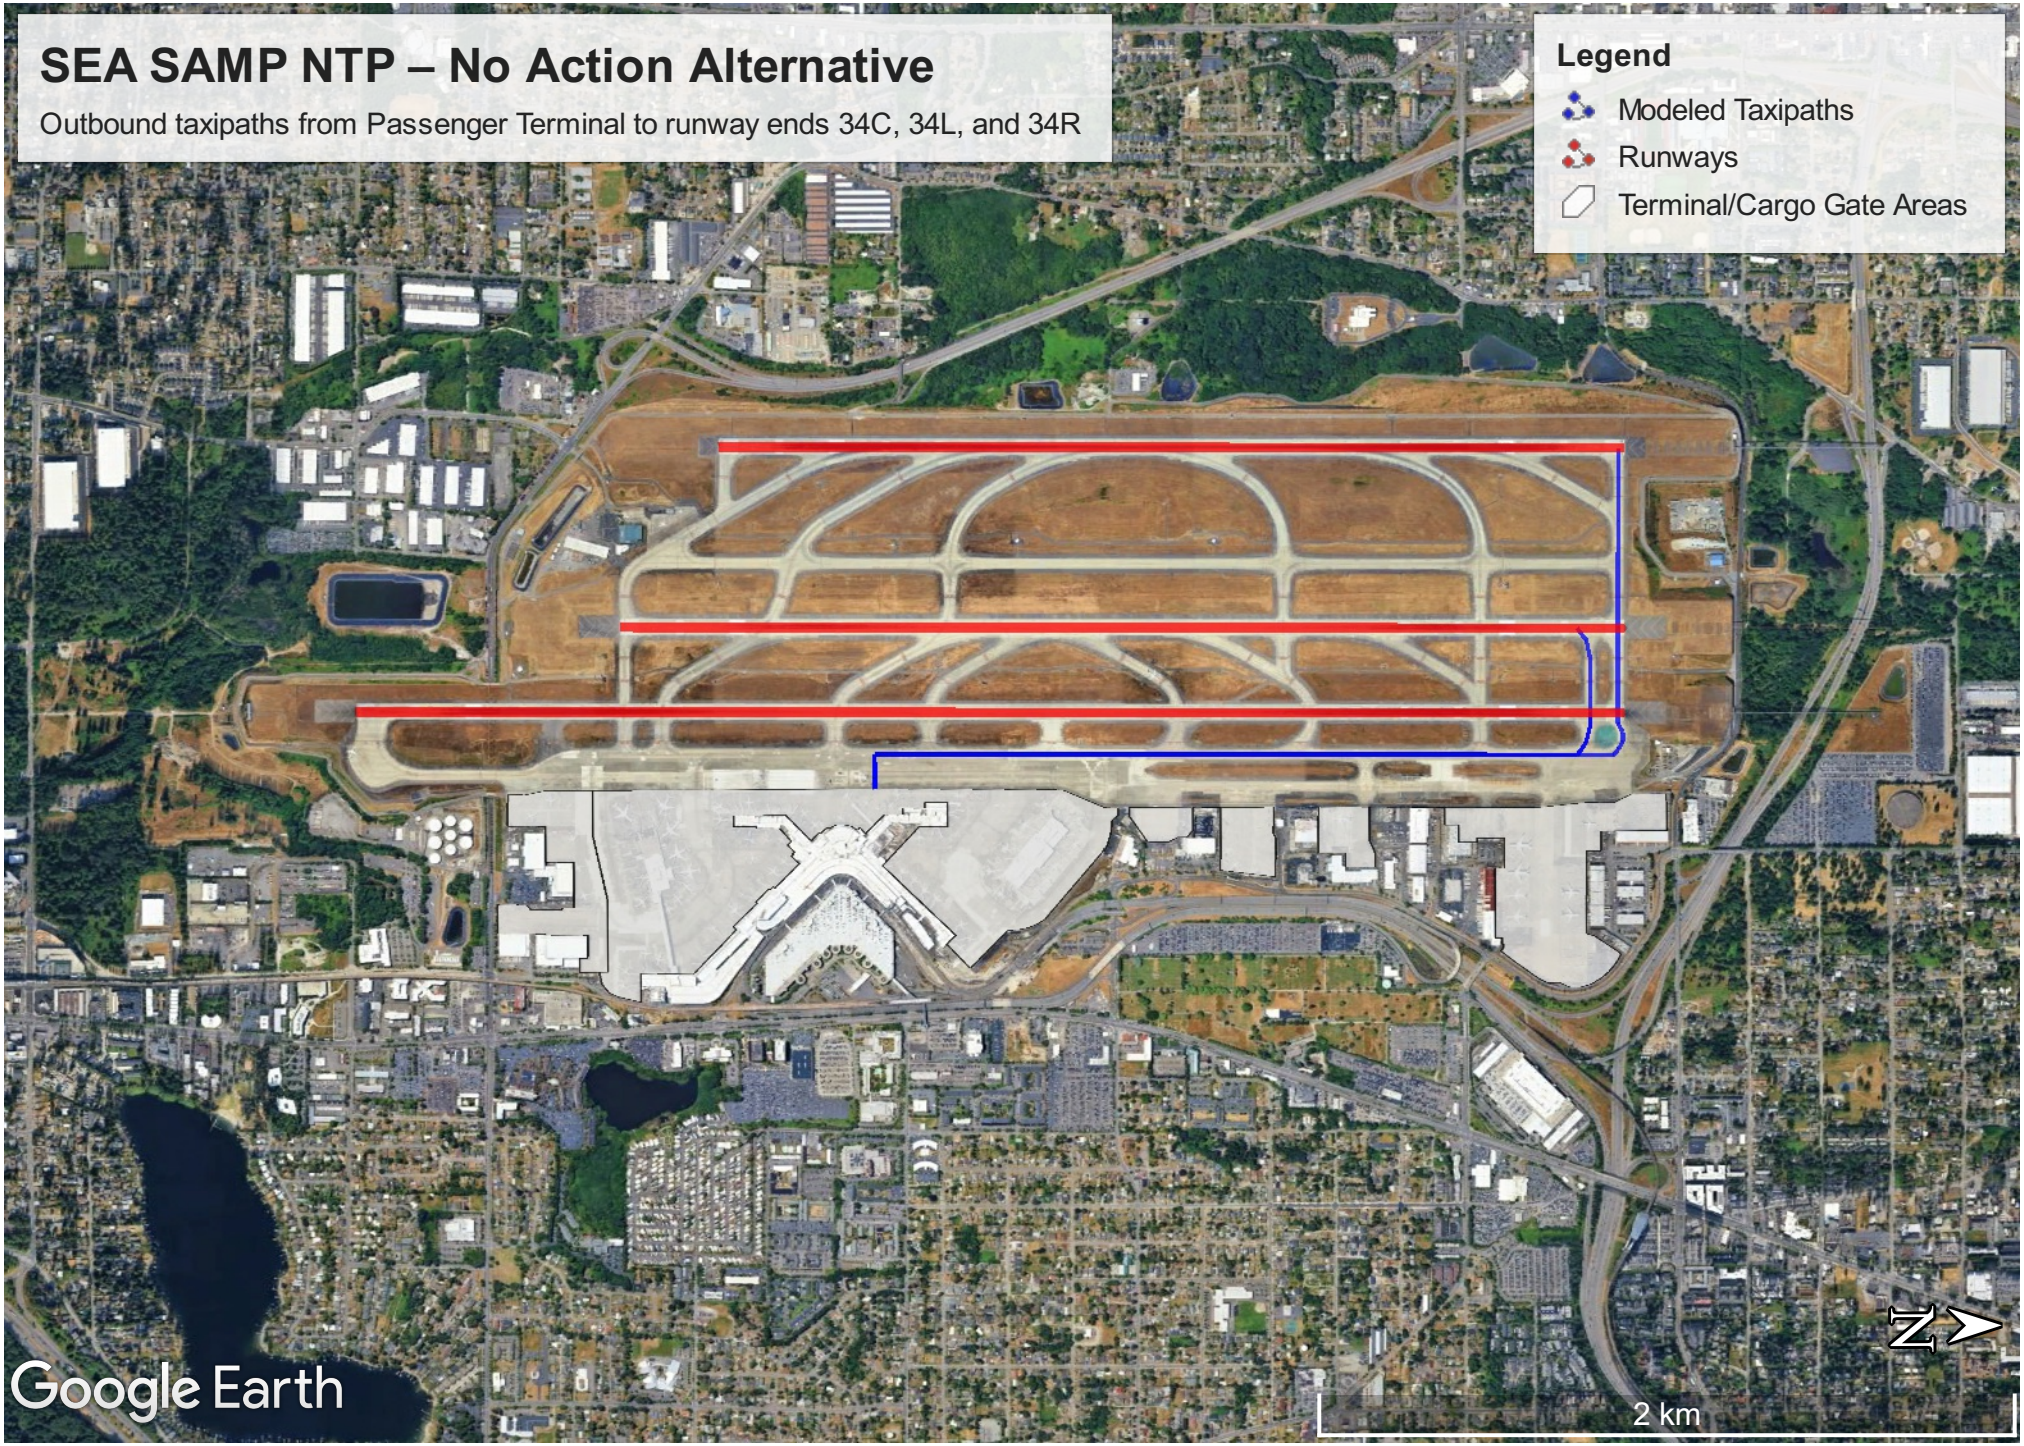
SEA SAMP NTP – No Action Alternative
Outbound taxipaths from Passenger Terminal to runway ends 34C, 34L, and 34R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

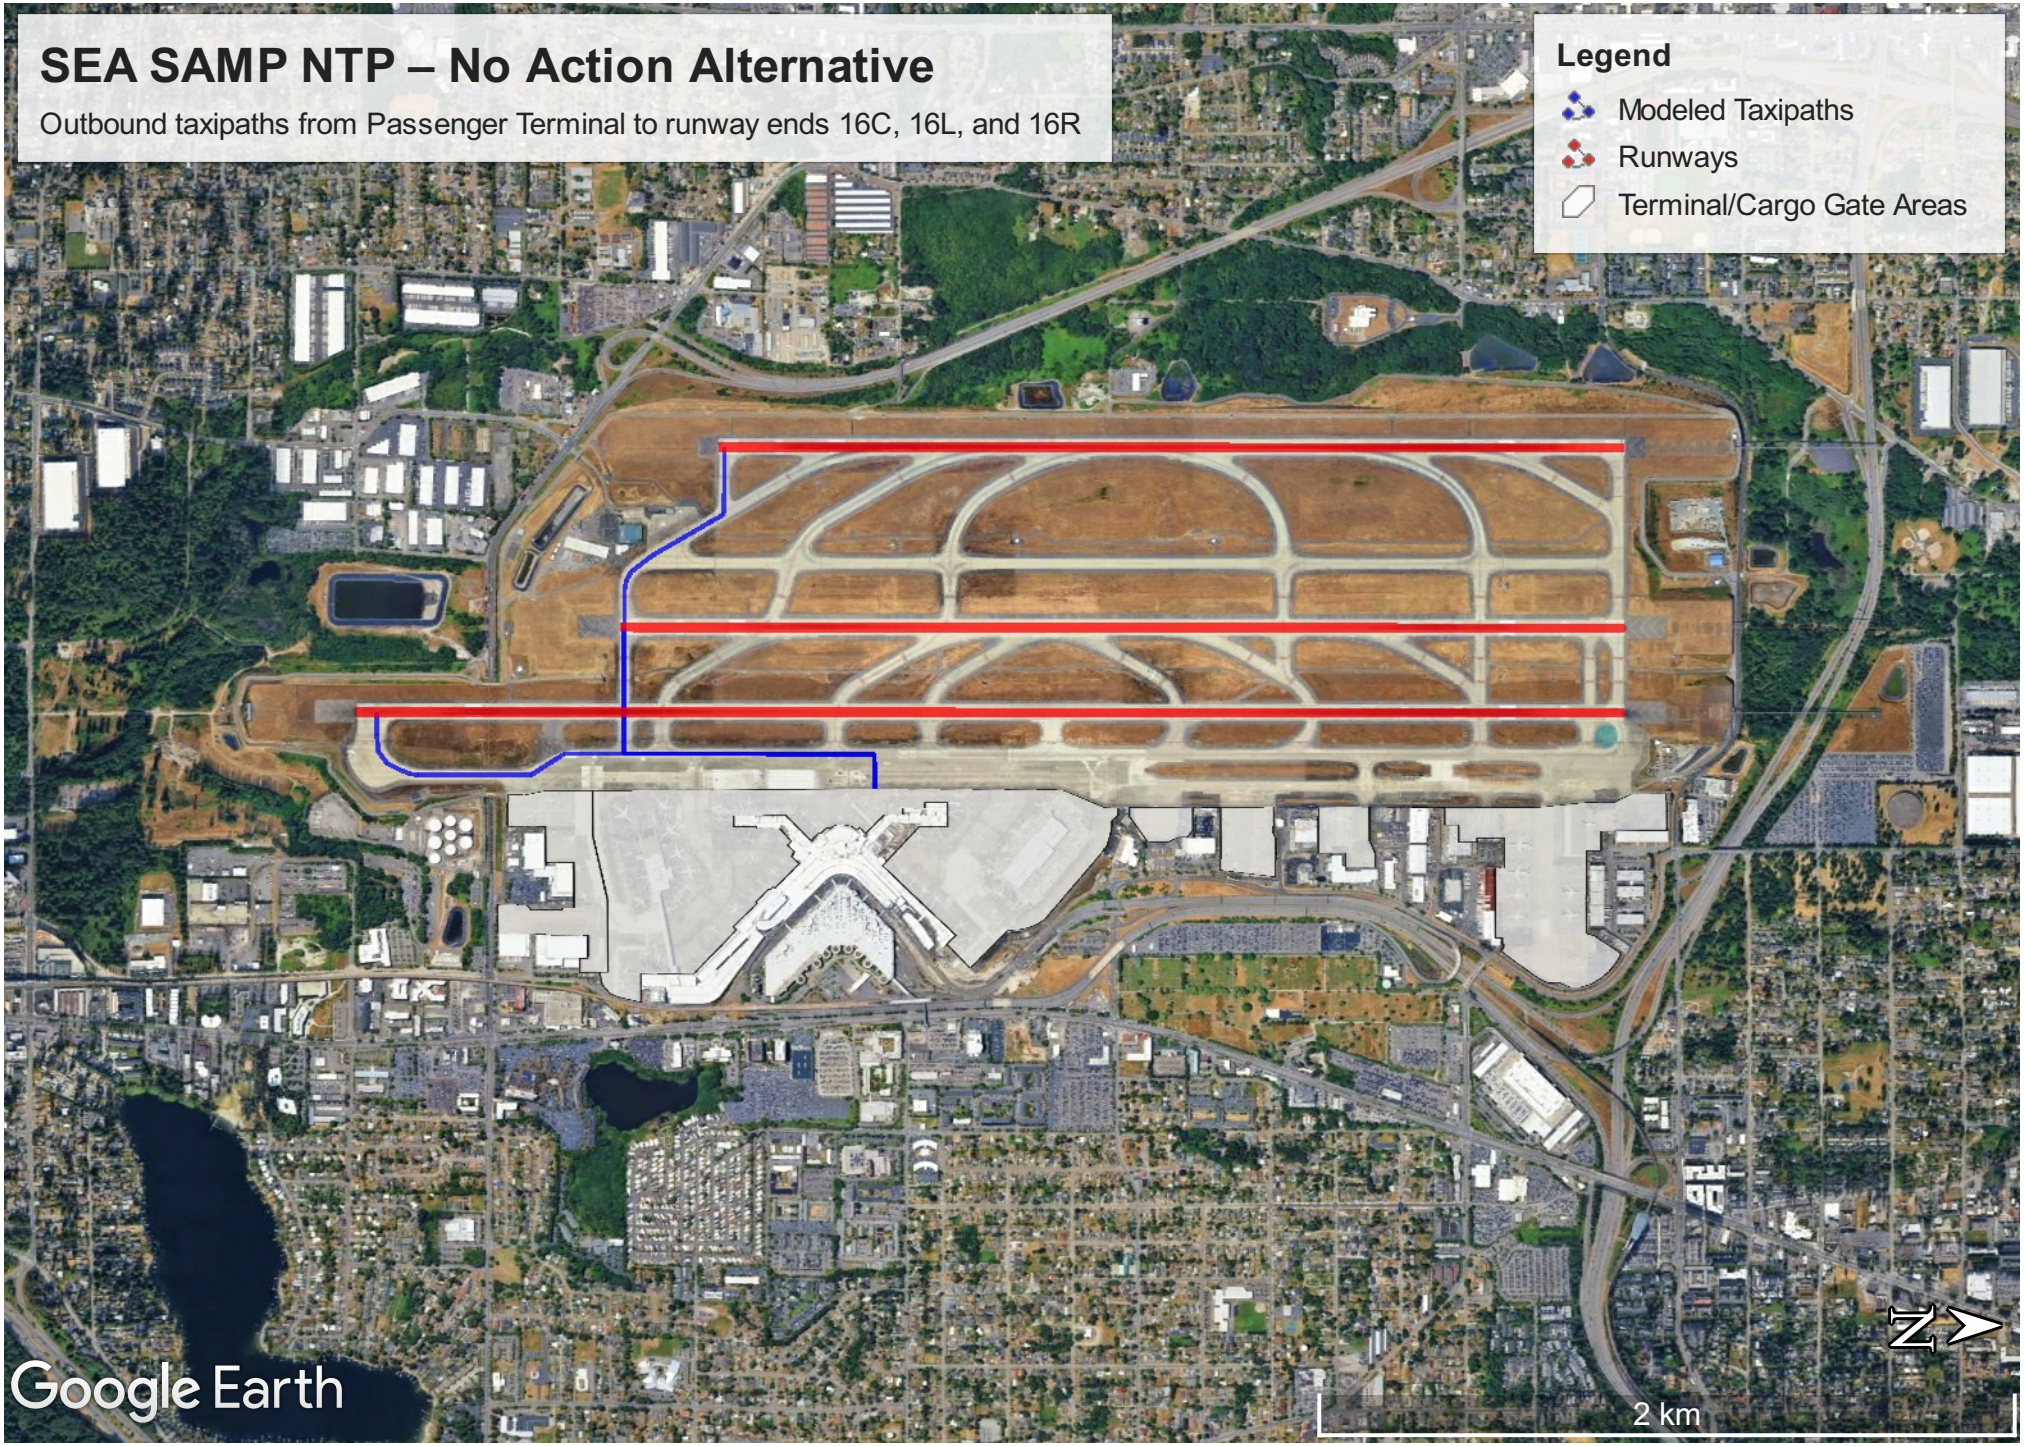
SEA SAMP NTP – No Action Alternative
Outbound taxipaths from Passenger Terminal to runway ends 16C, 16L, and 16R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

Proposed Action Airport Layout and Airfield Taxipaths for Dispersion Modeling

- Proposed Action Overall Airport Layout
- Proposed Action Runway End 16C, 16L, and 16R Inbound Taxipaths to Cargo North
- Proposed Action Runway End 16C, 16L, and 16R Inbound Taxipaths to Cargo South
- Proposed Action Runway End 16C, 16L, and 16R Inbound Taxipaths to Passenger Terminals
- Proposed Action Runway End 34C, 34L, and 34R Inbound Taxipaths to Cargo North
- Proposed Action Runway End 34C, 34L, and 34R Inbound Taxipaths to Cargo South
- Proposed Action Runway End 34C, 34L, and 34R Inbound Taxipaths to Passenger Terminals
- Proposed Action Cargo North Outbound Taxipaths to Runway End 34C, 34L, and 34R
- Proposed Action Cargo North Outbound Taxipaths to Runway End 16C, 16L, and 16R
- Proposed Action Cargo South Outbound Taxipaths to Runway End 34C, 34L, and 34R
- Proposed Action Cargo South Outbound Taxipaths to Runway End 16C, 16L, and 16R
- Proposed Action Passenger Terminals Outbound Taxipaths to Runway End 34C, 34L, and 34R
- Proposed Action Passenger Terminals Outbound Taxipaths to Runway End 16C, 16L, and 16R

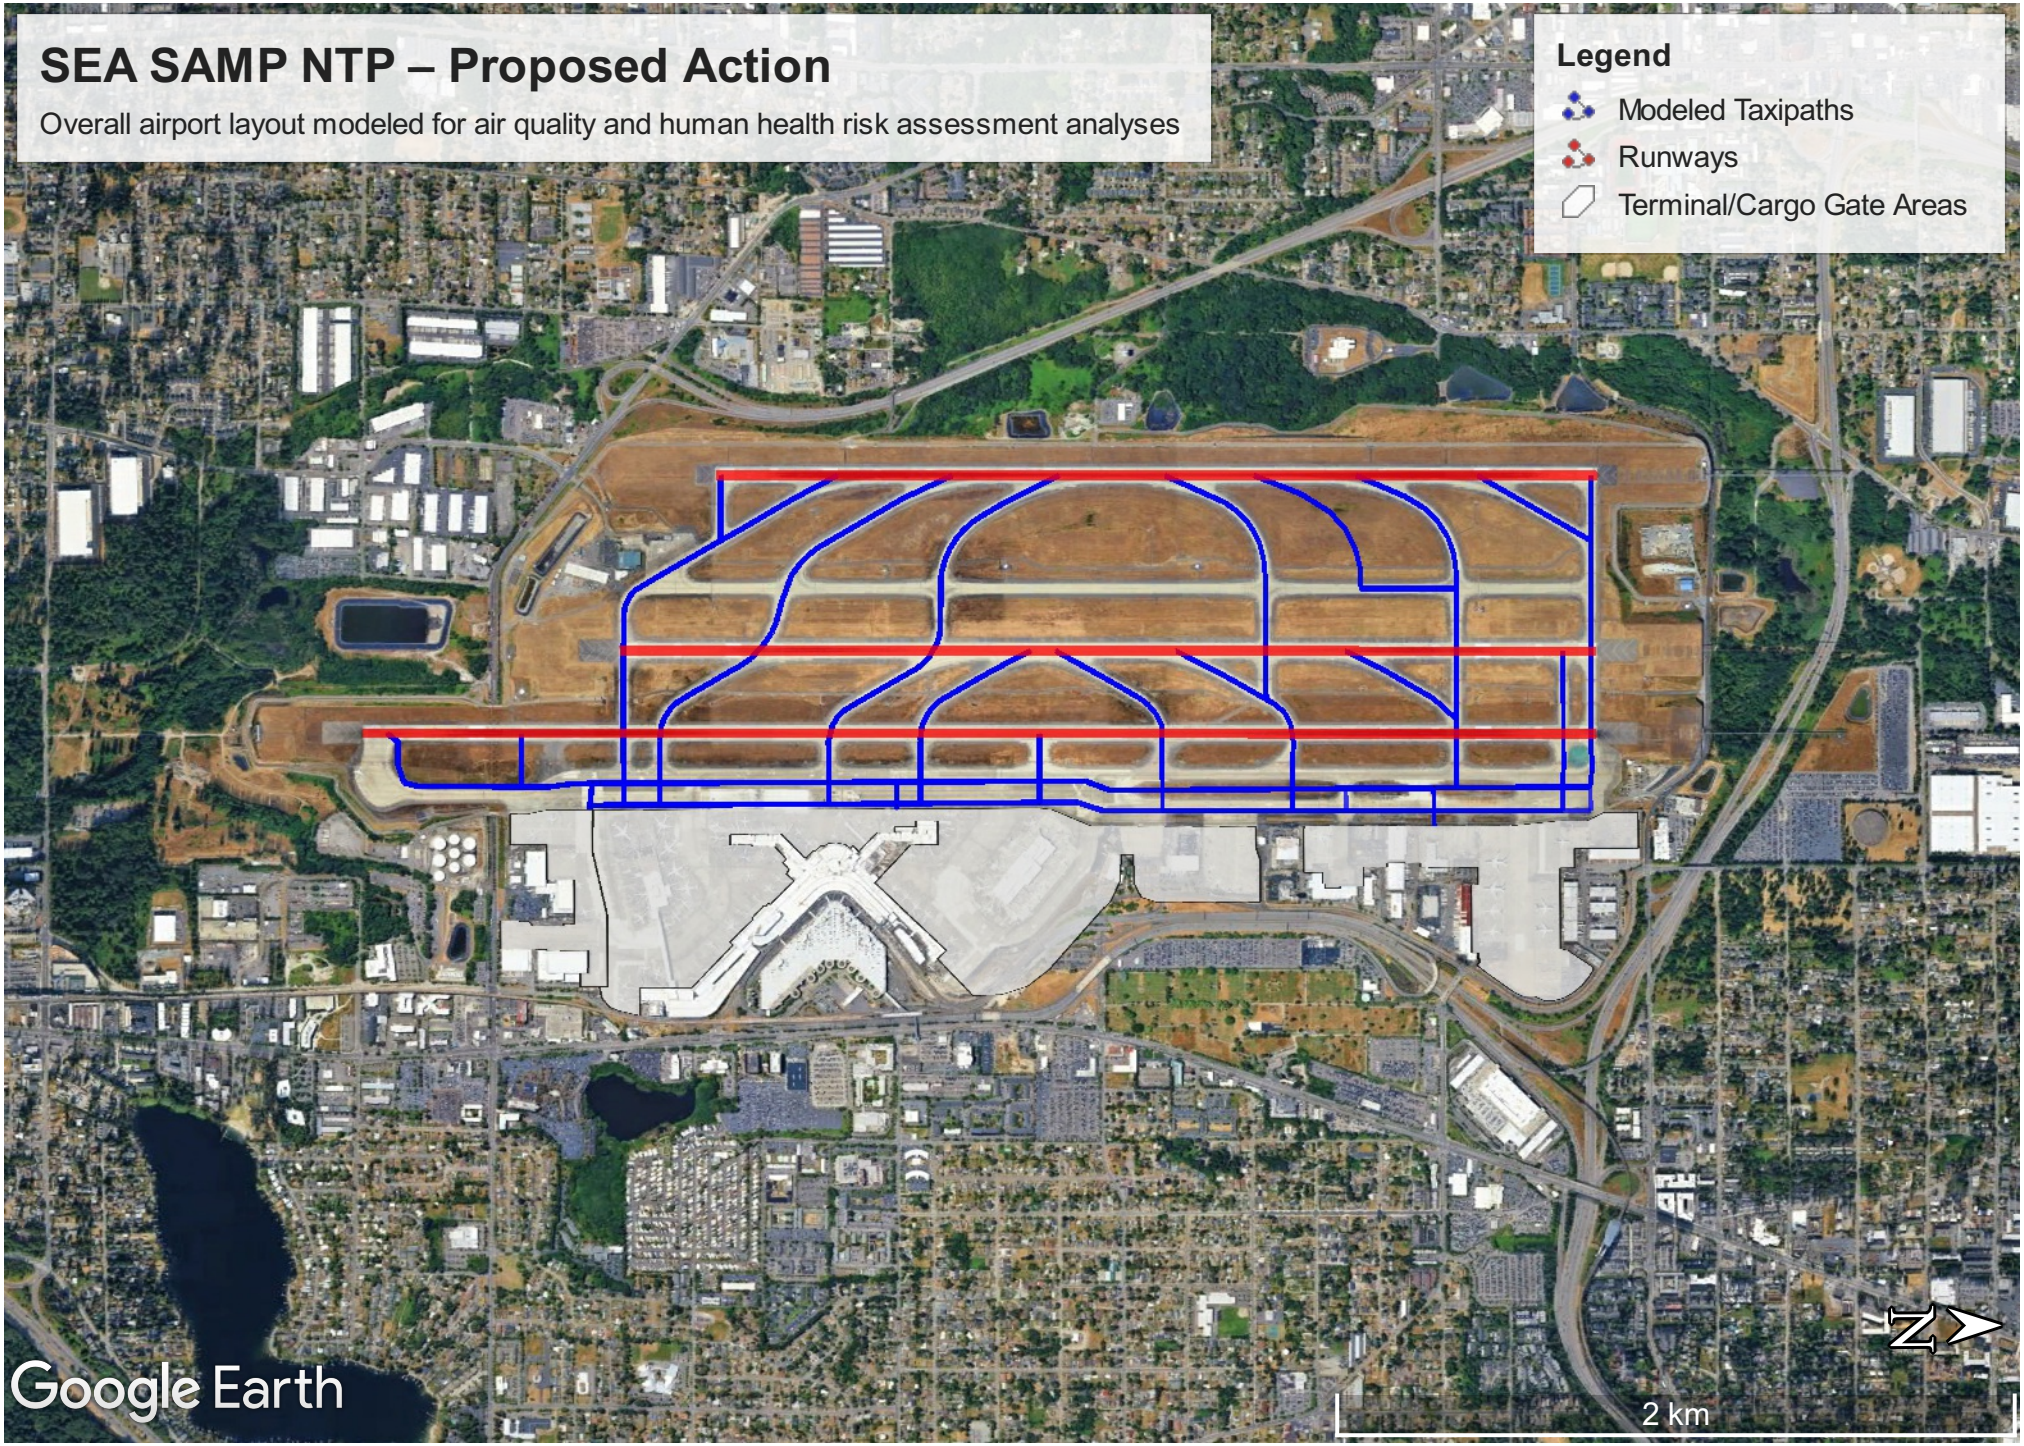
SEA SAMP NTP – Proposed Action
Overall airport layout modeled for air quality and human health risk assessment analyses
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km

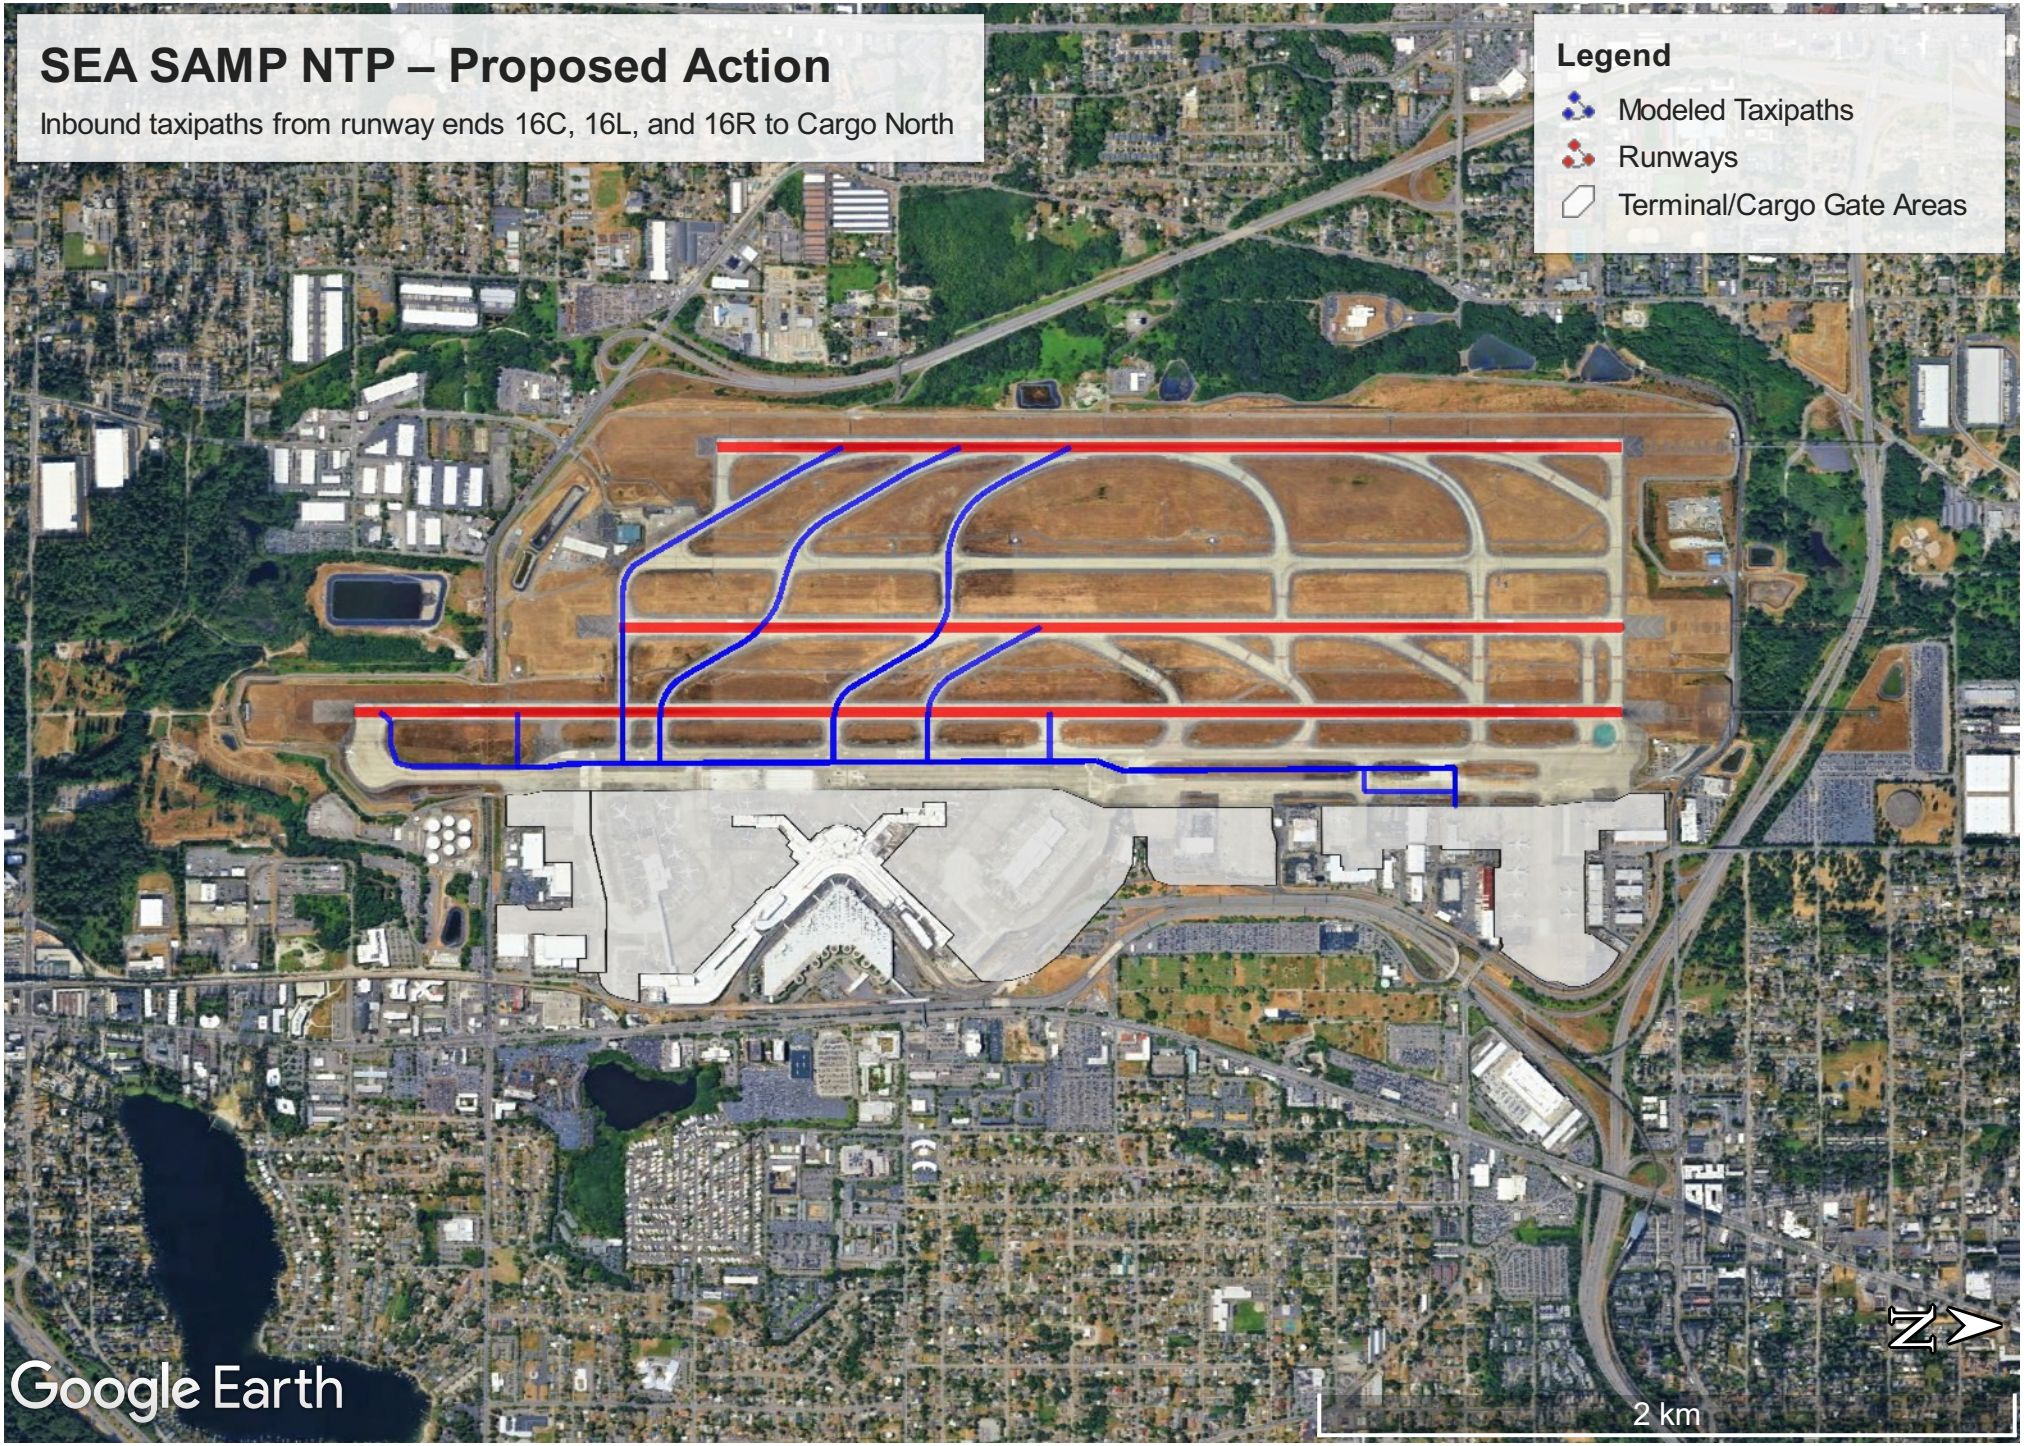
SEA SAMP NTP – Proposed Action
Inbound taxipaths from runway ends 16C, 16L, and 16R to Cargo North
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

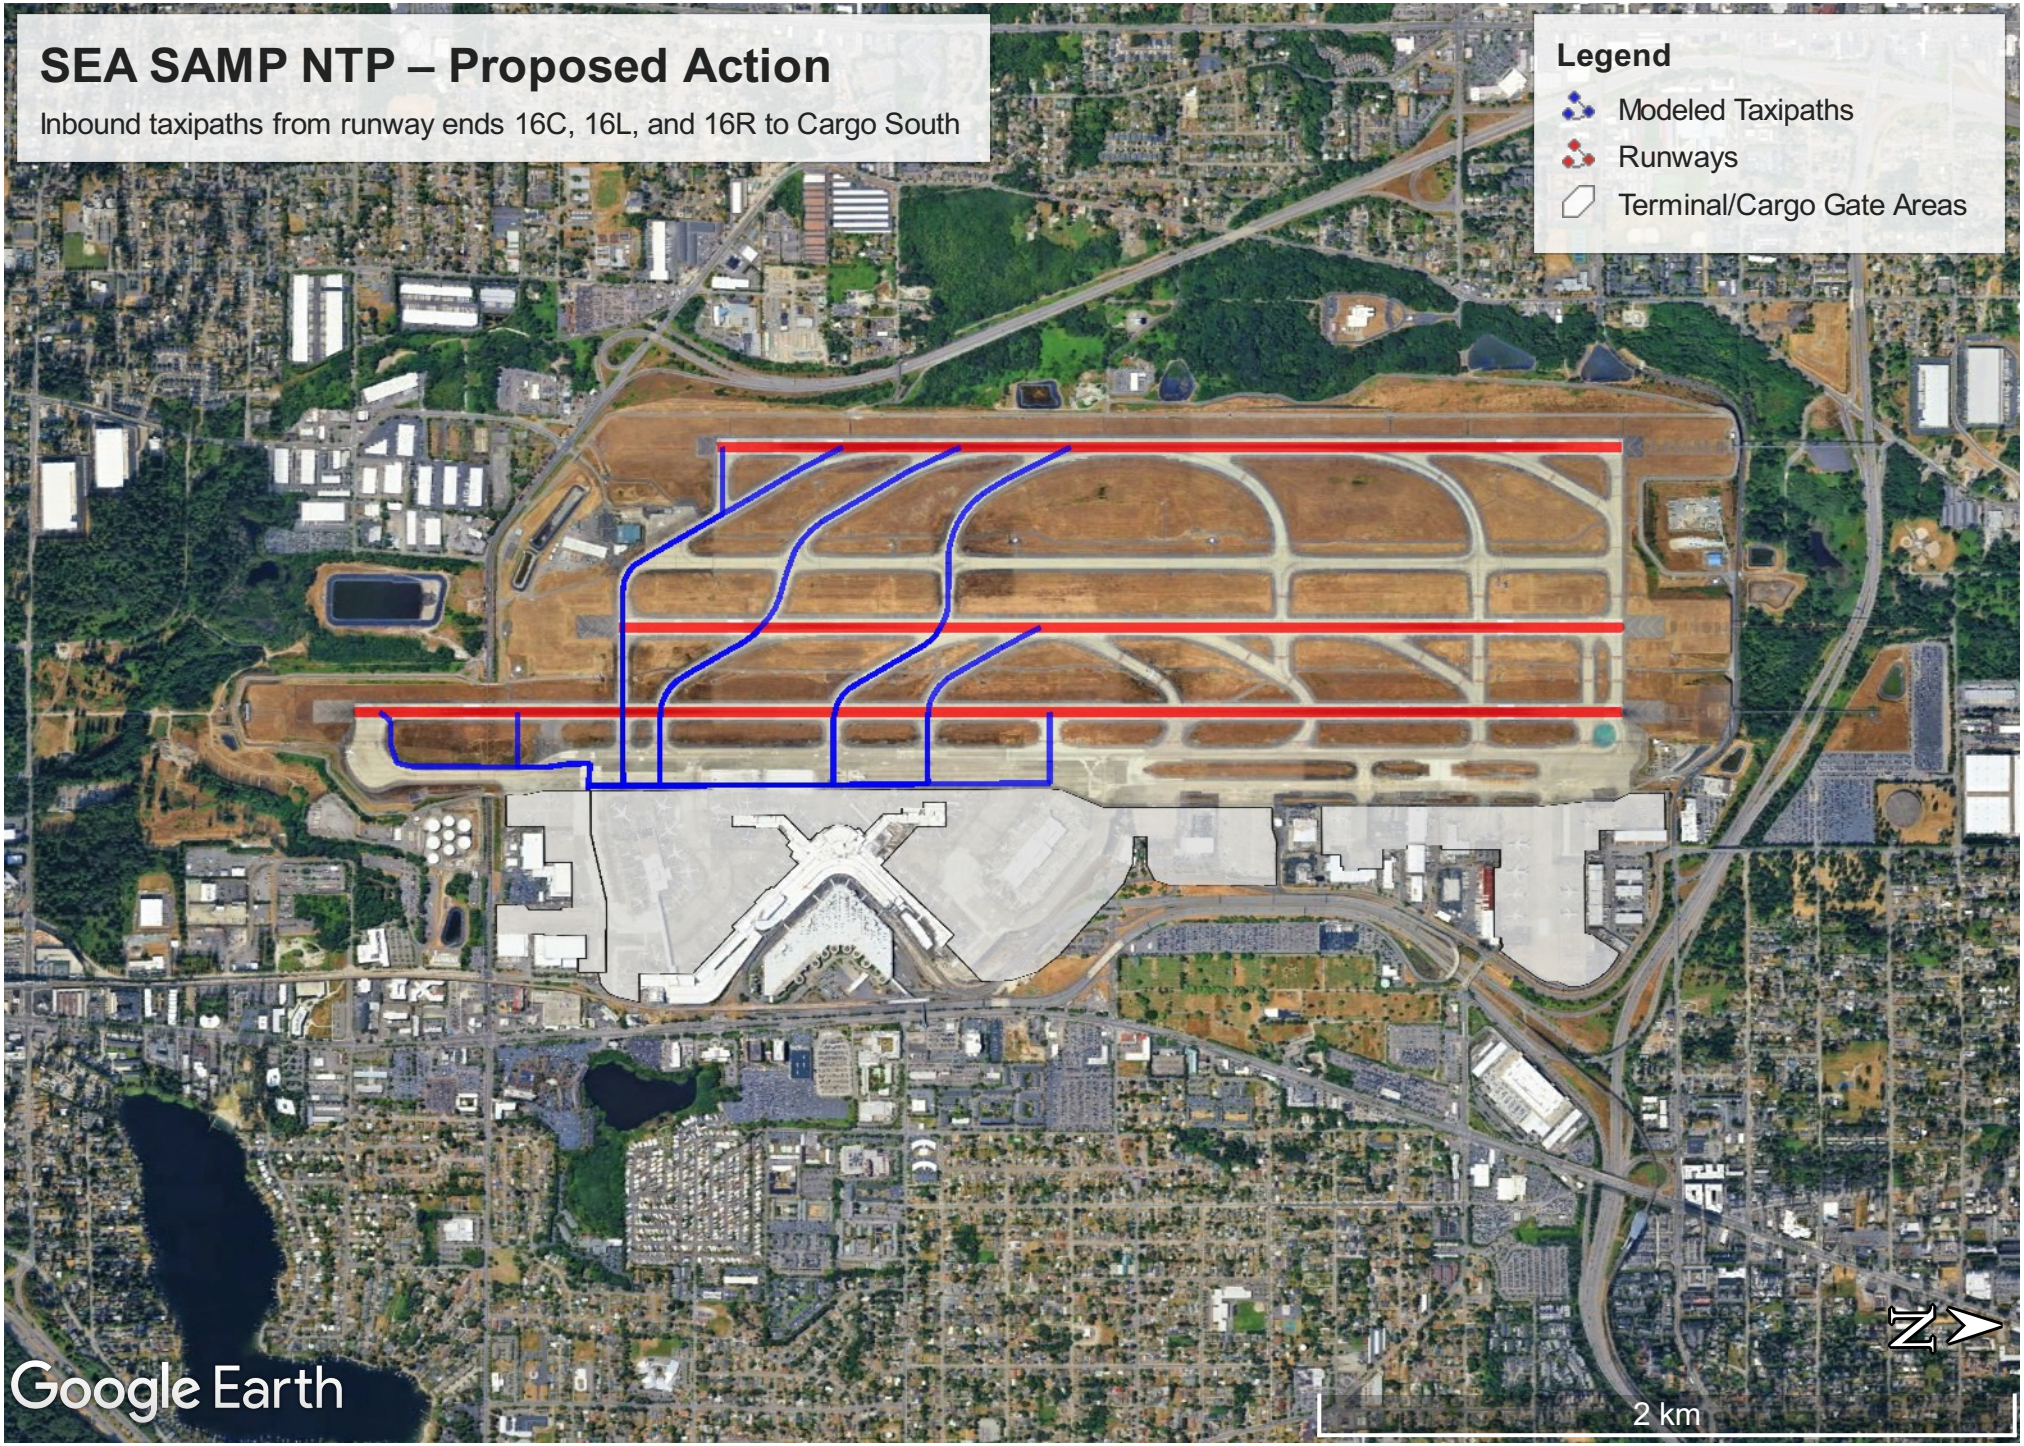
SEA SAMP NTP – Proposed Action
Inbound taxipaths from runway ends 16C, 16L, and 16R to Cargo South
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

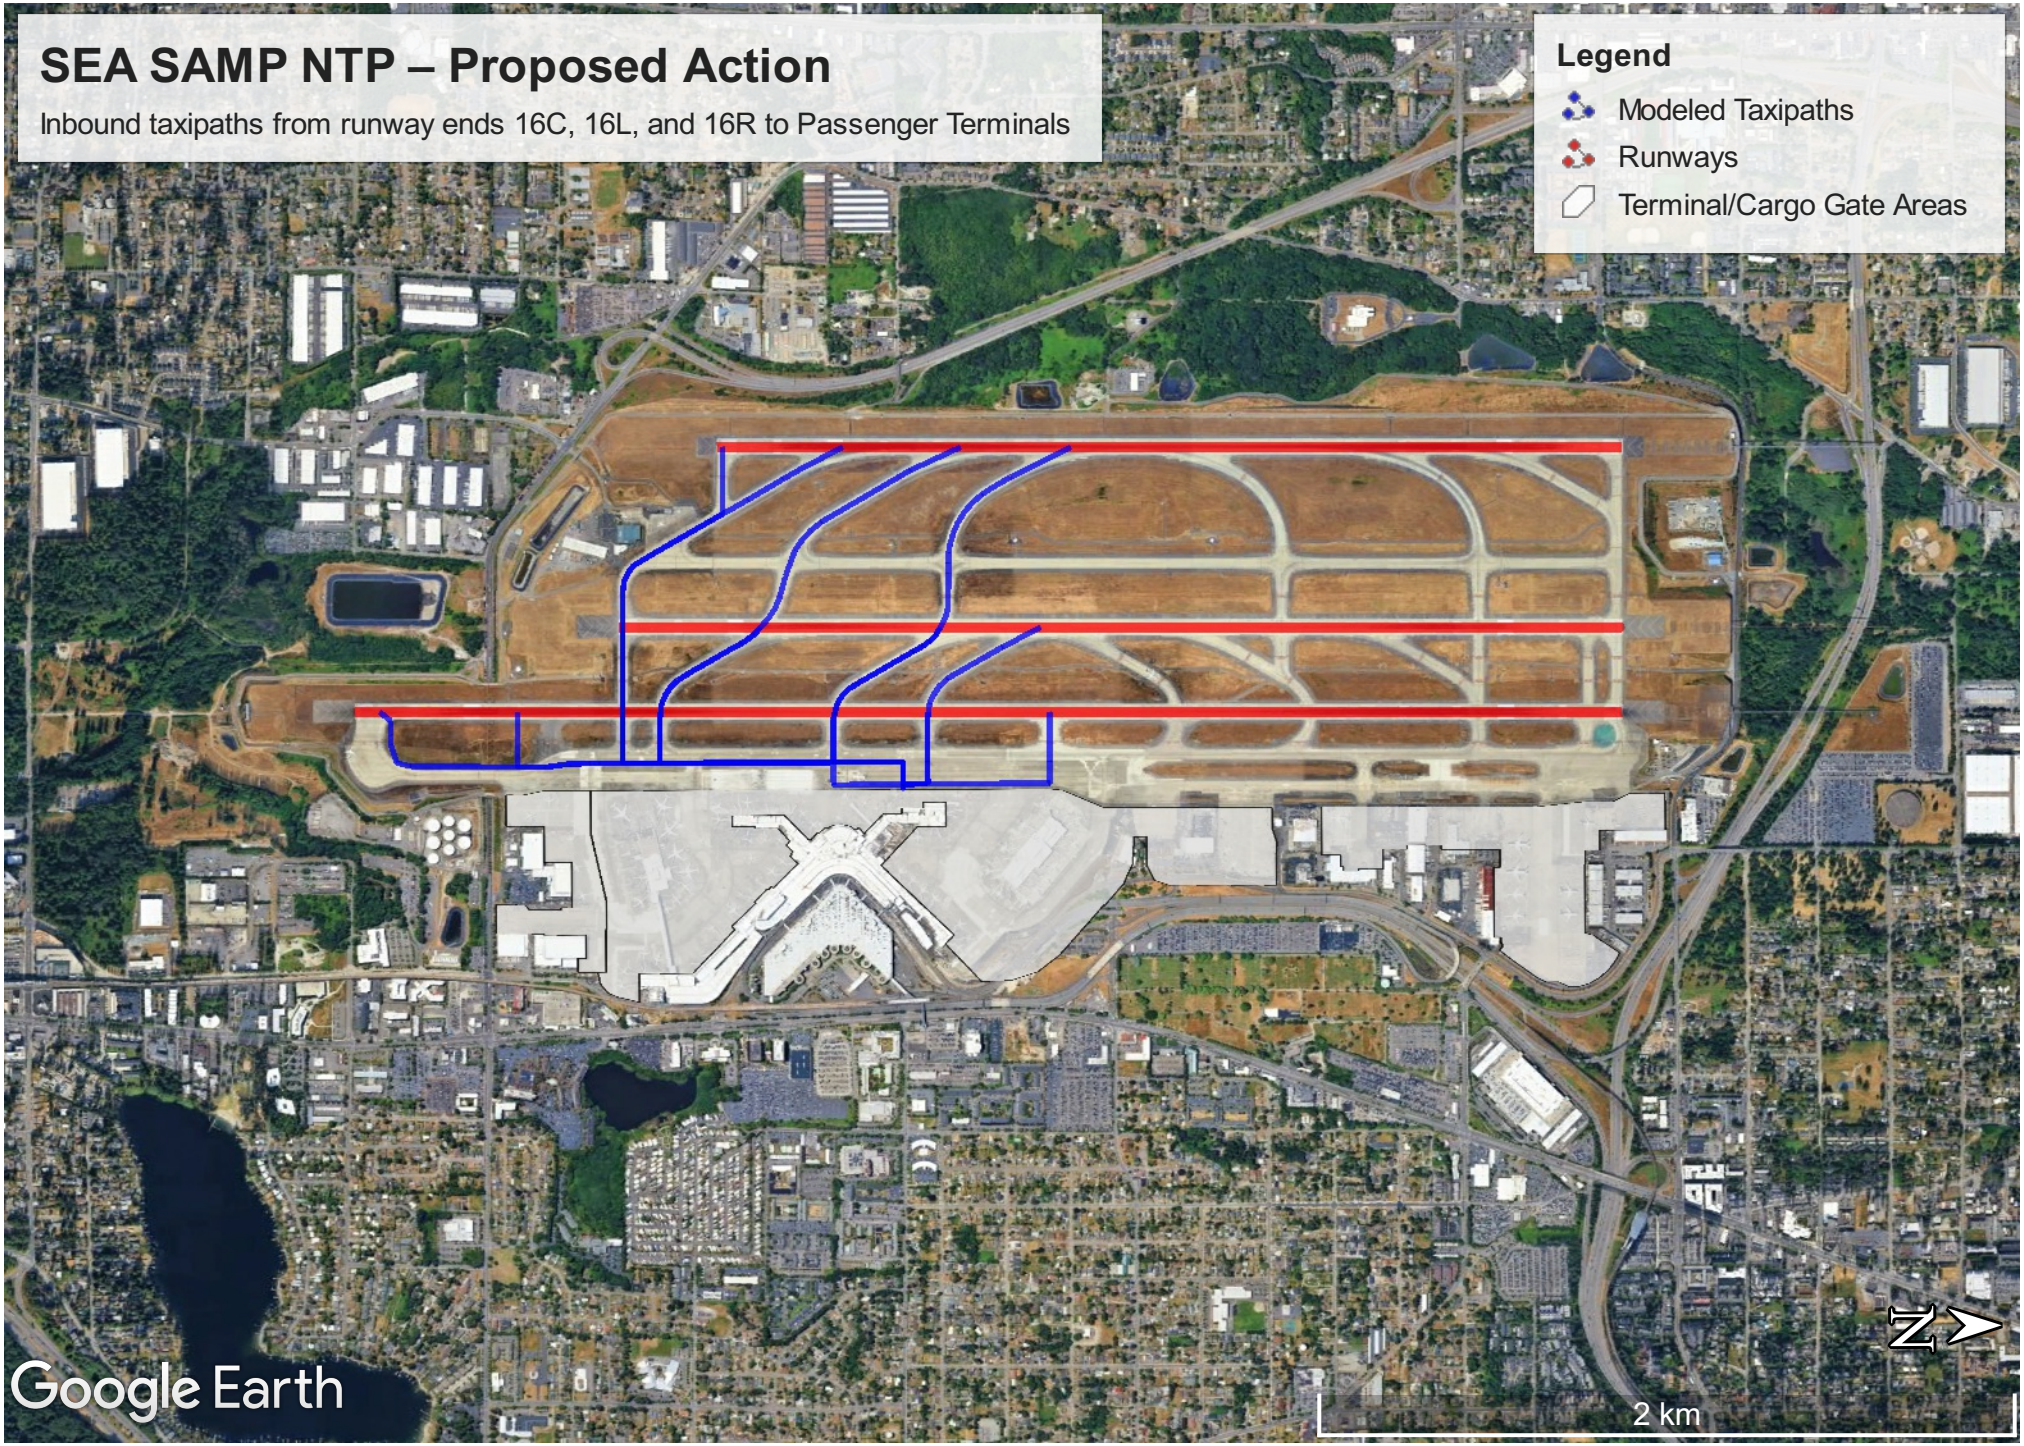
SEA SAMP NTP – Proposed Action
Inbound taxipaths from runway ends 16C, 16L, and 16R to Passenger Terminals
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

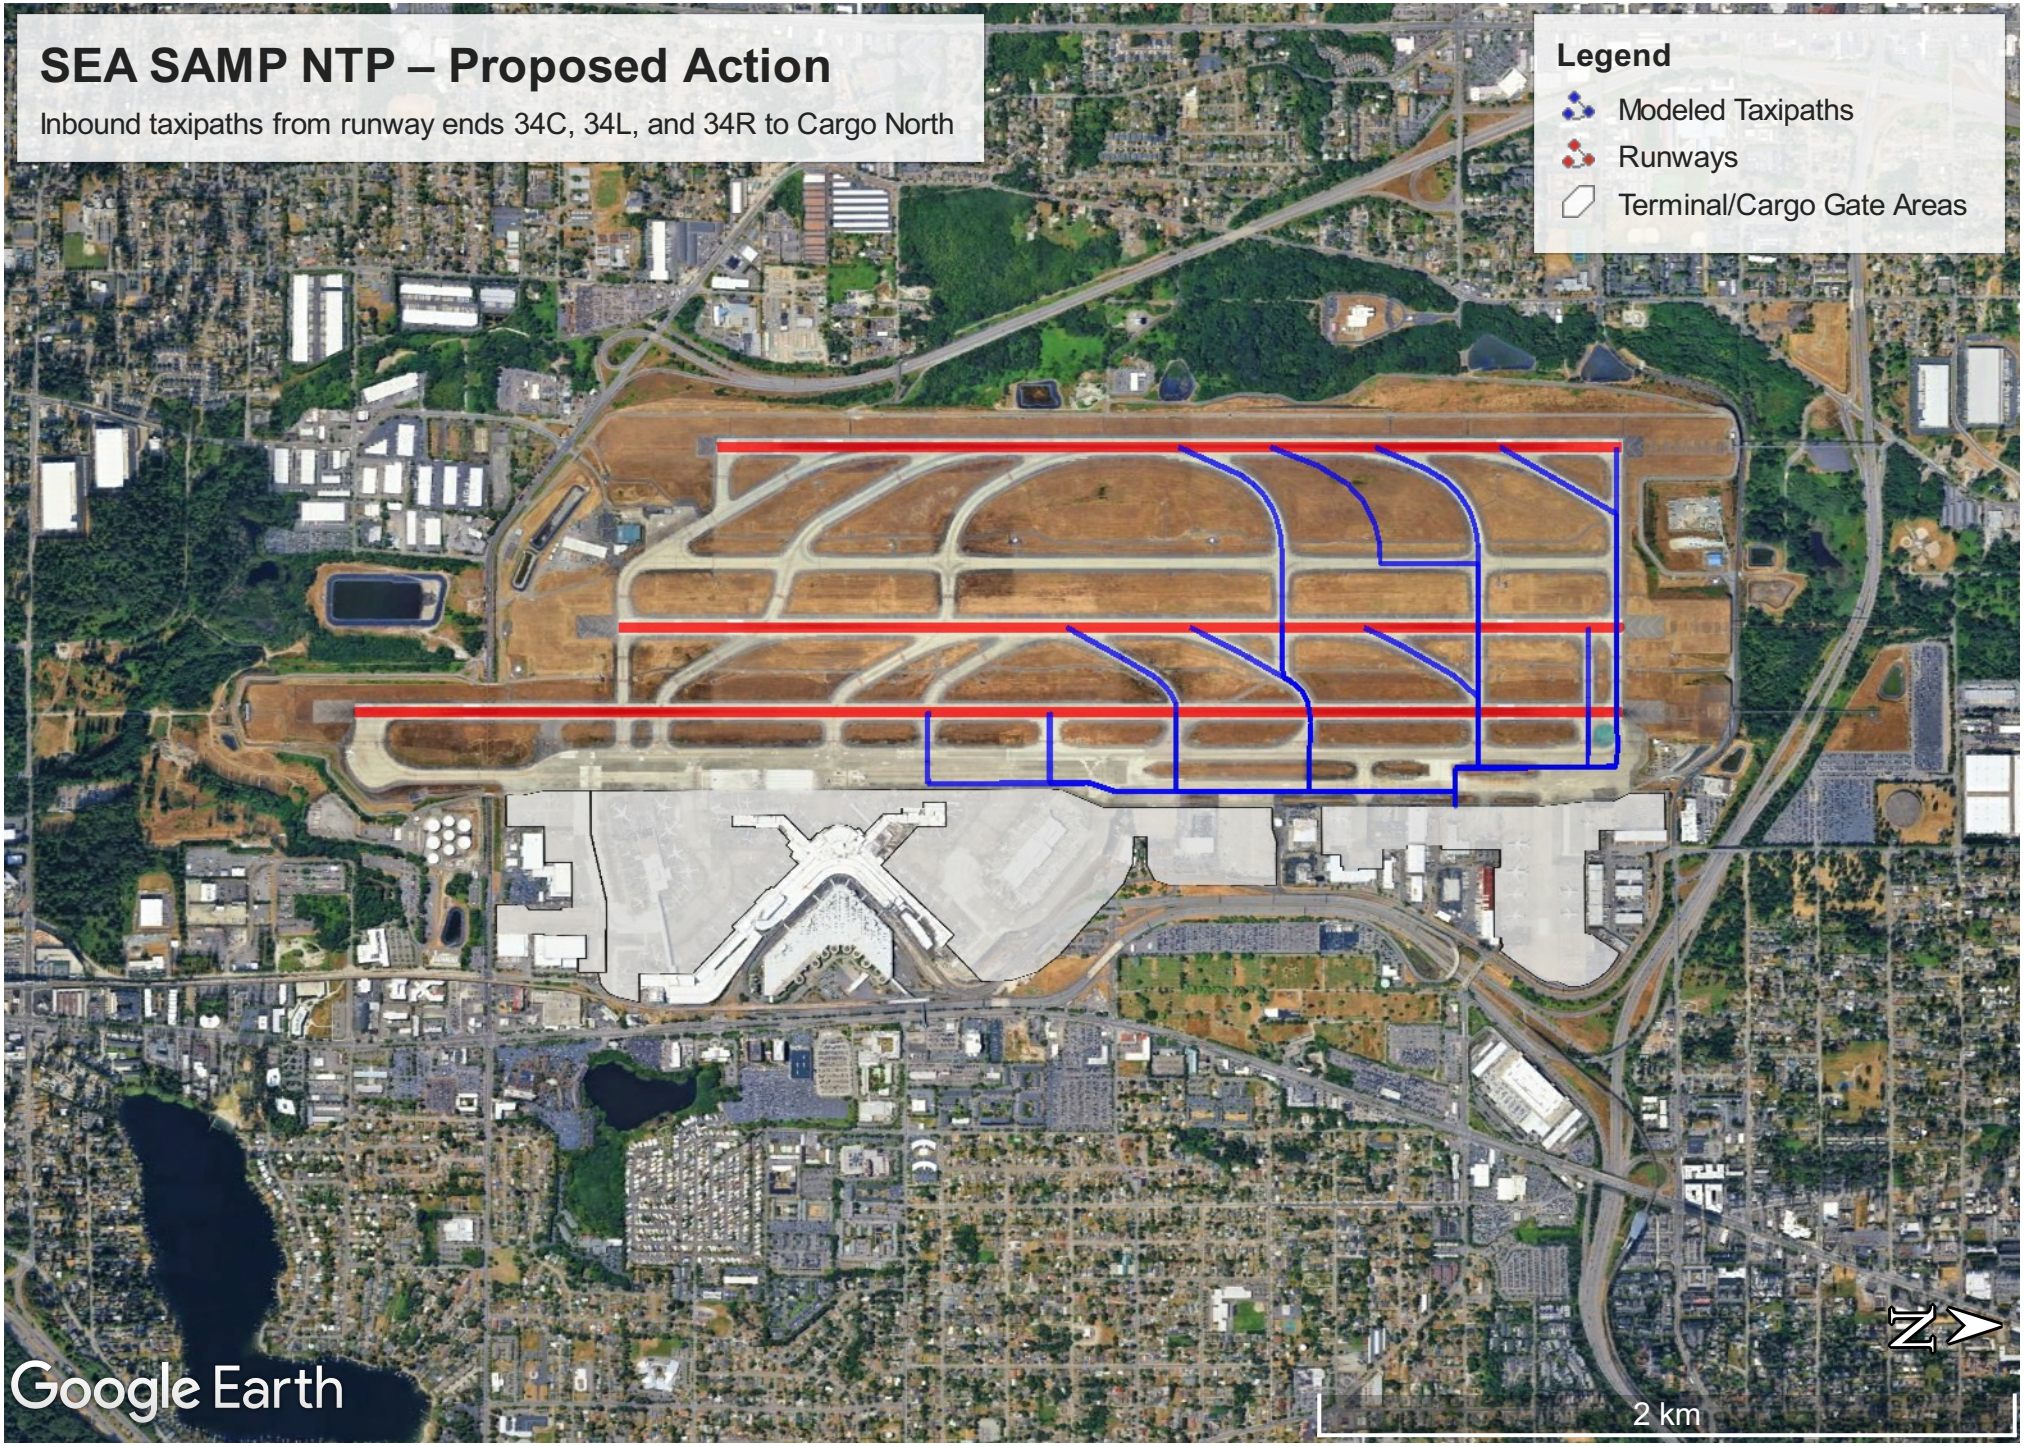
SEA SAMP NTP – Proposed Action
Inbound taxipaths from runway ends 34C, 34L, and 34R to Cargo North
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

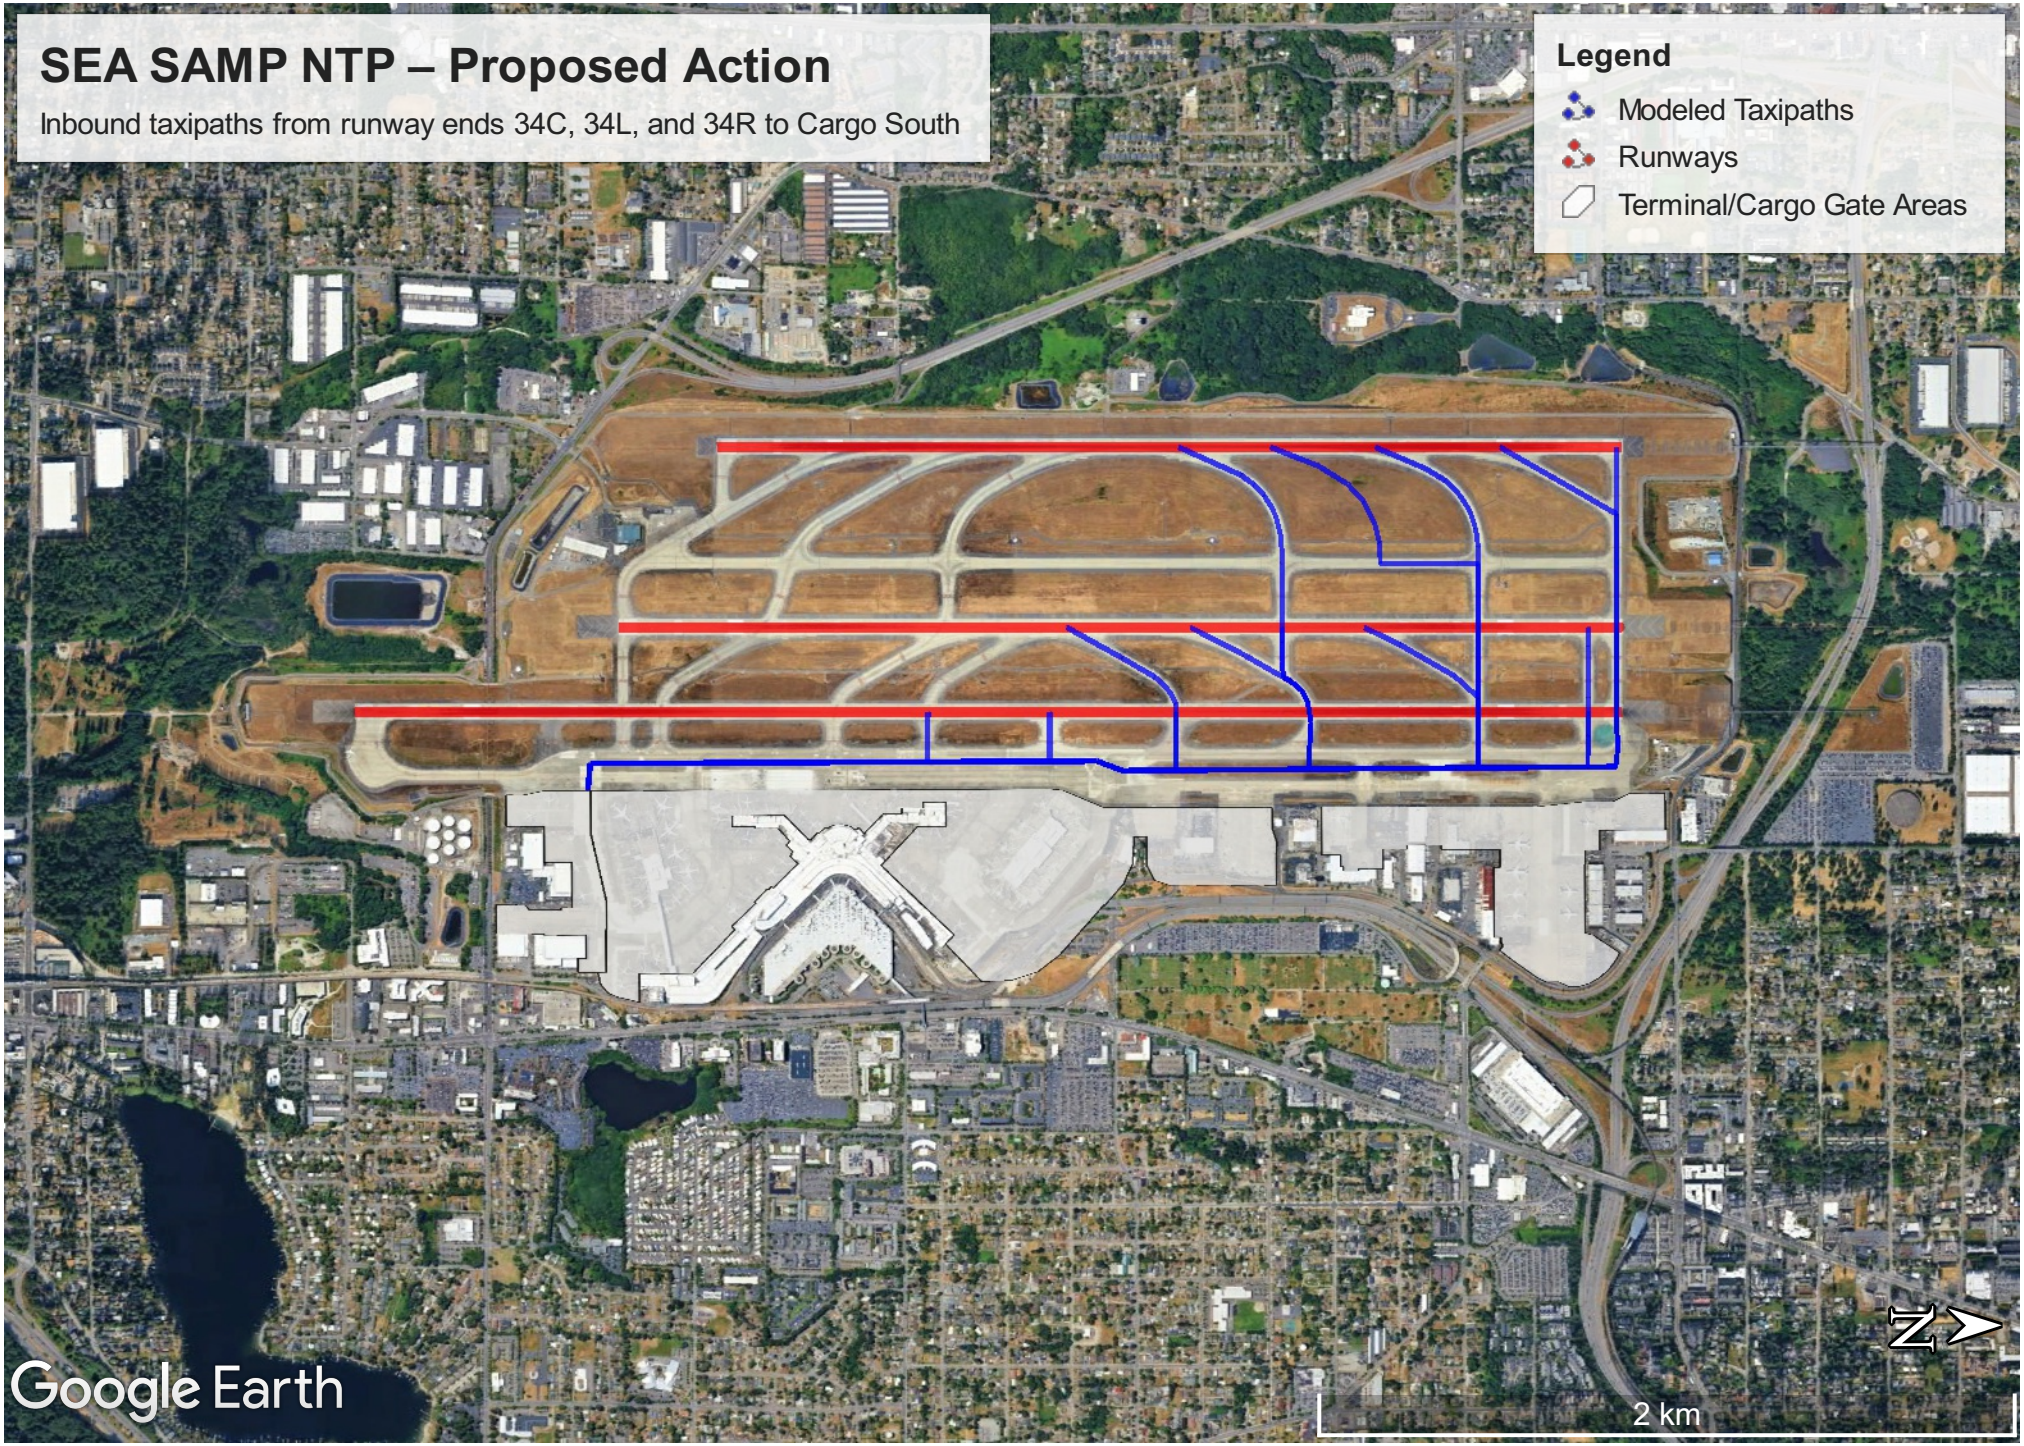
SEA SAMP NTP – Proposed Action
Inbound taxipaths from runway ends 34C, 34L, and 34R to Cargo South
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

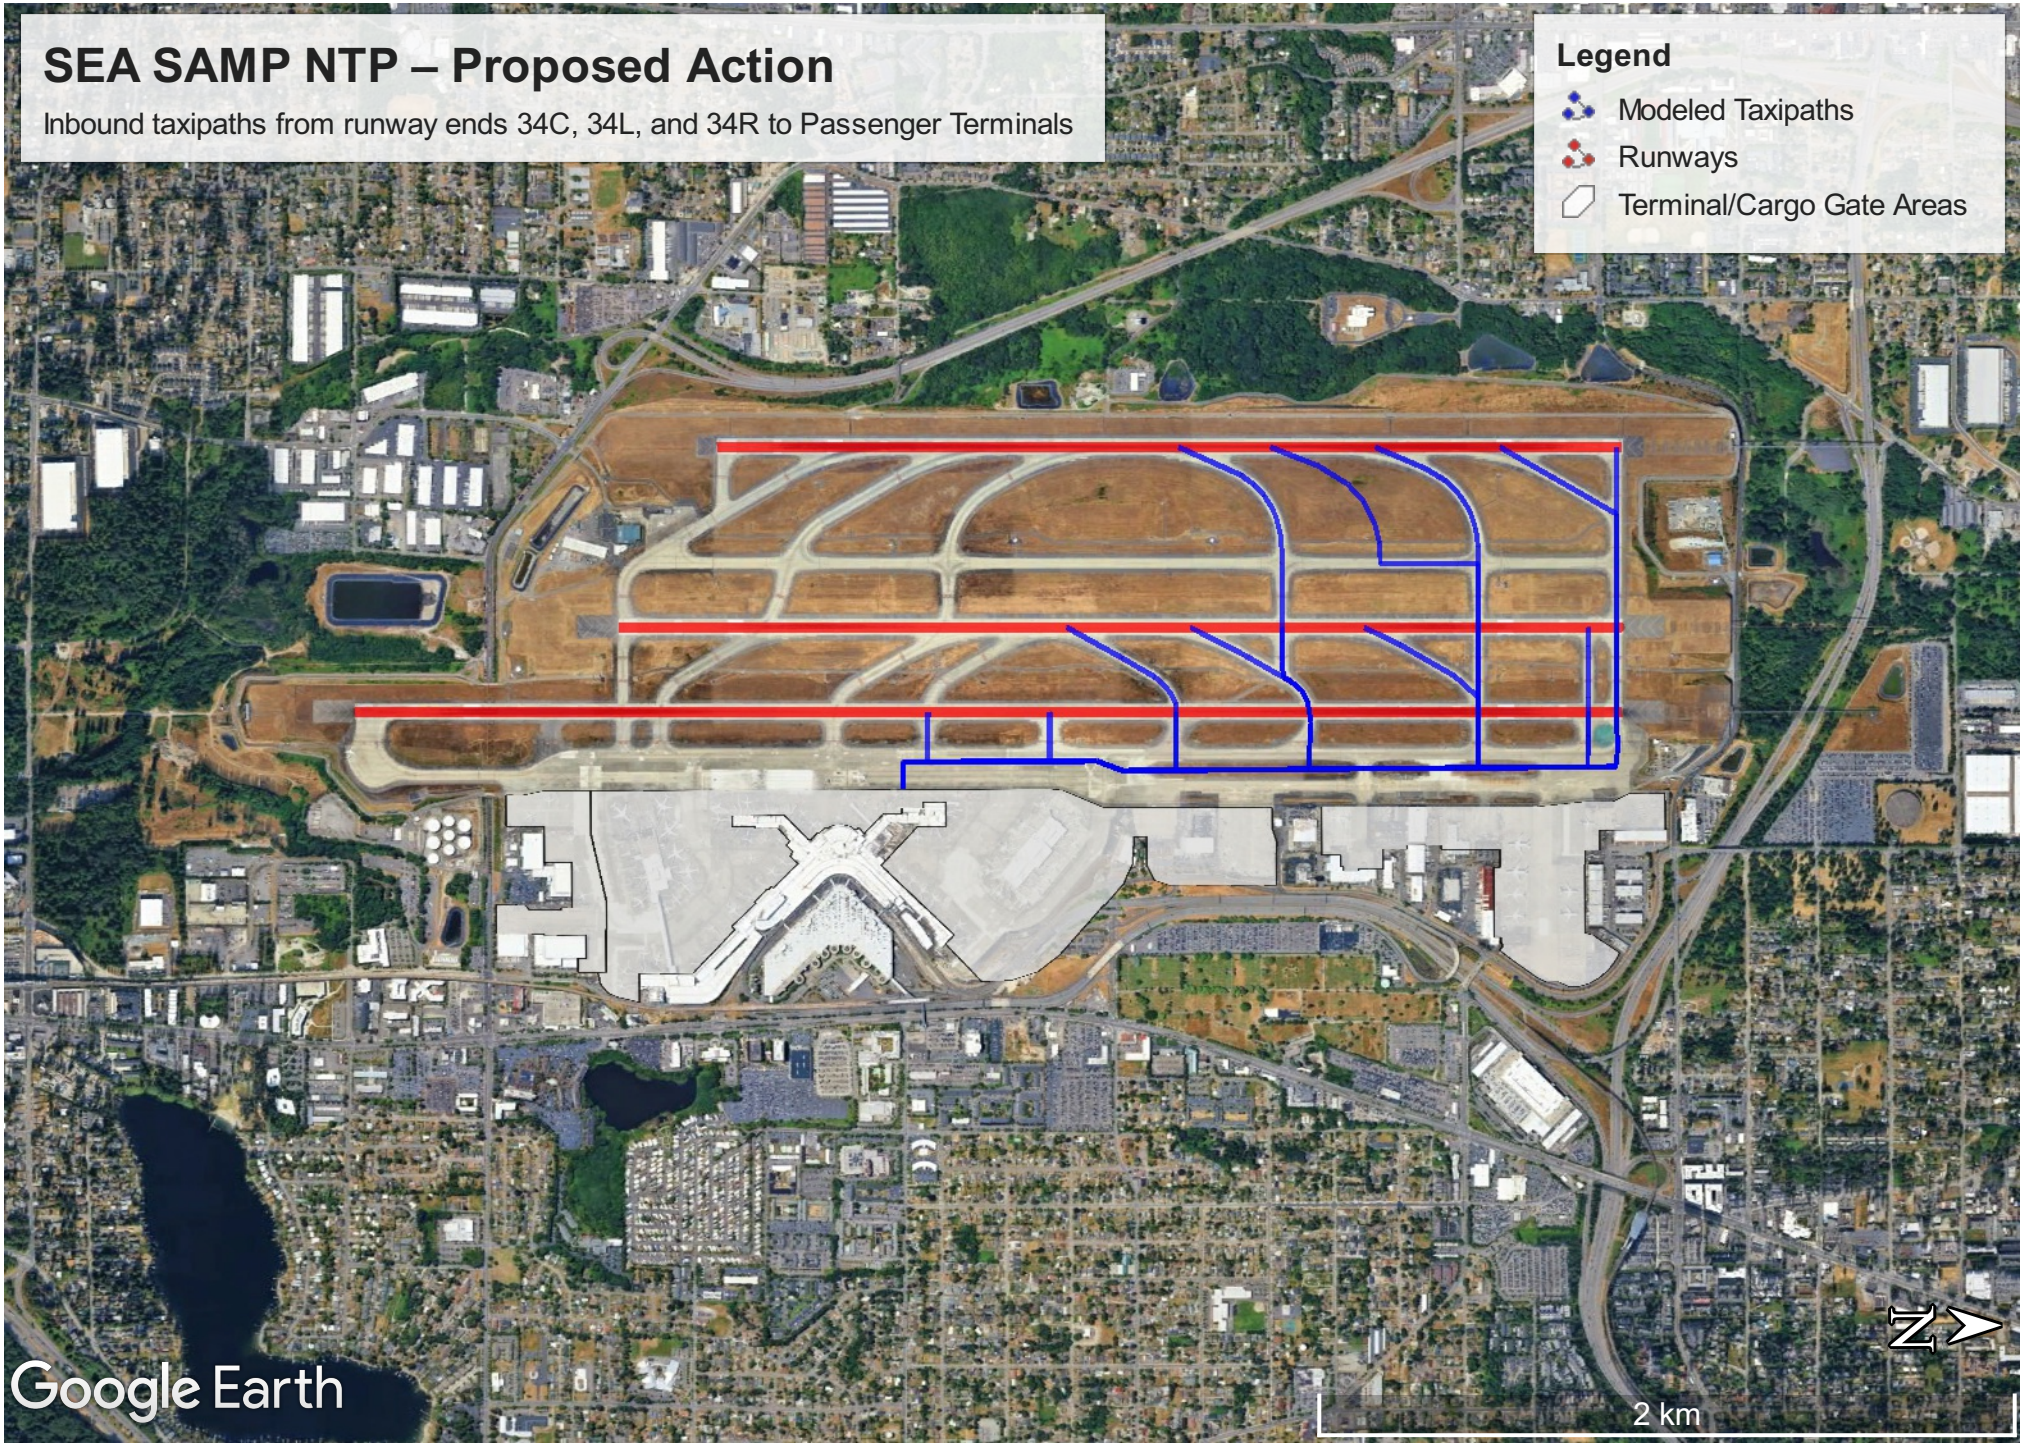
SEA SAMP NTP – Proposed Action
Inbound taxipaths from runway ends 34C, 34L, and 34R to Passenger Terminals
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

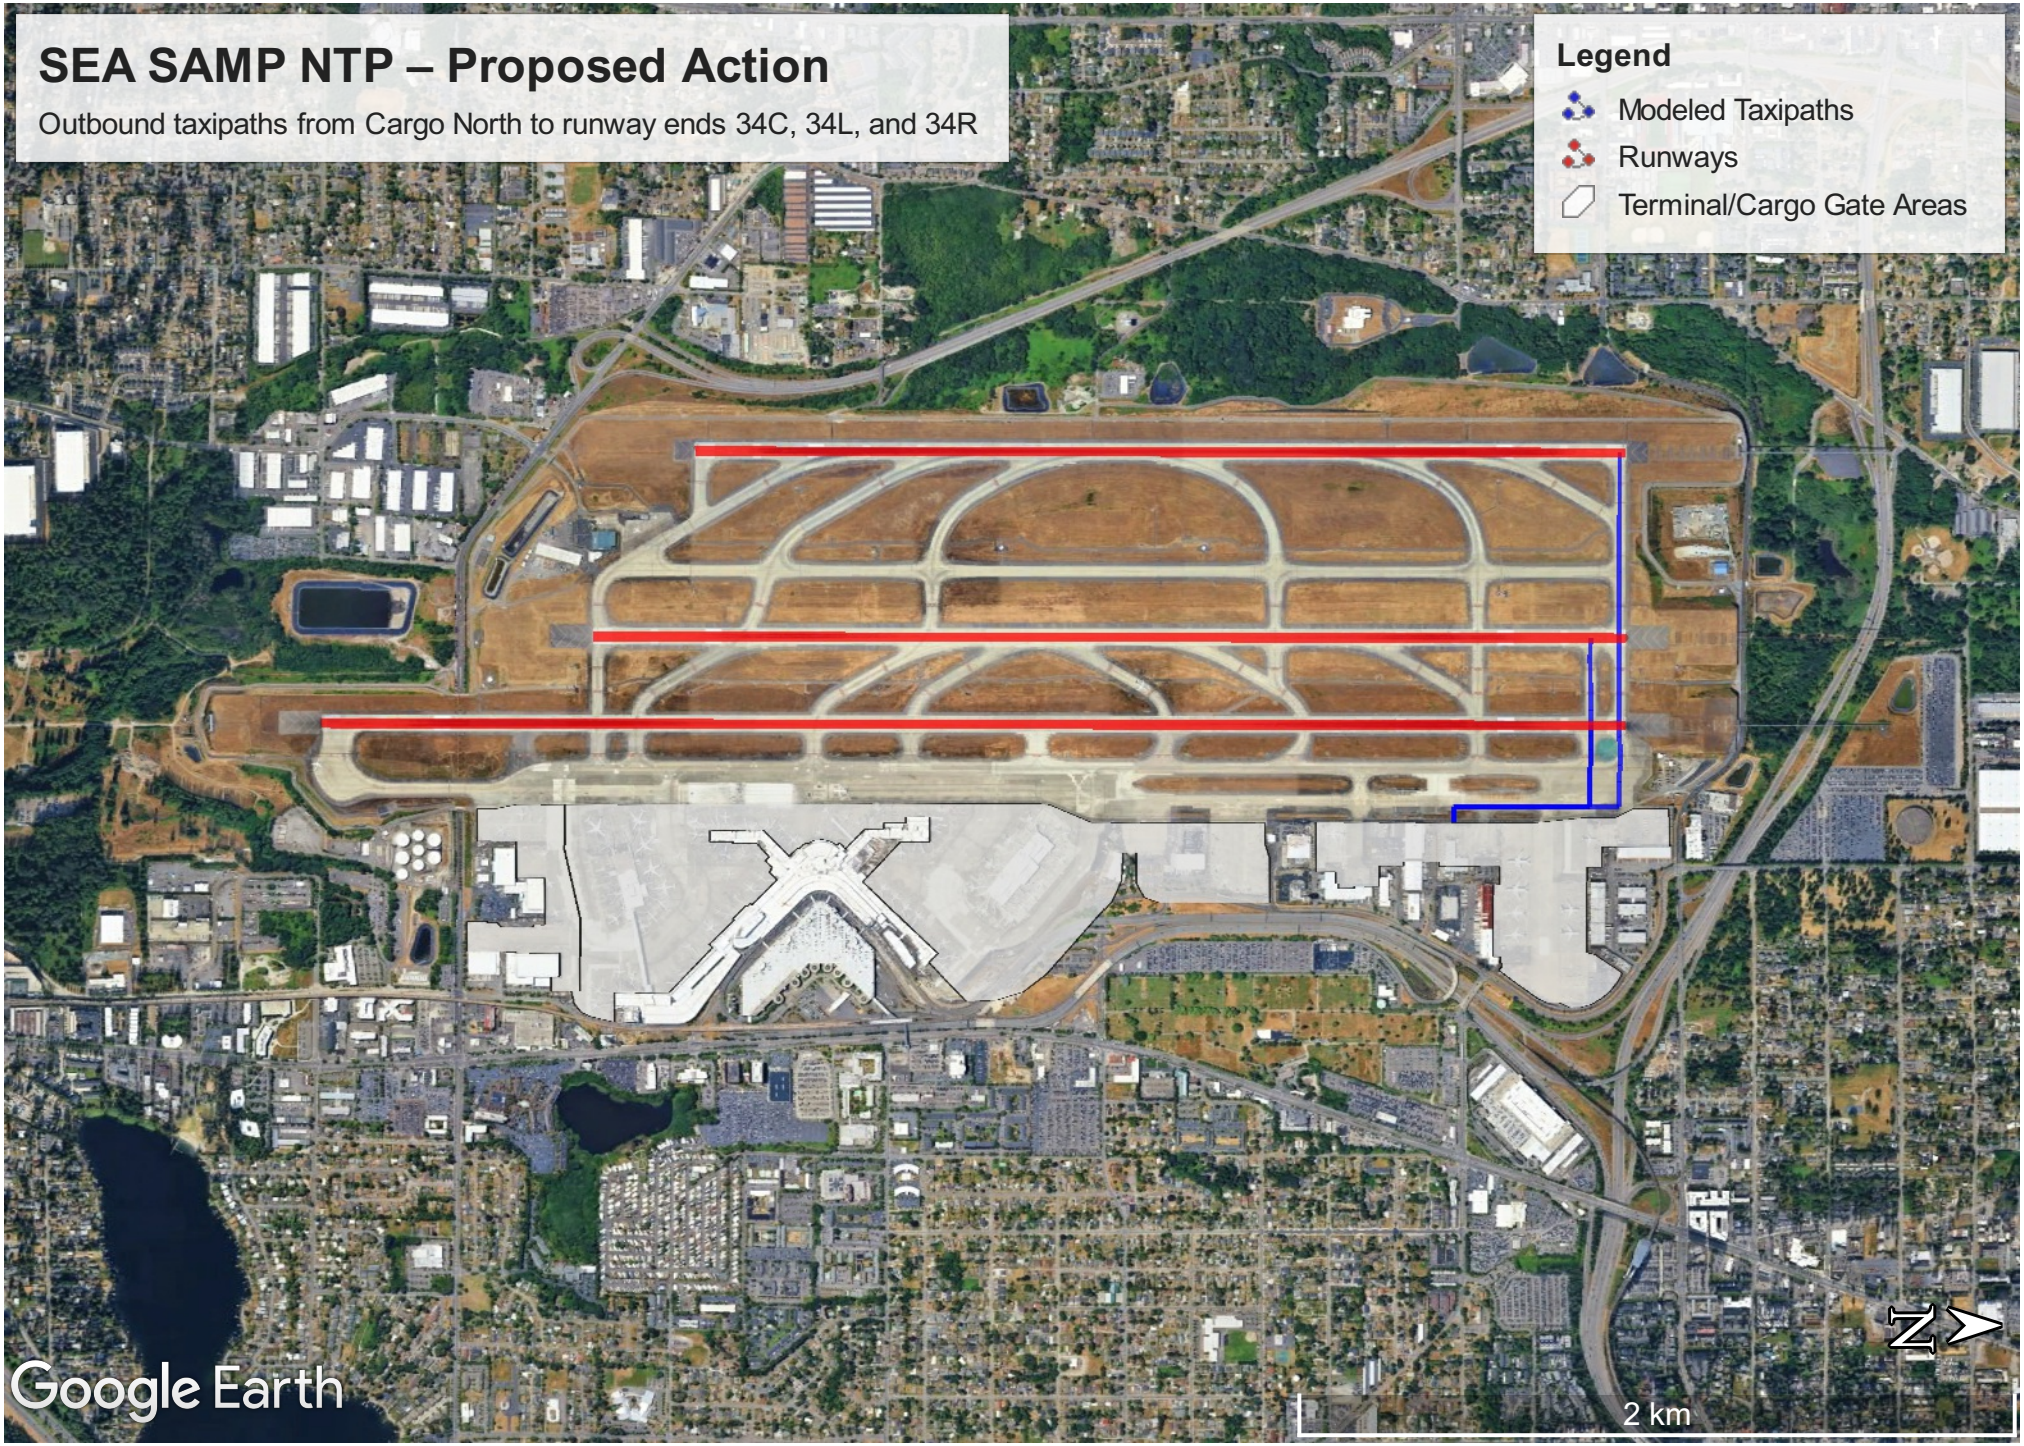
SEA SAMP NTP – Proposed Action
Outbound taxipaths from Cargo North to runway ends 34C, 34L, and 34R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

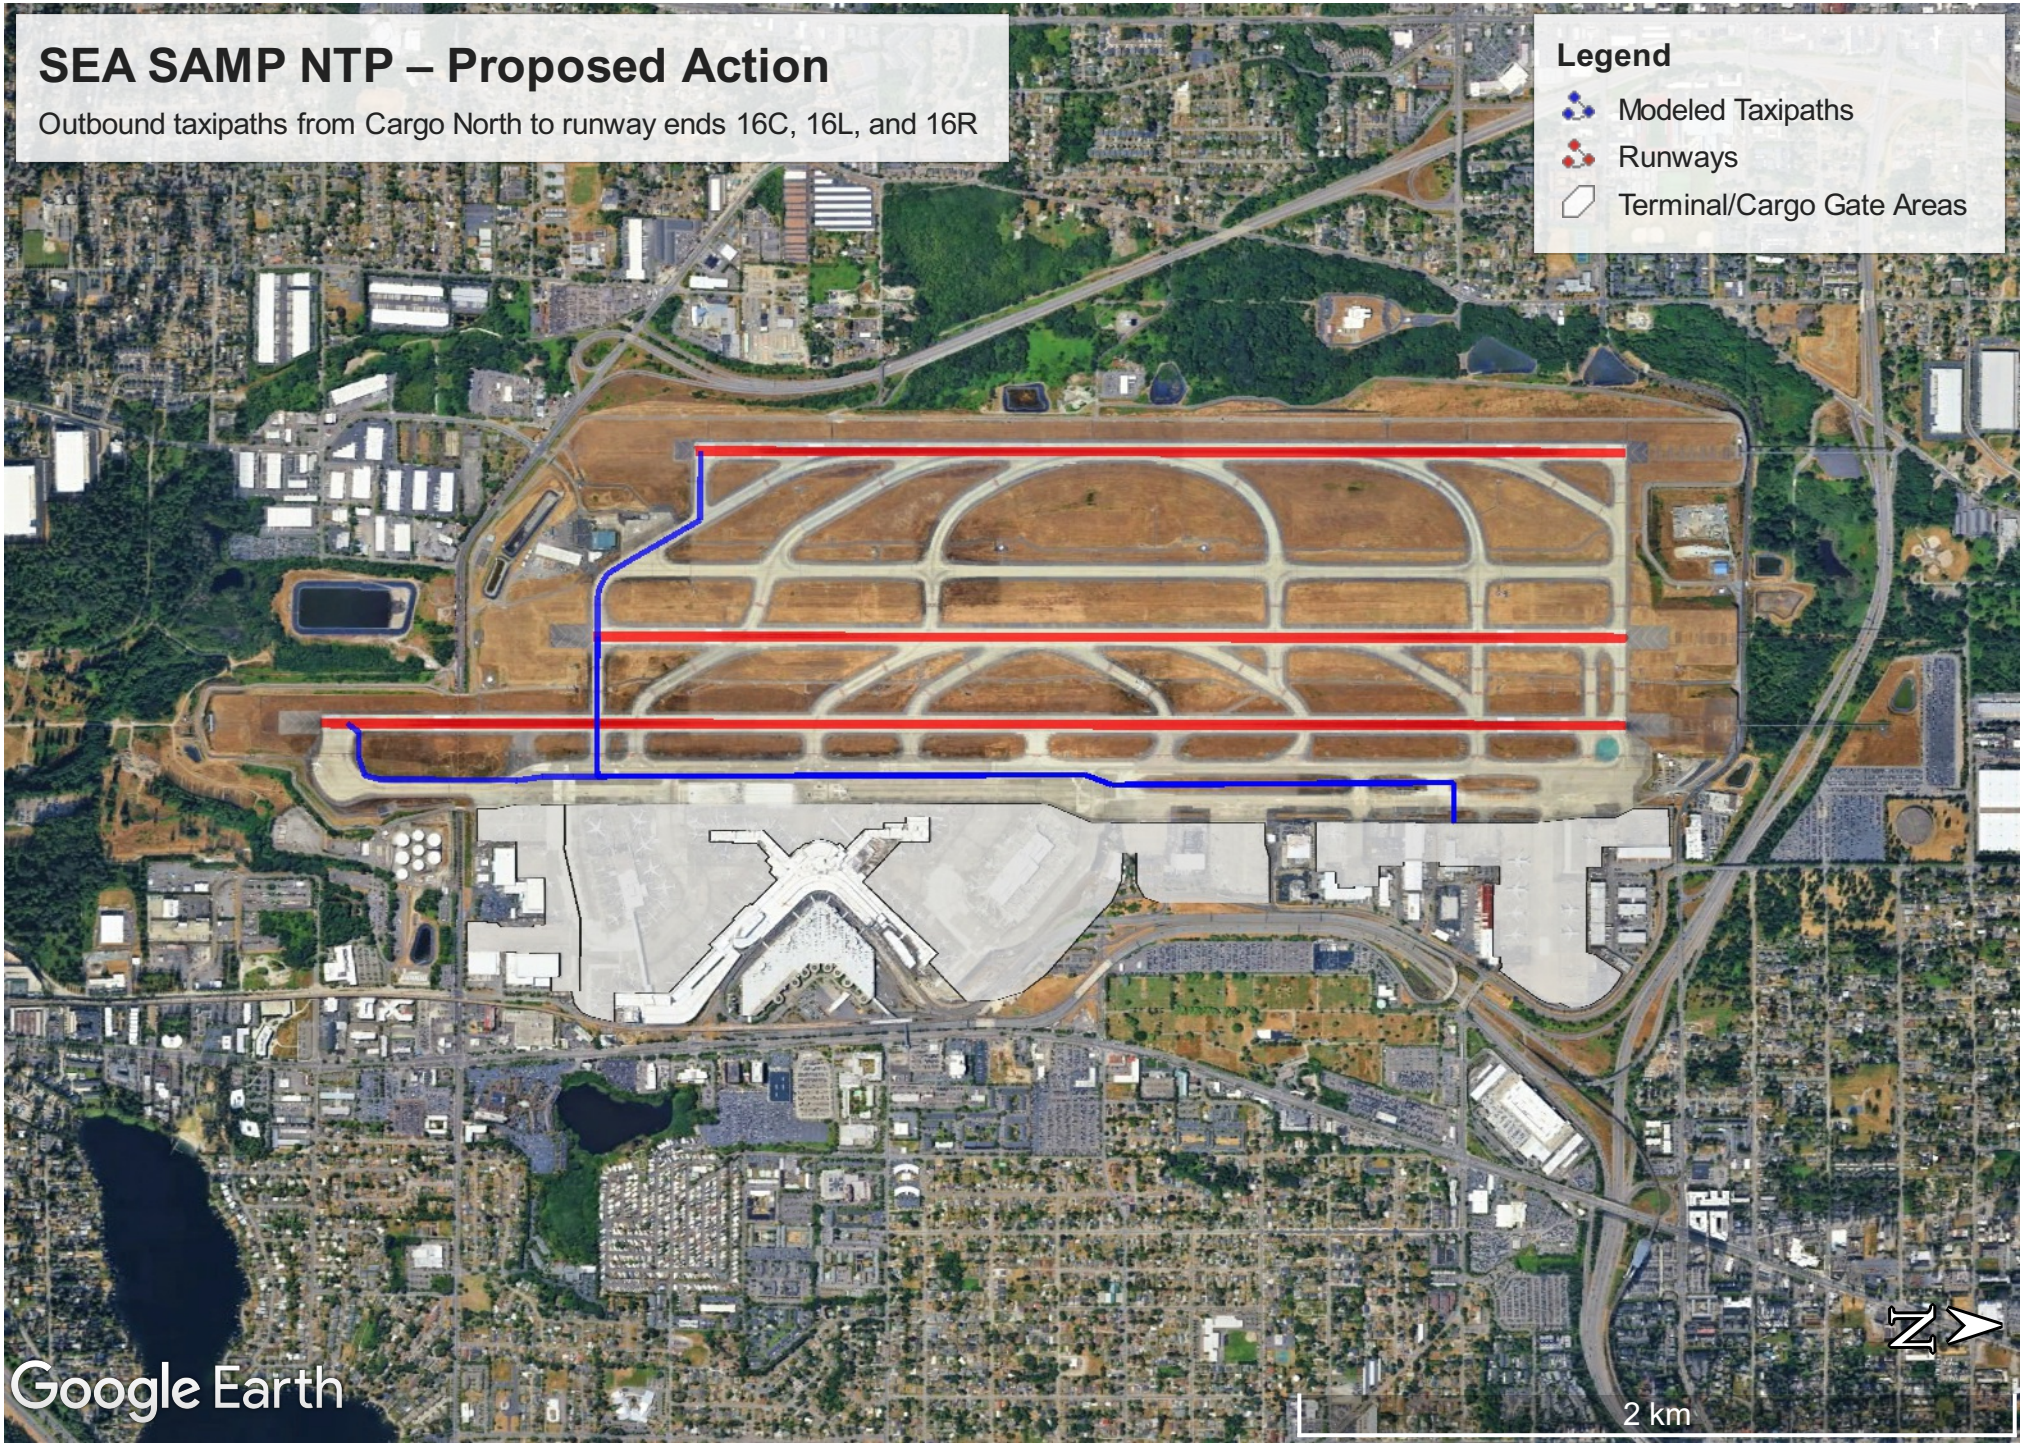
SEA SAMP NTP – Proposed Action
Outbound taxipaths from Cargo North to runway ends 16C, 16L, and 16R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

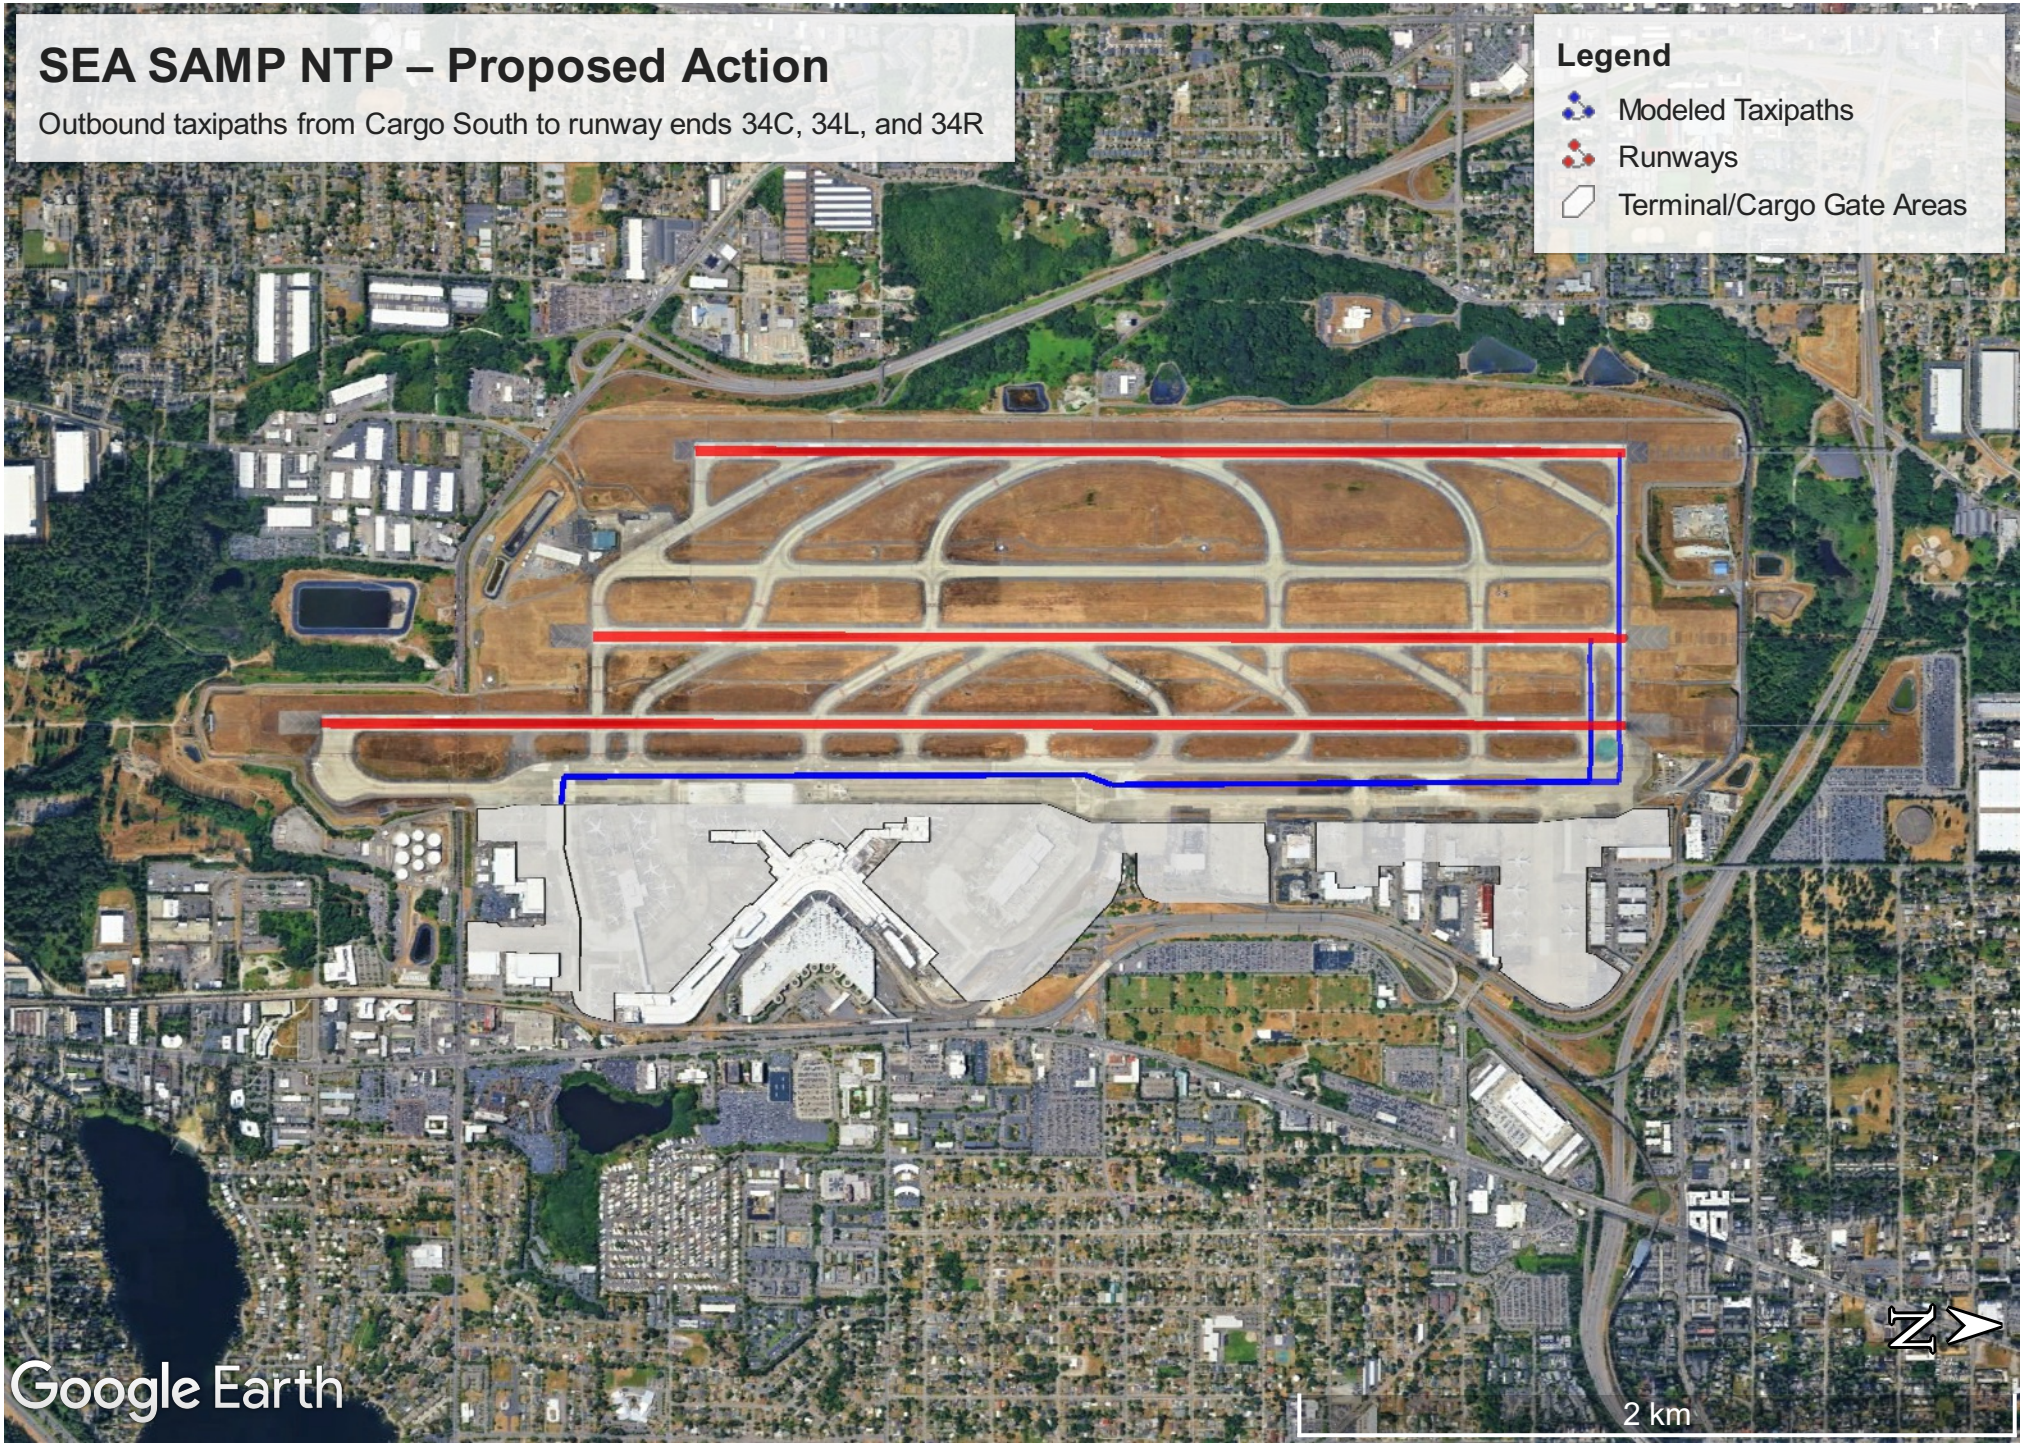
SEA SAMP NTP – Proposed Action
Outbound taxipaths from Cargo South to runway ends 34C, 34L, and 34R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

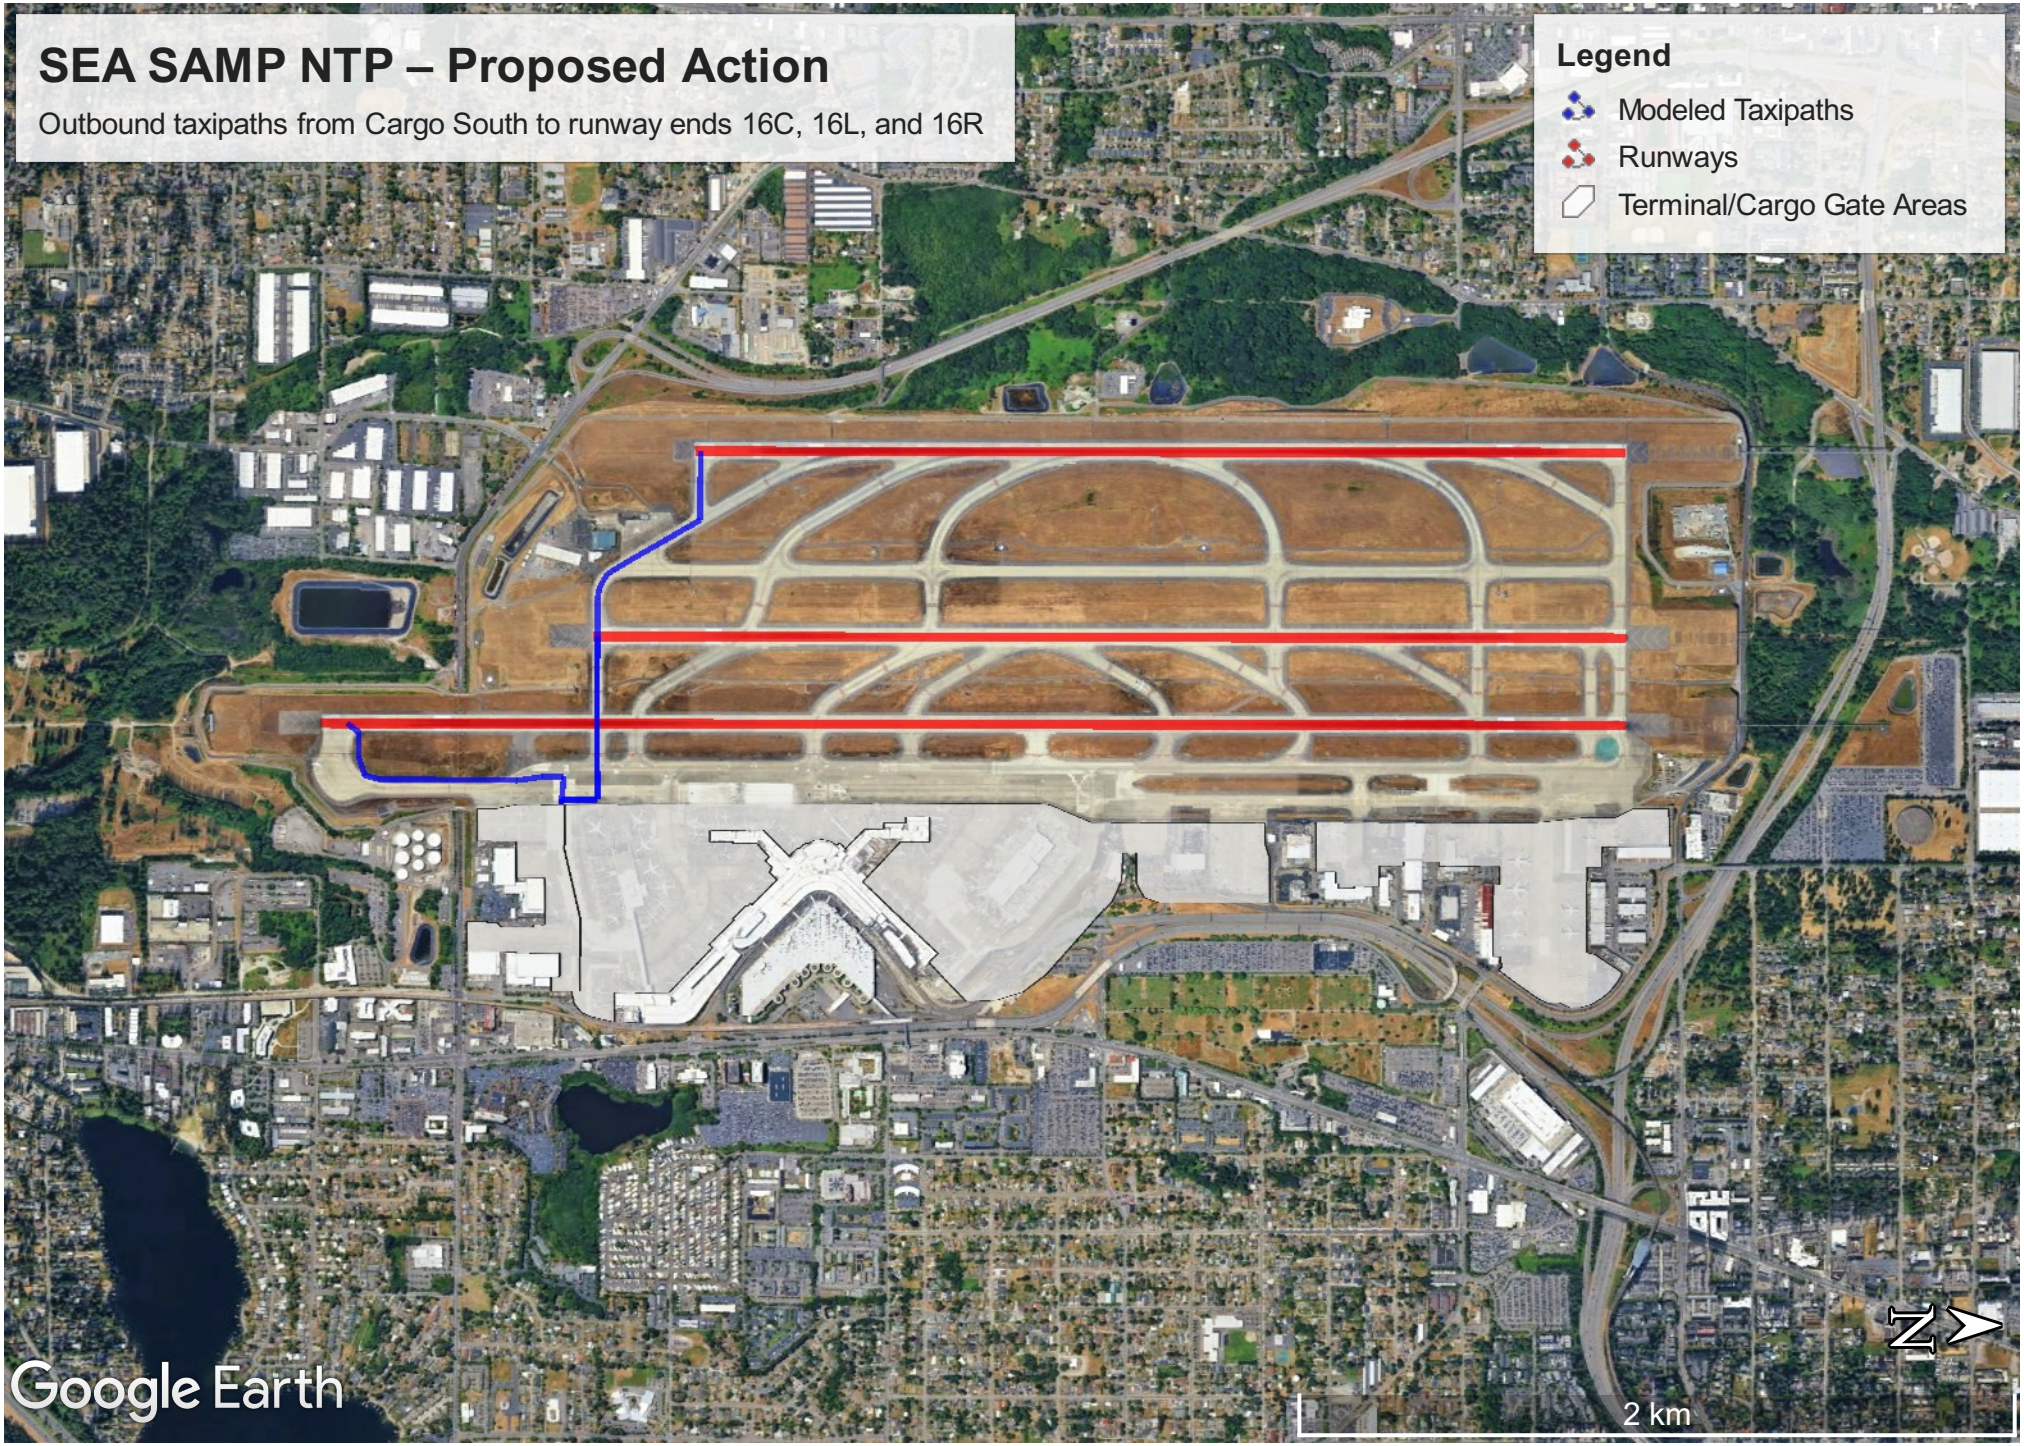
SEA SAMP NTP – Proposed Action
Outbound taxipaths from Cargo South to runway ends 16C, 16L, and 16R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

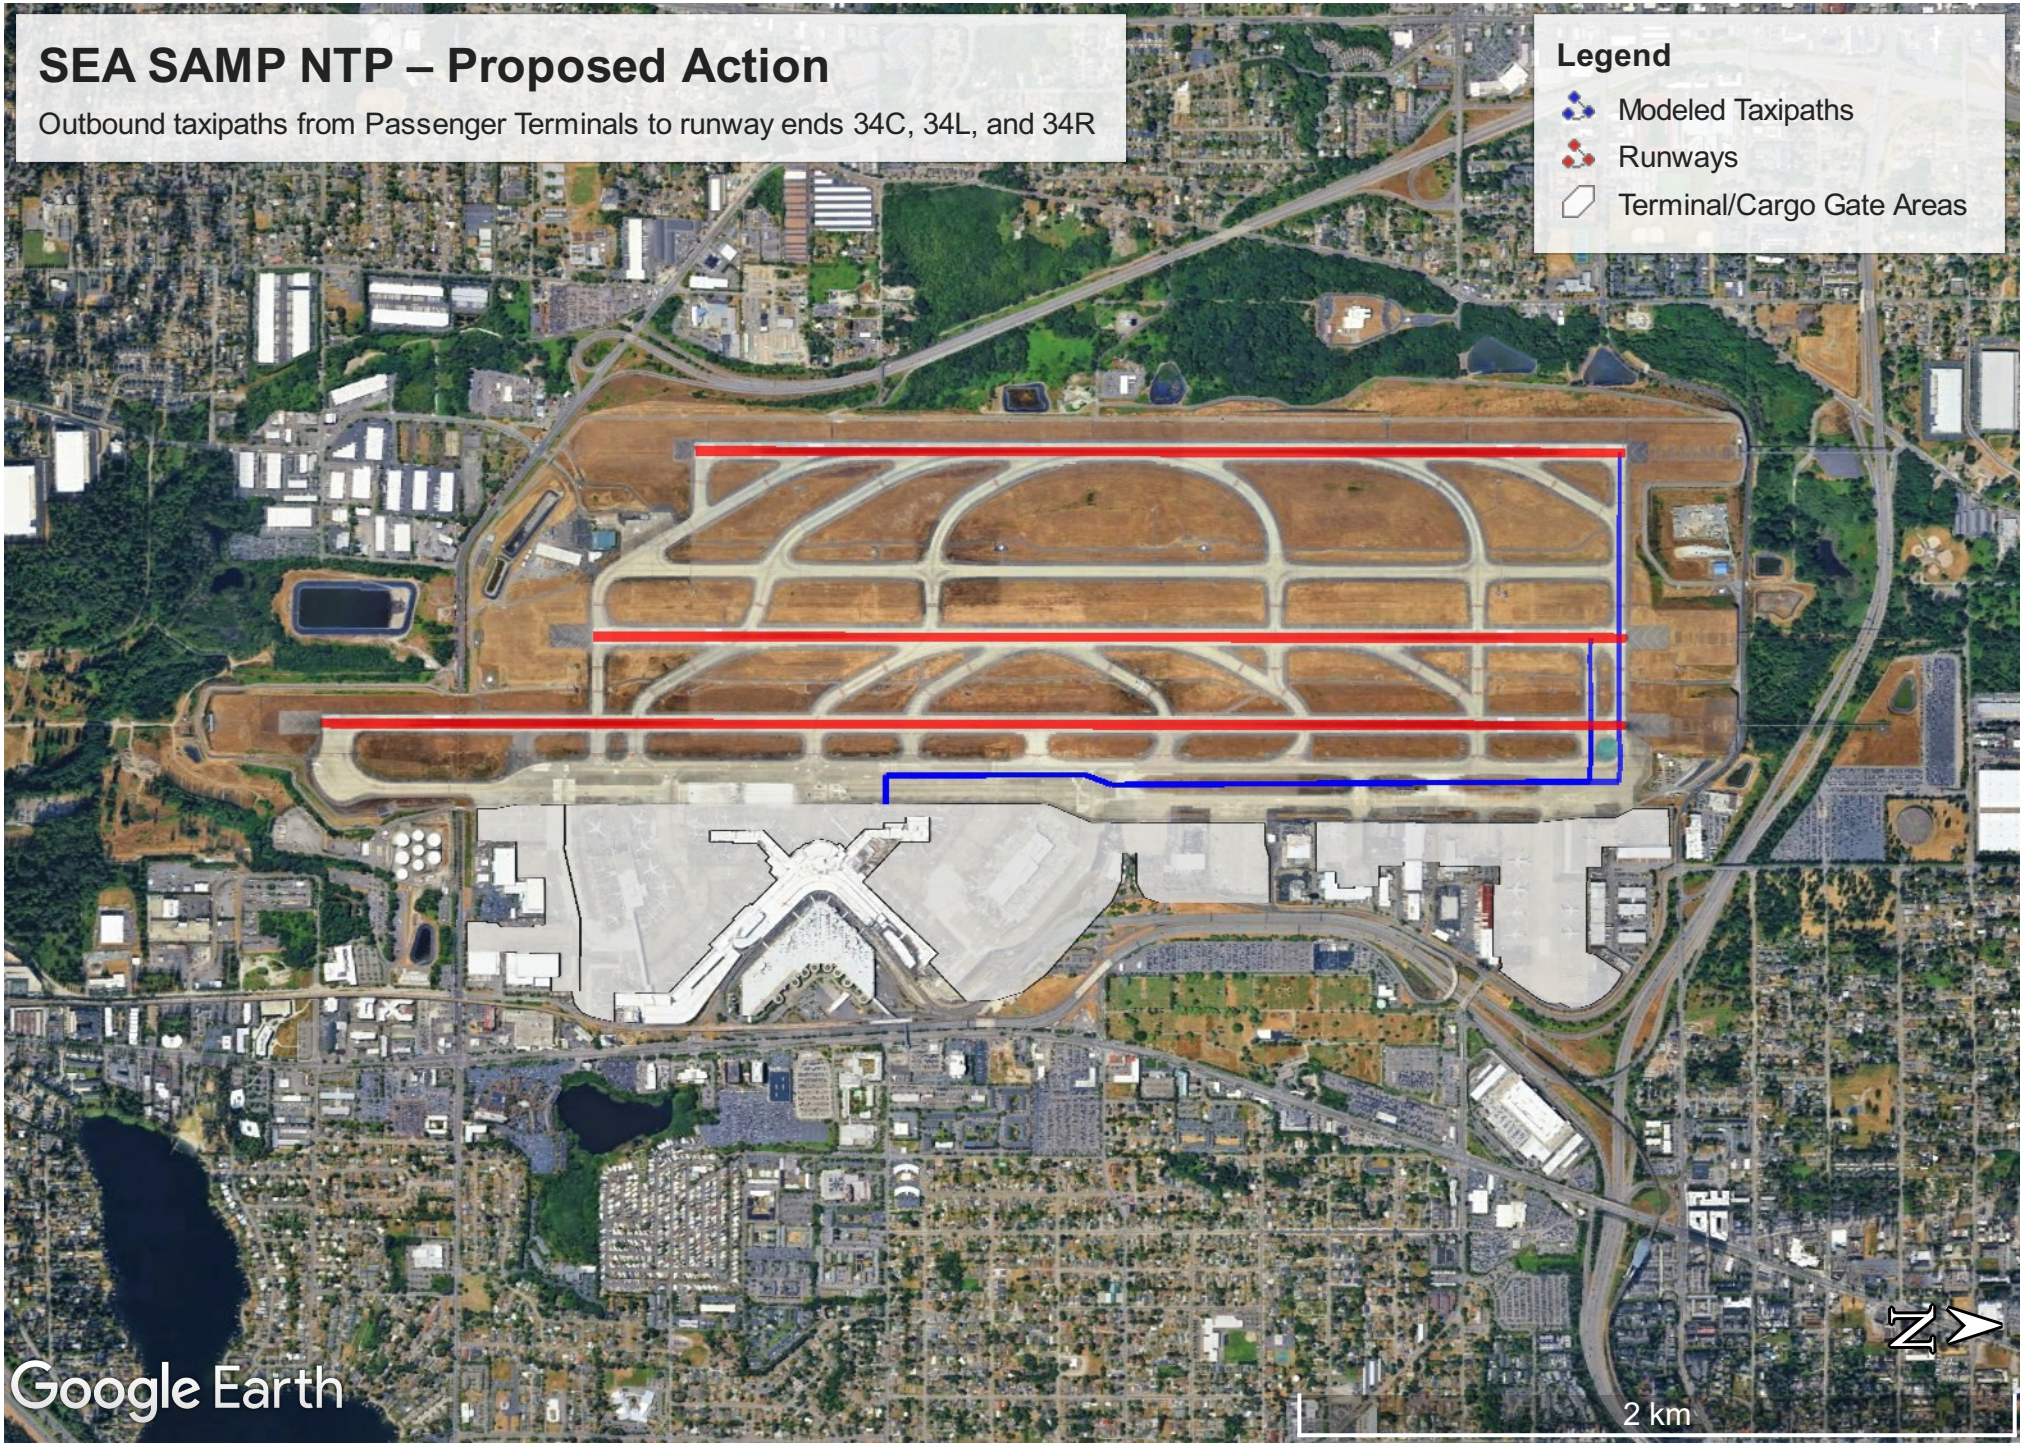
SEA SAMP NTP – Proposed Action
Outbound taxipaths from Passenger Terminals to runway ends 34C, 34L, and 34R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

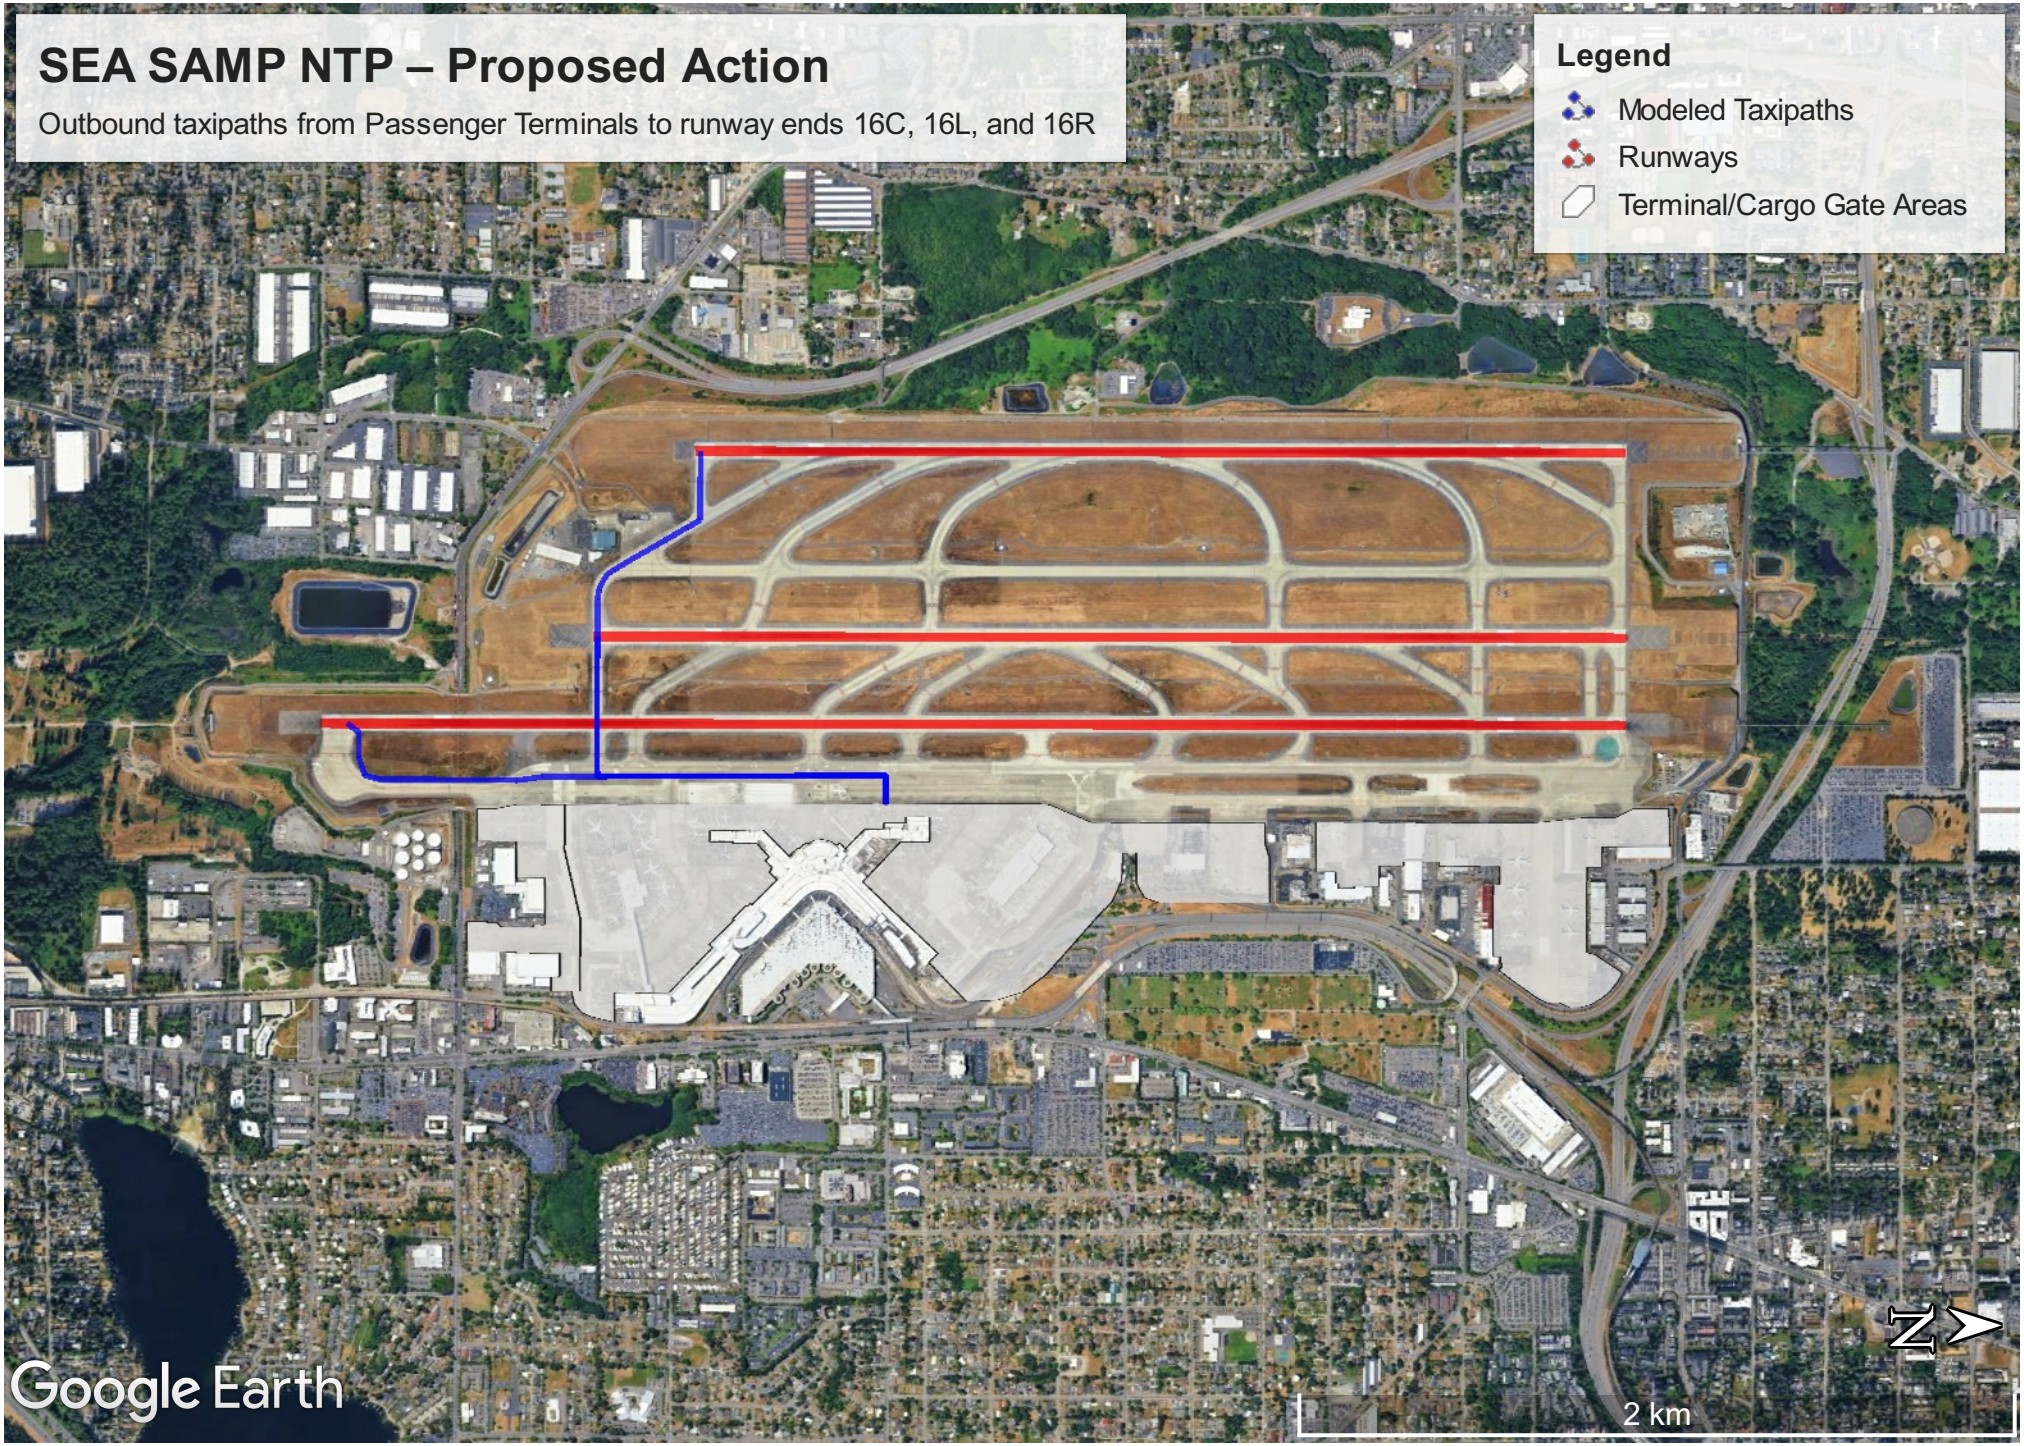
SEA SAMP NTP – Proposed Action
Outbound taxipaths from Passenger Terminals to runway ends 16C, 16L, and 16R
Legend
Modeled Taxipaths
Runways
Terminal/Cargo Gate Areas
Google Earth
2 km
N

Aircraft Operational Activity Distributions for Dispersion Modeling

- Quarter-hour-of-day Activity Distributions
- Day-of-week Activity Distributions
- Month-of-year Activity Distributions

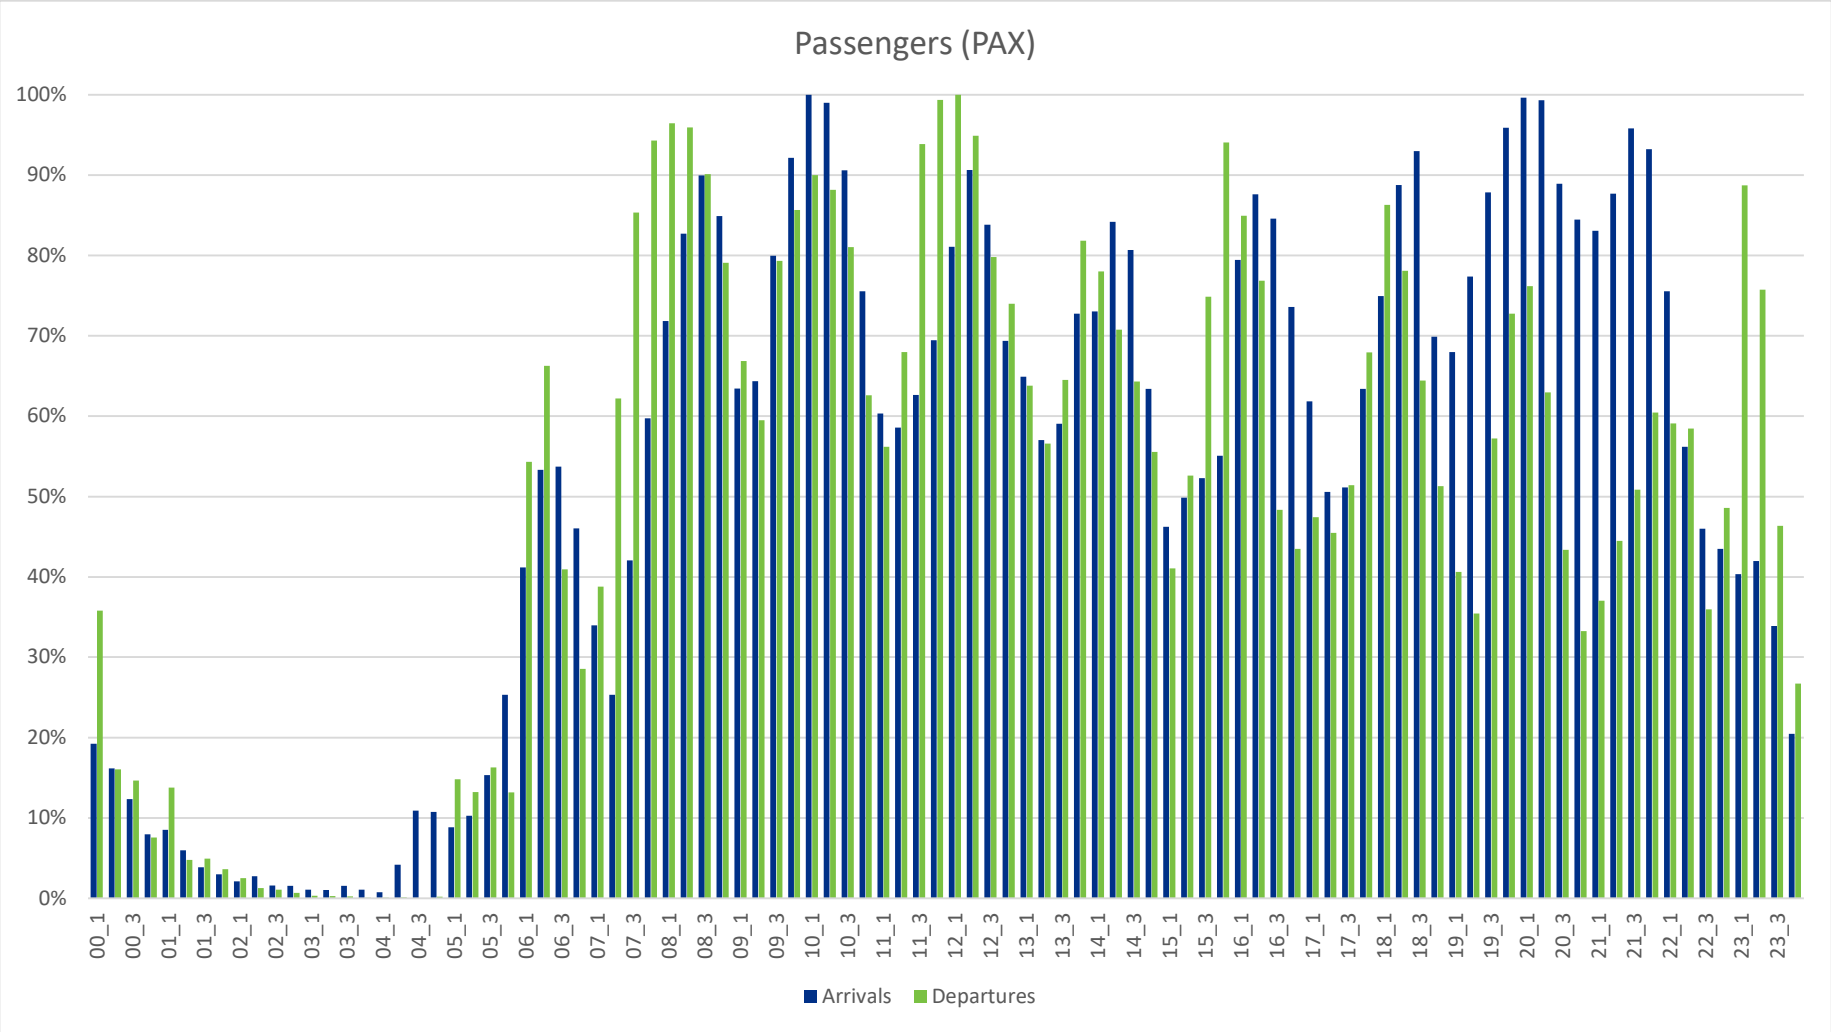

Quarter-Hour-of-Day Activity Profiles

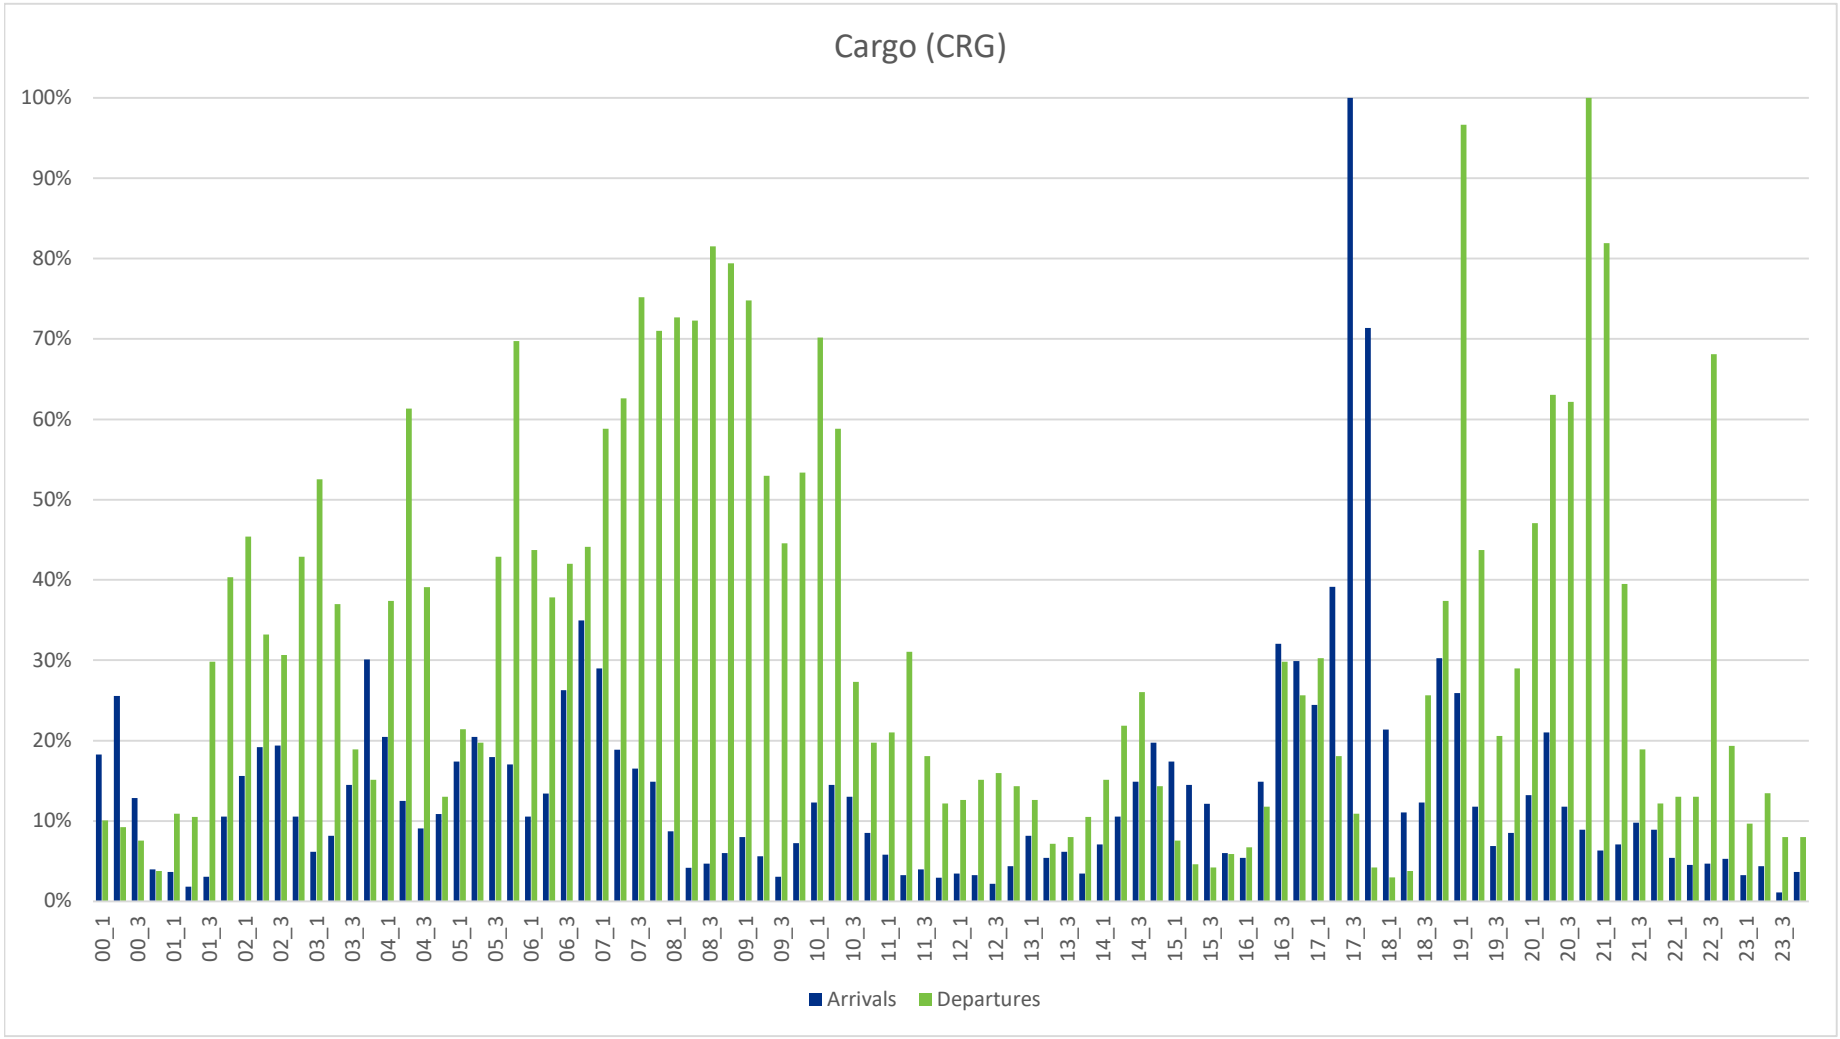

Quarter-Hour-of-Day Activity Profiles

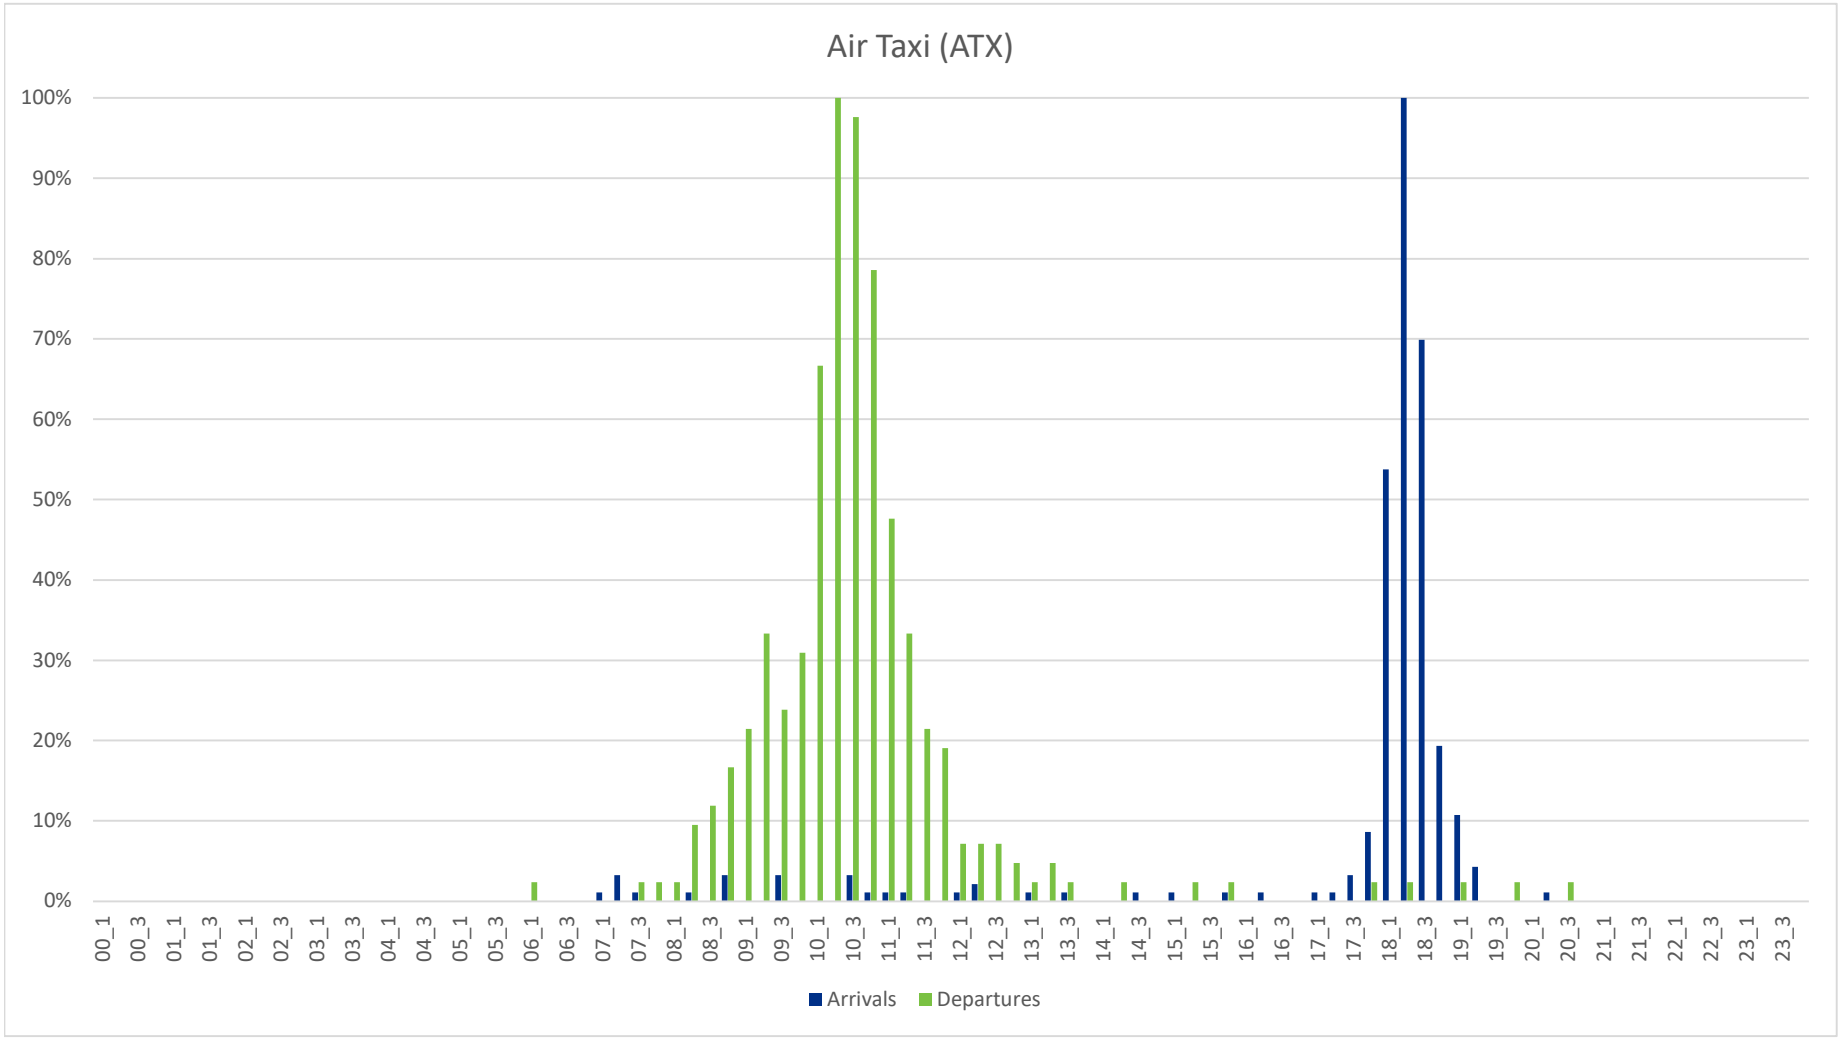

Quarter-Hour-of-Day Activity Profiles

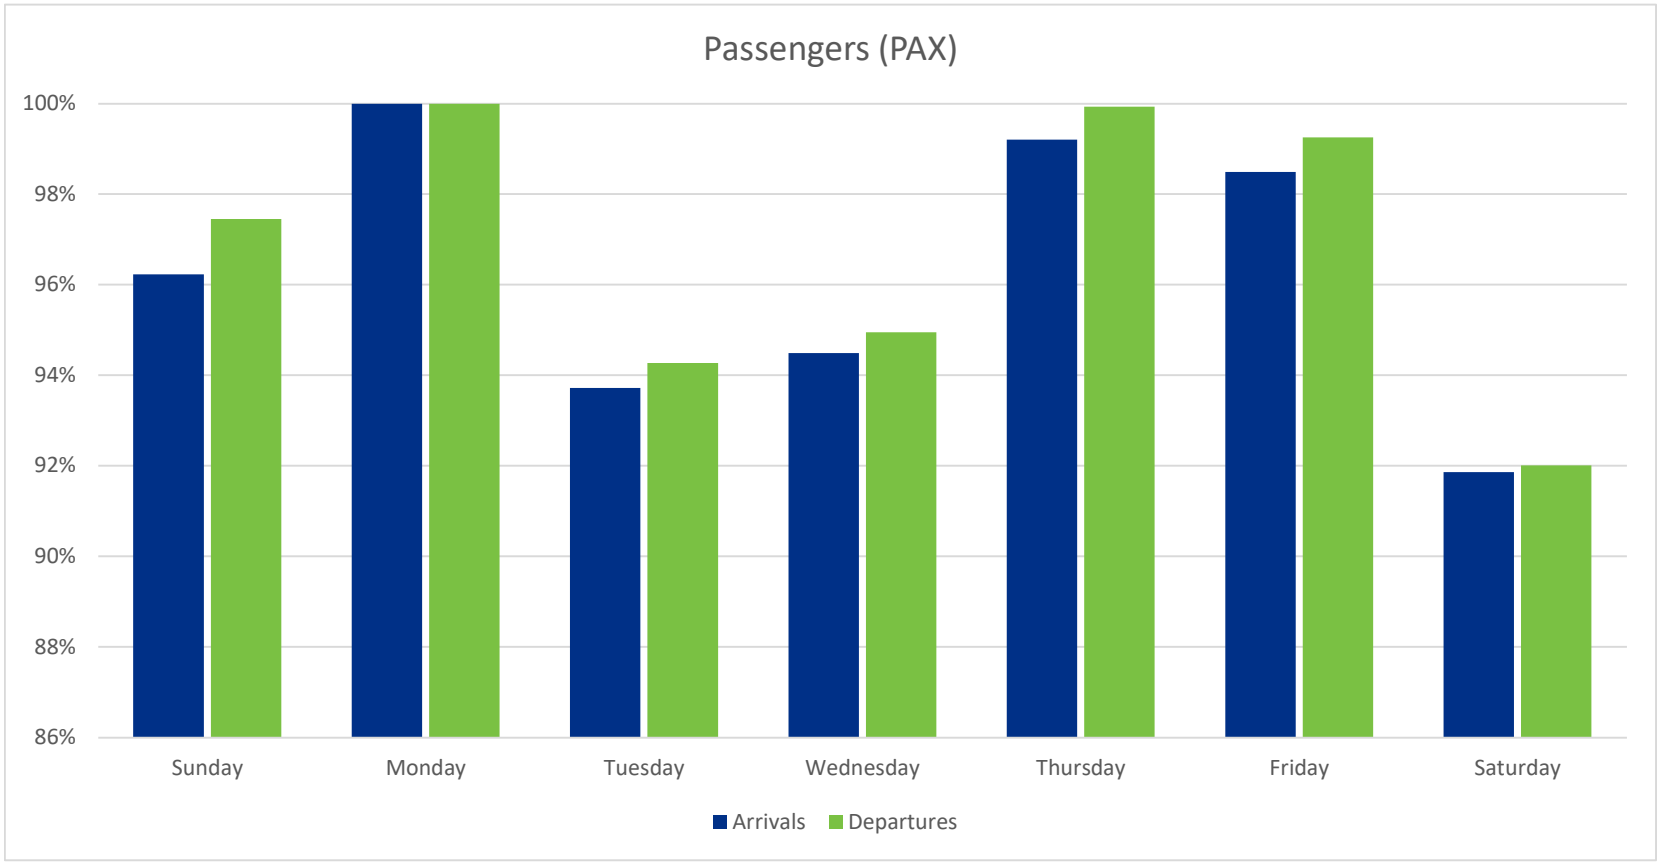

Day-of-Week Activity Profiles

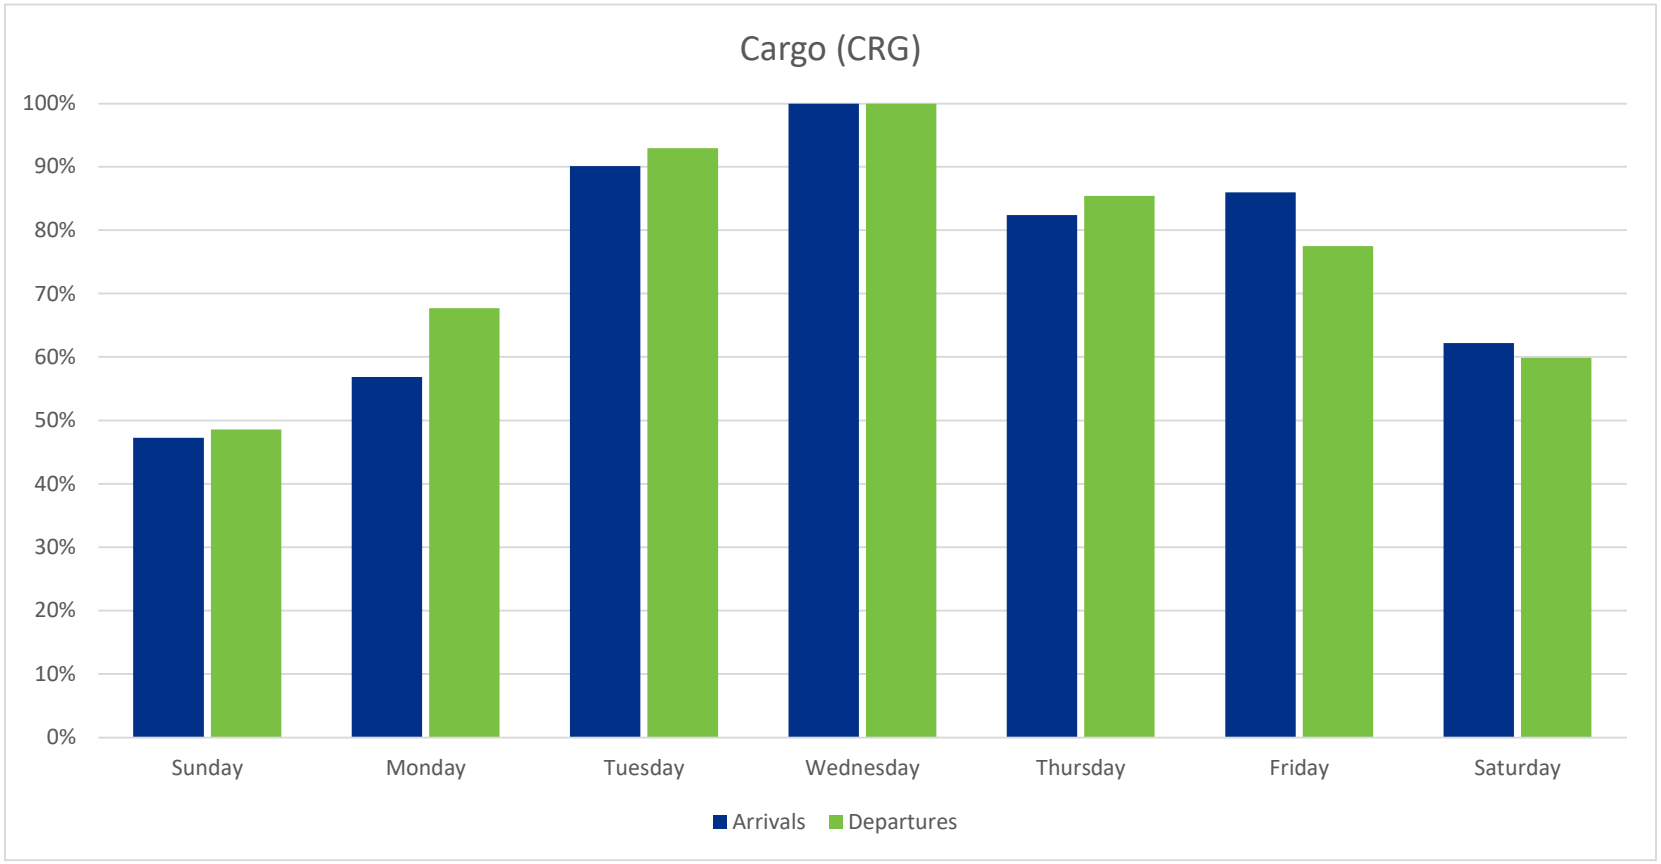

Day-of-Week Activity Profiles

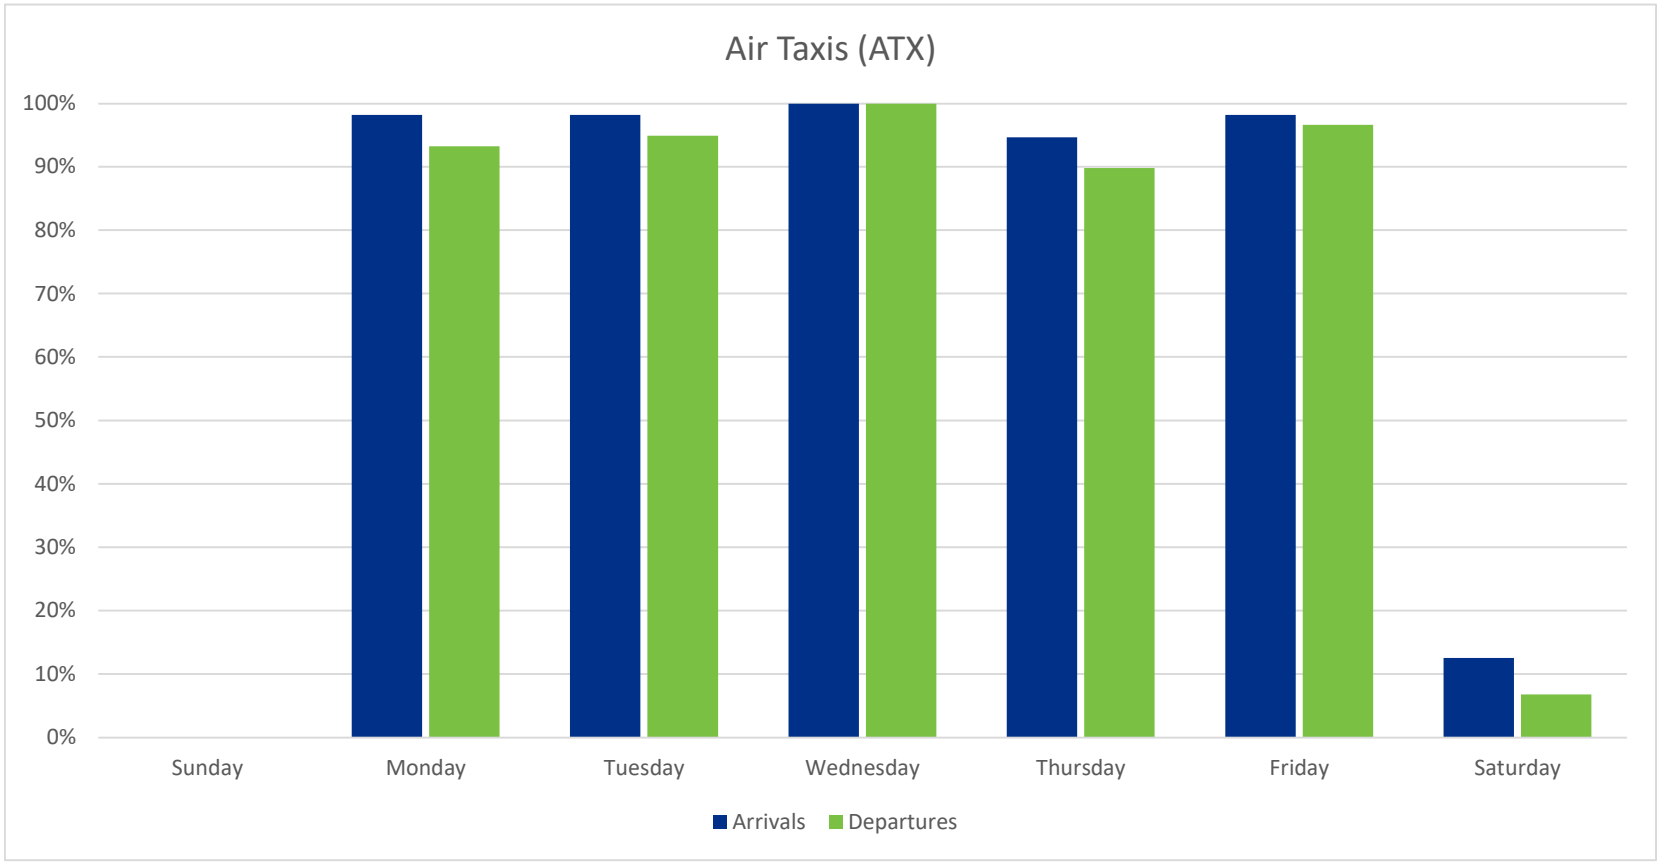

Day-of-Week Activity Profiles

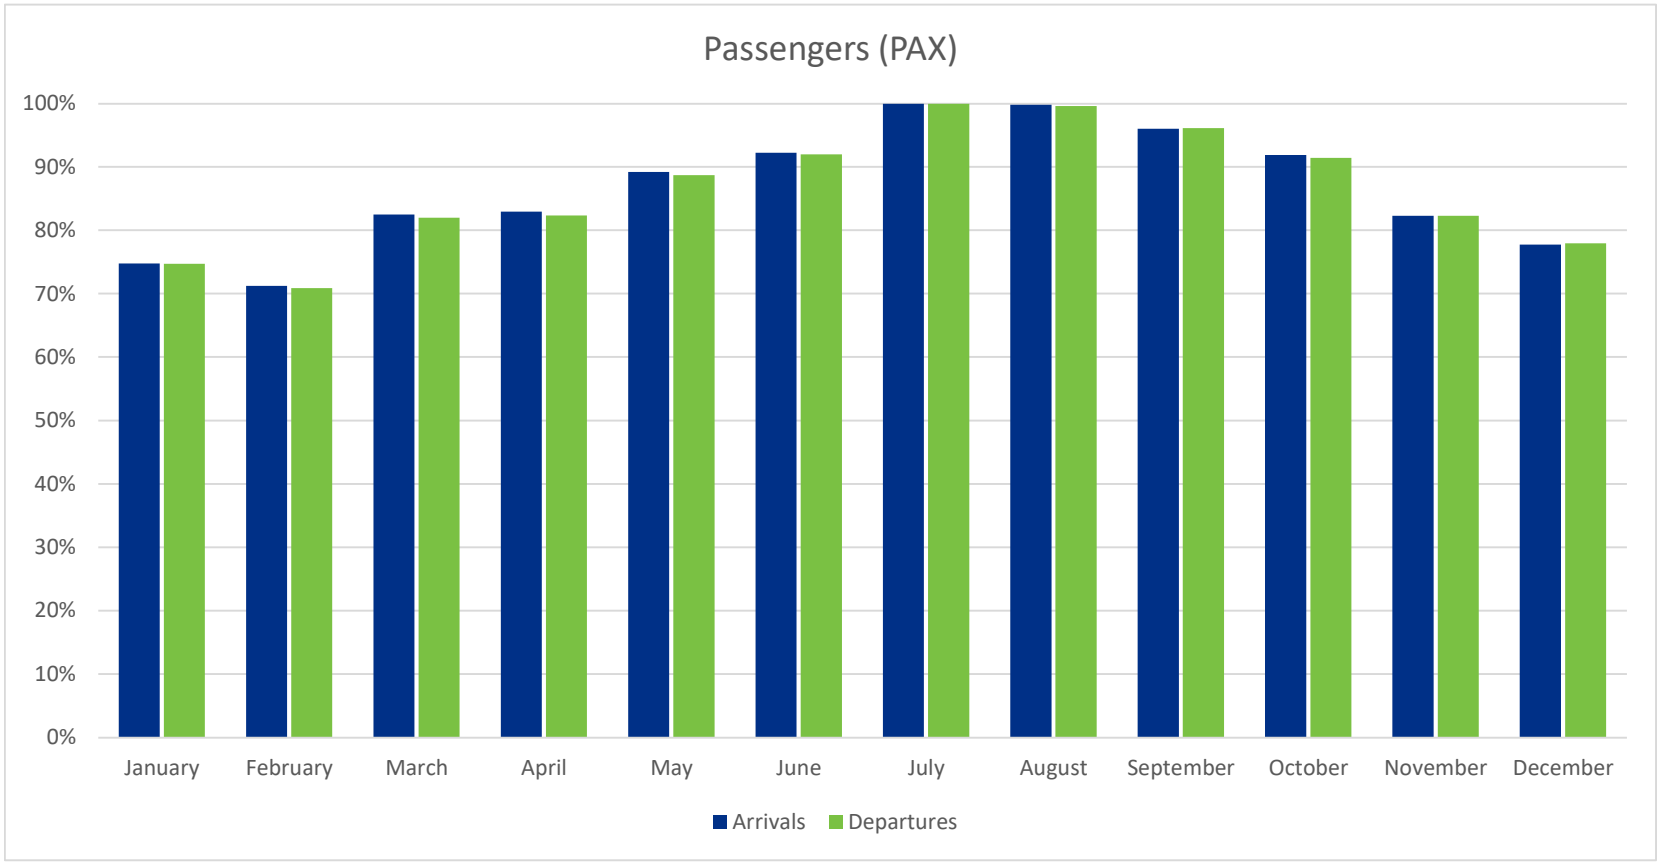

Month-of-Year Activity Profiles

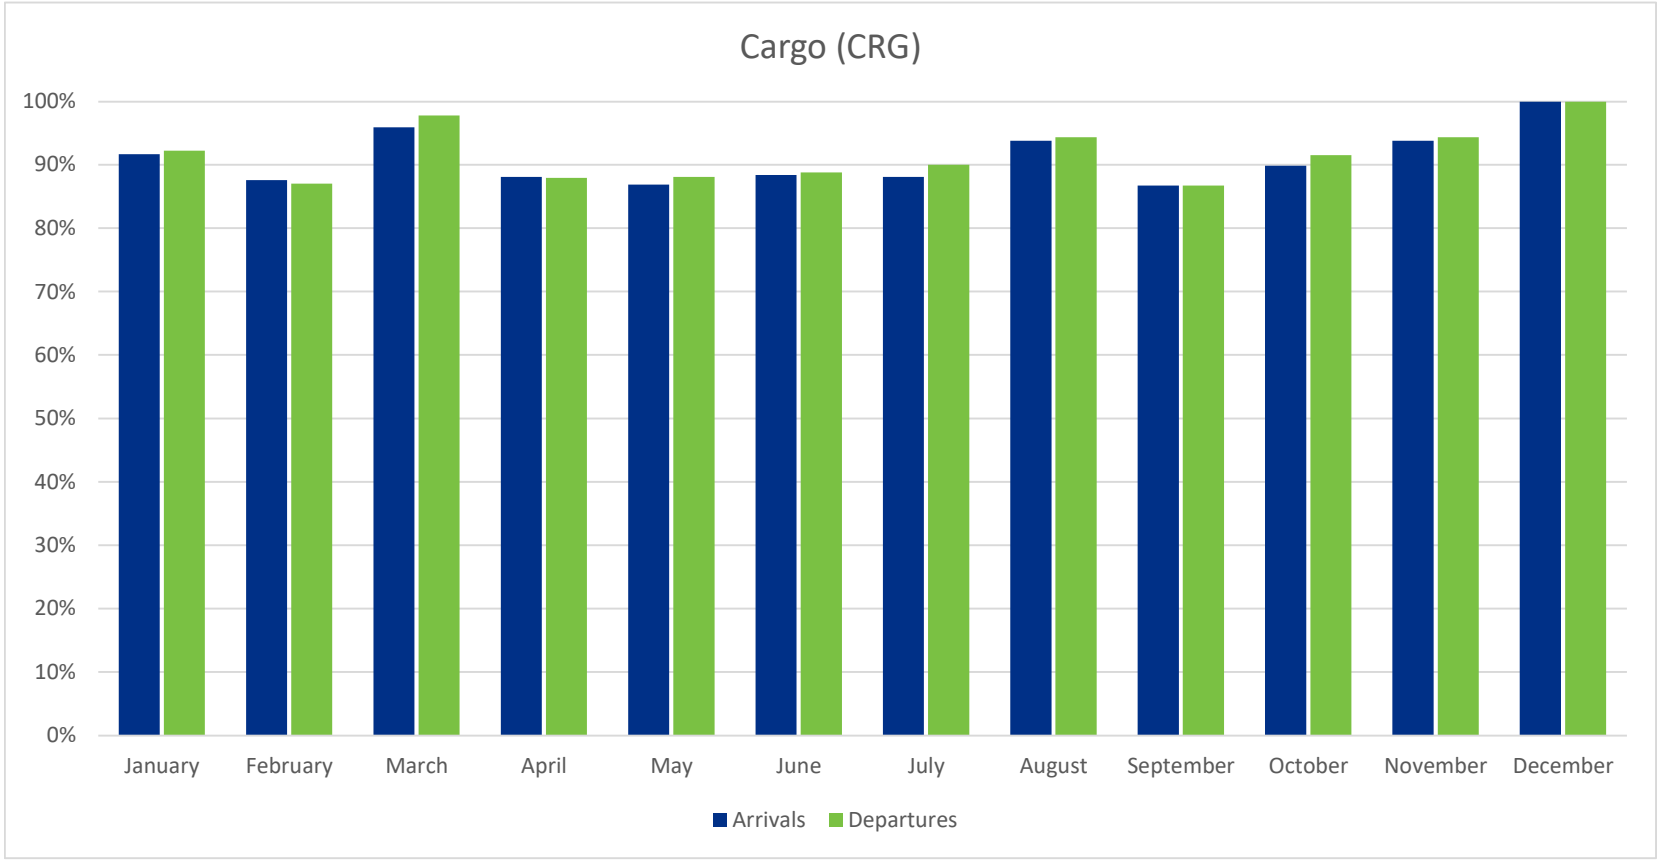

Month-of-Year Activity Profiles

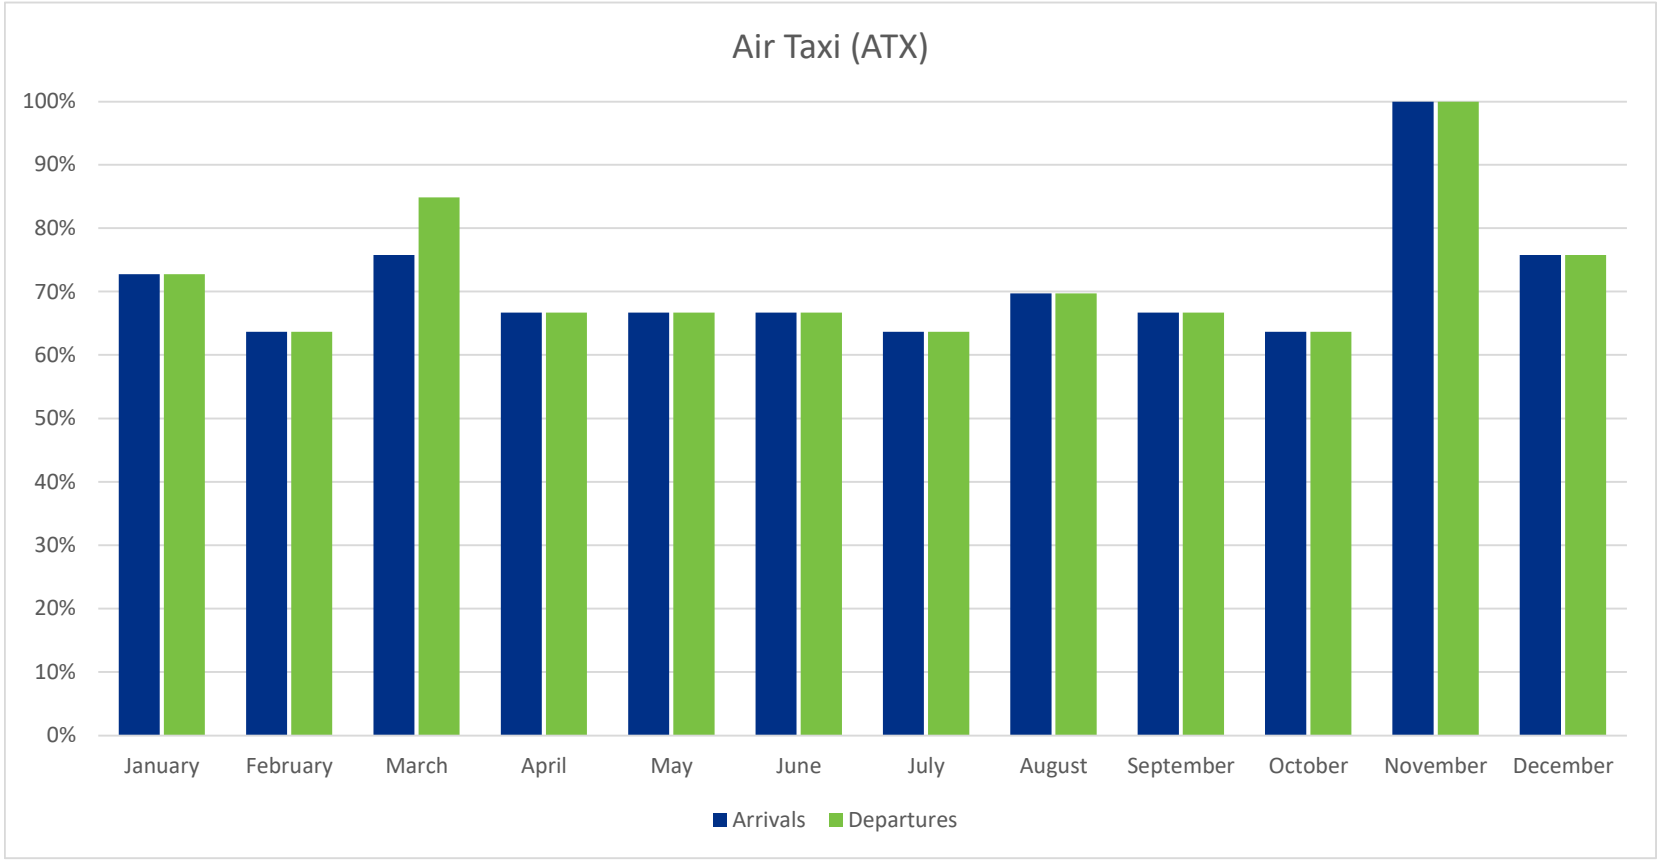

Month-of-Year Activity Profiles

No Action Alternative Future (2032) Modeled Annual Aircraft Operations

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A220-100	PW1524G	16C	1	PAX	71	0	0	71
Airbus A220-100	PW1524G	16C	2	PAX	2,590	0	0	2,590
Airbus A220-100	PW1524G	16L	1	PAX	465	0	0	465
Airbus A220-100	PW1524G	16L	2	PAX	4,230	0	0	4,230
Airbus A220-100	PW1524G	16R	1	PAX	6,285	0	0	6,285
Airbus A220-100	PW1524G	34C	1	PAX	24	0	0	24
Airbus A220-100	PW1524G	34C	2	PAX	81	0	0	81
Airbus A220-100	PW1524G	34L	1	PAX	2,565	0	0	2,565
Airbus A220-100	PW1524G	34R	1	PAX	177	0	0	177
Airbus A220-100	PW1524G	34R	2	PAX	2,686	0	0	2,686
Airbus A220-300	PW1521G	16C	1	PAX	128	0	0	128
Airbus A220-300	PW1521G	16C	2	PAX	57	0	0	57
Airbus A220-300	PW1521G	16C	3	PAX	57	0	0	57
Airbus A220-300	PW1521G	16C	4	PAX	128	0	0	128
Airbus A220-300	PW1521G	16L	1	PAX	260	0	0	260
Airbus A220-300	PW1521G	16L	2	PAX	97	0	0	97
Airbus A220-300	PW1521G	16L	3	PAX	97	0	0	97
Airbus A220-300	PW1521G	16L	4	PAX	214	0	0	214
Airbus A220-300	PW1521G	16R	1	PAX	934	0	0	934
Airbus A220-300	PW1521G	34L	1	PAX	375	0	0	375
Airbus A220-300	PW1521G	34R	1	PAX	146	0	0	146
Airbus A220-300	PW1521G	34R	2	PAX	45	0	0	45
Airbus A220-300	PW1521G	34R	3	PAX	45	0	0	45
Airbus A220-300	PW1521G	34R	4	PAX	139	0	0	139
Airbus A220-300	PW1524G	16C	1	PAX	266	0	0	266
Airbus A220-300	PW1524G	16C	2	PAX	121	0	0	121
Airbus A220-300	PW1524G	16C	3	PAX	121	0	0	121
Airbus A220-300	PW1524G	16C	4	PAX	253	0	0	253
Airbus A220-300	PW1524G	16L	1	PAX	542	0	0	542
Airbus A220-300	PW1524G	16L	2	PAX	204	0	0	204
Airbus A220-300	PW1524G	16L	3	PAX	204	0	0	204
Airbus A220-300	PW1524G	16L	4	PAX	420	0	0	420
Airbus A220-300	PW1524G	16R	1	PAX	1,845	0	0	1,845
Airbus A220-300	PW1524G	34C	1	PAX	6	0	0	6
Airbus A220-300	PW1524G	34C	4	PAX	2	0	0	2
Airbus A220-300	PW1524G	34L	1	PAX	747	0	0	747
Airbus A220-300	PW1524G	34R	1	PAX	292	0	0	292
Airbus A220-300	PW1524G	34R	2	PAX	121	0	0	121
Airbus A220-300	PW1524G	34R	3	PAX	121	0	0	121
Airbus A220-300	PW1524G	34R	4	PAX	261	0	0	261
Airbus A319-100 Series	V2522-A5	16C	1	PAX	56	0	0	56
Airbus A319-100 Series	V2522-A5	16C	2	PAX	57	0	0	57
Airbus A319-100 Series	V2522-A5	16L	1	PAX	101	0	0	101
Airbus A319-100 Series	V2522-A5	16L	2	PAX	94	0	0	94
Airbus A319-100 Series	V2522-A5	16R	1	PAX	273	0	0	273
Airbus A319-100 Series	V2522-A5	34L	1	PAX	100	0	0	100
Airbus A319-100 Series	V2522-A5	34R	1	PAX	41	0	0	41
Airbus A319-100 Series	V2522-A5	34R	2	PAX	40	0	0	40
Airbus A319-100 Series	V2524-A5	16C	1	PAX	33	0	0	33
Airbus A319-100 Series	V2524-A5	16C	2	PAX	33	0	0	33
Airbus A319-100 Series	V2524-A5	16L	1	PAX	56	0	0	56
Airbus A319-100 Series	V2524-A5	16L	2	PAX	56	0	0	56
Airbus A319-100 Series	V2524-A5	16R	1	PAX	149	0	0	149
Airbus A319-100 Series	V2524-A5	34L	1	PAX	55	0	0	55
Airbus A319-100 Series	V2524-A5	34R	1	PAX	13	0	0	13
Airbus A319-100 Series	V2524-A5	34R	2	PAX	13	0	0	13
Airbus A320-200 Series	CFM56-5-A1	16L	2	PAX	71	0	0	71
Airbus A320-200 Series	CFM56-5-A1	16R	1	PAX	60	0	0	60
Airbus A320-200 Series	CFM56-5-A1	34L	1	PAX	11	0	0	11
Airbus A320-200 Series	CFM56-5A3	16C	2	PAX	63	0	0	63
Airbus A320-200 Series	CFM56-5A3	16C	3	PAX	4	0	0	4
Airbus A320-200 Series	CFM56-5A3	16C	4	PAX	14	0	0	14
Airbus A320-200 Series	CFM56-5A3	16L	2	PAX	115	0	0	115
Airbus A320-200 Series	CFM56-5A3	16L	3	PAX	13	0	0	13
Airbus A320-200 Series	CFM56-5A3	16L	4	PAX	43	0	0	43
Airbus A320-200 Series	CFM56-5A3	16R	1	PAX	219	0	0	219
Airbus A320-200 Series	CFM56-5A3	34L	1	PAX	71	0	0	71
Airbus A320-200 Series	CFM56-5A3	34R	2	PAX	28	0	0	28
Airbus A320-200 Series	CFM56-5A3	34R	3	PAX	3	0	0	3
Airbus A320-200 Series	CFM56-5A3	34R	4	PAX	7	0	0	7
Airbus A320-200 Series	CFM56-5B4/3	16C	1	PAX	14	0	0	14
Airbus A320-200 Series	CFM56-5B4/3	16C	2	PAX	476	0	0	476
Airbus A320-200 Series	CFM56-5B4/3	16C	3	PAX	111	0	0	111
Airbus A320-200 Series	CFM56-5B4/3	16C	4	PAX	208	0	0	208
Airbus A320-200 Series	CFM56-5B4/3	16L	1	PAX	123	0	0	123
Airbus A320-200 Series	CFM56-5B4/3	16L	2	PAX	789	0	0	789
Airbus A320-200 Series	CFM56-5B4/3	16L	3	PAX	193	0	0	193
Airbus A320-200 Series	CFM56-5B4/3	16L	4	PAX	351	0	0	351
Airbus A320-200 Series	CFM56-5B4/3	16R	1	PAX	1,949	0	0	1,949
Airbus A320-200 Series	CFM56-5B4/3	34C	1	PAX	2	0	0	2
Airbus A320-200 Series	CFM56-5B4/3	34C	2	PAX	4	0	0	4
Airbus A320-200 Series	CFM56-5B4/3	34L	1	PAX	802	0	0	802

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A320-200 Series	CFM56-5B4/3	34R	1	PAX	32	0	0	32
Airbus A320-200 Series	CFM56-5B4/3	34R	2	PAX	493	0	0	493
Airbus A320-200 Series	CFM56-5B4/3	34R	3	PAX	97	0	0	97
Airbus A320-200 Series	CFM56-5B4/3	34R	4	PAX	200	0	0	200
Airbus A320-200 Series	CFM56-5B4/P	16C	2	PAX	64	0	0	64
Airbus A320-200 Series	CFM56-5B4/P	16C	3	PAX	7	0	0	7
Airbus A320-200 Series	CFM56-5B4/P	16C	4	PAX	20	0	0	20
Airbus A320-200 Series	CFM56-5B4/P	16L	2	PAX	118	0	0	118
Airbus A320-200 Series	CFM56-5B4/P	16L	3	PAX	19	0	0	19
Airbus A320-200 Series	CFM56-5B4/P	16L	4	PAX	43	0	0	43
Airbus A320-200 Series	CFM56-5B4/P	16R	1	PAX	232	0	0	232
Airbus A320-200 Series	CFM56-5B4/P	34L	1	PAX	82	0	0	82
Airbus A320-200 Series	CFM56-5B4/P	34R	2	PAX	28	0	0	28
Airbus A320-200 Series	CFM56-5B4/P	34R	3	PAX	3	0	0	3
Airbus A320-200 Series	CFM56-5B4/P	34R	4	PAX	12	0	0	12
Airbus A320-200 Series	V2527-A5	16C	2	PAX	103	0	0	103
Airbus A320-200 Series	V2527-A5	16C	3	PAX	18	0	0	18
Airbus A320-200 Series	V2527-A5	16C	4	PAX	39	0	0	39
Airbus A320-200 Series	V2527-A5	16L	1	PAX	11	0	0	11
Airbus A320-200 Series	V2527-A5	16L	2	PAX	186	0	0	186
Airbus A320-200 Series	V2527-A5	16L	3	PAX	36	0	0	36
Airbus A320-200 Series	V2527-A5	16L	4	PAX	75	0	0	75
Airbus A320-200 Series	V2527-A5	16R	1	PAX	400	0	0	400
Airbus A320-200 Series	V2527-A5	34L	1	PAX	140	0	0	140
Airbus A320-200 Series	V2527-A5	34R	1	PAX	1	0	0	1
Airbus A320-200 Series	V2527-A5	34R	2	PAX	71	0	0	71
Airbus A320-200 Series	V2527-A5	34R	3	PAX	8	0	0	8
Airbus A320-200 Series	V2527-A5	34R	4	PAX	16	0	0	16
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16C	2	PAX	58	0	0	58
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16C	3	PAX	2	0	0	2
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16C	4	PAX	13	0	0	13
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16L	2	PAX	106	0	0	106
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16L	3	PAX	13	0	0	13
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16L	4	PAX	33	0	0	33
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16R	1	PAX	200	0	0	200
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34L	1	PAX	62	0	0	62
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34R	2	PAX	27	0	0	27
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34R	3	PAX	3	0	0	3
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34R	4	PAX	7	0	0	7
Airbus A320-200 Series	V2527-A5E SelectOne? Upgrade Package	16L	2	PAX	57	0	0	57
Airbus A320-200 Series	V2527-A5E SelectOne? Upgrade Package	16R	1	PAX	47	0	0	47
Airbus A320-200 Series	V2527-A5E SelectOne? Upgrade Package	34L	1	PAX	10	0	0	10
Airbus A320-NEO	LEAP-1A26/26E1	16C	2	PAX	184	0	0	184
Airbus A320-NEO	LEAP-1A26/26E1	16C	3	PAX	102	0	0	102
Airbus A320-NEO	LEAP-1A26/26E1	16C	4	PAX	170	0	0	170
Airbus A320-NEO	LEAP-1A26/26E1	16L	1	PAX	65	0	0	65
Airbus A320-NEO	LEAP-1A26/26E1	16L	2	PAX	312	0	0	312
Airbus A320-NEO	LEAP-1A26/26E1	16L	3	PAX	178	0	0	178
Airbus A320-NEO	LEAP-1A26/26E1	16L	4	PAX	295	0	0	295
Airbus A320-NEO	LEAP-1A26/26E1	16R	1	PAX	1,156	0	0	1,156
Airbus A320-NEO	LEAP-1A26/26E1	34L	1	PAX	469	0	0	469
Airbus A320-NEO	LEAP-1A26/26E1	34R	1	PAX	10	0	0	10
Airbus A320-NEO	LEAP-1A26/26E1	34R	2	PAX	190	0	0	190
Airbus A320-NEO	LEAP-1A26/26E1	34R	3	PAX	103	0	0	103
Airbus A320-NEO	LEAP-1A26/26E1	34R	4	PAX	166	0	0	166
Airbus A320-NEO	PW1127G-JM	16C	1	PAX	6	0	0	6
Airbus A320-NEO	PW1127G-JM	16C	2	PAX	288	0	0	288
Airbus A320-NEO	PW1127G-JM	16C	3	PAX	169	0	0	169
Airbus A320-NEO	PW1127G-JM	16C	4	PAX	271	0	0	271
Airbus A320-NEO	PW1127G-JM	16L	1	PAX	117	0	0	117
Airbus A320-NEO	PW1127G-JM	16L	2	PAX	472	0	0	472
Airbus A320-NEO	PW1127G-JM	16L	3	PAX	278	0	0	278
Airbus A320-NEO	PW1127G-JM	16L	4	PAX	456	0	0	456
Airbus A320-NEO	PW1127G-JM	16R	1	PAX	1,807	0	0	1,807
Airbus A320-NEO	PW1127G-JM	34C	1	PAX	1	0	0	1
Airbus A320-NEO	PW1127G-JM	34C	2	PAX	3	0	0	3
Airbus A320-NEO	PW1127G-JM	34L	1	PAX	739	0	0	739
Airbus A320-NEO	PW1127G-JM	34R	1	PAX	28	0	0	28
Airbus A320-NEO	PW1127G-JM	34R	2	PAX	301	0	0	301
Airbus A320-NEO	PW1127G-JM	34R	3	PAX	179	0	0	179
Airbus A320-NEO	PW1127G-JM	34R	4	PAX	281	0	0	281
Airbus A321-200 Series	CFM56-5B3/3	16C	2	PAX	19	0	0	19
Airbus A321-200 Series	CFM56-5B3/3	16C	3	PAX	43	0	0	43
Airbus A321-200 Series	CFM56-5B3/3	16C	4	PAX	90	0	0	90
Airbus A321-200 Series	CFM56-5B3/3	16L	1	PAX	7	0	0	7
Airbus A321-200 Series	CFM56-5B3/3	16L	2	PAX	39	0	0	39
Airbus A321-200 Series	CFM56-5B3/3	16L	3	PAX	89	0	0	89
Airbus A321-200 Series	CFM56-5B3/3	16L	4	PAX	165	0	0	165
Airbus A321-200 Series	CFM56-5B3/3	16R	1	PAX	382	0	0	382
Airbus A321-200 Series	CFM56-5B3/3	34L	1	PAX	129	0	0	129
Airbus A321-200 Series	CFM56-5B3/3	34R	1	PAX	1	0	0	1
Airbus A321-200 Series	CFM56-5B3/3	34R	2	PAX	9	0	0	9

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A321-200 Series	CFM56-5B3/3	34R	3	PAX	18	0	0	18
Airbus A321-200 Series	CFM56-5B3/3	34R	4	PAX	47	0	0	47
Airbus A321-200 Series	CFM56-5B3/P	16C	2	PAX	19	0	0	19
Airbus A321-200 Series	CFM56-5B3/P	16C	3	PAX	44	0	0	44
Airbus A321-200 Series	CFM56-5B3/P	16C	4	PAX	91	0	0	91
Airbus A321-200 Series	CFM56-5B3/P	16L	1	PAX	8	0	0	8
Airbus A321-200 Series	CFM56-5B3/P	16L	2	PAX	41	0	0	41
Airbus A321-200 Series	CFM56-5B3/P	16L	3	PAX	95	0	0	95
Airbus A321-200 Series	CFM56-5B3/P	16L	4	PAX	170	0	0	170
Airbus A321-200 Series	CFM56-5B3/P	16R	1	PAX	393	0	0	393
Airbus A321-200 Series	CFM56-5B3/P	34L	1	PAX	134	0	0	134
Airbus A321-200 Series	CFM56-5B3/P	34R	1	PAX	1	0	0	1
Airbus A321-200 Series	CFM56-5B3/P	34R	2	PAX	9	0	0	9
Airbus A321-200 Series	CFM56-5B3/P	34R	3	PAX	18	0	0	18
Airbus A321-200 Series	CFM56-5B3/P	34R	4	PAX	49	0	0	49
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	1	PAX	14	0	0	14
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	2	PAX	137	0	0	137
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	3	PAX	256	0	0	256
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	4	PAX	453	0	0	453
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	1	PAX	139	0	0	139
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	2	PAX	241	0	0	241
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	3	PAX	435	0	0	435
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	4	PAX	762	0	0	762
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16R	1	PAX	2,099	0	0	2,099
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34C	1	PAX	4	0	0	4
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34C	3	PAX	1	0	0	1
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34C	4	PAX	5	0	0	5
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34L	1	PAX	857	0	0	857
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	1	PAX	36	0	0	36
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	2	PAX	125	0	0	125
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	3	PAX	258	0	0	258
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	4	PAX	476	0	0	476
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	1	PAX	55	0	0	55
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	2	PAX	441	0	0	441
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	3	PAX	290	0	0	290
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	4	PAX	1,341	0	0	1,341
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	1	PAX	364	0	0	364
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	2	PAX	738	0	0	738
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	3	PAX	489	0	0	489
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	4	PAX	2,212	0	0	2,212
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16R	1	PAX	5,078	0	0	5,078
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	1	PAX	15	0	0	15
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	2	PAX	6	0	0	6
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	3	PAX	3	0	0	3
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	4	PAX	19	0	0	19
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34L	1	PAX	2,065	0	0	2,065
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	1	PAX	137	0	0	137
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	2	PAX	470	0	0	470
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	3	PAX	302	0	0	302
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	4	PAX	1,403	0	0	1,403
Airbus A321-NEO	PW1133G-JM	16C	1	PAX	2	0	0	2
Airbus A321-NEO	PW1133G-JM	16C	2	PAX	144	0	0	144
Airbus A321-NEO	PW1133G-JM	16C	3	PAX	93	0	0	93
Airbus A321-NEO	PW1133G-JM	16C	4	PAX	454	0	0	454
Airbus A321-NEO	PW1133G-JM	16L	1	PAX	108	0	0	108
Airbus A321-NEO	PW1133G-JM	16L	2	PAX	250	0	0	250
Airbus A321-NEO	PW1133G-JM	16L	3	PAX	158	0	0	158
Airbus A321-NEO	PW1133G-JM	16L	4	PAX	770	0	0	770
Airbus A321-NEO	PW1133G-JM	16R	1	PAX	1,750	0	0	1,750
Airbus A321-NEO	PW1133G-JM	34C	1	PAX	1	0	0	1
Airbus A321-NEO	PW1133G-JM	34C	4	PAX	4	0	0	4
Airbus A321-NEO	PW1133G-JM	34L	1	PAX	717	0	0	717
Airbus A321-NEO	PW1133G-JM	34R	1	PAX	23	0	0	23
Airbus A321-NEO	PW1133G-JM	34R	2	PAX	153	0	0	153
Airbus A321-NEO	PW1133G-JM	34R	3	PAX	97	0	0	97
Airbus A321-NEO	PW1133G-JM	34R	4	PAX	478	0	0	478
Airbus A330-200 Series	Trent 772	16C	4	PAX	30	0	0	30
Airbus A330-200 Series	Trent 772	16C	6	PAX	67	0	0	67
Airbus A330-200 Series	Trent 772	16C	7	PAX	51	0	0	51
Airbus A330-200 Series	Trent 772	16L	1	PAX	727	0	0	727
Airbus A330-200 Series	Trent 772	16L	4	PAX	161	0	0	161
Airbus A330-200 Series	Trent 772	16L	6	PAX	340	0	0	340
Airbus A330-200 Series	Trent 772	16L	7	PAX	252	0	0	252
Airbus A330-200 Series	Trent 772	16R	1	PAX	175	0	0	175
Airbus A330-200 Series	Trent 772	34L	1	PAX	66	0	0	66
Airbus A330-200 Series	Trent 772	34R	1	PAX	275	0	0	275
Airbus A330-200 Series	Trent 772	34R	4	PAX	67	0	0	67
Airbus A330-200 Series	Trent 772	34R	6	PAX	158	0	0	158
Airbus A330-200 Series	Trent 772	34R	7	PAX	117	0	0	117
Airbus A330-300 Series	CF6-80E1A4	16C	6	PAX	17	0	0	17
Airbus A330-300 Series	CF6-80E1A4	16C	7	PAX	17	0	0	17
Airbus A330-300 Series	CF6-80E1A4	16L	1	PAX	171	0	0	171

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A330-300 Series	CF6-80E1A4	16L	6	PAX	98	0	0	98
Airbus A330-300 Series	CF6-80E1A4	16L	7	PAX	97	0	0	97
Airbus A330-300 Series	CF6-80E1A4	16R	1	PAX	35	0	0	35
Airbus A330-300 Series	CF6-80E1A4	34L	1	PAX	7	0	0	7
Airbus A330-300 Series	CF6-80E1A4	34R	1	PAX	60	0	0	60
Airbus A330-300 Series	CF6-80E1A4	34R	6	PAX	22	0	0	22
Airbus A330-300 Series	CF6-80E1A4	34R	7	PAX	22	0	0	22
Airbus A330-300 Series	PW4168A	16L	1	PAX	33	0	0	33
Airbus A330-300 Series	PW4168A	16L	6	PAX	18	0	0	18
Airbus A330-300 Series	PW4168A	16L	7	PAX	19	0	0	19
Airbus A330-300 Series	PW4168A	34R	1	PAX	4	0	0	4
Airbus A330-300 Series	PW4168A-1D	16C	6	PAX	47	0	0	47
Airbus A330-300 Series	PW4168A-1D	16C	7	PAX	47	0	0	47
Airbus A330-300 Series	PW4168A-1D	16L	1	PAX	448	0	0	448
Airbus A330-300 Series	PW4168A-1D	16L	6	PAX	235	0	0	235
Airbus A330-300 Series	PW4168A-1D	16L	7	PAX	235	0	0	235
Airbus A330-300 Series	PW4168A-1D	16R	1	PAX	110	0	0	110
Airbus A330-300 Series	PW4168A-1D	34L	1	PAX	35	0	0	35
Airbus A330-300 Series	PW4168A-1D	34R	1	PAX	178	0	0	178
Airbus A330-300 Series	PW4168A-1D	34R	6	PAX	103	0	0	103
Airbus A330-300 Series	PW4168A-1D	34R	7	PAX	104	0	0	104
Airbus A330-300 Series	PW4170	16C	6	PAX	6	0	0	6
Airbus A330-300 Series	PW4170	16C	7	PAX	6	0	0	6
Airbus A330-300 Series	PW4170	16L	1	PAX	120	0	0	120
Airbus A330-300 Series	PW4170	16L	6	PAX	73	0	0	73
Airbus A330-300 Series	PW4170	16L	7	PAX	73	0	0	73
Airbus A330-300 Series	PW4170	16R	1	PAX	25	0	0	25
Airbus A330-300 Series	PW4170	34L	1	PAX	4	0	0	4
Airbus A330-300 Series	PW4170	34R	1	PAX	32	0	0	32
Airbus A330-300 Series	PW4170	34R	6	PAX	11	0	0	11
Airbus A330-300 Series	PW4170	34R	7	PAX	12	0	0	12
Airbus A330-300 Series	Trent 772	16C	6	PAX	17	0	0	17
Airbus A330-300 Series	Trent 772	16C	7	PAX	17	0	0	17
Airbus A330-300 Series	Trent 772	16L	1	PAX	168	0	0	168
Airbus A330-300 Series	Trent 772	16L	6	PAX	96	0	0	96
Airbus A330-300 Series	Trent 772	16L	7	PAX	96	0	0	96
Airbus A330-300 Series	Trent 772	16R	1	PAX	35	0	0	35
Airbus A330-300 Series	Trent 772	34L	1	PAX	7	0	0	7
Airbus A330-300 Series	Trent 772	34R	1	PAX	59	0	0	59
Airbus A330-300 Series	Trent 772	34R	6	PAX	21	0	0	21
Airbus A330-300 Series	Trent 772	34R	7	PAX	22	0	0	22
Airbus A330-900N Series (Neo)	Trent7000-72	16C	1	PAX	14	0	0	14
Airbus A330-900N Series (Neo)	Trent7000-72	16C	7	PAX	320	0	0	320
Airbus A330-900N Series (Neo)	Trent7000-72	16L	1	PAX	1,392	0	0	1,392
Airbus A330-900N Series (Neo)	Trent7000-72	16L	7	PAX	1,465	0	0	1,465
Airbus A330-900N Series (Neo)	Trent7000-72	16R	1	PAX	376	0	0	376
Airbus A330-900N Series (Neo)	Trent7000-72	34C	1	PAX	4	0	0	4
Airbus A330-900N Series (Neo)	Trent7000-72	34C	7	PAX	4	0	0	4
Airbus A330-900N Series (Neo)	Trent7000-72	34L	1	PAX	162	0	0	162
Airbus A330-900N Series (Neo)	Trent7000-72	34R	1	PAX	563	0	0	563
Airbus A330-900N Series (Neo)	Trent7000-72	34R	7	PAX	722	0	0	722
Airbus A350-900 series	Trent XWB-84	16C	6	PAX	35	0	0	35
Airbus A350-900 series	Trent XWB-84	16C	7	PAX	72	0	0	72
Airbus A350-900 series	Trent XWB-84	16L	1	PAX	537	0	0	537
Airbus A350-900 series	Trent XWB-84	16L	6	PAX	195	0	0	195
Airbus A350-900 series	Trent XWB-84	16L	7	PAX	395	0	0	395
Airbus A350-900 series	Trent XWB-84	16R	1	PAX	137	0	0	137
Airbus A350-900 series	Trent XWB-84	34L	1	PAX	51	0	0	51
Airbus A350-900 series	Trent XWB-84	34R	1	PAX	215	0	0	215
Airbus A350-900 series	Trent XWB-84	34R	6	PAX	80	0	0	80
Airbus A350-900 series	Trent XWB-84	34R	7	PAX	163	0	0	163
Boeing 737-7	LEAP-1B27	16C	2	PAX	94	0	0	94
Boeing 737-7	LEAP-1B27	16C	4	PAX	67	0	0	67
Boeing 737-7	LEAP-1B27	16L	1	PAX	14	0	0	14
Boeing 737-7	LEAP-1B27	16L	2	PAX	164	0	0	164
Boeing 737-7	LEAP-1B27	16L	4	PAX	111	0	0	111
Boeing 737-7	LEAP-1B27	16R	1	PAX	390	0	0	390
Boeing 737-7	LEAP-1B27	34L	1	PAX	142	0	0	142
Boeing 737-7	LEAP-1B27	34R	1	PAX	1	0	0	1
Boeing 737-7	LEAP-1B27	34R	2	PAX	61	0	0	61
Boeing 737-7	LEAP-1B27	34R	4	PAX	50	0	0	50
Boeing 737-700 Series	CFM56-7B20	16C	2	PAX	11	0	0	11
Boeing 737-700 Series	CFM56-7B20	16L	2	PAX	31	0	0	31
Boeing 737-700 Series	CFM56-7B20	16R	1	PAX	42	0	0	42
Boeing 737-700 Series	CFM56-7B20	34L	1	PAX	5	0	0	5
Boeing 737-700 Series	CFM56-7B20	34R	2	PAX	5	0	0	5
Boeing 737-700 Series	CFM56-7B22	16C	2	PAX	429	0	0	429
Boeing 737-700 Series	CFM56-7B22	16L	1	PAX	62	0	0	62
Boeing 737-700 Series	CFM56-7B22	16L	2	PAX	722	0	0	722
Boeing 737-700 Series	CFM56-7B22	16R	1	PAX	1,086	0	0	1,086
Boeing 737-700 Series	CFM56-7B22	34C	2	PAX	4	0	0	4
Boeing 737-700 Series	CFM56-7B22	34L	1	PAX	444	0	0	444

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-700 Series	CFM56-7B22	34R	1	PAX	11	0	0	11
Boeing 737-700 Series	CFM56-7B22	34R	2	PAX	448	0	0	448
Boeing 737-700 Series	CFM56-7B22/3	16C	2	PAX	79	0	0	79
Boeing 737-700 Series	CFM56-7B22/3	16L	2	PAX	136	0	0	136
Boeing 737-700 Series	CFM56-7B22/3	16R	1	PAX	215	0	0	215
Boeing 737-700 Series	CFM56-7B22/3	34L	1	PAX	57	0	0	57
Boeing 737-700 Series	CFM56-7B22/3	34R	2	PAX	57	0	0	57
Boeing 737-700 Series	CFM56-7B24	16C	2	PAX	85	0	0	85
Boeing 737-700 Series	CFM56-7B24	16L	2	PAX	144	0	0	144
Boeing 737-700 Series	CFM56-7B24	16R	1	PAX	227	0	0	227
Boeing 737-700 Series	CFM56-7B24	34L	1	PAX	65	0	0	65
Boeing 737-700 Series	CFM56-7B24	34R	2	PAX	63	0	0	63
Boeing 737-8	LEAP-1B25	16C	2	PAX	15	0	0	15
Boeing 737-8	LEAP-1B25	16C	4	PAX	16	0	0	16
Boeing 737-8	LEAP-1B25	16L	2	PAX	52	0	0	52
Boeing 737-8	LEAP-1B25	16L	4	PAX	40	0	0	40
Boeing 737-8	LEAP-1B25	16R	1	PAX	118	0	0	118
Boeing 737-8	LEAP-1B25	34L	1	PAX	24	0	0	24
Boeing 737-8	LEAP-1B25	34R	2	PAX	11	0	0	11
Boeing 737-8	LEAP-1B25	34R	4	PAX	8	0	0	8
Boeing 737-8	LEAP-1B27	16C	1	PAX	27	0	0	27
Boeing 737-8	LEAP-1B27	16C	2	PAX	742	0	0	742
Boeing 737-8	LEAP-1B27	16C	4	PAX	502	0	0	502
Boeing 737-8	LEAP-1B27	16L	1	PAX	207	0	0	207
Boeing 737-8	LEAP-1B27	16L	2	PAX	1,220	0	0	1,220
Boeing 737-8	LEAP-1B27	16L	4	PAX	819	0	0	819
Boeing 737-8	LEAP-1B27	16R	1	PAX	3,039	0	0	3,039
Boeing 737-8	LEAP-1B27	34C	1	PAX	7	0	0	7
Boeing 737-8	LEAP-1B27	34C	2	PAX	8	0	0	8
Boeing 737-8	LEAP-1B27	34C	4	PAX	6	0	0	6
Boeing 737-8	LEAP-1B27	34L	1	PAX	1,240	0	0	1,240
Boeing 737-8	LEAP-1B27	34R	1	PAX	66	0	0	66
Boeing 737-8	LEAP-1B27	34R	2	PAX	770	0	0	770
Boeing 737-8	LEAP-1B27	34R	4	PAX	519	0	0	519
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	1	PAX	25	0	0	25
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	2	PAX	675	0	0	675
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	4	PAX	454	0	0	454
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	1	PAX	191	0	0	191
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	2	PAX	1,136	0	0	1,136
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	4	PAX	758	0	0	758
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16R	1	PAX	2,800	0	0	2,800
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	1	PAX	6	0	0	6
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	2	PAX	8	0	0	8
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	4	PAX	6	0	0	6
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34L	1	PAX	1,144	0	0	1,144
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	1	PAX	65	0	0	65
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	2	PAX	715	0	0	715
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	4	PAX	479	0	0	479
Boeing 737-800 Series	CFM56-7B24	16C	1	PAX	213	0	0	213
Boeing 737-800 Series	CFM56-7B24	16C	2	PAX	1,222	0	0	1,222
Boeing 737-800 Series	CFM56-7B24	16C	3	PAX	479	0	0	479
Boeing 737-800 Series	CFM56-7B24	16C	4	PAX	544	0	0	544
Boeing 737-800 Series	CFM56-7B24	16L	1	PAX	691	0	0	691
Boeing 737-800 Series	CFM56-7B24	16L	2	PAX	2,011	0	0	2,011
Boeing 737-800 Series	CFM56-7B24	16L	3	PAX	802	0	0	802
Boeing 737-800 Series	CFM56-7B24	16L	4	PAX	905	0	0	905
Boeing 737-800 Series	CFM56-7B24	16R	1	PAX	5,836	0	0	5,836
Boeing 737-800 Series	CFM56-7B24	34C	1	PAX	20	0	0	20
Boeing 737-800 Series	CFM56-7B24	34C	2	PAX	20	0	0	20
Boeing 737-800 Series	CFM56-7B24	34C	3	PAX	6	0	0	6
Boeing 737-800 Series	CFM56-7B24	34C	4	PAX	5	0	0	5
Boeing 737-800 Series	CFM56-7B24	34L	1	PAX	2,375	0	0	2,375
Boeing 737-800 Series	CFM56-7B24	34R	1	PAX	302	0	0	302
Boeing 737-800 Series	CFM56-7B24	34R	2	PAX	1,270	0	0	1,270
Boeing 737-800 Series	CFM56-7B24	34R	3	PAX	494	0	0	494
Boeing 737-800 Series	CFM56-7B24	34R	4	PAX	573	0	0	573
Boeing 737-800 Series	CFM56-7B24/3	16C	2	PAX	20	0	0	20
Boeing 737-800 Series	CFM56-7B24/3	16L	2	PAX	59	0	0	59
Boeing 737-800 Series	CFM56-7B24/3	16R	1	PAX	74	0	0	74
Boeing 737-800 Series	CFM56-7B24/3	34L	1	PAX	14	0	0	14
Boeing 737-800 Series	CFM56-7B24/3	34R	2	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B24E	16C	2	PAX	45	0	0	45
Boeing 737-800 Series	CFM56-7B24E	16C	3	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B24E	16C	4	PAX	8	0	0	8
Boeing 737-800 Series	CFM56-7B24E	16L	2	PAX	79	0	0	79
Boeing 737-800 Series	CFM56-7B24E	16L	3	PAX	27	0	0	27
Boeing 737-800 Series	CFM56-7B24E	16L	4	PAX	18	0	0	18
Boeing 737-800 Series	CFM56-7B24E	16R	1	PAX	168	0	0	168
Boeing 737-800 Series	CFM56-7B24E	34L	1	PAX	45	0	0	45
Boeing 737-800 Series	CFM56-7B24E	34R	2	PAX	19	0	0	19
Boeing 737-800 Series	CFM56-7B24E	34R	3	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B24E	34R	4	PAX	4	0	0	4

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-800 Series	CFM56-7B26	16C	1	PAX	314	0	0	314
Boeing 737-800 Series	CFM56-7B26	16C	2	PAX	1,666	0	0	1,666
Boeing 737-800 Series	CFM56-7B26	16C	3	PAX	662	0	0	662
Boeing 737-800 Series	CFM56-7B26	16C	4	PAX	748	0	0	748
Boeing 737-800 Series	CFM56-7B26	16L	1	PAX	958	0	0	958
Boeing 737-800 Series	CFM56-7B26	16L	2	PAX	2,729	0	0	2,729
Boeing 737-800 Series	CFM56-7B26	16L	3	PAX	1,087	0	0	1,087
Boeing 737-800 Series	CFM56-7B26	16L	4	PAX	1,243	0	0	1,243
Boeing 737-800 Series	CFM56-7B26	16R	1	PAX	7,955	0	0	7,955
Boeing 737-800 Series	CFM56-7B26	34C	1	PAX	34	0	0	34
Boeing 737-800 Series	CFM56-7B26	34C	2	PAX	29	0	0	29
Boeing 737-800 Series	CFM56-7B26	34C	3	PAX	8	0	0	8
Boeing 737-800 Series	CFM56-7B26	34C	4	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B26	34L	1	PAX	3,239	0	0	3,239
Boeing 737-800 Series	CFM56-7B26	34R	1	PAX	444	0	0	444
Boeing 737-800 Series	CFM56-7B26	34R	2	PAX	1,730	0	0	1,730
Boeing 737-800 Series	CFM56-7B26	34R	3	PAX	681	0	0	681
Boeing 737-800 Series	CFM56-7B26	34R	4	PAX	786	0	0	786
Boeing 737-800 Series	CFM56-7B26/3	16C	1	PAX	12	0	0	12
Boeing 737-800 Series	CFM56-7B26/3	16C	2	PAX	173	0	0	173
Boeing 737-800 Series	CFM56-7B26/3	16C	3	PAX	64	0	0	64
Boeing 737-800 Series	CFM56-7B26/3	16C	4	PAX	71	0	0	71
Boeing 737-800 Series	CFM56-7B26/3	16L	1	PAX	61	0	0	61
Boeing 737-800 Series	CFM56-7B26/3	16L	2	PAX	292	0	0	292
Boeing 737-800 Series	CFM56-7B26/3	16L	3	PAX	102	0	0	102
Boeing 737-800 Series	CFM56-7B26/3	16L	4	PAX	117	0	0	117
Boeing 737-800 Series	CFM56-7B26/3	16R	1	PAX	780	0	0	780
Boeing 737-800 Series	CFM56-7B26/3	34L	1	PAX	313	0	0	313
Boeing 737-800 Series	CFM56-7B26/3	34R	1	PAX	13	0	0	13
Boeing 737-800 Series	CFM56-7B26/3	34R	2	PAX	181	0	0	181
Boeing 737-800 Series	CFM56-7B26/3	34R	3	PAX	48	0	0	48
Boeing 737-800 Series	CFM56-7B26/3	34R	4	PAX	45	0	0	45
Boeing 737-800 Series	CFM56-7B26E	16C	1	PAX	55	0	0	55
Boeing 737-800 Series	CFM56-7B26E	16C	2	PAX	412	0	0	412
Boeing 737-800 Series	CFM56-7B26E	16C	3	PAX	152	0	0	152
Boeing 737-800 Series	CFM56-7B26E	16C	4	PAX	177	0	0	177
Boeing 737-800 Series	CFM56-7B26E	16L	1	PAX	205	0	0	205
Boeing 737-800 Series	CFM56-7B26E	16L	2	PAX	694	0	0	694
Boeing 737-800 Series	CFM56-7B26E	16L	3	PAX	262	0	0	262
Boeing 737-800 Series	CFM56-7B26E	16L	4	PAX	299	0	0	299
Boeing 737-800 Series	CFM56-7B26E	16R	1	PAX	1,940	0	0	1,940
Boeing 737-800 Series	CFM56-7B26E	34C	1	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B26E	34C	2	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B26E	34L	1	PAX	786	0	0	786
Boeing 737-800 Series	CFM56-7B26E	34R	1	PAX	58	0	0	58
Boeing 737-800 Series	CFM56-7B26E	34R	2	PAX	430	0	0	430
Boeing 737-800 Series	CFM56-7B26E	34R	3	PAX	158	0	0	158
Boeing 737-800 Series	CFM56-7B26E	34R	4	PAX	168	0	0	168
Boeing 737-800 Series	CFM56-7B27	16C	1	PAX	7	0	0	7
Boeing 737-800 Series	CFM56-7B27	16C	2	PAX	132	0	0	132
Boeing 737-800 Series	CFM56-7B27	16C	3	PAX	45	0	0	45
Boeing 737-800 Series	CFM56-7B27	16C	4	PAX	46	0	0	46
Boeing 737-800 Series	CFM56-7B27	16L	1	PAX	44	0	0	44
Boeing 737-800 Series	CFM56-7B27	16L	2	PAX	234	0	0	234
Boeing 737-800 Series	CFM56-7B27	16L	3	PAX	80	0	0	80
Boeing 737-800 Series	CFM56-7B27	16L	4	PAX	95	0	0	95
Boeing 737-800 Series	CFM56-7B27	16R	1	PAX	594	0	0	594
Boeing 737-800 Series	CFM56-7B27	34L	1	PAX	234	0	0	234
Boeing 737-800 Series	CFM56-7B27	34R	1	PAX	7	0	0	7
Boeing 737-800 Series	CFM56-7B27	34R	2	PAX	136	0	0	136
Boeing 737-800 Series	CFM56-7B27	34R	3	PAX	32	0	0	32
Boeing 737-800 Series	CFM56-7B27	34R	4	PAX	30	0	0	30
Boeing 737-800 Series	CFM56-7B27/3	16C	1	PAX	119	0	0	119
Boeing 737-800 Series	CFM56-7B27/3	16C	2	PAX	747	0	0	747
Boeing 737-800 Series	CFM56-7B27/3	16C	3	PAX	287	0	0	287
Boeing 737-800 Series	CFM56-7B27/3	16C	4	PAX	323	0	0	323
Boeing 737-800 Series	CFM56-7B27/3	16L	1	PAX	402	0	0	402
Boeing 737-800 Series	CFM56-7B27/3	16L	2	PAX	1,237	0	0	1,237
Boeing 737-800 Series	CFM56-7B27/3	16L	3	PAX	480	0	0	480
Boeing 737-800 Series	CFM56-7B27/3	16L	4	PAX	544	0	0	544
Boeing 737-800 Series	CFM56-7B27/3	16R	1	PAX	3,519	0	0	3,519
Boeing 737-800 Series	CFM56-7B27/3	34C	1	PAX	7	0	0	7
Boeing 737-800 Series	CFM56-7B27/3	34C	2	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B27/3	34C	3	PAX	3	0	0	3
Boeing 737-800 Series	CFM56-7B27/3	34C	4	PAX	2	0	0	2
Boeing 737-800 Series	CFM56-7B27/3	34L	1	PAX	1,439	0	0	1,439
Boeing 737-800 Series	CFM56-7B27/3	34R	1	PAX	155	0	0	155
Boeing 737-800 Series	CFM56-7B27/3	34R	2	PAX	776	0	0	776
Boeing 737-800 Series	CFM56-7B27/3	34R	3	PAX	294	0	0	294
Boeing 737-800 Series	CFM56-7B27/3	34R	4	PAX	323	0	0	323
Boeing 737-800 Series	CFM56-7B27E/B1	16C	1	PAX	18	0	0	18
Boeing 737-800 Series	CFM56-7B27E/B1	16C	2	PAX	237	0	0	237

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-800 Series	CFM56-7B27E/B1	16C	3	PAX	81	0	0	81
Boeing 737-800 Series	CFM56-7B27E/B1	16C	4	PAX	99	0	0	99
Boeing 737-800 Series	CFM56-7B27E/B1	16L	1	PAX	97	0	0	97
Boeing 737-800 Series	CFM56-7B27E/B1	16L	2	PAX	398	0	0	398
Boeing 737-800 Series	CFM56-7B27E/B1	16L	3	PAX	147	0	0	147
Boeing 737-800 Series	CFM56-7B27E/B1	16L	4	PAX	163	0	0	163
Boeing 737-800 Series	CFM56-7B27E/B1	16R	1	PAX	1,083	0	0	1,083
Boeing 737-800 Series	CFM56-7B27E/B1	34C	2	PAX	1	0	0	1
Boeing 737-800 Series	CFM56-7B27E/B1	34L	1	PAX	432	0	0	432
Boeing 737-800 Series	CFM56-7B27E/B1	34R	1	PAX	21	0	0	21
Boeing 737-800 Series	CFM56-7B27E/B1	34R	2	PAX	235	0	0	235
Boeing 737-800 Series	CFM56-7B27E/B1	34R	3	PAX	77	0	0	77
Boeing 737-800 Series	CFM56-7B27E/B1	34R	4	PAX	77	0	0	77
Boeing 737-800 Series	CFM56-7B27E/B1F	16L	2	PAX	33	0	0	33
Boeing 737-800 Series	CFM56-7B27E/B1F	16R	1	PAX	28	0	0	28
Boeing 737-800 Series	CFM56-7B27E/B1F	34L	1	PAX	5	0	0	5
Boeing 737-800 Series	CFM56-7B27E/F	16C	2	PAX	61	0	0	61
Boeing 737-800 Series	CFM56-7B27E/F	16C	3	PAX	21	0	0	21
Boeing 737-800 Series	CFM56-7B27E/F	16C	4	PAX	19	0	0	19
Boeing 737-800 Series	CFM56-7B27E/F	16L	1	PAX	3	0	0	3
Boeing 737-800 Series	CFM56-7B27E/F	16L	2	PAX	115	0	0	115
Boeing 737-800 Series	CFM56-7B27E/F	16L	3	PAX	38	0	0	38
Boeing 737-800 Series	CFM56-7B27E/F	16L	4	PAX	40	0	0	40
Boeing 737-800 Series	CFM56-7B27E/F	16R	1	PAX	261	0	0	261
Boeing 737-800 Series	CFM56-7B27E/F	34L	1	PAX	90	0	0	90
Boeing 737-800 Series	CFM56-7B27E/F	34R	2	PAX	39	0	0	39
Boeing 737-800 Series	CFM56-7B27E/F	34R	3	PAX	10	0	0	10
Boeing 737-800 Series	CFM56-7B27E/F	34R	4	PAX	7	0	0	7
Boeing 737-9	LEAP-1B27	16C	2	PAX	16	0	0	16
Boeing 737-9	LEAP-1B27	16C	3	PAX	3	0	0	3
Boeing 737-9	LEAP-1B27	16C	4	PAX	37	0	0	37
Boeing 737-9	LEAP-1B27	16L	2	PAX	43	0	0	43
Boeing 737-9	LEAP-1B27	16L	3	PAX	16	0	0	16
Boeing 737-9	LEAP-1B27	16L	4	PAX	78	0	0	78
Boeing 737-9	LEAP-1B27	16R	1	PAX	170	0	0	170
Boeing 737-9	LEAP-1B27	34L	1	PAX	51	0	0	51
Boeing 737-9	LEAP-1B27	34R	2	PAX	8	0	0	8
Boeing 737-9	LEAP-1B27	34R	3	PAX	3	0	0	3
Boeing 737-9	LEAP-1B27	34R	4	PAX	17	0	0	17
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	1	PAX	64	0	0	64
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	2	PAX	784	0	0	784
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	3	PAX	434	0	0	434
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	4	PAX	1,127	0	0	1,127
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	1	PAX	424	0	0	424
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	2	PAX	1,292	0	0	1,292
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	3	PAX	729	0	0	729
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	4	PAX	1,866	0	0	1,866
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16R	1	PAX	5,723	0	0	5,723
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	1	PAX	21	0	0	21
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	2	PAX	10	0	0	10
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	3	PAX	4	0	0	4
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	4	PAX	14	0	0	14
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34L	1	PAX	2,332	0	0	2,332
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	1	PAX	155	0	0	155
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	2	PAX	820	0	0	820
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	3	PAX	455	0	0	455
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	4	PAX	1,184	0	0	1,184
Boeing 737-900-ER	CFM56-7B26/3	16C	2	PAX	108	0	0	108
Boeing 737-900-ER	CFM56-7B26/3	16C	3	PAX	42	0	0	42
Boeing 737-900-ER	CFM56-7B26/3	16C	4	PAX	35	0	0	35
Boeing 737-900-ER	CFM56-7B26/3	16L	1	PAX	22	0	0	22
Boeing 737-900-ER	CFM56-7B26/3	16L	2	PAX	189	0	0	189
Boeing 737-900-ER	CFM56-7B26/3	16L	3	PAX	85	0	0	85
Boeing 737-900-ER	CFM56-7B26/3	16L	4	PAX	73	0	0	73
Boeing 737-900-ER	CFM56-7B26/3	16R	1	PAX	468	0	0	468
Boeing 737-900-ER	CFM56-7B26/3	34L	1	PAX	179	0	0	179
Boeing 737-900-ER	CFM56-7B26/3	34R	1	PAX	2	0	0	2
Boeing 737-900-ER	CFM56-7B26/3	34R	2	PAX	102	0	0	102
Boeing 737-900-ER	CFM56-7B26/3	34R	3	PAX	17	0	0	17
Boeing 737-900-ER	CFM56-7B26/3	34R	4	PAX	16	0	0	16
Boeing 737-900-ER	CFM56-7B26E	16C	1	PAX	236	0	0	236
Boeing 737-900-ER	CFM56-7B26E	16C	2	PAX	2,051	0	0	2,051
Boeing 737-900-ER	CFM56-7B26E	16C	3	PAX	991	0	0	991
Boeing 737-900-ER	CFM56-7B26E	16C	4	PAX	881	0	0	881
Boeing 737-900-ER	CFM56-7B26E	16L	1	PAX	924	0	0	924
Boeing 737-900-ER	CFM56-7B26E	16L	2	PAX	3,351	0	0	3,351
Boeing 737-900-ER	CFM56-7B26E	16L	3	PAX	1,623	0	0	1,623
Boeing 737-900-ER	CFM56-7B26E	16L	4	PAX	1,445	0	0	1,445
Boeing 737-900-ER	CFM56-7B26E	16R	1	PAX	9,750	0	0	9,750
Boeing 737-900-ER	CFM56-7B26E	34C	1	PAX	55	0	0	55
Boeing 737-900-ER	CFM56-7B26E	34C	2	PAX	44	0	0	44
Boeing 737-900-ER	CFM56-7B26E	34C	3	PAX	13	0	0	13

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-900-ER	CFM56-7B26E	34C	4	PAX	10	0	0	10
Boeing 737-900-ER	CFM56-7B26E	34L	1	PAX	3,966	0	0	3,966
Boeing 737-900-ER	CFM56-7B26E	34R	1	PAX	398	0	0	398
Boeing 737-900-ER	CFM56-7B26E	34R	2	PAX	2,122	0	0	2,122
Boeing 737-900-ER	CFM56-7B26E	34R	3	PAX	1,043	0	0	1,043
Boeing 737-900-ER	CFM56-7B26E	34R	4	PAX	921	0	0	921
Boeing 737-900-ER	CFM56-7B27	16C	2	PAX	95	0	0	95
Boeing 737-900-ER	CFM56-7B27	16C	3	PAX	38	0	0	38
Boeing 737-900-ER	CFM56-7B27	16C	4	PAX	33	0	0	33
Boeing 737-900-ER	CFM56-7B27	16L	1	PAX	18	0	0	18
Boeing 737-900-ER	CFM56-7B27	16L	2	PAX	180	0	0	180
Boeing 737-900-ER	CFM56-7B27	16L	3	PAX	71	0	0	71
Boeing 737-900-ER	CFM56-7B27	16L	4	PAX	60	0	0	60
Boeing 737-900-ER	CFM56-7B27	16R	1	PAX	422	0	0	422
Boeing 737-900-ER	CFM56-7B27	34L	1	PAX	158	0	0	158
Boeing 737-900-ER	CFM56-7B27	34R	1	PAX	2	0	0	2
Boeing 737-900-ER	CFM56-7B27	34R	2	PAX	93	0	0	93
Boeing 737-900-ER	CFM56-7B27	34R	3	PAX	16	0	0	16
Boeing 737-900-ER	CFM56-7B27	34R	4	PAX	14	0	0	14
Boeing 737-900-ER	CFM56-7B27E	16C	1	PAX	761	0	0	761
Boeing 737-900-ER	CFM56-7B27E	16C	2	PAX	5,814	0	0	5,814
Boeing 737-900-ER	CFM56-7B27E	16C	3	PAX	2,839	0	0	2,839
Boeing 737-900-ER	CFM56-7B27E	16C	4	PAX	2,518	0	0	2,518
Boeing 737-900-ER	CFM56-7B27E	16L	1	PAX	2,711	0	0	2,711
Boeing 737-900-ER	CFM56-7B27E	16L	2	PAX	9,492	0	0	9,492
Boeing 737-900-ER	CFM56-7B27E	16L	3	PAX	4,636	0	0	4,636
Boeing 737-900-ER	CFM56-7B27E	16L	4	PAX	4,120	0	0	4,120
Boeing 737-900-ER	CFM56-7B27E	16R	1	PAX	27,774	0	0	27,774
Boeing 737-900-ER	CFM56-7B27E	34C	1	PAX	196	0	0	196
Boeing 737-900-ER	CFM56-7B27E	34C	2	PAX	186	0	0	186
Boeing 737-900-ER	CFM56-7B27E	34C	3	PAX	68	0	0	68
Boeing 737-900-ER	CFM56-7B27E	34C	4	PAX	62	0	0	62
Boeing 737-900-ER	CFM56-7B27E	34L	1	PAX	11,309	0	0	11,309
Boeing 737-900-ER	CFM56-7B27E	34R	1	PAX	1,219	0	0	1,219
Boeing 737-900-ER	CFM56-7B27E	34R	2	PAX	6,013	0	0	6,013
Boeing 737-900-ER	CFM56-7B27E	34R	3	PAX	2,940	0	0	2,940
Boeing 737-900-ER	CFM56-7B27E	34R	4	PAX	2,618	0	0	2,618
Boeing 737-900-ER	CFM56-7B27E/F	16C	2	PAX	32	0	0	32
Boeing 737-900-ER	CFM56-7B27E/F	16L	2	PAX	63	0	0	63
Boeing 737-900-ER	CFM56-7B27E/F	16L	3	PAX	12	0	0	12
Boeing 737-900-ER	CFM56-7B27E/F	16L	4	PAX	11	0	0	11
Boeing 737-900-ER	CFM56-7B27E/F	16R	1	PAX	109	0	0	109
Boeing 737-900-ER	CFM56-7B27E/F	34L	1	PAX	21	0	0	21
Boeing 737-900-ER	CFM56-7B27E/F	34R	2	PAX	12	0	0	12
Boeing 767-400 ER	CF6-80C2B8F	16C	3	PAX	19	0	0	19
Boeing 767-400 ER	CF6-80C2B8F	16L	1	PAX	120	0	0	120
Boeing 767-400 ER	CF6-80C2B8F	16L	3	PAX	123	0	0	123
Boeing 767-400 ER	CF6-80C2B8F	16R	1	PAX	25	0	0	25
Boeing 767-400 ER	CF6-80C2B8F	34L	1	PAX	4	0	0	4
Boeing 767-400 ER	CF6-80C2B8F	34R	1	PAX	30	0	0	30
Boeing 767-400 ER	CF6-80C2B8F	34R	3	PAX	37	0	0	37
Boeing 777-200-ER	GE90-90B	16C	6	PAX	9	0	0	9
Boeing 777-200-ER	GE90-90B	16L	1	PAX	78	0	0	78
Boeing 777-200-ER	GE90-90B	16L	6	PAX	73	0	0	73
Boeing 777-200-ER	GE90-90B	16R	1	PAX	2	0	0	2
Boeing 777-200-ER	GE90-90B	34R	1	PAX	14	0	0	14
Boeing 777-200-ER	GE90-90B	34R	6	PAX	12	0	0	12
Boeing 777-200-ER	GE90-94B	16C	6	PAX	9	0	0	9
Boeing 777-200-ER	GE90-94B	16L	1	PAX	82	0	0	82
Boeing 777-200-ER	GE90-94B	16L	6	PAX	76	0	0	76
Boeing 777-200-ER	GE90-94B	16R	1	PAX	2	0	0	2
Boeing 777-200-ER	GE90-94B	34R	1	PAX	14	0	0	14
Boeing 777-200-ER	GE90-94B	34R	6	PAX	13	0	0	13
Boeing 777-200-ER	PW4090	16C	6	PAX	2	0	0	2
Boeing 777-200-ER	PW4090	16L	1	PAX	50	0	0	50
Boeing 777-200-ER	PW4090	16L	6	PAX	49	0	0	49
Boeing 777-200-ER	PW4090	34R	1	PAX	10	0	0	10
Boeing 777-200-ER	PW4090	34R	6	PAX	9	0	0	9
Boeing 777-200-ER	Trent 892	16C	6	PAX	24	0	0	24
Boeing 777-200-ER	Trent 892	16L	1	PAX	138	0	0	138
Boeing 777-200-ER	Trent 892	16L	6	PAX	139	0	0	139
Boeing 777-200-ER	Trent 892	16R	1	PAX	26	0	0	26
Boeing 777-200-ER	Trent 892	34L	1	PAX	7	0	0	7
Boeing 777-200-ER	Trent 892	34R	1	PAX	41	0	0	41
Boeing 777-200-ER	Trent 892	34R	6	PAX	49	0	0	49
Boeing 777-300 ER	GE90-115B	16C	7	PAX	74	0	0	74
Boeing 777-300 ER	GE90-115B	16L	1	PAX	374	0	0	374
Boeing 777-300 ER	GE90-115B	16L	7	PAX	392	0	0	392
Boeing 777-300 ER	GE90-115B	16R	1	PAX	92	0	0	92
Boeing 777-300 ER	GE90-115B	34L	1	PAX	24	0	0	24
Boeing 777-300 ER	GE90-115B	34R	1	PAX	142	0	0	142
Boeing 777-300 ER	GE90-115B	34R	7	PAX	166	0	0	166

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16C	7	PAX	7	0	0	7
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	1	PAX	113	0	0	113
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	2	PAX	33	0	0	33
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	6	PAX	33	0	0	33
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	7	PAX	76	0	0	76
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16R	1	PAX	25	0	0	25
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34L	1	PAX	2	0	0	2
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	1	PAX	28	0	0	28
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	2	PAX	3	0	0	3
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	6	PAX	3	0	0	3
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	7	PAX	13	0	0	13
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	2	PAX	6	0	0	6
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	6	PAX	6	0	0	6
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	7	PAX	21	0	0	21
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	1	PAX	222	0	0	222
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	2	PAX	65	0	0	65
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	6	PAX	65	0	0	65
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	7	PAX	133	0	0	133
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16R	1	PAX	50	0	0	50
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34L	1	PAX	9	0	0	9
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	1	PAX	81	0	0	81
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	2	PAX	11	0	0	11
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	6	PAX	11	0	0	11
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	7	PAX	44	0	0	44
Boeing 787-10 Dreamliner	Trent 1000-M3	16C	7	PAX	9	0	0	9
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	1	PAX	121	0	0	121
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	2	PAX	35	0	0	35
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	6	PAX	34	0	0	34
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	7	PAX	83	0	0	83
Boeing 787-10 Dreamliner	Trent 1000-M3	16R	1	PAX	26	0	0	26
Boeing 787-10 Dreamliner	Trent 1000-M3	34L	1	PAX	4	0	0	4
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	1	PAX	32	0	0	32
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	2	PAX	4	0	0	4
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	6	PAX	4	0	0	4
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	7	PAX	14	0	0	14
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16C	6	PAX	41	0	0	41
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16C	7	PAX	18	0	0	18
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	1	PAX	313	0	0	313
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	6	PAX	225	0	0	225
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	7	PAX	107	0	0	107
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16R	1	PAX	77	0	0	77
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34L	1	PAX	19	0	0	19
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	1	PAX	120	0	0	120
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	6	PAX	103	0	0	103
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	7	PAX	35	0	0	35
Boeing 787-8 Dreamliner	GEnx-1B67	16C	6	PAX	67	0	0	67
Boeing 787-8 Dreamliner	GEnx-1B67	16C	7	PAX	30	0	0	30
Boeing 787-8 Dreamliner	GEnx-1B67	16L	1	PAX	481	0	0	481
Boeing 787-8 Dreamliner	GEnx-1B67	16L	6	PAX	344	0	0	344
Boeing 787-8 Dreamliner	GEnx-1B67	16L	7	PAX	167	0	0	167
Boeing 787-8 Dreamliner	GEnx-1B67	16R	1	PAX	117	0	0	117
Boeing 787-8 Dreamliner	GEnx-1B67	34L	1	PAX	45	0	0	45
Boeing 787-8 Dreamliner	GEnx-1B67	34R	1	PAX	193	0	0	193
Boeing 787-8 Dreamliner	GEnx-1B67	34R	6	PAX	161	0	0	161
Boeing 787-8 Dreamliner	GEnx-1B67	34R	7	PAX	67	0	0	67
Boeing 787-8 Dreamliner	GEnx-1B70	16C	1	PAX	9	0	0	9
Boeing 787-8 Dreamliner	GEnx-1B70	16C	6	PAX	172	0	0	172
Boeing 787-8 Dreamliner	GEnx-1B70	16C	7	PAX	80	0	0	80
Boeing 787-8 Dreamliner	GEnx-1B70	16L	1	PAX	1,142	0	0	1,142
Boeing 787-8 Dreamliner	GEnx-1B70	16L	6	PAX	816	0	0	816
Boeing 787-8 Dreamliner	GEnx-1B70	16L	7	PAX	397	0	0	397
Boeing 787-8 Dreamliner	GEnx-1B70	16R	1	PAX	309	0	0	309
Boeing 787-8 Dreamliner	GEnx-1B70	34C	1	PAX	1	0	0	1
Boeing 787-8 Dreamliner	GEnx-1B70	34C	6	PAX	1	0	0	1
Boeing 787-8 Dreamliner	GEnx-1B70	34L	1	PAX	135	0	0	135
Boeing 787-8 Dreamliner	GEnx-1B70	34R	1	PAX	459	0	0	459
Boeing 787-8 Dreamliner	GEnx-1B70	34R	6	PAX	397	0	0	397
Boeing 787-8 Dreamliner	GEnx-1B70	34R	7	PAX	192	0	0	192
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	2	PAX	29	0	0	29
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	6	PAX	28	0	0	28
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	7	PAX	67	0	0	67
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	1	PAX	599	0	0	599
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	2	PAX	156	0	0	156
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	6	PAX	156	0	0	156
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	7	PAX	331	0	0	331
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16R	1	PAX	153	0	0	153
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34L	1	PAX	59	0	0	59
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	1	PAX	240	0	0	240
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	2	PAX	63	0	0	63
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	6	PAX	65	0	0	65
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	7	PAX	156	0	0	156
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	2	PAX	30	0	0	30

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	6	PAX	30	0	0	30
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	7	PAX	67	0	0	67
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	1	PAX	610	0	0	610
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	2	PAX	162	0	0	162
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	6	PAX	159	0	0	159
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	7	PAX	337	0	0	337
Boeing 787-9 Dreamliner	Trent 1000-J2	16R	1	PAX	161	0	0	161
Boeing 787-9 Dreamliner	Trent 1000-J2	34L	1	PAX	59	0	0	59
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	1	PAX	248	0	0	248
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	2	PAX	67	0	0	67
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	6	PAX	67	0	0	67
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	7	PAX	159	0	0	159
Boeing 787-9 Dreamliner	Trent 1000-J3	16C	7	PAX	11	0	0	11
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	1	PAX	150	0	0	150
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	2	PAX	45	0	0	45
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	6	PAX	45	0	0	45
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	7	PAX	101	0	0	101
Boeing 787-9 Dreamliner	Trent 1000-J3	16R	1	PAX	30	0	0	30
Boeing 787-9 Dreamliner	Trent 1000-J3	34L	1	PAX	7	0	0	7
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	1	PAX	49	0	0	49
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	2	PAX	8	0	0	8
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	6	PAX	8	0	0	8
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	7	PAX	18	0	0	18
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	2	PAX	9	0	0	9
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	6	PAX	9	0	0	9
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	7	PAX	29	0	0	29
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	1	PAX	276	0	0	276
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	2	PAX	77	0	0	77
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	6	PAX	78	0	0	78
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	7	PAX	166	0	0	166
Boeing 787-9 Dreamliner	Trent 1000-K2	16R	1	PAX	64	0	0	64
Boeing 787-9 Dreamliner	Trent 1000-K2	34L	1	PAX	14	0	0	14
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	1	PAX	100	0	0	100
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	2	PAX	13	0	0	13
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	6	PAX	13	0	0	13
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	7	PAX	60	0	0	60
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16C	1	PAX	111	0	0	111
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16L	1	PAX	191	0	0	191
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16R	1	PAX	131	0	0	131
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34C	1	PAX	28	0	0	28
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34L	1	PAX	79	0	0	79
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34R	1	PAX	16	0	0	16
Cessna 172 Skyhawk	IO-320-D1AD	16C	1	PAX	22	0	0	22
Cessna 172 Skyhawk	IO-320-D1AD	16L	1	PAX	51	0	0	51
Cessna 172 Skyhawk	IO-320-D1AD	16R	1	PAX	28	0	0	28
Cessna 172 Skyhawk	IO-320-D1AD	34C	1	PAX	11	0	0	11
Cessna 172 Skyhawk	IO-320-D1AD	34L	1	PAX	13	0	0	13
Cessna 172 Skyhawk	IO-320-D1AD	34R	1	PAX	7	0	0	7
Dassault Falcon 50	TFE731-3	16C	1	PAX	111	0	0	111
Dassault Falcon 50	TFE731-3	16L	1	PAX	191	0	0	191
Dassault Falcon 50	TFE731-3	16R	1	PAX	131	0	0	131
Dassault Falcon 50	TFE731-3	34C	1	PAX	28	0	0	28
Dassault Falcon 50	TFE731-3	34L	1	PAX	79	0	0	79
Dassault Falcon 50	TFE731-3	34R	1	PAX	16	0	0	16
Embraer ERJ175-LR	CF34-8E5	16C	1	PAX	11,952	0	0	11,952
Embraer ERJ175-LR	CF34-8E5	16C	2	PAX	3,481	0	0	3,481
Embraer ERJ175-LR	CF34-8E5	16C	3	PAX	563	0	0	563
Embraer ERJ175-LR	CF34-8E5	16L	1	PAX	21,409	0	0	21,409
Embraer ERJ175-LR	CF34-8E5	16L	2	PAX	5,687	0	0	5,687
Embraer ERJ175-LR	CF34-8E5	16L	3	PAX	919	0	0	919
Embraer ERJ175-LR	CF34-8E5	16R	1	PAX	37,170	0	0	37,170
Embraer ERJ175-LR	CF34-8E5	34C	1	PAX	667	0	0	667
Embraer ERJ175-LR	CF34-8E5	34C	2	PAX	110	0	0	110
Embraer ERJ175-LR	CF34-8E5	34C	3	PAX	8	0	0	8
Embraer ERJ175-LR	CF34-8E5	34L	1	PAX	15,144	0	0	15,144
Embraer ERJ175-LR	CF34-8E5	34R	1	PAX	12,953	0	0	12,953
Embraer ERJ175-LR	CF34-8E5	34R	2	PAX	3,611	0	0	3,611
Embraer ERJ175-LR	CF34-8E5	34R	3	PAX	578	0	0	578
Embraer Phenom 300 (EMB-505)	PW530	16C	1	PAX	44	0	0	44
Embraer Phenom 300 (EMB-505)	PW530	16L	1	PAX	54	0	0	54
Embraer Phenom 300 (EMB-505)	PW530	16R	1	PAX	68	0	0	68
Embraer Phenom 300 (EMB-505)	PW530	34C	1	PAX	6	0	0	6
Embraer Phenom 300 (EMB-505)	PW530	34L	1	PAX	23	0	0	23
Embraer Phenom 300 (EMB-505)	PW530	34R	1	PAX	3	0	0	3
Piper PA-31 Navajo	TIO-540-J2B2	16L	1	PAX	14	0	0	14
Piper PA-31 Navajo	TIO-540-J2B2	16R	1	PAX	4	0	0	4
Raytheon C-12 Huron	PT6A-60A	16C	1	PAX	21	0	0	21
Raytheon C-12 Huron	PT6A-60A	16L	1	PAX	23	0	0	23
Raytheon C-12 Huron	PT6A-60A	34L	1	PAX	44	0	0	44
Airbus A300F4-600 Series	CF6-80C2A5F	16C	2	CRG	0	12	0	12
Airbus A300F4-600 Series	CF6-80C2A5F	16L	1	CRG	0	81	12	93
Airbus A300F4-600 Series	CF6-80C2A5F	16L	2	CRG	0	81	11	92

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A300F4-600 Series	CF6-80C2A5F	16R	1	CRG	0	8	0	8
Airbus A300F4-600 Series	CF6-80C2A5F	34L	1	CRG	0	2	0	2
Airbus A300F4-600 Series	CF6-80C2A5F	34R	1	CRG	0	17	1	18
Airbus A300F4-600 Series	CF6-80C2A5F	34R	2	CRG	0	16	1	17
Airbus A300F4-600 Series	PW4158	16C	2	CRG	0	2	0	2
Airbus A300F4-600 Series	PW4158	16L	1	CRG	0	50	6	56
Airbus A300F4-600 Series	PW4158	16L	2	CRG	0	48	7	55
Airbus A300F4-600 Series	PW4158	34R	1	CRG	0	10	1	11
Airbus A300F4-600 Series	PW4158	34R	2	CRG	0	9	1	10
ATR 72-600 Freighter	PW127F	16C	1	CRG	0	18	2	20
ATR 72-600 Freighter	PW127F	16L	1	CRG	0	47	5	52
ATR 72-600 Freighter	PW127F	16R	1	CRG	0	78	6	84
ATR 72-600 Freighter	PW127F	34L	1	CRG	0	17	1	18
ATR 72-600 Freighter	PW127F	34R	1	CRG	0	30	0	30
Boeing 747-400 ERF	PW4062	16C	3	CRG	0	8	0	8
Boeing 747-400 ERF	PW4062	16C	7	CRG	0	16	3	19
Boeing 747-400 ERF	PW4062	16L	1	CRG	0	186	24	210
Boeing 747-400 ERF	PW4062	16L	3	CRG	0	69	7	76
Boeing 747-400 ERF	PW4062	16L	7	CRG	0	137	17	154
Boeing 747-400 ERF	PW4062	16R	1	CRG	0	28	1	29
Boeing 747-400 ERF	PW4062	34L	1	CRG	0	7	0	7
Boeing 747-400 ERF	PW4062	34R	1	CRG	0	46	4	50
Boeing 747-400 ERF	PW4062	34R	3	CRG	0	11	1	12
Boeing 747-400 ERF	PW4062	34R	7	CRG	0	23	4	27
Boeing 747-400BCF	CF6-80C2B5F	16C	3	CRG	0	8	0	8
Boeing 747-400BCF	CF6-80C2B5F	16C	7	CRG	0	16	3	19
Boeing 747-400BCF	CF6-80C2B5F	16L	1	CRG	0	186	24	210
Boeing 747-400BCF	CF6-80C2B5F	16L	3	CRG	0	69	7	76
Boeing 747-400BCF	CF6-80C2B5F	16L	7	CRG	0	137	17	154
Boeing 747-400BCF	CF6-80C2B5F	16R	1	CRG	0	28	1	29
Boeing 747-400BCF	CF6-80C2B5F	34L	1	CRG	0	7	0	7
Boeing 747-400BCF	CF6-80C2B5F	34R	1	CRG	0	46	4	50
Boeing 747-400BCF	CF6-80C2B5F	34R	3	CRG	0	11	1	12
Boeing 747-400BCF	CF6-80C2B5F	34R	7	CRG	0	23	4	27
Boeing 747-8F	GENX-2B67	16C	7	CRG	0	12	0	12
Boeing 747-8F	GENX-2B67	16L	1	CRG	0	82	12	94
Boeing 747-8F	GENX-2B67	16L	7	CRG	0	83	11	94
Boeing 747-8F	GENX-2B67	16R	1	CRG	0	10	0	10
Boeing 747-8F	GENX-2B67	34L	1	CRG	0	2	0	2
Boeing 747-8F	GENX-2B67	34R	1	CRG	0	18	1	19
Boeing 747-8F	GENX-2B67	34R	7	CRG	0	17	2	19
Boeing 747-8F	GEnx-2B67/P	16C	7	CRG	0	17	0	17
Boeing 747-8F	GEnx-2B67/P	16L	1	CRG	0	89	12	101
Boeing 747-8F	GEnx-2B67/P	16L	7	CRG	0	90	12	102
Boeing 747-8F	GEnx-2B67/P	16R	1	CRG	0	18	0	18
Boeing 747-8F	GEnx-2B67/P	34L	1	CRG	0	2	0	2
Boeing 747-8F	GEnx-2B67/P	34R	1	CRG	0	22	2	24
Boeing 747-8F	GEnx-2B67/P	34R	7	CRG	0	24	2	26
Boeing 747-8F	GEnx-2B67B	16L	1	CRG	0	33	2	35
Boeing 747-8F	GEnx-2B67B	16L	7	CRG	0	30	4	34
Boeing 747-8F	GEnx-2B67B	34R	1	CRG	0	4	0	4
Boeing 747-8F	GEnx-2B67B	34R	7	CRG	0	4	1	5
Boeing 767-200 Series Freighter	CF6-80A	16C	3	CRG	0	50	7	57
Boeing 767-200 Series Freighter	CF6-80A	16C	4	CRG	0	101	12	113
Boeing 767-200 Series Freighter	CF6-80A	16L	1	CRG	0	733	104	837
Boeing 767-200 Series Freighter	CF6-80A	16L	3	CRG	0	253	32	285
Boeing 767-200 Series Freighter	CF6-80A	16L	4	CRG	0	505	72	577
Boeing 767-200 Series Freighter	CF6-80A	16R	1	CRG	0	180	22	202
Boeing 767-200 Series Freighter	CF6-80A	34L	1	CRG	0	61	7	68
Boeing 767-200 Series Freighter	CF6-80A	34R	1	CRG	0	290	41	331
Boeing 767-200 Series Freighter	CF6-80A	34R	3	CRG	0	117	8	125
Boeing 767-200 Series Freighter	CF6-80A	34R	4	CRG	0	247	34	281
Boeing 767-200 Series Freighter	CF6-80A2	16C	3	CRG	0	23	2	25
Boeing 767-200 Series Freighter	CF6-80A2	16C	4	CRG	0	48	7	55
Boeing 767-200 Series Freighter	CF6-80A2	16L	1	CRG	0	388	54	442
Boeing 767-200 Series Freighter	CF6-80A2	16L	3	CRG	0	138	16	154
Boeing 767-200 Series Freighter	CF6-80A2	16L	4	CRG	0	279	39	318
Boeing 767-200 Series Freighter	CF6-80A2	16R	1	CRG	0	87	12	99
Boeing 767-200 Series Freighter	CF6-80A2	34L	1	CRG	0	18	3	21
Boeing 767-200 Series Freighter	CF6-80A2	34R	1	CRG	0	137	17	154
Boeing 767-200 Series Freighter	CF6-80A2	34R	3	CRG	0	48	4	52
Boeing 767-200 Series Freighter	CF6-80A2	34R	4	CRG	0	99	13	112
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	1	CRG	0	102	12	114
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	3	CRG	0	33	4	37
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	4	CRG	0	68	11	79
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	1	CRG	0	14	1	15
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	3	CRG	0	4	1	5
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	4	CRG	0	7	1	8
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	1	CRG	0	2	0	2
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	2	CRG	0	76	10	86
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	3	CRG	0	106	14	120
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	4	CRG	0	35	4	39

SEA SAMP NTP 2032 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	1	CRG	0	1,056	140	1,196
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	2	CRG	0	372	45	417
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	3	CRG	0	555	76	631
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	4	CRG	0	180	25	205
Boeing 767-300 ER Freighter	CF6-80C2B6F	16R	1	CRG	0	270	35	305
Boeing 767-300 ER Freighter	CF6-80C2B6F	34C	1	CRG	0	1	0	1
Boeing 767-300 ER Freighter	CF6-80C2B6F	34L	1	CRG	0	101	9	110
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	1	CRG	0	414	50	464
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	2	CRG	0	182	19	201
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	3	CRG	0	260	35	295
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	4	CRG	0	80	4	84
Boeing 767-300 ER Freighter	CF6-80C2B7F	16C	2	CRG	0	2	0	2
Boeing 767-300 ER Freighter	CF6-80C2B7F	16C	3	CRG	0	2	0	2
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	1	CRG	0	127	16	143
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	2	CRG	0	55	7	62
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	3	CRG	0	76	10	86
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	4	CRG	0	22	3	25
Boeing 767-300 ER Freighter	CF6-80C2B7F	16R	1	CRG	0	25	0	25
Boeing 767-300 ER Freighter	CF6-80C2B7F	34L	1	CRG	0	2	0	2
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	1	CRG	0	32	3	35
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	2	CRG	0	10	1	11
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	3	CRG	0	13	1	14
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	4	CRG	0	3	0	3
Boeing 777 Freighter	GE90-110B1	16C	6	CRG	0	130	16	146
Boeing 777 Freighter	GE90-110B1	16L	1	CRG	0	610	79	689
Boeing 777 Freighter	GE90-110B1	16L	6	CRG	0	633	86	719
Boeing 777 Freighter	GE90-110B1	16R	1	CRG	0	162	17	179
Boeing 777 Freighter	GE90-110B1	34L	1	CRG	0	59	3	62
Boeing 777 Freighter	GE90-110B1	34R	1	CRG	0	249	33	282
Boeing 777 Freighter	GE90-110B1	34R	6	CRG	0	308	39	347
Boeing 777 Freighter	GE90-115B	16L	1	CRG	0	25	4	29
Boeing 777 Freighter	GE90-115B	16L	6	CRG	0	23	3	26
Boeing 777 Freighter	GE90-115B	34R	6	CRG	0	3	0	3
Boeing MD-11 Freighter	CF6-80C2D1F	16C	2	CRG	0	35	4	39
Boeing MD-11 Freighter	CF6-80C2D1F	16C	4	CRG	0	29	4	33
Boeing MD-11 Freighter	CF6-80C2D1F	16L	1	CRG	0	347	43	390
Boeing MD-11 Freighter	CF6-80C2D1F	16L	2	CRG	0	190	26	216
Boeing MD-11 Freighter	CF6-80C2D1F	16L	4	CRG	0	177	26	203
Boeing MD-11 Freighter	CF6-80C2D1F	16R	1	CRG	0	82	12	94
Boeing MD-11 Freighter	CF6-80C2D1F	34L	1	CRG	0	15	1	16
Boeing MD-11 Freighter	CF6-80C2D1F	34R	1	CRG	0	116	12	128
Boeing MD-11 Freighter	CF6-80C2D1F	34R	2	CRG	0	79	4	83
Boeing MD-11 Freighter	CF6-80C2D1F	34R	4	CRG	0	50	4	54
Boeing MD-11 Freighter	PW4062	16C	2	CRG	0	2	0	2
Boeing MD-11 Freighter	PW4062	16L	1	CRG	0	92	13	105
Boeing MD-11 Freighter	PW4062	16L	2	CRG	0	50	7	57
Boeing MD-11 Freighter	PW4062	16L	4	CRG	0	42	7	49
Boeing MD-11 Freighter	PW4062	16R	1	CRG	0	2	0	2
Boeing MD-11 Freighter	PW4062	34R	1	CRG	0	15	3	18
Boeing MD-11 Freighter	PW4062	34R	2	CRG	0	10	1	11
Boeing MD-11 Freighter	PW4062	34R	4	CRG	0	5	1	6
Boeing MD-11 Freighter	PW4460	16C	2	CRG	0	9	0	9
Boeing MD-11 Freighter	PW4460	16L	1	CRG	0	133	14	147
Boeing MD-11 Freighter	PW4460	16L	2	CRG	0	80	10	90
Boeing MD-11 Freighter	PW4460	16L	4	CRG	0	68	10	78
Boeing MD-11 Freighter	PW4460	16R	1	CRG	0	25	0	25
Boeing MD-11 Freighter	PW4460	34L	1	CRG	0	2	0	2
Boeing MD-11 Freighter	PW4460	34R	1	CRG	0	27	3	30
Boeing MD-11 Freighter	PW4460	34R	2	CRG	0	14	1	15
Boeing MD-11 Freighter	PW4460	34R	4	CRG	0	11	1	12
Cessna 208 Caravan	PT6A-114	16C	1	CRG	0	176	23	199
Cessna 208 Caravan	PT6A-114	16L	1	CRG	0	326	40	366
Cessna 208 Caravan	PT6A-114	16R	1	CRG	0	243	35	278
Cessna 208 Caravan	PT6A-114	34C	1	CRG	0	76	10	86
Cessna 208 Caravan	PT6A-114	34L	1	CRG	0	138	14	152
Cessna 208 Caravan	PT6A-114	34R	1	CRG	0	63	6	69
Cessna 208 Caravan	PT6A-114A	16C	1	CRG	0	243	33	276
Cessna 208 Caravan	PT6A-114A	16L	1	CRG	0	433	57	490
Cessna 208 Caravan	PT6A-114A	16R	1	CRG	0	348	46	394
Cessna 208 Caravan	PT6A-114A	34C	1	CRG	0	100	12	112
Cessna 208 Caravan	PT6A-114A	34L	1	CRG	0	186	20	206
Cessna 208 Caravan	PT6A-114A	34R	1	CRG	0	80	12	92
Cessna 408 SkyCourier	PT6A-65B	16C	1	ATX	0	18	2	20
Cessna 408 SkyCourier	PT6A-65B	16L	1	ATX	0	47	5	52
Cessna 408 SkyCourier	PT6A-65B	16R	1	ATX	0	78	6	84
Cessna 408 SkyCourier	PT6A-65B	34L	1	ATX	0	17	1	18
Cessna 408 SkyCourier	PT6A-65B	34R	1	ATX	0	30	0	30
Raytheon Beech 99	PT6A-36	16C	1	ATX	0	39	6	45
Raytheon Beech 99	PT6A-36	16L	1	ATX	0	55	6	61
Raytheon Beech 99	PT6A-36	16R	1	ATX	0	46	6	52
Raytheon Beech 99	PT6A-36	34L	1	ATX	0	23	1	24

Proposed Action Future (2032) Modeled Annual Aircraft Operations

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A220-100	PW1524G	16C	1	PAX	73	0	0	73
Airbus A220-100	PW1524G	16C	2	PAX	2,644	0	0	2,644
Airbus A220-100	PW1524G	16L	1	PAX	477	0	0	477
Airbus A220-100	PW1524G	16L	2	PAX	4,306	0	0	4,306
Airbus A220-100	PW1524G	16R	1	PAX	6,399	0	0	6,399
Airbus A220-100	PW1524G	34C	1	PAX	82	0	0	82
Airbus A220-100	PW1524G	34C	2	PAX	84	0	0	84
Airbus A220-100	PW1524G	34L	1	PAX	2,563	0	0	2,563
Airbus A220-100	PW1524G	34R	1	PAX	181	0	0	181
Airbus A220-100	PW1524G	34R	2	PAX	2,741	0	0	2,741
Airbus A220-300	PW1521G	16C	1	PAX	130	0	0	130
Airbus A220-300	PW1521G	16C	2	PAX	61	0	0	61
Airbus A220-300	PW1521G	16C	3	PAX	61	0	0	61
Airbus A220-300	PW1521G	16C	4	PAX	130	0	0	130
Airbus A220-300	PW1521G	16L	1	PAX	267	0	0	267
Airbus A220-300	PW1521G	16L	2	PAX	98	0	0	98
Airbus A220-300	PW1521G	16L	3	PAX	98	0	0	98
Airbus A220-300	PW1521G	16L	4	PAX	219	0	0	219
Airbus A220-300	PW1521G	16R	1	PAX	951	0	0	951
Airbus A220-300	PW1521G	34C	1	PAX	4	0	0	4
Airbus A220-300	PW1521G	34L	1	PAX	375	0	0	375
Airbus A220-300	PW1521G	34R	1	PAX	147	0	0	147
Airbus A220-300	PW1521G	34R	2	PAX	47	0	0	47
Airbus A220-300	PW1521G	34R	3	PAX	47	0	0	47
Airbus A220-300	PW1521G	34R	4	PAX	139	0	0	139
Airbus A220-300	PW1524G	16C	1	PAX	269	0	0	269
Airbus A220-300	PW1524G	16C	2	PAX	123	0	0	123
Airbus A220-300	PW1524G	16C	3	PAX	123	0	0	123
Airbus A220-300	PW1524G	16C	4	PAX	255	0	0	255
Airbus A220-300	PW1524G	16L	1	PAX	547	0	0	547
Airbus A220-300	PW1524G	16L	2	PAX	207	0	0	207
Airbus A220-300	PW1524G	16L	3	PAX	206	0	0	206
Airbus A220-300	PW1524G	16L	4	PAX	424	0	0	424
Airbus A220-300	PW1524G	16R	1	PAX	1,889	0	0	1,889
Airbus A220-300	PW1524G	34C	1	PAX	10	0	0	10
Airbus A220-300	PW1524G	34C	4	PAX	2	0	0	2
Airbus A220-300	PW1524G	34L	1	PAX	750	0	0	750
Airbus A220-300	PW1524G	34R	1	PAX	300	0	0	300
Airbus A220-300	PW1524G	34R	2	PAX	131	0	0	131
Airbus A220-300	PW1524G	34R	3	PAX	131	0	0	131
Airbus A220-300	PW1524G	34R	4	PAX	267	0	0	267
Airbus A319-100 Series	V2522-A5	16C	1	PAX	59	0	0	59
Airbus A319-100 Series	V2522-A5	16C	2	PAX	58	0	0	58
Airbus A319-100 Series	V2522-A5	16L	1	PAX	96	0	0	96
Airbus A319-100 Series	V2522-A5	16L	2	PAX	96	0	0	96
Airbus A319-100 Series	V2522-A5	16R	1	PAX	291	0	0	291
Airbus A319-100 Series	V2522-A5	34L	1	PAX	98	0	0	98
Airbus A319-100 Series	V2522-A5	34R	1	PAX	40	0	0	40
Airbus A319-100 Series	V2522-A5	34R	2	PAX	40	0	0	40
Airbus A319-100 Series	V2524-A5	16C	1	PAX	33	0	0	33
Airbus A319-100 Series	V2524-A5	16C	2	PAX	33	0	0	33
Airbus A319-100 Series	V2524-A5	16L	1	PAX	57	0	0	57
Airbus A319-100 Series	V2524-A5	16L	2	PAX	57	0	0	57
Airbus A319-100 Series	V2524-A5	16R	1	PAX	172	0	0	172
Airbus A319-100 Series	V2524-A5	34L	1	PAX	36	0	0	36
Airbus A319-100 Series	V2524-A5	34R	1	PAX	14	0	0	14
Airbus A319-100 Series	V2524-A5	34R	2	PAX	14	0	0	14
Airbus A320-200 Series	CFM56-5-A1	16L	2	PAX	73	0	0	73
Airbus A320-200 Series	CFM56-5-A1	16R	1	PAX	62	0	0	62
Airbus A320-200 Series	CFM56-5-A1	34L	1	PAX	11	0	0	11
Airbus A320-200 Series	CFM56-5A3	16C	2	PAX	62	0	0	62
Airbus A320-200 Series	CFM56-5A3	16C	3	PAX	7	0	0	7
Airbus A320-200 Series	CFM56-5A3	16C	4	PAX	20	0	0	20
Airbus A320-200 Series	CFM56-5A3	16L	2	PAX	108	0	0	108
Airbus A320-200 Series	CFM56-5A3	16L	3	PAX	20	0	0	20
Airbus A320-200 Series	CFM56-5A3	16L	4	PAX	38	0	0	38
Airbus A320-200 Series	CFM56-5A3	16R	1	PAX	221	0	0	221
Airbus A320-200 Series	CFM56-5A3	34L	1	PAX	74	0	0	74
Airbus A320-200 Series	CFM56-5A3	34R	2	PAX	27	0	0	27
Airbus A320-200 Series	CFM56-5A3	34R	3	PAX	3	0	0	3
Airbus A320-200 Series	CFM56-5A3	34R	4	PAX	10	0	0	10
Airbus A320-200 Series	CFM56-5B4/3	16C	1	PAX	14	0	0	14
Airbus A320-200 Series	CFM56-5B4/3	16C	2	PAX	474	0	0	474
Airbus A320-200 Series	CFM56-5B4/3	16C	3	PAX	115	0	0	115
Airbus A320-200 Series	CFM56-5B4/3	16C	4	PAX	218	0	0	218
Airbus A320-200 Series	CFM56-5B4/3	16L	1	PAX	129	0	0	129
Airbus A320-200 Series	CFM56-5B4/3	16L	2	PAX	789	0	0	789
Airbus A320-200 Series	CFM56-5B4/3	16L	3	PAX	198	0	0	198
Airbus A320-200 Series	CFM56-5B4/3	16L	4	PAX	361	0	0	361
Airbus A320-200 Series	CFM56-5B4/3	16R	1	PAX	1,990	0	0	1,990
Airbus A320-200 Series	CFM56-5B4/3	34C	1	PAX	7	0	0	7
Airbus A320-200 Series	CFM56-5B4/3	34C	2	PAX	4	0	0	4

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A320-200 Series	CFM56-5B4/3	34L	1	PAX	806	0	0	806
Airbus A320-200 Series	CFM56-5B4/3	34R	1	PAX	34	0	0	34
Airbus A320-200 Series	CFM56-5B4/3	34R	2	PAX	501	0	0	501
Airbus A320-200 Series	CFM56-5B4/3	34R	3	PAX	106	0	0	106
Airbus A320-200 Series	CFM56-5B4/3	34R	4	PAX	214	0	0	214
Airbus A320-200 Series	CFM56-5B4/P	16C	2	PAX	64	0	0	64
Airbus A320-200 Series	CFM56-5B4/P	16C	3	PAX	7	0	0	7
Airbus A320-200 Series	CFM56-5B4/P	16C	4	PAX	22	0	0	22
Airbus A320-200 Series	CFM56-5B4/P	16L	2	PAX	118	0	0	118
Airbus A320-200 Series	CFM56-5B4/P	16L	3	PAX	21	0	0	21
Airbus A320-200 Series	CFM56-5B4/P	16L	4	PAX	47	0	0	47
Airbus A320-200 Series	CFM56-5B4/P	16R	1	PAX	239	0	0	239
Airbus A320-200 Series	CFM56-5B4/P	34L	1	PAX	81	0	0	81
Airbus A320-200 Series	CFM56-5B4/P	34R	2	PAX	28	0	0	28
Airbus A320-200 Series	CFM56-5B4/P	34R	3	PAX	3	0	0	3
Airbus A320-200 Series	CFM56-5B4/P	34R	4	PAX	10	0	0	10
Airbus A320-200 Series	V2527-A5	16C	2	PAX	108	0	0	108
Airbus A320-200 Series	V2527-A5	16C	3	PAX	18	0	0	18
Airbus A320-200 Series	V2527-A5	16C	4	PAX	39	0	0	39
Airbus A320-200 Series	V2527-A5	16L	1	PAX	14	0	0	14
Airbus A320-200 Series	V2527-A5	16L	2	PAX	186	0	0	186
Airbus A320-200 Series	V2527-A5	16L	3	PAX	35	0	0	35
Airbus A320-200 Series	V2527-A5	16L	4	PAX	85	0	0	85
Airbus A320-200 Series	V2527-A5	16R	1	PAX	406	0	0	406
Airbus A320-200 Series	V2527-A5	34L	1	PAX	142	0	0	142
Airbus A320-200 Series	V2527-A5	34R	1	PAX	1	0	0	1
Airbus A320-200 Series	V2527-A5	34R	2	PAX	67	0	0	67
Airbus A320-200 Series	V2527-A5	34R	3	PAX	8	0	0	8
Airbus A320-200 Series	V2527-A5	34R	4	PAX	17	0	0	17
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16C	2	PAX	57	0	0	57
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16C	3	PAX	3	0	0	3
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16C	4	PAX	14	0	0	14
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16L	2	PAX	104	0	0	104
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16L	3	PAX	13	0	0	13
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16L	4	PAX	38	0	0	38
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16R	1	PAX	205	0	0	205
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34L	1	PAX	62	0	0	62
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34R	2	PAX	27	0	0	27
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34R	3	PAX	3	0	0	3
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34R	4	PAX	8	0	0	8
Airbus A320-200 Series	V2527-A5E SelectOne? Upgrade Package	16L	2	PAX	58	0	0	58
Airbus A320-200 Series	V2527-A5E SelectOne? Upgrade Package	16R	1	PAX	48	0	0	48
Airbus A320-200 Series	V2527-A5E SelectOne? Upgrade Package	34L	1	PAX	10	0	0	10
Airbus A320-NEO	LEAP-1A26/26E1	16C	2	PAX	156	0	0	156
Airbus A320-NEO	LEAP-1A26/26E1	16C	3	PAX	130	0	0	130
Airbus A320-NEO	LEAP-1A26/26E1	16C	4	PAX	172	0	0	172
Airbus A320-NEO	LEAP-1A26/26E1	16L	1	PAX	65	0	0	65
Airbus A320-NEO	LEAP-1A26/26E1	16L	2	PAX	270	0	0	270
Airbus A320-NEO	LEAP-1A26/26E1	16L	3	PAX	220	0	0	220
Airbus A320-NEO	LEAP-1A26/26E1	16L	4	PAX	300	0	0	300
Airbus A320-NEO	LEAP-1A26/26E1	16R	1	PAX	1,181	0	0	1,181
Airbus A320-NEO	LEAP-1A26/26E1	34C	1	PAX	2	0	0	2
Airbus A320-NEO	LEAP-1A26/26E1	34L	1	PAX	475	0	0	475
Airbus A320-NEO	LEAP-1A26/26E1	34R	1	PAX	11	0	0	11
Airbus A320-NEO	LEAP-1A26/26E1	34R	2	PAX	176	0	0	176
Airbus A320-NEO	LEAP-1A26/26E1	34R	3	PAX	139	0	0	139
Airbus A320-NEO	LEAP-1A26/26E1	34R	4	PAX	171	0	0	171
Airbus A320-NEO	PW1127G-JM	16C	1	PAX	2	0	0	2
Airbus A320-NEO	PW1127G-JM	16C	2	PAX	253	0	0	253
Airbus A320-NEO	PW1127G-JM	16C	3	PAX	207	0	0	207
Airbus A320-NEO	PW1127G-JM	16C	4	PAX	281	0	0	281
Airbus A320-NEO	PW1127G-JM	16L	1	PAX	114	0	0	114
Airbus A320-NEO	PW1127G-JM	16L	2	PAX	421	0	0	421
Airbus A320-NEO	PW1127G-JM	16L	3	PAX	345	0	0	345
Airbus A320-NEO	PW1127G-JM	16L	4	PAX	470	0	0	470
Airbus A320-NEO	PW1127G-JM	16R	1	PAX	1,860	0	0	1,860
Airbus A320-NEO	PW1127G-JM	34C	1	PAX	8	0	0	8
Airbus A320-NEO	PW1127G-JM	34C	2	PAX	2	0	0	2
Airbus A320-NEO	PW1127G-JM	34C	3	PAX	1	0	0	1
Airbus A320-NEO	PW1127G-JM	34L	1	PAX	743	0	0	743
Airbus A320-NEO	PW1127G-JM	34R	1	PAX	24	0	0	24
Airbus A320-NEO	PW1127G-JM	34R	2	PAX	264	0	0	264
Airbus A320-NEO	PW1127G-JM	34R	3	PAX	215	0	0	215
Airbus A320-NEO	PW1127G-JM	34R	4	PAX	292	0	0	292
Airbus A321-200 Series	CFM56-5B3/3	16C	2	PAX	19	0	0	19
Airbus A321-200 Series	CFM56-5B3/3	16C	3	PAX	45	0	0	45
Airbus A321-200 Series	CFM56-5B3/3	16C	4	PAX	89	0	0	89
Airbus A321-200 Series	CFM56-5B3/3	16L	1	PAX	8	0	0	8
Airbus A321-200 Series	CFM56-5B3/3	16L	2	PAX	41	0	0	41
Airbus A321-200 Series	CFM56-5B3/3	16L	3	PAX	96	0	0	96
Airbus A321-200 Series	CFM56-5B3/3	16L	4	PAX	162	0	0	162
Airbus A321-200 Series	CFM56-5B3/3	16R	1	PAX	391	0	0	391

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A321-200 Series	CFM56-5B3/3	34L	1	PAX	129	0	0	129
Airbus A321-200 Series	CFM56-5B3/3	34R	1	PAX	1	0	0	1
Airbus A321-200 Series	CFM56-5B3/3	34R	2	PAX	11	0	0	11
Airbus A321-200 Series	CFM56-5B3/3	34R	3	PAX	21	0	0	21
Airbus A321-200 Series	CFM56-5B3/3	34R	4	PAX	45	0	0	45
Airbus A321-200 Series	CFM56-5B3/P	16C	2	PAX	19	0	0	19
Airbus A321-200 Series	CFM56-5B3/P	16C	3	PAX	45	0	0	45
Airbus A321-200 Series	CFM56-5B3/P	16C	4	PAX	90	0	0	90
Airbus A321-200 Series	CFM56-5B3/P	16L	1	PAX	10	0	0	10
Airbus A321-200 Series	CFM56-5B3/P	16L	2	PAX	41	0	0	41
Airbus A321-200 Series	CFM56-5B3/P	16L	3	PAX	98	0	0	98
Airbus A321-200 Series	CFM56-5B3/P	16L	4	PAX	166	0	0	166
Airbus A321-200 Series	CFM56-5B3/P	16R	1	PAX	401	0	0	401
Airbus A321-200 Series	CFM56-5B3/P	34L	1	PAX	134	0	0	134
Airbus A321-200 Series	CFM56-5B3/P	34R	1	PAX	1	0	0	1
Airbus A321-200 Series	CFM56-5B3/P	34R	2	PAX	11	0	0	11
Airbus A321-200 Series	CFM56-5B3/P	34R	3	PAX	21	0	0	21
Airbus A321-200 Series	CFM56-5B3/P	34R	4	PAX	55	0	0	55
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	1	PAX	14	0	0	14
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	2	PAX	144	0	0	144
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	3	PAX	271	0	0	271
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	4	PAX	448	0	0	448
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	1	PAX	140	0	0	140
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	2	PAX	252	0	0	252
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	3	PAX	454	0	0	454
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	4	PAX	754	0	0	754
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16R	1	PAX	2,148	0	0	2,148
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34C	1	PAX	10	0	0	10
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34C	3	PAX	1	0	0	1
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34C	4	PAX	4	0	0	4
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34L	1	PAX	861	0	0	861
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	1	PAX	38	0	0	38
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	2	PAX	136	0	0	136
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	3	PAX	273	0	0	273
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	4	PAX	474	0	0	474
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	1	PAX	55	0	0	55
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	2	PAX	449	0	0	449
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	3	PAX	295	0	0	295
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	4	PAX	1,367	0	0	1,367
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	1	PAX	377	0	0	377
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	2	PAX	750	0	0	750
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	3	PAX	501	0	0	501
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	4	PAX	2,251	0	0	2,251
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16R	1	PAX	5,181	0	0	5,181
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	1	PAX	45	0	0	45
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	2	PAX	6	0	0	6
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	3	PAX	3	0	0	3
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	4	PAX	23	0	0	23
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34L	1	PAX	2,070	0	0	2,070
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	1	PAX	138	0	0	138
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	2	PAX	476	0	0	476
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	3	PAX	314	0	0	314
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	4	PAX	1,431	0	0	1,431
Airbus A321-NEO	PW1133G-JM	16C	1	PAX	2	0	0	2
Airbus A321-NEO	PW1133G-JM	16C	2	PAX	145	0	0	145
Airbus A321-NEO	PW1133G-JM	16C	3	PAX	94	0	0	94
Airbus A321-NEO	PW1133G-JM	16C	4	PAX	463	0	0	463
Airbus A321-NEO	PW1133G-JM	16L	1	PAX	109	0	0	109
Airbus A321-NEO	PW1133G-JM	16L	2	PAX	254	0	0	254
Airbus A321-NEO	PW1133G-JM	16L	3	PAX	166	0	0	166
Airbus A321-NEO	PW1133G-JM	16L	4	PAX	784	0	0	784
Airbus A321-NEO	PW1133G-JM	16R	1	PAX	1,787	0	0	1,787
Airbus A321-NEO	PW1133G-JM	34C	1	PAX	8	0	0	8
Airbus A321-NEO	PW1133G-JM	34C	4	PAX	4	0	0	4
Airbus A321-NEO	PW1133G-JM	34L	1	PAX	720	0	0	720
Airbus A321-NEO	PW1133G-JM	34R	1	PAX	26	0	0	26
Airbus A321-NEO	PW1133G-JM	34R	2	PAX	155	0	0	155
Airbus A321-NEO	PW1133G-JM	34R	3	PAX	97	0	0	97
Airbus A321-NEO	PW1133G-JM	34R	4	PAX	490	0	0	490
Airbus A330-200 Series	Trent 772	16C	4	PAX	30	0	0	30
Airbus A330-200 Series	Trent 772	16C	6	PAX	67	0	0	67
Airbus A330-200 Series	Trent 772	16C	7	PAX	52	0	0	52
Airbus A330-200 Series	Trent 772	16L	1	PAX	737	0	0	737
Airbus A330-200 Series	Trent 772	16L	4	PAX	167	0	0	167
Airbus A330-200 Series	Trent 772	16L	6	PAX	349	0	0	349
Airbus A330-200 Series	Trent 772	16L	7	PAX	255	0	0	255
Airbus A330-200 Series	Trent 772	16R	1	PAX	179	0	0	179
Airbus A330-200 Series	Trent 772	34C	1	PAX	4	0	0	4
Airbus A330-200 Series	Trent 772	34L	1	PAX	90	0	0	90
Airbus A330-200 Series	Trent 772	34R	1	PAX	257	0	0	257
Airbus A330-200 Series	Trent 772	34R	4	PAX	67	0	0	67
Airbus A330-200 Series	Trent 772	34R	6	PAX	162	0	0	162

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A330-200 Series	Trent 772	34R	7	PAX	118	0	0	118
Airbus A330-300 Series	CF6-80E1A4	16C	6	PAX	17	0	0	17
Airbus A330-300 Series	CF6-80E1A4	16C	7	PAX	17	0	0	17
Airbus A330-300 Series	CF6-80E1A4	16L	1	PAX	177	0	0	177
Airbus A330-300 Series	CF6-80E1A4	16L	6	PAX	97	0	0	97
Airbus A330-300 Series	CF6-80E1A4	16L	7	PAX	97	0	0	97
Airbus A330-300 Series	CF6-80E1A4	16R	1	PAX	37	0	0	37
Airbus A330-300 Series	CF6-80E1A4	34L	1	PAX	8	0	0	8
Airbus A330-300 Series	CF6-80E1A4	34R	1	PAX	57	0	0	57
Airbus A330-300 Series	CF6-80E1A4	34R	6	PAX	25	0	0	25
Airbus A330-300 Series	CF6-80E1A4	34R	7	PAX	26	0	0	26
Airbus A330-300 Series	PW4168A	16L	1	PAX	34	0	0	34
Airbus A330-300 Series	PW4168A	16L	6	PAX	19	0	0	19
Airbus A330-300 Series	PW4168A	16L	7	PAX	19	0	0	19
Airbus A330-300 Series	PW4168A	34R	1	PAX	4	0	0	4
Airbus A330-300 Series	PW4168A-1D	16C	6	PAX	47	0	0	47
Airbus A330-300 Series	PW4168A-1D	16C	7	PAX	47	0	0	47
Airbus A330-300 Series	PW4168A-1D	16L	1	PAX	454	0	0	454
Airbus A330-300 Series	PW4168A-1D	16L	6	PAX	237	0	0	237
Airbus A330-300 Series	PW4168A-1D	16L	7	PAX	237	0	0	237
Airbus A330-300 Series	PW4168A-1D	16R	1	PAX	111	0	0	111
Airbus A330-300 Series	PW4168A-1D	34C	1	PAX	1	0	0	1
Airbus A330-300 Series	PW4168A-1D	34L	1	PAX	56	0	0	56
Airbus A330-300 Series	PW4168A-1D	34R	1	PAX	165	0	0	165
Airbus A330-300 Series	PW4168A-1D	34R	6	PAX	110	0	0	110
Airbus A330-300 Series	PW4168A-1D	34R	7	PAX	109	0	0	109
Airbus A330-300 Series	PW4170	16C	6	PAX	8	0	0	8
Airbus A330-300 Series	PW4170	16C	7	PAX	8	0	0	8
Airbus A330-300 Series	PW4170	16L	1	PAX	125	0	0	125
Airbus A330-300 Series	PW4170	16L	6	PAX	73	0	0	73
Airbus A330-300 Series	PW4170	16L	7	PAX	73	0	0	73
Airbus A330-300 Series	PW4170	16R	1	PAX	26	0	0	26
Airbus A330-300 Series	PW4170	34L	1	PAX	7	0	0	7
Airbus A330-300 Series	PW4170	34R	1	PAX	27	0	0	27
Airbus A330-300 Series	PW4170	34R	6	PAX	11	0	0	11
Airbus A330-300 Series	PW4170	34R	7	PAX	12	0	0	12
Airbus A330-300 Series	Trent 772	16C	6	PAX	17	0	0	17
Airbus A330-300 Series	Trent 772	16C	7	PAX	17	0	0	17
Airbus A330-300 Series	Trent 772	16L	1	PAX	175	0	0	175
Airbus A330-300 Series	Trent 772	16L	6	PAX	99	0	0	99
Airbus A330-300 Series	Trent 772	16L	7	PAX	98	0	0	98
Airbus A330-300 Series	Trent 772	16R	1	PAX	35	0	0	35
Airbus A330-300 Series	Trent 772	34L	1	PAX	8	0	0	8
Airbus A330-300 Series	Trent 772	34R	1	PAX	57	0	0	57
Airbus A330-300 Series	Trent 772	34R	6	PAX	22	0	0	22
Airbus A330-300 Series	Trent 772	34R	7	PAX	22	0	0	22
Airbus A330-900N Series (Neo)	Trent7000-72	16C	1	PAX	14	0	0	14
Airbus A330-900N Series (Neo)	Trent7000-72	16C	7	PAX	323	0	0	323
Airbus A330-900N Series (Neo)	Trent7000-72	16L	1	PAX	1,423	0	0	1,423
Airbus A330-900N Series (Neo)	Trent7000-72	16L	7	PAX	1,498	0	0	1,498
Airbus A330-900N Series (Neo)	Trent7000-72	16R	1	PAX	383	0	0	383
Airbus A330-900N Series (Neo)	Trent7000-72	34C	1	PAX	11	0	0	11
Airbus A330-900N Series (Neo)	Trent7000-72	34C	7	PAX	4	0	0	4
Airbus A330-900N Series (Neo)	Trent7000-72	34L	1	PAX	211	0	0	211
Airbus A330-900N Series (Neo)	Trent7000-72	34R	1	PAX	519	0	0	519
Airbus A330-900N Series (Neo)	Trent7000-72	34R	7	PAX	736	0	0	736
Airbus A350-900 series	Trent XWB-84	16C	6	PAX	35	0	0	35
Airbus A350-900 series	Trent XWB-84	16C	7	PAX	73	0	0	73
Airbus A350-900 series	Trent XWB-84	16L	1	PAX	546	0	0	546
Airbus A350-900 series	Trent XWB-84	16L	6	PAX	201	0	0	201
Airbus A350-900 series	Trent XWB-84	16L	7	PAX	400	0	0	400
Airbus A350-900 series	Trent XWB-84	16R	1	PAX	141	0	0	141
Airbus A350-900 series	Trent XWB-84	34C	1	PAX	1	0	0	1
Airbus A350-900 series	Trent XWB-84	34L	1	PAX	70	0	0	70
Airbus A350-900 series	Trent XWB-84	34R	1	PAX	201	0	0	201
Airbus A350-900 series	Trent XWB-84	34R	6	PAX	83	0	0	83
Airbus A350-900 series	Trent XWB-84	34R	7	PAX	167	0	0	167
Boeing 737-7	LEAP-1B27	16C	2	PAX	93	0	0	93
Boeing 737-7	LEAP-1B27	16C	4	PAX	69	0	0	69
Boeing 737-7	LEAP-1B27	16L	1	PAX	15	0	0	15
Boeing 737-7	LEAP-1B27	16L	2	PAX	159	0	0	159
Boeing 737-7	LEAP-1B27	16L	4	PAX	118	0	0	118
Boeing 737-7	LEAP-1B27	16R	1	PAX	397	0	0	397
Boeing 737-7	LEAP-1B27	34L	1	PAX	143	0	0	143
Boeing 737-7	LEAP-1B27	34R	1	PAX	2	0	0	2
Boeing 737-7	LEAP-1B27	34R	2	PAX	64	0	0	64
Boeing 737-7	LEAP-1B27	34R	4	PAX	54	0	0	54
Boeing 737-700 Series	CFM56-7B20	16C	2	PAX	11	0	0	11
Boeing 737-700 Series	CFM56-7B20	16L	2	PAX	32	0	0	32
Boeing 737-700 Series	CFM56-7B20	16R	1	PAX	48	0	0	48
Boeing 737-700 Series	CFM56-7B20	34R	2	PAX	5	0	0	5
Boeing 737-700 Series	CFM56-7B22	16C	2	PAX	441	0	0	441

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-700 Series	CFM56-7B22	16L	1	PAX	60	0	0	60
Boeing 737-700 Series	CFM56-7B22	16L	2	PAX	734	0	0	734
Boeing 737-700 Series	CFM56-7B22	16R	1	PAX	1,112	0	0	1,112
Boeing 737-700 Series	CFM56-7B22	34C	1	PAX	2	0	0	2
Boeing 737-700 Series	CFM56-7B22	34C	2	PAX	4	0	0	4
Boeing 737-700 Series	CFM56-7B22	34L	1	PAX	449	0	0	449
Boeing 737-700 Series	CFM56-7B22	34R	1	PAX	11	0	0	11
Boeing 737-700 Series	CFM56-7B22	34R	2	PAX	455	0	0	455
Boeing 737-700 Series	CFM56-7B22/3	16C	2	PAX	81	0	0	81
Boeing 737-700 Series	CFM56-7B22/3	16L	2	PAX	139	0	0	139
Boeing 737-700 Series	CFM56-7B22/3	16R	1	PAX	226	0	0	226
Boeing 737-700 Series	CFM56-7B22/3	34L	1	PAX	51	0	0	51
Boeing 737-700 Series	CFM56-7B22/3	34R	2	PAX	57	0	0	57
Boeing 737-700 Series	CFM56-7B24	16C	2	PAX	86	0	0	86
Boeing 737-700 Series	CFM56-7B24	16L	2	PAX	144	0	0	144
Boeing 737-700 Series	CFM56-7B24	16R	1	PAX	239	0	0	239
Boeing 737-700 Series	CFM56-7B24	34L	1	PAX	58	0	0	58
Boeing 737-700 Series	CFM56-7B24	34R	2	PAX	67	0	0	67
Boeing 737-8	LEAP-1B25	16C	2	PAX	20	0	0	20
Boeing 737-8	LEAP-1B25	16C	4	PAX	20	0	0	20
Boeing 737-8	LEAP-1B25	16L	2	PAX	45	0	0	45
Boeing 737-8	LEAP-1B25	16L	4	PAX	37	0	0	37
Boeing 737-8	LEAP-1B25	16R	1	PAX	120	0	0	120
Boeing 737-8	LEAP-1B25	34L	1	PAX	24	0	0	24
Boeing 737-8	LEAP-1B25	34R	2	PAX	12	0	0	12
Boeing 737-8	LEAP-1B25	34R	4	PAX	10	0	0	10
Boeing 737-8	LEAP-1B27	16C	1	PAX	28	0	0	28
Boeing 737-8	LEAP-1B27	16C	2	PAX	732	0	0	732
Boeing 737-8	LEAP-1B27	16C	4	PAX	529	0	0	529
Boeing 737-8	LEAP-1B27	16L	1	PAX	214	0	0	214
Boeing 737-8	LEAP-1B27	16L	2	PAX	1,206	0	0	1,206
Boeing 737-8	LEAP-1B27	16L	4	PAX	872	0	0	872
Boeing 737-8	LEAP-1B27	16R	1	PAX	3,095	0	0	3,095
Boeing 737-8	LEAP-1B27	34C	1	PAX	25	0	0	25
Boeing 737-8	LEAP-1B27	34C	2	PAX	7	0	0	7
Boeing 737-8	LEAP-1B27	34C	4	PAX	6	0	0	6
Boeing 737-8	LEAP-1B27	34L	1	PAX	1,239	0	0	1,239
Boeing 737-8	LEAP-1B27	34R	1	PAX	75	0	0	75
Boeing 737-8	LEAP-1B27	34R	2	PAX	766	0	0	766
Boeing 737-8	LEAP-1B27	34R	4	PAX	558	0	0	558
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	1	PAX	27	0	0	27
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	2	PAX	679	0	0	679
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	4	PAX	489	0	0	489
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	1	PAX	192	0	0	192
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	2	PAX	1,112	0	0	1,112
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	4	PAX	804	0	0	804
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16R	1	PAX	2,864	0	0	2,864
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	1	PAX	20	0	0	20
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	2	PAX	7	0	0	7
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	4	PAX	6	0	0	6
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34L	1	PAX	1,145	0	0	1,145
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	1	PAX	66	0	0	66
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	2	PAX	705	0	0	705
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	4	PAX	512	0	0	512
Boeing 737-800 Series	CFM56-7B24	16C	1	PAX	220	0	0	220
Boeing 737-800 Series	CFM56-7B24	16C	2	PAX	1,259	0	0	1,259
Boeing 737-800 Series	CFM56-7B24	16C	3	PAX	480	0	0	480
Boeing 737-800 Series	CFM56-7B24	16C	4	PAX	548	0	0	548
Boeing 737-800 Series	CFM56-7B24	16L	1	PAX	706	0	0	706
Boeing 737-800 Series	CFM56-7B24	16L	2	PAX	2,069	0	0	2,069
Boeing 737-800 Series	CFM56-7B24	16L	3	PAX	811	0	0	811
Boeing 737-800 Series	CFM56-7B24	16L	4	PAX	921	0	0	921
Boeing 737-800 Series	CFM56-7B24	16R	1	PAX	5,948	0	0	5,948
Boeing 737-800 Series	CFM56-7B24	34C	1	PAX	66	0	0	66
Boeing 737-800 Series	CFM56-7B24	34C	2	PAX	20	0	0	20
Boeing 737-800 Series	CFM56-7B24	34C	3	PAX	6	0	0	6
Boeing 737-800 Series	CFM56-7B24	34C	4	PAX	5	0	0	5
Boeing 737-800 Series	CFM56-7B24	34L	1	PAX	2,375	0	0	2,375
Boeing 737-800 Series	CFM56-7B24	34R	1	PAX	303	0	0	303
Boeing 737-800 Series	CFM56-7B24	34R	2	PAX	1,305	0	0	1,305
Boeing 737-800 Series	CFM56-7B24	34R	3	PAX	497	0	0	497
Boeing 737-800 Series	CFM56-7B24	34R	4	PAX	577	0	0	577
Boeing 737-800 Series	CFM56-7B24/3	16C	2	PAX	21	0	0	21
Boeing 737-800 Series	CFM56-7B24/3	16L	2	PAX	60	0	0	60
Boeing 737-800 Series	CFM56-7B24/3	16R	1	PAX	78	0	0	78
Boeing 737-800 Series	CFM56-7B24/3	34L	1	PAX	12	0	0	12
Boeing 737-800 Series	CFM56-7B24/3	34R	2	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B24E	16C	2	PAX	45	0	0	45
Boeing 737-800 Series	CFM56-7B24E	16C	3	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B24E	16C	4	PAX	8	0	0	8
Boeing 737-800 Series	CFM56-7B24E	16L	2	PAX	79	0	0	79
Boeing 737-800 Series	CFM56-7B24E	16L	3	PAX	27	0	0	27

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-800 Series	CFM56-7B24E	16L	4	PAX	22	0	0	22
Boeing 737-800 Series	CFM56-7B24E	16R	1	PAX	170	0	0	170
Boeing 737-800 Series	CFM56-7B24E	34L	1	PAX	47	0	0	47
Boeing 737-800 Series	CFM56-7B24E	34R	2	PAX	19	0	0	19
Boeing 737-800 Series	CFM56-7B24E	34R	3	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B24E	34R	4	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B26	16C	1	PAX	321	0	0	321
Boeing 737-800 Series	CFM56-7B26	16C	2	PAX	1,714	0	0	1,714
Boeing 737-800 Series	CFM56-7B26	16C	3	PAX	669	0	0	669
Boeing 737-800 Series	CFM56-7B26	16C	4	PAX	764	0	0	764
Boeing 737-800 Series	CFM56-7B26	16L	1	PAX	967	0	0	967
Boeing 737-800 Series	CFM56-7B26	16L	2	PAX	2,805	0	0	2,805
Boeing 737-800 Series	CFM56-7B26	16L	3	PAX	1,095	0	0	1,095
Boeing 737-800 Series	CFM56-7B26	16L	4	PAX	1,260	0	0	1,260
Boeing 737-800 Series	CFM56-7B26	16R	1	PAX	8,114	0	0	8,114
Boeing 737-800 Series	CFM56-7B26	34C	1	PAX	96	0	0	96
Boeing 737-800 Series	CFM56-7B26	34C	2	PAX	31	0	0	31
Boeing 737-800 Series	CFM56-7B26	34C	3	PAX	8	0	0	8
Boeing 737-800 Series	CFM56-7B26	34C	4	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B26	34L	1	PAX	3,248	0	0	3,248
Boeing 737-800 Series	CFM56-7B26	34R	1	PAX	447	0	0	447
Boeing 737-800 Series	CFM56-7B26	34R	2	PAX	1,775	0	0	1,775
Boeing 737-800 Series	CFM56-7B26	34R	3	PAX	682	0	0	682
Boeing 737-800 Series	CFM56-7B26	34R	4	PAX	795	0	0	795
Boeing 737-800 Series	CFM56-7B26/3	16C	1	PAX	12	0	0	12
Boeing 737-800 Series	CFM56-7B26/3	16C	2	PAX	173	0	0	173
Boeing 737-800 Series	CFM56-7B26/3	16C	3	PAX	65	0	0	65
Boeing 737-800 Series	CFM56-7B26/3	16C	4	PAX	72	0	0	72
Boeing 737-800 Series	CFM56-7B26/3	16L	1	PAX	63	0	0	63
Boeing 737-800 Series	CFM56-7B26/3	16L	2	PAX	301	0	0	301
Boeing 737-800 Series	CFM56-7B26/3	16L	3	PAX	107	0	0	107
Boeing 737-800 Series	CFM56-7B26/3	16L	4	PAX	118	0	0	118
Boeing 737-800 Series	CFM56-7B26/3	16R	1	PAX	801	0	0	801
Boeing 737-800 Series	CFM56-7B26/3	34C	1	PAX	1	0	0	1
Boeing 737-800 Series	CFM56-7B26/3	34L	1	PAX	312	0	0	312
Boeing 737-800 Series	CFM56-7B26/3	34R	1	PAX	13	0	0	13
Boeing 737-800 Series	CFM56-7B26/3	34R	2	PAX	184	0	0	184
Boeing 737-800 Series	CFM56-7B26/3	34R	3	PAX	49	0	0	49
Boeing 737-800 Series	CFM56-7B26/3	34R	4	PAX	45	0	0	45
Boeing 737-800 Series	CFM56-7B26E	16C	1	PAX	56	0	0	56
Boeing 737-800 Series	CFM56-7B26E	16C	2	PAX	425	0	0	425
Boeing 737-800 Series	CFM56-7B26E	16C	3	PAX	152	0	0	152
Boeing 737-800 Series	CFM56-7B26E	16C	4	PAX	179	0	0	179
Boeing 737-800 Series	CFM56-7B26E	16L	1	PAX	212	0	0	212
Boeing 737-800 Series	CFM56-7B26E	16L	2	PAX	710	0	0	710
Boeing 737-800 Series	CFM56-7B26E	16L	3	PAX	266	0	0	266
Boeing 737-800 Series	CFM56-7B26E	16L	4	PAX	304	0	0	304
Boeing 737-800 Series	CFM56-7B26E	16R	1	PAX	1,977	0	0	1,977
Boeing 737-800 Series	CFM56-7B26E	34C	1	PAX	11	0	0	11
Boeing 737-800 Series	CFM56-7B26E	34C	2	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B26E	34L	1	PAX	792	0	0	792
Boeing 737-800 Series	CFM56-7B26E	34R	1	PAX	59	0	0	59
Boeing 737-800 Series	CFM56-7B26E	34R	2	PAX	439	0	0	439
Boeing 737-800 Series	CFM56-7B26E	34R	3	PAX	159	0	0	159
Boeing 737-800 Series	CFM56-7B26E	34R	4	PAX	173	0	0	173
Boeing 737-800 Series	CFM56-7B27	16C	1	PAX	7	0	0	7
Boeing 737-800 Series	CFM56-7B27	16C	2	PAX	133	0	0	133
Boeing 737-800 Series	CFM56-7B27	16C	3	PAX	45	0	0	45
Boeing 737-800 Series	CFM56-7B27	16C	4	PAX	47	0	0	47
Boeing 737-800 Series	CFM56-7B27	16L	1	PAX	46	0	0	46
Boeing 737-800 Series	CFM56-7B27	16L	2	PAX	240	0	0	240
Boeing 737-800 Series	CFM56-7B27	16L	3	PAX	81	0	0	81
Boeing 737-800 Series	CFM56-7B27	16L	4	PAX	99	0	0	99
Boeing 737-800 Series	CFM56-7B27	16R	1	PAX	606	0	0	606
Boeing 737-800 Series	CFM56-7B27	34C	1	PAX	1	0	0	1
Boeing 737-800 Series	CFM56-7B27	34L	1	PAX	236	0	0	236
Boeing 737-800 Series	CFM56-7B27	34R	1	PAX	7	0	0	7
Boeing 737-800 Series	CFM56-7B27	34R	2	PAX	139	0	0	139
Boeing 737-800 Series	CFM56-7B27	34R	3	PAX	32	0	0	32
Boeing 737-800 Series	CFM56-7B27	34R	4	PAX	31	0	0	31
Boeing 737-800 Series	CFM56-7B27/3	16C	1	PAX	122	0	0	122
Boeing 737-800 Series	CFM56-7B27/3	16C	2	PAX	766	0	0	766
Boeing 737-800 Series	CFM56-7B27/3	16C	3	PAX	289	0	0	289
Boeing 737-800 Series	CFM56-7B27/3	16C	4	PAX	327	0	0	327
Boeing 737-800 Series	CFM56-7B27/3	16L	1	PAX	410	0	0	410
Boeing 737-800 Series	CFM56-7B27/3	16L	2	PAX	1,266	0	0	1,266
Boeing 737-800 Series	CFM56-7B27/3	16L	3	PAX	481	0	0	481
Boeing 737-800 Series	CFM56-7B27/3	16L	4	PAX	552	0	0	552
Boeing 737-800 Series	CFM56-7B27/3	16R	1	PAX	3,590	0	0	3,590
Boeing 737-800 Series	CFM56-7B27/3	34C	1	PAX	29	0	0	29
Boeing 737-800 Series	CFM56-7B27/3	34C	2	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B27/3	34C	3	PAX	3	0	0	3

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-800 Series	CFM56-7B27/3	34C	4	PAX	2	0	0	2
Boeing 737-800 Series	CFM56-7B27/3	34L	1	PAX	1,442	0	0	1,442
Boeing 737-800 Series	CFM56-7B27/3	34R	1	PAX	157	0	0	157
Boeing 737-800 Series	CFM56-7B27/3	34R	2	PAX	803	0	0	803
Boeing 737-800 Series	CFM56-7B27/3	34R	3	PAX	295	0	0	295
Boeing 737-800 Series	CFM56-7B27/3	34R	4	PAX	333	0	0	333
Boeing 737-800 Series	CFM56-7B27E/B1	16C	1	PAX	19	0	0	19
Boeing 737-800 Series	CFM56-7B27E/B1	16C	2	PAX	243	0	0	243
Boeing 737-800 Series	CFM56-7B27E/B1	16C	3	PAX	82	0	0	82
Boeing 737-800 Series	CFM56-7B27E/B1	16C	4	PAX	99	0	0	99
Boeing 737-800 Series	CFM56-7B27E/B1	16L	1	PAX	99	0	0	99
Boeing 737-800 Series	CFM56-7B27E/B1	16L	2	PAX	407	0	0	407
Boeing 737-800 Series	CFM56-7B27E/B1	16L	3	PAX	149	0	0	149
Boeing 737-800 Series	CFM56-7B27E/B1	16L	4	PAX	168	0	0	168
Boeing 737-800 Series	CFM56-7B27E/B1	16R	1	PAX	1,105	0	0	1,105
Boeing 737-800 Series	CFM56-7B27E/B1	34C	1	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B27E/B1	34C	2	PAX	1	0	0	1
Boeing 737-800 Series	CFM56-7B27E/B1	34L	1	PAX	434	0	0	434
Boeing 737-800 Series	CFM56-7B27E/B1	34R	1	PAX	23	0	0	23
Boeing 737-800 Series	CFM56-7B27E/B1	34R	2	PAX	239	0	0	239
Boeing 737-800 Series	CFM56-7B27E/B1	34R	3	PAX	79	0	0	79
Boeing 737-800 Series	CFM56-7B27E/B1	34R	4	PAX	79	0	0	79
Boeing 737-800 Series	CFM56-7B27E/B1F	16L	2	PAX	34	0	0	34
Boeing 737-800 Series	CFM56-7B27E/B1F	16R	1	PAX	29	0	0	29
Boeing 737-800 Series	CFM56-7B27E/B1F	34L	1	PAX	5	0	0	5
Boeing 737-800 Series	CFM56-7B27E/F	16C	2	PAX	61	0	0	61
Boeing 737-800 Series	CFM56-7B27E/F	16C	3	PAX	21	0	0	21
Boeing 737-800 Series	CFM56-7B27E/F	16C	4	PAX	19	0	0	19
Boeing 737-800 Series	CFM56-7B27E/F	16L	1	PAX	3	0	0	3
Boeing 737-800 Series	CFM56-7B27E/F	16L	2	PAX	120	0	0	120
Boeing 737-800 Series	CFM56-7B27E/F	16L	3	PAX	38	0	0	38
Boeing 737-800 Series	CFM56-7B27E/F	16L	4	PAX	41	0	0	41
Boeing 737-800 Series	CFM56-7B27E/F	16R	1	PAX	267	0	0	267
Boeing 737-800 Series	CFM56-7B27E/F	34L	1	PAX	91	0	0	91
Boeing 737-800 Series	CFM56-7B27E/F	34R	2	PAX	40	0	0	40
Boeing 737-800 Series	CFM56-7B27E/F	34R	3	PAX	10	0	0	10
Boeing 737-800 Series	CFM56-7B27E/F	34R	4	PAX	7	0	0	7
Boeing 737-9	LEAP-1B27	16C	2	PAX	14	0	0	14
Boeing 737-9	LEAP-1B27	16C	3	PAX	3	0	0	3
Boeing 737-9	LEAP-1B27	16C	4	PAX	42	0	0	42
Boeing 737-9	LEAP-1B27	16L	2	PAX	40	0	0	40
Boeing 737-9	LEAP-1B27	16L	3	PAX	13	0	0	13
Boeing 737-9	LEAP-1B27	16L	4	PAX	84	0	0	84
Boeing 737-9	LEAP-1B27	16R	1	PAX	175	0	0	175
Boeing 737-9	LEAP-1B27	34L	1	PAX	51	0	0	51
Boeing 737-9	LEAP-1B27	34R	2	PAX	8	0	0	8
Boeing 737-9	LEAP-1B27	34R	3	PAX	3	0	0	3
Boeing 737-9	LEAP-1B27	34R	4	PAX	19	0	0	19
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	1	PAX	64	0	0	64
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	2	PAX	757	0	0	757
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	3	PAX	414	0	0	414
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	4	PAX	1,231	0	0	1,231
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	1	PAX	428	0	0	428
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	2	PAX	1,248	0	0	1,248
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	3	PAX	702	0	0	702
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	4	PAX	2,003	0	0	2,003
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16R	1	PAX	5,837	0	0	5,837
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	1	PAX	68	0	0	68
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	2	PAX	8	0	0	8
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	3	PAX	3	0	0	3
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	4	PAX	16	0	0	16
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34L	1	PAX	2,334	0	0	2,334
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	1	PAX	159	0	0	159
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	2	PAX	789	0	0	789
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	3	PAX	439	0	0	439
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	4	PAX	1,280	0	0	1,280
Boeing 737-900-ER	CFM56-7B26/3	16C	2	PAX	103	0	0	103
Boeing 737-900-ER	CFM56-7B26/3	16C	3	PAX	45	0	0	45
Boeing 737-900-ER	CFM56-7B26/3	16C	4	PAX	38	0	0	38
Boeing 737-900-ER	CFM56-7B26/3	16L	1	PAX	23	0	0	23
Boeing 737-900-ER	CFM56-7B26/3	16L	2	PAX	185	0	0	185
Boeing 737-900-ER	CFM56-7B26/3	16L	3	PAX	92	0	0	92
Boeing 737-900-ER	CFM56-7B26/3	16L	4	PAX	77	0	0	77
Boeing 737-900-ER	CFM56-7B26/3	16R	1	PAX	480	0	0	480
Boeing 737-900-ER	CFM56-7B26/3	34L	1	PAX	179	0	0	179
Boeing 737-900-ER	CFM56-7B26/3	34R	1	PAX	2	0	0	2
Boeing 737-900-ER	CFM56-7B26/3	34R	2	PAX	95	0	0	95
Boeing 737-900-ER	CFM56-7B26/3	34R	3	PAX	24	0	0	24
Boeing 737-900-ER	CFM56-7B26/3	34R	4	PAX	21	0	0	21
Boeing 737-900-ER	CFM56-7B26E	16C	1	PAX	239	0	0	239
Boeing 737-900-ER	CFM56-7B26E	16C	2	PAX	2,010	0	0	2,010
Boeing 737-900-ER	CFM56-7B26E	16C	3	PAX	1,060	0	0	1,060

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-900-ER	CFM56-7B26E	16C	4	PAX	939	0	0	939
Boeing 737-900-ER	CFM56-7B26E	16L	1	PAX	937	0	0	937
Boeing 737-900-ER	CFM56-7B26E	16L	2	PAX	3,278	0	0	3,278
Boeing 737-900-ER	CFM56-7B26E	16L	3	PAX	1,731	0	0	1,731
Boeing 737-900-ER	CFM56-7B26E	16L	4	PAX	1,547	0	0	1,547
Boeing 737-900-ER	CFM56-7B26E	16R	1	PAX	9,940	0	0	9,940
Boeing 737-900-ER	CFM56-7B26E	34C	1	PAX	133	0	0	133
Boeing 737-900-ER	CFM56-7B26E	34C	2	PAX	44	0	0	44
Boeing 737-900-ER	CFM56-7B26E	34C	3	PAX	14	0	0	14
Boeing 737-900-ER	CFM56-7B26E	34C	4	PAX	9	0	0	9
Boeing 737-900-ER	CFM56-7B26E	34L	1	PAX	3,966	0	0	3,966
Boeing 737-900-ER	CFM56-7B26E	34R	1	PAX	400	0	0	400
Boeing 737-900-ER	CFM56-7B26E	34R	2	PAX	2,083	0	0	2,083
Boeing 737-900-ER	CFM56-7B26E	34R	3	PAX	1,099	0	0	1,099
Boeing 737-900-ER	CFM56-7B26E	34R	4	PAX	977	0	0	977
Boeing 737-900-ER	CFM56-7B27	16C	2	PAX	94	0	0	94
Boeing 737-900-ER	CFM56-7B27	16C	3	PAX	39	0	0	39
Boeing 737-900-ER	CFM56-7B27	16C	4	PAX	33	0	0	33
Boeing 737-900-ER	CFM56-7B27	16L	1	PAX	18	0	0	18
Boeing 737-900-ER	CFM56-7B27	16L	2	PAX	166	0	0	166
Boeing 737-900-ER	CFM56-7B27	16L	3	PAX	85	0	0	85
Boeing 737-900-ER	CFM56-7B27	16L	4	PAX	72	0	0	72
Boeing 737-900-ER	CFM56-7B27	16R	1	PAX	434	0	0	434
Boeing 737-900-ER	CFM56-7B27	34L	1	PAX	158	0	0	158
Boeing 737-900-ER	CFM56-7B27	34R	1	PAX	2	0	0	2
Boeing 737-900-ER	CFM56-7B27	34R	2	PAX	90	0	0	90
Boeing 737-900-ER	CFM56-7B27	34R	3	PAX	17	0	0	17
Boeing 737-900-ER	CFM56-7B27	34R	4	PAX	16	0	0	16
Boeing 737-900-ER	CFM56-7B27E	16C	1	PAX	769	0	0	769
Boeing 737-900-ER	CFM56-7B27E	16C	2	PAX	5,704	0	0	5,704
Boeing 737-900-ER	CFM56-7B27E	16C	3	PAX	3,011	0	0	3,011
Boeing 737-900-ER	CFM56-7B27E	16C	4	PAX	2,700	0	0	2,700
Boeing 737-900-ER	CFM56-7B27E	16L	1	PAX	2,752	0	0	2,752
Boeing 737-900-ER	CFM56-7B27E	16L	2	PAX	9,283	0	0	9,283
Boeing 737-900-ER	CFM56-7B27E	16L	3	PAX	4,916	0	0	4,916
Boeing 737-900-ER	CFM56-7B27E	16L	4	PAX	4,394	0	0	4,394
Boeing 737-900-ER	CFM56-7B27E	16R	1	PAX	28,313	0	0	28,313
Boeing 737-900-ER	CFM56-7B27E	34C	1	PAX	419	0	0	419
Boeing 737-900-ER	CFM56-7B27E	34C	2	PAX	186	0	0	186
Boeing 737-900-ER	CFM56-7B27E	34C	3	PAX	69	0	0	69
Boeing 737-900-ER	CFM56-7B27E	34C	4	PAX	64	0	0	64
Boeing 737-900-ER	CFM56-7B27E	34L	1	PAX	11,309	0	0	11,309
Boeing 737-900-ER	CFM56-7B27E	34R	1	PAX	1,228	0	0	1,228
Boeing 737-900-ER	CFM56-7B27E	34R	2	PAX	5,905	0	0	5,905
Boeing 737-900-ER	CFM56-7B27E	34R	3	PAX	3,129	0	0	3,129
Boeing 737-900-ER	CFM56-7B27E	34R	4	PAX	2,791	0	0	2,791
Boeing 737-900-ER	CFM56-7B27E/F	16C	2	PAX	26	0	0	26
Boeing 737-900-ER	CFM56-7B27E/F	16L	2	PAX	61	0	0	61
Boeing 737-900-ER	CFM56-7B27E/F	16L	3	PAX	13	0	0	13
Boeing 737-900-ER	CFM56-7B27E/F	16L	4	PAX	13	0	0	13
Boeing 737-900-ER	CFM56-7B27E/F	16R	1	PAX	110	0	0	110
Boeing 737-900-ER	CFM56-7B27E/F	34L	1	PAX	23	0	0	23
Boeing 737-900-ER	CFM56-7B27E/F	34R	2	PAX	12	0	0	12
Boeing 737-900-ER	CFM56-7B27E/F	34R	3	PAX	4	0	0	4
Boeing 737-900-ER	CFM56-7B27E/F	34R	4	PAX	4	0	0	4
Boeing 767-400 ER	CF6-80C2B8F	16C	3	PAX	22	0	0	22
Boeing 767-400 ER	CF6-80C2B8F	16L	1	PAX	123	0	0	123
Boeing 767-400 ER	CF6-80C2B8F	16L	3	PAX	124	0	0	124
Boeing 767-400 ER	CF6-80C2B8F	16R	1	PAX	26	0	0	26
Boeing 767-400 ER	CF6-80C2B8F	34L	1	PAX	7	0	0	7
Boeing 767-400 ER	CF6-80C2B8F	34R	1	PAX	27	0	0	27
Boeing 767-400 ER	CF6-80C2B8F	34R	3	PAX	37	0	0	37
Boeing 777-200-ER	GE90-90B	16C	6	PAX	9	0	0	9
Boeing 777-200-ER	GE90-90B	16L	1	PAX	80	0	0	80
Boeing 777-200-ER	GE90-90B	16L	6	PAX	75	0	0	75
Boeing 777-200-ER	GE90-90B	16R	1	PAX	2	0	0	2
Boeing 777-200-ER	GE90-90B	34L	1	PAX	2	0	0	2
Boeing 777-200-ER	GE90-90B	34R	1	PAX	12	0	0	12
Boeing 777-200-ER	GE90-90B	34R	6	PAX	12	0	0	12
Boeing 777-200-ER	GE90-94B	16C	6	PAX	9	0	0	9
Boeing 777-200-ER	GE90-94B	16L	1	PAX	81	0	0	81
Boeing 777-200-ER	GE90-94B	16L	6	PAX	77	0	0	77
Boeing 777-200-ER	GE90-94B	16R	1	PAX	2	0	0	2
Boeing 777-200-ER	GE90-94B	34L	1	PAX	2	0	0	2
Boeing 777-200-ER	GE90-94B	34R	1	PAX	14	0	0	14
Boeing 777-200-ER	GE90-94B	34R	6	PAX	13	0	0	13
Boeing 777-200-ER	PW4090	16C	6	PAX	2	0	0	2
Boeing 777-200-ER	PW4090	16L	1	PAX	52	0	0	52
Boeing 777-200-ER	PW4090	16L	6	PAX	50	0	0	50
Boeing 777-200-ER	PW4090	34R	1	PAX	10	0	0	10
Boeing 777-200-ER	PW4090	34R	6	PAX	10	0	0	10
Boeing 777-200-ER	Trent 892	16C	6	PAX	24	0	0	24

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 777-200-ER	Trent 892	16L	1	PAX	146	0	0	146
Boeing 777-200-ER	Trent 892	16L	6	PAX	142	0	0	142
Boeing 777-200-ER	Trent 892	16R	1	PAX	30	0	0	30
Boeing 777-200-ER	Trent 892	34L	1	PAX	7	0	0	7
Boeing 777-200-ER	Trent 892	34R	1	PAX	33	0	0	33
Boeing 777-200-ER	Trent 892	34R	6	PAX	50	0	0	50
Boeing 777-300 ER	GE90-115B	16C	7	PAX	74	0	0	74
Boeing 777-300 ER	GE90-115B	16L	1	PAX	376	0	0	376
Boeing 777-300 ER	GE90-115B	16L	7	PAX	400	0	0	400
Boeing 777-300 ER	GE90-115B	16R	1	PAX	93	0	0	93
Boeing 777-300 ER	GE90-115B	34L	1	PAX	39	0	0	39
Boeing 777-300 ER	GE90-115B	34R	1	PAX	136	0	0	136
Boeing 777-300 ER	GE90-115B	34R	7	PAX	170	0	0	170
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16C	6	PAX	11	0	0	11
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	1	PAX	114	0	0	114
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	6	PAX	96	0	0	96
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	7	PAX	42	0	0	42
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16R	1	PAX	25	0	0	25
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34L	1	PAX	7	0	0	7
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	1	PAX	25	0	0	25
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	6	PAX	16	0	0	16
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	7	PAX	6	0	0	6
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	6	PAX	30	0	0	30
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	7	PAX	12	0	0	12
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	1	PAX	227	0	0	227
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	6	PAX	171	0	0	171
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	7	PAX	79	0	0	79
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16R	1	PAX	50	0	0	50
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34L	1	PAX	14	0	0	14
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	1	PAX	78	0	0	78
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	6	PAX	62	0	0	62
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	7	PAX	15	0	0	15
Boeing 787-10 Dreamliner	Trent 1000-M3	16C	6	PAX	17	0	0	17
Boeing 787-10 Dreamliner	Trent 1000-M3	16C	7	PAX	2	0	0	2
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	1	PAX	124	0	0	124
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	6	PAX	96	0	0	96
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	7	PAX	43	0	0	43
Boeing 787-10 Dreamliner	Trent 1000-M3	16R	1	PAX	26	0	0	26
Boeing 787-10 Dreamliner	Trent 1000-M3	34L	1	PAX	7	0	0	7
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	1	PAX	29	0	0	29
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	6	PAX	20	0	0	20
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	7	PAX	8	0	0	8
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16C	6	PAX	43	0	0	43
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16C	7	PAX	18	0	0	18
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	1	PAX	325	0	0	325
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	6	PAX	231	0	0	231
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	7	PAX	109	0	0	109
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16R	1	PAX	78	0	0	78
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34L	1	PAX	27	0	0	27
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	1	PAX	110	0	0	110
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	6	PAX	103	0	0	103
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	7	PAX	36	0	0	36
Boeing 787-8 Dreamliner	GEnx-1B67	16C	6	PAX	67	0	0	67
Boeing 787-8 Dreamliner	GEnx-1B67	16C	7	PAX	30	0	0	30
Boeing 787-8 Dreamliner	GEnx-1B67	16L	1	PAX	494	0	0	494
Boeing 787-8 Dreamliner	GEnx-1B67	16L	6	PAX	351	0	0	351
Boeing 787-8 Dreamliner	GEnx-1B67	16L	7	PAX	169	0	0	169
Boeing 787-8 Dreamliner	GEnx-1B67	16R	1	PAX	121	0	0	121
Boeing 787-8 Dreamliner	GEnx-1B67	34C	1	PAX	1	0	0	1
Boeing 787-8 Dreamliner	GEnx-1B67	34L	1	PAX	59	0	0	59
Boeing 787-8 Dreamliner	GEnx-1B67	34R	1	PAX	178	0	0	178
Boeing 787-8 Dreamliner	GEnx-1B67	34R	6	PAX	169	0	0	169
Boeing 787-8 Dreamliner	GEnx-1B67	34R	7	PAX	67	0	0	67
Boeing 787-8 Dreamliner	GEnx-1B70	16C	1	PAX	9	0	0	9
Boeing 787-8 Dreamliner	GEnx-1B70	16C	6	PAX	176	0	0	176
Boeing 787-8 Dreamliner	GEnx-1B70	16C	7	PAX	80	0	0	80
Boeing 787-8 Dreamliner	GEnx-1B70	16L	1	PAX	1,174	0	0	1,174
Boeing 787-8 Dreamliner	GEnx-1B70	16L	6	PAX	830	0	0	830
Boeing 787-8 Dreamliner	GEnx-1B70	16L	7	PAX	407	0	0	407
Boeing 787-8 Dreamliner	GEnx-1B70	16R	1	PAX	311	0	0	311
Boeing 787-8 Dreamliner	GEnx-1B70	34C	1	PAX	7	0	0	7
Boeing 787-8 Dreamliner	GEnx-1B70	34C	6	PAX	1	0	0	1
Boeing 787-8 Dreamliner	GEnx-1B70	34L	1	PAX	167	0	0	167
Boeing 787-8 Dreamliner	GEnx-1B70	34R	1	PAX	427	0	0	427
Boeing 787-8 Dreamliner	GEnx-1B70	34R	6	PAX	408	0	0	408
Boeing 787-8 Dreamliner	GEnx-1B70	34R	7	PAX	193	0	0	193
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	2	PAX	30	0	0	30
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	6	PAX	30	0	0	30
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	7	PAX	67	0	0	67
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	1	PAX	609	0	0	609
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	2	PAX	158	0	0	158
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	6	PAX	159	0	0	159

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	7	PAX	336	0	0	336
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16R	1	PAX	159	0	0	159
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34C	1	PAX	2	0	0	2
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34L	1	PAX	81	0	0	81
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	1	PAX	221	0	0	221
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	2	PAX	67	0	0	67
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	6	PAX	67	0	0	67
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	7	PAX	158	0	0	158
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	2	PAX	30	0	0	30
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	6	PAX	30	0	0	30
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	7	PAX	67	0	0	67
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	1	PAX	630	0	0	630
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	2	PAX	165	0	0	165
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	6	PAX	166	0	0	166
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	7	PAX	345	0	0	345
Boeing 787-9 Dreamliner	Trent 1000-J2	16R	1	PAX	161	0	0	161
Boeing 787-9 Dreamliner	Trent 1000-J2	34C	1	PAX	2	0	0	2
Boeing 787-9 Dreamliner	Trent 1000-J2	34L	1	PAX	82	0	0	82
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	1	PAX	224	0	0	224
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	2	PAX	67	0	0	67
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	6	PAX	67	0	0	67
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	7	PAX	162	0	0	162
Boeing 787-9 Dreamliner	Trent 1000-J3	16C	2	PAX	2	0	0	2
Boeing 787-9 Dreamliner	Trent 1000-J3	16C	6	PAX	2	0	0	2
Boeing 787-9 Dreamliner	Trent 1000-J3	16C	7	PAX	13	0	0	13
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	1	PAX	157	0	0	157
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	2	PAX	44	0	0	44
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	6	PAX	44	0	0	44
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	7	PAX	99	0	0	99
Boeing 787-9 Dreamliner	Trent 1000-J3	16R	1	PAX	33	0	0	33
Boeing 787-9 Dreamliner	Trent 1000-J3	34L	1	PAX	8	0	0	8
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	1	PAX	42	0	0	42
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	2	PAX	8	0	0	8
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	6	PAX	8	0	0	8
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	7	PAX	20	0	0	20
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	2	PAX	9	0	0	9
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	6	PAX	9	0	0	9
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	7	PAX	30	0	0	30
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	1	PAX	284	0	0	284
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	2	PAX	79	0	0	79
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	6	PAX	79	0	0	79
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	7	PAX	170	0	0	170
Boeing 787-9 Dreamliner	Trent 1000-K2	16R	1	PAX	65	0	0	65
Boeing 787-9 Dreamliner	Trent 1000-K2	34L	1	PAX	24	0	0	24
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	1	PAX	90	0	0	90
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	2	PAX	13	0	0	13
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	6	PAX	13	0	0	13
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	7	PAX	61	0	0	61
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16C	1	PAX	114	0	0	114
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16L	1	PAX	189	0	0	189
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16R	1	PAX	131	0	0	131
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34C	1	PAX	27	0	0	27
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34L	1	PAX	79	0	0	79
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34R	1	PAX	16	0	0	16
Dassault Falcon 50	TFE731-3	16C	1	PAX	114	0	0	114
Dassault Falcon 50	TFE731-3	16L	1	PAX	189	0	0	189
Dassault Falcon 50	TFE731-3	16R	1	PAX	131	0	0	131
Dassault Falcon 50	TFE731-3	34C	1	PAX	27	0	0	27
Dassault Falcon 50	TFE731-3	34L	1	PAX	79	0	0	79
Dassault Falcon 50	TFE731-3	34R	1	PAX	16	0	0	16
Embraer ERJ175-LR	CF34-8E5	16C	1	PAX	12,244	0	0	12,244
Embraer ERJ175-LR	CF34-8E5	16C	2	PAX	3,523	0	0	3,523
Embraer ERJ175-LR	CF34-8E5	16C	3	PAX	547	0	0	547
Embraer ERJ175-LR	CF34-8E5	16L	1	PAX	21,923	0	0	21,923
Embraer ERJ175-LR	CF34-8E5	16L	2	PAX	5,740	0	0	5,740
Embraer ERJ175-LR	CF34-8E5	16L	3	PAX	898	0	0	898
Embraer ERJ175-LR	CF34-8E5	16R	1	PAX	37,893	0	0	37,893
Embraer ERJ175-LR	CF34-8E5	34C	1	PAX	976	0	0	976
Embraer ERJ175-LR	CF34-8E5	34C	2	PAX	111	0	0	111
Embraer ERJ175-LR	CF34-8E5	34C	3	PAX	7	0	0	7
Embraer ERJ175-LR	CF34-8E5	34L	1	PAX	15,155	0	0	15,155
Embraer ERJ175-LR	CF34-8E5	34R	1	PAX	13,261	0	0	13,261
Embraer ERJ175-LR	CF34-8E5	34R	2	PAX	3,654	0	0	3,654
Embraer ERJ175-LR	CF34-8E5	34R	3	PAX	564	0	0	564
Embraer Phenom 300 (EMB-505)	PW530	16C	1	PAX	45	0	0	45
Embraer Phenom 300 (EMB-505)	PW530	16L	1	PAX	53	0	0	53
Embraer Phenom 300 (EMB-505)	PW530	16R	1	PAX	68	0	0	68
Embraer Phenom 300 (EMB-505)	PW530	34C	1	PAX	6	0	0	6
Embraer Phenom 300 (EMB-505)	PW530	34L	1	PAX	23	0	0	23
Embraer Phenom 300 (EMB-505)	PW530	34R	1	PAX	3	0	0	3
Airbus A300F4-600 Series	CF6-80C2A5F	16C	2	CRG	0	12	0	12
Airbus A300F4-600 Series	CF6-80C2A5F	16L	1	CRG	0	81	12	93

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A300F4-600 Series	CF6-80C2A5F	16L	2	CRG	0	81	11	92
Airbus A300F4-600 Series	CF6-80C2A5F	16R	1	CRG	0	10	0	10
Airbus A300F4-600 Series	CF6-80C2A5F	34L	1	CRG	0	2	0	2
Airbus A300F4-600 Series	CF6-80C2A5F	34R	1	CRG	0	15	1	16
Airbus A300F4-600 Series	CF6-80C2A5F	34R	2	CRG	0	16	1	17
Airbus A300F4-600 Series	PW4158	16C	2	CRG	0	2	0	2
Airbus A300F4-600 Series	PW4158	16L	1	CRG	0	50	8	58
Airbus A300F4-600 Series	PW4158	16L	2	CRG	0	48	7	55
Airbus A300F4-600 Series	PW4158	34R	1	CRG	0	8	1	9
Airbus A300F4-600 Series	PW4158	34R	2	CRG	0	9	1	10
ATR 72-600 Freighter	PW127F	16C	1	CRG	11	9	0	20
ATR 72-600 Freighter	PW127F	16L	1	CRG	27	24	1	52
ATR 72-600 Freighter	PW127F	16R	1	CRG	43	41	0	84
ATR 72-600 Freighter	PW127F	34L	1	CRG	9	9	0	18
ATR 72-600 Freighter	PW127F	34R	1	CRG	18	12	0	30
Boeing 747-400 ERF	PW4062	16C	3	CRG	0	8	0	8
Boeing 747-400 ERF	PW4062	16C	7	CRG	0	16	3	19
Boeing 747-400 ERF	PW4062	16L	1	CRG	0	191	24	215
Boeing 747-400 ERF	PW4062	16L	3	CRG	0	69	7	76
Boeing 747-400 ERF	PW4062	16L	7	CRG	0	137	17	154
Boeing 747-400 ERF	PW4062	16R	1	CRG	0	28	1	29
Boeing 747-400 ERF	PW4062	34L	1	CRG	0	9	1	10
Boeing 747-400 ERF	PW4062	34R	1	CRG	0	38	4	42
Boeing 747-400 ERF	PW4062	34R	3	CRG	0	11	1	12
Boeing 747-400 ERF	PW4062	34R	7	CRG	0	23	4	27
Boeing 747-400BCF	CF6-80C2B5F	16C	3	CRG	0	8	0	8
Boeing 747-400BCF	CF6-80C2B5F	16C	7	CRG	0	16	3	19
Boeing 747-400BCF	CF6-80C2B5F	16L	1	CRG	0	191	24	215
Boeing 747-400BCF	CF6-80C2B5F	16L	3	CRG	0	69	7	76
Boeing 747-400BCF	CF6-80C2B5F	16L	7	CRG	0	137	17	154
Boeing 747-400BCF	CF6-80C2B5F	16R	1	CRG	0	28	1	29
Boeing 747-400BCF	CF6-80C2B5F	34L	1	CRG	0	9	1	10
Boeing 747-400BCF	CF6-80C2B5F	34R	1	CRG	0	38	4	42
Boeing 747-400BCF	CF6-80C2B5F	34R	3	CRG	0	11	1	12
Boeing 747-400BCF	CF6-80C2B5F	34R	7	CRG	0	23	4	27
Boeing 747-8F	GENX-2B67	16C	7	CRG	0	12	0	12
Boeing 747-8F	GENX-2B67	16L	1	CRG	0	82	12	94
Boeing 747-8F	GENX-2B67	16L	7	CRG	0	83	11	94
Boeing 747-8F	GENX-2B67	16R	1	CRG	0	12	0	12
Boeing 747-8F	GENX-2B67	34L	1	CRG	0	2	0	2
Boeing 747-8F	GENX-2B67	34R	1	CRG	0	16	1	17
Boeing 747-8F	GENX-2B67	34R	7	CRG	0	17	2	19
Boeing 747-8F	GEnx-2B67/P	16C	7	CRG	0	17	0	17
Boeing 747-8F	GEnx-2B67/P	16L	1	CRG	0	91	12	103
Boeing 747-8F	GEnx-2B67/P	16L	7	CRG	0	90	12	102
Boeing 747-8F	GEnx-2B67/P	16R	1	CRG	0	19	0	19
Boeing 747-8F	GEnx-2B67/P	34L	1	CRG	0	4	0	4
Boeing 747-8F	GEnx-2B67/P	34R	1	CRG	0	18	1	19
Boeing 747-8F	GEnx-2B67/P	34R	7	CRG	0	24	2	26
Boeing 747-8F	GEnx-2B67B	16L	1	CRG	0	34	2	36
Boeing 747-8F	GEnx-2B67B	16L	7	CRG	0	30	4	34
Boeing 747-8F	GEnx-2B67B	34R	1	CRG	0	3	0	3
Boeing 747-8F	GEnx-2B67B	34R	7	CRG	0	4	1	5
Boeing 767-200 Series Freighter	CF6-80A	16C	3	CRG	0	50	7	57
Boeing 767-200 Series Freighter	CF6-80A	16C	4	CRG	0	100	12	112
Boeing 767-200 Series Freighter	CF6-80A	16L	1	CRG	0	738	104	842
Boeing 767-200 Series Freighter	CF6-80A	16L	3	CRG	0	253	32	285
Boeing 767-200 Series Freighter	CF6-80A	16L	4	CRG	0	505	72	577
Boeing 767-200 Series Freighter	CF6-80A	16R	1	CRG	0	186	22	208
Boeing 767-200 Series Freighter	CF6-80A	34C	1	CRG	0	1	0	1
Boeing 767-200 Series Freighter	CF6-80A	34L	1	CRG	0	85	7	92
Boeing 767-200 Series Freighter	CF6-80A	34R	1	CRG	0	259	36	295
Boeing 767-200 Series Freighter	CF6-80A	34R	3	CRG	0	118	8	126
Boeing 767-200 Series Freighter	CF6-80A	34R	4	CRG	0	247	34	281
Boeing 767-200 Series Freighter	CF6-80A2	16C	3	CRG	0	23	2	25
Boeing 767-200 Series Freighter	CF6-80A2	16C	4	CRG	0	48	7	55
Boeing 767-200 Series Freighter	CF6-80A2	16L	1	CRG	0	393	54	447
Boeing 767-200 Series Freighter	CF6-80A2	16L	3	CRG	0	138	16	154
Boeing 767-200 Series Freighter	CF6-80A2	16L	4	CRG	0	279	39	318
Boeing 767-200 Series Freighter	CF6-80A2	16R	1	CRG	0	88	12	100
Boeing 767-200 Series Freighter	CF6-80A2	34L	1	CRG	0	29	3	32
Boeing 767-200 Series Freighter	CF6-80A2	34R	1	CRG	0	123	14	137
Boeing 767-200 Series Freighter	CF6-80A2	34R	3	CRG	0	48	4	52
Boeing 767-200 Series Freighter	CF6-80A2	34R	4	CRG	0	99	13	112
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	1	CRG	0	102	13	115
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	3	CRG	0	33	4	37
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	4	CRG	0	68	11	79
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	1	CRG	0	13	1	14
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	3	CRG	0	4	1	5
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	4	CRG	0	7	1	8
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	1	CRG	0	2	0	2
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	2	CRG	0	76	10	86

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	3	CRG	0	106	14	120
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	4	CRG	0	35	4	39
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	1	CRG	0	1,056	140	1,196
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	2	CRG	0	372	45	417
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	3	CRG	0	555	76	631
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	4	CRG	0	180	25	205
Boeing 767-300 ER Freighter	CF6-80C2B6F	16R	1	CRG	0	270	35	305
Boeing 767-300 ER Freighter	CF6-80C2B6F	34C	1	CRG	0	4	0	4
Boeing 767-300 ER Freighter	CF6-80C2B6F	34L	1	CRG	0	137	12	149
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	1	CRG	0	375	47	422
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	2	CRG	0	182	19	201
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	3	CRG	0	260	35	295
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	4	CRG	0	80	4	84
Boeing 767-300 ER Freighter	CF6-80C2B7F	16C	2	CRG	0	2	0	2
Boeing 767-300 ER Freighter	CF6-80C2B7F	16C	3	CRG	0	2	0	2
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	1	CRG	0	128	16	144
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	2	CRG	0	55	7	62
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	3	CRG	0	76	10	86
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	4	CRG	0	22	3	25
Boeing 767-300 ER Freighter	CF6-80C2B7F	16R	1	CRG	0	26	0	26
Boeing 767-300 ER Freighter	CF6-80C2B7F	34L	1	CRG	0	7	0	7
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	1	CRG	0	25	3	28
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	2	CRG	0	10	1	11
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	3	CRG	0	13	1	14
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	4	CRG	0	3	0	3
Boeing 777 Freighter	GE90-110B1	16C	6	CRG	0	130	16	146
Boeing 777 Freighter	GE90-110B1	16L	1	CRG	0	610	79	689
Boeing 777 Freighter	GE90-110B1	16L	6	CRG	0	633	86	719
Boeing 777 Freighter	GE90-110B1	16R	1	CRG	0	163	17	180
Boeing 777 Freighter	GE90-110B1	34C	1	CRG	0	4	0	4
Boeing 777 Freighter	GE90-110B1	34L	1	CRG	0	81	7	88
Boeing 777 Freighter	GE90-110B1	34R	1	CRG	0	221	30	251
Boeing 777 Freighter	GE90-110B1	34R	6	CRG	0	308	39	347
Boeing 777 Freighter	GE90-115B	16L	1	CRG	0	25	4	29
Boeing 777 Freighter	GE90-115B	16L	6	CRG	0	23	3	26
Boeing 777 Freighter	GE90-115B	34R	6	CRG	0	3	0	3
Boeing MD-11 Freighter	CF6-80C2D1F	16C	2	CRG	0	35	4	39
Boeing MD-11 Freighter	CF6-80C2D1F	16C	4	CRG	0	29	4	33
Boeing MD-11 Freighter	CF6-80C2D1F	16L	1	CRG	0	341	43	384
Boeing MD-11 Freighter	CF6-80C2D1F	16L	2	CRG	0	191	26	217
Boeing MD-11 Freighter	CF6-80C2D1F	16L	4	CRG	0	176	26	202
Boeing MD-11 Freighter	CF6-80C2D1F	16R	1	CRG	0	82	12	94
Boeing MD-11 Freighter	CF6-80C2D1F	34L	1	CRG	0	28	3	31
Boeing MD-11 Freighter	CF6-80C2D1F	34R	1	CRG	0	107	12	119
Boeing MD-11 Freighter	CF6-80C2D1F	34R	2	CRG	0	79	4	83
Boeing MD-11 Freighter	CF6-80C2D1F	34R	4	CRG	0	50	4	54
Boeing MD-11 Freighter	PW4062	16C	2	CRG	0	2	0	2
Boeing MD-11 Freighter	PW4062	16L	1	CRG	0	91	13	104
Boeing MD-11 Freighter	PW4062	16L	2	CRG	0	50	7	57
Boeing MD-11 Freighter	PW4062	16L	4	CRG	0	42	7	49
Boeing MD-11 Freighter	PW4062	16R	1	CRG	0	2	0	2
Boeing MD-11 Freighter	PW4062	34L	1	CRG	0	2	0	2
Boeing MD-11 Freighter	PW4062	34R	1	CRG	0	14	3	17
Boeing MD-11 Freighter	PW4062	34R	2	CRG	0	10	1	11
Boeing MD-11 Freighter	PW4062	34R	4	CRG	0	5	1	6
Boeing MD-11 Freighter	PW4460	16C	2	CRG	0	9	0	9
Boeing MD-11 Freighter	PW4460	16L	1	CRG	0	132	14	146
Boeing MD-11 Freighter	PW4460	16L	2	CRG	0	81	10	91
Boeing MD-11 Freighter	PW4460	16L	4	CRG	0	67	10	77
Boeing MD-11 Freighter	PW4460	16R	1	CRG	0	25	0	25
Boeing MD-11 Freighter	PW4460	34L	1	CRG	0	7	0	7
Boeing MD-11 Freighter	PW4460	34R	1	CRG	0	23	3	26
Boeing MD-11 Freighter	PW4460	34R	2	CRG	0	14	1	15
Boeing MD-11 Freighter	PW4460	34R	4	CRG	0	11	1	12
Cessna 172 Skyhawk	IO-320-D1AD	16C	1	CRG	10	10	1	21
Cessna 172 Skyhawk	IO-320-D1AD	16L	1	CRG	26	22	2	50
Cessna 172 Skyhawk	IO-320-D1AD	16R	1	CRG	15	14	1	30
Cessna 172 Skyhawk	IO-320-D1AD	34C	1	CRG	6	6	0	12
Cessna 172 Skyhawk	IO-320-D1AD	34L	1	CRG	6	6	0	12
Cessna 172 Skyhawk	IO-320-D1AD	34R	1	CRG	4	3	0	7
Cessna 208 Caravan	PT6A-114	16C	1	CRG	0	180	23	203
Cessna 208 Caravan	PT6A-114	16L	1	CRG	0	321	40	361
Cessna 208 Caravan	PT6A-114	16R	1	CRG	0	243	35	278
Cessna 208 Caravan	PT6A-114	34C	1	CRG	0	77	10	87
Cessna 208 Caravan	PT6A-114	34L	1	CRG	0	138	14	152
Cessna 208 Caravan	PT6A-114	34R	1	CRG	0	63	6	69
Cessna 208 Caravan	PT6A-114A	16C	1	CRG	0	249	33	282
Cessna 208 Caravan	PT6A-114A	16L	1	CRG	0	427	56	483
Cessna 208 Caravan	PT6A-114A	16R	1	CRG	0	348	46	394
Cessna 208 Caravan	PT6A-114A	34C	1	CRG	0	101	12	113
Cessna 208 Caravan	PT6A-114A	34L	1	CRG	0	186	20	206
Cessna 208 Caravan	PT6A-114A	34R	1	CRG	0	80	12	92

SEA SAMP NTP 2032 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Piper PA-31 Navajo	TIO-540-J2B2	16L	1	CRG	7	6	1	14
Piper PA-31 Navajo	TIO-540-J2B2	16R	1	CRG	2	2	0	4
Raytheon C-12 Huron	PT6A-60A	16C	1	CRG	10	9	2	21
Raytheon C-12 Huron	PT6A-60A	16L	1	CRG	11	10	2	23
Raytheon C-12 Huron	PT6A-60A	34L	1	CRG	22	19	3	44
Cessna 408 SkyCourier	PT6A-65B	16C	1	ATX	11	9	0	20
Cessna 408 SkyCourier	PT6A-65B	16L	1	ATX	27	24	1	52
Cessna 408 SkyCourier	PT6A-65B	16R	1	ATX	43	41	0	84
Cessna 408 SkyCourier	PT6A-65B	34L	1	ATX	9	9	0	18
Cessna 408 SkyCourier	PT6A-65B	34R	1	ATX	18	12	0	30
Raytheon Beech 99	PT6A-36	16C	1	ATX	22	19	2	43
Raytheon Beech 99	PT6A-36	16L	1	ATX	33	27	2	62
Raytheon Beech 99	PT6A-36	16R	1	ATX	27	25	0	52
Raytheon Beech 99	PT6A-36	34L	1	ATX	13	11	0	24

No Action Alternative Future (2037) Modeled Annual Aircraft Operations

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A220-100	PW1524G	16C	1	PAX	101	0	0	101
Airbus A220-100	PW1524G	16C	2	PAX	3,419	0	0	3,419
Airbus A220-100	PW1524G	16L	1	PAX	615	0	0	615
Airbus A220-100	PW1524G	16L	2	PAX	5,573	0	0	5,573
Airbus A220-100	PW1524G	16R	1	PAX	8,272	0	0	8,272
Airbus A220-100	PW1524G	34C	1	PAX	45	0	0	45
Airbus A220-100	PW1524G	34C	2	PAX	112	0	0	112
Airbus A220-100	PW1524G	34L	1	PAX	3,377	0	0	3,377
Airbus A220-100	PW1524G	34R	1	PAX	235	0	0	235
Airbus A220-100	PW1524G	34R	2	PAX	3,541	0	0	3,541
Airbus A220-300	PW1521G	16C	1	PAX	211	0	0	211
Airbus A220-300	PW1521G	16C	2	PAX	91	0	0	91
Airbus A220-300	PW1521G	16C	3	PAX	91	0	0	91
Airbus A220-300	PW1521G	16C	4	PAX	198	0	0	198
Airbus A220-300	PW1521G	16L	1	PAX	422	0	0	422
Airbus A220-300	PW1521G	16L	2	PAX	155	0	0	155
Airbus A220-300	PW1521G	16L	3	PAX	154	0	0	154
Airbus A220-300	PW1521G	16L	4	PAX	328	0	0	328
Airbus A220-300	PW1521G	16R	1	PAX	1,433	0	0	1,433
Airbus A220-300	PW1521G	34C	1	PAX	3	0	0	3
Airbus A220-300	PW1521G	34C	4	PAX	1	0	0	1
Airbus A220-300	PW1521G	34L	1	PAX	587	0	0	587
Airbus A220-300	PW1521G	34R	1	PAX	233	0	0	233
Airbus A220-300	PW1521G	34R	2	PAX	96	0	0	96
Airbus A220-300	PW1521G	34R	3	PAX	96	0	0	96
Airbus A220-300	PW1521G	34R	4	PAX	209	0	0	209
Airbus A220-300	PW1524G	16C	1	PAX	421	0	0	421
Airbus A220-300	PW1524G	16C	2	PAX	188	0	0	188
Airbus A220-300	PW1524G	16C	3	PAX	190	0	0	190
Airbus A220-300	PW1524G	16C	4	PAX	394	0	0	394
Airbus A220-300	PW1524G	16L	1	PAX	863	0	0	863
Airbus A220-300	PW1524G	16L	2	PAX	321	0	0	321
Airbus A220-300	PW1524G	16L	3	PAX	321	0	0	321
Airbus A220-300	PW1524G	16L	4	PAX	655	0	0	655
Airbus A220-300	PW1524G	16R	1	PAX	2,878	0	0	2,878
Airbus A220-300	PW1524G	34C	1	PAX	12	0	0	12
Airbus A220-300	PW1524G	34C	2	PAX	1	0	0	1
Airbus A220-300	PW1524G	34C	3	PAX	1	0	0	1
Airbus A220-300	PW1524G	34C	4	PAX	5	0	0	5
Airbus A220-300	PW1524G	34L	1	PAX	1,171	0	0	1,171
Airbus A220-300	PW1524G	34R	1	PAX	505	0	0	505
Airbus A220-300	PW1524G	34R	2	PAX	199	0	0	199
Airbus A220-300	PW1524G	34R	3	PAX	199	0	0	199
Airbus A220-300	PW1524G	34R	4	PAX	424	0	0	424
Airbus A320-200 Series	CFM56-5A3	16C	2	PAX	7	0	0	7
Airbus A320-200 Series	CFM56-5A3	16L	2	PAX	68	0	0	68
Airbus A320-200 Series	CFM56-5A3	16L	4	PAX	8	0	0	8
Airbus A320-200 Series	CFM56-5A3	16R	1	PAX	85	0	0	85
Airbus A320-200 Series	CFM56-5A3	34L	1	PAX	15	0	0	15
Airbus A320-200 Series	CFM56-5A3	34R	2	PAX	17	0	0	17
Airbus A320-200 Series	CFM56-5B4/3	16C	2	PAX	172	0	0	172
Airbus A320-200 Series	CFM56-5B4/3	16C	3	PAX	35	0	0	35
Airbus A320-200 Series	CFM56-5B4/3	16C	4	PAX	73	0	0	73
Airbus A320-200 Series	CFM56-5B4/3	16L	1	PAX	28	0	0	28
Airbus A320-200 Series	CFM56-5B4/3	16L	2	PAX	304	0	0	304
Airbus A320-200 Series	CFM56-5B4/3	16L	3	PAX	70	0	0	70
Airbus A320-200 Series	CFM56-5B4/3	16L	4	PAX	126	0	0	126
Airbus A320-200 Series	CFM56-5B4/3	16R	1	PAX	692	0	0	692
Airbus A320-200 Series	CFM56-5B4/3	34L	1	PAX	280	0	0	280
Airbus A320-200 Series	CFM56-5B4/3	34R	1	PAX	5	0	0	5
Airbus A320-200 Series	CFM56-5B4/3	34R	2	PAX	163	0	0	163
Airbus A320-200 Series	CFM56-5B4/3	34R	3	PAX	14	0	0	14
Airbus A320-200 Series	CFM56-5B4/3	34R	4	PAX	48	0	0	48
Airbus A320-200 Series	CFM56-5B4/P	16C	2	PAX	13	0	0	13
Airbus A320-200 Series	CFM56-5B4/P	16L	2	PAX	67	0	0	67
Airbus A320-200 Series	CFM56-5B4/P	16L	4	PAX	13	0	0	13
Airbus A320-200 Series	CFM56-5B4/P	16R	1	PAX	93	0	0	93
Airbus A320-200 Series	CFM56-5B4/P	34L	1	PAX	15	0	0	15
Airbus A320-200 Series	CFM56-5B4/P	34R	2	PAX	15	0	0	15
Airbus A320-200 Series	V2527-A5	16C	2	PAX	41	0	0	41
Airbus A320-200 Series	V2527-A5	16C	4	PAX	9	0	0	9
Airbus A320-200 Series	V2527-A5	16L	2	PAX	83	0	0	83
Airbus A320-200 Series	V2527-A5	16L	3	PAX	9	0	0	9
Airbus A320-200 Series	V2527-A5	16L	4	PAX	26	0	0	26
Airbus A320-200 Series	V2527-A5	16R	1	PAX	151	0	0	151
Airbus A320-200 Series	V2527-A5	34L	1	PAX	39	0	0	39
Airbus A320-200 Series	V2527-A5	34R	2	PAX	18	0	0	18
Airbus A320-200 Series	V2527-A5	34R	4	PAX	4	0	0	4
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16L	2	PAX	72	0	0	72
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16R	1	PAX	76	0	0	76
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34L	1	PAX	14	0	0	14
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34R	2	PAX	18	0	0	18

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A320-NEO	LEAP-1A26/26E1	16C	1	PAX	9	0	0	9
Airbus A320-NEO	LEAP-1A26/26E1	16C	2	PAX	302	0	0	302
Airbus A320-NEO	LEAP-1A26/26E1	16C	3	PAX	176	0	0	176
Airbus A320-NEO	LEAP-1A26/26E1	16C	4	PAX	290	0	0	290
Airbus A320-NEO	LEAP-1A26/26E1	16L	1	PAX	124	0	0	124
Airbus A320-NEO	LEAP-1A26/26E1	16L	2	PAX	508	0	0	508
Airbus A320-NEO	LEAP-1A26/26E1	16L	3	PAX	295	0	0	295
Airbus A320-NEO	LEAP-1A26/26E1	16L	4	PAX	484	0	0	484
Airbus A320-NEO	LEAP-1A26/26E1	16R	1	PAX	1,928	0	0	1,928
Airbus A320-NEO	LEAP-1A26/26E1	34C	1	PAX	1	0	0	1
Airbus A320-NEO	LEAP-1A26/26E1	34C	2	PAX	3	0	0	3
Airbus A320-NEO	LEAP-1A26/26E1	34L	1	PAX	783	0	0	783
Airbus A320-NEO	LEAP-1A26/26E1	34R	1	PAX	28	0	0	28
Airbus A320-NEO	LEAP-1A26/26E1	34R	2	PAX	325	0	0	325
Airbus A320-NEO	LEAP-1A26/26E1	34R	3	PAX	182	0	0	182
Airbus A320-NEO	LEAP-1A26/26E1	34R	4	PAX	308	0	0	308
Airbus A320-NEO	PW1127G-JM	16C	1	PAX	26	0	0	26
Airbus A320-NEO	PW1127G-JM	16C	2	PAX	476	0	0	476
Airbus A320-NEO	PW1127G-JM	16C	3	PAX	279	0	0	279
Airbus A320-NEO	PW1127G-JM	16C	4	PAX	461	0	0	461
Airbus A320-NEO	PW1127G-JM	16L	1	PAX	208	0	0	208
Airbus A320-NEO	PW1127G-JM	16L	2	PAX	800	0	0	800
Airbus A320-NEO	PW1127G-JM	16L	3	PAX	467	0	0	467
Airbus A320-NEO	PW1127G-JM	16L	4	PAX	773	0	0	773
Airbus A320-NEO	PW1127G-JM	16R	1	PAX	3,025	0	0	3,025
Airbus A320-NEO	PW1127G-JM	34C	1	PAX	4	0	0	4
Airbus A320-NEO	PW1127G-JM	34C	2	PAX	6	0	0	6
Airbus A320-NEO	PW1127G-JM	34C	3	PAX	3	0	0	3
Airbus A320-NEO	PW1127G-JM	34C	4	PAX	4	0	0	4
Airbus A320-NEO	PW1127G-JM	34L	1	PAX	1,233	0	0	1,233
Airbus A320-NEO	PW1127G-JM	34R	1	PAX	64	0	0	64
Airbus A320-NEO	PW1127G-JM	34R	2	PAX	502	0	0	502
Airbus A320-NEO	PW1127G-JM	34R	3	PAX	300	0	0	300
Airbus A320-NEO	PW1127G-JM	34R	4	PAX	489	0	0	489
Airbus A321-200 Series	CFM56-5B3/3	16C	3	PAX	10	0	0	10
Airbus A321-200 Series	CFM56-5B3/3	16C	4	PAX	26	0	0	26
Airbus A321-200 Series	CFM56-5B3/3	16L	2	PAX	7	0	0	7
Airbus A321-200 Series	CFM56-5B3/3	16L	3	PAX	25	0	0	25
Airbus A321-200 Series	CFM56-5B3/3	16L	4	PAX	77	0	0	77
Airbus A321-200 Series	CFM56-5B3/3	16R	1	PAX	134	0	0	134
Airbus A321-200 Series	CFM56-5B3/3	34L	1	PAX	28	0	0	28
Airbus A321-200 Series	CFM56-5B3/3	34R	3	PAX	5	0	0	5
Airbus A321-200 Series	CFM56-5B3/3	34R	4	PAX	12	0	0	12
Airbus A321-200 Series	CFM56-5B3/P	16C	3	PAX	10	0	0	10
Airbus A321-200 Series	CFM56-5B3/P	16C	4	PAX	26	0	0	26
Airbus A321-200 Series	CFM56-5B3/P	16L	2	PAX	10	0	0	10
Airbus A321-200 Series	CFM56-5B3/P	16L	3	PAX	30	0	0	30
Airbus A321-200 Series	CFM56-5B3/P	16L	4	PAX	76	0	0	76
Airbus A321-200 Series	CFM56-5B3/P	16R	1	PAX	136	0	0	136
Airbus A321-200 Series	CFM56-5B3/P	34L	1	PAX	32	0	0	32
Airbus A321-200 Series	CFM56-5B3/P	34R	3	PAX	5	0	0	5
Airbus A321-200 Series	CFM56-5B3/P	34R	4	PAX	11	0	0	11
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	2	PAX	39	0	0	39
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	3	PAX	85	0	0	85
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	4	PAX	156	0	0	156
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	1	PAX	27	0	0	27
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	2	PAX	78	0	0	78
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	3	PAX	145	0	0	145
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	4	PAX	258	0	0	258
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16R	1	PAX	679	0	0	679
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34L	1	PAX	274	0	0	274
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	1	PAX	4	0	0	4
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	2	PAX	19	0	0	19
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	3	PAX	59	0	0	59
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	4	PAX	145	0	0	145
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	1	PAX	82	0	0	82
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	2	PAX	611	0	0	611
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	3	PAX	395	0	0	395
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	4	PAX	1,838	0	0	1,838
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	1	PAX	515	0	0	515
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	2	PAX	991	0	0	991
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	3	PAX	664	0	0	664
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	4	PAX	2,993	0	0	2,993
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16R	1	PAX	6,882	0	0	6,882
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	1	PAX	23	0	0	23
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	2	PAX	8	0	0	8
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	3	PAX	5	0	0	5
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	4	PAX	33	0	0	33
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34L	1	PAX	2,807	0	0	2,807
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	1	PAX	199	0	0	199
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	2	PAX	634	0	0	634
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	3	PAX	428	0	0	428

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	4	PAX	1,908	0	0	1,908
Airbus A321-NEO	PW1133G-JM	16C	1	PAX	14	0	0	14
Airbus A321-NEO	PW1133G-JM	16C	2	PAX	199	0	0	199
Airbus A321-NEO	PW1133G-JM	16C	3	PAX	129	0	0	129
Airbus A321-NEO	PW1133G-JM	16C	4	PAX	623	0	0	623
Airbus A321-NEO	PW1133G-JM	16L	1	PAX	157	0	0	157
Airbus A321-NEO	PW1133G-JM	16L	2	PAX	334	0	0	334
Airbus A321-NEO	PW1133G-JM	16L	3	PAX	218	0	0	218
Airbus A321-NEO	PW1133G-JM	16L	4	PAX	1,029	0	0	1,029
Airbus A321-NEO	PW1133G-JM	16R	1	PAX	2,363	0	0	2,363
Airbus A321-NEO	PW1133G-JM	34C	1	PAX	4	0	0	4
Airbus A321-NEO	PW1133G-JM	34C	2	PAX	1	0	0	1
Airbus A321-NEO	PW1133G-JM	34C	4	PAX	6	0	0	6
Airbus A321-NEO	PW1133G-JM	34L	1	PAX	966	0	0	966
Airbus A321-NEO	PW1133G-JM	34R	1	PAX	39	0	0	39
Airbus A321-NEO	PW1133G-JM	34R	2	PAX	210	0	0	210
Airbus A321-NEO	PW1133G-JM	34R	3	PAX	141	0	0	141
Airbus A321-NEO	PW1133G-JM	34R	4	PAX	653	0	0	653
Airbus A330-200 Series	Trent 772	16C	4	PAX	30	0	0	30
Airbus A330-200 Series	Trent 772	16C	6	PAX	67	0	0	67
Airbus A330-200 Series	Trent 772	16C	7	PAX	52	0	0	52
Airbus A330-200 Series	Trent 772	16L	1	PAX	730	0	0	730
Airbus A330-200 Series	Trent 772	16L	4	PAX	164	0	0	164
Airbus A330-200 Series	Trent 772	16L	6	PAX	344	0	0	344
Airbus A330-200 Series	Trent 772	16L	7	PAX	254	0	0	254
Airbus A330-200 Series	Trent 772	16R	1	PAX	179	0	0	179
Airbus A330-200 Series	Trent 772	34L	1	PAX	68	0	0	68
Airbus A330-200 Series	Trent 772	34R	1	PAX	281	0	0	281
Airbus A330-200 Series	Trent 772	34R	4	PAX	67	0	0	67
Airbus A330-200 Series	Trent 772	34R	6	PAX	162	0	0	162
Airbus A330-200 Series	Trent 772	34R	7	PAX	118	0	0	118
Airbus A330-300 Series	CF6-80E1A4	16C	6	PAX	17	0	0	17
Airbus A330-300 Series	CF6-80E1A4	16C	7	PAX	17	0	0	17
Airbus A330-300 Series	CF6-80E1A4	16L	1	PAX	173	0	0	173
Airbus A330-300 Series	CF6-80E1A4	16L	6	PAX	96	0	0	96
Airbus A330-300 Series	CF6-80E1A4	16L	7	PAX	96	0	0	96
Airbus A330-300 Series	CF6-80E1A4	16R	1	PAX	36	0	0	36
Airbus A330-300 Series	CF6-80E1A4	34L	1	PAX	7	0	0	7
Airbus A330-300 Series	CF6-80E1A4	34R	1	PAX	60	0	0	60
Airbus A330-300 Series	CF6-80E1A4	34R	6	PAX	25	0	0	25
Airbus A330-300 Series	CF6-80E1A4	34R	7	PAX	25	0	0	25
Airbus A330-300 Series	PW4168A	16L	1	PAX	33	0	0	33
Airbus A330-300 Series	PW4168A	16L	6	PAX	19	0	0	19
Airbus A330-300 Series	PW4168A	16L	7	PAX	18	0	0	18
Airbus A330-300 Series	PW4168A	34R	1	PAX	4	0	0	4
Airbus A330-300 Series	PW4168A-1D	16C	6	PAX	47	0	0	47
Airbus A330-300 Series	PW4168A-1D	16C	7	PAX	47	0	0	47
Airbus A330-300 Series	PW4168A-1D	16L	1	PAX	454	0	0	454
Airbus A330-300 Series	PW4168A-1D	16L	6	PAX	236	0	0	236
Airbus A330-300 Series	PW4168A-1D	16L	7	PAX	235	0	0	235
Airbus A330-300 Series	PW4168A-1D	16R	1	PAX	111	0	0	111
Airbus A330-300 Series	PW4168A-1D	34L	1	PAX	35	0	0	35
Airbus A330-300 Series	PW4168A-1D	34R	1	PAX	180	0	0	180
Airbus A330-300 Series	PW4168A-1D	34R	6	PAX	107	0	0	107
Airbus A330-300 Series	PW4168A-1D	34R	7	PAX	108	0	0	108
Airbus A330-300 Series	PW4170	16C	6	PAX	8	0	0	8
Airbus A330-300 Series	PW4170	16C	7	PAX	8	0	0	8
Airbus A330-300 Series	PW4170	16L	1	PAX	121	0	0	121
Airbus A330-300 Series	PW4170	16L	6	PAX	72	0	0	72
Airbus A330-300 Series	PW4170	16L	7	PAX	73	0	0	73
Airbus A330-300 Series	PW4170	16R	1	PAX	26	0	0	26
Airbus A330-300 Series	PW4170	34L	1	PAX	4	0	0	4
Airbus A330-300 Series	PW4170	34R	1	PAX	32	0	0	32
Airbus A330-300 Series	PW4170	34R	6	PAX	11	0	0	11
Airbus A330-300 Series	PW4170	34R	7	PAX	11	0	0	11
Airbus A330-300 Series	Trent 772	16C	6	PAX	17	0	0	17
Airbus A330-300 Series	Trent 772	16C	7	PAX	17	0	0	17
Airbus A330-300 Series	Trent 772	16L	1	PAX	170	0	0	170
Airbus A330-300 Series	Trent 772	16L	6	PAX	96	0	0	96
Airbus A330-300 Series	Trent 772	16L	7	PAX	98	0	0	98
Airbus A330-300 Series	Trent 772	16R	1	PAX	35	0	0	35
Airbus A330-300 Series	Trent 772	34L	1	PAX	7	0	0	7
Airbus A330-300 Series	Trent 772	34R	1	PAX	60	0	0	60
Airbus A330-300 Series	Trent 772	34R	6	PAX	22	0	0	22
Airbus A330-300 Series	Trent 772	34R	7	PAX	22	0	0	22
Airbus A330-900N Series (Neo)	Trent7000-72	16C	1	PAX	18	0	0	18
Airbus A330-900N Series (Neo)	Trent7000-72	16C	7	PAX	351	0	0	351
Airbus A330-900N Series (Neo)	Trent7000-72	16L	1	PAX	1,524	0	0	1,524
Airbus A330-900N Series (Neo)	Trent7000-72	16L	7	PAX	1,605	0	0	1,605
Airbus A330-900N Series (Neo)	Trent7000-72	16R	1	PAX	412	0	0	412
Airbus A330-900N Series (Neo)	Trent7000-72	34C	1	PAX	4	0	0	4
Airbus A330-900N Series (Neo)	Trent7000-72	34C	7	PAX	5	0	0	5

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A330-900N Series (Neo)	Trent7000-72	34L	1	PAX	178	0	0	178
Airbus A330-900N Series (Neo)	Trent7000-72	34R	1	PAX	617	0	0	617
Airbus A330-900N Series (Neo)	Trent7000-72	34R	7	PAX	792	0	0	792
Airbus A350-900 series	Trent XWB-84	16C	1	PAX	2	0	0	2
Airbus A350-900 series	Trent XWB-84	16C	6	PAX	65	0	0	65
Airbus A350-900 series	Trent XWB-84	16C	7	PAX	128	0	0	128
Airbus A350-900 series	Trent XWB-84	16L	1	PAX	917	0	0	917
Airbus A350-900 series	Trent XWB-84	16L	6	PAX	319	0	0	319
Airbus A350-900 series	Trent XWB-84	16L	7	PAX	645	0	0	645
Airbus A350-900 series	Trent XWB-84	16R	1	PAX	241	0	0	241
Airbus A350-900 series	Trent XWB-84	34C	1	PAX	1	0	0	1
Airbus A350-900 series	Trent XWB-84	34L	1	PAX	96	0	0	96
Airbus A350-900 series	Trent XWB-84	34R	1	PAX	367	0	0	367
Airbus A350-900 series	Trent XWB-84	34R	6	PAX	152	0	0	152
Airbus A350-900 series	Trent XWB-84	34R	7	PAX	315	0	0	315
Boeing 737-7	LEAP-1B27	16C	2	PAX	133	0	0	133
Boeing 737-7	LEAP-1B27	16C	4	PAX	92	0	0	92
Boeing 737-7	LEAP-1B27	16L	1	PAX	25	0	0	25
Boeing 737-7	LEAP-1B27	16L	2	PAX	236	0	0	236
Boeing 737-7	LEAP-1B27	16L	4	PAX	161	0	0	161
Boeing 737-7	LEAP-1B27	16R	1	PAX	585	0	0	585
Boeing 737-7	LEAP-1B27	34L	1	PAX	232	0	0	232
Boeing 737-7	LEAP-1B27	34R	1	PAX	4	0	0	4
Boeing 737-7	LEAP-1B27	34R	2	PAX	127	0	0	127
Boeing 737-7	LEAP-1B27	34R	4	PAX	97	0	0	97
Boeing 737-700 Series	CFM56-7B22	16C	2	PAX	98	0	0	98
Boeing 737-700 Series	CFM56-7B22	16L	2	PAX	166	0	0	166
Boeing 737-700 Series	CFM56-7B22	16R	1	PAX	257	0	0	257
Boeing 737-700 Series	CFM56-7B22	34L	1	PAX	68	0	0	68
Boeing 737-700 Series	CFM56-7B22	34R	2	PAX	61	0	0	61
Boeing 737-700 Series	CFM56-7B22/3	16C	2	PAX	12	0	0	12
Boeing 737-700 Series	CFM56-7B22/3	16L	2	PAX	38	0	0	38
Boeing 737-700 Series	CFM56-7B22/3	16R	1	PAX	47	0	0	47
Boeing 737-700 Series	CFM56-7B22/3	34L	1	PAX	8	0	0	8
Boeing 737-700 Series	CFM56-7B22/3	34R	2	PAX	5	0	0	5
Boeing 737-700 Series	CFM56-7B24	16C	2	PAX	13	0	0	13
Boeing 737-700 Series	CFM56-7B24	16L	2	PAX	40	0	0	40
Boeing 737-700 Series	CFM56-7B24	16R	1	PAX	51	0	0	51
Boeing 737-700 Series	CFM56-7B24	34L	1	PAX	8	0	0	8
Boeing 737-700 Series	CFM56-7B24	34R	2	PAX	6	0	0	6
Boeing 737-8	LEAP-1B25	16C	2	PAX	55	0	0	55
Boeing 737-8	LEAP-1B25	16C	4	PAX	38	0	0	38
Boeing 737-8	LEAP-1B25	16L	2	PAX	103	0	0	103
Boeing 737-8	LEAP-1B25	16L	4	PAX	76	0	0	76
Boeing 737-8	LEAP-1B25	16R	1	PAX	237	0	0	237
Boeing 737-8	LEAP-1B25	34L	1	PAX	85	0	0	85
Boeing 737-8	LEAP-1B25	34R	2	PAX	29	0	0	29
Boeing 737-8	LEAP-1B25	34R	4	PAX	21	0	0	21
Boeing 737-8	LEAP-1B27	16C	1	PAX	79	0	0	79
Boeing 737-8	LEAP-1B27	16C	2	PAX	1,695	0	0	1,695
Boeing 737-8	LEAP-1B27	16C	4	PAX	1,131	0	0	1,131
Boeing 737-8	LEAP-1B27	16L	1	PAX	511	0	0	511
Boeing 737-8	LEAP-1B27	16L	2	PAX	2,765	0	0	2,765
Boeing 737-8	LEAP-1B27	16L	4	PAX	1,852	0	0	1,852
Boeing 737-8	LEAP-1B27	16R	1	PAX	6,826	0	0	6,826
Boeing 737-8	LEAP-1B27	34C	1	PAX	25	0	0	25
Boeing 737-8	LEAP-1B27	34C	2	PAX	28	0	0	28
Boeing 737-8	LEAP-1B27	34C	4	PAX	20	0	0	20
Boeing 737-8	LEAP-1B27	34L	1	PAX	2,788	0	0	2,788
Boeing 737-8	LEAP-1B27	34R	1	PAX	193	0	0	193
Boeing 737-8	LEAP-1B27	34R	2	PAX	1,760	0	0	1,760
Boeing 737-8	LEAP-1B27	34R	4	PAX	1,171	0	0	1,171
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	1	PAX	70	0	0	70
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	2	PAX	1,562	0	0	1,562
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	4	PAX	1,041	0	0	1,041
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	1	PAX	467	0	0	467
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	2	PAX	2,554	0	0	2,554
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	4	PAX	1,706	0	0	1,706
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16R	1	PAX	6,309	0	0	6,309
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	1	PAX	23	0	0	23
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	2	PAX	22	0	0	22
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	4	PAX	16	0	0	16
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34L	1	PAX	2,576	0	0	2,576
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	1	PAX	168	0	0	168
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	2	PAX	1,627	0	0	1,627
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	4	PAX	1,085	0	0	1,085
Boeing 737-800 Series	CFM56-7B24	16C	1	PAX	167	0	0	167
Boeing 737-800 Series	CFM56-7B24	16C	2	PAX	844	0	0	844
Boeing 737-800 Series	CFM56-7B24	16C	3	PAX	293	0	0	293
Boeing 737-800 Series	CFM56-7B24	16C	4	PAX	327	0	0	327
Boeing 737-800 Series	CFM56-7B24	16L	1	PAX	499	0	0	499
Boeing 737-800 Series	CFM56-7B24	16L	2	PAX	1,394	0	0	1,394

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-800 Series	CFM56-7B24	16L	3	PAX	489	0	0	489
Boeing 737-800 Series	CFM56-7B24	16L	4	PAX	553	0	0	553
Boeing 737-800 Series	CFM56-7B24	16R	1	PAX	3,897	0	0	3,897
Boeing 737-800 Series	CFM56-7B24	34C	1	PAX	11	0	0	11
Boeing 737-800 Series	CFM56-7B24	34C	2	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B24	34C	3	PAX	3	0	0	3
Boeing 737-800 Series	CFM56-7B24	34C	4	PAX	2	0	0	2
Boeing 737-800 Series	CFM56-7B24	34L	1	PAX	1,596	0	0	1,596
Boeing 737-800 Series	CFM56-7B24	34R	1	PAX	219	0	0	219
Boeing 737-800 Series	CFM56-7B24	34R	2	PAX	887	0	0	887
Boeing 737-800 Series	CFM56-7B24	34R	3	PAX	301	0	0	301
Boeing 737-800 Series	CFM56-7B24	34R	4	PAX	333	0	0	333
Boeing 737-800 Series	CFM56-7B24/3	16L	2	PAX	46	0	0	46
Boeing 737-800 Series	CFM56-7B24/3	16R	1	PAX	49	0	0	49
Boeing 737-800 Series	CFM56-7B24/3	34L	1	PAX	10	0	0	10
Boeing 737-800 Series	CFM56-7B24/3	34R	2	PAX	13	0	0	13
Boeing 737-800 Series	CFM56-7B24E	16C	2	PAX	36	0	0	36
Boeing 737-800 Series	CFM56-7B24E	16L	2	PAX	65	0	0	65
Boeing 737-800 Series	CFM56-7B24E	16L	3	PAX	12	0	0	12
Boeing 737-800 Series	CFM56-7B24E	16L	4	PAX	10	0	0	10
Boeing 737-800 Series	CFM56-7B24E	16R	1	PAX	114	0	0	114
Boeing 737-800 Series	CFM56-7B24E	34L	1	PAX	28	0	0	28
Boeing 737-800 Series	CFM56-7B24E	34R	2	PAX	16	0	0	16
Boeing 737-800 Series	CFM56-7B24E	34R	3	PAX	3	0	0	3
Boeing 737-800 Series	CFM56-7B26	16C	1	PAX	232	0	0	232
Boeing 737-800 Series	CFM56-7B26	16C	2	PAX	1,144	0	0	1,144
Boeing 737-800 Series	CFM56-7B26	16C	3	PAX	403	0	0	403
Boeing 737-800 Series	CFM56-7B26	16C	4	PAX	453	0	0	453
Boeing 737-800 Series	CFM56-7B26	16L	1	PAX	697	0	0	697
Boeing 737-800 Series	CFM56-7B26	16L	2	PAX	1,886	0	0	1,886
Boeing 737-800 Series	CFM56-7B26	16L	3	PAX	677	0	0	677
Boeing 737-800 Series	CFM56-7B26	16L	4	PAX	765	0	0	765
Boeing 737-800 Series	CFM56-7B26	16R	1	PAX	5,317	0	0	5,317
Boeing 737-800 Series	CFM56-7B26	34C	1	PAX	16	0	0	16
Boeing 737-800 Series	CFM56-7B26	34C	2	PAX	16	0	0	16
Boeing 737-800 Series	CFM56-7B26	34C	3	PAX	5	0	0	5
Boeing 737-800 Series	CFM56-7B26	34C	4	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B26	34L	1	PAX	2,168	0	0	2,168
Boeing 737-800 Series	CFM56-7B26	34R	1	PAX	319	0	0	319
Boeing 737-800 Series	CFM56-7B26	34R	2	PAX	1,195	0	0	1,195
Boeing 737-800 Series	CFM56-7B26	34R	3	PAX	410	0	0	410
Boeing 737-800 Series	CFM56-7B26	34R	4	PAX	479	0	0	479
Boeing 737-800 Series	CFM56-7B26/3	16C	1	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B26/3	16C	2	PAX	122	0	0	122
Boeing 737-800 Series	CFM56-7B26/3	16C	3	PAX	36	0	0	36
Boeing 737-800 Series	CFM56-7B26/3	16C	4	PAX	38	0	0	38
Boeing 737-800 Series	CFM56-7B26/3	16L	1	PAX	49	0	0	49
Boeing 737-800 Series	CFM56-7B26/3	16L	2	PAX	217	0	0	217
Boeing 737-800 Series	CFM56-7B26/3	16L	3	PAX	69	0	0	69
Boeing 737-800 Series	CFM56-7B26/3	16L	4	PAX	80	0	0	80
Boeing 737-800 Series	CFM56-7B26/3	16R	1	PAX	521	0	0	521
Boeing 737-800 Series	CFM56-7B26/3	34L	1	PAX	206	0	0	206
Boeing 737-800 Series	CFM56-7B26/3	34R	1	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B26/3	34R	2	PAX	119	0	0	119
Boeing 737-800 Series	CFM56-7B26/3	34R	3	PAX	20	0	0	20
Boeing 737-800 Series	CFM56-7B26/3	34R	4	PAX	17	0	0	17
Boeing 737-800 Series	CFM56-7B26E	16C	1	PAX	37	0	0	37
Boeing 737-800 Series	CFM56-7B26E	16C	2	PAX	287	0	0	287
Boeing 737-800 Series	CFM56-7B26E	16C	3	PAX	91	0	0	91
Boeing 737-800 Series	CFM56-7B26E	16C	4	PAX	108	0	0	108
Boeing 737-800 Series	CFM56-7B26E	16L	1	PAX	146	0	0	146
Boeing 737-800 Series	CFM56-7B26E	16L	2	PAX	493	0	0	493
Boeing 737-800 Series	CFM56-7B26E	16L	3	PAX	163	0	0	163
Boeing 737-800 Series	CFM56-7B26E	16L	4	PAX	188	0	0	188
Boeing 737-800 Series	CFM56-7B26E	16R	1	PAX	1,309	0	0	1,309
Boeing 737-800 Series	CFM56-7B26E	34C	1	PAX	1	0	0	1
Boeing 737-800 Series	CFM56-7B26E	34C	2	PAX	3	0	0	3
Boeing 737-800 Series	CFM56-7B26E	34L	1	PAX	530	0	0	530
Boeing 737-800 Series	CFM56-7B26E	34R	1	PAX	39	0	0	39
Boeing 737-800 Series	CFM56-7B26E	34R	2	PAX	289	0	0	289
Boeing 737-800 Series	CFM56-7B26E	34R	3	PAX	90	0	0	90
Boeing 737-800 Series	CFM56-7B26E	34R	4	PAX	88	0	0	88
Boeing 737-800 Series	CFM56-7B27	16C	1	PAX	6	0	0	6
Boeing 737-800 Series	CFM56-7B27	16C	2	PAX	94	0	0	94
Boeing 737-800 Series	CFM56-7B27	16C	3	PAX	30	0	0	30
Boeing 737-800 Series	CFM56-7B27	16C	4	PAX	28	0	0	28
Boeing 737-800 Series	CFM56-7B27	16L	1	PAX	36	0	0	36
Boeing 737-800 Series	CFM56-7B27	16L	2	PAX	169	0	0	169
Boeing 737-800 Series	CFM56-7B27	16L	3	PAX	52	0	0	52
Boeing 737-800 Series	CFM56-7B27	16L	4	PAX	56	0	0	56
Boeing 737-800 Series	CFM56-7B27	16R	1	PAX	400	0	0	400
Boeing 737-800 Series	CFM56-7B27	34L	1	PAX	151	0	0	151

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-800 Series	CFM56-7B27	34R	1	PAX	5	0	0	5
Boeing 737-800 Series	CFM56-7B27	34R	2	PAX	90	0	0	90
Boeing 737-800 Series	CFM56-7B27	34R	3	PAX	12	0	0	12
Boeing 737-800 Series	CFM56-7B27	34R	4	PAX	13	0	0	13
Boeing 737-800 Series	CFM56-7B27/3	16C	1	PAX	94	0	0	94
Boeing 737-800 Series	CFM56-7B27/3	16C	2	PAX	514	0	0	514
Boeing 737-800 Series	CFM56-7B27/3	16C	3	PAX	177	0	0	177
Boeing 737-800 Series	CFM56-7B27/3	16C	4	PAX	198	0	0	198
Boeing 737-800 Series	CFM56-7B27/3	16L	1	PAX	288	0	0	288
Boeing 737-800 Series	CFM56-7B27/3	16L	2	PAX	859	0	0	859
Boeing 737-800 Series	CFM56-7B27/3	16L	3	PAX	295	0	0	295
Boeing 737-800 Series	CFM56-7B27/3	16L	4	PAX	334	0	0	334
Boeing 737-800 Series	CFM56-7B27/3	16R	1	PAX	2,355	0	0	2,355
Boeing 737-800 Series	CFM56-7B27/3	34C	1	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B27/3	34C	2	PAX	6	0	0	6
Boeing 737-800 Series	CFM56-7B27/3	34L	1	PAX	962	0	0	962
Boeing 737-800 Series	CFM56-7B27/3	34R	1	PAX	112	0	0	112
Boeing 737-800 Series	CFM56-7B27/3	34R	2	PAX	527	0	0	527
Boeing 737-800 Series	CFM56-7B27/3	34R	3	PAX	182	0	0	182
Boeing 737-800 Series	CFM56-7B27/3	34R	4	PAX	191	0	0	191
Boeing 737-800 Series	CFM56-7B27E/B1	16C	1	PAX	18	0	0	18
Boeing 737-800 Series	CFM56-7B27E/B1	16C	2	PAX	166	0	0	166
Boeing 737-800 Series	CFM56-7B27E/B1	16C	3	PAX	53	0	0	53
Boeing 737-800 Series	CFM56-7B27E/B1	16C	4	PAX	56	0	0	56
Boeing 737-800 Series	CFM56-7B27E/B1	16L	1	PAX	68	0	0	68
Boeing 737-800 Series	CFM56-7B27E/B1	16L	2	PAX	283	0	0	283
Boeing 737-800 Series	CFM56-7B27E/B1	16L	3	PAX	89	0	0	89
Boeing 737-800 Series	CFM56-7B27E/B1	16L	4	PAX	103	0	0	103
Boeing 737-800 Series	CFM56-7B27E/B1	16R	1	PAX	729	0	0	729
Boeing 737-800 Series	CFM56-7B27E/B1	34L	1	PAX	284	0	0	284
Boeing 737-800 Series	CFM56-7B27E/B1	34R	1	PAX	15	0	0	15
Boeing 737-800 Series	CFM56-7B27E/B1	34R	2	PAX	170	0	0	170
Boeing 737-800 Series	CFM56-7B27E/B1	34R	3	PAX	37	0	0	37
Boeing 737-800 Series	CFM56-7B27E/B1	34R	4	PAX	37	0	0	37
Boeing 737-800 Series	CFM56-7B27E/F	16C	2	PAX	49	0	0	49
Boeing 737-800 Series	CFM56-7B27E/F	16C	3	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B27E/F	16C	4	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B27E/F	16L	2	PAX	87	0	0	87
Boeing 737-800 Series	CFM56-7B27E/F	16L	3	PAX	29	0	0	29
Boeing 737-800 Series	CFM56-7B27E/F	16L	4	PAX	23	0	0	23
Boeing 737-800 Series	CFM56-7B27E/F	16R	1	PAX	181	0	0	181
Boeing 737-800 Series	CFM56-7B27E/F	34L	1	PAX	53	0	0	53
Boeing 737-800 Series	CFM56-7B27E/F	34R	2	PAX	20	0	0	20
Boeing 737-800 Series	CFM56-7B27E/F	34R	3	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B27E/F	34R	4	PAX	4	0	0	4
Boeing 737-9	LEAP-1B27	16C	2	PAX	43	0	0	43
Boeing 737-9	LEAP-1B27	16C	3	PAX	18	0	0	18
Boeing 737-9	LEAP-1B27	16C	4	PAX	82	0	0	82
Boeing 737-9	LEAP-1B27	16L	1	PAX	10	0	0	10
Boeing 737-9	LEAP-1B27	16L	2	PAX	80	0	0	80
Boeing 737-9	LEAP-1B27	16L	3	PAX	39	0	0	39
Boeing 737-9	LEAP-1B27	16L	4	PAX	144	0	0	144
Boeing 737-9	LEAP-1B27	16R	1	PAX	345	0	0	345
Boeing 737-9	LEAP-1B27	34L	1	PAX	124	0	0	124
Boeing 737-9	LEAP-1B27	34R	1	PAX	1	0	0	1
Boeing 737-9	LEAP-1B27	34R	2	PAX	18	0	0	18
Boeing 737-9	LEAP-1B27	34R	3	PAX	9	0	0	9
Boeing 737-9	LEAP-1B27	34R	4	PAX	47	0	0	47
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	1	PAX	170	0	0	170
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	2	PAX	1,627	0	0	1,627
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	3	PAX	918	0	0	918
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	4	PAX	2,576	0	0	2,576
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	1	PAX	926	0	0	926
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	2	PAX	2,659	0	0	2,659
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	3	PAX	1,503	0	0	1,503
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	4	PAX	4,208	0	0	4,208
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16R	1	PAX	12,337	0	0	12,337
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	1	PAX	76	0	0	76
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	2	PAX	28	0	0	28
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	3	PAX	11	0	0	11
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	4	PAX	54	0	0	54
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34L	1	PAX	5,029	0	0	5,029
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	1	PAX	367	0	0	367
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	2	PAX	1,694	0	0	1,694
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	3	PAX	956	0	0	956
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	4	PAX	2,671	0	0	2,671
Boeing 737-900-ER	CFM56-7B26/3	16C	2	PAX	91	0	0	91
Boeing 737-900-ER	CFM56-7B26/3	16C	3	PAX	38	0	0	38
Boeing 737-900-ER	CFM56-7B26/3	16C	4	PAX	33	0	0	33
Boeing 737-900-ER	CFM56-7B26/3	16L	1	PAX	15	0	0	15
Boeing 737-900-ER	CFM56-7B26/3	16L	2	PAX	163	0	0	163
Boeing 737-900-ER	CFM56-7B26/3	16L	3	PAX	70	0	0	70

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-900-ER	CFM56-7B26/3	16L	4	PAX	65	0	0	65
Boeing 737-900-ER	CFM56-7B26/3	16R	1	PAX	400	0	0	400
Boeing 737-900-ER	CFM56-7B26/3	34L	1	PAX	150	0	0	150
Boeing 737-900-ER	CFM56-7B26/3	34R	1	PAX	2	0	0	2
Boeing 737-900-ER	CFM56-7B26/3	34R	2	PAX	75	0	0	75
Boeing 737-900-ER	CFM56-7B26/3	34R	3	PAX	16	0	0	16
Boeing 737-900-ER	CFM56-7B26/3	34R	4	PAX	16	0	0	16
Boeing 737-900-ER	CFM56-7B26E	16C	1	PAX	195	0	0	195
Boeing 737-900-ER	CFM56-7B26E	16C	2	PAX	1,671	0	0	1,671
Boeing 737-900-ER	CFM56-7B26E	16C	3	PAX	836	0	0	836
Boeing 737-900-ER	CFM56-7B26E	16C	4	PAX	795	0	0	795
Boeing 737-900-ER	CFM56-7B26E	16L	1	PAX	782	0	0	782
Boeing 737-900-ER	CFM56-7B26E	16L	2	PAX	2,737	0	0	2,737
Boeing 737-900-ER	CFM56-7B26E	16L	3	PAX	1,375	0	0	1,375
Boeing 737-900-ER	CFM56-7B26E	16L	4	PAX	1,314	0	0	1,314
Boeing 737-900-ER	CFM56-7B26E	16R	1	PAX	8,231	0	0	8,231
Boeing 737-900-ER	CFM56-7B26E	34C	1	PAX	38	0	0	38
Boeing 737-900-ER	CFM56-7B26E	34C	2	PAX	29	0	0	29
Boeing 737-900-ER	CFM56-7B26E	34C	3	PAX	11	0	0	11
Boeing 737-900-ER	CFM56-7B26E	34C	4	PAX	9	0	0	9
Boeing 737-900-ER	CFM56-7B26E	34L	1	PAX	3,355	0	0	3,355
Boeing 737-900-ER	CFM56-7B26E	34R	1	PAX	328	0	0	328
Boeing 737-900-ER	CFM56-7B26E	34R	2	PAX	1,737	0	0	1,737
Boeing 737-900-ER	CFM56-7B26E	34R	3	PAX	878	0	0	878
Boeing 737-900-ER	CFM56-7B26E	34R	4	PAX	839	0	0	839
Boeing 737-900-ER	CFM56-7B27	16C	1	PAX	19	0	0	19
Boeing 737-900-ER	CFM56-7B27	16C	2	PAX	85	0	0	85
Boeing 737-900-ER	CFM56-7B27	16C	3	PAX	33	0	0	33
Boeing 737-900-ER	CFM56-7B27	16C	4	PAX	33	0	0	33
Boeing 737-900-ER	CFM56-7B27	16L	1	PAX	79	0	0	79
Boeing 737-900-ER	CFM56-7B27	16L	2	PAX	149	0	0	149
Boeing 737-900-ER	CFM56-7B27	16L	3	PAX	62	0	0	62
Boeing 737-900-ER	CFM56-7B27	16L	4	PAX	62	0	0	62
Boeing 737-900-ER	CFM56-7B27	16R	1	PAX	426	0	0	426
Boeing 737-900-ER	CFM56-7B27	34C	1	PAX	8	0	0	8
Boeing 737-900-ER	CFM56-7B27	34L	1	PAX	157	0	0	157
Boeing 737-900-ER	CFM56-7B27	34R	1	PAX	1	0	0	1
Boeing 737-900-ER	CFM56-7B27	34R	2	PAX	70	0	0	70
Boeing 737-900-ER	CFM56-7B27	34R	3	PAX	15	0	0	15
Boeing 737-900-ER	CFM56-7B27	34R	4	PAX	13	0	0	13
Boeing 737-900-ER	CFM56-7B27E	16C	1	PAX	638	0	0	638
Boeing 737-900-ER	CFM56-7B27E	16C	2	PAX	4,739	0	0	4,739
Boeing 737-900-ER	CFM56-7B27E	16C	3	PAX	2,394	0	0	2,394
Boeing 737-900-ER	CFM56-7B27E	16C	4	PAX	2,275	0	0	2,275
Boeing 737-900-ER	CFM56-7B27E	16L	1	PAX	2,288	0	0	2,288
Boeing 737-900-ER	CFM56-7B27E	16L	2	PAX	7,721	0	0	7,721
Boeing 737-900-ER	CFM56-7B27E	16L	3	PAX	3,900	0	0	3,900
Boeing 737-900-ER	CFM56-7B27E	16L	4	PAX	3,733	0	0	3,733
Boeing 737-900-ER	CFM56-7B27E	16R	1	PAX	23,364	0	0	23,364
Boeing 737-900-ER	CFM56-7B27E	34C	1	PAX	159	0	0	159
Boeing 737-900-ER	CFM56-7B27E	34C	2	PAX	154	0	0	154
Boeing 737-900-ER	CFM56-7B27E	34C	3	PAX	51	0	0	51
Boeing 737-900-ER	CFM56-7B27E	34C	4	PAX	49	0	0	49
Boeing 737-900-ER	CFM56-7B27E	34L	1	PAX	9,516	0	0	9,516
Boeing 737-900-ER	CFM56-7B27E	34R	1	PAX	1,010	0	0	1,010
Boeing 737-900-ER	CFM56-7B27E	34R	2	PAX	4,908	0	0	4,908
Boeing 737-900-ER	CFM56-7B27E	34R	3	PAX	2,481	0	0	2,481
Boeing 737-900-ER	CFM56-7B27E	34R	4	PAX	2,378	0	0	2,378
Boeing 737-900-ER	CFM56-7B27E/F	16C	2	PAX	68	0	0	68
Boeing 737-900-ER	CFM56-7B27E/F	16C	3	PAX	10	0	0	10
Boeing 737-900-ER	CFM56-7B27E/F	16C	4	PAX	11	0	0	11
Boeing 737-900-ER	CFM56-7B27E/F	16L	2	PAX	129	0	0	129
Boeing 737-900-ER	CFM56-7B27E/F	16L	3	PAX	32	0	0	32
Boeing 737-900-ER	CFM56-7B27E/F	16L	4	PAX	37	0	0	37
Boeing 737-900-ER	CFM56-7B27E/F	16R	1	PAX	257	0	0	257
Boeing 737-900-ER	CFM56-7B27E/F	34L	1	PAX	71	0	0	71
Boeing 737-900-ER	CFM56-7B27E/F	34R	2	PAX	31	0	0	31
Boeing 737-900-ER	CFM56-7B27E/F	34R	3	PAX	5	0	0	5
Boeing 737-900-ER	CFM56-7B27E/F	34R	4	PAX	5	0	0	5
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16C	7	PAX	11	0	0	11
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	1	PAX	146	0	0	146
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	2	PAX	43	0	0	43
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	6	PAX	42	0	0	42
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	7	PAX	99	0	0	99
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16R	1	PAX	27	0	0	27
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34L	1	PAX	7	0	0	7
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	1	PAX	43	0	0	43
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	2	PAX	6	0	0	6
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	6	PAX	6	0	0	6
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	7	PAX	16	0	0	16
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	2	PAX	10	0	0	10
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	6	PAX	10	0	0	10

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	7	PAX	32	0	0	32
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	1	PAX	290	0	0	290
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	2	PAX	80	0	0	80
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	6	PAX	80	0	0	80
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	7	PAX	175	0	0	175
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16R	1	PAX	68	0	0	68
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34L	1	PAX	17	0	0	17
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	1	PAX	106	0	0	106
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	2	PAX	16	0	0	16
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	6	PAX	15	0	0	15
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	7	PAX	63	0	0	63
Boeing 787-10 Dreamliner	Trent 1000-M3	16C	2	PAX	2	0	0	2
Boeing 787-10 Dreamliner	Trent 1000-M3	16C	6	PAX	2	0	0	2
Boeing 787-10 Dreamliner	Trent 1000-M3	16C	7	PAX	17	0	0	17
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	1	PAX	151	0	0	151
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	2	PAX	44	0	0	44
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	6	PAX	44	0	0	44
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	7	PAX	98	0	0	98
Boeing 787-10 Dreamliner	Trent 1000-M3	16R	1	PAX	32	0	0	32
Boeing 787-10 Dreamliner	Trent 1000-M3	34L	1	PAX	7	0	0	7
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	1	PAX	53	0	0	53
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	2	PAX	8	0	0	8
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	6	PAX	8	0	0	8
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	7	PAX	20	0	0	20
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16C	6	PAX	57	0	0	57
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16C	7	PAX	24	0	0	24
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	1	PAX	412	0	0	412
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	6	PAX	297	0	0	297
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	7	PAX	139	0	0	139
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16R	1	PAX	100	0	0	100
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34L	1	PAX	32	0	0	32
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	1	PAX	165	0	0	165
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	6	PAX	142	0	0	142
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	7	PAX	50	0	0	50
Boeing 787-8 Dreamliner	GEnx-1B67	16C	6	PAX	91	0	0	91
Boeing 787-8 Dreamliner	GEnx-1B67	16C	7	PAX	43	0	0	43
Boeing 787-8 Dreamliner	GEnx-1B67	16L	1	PAX	640	0	0	640
Boeing 787-8 Dreamliner	GEnx-1B67	16L	6	PAX	454	0	0	454
Boeing 787-8 Dreamliner	GEnx-1B67	16L	7	PAX	220	0	0	220
Boeing 787-8 Dreamliner	GEnx-1B67	16R	1	PAX	162	0	0	162
Boeing 787-8 Dreamliner	GEnx-1B67	34L	1	PAX	62	0	0	62
Boeing 787-8 Dreamliner	GEnx-1B67	34R	1	PAX	257	0	0	257
Boeing 787-8 Dreamliner	GEnx-1B67	34R	6	PAX	215	0	0	215
Boeing 787-8 Dreamliner	GEnx-1B67	34R	7	PAX	98	0	0	98
Boeing 787-8 Dreamliner	GEnx-1B70	16C	1	PAX	18	0	0	18
Boeing 787-8 Dreamliner	GEnx-1B70	16C	6	PAX	231	0	0	231
Boeing 787-8 Dreamliner	GEnx-1B70	16C	7	PAX	113	0	0	113
Boeing 787-8 Dreamliner	GEnx-1B70	16L	1	PAX	1,524	0	0	1,524
Boeing 787-8 Dreamliner	GEnx-1B70	16L	6	PAX	1,076	0	0	1,076
Boeing 787-8 Dreamliner	GEnx-1B70	16L	7	PAX	539	0	0	539
Boeing 787-8 Dreamliner	GEnx-1B70	16R	1	PAX	412	0	0	412
Boeing 787-8 Dreamliner	GEnx-1B70	34C	1	PAX	4	0	0	4
Boeing 787-8 Dreamliner	GEnx-1B70	34C	6	PAX	2	0	0	2
Boeing 787-8 Dreamliner	GEnx-1B70	34L	1	PAX	178	0	0	178
Boeing 787-8 Dreamliner	GEnx-1B70	34R	1	PAX	618	0	0	618
Boeing 787-8 Dreamliner	GEnx-1B70	34R	6	PAX	535	0	0	535
Boeing 787-8 Dreamliner	GEnx-1B70	34R	7	PAX	258	0	0	258
Boeing 787-8 Dreamliner	GEnx-1B70/P2	16L	1	PAX	24	0	0	24
Boeing 787-8 Dreamliner	GEnx-1B70/P2	16L	6	PAX	24	0	0	24
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	1	PAX	2	0	0	2
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	2	PAX	52	0	0	52
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	6	PAX	52	0	0	52
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	7	PAX	107	0	0	107
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	1	PAX	971	0	0	971
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	2	PAX	254	0	0	254
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	6	PAX	254	0	0	254
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	7	PAX	528	0	0	528
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16R	1	PAX	267	0	0	267
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34C	1	PAX	1	0	0	1
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34L	1	PAX	107	0	0	107
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	1	PAX	389	0	0	389
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	2	PAX	118	0	0	118
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	6	PAX	118	0	0	118
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	7	PAX	254	0	0	254
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	1	PAX	2	0	0	2
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	2	PAX	52	0	0	52
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	6	PAX	53	0	0	53
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	7	PAX	109	0	0	109
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	1	PAX	996	0	0	996
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	2	PAX	263	0	0	263
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	6	PAX	263	0	0	263
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	7	PAX	549	0	0	549

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 787-9 Dreamliner	Trent 1000-J2	16R	1	PAX	272	0	0	272
Boeing 787-9 Dreamliner	Trent 1000-J2	34C	1	PAX	1	0	0	1
Boeing 787-9 Dreamliner	Trent 1000-J2	34L	1	PAX	110	0	0	110
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	1	PAX	401	0	0	401
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	2	PAX	118	0	0	118
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	6	PAX	118	0	0	118
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	7	PAX	257	0	0	257
Boeing 787-9 Dreamliner	Trent 1000-J3	16C	2	PAX	8	0	0	8
Boeing 787-9 Dreamliner	Trent 1000-J3	16C	6	PAX	8	0	0	8
Boeing 787-9 Dreamliner	Trent 1000-J3	16C	7	PAX	26	0	0	26
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	1	PAX	238	0	0	238
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	2	PAX	69	0	0	69
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	6	PAX	69	0	0	69
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	7	PAX	142	0	0	142
Boeing 787-9 Dreamliner	Trent 1000-J3	16R	1	PAX	50	0	0	50
Boeing 787-9 Dreamliner	Trent 1000-J3	34L	1	PAX	13	0	0	13
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	1	PAX	88	0	0	88
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	2	PAX	11	0	0	11
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	6	PAX	11	0	0	11
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	7	PAX	45	0	0	45
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	2	PAX	20	0	0	20
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	6	PAX	20	0	0	20
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	7	PAX	49	0	0	49
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	1	PAX	435	0	0	435
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	2	PAX	116	0	0	116
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	6	PAX	115	0	0	115
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	7	PAX	246	0	0	246
Boeing 787-9 Dreamliner	Trent 1000-K2	16R	1	PAX	109	0	0	109
Boeing 787-9 Dreamliner	Trent 1000-K2	34L	1	PAX	34	0	0	34
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	1	PAX	173	0	0	173
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	2	PAX	37	0	0	37
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	6	PAX	37	0	0	37
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	7	PAX	111	0	0	111
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16C	1	PAX	80	0	0	80
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16L	1	PAX	232	0	0	232
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16R	1	PAX	135	0	0	135
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34C	1	PAX	28	0	0	28
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34L	1	PAX	79	0	0	79
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34R	1	PAX	18	0	0	18
Cessna 172 Skyhawk	IO-320-D1AD	16C	1	PAX	15	0	0	15
Cessna 172 Skyhawk	IO-320-D1AD	16L	1	PAX	55	0	0	55
Cessna 172 Skyhawk	IO-320-D1AD	16R	1	PAX	21	0	0	21
Cessna 172 Skyhawk	IO-320-D1AD	34C	1	PAX	9	0	0	9
Cessna 172 Skyhawk	IO-320-D1AD	34L	1	PAX	13	0	0	13
Cessna 172 Skyhawk	IO-320-D1AD	34R	1	PAX	7	0	0	7
Dassault Falcon 50	TFE731-3	16C	1	PAX	80	0	0	80
Dassault Falcon 50	TFE731-3	16L	1	PAX	233	0	0	233
Dassault Falcon 50	TFE731-3	16R	1	PAX	135	0	0	135
Dassault Falcon 50	TFE731-3	34C	1	PAX	28	0	0	28
Dassault Falcon 50	TFE731-3	34L	1	PAX	79	0	0	79
Dassault Falcon 50	TFE731-3	34R	1	PAX	17	0	0	17
Embraer ERJ175-LR	CF34-8E5	16C	1	PAX	10,929	0	0	10,929
Embraer ERJ175-LR	CF34-8E5	16C	2	PAX	2,763	0	0	2,763
Embraer ERJ175-LR	CF34-8E5	16C	3	PAX	518	0	0	518
Embraer ERJ175-LR	CF34-8E5	16L	1	PAX	19,535	0	0	19,535
Embraer ERJ175-LR	CF34-8E5	16L	2	PAX	4,517	0	0	4,517
Embraer ERJ175-LR	CF34-8E5	16L	3	PAX	850	0	0	850
Embraer ERJ175-LR	CF34-8E5	16R	1	PAX	33,036	0	0	33,036
Embraer ERJ175-LR	CF34-8E5	34C	1	PAX	604	0	0	604
Embraer ERJ175-LR	CF34-8E5	34C	2	PAX	82	0	0	82
Embraer ERJ175-LR	CF34-8E5	34C	3	PAX	6	0	0	6
Embraer ERJ175-LR	CF34-8E5	34L	1	PAX	13,469	0	0	13,469
Embraer ERJ175-LR	CF34-8E5	34R	1	PAX	11,824	0	0	11,824
Embraer ERJ175-LR	CF34-8E5	34R	2	PAX	2,870	0	0	2,870
Embraer ERJ175-LR	CF34-8E5	34R	3	PAX	545	0	0	545
Embraer Phenom 300 (EMB-505)	PW530	16C	1	PAX	20	0	0	20
Embraer Phenom 300 (EMB-505)	PW530	16L	1	PAX	47	0	0	47
Embraer Phenom 300 (EMB-505)	PW530	16R	1	PAX	49	0	0	49
Embraer Phenom 300 (EMB-505)	PW530	34C	1	PAX	5	0	0	5
Embraer Phenom 300 (EMB-505)	PW530	34L	1	PAX	14	0	0	14
Embraer Phenom 300 (EMB-505)	PW530	34R	1	PAX	3	0	0	3
Piper PA-31 Navajo	TIO-540-J2B2	16L	1	PAX	14	0	0	14
Raytheon C-12 Huron	PT6A-60A	16C	1	PAX	9	0	0	9
Raytheon C-12 Huron	PT6A-60A	16L	1	PAX	61	0	0	61
Raytheon C-12 Huron	PT6A-60A	16R	1	PAX	34	0	0	34
Raytheon C-12 Huron	PT6A-60A	34L	1	PAX	36	0	0	36
ATR 72-600 Freighter	PW127F	16C	1	CRG	0	34	4	38
ATR 72-600 Freighter	PW127F	16L	1	CRG	0	72	6	78
ATR 72-600 Freighter	PW127F	16R	1	CRG	0	114	12	126
ATR 72-600 Freighter	PW127F	34L	1	CRG	0	33	3	36
ATR 72-600 Freighter	PW127F	34R	1	CRG	0	43	3	46
Boeing 747-400 ERF	PW4062	16C	3	CRG	0	7	0	7

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 747-400 ERF	PW4062	16C	7	CRG	0	16	3	19
Boeing 747-400 ERF	PW4062	16L	1	CRG	0	180	24	204
Boeing 747-400 ERF	PW4062	16L	3	CRG	0	67	7	74
Boeing 747-400 ERF	PW4062	16L	7	CRG	0	134	16	150
Boeing 747-400 ERF	PW4062	16R	1	CRG	0	28	1	29
Boeing 747-400 ERF	PW4062	34L	1	CRG	0	6	0	6
Boeing 747-400 ERF	PW4062	34R	1	CRG	0	46	4	50
Boeing 747-400 ERF	PW4062	34R	3	CRG	0	11	1	12
Boeing 747-400 ERF	PW4062	34R	7	CRG	0	23	4	27
Boeing 747-400BCF	CF6-80C2B5F	16C	3	CRG	0	7	0	7
Boeing 747-400BCF	CF6-80C2B5F	16C	7	CRG	0	16	3	19
Boeing 747-400BCF	CF6-80C2B5F	16L	1	CRG	0	181	24	205
Boeing 747-400BCF	CF6-80C2B5F	16L	3	CRG	0	67	7	74
Boeing 747-400BCF	CF6-80C2B5F	16L	7	CRG	0	134	16	150
Boeing 747-400BCF	CF6-80C2B5F	16R	1	CRG	0	28	1	29
Boeing 747-400BCF	CF6-80C2B5F	34L	1	CRG	0	6	0	6
Boeing 747-400BCF	CF6-80C2B5F	34R	1	CRG	0	45	4	49
Boeing 747-400BCF	CF6-80C2B5F	34R	3	CRG	0	11	1	12
Boeing 747-400BCF	CF6-80C2B5F	34R	7	CRG	0	23	4	27
Boeing 747-8F	GENX-2B67	16C	7	CRG	0	14	0	14
Boeing 747-8F	GENX-2B67	16L	1	CRG	0	87	12	99
Boeing 747-8F	GENX-2B67	16L	7	CRG	0	88	12	100
Boeing 747-8F	GENX-2B67	16R	1	CRG	0	14	0	14
Boeing 747-8F	GENX-2B67	34L	1	CRG	0	2	0	2
Boeing 747-8F	GENX-2B67	34R	1	CRG	0	20	1	21
Boeing 747-8F	GENX-2B67	34R	7	CRG	0	20	2	22
Boeing 747-8F	GEnx-2B67/P	16C	7	CRG	0	17	0	17
Boeing 747-8F	GEnx-2B67/P	16L	1	CRG	0	97	12	109
Boeing 747-8F	GEnx-2B67/P	16L	7	CRG	0	101	12	113
Boeing 747-8F	GEnx-2B67/P	16R	1	CRG	0	21	0	21
Boeing 747-8F	GEnx-2B67/P	34L	1	CRG	0	2	0	2
Boeing 747-8F	GEnx-2B67/P	34R	1	CRG	0	23	3	26
Boeing 747-8F	GEnx-2B67/P	34R	7	CRG	0	26	2	28
Boeing 747-8F	GEnx-2B67B	16L	1	CRG	0	38	1	39
Boeing 747-8F	GEnx-2B67B	16L	7	CRG	0	33	4	37
Boeing 747-8F	GEnx-2B67B	34R	1	CRG	0	3	0	3
Boeing 747-8F	GEnx-2B67B	34R	7	CRG	0	4	1	5
Boeing 767-200 Series Freighter	CF6-80A	16C	3	CRG	0	66	7	73
Boeing 767-200 Series Freighter	CF6-80A	16C	4	CRG	0	131	16	147
Boeing 767-200 Series Freighter	CF6-80A	16L	1	CRG	0	942	129	1,071
Boeing 767-200 Series Freighter	CF6-80A	16L	3	CRG	0	329	41	370
Boeing 767-200 Series Freighter	CF6-80A	16L	4	CRG	0	657	89	746
Boeing 767-200 Series Freighter	CF6-80A	16R	1	CRG	0	239	34	273
Boeing 767-200 Series Freighter	CF6-80A	34L	1	CRG	0	85	7	92
Boeing 767-200 Series Freighter	CF6-80A	34R	1	CRG	0	378	46	424
Boeing 767-200 Series Freighter	CF6-80A	34R	3	CRG	0	155	13	168
Boeing 767-200 Series Freighter	CF6-80A	34R	4	CRG	0	317	39	356
Boeing 767-200 Series Freighter	CF6-80A2	16C	3	CRG	0	32	3	35
Boeing 767-200 Series Freighter	CF6-80A2	16C	4	CRG	0	61	7	68
Boeing 767-200 Series Freighter	CF6-80A2	16L	1	CRG	0	485	64	549
Boeing 767-200 Series Freighter	CF6-80A2	16L	3	CRG	0	173	25	198
Boeing 767-200 Series Freighter	CF6-80A2	16L	4	CRG	0	341	44	385
Boeing 767-200 Series Freighter	CF6-80A2	16R	1	CRG	0	114	14	128
Boeing 767-200 Series Freighter	CF6-80A2	34L	1	CRG	0	28	3	31
Boeing 767-200 Series Freighter	CF6-80A2	34R	1	CRG	0	190	28	218
Boeing 767-200 Series Freighter	CF6-80A2	34R	3	CRG	0	71	4	75
Boeing 767-200 Series Freighter	CF6-80A2	34R	4	CRG	0	146	19	165
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	1	CRG	0	118	13	131
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	3	CRG	0	42	7	49
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	4	CRG	0	83	12	95
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16R	1	CRG	0	4	0	4
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34L	1	CRG	0	2	0	2
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	1	CRG	0	26	3	29
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	3	CRG	0	6	1	7
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	4	CRG	0	13	2	15
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	1	CRG	0	8	0	8
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	2	CRG	0	116	13	129
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	3	CRG	0	108	13	121
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	4	CRG	0	53	7	60
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	1	CRG	0	1,308	181	1,489
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	2	CRG	0	564	74	638
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	3	CRG	0	543	74	617
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	4	CRG	0	268	35	303
Boeing 767-300 ER Freighter	CF6-80C2B6F	16R	1	CRG	0	342	43	385
Boeing 767-300 ER Freighter	CF6-80C2B6F	34C	1	CRG	0	1	0	1
Boeing 767-300 ER Freighter	CF6-80C2B6F	34L	1	CRG	0	137	12	149
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	1	CRG	0	514	66	580
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	2	CRG	0	274	35	309
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	3	CRG	0	260	35	295
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	4	CRG	0	132	8	140
Boeing 767-300 ER Freighter	CF6-80C2B7F	16C	2	CRG	0	9	0	9
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	1	CRG	0	160	16	176

SEA SAMP NTP 2037 No Action Alternative - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	2	CRG	0	83	11	94
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	3	CRG	0	68	11	79
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	4	CRG	0	35	4	39
Boeing 767-300 ER Freighter	CF6-80C2B7F	16R	1	CRG	0	26	0	26
Boeing 767-300 ER Freighter	CF6-80C2B7F	34L	1	CRG	0	7	0	7
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	1	CRG	0	45	3	48
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	2	CRG	0	14	2	16
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	3	CRG	0	11	2	13
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	4	CRG	0	6	1	7
Boeing 777 Freighter	GE90-110B1	16C	1	CRG	0	6	0	6
Boeing 777 Freighter	GE90-110B1	16C	6	CRG	0	203	26	229
Boeing 777 Freighter	GE90-110B1	16L	1	CRG	0	917	126	1,043
Boeing 777 Freighter	GE90-110B1	16L	6	CRG	0	950	130	1,080
Boeing 777 Freighter	GE90-110B1	16R	1	CRG	0	242	34	276
Boeing 777 Freighter	GE90-110B1	34C	1	CRG	0	1	0	1
Boeing 777 Freighter	GE90-110B1	34C	6	CRG	0	2	0	2
Boeing 777 Freighter	GE90-110B1	34L	1	CRG	0	100	7	107
Boeing 777 Freighter	GE90-110B1	34R	1	CRG	0	367	46	413
Boeing 777 Freighter	GE90-110B1	34R	6	CRG	0	469	66	535
Boeing 777 Freighter	GE90-115B	16L	1	CRG	0	39	2	41
Boeing 777 Freighter	GE90-115B	16L	6	CRG	0	35	4	39
Boeing 777 Freighter	GE90-115B	34R	1	CRG	0	3	0	3
Boeing 777 Freighter	GE90-115B	34R	6	CRG	0	4	1	5
Cessna 208 Caravan	PT6A-114	16C	1	CRG	0	124	9	133
Cessna 208 Caravan	PT6A-114	16L	1	CRG	0	373	45	418
Cessna 208 Caravan	PT6A-114	16R	1	CRG	0	238	35	273
Cessna 208 Caravan	PT6A-114	34C	1	CRG	0	77	10	87
Cessna 208 Caravan	PT6A-114	34L	1	CRG	0	138	14	152
Cessna 208 Caravan	PT6A-114	34R	1	CRG	0	63	6	69
Cessna 208 Caravan	PT6A-114A	16C	1	CRG	0	150	17	167
Cessna 208 Caravan	PT6A-114A	16L	1	CRG	0	454	62	516
Cessna 208 Caravan	PT6A-114A	16R	1	CRG	0	295	43	338
Cessna 208 Caravan	PT6A-114A	34C	1	CRG	0	88	12	100
Cessna 208 Caravan	PT6A-114A	34L	1	CRG	0	160	17	177
Cessna 208 Caravan	PT6A-114A	34R	1	CRG	0	70	8	78
Cessna 408 SkyCourier	PT6A-65B	16C	1	ATX	0	34	4	38
Cessna 408 SkyCourier	PT6A-65B	16L	1	ATX	0	72	6	78
Cessna 408 SkyCourier	PT6A-65B	16R	1	ATX	0	114	12	126
Cessna 408 SkyCourier	PT6A-65B	34L	1	ATX	0	33	3	36
Cessna 408 SkyCourier	PT6A-65B	34R	1	ATX	0	43	3	46
Raytheon Beech 99	PT6A-36	16C	1	ATX	0	22	2	24
Raytheon Beech 99	PT6A-36	16L	1	ATX	0	87	6	93
Raytheon Beech 99	PT6A-36	16R	1	ATX	0	62	5	67
Raytheon Beech 99	PT6A-36	34C	1	ATX	0	12	0	12
Raytheon Beech 99	PT6A-36	34L	1	ATX	0	27	1	28
Raytheon Beech 99	PT6A-36	34R	1	ATX	0	10	0	10

Proposed Action Future (2037) Modeled Annual Aircraft Operations

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A220-100	PW1524G	16C	1	PAX	109	0	0	109
Airbus A220-100	PW1524G	16C	2	PAX	3,691	0	0	3,691
Airbus A220-100	PW1524G	16L	1	PAX	663	0	0	663
Airbus A220-100	PW1524G	16L	2	PAX	6,008	0	0	6,008
Airbus A220-100	PW1524G	16R	1	PAX	8,904	0	0	8,904
Airbus A220-100	PW1524G	34C	1	PAX	122	0	0	122
Airbus A220-100	PW1524G	34C	2	PAX	116	0	0	116
Airbus A220-100	PW1524G	34L	1	PAX	3,565	0	0	3,565
Airbus A220-100	PW1524G	34R	1	PAX	262	0	0	262
Airbus A220-100	PW1524G	34R	2	PAX	3,810	0	0	3,810
Airbus A220-300	PW1521G	16C	1	PAX	218	0	0	218
Airbus A220-300	PW1521G	16C	2	PAX	95	0	0	95
Airbus A220-300	PW1521G	16C	3	PAX	95	0	0	95
Airbus A220-300	PW1521G	16C	4	PAX	211	0	0	211
Airbus A220-300	PW1521G	16L	1	PAX	453	0	0	453
Airbus A220-300	PW1521G	16L	2	PAX	172	0	0	172
Airbus A220-300	PW1521G	16L	3	PAX	172	0	0	172
Airbus A220-300	PW1521G	16L	4	PAX	357	0	0	357
Airbus A220-300	PW1521G	16R	1	PAX	1,568	0	0	1,568
Airbus A220-300	PW1521G	34C	1	PAX	8	0	0	8
Airbus A220-300	PW1521G	34C	4	PAX	1	0	0	1
Airbus A220-300	PW1521G	34L	1	PAX	617	0	0	617
Airbus A220-300	PW1521G	34R	1	PAX	250	0	0	250
Airbus A220-300	PW1521G	34R	2	PAX	100	0	0	100
Airbus A220-300	PW1521G	34R	3	PAX	100	0	0	100
Airbus A220-300	PW1521G	34R	4	PAX	225	0	0	225
Airbus A220-300	PW1524G	16C	1	PAX	451	0	0	451
Airbus A220-300	PW1524G	16C	2	PAX	206	0	0	206
Airbus A220-300	PW1524G	16C	3	PAX	206	0	0	206
Airbus A220-300	PW1524G	16C	4	PAX	423	0	0	423
Airbus A220-300	PW1524G	16L	1	PAX	925	0	0	925
Airbus A220-300	PW1524G	16L	2	PAX	342	0	0	342
Airbus A220-300	PW1524G	16L	3	PAX	342	0	0	342
Airbus A220-300	PW1524G	16L	4	PAX	711	0	0	711
Airbus A220-300	PW1524G	16R	1	PAX	3,117	0	0	3,117
Airbus A220-300	PW1524G	34C	1	PAX	30	0	0	30
Airbus A220-300	PW1524G	34C	2	PAX	1	0	0	1
Airbus A220-300	PW1524G	34C	3	PAX	1	0	0	1
Airbus A220-300	PW1524G	34C	4	PAX	5	0	0	5
Airbus A220-300	PW1524G	34L	1	PAX	1,251	0	0	1,251
Airbus A220-300	PW1524G	34R	1	PAX	530	0	0	530
Airbus A220-300	PW1524G	34R	2	PAX	215	0	0	215
Airbus A220-300	PW1524G	34R	3	PAX	215	0	0	215
Airbus A220-300	PW1524G	34R	4	PAX	453	0	0	453
Airbus A320-200 Series	CFM56-5A3	16C	2	PAX	16	0	0	16
Airbus A320-200 Series	CFM56-5A3	16L	2	PAX	68	0	0	68
Airbus A320-200 Series	CFM56-5A3	16L	4	PAX	11	0	0	11
Airbus A320-200 Series	CFM56-5A3	16R	1	PAX	92	0	0	92
Airbus A320-200 Series	CFM56-5A3	34L	1	PAX	15	0	0	15
Airbus A320-200 Series	CFM56-5A3	34R	2	PAX	12	0	0	12
Airbus A320-200 Series	CFM56-5B4/3	16C	2	PAX	187	0	0	187
Airbus A320-200 Series	CFM56-5B4/3	16C	3	PAX	38	0	0	38
Airbus A320-200 Series	CFM56-5B4/3	16C	4	PAX	81	0	0	81
Airbus A320-200 Series	CFM56-5B4/3	16L	1	PAX	32	0	0	32
Airbus A320-200 Series	CFM56-5B4/3	16L	2	PAX	319	0	0	319
Airbus A320-200 Series	CFM56-5B4/3	16L	3	PAX	72	0	0	72
Airbus A320-200 Series	CFM56-5B4/3	16L	4	PAX	135	0	0	135
Airbus A320-200 Series	CFM56-5B4/3	16R	1	PAX	748	0	0	748
Airbus A320-200 Series	CFM56-5B4/3	34C	1	PAX	1	0	0	1
Airbus A320-200 Series	CFM56-5B4/3	34L	1	PAX	295	0	0	295
Airbus A320-200 Series	CFM56-5B4/3	34R	1	PAX	7	0	0	7
Airbus A320-200 Series	CFM56-5B4/3	34R	2	PAX	177	0	0	177
Airbus A320-200 Series	CFM56-5B4/3	34R	3	PAX	17	0	0	17
Airbus A320-200 Series	CFM56-5B4/3	34R	4	PAX	57	0	0	57
Airbus A320-200 Series	CFM56-5B4/P	16C	2	PAX	18	0	0	18
Airbus A320-200 Series	CFM56-5B4/P	16L	2	PAX	69	0	0	69
Airbus A320-200 Series	CFM56-5B4/P	16L	4	PAX	16	0	0	16
Airbus A320-200 Series	CFM56-5B4/P	16R	1	PAX	101	0	0	101
Airbus A320-200 Series	CFM56-5B4/P	34L	1	PAX	15	0	0	15
Airbus A320-200 Series	CFM56-5B4/P	34R	2	PAX	13	0	0	13
Airbus A320-200 Series	V2527-A5	16C	2	PAX	44	0	0	44
Airbus A320-200 Series	V2527-A5	16C	4	PAX	10	0	0	10
Airbus A320-200 Series	V2527-A5	16L	2	PAX	88	0	0	88
Airbus A320-200 Series	V2527-A5	16L	3	PAX	9	0	0	9
Airbus A320-200 Series	V2527-A5	16L	4	PAX	29	0	0	29
Airbus A320-200 Series	V2527-A5	16R	1	PAX	162	0	0	162
Airbus A320-200 Series	V2527-A5	34L	1	PAX	42	0	0	42
Airbus A320-200 Series	V2527-A5	34R	2	PAX	20	0	0	20
Airbus A320-200 Series	V2527-A5	34R	4	PAX	4	0	0	4
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16C	2	PAX	15	0	0	15
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16L	2	PAX	65	0	0	65
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16L	4	PAX	7	0	0	7

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	16R	1	PAX	83	0	0	83
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34L	1	PAX	14	0	0	14
Airbus A320-200 Series	V2527-A5 SelectOne? Upgrade Package	34R	2	PAX	10	0	0	10
Airbus A320-NEO	LEAP-1A26/26E1	16C	1	PAX	6	0	0	6
Airbus A320-NEO	LEAP-1A26/26E1	16C	2	PAX	327	0	0	327
Airbus A320-NEO	LEAP-1A26/26E1	16C	3	PAX	190	0	0	190
Airbus A320-NEO	LEAP-1A26/26E1	16C	4	PAX	313	0	0	313
Airbus A320-NEO	LEAP-1A26/26E1	16L	1	PAX	132	0	0	132
Airbus A320-NEO	LEAP-1A26/26E1	16L	2	PAX	549	0	0	549
Airbus A320-NEO	LEAP-1A26/26E1	16L	3	PAX	317	0	0	317
Airbus A320-NEO	LEAP-1A26/26E1	16L	4	PAX	524	0	0	524
Airbus A320-NEO	LEAP-1A26/26E1	16R	1	PAX	2,081	0	0	2,081
Airbus A320-NEO	LEAP-1A26/26E1	34C	1	PAX	11	0	0	11
Airbus A320-NEO	LEAP-1A26/26E1	34C	2	PAX	4	0	0	4
Airbus A320-NEO	LEAP-1A26/26E1	34C	3	PAX	1	0	0	1
Airbus A320-NEO	LEAP-1A26/26E1	34C	4	PAX	1	0	0	1
Airbus A320-NEO	LEAP-1A26/26E1	34L	1	PAX	832	0	0	832
Airbus A320-NEO	LEAP-1A26/26E1	34R	1	PAX	34	0	0	34
Airbus A320-NEO	LEAP-1A26/26E1	34R	2	PAX	343	0	0	343
Airbus A320-NEO	LEAP-1A26/26E1	34R	3	PAX	199	0	0	199
Airbus A320-NEO	LEAP-1A26/26E1	34R	4	PAX	328	0	0	328
Airbus A320-NEO	PW1127G-JM	16C	1	PAX	27	0	0	27
Airbus A320-NEO	PW1127G-JM	16C	2	PAX	517	0	0	517
Airbus A320-NEO	PW1127G-JM	16C	3	PAX	302	0	0	302
Airbus A320-NEO	PW1127G-JM	16C	4	PAX	493	0	0	493
Airbus A320-NEO	PW1127G-JM	16L	1	PAX	227	0	0	227
Airbus A320-NEO	PW1127G-JM	16L	2	PAX	848	0	0	848
Airbus A320-NEO	PW1127G-JM	16L	3	PAX	507	0	0	507
Airbus A320-NEO	PW1127G-JM	16L	4	PAX	836	0	0	836
Airbus A320-NEO	PW1127G-JM	16R	1	PAX	3,264	0	0	3,264
Airbus A320-NEO	PW1127G-JM	34C	1	PAX	18	0	0	18
Airbus A320-NEO	PW1127G-JM	34C	2	PAX	6	0	0	6
Airbus A320-NEO	PW1127G-JM	34C	3	PAX	3	0	0	3
Airbus A320-NEO	PW1127G-JM	34C	4	PAX	4	0	0	4
Airbus A320-NEO	PW1127G-JM	34L	1	PAX	1,308	0	0	1,308
Airbus A320-NEO	PW1127G-JM	34R	1	PAX	69	0	0	69
Airbus A320-NEO	PW1127G-JM	34R	2	PAX	544	0	0	544
Airbus A320-NEO	PW1127G-JM	34R	3	PAX	322	0	0	322
Airbus A320-NEO	PW1127G-JM	34R	4	PAX	531	0	0	531
Airbus A321-200 Series	CFM56-5B3/3	16C	3	PAX	10	0	0	10
Airbus A321-200 Series	CFM56-5B3/3	16C	4	PAX	32	0	0	32
Airbus A321-200 Series	CFM56-5B3/3	16L	2	PAX	10	0	0	10
Airbus A321-200 Series	CFM56-5B3/3	16L	3	PAX	31	0	0	31
Airbus A321-200 Series	CFM56-5B3/3	16L	4	PAX	76	0	0	76
Airbus A321-200 Series	CFM56-5B3/3	16R	1	PAX	143	0	0	143
Airbus A321-200 Series	CFM56-5B3/3	34L	1	PAX	32	0	0	32
Airbus A321-200 Series	CFM56-5B3/3	34R	3	PAX	5	0	0	5
Airbus A321-200 Series	CFM56-5B3/3	34R	4	PAX	11	0	0	11
Airbus A321-200 Series	CFM56-5B3/P	16C	3	PAX	11	0	0	11
Airbus A321-200 Series	CFM56-5B3/P	16C	4	PAX	33	0	0	33
Airbus A321-200 Series	CFM56-5B3/P	16L	2	PAX	10	0	0	10
Airbus A321-200 Series	CFM56-5B3/P	16L	3	PAX	31	0	0	31
Airbus A321-200 Series	CFM56-5B3/P	16L	4	PAX	78	0	0	78
Airbus A321-200 Series	CFM56-5B3/P	16R	1	PAX	146	0	0	146
Airbus A321-200 Series	CFM56-5B3/P	34L	1	PAX	34	0	0	34
Airbus A321-200 Series	CFM56-5B3/P	34R	3	PAX	5	0	0	5
Airbus A321-200 Series	CFM56-5B3/P	34R	4	PAX	12	0	0	12
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	2	PAX	41	0	0	41
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	3	PAX	91	0	0	91
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16C	4	PAX	162	0	0	162
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	1	PAX	29	0	0	29
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	2	PAX	85	0	0	85
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	3	PAX	155	0	0	155
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16L	4	PAX	289	0	0	289
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	16R	1	PAX	732	0	0	732
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34C	1	PAX	1	0	0	1
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34L	1	PAX	295	0	0	295
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	1	PAX	4	0	0	4
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	2	PAX	21	0	0	21
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	3	PAX	62	0	0	62
Airbus A321-200 Series	V2533-A5 SelectOne? Upgrade Package	34R	4	PAX	155	0	0	155
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	1	PAX	88	0	0	88
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	2	PAX	657	0	0	657
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	3	PAX	427	0	0	427
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16C	4	PAX	1,969	0	0	1,969
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	1	PAX	553	0	0	553
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	2	PAX	1,074	0	0	1,074
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	3	PAX	721	0	0	721
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16L	4	PAX	3,231	0	0	3,231
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	16R	1	PAX	7,420	0	0	7,420
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	1	PAX	85	0	0	85
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	2	PAX	9	0	0	9

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	3	PAX	5	0	0	5
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34C	4	PAX	36	0	0	36
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34L	1	PAX	2,968	0	0	2,968
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	1	PAX	208	0	0	208
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	2	PAX	686	0	0	686
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	3	PAX	457	0	0	457
Airbus A321-NEO	LEAP-1A35A/33/33B2/32/30	34R	4	PAX	2,050	0	0	2,050
Airbus A321-NEO	PW1133G-JM	16C	1	PAX	15	0	0	15
Airbus A321-NEO	PW1133G-JM	16C	2	PAX	216	0	0	216
Airbus A321-NEO	PW1133G-JM	16C	3	PAX	138	0	0	138
Airbus A321-NEO	PW1133G-JM	16C	4	PAX	671	0	0	671
Airbus A321-NEO	PW1133G-JM	16L	1	PAX	168	0	0	168
Airbus A321-NEO	PW1133G-JM	16L	2	PAX	363	0	0	363
Airbus A321-NEO	PW1133G-JM	16L	3	PAX	237	0	0	237
Airbus A321-NEO	PW1133G-JM	16L	4	PAX	1,111	0	0	1,111
Airbus A321-NEO	PW1133G-JM	16R	1	PAX	2,551	0	0	2,551
Airbus A321-NEO	PW1133G-JM	34C	1	PAX	16	0	0	16
Airbus A321-NEO	PW1133G-JM	34C	2	PAX	1	0	0	1
Airbus A321-NEO	PW1133G-JM	34C	4	PAX	6	0	0	6
Airbus A321-NEO	PW1133G-JM	34L	1	PAX	1,022	0	0	1,022
Airbus A321-NEO	PW1133G-JM	34R	1	PAX	45	0	0	45
Airbus A321-NEO	PW1133G-JM	34R	2	PAX	227	0	0	227
Airbus A321-NEO	PW1133G-JM	34R	3	PAX	147	0	0	147
Airbus A321-NEO	PW1133G-JM	34R	4	PAX	700	0	0	700
Airbus A330-200 Series	Trent 772	16C	4	PAX	43	0	0	43
Airbus A330-200 Series	Trent 772	16C	6	PAX	76	0	0	76
Airbus A330-200 Series	Trent 772	16C	7	PAX	43	0	0	43
Airbus A330-200 Series	Trent 772	16L	1	PAX	786	0	0	786
Airbus A330-200 Series	Trent 772	16L	4	PAX	221	0	0	221
Airbus A330-200 Series	Trent 772	16L	6	PAX	375	0	0	375
Airbus A330-200 Series	Trent 772	16L	7	PAX	221	0	0	221
Airbus A330-200 Series	Trent 772	16R	1	PAX	195	0	0	195
Airbus A330-200 Series	Trent 772	34C	1	PAX	4	0	0	4
Airbus A330-200 Series	Trent 772	34L	1	PAX	84	0	0	84
Airbus A330-200 Series	Trent 772	34R	1	PAX	286	0	0	286
Airbus A330-200 Series	Trent 772	34R	4	PAX	98	0	0	98
Airbus A330-200 Series	Trent 772	34R	6	PAX	180	0	0	180
Airbus A330-200 Series	Trent 772	34R	7	PAX	98	0	0	98
Airbus A330-300 Series	CF6-80E1A4	16C	6	PAX	8	0	0	8
Airbus A330-300 Series	CF6-80E1A4	16C	7	PAX	26	0	0	26
Airbus A330-300 Series	CF6-80E1A4	16L	1	PAX	183	0	0	183
Airbus A330-300 Series	CF6-80E1A4	16L	6	PAX	68	0	0	68
Airbus A330-300 Series	CF6-80E1A4	16L	7	PAX	140	0	0	140
Airbus A330-300 Series	CF6-80E1A4	16R	1	PAX	43	0	0	43
Airbus A330-300 Series	CF6-80E1A4	34L	1	PAX	8	0	0	8
Airbus A330-300 Series	CF6-80E1A4	34R	1	PAX	64	0	0	64
Airbus A330-300 Series	CF6-80E1A4	34R	6	PAX	11	0	0	11
Airbus A330-300 Series	CF6-80E1A4	34R	7	PAX	45	0	0	45
Airbus A330-300 Series	PW4168A	16L	1	PAX	37	0	0	37
Airbus A330-300 Series	PW4168A	16L	6	PAX	4	0	0	4
Airbus A330-300 Series	PW4168A	16L	7	PAX	31	0	0	31
Airbus A330-300 Series	PW4168A	34R	1	PAX	3	0	0	3
Airbus A330-300 Series	PW4168A	34R	7	PAX	5	0	0	5
Airbus A330-300 Series	PW4168A-1D	16C	6	PAX	30	0	0	30
Airbus A330-300 Series	PW4168A-1D	16C	7	PAX	67	0	0	67
Airbus A330-300 Series	PW4168A-1D	16L	1	PAX	483	0	0	483
Airbus A330-300 Series	PW4168A-1D	16L	6	PAX	167	0	0	167
Airbus A330-300 Series	PW4168A-1D	16L	7	PAX	348	0	0	348
Airbus A330-300 Series	PW4168A-1D	16R	1	PAX	120	0	0	120
Airbus A330-300 Series	PW4168A-1D	34C	1	PAX	1	0	0	1
Airbus A330-300 Series	PW4168A-1D	34L	1	PAX	49	0	0	49
Airbus A330-300 Series	PW4168A-1D	34R	1	PAX	188	0	0	188
Airbus A330-300 Series	PW4168A-1D	34R	6	PAX	67	0	0	67
Airbus A330-300 Series	PW4168A-1D	34R	7	PAX	162	0	0	162
Airbus A330-300 Series	PW4170	16C	6	PAX	2	0	0	2
Airbus A330-300 Series	PW4170	16C	7	PAX	17	0	0	17
Airbus A330-300 Series	PW4170	16L	1	PAX	132	0	0	132
Airbus A330-300 Series	PW4170	16L	6	PAX	45	0	0	45
Airbus A330-300 Series	PW4170	16L	7	PAX	102	0	0	102
Airbus A330-300 Series	PW4170	16R	1	PAX	26	0	0	26
Airbus A330-300 Series	PW4170	34L	1	PAX	7	0	0	7
Airbus A330-300 Series	PW4170	34R	1	PAX	32	0	0	32
Airbus A330-300 Series	PW4170	34R	6	PAX	8	0	0	8
Airbus A330-300 Series	PW4170	34R	7	PAX	23	0	0	23
Airbus A330-300 Series	Trent 772	16C	6	PAX	7	0	0	7
Airbus A330-300 Series	Trent 772	16C	7	PAX	25	0	0	25
Airbus A330-300 Series	Trent 772	16L	1	PAX	181	0	0	181
Airbus A330-300 Series	Trent 772	16L	6	PAX	67	0	0	67
Airbus A330-300 Series	Trent 772	16L	7	PAX	138	0	0	138
Airbus A330-300 Series	Trent 772	16R	1	PAX	43	0	0	43
Airbus A330-300 Series	Trent 772	34L	1	PAX	8	0	0	8
Airbus A330-300 Series	Trent 772	34R	1	PAX	61	0	0	61

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Airbus A330-300 Series	Trent 772	34R	6	PAX	11	0	0	11
Airbus A330-300 Series	Trent 772	34R	7	PAX	45	0	0	45
Airbus A330-900N Series (Neo)	Trent7000-72	16C	1	PAX	20	0	0	20
Airbus A330-900N Series (Neo)	Trent7000-72	16C	7	PAX	376	0	0	376
Airbus A330-900N Series (Neo)	Trent7000-72	16L	1	PAX	1,646	0	0	1,646
Airbus A330-900N Series (Neo)	Trent7000-72	16L	7	PAX	1,738	0	0	1,738
Airbus A330-900N Series (Neo)	Trent7000-72	16R	1	PAX	443	0	0	443
Airbus A330-900N Series (Neo)	Trent7000-72	34C	1	PAX	13	0	0	13
Airbus A330-900N Series (Neo)	Trent7000-72	34C	7	PAX	5	0	0	5
Airbus A330-900N Series (Neo)	Trent7000-72	34L	1	PAX	214	0	0	214
Airbus A330-900N Series (Neo)	Trent7000-72	34R	1	PAX	630	0	0	630
Airbus A330-900N Series (Neo)	Trent7000-72	34R	7	PAX	847	0	0	847
Airbus A350-900 series	Trent XWB-84	16C	1	PAX	2	0	0	2
Airbus A350-900 series	Trent XWB-84	16C	6	PAX	67	0	0	67
Airbus A350-900 series	Trent XWB-84	16C	7	PAX	135	0	0	135
Airbus A350-900 series	Trent XWB-84	16L	1	PAX	981	0	0	981
Airbus A350-900 series	Trent XWB-84	16L	6	PAX	351	0	0	351
Airbus A350-900 series	Trent XWB-84	16L	7	PAX	697	0	0	697
Airbus A350-900 series	Trent XWB-84	16R	1	PAX	268	0	0	268
Airbus A350-900 series	Trent XWB-84	34C	1	PAX	7	0	0	7
Airbus A350-900 series	Trent XWB-84	34L	1	PAX	115	0	0	115
Airbus A350-900 series	Trent XWB-84	34R	1	PAX	377	0	0	377
Airbus A350-900 series	Trent XWB-84	34R	6	PAX	168	0	0	168
Airbus A350-900 series	Trent XWB-84	34R	7	PAX	332	0	0	332
Boeing 737-7	LEAP-1B27	16C	2	PAX	166	0	0	166
Boeing 737-7	LEAP-1B27	16C	4	PAX	81	0	0	81
Boeing 737-7	LEAP-1B27	16L	1	PAX	28	0	0	28
Boeing 737-7	LEAP-1B27	16L	2	PAX	284	0	0	284
Boeing 737-7	LEAP-1B27	16L	4	PAX	139	0	0	139
Boeing 737-7	LEAP-1B27	16R	1	PAX	636	0	0	636
Boeing 737-7	LEAP-1B27	34C	1	PAX	1	0	0	1
Boeing 737-7	LEAP-1B27	34L	1	PAX	241	0	0	241
Boeing 737-7	LEAP-1B27	34R	1	PAX	5	0	0	5
Boeing 737-7	LEAP-1B27	34R	2	PAX	163	0	0	163
Boeing 737-7	LEAP-1B27	34R	4	PAX	78	0	0	78
Boeing 737-700 Series	CFM56-7B22	16C	2	PAX	97	0	0	97
Boeing 737-700 Series	CFM56-7B22	16L	2	PAX	172	0	0	172
Boeing 737-700 Series	CFM56-7B22	16R	1	PAX	274	0	0	274
Boeing 737-700 Series	CFM56-7B22	34L	1	PAX	77	0	0	77
Boeing 737-700 Series	CFM56-7B22	34R	2	PAX	82	0	0	82
Boeing 737-700 Series	CFM56-7B22/3	16C	2	PAX	16	0	0	16
Boeing 737-700 Series	CFM56-7B22/3	16L	2	PAX	37	0	0	37
Boeing 737-700 Series	CFM56-7B22/3	16R	1	PAX	51	0	0	51
Boeing 737-700 Series	CFM56-7B22/3	34L	1	PAX	8	0	0	8
Boeing 737-700 Series	CFM56-7B22/3	34R	2	PAX	6	0	0	6
Boeing 737-700 Series	CFM56-7B24	16C	2	PAX	16	0	0	16
Boeing 737-700 Series	CFM56-7B24	16L	2	PAX	39	0	0	39
Boeing 737-700 Series	CFM56-7B24	16R	1	PAX	57	0	0	57
Boeing 737-700 Series	CFM56-7B24	34L	1	PAX	7	0	0	7
Boeing 737-700 Series	CFM56-7B24	34R	2	PAX	9	0	0	9
Boeing 737-8	LEAP-1B25	16C	2	PAX	67	0	0	67
Boeing 737-8	LEAP-1B25	16C	4	PAX	33	0	0	33
Boeing 737-8	LEAP-1B25	16L	1	PAX	1	0	0	1
Boeing 737-8	LEAP-1B25	16L	2	PAX	123	0	0	123
Boeing 737-8	LEAP-1B25	16L	4	PAX	66	0	0	66
Boeing 737-8	LEAP-1B25	16R	1	PAX	257	0	0	257
Boeing 737-8	LEAP-1B25	34L	1	PAX	89	0	0	89
Boeing 737-8	LEAP-1B25	34R	2	PAX	44	0	0	44
Boeing 737-8	LEAP-1B25	34R	4	PAX	14	0	0	14
Boeing 737-8	LEAP-1B27	16C	1	PAX	86	0	0	86
Boeing 737-8	LEAP-1B27	16C	2	PAX	2,032	0	0	2,032
Boeing 737-8	LEAP-1B27	16C	4	PAX	1,012	0	0	1,012
Boeing 737-8	LEAP-1B27	16L	1	PAX	546	0	0	546
Boeing 737-8	LEAP-1B27	16L	2	PAX	3,313	0	0	3,313
Boeing 737-8	LEAP-1B27	16L	4	PAX	1,654	0	0	1,654
Boeing 737-8	LEAP-1B27	16R	1	PAX	7,350	0	0	7,350
Boeing 737-8	LEAP-1B27	34C	1	PAX	92	0	0	92
Boeing 737-8	LEAP-1B27	34C	2	PAX	36	0	0	36
Boeing 737-8	LEAP-1B27	34C	4	PAX	16	0	0	16
Boeing 737-8	LEAP-1B27	34L	1	PAX	2,943	0	0	2,943
Boeing 737-8	LEAP-1B27	34R	1	PAX	212	0	0	212
Boeing 737-8	LEAP-1B27	34R	2	PAX	2,114	0	0	2,114
Boeing 737-8	LEAP-1B27	34R	4	PAX	1,052	0	0	1,052
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	1	PAX	73	0	0	73
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	2	PAX	1,866	0	0	1,866
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16C	4	PAX	939	0	0	939
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	1	PAX	504	0	0	504
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	2	PAX	3,052	0	0	3,052
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16L	4	PAX	1,528	0	0	1,528
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	16R	1	PAX	6,789	0	0	6,789
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	1	PAX	85	0	0	85
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	2	PAX	33	0	0	33

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34C	4	PAX	14	0	0	14
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34L	1	PAX	2,716	0	0	2,716
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	1	PAX	191	0	0	191
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	2	PAX	1,948	0	0	1,948
Boeing 737-8	LEAP-1B28/28B1/28B2/28B3	34R	4	PAX	978	0	0	978
Boeing 737-800 Series	CFM56-7B24	16C	1	PAX	175	0	0	175
Boeing 737-800 Series	CFM56-7B24	16C	2	PAX	904	0	0	904
Boeing 737-800 Series	CFM56-7B24	16C	3	PAX	330	0	0	330
Boeing 737-800 Series	CFM56-7B24	16C	4	PAX	351	0	0	351
Boeing 737-800 Series	CFM56-7B24	16L	1	PAX	531	0	0	531
Boeing 737-800 Series	CFM56-7B24	16L	2	PAX	1,484	0	0	1,484
Boeing 737-800 Series	CFM56-7B24	16L	3	PAX	553	0	0	553
Boeing 737-800 Series	CFM56-7B24	16L	4	PAX	588	0	0	588
Boeing 737-800 Series	CFM56-7B24	16R	1	PAX	4,207	0	0	4,207
Boeing 737-800 Series	CFM56-7B24	34C	1	PAX	38	0	0	38
Boeing 737-800 Series	CFM56-7B24	34C	2	PAX	10	0	0	10
Boeing 737-800 Series	CFM56-7B24	34C	3	PAX	3	0	0	3
Boeing 737-800 Series	CFM56-7B24	34C	4	PAX	3	0	0	3
Boeing 737-800 Series	CFM56-7B24	34L	1	PAX	1,690	0	0	1,690
Boeing 737-800 Series	CFM56-7B24	34R	1	PAX	225	0	0	225
Boeing 737-800 Series	CFM56-7B24	34R	2	PAX	935	0	0	935
Boeing 737-800 Series	CFM56-7B24	34R	3	PAX	340	0	0	340
Boeing 737-800 Series	CFM56-7B24	34R	4	PAX	375	0	0	375
Boeing 737-800 Series	CFM56-7B24/3	16L	2	PAX	52	0	0	52
Boeing 737-800 Series	CFM56-7B24/3	16R	1	PAX	52	0	0	52
Boeing 737-800 Series	CFM56-7B24/3	34L	1	PAX	11	0	0	11
Boeing 737-800 Series	CFM56-7B24/3	34R	2	PAX	11	0	0	11
Boeing 737-800 Series	CFM56-7B24E	16C	2	PAX	37	0	0	37
Boeing 737-800 Series	CFM56-7B24E	16L	2	PAX	67	0	0	67
Boeing 737-800 Series	CFM56-7B24E	16L	3	PAX	16	0	0	16
Boeing 737-800 Series	CFM56-7B24E	16L	4	PAX	11	0	0	11
Boeing 737-800 Series	CFM56-7B24E	16R	1	PAX	125	0	0	125
Boeing 737-800 Series	CFM56-7B24E	34L	1	PAX	28	0	0	28
Boeing 737-800 Series	CFM56-7B24E	34R	2	PAX	18	0	0	18
Boeing 737-800 Series	CFM56-7B24E	34R	3	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B26	16C	1	PAX	254	0	0	254
Boeing 737-800 Series	CFM56-7B26	16C	2	PAX	1,216	0	0	1,216
Boeing 737-800 Series	CFM56-7B26	16C	3	PAX	450	0	0	450
Boeing 737-800 Series	CFM56-7B26	16C	4	PAX	488	0	0	488
Boeing 737-800 Series	CFM56-7B26	16L	1	PAX	751	0	0	751
Boeing 737-800 Series	CFM56-7B26	16L	2	PAX	2,008	0	0	2,008
Boeing 737-800 Series	CFM56-7B26	16L	3	PAX	749	0	0	749
Boeing 737-800 Series	CFM56-7B26	16L	4	PAX	816	0	0	816
Boeing 737-800 Series	CFM56-7B26	16R	1	PAX	5,725	0	0	5,725
Boeing 737-800 Series	CFM56-7B26	34C	1	PAX	65	0	0	65
Boeing 737-800 Series	CFM56-7B26	34C	2	PAX	16	0	0	16
Boeing 737-800 Series	CFM56-7B26	34C	3	PAX	5	0	0	5
Boeing 737-800 Series	CFM56-7B26	34C	4	PAX	5	0	0	5
Boeing 737-800 Series	CFM56-7B26	34L	1	PAX	2,292	0	0	2,292
Boeing 737-800 Series	CFM56-7B26	34R	1	PAX	346	0	0	346
Boeing 737-800 Series	CFM56-7B26	34R	2	PAX	1,270	0	0	1,270
Boeing 737-800 Series	CFM56-7B26	34R	3	PAX	467	0	0	467
Boeing 737-800 Series	CFM56-7B26	34R	4	PAX	519	0	0	519
Boeing 737-800 Series	CFM56-7B26/3	16C	1	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B26/3	16C	2	PAX	129	0	0	129
Boeing 737-800 Series	CFM56-7B26/3	16C	3	PAX	42	0	0	42
Boeing 737-800 Series	CFM56-7B26/3	16C	4	PAX	41	0	0	41
Boeing 737-800 Series	CFM56-7B26/3	16L	1	PAX	47	0	0	47
Boeing 737-800 Series	CFM56-7B26/3	16L	2	PAX	227	0	0	227
Boeing 737-800 Series	CFM56-7B26/3	16L	3	PAX	78	0	0	78
Boeing 737-800 Series	CFM56-7B26/3	16L	4	PAX	85	0	0	85
Boeing 737-800 Series	CFM56-7B26/3	16R	1	PAX	570	0	0	570
Boeing 737-800 Series	CFM56-7B26/3	34L	1	PAX	215	0	0	215
Boeing 737-800 Series	CFM56-7B26/3	34R	1	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B26/3	34R	2	PAX	131	0	0	131
Boeing 737-800 Series	CFM56-7B26/3	34R	3	PAX	26	0	0	26
Boeing 737-800 Series	CFM56-7B26/3	34R	4	PAX	19	0	0	19
Boeing 737-800 Series	CFM56-7B26E	16C	1	PAX	42	0	0	42
Boeing 737-800 Series	CFM56-7B26E	16C	2	PAX	308	0	0	308
Boeing 737-800 Series	CFM56-7B26E	16C	3	PAX	103	0	0	103
Boeing 737-800 Series	CFM56-7B26E	16C	4	PAX	114	0	0	114
Boeing 737-800 Series	CFM56-7B26E	16L	1	PAX	157	0	0	157
Boeing 737-800 Series	CFM56-7B26E	16L	2	PAX	529	0	0	529
Boeing 737-800 Series	CFM56-7B26E	16L	3	PAX	185	0	0	185
Boeing 737-800 Series	CFM56-7B26E	16L	4	PAX	201	0	0	201
Boeing 737-800 Series	CFM56-7B26E	16R	1	PAX	1,412	0	0	1,412
Boeing 737-800 Series	CFM56-7B26E	34C	1	PAX	7	0	0	7
Boeing 737-800 Series	CFM56-7B26E	34C	2	PAX	3	0	0	3
Boeing 737-800 Series	CFM56-7B26E	34L	1	PAX	556	0	0	556
Boeing 737-800 Series	CFM56-7B26E	34R	1	PAX	40	0	0	40
Boeing 737-800 Series	CFM56-7B26E	34R	2	PAX	308	0	0	308
Boeing 737-800 Series	CFM56-7B26E	34R	3	PAX	105	0	0	105

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-800 Series	CFM56-7B26E	34R	4	PAX	92	0	0	92
Boeing 737-800 Series	CFM56-7B27	16C	1	PAX	6	0	0	6
Boeing 737-800 Series	CFM56-7B27	16C	2	PAX	98	0	0	98
Boeing 737-800 Series	CFM56-7B27	16C	3	PAX	33	0	0	33
Boeing 737-800 Series	CFM56-7B27	16C	4	PAX	31	0	0	31
Boeing 737-800 Series	CFM56-7B27	16L	1	PAX	35	0	0	35
Boeing 737-800 Series	CFM56-7B27	16L	2	PAX	186	0	0	186
Boeing 737-800 Series	CFM56-7B27	16L	3	PAX	64	0	0	64
Boeing 737-800 Series	CFM56-7B27	16L	4	PAX	59	0	0	59
Boeing 737-800 Series	CFM56-7B27	16R	1	PAX	437	0	0	437
Boeing 737-800 Series	CFM56-7B27	34L	1	PAX	158	0	0	158
Boeing 737-800 Series	CFM56-7B27	34R	1	PAX	5	0	0	5
Boeing 737-800 Series	CFM56-7B27	34R	2	PAX	92	0	0	92
Boeing 737-800 Series	CFM56-7B27	34R	3	PAX	13	0	0	13
Boeing 737-800 Series	CFM56-7B27	34R	4	PAX	13	0	0	13
Boeing 737-800 Series	CFM56-7B27/3	16C	1	PAX	106	0	0	106
Boeing 737-800 Series	CFM56-7B27/3	16C	2	PAX	548	0	0	548
Boeing 737-800 Series	CFM56-7B27/3	16C	3	PAX	194	0	0	194
Boeing 737-800 Series	CFM56-7B27/3	16C	4	PAX	209	0	0	209
Boeing 737-800 Series	CFM56-7B27/3	16L	1	PAX	306	0	0	306
Boeing 737-800 Series	CFM56-7B27/3	16L	2	PAX	919	0	0	919
Boeing 737-800 Series	CFM56-7B27/3	16L	3	PAX	334	0	0	334
Boeing 737-800 Series	CFM56-7B27/3	16L	4	PAX	357	0	0	357
Boeing 737-800 Series	CFM56-7B27/3	16R	1	PAX	2,538	0	0	2,538
Boeing 737-800 Series	CFM56-7B27/3	34C	1	PAX	16	0	0	16
Boeing 737-800 Series	CFM56-7B27/3	34C	2	PAX	6	0	0	6
Boeing 737-800 Series	CFM56-7B27/3	34C	3	PAX	1	0	0	1
Boeing 737-800 Series	CFM56-7B27/3	34L	1	PAX	1,017	0	0	1,017
Boeing 737-800 Series	CFM56-7B27/3	34R	1	PAX	115	0	0	115
Boeing 737-800 Series	CFM56-7B27/3	34R	2	PAX	567	0	0	567
Boeing 737-800 Series	CFM56-7B27/3	34R	3	PAX	202	0	0	202
Boeing 737-800 Series	CFM56-7B27/3	34R	4	PAX	213	0	0	213
Boeing 737-800 Series	CFM56-7B27E/B1	16C	1	PAX	17	0	0	17
Boeing 737-800 Series	CFM56-7B27E/B1	16C	2	PAX	173	0	0	173
Boeing 737-800 Series	CFM56-7B27E/B1	16C	3	PAX	59	0	0	59
Boeing 737-800 Series	CFM56-7B27E/B1	16C	4	PAX	61	0	0	61
Boeing 737-800 Series	CFM56-7B27E/B1	16L	1	PAX	74	0	0	74
Boeing 737-800 Series	CFM56-7B27E/B1	16L	2	PAX	302	0	0	302
Boeing 737-800 Series	CFM56-7B27E/B1	16L	3	PAX	98	0	0	98
Boeing 737-800 Series	CFM56-7B27E/B1	16L	4	PAX	111	0	0	111
Boeing 737-800 Series	CFM56-7B27E/B1	16R	1	PAX	788	0	0	788
Boeing 737-800 Series	CFM56-7B27E/B1	34C	1	PAX	1	0	0	1
Boeing 737-800 Series	CFM56-7B27E/B1	34L	1	PAX	304	0	0	304
Boeing 737-800 Series	CFM56-7B27E/B1	34R	1	PAX	17	0	0	17
Boeing 737-800 Series	CFM56-7B27E/B1	34R	2	PAX	185	0	0	185
Boeing 737-800 Series	CFM56-7B27E/B1	34R	3	PAX	40	0	0	40
Boeing 737-800 Series	CFM56-7B27E/B1	34R	4	PAX	41	0	0	41
Boeing 737-800 Series	CFM56-7B27E/F	16C	2	PAX	52	0	0	52
Boeing 737-800 Series	CFM56-7B27E/F	16C	3	PAX	12	0	0	12
Boeing 737-800 Series	CFM56-7B27E/F	16C	4	PAX	9	0	0	9
Boeing 737-800 Series	CFM56-7B27E/F	16L	2	PAX	97	0	0	97
Boeing 737-800 Series	CFM56-7B27E/F	16L	3	PAX	29	0	0	29
Boeing 737-800 Series	CFM56-7B27E/F	16L	4	PAX	25	0	0	25
Boeing 737-800 Series	CFM56-7B27E/F	16R	1	PAX	189	0	0	189
Boeing 737-800 Series	CFM56-7B27E/F	34L	1	PAX	64	0	0	64
Boeing 737-800 Series	CFM56-7B27E/F	34R	2	PAX	21	0	0	21
Boeing 737-800 Series	CFM56-7B27E/F	34R	3	PAX	4	0	0	4
Boeing 737-800 Series	CFM56-7B27E/F	34R	4	PAX	4	0	0	4
Boeing 737-9	LEAP-1B27	16C	2	PAX	44	0	0	44
Boeing 737-9	LEAP-1B27	16C	3	PAX	19	0	0	19
Boeing 737-9	LEAP-1B27	16C	4	PAX	83	0	0	83
Boeing 737-9	LEAP-1B27	16L	1	PAX	14	0	0	14
Boeing 737-9	LEAP-1B27	16L	2	PAX	95	0	0	95
Boeing 737-9	LEAP-1B27	16L	3	PAX	41	0	0	41
Boeing 737-9	LEAP-1B27	16L	4	PAX	160	0	0	160
Boeing 737-9	LEAP-1B27	16R	1	PAX	368	0	0	368
Boeing 737-9	LEAP-1B27	34L	1	PAX	134	0	0	134
Boeing 737-9	LEAP-1B27	34R	1	PAX	1	0	0	1
Boeing 737-9	LEAP-1B27	34R	2	PAX	18	0	0	18
Boeing 737-9	LEAP-1B27	34R	3	PAX	9	0	0	9
Boeing 737-9	LEAP-1B27	34R	4	PAX	48	0	0	48
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	1	PAX	180	0	0	180
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	2	PAX	1,763	0	0	1,763
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	3	PAX	990	0	0	990
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16C	4	PAX	2,772	0	0	2,772
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	1	PAX	1,000	0	0	1,000
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	2	PAX	2,866	0	0	2,866
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	3	PAX	1,635	0	0	1,635
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16L	4	PAX	4,511	0	0	4,511
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	16R	1	PAX	13,293	0	0	13,293
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	1	PAX	186	0	0	186
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	2	PAX	30	0	0	30

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	3	PAX	13	0	0	13
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34C	4	PAX	57	0	0	57
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34L	1	PAX	5,315	0	0	5,315
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	1	PAX	397	0	0	397
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	2	PAX	1,831	0	0	1,831
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	3	PAX	1,035	0	0	1,035
Boeing 737-9	LEAP-1B28/28B1/28B2/28B3	34R	4	PAX	2,868	0	0	2,868
Boeing 737-900-ER	CFM56-7B26/3	16C	2	PAX	92	0	0	92
Boeing 737-900-ER	CFM56-7B26/3	16C	3	PAX	39	0	0	39
Boeing 737-900-ER	CFM56-7B26/3	16C	4	PAX	33	0	0	33
Boeing 737-900-ER	CFM56-7B26/3	16L	1	PAX	18	0	0	18
Boeing 737-900-ER	CFM56-7B26/3	16L	2	PAX	166	0	0	166
Boeing 737-900-ER	CFM56-7B26/3	16L	3	PAX	85	0	0	85
Boeing 737-900-ER	CFM56-7B26/3	16L	4	PAX	74	0	0	74
Boeing 737-900-ER	CFM56-7B26/3	16R	1	PAX	434	0	0	434
Boeing 737-900-ER	CFM56-7B26/3	34L	1	PAX	158	0	0	158
Boeing 737-900-ER	CFM56-7B26/3	34R	1	PAX	2	0	0	2
Boeing 737-900-ER	CFM56-7B26/3	34R	2	PAX	90	0	0	90
Boeing 737-900-ER	CFM56-7B26/3	34R	3	PAX	17	0	0	17
Boeing 737-900-ER	CFM56-7B26/3	34R	4	PAX	16	0	0	16
Boeing 737-900-ER	CFM56-7B26E	16C	1	PAX	228	0	0	228
Boeing 737-900-ER	CFM56-7B26E	16C	2	PAX	1,791	0	0	1,791
Boeing 737-900-ER	CFM56-7B26E	16C	3	PAX	931	0	0	931
Boeing 737-900-ER	CFM56-7B26E	16C	4	PAX	841	0	0	841
Boeing 737-900-ER	CFM56-7B26E	16L	1	PAX	856	0	0	856
Boeing 737-900-ER	CFM56-7B26E	16L	2	PAX	2,945	0	0	2,945
Boeing 737-900-ER	CFM56-7B26E	16L	3	PAX	1,518	0	0	1,518
Boeing 737-900-ER	CFM56-7B26E	16L	4	PAX	1,397	0	0	1,397
Boeing 737-900-ER	CFM56-7B26E	16R	1	PAX	8,922	0	0	8,922
Boeing 737-900-ER	CFM56-7B26E	34C	1	PAX	115	0	0	115
Boeing 737-900-ER	CFM56-7B26E	34C	2	PAX	40	0	0	40
Boeing 737-900-ER	CFM56-7B26E	34C	3	PAX	11	0	0	11
Boeing 737-900-ER	CFM56-7B26E	34C	4	PAX	9	0	0	9
Boeing 737-900-ER	CFM56-7B26E	34L	1	PAX	3,559	0	0	3,559
Boeing 737-900-ER	CFM56-7B26E	34R	1	PAX	355	0	0	355
Boeing 737-900-ER	CFM56-7B26E	34R	2	PAX	1,866	0	0	1,866
Boeing 737-900-ER	CFM56-7B26E	34R	3	PAX	972	0	0	972
Boeing 737-900-ER	CFM56-7B26E	34R	4	PAX	896	0	0	896
Boeing 737-900-ER	CFM56-7B27	16C	2	PAX	89	0	0	89
Boeing 737-900-ER	CFM56-7B27	16C	3	PAX	37	0	0	37
Boeing 737-900-ER	CFM56-7B27	16C	4	PAX	33	0	0	33
Boeing 737-900-ER	CFM56-7B27	16L	1	PAX	14	0	0	14
Boeing 737-900-ER	CFM56-7B27	16L	2	PAX	156	0	0	156
Boeing 737-900-ER	CFM56-7B27	16L	3	PAX	67	0	0	67
Boeing 737-900-ER	CFM56-7B27	16L	4	PAX	62	0	0	62
Boeing 737-900-ER	CFM56-7B27	16R	1	PAX	393	0	0	393
Boeing 737-900-ER	CFM56-7B27	34L	1	PAX	140	0	0	140
Boeing 737-900-ER	CFM56-7B27	34R	1	PAX	1	0	0	1
Boeing 737-900-ER	CFM56-7B27	34R	2	PAX	73	0	0	73
Boeing 737-900-ER	CFM56-7B27	34R	3	PAX	16	0	0	16
Boeing 737-900-ER	CFM56-7B27	34R	4	PAX	15	0	0	15
Boeing 737-900-ER	CFM56-7B27E	16C	1	PAX	719	0	0	719
Boeing 737-900-ER	CFM56-7B27E	16C	2	PAX	5,087	0	0	5,087
Boeing 737-900-ER	CFM56-7B27E	16C	3	PAX	2,645	0	0	2,645
Boeing 737-900-ER	CFM56-7B27E	16C	4	PAX	2,421	0	0	2,421
Boeing 737-900-ER	CFM56-7B27E	16L	1	PAX	2,511	0	0	2,511
Boeing 737-900-ER	CFM56-7B27E	16L	2	PAX	8,276	0	0	8,276
Boeing 737-900-ER	CFM56-7B27E	16L	3	PAX	4,316	0	0	4,316
Boeing 737-900-ER	CFM56-7B27E	16L	4	PAX	3,953	0	0	3,953
Boeing 737-900-ER	CFM56-7B27E	16R	1	PAX	25,271	0	0	25,271
Boeing 737-900-ER	CFM56-7B27E	34C	1	PAX	377	0	0	377
Boeing 737-900-ER	CFM56-7B27E	34C	2	PAX	164	0	0	164
Boeing 737-900-ER	CFM56-7B27E	34C	3	PAX	64	0	0	64
Boeing 737-900-ER	CFM56-7B27E	34C	4	PAX	57	0	0	57
Boeing 737-900-ER	CFM56-7B27E	34L	1	PAX	10,092	0	0	10,092
Boeing 737-900-ER	CFM56-7B27E	34R	1	PAX	1,141	0	0	1,141
Boeing 737-900-ER	CFM56-7B27E	34R	2	PAX	5,254	0	0	5,254
Boeing 737-900-ER	CFM56-7B27E	34R	3	PAX	2,743	0	0	2,743
Boeing 737-900-ER	CFM56-7B27E	34R	4	PAX	2,511	0	0	2,511
Boeing 737-900-ER	CFM56-7B27E/F	16C	2	PAX	24	0	0	24
Boeing 737-900-ER	CFM56-7B27E/F	16L	2	PAX	57	0	0	57
Boeing 737-900-ER	CFM56-7B27E/F	16L	3	PAX	13	0	0	13
Boeing 737-900-ER	CFM56-7B27E/F	16L	4	PAX	13	0	0	13
Boeing 737-900-ER	CFM56-7B27E/F	16R	1	PAX	98	0	0	98
Boeing 737-900-ER	CFM56-7B27E/F	34L	1	PAX	21	0	0	21
Boeing 737-900-ER	CFM56-7B27E/F	34R	2	PAX	12	0	0	12
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16C	6	PAX	9	0	0	9
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16C	7	PAX	9	0	0	9
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	1	PAX	157	0	0	157
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	2	PAX	33	0	0	33
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	6	PAX	79	0	0	79
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16L	7	PAX	79	0	0	79

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	16R	1	PAX	33	0	0	33
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34L	1	PAX	7	0	0	7
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	1	PAX	43	0	0	43
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	2	PAX	5	0	0	5
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	6	PAX	13	0	0	13
Boeing 787-10 Dreamliner	GEnx-1B74/75/P2	34R	7	PAX	13	0	0	13
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	2	PAX	7	0	0	7
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	6	PAX	24	0	0	24
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16C	7	PAX	24	0	0	24
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	1	PAX	313	0	0	313
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	2	PAX	67	0	0	67
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	6	PAX	143	0	0	143
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16L	7	PAX	142	0	0	142
Boeing 787-10 Dreamliner	GEnx-1B76/P2	16R	1	PAX	71	0	0	71
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34L	1	PAX	22	0	0	22
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	1	PAX	112	0	0	112
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	2	PAX	11	0	0	11
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	6	PAX	50	0	0	50
Boeing 787-10 Dreamliner	GEnx-1B76/P2	34R	7	PAX	50	0	0	50
Boeing 787-10 Dreamliner	Trent 1000-M3	16C	6	PAX	10	0	0	10
Boeing 787-10 Dreamliner	Trent 1000-M3	16C	7	PAX	10	0	0	10
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	1	PAX	164	0	0	164
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	2	PAX	35	0	0	35
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	6	PAX	86	0	0	86
Boeing 787-10 Dreamliner	Trent 1000-M3	16L	7	PAX	87	0	0	87
Boeing 787-10 Dreamliner	Trent 1000-M3	16R	1	PAX	34	0	0	34
Boeing 787-10 Dreamliner	Trent 1000-M3	34L	1	PAX	7	0	0	7
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	1	PAX	57	0	0	57
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	2	PAX	6	0	0	6
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	6	PAX	14	0	0	14
Boeing 787-10 Dreamliner	Trent 1000-M3	34R	7	PAX	14	0	0	14
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16C	6	PAX	65	0	0	65
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16C	7	PAX	26	0	0	26
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	1	PAX	445	0	0	445
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	6	PAX	318	0	0	318
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16L	7	PAX	148	0	0	148
Boeing 787-8 Dreamliner	GEnx-1B64/P2	16R	1	PAX	109	0	0	109
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34C	1	PAX	1	0	0	1
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34L	1	PAX	43	0	0	43
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	1	PAX	166	0	0	166
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	6	PAX	149	0	0	149
Boeing 787-8 Dreamliner	GEnx-1B64/P2	34R	7	PAX	58	0	0	58
Boeing 787-8 Dreamliner	GEnx-1B67	16C	6	PAX	96	0	0	96
Boeing 787-8 Dreamliner	GEnx-1B67	16C	7	PAX	47	0	0	47
Boeing 787-8 Dreamliner	GEnx-1B67	16L	1	PAX	688	0	0	688
Boeing 787-8 Dreamliner	GEnx-1B67	16L	6	PAX	490	0	0	490
Boeing 787-8 Dreamliner	GEnx-1B67	16L	7	PAX	235	0	0	235
Boeing 787-8 Dreamliner	GEnx-1B67	16R	1	PAX	179	0	0	179
Boeing 787-8 Dreamliner	GEnx-1B67	34C	1	PAX	4	0	0	4
Boeing 787-8 Dreamliner	GEnx-1B67	34L	1	PAX	80	0	0	80
Boeing 787-8 Dreamliner	GEnx-1B67	34R	1	PAX	257	0	0	257
Boeing 787-8 Dreamliner	GEnx-1B67	34R	6	PAX	233	0	0	233
Boeing 787-8 Dreamliner	GEnx-1B67	34R	7	PAX	107	0	0	107
Boeing 787-8 Dreamliner	GEnx-1B70	16C	1	PAX	20	0	0	20
Boeing 787-8 Dreamliner	GEnx-1B70	16C	6	PAX	252	0	0	252
Boeing 787-8 Dreamliner	GEnx-1B70	16C	7	PAX	121	0	0	121
Boeing 787-8 Dreamliner	GEnx-1B70	16L	1	PAX	1,647	0	0	1,647
Boeing 787-8 Dreamliner	GEnx-1B70	16L	6	PAX	1,166	0	0	1,166
Boeing 787-8 Dreamliner	GEnx-1B70	16L	7	PAX	578	0	0	578
Boeing 787-8 Dreamliner	GEnx-1B70	16R	1	PAX	443	0	0	443
Boeing 787-8 Dreamliner	GEnx-1B70	34C	1	PAX	13	0	0	13
Boeing 787-8 Dreamliner	GEnx-1B70	34C	6	PAX	3	0	0	3
Boeing 787-8 Dreamliner	GEnx-1B70	34L	1	PAX	214	0	0	214
Boeing 787-8 Dreamliner	GEnx-1B70	34R	1	PAX	631	0	0	631
Boeing 787-8 Dreamliner	GEnx-1B70	34R	6	PAX	569	0	0	569
Boeing 787-8 Dreamliner	GEnx-1B70	34R	7	PAX	279	0	0	279
Boeing 787-8 Dreamliner	GEnx-1B70/P2	16L	1	PAX	26	0	0	26
Boeing 787-8 Dreamliner	GEnx-1B70/P2	16L	6	PAX	26	0	0	26
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	1	PAX	6	0	0	6
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	2	PAX	42	0	0	42
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	6	PAX	91	0	0	91
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16C	7	PAX	91	0	0	91
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	1	PAX	1,044	0	0	1,044
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	2	PAX	218	0	0	218
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	6	PAX	451	0	0	451
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16L	7	PAX	451	0	0	451
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	16R	1	PAX	281	0	0	281
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34C	1	PAX	7	0	0	7
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34L	1	PAX	133	0	0	133
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	1	PAX	401	0	0	401
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	2	PAX	98	0	0	98
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	6	PAX	215	0	0	215

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 787-9 Dreamliner	GEnx-1B74/75/P2	34R	7	PAX	215	0	0	215
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	1	PAX	6	0	0	6
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	2	PAX	43	0	0	43
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	6	PAX	91	0	0	91
Boeing 787-9 Dreamliner	Trent 1000-J2	16C	7	PAX	91	0	0	91
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	1	PAX	1,076	0	0	1,076
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	2	PAX	223	0	0	223
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	6	PAX	460	0	0	460
Boeing 787-9 Dreamliner	Trent 1000-J2	16L	7	PAX	462	0	0	462
Boeing 787-9 Dreamliner	Trent 1000-J2	16R	1	PAX	287	0	0	287
Boeing 787-9 Dreamliner	Trent 1000-J2	34C	1	PAX	7	0	0	7
Boeing 787-9 Dreamliner	Trent 1000-J2	34L	1	PAX	135	0	0	135
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	1	PAX	409	0	0	409
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	2	PAX	100	0	0	100
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	6	PAX	225	0	0	225
Boeing 787-9 Dreamliner	Trent 1000-J2	34R	7	PAX	225	0	0	225
Boeing 787-9 Dreamliner	Trent 1000-J3	16C	2	PAX	6	0	0	6
Boeing 787-9 Dreamliner	Trent 1000-J3	16C	6	PAX	19	0	0	19
Boeing 787-9 Dreamliner	Trent 1000-J3	16C	7	PAX	19	0	0	19
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	1	PAX	254	0	0	254
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	2	PAX	56	0	0	56
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	6	PAX	119	0	0	119
Boeing 787-9 Dreamliner	Trent 1000-J3	16L	7	PAX	120	0	0	120
Boeing 787-9 Dreamliner	Trent 1000-J3	16R	1	PAX	62	0	0	62
Boeing 787-9 Dreamliner	Trent 1000-J3	34L	1	PAX	14	0	0	14
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	1	PAX	89	0	0	89
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	2	PAX	10	0	0	10
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	6	PAX	35	0	0	35
Boeing 787-9 Dreamliner	Trent 1000-J3	34R	7	PAX	35	0	0	35
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	2	PAX	17	0	0	17
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	6	PAX	38	0	0	38
Boeing 787-9 Dreamliner	Trent 1000-K2	16C	7	PAX	38	0	0	38
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	1	PAX	466	0	0	466
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	2	PAX	95	0	0	95
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	6	PAX	209	0	0	209
Boeing 787-9 Dreamliner	Trent 1000-K2	16L	7	PAX	209	0	0	209
Boeing 787-9 Dreamliner	Trent 1000-K2	16R	1	PAX	115	0	0	115
Boeing 787-9 Dreamliner	Trent 1000-K2	34C	1	PAX	1	0	0	1
Boeing 787-9 Dreamliner	Trent 1000-K2	34L	1	PAX	49	0	0	49
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	1	PAX	178	0	0	178
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	2	PAX	25	0	0	25
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	6	PAX	89	0	0	89
Boeing 787-9 Dreamliner	Trent 1000-K2	34R	7	PAX	89	0	0	89
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16C	1	PAX	118	0	0	118
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16L	1	PAX	195	0	0	195
Bombardier Challenger 350	AS907-2-1A (HTF7350)	16R	1	PAX	135	0	0	135
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34C	1	PAX	28	0	0	28
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34L	1	PAX	79	0	0	79
Bombardier Challenger 350	AS907-2-1A (HTF7350)	34R	1	PAX	17	0	0	17
Dassault Falcon 50	TFE731-3	16C	1	PAX	118	0	0	118
Dassault Falcon 50	TFE731-3	16L	1	PAX	195	0	0	195
Dassault Falcon 50	TFE731-3	16R	1	PAX	135	0	0	135
Dassault Falcon 50	TFE731-3	34C	1	PAX	28	0	0	28
Dassault Falcon 50	TFE731-3	34L	1	PAX	79	0	0	79
Dassault Falcon 50	TFE731-3	34R	1	PAX	17	0	0	17
Embraer ERJ175-LR	CF34-8E5	16C	1	PAX	11,811	0	0	11,811
Embraer ERJ175-LR	CF34-8E5	16C	2	PAX	2,967	0	0	2,967
Embraer ERJ175-LR	CF34-8E5	16C	3	PAX	540	0	0	540
Embraer ERJ175-LR	CF34-8E5	16L	1	PAX	21,111	0	0	21,111
Embraer ERJ175-LR	CF34-8E5	16L	2	PAX	4,841	0	0	4,841
Embraer ERJ175-LR	CF34-8E5	16L	3	PAX	883	0	0	883
Embraer ERJ175-LR	CF34-8E5	16R	1	PAX	35,588	0	0	35,588
Embraer ERJ175-LR	CF34-8E5	34C	1	PAX	929	0	0	929
Embraer ERJ175-LR	CF34-8E5	34C	2	PAX	92	0	0	92
Embraer ERJ175-LR	CF34-8E5	34C	3	PAX	7	0	0	7
Embraer ERJ175-LR	CF34-8E5	34L	1	PAX	14,234	0	0	14,234
Embraer ERJ175-LR	CF34-8E5	34R	1	PAX	12,779	0	0	12,779
Embraer ERJ175-LR	CF34-8E5	34R	2	PAX	3,078	0	0	3,078
Embraer ERJ175-LR	CF34-8E5	34R	3	PAX	562	0	0	562
Embraer Phenom 300 (EMB-505)	PW530	16C	1	PAX	46	0	0	46
Embraer Phenom 300 (EMB-505)	PW530	16L	1	PAX	56	0	0	56
Embraer Phenom 300 (EMB-505)	PW530	16R	1	PAX	73	0	0	73
Embraer Phenom 300 (EMB-505)	PW530	34C	1	PAX	7	0	0	7
Embraer Phenom 300 (EMB-505)	PW530	34L	1	PAX	23	0	0	23
Embraer Phenom 300 (EMB-505)	PW530	34R	1	PAX	3	0	0	3
ATR 72-600 Freighter	PW127F	16C	1	CRG	0	34	4	38
ATR 72-600 Freighter	PW127F	16L	1	CRG	0	72	6	78
ATR 72-600 Freighter	PW127F	16R	1	CRG	0	114	12	126
ATR 72-600 Freighter	PW127F	34L	1	CRG	0	33	3	36
ATR 72-600 Freighter	PW127F	34R	1	CRG	0	43	3	46
Boeing 747-400 ERF	PW4062	16C	3	CRG	0	7	0	7
Boeing 747-400 ERF	PW4062	16C	7	CRG	0	16	3	19

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 747-400 ERF	PW4062	16L	1	CRG	0	183	24	207
Boeing 747-400 ERF	PW4062	16L	3	CRG	0	67	7	74
Boeing 747-400 ERF	PW4062	16L	7	CRG	0	134	16	150
Boeing 747-400 ERF	PW4062	16R	1	CRG	0	28	1	29
Boeing 747-400 ERF	PW4062	34L	1	CRG	0	7	0	7
Boeing 747-400 ERF	PW4062	34R	1	CRG	0	42	4	46
Boeing 747-400 ERF	PW4062	34R	3	CRG	0	11	1	12
Boeing 747-400 ERF	PW4062	34R	7	CRG	0	23	4	27
Boeing 747-400BCF	CF6-80C2B5F	16C	3	CRG	0	7	0	7
Boeing 747-400BCF	CF6-80C2B5F	16C	7	CRG	0	16	3	19
Boeing 747-400BCF	CF6-80C2B5F	16L	1	CRG	0	183	24	207
Boeing 747-400BCF	CF6-80C2B5F	16L	3	CRG	0	67	7	74
Boeing 747-400BCF	CF6-80C2B5F	16L	7	CRG	0	134	16	150
Boeing 747-400BCF	CF6-80C2B5F	16R	1	CRG	0	28	1	29
Boeing 747-400BCF	CF6-80C2B5F	34L	1	CRG	0	7	0	7
Boeing 747-400BCF	CF6-80C2B5F	34R	1	CRG	0	42	4	46
Boeing 747-400BCF	CF6-80C2B5F	34R	3	CRG	0	11	1	12
Boeing 747-400BCF	CF6-80C2B5F	34R	7	CRG	0	23	4	27
Boeing 747-8F	GENX-2B67	16C	7	CRG	0	14	0	14
Boeing 747-8F	GENX-2B67	16L	1	CRG	0	89	12	101
Boeing 747-8F	GENX-2B67	16L	7	CRG	0	88	12	100
Boeing 747-8F	GENX-2B67	16R	1	CRG	0	14	0	14
Boeing 747-8F	GENX-2B67	34L	1	CRG	0	2	0	2
Boeing 747-8F	GENX-2B67	34R	1	CRG	0	18	1	19
Boeing 747-8F	GENX-2B67	34R	7	CRG	0	20	2	22
Boeing 747-8F	GEnx-2B67/P	16C	7	CRG	0	17	0	17
Boeing 747-8F	GEnx-2B67/P	16L	1	CRG	0	98	12	110
Boeing 747-8F	GEnx-2B67/P	16L	7	CRG	0	101	12	113
Boeing 747-8F	GEnx-2B67/P	16R	1	CRG	0	21	0	21
Boeing 747-8F	GEnx-2B67/P	34L	1	CRG	0	2	0	2
Boeing 747-8F	GEnx-2B67/P	34R	1	CRG	0	22	3	25
Boeing 747-8F	GEnx-2B67/P	34R	7	CRG	0	26	2	28
Boeing 747-8F	GEnx-2B67B	16L	1	CRG	0	38	1	39
Boeing 747-8F	GEnx-2B67B	16L	7	CRG	0	33	4	37
Boeing 747-8F	GEnx-2B67B	34R	1	CRG	0	3	0	3
Boeing 747-8F	GEnx-2B67B	34R	7	CRG	0	4	1	5
Boeing 767-200 Series Freighter	CF6-80A	16C	3	CRG	0	66	7	73
Boeing 767-200 Series Freighter	CF6-80A	16C	4	CRG	0	131	16	147
Boeing 767-200 Series Freighter	CF6-80A	16L	1	CRG	0	945	129	1,074
Boeing 767-200 Series Freighter	CF6-80A	16L	3	CRG	0	329	41	370
Boeing 767-200 Series Freighter	CF6-80A	16L	4	CRG	0	657	89	746
Boeing 767-200 Series Freighter	CF6-80A	16R	1	CRG	0	239	34	273
Boeing 767-200 Series Freighter	CF6-80A	34C	1	CRG	0	4	0	4
Boeing 767-200 Series Freighter	CF6-80A	34L	1	CRG	0	98	9	107
Boeing 767-200 Series Freighter	CF6-80A	34R	1	CRG	0	358	44	402
Boeing 767-200 Series Freighter	CF6-80A	34R	3	CRG	0	155	13	168
Boeing 767-200 Series Freighter	CF6-80A	34R	4	CRG	0	317	39	356
Boeing 767-200 Series Freighter	CF6-80A2	16C	3	CRG	0	32	3	35
Boeing 767-200 Series Freighter	CF6-80A2	16C	4	CRG	0	61	7	68
Boeing 767-200 Series Freighter	CF6-80A2	16L	1	CRG	0	488	67	555
Boeing 767-200 Series Freighter	CF6-80A2	16L	3	CRG	0	173	25	198
Boeing 767-200 Series Freighter	CF6-80A2	16L	4	CRG	0	341	44	385
Boeing 767-200 Series Freighter	CF6-80A2	16R	1	CRG	0	117	14	131
Boeing 767-200 Series Freighter	CF6-80A2	34L	1	CRG	0	31	3	34
Boeing 767-200 Series Freighter	CF6-80A2	34R	1	CRG	0	180	26	206
Boeing 767-200 Series Freighter	CF6-80A2	34R	3	CRG	0	71	4	75
Boeing 767-200 Series Freighter	CF6-80A2	34R	4	CRG	0	146	19	165
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	1	CRG	0	124	13	137
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	3	CRG	0	42	7	49
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16L	4	CRG	0	83	12	95
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	16R	1	CRG	0	4	0	4
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34L	1	CRG	0	2	0	2
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	1	CRG	0	20	3	23
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	3	CRG	0	6	1	7
Boeing 767-200 Series Freighter	JT9D-7R4D, -7R4D1	34R	4	CRG	0	13	2	15
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	1	CRG	0	12	0	12
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	2	CRG	0	91	12	103
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	3	CRG	0	136	16	152
Boeing 767-300 ER Freighter	CF6-80C2B6F	16C	4	CRG	0	43	4	47
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	1	CRG	0	1,305	182	1,487
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	2	CRG	0	469	62	531
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	3	CRG	0	695	93	788
Boeing 767-300 ER Freighter	CF6-80C2B6F	16L	4	CRG	0	225	28	253
Boeing 767-300 ER Freighter	CF6-80C2B6F	16R	1	CRG	0	341	43	384
Boeing 767-300 ER Freighter	CF6-80C2B6F	34C	1	CRG	0	7	0	7
Boeing 767-300 ER Freighter	CF6-80C2B6F	34L	1	CRG	0	149	14	163
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	1	CRG	0	493	66	559
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	2	CRG	0	225	25	250
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	3	CRG	0	330	48	378
Boeing 767-300 ER Freighter	CF6-80C2B6F	34R	4	CRG	0	106	4	110
Boeing 767-300 ER Freighter	CF6-80C2B7F	16C	2	CRG	0	6	0	6
Boeing 767-300 ER Freighter	CF6-80C2B7F	16C	3	CRG	0	6	0	6

SEA SAMP NTP 2037 Proposed Action - Modeled Annual Operations

					Annual Operations by Gate			
Airframe	Engine	Runway End	Stage Length	Activity Group	Passenger Terminals	Cargo North	Cargo South	Total Operations
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	1	CRG	0	164	17	181
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	2	CRG	0	67	7	74
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	3	CRG	0	97	12	109
Boeing 767-300 ER Freighter	CF6-80C2B7F	16L	4	CRG	0	29	3	32
Boeing 767-300 ER Freighter	CF6-80C2B7F	16R	1	CRG	0	26	0	26
Boeing 767-300 ER Freighter	CF6-80C2B7F	34L	1	CRG	0	7	0	7
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	1	CRG	0	40	3	43
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	2	CRG	0	11	1	12
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	3	CRG	0	14	1	15
Boeing 767-300 ER Freighter	CF6-80C2B7F	34R	4	CRG	0	3	0	3
Boeing 777 Freighter	GE90-110B1	16C	1	CRG	0	6	0	6
Boeing 777 Freighter	GE90-110B1	16C	6	CRG	0	203	26	229
Boeing 777 Freighter	GE90-110B1	16L	1	CRG	0	914	126	1,040
Boeing 777 Freighter	GE90-110B1	16L	6	CRG	0	949	130	1,079
Boeing 777 Freighter	GE90-110B1	16R	1	CRG	0	242	34	276
Boeing 777 Freighter	GE90-110B1	34C	1	CRG	0	4	0	4
Boeing 777 Freighter	GE90-110B1	34C	6	CRG	0	2	0	2
Boeing 777 Freighter	GE90-110B1	34L	1	CRG	0	114	9	123
Boeing 777 Freighter	GE90-110B1	34R	1	CRG	0	353	44	397
Boeing 777 Freighter	GE90-110B1	34R	6	CRG	0	470	66	536
Boeing 777 Freighter	GE90-115B	16L	1	CRG	0	39	2	41
Boeing 777 Freighter	GE90-115B	16L	6	CRG	0	35	4	39
Boeing 777 Freighter	GE90-115B	34R	1	CRG	0	3	0	3
Boeing 777 Freighter	GE90-115B	34R	6	CRG	0	4	1	5
Cessna 172 Skyhawk	IO-320-D1AD	16C	1	CRG	10	10	0	20
Cessna 172 Skyhawk	IO-320-D1AD	16L	1	CRG	25	21	2	48
Cessna 172 Skyhawk	IO-320-D1AD	16R	1	CRG	11	10	1	22
Cessna 172 Skyhawk	IO-320-D1AD	34C	1	CRG	6	3	0	9
Cessna 172 Skyhawk	IO-320-D1AD	34L	1	CRG	7	6	0	13
Cessna 172 Skyhawk	IO-320-D1AD	34R	1	CRG	4	3	0	7
Cessna 208 Caravan	PT6A-114	16C	1	CRG	0	176	23	199
Cessna 208 Caravan	PT6A-114	16L	1	CRG	0	317	40	357
Cessna 208 Caravan	PT6A-114	16R	1	CRG	0	238	35	273
Cessna 208 Caravan	PT6A-114	34C	1	CRG	0	73	10	83
Cessna 208 Caravan	PT6A-114	34L	1	CRG	0	138	14	152
Cessna 208 Caravan	PT6A-114	34R	1	CRG	0	62	6	68
Cessna 208 Caravan	PT6A-114A	16C	1	CRG	0	246	33	279
Cessna 208 Caravan	PT6A-114A	16L	1	CRG	0	421	56	477
Cessna 208 Caravan	PT6A-114A	16R	1	CRG	0	345	45	390
Cessna 208 Caravan	PT6A-114A	34C	1	CRG	0	100	12	112
Cessna 208 Caravan	PT6A-114A	34L	1	CRG	0	182	20	202
Cessna 208 Caravan	PT6A-114A	34R	1	CRG	0	78	10	88
Piper PA-31 Navajo	TIO-540-J2B2	16L	1	CRG	8	6	0	14
Raytheon C-12 Huron	PT6A-60A	16C	1	CRG	11	10	2	23
Raytheon C-12 Huron	PT6A-60A	16L	1	CRG	12	10	2	24
Raytheon C-12 Huron	PT6A-60A	34L	1	CRG	23	21	3	47
Cessna 408 SkyCourier	PT6A-65B	16C	1	ATX	0	58	5	63
Cessna 408 SkyCourier	PT6A-65B	16L	1	ATX	0	93	5	98
Cessna 408 SkyCourier	PT6A-65B	16R	1	ATX	0	82	6	88
Cessna 408 SkyCourier	PT6A-65B	34C	1	ATX	0	20	0	20
Cessna 408 SkyCourier	PT6A-65B	34L	1	ATX	0	38	3	41
Cessna 408 SkyCourier	PT6A-65B	34R	1	ATX	0	14	0	14
Raytheon Beech 99	PT6A-36	16C	1	ATX	22	21	1	44
Raytheon Beech 99	PT6A-36	16L	1	ATX	39	34	1	74
Raytheon Beech 99	PT6A-36	16R	1	ATX	35	29	0	64
Raytheon Beech 99	PT6A-36	34C	1	ATX	6	6	0	12
Raytheon Beech 99	PT6A-36	34L	1	ATX	16	14	0	30
Raytheon Beech 99	PT6A-36	34R	1	ATX	5	5	0	10

No Action Alternative and Proposed Action Ground Access Emissions

Please refer to the Port of Seattle Sustainable Airport Master Plan – Near-Term Projects Final National Environmental Policy Act (NEPA) Environmental Assessment (EA) Appendix C.

No Action Alternative and Proposed Action Ground Access Traffic Links for Dispersion Modeling

Please refer to the Port of Seattle Sustainable Airport Master Plan – Near-Term Projects Final National Environmental Policy Act (NEPA) Environmental Assessment (EA) Appendix L.

Sensitive Receptors

SEA SAMP NTP AQ-HHRA Analysis - Modeled Sensitive Receptors

Latitude	Longitude	Receptor	Address	Category
47.483451	-122.303999	All on Board Adult Family Home	2218 South 134th Street, SeaTac, WA 98168	Nursing Home
47.427600	-122.319778	Amin Early Learning & Preschool	19436 11th Pl S, Des Moines, WA 98148	Preschool, Kindergarten, School
47.451398	-122.294201	Amin Early Learning & Preschool	16901 31st Avenue South, SeaTac, WA 98188	Preschool, Kindergarten, School
47.451416	-122.292236	Anita's Daycare	16900 31st Place South, SeaTac, WA 98188	Preschool, Kindergarten, School
47.446560	-122.285898	Beverly Park Elementary School	3708 S 175th St, SeaTac, WA 98188	School
47.420500	-122.293600	Bezos Academy Seatac	20301 32nd Avenue South, Seattle, WA 98198	Preschool, Kindergarten, School, Academy
47.438831	-122.282933	Bow Lake Elementary School	18237 42nd Avenue South, SeaTac, WA 98188	School
47.466669	-122.327445	Bright & Shining Stars Daycare	431 South 152nd Street, Burien, WA 98148	School
47.459349	-122.282522	Bright Future Family Child Care	4015 South 160th Street, Seattle, WA 98188	Child Day Care, School
47.420720	-122.290230	Bright Kids Childcare	3402 South 203rd Street, SeaTac, WA 98198	Child Day Care, School
47.421451	-122.295624	Brightstar Beginning Early Learning Center	20040 International Boulevard, SeaTac, WA 98198	Preschool, Kindergarten, School
47.424611	-122.324261	Burien Cooperative Preschool	19834 8th Avenue South, Des Moines, WA 98148	Preschool, Kindergarten, School
47.447670	-122.286661	Bushra Family Child Care	3451 South 173rd Street, SeaTac, WA 98188	Child Day Care, School
47.419754	-122.318158	Careful Hands Child Care	20235 12th Place South, SeaTac, WA 98198	Child Day Care, School
47.467715	-122.296991	Child Heaven Early Learning Program	15032 28th Lane South, SeaTac, WA 98188	Preschool, Kindergarten, School
47.462925	-122.334852	Children's Therapy Center	127 Southwest 156th Street, Burien, WA 98166	Children's Hospital
47.437700	-122.325100	Choice Academy	18367 8th Avenue South, Des Moines, WA 98148	School, Academy
47.424477	-122.285223	Circle of Friends	3816 South 198th Street, SeaTac, WA 98188	Nursing Home
47.461639	-122.325797	Civic Education Washington State	560 South 158th Street, Burien, WA 98148	Special Education
47.465733	-122.334641	Combat Arts Academy of Burien	115 Southwest 153rd Street, Burien, WA 98166	Academy
47.454043	-122.283941	Compassionate Care Daycare	16620 37th Lane South, SeaTac, WA 98188	School
47.446400	-122.289410	Daisy Family Child Care/Daycare Seatac	17351 34th Avenue South, SeaTac, WA 98188	Child Day Care, School
47.454300	-122.282300	Dels Home of Solace	4011 South 166th Street, SeaTac, WA 98188	Nursing Home
47.446420	-122.287590	Eagle Family Home Childcare	3428 South 175th Street, SeaTac, WA 98188	Child Day Care, School
47.470879	-122.295694	Eat Play Learn Child Care	2906 South 148th Street, SeaTac, WA 98168	Preschool, Kindergarten, School
47.467232	-122.293025	El JardÃ-n de los SueÃ±os Spanish Immersion School	3034 South 152nd Street, SeaTac, WA 98188	Preschool, Kindergarten, School
47.468112	-122.281686	Fathi Family Childcare	4062 South 151st Street, Tukwila, WA 98188	Child Day Care, School
47.457000	-122.291500	First Academy Childcare	16230 32nd Avenue South, SeaTac, WA 98188	Academy
47.456996	-122.280142	Giving Tree Learning Center	4230 South 164th Street, Tukwila, WA 98188	School
47.477201	-122.300117	Glacier Middle School	2450 South 142nd Street, Seattle, WA 98168	School
47.466167	-122.289596	Golden Stars Early Learning Center	15300 33rd Avenue South Suite 200, SeaTac, WA 98188	Preschool, Kindergarten, School
47.476621	-122.327679	Grandma Lucy Childcare Daycare	14041 5th Avenue South, Burien, WA 98168	Child Day Care, School
47.457449	-122.325428	Happy Home Child Care	16215 Des Moines Memorial Drive South, Burien, WA 98148	Child Day Care, School
47.452558	-122.289373	Hariir Family Childcare	16809 34th Avenue South, SeaTac, WA 98188	Child Day Care, School
47.442916	-122.332616	Heaven Sent Daycare	17819 2nd Avenue South, Burien, WA 98148	School
47.431045	-122.287278	Helu Childcare	3614 South 192nd Street, SeaTac, WA 98188	Child Day Care, School
47.466500	-122.328900	Hi-Liners	401 South 152Nd Street, Seattle, WA 98148	School
47.467656	-122.324349	High West Residence	15035 8Th Avenue South, Burien, WA 98148	Nursing Home
47.437000	-122.328100	Highline Big Picture School	440 South 186th Street, Seattle, WA 98148	School
47.466492	-122.330153	Highline High School	225 South 152nd Street, Burien, WA 98148	School
47.437800	-122.325100	Hps Realistic Transition Program	18367 8th Avenue South, Des Moines, WA 98148	School
47.440520	-122.328820	Iftin Early Learning Program Weecare	412 South 181st Street, Seattle, WA 98148	School
47.452193	-122.289460	Iman Home Child Care & Learning Center	16823 34th Avenue South, SeaTac, WA 98188	Child Day Care, School
47.470970	-122.287990	Impact Public Schools	3438 South 148th Street, Tukwila, WA 98168	School
47.474100	-122.288910	Inspire Kids Early Learning Center	3417 South 144th Street, Tukwila, WA 98168	School
47.427130	-122.293530	Integrity Coaching & Training Systems	19550 International Boulevard, SeaTac, WA 98188	School
47.449716	-122.288679	Istahil Child Care	17052 34th Avenue South, SeaTac, WA 98188	Child Day Care, School
47.472218	-122.322230	Italiano Qui	829 South 146th Street, Burien, WA 98168	School
47.467207	-122.284733	Ittsy Bitty Kid Kare	3740 South 152nd Street, Seattle, WA 98188	School
47.423400	-122.287020	Jamila's Home Daycare Weecare	19931 Military Road South, SeaTac, WA 98188	School
47.477656	-122.326646	John F Kennedy Memorial High School	South 140th Street, Burien, WA 98168	School
47.441504	-122.326125	KinderCare	18020 Des Moines Memorial Drive South, SeaTac, WA 98148	Preschool, Kindergarten, School
47.469002	-122.286560	Kinderworld Learning Center	14862 Tukwila International Boulevard, Tukwila, WA 98168	School
47.463566	-122.334627	Kre8tive Kidz International Academy	15525 1st Avenue South, Burien, WA 98148	School, Academy
47.414929	-122.302149	Learning Education Family Childcare	20818 24th Avenue South, SeaTac, WA 98198	Child Day Care, Special Education, School
47.456478	-122.290896	Lessons in Your Home	3220 South 164th Street, SeaTac, WA 98188	School
47.468485	-122.285219	Little Happy Faces Childcare	3729 South 150th Street, Tukwila, WA 98188	Child Day Care, School
47.439823	-122.327035	Little Hearts Childcare Daycare	18126 5th Avenue South, Seattle, WA 98148	Child Day Care, School
47.467190	-122.292610	Little Sprout Home Child Care	3046 South 152nd Street, SeaTac, WA 98188	Child Day Care, School
47.449210	-122.290740	Liyah Family Home Day Care	17211 33rd Avenue South, SeaTac, WA 98188	School
47.443571	-122.285774	Lucky Family Childcare Seatac	17735 38th Avenue South, SeaTac, WA 98188	Child Day Care, School
47.420140	-122.293111	Madrona Elementary School	20301 32nd Avenue South, SeaTac, WA 98198	School
47.438384	-122.327677	Manhattan Learning Center	440 South 186th Street, Seattle, WA 98148	School
47.452682	-122.287915	Maria Early Learning	16805 35th Avenue South, SeaTac, WA 98188	School
47.433723	-122.288010	Matt Griffin YMCA	3595 South 188th Street, SeaTac, WA 98188	School
47.453291	-122.285207	McMicken Heights Elementary School	3708 South 168th Street, SeaTac, WA 98188	School
47.451560	-122.293485	Messi Daycare	16868 31st Avenue South, SeaTac, WA 98188	School
47.463750	-122.327510	Moshier Community Art Center	430 South 156th Street, Burien, WA 98148	School
47.469975	-122.298147	Najah Family Childcare	14820 26th Lane South, SeaTac, WA 98168	Child Day Care, School
47.472023	-122.286801	Nasiib Early Learning Center	3515 South 146th Street, Tukwila, WA 98168	Preschool, Kindergarten, School
47.462166	-122.278906	Nasri Childcare	15649 44th Avenue South, Seattle, WA 98188	Child Day Care, School

Latitude	Longitude	Receptor	Address	Category
47.448272	-122.293829	New Future Community Center	17229 32nd Avenue South, SeaTac, WA 98188	School
47.459090	-122.282470	Nimo Family Childcare	16018 40th Place South, SeaTac, WA 98188	Child Day Care, School
47.452974	-122.335831	Normandy Park Senior Living	16625 1st Avenue South, Burien, WA 98148	Assisted Living, Nursing Home
47.462280	-122.332600	Northstar Driving Academy	15704 1st Ave S, Seattle, WA 98148	School, Academy
47.457630	-122.289349	Nunu Childcare	16215 34th Avenue South, SeaTac, WA 98188	Preschool, Kindergarten, School
47.436621	-122.329341	Parkside Elementary School	609 South 186th Street, Seattle, WA 98148	School
47.475653	-122.302020	Precious Family Early Learning Program Daycare	14208 24th Avenue South, SeaTac, WA 98168	School
47.436012	-122.290667	Qalanjo Childcare	3226 South 186th Street, SeaTac, WA 98188	Child Day Care, School
47.451200	-122.292200	Raaho Family Childcare	16908 31st Place South, SeaTac, WA 98188	Child Day Care, School
47.464800	-122.335800	Ruth Dykeman Children's Center	137 Southwest 154th Street, Burien, WA 98166	School
47.441972	-122.295140	Ruun Family Child Care	17930 International Boulevard, SeaTac, WA 98188	Child Day Care, School, Academy
47.468404	-122.295003	Salma Daycare	15011 30th Avenue South, SeaTac, WA 98188	School
47.444094	-122.332996	Seeds & Sprouts-Bilingual ECE Academy	17684 1st Avenue South, Burien, WA 98148	Preschool, Kindergarten, School, Academy
47.467692	-122.289647	Somali Community Service Coalition	15027 Military Road South, SeaTac, WA 98188	School
47.465269	-122.336294	Special Products	154 Southwest 154th Street, Burien, WA 98166	Special Education
47.462585	-122.324041	Sunnydale Elementary School	15631 Des Moines Memorial Drive South, Burien, WA 98148	School
47.444228	-122.333070	Sylvan	17682 1st Avenue South, Burien, WA 98148	School
47.425200	-122.296600	Teacherly English Academy	19707 International Boulevard, SeaTac, WA 98188	School, Academy
47.460190	-122.336831	Three Tree Montessori School	220 Southwest 160th Street, Burien, WA 98166	School
47.416780	-122.319530	Tiny Steps Childcare	20704 Des Moines Memorial Drive South, SeaTac, WA 98198	Preschool, Kindergarten, School
47.446440	-122.285341	Tiny Treasure Childcare	3724 S 175th St, Seattle, WA 98188	Preschool, Kindergarten, School
47.478682	-122.297664	Tukwila Cricket Ground	140 28Th Place South, SeaTac, WA 98168	School

Construction Source Area Locations for Dispersion Modeling

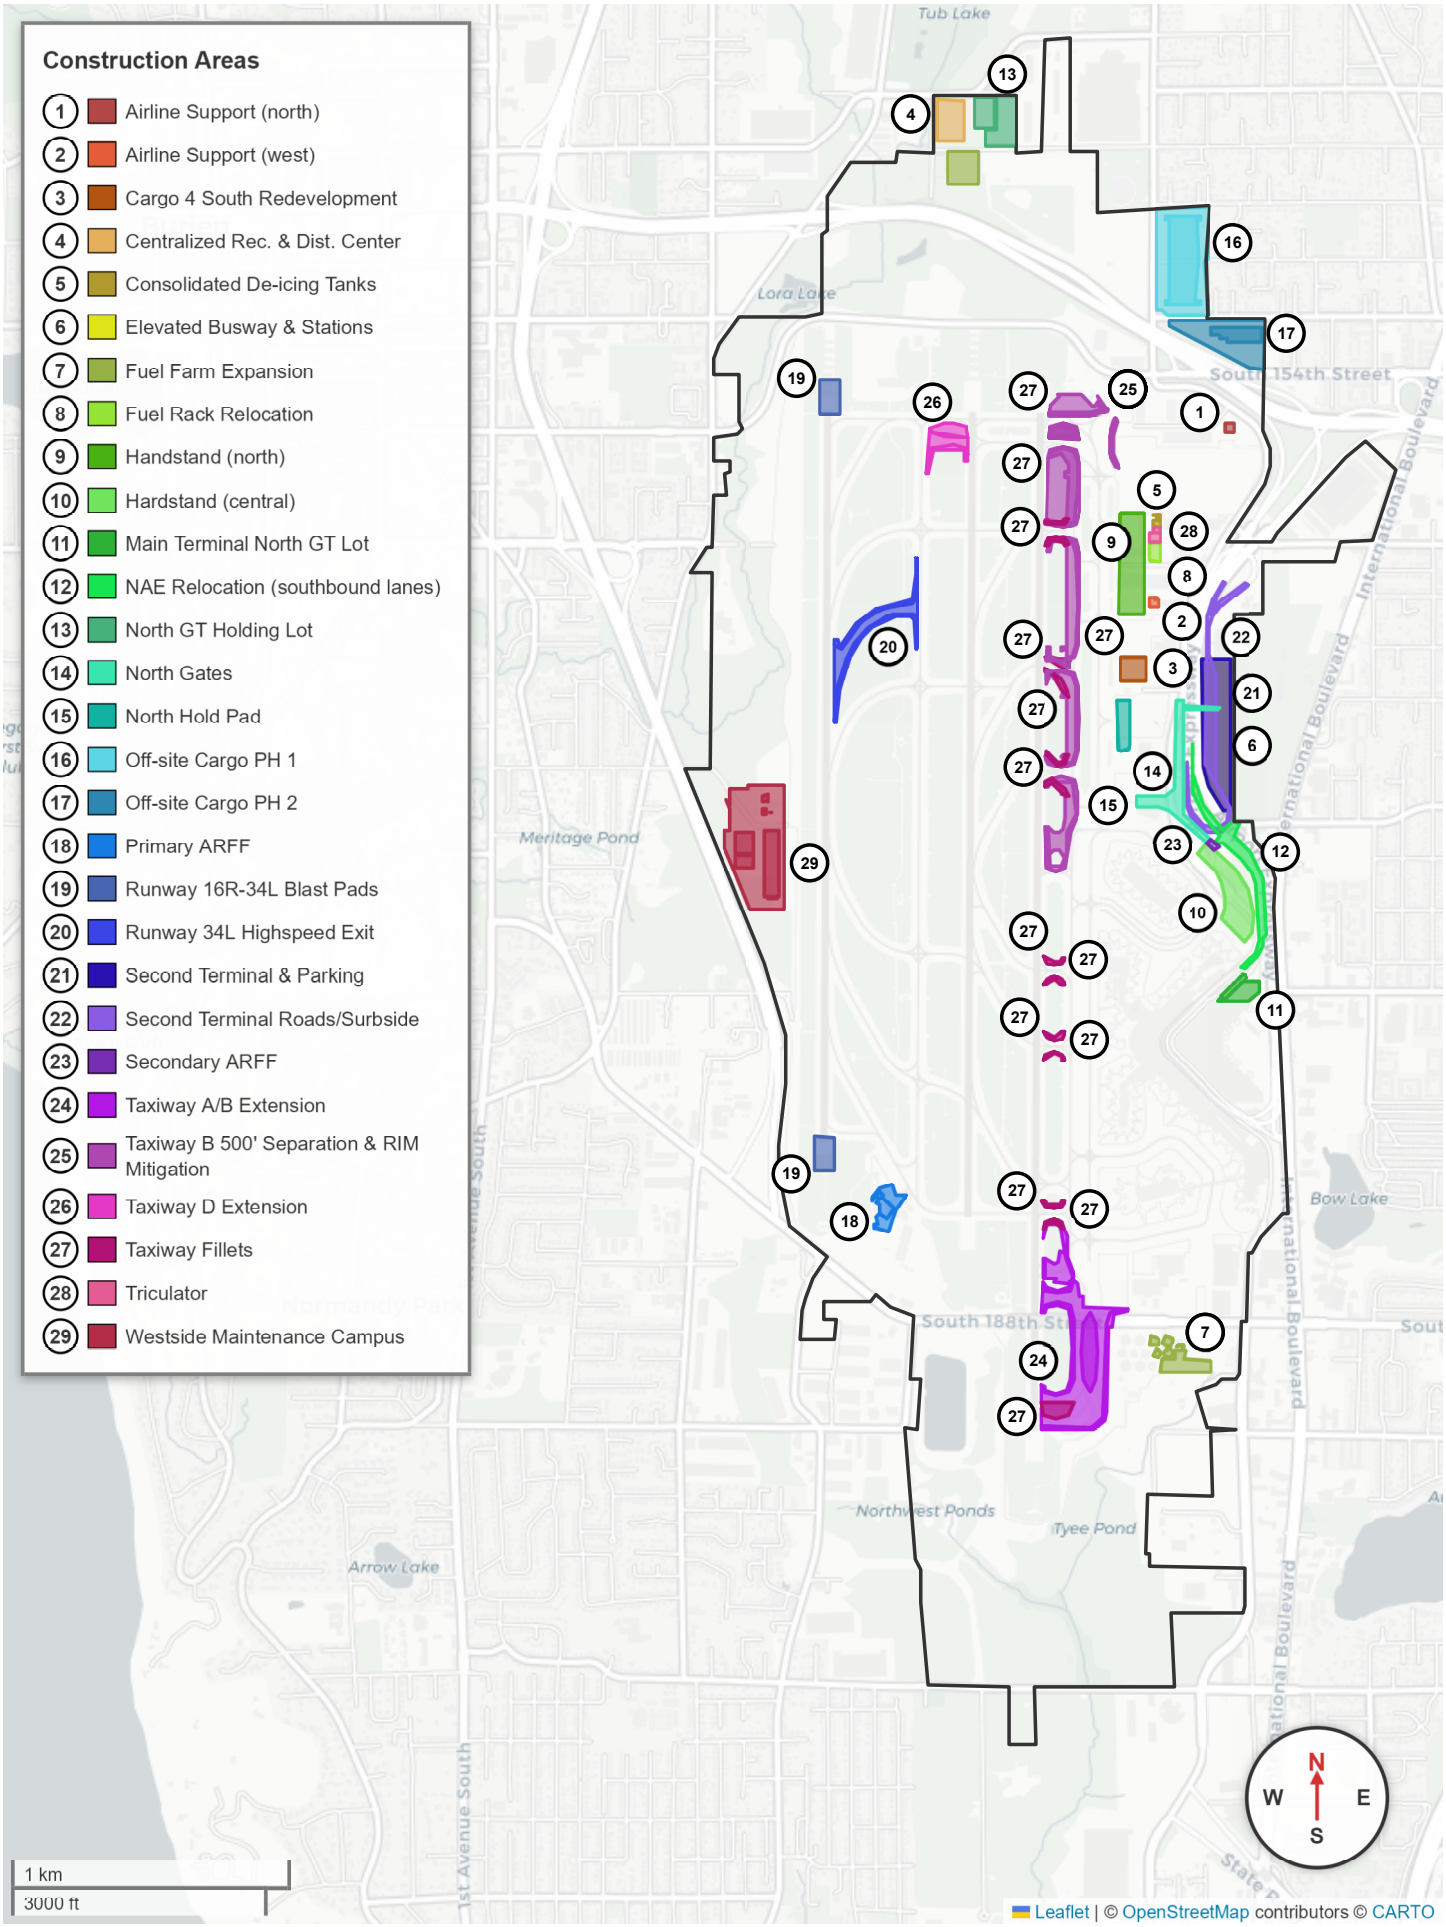
Construction Areas
1 Airline Support (north)
2 Airline Support (west)
3 Cargo 4 South Redevelopment
4 Centralized Rec. & Dist. Center
5 Consolidated De-icing Tanks
6 Elevated Busway & Stations
7 Fuel Farm Expansion
8 Fuel Rack Relocation
9 Handstand (north)
10 Hardstand (central)
11 Main Terminal North GT Lot
12 NAE Relocation (southbound lanes)
13 North GT Holding Lot
14 North Gates
15 North Hold Pad
16 Off-site Cargo PH 1
17 Off-site Cargo PH 2
18 Primary ARFF
19 Runway 16R-34L Blast Pads
20 Runway 34L Highspeed Exit
21 Second Terminal & Parking
22 Second Terminal Roads/Surbside
23 Secondary ARFF
24 Taxiway A/B Extension
25 Taxiway B 500' Separation & RIM Mitigation
26 Taxiway D Extension
27 Taxiway Fillets
28 Triculator
29 Westside Maintenance Campus
Tub Lake
Lora Lake
Meritage Pond
Bow Lake
Northwest Ponds
Tyee Pond
Arrow Lake
South 154th Street
South 188th St
International Boulevard
1st Avenue South
N
W
E
S
1 km
3000 ft
Leaflet | © OpenStreetMap contributors © CARTO

Stationary Source Emissions from AEDT 3g

SEA SAMP NTP AQ-HHRA Analysis - 2032 No Action Alternative Stationary Source Emissions from AEDT 3g

Equipment Type	Operation Type	CO (g)	TOG (g)	VOC (g)	NOx (g)	SOx (g)	PM10 (g)	PM2.5 (g)
Fuel Tank 1	Fuel Tank	N/A	1.44E+06	1.28E+06	N/A	N/A	N/A	N/A
Fuel Tank 2	Fuel Tank	N/A	1.44E+06	1.28E+06	N/A	N/A	N/A	N/A
Fuel Tank 3	Fuel Tank	N/A	1.44E+06	1.28E+06	N/A	N/A	N/A	N/A
Fuel Tank 4	Fuel Tank	N/A	1.44E+06	1.28E+06	N/A	N/A	N/A	N/A
Fuel Tank 5	Fuel Tank	N/A	9.94E+05	8.80E+05	N/A	N/A	N/A	N/A
Fuel Tank 6	Fuel Tank	N/A	9.94E+05	8.80E+05	N/A	N/A	N/A	N/A
Fuel Tank 7	Fuel Tank	N/A	9.94E+05	8.80E+05	N/A	N/A	N/A	N/A
Fuel Tank 8	Fuel Tank	N/A	9.94E+05	8.80E+05	N/A	N/A	N/A	N/A
Central Plant Boiler	Boiler/Space Heater	1.11E+07	1.46E+06	7.29E+05	1.33E+07	7.95E+04	2.52E+05	2.52E+05
Pumphouse	Boiler/Space Heater	1.23E+04	3.37E+03	1.69E+03	2.88E+04	1.84E+02	5.82E+02	5.82E+02
Fleet Maintenance (AC2 Bldg)	Boiler/Space Heater	5.64E+04	7.38E+03	3.69E+03	6.71E+04	4.03E+02	1.27E+03	1.27E+03
Fire Department	Boiler/Space Heater	1.02E+05	1.34E+04	6.69E+03	1.22E+05	7.30E+02	2.31E+03	2.31E+03
Learning Center Building	Boiler/Space Heater	2.57E+04	3.37E+03	1.68E+03	3.06E+04	1.84E+02	5.81E+02	5.81E+02
Bus Maintenance Facility	Boiler/Space Heater	1.37E+05	1.80E+04	8.99E+03	1.64E+05	9.81E+02	3.11E+03	3.11E+03
Distribution Center	Boiler/Space Heater	1.68E+04	4.62E+03	2.31E+03	3.95E+04	2.52E+02	7.98E+02	7.98E+02
Cargo Building 161E	Boiler/Space Heater	3.35E+04	4.39E+03	2.20E+03	3.99E+04	2.40E+02	7.59E+02	7.59E+02
Fire Station 2021	Boiler/Space Heater	3.27E+03	9.00E+02	4.50E+02	7.69E+03	4.91E+01	1.55E+02	1.55E+02
Cargo Building 166B-2380 S 166th St	Boiler/Space Heater	1.34E+05	3.68E+04	1.84E+04	3.14E+05	2.01E+03	6.36E+03	6.36E+03
Airfield Security Gate	Boiler/Space Heater	3.50E+03	9.62E+02	4.81E+02	8.22E+03	5.25E+01	1.66E+02	1.66E+02
Building Lights Generators	Emergency Generator	8.37E+03	1.08E+03	9.20E+02	3.66E+04	1.23E+05	1.08E+03	1.04E+03
Building Lights Generators	Emergency Generator	6.57E+04	8.45E+03	7.23E+03	2.88E+05	9.69E+05	8.45E+03	8.19E+03
Concourse A	Emergency Generator	3.07E+04	3.94E+03	3.37E+03	1.34E+05	4.52E+05	3.94E+03	3.82E+03
Concourse A	Emergency Generator	1.30E+05	1.67E+04	1.43E+04	5.70E+05	1.92E+06	1.67E+04	1.62E+04
Concourse A	Emergency Generator	4.51E+04	5.79E+03	4.96E+03	1.97E+05	6.65E+05	5.79E+03	5.62E+03
South Parking Garage	Emergency Generator	8.19E+03	1.05E+03	9.01E+02	3.58E+04	1.21E+05	1.05E+03	1.02E+03
Toll Plaza	Emergency Generator	5.89E+03	7.57E+02	6.48E+02	2.57E+04	8.68E+04	7.57E+02	7.34E+02
Pumphouse	Emergency Generator	1.38E+04	1.78E+03	1.52E+03	6.06E+04	2.04E+05	1.78E+03	1.73E+03
Pumphouse	Emergency Generator	6.16E+02	7.91E+01	6.77E+01	2.69E+03	9.07E+03	7.91E+01	7.67E+01
Pumphouse	Emergency Generator	4.72E+03	6.06E+02	5.19E+02	2.06E+04	6.96E+04	6.06E+02	5.88E+02
Pumphouse	Emergency Generator	4.10E+03	5.27E+02	4.51E+02	1.79E+04	6.05E+04	5.27E+02	5.12E+02
Pumphouse	Emergency Generator	3.90E+03	5.01E+02	4.29E+02	1.70E+04	5.75E+04	5.01E+02	4.86E+02
Pumphouse	Emergency Generator	1.28E+04	1.64E+03	1.41E+03	5.59E+04	1.88E+05	1.64E+03	1.59E+03
Pumphouse	Emergency Generator	1.42E+04	1.82E+03	1.56E+03	6.21E+04	2.09E+05	1.82E+03	1.77E+03
Pumphouse	Emergency Generator	1.57E+04	2.02E+03	1.73E+03	6.87E+04	2.32E+05	2.02E+03	1.96E+03
Pumphouse	Emergency Generator	1.38E+04	1.78E+03	1.52E+03	6.04E+04	2.04E+05	1.78E+03	1.72E+03
Third Runway Generator	Emergency Generator	5.17E+05	6.64E+04	5.68E+04	2.26E+06	7.61E+06	6.64E+04	6.44E+04
Third Runway Generator	Emergency Generator	6.79E+05	8.73E+04	7.47E+04	2.97E+06	1.00E+07	8.73E+04	8.47E+04
Waste Treatment Plant	Emergency Generator	7.00E+03	9.00E+02	7.70E+02	3.06E+04	1.03E+05	9.00E+02	8.73E+02
AUF Generator 1	Emergency Generator	3.25E+04	4.18E+03	3.58E+03	1.42E+05	4.79E+05	4.18E+03	4.05E+03
AUF Generator 2	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 3	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 4	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 5	Emergency Generator	3.58E+04	4.59E+03	3.93E+03	1.56E+05	5.27E+05	4.59E+03	4.46E+03
AUF Generator 6	Emergency Generator	4.23E+04	5.43E+03	4.65E+03	1.85E+05	6.23E+05	5.43E+03	5.27E+03
AUF Generator 7	Emergency Generator	4.55E+04	5.85E+03	5.01E+03	1.99E+05	6.71E+05	5.85E+03	5.67E+03
AUF Generator 8	Emergency Generator	3.58E+04	4.59E+03	3.93E+03	1.56E+05	5.27E+05	4.59E+03	4.46E+03
AUF Generator 9	Emergency Generator	3.36E+04	4.32E+03	3.69E+03	1.47E+05	4.95E+05	4.32E+03	4.19E+03
AUF Generator 10	Emergency Generator	1.63E+04	2.09E+03	1.79E+03	7.11E+04	2.40E+05	2.09E+03	2.03E+03
Fire Station 2021	Emergency Generator	2.94E+03	3.78E+02	3.23E+02	1.29E+04	4.33E+04	3.78E+02	3.67E+02
North Satellite Modernization Phase 2	Emergency Generator	9.99E+04	1.28E+04	1.10E+04	4.37E+05	1.47E+06	1.28E+04	1.25E+04
NA North Satellite Modernization Phase 2	Boiler/Space Heater	7.30E+05	9.56E+04	4.78E+04	8.69E+05	5.21E+03	1.65E+04	1.65E+04
NA International Arrivals Facility	Boiler/Space Heater	1.54E+06	2.02E+05	1.01E+05	1.84E+06	1.10E+04	3.49E+04	3.49E+04
NA Central Terminal Renovation Project	Boiler/Space Heater	3.43E+04	4.49E+03	2.24E+03	4.08E+04	2.45E+02	7.75E+02	7.75E+02
NA CONCOURSE A EXPANSION PROJECT FOR LOUNGES	Boiler/Space Heater	1.61E+05	2.11E+04	1.05E+04	1.92E+05	1.15E+03	3.64E+03	3.64E+03
NA C1 BUILDING EXPANSION	Boiler/Space Heater	3.70E+05	4.85E+04	2.42E+04	4.41E+05	2.64E+03	8.37E+03	8.37E+03
NA North Satellite Modernization Phase 2	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA International Arrivals Facility	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA Central Terminal Renovation Project	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA CONCOURSE A EXPANSION PROJECT FOR LOUNGES	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA C1 BUILDING EXPANSION	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03

SEA SAMP NTP AQ-HHRA Analysis - 2032 Proposed Action Stationary Source Emissions from AEDT 3g

Equipment Type	Operation Type	CO (g)	TOG (g)	VOC (g)	NOx (g)	SOx (g)	PM10 (g)	PM2.5 (g)
Fuel Tank 1	Fuel Tank	N/A	1.29E+06	1.14E+06	N/A	N/A	N/A	N/A
Fuel Tank 2	Fuel Tank	N/A	1.29E+06	1.14E+06	N/A	N/A	N/A	N/A
Fuel Tank 3	Fuel Tank	N/A	1.29E+06	1.14E+06	N/A	N/A	N/A	N/A
Fuel Tank 4	Fuel Tank	N/A	1.29E+06	1.14E+06	N/A	N/A	N/A	N/A
Fuel Tank 5	Fuel Tank	N/A	9.43E+05	8.35E+05	N/A	N/A	N/A	N/A
Fuel Tank 6	Fuel Tank	N/A	9.43E+05	8.35E+05	N/A	N/A	N/A	N/A
Fuel Tank 7	Fuel Tank	N/A	9.43E+05	8.35E+05	N/A	N/A	N/A	N/A
Fuel Tank 8	Fuel Tank	N/A	9.43E+05	8.35E+05	N/A	N/A	N/A	N/A
Central Plant Boiler	Boiler/Space Heater	1.11E+07	1.46E+06	7.29E+05	1.33E+07	7.95E+04	2.52E+05	2.52E+05
Pumphouse	Boiler/Space Heater	1.23E+04	3.37E+03	1.69E+03	2.88E+04	1.84E+02	5.82E+02	5.82E+02
Fleet Maintenance (AC2 Bldg)	Boiler/Space Heater	5.64E+04	7.38E+03	3.69E+03	6.71E+04	4.03E+02	1.27E+03	1.27E+03
Fire Department	Boiler/Space Heater	1.02E+05	1.34E+04	6.69E+03	1.22E+05	7.30E+02	2.31E+03	2.31E+03
Learning Center Building	Boiler/Space Heater	2.57E+04	3.37E+03	1.68E+03	3.06E+04	1.84E+02	5.81E+02	5.81E+02
Bus Maintenance Facility	Boiler/Space Heater	1.37E+05	1.80E+04	8.99E+03	1.64E+05	9.81E+02	3.11E+03	3.11E+03
Distribution Center	Boiler/Space Heater	1.68E+04	4.62E+03	2.31E+03	3.95E+04	2.52E+02	7.98E+02	7.98E+02
Cargo Building 161E	Boiler/Space Heater	3.35E+04	4.39E+03	2.20E+03	3.99E+04	2.40E+02	7.59E+02	7.59E+02
Fire Station 2021	Boiler/Space Heater	3.27E+03	9.00E+02	4.50E+02	7.69E+03	4.91E+01	1.55E+02	1.55E+02
Cargo Building 166B-2380 S 166th St	Boiler/Space Heater	1.34E+05	3.68E+04	1.84E+04	3.14E+05	2.01E+03	6.36E+03	6.36E+03
Airfield Security Gate	Boiler/Space Heater	3.50E+03	9.62E+02	4.81E+02	8.22E+03	5.25E+01	1.66E+02	1.66E+02
Building Lights Generators	Emergency Generator	8.37E+03	1.08E+03	9.20E+02	3.66E+04	1.23E+05	1.08E+03	1.04E+03
Building Lights Generators	Emergency Generator	6.57E+04	8.45E+03	7.23E+03	2.88E+05	9.69E+05	8.45E+03	8.19E+03
Concourse A	Emergency Generator	3.07E+04	3.94E+03	3.37E+03	1.34E+05	4.52E+05	3.94E+03	3.82E+03
Concourse A	Emergency Generator	1.30E+05	1.67E+04	1.43E+04	5.70E+05	1.92E+06	1.67E+04	1.62E+04
Concourse A	Emergency Generator	4.51E+04	5.79E+03	4.96E+03	1.97E+05	6.65E+05	5.79E+03	5.62E+03
South Parking Garage	Emergency Generator	8.19E+03	1.05E+03	9.01E+02	3.58E+04	1.21E+05	1.05E+03	1.02E+03
Toll Plaza	Emergency Generator	5.89E+03	7.57E+02	6.48E+02	2.57E+04	8.68E+04	7.57E+02	7.34E+02
Pumphouse	Emergency Generator	1.38E+04	1.78E+03	1.52E+03	6.06E+04	2.04E+05	1.78E+03	1.73E+03
Pumphouse	Emergency Generator	6.16E+02	7.91E+01	6.77E+01	2.69E+03	9.07E+03	7.91E+01	7.67E+01
Pumphouse	Emergency Generator	4.72E+03	6.06E+02	5.19E+02	2.06E+04	6.96E+04	6.06E+02	5.88E+02
Pumphouse	Emergency Generator	4.10E+03	5.27E+02	4.51E+02	1.79E+04	6.05E+04	5.27E+02	5.12E+02
Pumphouse	Emergency Generator	3.90E+03	5.01E+02	4.29E+02	1.70E+04	5.75E+04	5.01E+02	4.86E+02
Pumphouse	Emergency Generator	1.28E+04	1.64E+03	1.41E+03	5.59E+04	1.88E+05	1.64E+03	1.59E+03
Pumphouse	Emergency Generator	1.42E+04	1.82E+03	1.56E+03	6.21E+04	2.09E+05	1.82E+03	1.77E+03
Pumphouse	Emergency Generator	1.57E+04	2.02E+03	1.73E+03	6.87E+04	2.32E+05	2.02E+03	1.96E+03
Pumphouse	Emergency Generator	1.38E+04	1.78E+03	1.52E+03	6.04E+04	2.04E+05	1.78E+03	1.72E+03
Third Runway Generator	Emergency Generator	5.17E+05	6.64E+04	5.68E+04	2.26E+06	7.61E+06	6.64E+04	6.44E+04
Third Runway Generator	Emergency Generator	6.79E+05	8.73E+04	7.47E+04	2.97E+06	1.00E+07	8.73E+04	8.47E+04
Waste Treatment Plant	Emergency Generator	7.00E+03	9.00E+02	7.70E+02	3.06E+04	1.03E+05	9.00E+02	8.73E+02
AUF Generator 1	Emergency Generator	3.25E+04	4.18E+03	3.58E+03	1.42E+05	4.79E+05	4.18E+03	4.05E+03
AUF Generator 2	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 3	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 4	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 5	Emergency Generator	3.58E+04	4.59E+03	3.93E+03	1.56E+05	5.27E+05	4.59E+03	4.46E+03
AUF Generator 6	Emergency Generator	4.23E+04	5.43E+03	4.65E+03	1.85E+05	6.23E+05	5.43E+03	5.27E+03
AUF Generator 7	Emergency Generator	4.55E+04	5.85E+03	5.01E+03	1.99E+05	6.71E+05	5.85E+03	5.67E+03
AUF Generator 8	Emergency Generator	3.58E+04	4.59E+03	3.93E+03	1.56E+05	5.27E+05	4.59E+03	4.46E+03
AUF Generator 9	Emergency Generator	3.36E+04	4.32E+03	3.69E+03	1.47E+05	4.95E+05	4.32E+03	4.19E+03
AUF Generator 10	Emergency Generator	1.63E+04	2.09E+03	1.79E+03	7.11E+04	2.40E+05	2.09E+03	2.03E+03
Fire Station 2021	Emergency Generator	2.94E+03	3.78E+02	3.23E+02	1.29E+04	4.33E+04	3.78E+02	3.67E+02
North Satellite Modernization Phase 2	Emergency Generator	9.99E+04	1.28E+04	1.10E+04	4.37E+05	1.47E+06	1.28E+04	1.25E+04
NA North Satellite Modernization Phase 2	Boiler/Space Heater	7.30E+05	9.56E+04	4.78E+04	8.69E+05	5.21E+03	1.65E+04	1.65E+04
NA International Arrivals Facility	Boiler/Space Heater	1.54E+06	2.02E+05	1.01E+05	1.84E+06	1.10E+04	3.49E+04	3.49E+04
NA Central Terminal Renovation Project	Boiler/Space Heater	3.43E+04	4.49E+03	2.24E+03	4.08E+04	2.45E+02	7.75E+02	7.75E+02
NA CONCOURSE A EXPANSION PROJECT FOR LOUNGES	Boiler/Space Heater	1.61E+05	2.11E+04	1.05E+04	1.92E+05	1.15E+03	3.64E+03	3.64E+03
NA C1 BUILDING EXPANSION	Boiler/Space Heater	3.70E+05	4.85E+04	2.42E+04	4.41E+05	2.64E+03	8.37E+03	8.37E+03
NA North Satellite Modernization Phase 2	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA International Arrivals Facility	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA Central Terminal Renovation Project	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA CONCOURSE A EXPANSION PROJECT FOR LOUNGES	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA C1 BUILDING EXPANSION	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
North Gates (T1)	Boiler/Space Heater	2.09E+06	2.73E+05	1.37E+05	2.48E+06	1.49E+04	4.72E+04	4.72E+04
Second Terminal and Parking (T2)	Boiler/Space Heater	1.97E+06	2.58E+05	1.29E+05	2.35E+06	1.41E+04	4.46E+04	4.46E+04
Cargo 4 South Redevelopment (C01)	Boiler/Space Heater	5.47E+04	7.16E+03	3.58E+03	6.51E+04	3.91E+02	1.24E+03	1.24E+03
Cargo Warehousing (C02)	Boiler/Space Heater	2.26E+05	2.95E+04	1.48E+04	2.69E+05	1.61E+03	5.10E+03	5.10E+03
Cargo Warehousing (C03)	Boiler/Space Heater	6.15E+04	8.06E+03	4.03E+03	7.33E+04	4.40E+02	1.39E+03	1.39E+03
Elevated Busway and Stations (L02)	Boiler/Space Heater	2.26E+05	2.96E+04	1.48E+04	2.69E+05	1.62E+03	5.11E+03	5.11E+03
Main Terminal North GT Lot (L04)	Boiler/Space Heater	5.54E+04	7.25E+03	3.63E+03	6.59E+04	3.96E+02	1.25E+03	1.25E+03
Primary ARFF (S02)	Boiler/Space Heater	7.93E+04	1.04E+04	5.19E+03	9.44E+04	5.67E+02	1.79E+03	1.79E+03
Secondary ARFF (S03)	Boiler/Space Heater	6.84E+03	8.95E+02	4.48E+02	8.14E+03	4.88E+01	1.55E+02	1.55E+02

SEA SAMP NTP AQ-HHRA Analysis - 2032 Proposed Action Stationary Source Emissions from AEDT 3g

Equipment Type	Operation Type	CO (g)	TOG (g)	VOC (g)	NOx (g)	SOx (g)	PM10 (g)	PM2.5 (g)
Westside Maintenance Campus (S07)	Boiler/Space Heater	2.74E+05	3.58E+04	1.79E+04	3.26E+05	1.95E+03	6.19E+03	6.19E+03
Airline Support North (S08)	Boiler/Space Heater	1.03E+04	1.34E+03	6.72E+02	1.22E+04	7.33E+01	2.32E+02	2.32E+02
Airline Support West (S09)	Boiler/Space Heater	8.55E+03	1.12E+03	5.60E+02	1.02E+04	6.10E+01	1.93E+02	1.93E+02
Centralized Receiving Distribution Center (S10)	Boiler/Space Heater	3.76E+04	4.92E+03	2.46E+03	4.48E+04	2.69E+02	8.51E+02	8.51E+02
Employee Parking Structure (L07)	Emergency Generator	2.75E+03	3.53E+02	3.03E+02	1.20E+04	4.05E+04	3.53E+02	3.43E+02
Westside Maintenance Campus (S07)	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
Primary ARFF (S02)	Emergency Generator	8.27E+03	1.06E+03	9.10E+02	3.62E+04	1.22E+05	1.06E+03	1.03E+03
North Gates (T1)	Emergency Generator	3.73E+05	4.80E+04	4.11E+04	1.63E+06	5.50E+06	4.80E+04	4.65E+04
Second Terminal and Parking (T2)	Emergency Generator	3.73E+05	4.80E+04	4.11E+04	1.63E+06	5.50E+06	4.80E+04	4.65E+04
Centralized Receiving Distribution Center (S10)	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
Cargo Warehousing (C02)	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
Cargo Warehousing (C03)	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
Fuel Tank 9	Fuel Tank	N/A	1.29E+06	1.14E+06	N/A	N/A	N/A	N/A
Fuel Tank 10	Fuel Tank	N/A	1.29E+06	1.14E+06	N/A	N/A	N/A	N/A
Fuel Tank 11	Fuel Tank	N/A	9.43E+05	8.35E+05	N/A	N/A	N/A	N/A
Fuel Tank 12	Fuel Tank	N/A	9.43E+05	8.35E+05	N/A	N/A	N/A	N/A

SEA SAMP NTP AQ-HHRA Analysis - 2037 No Action Alternative Stationary Source Emissions from AEDT 3g

Equipment Type	Operation Type	CO (g)	TOG (g)	VOC (g)	NOx (g)	SOx (g)	PM10 (g)	PM2.5 (g)
Fuel Tank 1	Fuel Tank	N/A	1.44E+06	1.28E+06	N/A	N/A	N/A	N/A
Fuel Tank 2	Fuel Tank	N/A	1.44E+06	1.28E+06	N/A	N/A	N/A	N/A
Fuel Tank 3	Fuel Tank	N/A	1.44E+06	1.28E+06	N/A	N/A	N/A	N/A
Fuel Tank 4	Fuel Tank	N/A	1.44E+06	1.28E+06	N/A	N/A	N/A	N/A
Fuel Tank 5	Fuel Tank	N/A	9.96E+05	8.81E+05	N/A	N/A	N/A	N/A
Fuel Tank 6	Fuel Tank	N/A	9.96E+05	8.81E+05	N/A	N/A	N/A	N/A
Fuel Tank 7	Fuel Tank	N/A	9.96E+05	8.81E+05	N/A	N/A	N/A	N/A
Fuel Tank 8	Fuel Tank	N/A	9.96E+05	8.81E+05	N/A	N/A	N/A	N/A
Central Plant Boiler	Boiler/Space Heater	1.11E+07	1.46E+06	7.29E+05	1.33E+07	7.95E+04	2.52E+05	2.52E+05
Pumphouse	Boiler/Space Heater	1.23E+04	3.37E+03	1.69E+03	2.88E+04	1.84E+02	5.82E+02	5.82E+02
Fleet Maintenance (AC2 Bldg)	Boiler/Space Heater	5.64E+04	7.38E+03	3.69E+03	6.71E+04	4.03E+02	1.27E+03	1.27E+03
Fire Department	Boiler/Space Heater	1.02E+05	1.34E+04	6.69E+03	1.22E+05	7.30E+02	2.31E+03	2.31E+03
Learning Center Building	Boiler/Space Heater	2.57E+04	3.37E+03	1.68E+03	3.06E+04	1.84E+02	5.81E+02	5.81E+02
Bus Maintenance Facility	Boiler/Space Heater	1.37E+05	1.80E+04	8.99E+03	1.64E+05	9.81E+02	3.11E+03	3.11E+03
Distribution Center	Boiler/Space Heater	1.68E+04	4.62E+03	2.31E+03	3.95E+04	2.52E+02	7.98E+02	7.98E+02
Cargo Building 161E	Boiler/Space Heater	3.35E+04	4.39E+03	2.20E+03	3.99E+04	2.40E+02	7.59E+02	7.59E+02
Fire Station 2021	Boiler/Space Heater	3.27E+03	9.00E+02	4.50E+02	7.69E+03	4.91E+01	1.55E+02	1.55E+02
Cargo Building 166B-2380 S 166th St	Boiler/Space Heater	1.34E+05	3.68E+04	1.84E+04	3.14E+05	2.01E+03	6.36E+03	6.36E+03
Airfield Security Gate	Boiler/Space Heater	3.50E+03	9.62E+02	4.81E+02	8.22E+03	5.25E+01	1.66E+02	1.66E+02
Building Lights Generators	Emergency Generator	8.37E+03	1.08E+03	9.20E+02	3.66E+04	1.23E+05	1.08E+03	1.04E+03
Building Lights Generators	Emergency Generator	6.57E+04	8.45E+03	7.23E+03	2.88E+05	9.69E+05	8.45E+03	8.19E+03
Concourse A	Emergency Generator	3.07E+04	3.94E+03	3.37E+03	1.34E+05	4.52E+05	3.94E+03	3.82E+03
Concourse A	Emergency Generator	1.30E+05	1.67E+04	1.43E+04	5.70E+05	1.92E+06	1.67E+04	1.62E+04
Concourse A	Emergency Generator	4.51E+04	5.79E+03	4.96E+03	1.97E+05	6.65E+05	5.79E+03	5.62E+03
South Parking Garage	Emergency Generator	8.19E+03	1.05E+03	9.01E+02	3.58E+04	1.21E+05	1.05E+03	1.02E+03
Toll Plaza	Emergency Generator	5.89E+03	7.57E+02	6.48E+02	2.57E+04	8.68E+04	7.57E+02	7.34E+02
Pumphouse	Emergency Generator	1.38E+04	1.78E+03	1.52E+03	6.06E+04	2.04E+05	1.78E+03	1.73E+03
Pumphouse	Emergency Generator	6.16E+02	7.91E+01	6.77E+01	2.69E+03	9.07E+03	7.91E+01	7.67E+01
Pumphouse	Emergency Generator	4.72E+03	6.06E+02	5.19E+02	2.06E+04	6.96E+04	6.06E+02	5.88E+02
Pumphouse	Emergency Generator	4.10E+03	5.27E+02	4.51E+02	1.79E+04	6.05E+04	5.27E+02	5.12E+02
Pumphouse	Emergency Generator	3.90E+03	5.01E+02	4.29E+02	1.70E+04	5.75E+04	5.01E+02	4.86E+02
Pumphouse	Emergency Generator	1.28E+04	1.64E+03	1.41E+03	5.59E+04	1.88E+05	1.64E+03	1.59E+03
Pumphouse	Emergency Generator	1.42E+04	1.82E+03	1.56E+03	6.21E+04	2.09E+05	1.82E+03	1.77E+03
Pumphouse	Emergency Generator	1.57E+04	2.02E+03	1.73E+03	6.87E+04	2.32E+05	2.02E+03	1.96E+03
Pumphouse	Emergency Generator	1.38E+04	1.78E+03	1.52E+03	6.04E+04	2.04E+05	1.78E+03	1.72E+03
Third Runway Generator	Emergency Generator	5.17E+05	6.64E+04	5.68E+04	2.26E+06	7.61E+06	6.64E+04	6.44E+04
Third Runway Generator	Emergency Generator	6.79E+05	8.73E+04	7.47E+04	2.97E+06	1.00E+07	8.73E+04	8.47E+04
Waste Treatment Plant	Emergency Generator	7.00E+03	9.00E+02	7.70E+02	3.06E+04	1.03E+05	9.00E+02	8.73E+02
AUF Generator 1	Emergency Generator	3.25E+04	4.18E+03	3.58E+03	1.42E+05	4.79E+05	4.18E+03	4.05E+03
AUF Generator 2	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 3	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 4	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 5	Emergency Generator	3.58E+04	4.59E+03	3.93E+03	1.56E+05	5.27E+05	4.59E+03	4.46E+03
AUF Generator 6	Emergency Generator	4.23E+04	5.43E+03	4.65E+03	1.85E+05	6.23E+05	5.43E+03	5.27E+03
AUF Generator 7	Emergency Generator	4.55E+04	5.85E+03	5.01E+03	1.99E+05	6.71E+05	5.85E+03	5.67E+03
AUF Generator 8	Emergency Generator	3.58E+04	4.59E+03	3.93E+03	1.56E+05	5.27E+05	4.59E+03	4.46E+03
AUF Generator 9	Emergency Generator	3.36E+04	4.32E+03	3.69E+03	1.47E+05	4.95E+05	4.32E+03	4.19E+03
AUF Generator 10	Emergency Generator	1.63E+04	2.09E+03	1.79E+03	7.11E+04	2.40E+05	2.09E+03	2.03E+03
Fire Station 2021	Emergency Generator	2.94E+03	3.78E+02	3.23E+02	1.29E+04	4.33E+04	3.78E+02	3.67E+02
North Satellite Modernization Phase 2	Emergency Generator	9.99E+04	1.28E+04	1.10E+04	4.37E+05	1.47E+06	1.28E+04	1.25E+04
NA North Satellite Modernization Phase 2	Boiler/Space Heater	7.30E+05	9.56E+04	4.78E+04	8.69E+05	5.21E+03	1.65E+04	1.65E+04
NA International Arrivals Facility	Boiler/Space Heater	1.54E+06	2.02E+05	1.01E+05	1.84E+06	1.10E+04	3.49E+04	3.49E+04
NA Central Terminal Renovation Project	Boiler/Space Heater	3.43E+04	4.49E+03	2.24E+03	4.08E+04	2.45E+02	7.75E+02	7.75E+02
NA CONCOURSE A EXPANSION PROJECT FOR LOUNGES	Boiler/Space Heater	1.61E+05	2.11E+04	1.05E+04	1.92E+05	1.15E+03	3.64E+03	3.64E+03
NA C1 BUILDING EXPANSION	Boiler/Space Heater	3.70E+05	4.85E+04	2.42E+04	4.41E+05	2.64E+03	8.37E+03	8.37E+03
NA North Satellite Modernization Phase 2	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA International Arrivals Facility	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA Central Terminal Renovation Project	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA CONCOURSE A EXPANSION PROJECT FOR LOUNGES	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA C1 BUILDING EXPANSION	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03

SEA SAMP NTP AQ-HHRA Analysis - 2037 Proposed Action Stationary Source Emissions from AEDT 3g

Equipment Type	Operation Type	CO (g)	TOG (g)	VOC (g)	NOx (g)	SOx (g)	PM10 (g)	PM2.5 (g)
Fuel Tank 1	Fuel Tank	N/A	1.34E+06	1.18E+06	N/A	N/A	N/A	N/A
Fuel Tank 2	Fuel Tank	N/A	1.34E+06	1.18E+06	N/A	N/A	N/A	N/A
Fuel Tank 3	Fuel Tank	N/A	1.34E+06	1.18E+06	N/A	N/A	N/A	N/A
Fuel Tank 4	Fuel Tank	N/A	1.34E+06	1.18E+06	N/A	N/A	N/A	N/A
Fuel Tank 5	Fuel Tank	N/A	9.50E+05	8.41E+05	N/A	N/A	N/A	N/A
Fuel Tank 6	Fuel Tank	N/A	9.50E+05	8.41E+05	N/A	N/A	N/A	N/A
Fuel Tank 7	Fuel Tank	N/A	9.50E+05	8.41E+05	N/A	N/A	N/A	N/A
Fuel Tank 8	Fuel Tank	N/A	9.50E+05	8.41E+05	N/A	N/A	N/A	N/A
Central Plant Boiler	Boiler/Space Heater	1.11E+07	1.46E+06	7.29E+05	1.33E+07	7.95E+04	2.52E+05	2.52E+05
Pumphouse	Boiler/Space Heater	1.23E+04	3.37E+03	1.69E+03	2.88E+04	1.84E+02	5.82E+02	5.82E+02
Fleet Maintenance (AC2 Bldg)	Boiler/Space Heater	5.64E+04	7.38E+03	3.69E+03	6.71E+04	4.03E+02	1.27E+03	1.27E+03
Fire Department	Boiler/Space Heater	1.02E+05	1.34E+04	6.69E+03	1.22E+05	7.30E+02	2.31E+03	2.31E+03
Learning Center Building	Boiler/Space Heater	2.57E+04	3.37E+03	1.68E+03	3.06E+04	1.84E+02	5.81E+02	5.81E+02
Bus Maintenance Facility	Boiler/Space Heater	1.37E+05	1.80E+04	8.99E+03	1.64E+05	9.81E+02	3.11E+03	3.11E+03
Distribution Center	Boiler/Space Heater	1.68E+04	4.62E+03	2.31E+03	3.95E+04	2.52E+02	7.98E+02	7.98E+02
Cargo Building 161E	Boiler/Space Heater	3.35E+04	4.39E+03	2.20E+03	3.99E+04	2.40E+02	7.59E+02	7.59E+02
Fire Station 2021	Boiler/Space Heater	3.27E+03	9.00E+02	4.50E+02	7.69E+03	4.91E+01	1.55E+02	1.55E+02
Cargo Building 166B-2380 S 166th St	Boiler/Space Heater	1.34E+05	3.68E+04	1.84E+04	3.14E+05	2.01E+03	6.36E+03	6.36E+03
Airfield Security Gate	Boiler/Space Heater	3.50E+03	9.62E+02	4.81E+02	8.22E+03	5.25E+01	1.66E+02	1.66E+02
Building Lights Generators	Emergency Generator	8.37E+03	1.08E+03	9.20E+02	3.66E+04	1.23E+05	1.08E+03	1.04E+03
Building Lights Generators	Emergency Generator	6.57E+04	8.45E+03	7.23E+03	2.88E+05	9.69E+05	8.45E+03	8.19E+03
Concourse A	Emergency Generator	3.07E+04	3.94E+03	3.37E+03	1.34E+05	4.52E+05	3.94E+03	3.82E+03
Concourse A	Emergency Generator	1.30E+05	1.67E+04	1.43E+04	5.70E+05	1.92E+06	1.67E+04	1.62E+04
Concourse A	Emergency Generator	4.51E+04	5.79E+03	4.96E+03	1.97E+05	6.65E+05	5.79E+03	5.62E+03
South Parking Garage	Emergency Generator	8.19E+03	1.05E+03	9.01E+02	3.58E+04	1.21E+05	1.05E+03	1.02E+03
Toll Plaza	Emergency Generator	5.89E+03	7.57E+02	6.48E+02	2.57E+04	8.68E+04	7.57E+02	7.34E+02
Pumphouse	Emergency Generator	1.38E+04	1.78E+03	1.52E+03	6.06E+04	2.04E+05	1.78E+03	1.73E+03
Pumphouse	Emergency Generator	6.16E+02	7.91E+01	6.77E+01	2.69E+03	9.07E+03	7.91E+01	7.67E+01
Pumphouse	Emergency Generator	4.72E+03	6.06E+02	5.19E+02	2.06E+04	6.96E+04	6.06E+02	5.88E+02
Pumphouse	Emergency Generator	4.10E+03	5.27E+02	4.51E+02	1.79E+04	6.05E+04	5.27E+02	5.12E+02
Pumphouse	Emergency Generator	3.90E+03	5.01E+02	4.29E+02	1.70E+04	5.75E+04	5.01E+02	4.86E+02
Pumphouse	Emergency Generator	1.28E+04	1.64E+03	1.41E+03	5.59E+04	1.88E+05	1.64E+03	1.59E+03
Pumphouse	Emergency Generator	1.42E+04	1.82E+03	1.56E+03	6.21E+04	2.09E+05	1.82E+03	1.77E+03
Pumphouse	Emergency Generator	1.57E+04	2.02E+03	1.73E+03	6.87E+04	2.32E+05	2.02E+03	1.96E+03
Pumphouse	Emergency Generator	1.38E+04	1.78E+03	1.52E+03	6.04E+04	2.04E+05	1.78E+03	1.72E+03
Third Runway Generator	Emergency Generator	5.17E+05	6.64E+04	5.68E+04	2.26E+06	7.61E+06	6.64E+04	6.44E+04
Third Runway Generator	Emergency Generator	6.79E+05	8.73E+04	7.47E+04	2.97E+06	1.00E+07	8.73E+04	8.47E+04
Waste Treatment Plant	Emergency Generator	7.00E+03	9.00E+02	7.70E+02	3.06E+04	1.03E+05	9.00E+02	8.73E+02
AUF Generator 1	Emergency Generator	3.25E+04	4.18E+03	3.58E+03	1.42E+05	4.79E+05	4.18E+03	4.05E+03
AUF Generator 2	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 3	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 4	Emergency Generator	3.68E+04	4.73E+03	4.05E+03	1.61E+05	5.43E+05	4.73E+03	4.59E+03
AUF Generator 5	Emergency Generator	3.58E+04	4.59E+03	3.93E+03	1.56E+05	5.27E+05	4.59E+03	4.46E+03
AUF Generator 6	Emergency Generator	4.23E+04	5.43E+03	4.65E+03	1.85E+05	6.23E+05	5.43E+03	5.27E+03
AUF Generator 7	Emergency Generator	4.55E+04	5.85E+03	5.01E+03	1.99E+05	6.71E+05	5.85E+03	5.67E+03
AUF Generator 8	Emergency Generator	3.58E+04	4.59E+03	3.93E+03	1.56E+05	5.27E+05	4.59E+03	4.46E+03
AUF Generator 9	Emergency Generator	3.36E+04	4.32E+03	3.69E+03	1.47E+05	4.95E+05	4.32E+03	4.19E+03
AUF Generator 10	Emergency Generator	1.63E+04	2.09E+03	1.79E+03	7.11E+04	2.40E+05	2.09E+03	2.03E+03
Fire Station 2021	Emergency Generator	2.94E+03	3.78E+02	3.23E+02	1.29E+04	4.33E+04	3.78E+02	3.67E+02
North Satellite Modernization Phase 2	Emergency Generator	9.99E+04	1.28E+04	1.10E+04	4.37E+05	1.47E+06	1.28E+04	1.25E+04
NA North Satellite Modernization Phase 2	Boiler/Space Heater	7.30E+05	9.56E+04	4.78E+04	8.69E+05	5.21E+03	1.65E+04	1.65E+04
NA International Arrivals Facility	Boiler/Space Heater	1.54E+06	2.02E+05	1.01E+05	1.84E+06	1.10E+04	3.49E+04	3.49E+04
NA Central Terminal Renovation Project	Boiler/Space Heater	3.43E+04	4.49E+03	2.24E+03	4.08E+04	2.45E+02	7.75E+02	7.75E+02
NA CONCOURSE A EXPANSION PROJECT FOR LOUNGES	Boiler/Space Heater	1.61E+05	2.11E+04	1.05E+04	1.92E+05	1.15E+03	3.64E+03	3.64E+03
NA C1 BUILDING EXPANSION	Boiler/Space Heater	3.70E+05	4.85E+04	2.42E+04	4.41E+05	2.64E+03	8.37E+03	8.37E+03
NA North Satellite Modernization Phase 2	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA International Arrivals Facility	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA Central Terminal Renovation Project	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA CONCOURSE A EXPANSION PROJECT FOR LOUNGES	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
NA C1 BUILDING EXPANSION	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
North Gates (T1)	Boiler/Space Heater	2.09E+06	2.73E+05	1.37E+05	2.48E+06	1.49E+04	4.72E+04	4.72E+04
Second Terminal and Parking (T2)	Boiler/Space Heater	1.97E+06	2.58E+05	1.29E+05	2.35E+06	1.41E+04	4.46E+04	4.46E+04
Cargo 4 South Redevelopment (C01)	Boiler/Space Heater	5.47E+04	7.16E+03	3.58E+03	6.51E+04	3.91E+02	1.24E+03	1.24E+03
Cargo Warehousing (C02)	Boiler/Space Heater	2.26E+05	2.95E+04	1.48E+04	2.69E+05	1.61E+03	5.10E+03	5.10E+03
Cargo Warehousing (C03)	Boiler/Space Heater	6.15E+04	8.06E+03	4.03E+03	7.33E+04	4.40E+02	1.39E+03	1.39E+03
Elevated Busway and Stations (L02)	Boiler/Space Heater	2.26E+05	2.96E+04	1.48E+04	2.69E+05	1.62E+03	5.11E+03	5.11E+03
Main Terminal North GT Lot (L04)	Boiler/Space Heater	5.54E+04	7.25E+03	3.63E+03	6.59E+04	3.96E+02	1.25E+03	1.25E+03
Primary ARFF (S02)	Boiler/Space Heater	7.93E+04	1.04E+04	5.19E+03	9.44E+04	5.67E+02	1.79E+03	1.79E+03
Secondary ARFF (S03)	Boiler/Space Heater	6.84E+03	8.95E+02	4.48E+02	8.14E+03	4.88E+01	1.55E+02	1.55E+02

SEA SAMP NTP AQ-HHRA Analysis - 2037 Proposed Action Stationary Source Emissions from AEDT 3g

Equipment Type	Operation Type	CO (g)	TOG (g)	VOC (g)	NOx (g)	SOx (g)	PM10 (g)	PM2.5 (g)
Westside Maintenance Campus (S07)	Boiler/Space Heater	2.74E+05	3.58E+04	1.79E+04	3.26E+05	1.95E+03	6.19E+03	6.19E+03
Airline Support North (S08)	Boiler/Space Heater	1.03E+04	1.34E+03	6.72E+02	1.22E+04	7.33E+01	2.32E+02	2.32E+02
Airline Support West (S09)	Boiler/Space Heater	8.55E+03	1.12E+03	5.60E+02	1.02E+04	6.10E+01	1.93E+02	1.93E+02
Centralized Receiving Distribution Center (S10)	Boiler/Space Heater	3.76E+04	4.92E+03	2.46E+03	4.48E+04	2.69E+02	8.51E+02	8.51E+02
Employee Parking Structure (L07)	Emergency Generator	2.75E+03	3.53E+02	3.03E+02	1.20E+04	4.05E+04	3.53E+02	3.43E+02
Westside Maintenance Campus (S07)	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
Primary ARFF (S02)	Emergency Generator	8.27E+03	1.06E+03	9.10E+02	3.62E+04	1.22E+05	1.06E+03	1.03E+03
North Gates (T1)	Emergency Generator	3.73E+05	4.80E+04	4.11E+04	1.63E+06	5.50E+06	4.80E+04	4.65E+04
Second Terminal and Parking (T2)	Emergency Generator	3.73E+05	4.80E+04	4.11E+04	1.63E+06	5.50E+06	4.80E+04	4.65E+04
Centralized Receiving Distribution Center (S10)	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
Cargo Warehousing (C02)	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
Cargo Warehousing (C03)	Emergency Generator	7.51E+04	9.66E+03	8.27E+03	3.29E+05	1.11E+06	9.66E+03	9.37E+03
Fuel Tank 9	Fuel Tank	N/A	1.34E+06	1.18E+06	N/A	N/A	N/A	N/A
Fuel Tank 10	Fuel Tank	N/A	1.34E+06	1.18E+06	N/A	N/A	N/A	N/A
Fuel Tank 11	Fuel Tank	N/A	9.50E+05	8.41E+05	N/A	N/A	N/A	N/A
Fuel Tank 12	Fuel Tank	N/A	9.50E+05	8.41E+05	N/A	N/A	N/A	N/A

Ground Support Equipment Source Area Locations for Dispersion Modeling

SEA SAMP NTP – No Action Alternative
Ground support equipment emission source areas.
Legend
GSE Emission Source Areas
Google Earth
2 km
N

SEA SAMP NTP – Proposed Action
Ground support equipment emission source areas.
Legend
GSE Emission Source Areas
Google Earth
2 km
N

Profiles for Speciation of Toxic Air Pollutant Concentrations

Air Pollutant Speciation Profiles

Source	Analysis	Reference Pollutant	TAP	Mass Fraction	Source
Aircraft: Piston	Organics	TOG	1,3-butadiene	0.0157	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	1-butene	0.0179	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	1-decene	0.0015	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	1-hexene	0.0076	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	1-nonene	0.0022	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	1-octene	0.0025	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	1-pentene	0.0075	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	2-methyl-2-butene	0.0018	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	2-methylpentane	0.0035	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	acetaldehyde	0.0432	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	acetone	0.0293	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	acetylene	0.0369	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	acrolein	0.0206	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	benzaldehyde	0.0053	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	benzene	0.0179	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	butyraldehyde	0.0119	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	c-16 alkane	0.0013	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	c6h18o3si3	0.1177	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	c7-c16 paraffins	0.0027	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	c8h24o4si4	0.042	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	cis-2-butene	0.0045	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	ethane	0.0092	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	ethylbenzene	0.0015	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	ethylene	0.155	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	formaldehyde	0.1414	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	furfuryl alcohol	0.0181	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	glyoxal	0.0253	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	heptene	0.0052	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	hexaldehyde	0.002	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	isomers of dodecane	0.0016	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	isomers of pentadecane	0.0015	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	isomers of pentene	0.0064	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	isomers of tetradecane	0.0017	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	m & p-xylene	0.0026	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	methane	0.1095	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	methyl naphthalenes	0.0044	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	naphthalene	0.0051	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-butylbenzene	0.0022	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-decane	0.0042	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-dodecane	0.0121	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-heptadecane	0.0001	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-heptane	0.0006	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-hexadecane	0.0014	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-nonane	0.0015	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-octane	0.0004	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-pentadecane	0.0027	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-pentane	0.0019	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-pentylbenzene	0.0017	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-tetradecane	0.0059	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-tridecane	0.0066	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	n-undecane	0.0052	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	o-xylene	0.0018	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	phenol	0.0022	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	propane	0.002	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	propionaldehyde	0.009	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	propylene	0.0459	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	styrene	0.0037	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	toluene	0.0049	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Piston	Organics	TOG	xylene (m-, o-, p-)	0.0044	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1,2,3-trimethylbenzene	0.00106	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1,2,4-trimethylbenzene	0.0035	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1,3,5-trimethylbenzene	0.00054	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1,3-butadiene	0.01687	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1-butene	0.01754	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1-decene	0.00185	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1-hexene	0.00736	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1-methyl-2-ethylbenzene (o-ethyltoluene)	0.00065	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1-methyl-3-ethylbenzene (m-ethyltoluene)	0.00154	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1-methyl-4-ethylbenzene (p-ethyltoluene)	0.00064	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1-methylnaphthalene	0.00247	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G

Air Pollutant Speciation Profiles

Source	Analysis	Reference Pollutant	TAP	Mass Fraction	Source
Aircraft: Turbine and APU	Organics	TOG	1-nonene	0.00246	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1-octene	0.00276	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	1-pentene	0.00776	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	2-methyl-1-butene	0.0014	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	2-methyl-1-pentene	0.00034	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	2-methyl-2-butene	0.00185	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	2-methyl-2-propenal (methacrolein)	0.00429	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	2-methylnaphthalene	0.00206	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	2-methylpentane	0.00408	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	3-methyl-1-butene	0.00112	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	4-methyl-1-pentene	0.00069	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	acetaldehyde	0.04272	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	acetone	0.00369	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	acetylene	0.03939	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	acrolein	0.02449	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	benzaldehyde	0.0047	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	benzene	0.01681	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	butyraldehyde	0.00119	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	c-10 olefins	0.05843	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	c-10 paraffins	0.14606	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	c-14 alkane	0.00186	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	c-15 alkane	0.00177	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	c-16 alkane	0.00146	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	c-18 alkane	0.00002	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	c-4 benzene + c-3 aroald	0.00656	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	c-5 benzene + c-4 aroald	0.00324	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	cis-2-butene	0.0021	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	cis-2-pentene	0.00276	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	crotonaldehyde	0.01033	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	decanol	0.05843	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	dimethyl naphthalene	0.0009	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	dodecanol	0.02921	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	ethane	0.00521	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	ethylbenzene	0.00174	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	ethylene	0.15461	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	formaldehyde	0.1231	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	glyoxal	0.01816	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	heptene	0.00438	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	isopropylbenzene	0.00003	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	isovaleraldehyde	0.00032	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	m & p-xylene	0.00282	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	methanol	0.01805	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	methylglyoxal	0.01503	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	naphthalene	0.00541	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-decane	0.0032	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-dodecane	0.00462	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-heptadecane	0.00009	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-heptane	0.00064	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-hexadecane	0.00049	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-nonane	0.00062	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-octane	0.00062	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-pentadecane	0.00173	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-pentane	0.00198	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-propylbenzene	0.00053	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-tetradecane	0.00416	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-tridecane	0.00535	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	n-undecane	0.00444	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	o-tolualdehyde	0.0023	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	o-xylene	0.00166	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	phenol	0.00726	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	propane	0.00078	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	propionaldehyde	0.00727	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	propylene	0.04534	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	p-tolualdehyde	0.00048	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	styrene	0.00309	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	tolualdehyde	0.00278	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	toluene	0.00642	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	trans-2-hexene	0.0003	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	trans-2-pentene	0.00359	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Aircraft: Turbine and APU	Organics	TOG	valeraldehyde	0.00245	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G

Air Pollutant Speciation Profiles

Source	Analysis	Reference Pollutant	TAP	Mass Fraction	Source
Aircraft: Turbine and APU	Organics	TOG	xylene (m-, o-, p-)	0.00448	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Boiler/Space Heater: Natural Gas and LPG	Organics	TOG	benzene	0.04	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Boiler/Space Heater: Natural Gas and LPG	Organics	TOG	cyclohexane	0.01	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Boiler/Space Heater: Natural Gas and LPG	Organics	TOG	formaldehyde	0.08	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Boiler/Space Heater: Natural Gas and LPG	Organics	TOG	isomers of hexane	0.01	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Boiler/Space Heater: Natural Gas and LPG	Organics	TOG	isomers of pentane	0.09	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Boiler/Space Heater: Natural Gas and LPG	Organics	TOG	methane	0.56	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Boiler/Space Heater: Natural Gas and LPG	Organics	TOG	n-butane	0.09	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Boiler/Space Heater: Natural Gas and LPG	Organics	TOG	n-pentane	0.06	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Boiler/Space Heater: Natural Gas and LPG	Organics	TOG	propane	0.04	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Boiler/Space Heater: Natural Gas and LPG	Organics	TOG	toluene	0.02	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Emergency Generator: Distillate Oil (Diesel)	Organics	TOG	1,3-butadiene	0.07	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Emergency Generator: Distillate Oil (Diesel)	Organics	TOG	1-butene	0.134	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Emergency Generator: Distillate Oil (Diesel)	Organics	TOG	acetylene	0.113	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Emergency Generator: Distillate Oil (Diesel)	Organics	TOG	benzene	0.079	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Emergency Generator: Distillate Oil (Diesel)	Organics	TOG	ethane	0.028	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Emergency Generator: Distillate Oil (Diesel)	Organics	TOG	ethylene	0.287	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Emergency Generator: Distillate Oil (Diesel)	Organics	TOG	methane	0.116	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Emergency Generator: Distillate Oil (Diesel)	Organics	TOG	propylene	0.173	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	benzene	0.024	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	ethane	0.027	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	isobutane	0.093	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	isomers of heptane	0.05	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	isomers of hexane	0.051	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	isomers of octane	0.004	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	isomers of pentane	0.112	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	methane	0.088	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	n-butane	0.208	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	n-heptane	0.02	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	n-hexane	0.047	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	n-pentane	0.101	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	propane	0.161	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Organics	TOG	toluene	0.014	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	acetaldehyde	0.0291	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	benzaldehyde	0.0055	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-1 compounds	0.058	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-10 compounds	0.0352	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-11 compounds	0.0358	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-12 compounds	0.022	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-13 compounds	0.0343	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-14 compounds	0.0445	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-15 compounds	0.0435	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-16 compounds	0.0349	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-17 compounds	0.0306	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-18 compounds	0.0204	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-19 compounds	0.0156	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-2 compounds	0.1996	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-20 compounds	0.0091	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-21 compounds	0.0075	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-22 compounds	0.0059	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-23 compounds	0.0048	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-24 compounds	0.0048	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-25 compounds	0.0054	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-26 compounds	0.0044	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-27 compounds	0.0022	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-28 compounds	0.0032	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-29 compounds	0.0014	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-3 compounds	0.0521	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-30 compounds	0.0032	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-31 compounds	0.0029	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-32 compounds	0.0027	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-33 compounds	0.0022	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-34 compounds	0.0024	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-35 compounds	0.0016	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-36 compounds	0.002	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-37 compounds	0.0008	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-38 compounds	0.0005	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-39 compounds	0.0011	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-4 compounds	0.0408	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-40 compounds	0.0002	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G

Air Pollutant Speciation Profiles

Source	Analysis	Reference Pollutant	TAP	Mass Fraction	Source
GSE: Diesel	Organics	VOC	c-41 compounds	0.0005	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-42 compounds	0.0002	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-43 compounds	0.0001	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-5 compounds	0.0236	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-6 compounds	0.043	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-7 compounds	0.0289	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-8 compounds	0.0113	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	c-9 compounds	0.0075	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	crotonaldehyde	0.0101	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	formaldehyde	0.0861	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	hexaldehyde	0.0008	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Diesel	Organics	VOC	propionaldehyde	0.0177	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	(1-methylpropyl)benzene	0.0005	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1,2,3-trimethylbenzene	0.0026	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1,2,4-trimethylbenzene	0.0144	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1,2-diethylbenzene (ortho)	0.003	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1,2-propadiene	0.0011	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1,3,5-trimethylbenzene	0.0121	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1,3-diethylbenzene (meta)	0.0023	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1-butene	0.0111	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1-hexene	0.0028	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1-methyl-3-ethylbenzene (m-ethyltoluene)	0.0016	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1-methyl-3-propylbenzene	0.0016	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1-methylcyclopentene	0.0003	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1-pentene	0.0041	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1-propyne	0.0024	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	1-undecene	0.0014	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,2,4-trimethylpentane	0.015	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,2,5-trimethylhexane	0.0024	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,2-dimethylbutane	0.0022	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,3,3-trimethylpentane	0.0042	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,3,4-trimethylpentane	0.0026	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,3,5-trimethylhexane	0.0008	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,3-dimethylbutane	0.0098	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,3-dimethyloctane	0.0052	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,4,4-trimethyl-1-pentene	0.0173	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,4-dimethylheptane	0.0008	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,4-dimethylhexane	0.0042	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,4-dimethylpentane	0.0064	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,5-dimethylheptane	0.0013	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2,6-dimethyloctane	0.0007	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2-methyl-2-butene	0.0011	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2-methyl-2-pentene	0.0034	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2-methyldecane	0.0063	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2-methylheptane	0.0026	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2-methyloctane	0.0004	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	2-methylpentane	0.0281	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	3-methyl-1-butene	0.0014	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	3-methylheptane	0.0035	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	3-methyloctane	0.0031	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	3-methylpentane	0.0154	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	4-methylheptane	0.0025	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	4-methyloctane	0.0039	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	4-phenyl-1-butene	0.0026	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	acetylene	0.0266	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	benzene	0.0175	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	cis-1,4-dimethylcyclohexane	0.0008	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	cis-2-butene	0.0067	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	cis-2-hexene	0.0011	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	cis-2-pentene	0.0097	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	cyclohexene	0.0158	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	cyclopentane	0.0048	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	cyclopentene	0.0029	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	cyclopentylcyclopentane	0.0046	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	ethane	0.0069	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	ethylbenzene	0.0067	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	ethylene	0.0435	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	hexyne	0.0002	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	indan	0.0032	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	isobutane	0.0343	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G

Air Pollutant Speciation Profiles

Source	Analysis	Reference Pollutant	TAP	Mass Fraction	Source
GSE: Gasoline, LPG and CNG	Organics	VOC	isopentane	0.1104	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	isoprene	0.001	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	methane	0.0245	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	methylcyclohexane	0.0026	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	methylcyclooctane	0.0033	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	methylcyclopentane	0.0111	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	m-xylene	0.0186	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	n-butane	0.2242	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	n-butylbenzene	0.0021	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	n-decane	0.0011	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	n-heptane	0.0073	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	n-hexane	0.0153	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	n-nonane	0.0011	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	n-octane	0.0024	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	n-pentane	0.0486	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	n-propylbenzene	0.0031	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	n-undecane	0.0014	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	o-xylene	0.0091	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	pentyne	0.0019	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	propylene	0.0157	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	t-1-phenylbutene	0.0023	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	t-2-nonene	0.0017	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	toluene	0.0298	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	trans-2-butene	0.0089	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	trans-2-pentene	0.0082	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
GSE: Gasoline, LPG and CNG	Organics	VOC	xylene (m-, o-, p-)	0.0277	[FLEET].[dbo].[STN_MASSFRAC] from AEDT3G
Onroad Diesel Vehicles	Organics	TOG	1,3-butadiene	0.000580346	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Organics	TOG	acetaldehyde	0.029975698	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Organics	TOG	acrolein	0.003339779	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Organics	TOG	benzene	0.001717321	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Organics	TOG	ethylbenzene	0.006795347	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Organics	TOG	formaldehyde	0.032507736	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Organics	TOG	naphthalene	0.002438568	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Organics	TOG	propionaldehyde	0.002488791	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Organics	TOG	styrene	0.000255296	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Organics	TOG	toluene	0.011569249	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Organics	TOG	xylene (m-, o-, p-)	0.047939912	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	1,3-butadiene	0.001672226	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	acetaldehyde	0.004505357	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	acrolein	0.000243594	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	benzene	0.015579623	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	ethylbenzene	0.016567658	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	formaldehyde	0.003199737	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	naphthalene	0.000605759	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	propionaldehyde	0.000173373	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	styrene	0.000249711	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	toluene	0.122201131	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Organics	TOG	xylene (m-, o-, p-)	0.061650223	Onroad Default Scale Inventory from MOVES5.0.1
Aircraft: Piston	Particulates	SO2	lead	0.57995029	ASTM D910 fuel standards & AEDT3G defaults
Aircraft: Turbine and APU	Particulates	SO2	aluminum	0	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	barium	2.20588E-15	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	calcium	4.08088E-13	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	chromium	1.91176E-14	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	copper	3.67647E-15	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	iron	1.54412E-13	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	lead	8.08824E-15	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	magnesium	0	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	manganese	4.41176E-15	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	nickel	0	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	niobium	0	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	potassium	0	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	scandium	8.08824E-15	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	selenium	0	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	strontium	8.82353E-15	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	sulfur	8.97059E-13	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	tin	7.35294E-15	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	titanium	7.35294E-14	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	vanadium	0	U.S. Navy. 2000. Trace Element and...
Aircraft: Turbine and APU	Particulates	SO2	zirconium	1.17647E-14	U.S. Navy. 2000. Trace Element and...
Boiler/Space Heater: Natural Gas and LPG	Particulates	PM10	—	0	—

Air Pollutant Speciation Profiles

Source	Analysis	Reference Pollutant	TAP	Mass Fraction	Source
Emergency Generator: Distillate Oil (Diesel)	Particulates	PM10	diesel particulate matter	1	—
Fuel Tank: Jet Kerosene, Distillate Oil and Residual Oil	Particulates	PM10	—	0	—
GSE: Diesel	Particulates	PM10	diesel particulate matter	1	—
GSE: Gasoline, LPG and CNG	Particulates	PM10	arsenic	0.000487213	Onroad Default Scale Inventory from MOVES5.0.1
GSE: Gasoline, LPG and CNG	Particulates	PM10	chromium VI	4.35011E-06	Onroad Default Scale Inventory from MOVES5.0.1
GSE: Gasoline, LPG and CNG	Particulates	PM10	naphthalene	4.35011E-05	Onroad Default Scale Inventory from MOVES5.0.1
GSE: Gasoline, LPG and CNG	Particulates	PM10	nickel	0.000317558	Onroad Default Scale Inventory from MOVES5.0.1
GSE: Gasoline, LPG and CNG	Particulates	PM10	diesel particulate matter	1	Onroad Default Scale Inventory from MOVES5.0.1
GSE: Gasoline, LPG and CNG	Particulates	PM10	sulfates	0.020293285	Onroad Default Scale Inventory from MOVES5.0.1
GSE: Gasoline, LPG and CNG	Particulates	PM10	manganese	0	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Particulates	PM10	arsenic	0.00013646	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Particulates	PM10	chromium VI	0	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Particulates	PM10	naphthalene	0	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Particulates	PM10	nickel	2.92415E-05	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Particulates	PM10	diesel particulate matter	1	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Particulates	PM10	sulfates	0.155788838	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Diesel Vehicles	Particulates	PM10	manganese	0	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Particulates	PM10	arsenic	0.000487213	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Particulates	PM10	chromium VI	4.35011E-06	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Particulates	PM10	naphthalene	4.35011E-05	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Particulates	PM10	nickel	0.000317558	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Particulates	PM10	diesel particulate matter	1	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Particulates	PM10	sulfates	0.020293285	Onroad Default Scale Inventory from MOVES5.0.1
Onroad Gasoline Vehicles	Particulates	PM10	manganese	0	Onroad Default Scale Inventory from MOVES5.0.1
Construction Dust	Organics	VOC	—	0	—
Construction Dust	Particulates	PM10	aluminum	0.112554	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	antimony	0.000071	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	arsenic	0.000006	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	barium	0.001048	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	cadmium	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	calcium	0.043428	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	chloride ion	0.00042	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	chromium	0.000009	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	cobalt	0.000029	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	copper	0.000088	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	total carbon	0.040881	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	gallium	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	gold	0.00001	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	indium	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	iron	0.041924	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	lanthanum	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	lead	0.000059	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	magnesium	0.006068	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	manganese	0.001008	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	mercury	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	molybdenum	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	nickel	0.00001	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	nitrate	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	organic carbon	0.039937	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	palladium	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	phosphate	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	phosphorus	0.000763	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	potassium	0.032434	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	rubidium	0.000149	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	selenium	0.000003	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	silicon	0.34906	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	silver	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	sodium	0.006762	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	strontium	0.000519	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	sulfate	0.001469	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	sulfur	0.001032	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	thallium	0.000006	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	tin	0.000048	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	titanium	0.004173	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	uranium	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	vanadium	0.000084	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	yttrium	0.000025	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	zinc	0.00022	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	zirconium	0.000126	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	ammonium	0.000661	Profile 4158 from SPECIATE v5.4

Air Pollutant Speciation Profiles

Source	Analysis	Reference Pollutant	TAP	Mass Fraction	Source
Construction Dust	Particulates	PM10	sodium ion	0.000876	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	carbonate	0.008217	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	organic carbon ii	0.003972	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	organic carbon iii	0.016734	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	organic carbon iv	0.01215	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	pyrolyzed organic carbon	0.00708	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	elemental carbon i	0.006031	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	chlorine atom	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	elemental carbon iii	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	elemental carbon	0.000944	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	bromine atom	0.000006	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	organic carbon i	0	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	elemental carbon ii	0.001993	Profile 4158 from SPECIATE v5.4
Construction Dust	Particulates	PM10	potassium ion	0.000187	Profile 4158 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	1-butene	0.059	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	benzene	0.095	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	ethane	0.046	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	ethylene	0.02	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	isobutane	0.112	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	methane	0.157	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	n-butane	0.101	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	n-hexane	0.088	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	n-pentane	0.053	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	propane	0.055	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	propylene	0.039	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	c-7 cycloparaffins	0.037	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	isomers of hexane	0.081	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Organics	VOC	isomers of pentane	0.057	Profile 26 from SPECIATE v5.4
Asphaltic Concrete - In Place Road Asphalt	Particulates	PM10	—	0	—

Sources:

U.S. Environmental Protection Agency/Federal Aviation Administration. 2009. *Recommended Best Practice for Quantifying Speciated Organic Gas Emissions from Aircraft Equipped with Turbofan, Turbojet, and Turboprop Engines, Version 1.0, EPA-420-R-09-901.*

U.S. Environmental Protection Agency. 2025. *Motor Vehicle Emissions Simulator (MOVES) Version 5.0.1* .

U.S. Environmental Protection Agency. 2025. *SPECIATE Version 5.4* .

U.S. Federal Aviation Administration. 2025. *Aviation Environmental Design Tool (AEDT) Version 3G* .

U.S. Navy. 2000. *Trace Element and Polycyclic Aromatic Hydrocarbon Analyses of Jet Engine Fuels: Jet A, JP5, and JP8* , Technical Report 1845.

Appendix C Human Health Risk Assessment Calculation Summaries

Acute Hazards[6]

- Child Resident
- Adult Resident
- School Child
- Adult Off-Site Worker

Chronic Non-Cancer Hazards

- Child Resident
- Adult Resident
- School Child
- Adult Off-Site Worker

Chronic Cancer Risks

- Child Resident
- Adult Resident
- School Child
- Adult Off-Site Worker

[6] The absolute acute hazard quotient values do not change, but the location evaluated differ by receptor.

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1	4.2E-04	1.6E-03	2.9E-03	4.1E-03	4.0E-03	4.6E-03	1.7E-03	9.2E-03	1.1E-02	1.4E-02	1.7E-02	2.0E-02	2.3E-02
2	7.7E-04	1.5E-03	2.6E-03	2.6E-03	2.7E-03	2.2E-03	2.1E-03	-8.7E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.4E-02
3	3.6E-03	6.2E-03	6.7E-03	8.5E-03	1.4E-02	1.4E-02	1.3E-02	5.3E-03	7.3E-03	2.0E-02	3.3E-02	4.5E-02	5.8E-02
4	3.1E-03	5.3E-03	4.8E-03	6.0E-03	1.0E-02	9.8E-03	9.2E-03	9.5E-03	1.5E-02	2.9E-02	4.3E-02	5.7E-02	7.1E-02
5	1.4E-03	2.5E-03	3.9E-03	4.1E-03	6.7E-03	6.4E-03	6.1E-03	2.5E-03	4.2E-03	9.7E-03	1.5E-02	2.1E-02	2.6E-02
6	5.3E-04	1.4E-03	2.8E-03	3.5E-03	3.6E-03	2.0E-03	1.8E-03	-2.2E-02	-2.2E-02	-2.1E-02	-1.9E-02	-1.8E-02	-1.7E-02
7	1.1E-03	1.9E-03	3.2E-03	3.4E-03	3.3E-03	3.0E-03	2.9E-03	-3.9E-02	-2.9E-02	-1.8E-02	-6.2E-03	5.4E-03	1.7E-02
8	7.4E-04	1.1E-03	1.2E-03	1.2E-03	1.5E-03	1.2E-03	1.1E-03	-2.4E-03	-5.5E-04	1.9E-03	4.3E-03	6.8E-03	9.2E-03
9	1.6E-03	2.1E-03	3.2E-03	5.2E-03	5.3E-03	4.9E-03	4.9E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
10	5.2E-04	1.3E-03	2.1E-03	2.3E-03	2.4E-03	1.5E-03	1.3E-03	-3.3E-02	-3.3E-02	-3.3E-02	-3.2E-02	-3.2E-02	-3.1E-02
11	4.9E-04	1.7E-03	2.7E-03	3.4E-03	3.5E-03	2.1E-03	1.9E-03	1.2E-02	2.4E-03	-5.9E-03	-1.4E-02	-2.2E-02	-3.1E-02
12	4.8E-04	1.2E-03	2.0E-03	2.6E-03	2.2E-03	1.7E-03	1.6E-03	-4.7E-03	-6.1E-03	-6.7E-03	-7.2E-03	-7.7E-03	-8.2E-03
13	1.9E-03	3.3E-03	3.8E-03	4.3E-03	7.1E-03	7.0E-03	6.6E-03	-2.7E-02	-2.2E-02	-1.2E-02	-1.2E-03	9.0E-03	1.9E-02
14	4.8E-04	1.1E-03	2.2E-03	2.5E-03	1.9E-03	1.5E-03	1.5E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02	-9.6E-03
15	1.1E-03	4.2E-03	8.5E-03	1.2E-02	1.6E-02	6.1E-03	5.6E-03	3.5E-02	3.8E-02	4.4E-02	5.0E-02	5.6E-02	6.2E-02
16	3.6E-04	7.3E-04	9.3E-04	1.1E-03	1.0E-03	9.0E-04	9.0E-04	-1.5E-02	-1.3E-02	-1.1E-02	-8.3E-03	-5.9E-03	-3.4E-03
17	1.3E-03	1.5E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.4E-02	-1.0E-02	-6.1E-03	-2.0E-03	2.0E-03	6.1E-03
18	1.4E-03	1.6E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	1.9E-03	-1.5E-02	-1.0E-02	-5.6E-03	-7.0E-04	4.2E-03	9.0E-03
19	1.0E-03	1.3E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.5E-02	-1.1E-02	-6.8E-03	-2.6E-03	1.7E-03	6.0E-03
20	3.7E-04	1.2E-03	1.9E-03	2.1E-03	2.6E-03	1.9E-03	1.4E-03	-3.0E-02	-3.1E-02	-3.2E-02	-3.4E-02	-3.5E-02	-3.6E-02
21	1.2E-03	1.6E-03	1.8E-03	1.3E-03	1.3E-03	1.2E-03	1.1E-03	-1.1E-02	-8.6E-03	-6.2E-03	-3.7E-03	-1.3E-03	1.2E-03
22	3.5E-04	9.8E-04	1.2E-03	8.3E-04	7.6E-04	6.8E-04	6.8E-04	-1.0E-02	-8.1E-03	-5.7E-03	-3.3E-03	-9.4E-04	1.4E-03
23	1.5E-03	1.6E-03	3.1E-03	4.2E-03	4.3E-03	4.1E-03	4.1E-03	-1.9E-02	-1.5E-02	-8.4E-03	-2.1E-03	4.1E-03	1.0E-02
24	1.7E-03	2.2E-03	5.1E-03	5.9E-03	6.8E-03	5.4E-03	5.2E-03	1.9E-02	1.9E-02	2.1E-02	2.4E-02	2.6E-02	2.9E-02
25	1.5E-03	1.5E-03	2.9E-03	4.0E-03	4.1E-03	3.9E-03	3.9E-03	-1.4E-02	-1.1E-02	-6.3E-03	-1.8E-03	2.8E-03	7.4E-03
26	1.5E-03	2.2E-03	4.5E-03	4.9E-03	6.8E-03	6.1E-03	5.8E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02	2.5E-02
27	9.2E-04	5.1E-03	5.2E-03	7.1E-03	8.3E-03	4.2E-03	3.9E-03	2.7E-02	3.0E-02	3.5E-02	4.0E-02	4.5E-02	5.0E-02
28	9.1E-04	1.8E-03	5.5E-03	7.2E-03	7.2E-03	5.0E-03	4.7E-03	3.3E-04	9.0E-03	2.1E-02	3.2E-02	4.4E-02	5.6E-02
29	8.5E-04	1.1E-03	2.2E-03	2.7E-03	3.4E-03	3.1E-03	3.0E-03	-2.5E-03	-1.5E-03	1.4E-03	4.3E-03	7.2E-03	1.0E-02
30	3.0E-03	3.3E-03	5.8E-03	1.0E-02	1.1E-02	1.0E-02	1.0E-02	-1.9E-02	-1.7E-02	-1.1E-02	-3.9E-03	2.9E-03	9.6E-03
31	2.0E-03	2.1E-03	2.4E-03	4.2E-03	4.5E-03	4.2E-03	4.2E-03	-2.8E-02	-2.2E-02	-1.4E-02	-6.8E-03	8.6E-04	8.5E-03
32	7.5E-04	3.6E-03	5.8E-03	5.1E-03	4.4E-03	2.5E-03	2.2E-03	2.3E-02	2.3E-02	2.5E-02	2.6E-02	2.8E-02	2.9E-02
33	1.0E-03	1.7E-03	3.6E-03	4.0E-03	6.0E-03	5.6E-03	5.2E-03	-2.5E-02	-2.4E-02	-1.9E-02	-1.5E-02	-1.1E-02	-6.2E-03
34	6.2E-04	7.9E-04	7.6E-04	9.5E-04	2.1E-03	8.5E-04	7.6E-04	-1.1E-02	-9.3E-03	-7.4E-03	-5.4E-03	-3.5E-03	-1.5E-03
35	1.9E-03	2.4E-03	2.7E-03	1.5E-03	1.4E-03	1.7E-03	1.2E-03	-2.1E-02	-1.9E-02	-1.5E-02	-1.2E-02	-9.4E-03	-6.3E-03
36	1.9E-03	2.8E-03	4.2E-03	5.7E-03	5.9E-03	5.6E-03	5.6E-03	-1.9E-02	-1.0E-02	1.1E-03	1.3E-02	2.4E-02	3.6E-02
37	1.7E-03	2.1E-03	1.1E-03	7.5E-04	8.3E-04	1.1E-03	4.9E-04	-9.7E-03	-9.6E-03	-9.2E-03	-8.8E-03	-8.4E-03	-7.9E-03
38	6.7E-04	2.8E-03	4.3E-03	4.6E-03	3.9E-03	2.4E-03	2.1E-03	-4.5E-02	-4.0E-02	-3.4E-02	-2.8E-02	-2.1E-02	-1.5E-02
39	9.0E-04	1.1E-03	1.2E-03	1.1E-03	1.3E-03	9.6E-04	9.2E-04	1.5E-03	2.7E-03	4.4E-03	6.1E-03	7.8E-03	9.5E-03
40	6.0E-04	1.1E-03	1.1E-03	1.4E-03	1.8E-03	1.5E-03	1.4E-03	-2.1E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02
41	1.6E-03	1.8E-03	1.7E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	-1.3E-02	-1.0E-02	-6.6E-03	-3.1E-03	4.6E-04	4.0E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
42	8.5E-04	1.0E-03	1.1E-03	9.5E-04	1.2E-03	8.2E-04	7.8E-04	7.9E-04	2.0E-03	3.5E-03	5.1E-03	6.6E-03	8.2E-03
43	7.4E-04	1.0E-03	1.2E-03	8.5E-04	1.0E-03	7.2E-04	6.3E-04	-1.0E-03	3.2E-04	2.0E-03	3.7E-03	5.4E-03	7.0E-03
44	1.1E-03	1.3E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.4E-02	-1.1E-02	-6.5E-03	-2.3E-03	1.8E-03	6.0E-03
45	1.4E-03	2.4E-03	2.4E-03	1.2E-03	1.1E-03	9.6E-04	9.0E-04	-1.8E-02	-1.6E-02	-1.4E-02	-1.1E-02	-9.1E-03	-6.8E-03
46	1.7E-03	3.3E-03	4.1E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-1.6E-02	-8.9E-03	1.9E-03	1.3E-02	2.4E-02	3.4E-02
47	1.7E-03	3.3E-03	4.1E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-1.6E-02	-8.9E-03	1.9E-03	1.3E-02	2.4E-02	3.4E-02
48	7.7E-04	1.9E-03	2.8E-03	3.8E-03	4.2E-03	3.6E-03	3.3E-03	-2.3E-02	-1.9E-02	-1.3E-02	-7.2E-03	-1.0E-03	5.1E-03
49	5.1E-04	2.0E-03	2.6E-03	3.9E-03	3.5E-03	3.0E-03	2.8E-03	-1.2E-02	-7.3E-03	-3.3E-04	6.6E-03	1.4E-02	2.0E-02
50	5.7E-04	1.8E-03	3.3E-03	4.1E-03	4.2E-03	2.4E-03	2.2E-03	-6.2E-02	-6.0E-02	-5.7E-02	-5.3E-02	-5.0E-02	-4.6E-02
51	2.5E-03	4.1E-03	3.7E-03	4.4E-03	7.0E-03	6.9E-03	6.5E-03	-2.8E-02	-2.8E-02	-2.3E-02	-1.8E-02	-1.2E-02	-7.2E-03
52	1.7E-03	1.8E-03	3.6E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-2.3E-02	-1.6E-02	-5.6E-03	4.5E-03	1.5E-02	2.5E-02
53	6.3E-04	8.9E-04	1.3E-03	1.4E-03	1.9E-03	2.1E-03	9.9E-04	-1.0E-02	-9.0E-03	-7.2E-03	-5.4E-03	-3.6E-03	-1.8E-03
54	9.5E-04	1.3E-03	2.6E-03	2.9E-03	4.3E-03	3.8E-03	3.6E-03	1.9E-03	3.0E-03	6.5E-03	1.0E-02	1.4E-02	1.7E-02
55	4.5E-04	1.0E-03	1.9E-03	2.4E-03	2.7E-03	1.8E-03	1.5E-03	-3.8E-02	-4.0E-02	-4.0E-02	-4.1E-02	-4.2E-02	-4.2E-02
56	2.2E-03	4.0E-03	4.9E-03	5.6E-03	9.3E-03	9.2E-03	8.7E-03	-4.6E-02	-3.8E-02	-2.3E-02	-8.3E-03	6.5E-03	2.1E-02
57	5.0E-04	8.9E-04	1.2E-03	1.2E-03	2.0E-03	9.1E-04	8.7E-04	-3.7E-03	-2.9E-03	-1.7E-03	-4.7E-04	7.4E-04	2.0E-03
58	2.5E-03	2.8E-03	2.8E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02
59	7.8E-04	1.5E-03	2.8E-03	3.2E-03	4.7E-03	4.2E-03	3.9E-03	-1.4E-02	-1.4E-02	-1.2E-02	-9.3E-03	-6.8E-03	-4.2E-03
60	3.5E-04	8.4E-04	1.0E-03	1.0E-03	9.6E-04	8.7E-04	8.7E-04	-1.5E-02	-1.3E-02	-1.0E-02	-7.6E-03	-5.0E-03	-2.5E-03
61	4.4E-04	1.3E-03	2.4E-03	2.6E-03	2.8E-03	2.0E-03	1.7E-03	2.0E-03	3.1E-03	4.9E-03	6.8E-03	8.6E-03	1.0E-02
62	3.3E-03	3.5E-03	5.8E-03	9.8E-03	1.0E-02	9.6E-03	9.6E-03	-8.6E-03	-1.1E-02	-7.5E-03	-4.2E-03	-8.5E-04	2.5E-03
63	8.6E-04	1.3E-03	2.6E-03	2.9E-03	4.1E-03	3.6E-03	3.4E-03	9.0E-04	2.5E-04	1.8E-03	3.4E-03	5.0E-03	6.5E-03
64	2.1E-03	2.3E-03	2.3E-03	1.6E-03	1.6E-03	1.4E-03	1.4E-03	-1.9E-02	-1.6E-02	-1.1E-02	-7.2E-03	-3.0E-03	1.3E-03
65	8.9E-04	1.8E-03	5.3E-03	6.8E-03	6.8E-03	5.3E-03	5.0E-03	-3.4E-03	3.7E-03	1.4E-02	2.4E-02	3.4E-02	4.5E-02
66	2.2E-03	4.0E-03	4.9E-03	5.6E-03	9.4E-03	9.2E-03	8.7E-03	-4.6E-02	-3.8E-02	-2.3E-02	-8.2E-03	6.7E-03	2.1E-02
67	1.2E-03	1.7E-03	2.7E-03	3.5E-03	3.6E-03	3.2E-03	3.0E-03	-4.5E-02	-3.9E-02	-3.0E-02	-2.1E-02	-1.3E-02	-4.1E-03
68	5.3E-04	1.4E-03	2.8E-03	3.5E-03	3.5E-03	1.9E-03	1.8E-03	-3.1E-02	-2.9E-02	-2.5E-02	-2.2E-02	-1.8E-02	-1.5E-02
69	1.8E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	1.6E-03	1.6E-03	-1.4E-02	-9.8E-03	-5.0E-03	-2.4E-04	4.6E-03	9.3E-03
70	1.7E-03	1.8E-03	3.6E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-2.3E-02	-1.6E-02	-5.5E-03	4.5E-03	1.5E-02	2.5E-02
71	9.5E-04	3.3E-03	5.2E-03	5.7E-03	4.5E-03	3.0E-03	2.9E-03	-8.6E-02	-8.0E-02	-7.3E-02	-6.5E-02	-5.8E-02	-5.1E-02
72	1.4E-03	1.8E-03	2.8E-03	3.7E-03	3.9E-03	3.7E-03	3.7E-03	-2.5E-02	-2.1E-02	-1.5E-02	-9.2E-03	-3.3E-03	2.7E-03
73	3.4E-03	5.8E-03	5.9E-03	7.5E-03	1.3E-02	1.2E-02	1.2E-02	-3.7E-03	1.3E-03	1.6E-02	3.1E-02	4.5E-02	6.0E-02
74	1.1E-03	1.4E-03	1.5E-03	1.0E-03	2.0E-03	8.6E-04	8.3E-04	-2.8E-03	-1.2E-03	6.1E-04	2.4E-03	4.3E-03	6.1E-03
75	1.1E-03	8.7E-03	8.6E-03	9.3E-03	9.4E-03	3.8E-03	3.8E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.9E-02
76	7.2E-04	1.4E-03	2.5E-03	3.5E-03	3.8E-03	3.1E-03	2.9E-03	-2.3E-02	-2.0E-02	-1.6E-02	-1.1E-02	-6.2E-03	-1.5E-03
77	1.4E-03	1.5E-03	2.4E-03	3.9E-03	4.0E-03	3.7E-03	3.7E-03	-1.6E-02	-1.9E-02	-2.0E-02	-2.0E-02	-2.1E-02	-2.2E-02
78	3.4E-03	8.0E-03	8.4E-03	8.9E-03	1.0E-02	8.3E-03	8.3E-03	-1.0E-02	4.6E-03	2.6E-02	4.7E-02	6.8E-02	9.0E-02
79	1.7E-03	2.0E-03	3.2E-03	5.0E-03	5.1E-03	4.7E-03	4.7E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
80	7.6E-04	9.9E-04	5.1E-04	6.5E-04	5.4E-04	4.9E-04	4.8E-04	-3.2E-03	-2.6E-03	-1.8E-03	-9.1E-04	-3.8E-05	8.3E-04
81	3.9E-04	1.1E-03	1.3E-03	1.2E-03	1.2E-03	9.7E-04	9.7E-04	-1.6E-02	-1.4E-02	-1.1E-02	-8.8E-03	-6.3E-03	-3.7E-03
82	2.5E-03	2.9E-03	5.0E-03	8.8E-03	9.3E-03	8.7E-03	8.6E-03	-8.2E-03	-1.0E-02	-7.6E-03	-5.0E-03	-2.5E-03	7.3E-05

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
83	1.9E-03	2.0E-03	2.1E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.0E-02	-6.7E-03	-3.4E-03	-1.4E-05	3.3E-03
84	7.4E-04	3.8E-03	6.2E-03	8.2E-03	5.7E-03	2.6E-03	2.5E-03	1.5E-02	1.4E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02
85	8.5E-04	4.0E-03	6.0E-03	6.4E-03	5.3E-03	3.2E-03	2.8E-03	-1.1E-01	-1.0E-01	-9.2E-02	-8.4E-02	-7.6E-02	-6.7E-02
86	3.2E-03	5.4E-03	5.0E-03	6.3E-03	1.1E-02	1.0E-02	9.7E-03	1.1E-02	1.6E-02	3.0E-02	4.3E-02	5.7E-02	7.0E-02
87	3.3E-04	7.8E-04	9.7E-04	9.4E-04	8.7E-04	7.8E-04	7.8E-04	-1.4E-02	-1.2E-02	-9.0E-03	-6.4E-03	-3.8E-03	-1.2E-03
88	1.1E-03	9.5E-03	1.3E-02	1.3E-02	1.0E-02	4.9E-03	4.3E-03	-6.7E-02	-5.9E-02	-4.8E-02	-3.8E-02	-2.7E-02	-1.6E-02
89	1.1E-03	3.5E-03	6.2E-03	8.6E-03	8.4E-03	5.1E-03	4.7E-03	2.1E-02	2.7E-02	3.7E-02	4.6E-02	5.6E-02	6.6E-02
90	1.3E-03	1.7E-03	1.1E-03	6.9E-04	7.0E-04	9.9E-04	4.4E-04	-1.3E-02	-1.2E-02	-1.0E-02	-9.2E-03	-8.0E-03	-6.8E-03
91	1.3E-03	1.7E-03	1.1E-03	7.0E-04	7.0E-04	9.9E-04	4.5E-04	-1.2E-02	-1.2E-02	-1.0E-02	-9.1E-03	-7.8E-03	-6.6E-03
92	9.6E-04	1.6E-03	3.0E-03	3.8E-03	5.0E-03	4.6E-03	4.3E-03	-2.9E-02	-2.5E-02	-1.9E-02	-1.3E-02	-6.7E-03	-5.4E-04
93	3.1E-04	7.3E-04	9.2E-04	8.9E-04	8.2E-04	7.4E-04	7.3E-04	-1.3E-02	-1.1E-02	-8.3E-03	-5.7E-03	-3.2E-03	-6.4E-04
94	9.4E-04	1.4E-03	1.5E-03	1.1E-03	1.4E-03	1.1E-03	9.6E-04	-2.6E-03	-8.4E-04	1.3E-03	3.4E-03	5.5E-03	7.6E-03
95	1.3E-03	1.7E-03	1.1E-03	6.9E-04	7.1E-04	9.9E-04	4.4E-04	-1.3E-02	-1.2E-02	-1.0E-02	-9.3E-03	-8.1E-03	-6.9E-03
96	6.9E-04	2.3E-03	3.6E-03	4.5E-03	4.7E-03	2.3E-03	2.2E-03	5.3E-03	-5.3E-03	-1.4E-02	-2.3E-02	-3.3E-02	-4.2E-02
97	3.2E-04	6.0E-04	8.2E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-6.6E-03	-7.0E-03	-7.2E-03	-7.4E-03	-7.5E-03	-7.7E-03
98	3.2E-04	6.0E-04	8.2E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-6.7E-03	-7.1E-03	-7.2E-03	-7.4E-03	-7.5E-03	-7.7E-03
99	4.7E-04	1.0E-03	2.0E-03	2.2E-03	1.7E-03	1.4E-03	1.4E-03	-8.8E-03	-9.0E-03	-8.7E-03	-8.4E-03	-8.1E-03	-7.7E-03
100	1.4E-03	2.6E-03	3.7E-03	3.8E-03	6.4E-03	6.2E-03	5.9E-03	-8.2E-03	-3.5E-03	5.0E-03	1.3E-02	2.2E-02	3.0E-02
101	6.7E-04	2.5E-03	4.4E-03	5.7E-03	3.7E-03	2.1E-03	1.9E-03	1.5E-02	1.9E-02	2.3E-02	2.8E-02	3.3E-02	3.7E-02
102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
111	2.3E-03	2.6E-02	2.6E-02	2.6E-02	1.7E-02	7.7E-03	7.4E-03	-7.8E-02	-7.0E-02	-5.7E-02	-4.4E-02	-3.1E-02	-1.8E-02
112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
113	2.5E-03	2.4E-02	2.4E-02	2.4E-02	2.2E-02	8.0E-03	7.8E-03	-9.4E-02	-8.6E-02	-7.3E-02	-6.0E-02	-4.7E-02	-3.3E-02
114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
115	2.7E-03	2.4E-02	2.4E-02	2.4E-02	2.1E-02	8.4E-03	8.1E-03	-9.9E-02	-9.4E-02	-8.5E-02	-7.6E-02	-6.7E-02	-5.7E-02
116	2.9E-03	1.9E-02	1.9E-02	1.9E-02	1.9E-02	8.7E-03	8.4E-03	-1.0E-01	-9.7E-02	-8.9E-02	-8.1E-02	-7.3E-02	-6.5E-02
117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
118	2.9E-03	2.4E-02	2.4E-02	2.3E-02	1.8E-02	8.8E-03	8.5E-03	-9.6E-02	-9.3E-02	-8.6E-02	-7.9E-02	-7.2E-02	-6.4E-02
119	3.1E-03	2.1E-02	2.1E-02	2.0E-02	1.6E-02	9.0E-03	8.7E-03	-9.1E-02	-8.8E-02	-8.1E-02	-7.3E-02	-6.6E-02	-5.8E-02
120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
121	3.1E-03	2.0E-02	2.0E-02	1.9E-02	1.6E-02	9.2E-03	8.9E-03	-7.5E-02	-7.4E-02	-6.8E-02	-6.2E-02	-5.6E-02	-4.9E-02
122	3.3E-03	1.9E-02	1.9E-02	1.9E-02	1.4E-02	9.4E-03	9.1E-03	-6.5E-02	-6.3E-02	-5.7E-02	-5.0E-02	-4.3E-02	-3.7E-02
123	3.4E-03	1.8E-02	1.8E-02	1.7E-02	1.3E-02	9.5E-03	9.2E-03	-5.5E-02	-5.3E-02	-4.6E-02	-4.0E-02	-3.3E-02	-2.6E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
125	3.3E-03	1.6E-02	1.7E-02	1.7E-02	1.7E-02	9.5E-03	9.2E-03	-4.3E-02	-4.0E-02	-3.3E-02	-2.5E-02	-1.8E-02	-1.0E-02
126	3.5E-03	1.5E-02	1.5E-02	1.5E-02	1.3E-02	9.7E-03	9.4E-03	-3.7E-02	-3.4E-02	-2.5E-02	-1.7E-02	-8.9E-03	-6.4E-04
127	3.6E-03	1.6E-02	1.6E-02	1.5E-02	1.2E-02	9.8E-03	9.5E-03	-3.2E-02	-2.8E-02	-1.9E-02	-1.0E-02	-1.4E-03	7.6E-03
128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
129	3.5E-03	1.5E-02	1.7E-02	1.7E-02	1.7E-02	9.9E-03	9.6E-03	-8.0E-03	-1.6E-03	9.7E-03	2.1E-02	3.2E-02	4.4E-02
130	3.7E-03	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.0E-02	9.8E-03	-8.2E-03	-2.7E-03	8.3E-03	1.9E-02	3.0E-02	4.1E-02
131	3.7E-03	1.3E-02	1.3E-02	1.2E-02	1.3E-02	1.0E-02	9.8E-03	-7.1E-03	-2.1E-03	8.8E-03	2.0E-02	3.1E-02	4.2E-02
132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
133	3.8E-03	1.3E-02	1.5E-02	1.5E-02	1.5E-02	1.0E-02	1.0E-02	2.0E-02	3.1E-02	4.7E-02	6.4E-02	8.0E-02	9.6E-02
134	3.9E-03	1.2E-02	1.4E-02	1.4E-02	1.4E-02	1.0E-02	1.0E-02	1.5E-02	2.4E-02	3.9E-02	5.4E-02	6.9E-02	8.4E-02
135	3.9E-03	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.0E-02	1.0E-02	1.1E-02	1.8E-02	3.2E-02	4.5E-02	5.9E-02	7.2E-02
136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
137	4.0E-03	1.1E-02	1.4E-02	1.4E-02	1.4E-02	1.1E-02	1.0E-02	3.6E-02	4.9E-02	6.8E-02	8.7E-02	1.1E-01	1.3E-01
138	4.0E-03	1.1E-02	1.3E-02	1.3E-02	1.3E-02	1.1E-02	1.0E-02	2.7E-02	3.9E-02	5.6E-02	7.4E-02	9.2E-02	1.1E-01
139	4.0E-03	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.1E-02	1.0E-02	2.0E-02	2.9E-02	4.5E-02	6.1E-02	7.6E-02	9.2E-02
140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
141	4.2E-03	9.6E-03	1.4E-02	1.4E-02	1.4E-02	1.1E-02	1.1E-02	4.7E-02	5.8E-02	7.5E-02	9.2E-02	1.1E-01	1.3E-01
142	4.2E-03	9.9E-03	1.3E-02	1.3E-02	1.4E-02	1.1E-02	1.1E-02	4.0E-02	4.9E-02	6.5E-02	8.1E-02	9.6E-02	1.1E-01
143	4.1E-03	9.6E-03	1.2E-02	1.2E-02	1.3E-02	1.1E-02	1.1E-02	3.1E-02	4.0E-02	5.5E-02	7.0E-02	8.6E-02	1.0E-01
144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
145	4.4E-03	9.1E-03	1.4E-02	1.4E-02	1.5E-02	1.2E-02	1.1E-02	5.7E-02	6.8E-02	8.6E-02	1.0E-01	1.2E-01	1.4E-01
146	4.4E-03	8.6E-03	1.2E-02	1.3E-02	1.4E-02	1.2E-02	1.1E-02	4.4E-02	5.4E-02	7.2E-02	8.9E-02	1.1E-01	1.2E-01
147	4.2E-03	8.7E-03	1.1E-02	1.2E-02	1.4E-02	1.1E-02	1.1E-02	3.4E-02	4.5E-02	6.2E-02	7.9E-02	9.7E-02	1.1E-01
148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
149	4.6E-03	8.7E-03	1.3E-02	1.4E-02	1.5E-02	1.2E-02	1.2E-02	6.0E-02	7.4E-02	9.6E-02	1.2E-01	1.4E-01	1.6E-01
150	4.5E-03	7.6E-03	1.2E-02	1.3E-02	1.4E-02	1.2E-02	1.2E-02	5.0E-02	6.3E-02	8.3E-02	1.0E-01	1.2E-01	1.4E-01
151	4.3E-03	7.8E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	4.1E-02	5.1E-02	7.0E-02	8.8E-02	1.1E-01	1.2E-01
152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
153	4.8E-03	8.2E-03	1.2E-02	1.4E-02	1.5E-02	1.3E-02	1.2E-02	6.4E-02	8.1E-02	1.1E-01	1.3E-01	1.5E-01	1.8E-01
154	4.6E-03	7.5E-03	1.1E-02	1.3E-02	1.5E-02	1.2E-02	1.2E-02	5.2E-02	6.7E-02	9.0E-02	1.1E-01	1.4E-01	1.6E-01
155	4.3E-03	6.8E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	3.9E-02	5.4E-02	7.6E-02	9.8E-02	1.2E-01	1.4E-01
156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
157	4.9E-03	7.5E-03	1.1E-02	1.4E-02	1.5E-02	1.3E-02	1.2E-02	6.3E-02	8.2E-02	1.1E-01	1.4E-01	1.6E-01	1.9E-01
158	4.6E-03	7.3E-03	1.1E-02	1.3E-02	1.5E-02	1.2E-02	1.2E-02	4.5E-02	6.3E-02	8.9E-02	1.1E-01	1.4E-01	1.7E-01
159	4.3E-03	6.5E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	2.8E-02	4.5E-02	7.0E-02	9.5E-02	1.2E-01	1.4E-01
160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
161	5.0E-03	6.8E-03	9.9E-03	1.4E-02	1.6E-02	1.3E-02	1.3E-02	5.7E-02	7.2E-02	9.7E-02	1.2E-01	1.5E-01	1.7E-01
162	4.7E-03	6.9E-03	9.9E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	3.8E-02	5.5E-02	8.1E-02	1.1E-01	1.3E-01	1.6E-01
163	4.3E-03	6.4E-03	9.6E-03	1.2E-02	1.4E-02	1.2E-02	1.1E-02	2.3E-02	4.0E-02	6.5E-02	9.0E-02	1.1E-01	1.4E-01
164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
165	5.1E-03	6.1E-03	9.5E-03	1.4E-02	1.6E-02	1.4E-02	1.3E-02	5.0E-02	6.4E-02	8.7E-02	1.1E-01	1.3E-01	1.6E-01
166	4.7E-03	6.4E-03	9.1E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	3.3E-02	4.7E-02	6.9E-02	9.1E-02	1.1E-01	1.4E-01
167	4.3E-03	7.3E-03	1.1E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	1.5E-02	3.1E-02	5.6E-02	8.0E-02	1.0E-01	1.3E-01
168	6.0E-03	7.6E-03	1.1E-02	1.7E-02	1.9E-02	1.6E-02	1.6E-02	6.1E-02	7.7E-02	1.0E-01	1.3E-01	1.6E-01	1.8E-01
169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
170	5.1E-03	6.1E-03	1.0E-02	1.4E-02	1.6E-02	1.4E-02	1.3E-02	3.8E-02	5.2E-02	7.5E-02	9.9E-02	1.2E-01	1.5E-01
171	4.7E-03	6.7E-03	9.8E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	2.7E-02	4.0E-02	6.1E-02	8.3E-02	1.0E-01	1.3E-01
172	4.2E-03	7.0E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	1.4E-02	2.6E-02	4.6E-02	6.7E-02	8.7E-02	1.1E-01
173	6.1E-03	7.3E-03	1.1E-02	1.7E-02	1.9E-02	1.6E-02	1.6E-02	4.0E-02	5.3E-02	7.7E-02	1.0E-01	1.2E-01	1.5E-01
174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
178	6.2E-03	7.2E-03	1.1E-02	1.7E-02	1.9E-02	1.7E-02	1.6E-02	3.4E-02	4.4E-02	6.6E-02	8.8E-02	1.1E-01	1.3E-01
179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
180	5.1E-03	6.2E-03	9.3E-03	1.4E-02	1.6E-02	1.4E-02	1.3E-02	2.4E-02	3.5E-02	5.7E-02	7.9E-02	1.0E-01	1.2E-01
181	4.5E-03	5.6E-03	9.4E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	2.9E-02	4.0E-02	6.0E-02	8.1E-02	1.0E-01	1.2E-01
182	6.9E-03	8.0E-03	1.2E-02	1.9E-02	2.1E-02	1.9E-02	1.8E-02	3.4E-02	4.3E-02	6.4E-02	8.6E-02	1.1E-01	1.3E-01
183	6.3E-03	7.4E-03	1.1E-02	1.8E-02	2.0E-02	1.7E-02	1.7E-02	2.8E-02	3.8E-02	5.9E-02	8.0E-02	1.0E-01	1.2E-01
184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
185	5.0E-03	6.1E-03	9.3E-03	1.4E-02	1.6E-02	1.4E-02	1.3E-02	1.7E-02	2.8E-02	4.9E-02	7.0E-02	9.1E-02	1.1E-01
186	4.6E-03	5.5E-03	8.9E-03	1.3E-02	1.5E-02	1.2E-02	1.2E-02	1.8E-02	3.0E-02	5.1E-02	7.2E-02	9.3E-02	1.1E-01
187	7.8E-03	8.9E-03	1.3E-02	2.2E-02	2.4E-02	2.1E-02	2.1E-02	3.3E-02	3.9E-02	6.0E-02	8.1E-02	1.0E-01	1.2E-01
188	7.0E-03	8.0E-03	1.2E-02	2.0E-02	2.1E-02	1.9E-02	1.8E-02	2.6E-02	3.3E-02	5.3E-02	7.3E-02	9.3E-02	1.1E-01
189	6.2E-03	7.3E-03	1.1E-02	1.8E-02	2.0E-02	1.7E-02	1.7E-02	2.3E-02	3.0E-02	5.0E-02	6.9E-02	8.8E-02	1.1E-01
190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
191	4.9E-03	5.9E-03	9.1E-03	1.4E-02	1.6E-02	1.3E-02	1.3E-02	1.3E-02	2.3E-02	4.4E-02	6.4E-02	8.5E-02	1.1E-01
192	8.7E-03	9.8E-03	1.4E-02	2.4E-02	2.6E-02	2.4E-02	2.3E-02	1.7E-02	2.0E-02	3.9E-02	5.7E-02	7.6E-02	9.5E-02
193	7.8E-03	8.9E-03	1.3E-02	2.2E-02	2.4E-02	2.1E-02	2.1E-02	2.0E-02	2.3E-02	4.0E-02	5.8E-02	7.5E-02	9.2E-02
194	7.0E-03	8.1E-03	1.2E-02	2.0E-02	2.2E-02	1.9E-02	1.9E-02	2.0E-02	2.5E-02	4.2E-02	5.9E-02	7.7E-02	9.4E-02
195	6.1E-03	7.2E-03	1.1E-02	1.7E-02	1.9E-02	1.7E-02	1.6E-02	1.9E-02	2.5E-02	4.2E-02	6.0E-02	7.7E-02	9.4E-02
196	5.7E-03	6.8E-03	1.0E-02	1.6E-02	1.8E-02	1.6E-02	1.5E-02	1.7E-02	2.3E-02	4.1E-02	5.8E-02	7.6E-02	9.3E-02
197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
198	9.1E-03	1.0E-02	1.5E-02	2.6E-02	2.8E-02	2.5E-02	2.5E-02	1.4E-02	1.3E-02	2.8E-02	4.3E-02	5.8E-02	7.3E-02
199	8.1E-03	9.2E-03	1.3E-02	2.3E-02	2.5E-02	2.2E-02	2.2E-02	1.7E-02	1.8E-02	3.3E-02	4.9E-02	6.4E-02	8.0E-02
200	7.0E-03	8.1E-03	1.2E-02	2.0E-02	2.2E-02	1.9E-02	1.9E-02	1.7E-02	1.9E-02	3.4E-02	4.8E-02	6.3E-02	7.8E-02
201	6.0E-03	7.1E-03	1.1E-02	1.7E-02	1.9E-02	1.7E-02	1.6E-02	1.9E-02	2.1E-02	3.6E-02	5.0E-02	6.4E-02	7.9E-02
202	5.4E-03	6.6E-03	1.0E-02	1.6E-02	1.8E-02	1.5E-02	1.5E-02	1.8E-02	2.1E-02	3.6E-02	5.1E-02	6.6E-02	8.1E-02
203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
369	2.0E-03	1.2E-02	1.8E-02	1.8E-02	1.8E-02	6.8E-03	6.6E-03	-4.3E-02	-4.0E-02	-3.2E-02	-2.5E-02	-1.7E-02	-1.0E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
372	2.2E-03	1.1E-02	1.7E-02	1.6E-02	1.6E-02	7.2E-03	6.9E-03	-5.6E-02	-5.0E-02	-3.9E-02	-2.8E-02	-1.7E-02	-6.3E-03
373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
374	2.3E-03	1.7E-02	1.7E-02	1.7E-02	1.2E-02	7.5E-03	7.2E-03	-7.0E-02	-6.2E-02	-5.0E-02	-3.7E-02	-2.5E-02	-1.3E-02
375	2.5E-03	2.0E-02	2.0E-02	2.0E-02	1.4E-02	7.9E-03	7.6E-03	-8.9E-02	-8.1E-02	-7.0E-02	-5.8E-02	-4.6E-02	-3.5E-02
376	2.6E-03	2.2E-02	2.2E-02	2.1E-02	1.4E-02	8.2E-03	7.9E-03	-9.7E-02	-9.1E-02	-8.0E-02	-6.9E-02	-5.8E-02	-4.7E-02
377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
512	5.1E-04	1.5E-03	2.6E-03	3.5E-03	1.6E-02	1.8E-02	7.7E-03	4.0E-05	2.8E-03	7.3E-03	1.2E-02	1.6E-02	2.1E-02
513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
517	5.2E-04	1.5E-03	2.5E-03	3.5E-03	1.6E-02	2.1E-02	7.6E-03	-8.2E-04	2.1E-03	6.7E-03	1.1E-02	1.6E-02	2.1E-02
518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
548	1.5E-03	3.5E-03	1.6E-02	1.2E-02	1.2E-02	7.6E-03	7.1E-03	8.5E-03	2.7E-02	5.0E-02	7.2E-02	9.5E-02	1.2E-01
549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
551	1.5E-03	4.1E-03	1.6E-02	1.8E-02	1.4E-02	7.2E-03	6.6E-03	2.6E-02	4.6E-02	7.0E-02	9.4E-02	1.2E-01	1.4E-01
552	1.5E-03	3.7E-03	1.4E-02	1.4E-02	1.5E-02	7.4E-03	6.8E-03	2.5E-02	4.3E-02	6.5E-02	8.7E-02	1.1E-01	1.3E-01
553	1.5E-03	3.4E-03	1.4E-02	1.2E-02	1.5E-02	7.4E-03	6.9E-03	1.8E-02	3.4E-02	5.5E-02	7.6E-02	9.7E-02	1.2E-01
554	1.5E-03	3.0E-03	1.3E-02	1.0E-02	1.5E-02	7.3E-03	6.8E-03	1.0E-02	2.6E-02	4.6E-02	6.6E-02	8.6E-02	1.1E-01
555	1.4E-03	4.7E-03	1.7E-02	2.5E-02	1.9E-02	7.2E-03	6.7E-03	2.8E-02	4.3E-02	6.3E-02	8.3E-02	1.0E-01	1.2E-01
556	1.5E-03	4.4E-03	1.7E-02	2.1E-02	1.7E-02	7.1E-03	6.6E-03	2.4E-02	4.2E-02	6.3E-02	8.5E-02	1.1E-01	1.3E-01
557	1.5E-03	4.1E-03	1.5E-02	1.8E-02	1.8E-02	6.9E-03	6.5E-03	2.6E-02	4.3E-02	6.5E-02	8.7E-02	1.1E-01	1.3E-01
558	1.5E-03	3.7E-03	1.4E-02	1.6E-02	1.8E-02	7.2E-03	6.7E-03	2.7E-02	4.4E-02	6.5E-02	8.6E-02	1.1E-01	1.3E-01
559	1.5E-03	3.3E-03	1.2E-02	1.3E-02	1.7E-02	7.3E-03	6.7E-03	2.4E-02	3.9E-02	5.8E-02	7.7E-02	9.6E-02	1.2E-01
560	1.4E-03	2.9E-03	1.2E-02	1.0E-02	1.6E-02	7.2E-03	6.7E-03	1.6E-02	3.0E-02	4.9E-02	6.8E-02	8.7E-02	1.1E-01
561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
567	1.4E-03	4.9E-03	1.6E-02	2.2E-02	2.4E-02	6.9E-03	6.4E-03	3.5E-02	4.4E-02	5.8E-02	7.2E-02	8.5E-02	9.9E-02
568	1.4E-03	4.4E-03	1.3E-02	2.0E-02	2.3E-02	6.8E-03	6.3E-03	2.7E-02	4.0E-02	5.7E-02	7.4E-02	9.1E-02	1.1E-01
569	1.4E-03	3.9E-03	1.3E-02	1.7E-02	2.2E-02	6.7E-03	6.2E-03	2.2E-02	3.7E-02	5.7E-02	7.7E-02	9.7E-02	1.2E-01
570	1.4E-03	3.4E-03	1.2E-02	1.5E-02	2.0E-02	6.7E-03	6.2E-03	2.4E-02	3.9E-02	5.9E-02	7.8E-02	9.8E-02	1.2E-01
571	1.4E-03	2.9E-03	1.1E-02	1.4E-02	1.8E-02	6.9E-03	6.4E-03	2.5E-02	3.8E-02	5.6E-02	7.3E-02	9.0E-02	1.1E-01
572	1.4E-03	2.7E-03	1.0E-02	1.2E-02	1.5E-02	6.9E-03	6.4E-03	2.0E-02	3.2E-02	4.9E-02	6.5E-02	8.2E-02	9.8E-02
573	1.3E-03	4.8E-03	1.4E-02	2.0E-02	2.4E-02	6.7E-03	6.2E-03	3.6E-02	4.4E-02	5.5E-02	6.7E-02	7.8E-02	9.0E-02
574	1.4E-03	4.2E-03	1.3E-02	1.9E-02	2.3E-02	6.7E-03	6.2E-03	3.0E-02	4.0E-02	5.5E-02	6.9E-02	8.4E-02	9.8E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
575	1.4E-03	3.7E-03	1.1E-02	1.7E-02	2.0E-02	6.6E-03	6.1E-03	2.3E-02	3.6E-02	5.4E-02	7.2E-02	9.0E-02	1.1E-01
576	1.4E-03	3.1E-03	1.1E-02	1.5E-02	1.8E-02	6.5E-03	6.0E-03	2.2E-02	3.6E-02	5.5E-02	7.4E-02	9.3E-02	1.1E-01
577	1.4E-03	3.0E-03	1.1E-02	1.3E-02	1.6E-02	6.7E-03	6.2E-03	2.5E-02	3.8E-02	5.5E-02	7.2E-02	8.9E-02	1.1E-01
578	1.4E-03	2.9E-03	9.9E-03	1.2E-02	1.3E-02	6.7E-03	6.2E-03	2.1E-02	3.3E-02	4.9E-02	6.5E-02	8.1E-02	9.7E-02
579	1.3E-03	4.6E-03	1.3E-02	1.8E-02	2.4E-02	6.5E-03	6.1E-03	3.8E-02	4.3E-02	5.3E-02	6.2E-02	7.2E-02	8.1E-02
580	1.3E-03	4.0E-03	1.3E-02	1.8E-02	2.1E-02	6.5E-03	6.0E-03	3.2E-02	4.0E-02	5.2E-02	6.5E-02	7.7E-02	8.9E-02
581	1.4E-03	3.4E-03	1.1E-02	1.7E-02	1.8E-02	6.4E-03	6.0E-03	2.5E-02	3.6E-02	5.2E-02	6.7E-02	8.2E-02	9.8E-02
582	1.4E-03	3.3E-03	9.7E-03	1.5E-02	1.5E-02	6.3E-03	5.9E-03	2.0E-02	3.4E-02	5.2E-02	6.9E-02	8.7E-02	1.0E-01
583	1.4E-03	3.2E-03	9.8E-03	1.3E-02	1.3E-02	6.5E-03	6.0E-03	2.3E-02	3.6E-02	5.2E-02	6.9E-02	8.6E-02	1.0E-01
584	1.3E-03	3.1E-03	9.3E-03	1.2E-02	1.1E-02	6.6E-03	6.1E-03	2.2E-02	3.3E-02	4.8E-02	6.4E-02	7.9E-02	9.5E-02
585	1.3E-03	4.4E-03	1.1E-02	1.7E-02	2.1E-02	6.4E-03	5.9E-03	3.9E-02	4.2E-02	5.0E-02	5.7E-02	6.5E-02	7.2E-02
586	1.3E-03	3.8E-03	1.2E-02	1.6E-02	1.7E-02	6.4E-03	5.9E-03	3.3E-02	4.0E-02	5.0E-02	6.0E-02	7.1E-02	8.1E-02
587	1.3E-03	3.7E-03	1.1E-02	1.6E-02	1.5E-02	6.3E-03	5.8E-03	2.7E-02	3.6E-02	5.0E-02	6.3E-02	7.6E-02	8.9E-02
588	1.3E-03	3.6E-03	9.6E-03	1.5E-02	1.4E-02	6.1E-03	5.7E-03	2.2E-02	3.4E-02	5.0E-02	6.6E-02	8.2E-02	9.8E-02
589	1.3E-03	3.4E-03	8.8E-03	1.3E-02	1.3E-02	6.3E-03	5.9E-03	2.1E-02	3.3E-02	5.0E-02	6.6E-02	8.2E-02	9.8E-02
590	1.3E-03	3.2E-03	8.8E-03	1.2E-02	1.2E-02	6.4E-03	5.9E-03	2.1E-02	3.2E-02	4.7E-02	6.2E-02	7.7E-02	9.2E-02
591	1.3E-03	4.3E-03	1.0E-02	2.1E-02	2.1E-02	6.8E-03	6.4E-03	3.9E-02	4.1E-02	4.8E-02	5.5E-02	6.1E-02	6.8E-02
592	1.3E-03	4.1E-03	1.1E-02	2.0E-02	2.0E-02	6.9E-03	6.4E-03	3.5E-02	3.9E-02	4.8E-02	5.7E-02	6.5E-02	7.4E-02
593	1.3E-03	3.9E-03	1.1E-02	1.8E-02	1.8E-02	6.2E-03	5.7E-03	2.9E-02	3.6E-02	4.7E-02	5.8E-02	7.0E-02	8.1E-02
594	1.3E-03	3.7E-03	9.7E-03	1.7E-02	1.7E-02	6.0E-03	5.6E-03	2.4E-02	3.4E-02	4.8E-02	6.2E-02	7.6E-02	9.0E-02
595	1.3E-03	3.5E-03	8.2E-03	1.5E-02	1.5E-02	6.2E-03	5.7E-03	2.1E-02	3.2E-02	4.7E-02	6.3E-02	7.8E-02	9.3E-02
596	1.3E-03	3.3E-03	8.0E-03	1.3E-02	1.3E-02	6.3E-03	5.8E-03	2.1E-02	3.2E-02	4.6E-02	6.0E-02	7.5E-02	8.9E-02
597	1.2E-03	4.5E-03	1.0E-02	2.1E-02	2.1E-02	6.8E-03	6.3E-03	3.9E-02	4.1E-02	4.7E-02	5.3E-02	6.0E-02	6.6E-02
598	1.3E-03	4.3E-03	9.6E-03	2.1E-02	2.1E-02	6.8E-03	6.3E-03	3.6E-02	3.9E-02	4.6E-02	5.4E-02	6.2E-02	6.9E-02
599	1.3E-03	4.0E-03	1.0E-02	2.0E-02	2.0E-02	6.1E-03	5.6E-03	3.0E-02	3.6E-02	4.5E-02	5.5E-02	6.4E-02	7.4E-02
600	1.3E-03	3.7E-03	9.6E-03	1.8E-02	1.8E-02	5.9E-03	5.5E-03	2.4E-02	3.3E-02	4.5E-02	5.7E-02	7.0E-02	8.2E-02
601	1.3E-03	3.5E-03	8.4E-03	1.6E-02	1.6E-02	6.0E-03	5.5E-03	2.2E-02	3.2E-02	4.6E-02	6.0E-02	7.4E-02	8.7E-02
602	1.3E-03	3.2E-03	7.0E-03	1.4E-02	1.4E-02	6.1E-03	5.6E-03	2.1E-02	3.1E-02	4.4E-02	5.7E-02	7.1E-02	8.4E-02
603	1.2E-03	4.6E-03	9.7E-03	1.8E-02	1.8E-02	6.7E-03	6.1E-03	3.9E-02	4.1E-02	4.7E-02	5.3E-02	5.9E-02	6.5E-02
604	1.2E-03	4.3E-03	8.5E-03	1.8E-02	1.8E-02	6.6E-03	6.1E-03	3.6E-02	3.8E-02	4.6E-02	5.3E-02	6.0E-02	6.7E-02
605	1.3E-03	4.0E-03	9.2E-03	1.8E-02	1.8E-02	5.9E-03	5.5E-03	3.1E-02	3.6E-02	4.4E-02	5.3E-02	6.1E-02	7.0E-02
606	1.3E-03	3.7E-03	9.1E-03	1.8E-02	1.8E-02	5.8E-03	5.4E-03	2.5E-02	3.2E-02	4.3E-02	5.3E-02	6.4E-02	7.4E-02
607	1.3E-03	3.4E-03	8.4E-03	1.6E-02	1.6E-02	5.8E-03	5.4E-03	2.3E-02	3.1E-02	4.4E-02	5.6E-02	6.9E-02	8.1E-02
608	1.3E-03	3.1E-03	7.4E-03	1.4E-02	1.4E-02	5.9E-03	5.5E-03	2.2E-02	3.1E-02	4.4E-02	5.6E-02	6.8E-02	8.1E-02
609	1.4E-03	1.6E-02	1.6E-02	1.4E-02	1.4E-02	5.0E-03	5.0E-03	1.6E-02	2.5E-02	3.8E-02	5.0E-02	6.3E-02	7.5E-02
610	1.4E-03	1.3E-02	1.3E-02	1.3E-02	1.5E-02	5.1E-03	5.1E-03	1.5E-02	2.6E-02	3.9E-02	5.2E-02	6.5E-02	7.8E-02
611	1.4E-03	1.0E-02	1.2E-02	1.2E-02	1.6E-02	4.9E-03	4.9E-03	1.2E-02	2.4E-02	3.8E-02	5.2E-02	6.7E-02	8.1E-02
612	1.4E-03	7.8E-03	1.1E-02	1.4E-02	1.7E-02	4.7E-03	4.7E-03	9.1E-03	2.2E-02	3.8E-02	5.3E-02	6.9E-02	8.4E-02
613	1.4E-03	6.6E-03	1.1E-02	1.5E-02	1.7E-02	5.0E-03	4.9E-03	6.4E-03	2.0E-02	3.7E-02	5.4E-02	7.0E-02	8.7E-02
614	1.3E-03	5.7E-03	1.0E-02	1.6E-02	1.9E-02	5.5E-03	5.0E-03	7.9E-03	2.1E-02	3.7E-02	5.4E-02	7.0E-02	8.7E-02
615	1.3E-03	5.3E-03	9.9E-03	1.6E-02	2.1E-02	5.9E-03	5.4E-03	1.5E-02	2.5E-02	3.9E-02	5.3E-02	6.7E-02	8.1E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
616	1.2E-03	4.9E-03	9.9E-03	1.5E-02	2.0E-02	6.3E-03	5.7E-03	2.8E-02	3.4E-02	4.3E-02	5.2E-02	6.2E-02	7.1E-02
617	1.2E-03	4.6E-03	9.4E-03	1.4E-02	1.6E-02	6.5E-03	6.0E-03	3.9E-02	4.0E-02	4.6E-02	5.2E-02	5.8E-02	6.4E-02
618	1.2E-03	4.2E-03	8.4E-03	1.6E-02	1.6E-02	6.4E-03	6.0E-03	3.6E-02	3.8E-02	4.5E-02	5.1E-02	5.8E-02	6.5E-02
619	1.2E-03	3.9E-03	8.2E-03	1.7E-02	1.7E-02	5.8E-03	5.4E-03	3.1E-02	3.6E-02	4.4E-02	5.2E-02	6.0E-02	6.8E-02
620	1.2E-03	3.5E-03	8.4E-03	1.7E-02	1.7E-02	5.7E-03	5.3E-03	2.7E-02	3.3E-02	4.2E-02	5.1E-02	6.0E-02	7.0E-02
621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
622	1.2E-03	3.0E-03	7.5E-03	1.2E-02	1.2E-02	5.8E-03	5.3E-03	2.2E-02	3.0E-02	4.2E-02	5.3E-02	6.5E-02	7.6E-02
623	1.4E-03	1.6E-02	1.6E-02	1.5E-02	1.4E-02	5.0E-03	5.0E-03	1.6E-02	2.5E-02	3.7E-02	5.0E-02	6.2E-02	7.4E-02
624	1.4E-03	1.2E-02	1.4E-02	1.4E-02	1.4E-02	5.0E-03	5.0E-03	1.5E-02	2.5E-02	3.8E-02	5.1E-02	6.3E-02	7.6E-02
625	1.3E-03	9.4E-03	1.2E-02	1.2E-02	1.5E-02	4.8E-03	4.8E-03	1.3E-02	2.4E-02	3.8E-02	5.2E-02	6.5E-02	7.9E-02
626	1.3E-03	7.5E-03	1.1E-02	1.3E-02	1.5E-02	4.7E-03	4.6E-03	9.6E-03	2.2E-02	3.7E-02	5.2E-02	6.7E-02	8.3E-02
627	1.3E-03	6.3E-03	1.0E-02	1.4E-02	1.6E-02	4.8E-03	4.8E-03	7.1E-03	2.1E-02	3.7E-02	5.3E-02	6.9E-02	8.5E-02
628	1.3E-03	5.7E-03	1.0E-02	1.5E-02	1.8E-02	5.3E-03	4.9E-03	8.0E-03	2.1E-02	3.7E-02	5.3E-02	6.9E-02	8.5E-02
629	1.3E-03	5.2E-03	9.4E-03	1.6E-02	2.0E-02	5.8E-03	5.3E-03	1.4E-02	2.5E-02	3.9E-02	5.3E-02	6.7E-02	8.1E-02
630	1.2E-03	4.9E-03	9.5E-03	1.5E-02	1.9E-02	6.1E-03	5.6E-03	2.7E-02	3.3E-02	4.3E-02	5.2E-02	6.2E-02	7.1E-02
631	1.2E-03	4.5E-03	9.1E-03	1.3E-02	1.6E-02	6.4E-03	5.9E-03	3.8E-02	4.0E-02	4.6E-02	5.1E-02	5.7E-02	6.3E-02
632	1.2E-03	4.1E-03	8.3E-03	1.4E-02	1.5E-02	6.3E-03	5.9E-03	3.6E-02	3.8E-02	4.4E-02	5.1E-02	5.7E-02	6.3E-02
633	1.2E-03	3.7E-03	7.4E-03	1.5E-02	1.6E-02	5.7E-03	5.3E-03	3.2E-02	3.6E-02	4.3E-02	5.1E-02	5.9E-02	6.6E-02
634	1.2E-03	3.3E-03	7.8E-03	1.6E-02	1.6E-02	5.6E-03	5.2E-03	2.7E-02	3.3E-02	4.1E-02	5.0E-02	5.9E-02	6.8E-02
635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
636	1.2E-03	2.8E-03	7.4E-03	1.3E-02	1.3E-02	5.6E-03	5.2E-03	2.1E-02	2.9E-02	4.0E-02	5.1E-02	6.2E-02	7.3E-02
637	1.3E-03	1.5E-02	1.5E-02	1.5E-02	1.2E-02	5.1E-03	5.1E-03	2.0E-02	2.8E-02	3.9E-02	5.0E-02	6.1E-02	7.1E-02
638	1.3E-03	1.2E-02	1.4E-02	1.4E-02	1.3E-02	5.0E-03	5.0E-03	1.5E-02	2.5E-02	3.7E-02	5.0E-02	6.2E-02	7.5E-02
639	1.3E-03	8.7E-03	1.2E-02	1.2E-02	1.4E-02	4.8E-03	4.8E-03	1.3E-02	2.4E-02	3.7E-02	5.1E-02	6.4E-02	7.7E-02
640	1.3E-03	7.1E-03	1.1E-02	1.2E-02	1.4E-02	4.6E-03	4.6E-03	1.0E-02	2.2E-02	3.7E-02	5.2E-02	6.6E-02	8.1E-02
641	1.3E-03	6.2E-03	9.9E-03	1.3E-02	1.5E-02	4.7E-03	4.7E-03	7.8E-03	2.1E-02	3.7E-02	5.2E-02	6.8E-02	8.4E-02
642	1.3E-03	5.7E-03	9.5E-03	1.4E-02	1.7E-02	5.2E-03	4.8E-03	8.1E-03	2.1E-02	3.7E-02	5.3E-02	6.8E-02	8.4E-02
643	1.3E-03	5.2E-03	8.8E-03	1.5E-02	1.8E-02	5.6E-03	5.2E-03	1.3E-02	2.4E-02	3.8E-02	5.2E-02	6.6E-02	8.0E-02
644	1.2E-03	4.8E-03	9.0E-03	1.4E-02	1.8E-02	6.0E-03	5.5E-03	2.6E-02	3.2E-02	4.2E-02	5.2E-02	6.2E-02	7.2E-02
645	1.2E-03	4.4E-03	8.8E-03	1.2E-02	1.6E-02	6.2E-03	5.7E-03	3.6E-02	3.9E-02	4.5E-02	5.1E-02	5.7E-02	6.3E-02
646	1.2E-03	4.0E-03	8.2E-03	1.2E-02	1.5E-02	6.1E-03	5.7E-03	3.6E-02	3.8E-02	4.4E-02	5.0E-02	5.6E-02	6.2E-02
647	1.2E-03	3.5E-03	7.3E-03	1.3E-02	1.4E-02	5.6E-03	5.2E-03	3.2E-02	3.5E-02	4.3E-02	5.0E-02	5.7E-02	6.4E-02
648	1.2E-03	3.1E-03	7.2E-03	1.4E-02	1.4E-02	5.5E-03	5.1E-03	2.8E-02	3.3E-02	4.1E-02	4.9E-02	5.8E-02	6.6E-02
649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
650	1.3E-03	1.4E-02	1.5E-02	1.5E-02	1.1E-02	5.0E-03	5.0E-03	2.2E-02	2.9E-02	3.9E-02	4.9E-02	5.9E-02	6.9E-02
651	1.3E-03	1.1E-02	1.4E-02	1.4E-02	1.2E-02	4.9E-03	4.9E-03	1.7E-02	2.6E-02	3.8E-02	5.0E-02	6.1E-02	7.3E-02
652	1.2E-03	8.2E-03	1.2E-02	1.2E-02	1.3E-02	4.7E-03	4.7E-03	1.3E-02	2.4E-02	3.7E-02	5.0E-02	6.3E-02	7.6E-02
653	1.3E-03	6.9E-03	1.1E-02	1.2E-02	1.3E-02	4.5E-03	4.5E-03	1.0E-02	2.2E-02	3.7E-02	5.1E-02	6.5E-02	7.9E-02
654	1.3E-03	6.1E-03	9.7E-03	1.3E-02	1.4E-02	4.6E-03	4.6E-03	8.4E-03	2.1E-02	3.6E-02	5.2E-02	6.7E-02	8.2E-02
655	1.3E-03	5.6E-03	9.1E-03	1.4E-02	1.6E-02	5.0E-03	4.6E-03	8.1E-03	2.1E-02	3.6E-02	5.2E-02	6.7E-02	8.3E-02
656	1.2E-03	5.1E-03	8.5E-03	1.4E-02	1.7E-02	5.4E-03	5.0E-03	1.2E-02	2.3E-02	3.7E-02	5.2E-02	6.6E-02	8.0E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
657	1.2E-03	4.6E-03	8.6E-03	1.3E-02	1.7E-02	5.8E-03	5.3E-03	2.5E-02	3.1E-02	4.2E-02	5.2E-02	6.2E-02	7.2E-02
658	1.1E-03	4.2E-03	8.5E-03	1.2E-02	1.6E-02	6.0E-03	5.5E-03	3.5E-02	3.8E-02	4.4E-02	5.0E-02	5.6E-02	6.2E-02
659	1.1E-03	3.7E-03	8.0E-03	1.1E-02	1.4E-02	5.5E-03	5.1E-03	3.5E-02	3.7E-02	4.3E-02	4.9E-02	5.4E-02	6.0E-02
660	1.2E-03	3.3E-03	7.2E-03	1.1E-02	1.4E-02	5.5E-03	5.1E-03	3.2E-02	3.5E-02	4.2E-02	4.9E-02	5.6E-02	6.3E-02
661	1.2E-03	3.0E-03	6.5E-03	1.1E-02	1.2E-02	5.4E-03	5.0E-03	2.8E-02	3.2E-02	4.0E-02	4.8E-02	5.6E-02	6.4E-02
662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
663	1.2E-03	1.4E-02	1.4E-02	1.5E-02	1.0E-02	4.9E-03	4.9E-03	2.5E-02	3.1E-02	4.0E-02	4.9E-02	5.8E-02	6.8E-02
664	1.2E-03	1.0E-02	1.4E-02	1.4E-02	1.1E-02	4.9E-03	4.9E-03	1.8E-02	2.7E-02	3.8E-02	4.9E-02	6.0E-02	7.1E-02
665	1.2E-03	8.8E-03	1.2E-02	1.2E-02	1.2E-02	4.6E-03	4.6E-03	1.3E-02	2.3E-02	3.6E-02	4.9E-02	6.1E-02	7.4E-02
666	1.2E-03	7.8E-03	1.1E-02	1.1E-02	1.2E-02	4.7E-03	4.7E-03	1.1E-02	2.2E-02	3.6E-02	5.0E-02	6.4E-02	7.7E-02
667	1.3E-03	6.8E-03	9.5E-03	1.2E-02	1.3E-02	4.5E-03	4.5E-03	8.9E-03	2.1E-02	3.6E-02	5.1E-02	6.6E-02	8.0E-02
668	1.2E-03	5.9E-03	8.8E-03	1.3E-02	1.5E-02	4.9E-03	4.5E-03	8.0E-03	2.0E-02	3.6E-02	5.1E-02	6.6E-02	8.2E-02
669	1.2E-03	5.4E-03	8.2E-03	1.3E-02	1.6E-02	5.3E-03	4.9E-03	1.1E-02	2.2E-02	3.7E-02	5.1E-02	6.5E-02	7.9E-02
670	1.2E-03	5.0E-03	8.2E-03	1.3E-02	1.7E-02	5.6E-03	5.2E-03	2.3E-02	3.0E-02	4.1E-02	5.1E-02	6.2E-02	7.2E-02
671	1.1E-03	4.5E-03	8.1E-03	1.1E-02	1.6E-02	5.8E-03	5.4E-03	3.4E-02	3.7E-02	4.3E-02	4.9E-02	5.6E-02	6.2E-02
672	1.1E-03	4.0E-03	7.8E-03	1.1E-02	1.3E-02	5.4E-03	5.0E-03	3.5E-02	3.7E-02	4.2E-02	4.8E-02	5.3E-02	5.8E-02
673	1.1E-03	3.7E-03	7.1E-03	1.0E-02	1.3E-02	5.4E-03	5.0E-03	3.2E-02	3.5E-02	4.2E-02	4.9E-02	5.5E-02	6.2E-02
674	1.1E-03	3.4E-03	6.4E-03	1.0E-02	1.2E-02	5.3E-03	4.9E-03	2.8E-02	3.2E-02	4.0E-02	4.7E-02	5.4E-02	6.2E-02
675	1.2E-03	1.3E-02	1.5E-02	1.5E-02	9.9E-03	4.9E-03	4.9E-03	2.6E-02	3.2E-02	4.0E-02	4.9E-02	5.7E-02	6.6E-02
676	1.2E-03	1.1E-02	1.3E-02	1.3E-02	1.1E-02	4.7E-03	4.7E-03	1.8E-02	2.6E-02	3.7E-02	4.8E-02	5.9E-02	7.0E-02
677	1.2E-03	9.3E-03	1.2E-02	1.2E-02	1.2E-02	4.5E-03	4.5E-03	1.3E-02	2.3E-02	3.6E-02	4.8E-02	6.0E-02	7.3E-02
678	1.2E-03	8.3E-03	1.0E-02	1.1E-02	1.2E-02	4.6E-03	4.6E-03	1.1E-02	2.2E-02	3.6E-02	4.9E-02	6.2E-02	7.6E-02
679	1.2E-03	7.4E-03	9.3E-03	1.2E-02	1.3E-02	4.4E-03	4.4E-03	9.3E-03	2.1E-02	3.6E-02	5.0E-02	6.4E-02	7.9E-02
680	1.2E-03	6.6E-03	8.4E-03	1.3E-02	1.4E-02	4.7E-03	4.4E-03	8.1E-03	2.0E-02	3.5E-02	5.0E-02	6.6E-02	8.1E-02
681	1.2E-03	5.9E-03	8.0E-03	1.3E-02	1.5E-02	5.1E-03	4.7E-03	1.1E-02	2.2E-02	3.6E-02	5.0E-02	6.4E-02	7.9E-02
682	1.2E-03	5.4E-03	7.8E-03	1.2E-02	1.6E-02	5.5E-03	5.1E-03	2.2E-02	2.9E-02	4.0E-02	5.1E-02	6.2E-02	7.2E-02
683	1.1E-03	4.9E-03	7.8E-03	1.1E-02	1.5E-02	5.6E-03	5.2E-03	3.3E-02	3.6E-02	4.3E-02	4.9E-02	5.6E-02	6.3E-02
684	1.2E-03	1.2E-02	1.4E-02	1.4E-02	9.8E-03	4.7E-03	4.7E-03	2.6E-02	3.1E-02	3.9E-02	4.7E-02	5.6E-02	6.4E-02
685	1.2E-03	1.1E-02	1.3E-02	1.3E-02	1.1E-02	4.6E-03	4.6E-03	1.7E-02	2.6E-02	3.6E-02	4.7E-02	5.7E-02	6.8E-02
686	1.1E-03	9.4E-03	1.1E-02	1.1E-02	1.1E-02	4.4E-03	4.4E-03	1.5E-02	2.4E-02	3.6E-02	4.8E-02	6.0E-02	7.2E-02
687	1.1E-03	8.5E-03	9.6E-03	1.0E-02	1.1E-02	4.5E-03	4.5E-03	1.3E-02	2.4E-02	3.7E-02	4.9E-02	6.2E-02	7.5E-02
688	1.2E-03	7.7E-03	8.2E-03	1.1E-02	1.2E-02	4.3E-03	4.3E-03	9.5E-03	2.1E-02	3.5E-02	4.9E-02	6.3E-02	7.7E-02
689	1.2E-03	7.1E-03	7.9E-03	1.2E-02	1.3E-02	4.6E-03	4.3E-03	8.6E-03	2.0E-02	3.5E-02	4.9E-02	6.4E-02	7.8E-02
690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
696	1.1E-03	1.2E-02	1.4E-02	1.4E-02	9.5E-03	4.6E-03	4.6E-03	2.7E-02	3.2E-02	3.9E-02	4.6E-02	5.4E-02	6.1E-02
697	1.1E-03	1.1E-02	1.2E-02	1.2E-02	1.0E-02	4.4E-03	4.4E-03	1.8E-02	2.5E-02	3.5E-02	4.5E-02	5.5E-02	6.5E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
698	1.1E-03	9.8E-03	9.8E-03	9.9E-03	9.7E-03	4.3E-03	4.3E-03	1.5E-02	2.5E-02	3.6E-02	4.7E-02	5.8E-02	6.9E-02
699	1.1E-03	8.8E-03	8.8E-03	9.9E-03	9.7E-03	4.3E-03	4.3E-03	1.3E-02	2.4E-02	3.6E-02	4.8E-02	6.0E-02	7.2E-02
700	1.2E-03	8.0E-03	8.0E-03	1.0E-02	1.1E-02	4.1E-03	4.1E-03	1.0E-02	2.1E-02	3.4E-02	4.8E-02	6.1E-02	7.4E-02
701	1.2E-03	7.4E-03	7.4E-03	1.1E-02	1.2E-02	4.4E-03	4.1E-03	9.2E-03	2.1E-02	3.4E-02	4.8E-02	6.2E-02	7.6E-02
702	1.1E-03	1.3E-02	1.5E-02	1.4E-02	9.4E-03	4.5E-03	4.5E-03	2.8E-02	3.2E-02	3.9E-02	4.6E-02	5.3E-02	6.0E-02
703	1.1E-03	1.2E-02	1.2E-02	1.1E-02	9.7E-03	4.4E-03	4.4E-03	1.9E-02	2.6E-02	3.5E-02	4.5E-02	5.4E-02	6.3E-02
704	1.1E-03	1.0E-02	1.0E-02	9.3E-03	9.5E-03	4.2E-03	4.2E-03	1.6E-02	2.5E-02	3.5E-02	4.6E-02	5.7E-02	6.7E-02
705	1.1E-03	9.2E-03	9.1E-03	9.8E-03	9.4E-03	4.2E-03	4.2E-03	1.2E-02	2.2E-02	3.4E-02	4.6E-02	5.8E-02	7.0E-02
706	1.2E-03	8.1E-03	8.0E-03	1.0E-02	1.1E-02	4.0E-03	4.0E-03	1.1E-02	2.1E-02	3.4E-02	4.7E-02	6.0E-02	7.3E-02
707	1.1E-03	7.4E-03	7.4E-03	1.1E-02	1.2E-02	4.2E-03	4.1E-03	9.5E-03	2.1E-02	3.4E-02	4.8E-02	6.1E-02	7.5E-02
708	1.1E-03	1.3E-02	1.6E-02	1.5E-02	9.3E-03	4.4E-03	4.4E-03	2.8E-02	3.2E-02	3.9E-02	4.5E-02	5.2E-02	5.8E-02
709	1.1E-03	1.2E-02	1.2E-02	1.2E-02	9.5E-03	4.3E-03	4.3E-03	2.0E-02	2.7E-02	3.6E-02	4.4E-02	5.3E-02	6.1E-02
710	1.1E-03	1.0E-02	1.0E-02	9.4E-03	9.3E-03	4.1E-03	4.1E-03	1.6E-02	2.5E-02	3.5E-02	4.5E-02	5.5E-02	6.6E-02
711	1.1E-03	9.4E-03	9.3E-03	9.6E-03	9.2E-03	4.1E-03	4.1E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.8E-02
712	1.1E-03	8.4E-03	8.3E-03	9.8E-03	1.0E-02	4.0E-03	3.9E-03	1.1E-02	2.1E-02	3.4E-02	4.6E-02	5.9E-02	7.1E-02
713	1.1E-03	7.6E-03	7.5E-03	1.0E-02	1.1E-02	4.1E-03	4.0E-03	9.8E-03	2.1E-02	3.4E-02	4.7E-02	6.0E-02	7.4E-02
714	1.1E-03	1.3E-02	1.6E-02	1.5E-02	9.2E-03	4.3E-03	4.3E-03	2.8E-02	3.2E-02	3.9E-02	4.5E-02	5.1E-02	5.7E-02
715	1.1E-03	1.2E-02	1.3E-02	1.2E-02	9.1E-03	4.3E-03	4.3E-03	2.2E-02	2.8E-02	3.6E-02	4.4E-02	5.2E-02	6.0E-02
716	1.1E-03	1.1E-02	1.1E-02	1.0E-02	8.8E-03	4.1E-03	4.0E-03	1.6E-02	2.4E-02	3.4E-02	4.4E-02	5.4E-02	6.4E-02
717	1.1E-03	9.6E-03	9.5E-03	9.4E-03	8.7E-03	4.0E-03	4.0E-03	1.1E-02	2.1E-02	3.3E-02	4.4E-02	5.6E-02	6.7E-02
718	1.1E-03	8.6E-03	8.5E-03	9.5E-03	9.7E-03	3.9E-03	3.9E-03	1.1E-02	2.1E-02	3.3E-02	4.6E-02	5.8E-02	7.0E-02
719	1.1E-03	7.8E-03	7.7E-03	1.0E-02	1.1E-02	4.0E-03	3.9E-03	1.0E-02	2.1E-02	3.4E-02	4.7E-02	6.0E-02	7.2E-02
720	1.1E-03	1.3E-02	1.7E-02	1.6E-02	9.1E-03	4.3E-03	4.3E-03	2.8E-02	3.2E-02	3.8E-02	4.4E-02	5.1E-02	5.7E-02
721	1.1E-03	1.2E-02	1.4E-02	1.3E-02	8.9E-03	4.2E-03	4.2E-03	2.3E-02	2.8E-02	3.6E-02	4.3E-02	5.1E-02	5.8E-02
722	1.0E-03	1.1E-02	1.1E-02	1.1E-02	8.6E-03	4.0E-03	4.0E-03	1.6E-02	2.4E-02	3.4E-02	4.3E-02	5.3E-02	6.3E-02
723	1.0E-03	9.7E-03	9.6E-03	9.2E-03	8.4E-03	4.0E-03	4.0E-03	1.1E-02	2.1E-02	3.2E-02	4.3E-02	5.4E-02	6.6E-02
724	1.1E-03	8.8E-03	8.7E-03	9.2E-03	9.3E-03	3.8E-03	3.8E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.9E-02
725	1.1E-03	8.0E-03	7.9E-03	9.7E-03	1.0E-02	3.9E-03	3.8E-03	1.0E-02	2.1E-02	3.3E-02	4.6E-02	5.9E-02	7.1E-02
726	1.1E-03	1.3E-02	1.7E-02	1.6E-02	8.8E-03	4.2E-03	4.2E-03	2.9E-02	3.3E-02	3.9E-02	4.4E-02	5.0E-02	5.6E-02
727	1.0E-03	1.2E-02	1.4E-02	1.3E-02	8.6E-03	4.1E-03	4.1E-03	2.3E-02	2.8E-02	3.5E-02	4.2E-02	4.9E-02	5.7E-02
728	1.0E-03	1.1E-02	1.2E-02	1.1E-02	8.3E-03	3.9E-03	3.9E-03	1.6E-02	2.4E-02	3.3E-02	4.3E-02	5.2E-02	6.1E-02
729	1.0E-03	9.7E-03	9.9E-03	9.2E-03	8.3E-03	3.6E-03	3.6E-03	1.1E-02	2.1E-02	3.2E-02	4.3E-02	5.4E-02	6.5E-02
730	1.1E-03	8.8E-03	8.8E-03	9.0E-03	8.9E-03	3.7E-03	3.7E-03	1.1E-02	2.1E-02	3.3E-02	4.4E-02	5.6E-02	6.8E-02
731	1.1E-03	8.1E-03	8.0E-03	9.4E-03	1.0E-02	3.8E-03	3.8E-03	1.0E-02	2.1E-02	3.3E-02	4.5E-02	5.8E-02	7.0E-02
732	8.1E-04	4.1E-03	5.3E-03	8.4E-03	5.8E-03	4.3E-03	4.0E-03	2.4E-02	2.1E-02	2.0E-02	2.0E-02	1.9E-02	1.9E-02
733	8.3E-04	4.4E-03	6.8E-03	9.9E-03	6.0E-03	4.3E-03	4.0E-03	1.7E-02	1.6E-02	1.8E-02	2.1E-02	2.3E-02	2.5E-02
734	8.6E-04	4.8E-03	8.7E-03	1.2E-02	6.3E-03	4.4E-03	4.1E-03	1.4E-02	1.5E-02	1.9E-02	2.2E-02	2.6E-02	3.0E-02
735	8.8E-04	5.5E-03	1.1E-02	1.4E-02	6.6E-03	4.5E-03	4.2E-03	1.0E-02	1.2E-02	1.7E-02	2.1E-02	2.6E-02	3.1E-02
736	8.9E-04	7.2E-03	1.4E-02	1.6E-02	6.9E-03	4.6E-03	4.2E-03	1.3E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
737	1.0E-03	1.3E-02	1.8E-02	1.7E-02	8.6E-03	4.1E-03	4.1E-03	3.0E-02	3.3E-02	3.9E-02	4.4E-02	5.0E-02	5.5E-02
738	1.0E-03	1.2E-02	1.5E-02	1.4E-02	8.4E-03	4.1E-03	4.1E-03	2.4E-02	2.9E-02	3.5E-02	4.2E-02	4.9E-02	5.5E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
739	1.0E-03	1.1E-02	1.2E-02	1.1E-02	8.2E-03	3.8E-03	3.8E-03	1.5E-02	2.3E-02	3.2E-02	4.2E-02	5.1E-02	6.0E-02
740	1.0E-03	9.6E-03	1.0E-02	9.6E-03	8.0E-03	3.6E-03	3.6E-03	1.1E-02	2.0E-02	3.1E-02	4.2E-02	5.3E-02	6.3E-02
741	1.1E-03	8.8E-03	8.9E-03	8.9E-03	8.7E-03	3.7E-03	3.7E-03	1.1E-02	2.1E-02	3.2E-02	4.4E-02	5.5E-02	6.6E-02
742	1.1E-03	8.1E-03	8.0E-03	9.1E-03	9.8E-03	3.7E-03	3.7E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.9E-02
743	8.0E-04	3.6E-03	5.9E-03	8.9E-03	5.7E-03	4.2E-03	3.9E-03	2.4E-02	2.1E-02	2.0E-02	2.0E-02	2.0E-02	1.9E-02
744	8.3E-04	3.8E-03	7.5E-03	1.0E-02	6.0E-03	4.4E-03	4.1E-03	1.7E-02	1.6E-02	1.9E-02	2.1E-02	2.3E-02	2.6E-02
745	8.5E-04	4.2E-03	9.4E-03	1.2E-02	6.3E-03	4.4E-03	4.1E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.6E-02	3.0E-02
746	8.7E-04	6.0E-03	1.2E-02	1.5E-02	6.6E-03	4.5E-03	4.1E-03	1.0E-02	1.2E-02	1.7E-02	2.1E-02	2.6E-02	3.1E-02
747	8.8E-04	7.7E-03	1.4E-02	1.7E-02	6.9E-03	4.5E-03	4.2E-03	1.3E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
762	7.9E-04	3.0E-03	6.4E-03	9.3E-03	5.7E-03	4.2E-03	3.9E-03	2.4E-02	2.1E-02	2.1E-02	2.0E-02	2.0E-02	2.0E-02
763	8.9E-04	3.4E-03	8.0E-03	1.1E-02	6.2E-03	4.6E-03	4.3E-03	1.7E-02	1.6E-02	1.9E-02	2.1E-02	2.4E-02	2.6E-02
764	8.9E-04	4.7E-03	1.0E-02	1.3E-02	6.5E-03	4.7E-03	4.3E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.7E-02	3.0E-02
765	8.5E-04	6.4E-03	1.2E-02	1.5E-02	6.6E-03	4.4E-03	4.1E-03	9.8E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.1E-02
766	8.6E-04	8.1E-03	1.4E-02	1.6E-02	6.8E-03	4.4E-03	4.1E-03	1.2E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
767	9.2E-04	1.1E-02	1.7E-02	1.9E-02	7.3E-03	4.4E-03	4.1E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02	2.5E-02
768	9.7E-04	1.2E-02	1.8E-02	2.1E-02	7.7E-03	4.4E-03	4.0E-03	2.1E-02	2.0E-02	2.1E-02	2.3E-02	2.5E-02	2.6E-02
769	1.0E-03	1.3E-02	2.1E-02	2.4E-02	8.0E-03	4.4E-03	4.0E-03	2.5E-02	2.4E-02	2.6E-02	2.7E-02	2.9E-02	3.0E-02
770	1.0E-03	1.4E-02	2.2E-02	2.5E-02	8.1E-03	4.2E-03	3.9E-03	3.0E-02	3.0E-02	3.3E-02	3.6E-02	3.9E-02	4.2E-02
771	1.0E-03	1.6E-02	2.0E-02	2.4E-02	7.8E-03	4.0E-03	3.6E-03	3.5E-02	3.6E-02	4.0E-02	4.4E-02	4.8E-02	5.2E-02
772	1.0E-03	1.5E-02	2.1E-02	2.2E-02	7.9E-03	3.8E-03	3.8E-03	3.8E-02	3.9E-02	4.3E-02	4.7E-02	5.1E-02	5.4E-02
773	1.0E-03	1.4E-02	2.0E-02	2.2E-02	8.0E-03	3.9E-03	3.9E-03	3.7E-02	3.8E-02	4.2E-02	4.6E-02	5.0E-02	5.4E-02
774	1.0E-03	1.3E-02	1.7E-02	1.9E-02	8.2E-03	4.0E-03	4.0E-03	3.5E-02	3.6E-02	4.1E-02	4.5E-02	4.9E-02	5.3E-02
775	1.0E-03	1.1E-02	1.6E-02	1.6E-02	8.2E-03	4.0E-03	4.0E-03	3.1E-02	3.4E-02	3.9E-02	4.4E-02	4.8E-02	5.3E-02
776	1.0E-03	1.1E-02	1.5E-02	1.4E-02	8.0E-03	3.9E-03	3.9E-03	2.5E-02	2.9E-02	3.5E-02	4.1E-02	4.8E-02	5.4E-02
777	1.0E-03	9.6E-03	1.3E-02	1.2E-02	7.7E-03	3.7E-03	3.7E-03	1.6E-02	2.3E-02	3.1E-02	4.0E-02	4.9E-02	5.7E-02
778	1.0E-03	8.6E-03	1.1E-02	1.0E-02	7.6E-03	3.5E-03	3.5E-03	1.1E-02	2.0E-02	3.0E-02	4.0E-02	5.1E-02	6.1E-02
779	1.0E-03	8.0E-03	9.6E-03	8.9E-03	8.1E-03	3.5E-03	3.5E-03	1.1E-02	2.0E-02	3.1E-02	4.2E-02	5.3E-02	6.4E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
780	1.0E-03	7.5E-03	8.4E-03	8.6E-03	9.1E-03	3.6E-03	3.5E-03	1.1E-02	2.0E-02	3.2E-02	4.4E-02	5.5E-02	6.7E-02
781	8.6E-04	2.7E-03	6.9E-03	9.6E-03	5.7E-03	4.2E-03	3.9E-03	2.4E-02	2.1E-02	2.1E-02	2.1E-02	2.1E-02	2.0E-02
782	8.8E-04	3.7E-03	8.4E-03	1.1E-02	6.2E-03	4.5E-03	4.2E-03	1.5E-02	1.6E-02	2.0E-02	2.4E-02	2.7E-02	3.1E-02
783	8.9E-04	5.1E-03	1.0E-02	1.3E-02	6.5E-03	4.6E-03	4.3E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.7E-02	3.0E-02
784	8.4E-04	6.8E-03	1.2E-02	1.4E-02	6.5E-03	4.4E-03	4.0E-03	9.6E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.1E-02
785	8.5E-04	8.2E-03	1.3E-02	1.6E-02	6.8E-03	4.4E-03	4.0E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.6E-02	3.0E-02
786	9.1E-04	1.0E-02	1.5E-02	1.7E-02	7.3E-03	4.4E-03	4.0E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02	2.5E-02
787	9.5E-04	1.1E-02	1.7E-02	2.0E-02	7.6E-03	4.3E-03	4.0E-03	2.1E-02	1.9E-02	2.1E-02	2.3E-02	2.4E-02	2.6E-02
788	1.0E-03	1.2E-02	1.9E-02	2.2E-02	7.9E-03	4.3E-03	3.9E-03	2.5E-02	2.3E-02	2.5E-02	2.7E-02	2.8E-02	3.0E-02
789	1.0E-03	1.3E-02	2.0E-02	2.3E-02	7.9E-03	4.1E-03	3.8E-03	3.0E-02	3.0E-02	3.3E-02	3.6E-02	4.0E-02	4.3E-02
790	1.0E-03	1.4E-02	1.8E-02	2.2E-02	7.7E-03	3.9E-03	3.5E-03	3.4E-02	3.5E-02	3.9E-02	4.3E-02	4.7E-02	5.1E-02
791	1.0E-03	1.4E-02	1.9E-02	2.0E-02	7.8E-03	3.7E-03	3.7E-03	3.8E-02	3.9E-02	4.2E-02	4.6E-02	5.0E-02	5.4E-02
792	1.0E-03	1.3E-02	1.8E-02	2.0E-02	7.9E-03	3.9E-03	3.9E-03	3.6E-02	3.8E-02	4.2E-02	4.5E-02	4.9E-02	5.3E-02
793	1.0E-03	1.2E-02	1.6E-02	1.8E-02	8.1E-03	4.0E-03	4.0E-03	3.4E-02	3.6E-02	4.0E-02	4.4E-02	4.8E-02	5.2E-02
794	1.0E-03	9.8E-03	1.5E-02	1.4E-02	7.9E-03	4.0E-03	4.0E-03	3.1E-02	3.4E-02	3.8E-02	4.3E-02	4.8E-02	5.3E-02
795	1.0E-03	9.6E-03	1.4E-02	1.3E-02	7.9E-03	3.9E-03	3.9E-03	2.4E-02	2.9E-02	3.5E-02	4.1E-02	4.7E-02	5.3E-02
796	1.0E-03	9.1E-03	1.3E-02	1.2E-02	7.5E-03	3.7E-03	3.7E-03	1.2E-02	2.0E-02	2.9E-02	3.8E-02	4.7E-02	5.6E-02
797	9.9E-04	8.4E-03	1.1E-02	1.0E-02	7.5E-03	3.4E-03	3.4E-03	1.1E-02	1.9E-02	2.9E-02	3.9E-02	5.0E-02	6.0E-02
798	1.0E-03	7.6E-03	9.9E-03	8.9E-03	7.8E-03	3.5E-03	3.5E-03	1.1E-02	2.0E-02	3.1E-02	4.1E-02	5.2E-02	6.3E-02
799	8.7E-04	4.1E-03	8.7E-03	1.2E-02	6.2E-03	4.5E-03	4.2E-03	1.4E-02	1.6E-02	2.0E-02	2.4E-02	2.8E-02	3.3E-02
800	8.2E-04	5.4E-03	1.0E-02	1.3E-02	6.2E-03	4.3E-03	4.0E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.7E-02	3.0E-02
801	8.3E-04	7.0E-03	1.2E-02	1.4E-02	6.5E-03	4.3E-03	4.0E-03	9.7E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.0E-02
802	8.4E-04	8.2E-03	1.2E-02	1.4E-02	6.8E-03	4.3E-03	4.0E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
803	9.0E-04	9.7E-03	1.4E-02	1.6E-02	7.2E-03	4.3E-03	3.9E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02
804	9.4E-04	9.8E-03	1.6E-02	1.9E-02	7.5E-03	4.2E-03	3.9E-03	2.0E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02	2.6E-02
805	1.0E-03	1.1E-02	1.7E-02	2.0E-02	7.8E-03	4.2E-03	3.9E-03	2.7E-02	2.6E-02	2.8E-02	3.1E-02	3.3E-02	3.5E-02
806	1.0E-03	1.3E-02	1.8E-02	2.1E-02	7.7E-03	4.1E-03	3.7E-03	2.9E-02	3.0E-02	3.3E-02	3.7E-02	4.1E-02	4.4E-02
807	1.0E-03	1.3E-02	1.6E-02	2.0E-02	7.6E-03	3.8E-03	3.5E-03	3.3E-02	3.4E-02	3.8E-02	4.2E-02	4.6E-02	5.0E-02
808	1.0E-03	1.3E-02	1.7E-02	1.8E-02	7.7E-03	3.7E-03	3.7E-03	3.7E-02	3.8E-02	4.2E-02	4.6E-02	4.9E-02	5.3E-02
809	1.0E-03	1.2E-02	1.7E-02	1.8E-02	7.9E-03	3.8E-03	3.8E-03	3.6E-02	3.7E-02	4.1E-02	4.5E-02	4.8E-02	5.2E-02
810	1.0E-03	1.1E-02	1.5E-02	1.7E-02	7.9E-03	3.9E-03	3.9E-03	3.4E-02	3.6E-02	4.0E-02	4.3E-02	4.7E-02	5.1E-02
811	9.9E-04	9.2E-03	1.3E-02	1.4E-02	7.8E-03	3.9E-03	3.9E-03	3.1E-02	3.4E-02	3.8E-02	4.3E-02	4.7E-02	5.2E-02
812	9.9E-04	8.5E-03	1.3E-02	1.3E-02	7.6E-03	3.8E-03	3.8E-03	2.5E-02	2.9E-02	3.5E-02	4.1E-02	4.6E-02	5.2E-02
813	9.8E-04	8.3E-03	1.2E-02	1.1E-02	7.2E-03	3.6E-03	3.6E-03	1.3E-02	2.0E-02	2.9E-02	3.8E-02	4.6E-02	5.5E-02
814	9.8E-04	8.0E-03	1.1E-02	1.0E-02	7.3E-03	3.4E-03	3.4E-03	1.0E-02	1.9E-02	2.9E-02	3.9E-02	4.9E-02	5.8E-02
815	1.0E-03	7.5E-03	1.0E-02	9.0E-03	7.6E-03	3.4E-03	3.4E-03	1.1E-02	2.0E-02	3.0E-02	4.1E-02	5.1E-02	6.2E-02
816	8.0E-04	5.6E-03	9.9E-03	1.2E-02	6.2E-03	4.2E-03	3.9E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.6E-02	3.0E-02
817	8.2E-04	7.0E-03	1.1E-02	1.3E-02	6.5E-03	4.2E-03	3.9E-03	9.8E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.0E-02
818	8.3E-04	8.0E-03	1.1E-02	1.3E-02	6.7E-03	4.2E-03	3.9E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
819	8.9E-04	8.9E-03	1.3E-02	1.6E-02	7.2E-03	4.2E-03	3.9E-03	1.8E-02	1.7E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02
820	9.3E-04	8.7E-03	1.5E-02	1.7E-02	7.5E-03	4.1E-03	3.8E-03	2.0E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02	2.6E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
821	1.0E-03	1.0E-02	1.6E-02	1.9E-02	7.7E-03	4.1E-03	3.8E-03	2.6E-02	2.6E-02	2.8E-02	3.1E-02	3.3E-02	3.6E-02
822	1.0E-03	1.2E-02	1.6E-02	2.0E-02	7.6E-03	4.0E-03	3.7E-03	2.9E-02	3.0E-02	3.3E-02	3.7E-02	4.1E-02	4.4E-02
823	9.9E-04	1.2E-02	1.4E-02	1.8E-02	7.6E-03	3.7E-03	3.4E-03	3.2E-02	3.3E-02	3.7E-02	4.1E-02	4.5E-02	5.0E-02
824	1.0E-03	1.2E-02	1.6E-02	1.7E-02	7.6E-03	3.6E-03	3.6E-03	3.7E-02	3.8E-02	4.1E-02	4.5E-02	4.8E-02	5.2E-02
825	1.0E-03	1.1E-02	1.6E-02	1.7E-02	7.8E-03	3.8E-03	3.8E-03	3.5E-02	3.7E-02	4.0E-02	4.4E-02	4.8E-02	5.1E-02
826	9.9E-04	1.0E-02	1.4E-02	1.6E-02	7.8E-03	3.8E-03	3.8E-03	3.4E-02	3.5E-02	3.9E-02	4.3E-02	4.6E-02	5.0E-02
827	9.8E-04	9.0E-03	1.2E-02	1.4E-02	7.7E-03	3.8E-03	3.8E-03	3.1E-02	3.3E-02	3.8E-02	4.2E-02	4.7E-02	5.1E-02
828	9.8E-04	7.8E-03	1.2E-02	1.2E-02	7.4E-03	3.7E-03	3.7E-03	2.3E-02	2.7E-02	3.3E-02	3.9E-02	4.5E-02	5.1E-02
829	9.7E-04	7.2E-03	1.1E-02	1.1E-02	7.1E-03	3.5E-03	3.5E-03	1.4E-02	2.1E-02	2.9E-02	3.7E-02	4.6E-02	5.4E-02
830	1.0E-03	7.3E-03	1.1E-02	9.7E-03	7.2E-03	3.3E-03	3.3E-03	1.0E-02	1.9E-02	2.8E-02	3.8E-02	4.8E-02	5.7E-02
831	8.2E-04	7.7E-03	1.0E-02	1.3E-02	6.7E-03	4.2E-03	3.8E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
832	8.8E-04	8.1E-03	1.2E-02	1.5E-02	7.1E-03	4.1E-03	3.8E-03	1.7E-02	1.6E-02	1.8E-02	2.0E-02	2.2E-02	2.3E-02
833	9.2E-04	8.0E-03	1.4E-02	1.6E-02	7.4E-03	4.0E-03	3.7E-03	1.9E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02	2.5E-02
834	1.0E-03	9.5E-03	1.4E-02	1.8E-02	7.7E-03	4.1E-03	3.7E-03	2.6E-02	2.6E-02	2.8E-02	3.1E-02	3.4E-02	3.6E-02
835	9.9E-04	1.1E-02	1.5E-02	1.8E-02	7.5E-03	3.9E-03	3.6E-03	2.8E-02	2.9E-02	3.3E-02	3.7E-02	4.0E-02	4.4E-02
836	9.8E-04	1.1E-02	1.4E-02	1.7E-02	7.5E-03	3.6E-03	3.3E-03	3.1E-02	3.3E-02	3.7E-02	4.1E-02	4.5E-02	4.9E-02
837	9.9E-04	1.1E-02	1.4E-02	1.6E-02	7.6E-03	3.6E-03	3.6E-03	3.6E-02	3.7E-02	4.0E-02	4.4E-02	4.7E-02	5.1E-02
838	9.8E-04	1.0E-02	1.5E-02	1.6E-02	7.7E-03	3.7E-03	3.7E-03	3.5E-02	3.6E-02	4.0E-02	4.3E-02	4.7E-02	5.0E-02
839	9.8E-04	9.7E-03	1.4E-02	1.5E-02	7.7E-03	3.8E-03	3.8E-03	3.3E-02	3.5E-02	3.9E-02	4.2E-02	4.6E-02	4.9E-02
840	9.7E-04	8.6E-03	1.1E-02	1.3E-02	7.5E-03	3.8E-03	3.8E-03	3.0E-02	3.3E-02	3.7E-02	4.1E-02	4.6E-02	5.0E-02
841	9.7E-04	7.2E-03	1.1E-02	1.1E-02	7.2E-03	3.6E-03	3.6E-03	2.3E-02	2.7E-02	3.3E-02	3.9E-02	4.5E-02	5.1E-02
842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
854	4.9E-03	5.4E-03	3.4E-03	9.8E-04	1.2E-03	8.6E-04	8.6E-04	-5.3E-03	-5.0E-03	-4.2E-03	-3.5E-03	-2.8E-03	-2.0E-03
855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
894	5.4E-03	5.9E-03	5.7E-03	9.6E-04	1.1E-03	8.1E-04	8.1E-04	-8.3E-03	-7.4E-03	-6.2E-03	-5.0E-03	-3.8E-03	-2.6E-03
895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
897	5.1E-03	5.6E-03	4.0E-03	9.6E-04	1.1E-03	8.3E-04	8.2E-04	-7.4E-03	-6.7E-03	-5.7E-03	-4.6E-03	-3.6E-03	-2.6E-03
898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
912	1.1E-03	7.0E-03	9.1E-03	9.3E-03	9.0E-03	4.6E-03	3.9E-03	-9.2E-02	-8.1E-02	-6.7E-02	-5.3E-02	-3.9E-02	-2.5E-02
913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
914	1.1E-03	7.7E-03	1.0E-02	1.0E-02	9.2E-03	4.7E-03	4.0E-03	-8.3E-02	-7.3E-02	-6.1E-02	-4.8E-02	-3.5E-02	-2.3E-02
915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
916	1.1E-03	8.4E-03	1.1E-02	1.1E-02	9.2E-03	4.8E-03	4.1E-03	-7.9E-02	-7.0E-02	-5.8E-02	-4.6E-02	-3.4E-02	-2.2E-02
917	1.1E-03	8.5E-03	1.1E-02	1.2E-02	9.3E-03	4.8E-03	4.1E-03	-6.6E-02	-6.0E-02	-5.1E-02	-4.2E-02	-3.2E-02	-2.3E-02
918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
919	1.1E-03	9.1E-03	1.2E-02	1.2E-02	9.7E-03	4.9E-03	4.2E-03	-8.0E-02	-7.1E-02	-5.9E-02	-4.7E-02	-3.4E-02	-2.2E-02
920	1.1E-03	9.0E-03	1.2E-02	1.2E-02	9.8E-03	4.9E-03	4.2E-03	-6.6E-02	-5.9E-02	-5.0E-02	-4.1E-02	-3.2E-02	-2.3E-02
921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
922	1.2E-03	9.8E-03	1.3E-02	1.3E-02	1.0E-02	5.0E-03	4.3E-03	-8.7E-02	-7.6E-02	-6.2E-02	-4.8E-02	-3.5E-02	-2.1E-02
923	1.1E-03	9.4E-03	1.3E-02	1.3E-02	1.0E-02	4.9E-03	4.3E-03	-6.8E-02	-6.0E-02	-5.0E-02	-4.0E-02	-2.9E-02	-1.9E-02
924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
925	1.2E-03	1.0E-02	1.3E-02	1.4E-02	1.1E-02	5.1E-03	4.4E-03	-8.7E-02	-7.7E-02	-6.3E-02	-5.0E-02	-3.6E-02	-2.3E-02
926	1.1E-03	9.7E-03	1.3E-02	1.4E-02	1.0E-02	5.0E-03	4.3E-03	-6.9E-02	-6.0E-02	-4.9E-02	-3.7E-02	-2.6E-02	-1.4E-02
927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
928	1.2E-03	1.1E-02	1.4E-02	1.5E-02	1.1E-02	5.1E-03	4.4E-03	-8.3E-02	-7.4E-02	-6.3E-02	-5.1E-02	-4.0E-02	-2.8E-02
929	1.1E-03	9.8E-03	1.3E-02	1.4E-02	1.0E-02	5.0E-03	4.4E-03	-6.7E-02	-5.9E-02	-4.8E-02	-3.6E-02	-2.5E-02	-1.4E-02
930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
931	1.2E-03	1.1E-02	1.5E-02	1.5E-02	1.1E-02	5.2E-03	4.5E-03	-7.5E-02	-7.0E-02	-6.2E-02	-5.3E-02	-4.5E-02	-3.7E-02
932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
934	1.2E-03	1.1E-02	1.5E-02	1.5E-02	1.1E-02	5.3E-03	4.6E-03	-6.3E-02	-6.2E-02	-5.9E-02	-5.5E-02	-5.2E-02	-4.8E-02
935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
938	9.8E-04	4.2E-03	7.1E-03	8.6E-03	8.9E-03	4.7E-03	4.4E-03	-2.3E-01	-2.1E-01	-1.8E-01	-1.6E-01	-1.3E-01	-1.0E-01
939	9.3E-04	3.8E-03	7.1E-03	8.5E-03	8.9E-03	4.6E-03	4.3E-03	-2.1E-01	-1.9E-01	-1.7E-01	-1.5E-01	-1.2E-01	-1.0E-01
940	9.4E-04	3.7E-03	7.1E-03	8.5E-03	9.0E-03	4.5E-03	4.2E-03	-1.9E-01	-1.8E-01	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01
941	9.3E-04	3.7E-03	6.7E-03	8.1E-03	8.6E-03	4.3E-03	4.0E-03	-1.8E-01	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01	-1.3E-01
942	9.4E-04	3.7E-03	6.8E-03	8.2E-03	8.7E-03	4.4E-03	4.1E-03	-1.9E-01	-1.8E-01	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01
943	9.6E-04	3.8E-03	6.9E-03	8.4E-03	8.9E-03	4.4E-03	4.1E-03	-2.0E-01	-1.8E-01	-1.7E-01	-1.5E-01	-1.4E-01	-1.2E-01

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
947	9.2E-04	3.5E-03	5.8E-03	7.1E-03	7.6E-03	3.9E-03	3.7E-03	-1.4E-01	-1.3E-01	-1.1E-01	-8.6E-02	-6.7E-02	-4.7E-02
948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
949	9.3E-04	3.5E-03	5.8E-03	7.1E-03	7.7E-03	4.0E-03	3.7E-03	-1.4E-01	-1.2E-01	-1.1E-01	-9.0E-02	-7.4E-02	-5.8E-02
950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
951	9.4E-04	3.6E-03	5.8E-03	7.1E-03	7.7E-03	4.0E-03	3.7E-03	-1.2E-01	-1.1E-01	-9.7E-02	-8.2E-02	-6.7E-02	-5.2E-02
952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
953	9.5E-04	3.7E-03	5.7E-03	7.1E-03	7.7E-03	4.0E-03	3.7E-03	-1.2E-01	-1.0E-01	-8.6E-02	-6.9E-02	-5.1E-02	-3.3E-02
954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
955	9.6E-04	3.7E-03	5.9E-03	7.0E-03	7.6E-03	4.0E-03	3.7E-03	-1.1E-01	-9.1E-02	-7.2E-02	-5.4E-02	-3.5E-02	-1.6E-02
956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
961	9.6E-04	4.5E-03	6.1E-03	7.0E-03	7.7E-03	4.2E-03	3.5E-03	-9.9E-02	-8.4E-02	-6.7E-02	-5.0E-02	-3.3E-02	-1.5E-02
962	9.7E-04	5.0E-03	6.6E-03	7.1E-03	7.8E-03	4.2E-03	3.5E-03	-1.0E-01	-8.7E-02	-6.9E-02	-5.1E-02	-3.4E-02	-1.6E-02
963	9.9E-04	5.5E-03	7.3E-03	7.5E-03	7.9E-03	4.3E-03	3.6E-03	-1.1E-01	-9.6E-02	-7.6E-02	-5.6E-02	-3.7E-02	-1.7E-02
964	9.5E-04	2.8E-03	5.0E-03	6.0E-03	8.1E-03	5.9E-03	5.6E-03	-1.7E-02	-2.4E-02	-2.9E-02	-3.4E-02	-3.9E-02	-4.4E-02
965	9.4E-04	2.9E-03	5.1E-03	5.8E-03	7.5E-03	5.2E-03	4.9E-03	-1.1E-02	-1.9E-02	-2.6E-02	-3.2E-02	-3.8E-02	-4.4E-02
966	9.3E-04	3.0E-03	5.1E-03	5.9E-03	7.0E-03	4.5E-03	4.3E-03	-2.1E-03	-1.3E-02	-2.1E-02	-3.0E-02	-3.8E-02	-4.6E-02
967	9.2E-04	3.1E-03	5.1E-03	6.0E-03	6.4E-03	3.8E-03	3.5E-03	4.4E-03	-7.5E-03	-1.7E-02	-2.7E-02	-3.7E-02	-4.6E-02
968	9.0E-04	3.1E-03	5.1E-03	6.0E-03	6.3E-03	3.6E-03	3.4E-03	-5.3E-03	-1.5E-02	-2.3E-02	-3.1E-02	-3.9E-02	-4.7E-02
969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
970	8.2E-04	3.0E-03	4.7E-03	5.8E-03	6.2E-03	3.4E-03	3.4E-03	-3.4E-02	-3.6E-02	-3.6E-02	-3.6E-02	-3.6E-02	-3.6E-02
971	8.0E-04	2.9E-03	4.6E-03	5.8E-03	6.1E-03	3.3E-03	3.3E-03	-3.8E-02	-4.0E-02	-3.9E-02	-3.9E-02	-3.9E-02	-3.9E-02
972	7.6E-04	2.8E-03	4.5E-03	5.6E-03	5.9E-03	3.2E-03	3.0E-03	-4.4E-02	-4.5E-02	-4.4E-02	-4.2E-02	-4.1E-02	-4.0E-02
973	9.5E-04	2.8E-03	5.0E-03	6.2E-03	8.5E-03	6.3E-03	6.1E-03	-1.9E-02	-2.5E-02	-3.0E-02	-3.4E-02	-3.9E-02	-4.3E-02
974	9.5E-04	2.9E-03	5.1E-03	6.0E-03	8.0E-03	5.7E-03	5.3E-03	-1.1E-02	-1.9E-02	-2.5E-02	-3.1E-02	-3.7E-02	-4.2E-02
975	9.4E-04	3.0E-03	5.1E-03	6.0E-03	7.1E-03	4.6E-03	4.3E-03	-1.0E-03	-1.1E-02	-2.0E-02	-2.8E-02	-3.6E-02	-4.4E-02
976	9.3E-04	3.1E-03	5.2E-03	6.1E-03	6.5E-03	4.0E-03	4.0E-03	3.8E-03	-7.5E-03	-1.7E-02	-2.6E-02	-3.5E-02	-4.4E-02
977	9.1E-04	3.1E-03	5.1E-03	6.1E-03	6.4E-03	4.0E-03	4.0E-03	-7.2E-03	-1.7E-02	-2.4E-02	-3.1E-02	-3.8E-02	-4.6E-02
978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
979	8.3E-04	3.0E-03	4.8E-03	5.9E-03	6.2E-03	3.4E-03	3.2E-03	-3.5E-02	-3.8E-02	-3.8E-02	-3.9E-02	-3.9E-02	-4.0E-02
980	8.0E-04	3.0E-03	4.7E-03	5.8E-03	6.2E-03	3.3E-03	3.1E-03	-4.0E-02	-4.2E-02	-4.2E-02	-4.1E-02	-4.1E-02	-4.1E-02
981	7.7E-04	2.8E-03	4.5E-03	5.7E-03	6.0E-03	3.3E-03	3.0E-03	-4.6E-02	-4.7E-02	-4.6E-02	-4.4E-02	-4.3E-02	-4.1E-02
982	7.4E-04	2.7E-03	4.3E-03	5.4E-03	5.8E-03	3.4E-03	3.0E-03	-5.1E-02	-5.0E-02	-4.8E-02	-4.5E-02	-4.3E-02	-4.0E-02
983	9.5E-04	3.0E-03	5.1E-03	6.1E-03	8.3E-03	5.9E-03	5.6E-03	-1.1E-02	-1.8E-02	-2.4E-02	-2.9E-02	-3.5E-02	-4.0E-02
984	9.5E-04	3.1E-03	5.2E-03	6.1E-03	7.0E-03	5.3E-03	5.3E-03	3.2E-04	-9.9E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.2E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
985	9.3E-04	3.1E-03	5.2E-03	6.1E-03	6.6E-03	5.2E-03	5.2E-03	3.0E-03	-7.8E-03	-1.6E-02	-2.5E-02	-3.4E-02	-4.3E-02
986	9.1E-04	3.1E-03	5.1E-03	6.1E-03	6.5E-03	4.7E-03	4.7E-03	-9.8E-03	-1.8E-02	-2.5E-02	-3.1E-02	-3.8E-02	-4.4E-02
987	8.8E-04	3.1E-03	5.1E-03	6.1E-03	6.5E-03	4.0E-03	4.0E-03	-2.5E-02	-3.0E-02	-3.3E-02	-3.5E-02	-3.8E-02	-4.1E-02
988	8.3E-04	3.1E-03	4.8E-03	6.0E-03	6.4E-03	3.5E-03	3.2E-03	-3.8E-02	-4.0E-02	-4.1E-02	-4.1E-02	-4.2E-02	-4.2E-02
989	8.1E-04	3.0E-03	4.7E-03	5.9E-03	6.3E-03	3.4E-03	3.1E-03	-4.3E-02	-4.5E-02	-4.4E-02	-4.4E-02	-4.3E-02	-4.3E-02
990	7.7E-04	2.9E-03	4.6E-03	5.7E-03	6.1E-03	3.4E-03	3.0E-03	-4.8E-02	-4.9E-02	-4.7E-02	-4.6E-02	-4.4E-02	-4.3E-02
991	7.4E-04	2.7E-03	4.4E-03	5.5E-03	5.9E-03	3.4E-03	3.0E-03	-5.3E-02	-5.2E-02	-5.0E-02	-4.7E-02	-4.4E-02	-4.2E-02
992	7.1E-04	2.6E-03	4.4E-03	5.5E-03	5.6E-03	3.4E-03	3.1E-03	-6.4E-02	-6.0E-02	-5.5E-02	-4.9E-02	-4.3E-02	-3.8E-02
993	9.4E-04	3.2E-03	5.3E-03	6.2E-03	6.6E-03	6.1E-03	6.1E-03	1.9E-03	-8.6E-03	-1.7E-02	-2.5E-02	-3.4E-02	-4.2E-02
994	9.2E-04	3.2E-03	5.2E-03	6.2E-03	6.6E-03	4.8E-03	4.8E-03	-1.3E-02	-2.1E-02	-2.6E-02	-3.2E-02	-3.8E-02	-4.3E-02
995	8.9E-04	3.2E-03	5.1E-03	6.2E-03	6.5E-03	3.8E-03	3.8E-03	-2.7E-02	-3.2E-02	-3.5E-02	-3.7E-02	-3.9E-02	-4.2E-02
996	8.4E-04	3.1E-03	4.9E-03	6.1E-03	6.5E-03	3.5E-03	3.2E-03	-4.1E-02	-4.4E-02	-4.4E-02	-4.4E-02	-4.4E-02	-4.5E-02
997	8.2E-04	3.1E-03	4.8E-03	6.0E-03	6.3E-03	3.4E-03	3.2E-03	-4.6E-02	-4.7E-02	-4.7E-02	-4.6E-02	-4.6E-02	-4.5E-02
998	7.8E-04	2.9E-03	4.6E-03	5.8E-03	6.2E-03	3.4E-03	3.0E-03	-5.1E-02	-5.1E-02	-4.9E-02	-4.8E-02	-4.6E-02	-4.4E-02
999	7.5E-04	2.7E-03	4.5E-03	5.6E-03	5.9E-03	3.4E-03	3.1E-03	-5.5E-02	-5.4E-02	-5.2E-02	-4.9E-02	-4.6E-02	-4.3E-02
1000	7.2E-04	2.7E-03	4.5E-03	5.6E-03	5.8E-03	3.4E-03	3.1E-03	-6.8E-02	-6.3E-02	-5.7E-02	-5.1E-02	-4.4E-02	-3.8E-02
1001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1002	8.5E-04	3.2E-03	5.0E-03	6.1E-03	6.6E-03	3.6E-03	3.3E-03	-4.4E-02	-4.6E-02	-4.6E-02	-4.6E-02	-4.6E-02	-4.6E-02
1003	8.2E-04	3.1E-03	4.9E-03	6.1E-03	6.4E-03	3.4E-03	3.2E-03	-4.9E-02	-5.0E-02	-4.9E-02	-4.8E-02	-4.8E-02	-4.7E-02
1004	7.9E-04	3.0E-03	4.7E-03	5.9E-03	6.3E-03	3.4E-03	3.1E-03	-5.3E-02	-5.3E-02	-5.1E-02	-5.0E-02	-4.8E-02	-4.6E-02
1005	7.6E-04	2.8E-03	4.5E-03	5.6E-03	6.0E-03	3.4E-03	3.1E-03	-5.7E-02	-5.6E-02	-5.3E-02	-5.0E-02	-4.7E-02	-4.4E-02
1006	7.2E-04	2.7E-03	4.6E-03	5.7E-03	5.9E-03	3.5E-03	3.2E-03	-7.0E-02	-6.6E-02	-5.9E-02	-5.2E-02	-4.6E-02	-3.9E-02
1007	8.6E-04	3.2E-03	5.0E-03	6.2E-03	6.6E-03	3.5E-03	3.3E-03	-4.8E-02	-5.0E-02	-5.0E-02	-5.0E-02	-4.9E-02	-4.9E-02
1008	8.3E-04	3.2E-03	4.9E-03	6.1E-03	6.5E-03	3.5E-03	3.2E-03	-5.1E-02	-5.2E-02	-5.1E-02	-5.1E-02	-5.0E-02	-4.9E-02
1009	8.0E-04	3.0E-03	4.8E-03	5.9E-03	6.3E-03	3.4E-03	3.1E-03	-5.5E-02	-5.5E-02	-5.3E-02	-5.1E-02	-5.0E-02	-4.8E-02
1010	7.6E-04	2.8E-03	4.6E-03	5.7E-03	6.1E-03	3.5E-03	3.2E-03	-6.0E-02	-5.9E-02	-5.5E-02	-5.1E-02	-4.7E-02	-4.4E-02
1011	7.3E-04	2.7E-03	4.7E-03	5.8E-03	6.0E-03	3.5E-03	3.2E-03	-7.4E-02	-6.9E-02	-6.2E-02	-5.5E-02	-4.8E-02	-4.0E-02
1012	8.7E-04	3.3E-03	5.1E-03	6.3E-03	6.7E-03	3.6E-03	3.4E-03	-5.1E-02	-5.3E-02	-5.3E-02	-5.2E-02	-5.2E-02	-5.1E-02
1013	8.4E-04	3.2E-03	5.0E-03	6.2E-03	6.6E-03	3.5E-03	3.3E-03	-5.3E-02	-5.4E-02	-5.4E-02	-5.3E-02	-5.2E-02	-5.1E-02
1014	8.1E-04	3.1E-03	4.9E-03	6.0E-03	6.4E-03	3.5E-03	3.2E-03	-5.7E-02	-5.7E-02	-5.5E-02	-5.3E-02	-5.1E-02	-4.9E-02
1015	7.7E-04	2.9E-03	4.6E-03	5.8E-03	6.2E-03	3.5E-03	3.2E-03	-6.3E-02	-6.1E-02	-5.7E-02	-5.2E-02	-4.8E-02	-4.3E-02
1016	7.4E-04	2.8E-03	4.8E-03	5.9E-03	6.1E-03	3.5E-03	3.3E-03	-7.7E-02	-7.1E-02	-6.4E-02	-5.7E-02	-4.9E-02	-4.2E-02
1017	8.8E-04	3.4E-03	5.2E-03	6.5E-03	6.9E-03	3.6E-03	3.4E-03	-5.5E-02	-5.7E-02	-5.6E-02	-5.6E-02	-5.5E-02	-5.4E-02
1018	8.6E-04	3.3E-03	5.2E-03	6.4E-03	6.8E-03	3.6E-03	3.3E-03	-5.7E-02	-5.8E-02	-5.7E-02	-5.6E-02	-5.5E-02	-5.4E-02
1019	8.3E-04	3.1E-03	5.0E-03	6.2E-03	6.6E-03	3.5E-03	3.2E-03	-6.1E-02	-6.1E-02	-5.8E-02	-5.6E-02	-5.4E-02	-5.2E-02
1020	7.9E-04	3.0E-03	4.8E-03	5.9E-03	6.3E-03	3.6E-03	3.3E-03	-6.9E-02	-6.6E-02	-6.0E-02	-5.5E-02	-4.9E-02	-4.4E-02
1021	7.5E-04	2.8E-03	4.9E-03	6.1E-03	6.2E-03	3.6E-03	3.3E-03	-7.9E-02	-7.4E-02	-6.7E-02	-6.0E-02	-5.3E-02	-4.6E-02
1022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1023	8.8E-04	3.4E-03	5.3E-03	6.5E-03	6.9E-03	3.6E-03	3.4E-03	-6.0E-02	-6.1E-02	-6.0E-02	-5.9E-02	-5.8E-02	-5.6E-02
1024	8.4E-04	3.2E-03	5.1E-03	6.3E-03	6.7E-03	3.6E-03	3.3E-03	-6.3E-02	-6.3E-02	-6.0E-02	-5.8E-02	-5.5E-02	-5.2E-02
1025	8.0E-04	3.0E-03	4.9E-03	6.1E-03	6.5E-03	3.6E-03	3.3E-03	-7.4E-02	-7.0E-02	-6.3E-02	-5.7E-02	-5.0E-02	-4.4E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1026	7.5E-04	2.9E-03	5.0E-03	6.2E-03	6.4E-03	3.6E-03	3.4E-03	-8.0E-02	-7.6E-02	-7.0E-02	-6.4E-02	-5.7E-02	-5.1E-02
1027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1028	8.9E-04	3.5E-03	5.4E-03	6.7E-03	7.1E-03	3.7E-03	3.4E-03	-6.3E-02	-6.4E-02	-6.3E-02	-6.1E-02	-6.0E-02	-5.9E-02
1029	8.5E-04	3.3E-03	5.2E-03	6.4E-03	6.8E-03	3.6E-03	3.4E-03	-6.7E-02	-6.6E-02	-6.2E-02	-5.9E-02	-5.6E-02	-5.2E-02
1030	8.1E-04	3.1E-03	5.0E-03	6.2E-03	6.5E-03	3.7E-03	3.4E-03	-7.8E-02	-7.3E-02	-6.6E-02	-5.8E-02	-5.1E-02	-4.3E-02
1031	7.6E-04	2.9E-03	5.1E-03	6.3E-03	6.5E-03	3.7E-03	3.4E-03	-8.3E-02	-8.0E-02	-7.4E-02	-6.8E-02	-6.3E-02	-5.7E-02
1032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1033	9.0E-04	3.5E-03	5.5E-03	6.8E-03	7.2E-03	3.7E-03	3.5E-03	-6.5E-02	-6.6E-02	-6.5E-02	-6.4E-02	-6.2E-02	-6.1E-02
1034	8.6E-04	3.3E-03	5.3E-03	6.5E-03	7.0E-03	3.7E-03	3.4E-03	-7.1E-02	-6.9E-02	-6.5E-02	-6.1E-02	-5.6E-02	-5.2E-02
1035	8.2E-04	3.1E-03	5.1E-03	6.3E-03	6.6E-03	3.7E-03	3.5E-03	-7.9E-02	-7.4E-02	-6.7E-02	-6.1E-02	-5.4E-02	-4.7E-02
1036	7.7E-04	2.9E-03	5.2E-03	6.4E-03	6.6E-03	3.7E-03	3.5E-03	-8.6E-02	-8.3E-02	-7.8E-02	-7.4E-02	-6.9E-02	-6.4E-02
1037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1042	9.3E-04	3.7E-03	5.7E-03	7.0E-03	7.5E-03	3.9E-03	3.6E-03	-7.3E-02	-7.3E-02	-7.0E-02	-6.7E-02	-6.4E-02	-6.2E-02
1043	8.9E-04	3.5E-03	5.5E-03	6.8E-03	7.2E-03	3.8E-03	3.6E-03	-7.8E-02	-7.5E-02	-7.0E-02	-6.5E-02	-6.0E-02	-5.5E-02
1044	8.4E-04	3.2E-03	5.4E-03	6.6E-03	6.9E-03	3.9E-03	3.6E-03	-8.5E-02	-8.2E-02	-7.6E-02	-7.0E-02	-6.4E-02	-5.8E-02
1045	9.4E-04	3.8E-03	5.8E-03	7.2E-03	7.6E-03	3.9E-03	3.6E-03	-7.6E-02	-7.5E-02	-7.2E-02	-6.8E-02	-6.5E-02	-6.2E-02
1046	9.0E-04	3.5E-03	5.6E-03	6.9E-03	7.4E-03	3.9E-03	3.6E-03	-8.0E-02	-7.7E-02	-7.3E-02	-6.8E-02	-6.3E-02	-5.8E-02
1047	1.0E-03	4.5E-03	6.9E-03	8.4E-03	9.0E-03	4.6E-03	4.3E-03	-1.8E-01	-1.6E-01	-1.4E-01	-1.2E-01	-1.0E-01	-8.5E-02
1048	9.6E-04	4.1E-03	6.9E-03	8.4E-03	8.7E-03	4.6E-03	4.3E-03	-1.7E-01	-1.6E-01	-1.4E-01	-1.3E-01	-1.1E-01	-9.8E-02
1049	1.1E-03	4.5E-03	6.8E-03	8.3E-03	8.9E-03	4.4E-03	4.1E-03	-1.1E-01	-1.0E-01	-1.0E-01	-9.6E-02	-9.1E-02	-8.7E-02
1050	9.9E-04	4.2E-03	6.5E-03	7.9E-03	8.5E-03	4.4E-03	4.1E-03	-1.2E-01	-1.1E-01	-1.0E-01	-9.5E-02	-8.6E-02	-7.8E-02
1051	9.2E-04	3.8E-03	6.5E-03	7.9E-03	8.1E-03	4.4E-03	4.1E-03	-1.3E-01	-1.2E-01	-1.1E-01	-1.1E-01	-9.8E-02	-9.1E-02
1052	1.0E-03	4.3E-03	6.6E-03	8.1E-03	8.7E-03	4.5E-03	4.2E-03	-1.4E-01	-1.3E-01	-1.2E-01	-1.0E-01	-9.1E-02	-7.8E-02
1053	9.3E-04	3.9E-03	6.7E-03	8.1E-03	8.4E-03	4.4E-03	4.1E-03	-1.4E-01	-1.3E-01	-1.2E-01	-1.1E-01	-1.0E-01	-9.6E-02
1054	8.8E-04	3.6E-03	6.7E-03	8.1E-03	8.4E-03	4.4E-03	4.1E-03	-1.3E-01	-1.3E-01	-1.1E-01	-1.0E-01	-9.1E-02	-7.9E-02
1055	8.9E-04	3.4E-03	6.5E-03	7.9E-03	8.3E-03	4.3E-03	4.0E-03	-1.3E-01	-1.2E-01	-1.1E-01	-9.4E-02	-8.0E-02	-6.6E-02
1056	9.0E-04	3.6E-03	6.8E-03	8.2E-03	8.6E-03	4.4E-03	4.1E-03	-1.6E-01	-1.4E-01	-1.2E-01	-1.1E-01	-9.0E-02	-7.2E-02
1057	9.0E-04	3.5E-03	6.7E-03	8.0E-03	8.4E-03	4.3E-03	4.0E-03	-1.6E-01	-1.4E-01	-1.3E-01	-1.1E-01	-9.7E-02	-8.1E-02
1058	9.2E-04	3.6E-03	6.8E-03	8.2E-03	8.6E-03	4.4E-03	4.1E-03	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01	-1.2E-01	-1.1E-01
1059	9.1E-04	3.5E-03	6.5E-03	7.9E-03	8.3E-03	4.2E-03	3.9E-03	-1.7E-01	-1.6E-01	-1.5E-01	-1.3E-01	-1.2E-01	-1.1E-01
1060	8.4E-04	3.3E-03	5.6E-03	6.9E-03	7.1E-03	3.9E-03	3.7E-03	-9.1E-02	-8.9E-02	-8.5E-02	-8.0E-02	-7.6E-02	-7.1E-02
1061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1062	9.4E-04	3.8E-03	5.9E-03	7.2E-03	7.8E-03	3.9E-03	3.6E-03	-7.8E-02	-7.7E-02	-7.4E-02	-7.1E-02	-6.8E-02	-6.4E-02
1063	9.0E-04	3.6E-03	5.6E-03	6.9E-03	7.4E-03	4.0E-03	3.7E-03	-8.6E-02	-8.4E-02	-7.9E-02	-7.5E-02	-7.0E-02	-6.5E-02
1064	8.4E-04	3.3E-03	5.7E-03	7.0E-03	7.2E-03	4.0E-03	3.7E-03	-9.5E-02	-9.3E-02	-8.8E-02	-8.3E-02	-7.9E-02	-7.4E-02
1065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1066	9.5E-04	3.9E-03	6.0E-03	7.4E-03	7.9E-03	4.0E-03	3.7E-03	-8.3E-02	-8.2E-02	-7.9E-02	-7.6E-02	-7.3E-02	-7.0E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1067	9.0E-04	3.6E-03	5.7E-03	7.0E-03	7.6E-03	4.0E-03	3.8E-03	-8.9E-02	-8.6E-02	-8.1E-02	-7.7E-02	-7.2E-02	-6.7E-02
1068	8.5E-04	3.4E-03	5.8E-03	7.1E-03	7.4E-03	4.1E-03	3.8E-03	-1.0E-01	-9.8E-02	-9.2E-02	-8.7E-02	-8.2E-02	-7.6E-02
1069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1070	9.7E-04	4.0E-03	6.2E-03	7.5E-03	8.1E-03	4.1E-03	3.8E-03	-9.0E-02	-8.9E-02	-8.5E-02	-8.1E-02	-7.7E-02	-7.4E-02
1071	9.1E-04	3.7E-03	5.9E-03	7.2E-03	7.7E-03	4.1E-03	3.8E-03	-9.1E-02	-8.9E-02	-8.4E-02	-7.9E-02	-7.3E-02	-6.8E-02
1072	8.6E-04	3.4E-03	6.0E-03	7.3E-03	7.5E-03	4.1E-03	3.8E-03	-1.1E-01	-1.0E-01	-9.7E-02	-9.1E-02	-8.6E-02	-8.0E-02
1073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1074	9.9E-04	4.1E-03	6.3E-03	7.7E-03	8.3E-03	4.2E-03	3.9E-03	-9.4E-02	-9.2E-02	-8.8E-02	-8.4E-02	-8.0E-02	-7.6E-02
1075	9.2E-04	3.8E-03	6.0E-03	7.3E-03	7.8E-03	4.2E-03	3.9E-03	-9.6E-02	-9.3E-02	-8.7E-02	-8.1E-02	-7.6E-02	-7.0E-02
1076	8.6E-04	3.5E-03	6.1E-03	7.5E-03	7.7E-03	4.2E-03	3.9E-03	-1.1E-01	-1.1E-01	-1.0E-01	-9.4E-02	-8.8E-02	-8.3E-02
1077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1078	1.0E-03	4.2E-03	6.4E-03	7.8E-03	8.4E-03	4.2E-03	4.0E-03	-9.7E-02	-9.5E-02	-9.1E-02	-8.7E-02	-8.3E-02	-7.8E-02
1079	9.3E-04	3.8E-03	6.1E-03	7.5E-03	7.9E-03	4.2E-03	3.9E-03	-1.0E-01	-9.9E-02	-9.2E-02	-8.6E-02	-7.9E-02	-7.2E-02
1080	8.7E-04	3.6E-03	6.2E-03	7.6E-03	7.9E-03	4.2E-03	3.9E-03	-1.1E-01	-1.1E-01	-1.0E-01	-9.8E-02	-9.4E-02	-9.0E-02
1081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1097	8.1E-04	3.1E-03	5.9E-03	7.2E-03	7.5E-03	4.0E-03	3.8E-03	-9.8E-02	-9.8E-02	-9.5E-02	-9.2E-02	-8.9E-02	-8.6E-02
1098	8.3E-04	3.2E-03	6.0E-03	7.3E-03	7.6E-03	4.1E-03	3.8E-03	-9.4E-02	-9.5E-02	-9.4E-02	-9.3E-02	-9.2E-02	-9.1E-02
1099	8.4E-04	3.2E-03	6.1E-03	7.5E-03	7.8E-03	4.1E-03	3.8E-03	-9.2E-02	-9.5E-02	-9.5E-02	-9.5E-02	-9.5E-02	-9.5E-02
1100	8.5E-04	3.3E-03	6.3E-03	7.6E-03	7.9E-03	4.2E-03	3.9E-03	-1.0E-01	-1.0E-01	-1.0E-01	-9.8E-02	-9.5E-02	-9.3E-02
1101	8.7E-04	3.3E-03	6.4E-03	7.8E-03	8.1E-03	4.2E-03	3.9E-03	-1.1E-01	-1.1E-01	-1.0E-01	-9.7E-02	-9.0E-02	-8.4E-02
1102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1110	4.7E-04	1.5E-03	2.6E-03	3.5E-03	1.2E-02	1.4E-02	6.7E-03	5.1E-03	6.9E-03	1.0E-02	1.4E-02	1.8E-02	2.1E-02
1111	4.8E-04	1.5E-03	2.6E-03	3.5E-03	1.3E-02	1.5E-02	6.9E-03	3.7E-03	5.7E-03	9.6E-03	1.3E-02	1.7E-02	2.1E-02
1112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1120	6.3E-03	7.1E-03	7.0E-03	9.2E-04	8.8E-04	6.9E-04	6.9E-04	-1.0E-02	-8.3E-03	-6.1E-03	-3.9E-03	-1.7E-03	4.6E-04
1121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1122	5.8E-03	7.0E-03	6.8E-03	9.0E-04	9.3E-04	6.7E-04	6.7E-04	-9.1E-03	-7.8E-03	-6.1E-03	-4.3E-03	-2.6E-03	-9.2E-04
1123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1124	5.8E-03	7.1E-03	6.9E-03	8.9E-04	9.5E-04	7.1E-04	7.1E-04	-8.0E-03	-6.9E-03	-5.5E-03	-4.1E-03	-2.7E-03	-1.3E-03
1125	4.9E-03	6.5E-03	6.3E-03	9.0E-04	1.0E-03	7.3E-04	7.3E-04	-8.6E-03	-7.6E-03	-6.4E-03	-5.1E-03	-3.8E-03	-2.5E-03
1126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1127	4.9E-03	6.5E-03	6.3E-03	9.2E-04	1.0E-03	7.6E-04	7.6E-04	-8.8E-03	-7.8E-03	-6.4E-03	-5.1E-03	-3.8E-03	-2.5E-03
1128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1129	4.9E-03	5.4E-03	5.0E-03	9.3E-04	1.1E-03	7.8E-04	7.8E-04	-8.5E-03	-7.7E-03	-6.6E-03	-5.4E-03	-4.3E-03	-3.1E-03
1130	3.3E-03	3.7E-03	2.7E-03	9.6E-04	1.2E-03	8.5E-04	8.5E-04	-5.3E-03	-4.9E-03	-4.2E-03	-3.5E-03	-2.8E-03	-2.1E-03
1131	2.8E-03	3.3E-03	2.5E-03	9.6E-04	1.3E-03	8.6E-04	8.5E-04	-4.5E-03	-4.4E-03	-4.0E-03	-3.5E-03	-3.0E-03	-2.6E-03
1132	2.6E-03	3.0E-03	2.6E-03	9.6E-04	1.3E-03	8.6E-04	8.6E-04	-3.9E-03	-4.2E-03	-4.0E-03	-3.8E-03	-3.6E-03	-3.4E-03
1133	2.9E-03	3.3E-03	2.5E-03	9.6E-04	1.3E-03	8.9E-04	8.6E-04	-3.3E-03	-3.7E-03	-3.7E-03	-3.8E-03	-3.8E-03	-3.8E-03
1134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1144	3.2E-03	4.4E-03	9.3E-03	1.1E-02	1.7E-02	1.7E-02	1.6E-02	-1.0E-02	-6.1E-03	9.2E-03	2.4E-02	4.0E-02	5.5E-02
1145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1167	1.3E-03	1.1E-02	1.5E-02	1.6E-02	1.2E-02	5.5E-03	4.8E-03	-3.8E-02	-4.1E-02	-4.1E-02	-4.0E-02	-4.0E-02	-4.0E-02
1168	1.5E-03	9.9E-03	1.5E-02	1.4E-02	1.4E-02	5.6E-03	5.4E-03	-3.1E-02	-3.3E-02	-3.2E-02	-3.1E-02	-2.9E-02	-2.8E-02
1169	1.9E-03	9.3E-03	1.4E-02	1.3E-02	1.3E-02	6.2E-03	6.0E-03	-3.8E-02	-3.9E-02	-3.6E-02	-3.3E-02	-3.0E-02	-2.6E-02
1170	1.8E-03	1.3E-02	1.9E-02	1.9E-02	1.9E-02	6.2E-03	6.0E-03	-3.1E-02	-3.2E-02	-2.8E-02	-2.5E-02	-2.2E-02	-1.8E-02
1171	2.1E-03	9.7E-03	1.4E-02	1.4E-02	1.4E-02	7.0E-03	6.7E-03	-4.5E-02	-4.4E-02	-3.9E-02	-3.5E-02	-3.0E-02	-2.5E-02
1172	2.4E-03	7.0E-03	1.1E-02	1.0E-02	1.0E-02	7.4E-03	7.2E-03	-6.3E-02	-5.7E-02	-4.9E-02	-4.0E-02	-3.1E-02	-2.2E-02
1173	2.4E-03	7.8E-03	1.3E-02	1.2E-02	1.2E-02	7.6E-03	7.3E-03	-8.0E-02	-7.2E-02	-6.0E-02	-4.9E-02	-3.7E-02	-2.5E-02
1174	2.7E-03	6.0E-03	9.1E-03	1.0E-02	9.8E-03	7.9E-03	7.6E-03	-8.1E-02	-7.6E-02	-6.8E-02	-5.9E-02	-5.0E-02	-4.1E-02
1175	2.7E-03	1.3E-02	1.3E-02	1.3E-02	1.0E-02	8.1E-03	7.8E-03	-9.5E-02	-8.9E-02	-7.9E-02	-6.8E-02	-5.8E-02	-4.8E-02
1176	2.9E-03	1.0E-02	1.0E-02	1.1E-02	1.0E-02	8.4E-03	8.0E-03	-8.4E-02	-8.2E-02	-7.6E-02	-7.1E-02	-6.5E-02	-5.9E-02
1177	3.0E-03	1.6E-02	1.6E-02	1.6E-02	1.1E-02	8.7E-03	8.4E-03	-9.9E-02	-9.5E-02	-8.7E-02	-7.9E-02	-7.1E-02	-6.3E-02
1178	3.1E-03	1.2E-02	1.2E-02	1.2E-02	1.1E-02	8.8E-03	8.5E-03	-8.4E-02	-8.2E-02	-7.5E-02	-6.8E-02	-6.1E-02	-5.4E-02
1179	3.1E-03	9.7E-03	9.7E-03	9.8E-03	1.1E-02	8.7E-03	8.3E-03	-6.9E-02	-6.8E-02	-6.2E-02	-5.6E-02	-5.0E-02	-4.4E-02
1180	3.3E-03	1.3E-02	1.4E-02	1.4E-02	1.4E-02	9.3E-03	8.9E-03	-7.8E-02	-7.5E-02	-6.8E-02	-6.0E-02	-5.3E-02	-4.5E-02
1181	3.3E-03	1.1E-02	1.1E-02	1.1E-02	1.1E-02	9.2E-03	8.8E-03	-5.9E-02	-5.8E-02	-5.1E-02	-4.4E-02	-3.7E-02	-3.0E-02
1182	3.2E-03	9.6E-03	9.6E-03	9.6E-03	1.1E-02	8.8E-03	8.4E-03	-4.2E-02	-4.1E-02	-3.5E-02	-2.9E-02	-2.4E-02	-1.8E-02
1183	3.5E-03	1.5E-02	1.5E-02	1.5E-02	1.2E-02	9.7E-03	9.3E-03	-3.3E-02	-3.0E-02	-2.1E-02	-1.2E-02	-3.4E-03	5.4E-03
1184	3.5E-03	1.2E-02	1.2E-02	1.2E-02	1.2E-02	9.5E-03	9.0E-03	-2.6E-02	-2.3E-02	-1.5E-02	-7.1E-03	1.1E-03	9.2E-03
1185	3.8E-03	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.0E-02	9.7E-03	3.1E-03	8.3E-03	2.0E-02	3.1E-02	4.2E-02	5.4E-02
1186	3.5E-03	1.1E-02	1.1E-02	1.1E-02	1.2E-02	9.6E-03	9.1E-03	-3.0E-03	1.1E-03	1.1E-02	2.1E-02	3.2E-02	4.2E-02
1187	3.9E-03	9.5E-03	1.0E-02	1.1E-02	1.3E-02	1.1E-02	1.0E-02	2.1E-02	2.9E-02	4.4E-02	5.8E-02	7.3E-02	8.7E-02
1188	3.5E-03	8.0E-03	8.0E-03	1.0E-02	1.2E-02	9.6E-03	9.1E-03	1.5E-02	2.1E-02	3.5E-02	4.8E-02	6.1E-02	7.4E-02
1189	4.0E-03	8.0E-03	9.7E-03	1.1E-02	1.3E-02	1.1E-02	1.0E-02	3.0E-02	4.1E-02	5.8E-02	7.6E-02	9.3E-02	1.1E-01

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1190	1.7E-03	6.2E-03	9.9E-03	1.1E-02	8.5E-03	5.7E-03	5.5E-03	-4.4E-02	-4.2E-02	-3.7E-02	-3.1E-02	-2.6E-02	-2.1E-02
1191	2.2E-03	7.2E-03	1.0E-02	1.0E-02	1.0E-02	6.8E-03	6.5E-03	-5.3E-02	-4.9E-02	-4.1E-02	-3.3E-02	-2.5E-02	-1.7E-02
1192	2.6E-03	5.2E-03	8.2E-03	9.2E-03	9.3E-03	7.5E-03	7.2E-03	-6.3E-02	-5.6E-02	-4.6E-02	-3.6E-02	-2.5E-02	-1.5E-02
1193	2.7E-03	4.0E-03	7.3E-03	9.3E-03	9.7E-03	7.8E-03	7.4E-03	-5.5E-02	-5.5E-02	-5.0E-02	-4.5E-02	-4.0E-02	-3.6E-02
1194	2.9E-03	7.1E-03	7.1E-03	9.3E-03	1.0E-02	8.0E-03	7.6E-03	-6.2E-02	-6.3E-02	-6.0E-02	-5.6E-02	-5.3E-02	-5.0E-02
1195	2.8E-03	6.6E-03	6.6E-03	8.7E-03	9.8E-03	7.9E-03	7.4E-03	-5.4E-02	-5.4E-02	-5.0E-02	-4.6E-02	-4.2E-02	-3.8E-02
1196	2.9E-03	8.9E-03	8.9E-03	8.9E-03	9.9E-03	7.9E-03	7.4E-03	-4.6E-02	-4.7E-02	-4.2E-02	-3.7E-02	-3.3E-02	-2.8E-02
1197	2.8E-03	9.5E-03	9.5E-03	9.5E-03	9.8E-03	7.8E-03	7.3E-03	-2.8E-02	-2.9E-02	-2.5E-02	-2.1E-02	-1.7E-02	-1.3E-02
1198	2.5E-03	6.3E-03	6.3E-03	7.1E-03	8.6E-03	6.8E-03	6.4E-03	-8.4E-03	-9.7E-03	-5.9E-03	-2.2E-03	1.6E-03	5.4E-03
1199	2.7E-03	7.9E-03	7.9E-03	7.9E-03	9.5E-03	7.5E-03	7.0E-03	-8.0E-03	-7.9E-03	-2.3E-03	3.4E-03	9.0E-03	1.5E-02
1200	2.6E-03	6.0E-03	6.0E-03	7.2E-03	8.1E-03	6.6E-03	6.6E-03	1.3E-03	1.6E-03	7.0E-03	1.2E-02	1.8E-02	2.3E-02
1201	3.1E-03	9.1E-03	9.1E-03	8.8E-03	1.1E-02	8.5E-03	8.0E-03	-1.3E-03	6.3E-04	8.6E-03	1.6E-02	2.4E-02	3.2E-02
1202	2.8E-03	6.2E-03	7.8E-03	7.8E-03	9.1E-03	7.3E-03	7.0E-03	1.8E-03	3.2E-03	1.0E-02	1.7E-02	2.4E-02	3.1E-02
1203	2.7E-03	4.9E-03	5.9E-03	7.2E-03	7.5E-03	6.7E-03	6.6E-03	8.5E-03	9.3E-03	1.5E-02	2.1E-02	2.7E-02	3.2E-02
1204	3.0E-03	9.9E-03	9.9E-03	9.4E-03	1.0E-02	8.2E-03	7.6E-03	1.7E-02	2.2E-02	3.2E-02	4.2E-02	5.2E-02	6.3E-02
1205	3.0E-03	7.5E-03	7.6E-03	7.8E-03	8.5E-03	7.2E-03	7.2E-03	2.1E-02	2.4E-02	3.3E-02	4.2E-02	5.1E-02	5.9E-02
1206	2.8E-03	4.8E-03	5.4E-03	7.1E-03	8.2E-03	6.6E-03	6.6E-03	2.0E-02	2.3E-02	3.2E-02	4.0E-02	4.9E-02	5.7E-02
1207	3.2E-03	6.2E-03	6.2E-03	8.4E-03	9.6E-03	7.8E-03	7.8E-03	1.8E-02	2.6E-02	4.1E-02	5.6E-02	7.0E-02	8.5E-02
1208	3.0E-03	6.7E-03	6.7E-03	7.7E-03	9.0E-03	7.2E-03	7.2E-03	1.3E-02	2.0E-02	3.4E-02	4.7E-02	6.0E-02	7.3E-02
1209	2.7E-03	5.3E-03	5.7E-03	6.8E-03	8.8E-03	7.1E-03	6.7E-03	7.1E-03	1.5E-02	2.6E-02	3.8E-02	5.0E-02	6.2E-02
1210	3.4E-03	8.4E-03	8.8E-03	8.9E-03	1.1E-02	8.6E-03	8.3E-03	-1.7E-03	1.2E-02	3.3E-02	5.4E-02	7.5E-02	9.6E-02
1211	3.2E-03	6.0E-03	6.5E-03	8.4E-03	9.7E-03	7.8E-03	7.8E-03	-6.6E-03	6.5E-03	2.5E-02	4.5E-02	6.4E-02	8.3E-02
1212	2.9E-03	4.1E-03	6.2E-03	7.5E-03	9.6E-03	7.9E-03	7.5E-03	-1.2E-02	-7.1E-04	1.6E-02	3.2E-02	4.9E-02	6.5E-02
1213	2.5E-03	3.8E-03	6.0E-03	6.7E-03	9.0E-03	8.0E-03	7.6E-03	-2.0E-02	-9.4E-03	5.8E-03	2.1E-02	3.6E-02	5.1E-02
1214	3.6E-03	6.7E-03	9.9E-03	1.0E-02	1.2E-02	9.9E-03	9.3E-03	-2.7E-03	1.4E-02	3.8E-02	6.1E-02	8.5E-02	1.1E-01
1215	3.5E-03	7.3E-03	8.9E-03	9.1E-03	1.1E-02	8.5E-03	8.5E-03	-1.7E-02	-1.2E-03	2.1E-02	4.3E-02	6.5E-02	8.7E-02
1216	3.2E-03	6.6E-03	6.9E-03	8.1E-03	1.0E-02	8.8E-03	8.3E-03	-3.7E-02	-2.1E-02	7.5E-04	2.2E-02	4.4E-02	6.5E-02
1217	2.7E-03	4.4E-03	6.3E-03	7.0E-03	1.0E-02	9.1E-03	8.6E-03	-4.9E-02	-3.2E-02	-1.1E-02	1.0E-02	3.2E-02	5.3E-02
1218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1219	3.8E-03	5.3E-03	9.1E-03	9.9E-03	1.2E-02	9.3E-03	9.3E-03	-1.2E-02	3.4E-03	2.6E-02	4.9E-02	7.1E-02	9.4E-02
1220	3.5E-03	5.8E-03	8.0E-03	9.0E-03	1.1E-02	9.9E-03	9.3E-03	-2.6E-02	-9.7E-03	1.3E-02	3.6E-02	5.8E-02	8.1E-02
1221	3.0E-03	5.5E-03	6.7E-03	7.8E-03	1.1E-02	1.0E-02	9.6E-03	-3.3E-02	-1.7E-02	4.9E-03	2.7E-02	4.8E-02	7.0E-02
1222	2.5E-03	4.7E-03	6.4E-03	6.5E-03	1.1E-02	1.0E-02	9.6E-03	-3.5E-02	-2.1E-02	-6.1E-04	1.9E-02	3.9E-02	5.9E-02
1223	2.1E-03	3.8E-03	6.0E-03	6.2E-03	1.1E-02	1.0E-02	9.7E-03	-4.2E-02	-2.9E-02	-1.0E-02	8.8E-03	2.8E-02	4.7E-02
1224	4.3E-03	5.9E-03	8.6E-03	1.1E-02	1.3E-02	1.1E-02	1.1E-02	3.0E-02	4.0E-02	6.0E-02	7.9E-02	9.8E-02	1.2E-01
1225	3.8E-03	5.7E-03	8.8E-03	9.9E-03	1.2E-02	1.1E-02	1.0E-02	1.9E-02	2.9E-02	4.6E-02	6.3E-02	8.0E-02	9.7E-02
1226	3.3E-03	3.9E-03	7.3E-03	8.6E-03	1.2E-02	1.1E-02	1.1E-02	-2.1E-03	9.4E-03	2.7E-02	4.5E-02	6.3E-02	8.1E-02
1227	2.7E-03	4.8E-03	6.6E-03	7.1E-03	1.2E-02	1.1E-02	1.1E-02	-2.1E-02	-8.5E-03	1.1E-02	3.0E-02	5.0E-02	6.9E-02
1228	2.3E-03	4.3E-03	6.3E-03	6.6E-03	1.1E-02	1.1E-02	1.0E-02	-2.7E-02	-1.6E-02	3.1E-03	2.2E-02	4.0E-02	5.9E-02
1229	2.3E-03	4.2E-03	5.9E-03	6.6E-03	1.1E-02	1.1E-02	1.0E-02	-2.5E-02	-1.7E-02	-5.8E-04	1.5E-02	3.1E-02	4.7E-02
1230	4.3E-03	4.9E-03	8.3E-03	1.1E-02	1.3E-02	1.3E-02	1.2E-02	1.4E-02	2.6E-02	4.6E-02	6.7E-02	8.7E-02	1.1E-01

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1231	3.7E-03	5.4E-03	7.6E-03	9.6E-03	1.3E-02	1.3E-02	1.2E-02	2.8E-02	3.8E-02	5.5E-02	7.3E-02	9.0E-02	1.1E-01
1232	3.0E-03	4.5E-03	6.9E-03	7.9E-03	1.3E-02	1.2E-02	1.2E-02	2.7E-02	3.3E-02	4.8E-02	6.3E-02	7.7E-02	9.2E-02
1233	2.6E-03	4.6E-03	6.6E-03	7.3E-03	1.2E-02	1.2E-02	1.1E-02	1.1E-02	1.8E-02	3.4E-02	4.9E-02	6.4E-02	8.0E-02
1234	2.7E-03	4.7E-03	6.2E-03	7.1E-03	1.2E-02	1.2E-02	1.1E-02	-5.2E-03	1.4E-03	1.6E-02	3.1E-02	4.6E-02	6.1E-02
1235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1236	4.1E-03	4.9E-03	7.6E-03	1.1E-02	1.5E-02	1.4E-02	1.3E-02	4.6E-03	1.4E-02	3.4E-02	5.3E-02	7.3E-02	9.2E-02
1237	3.4E-03	5.1E-03	7.2E-03	8.9E-03	1.4E-02	1.4E-02	1.3E-02	1.1E-02	2.0E-02	3.9E-02	5.8E-02	7.8E-02	9.7E-02
1238	2.9E-03	5.2E-03	6.8E-03	8.0E-03	1.3E-02	1.3E-02	1.2E-02	2.3E-02	3.0E-02	4.7E-02	6.4E-02	8.1E-02	9.8E-02
1239	3.0E-03	5.2E-03	6.4E-03	7.5E-03	1.3E-02	1.2E-02	1.2E-02	2.3E-02	2.8E-02	4.2E-02	5.6E-02	7.1E-02	8.5E-02
1240	2.9E-03	5.0E-03	6.0E-03	7.1E-03	1.2E-02	1.2E-02	1.1E-02	9.0E-03	1.5E-02	2.9E-02	4.4E-02	5.8E-02	7.3E-02
1241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1242	3.7E-03	5.7E-03	7.5E-03	1.0E-02	1.5E-02	1.5E-02	1.4E-02	8.9E-03	1.2E-02	2.6E-02	4.0E-02	5.4E-02	6.8E-02
1243	3.3E-03	5.6E-03	7.0E-03	8.6E-03	1.4E-02	1.4E-02	1.3E-02	4.0E-05	7.1E-03	2.5E-02	4.2E-02	6.0E-02	7.7E-02
1244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1245	3.2E-03	5.5E-03	6.2E-03	7.6E-03	1.3E-02	1.3E-02	1.2E-02	1.6E-02	2.2E-02	3.9E-02	5.5E-02	7.1E-02	8.7E-02
1246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1248	3.7E-03	6.3E-03	7.4E-03	9.5E-03	1.6E-02	1.6E-02	1.5E-02	1.8E-02	1.3E-02	1.9E-02	2.5E-02	3.1E-02	3.7E-02
1249	3.6E-03	6.1E-03	6.8E-03	8.7E-03	1.5E-02	1.4E-02	1.4E-02	9.8E-03	9.5E-03	2.0E-02	3.1E-02	4.1E-02	5.2E-02
1250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1251	3.3E-03	5.6E-03	5.9E-03	7.4E-03	1.2E-02	1.2E-02	1.1E-02	5.3E-03	1.2E-02	2.8E-02	4.4E-02	6.0E-02	7.6E-02
1252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1254	4.0E-03	6.8E-03	7.3E-03	9.9E-03	1.6E-02	1.6E-02	1.5E-02	1.5E-02	5.0E-03	7.1E-03	9.1E-03	1.1E-02	1.3E-02
1255	3.8E-03	6.4E-03	6.6E-03	9.0E-03	1.5E-02	1.4E-02	1.3E-02	1.7E-02	9.8E-03	1.4E-02	1.7E-02	2.1E-02	2.5E-02
1256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1257	3.3E-03	5.5E-03	5.5E-03	7.5E-03	1.2E-02	1.1E-02	1.1E-02	-4.1E-03	-2.1E-04	1.3E-02	2.6E-02	3.9E-02	5.2E-02
1258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1260	4.1E-03	6.9E-03	7.7E-03	1.2E-02	1.6E-02	1.5E-02	1.4E-02	1.1E-02	6.7E-04	2.9E-03	5.1E-03	7.3E-03	9.5E-03
1261	3.8E-03	6.3E-03	7.1E-03	1.0E-02	1.4E-02	1.4E-02	1.3E-02	1.7E-02	5.6E-03	5.3E-03	5.0E-03	4.6E-03	4.3E-03
1262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1266	3.6E-03	5.9E-03	7.4E-03	1.2E-02	1.3E-02	1.2E-02	1.1E-02	9.9E-03	8.6E-04	1.9E-03	3.0E-03	4.1E-03	5.1E-03
1267	3.3E-03	5.3E-03	6.9E-03	1.1E-02	1.1E-02	1.1E-02	1.0E-02	1.8E-02	7.0E-03	4.7E-03	2.4E-03	1.8E-04	-2.1E-03
1268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1280	4.4E-03	4.5E-03	6.9E-03	1.2E-02	1.3E-02	1.2E-02	1.2E-02	-1.1E-02	-1.3E-02	-7.8E-03	-3.0E-03	1.7E-03	6.5E-03
1281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1282	4.5E-03	4.5E-03	7.4E-03	1.2E-02	1.2E-02	1.2E-02	1.2E-02	-1.5E-02	-1.6E-02	-1.1E-02	-5.1E-03	4.7E-04	6.0E-03
1283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1293	4.3E-03	4.6E-03	7.2E-03	1.3E-02	1.4E-02	1.3E-02	1.3E-02	-5.6E-03	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02
1294	4.0E-03	4.3E-03	6.3E-03	1.2E-02	1.2E-02	1.1E-02	1.1E-02	-7.0E-03	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.3E-03
1295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1297	3.8E-03	4.2E-03	7.8E-03	1.2E-02	1.4E-02	1.4E-02	1.3E-02	-6.3E-03	-1.3E-02	-1.0E-02	-7.8E-03	-5.4E-03	-2.9E-03
1298	3.5E-03	3.8E-03	6.3E-03	1.1E-02	1.2E-02	1.1E-02	1.1E-02	-5.8E-03	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
1299	3.4E-03	3.7E-03	5.8E-03	1.1E-02	1.1E-02	1.1E-02	1.1E-02	-7.6E-03	-1.1E-02	-9.3E-03	-7.2E-03	-5.2E-03	-3.1E-03
1300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1304	3.5E-03	3.8E-03	6.9E-03	1.0E-02	1.2E-02	1.2E-02	1.1E-02	-2.2E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02
1305	3.3E-03	3.7E-03	6.0E-03	1.0E-02	1.1E-02	1.0E-02	1.0E-02	-6.1E-03	-1.1E-02	-9.7E-03	-8.3E-03	-7.0E-03	-5.6E-03
1306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1309	3.4E-03	3.6E-03	7.1E-03	1.0E-02	1.3E-02	1.2E-02	1.2E-02	-2.5E-03	-9.3E-03	-7.9E-03	-6.6E-03	-5.2E-03	-3.9E-03
1310	3.2E-03	3.5E-03	6.3E-03	9.4E-03	1.1E-02	1.1E-02	1.0E-02	-3.6E-03	-1.0E-02	-1.0E-02	-9.7E-03	-9.5E-03	-9.3E-03
1311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1312	3.6E-03	4.8E-03	9.6E-03	1.2E-02	1.8E-02	1.7E-02	1.6E-02	-2.1E-02	-1.9E-02	-5.1E-03	8.6E-03	2.2E-02	3.6E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1313	3.5E-03	4.1E-03	8.6E-03	1.2E-02	1.6E-02	1.5E-02	1.4E-02	-1.5E-02	-1.6E-02	-6.8E-03	2.5E-03	1.2E-02	2.1E-02
1314	3.2E-03	3.4E-03	7.1E-03	9.9E-03	1.3E-02	1.3E-02	1.2E-02	-3.3E-03	-8.2E-03	-4.8E-03	-1.5E-03	1.9E-03	5.3E-03
1315	3.1E-03	3.3E-03	6.4E-03	9.4E-03	1.2E-02	1.1E-02	1.1E-02	6.3E-05	-7.6E-03	-8.1E-03	-8.5E-03	-9.0E-03	-9.4E-03
1316	3.0E-03	3.2E-03	5.8E-03	8.8E-03	1.0E-02	9.9E-03	9.4E-03	-4.2E-03	-9.5E-03	-8.5E-03	-7.4E-03	-6.4E-03	-5.4E-03
1317	3.4E-03	4.5E-03	9.1E-03	1.0E-02	1.7E-02	1.7E-02	1.6E-02	-2.0E-02	-1.7E-02	-2.3E-03	1.2E-02	2.6E-02	4.0E-02
1318	3.3E-03	4.0E-03	8.3E-03	1.1E-02	1.5E-02	1.5E-02	1.4E-02	-2.0E-02	-1.9E-02	-7.9E-03	3.0E-03	1.4E-02	2.5E-02
1319	3.1E-03	3.4E-03	7.2E-03	9.9E-03	1.3E-02	1.3E-02	1.2E-02	-8.7E-03	-1.1E-02	-4.6E-03	1.6E-03	7.9E-03	1.4E-02
1320	3.0E-03	3.2E-03	6.3E-03	8.9E-03	1.2E-02	1.1E-02	1.1E-02	1.4E-03	-5.4E-03	-4.8E-03	-4.2E-03	-3.6E-03	-3.0E-03
1321	2.9E-03	3.1E-03	5.8E-03	8.5E-03	1.1E-02	1.0E-02	9.5E-03	-1.9E-03	-7.8E-03	-7.3E-03	-6.7E-03	-6.2E-03	-5.6E-03
1322	3.1E-03	3.8E-03	7.8E-03	9.2E-03	1.4E-02	1.4E-02	1.3E-02	-2.2E-02	-2.0E-02	-8.7E-03	2.6E-03	1.4E-02	2.5E-02
1323	3.0E-03	3.4E-03	7.3E-03	9.4E-03	1.3E-02	1.3E-02	1.2E-02	-1.4E-02	-1.4E-02	-6.4E-03	1.5E-03	9.4E-03	1.7E-02
1324	2.8E-03	3.1E-03	6.2E-03	8.6E-03	1.1E-02	1.1E-02	1.0E-02	-2.9E-03	-7.0E-03	-3.9E-03	-8.8E-04	2.2E-03	5.3E-03
1325	2.8E-03	3.0E-03	5.8E-03	8.1E-03	1.1E-02	1.0E-02	9.6E-03	1.8E-03	-4.8E-03	-4.9E-03	-5.0E-03	-5.1E-03	-5.1E-03
1326	2.7E-03	3.0E-03	6.3E-03	8.2E-03	1.1E-02	1.1E-02	1.0E-02	-8.4E-03	-1.0E-02	-5.2E-03	-5.8E-05	5.1E-03	1.0E-02
1327	4.0E-03	4.4E-03	6.8E-03	1.1E-02	1.2E-02	1.1E-02	1.1E-02	8.2E-03	7.6E-04	1.6E-04	-4.3E-04	-1.0E-03	-1.6E-03
1328	1.2E-03	7.8E-03	1.2E-02	1.2E-02	8.9E-03	4.7E-03	4.4E-03	-4.0E-02	-3.6E-02	-3.0E-02	-2.3E-02	-1.7E-02	-1.0E-02
1329	1.4E-03	7.1E-03	1.1E-02	1.2E-02	8.4E-03	5.0E-03	4.8E-03	-4.8E-02	-4.3E-02	-3.4E-02	-2.6E-02	-1.8E-02	-9.2E-03
1330	1.7E-03	5.2E-03	8.9E-03	9.9E-03	7.2E-03	5.6E-03	5.4E-03	-4.2E-02	-4.0E-02	-3.5E-02	-3.0E-02	-2.5E-02	-2.0E-02
1331	1.9E-03	5.6E-03	8.4E-03	9.5E-03	8.0E-03	6.1E-03	5.9E-03	-5.3E-02	-4.8E-02	-4.1E-02	-3.3E-02	-2.6E-02	-1.8E-02
1332	2.1E-03	5.5E-03	8.1E-03	8.8E-03	8.0E-03	6.5E-03	6.2E-03	-5.4E-02	-5.0E-02	-4.3E-02	-3.6E-02	-2.9E-02	-2.2E-02
1333	2.3E-03	5.9E-03	8.8E-03	9.0E-03	8.6E-03	7.0E-03	6.7E-03	-7.1E-02	-6.2E-02	-5.0E-02	-3.8E-02	-2.5E-02	-1.3E-02
1334	2.4E-03	4.6E-03	7.3E-03	8.4E-03	8.6E-03	6.9E-03	6.6E-03	-8.6E-02	-7.5E-02	-6.1E-02	-4.6E-02	-3.1E-02	-1.6E-02
1335	2.6E-03	4.3E-03	7.0E-03	8.8E-03	9.3E-03	7.5E-03	7.1E-03	-7.8E-02	-6.9E-02	-5.6E-02	-4.2E-02	-2.9E-02	-1.6E-02
1336	2.7E-03	3.7E-03	6.7E-03	8.7E-03	9.5E-03	7.6E-03	7.2E-03	-6.1E-02	-5.8E-02	-5.1E-02	-4.4E-02	-3.6E-02	-2.9E-02
1337	8.2E-04	3.0E-03	4.0E-03	5.5E-03	4.8E-03	3.6E-03	3.4E-03	3.7E-02	2.7E-02	2.0E-02	1.2E-02	4.6E-03	-2.9E-03
1338	7.4E-04	3.3E-03	4.4E-03	6.8E-03	5.3E-03	4.0E-03	3.7E-03	3.2E-02	2.5E-02	2.1E-02	1.7E-02	1.2E-02	8.1E-03
1339	8.2E-04	2.3E-03	4.0E-03	5.8E-03	4.7E-03	3.5E-03	3.3E-03	3.6E-02	2.7E-02	2.0E-02	1.2E-02	5.2E-03	-2.1E-03
1340	7.5E-04	2.5E-03	4.8E-03	7.5E-03	5.2E-03	3.9E-03	3.7E-03	3.1E-02	2.5E-02	2.1E-02	1.8E-02	1.4E-02	1.0E-02
1341	7.7E-04	2.1E-03	5.4E-03	8.0E-03	5.2E-03	3.8E-03	3.6E-03	3.1E-02	2.5E-02	2.2E-02	1.8E-02	1.5E-02	1.1E-02
1342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1343	7.7E-04	2.4E-03	5.9E-03	8.3E-03	5.1E-03	3.7E-03	3.5E-03	3.1E-02	2.5E-02	2.2E-02	1.9E-02	1.6E-02	1.2E-02
1344	7.5E-04	4.0E-03	7.8E-03	1.0E-02	5.6E-03	3.9E-03	3.7E-03	2.1E-02	2.0E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02
1345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1360	4.5E-04	1.5E-03	2.7E-03	3.6E-03	1.1E-02	7.2E-03	4.6E-03	1.0E-02	1.1E-02	1.4E-02	1.6E-02	1.9E-02	2.2E-02
1361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1365	4.3E-04	1.5E-03	2.6E-03	3.5E-03	9.8E-03	1.0E-02	5.3E-03	9.7E-03	1.1E-02	1.3E-02	1.6E-02	1.9E-02	2.1E-02
1366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1407	5.0E-04	2.4E-03	3.7E-03	4.9E-03	4.0E-03	3.8E-03	2.5E-03	3.0E-02	2.3E-02	1.7E-02	1.1E-02	5.3E-03	-5.6E-04
1408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1421	4.8E-04	2.3E-03	3.7E-03	4.9E-03	3.9E-03	3.9E-03	2.5E-03	2.9E-02	2.2E-02	1.7E-02	1.1E-02	5.2E-03	-4.1E-04
1422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1487	1.4E-03	2.9E-03	1.0E-02	1.1E-02	1.1E-02	7.2E-03	6.7E-03	-1.3E-02	3.0E-03	2.4E-02	4.4E-02	6.5E-02	8.6E-02
1488	1.2E-03	2.3E-03	8.2E-03	8.3E-03	1.1E-02	7.0E-03	6.5E-03	-1.8E-02	-6.4E-03	9.6E-03	2.6E-02	4.2E-02	5.8E-02
1489	1.1E-03	2.0E-03	7.5E-03	6.4E-03	1.0E-02	7.4E-03	6.9E-03	-1.7E-02	-1.1E-02	-5.2E-04	1.0E-02	2.1E-02	3.1E-02
1490	1.2E-03	2.0E-03	6.5E-03	4.8E-03	9.0E-03	7.1E-03	6.7E-03	-2.6E-02	-2.2E-02	-1.3E-02	-4.9E-03	3.7E-03	1.2E-02
1491	1.3E-03	2.0E-03	5.8E-03	4.8E-03	7.9E-03	6.5E-03	6.1E-03	-3.3E-02	-2.8E-02	-1.9E-02	-1.0E-02	-1.4E-03	7.5E-03
1492	1.4E-03	2.6E-03	1.2E-02	9.1E-03	1.4E-02	7.1E-03	6.6E-03	5.3E-03	1.9E-02	3.8E-02	5.6E-02	7.5E-02	9.3E-02
1493	1.2E-03	2.1E-03	9.5E-03	8.1E-03	1.2E-02	6.4E-03	5.9E-03	-5.2E-03	6.4E-03	2.2E-02	3.8E-02	5.4E-02	7.0E-02
1494	1.1E-03	2.1E-03	7.2E-03	7.2E-03	1.0E-02	7.0E-03	6.5E-03	-1.2E-02	-4.3E-03	7.4E-03	1.9E-02	3.1E-02	4.3E-02
1495	1.1E-03	2.1E-03	5.3E-03	5.9E-03	8.4E-03	6.9E-03	6.4E-03	-2.5E-02	-2.0E-02	-1.1E-02	-1.6E-03	7.7E-03	1.7E-02
1496	1.2E-03	2.0E-03	4.9E-03	5.0E-03	7.1E-03	6.5E-03	6.1E-03	-3.5E-02	-2.9E-02	-2.0E-02	-1.0E-02	-9.9E-04	8.5E-03
1497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1502	1.3E-03	2.9E-03	9.1E-03	1.1E-02	1.1E-02	6.6E-03	6.1E-03	1.5E-02	2.6E-02	4.2E-02	5.8E-02	7.4E-02	9.0E-02
1503	1.2E-03	2.8E-03	7.4E-03	8.3E-03	8.0E-03	6.2E-03	5.7E-03	5.9E-03	1.7E-02	3.2E-02	4.7E-02	6.2E-02	7.6E-02
1504	1.0E-03	2.5E-03	7.3E-03	6.2E-03	6.4E-03	6.0E-03	5.6E-03	-3.5E-03	6.1E-03	1.9E-02	3.3E-02	4.6E-02	5.9E-02
1505	1.0E-03	2.3E-03	6.7E-03	5.1E-03	6.7E-03	6.3E-03	5.9E-03	-1.0E-02	-4.8E-03	4.5E-03	1.4E-02	2.3E-02	3.2E-02
1506	1.1E-03	2.0E-03	6.1E-03	4.5E-03	6.8E-03	6.3E-03	5.9E-03	-2.5E-02	-2.0E-02	-1.1E-02	-2.1E-03	6.9E-03	1.6E-02
1507	1.3E-03	3.1E-03	8.5E-03	1.1E-02	1.1E-02	6.4E-03	5.9E-03	1.7E-02	2.8E-02	4.3E-02	5.8E-02	7.3E-02	8.9E-02
1508	1.2E-03	2.8E-03	7.7E-03	9.1E-03	8.9E-03	6.1E-03	5.7E-03	7.8E-03	1.9E-02	3.3E-02	4.8E-02	6.3E-02	7.8E-02
1509	1.0E-03	2.4E-03	6.3E-03	7.3E-03	7.3E-03	5.6E-03	5.1E-03	1.5E-03	1.1E-02	2.3E-02	3.6E-02	4.9E-02	6.1E-02
1510	9.6E-04	2.1E-03	5.6E-03	6.2E-03	6.3E-03	5.9E-03	5.5E-03	-7.9E-03	-1.1E-03	9.2E-03	2.0E-02	3.0E-02	4.0E-02
1511	1.0E-03	1.8E-03	5.7E-03	5.4E-03	6.5E-03	6.1E-03	5.7E-03	-2.1E-02	-1.6E-02	-6.9E-03	2.1E-03	1.1E-02	2.0E-02
1512	1.3E-03	3.0E-03	7.4E-03	1.3E-02	1.3E-02	6.1E-03	5.7E-03	1.8E-02	2.8E-02	4.2E-02	5.6E-02	7.0E-02	8.4E-02
1513	1.2E-03	2.7E-03	7.2E-03	1.0E-02	1.0E-02	5.9E-03	5.5E-03	9.2E-03	2.0E-02	3.4E-02	4.9E-02	6.3E-02	7.8E-02
1514	1.0E-03	2.2E-03	6.4E-03	8.2E-03	8.2E-03	5.3E-03	4.9E-03	2.6E-03	1.2E-02	2.6E-02	3.9E-02	5.2E-02	6.6E-02
1515	9.1E-04	1.9E-03	5.6E-03	7.0E-03	7.0E-03	5.6E-03	5.2E-03	-3.5E-03	4.2E-03	1.5E-02	2.6E-02	3.7E-02	4.9E-02
1516	9.8E-04	1.8E-03	4.7E-03	6.1E-03	6.2E-03	5.8E-03	5.4E-03	-1.6E-02	-1.1E-02	-1.3E-03	7.9E-03	1.7E-02	2.6E-02
1517	1.2E-03	2.7E-03	6.6E-03	1.1E-02	1.1E-02	5.9E-03	5.4E-03	2.0E-02	2.9E-02	4.1E-02	5.3E-02	6.5E-02	7.7E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1518	1.2E-03	2.3E-03	6.4E-03	9.8E-03	9.8E-03	5.8E-03	5.4E-03	1.0E-02	2.0E-02	3.4E-02	4.8E-02	6.1E-02	7.5E-02
1519	1.0E-03	2.0E-03	6.1E-03	8.5E-03	8.5E-03	5.3E-03	4.9E-03	3.9E-03	1.4E-02	2.7E-02	4.1E-02	5.4E-02	6.8E-02
1520	9.0E-04	1.8E-03	5.6E-03	7.4E-03	7.4E-03	5.2E-03	4.8E-03	-1.4E-04	8.4E-03	2.0E-02	3.2E-02	4.3E-02	5.5E-02
1521	9.2E-04	1.8E-03	5.0E-03	6.5E-03	6.5E-03	5.5E-03	5.1E-03	-8.1E-03	-2.2E-03	7.1E-03	1.6E-02	2.6E-02	3.5E-02
1522	1.2E-03	2.5E-03	6.8E-03	1.2E-02	1.2E-02	5.6E-03	5.2E-03	2.2E-02	2.9E-02	3.9E-02	5.0E-02	6.0E-02	7.0E-02
1523	1.1E-03	2.1E-03	5.4E-03	9.2E-03	9.2E-03	5.6E-03	5.2E-03	1.1E-02	2.0E-02	3.3E-02	4.5E-02	5.8E-02	7.0E-02
1524	1.0E-03	1.9E-03	5.6E-03	7.7E-03	7.3E-03	5.2E-03	4.9E-03	4.4E-03	1.4E-02	2.7E-02	4.0E-02	5.3E-02	6.6E-02
1525	9.1E-04	1.8E-03	5.4E-03	6.8E-03	6.4E-03	4.8E-03	4.5E-03	5.0E-04	9.3E-03	2.1E-02	3.3E-02	4.5E-02	5.7E-02
1526	8.8E-04	1.8E-03	5.0E-03	6.1E-03	5.9E-03	5.2E-03	4.9E-03	-4.1E-03	2.4E-03	1.2E-02	2.2E-02	3.1E-02	4.1E-02
1527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1528	1.2E-03	2.9E-03	6.7E-03	9.9E-03	9.9E-03	5.4E-03	5.0E-03	2.1E-02	2.8E-02	3.8E-02	4.7E-02	5.7E-02	6.7E-02
1529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1531	9.1E-04	2.2E-03	5.0E-03	6.9E-03	6.6E-03	4.6E-03	4.3E-03	7.6E-04	9.6E-03	2.2E-02	3.4E-02	4.5E-02	5.7E-02
1532	8.3E-04	2.0E-03	4.8E-03	6.2E-03	5.5E-03	4.9E-03	4.6E-03	-2.7E-03	4.7E-03	1.5E-02	2.5E-02	3.6E-02	4.6E-02
1533	1.1E-03	5.2E-03	7.5E-03	1.0E-02	1.5E-02	5.4E-03	5.1E-03	3.2E-02	3.5E-02	4.2E-02	4.9E-02	5.6E-02	6.3E-02
1534	1.1E-03	4.2E-03	6.9E-03	9.4E-03	1.1E-02	5.2E-03	4.8E-03	3.2E-02	3.5E-02	4.1E-02	4.7E-02	5.3E-02	5.9E-02
1535	1.1E-03	3.8E-03	5.8E-03	9.3E-03	9.9E-03	5.1E-03	4.7E-03	2.5E-02	3.0E-02	3.7E-02	4.5E-02	5.3E-02	6.0E-02
1536	1.1E-03	3.5E-03	6.2E-03	8.5E-03	8.3E-03	5.1E-03	4.7E-03	2.1E-02	2.7E-02	3.7E-02	4.6E-02	5.6E-02	6.6E-02
1537	1.1E-03	3.0E-03	5.7E-03	8.4E-03	7.6E-03	5.2E-03	4.8E-03	1.7E-02	2.3E-02	3.3E-02	4.2E-02	5.2E-02	6.1E-02
1538	1.0E-03	2.8E-03	4.8E-03	7.7E-03	7.5E-03	5.0E-03	4.7E-03	6.2E-03	1.4E-02	2.6E-02	3.7E-02	4.8E-02	5.9E-02
1539	9.1E-04	2.6E-03	4.5E-03	6.9E-03	6.9E-03	4.6E-03	4.3E-03	-3.0E-04	8.5E-03	2.0E-02	3.2E-02	4.4E-02	5.6E-02
1540	7.9E-04	2.4E-03	4.5E-03	6.2E-03	6.0E-03	4.6E-03	4.3E-03	-3.0E-03	5.0E-03	1.6E-02	2.6E-02	3.7E-02	4.8E-02
1541	1.1E-03	5.7E-03	7.0E-03	9.7E-03	1.4E-02	4.8E-03	4.5E-03	2.8E-02	3.3E-02	4.1E-02	4.9E-02	5.6E-02	6.4E-02
1542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1548	1.0E-03	5.9E-03	6.4E-03	9.2E-03	1.3E-02	4.6E-03	4.3E-03	2.6E-02	3.1E-02	3.9E-02	4.8E-02	5.6E-02	6.4E-02
1549	1.0E-03	5.1E-03	6.3E-03	8.6E-03	1.0E-02	4.8E-03	4.4E-03	3.2E-02	3.4E-02	3.9E-02	4.3E-02	4.8E-02	5.3E-02
1550	1.0E-03	4.6E-03	5.7E-03	7.7E-03	8.4E-03	4.7E-03	4.4E-03	2.6E-02	3.0E-02	3.6E-02	4.2E-02	4.8E-02	5.4E-02
1551	1.1E-03	4.2E-03	4.8E-03	8.0E-03	7.4E-03	4.6E-03	4.2E-03	2.0E-02	2.5E-02	3.4E-02	4.2E-02	5.1E-02	6.0E-02
1552	1.0E-03	3.8E-03	5.2E-03	7.3E-03	6.6E-03	4.8E-03	4.5E-03	2.0E-02	2.6E-02	3.4E-02	4.3E-02	5.1E-02	5.9E-02
1553	9.9E-04	3.5E-03	5.0E-03	7.3E-03	5.6E-03	4.8E-03	4.5E-03	1.0E-02	1.7E-02	2.7E-02	3.7E-02	4.6E-02	5.6E-02
1554	1.0E-03	5.9E-03	6.0E-03	8.8E-03	1.2E-02	4.4E-03	4.1E-03	2.3E-02	2.9E-02	3.8E-02	4.7E-02	5.5E-02	6.4E-02
1555	9.6E-04	5.1E-03	6.0E-03	8.1E-03	1.0E-02	4.6E-03	4.3E-03	3.2E-02	3.3E-02	3.8E-02	4.2E-02	4.7E-02	5.1E-02
1556	1.0E-03	4.7E-03	5.6E-03	7.6E-03	8.4E-03	4.6E-03	4.3E-03	2.7E-02	3.0E-02	3.5E-02	4.1E-02	4.7E-02	5.3E-02
1557	1.0E-03	4.3E-03	4.9E-03	7.5E-03	6.9E-03	4.4E-03	4.1E-03	2.0E-02	2.5E-02	3.2E-02	4.0E-02	4.7E-02	5.4E-02
1558	1.0E-03	4.0E-03	4.7E-03	7.2E-03	6.2E-03	4.6E-03	4.3E-03	2.1E-02	2.6E-02	3.4E-02	4.2E-02	5.0E-02	5.8E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1559	9.8E-04	6.3E-03	6.2E-03	8.4E-03	1.1E-02	4.2E-03	3.9E-03	2.0E-02	2.7E-02	3.6E-02	4.6E-02	5.5E-02	6.4E-02
1560	9.3E-04	5.2E-03	5.7E-03	7.8E-03	9.7E-03	4.4E-03	4.1E-03	3.1E-02	3.3E-02	3.7E-02	4.2E-02	4.6E-02	5.1E-02
1561	9.7E-04	4.4E-03	5.4E-03	7.4E-03	8.3E-03	4.4E-03	4.1E-03	2.7E-02	2.9E-02	3.5E-02	4.1E-02	4.6E-02	5.2E-02
1562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1563	9.9E-04	6.6E-03	7.7E-03	8.4E-03	9.5E-03	3.8E-03	3.5E-03	1.0E-02	2.0E-02	3.2E-02	4.4E-02	5.5E-02	6.7E-02
1564	9.3E-04	6.0E-03	6.0E-03	7.7E-03	9.9E-03	3.9E-03	3.7E-03	1.7E-02	2.5E-02	3.4E-02	4.4E-02	5.3E-02	6.3E-02
1565	8.7E-04	5.5E-03	5.4E-03	7.3E-03	9.2E-03	4.1E-03	3.8E-03	3.0E-02	3.2E-02	3.7E-02	4.1E-02	4.6E-02	5.0E-02
1566	9.2E-04	5.0E-03	5.1E-03	6.9E-03	8.0E-03	4.2E-03	3.9E-03	2.6E-02	2.9E-02	3.4E-02	3.9E-02	4.4E-02	4.9E-02
1567	9.4E-04	4.5E-03	4.7E-03	6.4E-03	7.0E-03	4.1E-03	3.8E-03	2.1E-02	2.4E-02	3.0E-02	3.6E-02	4.2E-02	4.8E-02
1568	9.9E-04	7.1E-03	9.9E-03	8.8E-03	7.3E-03	3.3E-03	3.3E-03	1.1E-02	1.9E-02	3.0E-02	4.0E-02	5.0E-02	6.0E-02
1569	9.7E-04	6.2E-03	8.0E-03	8.0E-03	8.9E-03	3.6E-03	3.3E-03	1.1E-02	2.0E-02	3.1E-02	4.3E-02	5.4E-02	6.6E-02
1570	9.1E-04	5.1E-03	6.4E-03	7.4E-03	9.3E-03	3.8E-03	3.5E-03	1.5E-02	2.3E-02	3.2E-02	4.2E-02	5.2E-02	6.2E-02
1571	8.4E-04	5.0E-03	5.3E-03	7.1E-03	8.9E-03	4.0E-03	3.7E-03	3.0E-02	3.2E-02	3.7E-02	4.1E-02	4.6E-02	5.1E-02
1572	8.8E-04	4.8E-03	4.9E-03	6.6E-03	7.8E-03	4.0E-03	3.8E-03	2.6E-02	2.9E-02	3.3E-02	3.8E-02	4.3E-02	4.8E-02
1573	9.1E-04	4.6E-03	4.6E-03	6.3E-03	6.6E-03	4.0E-03	3.7E-03	2.2E-02	2.5E-02	3.0E-02	3.6E-02	4.1E-02	4.7E-02
1574	8.0E-04	6.8E-03	9.3E-03	1.2E-02	6.4E-03	4.1E-03	3.8E-03	1.0E-02	1.2E-02	1.7E-02	2.1E-02	2.6E-02	3.0E-02
1575	8.7E-04	7.4E-03	1.2E-02	1.4E-02	7.1E-03	4.0E-03	3.7E-03	1.7E-02	1.6E-02	1.8E-02	2.0E-02	2.1E-02	2.3E-02
1576	9.8E-04	8.9E-03	1.3E-02	1.6E-02	7.6E-03	4.0E-03	3.6E-03	2.5E-02	2.5E-02	2.7E-02	2.9E-02	3.2E-02	3.4E-02
1577	9.7E-04	1.0E-02	1.3E-02	1.6E-02	7.4E-03	3.5E-03	3.3E-03	3.0E-02	3.2E-02	3.6E-02	4.0E-02	4.4E-02	4.8E-02
1578	9.7E-04	9.5E-03	1.4E-02	1.5E-02	7.7E-03	3.6E-03	3.6E-03	3.4E-02	3.6E-02	3.9E-02	4.3E-02	4.6E-02	4.9E-02
1579	9.6E-04	8.3E-03	1.1E-02	1.3E-02	7.4E-03	3.7E-03	3.7E-03	3.0E-02	3.2E-02	3.6E-02	4.1E-02	4.5E-02	4.9E-02
1580	9.5E-04	6.5E-03	9.7E-03	1.0E-02	6.8E-03	3.4E-03	3.4E-03	1.5E-02	2.1E-02	2.9E-02	3.6E-02	4.4E-02	5.2E-02
1581	9.7E-04	6.0E-03	9.0E-03	8.5E-03	6.9E-03	3.2E-03	3.2E-03	1.0E-02	1.9E-02	2.9E-02	3.9E-02	4.8E-02	5.8E-02
1582	9.4E-04	5.9E-03	8.1E-03	7.6E-03	8.3E-03	3.4E-03	3.2E-03	1.1E-02	2.0E-02	3.1E-02	4.2E-02	5.3E-02	6.4E-02
1583	8.9E-04	5.2E-03	6.6E-03	7.2E-03	8.8E-03	3.7E-03	3.4E-03	1.3E-02	2.1E-02	3.1E-02	4.1E-02	5.1E-02	6.1E-02
1584	8.2E-04	4.5E-03	5.7E-03	6.9E-03	8.5E-03	3.8E-03	3.6E-03	2.8E-02	3.1E-02	3.6E-02	4.1E-02	4.6E-02	5.1E-02
1585	8.5E-04	4.2E-03	4.8E-03	6.5E-03	7.6E-03	3.9E-03	3.7E-03	2.7E-02	2.9E-02	3.3E-02	3.8E-02	4.3E-02	4.7E-02
1586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1599	8.3E-04	5.5E-03	9.8E-03	1.2E-02	6.8E-03	3.8E-03	3.5E-03	1.6E-02	1.5E-02	1.7E-02	1.9E-02	2.0E-02	2.2E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1600	9.4E-04	7.4E-03	1.1E-02	1.4E-02	7.2E-03	3.7E-03	3.4E-03	2.4E-02	2.4E-02	2.7E-02	3.0E-02	3.3E-02	3.6E-02
1601	9.3E-04	8.3E-03	1.1E-02	1.2E-02	7.3E-03	3.3E-03	3.1E-03	2.6E-02	2.8E-02	3.2E-02	3.6E-02	3.9E-02	4.3E-02
1602	9.2E-04	7.3E-03	9.8E-03	1.1E-02	7.2E-03	3.4E-03	3.4E-03	3.2E-02	3.3E-02	3.6E-02	3.9E-02	4.2E-02	4.5E-02
1603	9.2E-04	6.4E-03	9.2E-03	1.1E-02	6.8E-03	3.4E-03	3.4E-03	2.4E-02	2.7E-02	3.2E-02	3.6E-02	4.1E-02	4.5E-02
1604	9.1E-04	5.4E-03	7.5E-03	9.9E-03	6.3E-03	3.2E-03	3.2E-03	1.7E-02	2.2E-02	2.8E-02	3.5E-02	4.1E-02	4.8E-02
1605	9.2E-04	4.9E-03	7.3E-03	8.5E-03	6.2E-03	3.0E-03	3.0E-03	1.0E-02	1.8E-02	2.7E-02	3.6E-02	4.5E-02	5.4E-02
1606	9.0E-04	4.3E-03	6.8E-03	7.5E-03	7.4E-03	3.1E-03	3.0E-03	1.1E-02	1.9E-02	2.9E-02	4.0E-02	5.0E-02	6.0E-02
1607	8.5E-04	4.4E-03	6.5E-03	7.0E-03	7.9E-03	3.4E-03	3.2E-03	1.0E-02	1.9E-02	2.9E-02	3.9E-02	4.9E-02	5.9E-02
1608	7.9E-04	4.4E-03	5.8E-03	6.6E-03	7.9E-03	3.6E-03	3.3E-03	2.3E-02	2.7E-02	3.3E-02	3.9E-02	4.5E-02	5.1E-02
1609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1610	8.1E-04	5.1E-03	9.0E-03	1.1E-02	6.7E-03	3.6E-03	3.3E-03	1.6E-02	1.5E-02	1.7E-02	1.8E-02	2.0E-02	2.2E-02
1611	9.2E-04	6.8E-03	9.7E-03	1.3E-02	7.0E-03	3.6E-03	3.3E-03	2.3E-02	2.4E-02	2.7E-02	3.0E-02	3.3E-02	3.6E-02
1612	9.2E-04	7.4E-03	1.0E-02	1.1E-02	7.1E-03	3.1E-03	3.0E-03	2.5E-02	2.6E-02	3.0E-02	3.3E-02	3.7E-02	4.1E-02
1613	9.1E-04	6.6E-03	9.2E-03	9.9E-03	7.0E-03	3.3E-03	3.3E-03	2.8E-02	2.9E-02	3.2E-02	3.5E-02	3.8E-02	4.1E-02
1614	9.2E-04	5.7E-03	8.5E-03	1.0E-02	6.6E-03	3.2E-03	3.2E-03	2.5E-02	2.7E-02	3.2E-02	3.6E-02	4.0E-02	4.4E-02
1615	8.8E-04	5.2E-03	7.3E-03	9.5E-03	6.1E-03	3.1E-03	3.1E-03	1.8E-02	2.2E-02	2.8E-02	3.4E-02	4.0E-02	4.6E-02
1616	8.9E-04	4.3E-03	6.4E-03	8.4E-03	5.9E-03	2.9E-03	2.9E-03	1.0E-02	1.8E-02	2.6E-02	3.5E-02	4.3E-02	5.2E-02
1617	8.7E-04	4.1E-03	6.3E-03	7.5E-03	6.9E-03	3.0E-03	2.8E-03	1.1E-02	1.9E-02	2.8E-02	3.8E-02	4.8E-02	5.8E-02
1618	8.3E-04	3.6E-03	6.0E-03	6.9E-03	7.5E-03	3.3E-03	3.0E-03	1.1E-02	1.9E-02	2.8E-02	3.8E-02	4.8E-02	5.8E-02
1619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1620	8.0E-04	4.8E-03	8.3E-03	1.1E-02	6.6E-03	3.5E-03	3.2E-03	1.6E-02	1.5E-02	1.6E-02	1.8E-02	1.9E-02	2.1E-02
1621	9.0E-04	6.2E-03	8.7E-03	1.2E-02	6.9E-03	3.4E-03	3.2E-03	2.2E-02	2.3E-02	2.5E-02	2.8E-02	3.1E-02	3.4E-02
1622	9.0E-04	6.4E-03	8.9E-03	1.0E-02	6.9E-03	3.0E-03	2.9E-03	2.3E-02	2.5E-02	2.8E-02	3.1E-02	3.5E-02	3.8E-02
1623	9.1E-04	5.9E-03	8.5E-03	9.0E-03	6.8E-03	3.0E-03	3.0E-03	2.8E-02	2.9E-02	3.1E-02	3.4E-02	3.7E-02	3.9E-02
1624	9.0E-04	5.1E-03	7.8E-03	9.5E-03	6.2E-03	3.1E-03	3.1E-03	2.6E-02	2.8E-02	3.1E-02	3.5E-02	3.9E-02	4.2E-02
1625	8.6E-04	4.9E-03	7.0E-03	9.1E-03	5.9E-03	3.0E-03	3.0E-03	1.8E-02	2.2E-02	2.8E-02	3.4E-02	3.9E-02	4.5E-02
1626	8.7E-04	4.1E-03	5.9E-03	8.3E-03	5.7E-03	2.8E-03	2.8E-03	1.1E-02	1.8E-02	2.6E-02	3.4E-02	4.2E-02	5.0E-02
1627	8.5E-04	3.8E-03	5.7E-03	7.4E-03	6.5E-03	2.9E-03	2.7E-03	1.0E-02	1.8E-02	2.8E-02	3.7E-02	4.6E-02	5.6E-02
1628	8.9E-04	1.4E-03	1.4E-03	1.3E-03	1.6E-03	1.3E-03	1.1E-03	-1.1E-02	-8.6E-03	-5.2E-03	-1.8E-03	1.7E-03	5.1E-03
1629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1630	8.6E-04	1.3E-03	1.4E-03	1.3E-03	1.8E-03	1.3E-03	1.2E-03	-1.2E-02	-8.9E-03	-5.5E-03	-2.1E-03	1.2E-03	4.6E-03
1631	9.9E-04	1.3E-03	1.3E-03	1.3E-03	1.7E-03	1.5E-03	1.3E-03	-1.3E-02	-1.1E-02	-7.4E-03	-4.4E-03	-1.3E-03	1.8E-03
1632	8.2E-04	1.3E-03	1.3E-03	1.3E-03	2.1E-03	1.4E-03	1.3E-03	-1.2E-02	-9.8E-03	-6.7E-03	-3.7E-03	-6.4E-04	2.4E-03
1633	9.5E-04	1.3E-03	1.3E-03	1.4E-03	1.9E-03	1.5E-03	1.4E-03	-1.3E-02	-1.2E-02	-9.2E-03	-6.7E-03	-4.2E-03	-1.6E-03
1634	7.8E-04	1.2E-03	1.3E-03	1.3E-03	2.4E-03	1.4E-03	1.3E-03	-1.2E-02	-1.1E-02	-8.1E-03	-5.6E-03	-3.0E-03	-5.1E-04
1635	9.1E-04	1.2E-03	1.2E-03	1.4E-03	2.2E-03	1.5E-03	1.4E-03	-1.5E-02	-1.4E-02	-1.1E-02	-9.3E-03	-7.0E-03	-4.8E-03
1636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1663	1.4E-03	1.6E-03	1.7E-03	2.3E-03	2.1E-03	1.9E-03	1.9E-03	-1.8E-02	-1.5E-02	-1.2E-02	-8.4E-03	-4.9E-03	-1.4E-03
1664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1674	1.2E-03	1.4E-03	1.7E-03	2.4E-03	2.3E-03	2.1E-03	2.1E-03	-1.6E-02	-1.1E-02	-6.5E-03	-1.8E-03	2.9E-03	7.7E-03
1675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1680	1.2E-03	1.5E-03	1.8E-03	2.5E-03	2.4E-03	2.2E-03	2.2E-03	-1.7E-02	-1.2E-02	-6.4E-03	-1.0E-03	4.3E-03	9.7E-03
1681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1737	9.4E-04	2.9E-03	5.0E-03	5.8E-03	6.3E-03	3.9E-03	3.7E-03	-8.0E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.3E-02	-5.1E-02
1738	9.4E-04	2.9E-03	5.1E-03	5.9E-03	6.7E-03	4.3E-03	4.0E-03	-6.9E-03	-1.7E-02	-2.5E-02	-3.2E-02	-4.0E-02	-4.8E-02
1739	3.4E-03	4.9E-03	4.7E-03	8.8E-04	9.8E-04	6.4E-04	6.4E-04	-1.1E-02	-9.5E-03	-7.6E-03	-5.8E-03	-3.9E-03	-2.1E-03
1740	4.7E-03	5.9E-03	5.7E-03	9.0E-04	9.2E-04	6.7E-04	6.6E-04	-1.1E-02	-9.1E-03	-7.0E-03	-5.0E-03	-2.9E-03	-8.3E-04
1741	5.7E-03	6.4E-03	6.3E-03	9.3E-04	8.5E-04	7.3E-04	6.9E-04	-1.1E-02	-8.8E-03	-6.5E-03	-4.1E-03	-1.8E-03	6.0E-04
1742	3.3E-03	3.7E-03	2.1E-03	8.1E-04	1.1E-03	6.7E-04	6.3E-04	-9.0E-03	-8.5E-03	-7.6E-03	-6.7E-03	-5.9E-03	-5.0E-03
1743	3.5E-03	3.9E-03	3.2E-03	8.4E-04	1.1E-03	6.4E-04	6.4E-04	-9.1E-03	-8.3E-03	-7.3E-03	-6.2E-03	-5.1E-03	-4.0E-03
1744	3.6E-03	4.8E-03	4.6E-03	8.6E-04	1.0E-03	6.4E-04	6.4E-04	-9.4E-03	-8.3E-03	-7.0E-03	-5.6E-03	-4.2E-03	-2.8E-03
1745	4.7E-03	6.1E-03	5.9E-03	8.9E-04	9.6E-04	6.6E-04	6.6E-04	-9.7E-03	-8.3E-03	-6.6E-03	-4.9E-03	-3.2E-03	-1.5E-03
1746	2.8E-03	3.2E-03	2.0E-03	8.3E-04	1.1E-03	8.1E-04	6.7E-04	-8.5E-03	-8.6E-03	-8.4E-03	-8.2E-03	-7.9E-03	-7.7E-03
1747	3.3E-03	3.7E-03	2.2E-03	8.4E-04	1.1E-03	7.2E-04	6.8E-04	-8.5E-03	-8.4E-03	-8.0E-03	-7.6E-03	-7.2E-03	-6.8E-03
1748	3.7E-03	4.2E-03	2.7E-03	8.6E-04	1.1E-03	6.9E-04	6.9E-04	-8.6E-03	-8.3E-03	-7.6E-03	-6.9E-03	-6.2E-03	-5.6E-03
1749	4.1E-03	4.5E-03	4.3E-03	8.7E-04	1.0E-03	7.0E-04	7.0E-04	-8.7E-03	-8.0E-03	-7.0E-03	-6.0E-03	-5.0E-03	-4.0E-03
1750	2.5E-03	2.9E-03	2.0E-03	8.5E-04	1.2E-03	8.7E-04	7.1E-04	-9.0E-03	-8.8E-03	-8.3E-03	-7.8E-03	-7.3E-03	-6.9E-03
1751	3.2E-03	3.6E-03	2.3E-03	8.7E-04	1.2E-03	7.8E-04	7.3E-04	-9.2E-03	-8.7E-03	-8.0E-03	-7.2E-03	-6.5E-03	-5.7E-03
1752	3.8E-03	4.3E-03	2.5E-03	8.9E-04	1.1E-03	7.4E-04	7.4E-04	-9.1E-03	-8.5E-03	-7.5E-03	-6.6E-03	-5.6E-03	-4.7E-03
1753	4.4E-03	4.9E-03	3.8E-03	9.1E-04	1.1E-03	7.5E-04	7.5E-04	-8.5E-03	-7.8E-03	-6.7E-03	-5.7E-03	-4.6E-03	-3.6E-03
1754	1.5E-03	1.9E-03	1.6E-03	8.5E-04	1.2E-03	1.0E-03	7.3E-04	-8.7E-03	-8.6E-03	-8.2E-03	-7.8E-03	-7.4E-03	-7.1E-03
1755	2.0E-03	2.5E-03	1.9E-03	8.7E-04	1.2E-03	9.3E-04	7.5E-04	-8.6E-03	-8.4E-03	-7.9E-03	-7.4E-03	-6.9E-03	-6.4E-03
1756	2.8E-03	3.2E-03	2.2E-03	8.9E-04	1.2E-03	8.4E-04	7.6E-04	-8.3E-03	-8.0E-03	-7.4E-03	-6.9E-03	-6.3E-03	-5.7E-03
1757	3.7E-03	4.1E-03	2.6E-03	9.1E-04	1.2E-03	7.8E-04	7.8E-04	-7.9E-03	-7.5E-03	-6.9E-03	-6.3E-03	-5.6E-03	-5.0E-03
1758	4.6E-03	5.0E-03	3.1E-03	9.4E-04	1.1E-03	8.0E-04	8.0E-04	-8.0E-03	-7.4E-03	-6.5E-03	-5.6E-03	-4.7E-03	-3.8E-03
1759	1.5E-03	1.6E-03	1.6E-03	8.6E-04	1.2E-03	1.1E-03	7.5E-04	-8.5E-03	-8.2E-03	-7.6E-03	-7.0E-03	-6.4E-03	-5.8E-03
1760	1.7E-03	2.0E-03	1.7E-03	8.8E-04	1.2E-03	9.9E-04	7.7E-04	-8.3E-03	-8.0E-03	-7.3E-03	-6.6E-03	-5.9E-03	-5.2E-03
1761	2.2E-03	2.7E-03	2.0E-03	9.1E-04	1.2E-03	9.0E-04	7.9E-04	-8.1E-03	-7.7E-03	-6.9E-03	-6.1E-03	-5.2E-03	-4.4E-03
1762	3.2E-03	3.6E-03	2.5E-03	9.3E-04	1.2E-03	8.1E-04	8.1E-04	-7.4E-03	-6.8E-03	-5.9E-03	-5.0E-03	-4.2E-03	-3.3E-03
1763	4.4E-03	4.8E-03	3.1E-03	9.6E-04	1.2E-03	8.4E-04	8.3E-04	-6.5E-03	-5.8E-03	-4.9E-03	-3.9E-03	-3.0E-03	-2.0E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1764	1.6E-03	1.6E-03	1.7E-03	8.6E-04	1.2E-03	1.1E-03	7.6E-04	-8.1E-03	-7.5E-03	-6.7E-03	-5.8E-03	-4.9E-03	-4.0E-03
1765	1.7E-03	1.8E-03	1.8E-03	8.9E-04	1.2E-03	1.1E-03	7.8E-04	-7.4E-03	-6.9E-03	-6.0E-03	-5.2E-03	-4.3E-03	-3.4E-03
1766	1.9E-03	2.0E-03	2.0E-03	9.1E-04	1.3E-03	9.6E-04	8.1E-04	-6.5E-03	-6.0E-03	-5.1E-03	-4.2E-03	-3.3E-03	-2.4E-03
1767	2.4E-03	2.9E-03	2.2E-03	9.4E-04	1.3E-03	8.6E-04	8.3E-04	-5.7E-03	-5.3E-03	-4.4E-03	-3.6E-03	-2.8E-03	-2.0E-03
1768	1.5E-03	1.7E-03	1.7E-03	8.5E-04	1.2E-03	1.2E-03	7.6E-04	-6.2E-03	-5.7E-03	-4.9E-03	-4.1E-03	-3.3E-03	-2.4E-03
1769	1.7E-03	1.9E-03	1.8E-03	8.8E-04	1.2E-03	1.1E-03	7.9E-04	-5.3E-03	-5.0E-03	-4.3E-03	-3.7E-03	-3.0E-03	-2.3E-03
1770	1.9E-03	2.2E-03	2.1E-03	9.1E-04	1.3E-03	1.0E-03	8.1E-04	-4.3E-03	-4.3E-03	-3.9E-03	-3.5E-03	-3.1E-03	-2.7E-03
1771	2.3E-03	2.7E-03	2.3E-03	9.4E-04	1.3E-03	9.3E-04	8.4E-04	-3.7E-03	-3.9E-03	-3.7E-03	-3.5E-03	-3.3E-03	-3.1E-03
1772	1.7E-03	2.0E-03	1.6E-03	8.4E-04	1.2E-03	1.3E-03	7.5E-04	-3.4E-03	-3.3E-03	-2.8E-03	-2.3E-03	-1.8E-03	-1.3E-03
1773	1.9E-03	2.3E-03	1.8E-03	8.7E-04	1.3E-03	1.2E-03	7.8E-04	-2.4E-03	-2.5E-03	-2.2E-03	-2.0E-03	-1.7E-03	-1.4E-03
1774	2.2E-03	2.6E-03	1.9E-03	8.9E-04	1.3E-03	1.1E-03	8.0E-04	-2.3E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.3E-03
1775	2.7E-03	3.1E-03	2.2E-03	9.2E-04	1.3E-03	1.0E-03	8.3E-04	-2.5E-03	-3.0E-03	-3.2E-03	-3.3E-03	-3.4E-03	-3.5E-03
1776	1.9E-03	2.2E-03	1.5E-03	8.2E-04	1.2E-03	1.3E-03	7.6E-04	-2.0E-03	-2.2E-03	-1.9E-03	-1.6E-03	-1.4E-03	-1.1E-03
1777	2.2E-03	2.5E-03	1.6E-03	8.4E-04	1.3E-03	1.3E-03	7.7E-04	-2.0E-03	-2.5E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.4E-03
1778	2.5E-03	2.8E-03	1.7E-03	8.7E-04	1.3E-03	1.2E-03	7.9E-04	-2.5E-03	-3.2E-03	-3.5E-03	-3.7E-03	-3.9E-03	-4.1E-03
1779	3.0E-03	3.3E-03	2.0E-03	9.0E-04	1.4E-03	1.1E-03	8.2E-04	-4.6E-03	-5.4E-03	-5.7E-03	-6.0E-03	-6.3E-03	-6.6E-03
1780	2.1E-03	2.4E-03	1.3E-03	7.9E-04	1.2E-03	1.4E-03	7.7E-04	-1.8E-03	-2.5E-03	-2.8E-03	-3.1E-03	-3.4E-03	-3.7E-03
1781	2.3E-03	2.6E-03	1.4E-03	8.1E-04	1.3E-03	1.3E-03	7.8E-04	-3.4E-03	-4.3E-03	-4.7E-03	-5.1E-03	-5.5E-03	-5.9E-03
1782	2.6E-03	2.9E-03	1.9E-03	8.4E-04	1.4E-03	1.3E-03	8.0E-04	-6.2E-03	-7.0E-03	-7.4E-03	-7.7E-03	-8.1E-03	-8.4E-03
1783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1784	2.0E-03	2.4E-03	1.3E-03	7.7E-04	1.1E-03	1.4E-03	7.5E-04	-4.7E-03	-5.6E-03	-6.1E-03	-6.5E-03	-7.0E-03	-7.4E-03
1785	2.2E-03	2.6E-03	1.8E-03	7.9E-04	1.3E-03	1.4E-03	7.8E-04	-7.8E-03	-8.6E-03	-8.8E-03	-9.1E-03	-9.4E-03	-9.7E-03
1786	2.4E-03	2.8E-03	2.3E-03	8.1E-04	1.4E-03	1.3E-03	8.0E-04	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02
1787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1788	1.9E-03	2.3E-03	1.7E-03	8.2E-04	1.1E-03	1.5E-03	7.4E-04	-9.2E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
1789	2.0E-03	2.4E-03	2.1E-03	8.4E-04	1.2E-03	1.5E-03	7.6E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
1790	2.1E-03	2.5E-03	2.5E-03	8.6E-04	1.4E-03	1.4E-03	7.8E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
1791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1792	1.5E-03	2.2E-03	2.3E-03	9.0E-04	1.2E-03	1.5E-03	7.2E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02
1793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1808	3.8E-03	4.8E-03	4.7E-03	9.2E-04	9.1E-04	7.7E-04	7.2E-04	-1.7E-02	-1.6E-02	-1.4E-02	-1.3E-02	-1.1E-02	-9.4E-03
1809	4.5E-03	5.0E-03	5.0E-03	9.5E-04	9.4E-04	8.5E-04	7.9E-04	-1.7E-02	-1.5E-02	-1.4E-02	-1.2E-02	-9.8E-03	-8.0E-03
1810	4.8E-03	5.0E-03	4.8E-03	9.9E-04	1.0E-03	9.4E-04	8.8E-04	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.7E-03	-6.5E-03
1811	4.2E-03	4.4E-03	4.1E-03	1.0E-03	1.1E-03	1.0E-03	9.6E-04	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.7E-03	-5.3E-03
1812	5.1E-03	6.1E-03	6.0E-03	1.1E-03	1.2E-03	1.1E-03	1.1E-03	-1.6E-02	-1.4E-02	-1.2E-02	-9.3E-03	-6.7E-03	-4.1E-03
1813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1814	2.6E-03	4.0E-03	3.9E-03	8.7E-04	9.8E-04	6.2E-04	6.2E-04	-1.4E-02	-1.3E-02	-1.2E-02	-9.9E-03	-8.2E-03	-6.6E-03
1815	3.7E-03	4.9E-03	4.8E-03	9.0E-04	9.4E-04	6.9E-04	6.4E-04	-1.4E-02	-1.3E-02	-1.1E-02	-8.9E-03	-6.9E-03	-5.0E-03
1816	4.7E-03	5.5E-03	5.4E-03	9.3E-04	8.8E-04	7.6E-04	7.1E-04	-1.4E-02	-1.3E-02	-1.0E-02	-8.2E-03	-6.0E-03	-3.8E-03
1817	5.3E-03	5.5E-03	5.5E-03	9.7E-04	9.4E-04	8.5E-04	7.9E-04	-1.4E-02	-1.2E-02	-1.0E-02	-7.5E-03	-5.1E-03	-2.6E-03
1818	4.9E-03	5.1E-03	4.6E-03	9.8E-04	1.0E-03	9.2E-04	8.6E-04	-1.4E-02	-1.2E-02	-8.9E-03	-6.3E-03	-3.6E-03	-9.4E-04
1819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1823	3.0E-03	3.5E-03	2.5E-03	8.3E-04	1.1E-03	6.2E-04	5.9E-04	-1.2E-02	-1.1E-02	-9.2E-03	-7.9E-03	-6.6E-03	-5.3E-03
1824	9.0E-04	3.0E-03	5.0E-03	5.9E-03	6.1E-03	3.5E-03	3.3E-03	-1.5E-03	-1.3E-02	-2.3E-02	-3.3E-02	-4.3E-02	-5.2E-02
1825	9.0E-04	3.1E-03	5.0E-03	6.0E-03	6.2E-03	3.6E-03	3.3E-03	-4.6E-03	-1.5E-02	-2.4E-02	-3.3E-02	-4.2E-02	-5.0E-02
1826	8.2E-04	2.9E-03	4.7E-03	5.8E-03	6.1E-03	3.3E-03	3.1E-03	-3.2E-02	-3.5E-02	-3.5E-02	-3.5E-02	-3.6E-02	-3.6E-02
1827	9.3E-04	3.1E-03	5.1E-03	5.8E-03	6.0E-03	3.6E-03	3.4E-03	-4.4E-03	-1.5E-02	-2.4E-02	-3.3E-02	-4.1E-02	-5.0E-02
1828	9.7E-04	6.4E-03	8.5E-03	8.8E-03	7.7E-03	4.4E-03	3.7E-03	-1.1E-01	-9.7E-02	-7.8E-02	-6.0E-02	-4.2E-02	-2.3E-02
1829	9.8E-04	7.3E-03	9.8E-03	1.0E-02	8.1E-03	4.5E-03	3.9E-03	-9.5E-02	-8.5E-02	-7.2E-02	-5.9E-02	-4.6E-02	-3.3E-02
1830	9.9E-04	8.0E-03	1.1E-02	1.1E-02	8.9E-03	4.6E-03	4.0E-03	-6.4E-02	-5.7E-02	-4.8E-02	-3.9E-02	-3.0E-02	-2.1E-02
1831	1.0E-03	8.6E-03	1.2E-02	1.2E-02	9.5E-03	4.7E-03	4.1E-03	-5.2E-02	-4.8E-02	-4.1E-02	-3.4E-02	-2.7E-02	-2.0E-02
1832	8.7E-04	3.3E-03	6.1E-03	7.5E-03	7.9E-03	4.1E-03	3.8E-03	-1.3E-01	-1.2E-01	-1.0E-01	-9.0E-02	-7.6E-02	-6.2E-02
1833	8.7E-04	3.2E-03	5.3E-03	6.6E-03	7.1E-03	3.7E-03	3.5E-03	-1.6E-01	-1.5E-01	-1.4E-01	-1.3E-01	-1.2E-01	-1.0E-01
1834	8.7E-04	3.2E-03	5.7E-03	7.0E-03	7.5E-03	3.9E-03	3.6E-03	-1.6E-01	-1.5E-01	-1.3E-01	-1.2E-01	-1.1E-01	-9.8E-02
1835	9.2E-04	3.3E-03	5.5E-03	6.4E-03	7.1E-03	3.9E-03	3.4E-03	-1.2E-01	-1.1E-01	-9.2E-02	-7.6E-02	-6.0E-02	-4.5E-02
1836	9.4E-04	4.1E-03	5.8E-03	6.8E-03	7.4E-03	4.1E-03	3.4E-03	-1.0E-01	-8.7E-02	-6.9E-02	-5.1E-02	-3.3E-02	-1.5E-02
1837	8.1E-04	3.8E-03	5.3E-03	5.6E-03	6.3E-03	3.8E-03	3.1E-03	-1.1E-01	-9.6E-02	-8.1E-02	-6.5E-02	-5.0E-02	-3.5E-02
1838	8.2E-04	4.5E-03	6.2E-03	6.4E-03	6.5E-03	3.9E-03	3.3E-03	-9.0E-02	-7.6E-02	-5.9E-02	-4.3E-02	-2.6E-02	-9.9E-03
1839	8.3E-04	5.1E-03	7.0E-03	7.3E-03	6.5E-03	4.0E-03	3.4E-03	-9.0E-02	-7.6E-02	-5.9E-02	-4.3E-02	-2.7E-02	-1.1E-02
1840	8.3E-04	5.7E-03	7.9E-03	8.2E-03	6.7E-03	4.0E-03	3.4E-03	-8.7E-02	-7.3E-02	-5.8E-02	-4.3E-02	-2.7E-02	-1.2E-02
1841	8.3E-04	6.3E-03	8.8E-03	9.1E-03	7.4E-03	4.1E-03	3.5E-03	-9.7E-02	-8.2E-02	-6.6E-02	-4.9E-02	-3.3E-02	-1.6E-02
1842	1.0E-03	5.9E-03	8.7E-03	9.2E-03	7.3E-03	3.9E-03	3.6E-03	-8.4E-02	-7.2E-02	-5.8E-02	-4.3E-02	-2.9E-02	-1.5E-02
1843	9.6E-04	6.8E-03	9.7E-03	1.0E-02	8.0E-03	4.2E-03	3.7E-03	-8.5E-02	-7.5E-02	-6.3E-02	-5.1E-02	-3.9E-02	-2.8E-02
1844	1.1E-03	6.9E-03	1.0E-02	1.1E-02	8.1E-03	4.2E-03	3.8E-03	-6.4E-02	-5.6E-02	-4.5E-02	-3.5E-02	-2.4E-02	-1.3E-02
1845	1.2E-03	6.7E-03	1.0E-02	1.1E-02	8.1E-03	4.4E-03	4.2E-03	-4.0E-02	-3.6E-02	-2.9E-02	-2.3E-02	-1.6E-02	-9.2E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1846	8.1E-04	2.9E-03	5.0E-03	6.2E-03	6.7E-03	3.5E-03	3.3E-03	-1.1E-01	-1.1E-01	-9.7E-02	-8.8E-02	-7.9E-02	-7.0E-02
1847	7.9E-04	2.7E-03	4.5E-03	5.3E-03	5.9E-03	3.5E-03	2.9E-03	-1.3E-01	-1.3E-01	-1.2E-01	-1.2E-01	-1.1E-01	-1.1E-01
1848	8.1E-04	2.9E-03	4.7E-03	5.6E-03	6.2E-03	3.6E-03	3.0E-03	-1.3E-01	-1.3E-01	-1.2E-01	-1.1E-01	-1.0E-01	-9.8E-02
1849	7.4E-04	3.6E-03	5.1E-03	5.3E-03	5.8E-03	3.6E-03	3.0E-03	-1.2E-01	-1.1E-01	-1.1E-01	-1.0E-01	-9.5E-02	-8.9E-02
1850	9.2E-04	5.2E-03	7.6E-03	8.1E-03	6.5E-03	3.6E-03	3.2E-03	-7.4E-02	-6.1E-02	-4.5E-02	-2.9E-02	-1.4E-02	2.0E-03
1851	1.0E-03	5.3E-03	8.1E-03	8.6E-03	6.8E-03	3.7E-03	3.5E-03	-7.7E-02	-6.5E-02	-5.1E-02	-3.7E-02	-2.3E-02	-8.8E-03
1852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1853	7.8E-04	2.8E-03	4.9E-03	6.0E-03	6.4E-03	3.4E-03	3.2E-03	-1.0E-01	-9.4E-02	-8.2E-02	-7.0E-02	-5.9E-02	-4.7E-02
1854	7.5E-04	2.6E-03	4.0E-03	5.0E-03	5.4E-03	3.2E-03	2.7E-03	-1.1E-01	-1.0E-01	-9.4E-02	-8.4E-02	-7.4E-02	-6.4E-02
1855	7.6E-04	2.6E-03	4.2E-03	5.0E-03	5.6E-03	3.3E-03	2.7E-03	-1.3E-01	-1.2E-01	-1.1E-01	-1.0E-01	-9.4E-02	-8.4E-02
1856	7.2E-04	2.9E-03	4.2E-03	5.0E-03	5.6E-03	3.5E-03	2.9E-03	-1.2E-01	-1.2E-01	-1.1E-01	-1.1E-01	-1.0E-01	-9.8E-02
1857	6.9E-04	4.3E-03	6.2E-03	6.5E-03	5.4E-03	3.5E-03	3.0E-03	-1.0E-01	-9.6E-02	-8.8E-02	-8.0E-02	-7.2E-02	-6.4E-02
1858	7.7E-04	4.7E-03	6.8E-03	7.2E-03	5.9E-03	3.5E-03	3.0E-03	-8.1E-02	-6.8E-02	-5.3E-02	-3.8E-02	-2.3E-02	-8.6E-03
1859	1.3E-03	4.8E-03	8.0E-03	8.7E-03	6.7E-03	4.5E-03	4.3E-03	-7.0E-02	-6.1E-02	-4.9E-02	-3.7E-02	-2.5E-02	-1.3E-02
1860	1.3E-03	5.4E-03	8.7E-03	9.3E-03	7.1E-03	4.4E-03	4.2E-03	-7.1E-02	-6.3E-02	-5.2E-02	-4.1E-02	-3.0E-02	-1.9E-02
1861	1.5E-03	4.5E-03	7.8E-03	8.7E-03	6.6E-03	4.8E-03	4.6E-03	-6.4E-02	-5.6E-02	-4.6E-02	-3.6E-02	-2.6E-02	-1.6E-02
1862	1.4E-03	5.1E-03	8.6E-03	9.4E-03	7.0E-03	4.8E-03	4.6E-03	-5.3E-02	-4.8E-02	-4.0E-02	-3.3E-02	-2.5E-02	-1.8E-02
1863	1.6E-03	4.1E-03	7.6E-03	8.5E-03	6.6E-03	5.2E-03	5.0E-03	-4.7E-02	-4.4E-02	-4.0E-02	-3.6E-02	-3.1E-02	-2.7E-02
1864	1.8E-03	3.6E-03	7.0E-03	8.1E-03	7.0E-03	5.7E-03	5.4E-03	-5.2E-02	-5.1E-02	-4.7E-02	-4.3E-02	-3.9E-02	-3.5E-02
1865	1.6E-03	4.6E-03	8.3E-03	9.2E-03	6.9E-03	5.2E-03	5.0E-03	-3.6E-02	-3.4E-02	-2.9E-02	-2.4E-02	-1.9E-02	-1.4E-02
1866	1.8E-03	3.8E-03	7.3E-03	8.4E-03	6.9E-03	5.6E-03	5.3E-03	-3.8E-02	-3.8E-02	-3.6E-02	-3.4E-02	-3.2E-02	-3.0E-02
1867	2.0E-03	3.4E-03	6.9E-03	8.1E-03	7.4E-03	6.0E-03	5.8E-03	-4.6E-02	-4.6E-02	-4.2E-02	-3.9E-02	-3.6E-02	-3.3E-02
1868	1.5E-03	5.5E-03	9.3E-03	1.0E-02	7.4E-03	5.1E-03	4.9E-03	-3.5E-02	-3.3E-02	-2.8E-02	-2.3E-02	-1.8E-02	-1.3E-02
1869	1.8E-03	4.2E-03	7.9E-03	9.0E-03	6.9E-03	5.6E-03	5.4E-03	-4.0E-02	-3.9E-02	-3.5E-02	-3.0E-02	-2.6E-02	-2.2E-02
1870	1.9E-03	3.5E-03	7.0E-03	8.2E-03	7.3E-03	5.9E-03	5.6E-03	-4.5E-02	-4.2E-02	-3.7E-02	-3.1E-02	-2.6E-02	-2.0E-02
1871	2.2E-03	3.7E-03	6.6E-03	7.9E-03	7.9E-03	6.4E-03	6.1E-03	-5.9E-02	-5.3E-02	-4.4E-02	-3.6E-02	-2.7E-02	-1.8E-02
1872	1.9E-03	3.9E-03	7.6E-03	8.8E-03	7.4E-03	6.0E-03	5.8E-03	-4.4E-02	-4.3E-02	-3.9E-02	-3.5E-02	-3.1E-02	-2.7E-02
1873	2.1E-03	4.1E-03	6.8E-03	8.2E-03	7.7E-03	6.2E-03	5.9E-03	-5.5E-02	-5.0E-02	-4.2E-02	-3.4E-02	-2.6E-02	-1.8E-02
1874	2.3E-03	5.0E-03	7.5E-03	8.0E-03	8.2E-03	6.6E-03	6.3E-03	-7.2E-02	-6.2E-02	-4.8E-02	-3.4E-02	-2.0E-02	-6.5E-03
1875	2.2E-03	4.8E-03	7.1E-03	8.2E-03	8.1E-03	6.5E-03	6.2E-03	-7.0E-02	-6.2E-02	-5.2E-02	-4.1E-02	-3.0E-02	-1.9E-02
1876	8.0E-04	3.0E-03	5.8E-03	7.1E-03	7.3E-03	4.0E-03	3.7E-03	-9.7E-02	-9.6E-02	-9.3E-02	-9.0E-02	-8.7E-02	-8.4E-02
1877	8.0E-04	2.9E-03	5.6E-03	6.8E-03	7.1E-03	3.8E-03	3.5E-03	-8.2E-02	-8.4E-02	-8.3E-02	-8.3E-02	-8.2E-02	-8.2E-02
1878	7.7E-04	2.7E-03	4.9E-03	6.1E-03	6.5E-03	3.5E-03	3.2E-03	-7.5E-02	-7.3E-02	-6.8E-02	-6.4E-02	-5.9E-02	-5.5E-02
1879	6.7E-04	2.9E-03	4.2E-03	4.7E-03	5.3E-03	3.4E-03	2.8E-03	-1.2E-01	-1.1E-01	-1.0E-01	-9.3E-02	-8.4E-02	-7.5E-02
1880	7.1E-04	4.0E-03	5.9E-03	6.2E-03	5.2E-03	3.2E-03	2.8E-03	-9.4E-02	-9.3E-02	-9.0E-02	-8.7E-02	-8.4E-02	-8.1E-02
1881	1.2E-03	4.4E-03	7.2E-03	7.9E-03	6.2E-03	4.1E-03	3.9E-03	-6.2E-02	-5.0E-02	-3.6E-02	-2.1E-02	-7.0E-03	7.2E-03
1882	1.4E-03	4.3E-03	7.3E-03	8.0E-03	6.3E-03	4.4E-03	4.2E-03	-6.2E-02	-4.9E-02	-3.4E-02	-1.8E-02	-3.3E-03	1.2E-02
1883	1.5E-03	4.1E-03	7.2E-03	8.1E-03	6.3E-03	4.8E-03	4.6E-03	-6.3E-02	-5.4E-02	-4.3E-02	-3.1E-02	-2.0E-02	-9.2E-03
1884	9.0E-04	3.4E-03	5.3E-03	6.2E-03	6.4E-03	3.5E-03	3.3E-03	3.2E-04	-1.2E-02	-2.3E-02	-3.4E-02	-4.4E-02	-5.5E-02
1885	8.2E-04	2.9E-03	4.6E-03	5.7E-03	6.0E-03	3.3E-03	3.1E-03	-2.8E-02	-3.2E-02	-3.4E-02	-3.6E-02	-3.8E-02	-4.0E-02
1886	7.5E-04	2.7E-03	4.4E-03	5.5E-03	5.8E-03	3.2E-03	2.9E-03	-4.3E-02	-4.4E-02	-4.2E-02	-4.1E-02	-3.9E-02	-3.8E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1887	7.7E-04	3.0E-03	5.5E-03	6.7E-03	7.0E-03	3.9E-03	3.6E-03	-9.6E-02	-9.4E-02	-9.1E-02	-8.7E-02	-8.3E-02	-8.0E-02
1888	6.6E-04	2.3E-03	4.5E-03	5.6E-03	5.8E-03	3.4E-03	3.1E-03	-7.5E-02	-7.2E-02	-6.6E-02	-6.0E-02	-5.5E-02	-4.9E-02
1889	6.9E-04	2.4E-03	4.7E-03	5.8E-03	6.0E-03	3.4E-03	3.2E-03	-8.1E-02	-7.7E-02	-7.2E-02	-6.6E-02	-6.0E-02	-5.5E-02
1890	7.0E-04	2.4E-03	4.8E-03	5.9E-03	6.1E-03	3.5E-03	3.2E-03	-8.3E-02	-8.0E-02	-7.5E-02	-6.9E-02	-6.4E-02	-5.9E-02
1891	7.2E-04	2.5E-03	5.0E-03	6.1E-03	6.4E-03	3.6E-03	3.3E-03	-8.7E-02	-8.5E-02	-8.1E-02	-7.7E-02	-7.4E-02	-7.0E-02
1892	7.5E-04	2.6E-03	5.2E-03	6.4E-03	6.6E-03	3.6E-03	3.4E-03	-9.1E-02	-9.0E-02	-8.7E-02	-8.4E-02	-8.1E-02	-7.8E-02
1893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1894	9.0E-04	3.4E-03	5.2E-03	6.1E-03	6.3E-03	3.3E-03	3.1E-03	2.1E-03	-1.1E-02	-2.2E-02	-3.3E-02	-4.5E-02	-5.6E-02
1895	8.4E-04	3.2E-03	4.9E-03	6.0E-03	6.3E-03	3.2E-03	3.0E-03	-1.9E-02	-2.5E-02	-3.0E-02	-3.4E-02	-3.9E-02	-4.4E-02
1896	7.4E-04	2.8E-03	4.5E-03	5.5E-03	5.8E-03	2.9E-03	2.7E-03	-3.9E-02	-3.8E-02	-3.6E-02	-3.4E-02	-3.2E-02	-3.0E-02
1897	6.6E-04	2.6E-03	4.2E-03	5.2E-03	5.3E-03	3.0E-03	2.8E-03	-5.0E-02	-4.7E-02	-4.3E-02	-3.8E-02	-3.3E-02	-2.8E-02
1898	8.0E-04	3.2E-03	4.9E-03	6.1E-03	6.3E-03	3.2E-03	3.0E-03	-2.5E-02	-3.0E-02	-3.3E-02	-3.5E-02	-3.8E-02	-4.1E-02
1899	7.3E-04	2.9E-03	4.6E-03	5.6E-03	5.9E-03	3.0E-03	2.8E-03	-4.5E-02	-4.3E-02	-3.9E-02	-3.6E-02	-3.2E-02	-2.9E-02
1900	6.6E-04	2.5E-03	4.2E-03	5.2E-03	5.3E-03	3.1E-03	2.8E-03	-5.4E-02	-5.2E-02	-4.7E-02	-4.2E-02	-3.8E-02	-3.3E-02
1901	6.2E-04	2.0E-03	4.1E-03	5.1E-03	5.2E-03	3.1E-03	2.9E-03	-7.7E-02	-7.2E-02	-6.5E-02	-5.8E-02	-5.1E-02	-4.4E-02
1902	6.3E-04	2.2E-03	4.3E-03	5.3E-03	5.5E-03	3.0E-03	2.8E-03	-7.9E-02	-7.5E-02	-6.9E-02	-6.3E-02	-5.7E-02	-5.2E-02
1903	7.3E-04	2.5E-03	4.1E-03	5.2E-03	5.5E-03	3.1E-03	2.8E-03	-4.4E-02	-4.3E-02	-4.0E-02	-3.7E-02	-3.4E-02	-3.1E-02
1904	6.6E-04	2.3E-03	4.1E-03	5.1E-03	5.2E-03	3.1E-03	2.9E-03	-6.0E-02	-5.6E-02	-5.0E-02	-4.5E-02	-4.0E-02	-3.4E-02
1905	6.3E-04	2.0E-03	4.2E-03	5.2E-03	5.4E-03	3.1E-03	2.9E-03	-7.7E-02	-7.2E-02	-6.5E-02	-5.8E-02	-5.1E-02	-4.4E-02
1906	6.4E-04	2.1E-03	4.1E-03	5.1E-03	5.3E-03	3.0E-03	2.8E-03	-8.1E-02	-7.7E-02	-7.2E-02	-6.6E-02	-6.1E-02	-5.6E-02
1907	6.4E-04	2.3E-03	4.1E-03	5.2E-03	5.3E-03	2.9E-03	2.7E-03	-7.0E-02	-7.0E-02	-6.8E-02	-6.5E-02	-6.3E-02	-6.1E-02
1908	6.6E-04	2.4E-03	4.2E-03	5.2E-03	5.3E-03	3.2E-03	2.9E-03	-6.3E-02	-6.0E-02	-5.4E-02	-4.8E-02	-4.3E-02	-3.7E-02
1909	6.5E-04	2.1E-03	4.3E-03	5.3E-03	5.5E-03	3.2E-03	2.9E-03	-7.8E-02	-7.3E-02	-6.7E-02	-6.1E-02	-5.4E-02	-4.8E-02
1910	6.5E-04	2.1E-03	4.2E-03	5.2E-03	5.4E-03	3.1E-03	2.9E-03	-7.6E-02	-7.4E-02	-7.0E-02	-6.6E-02	-6.2E-02	-5.8E-02
1911	6.5E-04	2.3E-03	4.1E-03	5.2E-03	5.4E-03	2.9E-03	2.7E-03	-7.1E-02	-7.2E-02	-7.0E-02	-6.9E-02	-6.7E-02	-6.6E-02
1912	6.6E-04	2.4E-03	4.3E-03	5.3E-03	5.5E-03	3.3E-03	3.0E-03	-6.7E-02	-6.3E-02	-5.7E-02	-5.1E-02	-4.5E-02	-3.9E-02
1913	6.6E-04	2.2E-03	4.4E-03	5.4E-03	5.6E-03	3.2E-03	3.0E-03	-7.8E-02	-7.4E-02	-6.9E-02	-6.3E-02	-5.7E-02	-5.1E-02
1914	6.7E-04	2.2E-03	4.2E-03	5.3E-03	5.5E-03	3.1E-03	2.9E-03	-7.3E-02	-7.2E-02	-6.9E-02	-6.6E-02	-6.3E-02	-6.0E-02
1915	6.6E-04	2.3E-03	4.1E-03	5.2E-03	5.4E-03	2.9E-03	2.7E-03	-7.1E-02	-7.3E-02	-7.4E-02	-7.4E-02	-7.5E-02	-7.5E-02
1916	6.2E-04	2.1E-03	3.5E-03	4.5E-03	4.7E-03	2.6E-03	2.4E-03	-6.2E-02	-6.7E-02	-6.9E-02	-7.2E-02	-7.5E-02	-7.7E-02
1917	6.7E-04	2.2E-03	4.3E-03	5.4E-03	5.6E-03	3.1E-03	2.9E-03	-7.4E-02	-7.3E-02	-7.1E-02	-6.9E-02	-6.6E-02	-6.4E-02
1918	6.6E-04	2.2E-03	4.0E-03	5.0E-03	5.2E-03	2.9E-03	2.7E-03	-6.6E-02	-7.0E-02	-7.3E-02	-7.5E-02	-7.8E-02	-8.0E-02
1919	6.2E-04	2.0E-03	3.5E-03	4.4E-03	4.7E-03	2.6E-03	2.4E-03	-6.0E-02	-6.4E-02	-6.6E-02	-6.8E-02	-6.9E-02	-7.1E-02
1920	6.8E-04	2.3E-03	4.4E-03	5.4E-03	5.7E-03	3.2E-03	2.9E-03	-7.4E-02	-7.5E-02	-7.5E-02	-7.5E-02	-7.4E-02	-7.4E-02
1921	6.7E-04	2.2E-03	4.0E-03	5.0E-03	5.3E-03	2.9E-03	2.7E-03	-6.4E-02	-6.8E-02	-7.0E-02	-7.2E-02	-7.4E-02	-7.6E-02
1922	6.3E-04	2.0E-03	3.5E-03	4.4E-03	4.7E-03	2.6E-03	2.4E-03	-6.3E-02	-6.6E-02	-6.6E-02	-6.7E-02	-6.7E-02	-6.8E-02
1923	7.0E-04	2.4E-03	4.4E-03	5.5E-03	5.8E-03	3.2E-03	3.0E-03	-7.2E-02	-7.5E-02	-7.5E-02	-7.6E-02	-7.7E-02	-7.8E-02
1924	6.7E-04	2.2E-03	4.0E-03	5.0E-03	5.3E-03	2.9E-03	2.7E-03	-6.3E-02	-6.7E-02	-6.8E-02	-7.0E-02	-7.1E-02	-7.3E-02
1925	6.4E-04	2.1E-03	3.4E-03	4.4E-03	4.7E-03	2.7E-03	2.4E-03	-6.2E-02	-6.3E-02	-6.1E-02	-6.0E-02	-5.9E-02	-5.8E-02
1926	7.1E-04	2.4E-03	4.5E-03	5.6E-03	5.9E-03	3.2E-03	3.0E-03	-6.7E-02	-7.1E-02	-7.3E-02	-7.4E-02	-7.6E-02	-7.8E-02
1927	6.8E-04	2.3E-03	4.0E-03	5.1E-03	5.4E-03	3.0E-03	2.8E-03	-6.6E-02	-6.8E-02	-6.8E-02	-6.8E-02	-6.7E-02	-6.7E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1928	6.5E-04	2.1E-03	3.4E-03	4.4E-03	4.6E-03	2.8E-03	2.4E-03	-6.0E-02	-6.0E-02	-5.9E-02	-5.8E-02	-5.7E-02	-5.6E-02
1929	7.3E-04	2.5E-03	4.6E-03	5.7E-03	6.0E-03	3.3E-03	3.1E-03	-6.8E-02	-7.1E-02	-7.3E-02	-7.4E-02	-7.5E-02	-7.6E-02
1930	7.0E-04	2.3E-03	4.1E-03	5.1E-03	5.4E-03	3.0E-03	2.8E-03	-6.6E-02	-6.6E-02	-6.5E-02	-6.3E-02	-6.1E-02	-6.0E-02
1931	6.7E-04	2.2E-03	3.5E-03	4.4E-03	4.6E-03	2.9E-03	2.4E-03	-5.7E-02	-5.8E-02	-5.6E-02	-5.4E-02	-5.2E-02	-5.1E-02
1932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1935	7.0E-04	2.4E-03	4.0E-03	5.1E-03	5.4E-03	3.0E-03	2.8E-03	-6.7E-02	-6.3E-02	-5.7E-02	-5.1E-02	-4.5E-02	-3.9E-02
1936	6.8E-04	2.2E-03	3.5E-03	4.2E-03	4.8E-03	3.0E-03	2.4E-03	-9.0E-02	-8.1E-02	-7.0E-02	-5.8E-02	-4.7E-02	-3.6E-02
1937	7.1E-04	2.4E-03	4.0E-03	5.0E-03	5.4E-03	3.0E-03	2.7E-03	-9.4E-02	-8.5E-02	-7.4E-02	-6.3E-02	-5.2E-02	-4.0E-02
1938	6.9E-04	2.2E-03	3.7E-03	4.4E-03	5.0E-03	3.1E-03	2.5E-03	-9.9E-02	-8.8E-02	-7.6E-02	-6.4E-02	-5.2E-02	-4.0E-02
1939	7.3E-04	2.5E-03	3.9E-03	5.0E-03	5.4E-03	3.1E-03	2.7E-03	-1.1E-01	-1.0E-01	-8.6E-02	-7.3E-02	-6.0E-02	-4.7E-02
1940	9.1E-04	2.9E-03	4.9E-03	5.6E-03	5.8E-03	3.5E-03	3.3E-03	-4.9E-03	-1.5E-02	-2.3E-02	-3.0E-02	-3.8E-02	-4.6E-02
1941	7.0E-04	2.2E-03	3.9E-03	4.7E-03	5.3E-03	3.3E-03	2.7E-03	-1.1E-01	-1.0E-01	-9.6E-02	-8.7E-02	-7.9E-02	-7.0E-02
1942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1953	2.7E-03	3.1E-03	2.1E-03	8.2E-04	1.1E-03	6.5E-04	5.8E-04	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02	-9.9E-03	-8.8E-03
1954	1.4E-03	1.8E-03	1.8E-03	8.8E-04	1.1E-03	1.5E-03	6.9E-04	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02
1955	1.0E-03	2.0E-03	2.0E-03	9.3E-04	1.1E-03	1.6E-03	7.6E-04	-9.0E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
1956	1.0E-03	1.8E-03	2.0E-03	9.7E-04	1.1E-03	1.5E-03	8.0E-04	-7.4E-03	-8.9E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02
1957	1.1E-03	2.1E-03	2.4E-03	9.9E-04	1.1E-03	1.6E-03	8.1E-04	-7.5E-03	-8.9E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02
1958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1962	4.2E-03	4.3E-03	6.5E-03	1.1E-02	1.1E-02	1.0E-02	1.0E-02	-8.8E-03	-1.1E-02	-7.4E-03	-3.5E-03	3.2E-04	4.2E-03
1963	3.9E-03	4.1E-03	6.6E-03	1.1E-02	1.2E-02	1.1E-02	1.1E-02	-1.8E-02	-1.7E-02	-1.1E-02	-4.4E-03	2.1E-03	8.7E-03
1964	3.5E-03	3.7E-03	5.9E-03	9.7E-03	1.0E-02	9.5E-03	9.5E-03	-7.1E-03	-1.0E-02	-7.5E-03	-4.9E-03	-2.3E-03	3.1E-04
1965	3.0E-03	3.2E-03	5.7E-03	1.0E-02	1.1E-02	9.9E-03	9.8E-03	-1.8E-02	-1.6E-02	-9.5E-03	-2.5E-03	4.4E-03	1.1E-02
1966	2.8E-03	2.9E-03	5.3E-03	9.0E-03	9.4E-03	8.8E-03	8.8E-03	-5.7E-03	-9.3E-03	-7.9E-03	-6.5E-03	-5.1E-03	-3.8E-03
1967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1971	2.3E-03	2.7E-03	3.9E-03	7.1E-03	7.5E-03	6.9E-03	6.9E-03	-1.4E-02	-1.2E-02	-7.4E-03	-2.5E-03	2.5E-03	7.4E-03
1972	2.4E-03	2.6E-03	4.7E-03	6.8E-03	8.4E-03	7.9E-03	7.5E-03	-5.5E-03	-7.2E-03	-3.9E-03	-5.0E-04	2.9E-03	6.2E-03
1973	2.4E-03	2.5E-03	3.9E-03	6.1E-03	6.8E-03	6.3E-03	6.0E-03	-1.1E-02	-9.0E-03	-3.2E-03	2.5E-03	8.3E-03	1.4E-02
1974	2.3E-03	2.5E-03	3.3E-03	5.1E-03	5.5E-03	5.2E-03	4.9E-03	-2.0E-02	-1.7E-02	-9.4E-03	-2.3E-03	4.9E-03	1.2E-02
1975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1976	2.2E-03	2.4E-03	4.2E-03	6.0E-03	7.4E-03	6.9E-03	6.6E-03	-9.1E-03	-8.3E-03	-3.1E-03	2.1E-03	7.4E-03	1.3E-02
1977	2.2E-03	2.3E-03	3.6E-03	5.4E-03	6.0E-03	5.6E-03	5.3E-03	-1.4E-02	-1.1E-02	-4.5E-03	2.0E-03	8.5E-03	1.5E-02
1978	1.9E-03	2.2E-03	4.1E-03	5.6E-03	7.3E-03	6.9E-03	6.5E-03	-3.4E-03	-4.1E-03	-3.5E-04	3.4E-03	7.2E-03	1.1E-02
1979	1.9E-03	2.2E-03	3.7E-03	5.3E-03	6.5E-03	6.0E-03	5.6E-03	-6.0E-03	-4.8E-03	1.3E-04	5.1E-03	1.0E-02	1.5E-02
1980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1981	1.5E-03	2.0E-03	4.1E-03	5.1E-03	7.1E-03	6.5E-03	6.2E-03	6.1E-03	3.7E-03	5.4E-03	7.2E-03	8.9E-03	1.1E-02
1982	1.6E-03	2.0E-03	3.6E-03	4.9E-03	6.4E-03	6.0E-03	5.7E-03	-5.9E-03	-4.8E-03	1.1E-04	5.0E-03	9.9E-03	1.5E-02
1983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1990	1.1E-03	1.8E-03	4.8E-03	4.1E-03	5.9E-03	5.5E-03	5.1E-03	-3.3E-02	-2.9E-02	-2.1E-02	-1.3E-02	-5.2E-03	2.6E-03
1991	2.3E-03	3.2E-03	5.2E-03	6.7E-03	8.2E-03	6.4E-03	5.9E-03	-7.7E-02	-7.3E-02	-6.5E-02	-5.6E-02	-4.7E-02	-3.8E-02
1992	2.1E-03	2.6E-03	4.2E-03	6.3E-03	6.4E-03	5.7E-03	5.7E-03	-6.8E-02	-6.1E-02	-5.0E-02	-4.0E-02	-2.9E-02	-1.8E-02
1993	2.3E-03	4.7E-03	4.8E-03	6.6E-03	7.4E-03	6.1E-03	5.9E-03	-3.4E-02	-3.1E-02	-2.3E-02	-1.6E-02	-8.3E-03	-7.7E-04
1994	2.2E-03	2.7E-03	4.2E-03	6.1E-03	6.2E-03	5.6E-03	5.6E-03	-2.9E-02	-2.4E-02	-1.5E-02	-6.4E-03	2.2E-03	1.1E-02
1995	1.6E-03	2.2E-03	4.2E-03	5.1E-03	5.4E-03	4.2E-03	4.2E-03	-2.5E-02	-1.7E-02	-6.3E-03	4.4E-03	1.5E-02	2.6E-02
1996	1.2E-03	2.5E-03	4.2E-03	5.0E-03	5.8E-03	4.6E-03	4.3E-03	-2.5E-02	-1.5E-02	-1.7E-03	1.1E-02	2.4E-02	3.7E-02
1997	2.5E-03	3.2E-03	4.7E-03	7.2E-03	7.3E-03	6.7E-03	6.7E-03	1.3E-02	1.4E-02	1.9E-02	2.4E-02	2.9E-02	3.4E-02
1998	2.0E-03	2.5E-03	5.1E-03	6.1E-03	6.7E-03	4.9E-03	4.9E-03	1.8E-02	1.8E-02	2.2E-02	2.6E-02	2.9E-02	3.3E-02
1999	1.4E-03	2.0E-03	4.9E-03	5.5E-03	6.7E-03	5.6E-03	5.3E-03	2.3E-02	2.1E-02	2.3E-02	2.5E-02	2.7E-02	2.9E-02
2000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2003	2.4E-03	3.0E-03	5.2E-03	6.6E-03	7.5E-03	6.1E-03	6.1E-03	1.9E-02	2.2E-02	3.0E-02	3.7E-02	4.5E-02	5.2E-02
2004	1.6E-03	2.3E-03	5.3E-03	5.7E-03	7.6E-03	6.7E-03	6.4E-03	1.3E-02	1.7E-02	2.5E-02	3.3E-02	4.0E-02	4.8E-02
2005	1.8E-03	2.5E-03	4.7E-03	4.8E-03	7.3E-03	6.8E-03	6.5E-03	6.7E-03	9.6E-03	1.6E-02	2.3E-02	2.9E-02	3.6E-02
2006	1.5E-03	2.8E-03	4.2E-03	4.3E-03	7.2E-03	6.9E-03	6.6E-03	-9.9E-03	-7.5E-03	-9.2E-04	5.7E-03	1.2E-02	1.9E-02
2007	1.7E-03	3.0E-03	3.7E-03	4.1E-03	6.8E-03	6.6E-03	6.3E-03	-2.3E-02	-1.9E-02	-9.6E-03	-4.3E-04	8.7E-03	1.8E-02
2008	1.8E-03	3.0E-03	3.4E-03	3.9E-03	6.4E-03	6.3E-03	5.9E-03	-3.3E-02	-2.5E-02	-1.3E-02	-3.7E-04	1.2E-02	2.4E-02
2009	2.0E-03	3.4E-03	5.6E-03	5.9E-03	8.7E-03	8.0E-03	7.5E-03	-1.9E-02	-9.9E-03	2.9E-03	1.6E-02	2.9E-02	4.2E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2010	1.9E-03	2.9E-03	4.9E-03	4.9E-03	8.2E-03	7.9E-03	7.5E-03	-2.0E-02	-1.5E-02	-4.5E-03	5.9E-03	1.6E-02	2.6E-02
2011	1.8E-03	3.3E-03	4.3E-03	4.7E-03	7.7E-03	7.6E-03	7.2E-03	-1.2E-02	-7.3E-03	2.6E-03	1.3E-02	2.3E-02	3.2E-02
2012	2.0E-03	3.5E-03	3.9E-03	4.5E-03	7.3E-03	7.1E-03	6.8E-03	-4.3E-03	-4.7E-04	8.5E-03	1.8E-02	2.7E-02	3.6E-02
2013	2.0E-03	3.4E-03	3.4E-03	4.0E-03	6.5E-03	6.4E-03	6.1E-03	-1.7E-02	-1.2E-02	-1.8E-03	8.0E-03	1.8E-02	2.8E-02
2014	1.9E-03	3.1E-03	2.9E-03	3.6E-03	5.7E-03	5.6E-03	5.3E-03	-2.4E-02	-1.7E-02	-5.3E-03	6.4E-03	1.8E-02	3.0E-02
2015	2.1E-03	3.8E-03	5.4E-03	5.8E-03	9.8E-03	9.5E-03	9.0E-03	-4.6E-02	-3.6E-02	-2.0E-02	-3.2E-03	1.3E-02	2.9E-02
2016	2.3E-03	4.0E-03	4.7E-03	5.3E-03	8.8E-03	8.6E-03	8.2E-03	-3.2E-02	-2.8E-02	-1.9E-02	-8.7E-03	1.2E-03	1.1E-02
2017	2.4E-03	4.0E-03	4.0E-03	4.7E-03	7.6E-03	7.5E-03	7.1E-03	-2.2E-02	-1.9E-02	-9.9E-03	-1.2E-03	7.6E-03	1.6E-02
2018	2.2E-03	3.7E-03	3.5E-03	4.1E-03	6.7E-03	6.5E-03	6.2E-03	-1.1E-02	-8.4E-03	-7.9E-04	6.8E-03	1.4E-02	2.2E-02
2019	1.9E-03	3.2E-03	2.9E-03	3.7E-03	5.5E-03	5.4E-03	5.1E-03	-3.0E-03	-1.3E-03	4.7E-03	1.1E-02	1.7E-02	2.3E-02
2020	1.5E-03	2.6E-03	2.7E-03	3.6E-03	4.9E-03	4.8E-03	4.6E-03	-4.7E-03	-1.7E-03	4.8E-03	1.1E-02	1.8E-02	2.5E-02
2021	2.7E-03	4.6E-03	5.0E-03	5.9E-03	9.8E-03	9.6E-03	9.1E-03	-2.4E-02	-1.9E-02	-7.7E-03	4.0E-03	1.6E-02	2.7E-02
2022	2.7E-03	4.6E-03	4.3E-03	5.1E-03	8.2E-03	8.1E-03	7.6E-03	-2.5E-02	-2.4E-02	-1.7E-02	-1.0E-02	-3.0E-03	4.1E-03
2023	2.4E-03	3.9E-03	3.4E-03	4.2E-03	6.6E-03	6.5E-03	6.1E-03	-2.5E-02	-2.6E-02	-2.2E-02	-1.8E-02	-1.3E-02	-9.0E-03
2024	1.8E-03	3.1E-03	3.2E-03	4.0E-03	5.5E-03	5.4E-03	5.2E-03	-2.1E-02	-2.1E-02	-1.7E-02	-1.3E-02	-8.5E-03	-4.3E-03
2025	1.7E-03	2.7E-03	2.7E-03	3.8E-03	4.9E-03	4.9E-03	4.6E-03	-1.2E-02	-1.3E-02	-1.0E-02	-7.4E-03	-4.8E-03	-2.1E-03
2026	1.6E-03	2.7E-03	2.4E-03	3.7E-03	4.5E-03	4.4E-03	4.2E-03	-1.3E-02	-1.3E-02	-1.0E-02	-7.4E-03	-4.5E-03	-1.5E-03
2027	3.0E-03	5.0E-03	4.5E-03	5.4E-03	8.9E-03	8.7E-03	8.2E-03	-9.4E-03	-2.5E-03	1.1E-02	2.5E-02	3.9E-02	5.3E-02
2028	2.4E-03	4.0E-03	3.6E-03	4.5E-03	6.6E-03	6.5E-03	6.1E-03	-3.1E-02	-2.7E-02	-1.7E-02	-7.6E-03	2.1E-03	1.2E-02
2029	2.1E-03	3.3E-03	3.6E-03	4.4E-03	5.8E-03	5.7E-03	5.4E-03	-2.7E-02	-2.6E-02	-2.2E-02	-1.7E-02	-1.3E-02	-8.3E-03
2030	1.8E-03	3.1E-03	2.9E-03	4.2E-03	4.9E-03	4.9E-03	4.6E-03	-1.4E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.3E-03
2031	1.5E-03	2.8E-03	2.6E-03	3.9E-03	4.1E-03	4.0E-03	3.8E-03	-1.5E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.1E-03
2032	1.2E-03	2.4E-03	2.2E-03	3.4E-03	3.4E-03	3.3E-03	3.2E-03	-1.3E-02	-1.3E-02	-1.1E-02	-8.6E-03	-6.3E-03	-4.1E-03
2033	2.9E-03	4.9E-03	4.9E-03	6.4E-03	1.0E-02	1.0E-02	9.4E-03	3.4E-03	9.9E-03	2.4E-02	3.9E-02	5.4E-02	6.8E-02
2034	2.6E-03	4.2E-03	4.5E-03	5.6E-03	7.2E-03	7.1E-03	6.7E-03	-2.4E-03	4.0E-03	1.6E-02	2.8E-02	4.0E-02	5.2E-02
2035	2.2E-03	3.8E-03	3.9E-03	4.9E-03	5.8E-03	5.7E-03	5.4E-03	-1.7E-02	-1.0E-02	1.4E-03	1.3E-02	2.5E-02	3.6E-02
2036	1.8E-03	3.3E-03	3.5E-03	4.7E-03	4.8E-03	4.7E-03	4.5E-03	-2.7E-02	-2.2E-02	-1.3E-02	-3.4E-03	5.9E-03	1.5E-02
2037	1.3E-03	2.7E-03	3.1E-03	4.1E-03	3.9E-03	3.7E-03	3.6E-03	-3.1E-02	-3.0E-02	-2.6E-02	-2.3E-02	-1.9E-02	-1.5E-02
2038	1.1E-03	1.9E-03	2.6E-03	3.2E-03	3.2E-03	3.2E-03	3.0E-03	-1.6E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.6E-03
2039	1.1E-03	1.5E-03	2.6E-03	3.1E-03	3.2E-03	3.2E-03	3.0E-03	-1.2E-02	-1.3E-02	-1.1E-02	-9.2E-03	-7.5E-03	-5.8E-03
2040	2.8E-03	4.6E-03	6.2E-03	8.6E-03	8.9E-03	8.4E-03	8.4E-03	-5.9E-03	-5.4E-03	1.5E-03	8.5E-03	1.5E-02	2.2E-02
2041	2.3E-03	4.0E-03	5.1E-03	6.7E-03	7.0E-03	6.6E-03	6.6E-03	-5.3E-03	3.2E-04	1.1E-02	2.1E-02	3.2E-02	4.2E-02
2042	2.0E-03	3.0E-03	4.3E-03	5.8E-03	6.0E-03	5.7E-03	5.7E-03	-1.1E-02	-3.9E-03	7.1E-03	1.8E-02	2.9E-02	4.0E-02
2043	1.7E-03	2.2E-03	3.9E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-2.0E-02	-1.2E-02	-1.7E-03	8.9E-03	2.0E-02	3.0E-02
2044	1.5E-03	1.7E-03	3.4E-03	4.4E-03	4.5E-03	4.3E-03	4.3E-03	-2.8E-02	-2.2E-02	-1.3E-02	-4.7E-03	3.8E-03	1.2E-02
2045	1.3E-03	1.5E-03	2.9E-03	3.7E-03	3.8E-03	3.6E-03	3.6E-03	-2.6E-02	-2.4E-02	-2.0E-02	-1.5E-02	-1.1E-02	-7.2E-03
2046	1.2E-03	1.5E-03	2.7E-03	3.5E-03	3.7E-03	3.5E-03	3.5E-03	-2.2E-02	-2.1E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.2E-02
2047	3.5E-03	3.6E-03	6.2E-03	9.9E-03	1.0E-02	9.7E-03	9.7E-03	1.7E-02	8.7E-03	5.5E-03	2.2E-03	-1.0E-03	-4.3E-03
2048	3.0E-03	3.1E-03	5.4E-03	8.6E-03	9.0E-03	8.4E-03	8.4E-03	-1.1E-02	-1.0E-02	-5.6E-03	-1.1E-03	3.4E-03	7.9E-03
2049	2.3E-03	2.4E-03	4.9E-03	6.9E-03	7.2E-03	6.8E-03	6.8E-03	-1.6E-02	-1.1E-02	-2.8E-03	5.2E-03	1.3E-02	2.1E-02
2050	2.0E-03	2.3E-03	4.4E-03	5.9E-03	6.1E-03	5.8E-03	5.8E-03	-2.3E-02	-1.4E-02	-3.4E-03	7.4E-03	1.8E-02	2.9E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2051	1.8E-03	2.1E-03	3.7E-03	4.7E-03	4.9E-03	4.6E-03	4.6E-03	-3.0E-02	-2.2E-02	-1.2E-02	-2.8E-03	6.9E-03	1.7E-02
2052	1.5E-03	1.9E-03	3.0E-03	3.8E-03	3.9E-03	3.7E-03	3.7E-03	-3.1E-02	-2.5E-02	-1.7E-02	-9.6E-03	-1.8E-03	5.9E-03
2053	1.4E-03	1.8E-03	2.7E-03	3.7E-03	3.8E-03	3.6E-03	3.6E-03	-2.0E-02	-1.7E-02	-1.2E-02	-6.7E-03	-1.6E-03	3.5E-03
2054	1.5E-03	1.7E-03	2.7E-03	3.9E-03	4.1E-03	3.9E-03	3.9E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.4E-03	-4.8E-03
2055	3.9E-03	3.9E-03	5.8E-03	9.8E-03	1.0E-02	9.7E-03	9.6E-03	1.5E-03	-3.8E-03	-4.0E-03	-4.2E-03	-4.4E-03	-4.6E-03
2056	3.4E-03	3.5E-03	5.1E-03	8.7E-03	9.2E-03	8.6E-03	8.6E-03	1.2E-02	4.5E-03	1.3E-03	-1.8E-03	-5.0E-03	-8.1E-03
2057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2058	2.5E-03	2.6E-03	4.1E-03	6.3E-03	6.5E-03	6.2E-03	6.2E-03	-1.9E-02	-1.6E-02	-1.1E-02	-4.9E-03	9.2E-04	6.7E-03
2059	2.0E-03	2.1E-03	3.5E-03	5.0E-03	5.2E-03	5.0E-03	5.0E-03	-3.5E-02	-2.7E-02	-1.8E-02	-7.7E-03	2.2E-03	1.2E-02
2060	1.7E-03	1.8E-03	3.2E-03	4.4E-03	4.6E-03	4.4E-03	4.4E-03	-3.7E-02	-3.0E-02	-2.0E-02	-1.1E-02	-9.2E-04	8.7E-03
2061	1.6E-03	1.6E-03	3.1E-03	4.3E-03	4.5E-03	4.2E-03	4.2E-03	-3.0E-02	-2.4E-02	-1.6E-02	-8.3E-03	-5.0E-04	7.3E-03
2062	1.5E-03	1.5E-03	3.0E-03	4.1E-03	4.3E-03	4.0E-03	4.0E-03	-1.8E-02	-1.3E-02	-6.7E-03	-2.2E-04	6.3E-03	1.3E-02
2063	1.5E-03	1.5E-03	2.9E-03	4.0E-03	4.1E-03	3.9E-03	3.9E-03	-1.3E-02	-1.2E-02	-8.0E-03	-4.2E-03	-5.3E-04	3.2E-03
2064	3.5E-03	3.5E-03	5.6E-03	8.3E-03	8.8E-03	8.3E-03	8.2E-03	3.6E-03	-3.1E-03	-4.7E-03	-6.4E-03	-8.1E-03	-9.8E-03
2065	3.1E-03	3.2E-03	4.7E-03	7.4E-03	7.8E-03	7.3E-03	7.3E-03	1.0E-02	3.2E-03	-7.5E-05	-3.3E-03	-6.6E-03	-9.9E-03
2066	2.8E-03	2.8E-03	4.1E-03	6.5E-03	6.8E-03	6.4E-03	6.4E-03	-2.6E-03	-6.2E-03	-6.6E-03	-7.1E-03	-7.5E-03	-8.0E-03
2067	2.4E-03	2.4E-03	3.3E-03	5.3E-03	5.6E-03	5.3E-03	5.2E-03	-2.1E-02	-1.9E-02	-1.4E-02	-9.9E-03	-5.4E-03	-8.1E-04
2068	2.1E-03	2.2E-03	3.1E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-4.2E-02	-3.5E-02	-2.6E-02	-1.7E-02	-8.2E-03	8.0E-04
2069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2071	1.8E-03	1.9E-03	3.0E-03	4.6E-03	4.8E-03	4.5E-03	4.5E-03	-1.4E-02	-9.3E-03	-2.3E-03	4.7E-03	1.2E-02	1.9E-02
2072	1.7E-03	2.9E-03	3.3E-03	1.4E-03	1.3E-03	1.7E-03	1.1E-03	-2.0E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.2E-03	-5.2E-03
2073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2074	3.1E-03	3.3E-03	5.4E-03	8.2E-03	8.5E-03	8.0E-03	8.0E-03	6.5E-03	-9.7E-04	-3.7E-03	-6.5E-03	-9.2E-03	-1.2E-02
2075	2.9E-03	3.0E-03	4.4E-03	6.3E-03	6.8E-03	6.6E-03	6.4E-03	4.2E-03	-2.5E-03	-5.0E-03	-7.5E-03	-1.0E-02	-1.3E-02
2076	2.6E-03	2.7E-03	3.8E-03	5.6E-03	5.9E-03	5.8E-03	5.6E-03	-5.7E-03	-9.4E-03	-9.7E-03	-1.0E-02	-1.0E-02	-1.1E-02
2077	2.4E-03	2.5E-03	3.5E-03	5.2E-03	5.5E-03	5.2E-03	5.1E-03	-2.0E-02	-1.9E-02	-1.6E-02	-1.3E-02	-9.3E-03	-5.9E-03
2078	2.3E-03	2.3E-03	3.1E-03	5.0E-03	5.3E-03	5.0E-03	5.0E-03	-4.0E-02	-3.5E-02	-2.7E-02	-2.0E-02	-1.2E-02	-4.0E-03
2079	2.0E-03	2.1E-03	2.7E-03	4.5E-03	4.7E-03	4.5E-03	4.4E-03	-4.2E-02	-3.5E-02	-2.7E-02	-1.9E-02	-1.0E-02	-1.6E-03
2080	2.0E-03	2.0E-03	2.8E-03	4.6E-03	4.8E-03	4.5E-03	4.5E-03	-2.8E-02	-2.4E-02	-1.7E-02	-1.0E-02	-3.1E-03	3.7E-03
2081	1.9E-03	2.0E-03	2.7E-03	4.5E-03	4.7E-03	4.4E-03	4.4E-03	-1.9E-02	-1.4E-02	-6.9E-03	3.2E-05	7.0E-03	1.4E-02
2082	1.8E-03	2.5E-03	2.8E-03	1.4E-03	1.3E-03	1.7E-03	1.2E-03	-2.1E-02	-1.9E-02	-1.5E-02	-1.2E-02	-9.1E-03	-5.9E-03
2083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2084	2.8E-03	3.0E-03	5.0E-03	7.9E-03	8.3E-03	7.8E-03	7.8E-03	6.9E-03	-9.3E-04	-4.2E-03	-7.6E-03	-1.1E-02	-1.4E-02
2085	2.6E-03	2.8E-03	4.4E-03	6.5E-03	6.8E-03	6.3E-03	6.3E-03	-2.1E-03	-8.0E-03	-9.8E-03	-1.2E-02	-1.4E-02	-1.5E-02
2086	2.5E-03	2.7E-03	3.6E-03	5.1E-03	5.9E-03	5.8E-03	5.6E-03	-1.0E-02	-1.4E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02
2087	2.4E-03	2.5E-03	3.4E-03	4.5E-03	5.4E-03	5.3E-03	5.1E-03	-1.7E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.5E-03
2088	2.2E-03	2.3E-03	3.1E-03	4.2E-03	4.7E-03	4.6E-03	4.5E-03	-3.6E-02	-3.3E-02	-2.7E-02	-2.2E-02	-1.6E-02	-1.0E-02
2089	2.1E-03	2.2E-03	2.8E-03	4.3E-03	4.5E-03	4.2E-03	4.2E-03	-3.7E-02	-3.2E-02	-2.4E-02	-1.6E-02	-8.8E-03	-1.2E-03
2090	2.0E-03	2.1E-03	2.4E-03	4.2E-03	4.5E-03	4.2E-03	4.2E-03	-3.0E-02	-2.4E-02	-1.7E-02	-9.7E-03	-2.3E-03	5.0E-03
2091	1.8E-03	2.1E-03	2.4E-03	1.5E-03	1.4E-03	1.6E-03	1.3E-03	-2.1E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2097	2.0E-03	2.2E-03	3.1E-03	4.4E-03	5.2E-03	5.1E-03	4.8E-03	-1.3E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02
2098	2.0E-03	2.2E-03	3.1E-03	3.8E-03	4.9E-03	4.8E-03	4.6E-03	-2.7E-02	-2.6E-02	-2.3E-02	-1.9E-02	-1.5E-02	-1.2E-02
2099	2.0E-03	2.1E-03	2.9E-03	3.8E-03	4.5E-03	4.4E-03	4.2E-03	-3.1E-02	-2.7E-02	-2.1E-02	-1.5E-02	-9.5E-03	-3.6E-03
2100	1.9E-03	2.0E-03	2.6E-03	3.7E-03	4.0E-03	3.8E-03	3.7E-03	-2.9E-02	-2.4E-02	-1.7E-02	-9.3E-03	-2.1E-03	5.1E-03
2101	1.7E-03	2.0E-03	2.2E-03	1.6E-03	1.5E-03	1.4E-03	1.3E-03	-2.1E-02	-1.8E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.4E-03
2102	2.1E-03	2.6E-03	4.0E-03	6.9E-03	7.3E-03	6.8E-03	6.8E-03	-5.3E-03	-8.9E-03	-9.2E-03	-9.6E-03	-9.9E-03	-1.0E-02
2103	1.8E-03	2.5E-03	3.8E-03	6.5E-03	6.8E-03	6.3E-03	6.3E-03	-1.6E-03	-7.4E-03	-1.0E-02	-1.3E-02	-1.6E-02	-1.8E-02
2104	1.8E-03	2.2E-03	3.6E-03	5.9E-03	6.1E-03	5.7E-03	5.7E-03	-9.3E-03	-1.4E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.1E-02
2105	1.8E-03	2.0E-03	3.3E-03	5.3E-03	5.4E-03	5.0E-03	5.0E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02	-1.7E-02
2106	1.8E-03	1.9E-03	2.9E-03	4.4E-03	4.7E-03	4.6E-03	4.3E-03	-1.6E-02	-1.9E-02	-1.9E-02	-1.8E-02	-1.8E-02	-1.8E-02
2107	1.8E-03	1.9E-03	2.8E-03	3.9E-03	4.6E-03	4.5E-03	4.3E-03	-1.6E-02	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02	-1.7E-02
2108	1.7E-03	1.8E-03	2.6E-03	3.2E-03	4.4E-03	4.3E-03	4.1E-03	-2.4E-02	-2.3E-02	-1.9E-02	-1.4E-02	-1.0E-02	-5.9E-03
2109	1.5E-03	1.9E-03	2.1E-03	1.5E-03	1.5E-03	1.3E-03	1.3E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-7.9E-03	-5.0E-03
2110	1.2E-03	1.6E-03	1.8E-03	1.6E-03	1.5E-03	1.7E-03	1.4E-03	-1.6E-02	-1.4E-02	-1.1E-02	-8.4E-03	-5.6E-03	-2.8E-03
2111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2112	2.0E-03	2.3E-03	3.4E-03	5.9E-03	6.2E-03	5.8E-03	5.8E-03	-5.6E-03	-9.0E-03	-9.5E-03	-1.0E-02	-1.0E-02	-1.1E-02
2113	1.7E-03	2.3E-03	3.5E-03	5.8E-03	6.1E-03	5.7E-03	5.6E-03	-4.2E-03	-9.2E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.9E-02
2114	1.5E-03	2.2E-03	3.3E-03	5.5E-03	5.6E-03	5.2E-03	5.2E-03	-1.1E-02	-1.5E-02	-1.7E-02	-1.8E-02	-2.0E-02	-2.1E-02
2115	1.5E-03	2.0E-03	3.1E-03	5.0E-03	5.1E-03	4.7E-03	4.7E-03	-1.6E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
2116	1.5E-03	1.8E-03	2.8E-03	4.4E-03	4.4E-03	4.1E-03	4.1E-03	-1.7E-02	-1.9E-02	-1.9E-02	-1.8E-02	-1.8E-02	-1.8E-02
2117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2118	1.3E-03	1.7E-03	1.9E-03	1.4E-03	1.4E-03	1.3E-03	1.2E-03	-1.5E-02	-1.2E-02	-9.6E-03	-6.9E-03	-4.1E-03	-1.4E-03
2119	1.1E-03	1.6E-03	1.6E-03	1.5E-03	1.4E-03	1.5E-03	1.3E-03	-1.1E-02	-8.8E-03	-6.3E-03	-3.7E-03	-1.1E-03	1.4E-03
2120	2.1E-03	2.2E-03	3.0E-03	4.5E-03	4.9E-03	4.5E-03	4.3E-03	-1.9E-02	-1.5E-02	-8.8E-03	-2.2E-03	4.4E-03	1.1E-02
2121	2.0E-03	2.1E-03	2.6E-03	4.4E-03	4.7E-03	4.4E-03	4.3E-03	-1.1E-02	-1.0E-02	-7.2E-03	-3.9E-03	-5.5E-04	2.8E-03
2122	1.9E-03	2.0E-03	2.9E-03	4.9E-03	5.2E-03	4.8E-03	4.8E-03	-6.8E-03	-9.8E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02
2123	1.7E-03	1.8E-03	2.9E-03	5.0E-03	5.2E-03	4.8E-03	4.8E-03	-7.1E-03	-1.1E-02	-1.3E-02	-1.5E-02	-1.7E-02	-1.8E-02
2124	1.5E-03	2.0E-03	3.0E-03	4.9E-03	5.1E-03	4.7E-03	4.7E-03	-1.2E-02	-1.6E-02	-1.7E-02	-1.9E-02	-2.0E-02	-2.2E-02
2125	1.3E-03	1.9E-03	2.9E-03	4.7E-03	4.8E-03	4.4E-03	4.4E-03	-1.7E-02	-1.9E-02	-1.9E-02	-1.9E-02	-1.9E-02	-1.9E-02
2126	1.2E-03	1.8E-03	2.7E-03	4.3E-03	4.3E-03	3.9E-03	3.9E-03	-1.6E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02
2127	1.2E-03	1.7E-03	2.5E-03	3.8E-03	3.8E-03	3.4E-03	3.4E-03	-1.5E-02	-1.7E-02	-1.7E-02	-1.7E-02	-1.8E-02	-1.8E-02
2128	1.1E-03	1.5E-03	1.7E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	-8.7E-03	-6.7E-03	-4.4E-03	-2.1E-03	1.9E-04	2.5E-03
2129	1.0E-03	1.5E-03	1.6E-03	1.3E-03	1.2E-03	1.2E-03	1.1E-03	-4.6E-03	-2.9E-03	-9.8E-04	9.5E-04	2.9E-03	4.8E-03
2130	1.9E-03	2.1E-03	3.1E-03	4.7E-03	5.2E-03	4.8E-03	4.6E-03	-1.6E-02	-1.3E-02	-6.1E-03	5.6E-04	7.2E-03	1.4E-02
2131	1.9E-03	2.0E-03	2.7E-03	4.0E-03	4.4E-03	4.0E-03	3.8E-03	-1.7E-02	-1.4E-02	-8.1E-03	-2.3E-03	3.6E-03	9.4E-03
2132	1.8E-03	2.0E-03	2.3E-03	3.6E-03	3.9E-03	3.7E-03	3.5E-03	-1.1E-02	-1.0E-02	-7.7E-03	-5.1E-03	-2.6E-03	-1.1E-05

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2133	1.8E-03	1.9E-03	2.4E-03	4.0E-03	4.2E-03	3.9E-03	3.9E-03	-8.4E-03	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02
2134	1.6E-03	1.7E-03	2.6E-03	4.2E-03	4.4E-03	4.1E-03	4.1E-03	-9.4E-03	-1.3E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.9E-02
2135	1.5E-03	1.6E-03	2.6E-03	4.2E-03	4.4E-03	4.0E-03	4.0E-03	-1.4E-02	-1.7E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.2E-02
2136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2137	1.2E-03	1.5E-03	2.4E-03	3.9E-03	3.9E-03	3.6E-03	3.6E-03	-1.6E-02	-1.7E-02	-1.7E-02	-1.7E-02	-1.7E-02	-1.7E-02
2138	9.3E-04	1.4E-03	1.5E-03	1.1E-03	1.7E-03	9.7E-04	9.6E-04	-2.7E-03	-1.3E-03	5.2E-04	2.3E-03	4.1E-03	5.8E-03
2139	9.3E-04	1.4E-03	1.5E-03	1.1E-03	1.5E-03	1.1E-03	9.4E-04	-2.4E-03	-7.0E-04	1.4E-03	3.5E-03	5.6E-03	7.7E-03
2140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2142	1.6E-03	1.8E-03	2.3E-03	3.5E-03	3.8E-03	3.4E-03	3.2E-03	-1.6E-02	-1.3E-02	-8.1E-03	-3.1E-03	1.9E-03	6.9E-03
2143	1.7E-03	1.8E-03	2.1E-03	3.0E-03	3.4E-03	3.2E-03	3.1E-03	-1.1E-02	-1.1E-02	-8.7E-03	-6.7E-03	-4.8E-03	-2.8E-03
2144	1.6E-03	1.7E-03	2.2E-03	3.3E-03	3.5E-03	3.2E-03	3.2E-03	-9.9E-03	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02
2145	1.5E-03	1.6E-03	2.3E-03	3.6E-03	3.8E-03	3.5E-03	3.5E-03	-1.1E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.8E-02	-1.9E-02
2146	1.5E-03	1.6E-03	2.3E-03	3.8E-03	3.9E-03	3.6E-03	3.6E-03	-1.5E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.1E-02	-2.2E-02
2147	1.3E-03	1.4E-03	2.3E-03	3.7E-03	3.8E-03	3.5E-03	3.5E-03	-1.7E-02	-1.9E-02	-1.9E-02	-1.9E-02	-2.0E-02	-2.0E-02
2148	8.0E-04	1.2E-03	1.4E-03	1.0E-03	2.1E-03	9.0E-04	8.1E-04	-1.2E-03	3.1E-04	2.2E-03	4.0E-03	5.9E-03	7.8E-03
2149	8.4E-04	1.3E-03	1.4E-03	1.2E-03	2.0E-03	1.1E-03	1.0E-03	-5.7E-03	-3.2E-03	-1.7E-04	2.8E-03	5.8E-03	8.8E-03
2150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2154	1.5E-03	1.6E-03	1.9E-03	2.7E-03	3.0E-03	2.8E-03	2.7E-03	-1.1E-02	-1.1E-02	-9.6E-03	-8.1E-03	-6.6E-03	-5.1E-03
2155	1.5E-03	1.6E-03	1.9E-03	2.7E-03	2.9E-03	2.6E-03	2.6E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.5E-02
2156	1.5E-03	1.6E-03	2.1E-03	3.1E-03	3.3E-03	3.0E-03	3.0E-03	-1.2E-02	-1.5E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.0E-02
2157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2158	7.6E-04	1.1E-03	1.2E-03	1.1E-03	2.4E-03	1.0E-03	9.9E-04	-2.6E-03	-6.1E-04	1.8E-03	4.2E-03	6.7E-03	9.1E-03
2159	7.7E-04	1.2E-03	1.3E-03	1.2E-03	2.4E-03	1.2E-03	1.2E-03	-9.1E-03	-6.7E-03	-3.7E-03	-6.5E-04	2.4E-03	5.4E-03
2160	1.2E-03	1.7E-03	3.4E-03	3.8E-03	5.8E-03	5.3E-03	5.0E-03	4.8E-03	3.0E-03	4.6E-03	6.2E-03	7.7E-03	9.3E-03
2161	1.2E-03	1.7E-03	3.1E-03	4.0E-03	5.3E-03	4.9E-03	4.6E-03	-3.2E-03	-2.0E-03	2.2E-03	6.4E-03	1.1E-02	1.5E-02
2162	1.2E-03	1.6E-03	2.8E-03	3.8E-03	4.8E-03	4.5E-03	4.2E-03	-3.2E-03	-2.3E-03	1.4E-03	5.1E-03	8.8E-03	1.2E-02
2163	1.2E-03	1.6E-03	2.6E-03	3.6E-03	4.3E-03	3.8E-03	3.6E-03	-1.1E-02	-8.0E-03	-2.6E-03	2.7E-03	8.1E-03	1.3E-02
2164	1.3E-03	1.5E-03	2.3E-03	3.3E-03	3.6E-03	3.3E-03	3.1E-03	-1.6E-02	-1.3E-02	-7.7E-03	-2.6E-03	2.5E-03	7.6E-03
2165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2166	1.3E-03	1.5E-03	1.8E-03	2.5E-03	2.7E-03	2.6E-03	2.4E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.1E-03	-8.1E-03	-7.0E-03
2167	1.4E-03	1.5E-03	1.8E-03	2.3E-03	2.7E-03	2.5E-03	2.3E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.5E-02	-1.6E-02
2168	7.2E-04	1.0E-03	1.1E-03	1.2E-03	2.4E-03	1.2E-03	1.1E-03	-6.2E-03	-4.1E-03	-1.3E-03	1.5E-03	4.2E-03	7.0E-03
2169	7.1E-04	1.2E-03	1.2E-03	1.3E-03	2.7E-03	1.4E-03	1.3E-03	-1.1E-02	-8.6E-03	-5.9E-03	-3.1E-03	-3.7E-04	2.4E-03
2170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2172	1.1E-03	1.5E-03	2.8E-03	3.5E-03	4.6E-03	4.3E-03	4.0E-03	-5.1E-04	1.7E-04	3.5E-03	6.9E-03	1.0E-02	1.4E-02
2173	1.0E-03	1.5E-03	2.6E-03	3.4E-03	4.3E-03	4.0E-03	3.7E-03	-3.7E-03	-2.5E-03	1.2E-03	4.8E-03	8.5E-03	1.2E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2174	1.1E-03	1.4E-03	2.3E-03	3.2E-03	3.8E-03	3.3E-03	3.1E-03	-1.2E-02	-9.1E-03	-3.9E-03	1.3E-03	6.5E-03	1.2E-02
2175	1.1E-03	1.4E-03	2.1E-03	3.0E-03	3.2E-03	2.9E-03	2.8E-03	-1.4E-02	-1.2E-02	-7.4E-03	-3.1E-03	1.3E-03	5.7E-03
2176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2178	6.9E-04	1.0E-03	1.1E-03	1.3E-03	2.1E-03	1.3E-03	1.3E-03	-9.0E-03	-7.1E-03	-4.4E-03	-1.7E-03	9.9E-04	3.7E-03
2179	6.5E-04	1.1E-03	1.2E-03	1.4E-03	2.6E-03	1.4E-03	1.4E-03	-1.4E-02	-1.3E-02	-1.0E-02	-8.1E-03	-5.7E-03	-3.3E-03
2180	9.9E-04	1.7E-03	3.5E-03	4.0E-03	6.1E-03	5.6E-03	5.2E-03	-2.5E-02	-2.4E-02	-1.9E-02	-1.5E-02	-1.0E-02	-6.0E-03
2181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2182	1.0E-03	1.5E-03	2.9E-03	3.3E-03	4.9E-03	4.5E-03	4.2E-03	3.0E-04	-2.9E-04	1.9E-03	4.2E-03	6.4E-03	8.6E-03
2183	1.0E-03	1.4E-03	2.8E-03	3.3E-03	4.7E-03	4.2E-03	3.9E-03	-1.7E-03	-1.1E-04	4.1E-03	8.2E-03	1.2E-02	1.7E-02
2184	1.0E-03	1.4E-03	2.6E-03	3.3E-03	4.2E-03	3.9E-03	3.7E-03	-3.1E-04	8.7E-05	2.9E-03	5.8E-03	8.6E-03	1.1E-02
2185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2186	9.5E-04	1.3E-03	2.1E-03	2.9E-03	3.4E-03	3.0E-03	2.8E-03	-1.3E-02	-9.5E-03	-4.5E-03	5.5E-04	5.6E-03	1.1E-02
2187	1.0E-03	1.3E-03	1.9E-03	2.7E-03	3.0E-03	2.7E-03	2.6E-03	-1.4E-02	-1.1E-02	-7.4E-03	-3.4E-03	5.6E-04	4.6E-03
2188	1.0E-03	1.3E-03	1.7E-03	2.4E-03	2.6E-03	2.3E-03	2.2E-03	-1.1E-02	-1.0E-02	-7.8E-03	-5.4E-03	-3.1E-03	-7.5E-04
2189	6.1E-04	1.1E-03	1.1E-03	1.4E-03	2.3E-03	1.5E-03	1.4E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.5E-03
2190	1.0E-03	1.7E-03	3.9E-03	4.9E-03	5.8E-03	5.3E-03	4.9E-03	-3.0E-02	-2.5E-02	-1.7E-02	-8.8E-03	-4.7E-04	7.9E-03
2191	9.9E-04	1.7E-03	3.8E-03	3.8E-03	5.5E-03	5.1E-03	4.8E-03	-2.9E-02	-2.6E-02	-2.0E-02	-1.4E-02	-8.5E-03	-2.7E-03
2192	9.1E-04	1.6E-03	3.2E-03	3.4E-03	5.4E-03	4.9E-03	4.6E-03	-1.4E-02	-1.4E-02	-1.1E-02	-8.2E-03	-5.2E-03	-2.3E-03
2193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2199	6.0E-04	1.0E-03	1.1E-03	1.4E-03	1.6E-03	1.4E-03	1.3E-03	-2.4E-02	-2.2E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.3E-02
2200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2201	9.5E-04	1.7E-03	4.1E-03	4.8E-03	5.6E-03	5.1E-03	4.8E-03	-2.5E-02	-1.9E-02	-1.1E-02	-1.9E-03	6.9E-03	1.6E-02
2202	9.4E-04	1.6E-03	3.1E-03	3.7E-03	5.0E-03	4.5E-03	4.2E-03	-2.8E-02	-2.5E-02	-1.9E-02	-1.3E-02	-7.1E-03	-1.1E-03
2203	8.5E-04	1.6E-03	3.0E-03	3.4E-03	5.1E-03	4.7E-03	4.4E-03	-2.3E-02	-2.2E-02	-1.8E-02	-1.4E-02	-9.9E-03	-6.0E-03
2204	8.8E-04	1.5E-03	2.9E-03	3.2E-03	4.9E-03	4.3E-03	4.1E-03	-8.9E-03	-9.5E-03	-7.3E-03	-5.2E-03	-3.0E-03	-8.4E-04
2205	9.2E-04	1.4E-03	2.6E-03	3.0E-03	4.3E-03	3.9E-03	3.6E-03	1.8E-03	1.1E-03	2.8E-03	4.4E-03	6.1E-03	7.8E-03
2206	9.0E-04	1.3E-03	2.5E-03	2.8E-03	4.1E-03	3.6E-03	3.4E-03	2.5E-03	3.4E-03	6.6E-03	9.8E-03	1.3E-02	1.6E-02
2207	8.8E-04	1.2E-03	2.3E-03	2.7E-03	3.7E-03	3.3E-03	3.1E-03	1.8E-03	2.0E-03	4.4E-03	6.7E-03	9.0E-03	1.1E-02
2208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2209	5.5E-04	9.6E-04	1.1E-03	1.4E-03	1.5E-03	1.3E-03	1.2E-03	-2.5E-02	-2.3E-02	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02
2210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2225	7.9E-04	3.0E-03	3.7E-03	6.1E-03	4.9E-03	4.0E-03	3.8E-03	-4.1E-03	3.2E-03	1.3E-02	2.3E-02	3.3E-02	4.3E-02
2226	7.7E-04	2.5E-03	3.6E-03	5.1E-03	4.8E-03	4.4E-03	4.1E-03	-1.0E-02	-4.0E-03	4.7E-03	1.3E-02	2.2E-02	3.1E-02
2227	8.0E-04	2.0E-03	3.2E-03	4.2E-03	4.7E-03	4.1E-03	3.9E-03	-2.4E-02	-1.9E-02	-1.1E-02	-3.0E-03	5.0E-03	1.3E-02
2228	8.2E-04	1.8E-03	2.9E-03	3.7E-03	4.3E-03	3.8E-03	3.6E-03	-2.5E-02	-2.2E-02	-1.8E-02	-1.3E-02	-8.3E-03	-3.6E-03
2229	7.7E-04	1.6E-03	2.7E-03	3.3E-03	4.5E-03	4.1E-03	3.8E-03	-2.0E-02	-1.9E-02	-1.6E-02	-1.2E-02	-9.0E-03	-5.5E-03
2230	7.5E-04	1.4E-03	2.6E-03	3.0E-03	4.3E-03	3.8E-03	3.6E-03	-9.9E-03	-1.0E-02	-8.3E-03	-6.3E-03	-4.4E-03	-2.4E-03
2231	7.9E-04	1.3E-03	2.4E-03	2.8E-03	3.8E-03	3.2E-03	3.0E-03	-1.1E-04	-4.0E-04	1.3E-03	3.0E-03	4.7E-03	6.4E-03
2232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2236	7.9E-04	2.9E-03	4.0E-03	6.0E-03	4.8E-03	4.0E-03	3.7E-03	-1.6E-03	5.7E-03	1.6E-02	2.5E-02	3.5E-02	4.5E-02
2237	7.1E-04	2.5E-03	3.0E-03	5.0E-03	4.3E-03	3.9E-03	3.6E-03	-1.1E-02	-4.6E-03	4.0E-03	1.3E-02	2.1E-02	3.0E-02
2238	7.3E-04	2.2E-03	2.9E-03	4.3E-03	4.5E-03	4.0E-03	3.7E-03	-1.9E-02	-1.3E-02	-5.1E-03	3.0E-03	1.1E-02	1.9E-02
2239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2241	6.7E-04	1.5E-03	2.5E-03	3.0E-03	4.2E-03	3.7E-03	3.5E-03	-1.6E-02	-1.6E-02	-1.3E-02	-9.9E-03	-7.1E-03	-4.4E-03
2242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2245	9.0E-04	3.7E-03	3.6E-03	6.0E-03	5.3E-03	4.1E-03	3.8E-03	1.8E-02	2.3E-02	3.0E-02	3.7E-02	4.4E-02	5.1E-02
2246	7.9E-04	2.9E-03	3.8E-03	5.3E-03	4.7E-03	3.9E-03	3.6E-03	1.1E-03	8.4E-03	1.8E-02	2.8E-02	3.7E-02	4.7E-02
2247	6.2E-04	2.0E-03	3.1E-03	4.9E-03	4.1E-03	3.4E-03	3.2E-03	-8.2E-03	-2.4E-03	5.4E-03	1.3E-02	2.1E-02	2.9E-02
2248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2249	7.4E-04	1.7E-03	2.7E-03	3.9E-03	4.2E-03	3.6E-03	3.4E-03	-2.3E-02	-1.8E-02	-1.1E-02	-3.9E-03	3.1E-03	1.0E-02
2250	7.5E-04	1.6E-03	2.6E-03	3.5E-03	3.8E-03	3.4E-03	3.1E-03	-2.4E-02	-2.2E-02	-1.8E-02	-1.4E-02	-9.4E-03	-5.3E-03
2251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2253	8.6E-04	3.5E-03	4.4E-03	6.0E-03	6.5E-03	3.8E-03	3.5E-03	2.2E-02	2.5E-02	3.0E-02	3.5E-02	4.0E-02	4.4E-02
2254	8.6E-04	3.5E-03	3.7E-03	5.5E-03	5.4E-03	3.8E-03	3.5E-03	1.6E-02	2.1E-02	2.7E-02	3.4E-02	4.1E-02	4.7E-02
2255	7.7E-04	3.1E-03	3.3E-03	5.1E-03	4.7E-03	3.7E-03	3.5E-03	4.0E-03	1.1E-02	2.0E-02	2.8E-02	3.7E-02	4.6E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2256	6.1E-04	2.5E-03	3.1E-03	4.6E-03	4.0E-03	3.1E-03	2.9E-03	-6.4E-03	-4.4E-04	7.5E-03	1.6E-02	2.4E-02	3.1E-02
2257	6.0E-04	2.0E-03	2.7E-03	4.3E-03	3.9E-03	3.5E-03	3.2E-03	-1.3E-02	-8.1E-03	-1.1E-03	5.8E-03	1.3E-02	2.0E-02
2258	6.8E-04	1.5E-03	2.5E-03	3.7E-03	4.1E-03	3.5E-03	3.3E-03	-2.2E-02	-1.7E-02	-9.6E-03	-2.3E-03	5.1E-03	1.2E-02
2259	7.1E-04	1.3E-03	2.4E-03	3.5E-03	3.8E-03	3.1E-03	2.9E-03	-2.2E-02	-1.9E-02	-1.4E-02	-8.5E-03	-3.4E-03	1.7E-03
2260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2261	8.0E-04	3.6E-03	4.6E-03	5.7E-03	6.4E-03	3.6E-03	3.3E-03	2.3E-02	2.5E-02	3.0E-02	3.4E-02	3.8E-02	4.2E-02
2262	8.2E-04	2.8E-03	3.7E-03	5.0E-03	5.3E-03	3.4E-03	3.2E-03	1.4E-02	1.8E-02	2.4E-02	3.0E-02	3.6E-02	4.2E-02
2263	7.5E-04	2.5E-03	2.9E-03	4.8E-03	4.6E-03	3.5E-03	3.3E-03	8.0E-03	1.3E-02	2.1E-02	2.9E-02	3.6E-02	4.4E-02
2264	6.2E-04	2.4E-03	2.9E-03	4.2E-03	4.0E-03	3.1E-03	2.9E-03	-4.4E-03	1.8E-03	9.9E-03	1.8E-02	2.6E-02	3.4E-02
2265	5.3E-04	2.2E-03	2.8E-03	4.2E-03	3.6E-03	3.1E-03	2.9E-03	-1.1E-02	-5.9E-03	1.3E-03	8.5E-03	1.6E-02	2.3E-02
2266	6.2E-04	1.9E-03	2.4E-03	3.9E-03	3.9E-03	3.3E-03	3.1E-03	-2.0E-02	-1.5E-02	-8.0E-03	-1.1E-03	5.9E-03	1.3E-02
2267	7.4E-04	2.9E-03	5.0E-03	6.3E-03	7.0E-03	3.2E-03	3.0E-03	1.7E-02	2.2E-02	2.9E-02	3.6E-02	4.3E-02	5.1E-02
2268	7.5E-04	3.2E-03	4.6E-03	5.5E-03	6.2E-03	3.4E-03	3.2E-03	2.3E-02	2.6E-02	3.0E-02	3.5E-02	3.9E-02	4.4E-02
2269	7.7E-04	2.9E-03	3.7E-03	4.9E-03	5.2E-03	3.2E-03	3.0E-03	1.6E-02	1.9E-02	2.4E-02	2.9E-02	3.4E-02	3.9E-02
2270	7.2E-04	2.3E-03	2.9E-03	4.4E-03	4.5E-03	3.3E-03	3.1E-03	1.1E-02	1.5E-02	2.2E-02	2.8E-02	3.4E-02	4.0E-02
2271	6.1E-04	1.9E-03	2.7E-03	4.2E-03	3.9E-03	3.0E-03	2.8E-03	-3.1E-03	3.2E-03	1.1E-02	2.0E-02	2.8E-02	3.6E-02
2272	4.9E-04	2.0E-03	2.7E-03	4.0E-03	3.4E-03	2.8E-03	2.6E-03	-8.5E-03	-3.3E-03	3.6E-03	1.0E-02	1.7E-02	2.4E-02
2273	5.6E-04	1.9E-03	2.4E-03	3.8E-03	3.6E-03	3.1E-03	2.9E-03	-1.7E-02	-1.2E-02	-5.2E-03	1.6E-03	8.4E-03	1.5E-02
2274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2275	8.0E-04	4.8E-03	6.8E-03	8.5E-03	6.3E-03	2.9E-03	2.7E-03	1.9E-02	1.9E-02	2.0E-02	2.2E-02	2.4E-02	2.6E-02
2276	8.5E-04	4.6E-03	7.2E-03	6.9E-03	5.8E-03	2.5E-03	2.5E-03	2.7E-02	2.7E-02	2.9E-02	3.1E-02	3.3E-02	3.5E-02
2277	7.9E-04	3.9E-03	6.1E-03	7.8E-03	5.2E-03	2.7E-03	2.7E-03	2.0E-02	2.3E-02	2.8E-02	3.2E-02	3.7E-02	4.1E-02
2278	7.9E-04	3.1E-03	4.9E-03	7.0E-03	5.4E-03	2.6E-03	2.4E-03	9.9E-03	1.7E-02	2.5E-02	3.4E-02	4.2E-02	5.1E-02
2279	7.1E-04	2.8E-03	4.4E-03	6.1E-03	6.1E-03	3.0E-03	2.8E-03	1.3E-02	1.9E-02	2.7E-02	3.5E-02	4.3E-02	5.1E-02
2280	7.0E-04	2.5E-03	4.2E-03	5.3E-03	5.9E-03	3.2E-03	3.0E-03	2.3E-02	2.5E-02	2.9E-02	3.3E-02	3.8E-02	4.2E-02
2281	7.2E-04	2.6E-03	3.6E-03	4.8E-03	5.0E-03	3.0E-03	2.8E-03	1.7E-02	1.9E-02	2.4E-02	2.8E-02	3.2E-02	3.6E-02
2282	7.0E-04	2.3E-03	3.0E-03	4.0E-03	4.5E-03	3.1E-03	2.9E-03	1.3E-02	1.6E-02	2.2E-02	2.7E-02	3.2E-02	3.7E-02
2283	6.2E-04	2.0E-03	2.4E-03	4.1E-03	4.0E-03	3.0E-03	2.8E-03	2.1E-04	6.4E-03	1.4E-02	2.3E-02	3.1E-02	3.9E-02
2284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2290	7.6E-04	3.1E-03	4.7E-03	6.7E-03	4.8E-03	2.4E-03	2.3E-03	1.0E-02	1.7E-02	2.4E-02	3.2E-02	4.0E-02	4.7E-02
2291	6.9E-04	2.5E-03	4.0E-03	6.0E-03	5.6E-03	2.8E-03	2.6E-03	1.1E-02	1.7E-02	2.5E-02	3.3E-02	4.1E-02	4.9E-02
2292	6.5E-04	2.2E-03	3.7E-03	5.2E-03	5.6E-03	3.0E-03	2.8E-03	2.2E-02	2.4E-02	2.8E-02	3.2E-02	3.6E-02	3.9E-02
2293	6.8E-04	2.1E-03	3.5E-03	4.6E-03	4.9E-03	2.9E-03	2.7E-03	1.8E-02	2.0E-02	2.3E-02	2.7E-02	3.1E-02	3.5E-02
2294	6.8E-04	2.2E-03	3.0E-03	4.1E-03	4.4E-03	2.9E-03	2.7E-03	1.2E-02	1.6E-02	2.0E-02	2.5E-02	3.0E-02	3.5E-02
2295	6.1E-04	2.0E-03	2.5E-03	3.9E-03	4.0E-03	2.9E-03	2.7E-03	3.6E-03	8.8E-03	1.6E-02	2.3E-02	3.0E-02	3.7E-02
2296	5.1E-04	1.8E-03	2.3E-03	3.7E-03	3.4E-03	2.5E-03	2.4E-03	-5.6E-03	-3.1E-04	6.6E-03	1.4E-02	2.0E-02	2.7E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2298	6.2E-04	2.9E-03	5.1E-03	6.8E-03	4.8E-03	3.2E-03	2.4E-03	1.3E-02	1.4E-02	1.7E-02	1.9E-02	2.2E-02	2.5E-02
2299	7.2E-04	3.7E-03	5.5E-03	6.4E-03	4.9E-03	2.9E-03	2.1E-03	1.8E-02	1.8E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02
2300	7.6E-04	3.7E-03	5.9E-03	5.2E-03	4.4E-03	2.7E-03	2.2E-03	2.4E-02	2.4E-02	2.6E-02	2.7E-02	2.9E-02	3.0E-02
2301	7.2E-04	3.2E-03	5.3E-03	6.3E-03	4.1E-03	2.5E-03	2.2E-03	2.3E-02	2.5E-02	2.8E-02	3.1E-02	3.3E-02	3.6E-02
2302	7.2E-04	2.9E-03	4.6E-03	6.4E-03	4.4E-03	2.3E-03	2.1E-03	1.1E-02	1.7E-02	2.3E-02	3.0E-02	3.7E-02	4.4E-02
2303	6.7E-04	2.3E-03	3.9E-03	5.8E-03	5.2E-03	2.7E-03	2.5E-03	1.1E-02	1.7E-02	2.5E-02	3.3E-02	4.0E-02	4.8E-02
2304	6.0E-04	2.1E-03	3.6E-03	5.0E-03	5.3E-03	2.8E-03	2.6E-03	2.1E-02	2.3E-02	2.6E-02	3.0E-02	3.4E-02	3.7E-02
2305	6.5E-04	1.7E-03	3.4E-03	4.4E-03	4.8E-03	2.8E-03	2.6E-03	1.8E-02	2.0E-02	2.3E-02	2.7E-02	3.0E-02	3.4E-02
2306	6.5E-04	1.9E-03	3.0E-03	4.0E-03	4.3E-03	2.7E-03	2.6E-03	1.2E-02	1.5E-02	2.0E-02	2.5E-02	3.0E-02	3.4E-02
2307	6.0E-04	1.9E-03	2.5E-03	3.6E-03	3.9E-03	2.8E-03	2.6E-03	7.3E-03	1.1E-02	1.7E-02	2.3E-02	2.9E-02	3.5E-02
2308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2314	6.9E-04	3.3E-03	5.1E-03	5.8E-03	4.5E-03	3.7E-03	2.0E-03	1.7E-02	1.7E-02	1.9E-02	2.0E-02	2.2E-02	2.3E-02
2315	7.3E-04	3.4E-03	5.5E-03	4.7E-03	4.1E-03	2.4E-03	2.1E-03	2.3E-02	2.3E-02	2.4E-02	2.6E-02	2.7E-02	2.8E-02
2316	6.8E-04	3.0E-03	5.0E-03	5.7E-03	3.8E-03	2.4E-03	2.1E-03	2.3E-02	2.5E-02	2.7E-02	2.9E-02	3.2E-02	3.4E-02
2317	6.9E-04	2.7E-03	4.4E-03	6.0E-03	4.1E-03	2.4E-03	2.0E-03	1.2E-02	1.7E-02	2.3E-02	2.9E-02	3.5E-02	4.1E-02
2318	6.4E-04	2.3E-03	3.7E-03	5.6E-03	4.8E-03	2.6E-03	2.3E-03	1.1E-02	1.7E-02	2.4E-02	3.1E-02	3.9E-02	4.6E-02
2319	5.5E-04	1.9E-03	3.5E-03	4.9E-03	5.0E-03	3.4E-03	2.5E-03	1.9E-02	2.1E-02	2.5E-02	2.9E-02	3.2E-02	3.6E-02
2320	6.1E-04	1.8E-03	3.3E-03	4.3E-03	4.7E-03	3.0E-03	2.5E-03	1.8E-02	2.0E-02	2.4E-02	2.8E-02	3.1E-02	3.5E-02
2321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2324	6.6E-04	3.1E-03	4.7E-03	5.3E-03	4.2E-03	3.3E-03	1.9E-03	1.6E-02	1.7E-02	1.8E-02	2.0E-02	2.1E-02	2.3E-02
2325	7.0E-04	3.2E-03	5.1E-03	4.3E-03	3.8E-03	2.6E-03	2.1E-03	2.2E-02	2.2E-02	2.3E-02	2.4E-02	2.6E-02	2.7E-02
2326	6.6E-04	2.8E-03	4.7E-03	5.2E-03	3.6E-03	2.6E-03	2.0E-03	2.4E-02	2.5E-02	2.7E-02	2.8E-02	3.0E-02	3.2E-02
2327	6.6E-04	2.4E-03	4.2E-03	5.6E-03	3.7E-03	2.1E-03	1.9E-03	1.3E-02	1.7E-02	2.3E-02	2.8E-02	3.3E-02	3.8E-02
2328	6.2E-04	2.2E-03	3.5E-03	5.4E-03	4.4E-03	2.3E-03	2.2E-03	1.1E-02	1.6E-02	2.3E-02	3.0E-02	3.7E-02	4.4E-02
2329	5.1E-04	1.8E-03	3.4E-03	4.7E-03	4.7E-03	2.8E-03	2.4E-03	1.6E-02	1.9E-02	2.3E-02	2.7E-02	3.1E-02	3.5E-02
2330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2331	1.6E-03	3.6E-03	6.5E-03	7.4E-03	6.0E-03	4.9E-03	4.6E-03	-5.7E-02	-4.5E-02	-3.0E-02	-1.6E-02	-1.1E-03	1.3E-02
2332	1.8E-03	3.2E-03	6.3E-03	7.4E-03	6.8E-03	5.5E-03	5.2E-03	-6.5E-02	-5.8E-02	-4.8E-02	-3.7E-02	-2.7E-02	-1.7E-02
2333	2.1E-03	3.0E-03	6.0E-03	7.3E-03	7.6E-03	6.0E-03	5.7E-03	-5.8E-02	-5.4E-02	-4.8E-02	-4.1E-02	-3.5E-02	-2.8E-02
2334	1.9E-03	3.6E-03	5.5E-03	6.1E-03	7.1E-03	5.5E-03	5.0E-03	-6.2E-02	-5.5E-02	-4.4E-02	-3.4E-02	-2.3E-02	-1.3E-02
2335	2.2E-03	4.6E-03	6.9E-03	7.3E-03	8.0E-03	6.3E-03	5.9E-03	-8.3E-02	-6.9E-02	-5.2E-02	-3.5E-02	-1.7E-02	3.7E-04
2336	1.9E-03	3.5E-03	5.1E-03	5.8E-03	7.1E-03	5.4E-03	4.9E-03	-7.7E-02	-6.6E-02	-5.1E-02	-3.7E-02	-2.2E-02	-7.4E-03
2337	1.6E-03	3.1E-03	4.9E-03	5.1E-03	5.7E-03	4.6E-03	4.3E-03	-5.7E-02	-5.1E-02	-4.1E-02	-3.1E-02	-2.1E-02	-1.1E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2338	2.3E-03	4.1E-03	6.6E-03	7.1E-03	8.2E-03	6.5E-03	6.0E-03	-9.2E-02	-7.7E-02	-5.7E-02	-3.8E-02	-1.8E-02	1.1E-03
2339	1.8E-03	2.7E-03	4.7E-03	5.8E-03	6.7E-03	5.2E-03	4.8E-03	-7.8E-02	-6.9E-02	-5.5E-02	-4.2E-02	-2.9E-02	-1.5E-02
2340	1.7E-03	2.5E-03	3.8E-03	5.1E-03	5.0E-03	4.5E-03	4.5E-03	-6.9E-02	-6.2E-02	-5.2E-02	-4.3E-02	-3.3E-02	-2.3E-02
2341	1.9E-03	2.4E-03	3.5E-03	5.3E-03	5.3E-03	4.8E-03	4.8E-03	-6.7E-02	-5.5E-02	-4.0E-02	-2.6E-02	-1.1E-02	3.8E-03
2342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2344	8.1E-04	3.0E-03	4.6E-03	5.7E-03	6.0E-03	2.9E-03	2.7E-03	2.3E-03	-9.9E-03	-2.0E-02	-3.1E-02	-4.1E-02	-5.1E-02
2345	8.4E-04	2.5E-03	4.0E-03	4.9E-03	5.1E-03	2.7E-03	2.5E-03	-3.1E-02	-3.2E-02	-3.2E-02	-3.1E-02	-3.0E-02	-2.9E-02
2346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2349	8.7E-04	3.0E-03	4.9E-03	5.6E-03	5.8E-03	3.3E-03	3.1E-03	-2.5E-04	-1.1E-02	-1.9E-02	-2.8E-02	-3.7E-02	-4.5E-02
2350	8.8E-04	3.1E-03	4.9E-03	6.0E-03	6.1E-03	3.1E-03	2.9E-03	-3.6E-03	-1.4E-02	-2.3E-02	-3.2E-02	-4.1E-02	-4.9E-02
2351	7.6E-04	2.6E-03	4.0E-03	5.0E-03	5.2E-03	2.9E-03	2.6E-03	-4.2E-02	-4.0E-02	-3.5E-02	-3.1E-02	-2.7E-02	-2.3E-02
2352	6.1E-04	2.1E-03	4.3E-03	5.3E-03	5.4E-03	2.9E-03	2.7E-03	-7.3E-02	-6.8E-02	-6.2E-02	-5.5E-02	-4.9E-02	-4.2E-02
2353	5.8E-04	2.1E-03	3.7E-03	4.6E-03	4.8E-03	2.6E-03	2.4E-03	-7.3E-02	-7.1E-02	-6.7E-02	-6.4E-02	-6.0E-02	-5.6E-02
2354	5.2E-04	1.6E-03	2.7E-03	3.5E-03	3.6E-03	2.2E-03	1.9E-03	-5.5E-02	-5.7E-02	-5.7E-02	-5.8E-02	-5.8E-02	-5.9E-02
2355	4.8E-04	1.4E-03	2.4E-03	2.9E-03	3.4E-03	2.4E-03	1.8E-03	-4.8E-02	-5.2E-02	-5.4E-02	-5.7E-02	-5.9E-02	-6.2E-02
2356	4.2E-04	1.2E-03	2.3E-03	2.9E-03	3.3E-03	2.3E-03	1.9E-03	-4.4E-02	-4.5E-02	-4.5E-02	-4.5E-02	-4.5E-02	-4.5E-02
2357	6.2E-04	2.2E-03	4.3E-03	5.4E-03	5.5E-03	3.0E-03	2.8E-03	-7.9E-02	-7.4E-02	-6.7E-02	-6.0E-02	-5.3E-02	-4.7E-02
2358	6.0E-04	2.1E-03	3.7E-03	4.7E-03	4.8E-03	2.6E-03	2.5E-03	-6.7E-02	-6.7E-02	-6.5E-02	-6.3E-02	-6.2E-02	-6.0E-02
2359	5.4E-04	1.6E-03	2.7E-03	3.4E-03	3.6E-03	2.4E-03	1.9E-03	-5.6E-02	-6.0E-02	-6.3E-02	-6.6E-02	-6.8E-02	-7.1E-02
2360	4.9E-04	1.5E-03	2.8E-03	3.4E-03	3.8E-03	2.5E-03	2.0E-03	-4.9E-02	-5.1E-02	-5.2E-02	-5.3E-02	-5.4E-02	-5.5E-02
2361	4.4E-04	1.3E-03	2.5E-03	3.1E-03	3.5E-03	2.4E-03	2.0E-03	-4.3E-02	-4.4E-02	-4.3E-02	-4.3E-02	-4.3E-02	-4.2E-02
2362	4.2E-04	1.7E-03	2.7E-03	2.8E-03	3.2E-03	2.3E-03	1.8E-03	-2.7E-02	-2.9E-02	-2.9E-02	-2.9E-02	-3.0E-02	-3.0E-02
2363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2365	5.6E-04	1.8E-03	2.9E-03	3.3E-03	3.8E-03	2.5E-03	1.9E-03	-5.4E-02	-5.7E-02	-5.9E-02	-6.1E-02	-6.4E-02	-6.6E-02
2366	5.0E-04	1.6E-03	3.0E-03	3.6E-03	4.1E-03	2.6E-03	2.1E-03	-5.1E-02	-5.1E-02	-5.0E-02	-4.9E-02	-4.8E-02	-4.7E-02
2367	4.6E-04	1.5E-03	2.5E-03	3.1E-03	3.5E-03	2.4E-03	2.0E-03	-3.3E-02	-3.5E-02	-3.6E-02	-3.6E-02	-3.7E-02	-3.8E-02
2368	4.8E-04	2.2E-03	3.3E-03	3.6E-03	3.4E-03	2.4E-03	1.9E-03	-3.7E-02	-3.4E-02	-2.9E-02	-2.5E-02	-2.0E-02	-1.6E-02
2369	6.5E-04	2.7E-03	4.1E-03	4.4E-03	3.8E-03	2.3E-03	2.1E-03	-4.1E-02	-3.6E-02	-3.1E-02	-2.5E-02	-1.9E-02	-1.4E-02
2370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2375	5.8E-04	1.9E-03	3.1E-03	3.7E-03	4.2E-03	2.7E-03	2.1E-03	-5.8E-02	-5.8E-02	-5.8E-02	-5.7E-02	-5.6E-02	-5.5E-02
2376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2377	4.8E-04	2.0E-03	3.0E-03	3.2E-03	3.7E-03	2.5E-03	2.1E-03	-4.7E-02	-4.3E-02	-3.7E-02	-3.2E-02	-2.6E-02	-2.0E-02
2378	5.9E-04	2.8E-03	4.2E-03	4.5E-03	3.8E-03	2.6E-03	2.0E-03	-5.1E-02	-4.5E-02	-3.8E-02	-3.1E-02	-2.3E-02	-1.6E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2379	7.7E-04	3.1E-03	4.7E-03	5.1E-03	4.1E-03	2.5E-03	2.4E-03	-5.1E-02	-4.5E-02	-3.8E-02	-3.1E-02	-2.4E-02	-1.7E-02
2380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2386	5.2E-04	1.6E-03	3.0E-03	3.7E-03	4.2E-03	2.8E-03	2.3E-03	-5.7E-02	-5.2E-02	-4.5E-02	-3.9E-02	-3.3E-02	-2.6E-02
2387	5.1E-04	2.6E-03	3.9E-03	4.1E-03	3.9E-03	2.7E-03	2.1E-03	-6.3E-02	-5.6E-02	-4.6E-02	-3.7E-02	-2.8E-02	-1.9E-02
2388	7.1E-04	3.3E-03	4.9E-03	5.2E-03	4.3E-03	2.6E-03	2.3E-03	-5.7E-02	-5.0E-02	-4.2E-02	-3.4E-02	-2.6E-02	-1.9E-02
2389	8.9E-04	3.1E-03	4.9E-03	5.3E-03	4.2E-03	2.8E-03	2.7E-03	-5.6E-02	-5.1E-02	-4.4E-02	-3.8E-02	-3.1E-02	-2.5E-02
2390	1.0E-03	2.5E-03	4.3E-03	4.8E-03	3.9E-03	3.2E-03	3.0E-03	-6.2E-02	-5.9E-02	-5.4E-02	-5.0E-02	-4.5E-02	-4.0E-02
2391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2398	6.2E-04	3.3E-03	4.8E-03	5.1E-03	4.3E-03	2.8E-03	2.2E-03	-6.6E-02	-5.8E-02	-5.0E-02	-4.1E-02	-3.2E-02	-2.3E-02
2399	8.4E-04	3.5E-03	5.3E-03	5.7E-03	4.6E-03	2.7E-03	2.6E-03	-7.8E-02	-7.1E-02	-6.3E-02	-5.4E-02	-4.6E-02	-3.7E-02
2400	1.0E-03	2.8E-03	4.8E-03	5.3E-03	4.2E-03	3.2E-03	3.1E-03	-8.2E-02	-7.7E-02	-7.0E-02	-6.3E-02	-5.7E-02	-5.0E-02
2401	1.1E-03	2.1E-03	4.2E-03	4.7E-03	4.3E-03	3.5E-03	3.3E-03	-7.4E-02	-7.1E-02	-6.7E-02	-6.2E-02	-5.8E-02	-5.3E-02
2402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2404	5.7E-04	3.0E-03	4.3E-03	4.6E-03	4.4E-03	2.9E-03	2.4E-03	-8.4E-02	-7.5E-02	-6.5E-02	-5.4E-02	-4.4E-02	-3.4E-02
2405	7.5E-04	3.8E-03	5.6E-03	5.9E-03	4.9E-03	2.9E-03	2.5E-03	-9.3E-02	-8.6E-02	-7.7E-02	-6.9E-02	-6.0E-02	-5.2E-02
2406	9.8E-04	3.4E-03	5.5E-03	5.9E-03	4.6E-03	3.1E-03	3.0E-03	-9.8E-02	-9.2E-02	-8.4E-02	-7.7E-02	-7.0E-02	-6.2E-02
2407	1.1E-03	2.6E-03	4.7E-03	5.2E-03	4.3E-03	3.5E-03	3.4E-03	-7.9E-02	-7.6E-02	-7.2E-02	-6.7E-02	-6.2E-02	-5.8E-02
2408	1.2E-03	2.3E-03	4.0E-03	4.6E-03	4.7E-03	3.7E-03	3.4E-03	-6.6E-02	-6.4E-02	-6.1E-02	-5.7E-02	-5.3E-02	-5.0E-02
2409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2411	6.2E-04	2.5E-03	3.6E-03	4.4E-03	5.0E-03	3.2E-03	2.7E-03	-1.1E-01	-9.7E-02	-8.5E-02	-7.4E-02	-6.2E-02	-5.1E-02
2412	6.5E-04	3.8E-03	5.5E-03	5.8E-03	4.8E-03	3.1E-03	2.4E-03	-1.1E-01	-1.0E-01	-9.7E-02	-8.8E-02	-8.0E-02	-7.2E-02
2413	9.0E-04	3.9E-03	6.0E-03	6.4E-03	5.1E-03	3.0E-03	2.9E-03	-9.6E-02	-9.1E-02	-8.4E-02	-7.7E-02	-7.1E-02	-6.4E-02
2414	1.1E-03	3.2E-03	5.4E-03	5.9E-03	4.7E-03	3.5E-03	3.4E-03	-9.1E-02	-8.6E-02	-7.9E-02	-7.2E-02	-6.5E-02	-5.8E-02
2415	1.3E-03	2.5E-03	4.5E-03	5.1E-03	4.8E-03	3.9E-03	3.6E-03	-8.4E-02	-7.9E-02	-7.2E-02	-6.6E-02	-5.9E-02	-5.3E-02
2416	1.3E-03	2.3E-03	4.0E-03	4.6E-03	5.0E-03	3.9E-03	3.5E-03	-7.5E-02	-7.0E-02	-6.3E-02	-5.7E-02	-5.0E-02	-4.3E-02
2417	1.2E-03	1.8E-03	3.5E-03	4.0E-03	4.8E-03	3.5E-03	3.2E-03	-6.4E-02	-6.1E-02	-5.5E-02	-5.0E-02	-4.5E-02	-3.9E-02
2418	1.1E-03	1.3E-03	1.6E-03	2.1E-03	1.8E-03	1.7E-03	1.6E-03	-1.8E-02	-1.6E-02	-1.4E-02	-1.1E-02	-8.6E-03	-6.0E-03
2419	6.2E-04	3.0E-03	4.4E-03	4.7E-03	4.8E-03	3.2E-03	2.7E-03	-1.1E-01	-1.1E-01	-9.7E-02	-8.9E-02	-8.0E-02	-7.2E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2420	7.9E-04	3.6E-03	5.5E-03	5.9E-03	4.9E-03	3.2E-03	2.6E-03	-1.1E-01	-1.0E-01	-9.3E-02	-8.5E-02	-7.7E-02	-6.9E-02
2421	1.0E-03	3.5E-03	5.7E-03	6.3E-03	5.1E-03	3.4E-03	3.3E-03	-9.4E-02	-8.9E-02	-8.2E-02	-7.5E-02	-6.8E-02	-6.1E-02
2422	1.3E-03	3.1E-03	5.4E-03	6.1E-03	5.0E-03	3.9E-03	3.7E-03	-8.2E-02	-7.9E-02	-7.5E-02	-7.1E-02	-6.7E-02	-6.3E-02
2423	1.4E-03	2.6E-03	4.4E-03	5.1E-03	5.2E-03	4.1E-03	3.8E-03	-6.6E-02	-6.4E-02	-6.1E-02	-5.7E-02	-5.4E-02	-5.0E-02
2424	1.3E-03	2.0E-03	3.9E-03	4.5E-03	5.2E-03	3.9E-03	3.6E-03	-6.0E-02	-5.8E-02	-5.3E-02	-4.8E-02	-4.3E-02	-3.9E-02
2425	1.1E-03	1.8E-03	3.4E-03	3.8E-03	4.8E-03	3.4E-03	3.0E-03	-4.9E-02	-4.7E-02	-4.4E-02	-4.1E-02	-3.8E-02	-3.5E-02
2426	9.1E-04	1.5E-03	2.9E-03	3.2E-03	4.1E-03	3.1E-03	2.8E-03	-3.8E-02	-3.9E-02	-3.8E-02	-3.7E-02	-3.6E-02	-3.4E-02
2427	9.3E-04	3.9E-03	6.1E-03	6.5E-03	5.4E-03	3.2E-03	3.0E-03	-8.5E-02	-8.4E-02	-8.1E-02	-7.8E-02	-7.5E-02	-7.2E-02
2428	1.2E-03	3.4E-03	5.8E-03	6.5E-03	5.3E-03	3.8E-03	3.6E-03	-6.9E-02	-6.9E-02	-6.6E-02	-6.4E-02	-6.1E-02	-5.9E-02
2429	1.4E-03	2.9E-03	5.2E-03	6.0E-03	5.2E-03	4.1E-03	3.9E-03	-5.8E-02	-5.7E-02	-5.3E-02	-4.9E-02	-4.5E-02	-4.1E-02
2430	1.4E-03	2.5E-03	4.6E-03	5.3E-03	5.5E-03	4.2E-03	3.9E-03	-4.6E-02	-4.5E-02	-4.1E-02	-3.8E-02	-3.4E-02	-3.0E-02
2431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2432	1.1E-03	1.7E-03	3.2E-03	3.5E-03	4.7E-03	3.3E-03	3.1E-03	-2.2E-02	-2.5E-02	-2.6E-02	-2.7E-02	-2.8E-02	-2.9E-02
2433	9.3E-04	1.5E-03	2.7E-03	3.4E-03	3.8E-03	3.2E-03	2.8E-03	-2.3E-02	-2.7E-02	-2.9E-02	-3.0E-02	-3.2E-02	-3.4E-02
2434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2435	1.1E-03	4.0E-03	6.5E-03	7.1E-03	5.7E-03	3.7E-03	3.5E-03	-7.7E-02	-7.2E-02	-6.5E-02	-5.8E-02	-5.2E-02	-4.5E-02
2436	1.4E-03	3.3E-03	5.8E-03	6.6E-03	5.4E-03	4.2E-03	4.0E-03	-6.4E-02	-5.7E-02	-4.8E-02	-3.9E-02	-2.9E-02	-2.0E-02
2437	1.5E-03	2.7E-03	5.0E-03	5.8E-03	5.6E-03	4.4E-03	4.1E-03	-4.8E-02	-4.2E-02	-3.4E-02	-2.6E-02	-1.8E-02	-9.4E-03
2438	1.4E-03	2.3E-03	4.2E-03	5.0E-03	5.5E-03	4.1E-03	3.8E-03	-4.0E-02	-3.6E-02	-2.9E-02	-2.3E-02	-1.6E-02	-9.5E-03
2439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2440	9.9E-04	1.6E-03	3.0E-03	3.6E-03	4.4E-03	3.4E-03	3.1E-03	-4.0E-02	-4.1E-02	-3.9E-02	-3.7E-02	-3.5E-02	-3.3E-02
2441	1.0E-03	1.4E-03	2.8E-03	3.5E-03	3.4E-03	3.1E-03	2.9E-03	-3.9E-02	-3.7E-02	-3.3E-02	-3.0E-02	-2.6E-02	-2.2E-02
2442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2443	1.5E-03	3.1E-03	5.7E-03	6.5E-03	5.8E-03	4.7E-03	4.4E-03	-5.4E-02	-4.2E-02	-2.8E-02	-1.4E-02	-6.2E-04	1.3E-02
2444	1.5E-03	2.5E-03	4.8E-03	5.6E-03	5.9E-03	4.6E-03	4.2E-03	-5.2E-02	-4.1E-02	-2.8E-02	-1.5E-02	-1.5E-03	1.2E-02
2445	1.4E-03	2.2E-03	4.0E-03	4.6E-03	5.5E-03	4.1E-03	3.7E-03	-5.2E-02	-4.1E-02	-2.9E-02	-1.6E-02	-3.4E-03	9.2E-03
2446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2447	1.1E-03	1.8E-03	3.1E-03	3.8E-03	3.9E-03	3.4E-03	3.1E-03	-4.7E-02	-3.7E-02	-2.5E-02	-1.2E-02	-7.8E-06	1.2E-02
2448	1.1E-03	1.9E-03	3.2E-03	3.5E-03	3.3E-03	3.0E-03	2.9E-03	-4.0E-02	-3.0E-02	-1.8E-02	-6.7E-03	5.0E-03	1.7E-02
2449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2451	1.7E-03	2.8E-03	5.4E-03	6.4E-03	6.4E-03	5.0E-03	4.7E-03	-5.3E-02	-4.0E-02	-2.5E-02	-9.8E-03	5.6E-03	2.1E-02
2452	1.6E-03	2.4E-03	4.5E-03	5.4E-03	6.1E-03	4.7E-03	4.3E-03	-4.8E-02	-3.8E-02	-2.6E-02	-1.3E-02	-8.1E-04	1.2E-02
2453	1.4E-03	2.1E-03	3.7E-03	4.3E-03	5.5E-03	4.0E-03	3.7E-03	-4.6E-02	-3.8E-02	-2.7E-02	-1.6E-02	-5.3E-03	5.5E-03
2454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2459	1.6E-03	2.4E-03	4.3E-03	5.1E-03	6.2E-03	4.6E-03	4.2E-03	-5.6E-02	-4.9E-02	-4.0E-02	-3.1E-02	-2.2E-02	-1.3E-02
2460	1.2E-03	2.7E-03	4.4E-03	4.4E-03	5.3E-03	4.1E-03	3.7E-03	-4.9E-02	-4.2E-02	-3.2E-02	-2.2E-02	-1.2E-02	-1.7E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2461	1.3E-03	2.2E-03	3.9E-03	4.2E-03	4.0E-03	3.6E-03	3.5E-03	-3.8E-02	-3.1E-02	-2.2E-02	-1.2E-02	-3.1E-03	6.2E-03
2462	1.2E-03	2.0E-03	3.3E-03	3.7E-03	3.6E-03	3.2E-03	3.1E-03	-3.4E-02	-2.7E-02	-1.9E-02	-1.0E-02	-1.6E-03	7.1E-03
2463	1.1E-03	2.0E-03	3.1E-03	3.1E-03	3.1E-03	2.7E-03	2.7E-03	-3.4E-02	-2.7E-02	-1.9E-02	-1.1E-02	-2.5E-03	5.7E-03
2464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2466	1.4E-03	2.6E-03	3.9E-03	4.6E-03	4.8E-03	4.1E-03	3.8E-03	-5.5E-02	-4.9E-02	-4.1E-02	-3.2E-02	-2.4E-02	-1.5E-02
2467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2468	1.2E-03	1.9E-03	3.5E-03	3.4E-03	3.4E-03	3.0E-03	3.0E-03	-3.2E-02	-3.3E-02	-3.1E-02	-3.0E-02	-2.9E-02	-2.8E-02
2469	9.5E-04	1.4E-03	3.1E-03	3.0E-03	2.9E-03	2.6E-03	2.5E-03	-2.6E-02	-2.8E-02	-2.8E-02	-2.8E-02	-2.9E-02	-2.9E-02
2470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2472	1.5E-03	2.2E-03	4.2E-03	4.6E-03	4.4E-03	4.0E-03	4.0E-03	-5.0E-02	-4.6E-02	-3.9E-02	-3.2E-02	-2.5E-02	-1.8E-02
2473	1.3E-03	1.8E-03	3.4E-03	3.8E-03	3.8E-03	3.4E-03	3.3E-03	-5.2E-02	-4.7E-02	-4.0E-02	-3.4E-02	-2.7E-02	-2.0E-02
2474	1.1E-03	1.7E-03	2.7E-03	3.2E-03	3.2E-03	2.8E-03	2.7E-03	-4.8E-02	-4.2E-02	-3.5E-02	-2.8E-02	-2.1E-02	-1.4E-02
2475	8.6E-04	1.6E-03	2.4E-03	3.0E-03	3.4E-03	2.7E-03	2.5E-03	-3.5E-02	-3.2E-02	-2.7E-02	-2.1E-02	-1.6E-02	-1.1E-02
2476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2479	1.5E-03	2.2E-03	3.3E-03	4.3E-03	4.3E-03	3.8E-03	3.8E-03	-5.8E-02	-5.2E-02	-4.5E-02	-3.7E-02	-2.9E-02	-2.1E-02
2480	1.2E-03	1.8E-03	2.7E-03	3.4E-03	3.4E-03	3.1E-03	3.0E-03	-4.9E-02	-4.3E-02	-3.5E-02	-2.6E-02	-1.8E-02	-9.6E-03
2481	9.5E-04	1.5E-03	2.8E-03	3.4E-03	4.0E-03	3.0E-03	2.8E-03	-4.5E-02	-3.8E-02	-2.9E-02	-2.0E-02	-1.1E-02	-2.1E-03
2482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2486	1.4E-03	1.9E-03	3.1E-03	4.0E-03	4.1E-03	3.7E-03	3.7E-03	-5.5E-02	-4.3E-02	-2.9E-02	-1.4E-02	1.3E-04	1.5E-02
2487	1.1E-03	1.6E-03	3.2E-03	3.9E-03	4.7E-03	3.5E-03	3.4E-03	-4.3E-02	-3.3E-02	-2.0E-02	-8.1E-03	4.2E-03	1.6E-02
2488	1.1E-03	1.5E-03	3.5E-03	4.2E-03	5.0E-03	4.0E-03	3.8E-03	-2.5E-02	-1.9E-02	-9.8E-03	-1.2E-03	7.5E-03	1.6E-02
2489	2.2E-03	3.6E-03	3.5E-03	8.8E-04	9.6E-04	7.0E-04	6.5E-04	-1.7E-02	-1.7E-02	-1.6E-02	-1.5E-02	-1.4E-02	-1.3E-02
2490	1.1E-03	1.9E-03	3.5E-03	4.2E-03	5.4E-03	4.4E-03	4.2E-03	-2.7E-02	-1.7E-02	-3.3E-03	1.0E-02	2.3E-02	3.6E-02
2491	1.3E-03	1.8E-03	3.7E-03	4.0E-03	5.6E-03	5.0E-03	4.8E-03	-2.0E-02	-1.1E-02	-1.8E-04	1.1E-02	2.2E-02	3.3E-02
2492	7.9E-04	1.6E-03	1.9E-03	1.1E-03	1.0E-03	1.3E-03	8.1E-04	-5.6E-03	-7.0E-03	-8.1E-03	-9.3E-03	-1.0E-02	-1.2E-02
2493	7.2E-04	1.9E-03	2.2E-03	1.2E-03	1.0E-03	1.2E-03	9.3E-04	-1.2E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.6E-03	-8.9E-03
2494	7.8E-04	2.2E-03	2.5E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	-1.7E-02	-1.5E-02	-1.2E-02	-9.9E-03	-7.6E-03	-5.3E-03
2495	7.8E-04	2.2E-03	2.5E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.0E-03	-5.1E-03
2496	9.5E-04	2.1E-03	2.4E-03	1.4E-03	1.3E-03	1.1E-03	1.1E-03	-2.0E-02	-1.7E-02	-1.4E-02	-1.2E-02	-8.8E-03	-6.0E-03
2497	1.1E-03	2.0E-03	2.3E-03	1.5E-03	1.3E-03	1.2E-03	1.2E-03	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.5E-03	-6.8E-03
2498	1.3E-03	1.8E-03	2.1E-03	1.5E-03	1.4E-03	1.2E-03	1.2E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.5E-03	-5.7E-03
2499	1.3E-03	1.5E-03	1.8E-03	1.4E-03	1.5E-03	1.2E-03	1.2E-03	-1.7E-02	-1.4E-02	-1.2E-02	-9.0E-03	-6.2E-03	-3.5E-03
2500	1.3E-03	1.4E-03	1.6E-03	1.3E-03	1.8E-03	1.1E-03	1.1E-03	-1.2E-02	-1.0E-02	-7.5E-03	-4.9E-03	-2.3E-03	2.7E-04
2501	1.2E-03	1.4E-03	1.6E-03	1.1E-03	2.0E-03	9.5E-04	9.4E-04	-6.6E-03	-4.8E-03	-2.6E-03	-5.1E-04	1.6E-03	3.7E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2502	1.1E-03	1.3E-03	1.5E-03	9.6E-04	2.0E-03	9.0E-04	7.9E-04	-1.8E-03	-3.9E-04	1.3E-03	3.1E-03	4.8E-03	6.5E-03
2503	9.5E-04	1.2E-03	1.4E-03	1.0E-03	1.8E-03	1.0E-03	8.0E-04	-1.1E-04	1.2E-03	3.0E-03	4.7E-03	6.4E-03	8.2E-03
2504	8.4E-04	1.2E-03	1.3E-03	1.1E-03	1.5E-03	1.1E-03	9.5E-04	1.1E-03	2.4E-03	4.1E-03	5.9E-03	7.6E-03	9.4E-03
2505	6.2E-04	9.0E-04	1.1E-03	1.3E-03	1.6E-03	1.4E-03	1.3E-03	-1.1E-02	-9.2E-03	-7.0E-03	-4.8E-03	-2.7E-03	-5.1E-04
2506	5.2E-04	9.1E-04	1.1E-03	1.3E-03	1.7E-03	1.3E-03	1.1E-03	-1.6E-02	-1.5E-02	-1.2E-02	-1.0E-02	-8.0E-03	-5.8E-03
2507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2508	8.6E-04	1.7E-03	1.7E-03	9.4E-04	1.1E-03	1.4E-03	7.7E-04	-7.6E-03	-8.9E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02
2509	2.8E-03	3.2E-03	1.9E-03	7.8E-04	1.1E-03	7.8E-04	6.0E-04	-1.0E-02	-9.9E-03	-9.2E-03	-8.5E-03	-7.7E-03	-7.0E-03
2510	2.3E-03	2.7E-03	1.7E-03	8.2E-04	1.0E-03	6.7E-04	5.6E-04	-1.7E-02	-1.7E-02	-1.6E-02	-1.6E-02	-1.5E-02	-1.5E-02
2511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2512	2.2E-03	2.7E-03	1.7E-03	7.6E-04	1.1E-03	9.5E-04	5.5E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02
2513	1.6E-03	2.1E-03	1.6E-03	7.8E-04	1.1E-03	1.0E-03	6.3E-04	-9.3E-03	-9.8E-03	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
2514	1.2E-03	1.3E-03	1.3E-03	8.2E-04	1.1E-03	1.1E-03	6.9E-04	-8.9E-03	-9.0E-03	-8.9E-03	-8.7E-03	-8.6E-03	-8.4E-03
2515	1.3E-03	1.4E-03	1.5E-03	8.2E-04	1.0E-03	1.2E-03	7.2E-04	-8.6E-03	-8.3E-03	-7.7E-03	-7.1E-03	-6.4E-03	-5.8E-03
2516	1.2E-03	1.5E-03	1.4E-03	8.0E-04	9.9E-04	1.3E-03	7.1E-04	-6.0E-03	-5.5E-03	-4.7E-03	-3.9E-03	-3.0E-03	-2.2E-03
2517	1.6E-03	1.9E-03	1.2E-03	7.5E-04	9.7E-04	1.4E-03	7.2E-04	-1.6E-03	-1.5E-03	-1.1E-03	-5.8E-04	-9.6E-05	3.9E-04
2518	1.7E-03	2.1E-03	9.7E-04	7.6E-04	1.0E-03	1.4E-03	7.1E-04	-2.5E-03	-3.5E-03	-4.0E-03	-4.5E-03	-5.1E-03	-5.6E-03
2519	6.9E-04	1.3E-03	1.3E-03	1.0E-03	8.5E-04	9.5E-04	7.7E-04	-5.5E-03	-6.9E-03	-7.9E-03	-9.0E-03	-1.0E-02	-1.1E-02
2520	6.1E-04	1.1E-03	1.3E-03	1.1E-03	9.5E-04	8.6E-04	8.6E-04	-6.6E-03	-7.6E-03	-8.5E-03	-9.3E-03	-1.0E-02	-1.1E-02
2521	5.9E-04	1.4E-03	1.7E-03	1.2E-03	1.1E-03	9.8E-04	9.7E-04	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.0E-03	-8.0E-03
2522	1.4E-03	1.7E-03	1.2E-03	8.2E-04	9.7E-04	1.3E-03	6.3E-04	-7.5E-03	-8.2E-03	-8.5E-03	-8.8E-03	-9.0E-03	-9.3E-03
2523	2.3E-03	2.7E-03	1.5E-03	7.8E-04	1.0E-03	8.9E-04	5.3E-04	-1.7E-02	-1.7E-02	-1.6E-02	-1.6E-02	-1.6E-02	-1.5E-02
2524	9.5E-04	1.3E-03	1.3E-03	8.6E-04	8.7E-04	1.1E-03	7.0E-04	-7.9E-03	-8.8E-03	-9.4E-03	-1.0E-02	-1.1E-02	-1.1E-02
2525	5.6E-04	1.6E-03	1.9E-03	1.3E-03	1.1E-03	1.0E-03	1.0E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03	-4.8E-03
2526	6.0E-04	1.7E-03	2.0E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.0E-03	-5.3E-03
2527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2530	8.1E-04	8.8E-04	2.1E-03	2.3E-03	3.4E-03	1.7E-03	1.6E-03	-1.6E-02	-1.2E-02	-6.8E-03	-1.6E-03	3.6E-03	8.8E-03
2531	7.7E-04	9.4E-04	2.2E-03	2.5E-03	4.0E-03	1.9E-03	1.8E-03	-1.8E-02	-1.3E-02	-7.5E-03	-1.6E-03	4.3E-03	1.0E-02
2532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2533	5.5E-04	9.7E-04	2.1E-03	2.4E-03	3.2E-03	2.0E-03	1.8E-03	-2.0E-02	-1.5E-02	-8.9E-03	-2.6E-03	3.6E-03	9.9E-03
2534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2536	5.2E-04	1.0E-03	2.1E-03	2.5E-03	2.7E-03	2.9E-03	1.9E-03	-2.0E-02	-1.5E-02	-8.8E-03	-2.7E-03	3.5E-03	9.6E-03
2537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2553	5.9E-04	1.1E-03	2.1E-03	3.0E-03	6.2E-03	7.2E-03	3.7E-03	8.1E-03	8.8E-03	1.1E-02	1.3E-02	1.5E-02	1.7E-02
2554	6.0E-04	1.1E-03	2.1E-03	3.0E-03	8.1E-03	9.4E-03	3.8E-03	5.1E-03	5.8E-03	8.0E-03	1.0E-02	1.2E-02	1.4E-02
2555	5.5E-04	1.3E-03	2.2E-03	3.1E-03	7.7E-03	7.5E-03	3.1E-03	-3.4E-03	-6.5E-04	3.3E-03	7.3E-03	1.1E-02	1.5E-02
2556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2561	6.0E-04	1.2E-03	2.0E-03	3.0E-03	6.8E-03	7.5E-03	3.1E-03	9.5E-04	2.4E-03	5.1E-03	7.8E-03	1.1E-02	1.3E-02
2562	5.6E-04	1.3E-03	2.3E-03	3.0E-03	7.2E-03	7.7E-03	3.2E-03	-2.6E-03	1.7E-04	4.0E-03	7.9E-03	1.2E-02	1.6E-02
2563	6.0E-04	1.3E-03	2.4E-03	3.1E-03	7.0E-03	7.8E-03	3.3E-03	-4.1E-04	2.2E-03	5.8E-03	9.4E-03	1.3E-02	1.7E-02
2564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2573	5.8E-04	1.2E-03	2.3E-03	2.9E-03	5.5E-03	6.3E-03	2.8E-03	-1.3E-03	1.2E-03	4.7E-03	8.2E-03	1.2E-02	1.5E-02
2574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2581	6.1E-04	1.7E-03	2.0E-03	1.4E-03	1.3E-03	1.1E-03	1.1E-03	-1.9E-02	-1.6E-02	-1.4E-02	-1.1E-02	-8.7E-03	-6.1E-03
2582	5.2E-04	1.5E-03	1.7E-03	1.3E-03	1.5E-03	1.1E-03	1.1E-03	-1.8E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.7E-03	-5.2E-03
2583	7.8E-04	1.7E-03	2.0E-03	1.3E-03	1.5E-03	1.2E-03	1.1E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.9E-03	-5.3E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2584	5.0E-04	1.4E-03	1.7E-03	1.2E-03	1.6E-03	1.0E-03	1.0E-03	-1.6E-02	-1.4E-02	-1.2E-02	-9.1E-03	-6.6E-03	-4.1E-03
2585	9.1E-04	1.6E-03	1.8E-03	1.3E-03	1.7E-03	1.1E-03	1.1E-03	-1.6E-02	-1.4E-02	-1.1E-02	-8.6E-03	-6.0E-03	-3.4E-03
2586	4.4E-04	1.3E-03	1.5E-03	1.1E-03	1.3E-03	9.6E-04	9.6E-04	-1.5E-02	-1.3E-02	-1.0E-02	-8.0E-03	-5.5E-03	-3.0E-03
2587	6.2E-04	1.4E-03	1.7E-03	1.2E-03	1.5E-03	9.9E-04	9.9E-04	-1.5E-02	-1.2E-02	-9.7E-03	-7.2E-03	-4.6E-03	-2.1E-03
2588	9.8E-04	1.4E-03	1.7E-03	1.2E-03	1.8E-03	1.0E-03	1.0E-03	-1.3E-02	-1.1E-02	-8.1E-03	-5.6E-03	-3.1E-03	-6.2E-04
2589	3.9E-04	1.1E-03	1.3E-03	1.0E-03	9.7E-04	8.7E-04	8.7E-04	-1.4E-02	-1.2E-02	-9.5E-03	-7.0E-03	-4.5E-03	-2.0E-03
2590	4.3E-04	1.3E-03	1.5E-03	1.0E-03	1.0E-03	8.7E-04	8.7E-04	-1.3E-02	-1.1E-02	-8.2E-03	-5.7E-03	-3.3E-03	-8.0E-04
2591	7.2E-04	1.3E-03	1.6E-03	1.1E-03	1.4E-03	8.9E-04	8.9E-04	-1.1E-02	-9.1E-03	-6.7E-03	-4.3E-03	-1.9E-03	5.8E-04
2592	1.0E-03	1.2E-03	1.5E-03	1.0E-03	1.7E-03	8.8E-04	8.8E-04	-8.2E-03	-6.1E-03	-3.8E-03	-1.5E-03	8.0E-04	3.1E-03
2593	3.9E-04	1.1E-03	1.3E-03	9.4E-04	8.7E-04	7.8E-04	7.8E-04	-1.2E-02	-9.8E-03	-7.3E-03	-4.9E-03	-2.4E-03	2.2E-05
2594	5.0E-04	1.2E-03	1.4E-03	9.4E-04	8.7E-04	7.8E-04	7.8E-04	-1.0E-02	-7.9E-03	-5.5E-03	-3.1E-03	-7.6E-04	1.6E-03
2595	7.8E-04	1.2E-03	1.4E-03	9.3E-04	1.1E-03	8.6E-04	7.7E-04	-7.0E-03	-5.0E-03	-2.8E-03	-5.3E-04	1.7E-03	3.9E-03
2596	9.9E-04	1.2E-03	1.3E-03	9.1E-04	1.5E-03	9.3E-04	7.4E-04	-3.2E-03	-1.6E-03	3.6E-04	2.3E-03	4.2E-03	6.1E-03
2597	3.5E-04	1.0E-03	1.2E-03	8.6E-04	7.9E-04	7.1E-04	7.0E-04	-1.1E-02	-8.6E-03	-6.2E-03	-3.8E-03	-1.4E-03	9.8E-04
2598	3.8E-04	1.1E-03	1.3E-03	8.4E-04	7.7E-04	6.9E-04	6.8E-04	-8.8E-03	-6.7E-03	-4.3E-03	-2.0E-03	2.6E-04	2.6E-03
2599	5.8E-04	1.1E-03	1.4E-03	8.2E-04	8.4E-04	7.1E-04	6.6E-04	-5.6E-03	-3.7E-03	-1.6E-03	5.4E-04	2.7E-03	4.8E-03
2600	8.2E-04	1.1E-03	1.3E-03	8.3E-04	9.9E-04	8.3E-04	6.4E-04	-2.4E-03	-8.0E-04	1.1E-03	2.9E-03	4.8E-03	6.6E-03
2601	9.6E-04	1.1E-03	1.2E-03	9.4E-04	1.1E-03	9.5E-04	7.3E-04	-2.0E-05	1.2E-03	2.8E-03	4.4E-03	6.0E-03	7.6E-03
2602	3.5E-04	1.0E-03	1.2E-03	7.5E-04	7.3E-04	6.0E-04	6.0E-04	-7.5E-03	-5.5E-03	-3.2E-03	-1.0E-03	1.2E-03	3.4E-03
2603	4.1E-04	1.1E-03	1.3E-03	7.2E-04	8.4E-04	5.7E-04	5.7E-04	-4.7E-03	-2.9E-03	-7.8E-04	1.3E-03	3.4E-03	5.5E-03
2604	6.3E-04	1.0E-03	1.2E-03	8.2E-04	9.8E-04	6.3E-04	6.0E-04	-1.7E-03	-1.7E-04	1.6E-03	3.4E-03	5.2E-03	7.1E-03
2605	8.4E-04	9.8E-04	1.1E-03	9.2E-04	1.1E-03	7.7E-04	7.3E-04	2.2E-04	1.5E-03	3.1E-03	4.7E-03	6.3E-03	7.9E-03
2606	9.0E-04	1.1E-03	1.2E-03	1.0E-03	1.3E-03	9.2E-04	8.7E-04	1.2E-03	2.4E-03	4.1E-03	5.7E-03	7.4E-03	9.0E-03
2607	3.2E-04	9.1E-04	1.1E-03	6.8E-04	7.4E-04	5.3E-04	5.3E-04	-6.2E-03	-4.3E-03	-2.2E-03	-5.2E-05	2.1E-03	4.2E-03
2608	3.4E-04	9.8E-04	1.2E-03	7.2E-04	8.5E-04	5.4E-04	5.1E-04	-4.0E-03	-2.2E-03	-7.3E-05	2.0E-03	4.1E-03	6.2E-03
2609	4.7E-04	1.0E-03	1.2E-03	8.1E-04	9.7E-04	6.4E-04	6.1E-04	-1.2E-03	3.5E-04	2.2E-03	4.0E-03	5.8E-03	7.6E-03
2610	6.7E-04	9.6E-04	1.1E-03	9.0E-04	1.1E-03	7.7E-04	7.3E-04	3.1E-04	1.6E-03	3.2E-03	4.9E-03	6.5E-03	8.2E-03
2611	8.2E-04	9.6E-04	1.0E-03	1.0E-03	1.2E-03	9.1E-04	8.6E-04	1.7E-03	2.9E-03	4.4E-03	6.0E-03	7.6E-03	9.2E-03
2612	8.4E-04	1.1E-03	1.2E-03	1.1E-03	1.4E-03	1.1E-03	1.0E-03	2.0E-03	3.2E-03	5.0E-03	6.8E-03	8.5E-03	1.0E-02
2613	7.1E-04	1.0E-03	1.2E-03	1.2E-03	1.5E-03	1.2E-03	1.1E-03	-3.2E-03	-1.4E-03	1.1E-03	3.6E-03	6.1E-03	8.7E-03
2614	3.1E-04	8.8E-04	1.1E-03	7.1E-04	8.4E-04	5.4E-04	5.1E-04	-3.2E-03	-1.4E-03	6.4E-04	2.7E-03	4.8E-03	6.8E-03
2615	3.5E-04	9.5E-04	1.1E-03	8.0E-04	9.6E-04	6.5E-04	6.2E-04	-9.1E-04	6.6E-04	2.5E-03	4.4E-03	6.3E-03	8.2E-03
2616	5.3E-04	9.4E-04	1.1E-03	8.9E-04	1.1E-03	7.7E-04	7.3E-04	4.1E-04	1.7E-03	3.4E-03	5.1E-03	6.8E-03	8.5E-03
2617	6.9E-04	8.7E-04	1.0E-03	9.7E-04	1.2E-03	8.9E-04	8.4E-04	1.8E-03	2.9E-03	4.4E-03	5.9E-03	7.5E-03	9.0E-03
2618	8.0E-04	9.4E-04	1.0E-03	1.1E-03	1.3E-03	1.0E-03	9.7E-04	2.3E-03	3.5E-03	5.2E-03	6.9E-03	8.6E-03	1.0E-02
2619	7.7E-04	1.0E-03	1.2E-03	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-1.1E-03	5.1E-04	2.8E-03	5.1E-03	7.4E-03	9.7E-03
2620	6.1E-04	9.4E-04	1.1E-03	1.2E-03	1.5E-03	1.3E-03	1.2E-03	-5.8E-03	-4.3E-03	-2.0E-03	2.0E-04	2.4E-03	4.7E-03
2621	4.0E-04	9.1E-04	1.1E-03	8.8E-04	1.1E-03	7.7E-04	7.3E-04	6.5E-04	2.0E-03	3.7E-03	5.4E-03	7.2E-03	8.9E-03
2622	5.7E-04	8.7E-04	1.0E-03	9.6E-04	1.2E-03	8.8E-04	8.3E-04	2.0E-03	3.0E-03	4.5E-03	6.0E-03	7.5E-03	9.0E-03
2623	6.9E-04	8.1E-04	9.2E-04	1.0E-03	1.3E-03	9.9E-04	9.3E-04	2.7E-03	3.7E-03	5.3E-03	6.9E-03	8.4E-03	1.0E-02
2624	7.6E-04	9.2E-04	1.0E-03	1.1E-03	1.4E-03	1.1E-03	1.1E-03	1.0E-03	2.3E-03	4.2E-03	6.1E-03	8.0E-03	9.9E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2625	6.8E-04	9.6E-04	1.1E-03	1.2E-03	1.5E-03	1.2E-03	1.1E-03	-3.1E-03	-1.9E-03	-2.6E-05	1.9E-03	3.8E-03	5.7E-03
2626	5.4E-04	8.6E-04	1.0E-03	1.3E-03	1.5E-03	1.3E-03	1.2E-03	-1.0E-02	-9.0E-03	-7.1E-03	-5.2E-03	-3.3E-03	-1.4E-03
2627	5.7E-04	8.4E-04	1.1E-03	1.3E-03	1.5E-03	1.3E-03	1.3E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.8E-03
2628	4.4E-04	8.5E-04	1.0E-03	9.5E-04	1.2E-03	8.7E-04	8.2E-04	2.1E-03	3.1E-03	4.5E-03	6.0E-03	7.5E-03	8.9E-03
2629	6.0E-04	8.0E-04	9.4E-04	1.0E-03	1.2E-03	9.7E-04	9.2E-04	3.3E-03	4.2E-03	5.6E-03	7.0E-03	8.4E-03	9.9E-03
2630	6.9E-04	8.2E-04	9.1E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	3.0E-03	3.9E-03	5.4E-03	6.8E-03	8.3E-03	9.7E-03
2631	7.1E-04	9.1E-04	1.0E-03	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-9.4E-04	4.0E-05	1.7E-03	3.4E-03	5.0E-03	6.7E-03
2632	6.1E-04	9.0E-04	1.0E-03	1.2E-03	1.5E-03	1.2E-03	1.2E-03	-6.8E-03	-6.0E-03	-4.5E-03	-3.0E-03	-1.4E-03	1.1E-04
2633	5.1E-04	7.7E-04	1.0E-03	1.3E-03	1.5E-03	1.3E-03	1.2E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.2E-02	-9.8E-03	-8.0E-03
2634	5.6E-04	8.4E-04	1.1E-03	1.3E-03	1.5E-03	1.3E-03	1.2E-03	-2.2E-02	-2.1E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02
2635	4.8E-04	8.0E-04	9.5E-04	1.0E-03	1.2E-03	9.5E-04	8.9E-04	3.8E-03	4.5E-03	5.7E-03	6.9E-03	8.1E-03	9.3E-03
2636	6.2E-04	7.4E-04	8.9E-04	1.1E-03	1.3E-03	1.0E-03	9.7E-04	4.9E-03	5.3E-03	6.3E-03	7.3E-03	8.2E-03	9.2E-03
2637	6.7E-04	8.0E-04	9.2E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	1.2E-03	1.9E-03	3.4E-03	4.8E-03	6.2E-03	7.6E-03
2638	6.5E-04	8.8E-04	9.9E-04	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-4.9E-03	-4.3E-03	-3.0E-03	-1.7E-03	-3.3E-04	1.0E-03
2639	6.7E-04	1.0E-03	1.2E-03	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-1.3E-02	-1.2E-02	-1.1E-02	-9.2E-03	-7.8E-03	-6.4E-03
2640	7.1E-04	8.1E-04	9.7E-04	1.2E-03	1.3E-03	1.2E-03	1.2E-03	-2.0E-02	-1.9E-02	-1.7E-02	-1.6E-02	-1.4E-02	-1.2E-02
2641	7.7E-04	1.0E-03	1.0E-03	1.3E-03	1.5E-03	1.2E-03	1.1E-03	-2.5E-02	-2.3E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.3E-02
2642	5.0E-04	9.0E-04	1.1E-03	1.3E-03	1.5E-03	1.2E-03	1.1E-03	-2.5E-02	-2.2E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02
2643	6.2E-04	7.4E-04	8.9E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	3.1E-03	3.7E-03	5.0E-03	6.3E-03	7.5E-03	8.8E-03
2644	6.4E-04	8.0E-04	9.2E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	-3.8E-03	-3.3E-03	-2.0E-03	-8.2E-04	4.0E-04	1.6E-03
2645	7.0E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.1E-03	1.1E-03	-9.6E-03	-9.2E-03	-8.0E-03	-6.8E-03	-5.7E-03	-4.5E-03
2646	6.7E-04	9.2E-04	1.1E-03	1.2E-03	1.3E-03	1.2E-03	1.1E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.6E-03
2647	7.0E-04	7.9E-04	9.4E-04	1.2E-03	1.4E-03	1.2E-03	1.2E-03	-2.3E-02	-2.2E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02
2648	7.9E-04	9.6E-04	9.7E-04	1.2E-03	1.5E-03	1.3E-03	1.2E-03	-2.5E-02	-2.3E-02	-2.0E-02	-1.7E-02	-1.4E-02	-1.1E-02
2649	5.7E-04	1.1E-03	1.1E-03	1.3E-03	1.6E-03	1.5E-03	1.1E-03	-2.1E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03
2650	6.0E-04	7.8E-04	8.9E-04	1.1E-03	1.2E-03	1.1E-03	1.0E-03	-7.3E-03	-7.0E-03	-6.0E-03	-5.0E-03	-4.1E-03	-3.1E-03
2651	6.1E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.1E-03	1.0E-03	-1.5E-02	-1.4E-02	-1.2E-02	-1.1E-02	-9.5E-03	-8.0E-03
2652	6.2E-04	7.6E-04	9.0E-04	1.1E-03	1.3E-03	1.0E-03	9.8E-04	-2.1E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02
2653	6.9E-04	7.7E-04	1.0E-03	1.2E-03	1.5E-03	1.3E-03	1.2E-03	-2.6E-02	-2.4E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.2E-02
2654	7.2E-04	9.0E-04	1.0E-03	1.2E-03	1.5E-03	1.4E-03	1.3E-03	-2.5E-02	-2.3E-02	-2.0E-02	-1.7E-02	-1.4E-02	-1.0E-02
2655	5.8E-04	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.1E-03	-1.7E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.5E-03	-6.1E-03
2656	5.1E-04	8.9E-04	1.1E-03	1.2E-03	1.6E-03	1.7E-03	1.0E-03	-1.2E-02	-1.1E-02	-8.9E-03	-7.1E-03	-5.3E-03	-3.5E-03
2657	5.2E-04	8.7E-04	9.6E-04	1.1E-03	1.2E-03	9.6E-04	9.1E-04	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02
2658	5.5E-04	6.7E-04	8.8E-04	1.1E-03	1.2E-03	1.0E-03	9.8E-04	-2.2E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02
2659	6.7E-04	7.6E-04	9.7E-04	1.2E-03	1.5E-03	1.3E-03	1.3E-03	-2.7E-02	-2.5E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.2E-02
2660	6.7E-04	8.7E-04	9.6E-04	1.2E-03	1.4E-03	1.3E-03	1.2E-03	-2.3E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.0E-03
2661	5.8E-04	1.2E-03	1.1E-03	1.1E-03	1.5E-03	1.1E-03	9.9E-04	-1.3E-02	-1.1E-02	-9.4E-03	-7.4E-03	-5.5E-03	-3.5E-03
2662	6.7E-04	1.1E-03	1.2E-03	1.2E-03	1.9E-03	9.8E-04	9.2E-04	-8.6E-03	-7.7E-03	-6.2E-03	-4.6E-03	-3.1E-03	-1.6E-03
2663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2664	5.4E-04	6.1E-04	8.4E-04	1.1E-03	1.3E-03	1.1E-03	1.1E-03	-2.2E-02	-2.0E-02	-1.7E-02	-1.5E-02	-1.2E-02	-9.5E-03
2665	6.6E-04	7.5E-04	9.1E-04	1.2E-03	1.4E-03	1.3E-03	1.2E-03	-2.5E-02	-2.2E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2666	6.3E-04	9.0E-04	9.0E-04	1.2E-03	1.3E-03	1.2E-03	1.1E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.8E-03	-5.2E-03
2667	5.7E-04	1.1E-03	1.1E-03	1.1E-03	1.6E-03	9.4E-04	8.8E-04	-9.2E-03	-8.2E-03	-6.6E-03	-5.0E-03	-3.3E-03	-1.7E-03
2668	7.2E-04	1.0E-03	1.4E-03	1.4E-03	1.7E-03	1.1E-03	1.0E-03	-6.6E-03	-5.7E-03	-4.2E-03	-2.7E-03	-1.2E-03	3.1E-04
2669	7.1E-04	8.6E-04	1.8E-03	1.9E-03	2.1E-03	1.4E-03	1.3E-03	-9.4E-03	-7.8E-03	-5.5E-03	-3.3E-03	-1.0E-03	1.2E-03
2670	5.6E-04	6.3E-04	8.0E-04	1.0E-03	1.5E-03	1.1E-03	1.0E-03	-2.1E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03
2671	6.5E-04	7.6E-04	8.2E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	-2.0E-02	-1.7E-02	-1.5E-02	-1.2E-02	-9.0E-03	-6.2E-03
2672	5.9E-04	9.1E-04	9.2E-04	9.4E-04	1.5E-03	9.9E-04	9.2E-04	-1.1E-02	-1.0E-02	-8.4E-03	-6.5E-03	-4.7E-03	-2.8E-03
2673	5.6E-04	1.0E-03	1.1E-03	1.2E-03	1.8E-03	9.0E-04	8.0E-04	-5.9E-03	-5.1E-03	-3.8E-03	-2.5E-03	-1.2E-03	1.6E-04
2674	6.9E-04	9.7E-04	1.6E-03	1.6E-03	2.1E-03	1.1E-03	1.1E-03	-4.8E-03	-4.4E-03	-3.5E-03	-2.5E-03	-1.6E-03	-6.6E-04
2675	6.9E-04	8.2E-04	2.0E-03	2.1E-03	2.4E-03	1.5E-03	1.4E-03	-1.1E-02	-8.6E-03	-5.2E-03	-1.8E-03	1.5E-03	4.9E-03
2676	6.4E-04	7.6E-04	7.5E-04	9.7E-04	1.8E-03	9.2E-04	8.7E-04	-1.2E-02	-1.1E-02	-8.5E-03	-6.4E-03	-4.3E-03	-2.1E-03
2677	5.6E-04	9.7E-04	9.8E-04	1.0E-03	1.9E-03	9.2E-04	7.7E-04	-6.9E-03	-5.9E-03	-4.4E-03	-2.9E-03	-1.4E-03	1.3E-04
2678	5.6E-04	1.1E-03	1.3E-03	1.4E-03	2.2E-03	1.1E-03	1.0E-03	-4.2E-03	-3.3E-03	-2.0E-03	-7.5E-04	5.4E-04	1.8E-03
2679	6.5E-04	9.7E-04	1.7E-03	1.9E-03	2.6E-03	1.3E-03	1.3E-03	-6.9E-03	-5.6E-03	-3.6E-03	-1.7E-03	2.4E-04	2.2E-03
2680	6.5E-04	8.6E-04	2.0E-03	2.2E-03	2.9E-03	1.6E-03	1.6E-03	-1.4E-02	-1.0E-02	-5.5E-03	-7.8E-04	3.9E-03	8.6E-03
2681	5.8E-04	8.2E-04	8.8E-04	9.3E-04	2.3E-03	7.8E-04	7.1E-04	-7.6E-03	-6.5E-03	-5.0E-03	-3.5E-03	-1.9E-03	-4.1E-04
2682	5.1E-04	9.9E-04	1.2E-03	1.2E-03	2.3E-03	9.2E-04	8.7E-04	-4.0E-03	-3.2E-03	-2.0E-03	-7.8E-04	4.5E-04	1.7E-03
2683	5.5E-04	1.0E-03	1.5E-03	1.6E-03	2.1E-03	1.2E-03	1.1E-03	-2.6E-03	-2.4E-03	-1.6E-03	-7.6E-04	4.5E-05	8.5E-04
2684	5.9E-04	9.1E-04	1.8E-03	2.0E-03	2.2E-03	1.5E-03	1.4E-03	-9.5E-03	-7.1E-03	-4.0E-03	-8.8E-04	2.2E-03	5.4E-03
2685	6.2E-04	9.0E-04	2.1E-03	2.3E-03	2.5E-03	1.8E-03	1.7E-03	-1.7E-02	-1.2E-02	-6.4E-03	-7.8E-04	4.9E-03	1.1E-02
2686	4.4E-04	8.9E-04	1.3E-03	1.4E-03	1.5E-03	1.0E-03	9.8E-04	-2.7E-03	-1.9E-03	-7.2E-04	5.1E-04	1.7E-03	3.0E-03
2687	4.9E-04	9.1E-04	1.6E-03	1.7E-03	1.9E-03	1.3E-03	1.2E-03	-5.3E-03	-4.1E-03	-2.3E-03	-4.3E-04	1.4E-03	3.2E-03
2688	3.8E-04	8.2E-04	1.7E-03	2.0E-03	2.1E-03	1.6E-03	1.5E-03	-1.2E-02	-8.9E-03	-4.5E-03	-2.2E-04	4.1E-03	8.4E-03
2689	4.6E-04	9.1E-04	1.9E-03	2.3E-03	2.4E-03	2.8E-03	1.7E-03	-1.9E-02	-1.4E-02	-8.2E-03	-2.2E-03	3.7E-03	9.6E-03
2690	4.9E-04	1.0E-03	2.1E-03	2.5E-03	3.0E-03	3.0E-03	2.2E-03	-1.8E-02	-1.3E-02	-7.5E-03	-1.4E-03	4.6E-03	1.1E-02
2691	3.4E-04	7.4E-04	1.6E-03	1.8E-03	1.9E-03	1.8E-03	1.3E-03	-8.4E-03	-6.1E-03	-3.2E-03	-1.6E-04	2.8E-03	5.8E-03
2692	3.7E-04	8.4E-04	1.8E-03	2.0E-03	2.2E-03	2.6E-03	1.6E-03	-1.5E-02	-1.1E-02	-5.6E-03	-3.1E-04	4.9E-03	1.0E-02
2693	4.4E-04	9.3E-04	1.9E-03	2.3E-03	2.7E-03	2.5E-03	1.9E-03	-2.0E-02	-1.5E-02	-8.9E-03	-2.9E-03	3.1E-03	9.1E-03
2694	4.8E-04	1.0E-03	2.1E-03	2.6E-03	3.4E-03	3.4E-03	2.2E-03	-1.7E-02	-1.2E-02	-5.7E-03	4.3E-04	6.5E-03	1.3E-02
2695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2696	4.3E-04	9.6E-04	2.0E-03	2.4E-03	2.8E-03	2.9E-03	1.9E-03	-2.0E-02	-1.5E-02	-8.6E-03	-2.5E-03	3.6E-03	9.7E-03
2697	4.6E-04	1.0E-03	2.1E-03	2.6E-03	3.1E-03	3.2E-03	2.4E-03	-1.3E-02	-8.4E-03	-2.6E-03	3.3E-03	9.2E-03	1.5E-02
2698	4.3E-04	1.1E-03	2.1E-03	2.8E-03	4.3E-03	4.6E-03	3.0E-03	-6.0E-04	2.4E-03	6.7E-03	1.1E-02	1.5E-02	2.0E-02
2699	4.4E-04	1.0E-03	2.0E-03	2.7E-03	3.4E-03	3.4E-03	2.5E-03	-8.1E-03	-3.9E-03	1.4E-03	6.7E-03	1.2E-02	1.7E-02
2700	5.1E-04	1.1E-03	2.1E-03	2.8E-03	4.9E-03	5.5E-03	3.2E-03	3.4E-03	5.7E-03	9.2E-03	1.3E-02	1.6E-02	2.0E-02
2701	5.9E-04	1.1E-03	2.0E-03	2.9E-03	7.0E-03	8.1E-03	3.7E-03	9.5E-03	9.6E-03	1.1E-02	1.2E-02	1.4E-02	1.5E-02
2702	6.3E-04	2.8E-03	4.4E-03	4.3E-03	3.7E-03	3.3E-03	1.8E-03	1.7E-02	1.7E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02
2703	6.4E-04	2.7E-03	4.5E-03	3.7E-03	3.2E-03	2.3E-03	1.9E-03	2.3E-02	2.3E-02	2.3E-02	2.4E-02	2.5E-02	2.6E-02
2704	6.0E-04	2.4E-03	4.2E-03	4.6E-03	3.1E-03	2.2E-03	1.8E-03	2.3E-02	2.4E-02	2.6E-02	2.7E-02	2.9E-02	3.1E-02
2705	6.0E-04	2.0E-03	3.8E-03	5.0E-03	3.4E-03	2.1E-03	1.8E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.1E-02	3.6E-02
2706	5.5E-04	2.0E-03	3.2E-03	4.8E-03	4.0E-03	2.9E-03	2.0E-03	1.1E-02	1.5E-02	2.1E-02	2.7E-02	3.3E-02	3.9E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2707	5.4E-04	1.0E-03	2.0E-03	2.8E-03	5.5E-03	6.2E-03	3.2E-03	6.3E-03	7.6E-03	1.0E-02	1.3E-02	1.5E-02	1.8E-02
2708	5.9E-04	1.0E-03	1.9E-03	2.9E-03	6.6E-03	7.4E-03	3.3E-03	9.1E-03	9.0E-03	1.0E-02	1.1E-02	1.2E-02	1.3E-02
2709	6.0E-04	1.2E-03	2.0E-03	2.9E-03	5.2E-03	5.4E-03	2.5E-03	-3.0E-03	-2.4E-04	3.6E-03	7.5E-03	1.1E-02	1.5E-02
2710	5.5E-04	1.2E-03	2.2E-03	2.9E-03	7.4E-03	8.5E-03	3.2E-03	-1.6E-03	1.1E-03	4.9E-03	8.6E-03	1.2E-02	1.6E-02
2711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2713	6.1E-04	2.6E-03	4.2E-03	4.0E-03	3.4E-03	3.4E-03	1.7E-03	1.6E-02	1.7E-02	1.8E-02	2.0E-02	2.2E-02	2.3E-02
2714	6.2E-04	2.5E-03	4.3E-03	3.6E-03	3.0E-03	2.7E-03	1.8E-03	2.2E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02
2715	5.8E-04	2.3E-03	3.9E-03	4.2E-03	3.0E-03	2.0E-03	1.7E-03	2.3E-02	2.3E-02	2.5E-02	2.6E-02	2.8E-02	2.9E-02
2716	5.8E-04	1.9E-03	3.6E-03	4.6E-03	3.2E-03	2.8E-03	1.7E-03	1.4E-02	1.7E-02	2.1E-02	2.6E-02	3.0E-02	3.4E-02
2717	5.6E-04	1.2E-03	2.1E-03	2.8E-03	5.5E-03	5.0E-03	2.4E-03	-3.1E-03	-3.7E-04	3.5E-03	7.3E-03	1.1E-02	1.5E-02
2718	5.4E-04	1.2E-03	2.2E-03	2.8E-03	6.6E-03	7.3E-03	3.0E-03	-5.1E-04	2.2E-03	5.8E-03	9.4E-03	1.3E-02	1.7E-02
2719	5.6E-04	1.2E-03	2.3E-03	2.8E-03	5.1E-03	6.1E-03	2.5E-03	-1.8E-03	3.6E-04	3.6E-03	6.8E-03	1.0E-02	1.3E-02
2720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2725	3.8E-04	1.3E-03	2.9E-03	3.9E-03	4.3E-03	5.4E-03	1.9E-03	2.0E-02	1.5E-02	1.2E-02	8.2E-03	4.6E-03	1.1E-03
2726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2727	4.5E-04	1.7E-03	3.1E-03	4.3E-03	3.8E-03	5.2E-03	1.8E-03	7.7E-03	1.0E-02	1.4E-02	1.8E-02	2.1E-02	2.5E-02
2728	5.1E-04	2.0E-03	3.2E-03	4.3E-03	3.6E-03	4.3E-03	1.7E-03	1.1E-02	1.2E-02	1.4E-02	1.5E-02	1.7E-02	1.9E-02
2729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2730	5.9E-04	2.4E-03	4.1E-03	3.4E-03	2.9E-03	2.8E-03	1.8E-03	2.0E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.3E-02
2731	5.5E-04	2.2E-03	3.7E-03	3.9E-03	2.8E-03	2.7E-03	1.6E-03	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.7E-02	2.8E-02
2732	5.5E-04	1.8E-03	3.4E-03	4.4E-03	3.0E-03	2.8E-03	1.6E-03	1.6E-02	1.8E-02	2.2E-02	2.5E-02	2.8E-02	3.2E-02
2733	5.4E-04	1.2E-03	2.3E-03	2.7E-03	4.9E-03	5.9E-03	2.2E-03	-2.3E-03	-4.4E-04	2.5E-03	5.5E-03	8.4E-03	1.1E-02
2734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2743	5.6E-04	2.3E-03	3.8E-03	3.5E-03	3.1E-03	3.2E-03	1.6E-03	1.5E-02	1.5E-02	1.7E-02	1.9E-02	2.0E-02	2.2E-02
2744	5.7E-04	2.3E-03	3.9E-03	3.3E-03	2.7E-03	2.7E-03	1.7E-03	2.0E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02
2745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2751	4.2E-04	1.7E-03	2.9E-03	4.0E-03	3.4E-03	3.9E-03	1.7E-03	7.4E-03	9.9E-03	1.3E-02	1.7E-02	2.1E-02	2.4E-02
2752	4.9E-04	1.9E-03	3.0E-03	3.9E-03	3.2E-03	3.6E-03	1.5E-03	9.8E-03	1.1E-02	1.3E-02	1.5E-02	1.7E-02	1.9E-02
2753	5.5E-04	2.2E-03	3.6E-03	3.3E-03	2.9E-03	2.9E-03	1.6E-03	1.4E-02	1.5E-02	1.6E-02	1.8E-02	2.0E-02	2.1E-02
2754	3.9E-04	1.1E-03	1.3E-03	1.2E-03	1.3E-03	1.0E-03	9.9E-04	-1.7E-02	-1.4E-02	-1.2E-02	-9.2E-03	-6.7E-03	-4.2E-03
2755	3.4E-04	8.5E-04	1.1E-03	9.7E-04	9.0E-04	8.1E-04	8.1E-04	-1.4E-02	-1.2E-02	-9.2E-03	-6.6E-03	-4.0E-03	-1.5E-03
2756	2.8E-04	7.9E-04	9.8E-04	8.0E-04	7.3E-04	6.5E-04	6.4E-04	-1.1E-02	-8.7E-03	-6.2E-03	-3.8E-03	-1.3E-03	1.2E-03
2757	5.1E-04	1.0E-03	1.1E-03	1.0E-03	8.5E-04	7.6E-04	7.6E-04	-4.2E-03	-5.7E-03	-6.9E-03	-8.1E-03	-9.4E-03	-1.1E-02
2758	5.2E-04	9.0E-04	9.8E-04	1.1E-03	9.7E-04	8.8E-04	8.8E-04	-5.9E-03	-7.0E-03	-7.9E-03	-8.8E-03	-9.8E-03	-1.1E-02
2759	4.5E-04	7.9E-04	8.6E-04	1.1E-03	1.0E-03	8.9E-04	8.9E-04	-6.7E-03	-7.4E-03	-8.0E-03	-8.6E-03	-9.1E-03	-9.7E-03
2760	4.8E-04	8.2E-04	1.0E-03	1.2E-03	1.0E-03	9.5E-04	9.5E-04	-1.1E-02	-1.0E-02	-9.9E-03	-9.5E-03	-9.1E-03	-8.7E-03
2761	4.1E-04	7.2E-04	8.8E-04	1.1E-03	1.2E-03	9.2E-04	9.2E-04	-1.1E-02	-1.1E-02	-1.0E-02	-9.5E-03	-8.9E-03	-8.3E-03
2762	4.5E-04	1.0E-03	1.2E-03	1.2E-03	1.1E-03	9.8E-04	9.7E-04	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.2E-03	-6.1E-03
2763	3.9E-04	8.0E-04	1.0E-03	1.2E-03	1.3E-03	9.5E-04	9.5E-04	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.1E-03	-6.1E-03
2764	4.1E-04	1.2E-03	1.4E-03	1.3E-03	1.3E-03	1.0E-03	1.0E-03	-1.7E-02	-1.5E-02	-1.2E-02	-9.9E-03	-7.3E-03	-4.8E-03
2765	3.6E-04	9.4E-04	1.2E-03	1.2E-03	1.3E-03	1.0E-03	9.9E-04	-1.6E-02	-1.4E-02	-1.2E-02	-9.8E-03	-7.5E-03	-5.2E-03
2766	1.3E-03	1.6E-03	8.3E-04	6.8E-04	8.8E-04	1.2E-03	6.6E-04	-1.3E-03	-9.1E-04	-8.3E-05	7.4E-04	1.6E-03	2.4E-03
2767	1.1E-03	1.4E-03	7.0E-04	7.8E-04	6.8E-04	7.6E-04	6.1E-04	-3.2E-03	-4.2E-03	-4.9E-03	-5.6E-03	-6.3E-03	-7.0E-03
2768	8.4E-04	1.1E-03	9.8E-04	8.3E-04	7.5E-04	6.8E-04	6.8E-04	-5.7E-03	-6.6E-03	-7.2E-03	-7.8E-03	-8.4E-03	-8.9E-03
2769	5.9E-04	1.1E-03	1.1E-03	9.4E-04	7.8E-04	7.1E-04	7.1E-04	-5.1E-03	-6.3E-03	-7.1E-03	-8.0E-03	-8.9E-03	-9.8E-03
2770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2772	1.3E-03	1.7E-03	1.6E-03	8.4E-04	9.5E-04	7.8E-04	7.3E-04	-1.1E-02	-1.0E-02	-9.3E-03	-8.5E-03	-7.6E-03	-6.7E-03
2773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2774	1.9E-03	2.2E-03	1.1E-03	7.9E-04	9.4E-04	8.5E-04	5.4E-04	-1.3E-02	-1.2E-02	-1.1E-02	-9.6E-03	-8.4E-03	-7.2E-03
2775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2776	1.9E-03	2.3E-03	1.3E-03	7.5E-04	9.3E-04	9.2E-04	4.9E-04	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.3E-02	-1.2E-02
2777	2.1E-03	2.5E-03	1.3E-03	7.9E-04	1.0E-03	8.0E-04	5.2E-04	-1.6E-02	-1.6E-02	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02
2778	1.2E-03	1.6E-03	1.2E-03	6.8E-04	7.6E-04	1.0E-03	4.5E-04	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02
2779	1.7E-03	2.1E-03	1.3E-03	7.1E-04	9.0E-04	9.8E-04	4.8E-04	-1.5E-02	-1.6E-02	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02
2780	7.9E-04	1.2E-03	1.1E-03	6.8E-04	7.6E-04	1.1E-03	5.2E-04	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02
2781	1.2E-03	1.7E-03	1.3E-03	6.9E-04	8.8E-04	1.1E-03	5.3E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02
2782	7.5E-04	8.6E-04	8.6E-04	7.1E-04	7.7E-04	1.1E-03	5.8E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02
2783	8.1E-04	1.2E-03	1.1E-03	7.4E-04	8.5E-04	1.1E-03	6.0E-04	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.3E-02
2784	8.0E-04	8.7E-04	9.4E-04	6.9E-04	7.1E-04	9.4E-04	5.9E-04	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
2785	8.9E-04	9.6E-04	1.0E-03	7.3E-04	7.9E-04	1.1E-03	6.1E-04	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02
2786	1.0E-03	1.1E-03	1.1E-03	7.7E-04	8.4E-04	1.2E-03	6.5E-04	-9.9E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02
2787	7.9E-04	8.6E-04	1.0E-03	6.9E-04	6.9E-04	8.9E-04	5.9E-04	-8.7E-03	-8.9E-03	-8.7E-03	-8.5E-03	-8.3E-03	-8.2E-03
2788	9.0E-04	9.7E-04	1.1E-03	7.2E-04	7.9E-04	1.1E-03	6.2E-04	-8.6E-03	-8.6E-03	-8.3E-03	-8.1E-03	-7.8E-03	-7.5E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2789	1.1E-03	1.1E-03	1.3E-03	7.7E-04	8.6E-04	1.2E-03	6.7E-04	-8.7E-03	-8.7E-03	-8.3E-03	-8.0E-03	-7.6E-03	-7.2E-03
2790	7.0E-04	8.5E-04	9.7E-04	6.6E-04	7.1E-04	8.4E-04	5.9E-04	-6.4E-03	-6.3E-03	-5.9E-03	-5.4E-03	-4.9E-03	-4.5E-03
2791	8.0E-04	9.4E-04	1.1E-03	6.9E-04	7.7E-04	1.0E-03	6.2E-04	-6.4E-03	-6.2E-03	-5.7E-03	-5.1E-03	-4.6E-03	-4.0E-03
2792	9.4E-04	1.1E-03	1.2E-03	7.4E-04	8.8E-04	1.2E-03	6.5E-04	-6.5E-03	-6.2E-03	-5.5E-03	-4.9E-03	-4.2E-03	-3.5E-03
2793	8.1E-04	1.1E-03	8.3E-04	6.1E-04	7.1E-04	7.6E-04	6.1E-04	-3.2E-03	-2.9E-03	-2.2E-03	-1.5E-03	-8.1E-04	-1.2E-04
2794	9.4E-04	1.2E-03	9.0E-04	6.5E-04	7.5E-04	9.8E-04	6.3E-04	-3.2E-03	-2.8E-03	-2.0E-03	-1.1E-03	-2.8E-04	5.5E-04
2795	9.5E-04	1.2E-03	6.5E-04	6.4E-04	6.8E-04	6.7E-04	5.9E-04	-1.7E-03	-1.1E-03	-1.2E-04	8.5E-04	1.8E-03	2.8E-03
2796	1.1E-03	1.4E-03	6.9E-04	6.7E-04	7.1E-04	9.1E-04	6.2E-04	-1.8E-03	-1.1E-03	-2.7E-05	1.1E-03	2.2E-03	3.3E-03
2797	1.0E-03	1.3E-03	5.8E-04	7.1E-04	6.2E-04	5.8E-04	5.4E-04	-3.3E-03	-2.8E-03	-2.0E-03	-1.1E-03	-3.0E-04	5.4E-04
2798	9.6E-04	1.2E-03	5.9E-04	7.6E-04	6.6E-04	6.0E-04	6.0E-04	-2.7E-03	-3.4E-03	-3.8E-03	-4.3E-03	-4.7E-03	-5.1E-03
2799	7.8E-04	1.1E-03	7.5E-04	8.0E-04	7.2E-04	6.5E-04	6.5E-04	-3.2E-03	-4.2E-03	-4.9E-03	-5.6E-03	-6.3E-03	-7.0E-03
2800	5.7E-04	8.5E-04	9.2E-04	9.0E-04	7.4E-04	6.7E-04	6.7E-04	-4.5E-03	-5.4E-03	-6.1E-03	-6.8E-03	-7.5E-03	-8.2E-03
2801	4.5E-04	9.3E-04	1.0E-03	9.9E-04	8.1E-04	7.3E-04	7.3E-04	-3.9E-03	-5.3E-03	-6.4E-03	-7.6E-03	-8.7E-03	-9.9E-03
2802	1.1E-03	1.4E-03	1.6E-03	2.2E-03	2.1E-03	1.9E-03	1.9E-03	-1.6E-02	-1.3E-02	-8.7E-03	-4.7E-03	-7.1E-04	3.3E-03
2803	9.5E-04	1.1E-03	1.6E-03	2.2E-03	2.1E-03	1.9E-03	1.9E-03	-1.7E-02	-1.4E-02	-1.0E-02	-6.7E-03	-3.0E-03	7.0E-04
2804	1.4E-03	1.6E-03	1.6E-03	2.1E-03	2.1E-03	1.9E-03	1.9E-03	-1.4E-02	-1.0E-02	-6.3E-03	-2.4E-03	1.6E-03	5.5E-03
2805	1.8E-03	2.0E-03	2.0E-03	1.8E-03	1.9E-03	1.7E-03	1.6E-03	-1.4E-02	-1.0E-02	-5.2E-03	-3.8E-04	4.4E-03	9.3E-03
2806	1.6E-03	1.8E-03	1.6E-03	2.0E-03	2.1E-03	1.9E-03	1.8E-03	-1.5E-02	-1.1E-02	-5.5E-03	-4.5E-04	4.6E-03	9.6E-03
2807	1.6E-03	2.3E-03	2.4E-03	1.4E-03	1.4E-03	1.2E-03	1.2E-03	-1.7E-02	-1.3E-02	-8.7E-03	-4.2E-03	3.6E-04	4.9E-03
2808	2.0E-03	2.2E-03	2.3E-03	1.7E-03	1.7E-03	1.5E-03	1.4E-03	-1.7E-02	-1.3E-02	-8.3E-03	-3.5E-03	1.2E-03	5.9E-03
2809	8.3E-04	1.9E-03	1.9E-03	1.1E-03	1.3E-03	9.1E-04	8.5E-04	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.8E-03	-5.2E-03
2810	1.1E-03	1.6E-03	1.6E-03	9.0E-04	1.2E-03	8.5E-04	8.0E-04	-1.3E-02	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.3E-03
2811	1.5E-03	1.9E-03	1.2E-03	8.0E-04	1.2E-03	9.7E-04	6.4E-04	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
2812	1.3E-03	1.8E-03	1.1E-03	7.0E-04	7.1E-04	1.0E-03	4.5E-04	-1.3E-02	-1.2E-02	-1.1E-02	-9.9E-03	-8.9E-03	-7.8E-03
2813	5.7E-04	7.2E-04	7.4E-04	5.6E-04	6.4E-04	5.7E-04	5.4E-04	-5.1E-03	-5.0E-03	-4.5E-03	-4.1E-03	-3.7E-03	-3.3E-03
2814	6.3E-04	8.0E-04	8.1E-04	5.9E-04	6.8E-04	6.0E-04	5.7E-04	-4.9E-03	-4.8E-03	-4.3E-03	-3.8E-03	-3.3E-03	-2.8E-03
2815	5.6E-04	7.8E-04	5.8E-04	5.3E-04	5.9E-04	5.3E-04	5.0E-04	-2.6E-03	-2.3E-03	-1.7E-03	-1.1E-03	-4.9E-04	1.0E-04
2816	6.5E-04	8.8E-04	6.2E-04	5.5E-04	6.2E-04	5.6E-04	5.3E-04	-2.3E-03	-2.0E-03	-1.3E-03	-6.9E-04	-4.2E-05	6.0E-04
2817	7.4E-04	9.8E-04	6.5E-04	5.7E-04	6.5E-04	5.9E-04	5.5E-04	-2.0E-03	-1.7E-03	-1.0E-03	-3.3E-04	3.3E-04	1.0E-03
2818	6.5E-04	8.7E-04	4.7E-04	5.8E-04	5.4E-04	5.0E-04	4.7E-04	-8.1E-04	-7.7E-04	-4.3E-04	-9.1E-05	2.5E-04	5.9E-04
2819	7.2E-04	9.5E-04	4.8E-04	6.1E-04	5.7E-04	5.2E-04	4.9E-04	-1.4E-03	-1.1E-03	-5.0E-04	9.2E-05	6.8E-04	1.3E-03
2820	8.2E-04	1.1E-03	5.1E-04	6.4E-04	6.0E-04	5.5E-04	5.2E-04	-2.0E-03	-1.4E-03	-5.4E-04	3.4E-04	1.2E-03	2.1E-03
2821	6.9E-04	9.1E-04	5.0E-04	6.4E-04	5.8E-04	4.8E-04	4.7E-04	-3.1E-03	-2.6E-03	-1.8E-03	-9.7E-04	-1.6E-04	6.5E-04
2822	7.8E-04	1.0E-03	5.2E-04	6.7E-04	5.6E-04	5.0E-04	5.0E-04	-3.5E-03	-3.0E-03	-2.2E-03	-1.3E-03	-5.2E-04	3.1E-04
2823	8.8E-04	1.1E-03	5.4E-04	7.0E-04	5.9E-04	5.3E-04	5.3E-04	-3.8E-03	-3.4E-03	-2.6E-03	-1.8E-03	-1.0E-03	-2.5E-04
2824	7.1E-04	9.5E-04	5.2E-04	6.7E-04	6.9E-04	5.3E-04	5.3E-04	-3.7E-03	-3.4E-03	-2.9E-03	-2.4E-03	-1.8E-03	-1.3E-03
2825	7.8E-04	1.0E-03	5.6E-04	7.1E-04	6.2E-04	5.6E-04	5.6E-04	-3.5E-03	-3.4E-03	-3.1E-03	-2.8E-03	-2.4E-03	-2.1E-03
2826	8.4E-04	1.1E-03	5.9E-04	7.4E-04	6.6E-04	6.0E-04	5.9E-04	-2.3E-03	-3.0E-03	-3.4E-03	-3.8E-03	-4.2E-03	-4.6E-03
2827	6.6E-04	9.0E-04	5.8E-04	7.0E-04	8.0E-04	5.6E-04	5.6E-04	-1.8E-03	-2.2E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.2E-03
2828	7.0E-04	9.5E-04	6.2E-04	7.6E-04	7.4E-04	6.0E-04	6.0E-04	-3.3E-04	-1.4E-03	-2.3E-03	-3.2E-03	-4.1E-03	-4.9E-03
2829	7.1E-04	9.8E-04	6.6E-04	8.1E-04	7.0E-04	6.3E-04	6.3E-04	-1.3E-03	-2.4E-03	-3.4E-03	-4.3E-03	-5.2E-03	-6.1E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2830	5.6E-04	8.0E-04	6.3E-04	7.8E-04	9.0E-04	5.7E-04	5.7E-04	8.3E-04	-1.7E-04	-1.0E-03	-1.8E-03	-2.7E-03	-3.5E-03
2831	5.7E-04	8.1E-04	6.7E-04	8.4E-04	8.7E-04	6.1E-04	6.1E-04	-1.2E-03	-2.1E-03	-2.8E-03	-3.6E-03	-4.3E-03	-5.1E-03
2832	5.3E-04	7.8E-04	7.6E-04	8.9E-04	7.7E-04	6.3E-04	6.3E-04	-3.6E-03	-4.4E-03	-4.9E-03	-5.5E-03	-6.1E-03	-6.6E-03
2833	4.5E-04	6.7E-04	6.7E-04	8.4E-04	9.5E-04	6.1E-04	6.0E-04	-1.5E-03	-2.2E-03	-2.8E-03	-3.4E-03	-3.9E-03	-4.5E-03
2834	4.5E-04	6.8E-04	7.4E-04	9.2E-04	9.9E-04	6.7E-04	6.7E-04	-2.9E-03	-3.8E-03	-4.5E-03	-5.3E-03	-6.0E-03	-6.8E-03
2835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2836	3.7E-04	5.9E-04	7.1E-04	9.1E-04	1.0E-03	6.9E-04	6.9E-04	-2.0E-03	-3.2E-03	-4.2E-03	-5.2E-03	-6.2E-03	-7.2E-03
2837	3.5E-04	7.1E-04	7.8E-04	9.7E-04	1.1E-03	7.5E-04	7.4E-04	-2.3E-03	-3.8E-03	-5.2E-03	-6.5E-03	-7.8E-03	-9.2E-03
2838	3.7E-04	7.8E-04	8.5E-04	1.0E-03	1.0E-03	8.0E-04	7.9E-04	-2.5E-03	-4.2E-03	-5.7E-03	-7.2E-03	-8.7E-03	-1.0E-02
2839	3.3E-04	6.6E-04	7.6E-04	9.6E-04	1.0E-03	7.6E-04	7.6E-04	-1.5E-03	-3.1E-03	-4.6E-03	-6.1E-03	-7.5E-03	-9.0E-03
2840	3.4E-04	7.2E-04	8.0E-04	1.0E-03	1.1E-03	8.1E-04	8.1E-04	-2.9E-03	-4.4E-03	-5.7E-03	-7.0E-03	-8.3E-03	-9.6E-03
2841	3.9E-04	7.1E-04	8.2E-04	1.0E-03	1.2E-03	8.6E-04	8.5E-04	-5.6E-03	-6.5E-03	-7.2E-03	-7.9E-03	-8.6E-03	-9.3E-03
2842	3.1E-04	6.5E-04	7.8E-04	9.9E-04	9.6E-04	8.0E-04	7.9E-04	-3.8E-03	-5.0E-03	-5.9E-03	-6.8E-03	-7.7E-03	-8.6E-03
2843	3.5E-04	6.4E-04	8.2E-04	1.0E-03	1.1E-03	8.4E-04	8.3E-04	-6.4E-03	-7.0E-03	-7.3E-03	-7.6E-03	-8.0E-03	-8.3E-03
2844	3.7E-04	6.7E-04	8.6E-04	1.1E-03	1.2E-03	8.7E-04	8.7E-04	-9.3E-03	-9.4E-03	-9.2E-03	-9.1E-03	-8.9E-03	-8.8E-03
2845	3.1E-04	5.8E-04	8.3E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-7.3E-03	-7.5E-03	-7.6E-03	-7.6E-03	-7.7E-03	-7.7E-03
2846	3.3E-04	6.1E-04	8.6E-04	1.1E-03	1.0E-03	8.5E-04	8.5E-04	-1.0E-02	-9.9E-03	-9.6E-03	-9.3E-03	-9.0E-03	-8.8E-03
2847	3.5E-04	6.0E-04	9.0E-04	1.1E-03	1.2E-03	9.1E-04	9.0E-04	-1.4E-02	-1.3E-02	-1.1E-02	-1.0E-02	-8.8E-03	-7.5E-03
2848	3.2E-04	5.6E-04	8.6E-04	1.1E-03	9.5E-04	8.6E-04	8.5E-04	-1.0E-02	-1.0E-02	-9.7E-03	-9.5E-03	-9.2E-03	-8.9E-03
2849	3.3E-04	5.6E-04	9.0E-04	1.1E-03	9.9E-04	9.0E-04	9.0E-04	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.0E-03	-8.0E-03
2850	3.5E-04	6.4E-04	9.3E-04	1.2E-03	1.1E-03	9.4E-04	9.4E-04	-1.5E-02	-1.4E-02	-1.2E-02	-9.8E-03	-7.9E-03	-6.0E-03
2851	3.5E-04	5.3E-04	9.1E-04	1.1E-03	1.0E-03	9.1E-04	9.1E-04	-1.5E-02	-1.3E-02	-1.1E-02	-9.4E-03	-7.7E-03	-5.9E-03
2852	3.6E-04	7.7E-04	9.7E-04	1.1E-03	1.0E-03	9.4E-04	9.4E-04	-1.6E-02	-1.4E-02	-1.1E-02	-8.9E-03	-6.6E-03	-4.2E-03
2853	3.5E-04	6.4E-04	9.1E-04	1.1E-03	9.8E-04	8.9E-04	8.9E-04	-1.5E-02	-1.3E-02	-1.1E-02	-8.5E-03	-6.2E-03	-3.9E-03
2854	6.7E-04	1.3E-03	1.8E-03	1.8E-03	1.1E-03	9.4E-04	8.9E-04	-4.2E-03	-2.2E-03	3.6E-04	2.9E-03	5.4E-03	7.9E-03
2855	9.9E-04	1.3E-03	1.7E-03	2.3E-03	1.4E-03	1.1E-03	1.0E-03	-6.4E-03	-4.2E-03	-1.5E-03	1.3E-03	4.0E-03	6.8E-03
2856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2857	8.5E-04	1.2E-03	1.8E-03	1.7E-03	1.3E-03	1.1E-03	1.1E-03	-5.3E-03	-4.6E-03	-3.5E-03	-2.3E-03	-1.2E-03	-3.6E-05
2858	7.0E-04	1.3E-03	1.9E-03	1.7E-03	1.1E-03	9.6E-04	9.0E-04	-4.2E-03	-2.9E-03	-1.1E-03	7.2E-04	2.5E-03	4.4E-03
2859	1.0E-03	1.4E-03	2.0E-03	2.0E-03	1.3E-03	1.0E-03	9.5E-04	-4.6E-03	-2.8E-03	-4.8E-04	1.8E-03	4.2E-03	6.5E-03
2860	7.7E-04	1.0E-03	1.6E-03	1.9E-03	1.7E-03	1.5E-03	1.5E-03	-1.2E-02	-1.1E-02	-9.1E-03	-7.6E-03	-6.1E-03	-4.6E-03
2861	7.6E-04	9.7E-04	1.7E-03	1.8E-03	1.5E-03	1.3E-03	1.3E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.1E-03	-8.1E-03	-7.2E-03
2862	7.3E-04	1.2E-03	1.9E-03	1.7E-03	1.3E-03	1.1E-03	1.1E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.1E-03	-8.2E-03	-7.2E-03
2863	1.1E-03	1.5E-03	2.1E-03	1.9E-03	1.2E-03	1.0E-03	9.7E-04	-8.0E-03	-7.9E-03	-7.2E-03	-6.5E-03	-5.8E-03	-5.1E-03
2864	1.2E-03	1.4E-03	1.6E-03	2.0E-03	1.9E-03	1.7E-03	1.7E-03	-1.4E-02	-1.1E-02	-8.7E-03	-5.9E-03	-3.2E-03	-4.9E-04
2865	8.7E-04	1.1E-03	1.6E-03	2.0E-03	1.9E-03	1.7E-03	1.7E-03	-1.4E-02	-1.2E-02	-1.0E-02	-8.1E-03	-5.9E-03	-3.7E-03
2866	8.3E-04	9.4E-04	1.6E-03	2.0E-03	1.8E-03	1.6E-03	1.6E-03	-1.5E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.8E-03	-7.2E-03
2867	7.5E-04	9.7E-04	1.8E-03	1.9E-03	1.6E-03	1.4E-03	1.4E-03	-1.6E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02
2868	1.9E-03	2.0E-03	1.7E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.1E-02	-7.2E-03	-3.8E-03	-4.6E-04	2.9E-03
2869	1.3E-03	1.5E-03	1.6E-03	2.1E-03	2.0E-03	1.8E-03	1.8E-03	-1.5E-02	-1.2E-02	-8.2E-03	-4.6E-03	-9.1E-04	2.7E-03
2870	1.9E-03	2.1E-03	2.1E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.0E-02	-6.5E-03	-3.1E-03	3.6E-04	3.8E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2871	1.5E-03	1.7E-03	1.6E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	-1.4E-02	-1.0E-02	-6.9E-03	-3.3E-03	2.7E-04	3.9E-03
2872	1.8E-03	2.2E-03	2.3E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	-1.1E-02	-8.0E-03	-4.3E-03	-7.2E-04	2.9E-03	6.5E-03
2873	4.2E-04	1.1E-03	1.8E-03	2.3E-03	2.1E-03	1.7E-03	1.6E-03	-5.1E-03	-7.0E-03	-7.9E-03	-8.9E-03	-9.9E-03	-1.1E-02
2874	4.5E-04	1.2E-03	2.1E-03	2.3E-03	2.3E-03	1.8E-03	1.7E-03	-7.8E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
2875	5.7E-04	1.2E-03	2.2E-03	2.3E-03	2.4E-03	1.8E-03	1.7E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02
2876	6.3E-04	1.2E-03	2.3E-03	2.2E-03	2.5E-03	1.8E-03	1.7E-03	-1.2E-02	-1.5E-02	-1.6E-02	-1.8E-02	-2.0E-02	-2.1E-02
2877	6.2E-04	1.1E-03	2.3E-03	2.3E-03	2.4E-03	1.7E-03	1.6E-03	-9.9E-03	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.7E-02
2878	5.7E-04	1.1E-03	2.4E-03	2.5E-03	2.4E-03	1.8E-03	1.8E-03	-1.4E-02	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.2E-02
2879	5.7E-04	1.2E-03	2.4E-03	2.7E-03	2.2E-03	1.8E-03	1.8E-03	-1.4E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02
2880	5.3E-04	1.3E-03	2.5E-03	2.8E-03	2.1E-03	1.7E-03	1.7E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.9E-03	-7.6E-03
2881	4.9E-04	1.4E-03	2.5E-03	2.9E-03	1.9E-03	1.6E-03	1.6E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.0E-02	-8.3E-03	-6.2E-03
2882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2885	4.6E-04	1.2E-03	1.8E-03	2.4E-03	2.0E-03	1.6E-03	1.5E-03	-4.6E-03	-6.2E-03	-6.9E-03	-7.6E-03	-8.2E-03	-8.9E-03
2886	4.6E-04	1.3E-03	2.1E-03	2.4E-03	2.3E-03	1.8E-03	1.7E-03	-6.3E-03	-8.3E-03	-9.3E-03	-1.0E-02	-1.1E-02	-1.2E-02
2887	5.9E-04	1.3E-03	2.2E-03	2.3E-03	2.4E-03	1.9E-03	1.8E-03	-9.4E-03	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02
2888	6.6E-04	1.2E-03	2.3E-03	2.3E-03	2.5E-03	1.9E-03	1.8E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.8E-02	-2.0E-02
2889	6.5E-04	1.2E-03	2.4E-03	2.2E-03	2.5E-03	1.8E-03	1.7E-03	-1.3E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.1E-02	-2.2E-02
2890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2891	5.9E-04	1.2E-03	2.4E-03	2.7E-03	2.4E-03	1.9E-03	1.9E-03	-1.5E-02	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02
2892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2895	4.6E-04	1.1E-03	1.8E-03	2.4E-03	2.0E-03	1.6E-03	1.5E-03	-5.6E-03	-6.7E-03	-6.9E-03	-7.1E-03	-7.2E-03	-7.4E-03
2896	4.7E-04	1.3E-03	2.1E-03	2.5E-03	2.3E-03	1.8E-03	1.7E-03	-4.4E-03	-6.3E-03	-7.2E-03	-8.2E-03	-9.1E-03	-1.0E-02
2897	6.2E-04	1.3E-03	2.2E-03	2.4E-03	2.4E-03	1.9E-03	1.8E-03	-7.8E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
2898	6.9E-04	1.3E-03	2.3E-03	2.4E-03	2.6E-03	2.0E-03	1.9E-03	-1.1E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02	-1.8E-02
2899	6.7E-04	1.2E-03	2.4E-03	2.3E-03	2.6E-03	1.9E-03	1.8E-03	-1.4E-02	-1.6E-02	-1.8E-02	-2.0E-02	-2.1E-02	-2.3E-02
2900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2905	3.8E-04	8.9E-04	1.5E-03	2.2E-03	1.6E-03	1.2E-03	1.1E-03	-9.0E-03	-9.5E-03	-9.4E-03	-9.3E-03	-9.2E-03	-9.1E-03
2906	3.9E-04	1.1E-03	1.7E-03	2.4E-03	1.9E-03	1.5E-03	1.4E-03	-7.6E-03	-8.7E-03	-9.0E-03	-9.3E-03	-9.6E-03	-9.9E-03
2907	5.0E-04	1.2E-03	1.9E-03	2.5E-03	2.2E-03	1.7E-03	1.6E-03	-4.8E-03	-6.2E-03	-6.6E-03	-6.9E-03	-7.3E-03	-7.7E-03
2908	6.5E-04	1.3E-03	2.2E-03	2.5E-03	2.4E-03	1.9E-03	1.8E-03	-5.9E-03	-7.9E-03	-8.8E-03	-9.7E-03	-1.1E-02	-1.2E-02
2909	7.2E-04	1.3E-03	2.4E-03	2.4E-03	2.6E-03	2.0E-03	1.9E-03	-9.8E-03	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02
2910	6.9E-04	1.3E-03	2.4E-03	2.3E-03	2.6E-03	2.0E-03	1.9E-03	-1.3E-02	-1.6E-02	-1.7E-02	-1.8E-02	-1.9E-02	-2.1E-02
2911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2915	4.1E-04	8.4E-04	1.4E-03	2.1E-03	1.5E-03	1.0E-03	9.8E-04	-8.8E-03	-8.6E-03	-7.9E-03	-7.2E-03	-6.5E-03	-5.8E-03
2916	4.0E-04	1.0E-03	1.7E-03	2.3E-03	1.8E-03	1.3E-03	1.3E-03	-8.7E-03	-9.5E-03	-9.6E-03	-9.7E-03	-9.7E-03	-9.8E-03
2917	5.2E-04	1.2E-03	1.9E-03	2.6E-03	2.1E-03	1.6E-03	1.5E-03	-6.5E-03	-8.0E-03	-8.6E-03	-9.2E-03	-9.8E-03	-1.0E-02
2918	6.9E-04	1.4E-03	2.2E-03	2.6E-03	2.4E-03	1.9E-03	1.8E-03	-4.4E-03	-6.1E-03	-6.8E-03	-7.5E-03	-8.2E-03	-8.9E-03
2919	7.6E-04	1.4E-03	2.4E-03	2.6E-03	2.6E-03	2.1E-03	2.0E-03	-7.7E-03	-9.8E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
2920	7.1E-04	1.3E-03	2.4E-03	2.4E-03	2.7E-03	2.1E-03	2.0E-03	-1.2E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02	-1.8E-02
2921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2925	4.4E-04	8.0E-04	1.3E-03	2.0E-03	1.4E-03	9.3E-04	8.7E-04	-8.4E-03	-7.4E-03	-5.9E-03	-4.4E-03	-2.9E-03	-1.5E-03
2926	4.2E-04	9.4E-04	1.6E-03	2.3E-03	1.6E-03	1.2E-03	1.1E-03	-9.8E-03	-9.6E-03	-8.7E-03	-7.9E-03	-7.0E-03	-6.1E-03
2927	5.4E-04	1.2E-03	1.9E-03	2.6E-03	2.0E-03	1.5E-03	1.4E-03	-8.5E-03	-9.6E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.1E-02
2928	7.2E-04	1.4E-03	2.2E-03	2.7E-03	2.3E-03	1.9E-03	1.7E-03	-5.4E-03	-7.2E-03	-8.0E-03	-8.8E-03	-9.5E-03	-1.0E-02
2929	8.0E-04	1.5E-03	2.4E-03	2.7E-03	2.6E-03	2.1E-03	1.9E-03	-4.6E-03	-6.7E-03	-7.7E-03	-8.6E-03	-9.6E-03	-1.1E-02
2930	7.5E-04	1.4E-03	2.5E-03	2.5E-03	2.7E-03	2.2E-03	2.0E-03	-1.0E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02
2931	6.4E-04	1.3E-03	2.5E-03	2.4E-03	2.8E-03	2.2E-03	2.0E-03	-1.4E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.1E-02
2932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2937	5.1E-04	8.3E-04	1.1E-03	1.6E-03	1.0E-03	7.9E-04	7.4E-04	-5.2E-03	-3.5E-03	-1.3E-03	9.4E-04	3.1E-03	5.3E-03
2938	4.8E-04	7.7E-04	1.2E-03	1.9E-03	1.2E-03	9.0E-04	8.4E-04	-7.7E-03	-6.0E-03	-3.8E-03	-1.5E-03	6.7E-04	2.9E-03
2939	4.4E-04	8.8E-04	1.5E-03	2.2E-03	1.5E-03	1.1E-03	1.0E-03	-9.4E-03	-8.2E-03	-6.4E-03	-4.7E-03	-2.9E-03	-1.2E-03
2940	5.5E-04	1.1E-03	1.8E-03	2.5E-03	1.9E-03	1.4E-03	1.3E-03	-1.1E-02	-1.1E-02	-9.6E-03	-8.5E-03	-7.4E-03	-6.3E-03
2941	7.6E-04	1.4E-03	2.1E-03	2.8E-03	2.2E-03	1.8E-03	1.6E-03	-8.8E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02
2942	8.6E-04	1.5E-03	2.5E-03	2.8E-03	2.5E-03	2.1E-03	1.9E-03	-4.5E-03	-6.5E-03	-7.3E-03	-8.1E-03	-8.8E-03	-9.6E-03
2943	7.9E-04	1.5E-03	2.6E-03	2.7E-03	2.7E-03	2.2E-03	2.1E-03	-6.5E-03	-8.8E-03	-9.8E-03	-1.1E-02	-1.2E-02	-1.3E-02
2944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2948	5.6E-04	9.2E-04	1.3E-03	1.2E-03	9.1E-04	7.4E-04	7.0E-04	-2.2E-03	-2.0E-04	2.2E-03	4.6E-03	7.1E-03	9.5E-03
2949	5.3E-04	9.2E-04	1.3E-03	1.5E-03	9.6E-04	7.7E-04	7.3E-04	-3.5E-03	-1.6E-03	7.1E-04	3.0E-03	5.3E-03	7.6E-03
2950	5.2E-04	8.8E-04	1.2E-03	1.7E-03	1.1E-03	8.6E-04	8.1E-04	-5.9E-03	-4.0E-03	-1.6E-03	7.9E-04	3.2E-03	5.6E-03
2951	4.6E-04	8.3E-04	1.4E-03	2.1E-03	1.4E-03	9.8E-04	9.2E-04	-8.2E-03	-6.5E-03	-4.2E-03	-1.9E-03	3.5E-04	2.6E-03
2952	6.1E-04	9.0E-04	1.8E-03	2.5E-03	1.7E-03	1.3E-03	1.2E-03	-1.0E-02	-8.9E-03	-6.9E-03	-4.8E-03	-2.8E-03	-7.5E-04

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2953	9.1E-04	1.3E-03	2.2E-03	3.0E-03	2.1E-03	1.6E-03	1.5E-03	-1.2E-02	-1.2E-02	-1.0E-02	-9.0E-03	-7.6E-03	-6.2E-03
2954	9.1E-04	1.6E-03	2.4E-03	3.0E-03	2.5E-03	2.0E-03	1.9E-03	-9.3E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
2955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2960	7.8E-04	1.0E-03	1.4E-03	1.4E-03	1.0E-03	9.1E-04	9.1E-04	-2.8E-03	-1.3E-03	6.8E-04	2.6E-03	4.6E-03	6.5E-03
2961	6.4E-04	9.5E-04	1.4E-03	1.3E-03	9.0E-04	7.7E-04	7.7E-04	-3.1E-03	-1.1E-03	1.3E-03	3.7E-03	6.1E-03	8.5E-03
2962	6.7E-04	9.9E-04	1.4E-03	1.4E-03	9.7E-04	7.9E-04	7.4E-04	-2.2E-03	-2.1E-04	2.2E-03	4.6E-03	7.0E-03	9.5E-03
2963	5.5E-04	9.8E-04	1.3E-03	1.6E-03	1.0E-03	8.1E-04	7.6E-04	-3.6E-03	-1.6E-03	9.3E-04	3.4E-03	5.9E-03	8.4E-03
2964	4.9E-04	9.3E-04	1.3E-03	2.0E-03	1.3E-03	9.5E-04	8.9E-04	-6.3E-03	-4.3E-03	-1.7E-03	8.0E-04	3.3E-03	5.9E-03
2965	6.3E-04	9.0E-04	1.6E-03	2.4E-03	1.6E-03	1.1E-03	1.1E-03	-8.8E-03	-7.1E-03	-4.8E-03	-2.6E-03	-2.7E-04	2.0E-03
2966	9.4E-04	1.2E-03	2.0E-03	2.8E-03	2.0E-03	1.5E-03	1.4E-03	-1.1E-02	-9.7E-03	-7.6E-03	-5.5E-03	-3.4E-03	-1.3E-03
2967	9.7E-04	1.6E-03	2.4E-03	3.1E-03	2.3E-03	1.9E-03	1.8E-03	-1.3E-02	-1.2E-02	-1.1E-02	-9.0E-03	-7.4E-03	-5.8E-03
2968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2972	8.6E-04	1.1E-03	1.5E-03	1.5E-03	1.2E-03	1.1E-03	1.1E-03	-2.3E-03	-8.4E-04	1.0E-03	2.9E-03	4.8E-03	6.6E-03
2973	7.3E-04	9.6E-04	1.5E-03	1.5E-03	1.1E-03	9.5E-04	9.5E-04	-3.1E-03	-1.5E-03	5.1E-04	2.5E-03	4.6E-03	6.6E-03
2974	5.9E-04	1.0E-03	1.5E-03	1.4E-03	9.6E-04	8.1E-04	8.1E-04	-2.9E-03	-9.6E-04	1.4E-03	3.8E-03	6.2E-03	8.6E-03
2975	6.0E-04	1.1E-03	1.5E-03	1.5E-03	1.0E-03	8.4E-04	7.9E-04	-2.8E-03	-7.4E-04	1.8E-03	4.4E-03	6.9E-03	9.4E-03
2976	6.0E-04	1.1E-03	1.4E-03	1.8E-03	1.1E-03	9.0E-04	8.4E-04	-3.9E-03	-1.8E-03	8.0E-04	3.4E-03	6.0E-03	8.6E-03
2977	6.6E-04	9.9E-04	1.4E-03	2.2E-03	1.4E-03	1.0E-03	9.8E-04	-6.9E-03	-4.7E-03	-2.0E-03	7.6E-04	3.5E-03	6.2E-03
2978	8.9E-04	1.1E-03	1.9E-03	2.7E-03	1.8E-03	1.3E-03	1.2E-03	-9.6E-03	-7.8E-03	-5.3E-03	-2.8E-03	-2.5E-04	2.3E-03
2979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2983	1.2E-03	1.4E-03	1.4E-03	1.7E-03	1.5E-03	1.3E-03	1.3E-03	-2.7E-03	-4.2E-04	2.2E-03	4.9E-03	7.6E-03	1.0E-02
2984	9.5E-04	1.2E-03	1.5E-03	1.7E-03	1.4E-03	1.3E-03	1.3E-03	-2.9E-03	-1.0E-03	1.3E-03	3.6E-03	5.9E-03	8.2E-03
2985	9.4E-04	1.2E-03	1.5E-03	1.6E-03	1.3E-03	1.1E-03	1.1E-03	-3.3E-03	-1.8E-03	2.2E-04	2.2E-03	4.2E-03	6.1E-03
2986	7.0E-04	1.0E-03	1.6E-03	1.5E-03	1.1E-03	1.0E-03	1.0E-03	-4.0E-03	-2.3E-03	-1.3E-04	2.0E-03	4.2E-03	6.4E-03
2987	6.4E-04	1.1E-03	1.6E-03	1.4E-03	1.0E-03	8.4E-04	8.3E-04	-3.2E-03	-1.3E-03	1.2E-03	3.6E-03	6.0E-03	8.4E-03
2988	6.8E-04	1.3E-03	1.7E-03	1.6E-03	1.1E-03	8.9E-04	8.4E-04	-3.5E-03	-1.4E-03	1.2E-03	3.8E-03	6.4E-03	9.0E-03
2989	7.5E-04	1.3E-03	1.7E-03	1.9E-03	1.3E-03	9.9E-04	9.3E-04	-5.3E-03	-3.1E-03	-2.2E-04	2.6E-03	5.5E-03	8.3E-03
2990	9.4E-04	1.1E-03	1.7E-03	2.5E-03	1.6E-03	1.1E-03	1.1E-03	-8.0E-03	-5.8E-03	-3.0E-03	-1.3E-04	2.7E-03	5.5E-03
2991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2993	1.3E-03	1.4E-03	1.5E-03	1.8E-03	1.6E-03	1.4E-03	1.4E-03	-3.8E-03	-1.7E-03	6.6E-04	3.0E-03	5.4E-03	7.8E-03

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2994	1.3E-03	1.5E-03	1.4E-03	1.7E-03	1.6E-03	1.4E-03	1.4E-03	-3.1E-03	-1.2E-03	9.8E-04	3.2E-03	5.4E-03	7.6E-03
2995	1.1E-03	1.3E-03	1.3E-03	1.6E-03	1.5E-03	1.3E-03	1.3E-03	-3.6E-03	-1.9E-03	2.0E-04	2.3E-03	4.4E-03	6.4E-03
2996	7.3E-04	1.0E-03	1.5E-03	1.6E-03	1.4E-03	1.2E-03	1.2E-03	-4.2E-03	-2.8E-03	-9.0E-04	9.8E-04	2.9E-03	4.7E-03
2997	6.8E-04	1.1E-03	1.7E-03	1.6E-03	1.2E-03	1.0E-03	1.0E-03	-5.2E-03	-3.5E-03	-1.3E-03	8.6E-04	3.0E-03	5.2E-03
2998	7.7E-04	1.3E-03	1.9E-03	1.5E-03	1.1E-03	9.1E-04	8.7E-04	-4.6E-03	-2.5E-03	8.0E-05	2.7E-03	5.3E-03	7.8E-03
2999	1.3E-03	1.6E-03	1.7E-03	1.8E-03	1.7E-03	1.5E-03	1.5E-03	-1.0E-02	-7.7E-03	-4.9E-03	-2.1E-03	6.9E-04	3.5E-03
3000	1.5E-03	1.7E-03	1.4E-03	1.8E-03	1.7E-03	1.5E-03	1.5E-03	-9.3E-03	-7.1E-03	-4.4E-03	-1.8E-03	7.9E-04	3.4E-03
3001	1.3E-03	1.5E-03	1.4E-03	1.8E-03	1.7E-03	1.5E-03	1.5E-03	-8.3E-03	-6.4E-03	-4.1E-03	-1.7E-03	5.7E-04	2.9E-03
3002	9.2E-04	1.2E-03	1.6E-03	1.8E-03	1.6E-03	1.4E-03	1.4E-03	-6.6E-03	-5.3E-03	-3.6E-03	-1.9E-03	-1.8E-04	1.5E-03
3003	7.3E-04	9.5E-04	1.7E-03	1.7E-03	1.4E-03	1.3E-03	1.3E-03	-5.0E-03	-4.5E-03	-3.5E-03	-2.6E-03	-1.6E-03	-6.3E-04
3004	1.3E-03	1.8E-03	2.0E-03	1.8E-03	1.7E-03	1.6E-03	1.6E-03	-1.1E-02	-8.7E-03	-5.9E-03	-3.2E-03	-4.9E-04	2.2E-03
3005	1.6E-03	1.8E-03	1.6E-03	1.8E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-9.6E-03	-6.8E-03	-4.0E-03	-1.3E-03	1.5E-03
3006	1.5E-03	1.7E-03	1.4E-03	1.9E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-1.0E-02	-7.6E-03	-5.1E-03	-2.5E-03	1.3E-05
3007	1.0E-03	1.2E-03	1.6E-03	1.9E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-1.0E-02	-8.4E-03	-6.4E-03	-4.3E-03	-2.3E-03
3008	1.1E-03	2.0E-03	2.1E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	-1.1E-02	-8.5E-03	-5.8E-03	-3.1E-03	-3.7E-04	2.3E-03
3009	1.6E-03	1.8E-03	1.9E-03	1.9E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-9.4E-03	-6.4E-03	-3.3E-03	-3.4E-04	2.7E-03
3010	1.7E-03	1.9E-03	1.5E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.0E-02	-7.3E-03	-4.2E-03	-1.0E-03	2.1E-03
3011	8.6E-04	2.1E-03	2.1E-03	1.6E-03	1.6E-03	1.4E-03	1.4E-03	-1.1E-02	-8.8E-03	-6.0E-03	-3.3E-03	-5.8E-04	2.1E-03
3012	1.5E-03	2.1E-03	2.2E-03	1.8E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-9.7E-03	-6.7E-03	-3.8E-03	-8.0E-04	2.2E-03
3013	6.3E-04	2.0E-03	2.0E-03	1.5E-03	1.5E-03	1.3E-03	1.3E-03	-1.0E-02	-8.0E-03	-5.2E-03	-2.4E-03	4.2E-04	3.2E-03
3014	1.4E-03	2.3E-03	2.4E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	-1.2E-02	-9.1E-03	-5.8E-03	-2.6E-03	6.1E-04	3.8E-03
3015	5.3E-04	1.1E-03	1.3E-03	1.2E-03	1.2E-03	9.2E-04	9.1E-04	-9.5E-03	-7.3E-03	-4.6E-03	-1.9E-03	8.1E-04	3.5E-03
3016	5.0E-04	1.8E-03	1.8E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	-9.9E-03	-7.3E-03	-4.2E-03	-1.2E-03	1.9E-03	5.0E-03
3017	1.1E-03	2.4E-03	2.4E-03	1.5E-03	1.5E-03	1.3E-03	1.3E-03	-1.1E-02	-7.7E-03	-4.3E-03	-8.5E-04	2.6E-03	6.0E-03
3018	6.6E-04	9.8E-04	1.3E-03	1.0E-03	1.2E-03	8.2E-04	7.7E-04	-1.3E-02	-1.0E-02	-7.2E-03	-3.9E-03	-6.2E-04	2.6E-03
3019	5.3E-04	1.5E-03	1.5E-03	1.2E-03	1.3E-03	9.2E-04	9.1E-04	-1.4E-02	-1.1E-02	-7.1E-03	-3.3E-03	4.7E-04	4.2E-03
3020	8.7E-04	2.3E-03	2.3E-03	1.4E-03	1.3E-03	1.1E-03	1.1E-03	-1.5E-02	-1.1E-02	-6.8E-03	-2.6E-03	1.6E-03	5.9E-03
3021	9.2E-04	1.2E-03	1.2E-03	8.9E-04	1.1E-03	8.7E-04	7.4E-04	-1.6E-02	-1.3E-02	-9.9E-03	-6.9E-03	-3.8E-03	-7.0E-04
3022	6.5E-04	1.2E-03	1.3E-03	1.0E-03	1.4E-03	8.6E-04	8.1E-04	-1.7E-02	-1.4E-02	-1.0E-02	-6.4E-03	-2.7E-03	9.0E-04
3023	1.2E-03	1.5E-03	1.2E-03	7.9E-04	1.0E-03	1.0E-03	6.9E-04	-1.3E-02	-1.2E-02	-1.1E-02	-9.8E-03	-8.6E-03	-7.4E-03
3024	9.6E-04	1.3E-03	1.3E-03	8.8E-04	1.3E-03	8.1E-04	7.6E-04	-1.5E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.8E-03	-7.1E-03
3025	1.4E-03	1.8E-03	1.1E-03	7.8E-04	9.1E-04	1.1E-03	6.1E-04	-9.8E-03	-1.0E-02	-9.8E-03	-9.7E-03	-9.5E-03	-9.4E-03
3026	1.6E-03	2.0E-03	1.1E-03	7.5E-04	8.5E-04	1.2E-03	5.3E-04	-9.6E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
3027	1.6E-03	2.0E-03	1.1E-03	7.3E-04	7.0E-04	9.5E-04	4.5E-04	-9.6E-03	-9.3E-03	-8.8E-03	-8.2E-03	-7.6E-03	-7.0E-03
3028	1.8E-03	2.2E-03	1.1E-03	7.7E-04	8.3E-04	9.1E-04	5.2E-04	-1.0E-02	-9.9E-03	-9.1E-03	-8.4E-03	-7.6E-03	-6.8E-03
3029	6.5E-04	1.1E-03	9.4E-04	6.2E-04	6.9E-04	9.4E-04	4.3E-04	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02
3030	5.3E-04	8.0E-04	8.2E-04	6.3E-04	6.8E-04	9.2E-04	4.7E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
3031	6.4E-04	1.0E-03	9.7E-04	6.4E-04	7.4E-04	1.0E-03	4.8E-04	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.5E-02	-1.5E-02
3032	6.1E-04	6.9E-04	7.1E-04	6.5E-04	6.5E-04	8.7E-04	5.2E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
3033	6.3E-04	7.8E-04	7.9E-04	6.7E-04	7.3E-04	1.0E-03	5.4E-04	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
3034	6.5E-04	7.2E-04	8.1E-04	6.4E-04	6.0E-04	6.3E-04	5.3E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3035	6.9E-04	7.6E-04	8.2E-04	6.6E-04	6.1E-04	7.9E-04	5.5E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
3036	6.5E-04	7.2E-04	8.7E-04	6.3E-04	6.3E-04	5.6E-04	5.4E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
3037	7.1E-04	7.8E-04	9.0E-04	6.6E-04	6.4E-04	7.2E-04	5.6E-04	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02
3038	5.4E-04	6.1E-04	7.9E-04	5.8E-04	6.3E-04	5.5E-04	5.2E-04	-8.7E-03	-9.1E-03	-9.1E-03	-9.1E-03	-9.1E-03	-9.1E-03
3039	5.9E-04	6.6E-04	8.3E-04	6.1E-04	6.4E-04	5.6E-04	5.3E-04	-8.1E-03	-8.4E-03	-8.3E-03	-8.3E-03	-8.3E-03	-8.3E-03
3040	6.6E-04	7.3E-04	9.1E-04	6.4E-04	6.8E-04	6.5E-04	5.5E-04	-7.8E-03	-8.0E-03	-7.8E-03	-7.6E-03	-7.4E-03	-7.2E-03
3041	7.6E-04	2.8E-03	4.6E-03	5.3E-03	5.5E-03	2.9E-03	2.7E-03	1.2E-02	-2.9E-04	-1.0E-02	-2.1E-02	-3.1E-02	-4.1E-02
3042	2.9E-04	9.6E-04	1.5E-03	1.8E-03	1.5E-03	9.3E-04	8.6E-04	-1.9E-02	-1.4E-02	-8.7E-03	-3.1E-03	2.5E-03	8.1E-03
3043	2.9E-04	8.2E-04	1.4E-03	1.5E-03	1.5E-03	9.1E-04	8.5E-04	-1.6E-02	-1.1E-02	-5.5E-03	-2.0E-04	5.1E-03	1.0E-02
3044	2.7E-04	7.8E-04	1.4E-03	1.5E-03	1.5E-03	8.8E-04	8.4E-04	-5.8E-03	-2.7E-03	7.6E-04	4.3E-03	7.8E-03	1.1E-02
3045	2.6E-04	7.9E-04	1.4E-03	1.5E-03	1.4E-03	8.5E-04	8.5E-04	6.2E-04	2.3E-03	4.4E-03	6.5E-03	8.6E-03	1.1E-02
3046	2.4E-04	7.7E-04	1.4E-03	1.5E-03	1.4E-03	8.6E-04	8.3E-04	2.9E-03	3.7E-03	5.0E-03	6.3E-03	7.6E-03	8.9E-03
3047	2.2E-04	7.0E-04	1.3E-03	1.4E-03	1.3E-03	1.0E-03	7.7E-04	1.2E-02	8.7E-03	5.8E-03	2.8E-03	-1.1E-04	-3.1E-03
3048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3052	4.7E-04	1.4E-03	2.5E-03	2.8E-03	2.9E-03	2.1E-03	1.8E-03	-3.4E-03	-2.5E-03	-7.3E-04	1.0E-03	2.8E-03	4.6E-03
3053	4.9E-04	1.4E-03	2.6E-03	2.9E-03	3.2E-03	2.2E-03	2.0E-03	-3.5E-03	-9.9E-04	2.5E-03	5.9E-03	9.3E-03	1.3E-02
3054	3.8E-04	1.0E-03	1.8E-03	2.1E-03	1.4E-03	1.2E-03	1.2E-03	-7.2E-03	-7.2E-03	-6.8E-03	-6.4E-03	-6.0E-03	-5.6E-03
3055	3.5E-04	1.1E-03	1.8E-03	2.1E-03	1.4E-03	1.1E-03	1.1E-03	-1.2E-02	-1.1E-02	-1.0E-02	-9.3E-03	-8.3E-03	-7.4E-03
3056	3.1E-04	1.1E-03	1.8E-03	2.1E-03	1.4E-03	1.0E-03	1.0E-03	-1.5E-02	-1.3E-02	-1.1E-02	-9.5E-03	-7.6E-03	-5.6E-03
3057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3067	4.8E-04	1.4E-03	2.5E-03	2.8E-03	3.0E-03	2.2E-03	1.9E-03	-4.1E-03	-3.4E-03	-1.8E-03	-1.3E-04	1.5E-03	3.1E-03
3068	5.0E-04	1.5E-03	2.6E-03	3.0E-03	3.3E-03	2.2E-03	2.0E-03	-3.7E-03	-1.4E-03	1.9E-03	5.2E-03	8.6E-03	1.2E-02
3069	4.9E-04	1.5E-03	2.5E-03	3.0E-03	3.2E-03	2.1E-03	2.0E-03	-5.9E-03	-5.0E-03	-3.0E-03	-1.1E-03	8.6E-04	2.8E-03
3070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3071	4.5E-04	1.2E-03	2.1E-03	2.7E-03	2.8E-03	1.9E-03	1.6E-03	1.9E-02	1.3E-02	6.9E-03	1.2E-03	-4.5E-03	-1.0E-02
3072	4.8E-04	1.0E-03	2.0E-03	2.2E-03	1.9E-03	1.4E-03	1.4E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02	-9.9E-03	-9.5E-03
3073	4.6E-04	1.0E-03	2.0E-03	2.2E-03	1.7E-03	1.4E-03	1.3E-03	-8.0E-03	-8.3E-03	-8.0E-03	-7.7E-03	-7.5E-03	-7.2E-03
3074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3087	4.8E-04	1.4E-03	2.5E-03	2.9E-03	3.1E-03	2.2E-03	1.9E-03	-4.0E-03	-3.3E-03	-1.7E-03	-1.2E-04	1.5E-03	3.0E-03
3088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3091	4.7E-04	1.3E-03	2.2E-03	2.8E-03	2.9E-03	2.0E-03	1.7E-03	1.8E-02	1.1E-02	5.1E-03	-1.1E-03	-7.3E-03	-1.4E-02
3092	4.5E-04	1.1E-03	2.0E-03	2.6E-03	2.8E-03	1.9E-03	1.7E-03	1.3E-02	6.1E-03	-3.5E-04	-6.8E-03	-1.3E-02	-2.0E-02
3093	4.2E-04	1.0E-03	2.1E-03	2.7E-03	2.8E-03	1.8E-03	1.6E-03	2.2E-03	-2.9E-03	-7.0E-03	-1.1E-02	-1.5E-02	-1.9E-02
3094	4.9E-04	1.1E-03	2.1E-03	2.1E-03	2.1E-03	1.4E-03	1.4E-03	-9.4E-03	-1.0E-02	-1.0E-02	-1.0E-02	-9.9E-03	-9.9E-03
3095	5.0E-04	1.1E-03	2.1E-03	2.2E-03	2.0E-03	1.5E-03	1.5E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
3096	4.8E-04	1.0E-03	2.0E-03	2.2E-03	1.8E-03	1.4E-03	1.4E-03	-1.0E-02	-1.0E-02	-1.0E-02	-9.6E-03	-9.3E-03	-8.9E-03
3097	4.3E-04	1.1E-03	2.0E-03	2.3E-03	1.6E-03	1.3E-03	1.3E-03	-6.2E-03	-6.5E-03	-6.4E-03	-6.2E-03	-6.0E-03	-5.8E-03
3098	4.0E-04	1.1E-03	2.0E-03	2.3E-03	1.6E-03	1.3E-03	1.3E-03	-1.0E-02	-9.6E-03	-8.7E-03	-7.7E-03	-6.8E-03	-5.9E-03
3099	3.6E-04	1.2E-03	2.0E-03	2.3E-03	1.4E-03	1.2E-03	1.2E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.6E-03	-7.1E-03
3100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3114	4.9E-04	1.3E-03	2.3E-03	2.8E-03	3.0E-03	2.0E-03	1.7E-03	1.9E-02	1.1E-02	3.5E-03	-3.7E-03	-1.1E-02	-1.8E-02
3115	4.5E-04	1.2E-03	2.1E-03	2.7E-03	2.9E-03	1.9E-03	1.7E-03	1.2E-02	4.3E-03	-2.2E-03	-8.7E-03	-1.5E-02	-2.2E-02
3116	4.0E-04	1.1E-03	2.2E-03	2.8E-03	2.9E-03	1.8E-03	1.7E-03	-3.6E-03	-7.4E-03	-1.0E-02	-1.3E-02	-1.6E-02	-1.9E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3118	4.5E-04	1.1E-03	2.0E-03	1.9E-03	2.1E-03	1.6E-03	1.5E-03	-7.5E-03	-9.9E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.6E-02
3119	5.1E-04	1.1E-03	2.1E-03	2.0E-03	2.2E-03	1.5E-03	1.4E-03	-9.1E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02
3120	5.3E-04	1.1E-03	2.1E-03	2.2E-03	2.1E-03	1.5E-03	1.5E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02
3121	5.0E-04	1.0E-03	2.1E-03	2.2E-03	1.9E-03	1.5E-03	1.5E-03	-1.1E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02
3122	4.5E-04	1.1E-03	2.1E-03	2.3E-03	1.8E-03	1.4E-03	1.4E-03	-8.9E-03	-9.1E-03	-8.8E-03	-8.4E-03	-8.1E-03	-7.7E-03
3123	4.3E-04	1.2E-03	2.1E-03	2.4E-03	1.7E-03	1.4E-03	1.4E-03	-9.4E-03	-8.9E-03	-8.0E-03	-7.2E-03	-6.3E-03	-5.4E-03
3124	3.9E-04	1.2E-03	2.1E-03	2.4E-03	1.6E-03	1.3E-03	1.3E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.9E-03	-7.6E-03
3125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3134	4.5E-04	1.3E-03	2.4E-03	2.8E-03	2.9E-03	2.1E-03	1.8E-03	-2.7E-04	8.0E-04	2.7E-03	4.6E-03	6.4E-03	8.3E-03
3135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3137	5.2E-04	1.6E-03	2.7E-03	3.2E-03	3.6E-03	2.4E-03	2.1E-03	-6.3E-03	-6.0E-03	-4.6E-03	-3.2E-03	-1.8E-03	-3.9E-04
3138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3139	6.0E-04	1.4E-03	2.3E-03	2.9E-03	3.0E-03	2.0E-03	1.8E-03	1.9E-02	9.8E-03	1.6E-03	-6.7E-03	-1.5E-02	-2.3E-02
3140	5.3E-04	1.2E-03	2.2E-03	2.9E-03	3.0E-03	1.9E-03	1.7E-03	1.0E-02	2.5E-03	-4.1E-03	-1.1E-02	-1.7E-02	-2.4E-02
3141	4.2E-04	1.2E-03	2.5E-03	3.2E-03	3.2E-03	1.9E-03	1.7E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02
3142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3143	4.2E-04	1.1E-03	1.9E-03	2.5E-03	2.6E-03	1.5E-03	1.4E-03	-3.6E-02	-3.3E-02	-2.9E-02	-2.6E-02	-2.2E-02	-1.8E-02
3144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3145	3.9E-04	1.1E-03	1.9E-03	2.1E-03	2.2E-03	1.7E-03	1.6E-03	-9.3E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02
3146	4.6E-04	1.2E-03	2.1E-03	2.1E-03	2.3E-03	1.7E-03	1.6E-03	-9.0E-03	-1.2E-02	-1.3E-02	-1.5E-02	-1.6E-02	-1.8E-02
3147	5.3E-04	1.1E-03	2.2E-03	2.1E-03	2.3E-03	1.6E-03	1.5E-03	-8.2E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.5E-02
3148	5.4E-04	1.1E-03	2.1E-03	2.1E-03	2.2E-03	1.5E-03	1.5E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02	-9.9E-03
3149	5.3E-04	1.1E-03	2.2E-03	2.3E-03	2.1E-03	1.6E-03	1.5E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02
3150	4.9E-04	1.1E-03	2.2E-03	2.4E-03	1.9E-03	1.5E-03	1.5E-03	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02
3151	4.6E-04	1.2E-03	2.2E-03	2.5E-03	1.8E-03	1.5E-03	1.5E-03	-8.6E-03	-8.3E-03	-7.6E-03	-6.8E-03	-6.1E-03	-5.3E-03
3152	4.2E-04	1.3E-03	2.3E-03	2.5E-03	1.7E-03	1.4E-03	1.4E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.9E-03	-7.6E-03
3153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3164	5.5E-04	1.6E-03	2.9E-03	3.3E-03	3.7E-03	2.5E-03	2.3E-03	-4.4E-03	-2.9E-03	-1.7E-04	2.5E-03	5.2E-03	7.9E-03
3165	5.5E-04	1.7E-03	2.9E-03	3.4E-03	3.7E-03	2.4E-03	2.3E-03	-5.3E-03	-5.5E-03	-4.5E-03	-3.5E-03	-2.5E-03	-1.5E-03
3166	6.8E-04	1.7E-03	2.8E-03	3.5E-03	3.6E-03	2.2E-03	2.0E-03	1.8E-02	1.1E-02	5.2E-03	-5.3E-04	-6.3E-03	-1.2E-02
3167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3169	4.8E-04	1.4E-03	2.7E-03	3.4E-03	3.4E-03	1.9E-03	1.8E-03	-2.1E-02	-2.1E-02	-1.9E-02	-1.8E-02	-1.7E-02	-1.6E-02
3170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3171	4.7E-04	1.2E-03	2.0E-03	2.6E-03	2.6E-03	1.5E-03	1.4E-03	-3.8E-02	-3.6E-02	-3.3E-02	-3.0E-02	-2.7E-02	-2.4E-02
3172	4.4E-04	1.1E-03	1.8E-03	2.0E-03	2.0E-03	1.5E-03	1.1E-03	-2.7E-02	-2.8E-02	-2.9E-02	-2.9E-02	-2.9E-02	-2.9E-02
3173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3174	3.7E-04	1.1E-03	1.9E-03	2.2E-03	2.2E-03	1.7E-03	1.6E-03	-8.0E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
3175	4.5E-04	1.2E-03	2.1E-03	2.2E-03	2.3E-03	1.7E-03	1.6E-03	-1.0E-02	-1.2E-02	-1.3E-02	-1.5E-02	-1.6E-02	-1.7E-02
3176	5.4E-04	1.1E-03	2.2E-03	2.1E-03	2.3E-03	1.7E-03	1.6E-03	-9.8E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.9E-02
3177	5.7E-04	1.1E-03	2.2E-03	2.1E-03	2.3E-03	1.5E-03	1.5E-03	-9.1E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02
3178	5.5E-04	1.1E-03	2.2E-03	2.3E-03	2.2E-03	1.6E-03	1.6E-03	-1.3E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02
3179	5.2E-04	1.1E-03	2.3E-03	2.5E-03	2.1E-03	1.6E-03	1.6E-03	-1.3E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02
3180	5.0E-04	1.2E-03	2.3E-03	2.6E-03	1.9E-03	1.6E-03	1.6E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.2E-03	-8.3E-03	-7.4E-03
3181	4.6E-04	1.3E-03	2.3E-03	2.7E-03	1.8E-03	1.5E-03	1.5E-03	-1.3E-02	-1.2E-02	-1.0E-02	-8.8E-03	-7.2E-03	-5.6E-03
3182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3191	4.6E-04	1.3E-03	2.4E-03	2.8E-03	3.0E-03	2.2E-03	1.9E-03	-2.2E-03	-1.2E-03	6.5E-04	2.5E-03	4.3E-03	6.1E-03
3192	5.3E-04	1.5E-03	2.8E-03	3.2E-03	3.5E-03	2.5E-03	2.2E-03	-4.7E-03	-3.3E-03	-9.4E-04	1.4E-03	3.8E-03	6.2E-03
3193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3194	5.8E-04	1.7E-03	3.0E-03	3.5E-03	3.8E-03	2.5E-03	2.3E-03	-1.5E-03	-3.2E-03	-3.7E-03	-4.2E-03	-4.6E-03	-5.1E-03
3195	7.2E-04	1.9E-03	3.0E-03	3.8E-03	3.9E-03	2.2E-03	2.0E-03	2.0E-02	1.2E-02	5.0E-03	-1.6E-03	-8.3E-03	-1.5E-02
3196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3198	5.4E-04	1.4E-03	2.8E-03	3.5E-03	3.6E-03	2.0E-03	1.8E-03	-3.0E-02	-2.8E-02	-2.5E-02	-2.1E-02	-1.8E-02	-1.5E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3200	4.7E-04	1.3E-03	2.0E-03	2.5E-03	2.6E-03	1.5E-03	1.4E-03	-3.8E-02	-3.6E-02	-3.4E-02	-3.1E-02	-2.9E-02	-2.7E-02
3201	5.5E-04	1.2E-03	1.9E-03	2.0E-03	2.2E-03	1.6E-03	1.2E-03	-3.3E-02	-3.4E-02	-3.4E-02	-3.4E-02	-3.4E-02	-3.4E-02
3202	5.4E-04	9.7E-04	1.7E-03	2.1E-03	2.5E-03	1.7E-03	1.3E-03	-4.1E-02	-4.2E-02	-4.3E-02	-4.4E-02	-4.5E-02	-4.6E-02
3203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3206	3.9E-04	1.2E-03	2.3E-03	2.6E-03	2.6E-03	1.9E-03	1.6E-03	-2.4E-03	-1.2E-03	6.2E-04	2.5E-03	4.3E-03	6.2E-03
3207	4.8E-04	1.4E-03	2.6E-03	3.0E-03	3.1E-03	2.3E-03	2.0E-03	-3.7E-03	-2.8E-03	-1.0E-03	7.5E-04	2.5E-03	4.3E-03
3208	5.7E-04	1.6E-03	2.9E-03	3.3E-03	3.7E-03	2.7E-03	2.4E-03	-5.3E-03	-3.7E-03	-1.1E-03	1.6E-03	4.3E-03	7.0E-03
3209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3210	7.5E-04	2.0E-03	3.3E-03	3.9E-03	4.1E-03	2.5E-03	2.3E-03	1.9E-03	-1.5E-03	-3.5E-03	-5.5E-03	-7.5E-03	-9.5E-03
3211	6.9E-04	2.0E-03	3.2E-03	4.0E-03	4.1E-03	2.2E-03	2.0E-03	2.2E-02	1.2E-02	3.5E-03	-5.2E-03	-1.4E-02	-2.2E-02
3212	5.0E-04	1.8E-03	2.8E-03	3.5E-03	3.6E-03	2.1E-03	1.9E-03	1.4E-02	4.0E-03	-4.7E-03	-1.3E-02	-2.2E-02	-3.1E-02
3213	5.5E-04	1.3E-03	2.9E-03	3.6E-03	3.6E-03	2.1E-03	1.9E-03	-2.2E-03	-7.6E-03	-1.2E-02	-1.6E-02	-2.0E-02	-2.4E-02
3214	5.7E-04	1.5E-03	2.9E-03	3.7E-03	3.7E-03	2.0E-03	1.9E-03	-4.0E-02	-3.7E-02	-3.2E-02	-2.7E-02	-2.2E-02	-1.8E-02
3215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3216	5.5E-04	1.3E-03	2.1E-03	2.5E-03	2.6E-03	1.5E-03	1.4E-03	-3.5E-02	-3.6E-02	-3.5E-02	-3.4E-02	-3.4E-02	-3.3E-02
3217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3218	5.6E-04	9.8E-04	1.9E-03	2.3E-03	2.7E-03	1.8E-03	1.4E-03	-4.3E-02	-4.5E-02	-4.7E-02	-4.9E-02	-5.0E-02	-5.2E-02
3219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3221	4.5E-04	1.3E-03	2.3E-03	2.7E-03	2.6E-03	2.0E-03	1.6E-03	-3.5E-03	-2.4E-03	-5.3E-04	1.3E-03	3.2E-03	5.0E-03
3222	5.3E-04	1.5E-03	2.7E-03	3.2E-03	3.3E-03	2.5E-03	2.1E-03	-5.5E-03	-4.8E-03	-3.1E-03	-1.4E-03	3.1E-04	2.0E-03
3223	6.1E-04	1.7E-03	3.1E-03	3.5E-03	4.0E-03	2.9E-03	2.7E-03	-5.9E-03	-4.1E-03	-1.1E-03	1.8E-03	4.8E-03	7.8E-03
3224	7.5E-04	1.9E-03	3.3E-03	3.7E-03	4.2E-03	2.9E-03	2.7E-03	-7.5E-03	-6.5E-03	-4.3E-03	-2.0E-03	2.4E-04	2.5E-03
3225	7.8E-04	2.2E-03	3.6E-03	4.1E-03	4.4E-03	2.5E-03	2.4E-03	5.3E-03	2.8E-04	-3.4E-03	-7.0E-03	-1.1E-02	-1.4E-02
3226	6.0E-04	2.1E-03	3.4E-03	4.2E-03	4.3E-03	2.2E-03	2.1E-03	2.2E-02	1.0E-02	-5.5E-04	-1.1E-02	-2.2E-02	-3.2E-02
3227	5.5E-04	1.9E-03	2.9E-03	3.6E-03	3.8E-03	2.1E-03	1.9E-03	1.2E-02	2.0E-03	-6.7E-03	-1.5E-02	-2.4E-02	-3.3E-02
3228	6.0E-04	1.4E-03	3.0E-03	3.8E-03	3.8E-03	2.2E-03	2.0E-03	-1.3E-02	-1.6E-02	-1.7E-02	-1.9E-02	-2.1E-02	-2.2E-02
3229	5.6E-04	1.6E-03	3.0E-03	3.8E-03	3.8E-03	2.1E-03	1.9E-03	-5.0E-02	-4.5E-02	-3.9E-02	-3.3E-02	-2.7E-02	-2.1E-02
3230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3231	6.2E-04	1.3E-03	2.1E-03	2.4E-03	2.5E-03	1.6E-03	1.4E-03	-3.9E-02	-4.0E-02	-3.9E-02	-3.9E-02	-3.9E-02	-3.8E-02
3232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3233	5.2E-04	1.0E-03	2.0E-03	2.4E-03	2.8E-03	1.9E-03	1.4E-03	-4.2E-02	-4.4E-02	-4.5E-02	-4.6E-02	-4.8E-02	-4.9E-02
3234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3237	7.2E-04	2.4E-03	3.8E-03	4.3E-03	4.5E-03	2.6E-03	2.4E-03	9.0E-03	2.2E-03	-3.2E-03	-8.6E-03	-1.4E-02	-1.9E-02
3238	5.8E-04	2.2E-03	3.5E-03	4.4E-03	4.5E-03	2.3E-03	2.2E-03	2.0E-02	7.2E-03	-3.8E-03	-1.5E-02	-2.6E-02	-3.7E-02
3239	6.3E-04	1.9E-03	3.0E-03	3.8E-03	3.9E-03	2.2E-03	2.0E-03	8.8E-03	-9.2E-04	-9.3E-03	-1.8E-02	-2.6E-02	-3.5E-02

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3240	6.0E-04	1.5E-03	3.2E-03	3.9E-03	4.0E-03	2.2E-03	2.1E-03	-2.5E-02	-2.5E-02	-2.3E-02	-2.2E-02	-2.1E-02	-1.9E-02
3241	5.5E-04	1.6E-03	3.1E-03	3.8E-03	3.9E-03	2.1E-03	2.0E-03	-5.7E-02	-5.1E-02	-4.4E-02	-3.7E-02	-2.9E-02	-2.2E-02
3242	6.2E-04	1.5E-03	2.5E-03	3.2E-03	3.3E-03	1.9E-03	1.7E-03	-4.7E-02	-4.6E-02	-4.3E-02	-4.1E-02	-3.8E-02	-3.6E-02
3243	6.2E-04	1.4E-03	2.2E-03	2.4E-03	2.5E-03	1.7E-03	1.4E-03	-4.5E-02	-4.5E-02	-4.4E-02	-4.2E-02	-4.1E-02	-4.0E-02
3244	5.5E-04	1.1E-03	1.9E-03	2.3E-03	2.8E-03	1.9E-03	1.4E-03	-4.8E-02	-5.0E-02	-5.1E-02	-5.2E-02	-5.3E-02	-5.4E-02
3245	4.6E-04	1.1E-03	2.0E-03	2.5E-03	2.9E-03	1.9E-03	1.5E-03	-3.8E-02	-4.1E-02	-4.2E-02	-4.4E-02	-4.5E-02	-4.7E-02
3246	4.5E-04	9.8E-04	1.8E-03	2.3E-03	2.6E-03	1.8E-03	1.5E-03	-3.7E-02	-3.9E-02	-3.9E-02	-4.0E-02	-4.1E-02	-4.1E-02
3247	3.9E-04	9.3E-04	1.7E-03	2.1E-03	2.5E-03	1.7E-03	1.3E-03	-2.9E-02	-3.1E-02	-3.3E-02	-3.4E-02	-3.6E-02	-3.7E-02
3248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3251	6.3E-04	2.3E-03	3.7E-03	4.6E-03	4.8E-03	2.4E-03	2.2E-03	1.7E-02	4.9E-03	-6.1E-03	-1.7E-02	-2.8E-02	-3.9E-02
3252	6.6E-04	2.0E-03	3.1E-03	3.8E-03	4.0E-03	2.3E-03	2.1E-03	2.0E-03	-6.4E-03	-1.4E-02	-2.1E-02	-2.8E-02	-3.5E-02
3253	5.6E-04	1.6E-03	3.3E-03	4.1E-03	4.1E-03	2.3E-03	2.1E-03	-3.7E-02	-3.4E-02	-3.1E-02	-2.7E-02	-2.3E-02	-1.9E-02
3254	6.0E-04	1.6E-03	3.0E-03	3.8E-03	3.9E-03	2.2E-03	2.0E-03	-5.6E-02	-5.0E-02	-4.3E-02	-3.6E-02	-2.9E-02	-2.1E-02
3255	6.3E-04	1.4E-03	2.5E-03	3.2E-03	3.3E-03	1.9E-03	1.7E-03	-4.8E-02	-4.8E-02	-4.6E-02	-4.5E-02	-4.4E-02	-4.3E-02
3256	5.7E-04	1.3E-03	2.2E-03	2.4E-03	2.5E-03	1.8E-03	1.4E-03	-5.0E-02	-5.0E-02	-4.9E-02	-4.8E-02	-4.7E-02	-4.6E-02
3257	4.7E-04	1.1E-03	2.0E-03	2.4E-03	2.9E-03	2.0E-03	1.5E-03	-4.6E-02	-4.7E-02	-4.8E-02	-4.9E-02	-5.0E-02	-5.1E-02
3258	4.5E-04	1.1E-03	2.0E-03	2.5E-03	2.9E-03	2.0E-03	1.5E-03	-4.1E-02	-4.2E-02	-4.2E-02	-4.3E-02	-4.3E-02	-4.4E-02
3259	4.0E-04	9.5E-04	1.8E-03	2.3E-03	2.5E-03	1.8E-03	1.5E-03	-3.5E-02	-3.7E-02	-3.9E-02	-4.0E-02	-4.1E-02	-4.3E-02
3260	3.9E-04	1.0E-03	1.8E-03	2.1E-03	2.6E-03	1.8E-03	1.4E-03	-2.9E-02	-3.2E-02	-3.3E-02	-3.4E-02	-3.6E-02	-3.7E-02
3261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3263	7.0E-04	2.4E-03	3.8E-03	4.8E-03	5.0E-03	2.5E-03	2.3E-03	1.5E-02	2.0E-03	-9.3E-03	-2.1E-02	-3.2E-02	-4.3E-02
3264	6.4E-04	2.0E-03	3.2E-03	4.0E-03	4.2E-03	2.4E-03	2.2E-03	-7.4E-03	-1.4E-02	-1.8E-02	-2.3E-02	-2.8E-02	-3.3E-02
3265	5.9E-04	1.6E-03	3.3E-03	4.1E-03	4.2E-03	2.4E-03	2.2E-03	-4.8E-02	-4.4E-02	-3.8E-02	-3.3E-02	-2.7E-02	-2.1E-02
3266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3267	4.4E-04	1.3E-03	2.4E-03	3.1E-03	3.2E-03	1.8E-03	1.7E-03	-4.9E-02	-4.8E-02	-4.6E-02	-4.5E-02	-4.3E-02	-4.1E-02
3268	4.8E-04	1.2E-03	2.1E-03	2.4E-03	2.6E-03	1.9E-03	1.4E-03	-5.3E-02	-5.4E-02	-5.3E-02	-5.3E-02	-5.3E-02	-5.3E-02
3269	4.1E-04	1.1E-03	1.9E-03	2.4E-03	2.8E-03	2.0E-03	1.6E-03	-4.1E-02	-4.3E-02	-4.4E-02	-4.6E-02	-4.7E-02	-4.8E-02
3270	3.8E-04	9.7E-04	1.9E-03	2.4E-03	2.7E-03	2.0E-03	1.6E-03	-4.0E-02	-4.2E-02	-4.3E-02	-4.4E-02	-4.5E-02	-4.6E-02
3271	3.8E-04	9.4E-04	1.8E-03	2.2E-03	2.6E-03	1.8E-03	1.5E-03	-3.1E-02	-3.4E-02	-3.6E-02	-3.7E-02	-3.9E-02	-4.1E-02
3272	3.4E-04	1.3E-03	2.1E-03	2.2E-03	2.6E-03	1.9E-03	1.4E-03	-2.9E-02	-3.1E-02	-3.2E-02	-3.2E-02	-3.3E-02	-3.4E-02
3273	7.0E-04	2.4E-03	4.0E-03	5.0E-03	5.2E-03	2.5E-03	2.4E-03	1.0E-02	-2.4E-03	-1.3E-02	-2.4E-02	-3.5E-02	-4.6E-02
3274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3282	4.0E-04	1.4E-03	2.3E-03	2.4E-03	2.5E-03	1.9E-03	1.4E-03	-2.9E-02	-3.0E-02	-3.0E-02	-3.0E-02	-3.1E-02	-3.1E-02
3283	6.6E-04	2.5E-03	4.1E-03	5.2E-03	5.4E-03	2.6E-03	2.5E-03	2.1E-03	-9.0E-03	-1.8E-02	-2.8E-02	-3.7E-02	-4.7E-02
3284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3285	7.2E-04	1.9E-03	3.8E-03	4.6E-03	4.7E-03	2.5E-03	2.4E-03	-6.7E-02	-6.0E-02	-5.2E-02	-4.4E-02	-3.6E-02	-2.7E-02
3286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3297	4.7E-04	1.4E-03	2.4E-03	2.9E-03	3.1E-03	2.0E-03	1.9E-03	-4.6E-03	-3.8E-03	-2.0E-03	-1.9E-04	1.6E-03	3.4E-03
3298	4.2E-04	1.3E-03	2.2E-03	2.8E-03	2.9E-03	1.8E-03	1.7E-03	6.4E-03	4.9E-03	4.3E-03	3.8E-03	3.2E-03	2.7E-03
3299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3300	2.8E-04	9.0E-04	1.5E-03	1.7E-03	1.3E-03	8.5E-04	8.4E-04	-1.6E-02	-1.2E-02	-8.2E-03	-4.2E-03	-2.4E-04	3.8E-03
3301	2.6E-04	8.2E-04	1.3E-03	1.5E-03	1.4E-03	8.6E-04	7.9E-04	-1.7E-02	-1.2E-02	-7.2E-03	-2.1E-03	3.0E-03	8.1E-03
3302	2.8E-04	7.2E-04	1.3E-03	1.4E-03	1.4E-03	8.7E-04	8.1E-04	-1.3E-02	-9.2E-03	-4.7E-03	-2.8E-04	4.2E-03	8.7E-03
3303	2.7E-04	7.6E-04	1.4E-03	1.5E-03	1.4E-03	8.4E-04	8.2E-04	-4.9E-03	-2.2E-03	1.0E-03	4.2E-03	7.4E-03	1.1E-02
3304	2.5E-04	7.6E-04	1.4E-03	1.5E-03	1.3E-03	8.3E-04	8.2E-04	1.7E-03	3.3E-03	5.3E-03	7.3E-03	9.3E-03	1.1E-02
3305	2.4E-04	7.3E-04	1.3E-03	1.4E-03	1.3E-03	8.5E-04	8.0E-04	2.8E-03	3.2E-03	4.1E-03	4.9E-03	5.8E-03	6.7E-03
3306	2.2E-04	6.6E-04	1.3E-03	1.4E-03	1.3E-03	1.0E-03	7.3E-04	1.3E-02	9.2E-03	5.9E-03	2.7E-03	-5.6E-04	-3.8E-03
3307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3311	4.6E-04	1.3E-03	2.4E-03	2.7E-03	2.9E-03	2.0E-03	1.8E-03	-2.1E-03	-1.2E-03	6.3E-04	2.4E-03	4.2E-03	6.0E-03
3312	4.8E-04	1.4E-03	2.5E-03	2.8E-03	3.1E-03	2.1E-03	1.9E-03	-3.0E-03	-5.0E-04	2.9E-03	6.3E-03	9.7E-03	1.3E-02
3313	3.6E-04	9.5E-04	1.7E-03	1.9E-03	1.3E-03	1.1E-03	1.1E-03	-8.5E-03	-8.3E-03	-7.7E-03	-7.1E-03	-6.5E-03	-5.9E-03
3314	3.3E-04	9.7E-04	1.7E-03	1.9E-03	1.2E-03	1.0E-03	9.9E-04	-1.2E-02	-1.1E-02	-1.0E-02	-9.0E-03	-7.9E-03	-6.8E-03
3315	4.6E-04	1.0E-03	2.0E-03	2.1E-03	1.7E-03	1.4E-03	1.3E-03	-8.9E-03	-9.1E-03	-8.8E-03	-8.5E-03	-8.2E-03	-7.9E-03
3316	4.7E-04	1.1E-03	2.1E-03	2.1E-03	2.0E-03	1.4E-03	1.4E-03	-9.7E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
3317	2.5E-04	6.9E-04	1.3E-03	1.3E-03	1.3E-03	7.8E-04	7.4E-04	-5.6E-03	-2.9E-03	2.8E-04	3.4E-03	6.6E-03	9.8E-03
3318	2.2E-04	6.6E-04	1.2E-03	1.3E-03	1.3E-03	9.1E-04	7.2E-04	1.0E-02	7.5E-03	5.3E-03	3.2E-03	1.0E-03	-1.2E-03
3319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3327	2.7E-03	3.1E-03	6.4E-03	7.9E-03	1.2E-02	1.1E-02	1.1E-02	-1.3E-02	-1.3E-02	-6.4E-03	5.8E-04	7.5E-03	1.4E-02
3328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3333	2.2E-03	2.5E-03	5.0E-03	6.7E-03	8.9E-03	8.5E-03	8.0E-03	4.7E-03	-1.7E-04	4.3E-04	1.0E-03	1.6E-03	2.2E-03
3334	1.9E-03	2.3E-03	4.8E-03	6.0E-03	8.5E-03	7.9E-03	7.5E-03	1.9E-03	-1.2E-03	8.2E-04	2.9E-03	4.9E-03	6.9E-03
3335	1.6E-03	2.2E-03	4.5E-03	5.2E-03	7.9E-03	7.4E-03	7.0E-03	-7.3E-04	-2.9E-03	-4.1E-04	2.1E-03	4.7E-03	7.2E-03
3336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3357	1.2E-03	4.7E-03	1.0E-02	1.7E-02	1.8E-02	6.6E-03	6.1E-03	3.7E-02	4.0E-02	4.6E-02	5.3E-02	6.0E-02	6.6E-02
3358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3359	1.1E-03	1.3E-02	1.5E-02	1.5E-02	9.3E-03	4.6E-03	4.6E-03	3.2E-02	3.6E-02	4.2E-02	4.9E-02	5.5E-02	6.2E-02
3360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3364	8.9E-04	7.1E-03	1.3E-02	1.6E-02	6.9E-03	4.6E-03	4.2E-03	1.3E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
3365	8.0E-04	4.1E-03	4.9E-03	8.0E-03	5.7E-03	4.2E-03	3.9E-03	2.5E-02	2.1E-02	2.0E-02	1.9E-02	1.8E-02	1.7E-02
3366	8.2E-04	3.2E-03	4.0E-03	5.5E-03	4.8E-03	3.7E-03	3.5E-03	3.7E-02	2.7E-02	2.0E-02	1.2E-02	4.1E-03	-3.6E-03
3367	8.2E-04	3.1E-03	4.0E-03	5.5E-03	4.8E-03	3.6E-03	3.4E-03	3.7E-02	2.7E-02	2.0E-02	1.2E-02	4.3E-03	-3.3E-03
3368	8.0E-04	2.0E-03	3.9E-03	6.1E-03	4.6E-03	3.5E-03	3.3E-03	3.6E-02	2.7E-02	2.0E-02	1.3E-02	5.5E-03	-1.7E-03
3369	7.1E-04	1.9E-03	4.6E-03	7.0E-03	4.6E-03	3.5E-03	3.3E-03	3.5E-02	2.7E-02	2.0E-02	1.4E-02	7.4E-03	9.5E-04
3370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3411	7.5E-04	1.2E-03	1.2E-03	1.3E-03	2.6E-03	1.4E-03	1.3E-03	-1.2E-02	-1.1E-02	-8.1E-03	-5.6E-03	-3.1E-03	-5.9E-04
3412	7.6E-04	1.2E-03	1.2E-03	1.4E-03	2.6E-03	1.5E-03	1.4E-03	-1.4E-02	-1.2E-02	-1.0E-02	-7.8E-03	-5.4E-03	-3.1E-03
3413	9.0E-04	1.2E-03	1.2E-03	1.4E-03	2.5E-03	1.5E-03	1.5E-03	-1.7E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.4E-03
3414	9.3E-04	1.2E-03	1.2E-03	1.4E-03	2.2E-03	1.5E-03	1.4E-03	-1.5E-02	-1.4E-02	-1.2E-02	-9.9E-03	-7.8E-03	-5.6E-03
3415	1.0E-03	1.3E-03	1.3E-03	1.3E-03	1.8E-03	1.6E-03	1.3E-03	-1.3E-02	-1.1E-02	-8.0E-03	-5.0E-03	-2.1E-03	8.9E-04
3416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3424	9.9E-04	1.5E-03	1.6E-03	1.2E-03	1.6E-03	1.8E-03	9.7E-04	-9.5E-03	-6.2E-03	-2.6E-03	1.1E-03	4.7E-03	8.4E-03
3425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3428	1.0E-03	1.6E-03	1.7E-03	1.3E-03	1.6E-03	2.0E-03	1.1E-03	-5.4E-03	-3.2E-03	-6.8E-04	1.8E-03	4.3E-03	6.9E-03
3429	1.1E-03	1.6E-03	1.7E-03	1.3E-03	1.7E-03	2.1E-03	1.2E-03	-5.1E-03	-3.2E-03	-9.2E-04	1.3E-03	3.6E-03	5.9E-03
3430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3539	7.7E-04	2.8E-03	4.5E-03	5.2E-03	5.4E-03	2.9E-03	2.7E-03	1.1E-02	6.0E-05	-8.8E-03	-1.8E-02	-2.7E-02	-3.6E-02
3540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3554	9.5E-04	2.9E-03	5.0E-03	5.8E-03	6.3E-03	4.0E-03	3.8E-03	-1.0E-02	-2.0E-02	-2.7E-02	-3.5E-02	-4.3E-02	-5.0E-02
3555	9.1E-04	3.0E-03	5.0E-03	5.9E-03	6.1E-03	3.5E-03	3.3E-03	7.3E-04	-1.2E-02	-2.2E-02	-3.2E-02	-4.2E-02	-5.2E-02
3556	8.8E-04	3.0E-03	4.9E-03	5.8E-03	6.1E-03	3.5E-03	3.2E-03	-7.4E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.2E-02	-5.1E-02
3557	9.4E-04	2.9E-03	5.0E-03	5.8E-03	6.2E-03	3.9E-03	3.6E-03	-7.3E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.3E-02	-5.1E-02
3558	9.5E-04	2.8E-03	5.0E-03	5.7E-03	6.4E-03	4.2E-03	4.0E-03	-1.2E-02	-2.1E-02	-2.7E-02	-3.4E-02	-4.0E-02	-4.7E-02
3559	9.5E-04	2.8E-03	4.9E-03	5.8E-03	7.6E-03	5.5E-03	5.3E-03	-1.7E-02	-2.4E-02	-2.9E-02	-3.3E-02	-3.8E-02	-4.3E-02
3560	9.4E-04	2.7E-03	4.9E-03	6.5E-03	1.0E-02	8.0E-03	7.6E-03	-2.2E-02	-2.7E-02	-3.1E-02	-3.4E-02	-3.7E-02	-4.1E-02
3561	9.5E-04	2.9E-03	5.0E-03	6.5E-03	9.5E-03	7.2E-03	6.9E-03	-1.9E-02	-2.5E-02	-2.9E-02	-3.3E-02	-3.7E-02	-4.2E-02
3562	9.6E-04	3.0E-03	5.2E-03	6.1E-03	8.3E-03	5.9E-03	5.8E-03	-9.4E-03	-1.7E-02	-2.3E-02	-2.8E-02	-3.4E-02	-4.0E-02
3563	9.5E-04	3.1E-03	5.2E-03	6.1E-03	7.1E-03	6.2E-03	6.2E-03	3.8E-05	-9.9E-03	-1.8E-02	-2.5E-02	-3.3E-02	-4.1E-02
3564	9.6E-04	3.2E-03	5.3E-03	6.2E-03	7.2E-03	6.9E-03	6.9E-03	5.8E-03	-5.2E-03	-1.4E-02	-2.3E-02	-3.2E-02	-4.1E-02
3565	9.4E-04	3.2E-03	5.3E-03	6.3E-03	6.6E-03	5.2E-03	5.2E-03	-7.3E-03	-1.6E-02	-2.3E-02	-3.0E-02	-3.7E-02	-4.4E-02
3566	9.0E-04	3.2E-03	5.2E-03	6.2E-03	6.6E-03	3.9E-03	3.9E-03	-2.6E-02	-3.1E-02	-3.4E-02	-3.7E-02	-4.0E-02	-4.3E-02
3567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3579	9.6E-04	3.9E-03	7.4E-03	8.9E-03	9.3E-03	4.7E-03	4.4E-03	-2.3E-01	-2.1E-01	-2.0E-01	-1.9E-01	-1.7E-01	-1.6E-01
3580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3584	6.1E-03	7.6E-03	1.1E-02	1.7E-02	1.9E-02	1.6E-02	1.6E-02	6.6E-02	8.3E-02	1.1E-01	1.4E-01	1.7E-01	1.9E-01
3585	6.4E-03	7.6E-03	1.1E-02	1.8E-02	2.0E-02	1.7E-02	1.7E-02	4.8E-02	6.2E-02	8.7E-02	1.1E-01	1.4E-01	1.6E-01
3586	6.8E-03	7.9E-03	1.2E-02	1.9E-02	2.1E-02	1.8E-02	1.8E-02	4.5E-02	5.5E-02	7.9E-02	1.0E-01	1.2E-01	1.5E-01
3587	7.7E-03	8.9E-03	1.3E-02	2.2E-02	2.4E-02	2.1E-02	2.1E-02	3.8E-02	4.6E-02	6.9E-02	9.1E-02	1.1E-01	1.4E-01
3588	8.5E-03	9.6E-03	1.4E-02	2.4E-02	2.6E-02	2.3E-02	2.3E-02	2.1E-02	2.5E-02	4.4E-02	6.3E-02	8.2E-02	1.0E-01
3589	8.9E-03	1.0E-02	1.4E-02	2.5E-02	2.7E-02	2.4E-02	2.4E-02	1.6E-02	1.7E-02	3.4E-02	5.2E-02	6.9E-02	8.6E-02
3590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

APPENDIX C. ANNUAL HUMAN HEALTH ACUTE HAZARDS FOR THE SEATTLE-TACOMA INTERNATIONAL AIRPORT

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1	4.2E-04	1.6E-03	2.9E-03	4.1E-03	4.0E-03	4.6E-03	1.7E-03	9.2E-03	1.1E-02	1.4E-02	1.7E-02	2.0E-02	2.3E-02
2	7.7E-04	1.5E-03	2.6E-03	2.6E-03	2.7E-03	2.2E-03	2.1E-03	-8.7E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.4E-02
3	3.6E-03	6.2E-03	6.7E-03	8.5E-03	1.4E-02	1.4E-02	1.3E-02	5.3E-03	7.3E-03	2.0E-02	3.3E-02	4.5E-02	5.8E-02
4	3.1E-03	5.3E-03	4.8E-03	6.0E-03	1.0E-02	9.8E-03	9.2E-03	9.5E-03	1.5E-02	2.9E-02	4.3E-02	5.7E-02	7.1E-02
5	1.4E-03	2.5E-03	3.9E-03	4.1E-03	6.7E-03	6.4E-03	6.1E-03	2.5E-03	4.2E-03	9.7E-03	1.5E-02	2.1E-02	2.6E-02
6	5.3E-04	1.4E-03	2.8E-03	3.5E-03	3.6E-03	2.0E-03	1.8E-03	-2.2E-02	-2.2E-02	-2.1E-02	-1.9E-02	-1.8E-02	-1.7E-02
7	1.1E-03	1.9E-03	3.2E-03	3.4E-03	3.3E-03	3.0E-03	2.9E-03	-3.9E-02	-2.9E-02	-1.8E-02	-6.2E-03	5.4E-03	1.7E-02
8	7.4E-04	1.1E-03	1.2E-03	1.2E-03	1.5E-03	1.2E-03	1.1E-03	-2.4E-03	-5.5E-04	1.9E-03	4.3E-03	6.8E-03	9.2E-03
9	1.6E-03	2.1E-03	3.2E-03	5.2E-03	5.3E-03	4.9E-03	4.9E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
10	5.2E-04	1.3E-03	2.1E-03	2.3E-03	2.4E-03	1.5E-03	1.3E-03	-3.3E-02	-3.3E-02	-3.3E-02	-3.2E-02	-3.2E-02	-3.1E-02
11	4.9E-04	1.7E-03	2.7E-03	3.4E-03	3.5E-03	2.1E-03	1.9E-03	1.2E-02	2.4E-03	-5.9E-03	-1.4E-02	-2.2E-02	-3.1E-02
12	4.8E-04	1.2E-03	2.0E-03	2.6E-03	2.2E-03	1.7E-03	1.6E-03	-4.7E-03	-6.1E-03	-6.7E-03	-7.2E-03	-7.7E-03	-8.2E-03
13	1.9E-03	3.3E-03	3.8E-03	4.3E-03	7.1E-03	7.0E-03	6.6E-03	-2.7E-02	-2.2E-02	-1.2E-02	-1.2E-03	9.0E-03	1.9E-02
14	4.8E-04	1.1E-03	2.2E-03	2.5E-03	1.9E-03	1.5E-03	1.5E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02	-9.6E-03
15	1.1E-03	4.2E-03	8.5E-03	1.2E-02	1.6E-02	6.1E-03	5.6E-03	3.5E-02	3.8E-02	4.4E-02	5.0E-02	5.6E-02	6.2E-02
16	3.6E-04	7.3E-04	9.3E-04	1.1E-03	1.0E-03	9.0E-04	9.0E-04	-1.5E-02	-1.3E-02	-1.1E-02	-8.3E-03	-5.9E-03	-3.4E-03
17	1.3E-03	1.5E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.4E-02	-1.0E-02	-6.1E-03	-2.0E-03	2.0E-03	6.1E-03
18	1.4E-03	1.6E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	1.9E-03	-1.5E-02	-1.0E-02	-5.6E-03	-7.0E-04	4.2E-03	9.0E-03
19	1.0E-03	1.3E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.5E-02	-1.1E-02	-6.8E-03	-2.6E-03	1.7E-03	6.0E-03
20	3.7E-04	1.2E-03	1.9E-03	2.1E-03	2.6E-03	1.9E-03	1.4E-03	-3.0E-02	-3.1E-02	-3.2E-02	-3.4E-02	-3.5E-02	-3.6E-02
21	1.2E-03	1.6E-03	1.8E-03	1.3E-03	1.3E-03	1.2E-03	1.1E-03	-1.1E-02	-8.6E-03	-6.2E-03	-3.7E-03	-1.3E-03	1.2E-03
22	3.5E-04	9.8E-04	1.2E-03	8.3E-04	7.6E-04	6.8E-04	6.8E-04	-1.0E-02	-8.1E-03	-5.7E-03	-3.3E-03	-9.4E-04	1.4E-03
23	1.5E-03	1.6E-03	3.1E-03	4.2E-03	4.3E-03	4.1E-03	4.1E-03	-1.9E-02	-1.5E-02	-8.4E-03	-2.1E-03	4.1E-03	1.0E-02
24	1.7E-03	2.2E-03	5.1E-03	5.9E-03	6.8E-03	5.4E-03	5.2E-03	1.9E-02	1.9E-02	2.1E-02	2.4E-02	2.6E-02	2.9E-02
25	1.5E-03	1.5E-03	2.9E-03	4.0E-03	4.1E-03	3.9E-03	3.9E-03	-1.4E-02	-1.1E-02	-6.3E-03	-1.8E-03	2.8E-03	7.4E-03
26	1.5E-03	2.2E-03	4.5E-03	4.9E-03	6.8E-03	6.1E-03	5.8E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02	2.5E-02
27	9.2E-04	5.1E-03	5.2E-03	7.1E-03	8.3E-03	4.2E-03	3.9E-03	2.7E-02	3.0E-02	3.5E-02	4.0E-02	4.5E-02	5.0E-02
28	9.1E-04	1.8E-03	5.5E-03	7.2E-03	7.2E-03	5.0E-03	4.7E-03	3.3E-04	9.0E-03	2.1E-02	3.2E-02	4.4E-02	5.6E-02
29	8.5E-04	1.1E-03	2.2E-03	2.7E-03	3.4E-03	3.1E-03	3.0E-03	-2.5E-03	-1.5E-03	1.4E-03	4.3E-03	7.2E-03	1.0E-02
30	3.0E-03	3.3E-03	5.8E-03	1.0E-02	1.1E-02	1.0E-02	1.0E-02	-1.9E-02	-1.7E-02	-1.1E-02	-3.9E-03	2.9E-03	9.6E-03
31	2.0E-03	2.1E-03	2.4E-03	4.2E-03	4.5E-03	4.2E-03	4.2E-03	-2.8E-02	-2.2E-02	-1.4E-02	-6.8E-03	8.6E-04	8.5E-03
32	7.5E-04	3.6E-03	5.8E-03	5.1E-03	4.4E-03	2.5E-03	2.2E-03	2.3E-02	2.3E-02	2.5E-02	2.6E-02	2.8E-02	2.9E-02
33	1.0E-03	1.7E-03	3.6E-03	4.0E-03	6.0E-03	5.6E-03	5.2E-03	-2.5E-02	-2.4E-02	-1.9E-02	-1.5E-02	-1.1E-02	-6.2E-03
34	6.2E-04	7.9E-04	7.6E-04	9.5E-04	2.1E-03	8.5E-04	7.6E-04	-1.1E-02	-9.3E-03	-7.4E-03	-5.4E-03	-3.5E-03	-1.5E-03
35	1.9E-03	2.4E-03	2.7E-03	1.5E-03	1.4E-03	1.7E-03	1.2E-03	-2.1E-02	-1.9E-02	-1.5E-02	-1.2E-02	-9.4E-03	-6.3E-03
36	1.9E-03	2.8E-03	4.2E-03	5.7E-03	5.9E-03	5.6E-03	5.6E-03	-1.9E-02	-1.0E-02	1.1E-03	1.3E-02	2.4E-02	3.6E-02
37	1.7E-03	2.1E-03	1.1E-03	7.5E-04	8.3E-04	1.1E-03	4.9E-04	-9.7E-03	-9.6E-03	-9.2E-03	-8.8E-03	-8.4E-03	-7.9E-03
38	6.7E-04	2.8E-03	4.3E-03	4.6E-03	3.9E-03	2.4E-03	2.1E-03	-4.5E-02	-4.0E-02	-3.4E-02	-2.8E-02	-2.1E-02	-1.5E-02
39	9.0E-04	1.1E-03	1.2E-03	1.1E-03	1.3E-03	9.6E-04	9.2E-04	1.5E-03	2.7E-03	4.4E-03	6.1E-03	7.8E-03	9.5E-03
40	6.0E-04	1.1E-03	1.1E-03	1.4E-03	1.8E-03	1.5E-03	1.4E-03	-2.1E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02
41	1.6E-03	1.8E-03	1.7E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	-1.3E-02	-1.0E-02	-6.6E-03	-3.1E-03	4.6E-04	4.0E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
42	8.5E-04	1.0E-03	1.1E-03	9.5E-04	1.2E-03	8.2E-04	7.8E-04	7.9E-04	2.0E-03	3.5E-03	5.1E-03	6.6E-03	8.2E-03
43	7.4E-04	1.0E-03	1.2E-03	8.5E-04	1.0E-03	7.2E-04	6.3E-04	-1.0E-03	3.2E-04	2.0E-03	3.7E-03	5.4E-03	7.0E-03
44	1.1E-03	1.3E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.4E-02	-1.1E-02	-6.5E-03	-2.3E-03	1.8E-03	6.0E-03
45	1.4E-03	2.4E-03	2.4E-03	1.2E-03	1.1E-03	9.6E-04	9.0E-04	-1.8E-02	-1.6E-02	-1.4E-02	-1.1E-02	-9.1E-03	-6.8E-03
46	1.7E-03	3.3E-03	4.1E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-1.6E-02	-8.9E-03	1.9E-03	1.3E-02	2.4E-02	3.4E-02
47	1.7E-03	3.3E-03	4.1E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-1.6E-02	-8.9E-03	1.9E-03	1.3E-02	2.4E-02	3.4E-02
48	7.7E-04	1.9E-03	2.8E-03	3.8E-03	4.2E-03	3.6E-03	3.3E-03	-2.3E-02	-1.9E-02	-1.3E-02	-7.2E-03	-1.0E-03	5.1E-03
49	5.1E-04	2.0E-03	2.6E-03	3.9E-03	3.5E-03	3.0E-03	2.8E-03	-1.2E-02	-7.3E-03	-3.3E-04	6.6E-03	1.4E-02	2.0E-02
50	5.7E-04	1.8E-03	3.3E-03	4.1E-03	4.2E-03	2.4E-03	2.2E-03	-6.2E-02	-6.0E-02	-5.7E-02	-5.3E-02	-5.0E-02	-4.6E-02
51	2.5E-03	4.1E-03	3.7E-03	4.4E-03	7.0E-03	6.9E-03	6.5E-03	-2.8E-02	-2.8E-02	-2.3E-02	-1.8E-02	-1.2E-02	-7.2E-03
52	1.7E-03	1.8E-03	3.6E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-2.3E-02	-1.6E-02	-5.6E-03	4.5E-03	1.5E-02	2.5E-02
53	6.3E-04	8.9E-04	1.3E-03	1.4E-03	1.9E-03	2.1E-03	9.9E-04	-1.0E-02	-9.0E-03	-7.2E-03	-5.4E-03	-3.6E-03	-1.8E-03
54	9.5E-04	1.3E-03	2.6E-03	2.9E-03	4.3E-03	3.8E-03	3.6E-03	1.9E-03	3.0E-03	6.5E-03	1.0E-02	1.4E-02	1.7E-02
55	4.5E-04	1.0E-03	1.9E-03	2.4E-03	2.7E-03	1.8E-03	1.5E-03	-3.8E-02	-4.0E-02	-4.0E-02	-4.1E-02	-4.2E-02	-4.2E-02
56	2.2E-03	4.0E-03	4.9E-03	5.6E-03	9.3E-03	9.2E-03	8.7E-03	-4.6E-02	-3.8E-02	-2.3E-02	-8.3E-03	6.5E-03	2.1E-02
57	5.0E-04	8.9E-04	1.2E-03	1.2E-03	2.0E-03	9.1E-04	8.7E-04	-3.7E-03	-2.9E-03	-1.7E-03	-4.7E-04	7.4E-04	2.0E-03
58	2.5E-03	2.8E-03	2.8E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02
59	7.8E-04	1.5E-03	2.8E-03	3.2E-03	4.7E-03	4.2E-03	3.9E-03	-1.4E-02	-1.4E-02	-1.2E-02	-9.3E-03	-6.8E-03	-4.2E-03
60	3.5E-04	8.4E-04	1.0E-03	1.0E-03	9.6E-04	8.7E-04	8.7E-04	-1.5E-02	-1.3E-02	-1.0E-02	-7.6E-03	-5.0E-03	-2.5E-03
61	4.4E-04	1.3E-03	2.4E-03	2.6E-03	2.8E-03	2.0E-03	1.7E-03	2.0E-03	3.1E-03	4.9E-03	6.8E-03	8.6E-03	1.0E-02
62	3.3E-03	3.5E-03	5.8E-03	9.8E-03	1.0E-02	9.6E-03	9.6E-03	-8.6E-03	-1.1E-02	-7.5E-03	-4.2E-03	-8.5E-04	2.5E-03
63	8.6E-04	1.3E-03	2.6E-03	2.9E-03	4.1E-03	3.6E-03	3.4E-03	9.0E-04	2.5E-04	1.8E-03	3.4E-03	5.0E-03	6.5E-03
64	2.1E-03	2.3E-03	2.3E-03	1.6E-03	1.6E-03	1.4E-03	1.4E-03	-1.9E-02	-1.6E-02	-1.1E-02	-7.2E-03	-3.0E-03	1.3E-03
65	8.9E-04	1.8E-03	5.3E-03	6.8E-03	6.8E-03	5.3E-03	5.0E-03	-3.4E-03	3.7E-03	1.4E-02	2.4E-02	3.4E-02	4.5E-02
66	2.2E-03	4.0E-03	4.9E-03	5.6E-03	9.4E-03	9.2E-03	8.7E-03	-4.6E-02	-3.8E-02	-2.3E-02	-8.2E-03	6.7E-03	2.1E-02
67	1.2E-03	1.7E-03	2.7E-03	3.5E-03	3.6E-03	3.2E-03	3.0E-03	-4.5E-02	-3.9E-02	-3.0E-02	-2.1E-02	-1.3E-02	-4.1E-03
68	5.3E-04	1.4E-03	2.8E-03	3.5E-03	3.5E-03	1.9E-03	1.8E-03	-3.1E-02	-2.9E-02	-2.5E-02	-2.2E-02	-1.8E-02	-1.5E-02
69	1.8E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	1.6E-03	1.6E-03	-1.4E-02	-9.8E-03	-5.0E-03	-2.4E-04	4.6E-03	9.3E-03
70	1.7E-03	1.8E-03	3.6E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-2.3E-02	-1.6E-02	-5.5E-03	4.5E-03	1.5E-02	2.5E-02
71	9.5E-04	3.3E-03	5.2E-03	5.7E-03	4.5E-03	3.0E-03	2.9E-03	-8.6E-02	-8.0E-02	-7.3E-02	-6.5E-02	-5.8E-02	-5.1E-02
72	1.4E-03	1.8E-03	2.8E-03	3.7E-03	3.9E-03	3.7E-03	3.7E-03	-2.5E-02	-2.1E-02	-1.5E-02	-9.2E-03	-3.3E-03	2.7E-03
73	3.4E-03	5.8E-03	5.9E-03	7.5E-03	1.3E-02	1.2E-02	1.2E-02	-3.7E-03	1.3E-03	1.6E-02	3.1E-02	4.5E-02	6.0E-02
74	1.1E-03	1.4E-03	1.5E-03	1.0E-03	2.0E-03	8.6E-04	8.3E-04	-2.8E-03	-1.2E-03	6.1E-04	2.4E-03	4.3E-03	6.1E-03
75	1.1E-03	8.7E-03	8.6E-03	9.3E-03	9.4E-03	3.8E-03	3.8E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.9E-02
76	7.2E-04	1.4E-03	2.5E-03	3.5E-03	3.8E-03	3.1E-03	2.9E-03	-2.3E-02	-2.0E-02	-1.6E-02	-1.1E-02	-6.2E-03	-1.5E-03
77	1.4E-03	1.5E-03	2.4E-03	3.9E-03	4.0E-03	3.7E-03	3.7E-03	-1.6E-02	-1.9E-02	-2.0E-02	-2.0E-02	-2.1E-02	-2.2E-02
78	3.4E-03	8.0E-03	8.4E-03	8.9E-03	1.0E-02	8.3E-03	8.3E-03	-1.0E-02	4.6E-03	2.6E-02	4.7E-02	6.8E-02	9.0E-02
79	1.7E-03	2.0E-03	3.2E-03	5.0E-03	5.1E-03	4.7E-03	4.7E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
80	7.6E-04	9.9E-04	5.1E-04	6.5E-04	5.4E-04	4.9E-04	4.8E-04	-3.2E-03	-2.6E-03	-1.8E-03	-9.1E-04	-3.8E-05	8.3E-04
81	3.9E-04	1.1E-03	1.3E-03	1.2E-03	1.2E-03	9.7E-04	9.7E-04	-1.6E-02	-1.4E-02	-1.1E-02	-8.8E-03	-6.3E-03	-3.7E-03
82	2.5E-03	2.9E-03	5.0E-03	8.8E-03	9.3E-03	8.7E-03	8.6E-03	-8.2E-03	-1.0E-02	-7.6E-03	-5.0E-03	-2.5E-03	7.3E-05

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
83	1.9E-03	2.0E-03	2.1E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.0E-02	-6.7E-03	-3.4E-03	-1.4E-05	3.3E-03
84	7.4E-04	3.8E-03	6.2E-03	8.2E-03	5.7E-03	2.6E-03	2.5E-03	1.5E-02	1.4E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02
85	8.5E-04	4.0E-03	6.0E-03	6.4E-03	5.3E-03	3.2E-03	2.8E-03	-1.1E-01	-1.0E-01	-9.2E-02	-8.4E-02	-7.6E-02	-6.7E-02
86	3.2E-03	5.4E-03	5.0E-03	6.3E-03	1.1E-02	1.0E-02	9.7E-03	1.1E-02	1.6E-02	3.0E-02	4.3E-02	5.7E-02	7.0E-02
87	3.3E-04	7.8E-04	9.7E-04	9.4E-04	8.7E-04	7.8E-04	7.8E-04	-1.4E-02	-1.2E-02	-9.0E-03	-6.4E-03	-3.8E-03	-1.2E-03
88	1.1E-03	9.5E-03	1.3E-02	1.3E-02	1.0E-02	4.9E-03	4.3E-03	-6.7E-02	-5.9E-02	-4.8E-02	-3.8E-02	-2.7E-02	-1.6E-02
89	1.1E-03	3.5E-03	6.2E-03	8.6E-03	8.4E-03	5.1E-03	4.7E-03	2.1E-02	2.7E-02	3.7E-02	4.6E-02	5.6E-02	6.6E-02
90	1.3E-03	1.7E-03	1.1E-03	6.9E-04	7.0E-04	9.9E-04	4.4E-04	-1.3E-02	-1.2E-02	-1.0E-02	-9.2E-03	-8.0E-03	-6.8E-03
91	1.3E-03	1.7E-03	1.1E-03	7.0E-04	7.0E-04	9.9E-04	4.5E-04	-1.2E-02	-1.2E-02	-1.0E-02	-9.1E-03	-7.8E-03	-6.6E-03
92	9.6E-04	1.6E-03	3.0E-03	3.8E-03	5.0E-03	4.6E-03	4.3E-03	-2.9E-02	-2.5E-02	-1.9E-02	-1.3E-02	-6.7E-03	-5.4E-04
93	3.1E-04	7.3E-04	9.2E-04	8.9E-04	8.2E-04	7.4E-04	7.3E-04	-1.3E-02	-1.1E-02	-8.3E-03	-5.7E-03	-3.2E-03	-6.4E-04
94	9.4E-04	1.4E-03	1.5E-03	1.1E-03	1.4E-03	1.1E-03	9.6E-04	-2.6E-03	-8.4E-04	1.3E-03	3.4E-03	5.5E-03	7.6E-03
95	1.3E-03	1.7E-03	1.1E-03	6.9E-04	7.1E-04	9.9E-04	4.4E-04	-1.3E-02	-1.2E-02	-1.0E-02	-9.3E-03	-8.1E-03	-6.9E-03
96	6.9E-04	2.3E-03	3.6E-03	4.5E-03	4.7E-03	2.3E-03	2.2E-03	5.3E-03	-5.3E-03	-1.4E-02	-2.3E-02	-3.3E-02	-4.2E-02
97	3.2E-04	6.0E-04	8.2E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-6.6E-03	-7.0E-03	-7.2E-03	-7.4E-03	-7.5E-03	-7.7E-03
98	3.2E-04	6.0E-04	8.2E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-6.7E-03	-7.1E-03	-7.2E-03	-7.4E-03	-7.5E-03	-7.7E-03
99	4.7E-04	1.0E-03	2.0E-03	2.2E-03	1.7E-03	1.4E-03	1.4E-03	-8.8E-03	-9.0E-03	-8.7E-03	-8.4E-03	-8.1E-03	-7.7E-03
100	1.4E-03	2.6E-03	3.7E-03	3.8E-03	6.4E-03	6.2E-03	5.9E-03	-8.2E-03	-3.5E-03	5.0E-03	1.3E-02	2.2E-02	3.0E-02
101	6.7E-04	2.5E-03	4.4E-03	5.7E-03	3.7E-03	2.1E-03	1.9E-03	1.5E-02	1.9E-02	2.3E-02	2.8E-02	3.3E-02	3.7E-02
102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
111	2.3E-03	2.6E-02	2.6E-02	2.6E-02	1.7E-02	7.7E-03	7.4E-03	-7.8E-02	-7.0E-02	-5.7E-02	-4.4E-02	-3.1E-02	-1.8E-02
112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
113	2.5E-03	2.4E-02	2.4E-02	2.4E-02	2.2E-02	8.0E-03	7.8E-03	-9.4E-02	-8.6E-02	-7.3E-02	-6.0E-02	-4.7E-02	-3.3E-02
114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
115	2.7E-03	2.4E-02	2.4E-02	2.4E-02	2.1E-02	8.4E-03	8.1E-03	-9.9E-02	-9.4E-02	-8.5E-02	-7.6E-02	-6.7E-02	-5.7E-02
116	2.9E-03	1.9E-02	1.9E-02	1.9E-02	1.9E-02	8.7E-03	8.4E-03	-1.0E-01	-9.7E-02	-8.9E-02	-8.1E-02	-7.3E-02	-6.5E-02
117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
118	2.9E-03	2.4E-02	2.4E-02	2.3E-02	1.8E-02	8.8E-03	8.5E-03	-9.6E-02	-9.3E-02	-8.6E-02	-7.9E-02	-7.2E-02	-6.4E-02
119	3.1E-03	2.1E-02	2.1E-02	2.0E-02	1.6E-02	9.0E-03	8.7E-03	-9.1E-02	-8.8E-02	-8.1E-02	-7.3E-02	-6.6E-02	-5.8E-02
120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
121	3.1E-03	2.0E-02	2.0E-02	1.9E-02	1.6E-02	9.2E-03	8.9E-03	-7.5E-02	-7.4E-02	-6.8E-02	-6.2E-02	-5.6E-02	-4.9E-02
122	3.3E-03	1.9E-02	1.9E-02	1.9E-02	1.4E-02	9.4E-03	9.1E-03	-6.5E-02	-6.3E-02	-5.7E-02	-5.0E-02	-4.3E-02	-3.7E-02
123	3.4E-03	1.8E-02	1.8E-02	1.7E-02	1.3E-02	9.5E-03	9.2E-03	-5.5E-02	-5.3E-02	-4.6E-02	-4.0E-02	-3.3E-02	-2.6E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
125	3.3E-03	1.6E-02	1.7E-02	1.7E-02	1.7E-02	9.5E-03	9.2E-03	-4.3E-02	-4.0E-02	-3.3E-02	-2.5E-02	-1.8E-02	-1.0E-02
126	3.5E-03	1.5E-02	1.5E-02	1.5E-02	1.3E-02	9.7E-03	9.4E-03	-3.7E-02	-3.4E-02	-2.5E-02	-1.7E-02	-8.9E-03	-6.4E-04
127	3.6E-03	1.6E-02	1.6E-02	1.5E-02	1.2E-02	9.8E-03	9.5E-03	-3.2E-02	-2.8E-02	-1.9E-02	-1.0E-02	-1.4E-03	7.6E-03
128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
129	3.5E-03	1.5E-02	1.7E-02	1.7E-02	1.7E-02	9.9E-03	9.6E-03	-8.0E-03	-1.6E-03	9.7E-03	2.1E-02	3.2E-02	4.4E-02
130	3.7E-03	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.0E-02	9.8E-03	-8.2E-03	-2.7E-03	8.3E-03	1.9E-02	3.0E-02	4.1E-02
131	3.7E-03	1.3E-02	1.3E-02	1.2E-02	1.3E-02	1.0E-02	9.8E-03	-7.1E-03	-2.1E-03	8.8E-03	2.0E-02	3.1E-02	4.2E-02
132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
133	3.8E-03	1.3E-02	1.5E-02	1.5E-02	1.5E-02	1.0E-02	1.0E-02	2.0E-02	3.1E-02	4.7E-02	6.4E-02	8.0E-02	9.6E-02
134	3.9E-03	1.2E-02	1.4E-02	1.4E-02	1.4E-02	1.0E-02	1.0E-02	1.5E-02	2.4E-02	3.9E-02	5.4E-02	6.9E-02	8.4E-02
135	3.9E-03	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.0E-02	1.0E-02	1.1E-02	1.8E-02	3.2E-02	4.5E-02	5.9E-02	7.2E-02
136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
137	4.0E-03	1.1E-02	1.4E-02	1.4E-02	1.4E-02	1.1E-02	1.0E-02	3.6E-02	4.9E-02	6.8E-02	8.7E-02	1.1E-01	1.3E-01
138	4.0E-03	1.1E-02	1.3E-02	1.3E-02	1.3E-02	1.1E-02	1.0E-02	2.7E-02	3.9E-02	5.6E-02	7.4E-02	9.2E-02	1.1E-01
139	4.0E-03	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.1E-02	1.0E-02	2.0E-02	2.9E-02	4.5E-02	6.1E-02	7.6E-02	9.2E-02
140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
141	4.2E-03	9.6E-03	1.4E-02	1.4E-02	1.4E-02	1.1E-02	1.1E-02	4.7E-02	5.8E-02	7.5E-02	9.2E-02	1.1E-01	1.3E-01
142	4.2E-03	9.9E-03	1.3E-02	1.3E-02	1.4E-02	1.1E-02	1.1E-02	4.0E-02	4.9E-02	6.5E-02	8.1E-02	9.6E-02	1.1E-01
143	4.1E-03	9.6E-03	1.2E-02	1.2E-02	1.3E-02	1.1E-02	1.1E-02	3.1E-02	4.0E-02	5.5E-02	7.0E-02	8.6E-02	1.0E-01
144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
145	4.4E-03	9.1E-03	1.4E-02	1.4E-02	1.5E-02	1.2E-02	1.1E-02	5.7E-02	6.8E-02	8.6E-02	1.0E-01	1.2E-01	1.4E-01
146	4.4E-03	8.6E-03	1.2E-02	1.3E-02	1.4E-02	1.2E-02	1.1E-02	4.4E-02	5.4E-02	7.2E-02	8.9E-02	1.1E-01	1.2E-01
147	4.2E-03	8.7E-03	1.1E-02	1.2E-02	1.4E-02	1.1E-02	1.1E-02	3.4E-02	4.5E-02	6.2E-02	7.9E-02	9.7E-02	1.1E-01
148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
149	4.6E-03	8.7E-03	1.3E-02	1.4E-02	1.5E-02	1.2E-02	1.2E-02	6.0E-02	7.4E-02	9.6E-02	1.2E-01	1.4E-01	1.6E-01
150	4.5E-03	7.6E-03	1.2E-02	1.3E-02	1.4E-02	1.2E-02	1.2E-02	5.0E-02	6.3E-02	8.3E-02	1.0E-01	1.2E-01	1.4E-01
151	4.3E-03	7.8E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	4.1E-02	5.1E-02	7.0E-02	8.8E-02	1.1E-01	1.2E-01
152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
153	4.8E-03	8.2E-03	1.2E-02	1.4E-02	1.5E-02	1.3E-02	1.2E-02	6.4E-02	8.1E-02	1.1E-01	1.3E-01	1.5E-01	1.8E-01
154	4.6E-03	7.5E-03	1.1E-02	1.3E-02	1.5E-02	1.2E-02	1.2E-02	5.2E-02	6.7E-02	9.0E-02	1.1E-01	1.4E-01	1.6E-01
155	4.3E-03	6.8E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	3.9E-02	5.4E-02	7.6E-02	9.8E-02	1.2E-01	1.4E-01
156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
157	4.9E-03	7.5E-03	1.1E-02	1.4E-02	1.5E-02	1.3E-02	1.2E-02	6.3E-02	8.2E-02	1.1E-01	1.4E-01	1.6E-01	1.9E-01
158	4.6E-03	7.3E-03	1.1E-02	1.3E-02	1.5E-02	1.2E-02	1.2E-02	4.5E-02	6.3E-02	8.9E-02	1.1E-01	1.4E-01	1.7E-01
159	4.3E-03	6.5E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	2.8E-02	4.5E-02	7.0E-02	9.5E-02	1.2E-01	1.4E-01
160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
161	5.0E-03	6.8E-03	9.9E-03	1.4E-02	1.6E-02	1.3E-02	1.3E-02	5.7E-02	7.2E-02	9.7E-02	1.2E-01	1.5E-01	1.7E-01
162	4.7E-03	6.9E-03	9.9E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	3.8E-02	5.5E-02	8.1E-02	1.1E-01	1.3E-01	1.6E-01
163	4.3E-03	6.4E-03	9.6E-03	1.2E-02	1.4E-02	1.2E-02	1.1E-02	2.3E-02	4.0E-02	6.5E-02	9.0E-02	1.1E-01	1.4E-01
164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
165	5.1E-03	6.1E-03	9.5E-03	1.4E-02	1.6E-02	1.4E-02	1.3E-02	5.0E-02	6.4E-02	8.7E-02	1.1E-01	1.3E-01	1.6E-01
166	4.7E-03	6.4E-03	9.1E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	3.3E-02	4.7E-02	6.9E-02	9.1E-02	1.1E-01	1.4E-01
167	4.3E-03	7.3E-03	1.1E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	1.5E-02	3.1E-02	5.6E-02	8.0E-02	1.0E-01	1.3E-01
168	6.0E-03	7.6E-03	1.1E-02	1.7E-02	1.9E-02	1.6E-02	1.6E-02	6.1E-02	7.7E-02	1.0E-01	1.3E-01	1.6E-01	1.8E-01
169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
170	5.1E-03	6.1E-03	1.0E-02	1.4E-02	1.6E-02	1.4E-02	1.3E-02	3.8E-02	5.2E-02	7.5E-02	9.9E-02	1.2E-01	1.5E-01
171	4.7E-03	6.7E-03	9.8E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	2.7E-02	4.0E-02	6.1E-02	8.3E-02	1.0E-01	1.3E-01
172	4.2E-03	7.0E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	1.4E-02	2.6E-02	4.6E-02	6.7E-02	8.7E-02	1.1E-01
173	6.1E-03	7.3E-03	1.1E-02	1.7E-02	1.9E-02	1.6E-02	1.6E-02	4.0E-02	5.3E-02	7.7E-02	1.0E-01	1.2E-01	1.5E-01
174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
178	6.2E-03	7.2E-03	1.1E-02	1.7E-02	1.9E-02	1.7E-02	1.6E-02	3.4E-02	4.4E-02	6.6E-02	8.8E-02	1.1E-01	1.3E-01
179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
180	5.1E-03	6.2E-03	9.3E-03	1.4E-02	1.6E-02	1.4E-02	1.3E-02	2.4E-02	3.5E-02	5.7E-02	7.9E-02	1.0E-01	1.2E-01
181	4.5E-03	5.6E-03	9.4E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	2.9E-02	4.0E-02	6.0E-02	8.1E-02	1.0E-01	1.2E-01
182	6.9E-03	8.0E-03	1.2E-02	1.9E-02	2.1E-02	1.9E-02	1.8E-02	3.4E-02	4.3E-02	6.4E-02	8.6E-02	1.1E-01	1.3E-01
183	6.3E-03	7.4E-03	1.1E-02	1.8E-02	2.0E-02	1.7E-02	1.7E-02	2.8E-02	3.8E-02	5.9E-02	8.0E-02	1.0E-01	1.2E-01
184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
185	5.0E-03	6.1E-03	9.3E-03	1.4E-02	1.6E-02	1.4E-02	1.3E-02	1.7E-02	2.8E-02	4.9E-02	7.0E-02	9.1E-02	1.1E-01
186	4.6E-03	5.5E-03	8.9E-03	1.3E-02	1.5E-02	1.2E-02	1.2E-02	1.8E-02	3.0E-02	5.1E-02	7.2E-02	9.3E-02	1.1E-01
187	7.8E-03	8.9E-03	1.3E-02	2.2E-02	2.4E-02	2.1E-02	2.1E-02	3.3E-02	3.9E-02	6.0E-02	8.1E-02	1.0E-01	1.2E-01
188	7.0E-03	8.0E-03	1.2E-02	2.0E-02	2.1E-02	1.9E-02	1.8E-02	2.6E-02	3.3E-02	5.3E-02	7.3E-02	9.3E-02	1.1E-01
189	6.2E-03	7.3E-03	1.1E-02	1.8E-02	2.0E-02	1.7E-02	1.7E-02	2.3E-02	3.0E-02	5.0E-02	6.9E-02	8.8E-02	1.1E-01
190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
191	4.9E-03	5.9E-03	9.1E-03	1.4E-02	1.6E-02	1.3E-02	1.3E-02	1.3E-02	2.3E-02	4.4E-02	6.4E-02	8.5E-02	1.1E-01
192	8.7E-03	9.8E-03	1.4E-02	2.4E-02	2.6E-02	2.4E-02	2.3E-02	1.7E-02	2.0E-02	3.9E-02	5.7E-02	7.6E-02	9.5E-02
193	7.8E-03	8.9E-03	1.3E-02	2.2E-02	2.4E-02	2.1E-02	2.1E-02	2.0E-02	2.3E-02	4.0E-02	5.8E-02	7.5E-02	9.2E-02
194	7.0E-03	8.1E-03	1.2E-02	2.0E-02	2.2E-02	1.9E-02	1.9E-02	2.0E-02	2.5E-02	4.2E-02	5.9E-02	7.7E-02	9.4E-02
195	6.1E-03	7.2E-03	1.1E-02	1.7E-02	1.9E-02	1.7E-02	1.6E-02	1.9E-02	2.5E-02	4.2E-02	6.0E-02	7.7E-02	9.4E-02
196	5.7E-03	6.8E-03	1.0E-02	1.6E-02	1.8E-02	1.6E-02	1.5E-02	1.7E-02	2.3E-02	4.1E-02	5.8E-02	7.6E-02	9.3E-02
197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
198	9.1E-03	1.0E-02	1.5E-02	2.6E-02	2.8E-02	2.5E-02	2.5E-02	1.4E-02	1.3E-02	2.8E-02	4.3E-02	5.8E-02	7.3E-02
199	8.1E-03	9.2E-03	1.3E-02	2.3E-02	2.5E-02	2.2E-02	2.2E-02	1.7E-02	1.8E-02	3.3E-02	4.9E-02	6.4E-02	8.0E-02
200	7.0E-03	8.1E-03	1.2E-02	2.0E-02	2.2E-02	1.9E-02	1.9E-02	1.7E-02	1.9E-02	3.4E-02	4.8E-02	6.3E-02	7.8E-02
201	6.0E-03	7.1E-03	1.1E-02	1.7E-02	1.9E-02	1.7E-02	1.6E-02	1.9E-02	2.1E-02	3.6E-02	5.0E-02	6.4E-02	7.9E-02
202	5.4E-03	6.6E-03	1.0E-02	1.6E-02	1.8E-02	1.5E-02	1.5E-02	1.8E-02	2.1E-02	3.6E-02	5.1E-02	6.6E-02	8.1E-02
203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
369	2.0E-03	1.2E-02	1.8E-02	1.8E-02	1.8E-02	6.8E-03	6.6E-03	-4.3E-02	-4.0E-02	-3.2E-02	-2.5E-02	-1.7E-02	-1.0E-02

APPENDIX C. ANNUAL HUMAN HEALTH ACUTE HAZARDS FOR THE SEATTLE-TACOMA INTERNATIONAL AIRPORT

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
372	2.2E-03	1.1E-02	1.7E-02	1.6E-02	1.6E-02	7.2E-03	6.9E-03	-5.6E-02	-5.0E-02	-3.9E-02	-2.8E-02	-1.7E-02	-6.3E-03
373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
374	2.3E-03	1.7E-02	1.7E-02	1.7E-02	1.2E-02	7.5E-03	7.2E-03	-7.0E-02	-6.2E-02	-5.0E-02	-3.7E-02	-2.5E-02	-1.3E-02
375	2.5E-03	2.0E-02	2.0E-02	2.0E-02	1.4E-02	7.9E-03	7.6E-03	-8.9E-02	-8.1E-02	-7.0E-02	-5.8E-02	-4.6E-02	-3.5E-02
376	2.6E-03	2.2E-02	2.2E-02	2.1E-02	1.4E-02	8.2E-03	7.9E-03	-9.7E-02	-9.1E-02	-8.0E-02	-6.9E-02	-5.8E-02	-4.7E-02
377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
512	5.1E-04	1.5E-03	2.6E-03	3.5E-03	1.6E-02	1.8E-02	7.7E-03	4.0E-05	2.8E-03	7.3E-03	1.2E-02	1.6E-02	2.1E-02
513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
517	5.2E-04	1.5E-03	2.5E-03	3.5E-03	1.6E-02	2.1E-02	7.6E-03	-8.2E-04	2.1E-03	6.7E-03	1.1E-02	1.6E-02	2.1E-02
518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
548	1.5E-03	3.5E-03	1.6E-02	1.2E-02	1.2E-02	7.6E-03	7.1E-03	8.5E-03	2.7E-02	5.0E-02	7.2E-02	9.5E-02	1.2E-01
549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
551	1.5E-03	4.1E-03	1.6E-02	1.8E-02	1.4E-02	7.2E-03	6.6E-03	2.6E-02	4.6E-02	7.0E-02	9.4E-02	1.2E-01	1.4E-01
552	1.5E-03	3.7E-03	1.4E-02	1.4E-02	1.5E-02	7.4E-03	6.8E-03	2.5E-02	4.3E-02	6.5E-02	8.7E-02	1.1E-01	1.3E-01
553	1.5E-03	3.4E-03	1.4E-02	1.2E-02	1.5E-02	7.4E-03	6.9E-03	1.8E-02	3.4E-02	5.5E-02	7.6E-02	9.7E-02	1.2E-01
554	1.5E-03	3.0E-03	1.3E-02	1.0E-02	1.5E-02	7.3E-03	6.8E-03	1.0E-02	2.6E-02	4.6E-02	6.6E-02	8.6E-02	1.1E-01
555	1.4E-03	4.7E-03	1.7E-02	2.5E-02	1.9E-02	7.2E-03	6.7E-03	2.8E-02	4.3E-02	6.3E-02	8.3E-02	1.0E-01	1.2E-01
556	1.5E-03	4.4E-03	1.7E-02	2.1E-02	1.7E-02	7.1E-03	6.6E-03	2.4E-02	4.2E-02	6.3E-02	8.5E-02	1.1E-01	1.3E-01
557	1.5E-03	4.1E-03	1.5E-02	1.8E-02	1.8E-02	6.9E-03	6.5E-03	2.6E-02	4.3E-02	6.5E-02	8.7E-02	1.1E-01	1.3E-01
558	1.5E-03	3.7E-03	1.4E-02	1.6E-02	1.8E-02	7.2E-03	6.7E-03	2.7E-02	4.4E-02	6.5E-02	8.6E-02	1.1E-01	1.3E-01
559	1.5E-03	3.3E-03	1.2E-02	1.3E-02	1.7E-02	7.3E-03	6.7E-03	2.4E-02	3.9E-02	5.8E-02	7.7E-02	9.6E-02	1.2E-01
560	1.4E-03	2.9E-03	1.2E-02	1.0E-02	1.6E-02	7.2E-03	6.7E-03	1.6E-02	3.0E-02	4.9E-02	6.8E-02	8.7E-02	1.1E-01
561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
567	1.4E-03	4.9E-03	1.6E-02	2.2E-02	2.4E-02	6.9E-03	6.4E-03	3.5E-02	4.4E-02	5.8E-02	7.2E-02	8.5E-02	9.9E-02
568	1.4E-03	4.4E-03	1.3E-02	2.0E-02	2.3E-02	6.8E-03	6.3E-03	2.7E-02	4.0E-02	5.7E-02	7.4E-02	9.1E-02	1.1E-01
569	1.4E-03	3.9E-03	1.3E-02	1.7E-02	2.2E-02	6.7E-03	6.2E-03	2.2E-02	3.7E-02	5.7E-02	7.7E-02	9.7E-02	1.2E-01
570	1.4E-03	3.4E-03	1.2E-02	1.5E-02	2.0E-02	6.7E-03	6.2E-03	2.4E-02	3.9E-02	5.9E-02	7.8E-02	9.8E-02	1.2E-01
571	1.4E-03	2.9E-03	1.1E-02	1.4E-02	1.8E-02	6.9E-03	6.4E-03	2.5E-02	3.8E-02	5.6E-02	7.3E-02	9.0E-02	1.1E-01
572	1.4E-03	2.7E-03	1.0E-02	1.2E-02	1.5E-02	6.9E-03	6.4E-03	2.0E-02	3.2E-02	4.9E-02	6.5E-02	8.2E-02	9.8E-02
573	1.3E-03	4.8E-03	1.4E-02	2.0E-02	2.4E-02	6.7E-03	6.2E-03	3.6E-02	4.4E-02	5.5E-02	6.7E-02	7.8E-02	9.0E-02
574	1.4E-03	4.2E-03	1.3E-02	1.9E-02	2.3E-02	6.7E-03	6.2E-03	3.0E-02	4.0E-02	5.5E-02	6.9E-02	8.4E-02	9.8E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
575	1.4E-03	3.7E-03	1.1E-02	1.7E-02	2.0E-02	6.6E-03	6.1E-03	2.3E-02	3.6E-02	5.4E-02	7.2E-02	9.0E-02	1.1E-01
576	1.4E-03	3.1E-03	1.1E-02	1.5E-02	1.8E-02	6.5E-03	6.0E-03	2.2E-02	3.6E-02	5.5E-02	7.4E-02	9.3E-02	1.1E-01
577	1.4E-03	3.0E-03	1.1E-02	1.3E-02	1.6E-02	6.7E-03	6.2E-03	2.5E-02	3.8E-02	5.5E-02	7.2E-02	8.9E-02	1.1E-01
578	1.4E-03	2.9E-03	9.9E-03	1.2E-02	1.3E-02	6.7E-03	6.2E-03	2.1E-02	3.3E-02	4.9E-02	6.5E-02	8.1E-02	9.7E-02
579	1.3E-03	4.6E-03	1.3E-02	1.8E-02	2.4E-02	6.5E-03	6.1E-03	3.8E-02	4.3E-02	5.3E-02	6.2E-02	7.2E-02	8.1E-02
580	1.3E-03	4.0E-03	1.3E-02	1.8E-02	2.1E-02	6.5E-03	6.0E-03	3.2E-02	4.0E-02	5.2E-02	6.5E-02	7.7E-02	8.9E-02
581	1.4E-03	3.4E-03	1.1E-02	1.7E-02	1.8E-02	6.4E-03	6.0E-03	2.5E-02	3.6E-02	5.2E-02	6.7E-02	8.2E-02	9.8E-02
582	1.4E-03	3.3E-03	9.7E-03	1.5E-02	1.5E-02	6.3E-03	5.9E-03	2.0E-02	3.4E-02	5.2E-02	6.9E-02	8.7E-02	1.0E-01
583	1.4E-03	3.2E-03	9.8E-03	1.3E-02	1.3E-02	6.5E-03	6.0E-03	2.3E-02	3.6E-02	5.2E-02	6.9E-02	8.6E-02	1.0E-01
584	1.3E-03	3.1E-03	9.3E-03	1.2E-02	1.1E-02	6.6E-03	6.1E-03	2.2E-02	3.3E-02	4.8E-02	6.4E-02	7.9E-02	9.5E-02
585	1.3E-03	4.4E-03	1.1E-02	1.7E-02	2.1E-02	6.4E-03	5.9E-03	3.9E-02	4.2E-02	5.0E-02	5.7E-02	6.5E-02	7.2E-02
586	1.3E-03	3.8E-03	1.2E-02	1.6E-02	1.7E-02	6.4E-03	5.9E-03	3.3E-02	4.0E-02	5.0E-02	6.0E-02	7.1E-02	8.1E-02
587	1.3E-03	3.7E-03	1.1E-02	1.6E-02	1.5E-02	6.3E-03	5.8E-03	2.7E-02	3.6E-02	5.0E-02	6.3E-02	7.6E-02	8.9E-02
588	1.3E-03	3.6E-03	9.6E-03	1.5E-02	1.4E-02	6.1E-03	5.7E-03	2.2E-02	3.4E-02	5.0E-02	6.6E-02	8.2E-02	9.8E-02
589	1.3E-03	3.4E-03	8.8E-03	1.3E-02	1.3E-02	6.3E-03	5.9E-03	2.1E-02	3.3E-02	5.0E-02	6.6E-02	8.2E-02	9.8E-02
590	1.3E-03	3.2E-03	8.8E-03	1.2E-02	1.2E-02	6.4E-03	5.9E-03	2.1E-02	3.2E-02	4.7E-02	6.2E-02	7.7E-02	9.2E-02
591	1.3E-03	4.3E-03	1.0E-02	2.1E-02	2.1E-02	6.8E-03	6.4E-03	3.9E-02	4.1E-02	4.8E-02	5.5E-02	6.1E-02	6.8E-02
592	1.3E-03	4.1E-03	1.1E-02	2.0E-02	2.0E-02	6.9E-03	6.4E-03	3.5E-02	3.9E-02	4.8E-02	5.7E-02	6.5E-02	7.4E-02
593	1.3E-03	3.9E-03	1.1E-02	1.8E-02	1.8E-02	6.2E-03	5.7E-03	2.9E-02	3.6E-02	4.7E-02	5.8E-02	7.0E-02	8.1E-02
594	1.3E-03	3.7E-03	9.7E-03	1.7E-02	1.7E-02	6.0E-03	5.6E-03	2.4E-02	3.4E-02	4.8E-02	6.2E-02	7.6E-02	9.0E-02
595	1.3E-03	3.5E-03	8.2E-03	1.5E-02	1.5E-02	6.2E-03	5.7E-03	2.1E-02	3.2E-02	4.7E-02	6.3E-02	7.8E-02	9.3E-02
596	1.3E-03	3.3E-03	8.0E-03	1.3E-02	1.3E-02	6.3E-03	5.8E-03	2.1E-02	3.2E-02	4.6E-02	6.0E-02	7.5E-02	8.9E-02
597	1.2E-03	4.5E-03	1.0E-02	2.1E-02	2.1E-02	6.8E-03	6.3E-03	3.9E-02	4.1E-02	4.7E-02	5.3E-02	6.0E-02	6.6E-02
598	1.3E-03	4.3E-03	9.6E-03	2.1E-02	2.1E-02	6.8E-03	6.3E-03	3.6E-02	3.9E-02	4.6E-02	5.4E-02	6.2E-02	6.9E-02
599	1.3E-03	4.0E-03	1.0E-02	2.0E-02	2.0E-02	6.1E-03	5.6E-03	3.0E-02	3.6E-02	4.5E-02	5.5E-02	6.4E-02	7.4E-02
600	1.3E-03	3.7E-03	9.6E-03	1.8E-02	1.8E-02	5.9E-03	5.5E-03	2.4E-02	3.3E-02	4.5E-02	5.7E-02	7.0E-02	8.2E-02
601	1.3E-03	3.5E-03	8.4E-03	1.6E-02	1.6E-02	6.0E-03	5.5E-03	2.2E-02	3.2E-02	4.6E-02	6.0E-02	7.4E-02	8.7E-02
602	1.3E-03	3.2E-03	7.0E-03	1.4E-02	1.4E-02	6.1E-03	5.6E-03	2.1E-02	3.1E-02	4.4E-02	5.7E-02	7.1E-02	8.4E-02
603	1.2E-03	4.6E-03	9.7E-03	1.8E-02	1.8E-02	6.7E-03	6.1E-03	3.9E-02	4.1E-02	4.7E-02	5.3E-02	5.9E-02	6.5E-02
604	1.2E-03	4.3E-03	8.5E-03	1.8E-02	1.8E-02	6.6E-03	6.1E-03	3.6E-02	3.8E-02	4.6E-02	5.3E-02	6.0E-02	6.7E-02
605	1.3E-03	4.0E-03	9.2E-03	1.8E-02	1.8E-02	5.9E-03	5.5E-03	3.1E-02	3.6E-02	4.4E-02	5.3E-02	6.1E-02	7.0E-02
606	1.3E-03	3.7E-03	9.1E-03	1.8E-02	1.8E-02	5.8E-03	5.4E-03	2.5E-02	3.2E-02	4.3E-02	5.3E-02	6.4E-02	7.4E-02
607	1.3E-03	3.4E-03	8.4E-03	1.6E-02	1.6E-02	5.8E-03	5.4E-03	2.3E-02	3.1E-02	4.4E-02	5.6E-02	6.9E-02	8.1E-02
608	1.3E-03	3.1E-03	7.4E-03	1.4E-02	1.4E-02	5.9E-03	5.5E-03	2.2E-02	3.1E-02	4.4E-02	5.6E-02	6.8E-02	8.1E-02
609	1.4E-03	1.6E-02	1.6E-02	1.4E-02	1.4E-02	5.0E-03	5.0E-03	1.6E-02	2.5E-02	3.8E-02	5.0E-02	6.3E-02	7.5E-02
610	1.4E-03	1.3E-02	1.3E-02	1.3E-02	1.5E-02	5.1E-03	5.1E-03	1.5E-02	2.6E-02	3.9E-02	5.2E-02	6.5E-02	7.8E-02
611	1.4E-03	1.0E-02	1.2E-02	1.2E-02	1.6E-02	4.9E-03	4.9E-03	1.2E-02	2.4E-02	3.8E-02	5.2E-02	6.7E-02	8.1E-02
612	1.4E-03	7.8E-03	1.1E-02	1.4E-02	1.7E-02	4.7E-03	4.7E-03	9.1E-03	2.2E-02	3.8E-02	5.3E-02	6.9E-02	8.4E-02
613	1.4E-03	6.6E-03	1.1E-02	1.5E-02	1.7E-02	5.0E-03	4.9E-03	6.4E-03	2.0E-02	3.7E-02	5.4E-02	7.0E-02	8.7E-02
614	1.3E-03	5.7E-03	1.0E-02	1.6E-02	1.9E-02	5.5E-03	5.0E-03	7.9E-03	2.1E-02	3.7E-02	5.4E-02	7.0E-02	8.7E-02
615	1.3E-03	5.3E-03	9.9E-03	1.6E-02	2.1E-02	5.9E-03	5.4E-03	1.5E-02	2.5E-02	3.9E-02	5.3E-02	6.7E-02	8.1E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
616	1.2E-03	4.9E-03	9.9E-03	1.5E-02	2.0E-02	6.3E-03	5.7E-03	2.8E-02	3.4E-02	4.3E-02	5.2E-02	6.2E-02	7.1E-02
617	1.2E-03	4.6E-03	9.4E-03	1.4E-02	1.6E-02	6.5E-03	6.0E-03	3.9E-02	4.0E-02	4.6E-02	5.2E-02	5.8E-02	6.4E-02
618	1.2E-03	4.2E-03	8.4E-03	1.6E-02	1.6E-02	6.4E-03	6.0E-03	3.6E-02	3.8E-02	4.5E-02	5.1E-02	5.8E-02	6.5E-02
619	1.2E-03	3.9E-03	8.2E-03	1.7E-02	1.7E-02	5.8E-03	5.4E-03	3.1E-02	3.6E-02	4.4E-02	5.2E-02	6.0E-02	6.8E-02
620	1.2E-03	3.5E-03	8.4E-03	1.7E-02	1.7E-02	5.7E-03	5.3E-03	2.7E-02	3.3E-02	4.2E-02	5.1E-02	6.0E-02	7.0E-02
621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
622	1.2E-03	3.0E-03	7.5E-03	1.2E-02	1.2E-02	5.8E-03	5.3E-03	2.2E-02	3.0E-02	4.2E-02	5.3E-02	6.5E-02	7.6E-02
623	1.4E-03	1.6E-02	1.6E-02	1.5E-02	1.4E-02	5.0E-03	5.0E-03	1.6E-02	2.5E-02	3.7E-02	5.0E-02	6.2E-02	7.4E-02
624	1.4E-03	1.2E-02	1.4E-02	1.4E-02	1.4E-02	5.0E-03	5.0E-03	1.5E-02	2.5E-02	3.8E-02	5.1E-02	6.3E-02	7.6E-02
625	1.3E-03	9.4E-03	1.2E-02	1.2E-02	1.5E-02	4.8E-03	4.8E-03	1.3E-02	2.4E-02	3.8E-02	5.2E-02	6.5E-02	7.9E-02
626	1.3E-03	7.5E-03	1.1E-02	1.3E-02	1.5E-02	4.7E-03	4.6E-03	9.6E-03	2.2E-02	3.7E-02	5.2E-02	6.7E-02	8.3E-02
627	1.3E-03	6.3E-03	1.0E-02	1.4E-02	1.6E-02	4.8E-03	4.8E-03	7.1E-03	2.1E-02	3.7E-02	5.3E-02	6.9E-02	8.5E-02
628	1.3E-03	5.7E-03	1.0E-02	1.5E-02	1.8E-02	5.3E-03	4.9E-03	8.0E-03	2.1E-02	3.7E-02	5.3E-02	6.9E-02	8.5E-02
629	1.3E-03	5.2E-03	9.4E-03	1.6E-02	2.0E-02	5.8E-03	5.3E-03	1.4E-02	2.5E-02	3.9E-02	5.3E-02	6.7E-02	8.1E-02
630	1.2E-03	4.9E-03	9.5E-03	1.5E-02	1.9E-02	6.1E-03	5.6E-03	2.7E-02	3.3E-02	4.3E-02	5.2E-02	6.2E-02	7.1E-02
631	1.2E-03	4.5E-03	9.1E-03	1.3E-02	1.6E-02	6.4E-03	5.9E-03	3.8E-02	4.0E-02	4.6E-02	5.1E-02	5.7E-02	6.3E-02
632	1.2E-03	4.1E-03	8.3E-03	1.4E-02	1.5E-02	6.3E-03	5.9E-03	3.6E-02	3.8E-02	4.4E-02	5.1E-02	5.7E-02	6.3E-02
633	1.2E-03	3.7E-03	7.4E-03	1.5E-02	1.6E-02	5.7E-03	5.3E-03	3.2E-02	3.6E-02	4.3E-02	5.1E-02	5.9E-02	6.6E-02
634	1.2E-03	3.3E-03	7.8E-03	1.6E-02	1.6E-02	5.6E-03	5.2E-03	2.7E-02	3.3E-02	4.1E-02	5.0E-02	5.9E-02	6.8E-02
635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
636	1.2E-03	2.8E-03	7.4E-03	1.3E-02	1.3E-02	5.6E-03	5.2E-03	2.1E-02	2.9E-02	4.0E-02	5.1E-02	6.2E-02	7.3E-02
637	1.3E-03	1.5E-02	1.5E-02	1.5E-02	1.2E-02	5.1E-03	5.1E-03	2.0E-02	2.8E-02	3.9E-02	5.0E-02	6.1E-02	7.1E-02
638	1.3E-03	1.2E-02	1.4E-02	1.4E-02	1.3E-02	5.0E-03	5.0E-03	1.5E-02	2.5E-02	3.7E-02	5.0E-02	6.2E-02	7.5E-02
639	1.3E-03	8.7E-03	1.2E-02	1.2E-02	1.4E-02	4.8E-03	4.8E-03	1.3E-02	2.4E-02	3.7E-02	5.1E-02	6.4E-02	7.7E-02
640	1.3E-03	7.1E-03	1.1E-02	1.2E-02	1.4E-02	4.6E-03	4.6E-03	1.0E-02	2.2E-02	3.7E-02	5.2E-02	6.6E-02	8.1E-02
641	1.3E-03	6.2E-03	9.9E-03	1.3E-02	1.5E-02	4.7E-03	4.7E-03	7.8E-03	2.1E-02	3.7E-02	5.2E-02	6.8E-02	8.4E-02
642	1.3E-03	5.7E-03	9.5E-03	1.4E-02	1.7E-02	5.2E-03	4.8E-03	8.1E-03	2.1E-02	3.7E-02	5.3E-02	6.8E-02	8.4E-02
643	1.3E-03	5.2E-03	8.8E-03	1.5E-02	1.8E-02	5.6E-03	5.2E-03	1.3E-02	2.4E-02	3.8E-02	5.2E-02	6.6E-02	8.0E-02
644	1.2E-03	4.8E-03	9.0E-03	1.4E-02	1.8E-02	6.0E-03	5.5E-03	2.6E-02	3.2E-02	4.2E-02	5.2E-02	6.2E-02	7.2E-02
645	1.2E-03	4.4E-03	8.8E-03	1.2E-02	1.6E-02	6.2E-03	5.7E-03	3.6E-02	3.9E-02	4.5E-02	5.1E-02	5.7E-02	6.3E-02
646	1.2E-03	4.0E-03	8.2E-03	1.2E-02	1.5E-02	6.1E-03	5.7E-03	3.6E-02	3.8E-02	4.4E-02	5.0E-02	5.6E-02	6.2E-02
647	1.2E-03	3.5E-03	7.3E-03	1.3E-02	1.4E-02	5.6E-03	5.2E-03	3.2E-02	3.5E-02	4.3E-02	5.0E-02	5.7E-02	6.4E-02
648	1.2E-03	3.1E-03	7.2E-03	1.4E-02	1.4E-02	5.5E-03	5.1E-03	2.8E-02	3.3E-02	4.1E-02	4.9E-02	5.8E-02	6.6E-02
649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
650	1.3E-03	1.4E-02	1.5E-02	1.5E-02	1.1E-02	5.0E-03	5.0E-03	2.2E-02	2.9E-02	3.9E-02	4.9E-02	5.9E-02	6.9E-02
651	1.3E-03	1.1E-02	1.4E-02	1.4E-02	1.2E-02	4.9E-03	4.9E-03	1.7E-02	2.6E-02	3.8E-02	5.0E-02	6.1E-02	7.3E-02
652	1.2E-03	8.2E-03	1.2E-02	1.2E-02	1.3E-02	4.7E-03	4.7E-03	1.3E-02	2.4E-02	3.7E-02	5.0E-02	6.3E-02	7.6E-02
653	1.3E-03	6.9E-03	1.1E-02	1.2E-02	1.3E-02	4.5E-03	4.5E-03	1.0E-02	2.2E-02	3.7E-02	5.1E-02	6.5E-02	7.9E-02
654	1.3E-03	6.1E-03	9.7E-03	1.3E-02	1.4E-02	4.6E-03	4.6E-03	8.4E-03	2.1E-02	3.6E-02	5.2E-02	6.7E-02	8.2E-02
655	1.3E-03	5.6E-03	9.1E-03	1.4E-02	1.6E-02	5.0E-03	4.6E-03	8.1E-03	2.1E-02	3.6E-02	5.2E-02	6.7E-02	8.3E-02
656	1.2E-03	5.1E-03	8.5E-03	1.4E-02	1.7E-02	5.4E-03	5.0E-03	1.2E-02	2.3E-02	3.7E-02	5.2E-02	6.6E-02	8.0E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
657	1.2E-03	4.6E-03	8.6E-03	1.3E-02	1.7E-02	5.8E-03	5.3E-03	2.5E-02	3.1E-02	4.2E-02	5.2E-02	6.2E-02	7.2E-02
658	1.1E-03	4.2E-03	8.5E-03	1.2E-02	1.6E-02	6.0E-03	5.5E-03	3.5E-02	3.8E-02	4.4E-02	5.0E-02	5.6E-02	6.2E-02
659	1.1E-03	3.7E-03	8.0E-03	1.1E-02	1.4E-02	5.5E-03	5.1E-03	3.5E-02	3.7E-02	4.3E-02	4.9E-02	5.4E-02	6.0E-02
660	1.2E-03	3.3E-03	7.2E-03	1.1E-02	1.4E-02	5.5E-03	5.1E-03	3.2E-02	3.5E-02	4.2E-02	4.9E-02	5.6E-02	6.3E-02
661	1.2E-03	3.0E-03	6.5E-03	1.1E-02	1.2E-02	5.4E-03	5.0E-03	2.8E-02	3.2E-02	4.0E-02	4.8E-02	5.6E-02	6.4E-02
662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
663	1.2E-03	1.4E-02	1.4E-02	1.5E-02	1.0E-02	4.9E-03	4.9E-03	2.5E-02	3.1E-02	4.0E-02	4.9E-02	5.8E-02	6.8E-02
664	1.2E-03	1.0E-02	1.4E-02	1.4E-02	1.1E-02	4.9E-03	4.9E-03	1.8E-02	2.7E-02	3.8E-02	4.9E-02	6.0E-02	7.1E-02
665	1.2E-03	8.8E-03	1.2E-02	1.2E-02	1.2E-02	4.6E-03	4.6E-03	1.3E-02	2.3E-02	3.6E-02	4.9E-02	6.1E-02	7.4E-02
666	1.2E-03	7.8E-03	1.1E-02	1.1E-02	1.2E-02	4.7E-03	4.7E-03	1.1E-02	2.2E-02	3.6E-02	5.0E-02	6.4E-02	7.7E-02
667	1.3E-03	6.8E-03	9.5E-03	1.2E-02	1.3E-02	4.5E-03	4.5E-03	8.9E-03	2.1E-02	3.6E-02	5.1E-02	6.6E-02	8.0E-02
668	1.2E-03	5.9E-03	8.8E-03	1.3E-02	1.5E-02	4.9E-03	4.5E-03	8.0E-03	2.0E-02	3.6E-02	5.1E-02	6.6E-02	8.2E-02
669	1.2E-03	5.4E-03	8.2E-03	1.3E-02	1.6E-02	5.3E-03	4.9E-03	1.1E-02	2.2E-02	3.7E-02	5.1E-02	6.5E-02	7.9E-02
670	1.2E-03	5.0E-03	8.2E-03	1.3E-02	1.7E-02	5.6E-03	5.2E-03	2.3E-02	3.0E-02	4.1E-02	5.1E-02	6.2E-02	7.2E-02
671	1.1E-03	4.5E-03	8.1E-03	1.1E-02	1.6E-02	5.8E-03	5.4E-03	3.4E-02	3.7E-02	4.3E-02	4.9E-02	5.6E-02	6.2E-02
672	1.1E-03	4.0E-03	7.8E-03	1.1E-02	1.3E-02	5.4E-03	5.0E-03	3.5E-02	3.7E-02	4.2E-02	4.8E-02	5.3E-02	5.8E-02
673	1.1E-03	3.7E-03	7.1E-03	1.0E-02	1.3E-02	5.4E-03	5.0E-03	3.2E-02	3.5E-02	4.2E-02	4.9E-02	5.5E-02	6.2E-02
674	1.1E-03	3.4E-03	6.4E-03	1.0E-02	1.2E-02	5.3E-03	4.9E-03	2.8E-02	3.2E-02	4.0E-02	4.7E-02	5.4E-02	6.2E-02
675	1.2E-03	1.3E-02	1.5E-02	1.5E-02	9.9E-03	4.9E-03	4.9E-03	2.6E-02	3.2E-02	4.0E-02	4.9E-02	5.7E-02	6.6E-02
676	1.2E-03	1.1E-02	1.3E-02	1.3E-02	1.1E-02	4.7E-03	4.7E-03	1.8E-02	2.6E-02	3.7E-02	4.8E-02	5.9E-02	7.0E-02
677	1.2E-03	9.3E-03	1.2E-02	1.2E-02	1.2E-02	4.5E-03	4.5E-03	1.3E-02	2.3E-02	3.6E-02	4.8E-02	6.0E-02	7.3E-02
678	1.2E-03	8.3E-03	1.0E-02	1.1E-02	1.2E-02	4.6E-03	4.6E-03	1.1E-02	2.2E-02	3.6E-02	4.9E-02	6.2E-02	7.6E-02
679	1.2E-03	7.4E-03	9.3E-03	1.2E-02	1.3E-02	4.4E-03	4.4E-03	9.3E-03	2.1E-02	3.6E-02	5.0E-02	6.4E-02	7.9E-02
680	1.2E-03	6.6E-03	8.4E-03	1.3E-02	1.4E-02	4.7E-03	4.4E-03	8.1E-03	2.0E-02	3.5E-02	5.0E-02	6.6E-02	8.1E-02
681	1.2E-03	5.9E-03	8.0E-03	1.3E-02	1.5E-02	5.1E-03	4.7E-03	1.1E-02	2.2E-02	3.6E-02	5.0E-02	6.4E-02	7.9E-02
682	1.2E-03	5.4E-03	7.8E-03	1.2E-02	1.6E-02	5.5E-03	5.1E-03	2.2E-02	2.9E-02	4.0E-02	5.1E-02	6.2E-02	7.2E-02
683	1.1E-03	4.9E-03	7.8E-03	1.1E-02	1.5E-02	5.6E-03	5.2E-03	3.3E-02	3.6E-02	4.3E-02	4.9E-02	5.6E-02	6.3E-02
684	1.2E-03	1.2E-02	1.4E-02	1.4E-02	9.8E-03	4.7E-03	4.7E-03	2.6E-02	3.1E-02	3.9E-02	4.7E-02	5.6E-02	6.4E-02
685	1.2E-03	1.1E-02	1.3E-02	1.3E-02	1.1E-02	4.6E-03	4.6E-03	1.7E-02	2.6E-02	3.6E-02	4.7E-02	5.7E-02	6.8E-02
686	1.1E-03	9.4E-03	1.1E-02	1.1E-02	1.1E-02	4.4E-03	4.4E-03	1.5E-02	2.4E-02	3.6E-02	4.8E-02	6.0E-02	7.2E-02
687	1.1E-03	8.5E-03	9.6E-03	1.0E-02	1.1E-02	4.5E-03	4.5E-03	1.3E-02	2.4E-02	3.7E-02	4.9E-02	6.2E-02	7.5E-02
688	1.2E-03	7.7E-03	8.2E-03	1.1E-02	1.2E-02	4.3E-03	4.3E-03	9.5E-03	2.1E-02	3.5E-02	4.9E-02	6.3E-02	7.7E-02
689	1.2E-03	7.1E-03	7.9E-03	1.2E-02	1.3E-02	4.6E-03	4.3E-03	8.6E-03	2.0E-02	3.5E-02	4.9E-02	6.4E-02	7.8E-02
690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
696	1.1E-03	1.2E-02	1.4E-02	1.4E-02	9.5E-03	4.6E-03	4.6E-03	2.7E-02	3.2E-02	3.9E-02	4.6E-02	5.4E-02	6.1E-02
697	1.1E-03	1.1E-02	1.2E-02	1.2E-02	1.0E-02	4.4E-03	4.4E-03	1.8E-02	2.5E-02	3.5E-02	4.5E-02	5.5E-02	6.5E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
698	1.1E-03	9.8E-03	9.8E-03	9.9E-03	9.7E-03	4.3E-03	4.3E-03	1.5E-02	2.5E-02	3.6E-02	4.7E-02	5.8E-02	6.9E-02
699	1.1E-03	8.8E-03	8.8E-03	9.9E-03	9.7E-03	4.3E-03	4.3E-03	1.3E-02	2.4E-02	3.6E-02	4.8E-02	6.0E-02	7.2E-02
700	1.2E-03	8.0E-03	8.0E-03	1.0E-02	1.1E-02	4.1E-03	4.1E-03	1.0E-02	2.1E-02	3.4E-02	4.8E-02	6.1E-02	7.4E-02
701	1.2E-03	7.4E-03	7.4E-03	1.1E-02	1.2E-02	4.4E-03	4.1E-03	9.2E-03	2.1E-02	3.4E-02	4.8E-02	6.2E-02	7.6E-02
702	1.1E-03	1.3E-02	1.5E-02	1.4E-02	9.4E-03	4.5E-03	4.5E-03	2.8E-02	3.2E-02	3.9E-02	4.6E-02	5.3E-02	6.0E-02
703	1.1E-03	1.2E-02	1.2E-02	1.1E-02	9.7E-03	4.4E-03	4.4E-03	1.9E-02	2.6E-02	3.5E-02	4.5E-02	5.4E-02	6.3E-02
704	1.1E-03	1.0E-02	1.0E-02	9.3E-03	9.5E-03	4.2E-03	4.2E-03	1.6E-02	2.5E-02	3.5E-02	4.6E-02	5.7E-02	6.7E-02
705	1.1E-03	9.2E-03	9.1E-03	9.8E-03	9.4E-03	4.2E-03	4.2E-03	1.2E-02	2.2E-02	3.4E-02	4.6E-02	5.8E-02	7.0E-02
706	1.2E-03	8.1E-03	8.0E-03	1.0E-02	1.1E-02	4.0E-03	4.0E-03	1.1E-02	2.1E-02	3.4E-02	4.7E-02	6.0E-02	7.3E-02
707	1.1E-03	7.4E-03	7.4E-03	1.1E-02	1.2E-02	4.2E-03	4.1E-03	9.5E-03	2.1E-02	3.4E-02	4.8E-02	6.1E-02	7.5E-02
708	1.1E-03	1.3E-02	1.6E-02	1.5E-02	9.3E-03	4.4E-03	4.4E-03	2.8E-02	3.2E-02	3.9E-02	4.5E-02	5.2E-02	5.8E-02
709	1.1E-03	1.2E-02	1.2E-02	1.2E-02	9.5E-03	4.3E-03	4.3E-03	2.0E-02	2.7E-02	3.6E-02	4.4E-02	5.3E-02	6.1E-02
710	1.1E-03	1.0E-02	1.0E-02	9.4E-03	9.3E-03	4.1E-03	4.1E-03	1.6E-02	2.5E-02	3.5E-02	4.5E-02	5.5E-02	6.6E-02
711	1.1E-03	9.4E-03	9.3E-03	9.6E-03	9.2E-03	4.1E-03	4.1E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.8E-02
712	1.1E-03	8.4E-03	8.3E-03	9.8E-03	1.0E-02	4.0E-03	3.9E-03	1.1E-02	2.1E-02	3.4E-02	4.6E-02	5.9E-02	7.1E-02
713	1.1E-03	7.6E-03	7.5E-03	1.0E-02	1.1E-02	4.1E-03	4.0E-03	9.8E-03	2.1E-02	3.4E-02	4.7E-02	6.0E-02	7.4E-02
714	1.1E-03	1.3E-02	1.6E-02	1.5E-02	9.2E-03	4.3E-03	4.3E-03	2.8E-02	3.2E-02	3.9E-02	4.5E-02	5.1E-02	5.7E-02
715	1.1E-03	1.2E-02	1.3E-02	1.2E-02	9.1E-03	4.3E-03	4.3E-03	2.2E-02	2.8E-02	3.6E-02	4.4E-02	5.2E-02	6.0E-02
716	1.1E-03	1.1E-02	1.1E-02	1.0E-02	8.8E-03	4.1E-03	4.0E-03	1.6E-02	2.4E-02	3.4E-02	4.4E-02	5.4E-02	6.4E-02
717	1.1E-03	9.6E-03	9.5E-03	9.4E-03	8.7E-03	4.0E-03	4.0E-03	1.1E-02	2.1E-02	3.3E-02	4.4E-02	5.6E-02	6.7E-02
718	1.1E-03	8.6E-03	8.5E-03	9.5E-03	9.7E-03	3.9E-03	3.9E-03	1.1E-02	2.1E-02	3.3E-02	4.6E-02	5.8E-02	7.0E-02
719	1.1E-03	7.8E-03	7.7E-03	1.0E-02	1.1E-02	4.0E-03	3.9E-03	1.0E-02	2.1E-02	3.4E-02	4.7E-02	6.0E-02	7.2E-02
720	1.1E-03	1.3E-02	1.7E-02	1.6E-02	9.1E-03	4.3E-03	4.3E-03	2.8E-02	3.2E-02	3.8E-02	4.4E-02	5.1E-02	5.7E-02
721	1.1E-03	1.2E-02	1.4E-02	1.3E-02	8.9E-03	4.2E-03	4.2E-03	2.3E-02	2.8E-02	3.6E-02	4.3E-02	5.1E-02	5.8E-02
722	1.0E-03	1.1E-02	1.1E-02	1.1E-02	8.6E-03	4.0E-03	4.0E-03	1.6E-02	2.4E-02	3.4E-02	4.3E-02	5.3E-02	6.3E-02
723	1.0E-03	9.7E-03	9.6E-03	9.2E-03	8.4E-03	4.0E-03	4.0E-03	1.1E-02	2.1E-02	3.2E-02	4.3E-02	5.4E-02	6.6E-02
724	1.1E-03	8.8E-03	8.7E-03	9.2E-03	9.3E-03	3.8E-03	3.8E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.9E-02
725	1.1E-03	8.0E-03	7.9E-03	9.7E-03	1.0E-02	3.9E-03	3.8E-03	1.0E-02	2.1E-02	3.3E-02	4.6E-02	5.9E-02	7.1E-02
726	1.1E-03	1.3E-02	1.7E-02	1.6E-02	8.8E-03	4.2E-03	4.2E-03	2.9E-02	3.3E-02	3.9E-02	4.4E-02	5.0E-02	5.6E-02
727	1.0E-03	1.2E-02	1.4E-02	1.3E-02	8.6E-03	4.1E-03	4.1E-03	2.3E-02	2.8E-02	3.5E-02	4.2E-02	4.9E-02	5.7E-02
728	1.0E-03	1.1E-02	1.2E-02	1.1E-02	8.3E-03	3.9E-03	3.9E-03	1.6E-02	2.4E-02	3.3E-02	4.3E-02	5.2E-02	6.1E-02
729	1.0E-03	9.7E-03	9.9E-03	9.2E-03	8.3E-03	3.6E-03	3.6E-03	1.1E-02	2.1E-02	3.2E-02	4.3E-02	5.4E-02	6.5E-02
730	1.1E-03	8.8E-03	8.8E-03	9.0E-03	8.9E-03	3.7E-03	3.7E-03	1.1E-02	2.1E-02	3.3E-02	4.4E-02	5.6E-02	6.8E-02
731	1.1E-03	8.1E-03	8.0E-03	9.4E-03	1.0E-02	3.8E-03	3.8E-03	1.0E-02	2.1E-02	3.3E-02	4.5E-02	5.8E-02	7.0E-02
732	8.1E-04	4.1E-03	5.3E-03	8.4E-03	5.8E-03	4.3E-03	4.0E-03	2.4E-02	2.1E-02	2.0E-02	2.0E-02	1.9E-02	1.9E-02
733	8.3E-04	4.4E-03	6.8E-03	9.9E-03	6.0E-03	4.3E-03	4.0E-03	1.7E-02	1.6E-02	1.8E-02	2.1E-02	2.3E-02	2.5E-02
734	8.6E-04	4.8E-03	8.7E-03	1.2E-02	6.3E-03	4.4E-03	4.1E-03	1.4E-02	1.5E-02	1.9E-02	2.2E-02	2.6E-02	3.0E-02
735	8.8E-04	5.5E-03	1.1E-02	1.4E-02	6.6E-03	4.5E-03	4.2E-03	1.0E-02	1.2E-02	1.7E-02	2.1E-02	2.6E-02	3.1E-02
736	8.9E-04	7.2E-03	1.4E-02	1.6E-02	6.9E-03	4.6E-03	4.2E-03	1.3E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
737	1.0E-03	1.3E-02	1.8E-02	1.7E-02	8.6E-03	4.1E-03	4.1E-03	3.0E-02	3.3E-02	3.9E-02	4.4E-02	5.0E-02	5.5E-02
738	1.0E-03	1.2E-02	1.5E-02	1.4E-02	8.4E-03	4.1E-03	4.1E-03	2.4E-02	2.9E-02	3.5E-02	4.2E-02	4.9E-02	5.5E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
739	1.0E-03	1.1E-02	1.2E-02	1.1E-02	8.2E-03	3.8E-03	3.8E-03	1.5E-02	2.3E-02	3.2E-02	4.2E-02	5.1E-02	6.0E-02
740	1.0E-03	9.6E-03	1.0E-02	9.6E-03	8.0E-03	3.6E-03	3.6E-03	1.1E-02	2.0E-02	3.1E-02	4.2E-02	5.3E-02	6.3E-02
741	1.1E-03	8.8E-03	8.9E-03	8.9E-03	8.7E-03	3.7E-03	3.7E-03	1.1E-02	2.1E-02	3.2E-02	4.4E-02	5.5E-02	6.6E-02
742	1.1E-03	8.1E-03	8.0E-03	9.1E-03	9.8E-03	3.7E-03	3.7E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.9E-02
743	8.0E-04	3.6E-03	5.9E-03	8.9E-03	5.7E-03	4.2E-03	3.9E-03	2.4E-02	2.1E-02	2.0E-02	2.0E-02	2.0E-02	1.9E-02
744	8.3E-04	3.8E-03	7.5E-03	1.0E-02	6.0E-03	4.4E-03	4.1E-03	1.7E-02	1.6E-02	1.9E-02	2.1E-02	2.3E-02	2.6E-02
745	8.5E-04	4.2E-03	9.4E-03	1.2E-02	6.3E-03	4.4E-03	4.1E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.6E-02	3.0E-02
746	8.7E-04	6.0E-03	1.2E-02	1.5E-02	6.6E-03	4.5E-03	4.1E-03	1.0E-02	1.2E-02	1.7E-02	2.1E-02	2.6E-02	3.1E-02
747	8.8E-04	7.7E-03	1.4E-02	1.7E-02	6.9E-03	4.5E-03	4.2E-03	1.3E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
762	7.9E-04	3.0E-03	6.4E-03	9.3E-03	5.7E-03	4.2E-03	3.9E-03	2.4E-02	2.1E-02	2.1E-02	2.0E-02	2.0E-02	2.0E-02
763	8.9E-04	3.4E-03	8.0E-03	1.1E-02	6.2E-03	4.6E-03	4.3E-03	1.7E-02	1.6E-02	1.9E-02	2.1E-02	2.4E-02	2.6E-02
764	8.9E-04	4.7E-03	1.0E-02	1.3E-02	6.5E-03	4.7E-03	4.3E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.7E-02	3.0E-02
765	8.5E-04	6.4E-03	1.2E-02	1.5E-02	6.6E-03	4.4E-03	4.1E-03	9.8E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.1E-02
766	8.6E-04	8.1E-03	1.4E-02	1.6E-02	6.8E-03	4.4E-03	4.1E-03	1.2E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
767	9.2E-04	1.1E-02	1.7E-02	1.9E-02	7.3E-03	4.4E-03	4.1E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02	2.5E-02
768	9.7E-04	1.2E-02	1.8E-02	2.1E-02	7.7E-03	4.4E-03	4.0E-03	2.1E-02	2.0E-02	2.1E-02	2.3E-02	2.5E-02	2.6E-02
769	1.0E-03	1.3E-02	2.1E-02	2.4E-02	8.0E-03	4.4E-03	4.0E-03	2.5E-02	2.4E-02	2.6E-02	2.7E-02	2.9E-02	3.0E-02
770	1.0E-03	1.4E-02	2.2E-02	2.5E-02	8.1E-03	4.2E-03	3.9E-03	3.0E-02	3.0E-02	3.3E-02	3.6E-02	3.9E-02	4.2E-02
771	1.0E-03	1.6E-02	2.0E-02	2.4E-02	7.8E-03	4.0E-03	3.6E-03	3.5E-02	3.6E-02	4.0E-02	4.4E-02	4.8E-02	5.2E-02
772	1.0E-03	1.5E-02	2.1E-02	2.2E-02	7.9E-03	3.8E-03	3.8E-03	3.8E-02	3.9E-02	4.3E-02	4.7E-02	5.1E-02	5.4E-02
773	1.0E-03	1.4E-02	2.0E-02	2.2E-02	8.0E-03	3.9E-03	3.9E-03	3.7E-02	3.8E-02	4.2E-02	4.6E-02	5.0E-02	5.4E-02
774	1.0E-03	1.3E-02	1.7E-02	1.9E-02	8.2E-03	4.0E-03	4.0E-03	3.5E-02	3.6E-02	4.1E-02	4.5E-02	4.9E-02	5.3E-02
775	1.0E-03	1.1E-02	1.6E-02	1.6E-02	8.2E-03	4.0E-03	4.0E-03	3.1E-02	3.4E-02	3.9E-02	4.4E-02	4.8E-02	5.3E-02
776	1.0E-03	1.1E-02	1.5E-02	1.4E-02	8.0E-03	3.9E-03	3.9E-03	2.5E-02	2.9E-02	3.5E-02	4.1E-02	4.8E-02	5.4E-02
777	1.0E-03	9.6E-03	1.3E-02	1.2E-02	7.7E-03	3.7E-03	3.7E-03	1.6E-02	2.3E-02	3.1E-02	4.0E-02	4.9E-02	5.7E-02
778	1.0E-03	8.6E-03	1.1E-02	1.0E-02	7.6E-03	3.5E-03	3.5E-03	1.1E-02	2.0E-02	3.0E-02	4.0E-02	5.1E-02	6.1E-02
779	1.0E-03	8.0E-03	9.6E-03	8.9E-03	8.1E-03	3.5E-03	3.5E-03	1.1E-02	2.0E-02	3.1E-02	4.2E-02	5.3E-02	6.4E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
780	1.0E-03	7.5E-03	8.4E-03	8.6E-03	9.1E-03	3.6E-03	3.5E-03	1.1E-02	2.0E-02	3.2E-02	4.4E-02	5.5E-02	6.7E-02
781	8.6E-04	2.7E-03	6.9E-03	9.6E-03	5.7E-03	4.2E-03	3.9E-03	2.4E-02	2.1E-02	2.1E-02	2.1E-02	2.1E-02	2.0E-02
782	8.8E-04	3.7E-03	8.4E-03	1.1E-02	6.2E-03	4.5E-03	4.2E-03	1.5E-02	1.6E-02	2.0E-02	2.4E-02	2.7E-02	3.1E-02
783	8.9E-04	5.1E-03	1.0E-02	1.3E-02	6.5E-03	4.6E-03	4.3E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.7E-02	3.0E-02
784	8.4E-04	6.8E-03	1.2E-02	1.4E-02	6.5E-03	4.4E-03	4.0E-03	9.6E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.1E-02
785	8.5E-04	8.2E-03	1.3E-02	1.6E-02	6.8E-03	4.4E-03	4.0E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.6E-02	3.0E-02
786	9.1E-04	1.0E-02	1.5E-02	1.7E-02	7.3E-03	4.4E-03	4.0E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02	2.5E-02
787	9.5E-04	1.1E-02	1.7E-02	2.0E-02	7.6E-03	4.3E-03	4.0E-03	2.1E-02	1.9E-02	2.1E-02	2.3E-02	2.4E-02	2.6E-02
788	1.0E-03	1.2E-02	1.9E-02	2.2E-02	7.9E-03	4.3E-03	3.9E-03	2.5E-02	2.3E-02	2.5E-02	2.7E-02	2.8E-02	3.0E-02
789	1.0E-03	1.3E-02	2.0E-02	2.3E-02	7.9E-03	4.1E-03	3.8E-03	3.0E-02	3.0E-02	3.3E-02	3.6E-02	4.0E-02	4.3E-02
790	1.0E-03	1.4E-02	1.8E-02	2.2E-02	7.7E-03	3.9E-03	3.5E-03	3.4E-02	3.5E-02	3.9E-02	4.3E-02	4.7E-02	5.1E-02
791	1.0E-03	1.4E-02	1.9E-02	2.0E-02	7.8E-03	3.7E-03	3.7E-03	3.8E-02	3.9E-02	4.2E-02	4.6E-02	5.0E-02	5.4E-02
792	1.0E-03	1.3E-02	1.8E-02	2.0E-02	7.9E-03	3.9E-03	3.9E-03	3.6E-02	3.8E-02	4.2E-02	4.5E-02	4.9E-02	5.3E-02
793	1.0E-03	1.2E-02	1.6E-02	1.8E-02	8.1E-03	4.0E-03	4.0E-03	3.4E-02	3.6E-02	4.0E-02	4.4E-02	4.8E-02	5.2E-02
794	1.0E-03	9.8E-03	1.5E-02	1.4E-02	7.9E-03	4.0E-03	4.0E-03	3.1E-02	3.4E-02	3.8E-02	4.3E-02	4.8E-02	5.3E-02
795	1.0E-03	9.6E-03	1.4E-02	1.3E-02	7.9E-03	3.9E-03	3.9E-03	2.4E-02	2.9E-02	3.5E-02	4.1E-02	4.7E-02	5.3E-02
796	1.0E-03	9.1E-03	1.3E-02	1.2E-02	7.5E-03	3.7E-03	3.7E-03	1.2E-02	2.0E-02	2.9E-02	3.8E-02	4.7E-02	5.6E-02
797	9.9E-04	8.4E-03	1.1E-02	1.0E-02	7.5E-03	3.4E-03	3.4E-03	1.1E-02	1.9E-02	2.9E-02	3.9E-02	5.0E-02	6.0E-02
798	1.0E-03	7.6E-03	9.9E-03	8.9E-03	7.8E-03	3.5E-03	3.5E-03	1.1E-02	2.0E-02	3.1E-02	4.1E-02	5.2E-02	6.3E-02
799	8.7E-04	4.1E-03	8.7E-03	1.2E-02	6.2E-03	4.5E-03	4.2E-03	1.4E-02	1.6E-02	2.0E-02	2.4E-02	2.8E-02	3.3E-02
800	8.2E-04	5.4E-03	1.0E-02	1.3E-02	6.2E-03	4.3E-03	4.0E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.7E-02	3.0E-02
801	8.3E-04	7.0E-03	1.2E-02	1.4E-02	6.5E-03	4.3E-03	4.0E-03	9.7E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.0E-02
802	8.4E-04	8.2E-03	1.2E-02	1.4E-02	6.8E-03	4.3E-03	4.0E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
803	9.0E-04	9.7E-03	1.4E-02	1.6E-02	7.2E-03	4.3E-03	3.9E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02
804	9.4E-04	9.8E-03	1.6E-02	1.9E-02	7.5E-03	4.2E-03	3.9E-03	2.0E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02	2.6E-02
805	1.0E-03	1.1E-02	1.7E-02	2.0E-02	7.8E-03	4.2E-03	3.9E-03	2.7E-02	2.6E-02	2.8E-02	3.1E-02	3.3E-02	3.5E-02
806	1.0E-03	1.3E-02	1.8E-02	2.1E-02	7.7E-03	4.1E-03	3.7E-03	2.9E-02	3.0E-02	3.3E-02	3.7E-02	4.1E-02	4.4E-02
807	1.0E-03	1.3E-02	1.6E-02	2.0E-02	7.6E-03	3.8E-03	3.5E-03	3.3E-02	3.4E-02	3.8E-02	4.2E-02	4.6E-02	5.0E-02
808	1.0E-03	1.3E-02	1.7E-02	1.8E-02	7.7E-03	3.7E-03	3.7E-03	3.7E-02	3.8E-02	4.2E-02	4.6E-02	4.9E-02	5.3E-02
809	1.0E-03	1.2E-02	1.7E-02	1.8E-02	7.9E-03	3.8E-03	3.8E-03	3.6E-02	3.7E-02	4.1E-02	4.5E-02	4.8E-02	5.2E-02
810	1.0E-03	1.1E-02	1.5E-02	1.7E-02	7.9E-03	3.9E-03	3.9E-03	3.4E-02	3.6E-02	4.0E-02	4.3E-02	4.7E-02	5.1E-02
811	9.9E-04	9.2E-03	1.3E-02	1.4E-02	7.8E-03	3.9E-03	3.9E-03	3.1E-02	3.4E-02	3.8E-02	4.3E-02	4.7E-02	5.2E-02
812	9.9E-04	8.5E-03	1.3E-02	1.3E-02	7.6E-03	3.8E-03	3.8E-03	2.5E-02	2.9E-02	3.5E-02	4.1E-02	4.6E-02	5.2E-02
813	9.8E-04	8.3E-03	1.2E-02	1.1E-02	7.2E-03	3.6E-03	3.6E-03	1.3E-02	2.0E-02	2.9E-02	3.8E-02	4.6E-02	5.5E-02
814	9.8E-04	8.0E-03	1.1E-02	1.0E-02	7.3E-03	3.4E-03	3.4E-03	1.0E-02	1.9E-02	2.9E-02	3.9E-02	4.9E-02	5.8E-02
815	1.0E-03	7.5E-03	1.0E-02	9.0E-03	7.6E-03	3.4E-03	3.4E-03	1.1E-02	2.0E-02	3.0E-02	4.1E-02	5.1E-02	6.2E-02
816	8.0E-04	5.6E-03	9.9E-03	1.2E-02	6.2E-03	4.2E-03	3.9E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.6E-02	3.0E-02
817	8.2E-04	7.0E-03	1.1E-02	1.3E-02	6.5E-03	4.2E-03	3.9E-03	9.8E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.0E-02
818	8.3E-04	8.0E-03	1.1E-02	1.3E-02	6.7E-03	4.2E-03	3.9E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
819	8.9E-04	8.9E-03	1.3E-02	1.6E-02	7.2E-03	4.2E-03	3.9E-03	1.8E-02	1.7E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02
820	9.3E-04	8.7E-03	1.5E-02	1.7E-02	7.5E-03	4.1E-03	3.8E-03	2.0E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02	2.6E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
821	1.0E-03	1.0E-02	1.6E-02	1.9E-02	7.7E-03	4.1E-03	3.8E-03	2.6E-02	2.6E-02	2.8E-02	3.1E-02	3.3E-02	3.6E-02
822	1.0E-03	1.2E-02	1.6E-02	2.0E-02	7.6E-03	4.0E-03	3.7E-03	2.9E-02	3.0E-02	3.3E-02	3.7E-02	4.1E-02	4.4E-02
823	9.9E-04	1.2E-02	1.4E-02	1.8E-02	7.6E-03	3.7E-03	3.4E-03	3.2E-02	3.3E-02	3.7E-02	4.1E-02	4.5E-02	5.0E-02
824	1.0E-03	1.2E-02	1.6E-02	1.7E-02	7.6E-03	3.6E-03	3.6E-03	3.7E-02	3.8E-02	4.1E-02	4.5E-02	4.8E-02	5.2E-02
825	1.0E-03	1.1E-02	1.6E-02	1.7E-02	7.8E-03	3.8E-03	3.8E-03	3.5E-02	3.7E-02	4.0E-02	4.4E-02	4.8E-02	5.1E-02
826	9.9E-04	1.0E-02	1.4E-02	1.6E-02	7.8E-03	3.8E-03	3.8E-03	3.4E-02	3.5E-02	3.9E-02	4.3E-02	4.6E-02	5.0E-02
827	9.8E-04	9.0E-03	1.2E-02	1.4E-02	7.7E-03	3.8E-03	3.8E-03	3.1E-02	3.3E-02	3.8E-02	4.2E-02	4.7E-02	5.1E-02
828	9.8E-04	7.8E-03	1.2E-02	1.2E-02	7.4E-03	3.7E-03	3.7E-03	2.3E-02	2.7E-02	3.3E-02	3.9E-02	4.5E-02	5.1E-02
829	9.7E-04	7.2E-03	1.1E-02	1.1E-02	7.1E-03	3.5E-03	3.5E-03	1.4E-02	2.1E-02	2.9E-02	3.7E-02	4.6E-02	5.4E-02
830	1.0E-03	7.3E-03	1.1E-02	9.7E-03	7.2E-03	3.3E-03	3.3E-03	1.0E-02	1.9E-02	2.8E-02	3.8E-02	4.8E-02	5.7E-02
831	8.2E-04	7.7E-03	1.0E-02	1.3E-02	6.7E-03	4.2E-03	3.8E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
832	8.8E-04	8.1E-03	1.2E-02	1.5E-02	7.1E-03	4.1E-03	3.8E-03	1.7E-02	1.6E-02	1.8E-02	2.0E-02	2.2E-02	2.3E-02
833	9.2E-04	8.0E-03	1.4E-02	1.6E-02	7.4E-03	4.0E-03	3.7E-03	1.9E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02	2.5E-02
834	1.0E-03	9.5E-03	1.4E-02	1.8E-02	7.7E-03	4.1E-03	3.7E-03	2.6E-02	2.6E-02	2.8E-02	3.1E-02	3.4E-02	3.6E-02
835	9.9E-04	1.1E-02	1.5E-02	1.8E-02	7.5E-03	3.9E-03	3.6E-03	2.8E-02	2.9E-02	3.3E-02	3.7E-02	4.0E-02	4.4E-02
836	9.8E-04	1.1E-02	1.4E-02	1.7E-02	7.5E-03	3.6E-03	3.3E-03	3.1E-02	3.3E-02	3.7E-02	4.1E-02	4.5E-02	4.9E-02
837	9.9E-04	1.1E-02	1.4E-02	1.6E-02	7.6E-03	3.6E-03	3.6E-03	3.6E-02	3.7E-02	4.0E-02	4.4E-02	4.7E-02	5.1E-02
838	9.8E-04	1.0E-02	1.5E-02	1.6E-02	7.7E-03	3.7E-03	3.7E-03	3.5E-02	3.6E-02	4.0E-02	4.3E-02	4.7E-02	5.0E-02
839	9.8E-04	9.7E-03	1.4E-02	1.5E-02	7.7E-03	3.8E-03	3.8E-03	3.3E-02	3.5E-02	3.9E-02	4.2E-02	4.6E-02	4.9E-02
840	9.7E-04	8.6E-03	1.1E-02	1.3E-02	7.5E-03	3.8E-03	3.8E-03	3.0E-02	3.3E-02	3.7E-02	4.1E-02	4.6E-02	5.0E-02
841	9.7E-04	7.2E-03	1.1E-02	1.1E-02	7.2E-03	3.6E-03	3.6E-03	2.3E-02	2.7E-02	3.3E-02	3.9E-02	4.5E-02	5.1E-02
842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
854	4.9E-03	5.4E-03	3.4E-03	9.8E-04	1.2E-03	8.6E-04	8.6E-04	-5.3E-03	-5.0E-03	-4.2E-03	-3.5E-03	-2.8E-03	-2.0E-03
855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
894	5.4E-03	5.9E-03	5.7E-03	9.6E-04	1.1E-03	8.1E-04	8.1E-04	-8.3E-03	-7.4E-03	-6.2E-03	-5.0E-03	-3.8E-03	-2.6E-03
895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
897	5.1E-03	5.6E-03	4.0E-03	9.6E-04	1.1E-03	8.3E-04	8.2E-04	-7.4E-03	-6.7E-03	-5.7E-03	-4.6E-03	-3.6E-03	-2.6E-03
898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
912	1.1E-03	7.0E-03	9.1E-03	9.3E-03	9.0E-03	4.6E-03	3.9E-03	-9.2E-02	-8.1E-02	-6.7E-02	-5.3E-02	-3.9E-02	-2.5E-02
913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
914	1.1E-03	7.7E-03	1.0E-02	1.0E-02	9.2E-03	4.7E-03	4.0E-03	-8.3E-02	-7.3E-02	-6.1E-02	-4.8E-02	-3.5E-02	-2.3E-02
915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
916	1.1E-03	8.4E-03	1.1E-02	1.1E-02	9.2E-03	4.8E-03	4.1E-03	-7.9E-02	-7.0E-02	-5.8E-02	-4.6E-02	-3.4E-02	-2.2E-02
917	1.1E-03	8.5E-03	1.1E-02	1.2E-02	9.3E-03	4.8E-03	4.1E-03	-6.6E-02	-6.0E-02	-5.1E-02	-4.2E-02	-3.2E-02	-2.3E-02
918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
919	1.1E-03	9.1E-03	1.2E-02	1.2E-02	9.7E-03	4.9E-03	4.2E-03	-8.0E-02	-7.1E-02	-5.9E-02	-4.7E-02	-3.4E-02	-2.2E-02
920	1.1E-03	9.0E-03	1.2E-02	1.2E-02	9.8E-03	4.9E-03	4.2E-03	-6.6E-02	-5.9E-02	-5.0E-02	-4.1E-02	-3.2E-02	-2.3E-02
921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
922	1.2E-03	9.8E-03	1.3E-02	1.3E-02	1.0E-02	5.0E-03	4.3E-03	-8.7E-02	-7.6E-02	-6.2E-02	-4.8E-02	-3.5E-02	-2.1E-02
923	1.1E-03	9.4E-03	1.3E-02	1.3E-02	1.0E-02	4.9E-03	4.3E-03	-6.8E-02	-6.0E-02	-5.0E-02	-4.0E-02	-2.9E-02	-1.9E-02
924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
925	1.2E-03	1.0E-02	1.3E-02	1.4E-02	1.1E-02	5.1E-03	4.4E-03	-8.7E-02	-7.7E-02	-6.3E-02	-5.0E-02	-3.6E-02	-2.3E-02
926	1.1E-03	9.7E-03	1.3E-02	1.4E-02	1.0E-02	5.0E-03	4.3E-03	-6.9E-02	-6.0E-02	-4.9E-02	-3.7E-02	-2.6E-02	-1.4E-02
927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
928	1.2E-03	1.1E-02	1.4E-02	1.5E-02	1.1E-02	5.1E-03	4.4E-03	-8.3E-02	-7.4E-02	-6.3E-02	-5.1E-02	-4.0E-02	-2.8E-02
929	1.1E-03	9.8E-03	1.3E-02	1.4E-02	1.0E-02	5.0E-03	4.4E-03	-6.7E-02	-5.9E-02	-4.8E-02	-3.6E-02	-2.5E-02	-1.4E-02
930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
931	1.2E-03	1.1E-02	1.5E-02	1.5E-02	1.1E-02	5.2E-03	4.5E-03	-7.5E-02	-7.0E-02	-6.2E-02	-5.3E-02	-4.5E-02	-3.7E-02
932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
934	1.2E-03	1.1E-02	1.5E-02	1.5E-02	1.1E-02	5.3E-03	4.6E-03	-6.3E-02	-6.2E-02	-5.9E-02	-5.5E-02	-5.2E-02	-4.8E-02
935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
938	9.8E-04	4.2E-03	7.1E-03	8.6E-03	8.9E-03	4.7E-03	4.4E-03	-2.3E-01	-2.1E-01	-1.8E-01	-1.6E-01	-1.3E-01	-1.0E-01
939	9.3E-04	3.8E-03	7.1E-03	8.5E-03	8.9E-03	4.6E-03	4.3E-03	-2.1E-01	-1.9E-01	-1.7E-01	-1.5E-01	-1.2E-01	-1.0E-01
940	9.4E-04	3.7E-03	7.1E-03	8.5E-03	9.0E-03	4.5E-03	4.2E-03	-1.9E-01	-1.8E-01	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01
941	9.3E-04	3.7E-03	6.7E-03	8.1E-03	8.6E-03	4.3E-03	4.0E-03	-1.8E-01	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01	-1.3E-01
942	9.4E-04	3.7E-03	6.8E-03	8.2E-03	8.7E-03	4.4E-03	4.1E-03	-1.9E-01	-1.8E-01	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01
943	9.6E-04	3.8E-03	6.9E-03	8.4E-03	8.9E-03	4.4E-03	4.1E-03	-2.0E-01	-1.8E-01	-1.7E-01	-1.5E-01	-1.4E-01	-1.2E-01

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
947	9.2E-04	3.5E-03	5.8E-03	7.1E-03	7.6E-03	3.9E-03	3.7E-03	-1.4E-01	-1.3E-01	-1.1E-01	-8.6E-02	-6.7E-02	-4.7E-02
948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
949	9.3E-04	3.5E-03	5.8E-03	7.1E-03	7.7E-03	4.0E-03	3.7E-03	-1.4E-01	-1.2E-01	-1.1E-01	-9.0E-02	-7.4E-02	-5.8E-02
950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
951	9.4E-04	3.6E-03	5.8E-03	7.1E-03	7.7E-03	4.0E-03	3.7E-03	-1.2E-01	-1.1E-01	-9.7E-02	-8.2E-02	-6.7E-02	-5.2E-02
952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
953	9.5E-04	3.7E-03	5.7E-03	7.1E-03	7.7E-03	4.0E-03	3.7E-03	-1.2E-01	-1.0E-01	-8.6E-02	-6.9E-02	-5.1E-02	-3.3E-02
954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
955	9.6E-04	3.7E-03	5.9E-03	7.0E-03	7.6E-03	4.0E-03	3.7E-03	-1.1E-01	-9.1E-02	-7.2E-02	-5.4E-02	-3.5E-02	-1.6E-02
956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
961	9.6E-04	4.5E-03	6.1E-03	7.0E-03	7.7E-03	4.2E-03	3.5E-03	-9.9E-02	-8.4E-02	-6.7E-02	-5.0E-02	-3.3E-02	-1.5E-02
962	9.7E-04	5.0E-03	6.6E-03	7.1E-03	7.8E-03	4.2E-03	3.5E-03	-1.0E-01	-8.7E-02	-6.9E-02	-5.1E-02	-3.4E-02	-1.6E-02
963	9.9E-04	5.5E-03	7.3E-03	7.5E-03	7.9E-03	4.3E-03	3.6E-03	-1.1E-01	-9.6E-02	-7.6E-02	-5.6E-02	-3.7E-02	-1.7E-02
964	9.5E-04	2.8E-03	5.0E-03	6.0E-03	8.1E-03	5.9E-03	5.6E-03	-1.7E-02	-2.4E-02	-2.9E-02	-3.4E-02	-3.9E-02	-4.4E-02
965	9.4E-04	2.9E-03	5.1E-03	5.8E-03	7.5E-03	5.2E-03	4.9E-03	-1.1E-02	-1.9E-02	-2.6E-02	-3.2E-02	-3.8E-02	-4.4E-02
966	9.3E-04	3.0E-03	5.1E-03	5.9E-03	7.0E-03	4.5E-03	4.3E-03	-2.1E-03	-1.3E-02	-2.1E-02	-3.0E-02	-3.8E-02	-4.6E-02
967	9.2E-04	3.1E-03	5.1E-03	6.0E-03	6.4E-03	3.8E-03	3.5E-03	4.4E-03	-7.5E-03	-1.7E-02	-2.7E-02	-3.7E-02	-4.6E-02
968	9.0E-04	3.1E-03	5.1E-03	6.0E-03	6.3E-03	3.6E-03	3.4E-03	-5.3E-03	-1.5E-02	-2.3E-02	-3.1E-02	-3.9E-02	-4.7E-02
969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
970	8.2E-04	3.0E-03	4.7E-03	5.8E-03	6.2E-03	3.4E-03	3.4E-03	-3.4E-02	-3.6E-02	-3.6E-02	-3.6E-02	-3.6E-02	-3.6E-02
971	8.0E-04	2.9E-03	4.6E-03	5.8E-03	6.1E-03	3.3E-03	3.3E-03	-3.8E-02	-4.0E-02	-3.9E-02	-3.9E-02	-3.9E-02	-3.9E-02
972	7.6E-04	2.8E-03	4.5E-03	5.6E-03	5.9E-03	3.2E-03	3.0E-03	-4.4E-02	-4.5E-02	-4.4E-02	-4.2E-02	-4.1E-02	-4.0E-02
973	9.5E-04	2.8E-03	5.0E-03	6.2E-03	8.5E-03	6.3E-03	6.1E-03	-1.9E-02	-2.5E-02	-3.0E-02	-3.4E-02	-3.9E-02	-4.3E-02
974	9.5E-04	2.9E-03	5.1E-03	6.0E-03	8.0E-03	5.7E-03	5.3E-03	-1.1E-02	-1.9E-02	-2.5E-02	-3.1E-02	-3.7E-02	-4.2E-02
975	9.4E-04	3.0E-03	5.1E-03	6.0E-03	7.1E-03	4.6E-03	4.3E-03	-1.0E-03	-1.1E-02	-2.0E-02	-2.8E-02	-3.6E-02	-4.4E-02
976	9.3E-04	3.1E-03	5.2E-03	6.1E-03	6.5E-03	4.0E-03	4.0E-03	3.8E-03	-7.5E-03	-1.7E-02	-2.6E-02	-3.5E-02	-4.4E-02
977	9.1E-04	3.1E-03	5.1E-03	6.1E-03	6.4E-03	4.0E-03	4.0E-03	-7.2E-03	-1.7E-02	-2.4E-02	-3.1E-02	-3.8E-02	-4.6E-02
978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
979	8.3E-04	3.0E-03	4.8E-03	5.9E-03	6.2E-03	3.4E-03	3.2E-03	-3.5E-02	-3.8E-02	-3.8E-02	-3.9E-02	-3.9E-02	-4.0E-02
980	8.0E-04	3.0E-03	4.7E-03	5.8E-03	6.2E-03	3.3E-03	3.1E-03	-4.0E-02	-4.2E-02	-4.2E-02	-4.1E-02	-4.1E-02	-4.1E-02
981	7.7E-04	2.8E-03	4.5E-03	5.7E-03	6.0E-03	3.3E-03	3.0E-03	-4.6E-02	-4.7E-02	-4.6E-02	-4.4E-02	-4.3E-02	-4.1E-02
982	7.4E-04	2.7E-03	4.3E-03	5.4E-03	5.8E-03	3.4E-03	3.0E-03	-5.1E-02	-5.0E-02	-4.8E-02	-4.5E-02	-4.3E-02	-4.0E-02
983	9.5E-04	3.0E-03	5.1E-03	6.1E-03	8.3E-03	5.9E-03	5.6E-03	-1.1E-02	-1.8E-02	-2.4E-02	-2.9E-02	-3.5E-02	-4.0E-02
984	9.5E-04	3.1E-03	5.2E-03	6.1E-03	7.0E-03	5.3E-03	5.3E-03	3.2E-04	-9.9E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.2E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
985	9.3E-04	3.1E-03	5.2E-03	6.1E-03	6.6E-03	5.2E-03	5.2E-03	3.0E-03	-7.8E-03	-1.6E-02	-2.5E-02	-3.4E-02	-4.3E-02
986	9.1E-04	3.1E-03	5.1E-03	6.1E-03	6.5E-03	4.7E-03	4.7E-03	-9.8E-03	-1.8E-02	-2.5E-02	-3.1E-02	-3.8E-02	-4.4E-02
987	8.8E-04	3.1E-03	5.1E-03	6.1E-03	6.5E-03	4.0E-03	4.0E-03	-2.5E-02	-3.0E-02	-3.3E-02	-3.5E-02	-3.8E-02	-4.1E-02
988	8.3E-04	3.1E-03	4.8E-03	6.0E-03	6.4E-03	3.5E-03	3.2E-03	-3.8E-02	-4.0E-02	-4.1E-02	-4.1E-02	-4.2E-02	-4.2E-02
989	8.1E-04	3.0E-03	4.7E-03	5.9E-03	6.3E-03	3.4E-03	3.1E-03	-4.3E-02	-4.5E-02	-4.4E-02	-4.4E-02	-4.3E-02	-4.3E-02
990	7.7E-04	2.9E-03	4.6E-03	5.7E-03	6.1E-03	3.4E-03	3.0E-03	-4.8E-02	-4.9E-02	-4.7E-02	-4.6E-02	-4.4E-02	-4.3E-02
991	7.4E-04	2.7E-03	4.4E-03	5.5E-03	5.9E-03	3.4E-03	3.0E-03	-5.3E-02	-5.2E-02	-5.0E-02	-4.7E-02	-4.4E-02	-4.2E-02
992	7.1E-04	2.6E-03	4.4E-03	5.5E-03	5.6E-03	3.4E-03	3.1E-03	-6.4E-02	-6.0E-02	-5.5E-02	-4.9E-02	-4.3E-02	-3.8E-02
993	9.4E-04	3.2E-03	5.3E-03	6.2E-03	6.6E-03	6.1E-03	6.1E-03	1.9E-03	-8.6E-03	-1.7E-02	-2.5E-02	-3.4E-02	-4.2E-02
994	9.2E-04	3.2E-03	5.2E-03	6.2E-03	6.6E-03	4.8E-03	4.8E-03	-1.3E-02	-2.1E-02	-2.6E-02	-3.2E-02	-3.8E-02	-4.3E-02
995	8.9E-04	3.2E-03	5.1E-03	6.2E-03	6.5E-03	3.8E-03	3.8E-03	-2.7E-02	-3.2E-02	-3.5E-02	-3.7E-02	-3.9E-02	-4.2E-02
996	8.4E-04	3.1E-03	4.9E-03	6.1E-03	6.5E-03	3.5E-03	3.2E-03	-4.1E-02	-4.4E-02	-4.4E-02	-4.4E-02	-4.4E-02	-4.5E-02
997	8.2E-04	3.1E-03	4.8E-03	6.0E-03	6.3E-03	3.4E-03	3.2E-03	-4.6E-02	-4.7E-02	-4.7E-02	-4.6E-02	-4.6E-02	-4.5E-02
998	7.8E-04	2.9E-03	4.6E-03	5.8E-03	6.2E-03	3.4E-03	3.0E-03	-5.1E-02	-5.1E-02	-4.9E-02	-4.8E-02	-4.6E-02	-4.4E-02
999	7.5E-04	2.7E-03	4.5E-03	5.6E-03	5.9E-03	3.4E-03	3.1E-03	-5.5E-02	-5.4E-02	-5.2E-02	-4.9E-02	-4.6E-02	-4.3E-02
1000	7.2E-04	2.7E-03	4.5E-03	5.6E-03	5.8E-03	3.4E-03	3.1E-03	-6.8E-02	-6.3E-02	-5.7E-02	-5.1E-02	-4.4E-02	-3.8E-02
1001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1002	8.5E-04	3.2E-03	5.0E-03	6.1E-03	6.6E-03	3.6E-03	3.3E-03	-4.4E-02	-4.6E-02	-4.6E-02	-4.6E-02	-4.6E-02	-4.6E-02
1003	8.2E-04	3.1E-03	4.9E-03	6.1E-03	6.4E-03	3.4E-03	3.2E-03	-4.9E-02	-5.0E-02	-4.9E-02	-4.8E-02	-4.8E-02	-4.7E-02
1004	7.9E-04	3.0E-03	4.7E-03	5.9E-03	6.3E-03	3.4E-03	3.1E-03	-5.3E-02	-5.3E-02	-5.1E-02	-5.0E-02	-4.8E-02	-4.6E-02
1005	7.6E-04	2.8E-03	4.5E-03	5.6E-03	6.0E-03	3.4E-03	3.1E-03	-5.7E-02	-5.6E-02	-5.3E-02	-5.0E-02	-4.7E-02	-4.4E-02
1006	7.2E-04	2.7E-03	4.6E-03	5.7E-03	5.9E-03	3.5E-03	3.2E-03	-7.0E-02	-6.6E-02	-5.9E-02	-5.2E-02	-4.6E-02	-3.9E-02
1007	8.6E-04	3.2E-03	5.0E-03	6.2E-03	6.6E-03	3.5E-03	3.3E-03	-4.8E-02	-5.0E-02	-5.0E-02	-5.0E-02	-4.9E-02	-4.9E-02
1008	8.3E-04	3.2E-03	4.9E-03	6.1E-03	6.5E-03	3.5E-03	3.2E-03	-5.1E-02	-5.2E-02	-5.1E-02	-5.1E-02	-5.0E-02	-4.9E-02
1009	8.0E-04	3.0E-03	4.8E-03	5.9E-03	6.3E-03	3.4E-03	3.1E-03	-5.5E-02	-5.5E-02	-5.3E-02	-5.1E-02	-5.0E-02	-4.8E-02
1010	7.6E-04	2.8E-03	4.6E-03	5.7E-03	6.1E-03	3.5E-03	3.2E-03	-6.0E-02	-5.9E-02	-5.5E-02	-5.1E-02	-4.7E-02	-4.4E-02
1011	7.3E-04	2.7E-03	4.7E-03	5.8E-03	6.0E-03	3.5E-03	3.2E-03	-7.4E-02	-6.9E-02	-6.2E-02	-5.5E-02	-4.8E-02	-4.0E-02
1012	8.7E-04	3.3E-03	5.1E-03	6.3E-03	6.7E-03	3.6E-03	3.4E-03	-5.1E-02	-5.3E-02	-5.3E-02	-5.2E-02	-5.2E-02	-5.1E-02
1013	8.4E-04	3.2E-03	5.0E-03	6.2E-03	6.6E-03	3.5E-03	3.3E-03	-5.3E-02	-5.4E-02	-5.4E-02	-5.3E-02	-5.2E-02	-5.1E-02
1014	8.1E-04	3.1E-03	4.9E-03	6.0E-03	6.4E-03	3.5E-03	3.2E-03	-5.7E-02	-5.7E-02	-5.5E-02	-5.3E-02	-5.1E-02	-4.9E-02
1015	7.7E-04	2.9E-03	4.6E-03	5.8E-03	6.2E-03	3.5E-03	3.2E-03	-6.3E-02	-6.1E-02	-5.7E-02	-5.2E-02	-4.8E-02	-4.3E-02
1016	7.4E-04	2.8E-03	4.8E-03	5.9E-03	6.1E-03	3.5E-03	3.3E-03	-7.7E-02	-7.1E-02	-6.4E-02	-5.7E-02	-4.9E-02	-4.2E-02
1017	8.8E-04	3.4E-03	5.2E-03	6.5E-03	6.9E-03	3.6E-03	3.4E-03	-5.5E-02	-5.7E-02	-5.6E-02	-5.6E-02	-5.5E-02	-5.4E-02
1018	8.6E-04	3.3E-03	5.2E-03	6.4E-03	6.8E-03	3.6E-03	3.3E-03	-5.7E-02	-5.8E-02	-5.7E-02	-5.6E-02	-5.5E-02	-5.4E-02
1019	8.3E-04	3.1E-03	5.0E-03	6.2E-03	6.6E-03	3.5E-03	3.2E-03	-6.1E-02	-6.1E-02	-5.8E-02	-5.6E-02	-5.4E-02	-5.2E-02
1020	7.9E-04	3.0E-03	4.8E-03	5.9E-03	6.3E-03	3.6E-03	3.3E-03	-6.9E-02	-6.6E-02	-6.0E-02	-5.5E-02	-4.9E-02	-4.4E-02
1021	7.5E-04	2.8E-03	4.9E-03	6.1E-03	6.2E-03	3.6E-03	3.3E-03	-7.9E-02	-7.4E-02	-6.7E-02	-6.0E-02	-5.3E-02	-4.6E-02
1022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1023	8.8E-04	3.4E-03	5.3E-03	6.5E-03	6.9E-03	3.6E-03	3.4E-03	-6.0E-02	-6.1E-02	-6.0E-02	-5.9E-02	-5.8E-02	-5.6E-02
1024	8.4E-04	3.2E-03	5.1E-03	6.3E-03	6.7E-03	3.6E-03	3.3E-03	-6.3E-02	-6.3E-02	-6.0E-02	-5.8E-02	-5.5E-02	-5.2E-02
1025	8.0E-04	3.0E-03	4.9E-03	6.1E-03	6.5E-03	3.6E-03	3.3E-03	-7.4E-02	-7.0E-02	-6.3E-02	-5.7E-02	-5.0E-02	-4.4E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1026	7.5E-04	2.9E-03	5.0E-03	6.2E-03	6.4E-03	3.6E-03	3.4E-03	-8.0E-02	-7.6E-02	-7.0E-02	-6.4E-02	-5.7E-02	-5.1E-02
1027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1028	8.9E-04	3.5E-03	5.4E-03	6.7E-03	7.1E-03	3.7E-03	3.4E-03	-6.3E-02	-6.4E-02	-6.3E-02	-6.1E-02	-6.0E-02	-5.9E-02
1029	8.5E-04	3.3E-03	5.2E-03	6.4E-03	6.8E-03	3.6E-03	3.4E-03	-6.7E-02	-6.6E-02	-6.2E-02	-5.9E-02	-5.6E-02	-5.2E-02
1030	8.1E-04	3.1E-03	5.0E-03	6.2E-03	6.5E-03	3.7E-03	3.4E-03	-7.8E-02	-7.3E-02	-6.6E-02	-5.8E-02	-5.1E-02	-4.3E-02
1031	7.6E-04	2.9E-03	5.1E-03	6.3E-03	6.5E-03	3.7E-03	3.4E-03	-8.3E-02	-8.0E-02	-7.4E-02	-6.8E-02	-6.3E-02	-5.7E-02
1032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1033	9.0E-04	3.5E-03	5.5E-03	6.8E-03	7.2E-03	3.7E-03	3.5E-03	-6.5E-02	-6.6E-02	-6.5E-02	-6.4E-02	-6.2E-02	-6.1E-02
1034	8.6E-04	3.3E-03	5.3E-03	6.5E-03	7.0E-03	3.7E-03	3.4E-03	-7.1E-02	-6.9E-02	-6.5E-02	-6.1E-02	-5.6E-02	-5.2E-02
1035	8.2E-04	3.1E-03	5.1E-03	6.3E-03	6.6E-03	3.7E-03	3.5E-03	-7.9E-02	-7.4E-02	-6.7E-02	-6.1E-02	-5.4E-02	-4.7E-02
1036	7.7E-04	2.9E-03	5.2E-03	6.4E-03	6.6E-03	3.7E-03	3.5E-03	-8.6E-02	-8.3E-02	-7.8E-02	-7.4E-02	-6.9E-02	-6.4E-02
1037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1042	9.3E-04	3.7E-03	5.7E-03	7.0E-03	7.5E-03	3.9E-03	3.6E-03	-7.3E-02	-7.3E-02	-7.0E-02	-6.7E-02	-6.4E-02	-6.2E-02
1043	8.9E-04	3.5E-03	5.5E-03	6.8E-03	7.2E-03	3.8E-03	3.6E-03	-7.8E-02	-7.5E-02	-7.0E-02	-6.5E-02	-6.0E-02	-5.5E-02
1044	8.4E-04	3.2E-03	5.4E-03	6.6E-03	6.9E-03	3.9E-03	3.6E-03	-8.5E-02	-8.2E-02	-7.6E-02	-7.0E-02	-6.4E-02	-5.8E-02
1045	9.4E-04	3.8E-03	5.8E-03	7.2E-03	7.6E-03	3.9E-03	3.6E-03	-7.6E-02	-7.5E-02	-7.2E-02	-6.8E-02	-6.5E-02	-6.2E-02
1046	9.0E-04	3.5E-03	5.6E-03	6.9E-03	7.4E-03	3.9E-03	3.6E-03	-8.0E-02	-7.7E-02	-7.3E-02	-6.8E-02	-6.3E-02	-5.8E-02
1047	1.0E-03	4.5E-03	6.9E-03	8.4E-03	9.0E-03	4.6E-03	4.3E-03	-1.8E-01	-1.6E-01	-1.4E-01	-1.2E-01	-1.0E-01	-8.5E-02
1048	9.6E-04	4.1E-03	6.9E-03	8.4E-03	8.7E-03	4.6E-03	4.3E-03	-1.7E-01	-1.6E-01	-1.4E-01	-1.3E-01	-1.1E-01	-9.8E-02
1049	1.1E-03	4.5E-03	6.8E-03	8.3E-03	8.9E-03	4.4E-03	4.1E-03	-1.1E-01	-1.0E-01	-1.0E-01	-9.6E-02	-9.1E-02	-8.7E-02
1050	9.9E-04	4.2E-03	6.5E-03	7.9E-03	8.5E-03	4.4E-03	4.1E-03	-1.2E-01	-1.1E-01	-1.0E-01	-9.5E-02	-8.6E-02	-7.8E-02
1051	9.2E-04	3.8E-03	6.5E-03	7.9E-03	8.1E-03	4.4E-03	4.1E-03	-1.3E-01	-1.2E-01	-1.1E-01	-1.1E-01	-9.8E-02	-9.1E-02
1052	1.0E-03	4.3E-03	6.6E-03	8.1E-03	8.7E-03	4.5E-03	4.2E-03	-1.4E-01	-1.3E-01	-1.2E-01	-1.0E-01	-9.1E-02	-7.8E-02
1053	9.3E-04	3.9E-03	6.7E-03	8.1E-03	8.4E-03	4.4E-03	4.1E-03	-1.4E-01	-1.3E-01	-1.2E-01	-1.1E-01	-1.0E-01	-9.6E-02
1054	8.8E-04	3.6E-03	6.7E-03	8.1E-03	8.4E-03	4.4E-03	4.1E-03	-1.3E-01	-1.3E-01	-1.1E-01	-1.0E-01	-9.1E-02	-7.9E-02
1055	8.9E-04	3.4E-03	6.5E-03	7.9E-03	8.3E-03	4.3E-03	4.0E-03	-1.3E-01	-1.2E-01	-1.1E-01	-9.4E-02	-8.0E-02	-6.6E-02
1056	9.0E-04	3.6E-03	6.8E-03	8.2E-03	8.6E-03	4.4E-03	4.1E-03	-1.6E-01	-1.4E-01	-1.2E-01	-1.1E-01	-9.0E-02	-7.2E-02
1057	9.0E-04	3.5E-03	6.7E-03	8.0E-03	8.4E-03	4.3E-03	4.0E-03	-1.6E-01	-1.4E-01	-1.3E-01	-1.1E-01	-9.7E-02	-8.1E-02
1058	9.2E-04	3.6E-03	6.8E-03	8.2E-03	8.6E-03	4.4E-03	4.1E-03	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01	-1.2E-01	-1.1E-01
1059	9.1E-04	3.5E-03	6.5E-03	7.9E-03	8.3E-03	4.2E-03	3.9E-03	-1.7E-01	-1.6E-01	-1.5E-01	-1.3E-01	-1.2E-01	-1.1E-01
1060	8.4E-04	3.3E-03	5.6E-03	6.9E-03	7.1E-03	3.9E-03	3.7E-03	-9.1E-02	-8.9E-02	-8.5E-02	-8.0E-02	-7.6E-02	-7.1E-02
1061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1062	9.4E-04	3.8E-03	5.9E-03	7.2E-03	7.8E-03	3.9E-03	3.6E-03	-7.8E-02	-7.7E-02	-7.4E-02	-7.1E-02	-6.8E-02	-6.4E-02
1063	9.0E-04	3.6E-03	5.6E-03	6.9E-03	7.4E-03	4.0E-03	3.7E-03	-8.6E-02	-8.4E-02	-7.9E-02	-7.5E-02	-7.0E-02	-6.5E-02
1064	8.4E-04	3.3E-03	5.7E-03	7.0E-03	7.2E-03	4.0E-03	3.7E-03	-9.5E-02	-9.3E-02	-8.8E-02	-8.3E-02	-7.9E-02	-7.4E-02
1065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1066	9.5E-04	3.9E-03	6.0E-03	7.4E-03	7.9E-03	4.0E-03	3.7E-03	-8.3E-02	-8.2E-02	-7.9E-02	-7.6E-02	-7.3E-02	-7.0E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1067	9.0E-04	3.6E-03	5.7E-03	7.0E-03	7.6E-03	4.0E-03	3.8E-03	-8.9E-02	-8.6E-02	-8.1E-02	-7.7E-02	-7.2E-02	-6.7E-02
1068	8.5E-04	3.4E-03	5.8E-03	7.1E-03	7.4E-03	4.1E-03	3.8E-03	-1.0E-01	-9.8E-02	-9.2E-02	-8.7E-02	-8.2E-02	-7.6E-02
1069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1070	9.7E-04	4.0E-03	6.2E-03	7.5E-03	8.1E-03	4.1E-03	3.8E-03	-9.0E-02	-8.9E-02	-8.5E-02	-8.1E-02	-7.7E-02	-7.4E-02
1071	9.1E-04	3.7E-03	5.9E-03	7.2E-03	7.7E-03	4.1E-03	3.8E-03	-9.1E-02	-8.9E-02	-8.4E-02	-7.9E-02	-7.3E-02	-6.8E-02
1072	8.6E-04	3.4E-03	6.0E-03	7.3E-03	7.5E-03	4.1E-03	3.8E-03	-1.1E-01	-1.0E-01	-9.7E-02	-9.1E-02	-8.6E-02	-8.0E-02
1073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1074	9.9E-04	4.1E-03	6.3E-03	7.7E-03	8.3E-03	4.2E-03	3.9E-03	-9.4E-02	-9.2E-02	-8.8E-02	-8.4E-02	-8.0E-02	-7.6E-02
1075	9.2E-04	3.8E-03	6.0E-03	7.3E-03	7.8E-03	4.2E-03	3.9E-03	-9.6E-02	-9.3E-02	-8.7E-02	-8.1E-02	-7.6E-02	-7.0E-02
1076	8.6E-04	3.5E-03	6.1E-03	7.5E-03	7.7E-03	4.2E-03	3.9E-03	-1.1E-01	-1.1E-01	-1.0E-01	-9.4E-02	-8.8E-02	-8.3E-02
1077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1078	1.0E-03	4.2E-03	6.4E-03	7.8E-03	8.4E-03	4.2E-03	4.0E-03	-9.7E-02	-9.5E-02	-9.1E-02	-8.7E-02	-8.3E-02	-7.8E-02
1079	9.3E-04	3.8E-03	6.1E-03	7.5E-03	7.9E-03	4.2E-03	3.9E-03	-1.0E-01	-9.9E-02	-9.2E-02	-8.6E-02	-7.9E-02	-7.2E-02
1080	8.7E-04	3.6E-03	6.2E-03	7.6E-03	7.9E-03	4.2E-03	3.9E-03	-1.1E-01	-1.1E-01	-1.0E-01	-9.8E-02	-9.4E-02	-9.0E-02
1081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1097	8.1E-04	3.1E-03	5.9E-03	7.2E-03	7.5E-03	4.0E-03	3.8E-03	-9.8E-02	-9.8E-02	-9.5E-02	-9.2E-02	-8.9E-02	-8.6E-02
1098	8.3E-04	3.2E-03	6.0E-03	7.3E-03	7.6E-03	4.1E-03	3.8E-03	-9.4E-02	-9.5E-02	-9.4E-02	-9.3E-02	-9.2E-02	-9.1E-02
1099	8.4E-04	3.2E-03	6.1E-03	7.5E-03	7.8E-03	4.1E-03	3.8E-03	-9.2E-02	-9.5E-02	-9.5E-02	-9.5E-02	-9.5E-02	-9.5E-02
1100	8.5E-04	3.3E-03	6.3E-03	7.6E-03	7.9E-03	4.2E-03	3.9E-03	-1.0E-01	-1.0E-01	-1.0E-01	-9.8E-02	-9.5E-02	-9.3E-02
1101	8.7E-04	3.3E-03	6.4E-03	7.8E-03	8.1E-03	4.2E-03	3.9E-03	-1.1E-01	-1.1E-01	-1.0E-01	-9.7E-02	-9.0E-02	-8.4E-02
1102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1110	4.7E-04	1.5E-03	2.6E-03	3.5E-03	1.2E-02	1.4E-02	6.7E-03	5.1E-03	6.9E-03	1.0E-02	1.4E-02	1.8E-02	2.1E-02
1111	4.8E-04	1.5E-03	2.6E-03	3.5E-03	1.3E-02	1.5E-02	6.9E-03	3.7E-03	5.7E-03	9.6E-03	1.3E-02	1.7E-02	2.1E-02
1112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1120	6.3E-03	7.1E-03	7.0E-03	9.2E-04	8.8E-04	6.9E-04	6.9E-04	-1.0E-02	-8.3E-03	-6.1E-03	-3.9E-03	-1.7E-03	4.6E-04
1121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1122	5.8E-03	7.0E-03	6.8E-03	9.0E-04	9.3E-04	6.7E-04	6.7E-04	-9.1E-03	-7.8E-03	-6.1E-03	-4.3E-03	-2.6E-03	-9.2E-04
1123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1124	5.8E-03	7.1E-03	6.9E-03	8.9E-04	9.5E-04	7.1E-04	7.1E-04	-8.0E-03	-6.9E-03	-5.5E-03	-4.1E-03	-2.7E-03	-1.3E-03
1125	4.9E-03	6.5E-03	6.3E-03	9.0E-04	1.0E-03	7.3E-04	7.3E-04	-8.6E-03	-7.6E-03	-6.4E-03	-5.1E-03	-3.8E-03	-2.5E-03
1126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1127	4.9E-03	6.5E-03	6.3E-03	9.2E-04	1.0E-03	7.6E-04	7.6E-04	-8.8E-03	-7.8E-03	-6.4E-03	-5.1E-03	-3.8E-03	-2.5E-03
1128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1129	4.9E-03	5.4E-03	5.0E-03	9.3E-04	1.1E-03	7.8E-04	7.8E-04	-8.5E-03	-7.7E-03	-6.6E-03	-5.4E-03	-4.3E-03	-3.1E-03
1130	3.3E-03	3.7E-03	2.7E-03	9.6E-04	1.2E-03	8.5E-04	8.5E-04	-5.3E-03	-4.9E-03	-4.2E-03	-3.5E-03	-2.8E-03	-2.1E-03
1131	2.8E-03	3.3E-03	2.5E-03	9.6E-04	1.3E-03	8.6E-04	8.5E-04	-4.5E-03	-4.4E-03	-4.0E-03	-3.5E-03	-3.0E-03	-2.6E-03
1132	2.6E-03	3.0E-03	2.6E-03	9.6E-04	1.3E-03	8.6E-04	8.6E-04	-3.9E-03	-4.2E-03	-4.0E-03	-3.8E-03	-3.6E-03	-3.4E-03
1133	2.9E-03	3.3E-03	2.5E-03	9.6E-04	1.3E-03	8.9E-04	8.6E-04	-3.3E-03	-3.7E-03	-3.7E-03	-3.8E-03	-3.8E-03	-3.8E-03
1134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1144	3.2E-03	4.4E-03	9.3E-03	1.1E-02	1.7E-02	1.7E-02	1.6E-02	-1.0E-02	-6.1E-03	9.2E-03	2.4E-02	4.0E-02	5.5E-02
1145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1167	1.3E-03	1.1E-02	1.5E-02	1.6E-02	1.2E-02	5.5E-03	4.8E-03	-3.8E-02	-4.1E-02	-4.1E-02	-4.0E-02	-4.0E-02	-4.0E-02
1168	1.5E-03	9.9E-03	1.5E-02	1.4E-02	1.4E-02	5.6E-03	5.4E-03	-3.1E-02	-3.3E-02	-3.2E-02	-3.1E-02	-2.9E-02	-2.8E-02
1169	1.9E-03	9.3E-03	1.4E-02	1.3E-02	1.3E-02	6.2E-03	6.0E-03	-3.8E-02	-3.9E-02	-3.6E-02	-3.3E-02	-3.0E-02	-2.6E-02
1170	1.8E-03	1.3E-02	1.9E-02	1.9E-02	1.9E-02	6.2E-03	6.0E-03	-3.1E-02	-3.2E-02	-2.8E-02	-2.5E-02	-2.2E-02	-1.8E-02
1171	2.1E-03	9.7E-03	1.4E-02	1.4E-02	1.4E-02	7.0E-03	6.7E-03	-4.5E-02	-4.4E-02	-3.9E-02	-3.5E-02	-3.0E-02	-2.5E-02
1172	2.4E-03	7.0E-03	1.1E-02	1.0E-02	1.0E-02	7.4E-03	7.2E-03	-6.3E-02	-5.7E-02	-4.9E-02	-4.0E-02	-3.1E-02	-2.2E-02
1173	2.4E-03	7.8E-03	1.3E-02	1.2E-02	1.2E-02	7.6E-03	7.3E-03	-8.0E-02	-7.2E-02	-6.0E-02	-4.9E-02	-3.7E-02	-2.5E-02
1174	2.7E-03	6.0E-03	9.1E-03	1.0E-02	9.8E-03	7.9E-03	7.6E-03	-8.1E-02	-7.6E-02	-6.8E-02	-5.9E-02	-5.0E-02	-4.1E-02
1175	2.7E-03	1.3E-02	1.3E-02	1.3E-02	1.0E-02	8.1E-03	7.8E-03	-9.5E-02	-8.9E-02	-7.9E-02	-6.8E-02	-5.8E-02	-4.8E-02
1176	2.9E-03	1.0E-02	1.0E-02	1.1E-02	1.0E-02	8.4E-03	8.0E-03	-8.4E-02	-8.2E-02	-7.6E-02	-7.1E-02	-6.5E-02	-5.9E-02
1177	3.0E-03	1.6E-02	1.6E-02	1.6E-02	1.1E-02	8.7E-03	8.4E-03	-9.9E-02	-9.5E-02	-8.7E-02	-7.9E-02	-7.1E-02	-6.3E-02
1178	3.1E-03	1.2E-02	1.2E-02	1.2E-02	1.1E-02	8.8E-03	8.5E-03	-8.4E-02	-8.2E-02	-7.5E-02	-6.8E-02	-6.1E-02	-5.4E-02
1179	3.1E-03	9.7E-03	9.7E-03	9.8E-03	1.1E-02	8.7E-03	8.3E-03	-6.9E-02	-6.8E-02	-6.2E-02	-5.6E-02	-5.0E-02	-4.4E-02
1180	3.3E-03	1.3E-02	1.4E-02	1.4E-02	1.4E-02	9.3E-03	8.9E-03	-7.8E-02	-7.5E-02	-6.8E-02	-6.0E-02	-5.3E-02	-4.5E-02
1181	3.3E-03	1.1E-02	1.1E-02	1.1E-02	1.1E-02	9.2E-03	8.8E-03	-5.9E-02	-5.8E-02	-5.1E-02	-4.4E-02	-3.7E-02	-3.0E-02
1182	3.2E-03	9.6E-03	9.6E-03	9.6E-03	1.1E-02	8.8E-03	8.4E-03	-4.2E-02	-4.1E-02	-3.5E-02	-2.9E-02	-2.4E-02	-1.8E-02
1183	3.5E-03	1.5E-02	1.5E-02	1.5E-02	1.2E-02	9.7E-03	9.3E-03	-3.3E-02	-3.0E-02	-2.1E-02	-1.2E-02	-3.4E-03	5.4E-03
1184	3.5E-03	1.2E-02	1.2E-02	1.2E-02	1.2E-02	9.5E-03	9.0E-03	-2.6E-02	-2.3E-02	-1.5E-02	-7.1E-03	1.1E-03	9.2E-03
1185	3.8E-03	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.0E-02	9.7E-03	3.1E-03	8.3E-03	2.0E-02	3.1E-02	4.2E-02	5.4E-02
1186	3.5E-03	1.1E-02	1.1E-02	1.1E-02	1.2E-02	9.6E-03	9.1E-03	-3.0E-03	1.1E-03	1.1E-02	2.1E-02	3.2E-02	4.2E-02
1187	3.9E-03	9.5E-03	1.0E-02	1.1E-02	1.3E-02	1.1E-02	1.0E-02	2.1E-02	2.9E-02	4.4E-02	5.8E-02	7.3E-02	8.7E-02
1188	3.5E-03	8.0E-03	8.0E-03	1.0E-02	1.2E-02	9.6E-03	9.1E-03	1.5E-02	2.1E-02	3.5E-02	4.8E-02	6.1E-02	7.4E-02
1189	4.0E-03	8.0E-03	9.7E-03	1.1E-02	1.3E-02	1.1E-02	1.0E-02	3.0E-02	4.1E-02	5.8E-02	7.6E-02	9.3E-02	1.1E-01

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1190	1.7E-03	6.2E-03	9.9E-03	1.1E-02	8.5E-03	5.7E-03	5.5E-03	-4.4E-02	-4.2E-02	-3.7E-02	-3.1E-02	-2.6E-02	-2.1E-02
1191	2.2E-03	7.2E-03	1.0E-02	1.0E-02	1.0E-02	6.8E-03	6.5E-03	-5.3E-02	-4.9E-02	-4.1E-02	-3.3E-02	-2.5E-02	-1.7E-02
1192	2.6E-03	5.2E-03	8.2E-03	9.2E-03	9.3E-03	7.5E-03	7.2E-03	-6.3E-02	-5.6E-02	-4.6E-02	-3.6E-02	-2.5E-02	-1.5E-02
1193	2.7E-03	4.0E-03	7.3E-03	9.3E-03	9.7E-03	7.8E-03	7.4E-03	-5.5E-02	-5.5E-02	-5.0E-02	-4.5E-02	-4.0E-02	-3.6E-02
1194	2.9E-03	7.1E-03	7.1E-03	9.3E-03	1.0E-02	8.0E-03	7.6E-03	-6.2E-02	-6.3E-02	-6.0E-02	-5.6E-02	-5.3E-02	-5.0E-02
1195	2.8E-03	6.6E-03	6.6E-03	8.7E-03	9.8E-03	7.9E-03	7.4E-03	-5.4E-02	-5.4E-02	-5.0E-02	-4.6E-02	-4.2E-02	-3.8E-02
1196	2.9E-03	8.9E-03	8.9E-03	8.9E-03	9.9E-03	7.9E-03	7.4E-03	-4.6E-02	-4.7E-02	-4.2E-02	-3.7E-02	-3.3E-02	-2.8E-02
1197	2.8E-03	9.5E-03	9.5E-03	9.5E-03	9.8E-03	7.8E-03	7.3E-03	-2.8E-02	-2.9E-02	-2.5E-02	-2.1E-02	-1.7E-02	-1.3E-02
1198	2.5E-03	6.3E-03	6.3E-03	7.1E-03	8.6E-03	6.8E-03	6.4E-03	-8.4E-03	-9.7E-03	-5.9E-03	-2.2E-03	1.6E-03	5.4E-03
1199	2.7E-03	7.9E-03	7.9E-03	7.9E-03	9.5E-03	7.5E-03	7.0E-03	-8.0E-03	-7.9E-03	-2.3E-03	3.4E-03	9.0E-03	1.5E-02
1200	2.6E-03	6.0E-03	6.0E-03	7.2E-03	8.1E-03	6.6E-03	6.6E-03	1.3E-03	1.6E-03	7.0E-03	1.2E-02	1.8E-02	2.3E-02
1201	3.1E-03	9.1E-03	9.1E-03	8.8E-03	1.1E-02	8.5E-03	8.0E-03	-1.3E-03	6.3E-04	8.6E-03	1.6E-02	2.4E-02	3.2E-02
1202	2.8E-03	6.2E-03	7.8E-03	7.8E-03	9.1E-03	7.3E-03	7.0E-03	1.8E-03	3.2E-03	1.0E-02	1.7E-02	2.4E-02	3.1E-02
1203	2.7E-03	4.9E-03	5.9E-03	7.2E-03	7.5E-03	6.7E-03	6.6E-03	8.5E-03	9.3E-03	1.5E-02	2.1E-02	2.7E-02	3.2E-02
1204	3.0E-03	9.9E-03	9.9E-03	9.4E-03	1.0E-02	8.2E-03	7.6E-03	1.7E-02	2.2E-02	3.2E-02	4.2E-02	5.2E-02	6.3E-02
1205	3.0E-03	7.5E-03	7.6E-03	7.8E-03	8.5E-03	7.2E-03	7.2E-03	2.1E-02	2.4E-02	3.3E-02	4.2E-02	5.1E-02	5.9E-02
1206	2.8E-03	4.8E-03	5.4E-03	7.1E-03	8.2E-03	6.6E-03	6.6E-03	2.0E-02	2.3E-02	3.2E-02	4.0E-02	4.9E-02	5.7E-02
1207	3.2E-03	6.2E-03	6.2E-03	8.4E-03	9.6E-03	7.8E-03	7.8E-03	1.8E-02	2.6E-02	4.1E-02	5.6E-02	7.0E-02	8.5E-02
1208	3.0E-03	6.7E-03	6.7E-03	7.7E-03	9.0E-03	7.2E-03	7.2E-03	1.3E-02	2.0E-02	3.4E-02	4.7E-02	6.0E-02	7.3E-02
1209	2.7E-03	5.3E-03	5.7E-03	6.8E-03	8.8E-03	7.1E-03	6.7E-03	7.1E-03	1.5E-02	2.6E-02	3.8E-02	5.0E-02	6.2E-02
1210	3.4E-03	8.4E-03	8.8E-03	8.9E-03	1.1E-02	8.6E-03	8.3E-03	-1.7E-03	1.2E-02	3.3E-02	5.4E-02	7.5E-02	9.6E-02
1211	3.2E-03	6.0E-03	6.5E-03	8.4E-03	9.7E-03	7.8E-03	7.8E-03	-6.6E-03	6.5E-03	2.5E-02	4.5E-02	6.4E-02	8.3E-02
1212	2.9E-03	4.1E-03	6.2E-03	7.5E-03	9.6E-03	7.9E-03	7.5E-03	-1.2E-02	-7.1E-04	1.6E-02	3.2E-02	4.9E-02	6.5E-02
1213	2.5E-03	3.8E-03	6.0E-03	6.7E-03	9.0E-03	8.0E-03	7.6E-03	-2.0E-02	-9.4E-03	5.8E-03	2.1E-02	3.6E-02	5.1E-02
1214	3.6E-03	6.7E-03	9.9E-03	1.0E-02	1.2E-02	9.9E-03	9.3E-03	-2.7E-03	1.4E-02	3.8E-02	6.1E-02	8.5E-02	1.1E-01
1215	3.5E-03	7.3E-03	8.9E-03	9.1E-03	1.1E-02	8.5E-03	8.5E-03	-1.7E-02	-1.2E-03	2.1E-02	4.3E-02	6.5E-02	8.7E-02
1216	3.2E-03	6.6E-03	6.9E-03	8.1E-03	1.0E-02	8.8E-03	8.3E-03	-3.7E-02	-2.1E-02	7.5E-04	2.2E-02	4.4E-02	6.5E-02
1217	2.7E-03	4.4E-03	6.3E-03	7.0E-03	1.0E-02	9.1E-03	8.6E-03	-4.9E-02	-3.2E-02	-1.1E-02	1.0E-02	3.2E-02	5.3E-02
1218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1219	3.8E-03	5.3E-03	9.1E-03	9.9E-03	1.2E-02	9.3E-03	9.3E-03	-1.2E-02	3.4E-03	2.6E-02	4.9E-02	7.1E-02	9.4E-02
1220	3.5E-03	5.8E-03	8.0E-03	9.0E-03	1.1E-02	9.9E-03	9.3E-03	-2.6E-02	-9.7E-03	1.3E-02	3.6E-02	5.8E-02	8.1E-02
1221	3.0E-03	5.5E-03	6.7E-03	7.8E-03	1.1E-02	1.0E-02	9.6E-03	-3.3E-02	-1.7E-02	4.9E-03	2.7E-02	4.8E-02	7.0E-02
1222	2.5E-03	4.7E-03	6.4E-03	6.5E-03	1.1E-02	1.0E-02	9.6E-03	-3.5E-02	-2.1E-02	-6.1E-04	1.9E-02	3.9E-02	5.9E-02
1223	2.1E-03	3.8E-03	6.0E-03	6.2E-03	1.1E-02	1.0E-02	9.7E-03	-4.2E-02	-2.9E-02	-1.0E-02	8.8E-03	2.8E-02	4.7E-02
1224	4.3E-03	5.9E-03	8.6E-03	1.1E-02	1.3E-02	1.1E-02	1.1E-02	3.0E-02	4.0E-02	6.0E-02	7.9E-02	9.8E-02	1.2E-01
1225	3.8E-03	5.7E-03	8.8E-03	9.9E-03	1.2E-02	1.1E-02	1.0E-02	1.9E-02	2.9E-02	4.6E-02	6.3E-02	8.0E-02	9.7E-02
1226	3.3E-03	3.9E-03	7.3E-03	8.6E-03	1.2E-02	1.1E-02	1.1E-02	-2.1E-03	9.4E-03	2.7E-02	4.5E-02	6.3E-02	8.1E-02
1227	2.7E-03	4.8E-03	6.6E-03	7.1E-03	1.2E-02	1.1E-02	1.1E-02	-2.1E-02	-8.5E-03	1.1E-02	3.0E-02	5.0E-02	6.9E-02
1228	2.3E-03	4.3E-03	6.3E-03	6.6E-03	1.1E-02	1.1E-02	1.0E-02	-2.7E-02	-1.6E-02	3.1E-03	2.2E-02	4.0E-02	5.9E-02
1229	2.3E-03	4.2E-03	5.9E-03	6.6E-03	1.1E-02	1.1E-02	1.0E-02	-2.5E-02	-1.7E-02	-5.8E-04	1.5E-02	3.1E-02	4.7E-02
1230	4.3E-03	4.9E-03	8.3E-03	1.1E-02	1.3E-02	1.3E-02	1.2E-02	1.4E-02	2.6E-02	4.6E-02	6.7E-02	8.7E-02	1.1E-01

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1231	3.7E-03	5.4E-03	7.6E-03	9.6E-03	1.3E-02	1.3E-02	1.2E-02	2.8E-02	3.8E-02	5.5E-02	7.3E-02	9.0E-02	1.1E-01
1232	3.0E-03	4.5E-03	6.9E-03	7.9E-03	1.3E-02	1.2E-02	1.2E-02	2.7E-02	3.3E-02	4.8E-02	6.3E-02	7.7E-02	9.2E-02
1233	2.6E-03	4.6E-03	6.6E-03	7.3E-03	1.2E-02	1.2E-02	1.1E-02	1.1E-02	1.8E-02	3.4E-02	4.9E-02	6.4E-02	8.0E-02
1234	2.7E-03	4.7E-03	6.2E-03	7.1E-03	1.2E-02	1.2E-02	1.1E-02	-5.2E-03	1.4E-03	1.6E-02	3.1E-02	4.6E-02	6.1E-02
1235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1236	4.1E-03	4.9E-03	7.6E-03	1.1E-02	1.5E-02	1.4E-02	1.3E-02	4.6E-03	1.4E-02	3.4E-02	5.3E-02	7.3E-02	9.2E-02
1237	3.4E-03	5.1E-03	7.2E-03	8.9E-03	1.4E-02	1.4E-02	1.3E-02	1.1E-02	2.0E-02	3.9E-02	5.8E-02	7.8E-02	9.7E-02
1238	2.9E-03	5.2E-03	6.8E-03	8.0E-03	1.3E-02	1.3E-02	1.2E-02	2.3E-02	3.0E-02	4.7E-02	6.4E-02	8.1E-02	9.8E-02
1239	3.0E-03	5.2E-03	6.4E-03	7.5E-03	1.3E-02	1.2E-02	1.2E-02	2.3E-02	2.8E-02	4.2E-02	5.6E-02	7.1E-02	8.5E-02
1240	2.9E-03	5.0E-03	6.0E-03	7.1E-03	1.2E-02	1.2E-02	1.1E-02	9.0E-03	1.5E-02	2.9E-02	4.4E-02	5.8E-02	7.3E-02
1241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1242	3.7E-03	5.7E-03	7.5E-03	1.0E-02	1.5E-02	1.5E-02	1.4E-02	8.9E-03	1.2E-02	2.6E-02	4.0E-02	5.4E-02	6.8E-02
1243	3.3E-03	5.6E-03	7.0E-03	8.6E-03	1.4E-02	1.4E-02	1.3E-02	4.0E-05	7.1E-03	2.5E-02	4.2E-02	6.0E-02	7.7E-02
1244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1245	3.2E-03	5.5E-03	6.2E-03	7.6E-03	1.3E-02	1.3E-02	1.2E-02	1.6E-02	2.2E-02	3.9E-02	5.5E-02	7.1E-02	8.7E-02
1246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1248	3.7E-03	6.3E-03	7.4E-03	9.5E-03	1.6E-02	1.6E-02	1.5E-02	1.8E-02	1.3E-02	1.9E-02	2.5E-02	3.1E-02	3.7E-02
1249	3.6E-03	6.1E-03	6.8E-03	8.7E-03	1.5E-02	1.4E-02	1.4E-02	9.8E-03	9.5E-03	2.0E-02	3.1E-02	4.1E-02	5.2E-02
1250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1251	3.3E-03	5.6E-03	5.9E-03	7.4E-03	1.2E-02	1.2E-02	1.1E-02	5.3E-03	1.2E-02	2.8E-02	4.4E-02	6.0E-02	7.6E-02
1252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1254	4.0E-03	6.8E-03	7.3E-03	9.9E-03	1.6E-02	1.6E-02	1.5E-02	1.5E-02	5.0E-03	7.1E-03	9.1E-03	1.1E-02	1.3E-02
1255	3.8E-03	6.4E-03	6.6E-03	9.0E-03	1.5E-02	1.4E-02	1.3E-02	1.7E-02	9.8E-03	1.4E-02	1.7E-02	2.1E-02	2.5E-02
1256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1257	3.3E-03	5.5E-03	5.5E-03	7.5E-03	1.2E-02	1.1E-02	1.1E-02	-4.1E-03	-2.1E-04	1.3E-02	2.6E-02	3.9E-02	5.2E-02
1258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1260	4.1E-03	6.9E-03	7.7E-03	1.2E-02	1.6E-02	1.5E-02	1.4E-02	1.1E-02	6.7E-04	2.9E-03	5.1E-03	7.3E-03	9.5E-03
1261	3.8E-03	6.3E-03	7.1E-03	1.0E-02	1.4E-02	1.4E-02	1.3E-02	1.7E-02	5.6E-03	5.3E-03	5.0E-03	4.6E-03	4.3E-03
1262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1266	3.6E-03	5.9E-03	7.4E-03	1.2E-02	1.3E-02	1.2E-02	1.1E-02	9.9E-03	8.6E-04	1.9E-03	3.0E-03	4.1E-03	5.1E-03
1267	3.3E-03	5.3E-03	6.9E-03	1.1E-02	1.1E-02	1.1E-02	1.0E-02	1.8E-02	7.0E-03	4.7E-03	2.4E-03	1.8E-04	-2.1E-03
1268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1280	4.4E-03	4.5E-03	6.9E-03	1.2E-02	1.3E-02	1.2E-02	1.2E-02	-1.1E-02	-1.3E-02	-7.8E-03	-3.0E-03	1.7E-03	6.5E-03
1281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1282	4.5E-03	4.5E-03	7.4E-03	1.2E-02	1.2E-02	1.2E-02	1.2E-02	-1.5E-02	-1.6E-02	-1.1E-02	-5.1E-03	4.7E-04	6.0E-03
1283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1293	4.3E-03	4.6E-03	7.2E-03	1.3E-02	1.4E-02	1.3E-02	1.3E-02	-5.6E-03	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02
1294	4.0E-03	4.3E-03	6.3E-03	1.2E-02	1.2E-02	1.1E-02	1.1E-02	-7.0E-03	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.3E-03
1295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1297	3.8E-03	4.2E-03	7.8E-03	1.2E-02	1.4E-02	1.4E-02	1.3E-02	-6.3E-03	-1.3E-02	-1.0E-02	-7.8E-03	-5.4E-03	-2.9E-03
1298	3.5E-03	3.8E-03	6.3E-03	1.1E-02	1.2E-02	1.1E-02	1.1E-02	-5.8E-03	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
1299	3.4E-03	3.7E-03	5.8E-03	1.1E-02	1.1E-02	1.1E-02	1.1E-02	-7.6E-03	-1.1E-02	-9.3E-03	-7.2E-03	-5.2E-03	-3.1E-03
1300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1304	3.5E-03	3.8E-03	6.9E-03	1.0E-02	1.2E-02	1.2E-02	1.1E-02	-2.2E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02
1305	3.3E-03	3.7E-03	6.0E-03	1.0E-02	1.1E-02	1.0E-02	1.0E-02	-6.1E-03	-1.1E-02	-9.7E-03	-8.3E-03	-7.0E-03	-5.6E-03
1306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1309	3.4E-03	3.6E-03	7.1E-03	1.0E-02	1.3E-02	1.2E-02	1.2E-02	-2.5E-03	-9.3E-03	-7.9E-03	-6.6E-03	-5.2E-03	-3.9E-03
1310	3.2E-03	3.5E-03	6.3E-03	9.4E-03	1.1E-02	1.1E-02	1.0E-02	-3.6E-03	-1.0E-02	-1.0E-02	-9.7E-03	-9.5E-03	-9.3E-03
1311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1312	3.6E-03	4.8E-03	9.6E-03	1.2E-02	1.8E-02	1.7E-02	1.6E-02	-2.1E-02	-1.9E-02	-5.1E-03	8.6E-03	2.2E-02	3.6E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1313	3.5E-03	4.1E-03	8.6E-03	1.2E-02	1.6E-02	1.5E-02	1.4E-02	-1.5E-02	-1.6E-02	-6.8E-03	2.5E-03	1.2E-02	2.1E-02
1314	3.2E-03	3.4E-03	7.1E-03	9.9E-03	1.3E-02	1.3E-02	1.2E-02	-3.3E-03	-8.2E-03	-4.8E-03	-1.5E-03	1.9E-03	5.3E-03
1315	3.1E-03	3.3E-03	6.4E-03	9.4E-03	1.2E-02	1.1E-02	1.1E-02	6.3E-05	-7.6E-03	-8.1E-03	-8.5E-03	-9.0E-03	-9.4E-03
1316	3.0E-03	3.2E-03	5.8E-03	8.8E-03	1.0E-02	9.9E-03	9.4E-03	-4.2E-03	-9.5E-03	-8.5E-03	-7.4E-03	-6.4E-03	-5.4E-03
1317	3.4E-03	4.5E-03	9.1E-03	1.0E-02	1.7E-02	1.7E-02	1.6E-02	-2.0E-02	-1.7E-02	-2.3E-03	1.2E-02	2.6E-02	4.0E-02
1318	3.3E-03	4.0E-03	8.3E-03	1.1E-02	1.5E-02	1.5E-02	1.4E-02	-2.0E-02	-1.9E-02	-7.9E-03	3.0E-03	1.4E-02	2.5E-02
1319	3.1E-03	3.4E-03	7.2E-03	9.9E-03	1.3E-02	1.3E-02	1.2E-02	-8.7E-03	-1.1E-02	-4.6E-03	1.6E-03	7.9E-03	1.4E-02
1320	3.0E-03	3.2E-03	6.3E-03	8.9E-03	1.2E-02	1.1E-02	1.1E-02	1.4E-03	-5.4E-03	-4.8E-03	-4.2E-03	-3.6E-03	-3.0E-03
1321	2.9E-03	3.1E-03	5.8E-03	8.5E-03	1.1E-02	1.0E-02	9.5E-03	-1.9E-03	-7.8E-03	-7.3E-03	-6.7E-03	-6.2E-03	-5.6E-03
1322	3.1E-03	3.8E-03	7.8E-03	9.2E-03	1.4E-02	1.4E-02	1.3E-02	-2.2E-02	-2.0E-02	-8.7E-03	2.6E-03	1.4E-02	2.5E-02
1323	3.0E-03	3.4E-03	7.3E-03	9.4E-03	1.3E-02	1.3E-02	1.2E-02	-1.4E-02	-1.4E-02	-6.4E-03	1.5E-03	9.4E-03	1.7E-02
1324	2.8E-03	3.1E-03	6.2E-03	8.6E-03	1.1E-02	1.1E-02	1.0E-02	-2.9E-03	-7.0E-03	-3.9E-03	-8.8E-04	2.2E-03	5.3E-03
1325	2.8E-03	3.0E-03	5.8E-03	8.1E-03	1.1E-02	1.0E-02	9.6E-03	1.8E-03	-4.8E-03	-4.9E-03	-5.0E-03	-5.1E-03	-5.1E-03
1326	2.7E-03	3.0E-03	6.3E-03	8.2E-03	1.1E-02	1.1E-02	1.0E-02	-8.4E-03	-1.0E-02	-5.2E-03	-5.8E-05	5.1E-03	1.0E-02
1327	4.0E-03	4.4E-03	6.8E-03	1.1E-02	1.2E-02	1.1E-02	1.1E-02	8.2E-03	7.6E-04	1.6E-04	-4.3E-04	-1.0E-03	-1.6E-03
1328	1.2E-03	7.8E-03	1.2E-02	1.2E-02	8.9E-03	4.7E-03	4.4E-03	-4.0E-02	-3.6E-02	-3.0E-02	-2.3E-02	-1.7E-02	-1.0E-02
1329	1.4E-03	7.1E-03	1.1E-02	1.2E-02	8.4E-03	5.0E-03	4.8E-03	-4.8E-02	-4.3E-02	-3.4E-02	-2.6E-02	-1.8E-02	-9.2E-03
1330	1.7E-03	5.2E-03	8.9E-03	9.9E-03	7.2E-03	5.6E-03	5.4E-03	-4.2E-02	-4.0E-02	-3.5E-02	-3.0E-02	-2.5E-02	-2.0E-02
1331	1.9E-03	5.6E-03	8.4E-03	9.5E-03	8.0E-03	6.1E-03	5.9E-03	-5.3E-02	-4.8E-02	-4.1E-02	-3.3E-02	-2.6E-02	-1.8E-02
1332	2.1E-03	5.5E-03	8.1E-03	8.8E-03	8.0E-03	6.5E-03	6.2E-03	-5.4E-02	-5.0E-02	-4.3E-02	-3.6E-02	-2.9E-02	-2.2E-02
1333	2.3E-03	5.9E-03	8.8E-03	9.0E-03	8.6E-03	7.0E-03	6.7E-03	-7.1E-02	-6.2E-02	-5.0E-02	-3.8E-02	-2.5E-02	-1.3E-02
1334	2.4E-03	4.6E-03	7.3E-03	8.4E-03	8.6E-03	6.9E-03	6.6E-03	-8.6E-02	-7.5E-02	-6.1E-02	-4.6E-02	-3.1E-02	-1.6E-02
1335	2.6E-03	4.3E-03	7.0E-03	8.8E-03	9.3E-03	7.5E-03	7.1E-03	-7.8E-02	-6.9E-02	-5.6E-02	-4.2E-02	-2.9E-02	-1.6E-02
1336	2.7E-03	3.7E-03	6.7E-03	8.7E-03	9.5E-03	7.6E-03	7.2E-03	-6.1E-02	-5.8E-02	-5.1E-02	-4.4E-02	-3.6E-02	-2.9E-02
1337	8.2E-04	3.0E-03	4.0E-03	5.5E-03	4.8E-03	3.6E-03	3.4E-03	3.7E-02	2.7E-02	2.0E-02	1.2E-02	4.6E-03	-2.9E-03
1338	7.4E-04	3.3E-03	4.4E-03	6.8E-03	5.3E-03	4.0E-03	3.7E-03	3.2E-02	2.5E-02	2.1E-02	1.7E-02	1.2E-02	8.1E-03
1339	8.2E-04	2.3E-03	4.0E-03	5.8E-03	4.7E-03	3.5E-03	3.3E-03	3.6E-02	2.7E-02	2.0E-02	1.2E-02	5.2E-03	-2.1E-03
1340	7.5E-04	2.5E-03	4.8E-03	7.5E-03	5.2E-03	3.9E-03	3.7E-03	3.1E-02	2.5E-02	2.1E-02	1.8E-02	1.4E-02	1.0E-02
1341	7.7E-04	2.1E-03	5.4E-03	8.0E-03	5.2E-03	3.8E-03	3.6E-03	3.1E-02	2.5E-02	2.2E-02	1.8E-02	1.5E-02	1.1E-02
1342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1343	7.7E-04	2.4E-03	5.9E-03	8.3E-03	5.1E-03	3.7E-03	3.5E-03	3.1E-02	2.5E-02	2.2E-02	1.9E-02	1.6E-02	1.2E-02
1344	7.5E-04	4.0E-03	7.8E-03	1.0E-02	5.6E-03	3.9E-03	3.7E-03	2.1E-02	2.0E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02
1345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1360	4.5E-04	1.5E-03	2.7E-03	3.6E-03	1.1E-02	7.2E-03	4.6E-03	1.0E-02	1.1E-02	1.4E-02	1.6E-02	1.9E-02	2.2E-02
1361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1365	4.3E-04	1.5E-03	2.6E-03	3.5E-03	9.8E-03	1.0E-02	5.3E-03	9.7E-03	1.1E-02	1.3E-02	1.6E-02	1.9E-02	2.1E-02
1366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1407	5.0E-04	2.4E-03	3.7E-03	4.9E-03	4.0E-03	3.8E-03	2.5E-03	3.0E-02	2.3E-02	1.7E-02	1.1E-02	5.3E-03	-5.6E-04
1408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1421	4.8E-04	2.3E-03	3.7E-03	4.9E-03	3.9E-03	3.9E-03	2.5E-03	2.9E-02	2.2E-02	1.7E-02	1.1E-02	5.2E-03	-4.1E-04
1422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1487	1.4E-03	2.9E-03	1.0E-02	1.1E-02	1.1E-02	7.2E-03	6.7E-03	-1.3E-02	3.0E-03	2.4E-02	4.4E-02	6.5E-02	8.6E-02
1488	1.2E-03	2.3E-03	8.2E-03	8.3E-03	1.1E-02	7.0E-03	6.5E-03	-1.8E-02	-6.4E-03	9.6E-03	2.6E-02	4.2E-02	5.8E-02
1489	1.1E-03	2.0E-03	7.5E-03	6.4E-03	1.0E-02	7.4E-03	6.9E-03	-1.7E-02	-1.1E-02	-5.2E-04	1.0E-02	2.1E-02	3.1E-02
1490	1.2E-03	2.0E-03	6.5E-03	4.8E-03	9.0E-03	7.1E-03	6.7E-03	-2.6E-02	-2.2E-02	-1.3E-02	-4.9E-03	3.7E-03	1.2E-02
1491	1.3E-03	2.0E-03	5.8E-03	4.8E-03	7.9E-03	6.5E-03	6.1E-03	-3.3E-02	-2.8E-02	-1.9E-02	-1.0E-02	-1.4E-03	7.5E-03
1492	1.4E-03	2.6E-03	1.2E-02	9.1E-03	1.4E-02	7.1E-03	6.6E-03	5.3E-03	1.9E-02	3.8E-02	5.6E-02	7.5E-02	9.3E-02
1493	1.2E-03	2.1E-03	9.5E-03	8.1E-03	1.2E-02	6.4E-03	5.9E-03	-5.2E-03	6.4E-03	2.2E-02	3.8E-02	5.4E-02	7.0E-02
1494	1.1E-03	2.1E-03	7.2E-03	7.2E-03	1.0E-02	7.0E-03	6.5E-03	-1.2E-02	-4.3E-03	7.4E-03	1.9E-02	3.1E-02	4.3E-02
1495	1.1E-03	2.1E-03	5.3E-03	5.9E-03	8.4E-03	6.9E-03	6.4E-03	-2.5E-02	-2.0E-02	-1.1E-02	-1.6E-03	7.7E-03	1.7E-02
1496	1.2E-03	2.0E-03	4.9E-03	5.0E-03	7.1E-03	6.5E-03	6.1E-03	-3.5E-02	-2.9E-02	-2.0E-02	-1.0E-02	-9.9E-04	8.5E-03
1497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1502	1.3E-03	2.9E-03	9.1E-03	1.1E-02	1.1E-02	6.6E-03	6.1E-03	1.5E-02	2.6E-02	4.2E-02	5.8E-02	7.4E-02	9.0E-02
1503	1.2E-03	2.8E-03	7.4E-03	8.3E-03	8.0E-03	6.2E-03	5.7E-03	5.9E-03	1.7E-02	3.2E-02	4.7E-02	6.2E-02	7.6E-02
1504	1.0E-03	2.5E-03	7.3E-03	6.2E-03	6.4E-03	6.0E-03	5.6E-03	-3.5E-03	6.1E-03	1.9E-02	3.3E-02	4.6E-02	5.9E-02
1505	1.0E-03	2.3E-03	6.7E-03	5.1E-03	6.7E-03	6.3E-03	5.9E-03	-1.0E-02	-4.8E-03	4.5E-03	1.4E-02	2.3E-02	3.2E-02
1506	1.1E-03	2.0E-03	6.1E-03	4.5E-03	6.8E-03	6.3E-03	5.9E-03	-2.5E-02	-2.0E-02	-1.1E-02	-2.1E-03	6.9E-03	1.6E-02
1507	1.3E-03	3.1E-03	8.5E-03	1.1E-02	1.1E-02	6.4E-03	5.9E-03	1.7E-02	2.8E-02	4.3E-02	5.8E-02	7.3E-02	8.9E-02
1508	1.2E-03	2.8E-03	7.7E-03	9.1E-03	8.9E-03	6.1E-03	5.7E-03	7.8E-03	1.9E-02	3.3E-02	4.8E-02	6.3E-02	7.8E-02
1509	1.0E-03	2.4E-03	6.3E-03	7.3E-03	7.3E-03	5.6E-03	5.1E-03	1.5E-03	1.1E-02	2.3E-02	3.6E-02	4.9E-02	6.1E-02
1510	9.6E-04	2.1E-03	5.6E-03	6.2E-03	6.3E-03	5.9E-03	5.5E-03	-7.9E-03	-1.1E-03	9.2E-03	2.0E-02	3.0E-02	4.0E-02
1511	1.0E-03	1.8E-03	5.7E-03	5.4E-03	6.5E-03	6.1E-03	5.7E-03	-2.1E-02	-1.6E-02	-6.9E-03	2.1E-03	1.1E-02	2.0E-02
1512	1.3E-03	3.0E-03	7.4E-03	1.3E-02	1.3E-02	6.1E-03	5.7E-03	1.8E-02	2.8E-02	4.2E-02	5.6E-02	7.0E-02	8.4E-02
1513	1.2E-03	2.7E-03	7.2E-03	1.0E-02	1.0E-02	5.9E-03	5.5E-03	9.2E-03	2.0E-02	3.4E-02	4.9E-02	6.3E-02	7.8E-02
1514	1.0E-03	2.2E-03	6.4E-03	8.2E-03	8.2E-03	5.3E-03	4.9E-03	2.6E-03	1.2E-02	2.6E-02	3.9E-02	5.2E-02	6.6E-02
1515	9.1E-04	1.9E-03	5.6E-03	7.0E-03	7.0E-03	5.6E-03	5.2E-03	-3.5E-03	4.2E-03	1.5E-02	2.6E-02	3.7E-02	4.9E-02
1516	9.8E-04	1.8E-03	4.7E-03	6.1E-03	6.2E-03	5.8E-03	5.4E-03	-1.6E-02	-1.1E-02	-1.3E-03	7.9E-03	1.7E-02	2.6E-02
1517	1.2E-03	2.7E-03	6.6E-03	1.1E-02	1.1E-02	5.9E-03	5.4E-03	2.0E-02	2.9E-02	4.1E-02	5.3E-02	6.5E-02	7.7E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1518	1.2E-03	2.3E-03	6.4E-03	9.8E-03	9.8E-03	5.8E-03	5.4E-03	1.0E-02	2.0E-02	3.4E-02	4.8E-02	6.1E-02	7.5E-02
1519	1.0E-03	2.0E-03	6.1E-03	8.5E-03	8.5E-03	5.3E-03	4.9E-03	3.9E-03	1.4E-02	2.7E-02	4.1E-02	5.4E-02	6.8E-02
1520	9.0E-04	1.8E-03	5.6E-03	7.4E-03	7.4E-03	5.2E-03	4.8E-03	-1.4E-04	8.4E-03	2.0E-02	3.2E-02	4.3E-02	5.5E-02
1521	9.2E-04	1.8E-03	5.0E-03	6.5E-03	6.5E-03	5.5E-03	5.1E-03	-8.1E-03	-2.2E-03	7.1E-03	1.6E-02	2.6E-02	3.5E-02
1522	1.2E-03	2.5E-03	6.8E-03	1.2E-02	1.2E-02	5.6E-03	5.2E-03	2.2E-02	2.9E-02	3.9E-02	5.0E-02	6.0E-02	7.0E-02
1523	1.1E-03	2.1E-03	5.4E-03	9.2E-03	9.2E-03	5.6E-03	5.2E-03	1.1E-02	2.0E-02	3.3E-02	4.5E-02	5.8E-02	7.0E-02
1524	1.0E-03	1.9E-03	5.6E-03	7.7E-03	7.3E-03	5.2E-03	4.9E-03	4.4E-03	1.4E-02	2.7E-02	4.0E-02	5.3E-02	6.6E-02
1525	9.1E-04	1.8E-03	5.4E-03	6.8E-03	6.4E-03	4.8E-03	4.5E-03	5.0E-04	9.3E-03	2.1E-02	3.3E-02	4.5E-02	5.7E-02
1526	8.8E-04	1.8E-03	5.0E-03	6.1E-03	5.9E-03	5.2E-03	4.9E-03	-4.1E-03	2.4E-03	1.2E-02	2.2E-02	3.1E-02	4.1E-02
1527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1528	1.2E-03	2.9E-03	6.7E-03	9.9E-03	9.9E-03	5.4E-03	5.0E-03	2.1E-02	2.8E-02	3.8E-02	4.7E-02	5.7E-02	6.7E-02
1529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1531	9.1E-04	2.2E-03	5.0E-03	6.9E-03	6.6E-03	4.6E-03	4.3E-03	7.6E-04	9.6E-03	2.2E-02	3.4E-02	4.5E-02	5.7E-02
1532	8.3E-04	2.0E-03	4.8E-03	6.2E-03	5.5E-03	4.9E-03	4.6E-03	-2.7E-03	4.7E-03	1.5E-02	2.5E-02	3.6E-02	4.6E-02
1533	1.1E-03	5.2E-03	7.5E-03	1.0E-02	1.5E-02	5.4E-03	5.1E-03	3.2E-02	3.5E-02	4.2E-02	4.9E-02	5.6E-02	6.3E-02
1534	1.1E-03	4.2E-03	6.9E-03	9.4E-03	1.1E-02	5.2E-03	4.8E-03	3.2E-02	3.5E-02	4.1E-02	4.7E-02	5.3E-02	5.9E-02
1535	1.1E-03	3.8E-03	5.8E-03	9.3E-03	9.9E-03	5.1E-03	4.7E-03	2.5E-02	3.0E-02	3.7E-02	4.5E-02	5.3E-02	6.0E-02
1536	1.1E-03	3.5E-03	6.2E-03	8.5E-03	8.3E-03	5.1E-03	4.7E-03	2.1E-02	2.7E-02	3.7E-02	4.6E-02	5.6E-02	6.6E-02
1537	1.1E-03	3.0E-03	5.7E-03	8.4E-03	7.6E-03	5.2E-03	4.8E-03	1.7E-02	2.3E-02	3.3E-02	4.2E-02	5.2E-02	6.1E-02
1538	1.0E-03	2.8E-03	4.8E-03	7.7E-03	7.5E-03	5.0E-03	4.7E-03	6.2E-03	1.4E-02	2.6E-02	3.7E-02	4.8E-02	5.9E-02
1539	9.1E-04	2.6E-03	4.5E-03	6.9E-03	6.9E-03	4.6E-03	4.3E-03	-3.0E-04	8.5E-03	2.0E-02	3.2E-02	4.4E-02	5.6E-02
1540	7.9E-04	2.4E-03	4.5E-03	6.2E-03	6.0E-03	4.6E-03	4.3E-03	-3.0E-03	5.0E-03	1.6E-02	2.6E-02	3.7E-02	4.8E-02
1541	1.1E-03	5.7E-03	7.0E-03	9.7E-03	1.4E-02	4.8E-03	4.5E-03	2.8E-02	3.3E-02	4.1E-02	4.9E-02	5.6E-02	6.4E-02
1542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1548	1.0E-03	5.9E-03	6.4E-03	9.2E-03	1.3E-02	4.6E-03	4.3E-03	2.6E-02	3.1E-02	3.9E-02	4.8E-02	5.6E-02	6.4E-02
1549	1.0E-03	5.1E-03	6.3E-03	8.6E-03	1.0E-02	4.8E-03	4.4E-03	3.2E-02	3.4E-02	3.9E-02	4.3E-02	4.8E-02	5.3E-02
1550	1.0E-03	4.6E-03	5.7E-03	7.7E-03	8.4E-03	4.7E-03	4.4E-03	2.6E-02	3.0E-02	3.6E-02	4.2E-02	4.8E-02	5.4E-02
1551	1.1E-03	4.2E-03	4.8E-03	8.0E-03	7.4E-03	4.6E-03	4.2E-03	2.0E-02	2.5E-02	3.4E-02	4.2E-02	5.1E-02	6.0E-02
1552	1.0E-03	3.8E-03	5.2E-03	7.3E-03	6.6E-03	4.8E-03	4.5E-03	2.0E-02	2.6E-02	3.4E-02	4.3E-02	5.1E-02	5.9E-02
1553	9.9E-04	3.5E-03	5.0E-03	7.3E-03	5.6E-03	4.8E-03	4.5E-03	1.0E-02	1.7E-02	2.7E-02	3.7E-02	4.6E-02	5.6E-02
1554	1.0E-03	5.9E-03	6.0E-03	8.8E-03	1.2E-02	4.4E-03	4.1E-03	2.3E-02	2.9E-02	3.8E-02	4.7E-02	5.5E-02	6.4E-02
1555	9.6E-04	5.1E-03	6.0E-03	8.1E-03	1.0E-02	4.6E-03	4.3E-03	3.2E-02	3.3E-02	3.8E-02	4.2E-02	4.7E-02	5.1E-02
1556	1.0E-03	4.7E-03	5.6E-03	7.6E-03	8.4E-03	4.6E-03	4.3E-03	2.7E-02	3.0E-02	3.5E-02	4.1E-02	4.7E-02	5.3E-02
1557	1.0E-03	4.3E-03	4.9E-03	7.5E-03	6.9E-03	4.4E-03	4.1E-03	2.0E-02	2.5E-02	3.2E-02	4.0E-02	4.7E-02	5.4E-02
1558	1.0E-03	4.0E-03	4.7E-03	7.2E-03	6.2E-03	4.6E-03	4.3E-03	2.1E-02	2.6E-02	3.4E-02	4.2E-02	5.0E-02	5.8E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1559	9.8E-04	6.3E-03	6.2E-03	8.4E-03	1.1E-02	4.2E-03	3.9E-03	2.0E-02	2.7E-02	3.6E-02	4.6E-02	5.5E-02	6.4E-02
1560	9.3E-04	5.2E-03	5.7E-03	7.8E-03	9.7E-03	4.4E-03	4.1E-03	3.1E-02	3.3E-02	3.7E-02	4.2E-02	4.6E-02	5.1E-02
1561	9.7E-04	4.4E-03	5.4E-03	7.4E-03	8.3E-03	4.4E-03	4.1E-03	2.7E-02	2.9E-02	3.5E-02	4.1E-02	4.6E-02	5.2E-02
1562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1563	9.9E-04	6.6E-03	7.7E-03	8.4E-03	9.5E-03	3.8E-03	3.5E-03	1.0E-02	2.0E-02	3.2E-02	4.4E-02	5.5E-02	6.7E-02
1564	9.3E-04	6.0E-03	6.0E-03	7.7E-03	9.9E-03	3.9E-03	3.7E-03	1.7E-02	2.5E-02	3.4E-02	4.4E-02	5.3E-02	6.3E-02
1565	8.7E-04	5.5E-03	5.4E-03	7.3E-03	9.2E-03	4.1E-03	3.8E-03	3.0E-02	3.2E-02	3.7E-02	4.1E-02	4.6E-02	5.0E-02
1566	9.2E-04	5.0E-03	5.1E-03	6.9E-03	8.0E-03	4.2E-03	3.9E-03	2.6E-02	2.9E-02	3.4E-02	3.9E-02	4.4E-02	4.9E-02
1567	9.4E-04	4.5E-03	4.7E-03	6.4E-03	7.0E-03	4.1E-03	3.8E-03	2.1E-02	2.4E-02	3.0E-02	3.6E-02	4.2E-02	4.8E-02
1568	9.9E-04	7.1E-03	9.9E-03	8.8E-03	7.3E-03	3.3E-03	3.3E-03	1.1E-02	1.9E-02	3.0E-02	4.0E-02	5.0E-02	6.0E-02
1569	9.7E-04	6.2E-03	8.0E-03	8.0E-03	8.9E-03	3.6E-03	3.3E-03	1.1E-02	2.0E-02	3.1E-02	4.3E-02	5.4E-02	6.6E-02
1570	9.1E-04	5.1E-03	6.4E-03	7.4E-03	9.3E-03	3.8E-03	3.5E-03	1.5E-02	2.3E-02	3.2E-02	4.2E-02	5.2E-02	6.2E-02
1571	8.4E-04	5.0E-03	5.3E-03	7.1E-03	8.9E-03	4.0E-03	3.7E-03	3.0E-02	3.2E-02	3.7E-02	4.1E-02	4.6E-02	5.1E-02
1572	8.8E-04	4.8E-03	4.9E-03	6.6E-03	7.8E-03	4.0E-03	3.8E-03	2.6E-02	2.9E-02	3.3E-02	3.8E-02	4.3E-02	4.8E-02
1573	9.1E-04	4.6E-03	4.6E-03	6.3E-03	6.6E-03	4.0E-03	3.7E-03	2.2E-02	2.5E-02	3.0E-02	3.6E-02	4.1E-02	4.7E-02
1574	8.0E-04	6.8E-03	9.3E-03	1.2E-02	6.4E-03	4.1E-03	3.8E-03	1.0E-02	1.2E-02	1.7E-02	2.1E-02	2.6E-02	3.0E-02
1575	8.7E-04	7.4E-03	1.2E-02	1.4E-02	7.1E-03	4.0E-03	3.7E-03	1.7E-02	1.6E-02	1.8E-02	2.0E-02	2.1E-02	2.3E-02
1576	9.8E-04	8.9E-03	1.3E-02	1.6E-02	7.6E-03	4.0E-03	3.6E-03	2.5E-02	2.5E-02	2.7E-02	2.9E-02	3.2E-02	3.4E-02
1577	9.7E-04	1.0E-02	1.3E-02	1.6E-02	7.4E-03	3.5E-03	3.3E-03	3.0E-02	3.2E-02	3.6E-02	4.0E-02	4.4E-02	4.8E-02
1578	9.7E-04	9.5E-03	1.4E-02	1.5E-02	7.7E-03	3.6E-03	3.6E-03	3.4E-02	3.6E-02	3.9E-02	4.3E-02	4.6E-02	4.9E-02
1579	9.6E-04	8.3E-03	1.1E-02	1.3E-02	7.4E-03	3.7E-03	3.7E-03	3.0E-02	3.2E-02	3.6E-02	4.1E-02	4.5E-02	4.9E-02
1580	9.5E-04	6.5E-03	9.7E-03	1.0E-02	6.8E-03	3.4E-03	3.4E-03	1.5E-02	2.1E-02	2.9E-02	3.6E-02	4.4E-02	5.2E-02
1581	9.7E-04	6.0E-03	9.0E-03	8.5E-03	6.9E-03	3.2E-03	3.2E-03	1.0E-02	1.9E-02	2.9E-02	3.9E-02	4.8E-02	5.8E-02
1582	9.4E-04	5.9E-03	8.1E-03	7.6E-03	8.3E-03	3.4E-03	3.2E-03	1.1E-02	2.0E-02	3.1E-02	4.2E-02	5.3E-02	6.4E-02
1583	8.9E-04	5.2E-03	6.6E-03	7.2E-03	8.8E-03	3.7E-03	3.4E-03	1.3E-02	2.1E-02	3.1E-02	4.1E-02	5.1E-02	6.1E-02
1584	8.2E-04	4.5E-03	5.7E-03	6.9E-03	8.5E-03	3.8E-03	3.6E-03	2.8E-02	3.1E-02	3.6E-02	4.1E-02	4.6E-02	5.1E-02
1585	8.5E-04	4.2E-03	4.8E-03	6.5E-03	7.6E-03	3.9E-03	3.7E-03	2.7E-02	2.9E-02	3.3E-02	3.8E-02	4.3E-02	4.7E-02
1586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1599	8.3E-04	5.5E-03	9.8E-03	1.2E-02	6.8E-03	3.8E-03	3.5E-03	1.6E-02	1.5E-02	1.7E-02	1.9E-02	2.0E-02	2.2E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1600	9.4E-04	7.4E-03	1.1E-02	1.4E-02	7.2E-03	3.7E-03	3.4E-03	2.4E-02	2.4E-02	2.7E-02	3.0E-02	3.3E-02	3.6E-02
1601	9.3E-04	8.3E-03	1.1E-02	1.2E-02	7.3E-03	3.3E-03	3.1E-03	2.6E-02	2.8E-02	3.2E-02	3.6E-02	3.9E-02	4.3E-02
1602	9.2E-04	7.3E-03	9.8E-03	1.1E-02	7.2E-03	3.4E-03	3.4E-03	3.2E-02	3.3E-02	3.6E-02	3.9E-02	4.2E-02	4.5E-02
1603	9.2E-04	6.4E-03	9.2E-03	1.1E-02	6.8E-03	3.4E-03	3.4E-03	2.4E-02	2.7E-02	3.2E-02	3.6E-02	4.1E-02	4.5E-02
1604	9.1E-04	5.4E-03	7.5E-03	9.9E-03	6.3E-03	3.2E-03	3.2E-03	1.7E-02	2.2E-02	2.8E-02	3.5E-02	4.1E-02	4.8E-02
1605	9.2E-04	4.9E-03	7.3E-03	8.5E-03	6.2E-03	3.0E-03	3.0E-03	1.0E-02	1.8E-02	2.7E-02	3.6E-02	4.5E-02	5.4E-02
1606	9.0E-04	4.3E-03	6.8E-03	7.5E-03	7.4E-03	3.1E-03	3.0E-03	1.1E-02	1.9E-02	2.9E-02	4.0E-02	5.0E-02	6.0E-02
1607	8.5E-04	4.4E-03	6.5E-03	7.0E-03	7.9E-03	3.4E-03	3.2E-03	1.0E-02	1.9E-02	2.9E-02	3.9E-02	4.9E-02	5.9E-02
1608	7.9E-04	4.4E-03	5.8E-03	6.6E-03	7.9E-03	3.6E-03	3.3E-03	2.3E-02	2.7E-02	3.3E-02	3.9E-02	4.5E-02	5.1E-02
1609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1610	8.1E-04	5.1E-03	9.0E-03	1.1E-02	6.7E-03	3.6E-03	3.3E-03	1.6E-02	1.5E-02	1.7E-02	1.8E-02	2.0E-02	2.2E-02
1611	9.2E-04	6.8E-03	9.7E-03	1.3E-02	7.0E-03	3.6E-03	3.3E-03	2.3E-02	2.4E-02	2.7E-02	3.0E-02	3.3E-02	3.6E-02
1612	9.2E-04	7.4E-03	1.0E-02	1.1E-02	7.1E-03	3.1E-03	3.0E-03	2.5E-02	2.6E-02	3.0E-02	3.3E-02	3.7E-02	4.1E-02
1613	9.1E-04	6.6E-03	9.2E-03	9.9E-03	7.0E-03	3.3E-03	3.3E-03	2.8E-02	2.9E-02	3.2E-02	3.5E-02	3.8E-02	4.1E-02
1614	9.2E-04	5.7E-03	8.5E-03	1.0E-02	6.6E-03	3.2E-03	3.2E-03	2.5E-02	2.7E-02	3.2E-02	3.6E-02	4.0E-02	4.4E-02
1615	8.8E-04	5.2E-03	7.3E-03	9.5E-03	6.1E-03	3.1E-03	3.1E-03	1.8E-02	2.2E-02	2.8E-02	3.4E-02	4.0E-02	4.6E-02
1616	8.9E-04	4.3E-03	6.4E-03	8.4E-03	5.9E-03	2.9E-03	2.9E-03	1.0E-02	1.8E-02	2.6E-02	3.5E-02	4.3E-02	5.2E-02
1617	8.7E-04	4.1E-03	6.3E-03	7.5E-03	6.9E-03	3.0E-03	2.8E-03	1.1E-02	1.9E-02	2.8E-02	3.8E-02	4.8E-02	5.8E-02
1618	8.3E-04	3.6E-03	6.0E-03	6.9E-03	7.5E-03	3.3E-03	3.0E-03	1.1E-02	1.9E-02	2.8E-02	3.8E-02	4.8E-02	5.8E-02
1619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1620	8.0E-04	4.8E-03	8.3E-03	1.1E-02	6.6E-03	3.5E-03	3.2E-03	1.6E-02	1.5E-02	1.6E-02	1.8E-02	1.9E-02	2.1E-02
1621	9.0E-04	6.2E-03	8.7E-03	1.2E-02	6.9E-03	3.4E-03	3.2E-03	2.2E-02	2.3E-02	2.5E-02	2.8E-02	3.1E-02	3.4E-02
1622	9.0E-04	6.4E-03	8.9E-03	1.0E-02	6.9E-03	3.0E-03	2.9E-03	2.3E-02	2.5E-02	2.8E-02	3.1E-02	3.5E-02	3.8E-02
1623	9.1E-04	5.9E-03	8.5E-03	9.0E-03	6.8E-03	3.0E-03	3.0E-03	2.8E-02	2.9E-02	3.1E-02	3.4E-02	3.7E-02	3.9E-02
1624	9.0E-04	5.1E-03	7.8E-03	9.5E-03	6.2E-03	3.1E-03	3.1E-03	2.6E-02	2.8E-02	3.1E-02	3.5E-02	3.9E-02	4.2E-02
1625	8.6E-04	4.9E-03	7.0E-03	9.1E-03	5.9E-03	3.0E-03	3.0E-03	1.8E-02	2.2E-02	2.8E-02	3.4E-02	3.9E-02	4.5E-02
1626	8.7E-04	4.1E-03	5.9E-03	8.3E-03	5.7E-03	2.8E-03	2.8E-03	1.1E-02	1.8E-02	2.6E-02	3.4E-02	4.2E-02	5.0E-02
1627	8.5E-04	3.8E-03	5.7E-03	7.4E-03	6.5E-03	2.9E-03	2.7E-03	1.0E-02	1.8E-02	2.8E-02	3.7E-02	4.6E-02	5.6E-02
1628	8.9E-04	1.4E-03	1.4E-03	1.3E-03	1.6E-03	1.3E-03	1.1E-03	-1.1E-02	-8.6E-03	-5.2E-03	-1.8E-03	1.7E-03	5.1E-03
1629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1630	8.6E-04	1.3E-03	1.4E-03	1.3E-03	1.8E-03	1.3E-03	1.2E-03	-1.2E-02	-8.9E-03	-5.5E-03	-2.1E-03	1.2E-03	4.6E-03
1631	9.9E-04	1.3E-03	1.3E-03	1.3E-03	1.7E-03	1.5E-03	1.3E-03	-1.3E-02	-1.1E-02	-7.4E-03	-4.4E-03	-1.3E-03	1.8E-03
1632	8.2E-04	1.3E-03	1.3E-03	1.3E-03	2.1E-03	1.4E-03	1.3E-03	-1.2E-02	-9.8E-03	-6.7E-03	-3.7E-03	-6.4E-04	2.4E-03
1633	9.5E-04	1.3E-03	1.3E-03	1.4E-03	1.9E-03	1.5E-03	1.4E-03	-1.3E-02	-1.2E-02	-9.2E-03	-6.7E-03	-4.2E-03	-1.6E-03
1634	7.8E-04	1.2E-03	1.3E-03	1.3E-03	2.4E-03	1.4E-03	1.3E-03	-1.2E-02	-1.1E-02	-8.1E-03	-5.6E-03	-3.0E-03	-5.1E-04
1635	9.1E-04	1.2E-03	1.2E-03	1.4E-03	2.2E-03	1.5E-03	1.4E-03	-1.5E-02	-1.4E-02	-1.1E-02	-9.3E-03	-7.0E-03	-4.8E-03
1636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1663	1.4E-03	1.6E-03	1.7E-03	2.3E-03	2.1E-03	1.9E-03	1.9E-03	-1.8E-02	-1.5E-02	-1.2E-02	-8.4E-03	-4.9E-03	-1.4E-03
1664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1674	1.2E-03	1.4E-03	1.7E-03	2.4E-03	2.3E-03	2.1E-03	2.1E-03	-1.6E-02	-1.1E-02	-6.5E-03	-1.8E-03	2.9E-03	7.7E-03
1675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1680	1.2E-03	1.5E-03	1.8E-03	2.5E-03	2.4E-03	2.2E-03	2.2E-03	-1.7E-02	-1.2E-02	-6.4E-03	-1.0E-03	4.3E-03	9.7E-03
1681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1737	9.4E-04	2.9E-03	5.0E-03	5.8E-03	6.3E-03	3.9E-03	3.7E-03	-8.0E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.3E-02	-5.1E-02
1738	9.4E-04	2.9E-03	5.1E-03	5.9E-03	6.7E-03	4.3E-03	4.0E-03	-6.9E-03	-1.7E-02	-2.5E-02	-3.2E-02	-4.0E-02	-4.8E-02
1739	3.4E-03	4.9E-03	4.7E-03	8.8E-04	9.8E-04	6.4E-04	6.4E-04	-1.1E-02	-9.5E-03	-7.6E-03	-5.8E-03	-3.9E-03	-2.1E-03
1740	4.7E-03	5.9E-03	5.7E-03	9.0E-04	9.2E-04	6.7E-04	6.6E-04	-1.1E-02	-9.1E-03	-7.0E-03	-5.0E-03	-2.9E-03	-8.3E-04
1741	5.7E-03	6.4E-03	6.3E-03	9.3E-04	8.5E-04	7.3E-04	6.9E-04	-1.1E-02	-8.8E-03	-6.5E-03	-4.1E-03	-1.8E-03	6.0E-04
1742	3.3E-03	3.7E-03	2.1E-03	8.1E-04	1.1E-03	6.7E-04	6.3E-04	-9.0E-03	-8.5E-03	-7.6E-03	-6.7E-03	-5.9E-03	-5.0E-03
1743	3.5E-03	3.9E-03	3.2E-03	8.4E-04	1.1E-03	6.4E-04	6.4E-04	-9.1E-03	-8.3E-03	-7.3E-03	-6.2E-03	-5.1E-03	-4.0E-03
1744	3.6E-03	4.8E-03	4.6E-03	8.6E-04	1.0E-03	6.4E-04	6.4E-04	-9.4E-03	-8.3E-03	-7.0E-03	-5.6E-03	-4.2E-03	-2.8E-03
1745	4.7E-03	6.1E-03	5.9E-03	8.9E-04	9.6E-04	6.6E-04	6.6E-04	-9.7E-03	-8.3E-03	-6.6E-03	-4.9E-03	-3.2E-03	-1.5E-03
1746	2.8E-03	3.2E-03	2.0E-03	8.3E-04	1.1E-03	8.1E-04	6.7E-04	-8.5E-03	-8.6E-03	-8.4E-03	-8.2E-03	-7.9E-03	-7.7E-03
1747	3.3E-03	3.7E-03	2.2E-03	8.4E-04	1.1E-03	7.2E-04	6.8E-04	-8.5E-03	-8.4E-03	-8.0E-03	-7.6E-03	-7.2E-03	-6.8E-03
1748	3.7E-03	4.2E-03	2.7E-03	8.6E-04	1.1E-03	6.9E-04	6.9E-04	-8.6E-03	-8.3E-03	-7.6E-03	-6.9E-03	-6.2E-03	-5.6E-03
1749	4.1E-03	4.5E-03	4.3E-03	8.7E-04	1.0E-03	7.0E-04	7.0E-04	-8.7E-03	-8.0E-03	-7.0E-03	-6.0E-03	-5.0E-03	-4.0E-03
1750	2.5E-03	2.9E-03	2.0E-03	8.5E-04	1.2E-03	8.7E-04	7.1E-04	-9.0E-03	-8.8E-03	-8.3E-03	-7.8E-03	-7.3E-03	-6.9E-03
1751	3.2E-03	3.6E-03	2.3E-03	8.7E-04	1.2E-03	7.8E-04	7.3E-04	-9.2E-03	-8.7E-03	-8.0E-03	-7.2E-03	-6.5E-03	-5.7E-03
1752	3.8E-03	4.3E-03	2.5E-03	8.9E-04	1.1E-03	7.4E-04	7.4E-04	-9.1E-03	-8.5E-03	-7.5E-03	-6.6E-03	-5.6E-03	-4.7E-03
1753	4.4E-03	4.9E-03	3.8E-03	9.1E-04	1.1E-03	7.5E-04	7.5E-04	-8.5E-03	-7.8E-03	-6.7E-03	-5.7E-03	-4.6E-03	-3.6E-03
1754	1.5E-03	1.9E-03	1.6E-03	8.5E-04	1.2E-03	1.0E-03	7.3E-04	-8.7E-03	-8.6E-03	-8.2E-03	-7.8E-03	-7.4E-03	-7.1E-03
1755	2.0E-03	2.5E-03	1.9E-03	8.7E-04	1.2E-03	9.3E-04	7.5E-04	-8.6E-03	-8.4E-03	-7.9E-03	-7.4E-03	-6.9E-03	-6.4E-03
1756	2.8E-03	3.2E-03	2.2E-03	8.9E-04	1.2E-03	8.4E-04	7.6E-04	-8.3E-03	-8.0E-03	-7.4E-03	-6.9E-03	-6.3E-03	-5.7E-03
1757	3.7E-03	4.1E-03	2.6E-03	9.1E-04	1.2E-03	7.8E-04	7.8E-04	-7.9E-03	-7.5E-03	-6.9E-03	-6.3E-03	-5.6E-03	-5.0E-03
1758	4.6E-03	5.0E-03	3.1E-03	9.4E-04	1.1E-03	8.0E-04	8.0E-04	-8.0E-03	-7.4E-03	-6.5E-03	-5.6E-03	-4.7E-03	-3.8E-03
1759	1.5E-03	1.6E-03	1.6E-03	8.6E-04	1.2E-03	1.1E-03	7.5E-04	-8.5E-03	-8.2E-03	-7.6E-03	-7.0E-03	-6.4E-03	-5.8E-03
1760	1.7E-03	2.0E-03	1.7E-03	8.8E-04	1.2E-03	9.9E-04	7.7E-04	-8.3E-03	-8.0E-03	-7.3E-03	-6.6E-03	-5.9E-03	-5.2E-03
1761	2.2E-03	2.7E-03	2.0E-03	9.1E-04	1.2E-03	9.0E-04	7.9E-04	-8.1E-03	-7.7E-03	-6.9E-03	-6.1E-03	-5.2E-03	-4.4E-03
1762	3.2E-03	3.6E-03	2.5E-03	9.3E-04	1.2E-03	8.1E-04	8.1E-04	-7.4E-03	-6.8E-03	-5.9E-03	-5.0E-03	-4.2E-03	-3.3E-03
1763	4.4E-03	4.8E-03	3.1E-03	9.6E-04	1.2E-03	8.4E-04	8.3E-04	-6.5E-03	-5.8E-03	-4.9E-03	-3.9E-03	-3.0E-03	-2.0E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1764	1.6E-03	1.6E-03	1.7E-03	8.6E-04	1.2E-03	1.1E-03	7.6E-04	-8.1E-03	-7.5E-03	-6.7E-03	-5.8E-03	-4.9E-03	-4.0E-03
1765	1.7E-03	1.8E-03	1.8E-03	8.9E-04	1.2E-03	1.1E-03	7.8E-04	-7.4E-03	-6.9E-03	-6.0E-03	-5.2E-03	-4.3E-03	-3.4E-03
1766	1.9E-03	2.0E-03	2.0E-03	9.1E-04	1.3E-03	9.6E-04	8.1E-04	-6.5E-03	-6.0E-03	-5.1E-03	-4.2E-03	-3.3E-03	-2.4E-03
1767	2.4E-03	2.9E-03	2.2E-03	9.4E-04	1.3E-03	8.6E-04	8.3E-04	-5.7E-03	-5.3E-03	-4.4E-03	-3.6E-03	-2.8E-03	-2.0E-03
1768	1.5E-03	1.7E-03	1.7E-03	8.5E-04	1.2E-03	1.2E-03	7.6E-04	-6.2E-03	-5.7E-03	-4.9E-03	-4.1E-03	-3.3E-03	-2.4E-03
1769	1.7E-03	1.9E-03	1.8E-03	8.8E-04	1.2E-03	1.1E-03	7.9E-04	-5.3E-03	-5.0E-03	-4.3E-03	-3.7E-03	-3.0E-03	-2.3E-03
1770	1.9E-03	2.2E-03	2.1E-03	9.1E-04	1.3E-03	1.0E-03	8.1E-04	-4.3E-03	-4.3E-03	-3.9E-03	-3.5E-03	-3.1E-03	-2.7E-03
1771	2.3E-03	2.7E-03	2.3E-03	9.4E-04	1.3E-03	9.3E-04	8.4E-04	-3.7E-03	-3.9E-03	-3.7E-03	-3.5E-03	-3.3E-03	-3.1E-03
1772	1.7E-03	2.0E-03	1.6E-03	8.4E-04	1.2E-03	1.3E-03	7.5E-04	-3.4E-03	-3.3E-03	-2.8E-03	-2.3E-03	-1.8E-03	-1.3E-03
1773	1.9E-03	2.3E-03	1.8E-03	8.7E-04	1.3E-03	1.2E-03	7.8E-04	-2.4E-03	-2.5E-03	-2.2E-03	-2.0E-03	-1.7E-03	-1.4E-03
1774	2.2E-03	2.6E-03	1.9E-03	8.9E-04	1.3E-03	1.1E-03	8.0E-04	-2.3E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.3E-03
1775	2.7E-03	3.1E-03	2.2E-03	9.2E-04	1.3E-03	1.0E-03	8.3E-04	-2.5E-03	-3.0E-03	-3.2E-03	-3.3E-03	-3.4E-03	-3.5E-03
1776	1.9E-03	2.2E-03	1.5E-03	8.2E-04	1.2E-03	1.3E-03	7.6E-04	-2.0E-03	-2.2E-03	-1.9E-03	-1.6E-03	-1.4E-03	-1.1E-03
1777	2.2E-03	2.5E-03	1.6E-03	8.4E-04	1.3E-03	1.3E-03	7.7E-04	-2.0E-03	-2.5E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.4E-03
1778	2.5E-03	2.8E-03	1.7E-03	8.7E-04	1.3E-03	1.2E-03	7.9E-04	-2.5E-03	-3.2E-03	-3.5E-03	-3.7E-03	-3.9E-03	-4.1E-03
1779	3.0E-03	3.3E-03	2.0E-03	9.0E-04	1.4E-03	1.1E-03	8.2E-04	-4.6E-03	-5.4E-03	-5.7E-03	-6.0E-03	-6.3E-03	-6.6E-03
1780	2.1E-03	2.4E-03	1.3E-03	7.9E-04	1.2E-03	1.4E-03	7.7E-04	-1.8E-03	-2.5E-03	-2.8E-03	-3.1E-03	-3.4E-03	-3.7E-03
1781	2.3E-03	2.6E-03	1.4E-03	8.1E-04	1.3E-03	1.3E-03	7.8E-04	-3.4E-03	-4.3E-03	-4.7E-03	-5.1E-03	-5.5E-03	-5.9E-03
1782	2.6E-03	2.9E-03	1.9E-03	8.4E-04	1.4E-03	1.3E-03	8.0E-04	-6.2E-03	-7.0E-03	-7.4E-03	-7.7E-03	-8.1E-03	-8.4E-03
1783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1784	2.0E-03	2.4E-03	1.3E-03	7.7E-04	1.1E-03	1.4E-03	7.5E-04	-4.7E-03	-5.6E-03	-6.1E-03	-6.5E-03	-7.0E-03	-7.4E-03
1785	2.2E-03	2.6E-03	1.8E-03	7.9E-04	1.3E-03	1.4E-03	7.8E-04	-7.8E-03	-8.6E-03	-8.8E-03	-9.1E-03	-9.4E-03	-9.7E-03
1786	2.4E-03	2.8E-03	2.3E-03	8.1E-04	1.4E-03	1.3E-03	8.0E-04	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02
1787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1788	1.9E-03	2.3E-03	1.7E-03	8.2E-04	1.1E-03	1.5E-03	7.4E-04	-9.2E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
1789	2.0E-03	2.4E-03	2.1E-03	8.4E-04	1.2E-03	1.5E-03	7.6E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
1790	2.1E-03	2.5E-03	2.5E-03	8.6E-04	1.4E-03	1.4E-03	7.8E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
1791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1792	1.5E-03	2.2E-03	2.3E-03	9.0E-04	1.2E-03	1.5E-03	7.2E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02
1793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1808	3.8E-03	4.8E-03	4.7E-03	9.2E-04	9.1E-04	7.7E-04	7.2E-04	-1.7E-02	-1.6E-02	-1.4E-02	-1.3E-02	-1.1E-02	-9.4E-03
1809	4.5E-03	5.0E-03	5.0E-03	9.5E-04	9.4E-04	8.5E-04	7.9E-04	-1.7E-02	-1.5E-02	-1.4E-02	-1.2E-02	-9.8E-03	-8.0E-03
1810	4.8E-03	5.0E-03	4.8E-03	9.9E-04	1.0E-03	9.4E-04	8.8E-04	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.7E-03	-6.5E-03
1811	4.2E-03	4.4E-03	4.1E-03	1.0E-03	1.1E-03	1.0E-03	9.6E-04	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.7E-03	-5.3E-03
1812	5.1E-03	6.1E-03	6.0E-03	1.1E-03	1.2E-03	1.1E-03	1.1E-03	-1.6E-02	-1.4E-02	-1.2E-02	-9.3E-03	-6.7E-03	-4.1E-03
1813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1814	2.6E-03	4.0E-03	3.9E-03	8.7E-04	9.8E-04	6.2E-04	6.2E-04	-1.4E-02	-1.3E-02	-1.2E-02	-9.9E-03	-8.2E-03	-6.6E-03
1815	3.7E-03	4.9E-03	4.8E-03	9.0E-04	9.4E-04	6.9E-04	6.4E-04	-1.4E-02	-1.3E-02	-1.1E-02	-8.9E-03	-6.9E-03	-5.0E-03
1816	4.7E-03	5.5E-03	5.4E-03	9.3E-04	8.8E-04	7.6E-04	7.1E-04	-1.4E-02	-1.3E-02	-1.0E-02	-8.2E-03	-6.0E-03	-3.8E-03
1817	5.3E-03	5.5E-03	5.5E-03	9.7E-04	9.4E-04	8.5E-04	7.9E-04	-1.4E-02	-1.2E-02	-1.0E-02	-7.5E-03	-5.1E-03	-2.6E-03
1818	4.9E-03	5.1E-03	4.6E-03	9.8E-04	1.0E-03	9.2E-04	8.6E-04	-1.4E-02	-1.2E-02	-8.9E-03	-6.3E-03	-3.6E-03	-9.4E-04
1819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1823	3.0E-03	3.5E-03	2.5E-03	8.3E-04	1.1E-03	6.2E-04	5.9E-04	-1.2E-02	-1.1E-02	-9.2E-03	-7.9E-03	-6.6E-03	-5.3E-03
1824	9.0E-04	3.0E-03	5.0E-03	5.9E-03	6.1E-03	3.5E-03	3.3E-03	-1.5E-03	-1.3E-02	-2.3E-02	-3.3E-02	-4.3E-02	-5.2E-02
1825	9.0E-04	3.1E-03	5.0E-03	6.0E-03	6.2E-03	3.6E-03	3.3E-03	-4.6E-03	-1.5E-02	-2.4E-02	-3.3E-02	-4.2E-02	-5.0E-02
1826	8.2E-04	2.9E-03	4.7E-03	5.8E-03	6.1E-03	3.3E-03	3.1E-03	-3.2E-02	-3.5E-02	-3.5E-02	-3.5E-02	-3.6E-02	-3.6E-02
1827	9.3E-04	3.1E-03	5.1E-03	5.8E-03	6.0E-03	3.6E-03	3.4E-03	-4.4E-03	-1.5E-02	-2.4E-02	-3.3E-02	-4.1E-02	-5.0E-02
1828	9.7E-04	6.4E-03	8.5E-03	8.8E-03	7.7E-03	4.4E-03	3.7E-03	-1.1E-01	-9.7E-02	-7.8E-02	-6.0E-02	-4.2E-02	-2.3E-02
1829	9.8E-04	7.3E-03	9.8E-03	1.0E-02	8.1E-03	4.5E-03	3.9E-03	-9.5E-02	-8.5E-02	-7.2E-02	-5.9E-02	-4.6E-02	-3.3E-02
1830	9.9E-04	8.0E-03	1.1E-02	1.1E-02	8.9E-03	4.6E-03	4.0E-03	-6.4E-02	-5.7E-02	-4.8E-02	-3.9E-02	-3.0E-02	-2.1E-02
1831	1.0E-03	8.6E-03	1.2E-02	1.2E-02	9.5E-03	4.7E-03	4.1E-03	-5.2E-02	-4.8E-02	-4.1E-02	-3.4E-02	-2.7E-02	-2.0E-02
1832	8.7E-04	3.3E-03	6.1E-03	7.5E-03	7.9E-03	4.1E-03	3.8E-03	-1.3E-01	-1.2E-01	-1.0E-01	-9.0E-02	-7.6E-02	-6.2E-02
1833	8.7E-04	3.2E-03	5.3E-03	6.6E-03	7.1E-03	3.7E-03	3.5E-03	-1.6E-01	-1.5E-01	-1.4E-01	-1.3E-01	-1.2E-01	-1.0E-01
1834	8.7E-04	3.2E-03	5.7E-03	7.0E-03	7.5E-03	3.9E-03	3.6E-03	-1.6E-01	-1.5E-01	-1.3E-01	-1.2E-01	-1.1E-01	-9.8E-02
1835	9.2E-04	3.3E-03	5.5E-03	6.4E-03	7.1E-03	3.9E-03	3.4E-03	-1.2E-01	-1.1E-01	-9.2E-02	-7.6E-02	-6.0E-02	-4.5E-02
1836	9.4E-04	4.1E-03	5.8E-03	6.8E-03	7.4E-03	4.1E-03	3.4E-03	-1.0E-01	-8.7E-02	-6.9E-02	-5.1E-02	-3.3E-02	-1.5E-02
1837	8.1E-04	3.8E-03	5.3E-03	5.6E-03	6.3E-03	3.8E-03	3.1E-03	-1.1E-01	-9.6E-02	-8.1E-02	-6.5E-02	-5.0E-02	-3.5E-02
1838	8.2E-04	4.5E-03	6.2E-03	6.4E-03	6.5E-03	3.9E-03	3.3E-03	-9.0E-02	-7.6E-02	-5.9E-02	-4.3E-02	-2.6E-02	-9.9E-03
1839	8.3E-04	5.1E-03	7.0E-03	7.3E-03	6.5E-03	4.0E-03	3.4E-03	-9.0E-02	-7.6E-02	-5.9E-02	-4.3E-02	-2.7E-02	-1.1E-02
1840	8.3E-04	5.7E-03	7.9E-03	8.2E-03	6.7E-03	4.0E-03	3.4E-03	-8.7E-02	-7.3E-02	-5.8E-02	-4.3E-02	-2.7E-02	-1.2E-02
1841	8.3E-04	6.3E-03	8.8E-03	9.1E-03	7.4E-03	4.1E-03	3.5E-03	-9.7E-02	-8.2E-02	-6.6E-02	-4.9E-02	-3.3E-02	-1.6E-02
1842	1.0E-03	5.9E-03	8.7E-03	9.2E-03	7.3E-03	3.9E-03	3.6E-03	-8.4E-02	-7.2E-02	-5.8E-02	-4.3E-02	-2.9E-02	-1.5E-02
1843	9.6E-04	6.8E-03	9.7E-03	1.0E-02	8.0E-03	4.2E-03	3.7E-03	-8.5E-02	-7.5E-02	-6.3E-02	-5.1E-02	-3.9E-02	-2.8E-02
1844	1.1E-03	6.9E-03	1.0E-02	1.1E-02	8.1E-03	4.2E-03	3.8E-03	-6.4E-02	-5.6E-02	-4.5E-02	-3.5E-02	-2.4E-02	-1.3E-02
1845	1.2E-03	6.7E-03	1.0E-02	1.1E-02	8.1E-03	4.4E-03	4.2E-03	-4.0E-02	-3.6E-02	-2.9E-02	-2.3E-02	-1.6E-02	-9.2E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1846	8.1E-04	2.9E-03	5.0E-03	6.2E-03	6.7E-03	3.5E-03	3.3E-03	-1.1E-01	-1.1E-01	-9.7E-02	-8.8E-02	-7.9E-02	-7.0E-02
1847	7.9E-04	2.7E-03	4.5E-03	5.3E-03	5.9E-03	3.5E-03	2.9E-03	-1.3E-01	-1.3E-01	-1.2E-01	-1.2E-01	-1.1E-01	-1.1E-01
1848	8.1E-04	2.9E-03	4.7E-03	5.6E-03	6.2E-03	3.6E-03	3.0E-03	-1.3E-01	-1.3E-01	-1.2E-01	-1.1E-01	-1.0E-01	-9.8E-02
1849	7.4E-04	3.6E-03	5.1E-03	5.3E-03	5.8E-03	3.6E-03	3.0E-03	-1.2E-01	-1.1E-01	-1.1E-01	-1.0E-01	-9.5E-02	-8.9E-02
1850	9.2E-04	5.2E-03	7.6E-03	8.1E-03	6.5E-03	3.6E-03	3.2E-03	-7.4E-02	-6.1E-02	-4.5E-02	-2.9E-02	-1.4E-02	2.0E-03
1851	1.0E-03	5.3E-03	8.1E-03	8.6E-03	6.8E-03	3.7E-03	3.5E-03	-7.7E-02	-6.5E-02	-5.1E-02	-3.7E-02	-2.3E-02	-8.8E-03
1852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1853	7.8E-04	2.8E-03	4.9E-03	6.0E-03	6.4E-03	3.4E-03	3.2E-03	-1.0E-01	-9.4E-02	-8.2E-02	-7.0E-02	-5.9E-02	-4.7E-02
1854	7.5E-04	2.6E-03	4.0E-03	5.0E-03	5.4E-03	3.2E-03	2.7E-03	-1.1E-01	-1.0E-01	-9.4E-02	-8.4E-02	-7.4E-02	-6.4E-02
1855	7.6E-04	2.6E-03	4.2E-03	5.0E-03	5.6E-03	3.3E-03	2.7E-03	-1.3E-01	-1.2E-01	-1.1E-01	-1.0E-01	-9.4E-02	-8.4E-02
1856	7.2E-04	2.9E-03	4.2E-03	5.0E-03	5.6E-03	3.5E-03	2.9E-03	-1.2E-01	-1.2E-01	-1.1E-01	-1.1E-01	-1.0E-01	-9.8E-02
1857	6.9E-04	4.3E-03	6.2E-03	6.5E-03	5.4E-03	3.5E-03	3.0E-03	-1.0E-01	-9.6E-02	-8.8E-02	-8.0E-02	-7.2E-02	-6.4E-02
1858	7.7E-04	4.7E-03	6.8E-03	7.2E-03	5.9E-03	3.5E-03	3.0E-03	-8.1E-02	-6.8E-02	-5.3E-02	-3.8E-02	-2.3E-02	-8.6E-03
1859	1.3E-03	4.8E-03	8.0E-03	8.7E-03	6.7E-03	4.5E-03	4.3E-03	-7.0E-02	-6.1E-02	-4.9E-02	-3.7E-02	-2.5E-02	-1.3E-02
1860	1.3E-03	5.4E-03	8.7E-03	9.3E-03	7.1E-03	4.4E-03	4.2E-03	-7.1E-02	-6.3E-02	-5.2E-02	-4.1E-02	-3.0E-02	-1.9E-02
1861	1.5E-03	4.5E-03	7.8E-03	8.7E-03	6.6E-03	4.8E-03	4.6E-03	-6.4E-02	-5.6E-02	-4.6E-02	-3.6E-02	-2.6E-02	-1.6E-02
1862	1.4E-03	5.1E-03	8.6E-03	9.4E-03	7.0E-03	4.8E-03	4.6E-03	-5.3E-02	-4.8E-02	-4.0E-02	-3.3E-02	-2.5E-02	-1.8E-02
1863	1.6E-03	4.1E-03	7.6E-03	8.5E-03	6.6E-03	5.2E-03	5.0E-03	-4.7E-02	-4.4E-02	-4.0E-02	-3.6E-02	-3.1E-02	-2.7E-02
1864	1.8E-03	3.6E-03	7.0E-03	8.1E-03	7.0E-03	5.7E-03	5.4E-03	-5.2E-02	-5.1E-02	-4.7E-02	-4.3E-02	-3.9E-02	-3.5E-02
1865	1.6E-03	4.6E-03	8.3E-03	9.2E-03	6.9E-03	5.2E-03	5.0E-03	-3.6E-02	-3.4E-02	-2.9E-02	-2.4E-02	-1.9E-02	-1.4E-02
1866	1.8E-03	3.8E-03	7.3E-03	8.4E-03	6.9E-03	5.6E-03	5.3E-03	-3.8E-02	-3.8E-02	-3.6E-02	-3.4E-02	-3.2E-02	-3.0E-02
1867	2.0E-03	3.4E-03	6.9E-03	8.1E-03	7.4E-03	6.0E-03	5.8E-03	-4.6E-02	-4.6E-02	-4.2E-02	-3.9E-02	-3.6E-02	-3.3E-02
1868	1.5E-03	5.5E-03	9.3E-03	1.0E-02	7.4E-03	5.1E-03	4.9E-03	-3.5E-02	-3.3E-02	-2.8E-02	-2.3E-02	-1.8E-02	-1.3E-02
1869	1.8E-03	4.2E-03	7.9E-03	9.0E-03	6.9E-03	5.6E-03	5.4E-03	-4.0E-02	-3.9E-02	-3.5E-02	-3.0E-02	-2.6E-02	-2.2E-02
1870	1.9E-03	3.5E-03	7.0E-03	8.2E-03	7.3E-03	5.9E-03	5.6E-03	-4.5E-02	-4.2E-02	-3.7E-02	-3.1E-02	-2.6E-02	-2.0E-02
1871	2.2E-03	3.7E-03	6.6E-03	7.9E-03	7.9E-03	6.4E-03	6.1E-03	-5.9E-02	-5.3E-02	-4.4E-02	-3.6E-02	-2.7E-02	-1.8E-02
1872	1.9E-03	3.9E-03	7.6E-03	8.8E-03	7.4E-03	6.0E-03	5.8E-03	-4.4E-02	-4.3E-02	-3.9E-02	-3.5E-02	-3.1E-02	-2.7E-02
1873	2.1E-03	4.1E-03	6.8E-03	8.2E-03	7.7E-03	6.2E-03	5.9E-03	-5.5E-02	-5.0E-02	-4.2E-02	-3.4E-02	-2.6E-02	-1.8E-02
1874	2.3E-03	5.0E-03	7.5E-03	8.0E-03	8.2E-03	6.6E-03	6.3E-03	-7.2E-02	-6.2E-02	-4.8E-02	-3.4E-02	-2.0E-02	-6.5E-03
1875	2.2E-03	4.8E-03	7.1E-03	8.2E-03	8.1E-03	6.5E-03	6.2E-03	-7.0E-02	-6.2E-02	-5.2E-02	-4.1E-02	-3.0E-02	-1.9E-02
1876	8.0E-04	3.0E-03	5.8E-03	7.1E-03	7.3E-03	4.0E-03	3.7E-03	-9.7E-02	-9.6E-02	-9.3E-02	-9.0E-02	-8.7E-02	-8.4E-02
1877	8.0E-04	2.9E-03	5.6E-03	6.8E-03	7.1E-03	3.8E-03	3.5E-03	-8.2E-02	-8.4E-02	-8.3E-02	-8.3E-02	-8.2E-02	-8.2E-02
1878	7.7E-04	2.7E-03	4.9E-03	6.1E-03	6.5E-03	3.5E-03	3.2E-03	-7.5E-02	-7.3E-02	-6.8E-02	-6.4E-02	-5.9E-02	-5.5E-02
1879	6.7E-04	2.9E-03	4.2E-03	4.7E-03	5.3E-03	3.4E-03	2.8E-03	-1.2E-01	-1.1E-01	-1.0E-01	-9.3E-02	-8.4E-02	-7.5E-02
1880	7.1E-04	4.0E-03	5.9E-03	6.2E-03	5.2E-03	3.2E-03	2.8E-03	-9.4E-02	-9.3E-02	-9.0E-02	-8.7E-02	-8.4E-02	-8.1E-02
1881	1.2E-03	4.4E-03	7.2E-03	7.9E-03	6.2E-03	4.1E-03	3.9E-03	-6.2E-02	-5.0E-02	-3.6E-02	-2.1E-02	-7.0E-03	7.2E-03
1882	1.4E-03	4.3E-03	7.3E-03	8.0E-03	6.3E-03	4.4E-03	4.2E-03	-6.2E-02	-4.9E-02	-3.4E-02	-1.8E-02	-3.3E-03	1.2E-02
1883	1.5E-03	4.1E-03	7.2E-03	8.1E-03	6.3E-03	4.8E-03	4.6E-03	-6.3E-02	-5.4E-02	-4.3E-02	-3.1E-02	-2.0E-02	-9.2E-03
1884	9.0E-04	3.4E-03	5.3E-03	6.2E-03	6.4E-03	3.5E-03	3.3E-03	3.2E-04	-1.2E-02	-2.3E-02	-3.4E-02	-4.4E-02	-5.5E-02
1885	8.2E-04	2.9E-03	4.6E-03	5.7E-03	6.0E-03	3.3E-03	3.1E-03	-2.8E-02	-3.2E-02	-3.4E-02	-3.6E-02	-3.8E-02	-4.0E-02
1886	7.5E-04	2.7E-03	4.4E-03	5.5E-03	5.8E-03	3.2E-03	2.9E-03	-4.3E-02	-4.4E-02	-4.2E-02	-4.1E-02	-3.9E-02	-3.8E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1887	7.7E-04	3.0E-03	5.5E-03	6.7E-03	7.0E-03	3.9E-03	3.6E-03	-9.6E-02	-9.4E-02	-9.1E-02	-8.7E-02	-8.3E-02	-8.0E-02
1888	6.6E-04	2.3E-03	4.5E-03	5.6E-03	5.8E-03	3.4E-03	3.1E-03	-7.5E-02	-7.2E-02	-6.6E-02	-6.0E-02	-5.5E-02	-4.9E-02
1889	6.9E-04	2.4E-03	4.7E-03	5.8E-03	6.0E-03	3.4E-03	3.2E-03	-8.1E-02	-7.7E-02	-7.2E-02	-6.6E-02	-6.0E-02	-5.5E-02
1890	7.0E-04	2.4E-03	4.8E-03	5.9E-03	6.1E-03	3.5E-03	3.2E-03	-8.3E-02	-8.0E-02	-7.5E-02	-6.9E-02	-6.4E-02	-5.9E-02
1891	7.2E-04	2.5E-03	5.0E-03	6.1E-03	6.4E-03	3.6E-03	3.3E-03	-8.7E-02	-8.5E-02	-8.1E-02	-7.7E-02	-7.4E-02	-7.0E-02
1892	7.5E-04	2.6E-03	5.2E-03	6.4E-03	6.6E-03	3.6E-03	3.4E-03	-9.1E-02	-9.0E-02	-8.7E-02	-8.4E-02	-8.1E-02	-7.8E-02
1893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1894	9.0E-04	3.4E-03	5.2E-03	6.1E-03	6.3E-03	3.3E-03	3.1E-03	2.1E-03	-1.1E-02	-2.2E-02	-3.3E-02	-4.5E-02	-5.6E-02
1895	8.4E-04	3.2E-03	4.9E-03	6.0E-03	6.3E-03	3.2E-03	3.0E-03	-1.9E-02	-2.5E-02	-3.0E-02	-3.4E-02	-3.9E-02	-4.4E-02
1896	7.4E-04	2.8E-03	4.5E-03	5.5E-03	5.8E-03	2.9E-03	2.7E-03	-3.9E-02	-3.8E-02	-3.6E-02	-3.4E-02	-3.2E-02	-3.0E-02
1897	6.6E-04	2.6E-03	4.2E-03	5.2E-03	5.3E-03	3.0E-03	2.8E-03	-5.0E-02	-4.7E-02	-4.3E-02	-3.8E-02	-3.3E-02	-2.8E-02
1898	8.0E-04	3.2E-03	4.9E-03	6.1E-03	6.3E-03	3.2E-03	3.0E-03	-2.5E-02	-3.0E-02	-3.3E-02	-3.5E-02	-3.8E-02	-4.1E-02
1899	7.3E-04	2.9E-03	4.6E-03	5.6E-03	5.9E-03	3.0E-03	2.8E-03	-4.5E-02	-4.3E-02	-3.9E-02	-3.6E-02	-3.2E-02	-2.9E-02
1900	6.6E-04	2.5E-03	4.2E-03	5.2E-03	5.3E-03	3.1E-03	2.8E-03	-5.4E-02	-5.2E-02	-4.7E-02	-4.2E-02	-3.8E-02	-3.3E-02
1901	6.2E-04	2.0E-03	4.1E-03	5.1E-03	5.2E-03	3.1E-03	2.9E-03	-7.7E-02	-7.2E-02	-6.5E-02	-5.8E-02	-5.1E-02	-4.4E-02
1902	6.3E-04	2.2E-03	4.3E-03	5.3E-03	5.5E-03	3.0E-03	2.8E-03	-7.9E-02	-7.5E-02	-6.9E-02	-6.3E-02	-5.7E-02	-5.2E-02
1903	7.3E-04	2.5E-03	4.1E-03	5.2E-03	5.5E-03	3.1E-03	2.8E-03	-4.4E-02	-4.3E-02	-4.0E-02	-3.7E-02	-3.4E-02	-3.1E-02
1904	6.6E-04	2.3E-03	4.1E-03	5.1E-03	5.2E-03	3.1E-03	2.9E-03	-6.0E-02	-5.6E-02	-5.0E-02	-4.5E-02	-4.0E-02	-3.4E-02
1905	6.3E-04	2.0E-03	4.2E-03	5.2E-03	5.4E-03	3.1E-03	2.9E-03	-7.7E-02	-7.2E-02	-6.5E-02	-5.8E-02	-5.1E-02	-4.4E-02
1906	6.4E-04	2.1E-03	4.1E-03	5.1E-03	5.3E-03	3.0E-03	2.8E-03	-8.1E-02	-7.7E-02	-7.2E-02	-6.6E-02	-6.1E-02	-5.6E-02
1907	6.4E-04	2.3E-03	4.1E-03	5.2E-03	5.3E-03	2.9E-03	2.7E-03	-7.0E-02	-7.0E-02	-6.8E-02	-6.5E-02	-6.3E-02	-6.1E-02
1908	6.6E-04	2.4E-03	4.2E-03	5.2E-03	5.3E-03	3.2E-03	2.9E-03	-6.3E-02	-6.0E-02	-5.4E-02	-4.8E-02	-4.3E-02	-3.7E-02
1909	6.5E-04	2.1E-03	4.3E-03	5.3E-03	5.5E-03	3.2E-03	2.9E-03	-7.8E-02	-7.3E-02	-6.7E-02	-6.1E-02	-5.4E-02	-4.8E-02
1910	6.5E-04	2.1E-03	4.2E-03	5.2E-03	5.4E-03	3.1E-03	2.9E-03	-7.6E-02	-7.4E-02	-7.0E-02	-6.6E-02	-6.2E-02	-5.8E-02
1911	6.5E-04	2.3E-03	4.1E-03	5.2E-03	5.4E-03	2.9E-03	2.7E-03	-7.1E-02	-7.2E-02	-7.0E-02	-6.9E-02	-6.7E-02	-6.6E-02
1912	6.6E-04	2.4E-03	4.3E-03	5.3E-03	5.5E-03	3.3E-03	3.0E-03	-6.7E-02	-6.3E-02	-5.7E-02	-5.1E-02	-4.5E-02	-3.9E-02
1913	6.6E-04	2.2E-03	4.4E-03	5.4E-03	5.6E-03	3.2E-03	3.0E-03	-7.8E-02	-7.4E-02	-6.9E-02	-6.3E-02	-5.7E-02	-5.1E-02
1914	6.7E-04	2.2E-03	4.2E-03	5.3E-03	5.5E-03	3.1E-03	2.9E-03	-7.3E-02	-7.2E-02	-6.9E-02	-6.6E-02	-6.3E-02	-6.0E-02
1915	6.6E-04	2.3E-03	4.1E-03	5.2E-03	5.4E-03	2.9E-03	2.7E-03	-7.1E-02	-7.3E-02	-7.4E-02	-7.4E-02	-7.5E-02	-7.5E-02
1916	6.2E-04	2.1E-03	3.5E-03	4.5E-03	4.7E-03	2.6E-03	2.4E-03	-6.2E-02	-6.7E-02	-6.9E-02	-7.2E-02	-7.5E-02	-7.7E-02
1917	6.7E-04	2.2E-03	4.3E-03	5.4E-03	5.6E-03	3.1E-03	2.9E-03	-7.4E-02	-7.3E-02	-7.1E-02	-6.9E-02	-6.6E-02	-6.4E-02
1918	6.6E-04	2.2E-03	4.0E-03	5.0E-03	5.2E-03	2.9E-03	2.7E-03	-6.6E-02	-7.0E-02	-7.3E-02	-7.5E-02	-7.8E-02	-8.0E-02
1919	6.2E-04	2.0E-03	3.5E-03	4.4E-03	4.7E-03	2.6E-03	2.4E-03	-6.0E-02	-6.4E-02	-6.6E-02	-6.8E-02	-6.9E-02	-7.1E-02
1920	6.8E-04	2.3E-03	4.4E-03	5.4E-03	5.7E-03	3.2E-03	2.9E-03	-7.4E-02	-7.5E-02	-7.5E-02	-7.5E-02	-7.4E-02	-7.4E-02
1921	6.7E-04	2.2E-03	4.0E-03	5.0E-03	5.3E-03	2.9E-03	2.7E-03	-6.4E-02	-6.8E-02	-7.0E-02	-7.2E-02	-7.4E-02	-7.6E-02
1922	6.3E-04	2.0E-03	3.5E-03	4.4E-03	4.7E-03	2.6E-03	2.4E-03	-6.3E-02	-6.6E-02	-6.6E-02	-6.7E-02	-6.7E-02	-6.8E-02
1923	7.0E-04	2.4E-03	4.4E-03	5.5E-03	5.8E-03	3.2E-03	3.0E-03	-7.2E-02	-7.5E-02	-7.5E-02	-7.6E-02	-7.7E-02	-7.8E-02
1924	6.7E-04	2.2E-03	4.0E-03	5.0E-03	5.3E-03	2.9E-03	2.7E-03	-6.3E-02	-6.7E-02	-6.8E-02	-7.0E-02	-7.1E-02	-7.3E-02
1925	6.4E-04	2.1E-03	3.4E-03	4.4E-03	4.7E-03	2.7E-03	2.4E-03	-6.2E-02	-6.3E-02	-6.1E-02	-6.0E-02	-5.9E-02	-5.8E-02
1926	7.1E-04	2.4E-03	4.5E-03	5.6E-03	5.9E-03	3.2E-03	3.0E-03	-6.7E-02	-7.1E-02	-7.3E-02	-7.4E-02	-7.6E-02	-7.8E-02
1927	6.8E-04	2.3E-03	4.0E-03	5.1E-03	5.4E-03	3.0E-03	2.8E-03	-6.6E-02	-6.8E-02	-6.8E-02	-6.8E-02	-6.7E-02	-6.7E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1928	6.5E-04	2.1E-03	3.4E-03	4.4E-03	4.6E-03	2.8E-03	2.4E-03	-6.0E-02	-6.0E-02	-5.9E-02	-5.8E-02	-5.7E-02	-5.6E-02
1929	7.3E-04	2.5E-03	4.6E-03	5.7E-03	6.0E-03	3.3E-03	3.1E-03	-6.8E-02	-7.1E-02	-7.3E-02	-7.4E-02	-7.5E-02	-7.6E-02
1930	7.0E-04	2.3E-03	4.1E-03	5.1E-03	5.4E-03	3.0E-03	2.8E-03	-6.6E-02	-6.6E-02	-6.5E-02	-6.3E-02	-6.1E-02	-6.0E-02
1931	6.7E-04	2.2E-03	3.5E-03	4.4E-03	4.6E-03	2.9E-03	2.4E-03	-5.7E-02	-5.8E-02	-5.6E-02	-5.4E-02	-5.2E-02	-5.1E-02
1932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1935	7.0E-04	2.4E-03	4.0E-03	5.1E-03	5.4E-03	3.0E-03	2.8E-03	-6.7E-02	-6.3E-02	-5.7E-02	-5.1E-02	-4.5E-02	-3.9E-02
1936	6.8E-04	2.2E-03	3.5E-03	4.2E-03	4.8E-03	3.0E-03	2.4E-03	-9.0E-02	-8.1E-02	-7.0E-02	-5.8E-02	-4.7E-02	-3.6E-02
1937	7.1E-04	2.4E-03	4.0E-03	5.0E-03	5.4E-03	3.0E-03	2.7E-03	-9.4E-02	-8.5E-02	-7.4E-02	-6.3E-02	-5.2E-02	-4.0E-02
1938	6.9E-04	2.2E-03	3.7E-03	4.4E-03	5.0E-03	3.1E-03	2.5E-03	-9.9E-02	-8.8E-02	-7.6E-02	-6.4E-02	-5.2E-02	-4.0E-02
1939	7.3E-04	2.5E-03	3.9E-03	5.0E-03	5.4E-03	3.1E-03	2.7E-03	-1.1E-01	-1.0E-01	-8.6E-02	-7.3E-02	-6.0E-02	-4.7E-02
1940	9.1E-04	2.9E-03	4.9E-03	5.6E-03	5.8E-03	3.5E-03	3.3E-03	-4.9E-03	-1.5E-02	-2.3E-02	-3.0E-02	-3.8E-02	-4.6E-02
1941	7.0E-04	2.2E-03	3.9E-03	4.7E-03	5.3E-03	3.3E-03	2.7E-03	-1.1E-01	-1.0E-01	-9.6E-02	-8.7E-02	-7.9E-02	-7.0E-02
1942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1953	2.7E-03	3.1E-03	2.1E-03	8.2E-04	1.1E-03	6.5E-04	5.8E-04	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02	-9.9E-03	-8.8E-03
1954	1.4E-03	1.8E-03	1.8E-03	8.8E-04	1.1E-03	1.5E-03	6.9E-04	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02
1955	1.0E-03	2.0E-03	2.0E-03	9.3E-04	1.1E-03	1.6E-03	7.6E-04	-9.0E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
1956	1.0E-03	1.8E-03	2.0E-03	9.7E-04	1.1E-03	1.5E-03	8.0E-04	-7.4E-03	-8.9E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02
1957	1.1E-03	2.1E-03	2.4E-03	9.9E-04	1.1E-03	1.6E-03	8.1E-04	-7.5E-03	-8.9E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02
1958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1962	4.2E-03	4.3E-03	6.5E-03	1.1E-02	1.1E-02	1.0E-02	1.0E-02	-8.8E-03	-1.1E-02	-7.4E-03	-3.5E-03	3.2E-04	4.2E-03
1963	3.9E-03	4.1E-03	6.6E-03	1.1E-02	1.2E-02	1.1E-02	1.1E-02	-1.8E-02	-1.7E-02	-1.1E-02	-4.4E-03	2.1E-03	8.7E-03
1964	3.5E-03	3.7E-03	5.9E-03	9.7E-03	1.0E-02	9.5E-03	9.5E-03	-7.1E-03	-1.0E-02	-7.5E-03	-4.9E-03	-2.3E-03	3.1E-04
1965	3.0E-03	3.2E-03	5.7E-03	1.0E-02	1.1E-02	9.9E-03	9.8E-03	-1.8E-02	-1.6E-02	-9.5E-03	-2.5E-03	4.4E-03	1.1E-02
1966	2.8E-03	2.9E-03	5.3E-03	9.0E-03	9.4E-03	8.8E-03	8.8E-03	-5.7E-03	-9.3E-03	-7.9E-03	-6.5E-03	-5.1E-03	-3.8E-03
1967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1971	2.3E-03	2.7E-03	3.9E-03	7.1E-03	7.5E-03	6.9E-03	6.9E-03	-1.4E-02	-1.2E-02	-7.4E-03	-2.5E-03	2.5E-03	7.4E-03
1972	2.4E-03	2.6E-03	4.7E-03	6.8E-03	8.4E-03	7.9E-03	7.5E-03	-5.5E-03	-7.2E-03	-3.9E-03	-5.0E-04	2.9E-03	6.2E-03
1973	2.4E-03	2.5E-03	3.9E-03	6.1E-03	6.8E-03	6.3E-03	6.0E-03	-1.1E-02	-9.0E-03	-3.2E-03	2.5E-03	8.3E-03	1.4E-02
1974	2.3E-03	2.5E-03	3.3E-03	5.1E-03	5.5E-03	5.2E-03	4.9E-03	-2.0E-02	-1.7E-02	-9.4E-03	-2.3E-03	4.9E-03	1.2E-02
1975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1976	2.2E-03	2.4E-03	4.2E-03	6.0E-03	7.4E-03	6.9E-03	6.6E-03	-9.1E-03	-8.3E-03	-3.1E-03	2.1E-03	7.4E-03	1.3E-02
1977	2.2E-03	2.3E-03	3.6E-03	5.4E-03	6.0E-03	5.6E-03	5.3E-03	-1.4E-02	-1.1E-02	-4.5E-03	2.0E-03	8.5E-03	1.5E-02
1978	1.9E-03	2.2E-03	4.1E-03	5.6E-03	7.3E-03	6.9E-03	6.5E-03	-3.4E-03	-4.1E-03	-3.5E-04	3.4E-03	7.2E-03	1.1E-02
1979	1.9E-03	2.2E-03	3.7E-03	5.3E-03	6.5E-03	6.0E-03	5.6E-03	-6.0E-03	-4.8E-03	1.3E-04	5.1E-03	1.0E-02	1.5E-02
1980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1981	1.5E-03	2.0E-03	4.1E-03	5.1E-03	7.1E-03	6.5E-03	6.2E-03	6.1E-03	3.7E-03	5.4E-03	7.2E-03	8.9E-03	1.1E-02
1982	1.6E-03	2.0E-03	3.6E-03	4.9E-03	6.4E-03	6.0E-03	5.7E-03	-5.9E-03	-4.8E-03	1.1E-04	5.0E-03	9.9E-03	1.5E-02
1983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1990	1.1E-03	1.8E-03	4.8E-03	4.1E-03	5.9E-03	5.5E-03	5.1E-03	-3.3E-02	-2.9E-02	-2.1E-02	-1.3E-02	-5.2E-03	2.6E-03
1991	2.3E-03	3.2E-03	5.2E-03	6.7E-03	8.2E-03	6.4E-03	5.9E-03	-7.7E-02	-7.3E-02	-6.5E-02	-5.6E-02	-4.7E-02	-3.8E-02
1992	2.1E-03	2.6E-03	4.2E-03	6.3E-03	6.4E-03	5.7E-03	5.7E-03	-6.8E-02	-6.1E-02	-5.0E-02	-4.0E-02	-2.9E-02	-1.8E-02
1993	2.3E-03	4.7E-03	4.8E-03	6.6E-03	7.4E-03	6.1E-03	5.9E-03	-3.4E-02	-3.1E-02	-2.3E-02	-1.6E-02	-8.3E-03	-7.7E-04
1994	2.2E-03	2.7E-03	4.2E-03	6.1E-03	6.2E-03	5.6E-03	5.6E-03	-2.9E-02	-2.4E-02	-1.5E-02	-6.4E-03	2.2E-03	1.1E-02
1995	1.6E-03	2.2E-03	4.2E-03	5.1E-03	5.4E-03	4.2E-03	4.2E-03	-2.5E-02	-1.7E-02	-6.3E-03	4.4E-03	1.5E-02	2.6E-02
1996	1.2E-03	2.5E-03	4.2E-03	5.0E-03	5.8E-03	4.6E-03	4.3E-03	-2.5E-02	-1.5E-02	-1.7E-03	1.1E-02	2.4E-02	3.7E-02
1997	2.5E-03	3.2E-03	4.7E-03	7.2E-03	7.3E-03	6.7E-03	6.7E-03	1.3E-02	1.4E-02	1.9E-02	2.4E-02	2.9E-02	3.4E-02
1998	2.0E-03	2.5E-03	5.1E-03	6.1E-03	6.7E-03	4.9E-03	4.9E-03	1.8E-02	1.8E-02	2.2E-02	2.6E-02	2.9E-02	3.3E-02
1999	1.4E-03	2.0E-03	4.9E-03	5.5E-03	6.7E-03	5.6E-03	5.3E-03	2.3E-02	2.1E-02	2.3E-02	2.5E-02	2.7E-02	2.9E-02
2000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2003	2.4E-03	3.0E-03	5.2E-03	6.6E-03	7.5E-03	6.1E-03	6.1E-03	1.9E-02	2.2E-02	3.0E-02	3.7E-02	4.5E-02	5.2E-02
2004	1.6E-03	2.3E-03	5.3E-03	5.7E-03	7.6E-03	6.7E-03	6.4E-03	1.3E-02	1.7E-02	2.5E-02	3.3E-02	4.0E-02	4.8E-02
2005	1.8E-03	2.5E-03	4.7E-03	4.8E-03	7.3E-03	6.8E-03	6.5E-03	6.7E-03	9.6E-03	1.6E-02	2.3E-02	2.9E-02	3.6E-02
2006	1.5E-03	2.8E-03	4.2E-03	4.3E-03	7.2E-03	6.9E-03	6.6E-03	-9.9E-03	-7.5E-03	-9.2E-04	5.7E-03	1.2E-02	1.9E-02
2007	1.7E-03	3.0E-03	3.7E-03	4.1E-03	6.8E-03	6.6E-03	6.3E-03	-2.3E-02	-1.9E-02	-9.6E-03	-4.3E-04	8.7E-03	1.8E-02
2008	1.8E-03	3.0E-03	3.4E-03	3.9E-03	6.4E-03	6.3E-03	5.9E-03	-3.3E-02	-2.5E-02	-1.3E-02	-3.7E-04	1.2E-02	2.4E-02
2009	2.0E-03	3.4E-03	5.6E-03	5.9E-03	8.7E-03	8.0E-03	7.5E-03	-1.9E-02	-9.9E-03	2.9E-03	1.6E-02	2.9E-02	4.2E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2010	1.9E-03	2.9E-03	4.9E-03	4.9E-03	8.2E-03	7.9E-03	7.5E-03	-2.0E-02	-1.5E-02	-4.5E-03	5.9E-03	1.6E-02	2.6E-02
2011	1.8E-03	3.3E-03	4.3E-03	4.7E-03	7.7E-03	7.6E-03	7.2E-03	-1.2E-02	-7.3E-03	2.6E-03	1.3E-02	2.3E-02	3.2E-02
2012	2.0E-03	3.5E-03	3.9E-03	4.5E-03	7.3E-03	7.1E-03	6.8E-03	-4.3E-03	-4.7E-04	8.5E-03	1.8E-02	2.7E-02	3.6E-02
2013	2.0E-03	3.4E-03	3.4E-03	4.0E-03	6.5E-03	6.4E-03	6.1E-03	-1.7E-02	-1.2E-02	-1.8E-03	8.0E-03	1.8E-02	2.8E-02
2014	1.9E-03	3.1E-03	2.9E-03	3.6E-03	5.7E-03	5.6E-03	5.3E-03	-2.4E-02	-1.7E-02	-5.3E-03	6.4E-03	1.8E-02	3.0E-02
2015	2.1E-03	3.8E-03	5.4E-03	5.8E-03	9.8E-03	9.5E-03	9.0E-03	-4.6E-02	-3.6E-02	-2.0E-02	-3.2E-03	1.3E-02	2.9E-02
2016	2.3E-03	4.0E-03	4.7E-03	5.3E-03	8.8E-03	8.6E-03	8.2E-03	-3.2E-02	-2.8E-02	-1.9E-02	-8.7E-03	1.2E-03	1.1E-02
2017	2.4E-03	4.0E-03	4.0E-03	4.7E-03	7.6E-03	7.5E-03	7.1E-03	-2.2E-02	-1.9E-02	-9.9E-03	-1.2E-03	7.6E-03	1.6E-02
2018	2.2E-03	3.7E-03	3.5E-03	4.1E-03	6.7E-03	6.5E-03	6.2E-03	-1.1E-02	-8.4E-03	-7.9E-04	6.8E-03	1.4E-02	2.2E-02
2019	1.9E-03	3.2E-03	2.9E-03	3.7E-03	5.5E-03	5.4E-03	5.1E-03	-3.0E-03	-1.3E-03	4.7E-03	1.1E-02	1.7E-02	2.3E-02
2020	1.5E-03	2.6E-03	2.7E-03	3.6E-03	4.9E-03	4.8E-03	4.6E-03	-4.7E-03	-1.7E-03	4.8E-03	1.1E-02	1.8E-02	2.5E-02
2021	2.7E-03	4.6E-03	5.0E-03	5.9E-03	9.8E-03	9.6E-03	9.1E-03	-2.4E-02	-1.9E-02	-7.7E-03	4.0E-03	1.6E-02	2.7E-02
2022	2.7E-03	4.6E-03	4.3E-03	5.1E-03	8.2E-03	8.1E-03	7.6E-03	-2.5E-02	-2.4E-02	-1.7E-02	-1.0E-02	-3.0E-03	4.1E-03
2023	2.4E-03	3.9E-03	3.4E-03	4.2E-03	6.6E-03	6.5E-03	6.1E-03	-2.5E-02	-2.6E-02	-2.2E-02	-1.8E-02	-1.3E-02	-9.0E-03
2024	1.8E-03	3.1E-03	3.2E-03	4.0E-03	5.5E-03	5.4E-03	5.2E-03	-2.1E-02	-2.1E-02	-1.7E-02	-1.3E-02	-8.5E-03	-4.3E-03
2025	1.7E-03	2.7E-03	2.7E-03	3.8E-03	4.9E-03	4.9E-03	4.6E-03	-1.2E-02	-1.3E-02	-1.0E-02	-7.4E-03	-4.8E-03	-2.1E-03
2026	1.6E-03	2.7E-03	2.4E-03	3.7E-03	4.5E-03	4.4E-03	4.2E-03	-1.3E-02	-1.3E-02	-1.0E-02	-7.4E-03	-4.5E-03	-1.5E-03
2027	3.0E-03	5.0E-03	4.5E-03	5.4E-03	8.9E-03	8.7E-03	8.2E-03	-9.4E-03	-2.5E-03	1.1E-02	2.5E-02	3.9E-02	5.3E-02
2028	2.4E-03	4.0E-03	3.6E-03	4.5E-03	6.6E-03	6.5E-03	6.1E-03	-3.1E-02	-2.7E-02	-1.7E-02	-7.6E-03	2.1E-03	1.2E-02
2029	2.1E-03	3.3E-03	3.6E-03	4.4E-03	5.8E-03	5.7E-03	5.4E-03	-2.7E-02	-2.6E-02	-2.2E-02	-1.7E-02	-1.3E-02	-8.3E-03
2030	1.8E-03	3.1E-03	2.9E-03	4.2E-03	4.9E-03	4.9E-03	4.6E-03	-1.4E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.3E-03
2031	1.5E-03	2.8E-03	2.6E-03	3.9E-03	4.1E-03	4.0E-03	3.8E-03	-1.5E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.1E-03
2032	1.2E-03	2.4E-03	2.2E-03	3.4E-03	3.4E-03	3.3E-03	3.2E-03	-1.3E-02	-1.3E-02	-1.1E-02	-8.6E-03	-6.3E-03	-4.1E-03
2033	2.9E-03	4.9E-03	4.9E-03	6.4E-03	1.0E-02	1.0E-02	9.4E-03	3.4E-03	9.9E-03	2.4E-02	3.9E-02	5.4E-02	6.8E-02
2034	2.6E-03	4.2E-03	4.5E-03	5.6E-03	7.2E-03	7.1E-03	6.7E-03	-2.4E-03	4.0E-03	1.6E-02	2.8E-02	4.0E-02	5.2E-02
2035	2.2E-03	3.8E-03	3.9E-03	4.9E-03	5.8E-03	5.7E-03	5.4E-03	-1.7E-02	-1.0E-02	1.4E-03	1.3E-02	2.5E-02	3.6E-02
2036	1.8E-03	3.3E-03	3.5E-03	4.7E-03	4.8E-03	4.7E-03	4.5E-03	-2.7E-02	-2.2E-02	-1.3E-02	-3.4E-03	5.9E-03	1.5E-02
2037	1.3E-03	2.7E-03	3.1E-03	4.1E-03	3.9E-03	3.7E-03	3.6E-03	-3.1E-02	-3.0E-02	-2.6E-02	-2.3E-02	-1.9E-02	-1.5E-02
2038	1.1E-03	1.9E-03	2.6E-03	3.2E-03	3.2E-03	3.2E-03	3.0E-03	-1.6E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.6E-03
2039	1.1E-03	1.5E-03	2.6E-03	3.1E-03	3.2E-03	3.2E-03	3.0E-03	-1.2E-02	-1.3E-02	-1.1E-02	-9.2E-03	-7.5E-03	-5.8E-03
2040	2.8E-03	4.6E-03	6.2E-03	8.6E-03	8.9E-03	8.4E-03	8.4E-03	-5.9E-03	-5.4E-03	1.5E-03	8.5E-03	1.5E-02	2.2E-02
2041	2.3E-03	4.0E-03	5.1E-03	6.7E-03	7.0E-03	6.6E-03	6.6E-03	-5.3E-03	3.2E-04	1.1E-02	2.1E-02	3.2E-02	4.2E-02
2042	2.0E-03	3.0E-03	4.3E-03	5.8E-03	6.0E-03	5.7E-03	5.7E-03	-1.1E-02	-3.9E-03	7.1E-03	1.8E-02	2.9E-02	4.0E-02
2043	1.7E-03	2.2E-03	3.9E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-2.0E-02	-1.2E-02	-1.7E-03	8.9E-03	2.0E-02	3.0E-02
2044	1.5E-03	1.7E-03	3.4E-03	4.4E-03	4.5E-03	4.3E-03	4.3E-03	-2.8E-02	-2.2E-02	-1.3E-02	-4.7E-03	3.8E-03	1.2E-02
2045	1.3E-03	1.5E-03	2.9E-03	3.7E-03	3.8E-03	3.6E-03	3.6E-03	-2.6E-02	-2.4E-02	-2.0E-02	-1.5E-02	-1.1E-02	-7.2E-03
2046	1.2E-03	1.5E-03	2.7E-03	3.5E-03	3.7E-03	3.5E-03	3.5E-03	-2.2E-02	-2.1E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.2E-02
2047	3.5E-03	3.6E-03	6.2E-03	9.9E-03	1.0E-02	9.7E-03	9.7E-03	1.7E-02	8.7E-03	5.5E-03	2.2E-03	-1.0E-03	-4.3E-03
2048	3.0E-03	3.1E-03	5.4E-03	8.6E-03	9.0E-03	8.4E-03	8.4E-03	-1.1E-02	-1.0E-02	-5.6E-03	-1.1E-03	3.4E-03	7.9E-03
2049	2.3E-03	2.4E-03	4.9E-03	6.9E-03	7.2E-03	6.8E-03	6.8E-03	-1.6E-02	-1.1E-02	-2.8E-03	5.2E-03	1.3E-02	2.1E-02
2050	2.0E-03	2.3E-03	4.4E-03	5.9E-03	6.1E-03	5.8E-03	5.8E-03	-2.3E-02	-1.4E-02	-3.4E-03	7.4E-03	1.8E-02	2.9E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2051	1.8E-03	2.1E-03	3.7E-03	4.7E-03	4.9E-03	4.6E-03	4.6E-03	-3.0E-02	-2.2E-02	-1.2E-02	-2.8E-03	6.9E-03	1.7E-02
2052	1.5E-03	1.9E-03	3.0E-03	3.8E-03	3.9E-03	3.7E-03	3.7E-03	-3.1E-02	-2.5E-02	-1.7E-02	-9.6E-03	-1.8E-03	5.9E-03
2053	1.4E-03	1.8E-03	2.7E-03	3.7E-03	3.8E-03	3.6E-03	3.6E-03	-2.0E-02	-1.7E-02	-1.2E-02	-6.7E-03	-1.6E-03	3.5E-03
2054	1.5E-03	1.7E-03	2.7E-03	3.9E-03	4.1E-03	3.9E-03	3.9E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.4E-03	-4.8E-03
2055	3.9E-03	3.9E-03	5.8E-03	9.8E-03	1.0E-02	9.7E-03	9.6E-03	1.5E-03	-3.8E-03	-4.0E-03	-4.2E-03	-4.4E-03	-4.6E-03
2056	3.4E-03	3.5E-03	5.1E-03	8.7E-03	9.2E-03	8.6E-03	8.6E-03	1.2E-02	4.5E-03	1.3E-03	-1.8E-03	-5.0E-03	-8.1E-03
2057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2058	2.5E-03	2.6E-03	4.1E-03	6.3E-03	6.5E-03	6.2E-03	6.2E-03	-1.9E-02	-1.6E-02	-1.1E-02	-4.9E-03	9.2E-04	6.7E-03
2059	2.0E-03	2.1E-03	3.5E-03	5.0E-03	5.2E-03	5.0E-03	5.0E-03	-3.5E-02	-2.7E-02	-1.8E-02	-7.7E-03	2.2E-03	1.2E-02
2060	1.7E-03	1.8E-03	3.2E-03	4.4E-03	4.6E-03	4.4E-03	4.4E-03	-3.7E-02	-3.0E-02	-2.0E-02	-1.1E-02	-9.2E-04	8.7E-03
2061	1.6E-03	1.6E-03	3.1E-03	4.3E-03	4.5E-03	4.2E-03	4.2E-03	-3.0E-02	-2.4E-02	-1.6E-02	-8.3E-03	-5.0E-04	7.3E-03
2062	1.5E-03	1.5E-03	3.0E-03	4.1E-03	4.3E-03	4.0E-03	4.0E-03	-1.8E-02	-1.3E-02	-6.7E-03	-2.2E-04	6.3E-03	1.3E-02
2063	1.5E-03	1.5E-03	2.9E-03	4.0E-03	4.1E-03	3.9E-03	3.9E-03	-1.3E-02	-1.2E-02	-8.0E-03	-4.2E-03	-5.3E-04	3.2E-03
2064	3.5E-03	3.5E-03	5.6E-03	8.3E-03	8.8E-03	8.3E-03	8.2E-03	3.6E-03	-3.1E-03	-4.7E-03	-6.4E-03	-8.1E-03	-9.8E-03
2065	3.1E-03	3.2E-03	4.7E-03	7.4E-03	7.8E-03	7.3E-03	7.3E-03	1.0E-02	3.2E-03	-7.5E-05	-3.3E-03	-6.6E-03	-9.9E-03
2066	2.8E-03	2.8E-03	4.1E-03	6.5E-03	6.8E-03	6.4E-03	6.4E-03	-2.6E-03	-6.2E-03	-6.6E-03	-7.1E-03	-7.5E-03	-8.0E-03
2067	2.4E-03	2.4E-03	3.3E-03	5.3E-03	5.6E-03	5.3E-03	5.2E-03	-2.1E-02	-1.9E-02	-1.4E-02	-9.9E-03	-5.4E-03	-8.1E-04
2068	2.1E-03	2.2E-03	3.1E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-4.2E-02	-3.5E-02	-2.6E-02	-1.7E-02	-8.2E-03	8.0E-04
2069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2071	1.8E-03	1.9E-03	3.0E-03	4.6E-03	4.8E-03	4.5E-03	4.5E-03	-1.4E-02	-9.3E-03	-2.3E-03	4.7E-03	1.2E-02	1.9E-02
2072	1.7E-03	2.9E-03	3.3E-03	1.4E-03	1.3E-03	1.7E-03	1.1E-03	-2.0E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.2E-03	-5.2E-03
2073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2074	3.1E-03	3.3E-03	5.4E-03	8.2E-03	8.5E-03	8.0E-03	8.0E-03	6.5E-03	-9.7E-04	-3.7E-03	-6.5E-03	-9.2E-03	-1.2E-02
2075	2.9E-03	3.0E-03	4.4E-03	6.3E-03	6.8E-03	6.6E-03	6.4E-03	4.2E-03	-2.5E-03	-5.0E-03	-7.5E-03	-1.0E-02	-1.3E-02
2076	2.6E-03	2.7E-03	3.8E-03	5.6E-03	5.9E-03	5.8E-03	5.6E-03	-5.7E-03	-9.4E-03	-9.7E-03	-1.0E-02	-1.0E-02	-1.1E-02
2077	2.4E-03	2.5E-03	3.5E-03	5.2E-03	5.5E-03	5.2E-03	5.1E-03	-2.0E-02	-1.9E-02	-1.6E-02	-1.3E-02	-9.3E-03	-5.9E-03
2078	2.3E-03	2.3E-03	3.1E-03	5.0E-03	5.3E-03	5.0E-03	5.0E-03	-4.0E-02	-3.5E-02	-2.7E-02	-2.0E-02	-1.2E-02	-4.0E-03
2079	2.0E-03	2.1E-03	2.7E-03	4.5E-03	4.7E-03	4.5E-03	4.4E-03	-4.2E-02	-3.5E-02	-2.7E-02	-1.9E-02	-1.0E-02	-1.6E-03
2080	2.0E-03	2.0E-03	2.8E-03	4.6E-03	4.8E-03	4.5E-03	4.5E-03	-2.8E-02	-2.4E-02	-1.7E-02	-1.0E-02	-3.1E-03	3.7E-03
2081	1.9E-03	2.0E-03	2.7E-03	4.5E-03	4.7E-03	4.4E-03	4.4E-03	-1.9E-02	-1.4E-02	-6.9E-03	3.2E-05	7.0E-03	1.4E-02
2082	1.8E-03	2.5E-03	2.8E-03	1.4E-03	1.3E-03	1.7E-03	1.2E-03	-2.1E-02	-1.9E-02	-1.5E-02	-1.2E-02	-9.1E-03	-5.9E-03
2083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2084	2.8E-03	3.0E-03	5.0E-03	7.9E-03	8.3E-03	7.8E-03	7.8E-03	6.9E-03	-9.3E-04	-4.2E-03	-7.6E-03	-1.1E-02	-1.4E-02
2085	2.6E-03	2.8E-03	4.4E-03	6.5E-03	6.8E-03	6.3E-03	6.3E-03	-2.1E-03	-8.0E-03	-9.8E-03	-1.2E-02	-1.4E-02	-1.5E-02
2086	2.5E-03	2.7E-03	3.6E-03	5.1E-03	5.9E-03	5.8E-03	5.6E-03	-1.0E-02	-1.4E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02
2087	2.4E-03	2.5E-03	3.4E-03	4.5E-03	5.4E-03	5.3E-03	5.1E-03	-1.7E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.5E-03
2088	2.2E-03	2.3E-03	3.1E-03	4.2E-03	4.7E-03	4.6E-03	4.5E-03	-3.6E-02	-3.3E-02	-2.7E-02	-2.2E-02	-1.6E-02	-1.0E-02
2089	2.1E-03	2.2E-03	2.8E-03	4.3E-03	4.5E-03	4.2E-03	4.2E-03	-3.7E-02	-3.2E-02	-2.4E-02	-1.6E-02	-8.8E-03	-1.2E-03
2090	2.0E-03	2.1E-03	2.4E-03	4.2E-03	4.5E-03	4.2E-03	4.2E-03	-3.0E-02	-2.4E-02	-1.7E-02	-9.7E-03	-2.3E-03	5.0E-03
2091	1.8E-03	2.1E-03	2.4E-03	1.5E-03	1.4E-03	1.6E-03	1.3E-03	-2.1E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2097	2.0E-03	2.2E-03	3.1E-03	4.4E-03	5.2E-03	5.1E-03	4.8E-03	-1.3E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02
2098	2.0E-03	2.2E-03	3.1E-03	3.8E-03	4.9E-03	4.8E-03	4.6E-03	-2.7E-02	-2.6E-02	-2.3E-02	-1.9E-02	-1.5E-02	-1.2E-02
2099	2.0E-03	2.1E-03	2.9E-03	3.8E-03	4.5E-03	4.4E-03	4.2E-03	-3.1E-02	-2.7E-02	-2.1E-02	-1.5E-02	-9.5E-03	-3.6E-03
2100	1.9E-03	2.0E-03	2.6E-03	3.7E-03	4.0E-03	3.8E-03	3.7E-03	-2.9E-02	-2.4E-02	-1.7E-02	-9.3E-03	-2.1E-03	5.1E-03
2101	1.7E-03	2.0E-03	2.2E-03	1.6E-03	1.5E-03	1.4E-03	1.3E-03	-2.1E-02	-1.8E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.4E-03
2102	2.1E-03	2.6E-03	4.0E-03	6.9E-03	7.3E-03	6.8E-03	6.8E-03	-5.3E-03	-8.9E-03	-9.2E-03	-9.6E-03	-9.9E-03	-1.0E-02
2103	1.8E-03	2.5E-03	3.8E-03	6.5E-03	6.8E-03	6.3E-03	6.3E-03	-1.6E-03	-7.4E-03	-1.0E-02	-1.3E-02	-1.6E-02	-1.8E-02
2104	1.8E-03	2.2E-03	3.6E-03	5.9E-03	6.1E-03	5.7E-03	5.7E-03	-9.3E-03	-1.4E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.1E-02
2105	1.8E-03	2.0E-03	3.3E-03	5.3E-03	5.4E-03	5.0E-03	5.0E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02	-1.7E-02
2106	1.8E-03	1.9E-03	2.9E-03	4.4E-03	4.7E-03	4.6E-03	4.3E-03	-1.6E-02	-1.9E-02	-1.9E-02	-1.8E-02	-1.8E-02	-1.8E-02
2107	1.8E-03	1.9E-03	2.8E-03	3.9E-03	4.6E-03	4.5E-03	4.3E-03	-1.6E-02	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02	-1.7E-02
2108	1.7E-03	1.8E-03	2.6E-03	3.2E-03	4.4E-03	4.3E-03	4.1E-03	-2.4E-02	-2.3E-02	-1.9E-02	-1.4E-02	-1.0E-02	-5.9E-03
2109	1.5E-03	1.9E-03	2.1E-03	1.5E-03	1.5E-03	1.3E-03	1.3E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-7.9E-03	-5.0E-03
2110	1.2E-03	1.6E-03	1.8E-03	1.6E-03	1.5E-03	1.7E-03	1.4E-03	-1.6E-02	-1.4E-02	-1.1E-02	-8.4E-03	-5.6E-03	-2.8E-03
2111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2112	2.0E-03	2.3E-03	3.4E-03	5.9E-03	6.2E-03	5.8E-03	5.8E-03	-5.6E-03	-9.0E-03	-9.5E-03	-1.0E-02	-1.0E-02	-1.1E-02
2113	1.7E-03	2.3E-03	3.5E-03	5.8E-03	6.1E-03	5.7E-03	5.6E-03	-4.2E-03	-9.2E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.9E-02
2114	1.5E-03	2.2E-03	3.3E-03	5.5E-03	5.6E-03	5.2E-03	5.2E-03	-1.1E-02	-1.5E-02	-1.7E-02	-1.8E-02	-2.0E-02	-2.1E-02
2115	1.5E-03	2.0E-03	3.1E-03	5.0E-03	5.1E-03	4.7E-03	4.7E-03	-1.6E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
2116	1.5E-03	1.8E-03	2.8E-03	4.4E-03	4.4E-03	4.1E-03	4.1E-03	-1.7E-02	-1.9E-02	-1.9E-02	-1.8E-02	-1.8E-02	-1.8E-02
2117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2118	1.3E-03	1.7E-03	1.9E-03	1.4E-03	1.4E-03	1.3E-03	1.2E-03	-1.5E-02	-1.2E-02	-9.6E-03	-6.9E-03	-4.1E-03	-1.4E-03
2119	1.1E-03	1.6E-03	1.6E-03	1.5E-03	1.4E-03	1.5E-03	1.3E-03	-1.1E-02	-8.8E-03	-6.3E-03	-3.7E-03	-1.1E-03	1.4E-03
2120	2.1E-03	2.2E-03	3.0E-03	4.5E-03	4.9E-03	4.5E-03	4.3E-03	-1.9E-02	-1.5E-02	-8.8E-03	-2.2E-03	4.4E-03	1.1E-02
2121	2.0E-03	2.1E-03	2.6E-03	4.4E-03	4.7E-03	4.4E-03	4.3E-03	-1.1E-02	-1.0E-02	-7.2E-03	-3.9E-03	-5.5E-04	2.8E-03
2122	1.9E-03	2.0E-03	2.9E-03	4.9E-03	5.2E-03	4.8E-03	4.8E-03	-6.8E-03	-9.8E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02
2123	1.7E-03	1.8E-03	2.9E-03	5.0E-03	5.2E-03	4.8E-03	4.8E-03	-7.1E-03	-1.1E-02	-1.3E-02	-1.5E-02	-1.7E-02	-1.8E-02
2124	1.5E-03	2.0E-03	3.0E-03	4.9E-03	5.1E-03	4.7E-03	4.7E-03	-1.2E-02	-1.6E-02	-1.7E-02	-1.9E-02	-2.0E-02	-2.2E-02
2125	1.3E-03	1.9E-03	2.9E-03	4.7E-03	4.8E-03	4.4E-03	4.4E-03	-1.7E-02	-1.9E-02	-1.9E-02	-1.9E-02	-1.9E-02	-1.9E-02
2126	1.2E-03	1.8E-03	2.7E-03	4.3E-03	4.3E-03	3.9E-03	3.9E-03	-1.6E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02
2127	1.2E-03	1.7E-03	2.5E-03	3.8E-03	3.8E-03	3.4E-03	3.4E-03	-1.5E-02	-1.7E-02	-1.7E-02	-1.7E-02	-1.8E-02	-1.8E-02
2128	1.1E-03	1.5E-03	1.7E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	-8.7E-03	-6.7E-03	-4.4E-03	-2.1E-03	1.9E-04	2.5E-03
2129	1.0E-03	1.5E-03	1.6E-03	1.3E-03	1.2E-03	1.2E-03	1.1E-03	-4.6E-03	-2.9E-03	-9.8E-04	9.5E-04	2.9E-03	4.8E-03
2130	1.9E-03	2.1E-03	3.1E-03	4.7E-03	5.2E-03	4.8E-03	4.6E-03	-1.6E-02	-1.3E-02	-6.1E-03	5.6E-04	7.2E-03	1.4E-02
2131	1.9E-03	2.0E-03	2.7E-03	4.0E-03	4.4E-03	4.0E-03	3.8E-03	-1.7E-02	-1.4E-02	-8.1E-03	-2.3E-03	3.6E-03	9.4E-03
2132	1.8E-03	2.0E-03	2.3E-03	3.6E-03	3.9E-03	3.7E-03	3.5E-03	-1.1E-02	-1.0E-02	-7.7E-03	-5.1E-03	-2.6E-03	-1.1E-05

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2133	1.8E-03	1.9E-03	2.4E-03	4.0E-03	4.2E-03	3.9E-03	3.9E-03	-8.4E-03	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02
2134	1.6E-03	1.7E-03	2.6E-03	4.2E-03	4.4E-03	4.1E-03	4.1E-03	-9.4E-03	-1.3E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.9E-02
2135	1.5E-03	1.6E-03	2.6E-03	4.2E-03	4.4E-03	4.0E-03	4.0E-03	-1.4E-02	-1.7E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.2E-02
2136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2137	1.2E-03	1.5E-03	2.4E-03	3.9E-03	3.9E-03	3.6E-03	3.6E-03	-1.6E-02	-1.7E-02	-1.7E-02	-1.7E-02	-1.7E-02	-1.7E-02
2138	9.3E-04	1.4E-03	1.5E-03	1.1E-03	1.7E-03	9.7E-04	9.6E-04	-2.7E-03	-1.3E-03	5.2E-04	2.3E-03	4.1E-03	5.8E-03
2139	9.3E-04	1.4E-03	1.5E-03	1.1E-03	1.5E-03	1.1E-03	9.4E-04	-2.4E-03	-7.0E-04	1.4E-03	3.5E-03	5.6E-03	7.7E-03
2140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2142	1.6E-03	1.8E-03	2.3E-03	3.5E-03	3.8E-03	3.4E-03	3.2E-03	-1.6E-02	-1.3E-02	-8.1E-03	-3.1E-03	1.9E-03	6.9E-03
2143	1.7E-03	1.8E-03	2.1E-03	3.0E-03	3.4E-03	3.2E-03	3.1E-03	-1.1E-02	-1.1E-02	-8.7E-03	-6.7E-03	-4.8E-03	-2.8E-03
2144	1.6E-03	1.7E-03	2.2E-03	3.3E-03	3.5E-03	3.2E-03	3.2E-03	-9.9E-03	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02
2145	1.5E-03	1.6E-03	2.3E-03	3.6E-03	3.8E-03	3.5E-03	3.5E-03	-1.1E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.8E-02	-1.9E-02
2146	1.5E-03	1.6E-03	2.3E-03	3.8E-03	3.9E-03	3.6E-03	3.6E-03	-1.5E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.1E-02	-2.2E-02
2147	1.3E-03	1.4E-03	2.3E-03	3.7E-03	3.8E-03	3.5E-03	3.5E-03	-1.7E-02	-1.9E-02	-1.9E-02	-1.9E-02	-2.0E-02	-2.0E-02
2148	8.0E-04	1.2E-03	1.4E-03	1.0E-03	2.1E-03	9.0E-04	8.1E-04	-1.2E-03	3.1E-04	2.2E-03	4.0E-03	5.9E-03	7.8E-03
2149	8.4E-04	1.3E-03	1.4E-03	1.2E-03	2.0E-03	1.1E-03	1.0E-03	-5.7E-03	-3.2E-03	-1.7E-04	2.8E-03	5.8E-03	8.8E-03
2150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2154	1.5E-03	1.6E-03	1.9E-03	2.7E-03	3.0E-03	2.8E-03	2.7E-03	-1.1E-02	-1.1E-02	-9.6E-03	-8.1E-03	-6.6E-03	-5.1E-03
2155	1.5E-03	1.6E-03	1.9E-03	2.7E-03	2.9E-03	2.6E-03	2.6E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.5E-02
2156	1.5E-03	1.6E-03	2.1E-03	3.1E-03	3.3E-03	3.0E-03	3.0E-03	-1.2E-02	-1.5E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.0E-02
2157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2158	7.6E-04	1.1E-03	1.2E-03	1.1E-03	2.4E-03	1.0E-03	9.9E-04	-2.6E-03	-6.1E-04	1.8E-03	4.2E-03	6.7E-03	9.1E-03
2159	7.7E-04	1.2E-03	1.3E-03	1.2E-03	2.4E-03	1.2E-03	1.2E-03	-9.1E-03	-6.7E-03	-3.7E-03	-6.5E-04	2.4E-03	5.4E-03
2160	1.2E-03	1.7E-03	3.4E-03	3.8E-03	5.8E-03	5.3E-03	5.0E-03	4.8E-03	3.0E-03	4.6E-03	6.2E-03	7.7E-03	9.3E-03
2161	1.2E-03	1.7E-03	3.1E-03	4.0E-03	5.3E-03	4.9E-03	4.6E-03	-3.2E-03	-2.0E-03	2.2E-03	6.4E-03	1.1E-02	1.5E-02
2162	1.2E-03	1.6E-03	2.8E-03	3.8E-03	4.8E-03	4.5E-03	4.2E-03	-3.2E-03	-2.3E-03	1.4E-03	5.1E-03	8.8E-03	1.2E-02
2163	1.2E-03	1.6E-03	2.6E-03	3.6E-03	4.3E-03	3.8E-03	3.6E-03	-1.1E-02	-8.0E-03	-2.6E-03	2.7E-03	8.1E-03	1.3E-02
2164	1.3E-03	1.5E-03	2.3E-03	3.3E-03	3.6E-03	3.3E-03	3.1E-03	-1.6E-02	-1.3E-02	-7.7E-03	-2.6E-03	2.5E-03	7.6E-03
2165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2166	1.3E-03	1.5E-03	1.8E-03	2.5E-03	2.7E-03	2.6E-03	2.4E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.1E-03	-8.1E-03	-7.0E-03
2167	1.4E-03	1.5E-03	1.8E-03	2.3E-03	2.7E-03	2.5E-03	2.3E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.5E-02	-1.6E-02
2168	7.2E-04	1.0E-03	1.1E-03	1.2E-03	2.4E-03	1.2E-03	1.1E-03	-6.2E-03	-4.1E-03	-1.3E-03	1.5E-03	4.2E-03	7.0E-03
2169	7.1E-04	1.2E-03	1.2E-03	1.3E-03	2.7E-03	1.4E-03	1.3E-03	-1.1E-02	-8.6E-03	-5.9E-03	-3.1E-03	-3.7E-04	2.4E-03
2170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2172	1.1E-03	1.5E-03	2.8E-03	3.5E-03	4.6E-03	4.3E-03	4.0E-03	-5.1E-04	1.7E-04	3.5E-03	6.9E-03	1.0E-02	1.4E-02
2173	1.0E-03	1.5E-03	2.6E-03	3.4E-03	4.3E-03	4.0E-03	3.7E-03	-3.7E-03	-2.5E-03	1.2E-03	4.8E-03	8.5E-03	1.2E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2174	1.1E-03	1.4E-03	2.3E-03	3.2E-03	3.8E-03	3.3E-03	3.1E-03	-1.2E-02	-9.1E-03	-3.9E-03	1.3E-03	6.5E-03	1.2E-02
2175	1.1E-03	1.4E-03	2.1E-03	3.0E-03	3.2E-03	2.9E-03	2.8E-03	-1.4E-02	-1.2E-02	-7.4E-03	-3.1E-03	1.3E-03	5.7E-03
2176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2178	6.9E-04	1.0E-03	1.1E-03	1.3E-03	2.1E-03	1.3E-03	1.3E-03	-9.0E-03	-7.1E-03	-4.4E-03	-1.7E-03	9.9E-04	3.7E-03
2179	6.5E-04	1.1E-03	1.2E-03	1.4E-03	2.6E-03	1.4E-03	1.4E-03	-1.4E-02	-1.3E-02	-1.0E-02	-8.1E-03	-5.7E-03	-3.3E-03
2180	9.9E-04	1.7E-03	3.5E-03	4.0E-03	6.1E-03	5.6E-03	5.2E-03	-2.5E-02	-2.4E-02	-1.9E-02	-1.5E-02	-1.0E-02	-6.0E-03
2181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2182	1.0E-03	1.5E-03	2.9E-03	3.3E-03	4.9E-03	4.5E-03	4.2E-03	3.0E-04	-2.9E-04	1.9E-03	4.2E-03	6.4E-03	8.6E-03
2183	1.0E-03	1.4E-03	2.8E-03	3.3E-03	4.7E-03	4.2E-03	3.9E-03	-1.7E-03	-1.1E-04	4.1E-03	8.2E-03	1.2E-02	1.7E-02
2184	1.0E-03	1.4E-03	2.6E-03	3.3E-03	4.2E-03	3.9E-03	3.7E-03	-3.1E-04	8.7E-05	2.9E-03	5.8E-03	8.6E-03	1.1E-02
2185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2186	9.5E-04	1.3E-03	2.1E-03	2.9E-03	3.4E-03	3.0E-03	2.8E-03	-1.3E-02	-9.5E-03	-4.5E-03	5.5E-04	5.6E-03	1.1E-02
2187	1.0E-03	1.3E-03	1.9E-03	2.7E-03	3.0E-03	2.7E-03	2.6E-03	-1.4E-02	-1.1E-02	-7.4E-03	-3.4E-03	5.6E-04	4.6E-03
2188	1.0E-03	1.3E-03	1.7E-03	2.4E-03	2.6E-03	2.3E-03	2.2E-03	-1.1E-02	-1.0E-02	-7.8E-03	-5.4E-03	-3.1E-03	-7.5E-04
2189	6.1E-04	1.1E-03	1.1E-03	1.4E-03	2.3E-03	1.5E-03	1.4E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.5E-03
2190	1.0E-03	1.7E-03	3.9E-03	4.9E-03	5.8E-03	5.3E-03	4.9E-03	-3.0E-02	-2.5E-02	-1.7E-02	-8.8E-03	-4.7E-04	7.9E-03
2191	9.9E-04	1.7E-03	3.8E-03	3.8E-03	5.5E-03	5.1E-03	4.8E-03	-2.9E-02	-2.6E-02	-2.0E-02	-1.4E-02	-8.5E-03	-2.7E-03
2192	9.1E-04	1.6E-03	3.2E-03	3.4E-03	5.4E-03	4.9E-03	4.6E-03	-1.4E-02	-1.4E-02	-1.1E-02	-8.2E-03	-5.2E-03	-2.3E-03
2193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2199	6.0E-04	1.0E-03	1.1E-03	1.4E-03	1.6E-03	1.4E-03	1.3E-03	-2.4E-02	-2.2E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.3E-02
2200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2201	9.5E-04	1.7E-03	4.1E-03	4.8E-03	5.6E-03	5.1E-03	4.8E-03	-2.5E-02	-1.9E-02	-1.1E-02	-1.9E-03	6.9E-03	1.6E-02
2202	9.4E-04	1.6E-03	3.1E-03	3.7E-03	5.0E-03	4.5E-03	4.2E-03	-2.8E-02	-2.5E-02	-1.9E-02	-1.3E-02	-7.1E-03	-1.1E-03
2203	8.5E-04	1.6E-03	3.0E-03	3.4E-03	5.1E-03	4.7E-03	4.4E-03	-2.3E-02	-2.2E-02	-1.8E-02	-1.4E-02	-9.9E-03	-6.0E-03
2204	8.8E-04	1.5E-03	2.9E-03	3.2E-03	4.9E-03	4.3E-03	4.1E-03	-8.9E-03	-9.5E-03	-7.3E-03	-5.2E-03	-3.0E-03	-8.4E-04
2205	9.2E-04	1.4E-03	2.6E-03	3.0E-03	4.3E-03	3.9E-03	3.6E-03	1.8E-03	1.1E-03	2.8E-03	4.4E-03	6.1E-03	7.8E-03
2206	9.0E-04	1.3E-03	2.5E-03	2.8E-03	4.1E-03	3.6E-03	3.4E-03	2.5E-03	3.4E-03	6.6E-03	9.8E-03	1.3E-02	1.6E-02
2207	8.8E-04	1.2E-03	2.3E-03	2.7E-03	3.7E-03	3.3E-03	3.1E-03	1.8E-03	2.0E-03	4.4E-03	6.7E-03	9.0E-03	1.1E-02
2208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2209	5.5E-04	9.6E-04	1.1E-03	1.4E-03	1.5E-03	1.3E-03	1.2E-03	-2.5E-02	-2.3E-02	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02
2210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2225	7.9E-04	3.0E-03	3.7E-03	6.1E-03	4.9E-03	4.0E-03	3.8E-03	-4.1E-03	3.2E-03	1.3E-02	2.3E-02	3.3E-02	4.3E-02
2226	7.7E-04	2.5E-03	3.6E-03	5.1E-03	4.8E-03	4.4E-03	4.1E-03	-1.0E-02	-4.0E-03	4.7E-03	1.3E-02	2.2E-02	3.1E-02
2227	8.0E-04	2.0E-03	3.2E-03	4.2E-03	4.7E-03	4.1E-03	3.9E-03	-2.4E-02	-1.9E-02	-1.1E-02	-3.0E-03	5.0E-03	1.3E-02
2228	8.2E-04	1.8E-03	2.9E-03	3.7E-03	4.3E-03	3.8E-03	3.6E-03	-2.5E-02	-2.2E-02	-1.8E-02	-1.3E-02	-8.3E-03	-3.6E-03
2229	7.7E-04	1.6E-03	2.7E-03	3.3E-03	4.5E-03	4.1E-03	3.8E-03	-2.0E-02	-1.9E-02	-1.6E-02	-1.2E-02	-9.0E-03	-5.5E-03
2230	7.5E-04	1.4E-03	2.6E-03	3.0E-03	4.3E-03	3.8E-03	3.6E-03	-9.9E-03	-1.0E-02	-8.3E-03	-6.3E-03	-4.4E-03	-2.4E-03
2231	7.9E-04	1.3E-03	2.4E-03	2.8E-03	3.8E-03	3.2E-03	3.0E-03	-1.1E-04	-4.0E-04	1.3E-03	3.0E-03	4.7E-03	6.4E-03
2232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2236	7.9E-04	2.9E-03	4.0E-03	6.0E-03	4.8E-03	4.0E-03	3.7E-03	-1.6E-03	5.7E-03	1.6E-02	2.5E-02	3.5E-02	4.5E-02
2237	7.1E-04	2.5E-03	3.0E-03	5.0E-03	4.3E-03	3.9E-03	3.6E-03	-1.1E-02	-4.6E-03	4.0E-03	1.3E-02	2.1E-02	3.0E-02
2238	7.3E-04	2.2E-03	2.9E-03	4.3E-03	4.5E-03	4.0E-03	3.7E-03	-1.9E-02	-1.3E-02	-5.1E-03	3.0E-03	1.1E-02	1.9E-02
2239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2241	6.7E-04	1.5E-03	2.5E-03	3.0E-03	4.2E-03	3.7E-03	3.5E-03	-1.6E-02	-1.6E-02	-1.3E-02	-9.9E-03	-7.1E-03	-4.4E-03
2242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2245	9.0E-04	3.7E-03	3.6E-03	6.0E-03	5.3E-03	4.1E-03	3.8E-03	1.8E-02	2.3E-02	3.0E-02	3.7E-02	4.4E-02	5.1E-02
2246	7.9E-04	2.9E-03	3.8E-03	5.3E-03	4.7E-03	3.9E-03	3.6E-03	1.1E-03	8.4E-03	1.8E-02	2.8E-02	3.7E-02	4.7E-02
2247	6.2E-04	2.0E-03	3.1E-03	4.9E-03	4.1E-03	3.4E-03	3.2E-03	-8.2E-03	-2.4E-03	5.4E-03	1.3E-02	2.1E-02	2.9E-02
2248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2249	7.4E-04	1.7E-03	2.7E-03	3.9E-03	4.2E-03	3.6E-03	3.4E-03	-2.3E-02	-1.8E-02	-1.1E-02	-3.9E-03	3.1E-03	1.0E-02
2250	7.5E-04	1.6E-03	2.6E-03	3.5E-03	3.8E-03	3.4E-03	3.1E-03	-2.4E-02	-2.2E-02	-1.8E-02	-1.4E-02	-9.4E-03	-5.3E-03
2251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2253	8.6E-04	3.5E-03	4.4E-03	6.0E-03	6.5E-03	3.8E-03	3.5E-03	2.2E-02	2.5E-02	3.0E-02	3.5E-02	4.0E-02	4.4E-02
2254	8.6E-04	3.5E-03	3.7E-03	5.5E-03	5.4E-03	3.8E-03	3.5E-03	1.6E-02	2.1E-02	2.7E-02	3.4E-02	4.1E-02	4.7E-02
2255	7.7E-04	3.1E-03	3.3E-03	5.1E-03	4.7E-03	3.7E-03	3.5E-03	4.0E-03	1.1E-02	2.0E-02	2.8E-02	3.7E-02	4.6E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2256	6.1E-04	2.5E-03	3.1E-03	4.6E-03	4.0E-03	3.1E-03	2.9E-03	-6.4E-03	-4.4E-04	7.5E-03	1.6E-02	2.4E-02	3.1E-02
2257	6.0E-04	2.0E-03	2.7E-03	4.3E-03	3.9E-03	3.5E-03	3.2E-03	-1.3E-02	-8.1E-03	-1.1E-03	5.8E-03	1.3E-02	2.0E-02
2258	6.8E-04	1.5E-03	2.5E-03	3.7E-03	4.1E-03	3.5E-03	3.3E-03	-2.2E-02	-1.7E-02	-9.6E-03	-2.3E-03	5.1E-03	1.2E-02
2259	7.1E-04	1.3E-03	2.4E-03	3.5E-03	3.8E-03	3.1E-03	2.9E-03	-2.2E-02	-1.9E-02	-1.4E-02	-8.5E-03	-3.4E-03	1.7E-03
2260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2261	8.0E-04	3.6E-03	4.6E-03	5.7E-03	6.4E-03	3.6E-03	3.3E-03	2.3E-02	2.5E-02	3.0E-02	3.4E-02	3.8E-02	4.2E-02
2262	8.2E-04	2.8E-03	3.7E-03	5.0E-03	5.3E-03	3.4E-03	3.2E-03	1.4E-02	1.8E-02	2.4E-02	3.0E-02	3.6E-02	4.2E-02
2263	7.5E-04	2.5E-03	2.9E-03	4.8E-03	4.6E-03	3.5E-03	3.3E-03	8.0E-03	1.3E-02	2.1E-02	2.9E-02	3.6E-02	4.4E-02
2264	6.2E-04	2.4E-03	2.9E-03	4.2E-03	4.0E-03	3.1E-03	2.9E-03	-4.4E-03	1.8E-03	9.9E-03	1.8E-02	2.6E-02	3.4E-02
2265	5.3E-04	2.2E-03	2.8E-03	4.2E-03	3.6E-03	3.1E-03	2.9E-03	-1.1E-02	-5.9E-03	1.3E-03	8.5E-03	1.6E-02	2.3E-02
2266	6.2E-04	1.9E-03	2.4E-03	3.9E-03	3.9E-03	3.3E-03	3.1E-03	-2.0E-02	-1.5E-02	-8.0E-03	-1.1E-03	5.9E-03	1.3E-02
2267	7.4E-04	2.9E-03	5.0E-03	6.3E-03	7.0E-03	3.2E-03	3.0E-03	1.7E-02	2.2E-02	2.9E-02	3.6E-02	4.3E-02	5.1E-02
2268	7.5E-04	3.2E-03	4.6E-03	5.5E-03	6.2E-03	3.4E-03	3.2E-03	2.3E-02	2.6E-02	3.0E-02	3.5E-02	3.9E-02	4.4E-02
2269	7.7E-04	2.9E-03	3.7E-03	4.9E-03	5.2E-03	3.2E-03	3.0E-03	1.6E-02	1.9E-02	2.4E-02	2.9E-02	3.4E-02	3.9E-02
2270	7.2E-04	2.3E-03	2.9E-03	4.4E-03	4.5E-03	3.3E-03	3.1E-03	1.1E-02	1.5E-02	2.2E-02	2.8E-02	3.4E-02	4.0E-02
2271	6.1E-04	1.9E-03	2.7E-03	4.2E-03	3.9E-03	3.0E-03	2.8E-03	-3.1E-03	3.2E-03	1.1E-02	2.0E-02	2.8E-02	3.6E-02
2272	4.9E-04	2.0E-03	2.7E-03	4.0E-03	3.4E-03	2.8E-03	2.6E-03	-8.5E-03	-3.3E-03	3.6E-03	1.0E-02	1.7E-02	2.4E-02
2273	5.6E-04	1.9E-03	2.4E-03	3.8E-03	3.6E-03	3.1E-03	2.9E-03	-1.7E-02	-1.2E-02	-5.2E-03	1.6E-03	8.4E-03	1.5E-02
2274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2275	8.0E-04	4.8E-03	6.8E-03	8.5E-03	6.3E-03	2.9E-03	2.7E-03	1.9E-02	1.9E-02	2.0E-02	2.2E-02	2.4E-02	2.6E-02
2276	8.5E-04	4.6E-03	7.2E-03	6.9E-03	5.8E-03	2.5E-03	2.5E-03	2.7E-02	2.7E-02	2.9E-02	3.1E-02	3.3E-02	3.5E-02
2277	7.9E-04	3.9E-03	6.1E-03	7.8E-03	5.2E-03	2.7E-03	2.7E-03	2.0E-02	2.3E-02	2.8E-02	3.2E-02	3.7E-02	4.1E-02
2278	7.9E-04	3.1E-03	4.9E-03	7.0E-03	5.4E-03	2.6E-03	2.4E-03	9.9E-03	1.7E-02	2.5E-02	3.4E-02	4.2E-02	5.1E-02
2279	7.1E-04	2.8E-03	4.4E-03	6.1E-03	6.1E-03	3.0E-03	2.8E-03	1.3E-02	1.9E-02	2.7E-02	3.5E-02	4.3E-02	5.1E-02
2280	7.0E-04	2.5E-03	4.2E-03	5.3E-03	5.9E-03	3.2E-03	3.0E-03	2.3E-02	2.5E-02	2.9E-02	3.3E-02	3.8E-02	4.2E-02
2281	7.2E-04	2.6E-03	3.6E-03	4.8E-03	5.0E-03	3.0E-03	2.8E-03	1.7E-02	1.9E-02	2.4E-02	2.8E-02	3.2E-02	3.6E-02
2282	7.0E-04	2.3E-03	3.0E-03	4.0E-03	4.5E-03	3.1E-03	2.9E-03	1.3E-02	1.6E-02	2.2E-02	2.7E-02	3.2E-02	3.7E-02
2283	6.2E-04	2.0E-03	2.4E-03	4.1E-03	4.0E-03	3.0E-03	2.8E-03	2.1E-04	6.4E-03	1.4E-02	2.3E-02	3.1E-02	3.9E-02
2284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2290	7.6E-04	3.1E-03	4.7E-03	6.7E-03	4.8E-03	2.4E-03	2.3E-03	1.0E-02	1.7E-02	2.4E-02	3.2E-02	4.0E-02	4.7E-02
2291	6.9E-04	2.5E-03	4.0E-03	6.0E-03	5.6E-03	2.8E-03	2.6E-03	1.1E-02	1.7E-02	2.5E-02	3.3E-02	4.1E-02	4.9E-02
2292	6.5E-04	2.2E-03	3.7E-03	5.2E-03	5.6E-03	3.0E-03	2.8E-03	2.2E-02	2.4E-02	2.8E-02	3.2E-02	3.6E-02	3.9E-02
2293	6.8E-04	2.1E-03	3.5E-03	4.6E-03	4.9E-03	2.9E-03	2.7E-03	1.8E-02	2.0E-02	2.3E-02	2.7E-02	3.1E-02	3.5E-02
2294	6.8E-04	2.2E-03	3.0E-03	4.1E-03	4.4E-03	2.9E-03	2.7E-03	1.2E-02	1.6E-02	2.0E-02	2.5E-02	3.0E-02	3.5E-02
2295	6.1E-04	2.0E-03	2.5E-03	3.9E-03	4.0E-03	2.9E-03	2.7E-03	3.6E-03	8.8E-03	1.6E-02	2.3E-02	3.0E-02	3.7E-02
2296	5.1E-04	1.8E-03	2.3E-03	3.7E-03	3.4E-03	2.5E-03	2.4E-03	-5.6E-03	-3.1E-04	6.6E-03	1.4E-02	2.0E-02	2.7E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2298	6.2E-04	2.9E-03	5.1E-03	6.8E-03	4.8E-03	3.2E-03	2.4E-03	1.3E-02	1.4E-02	1.7E-02	1.9E-02	2.2E-02	2.5E-02
2299	7.2E-04	3.7E-03	5.5E-03	6.4E-03	4.9E-03	2.9E-03	2.1E-03	1.8E-02	1.8E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02
2300	7.6E-04	3.7E-03	5.9E-03	5.2E-03	4.4E-03	2.7E-03	2.2E-03	2.4E-02	2.4E-02	2.6E-02	2.7E-02	2.9E-02	3.0E-02
2301	7.2E-04	3.2E-03	5.3E-03	6.3E-03	4.1E-03	2.5E-03	2.2E-03	2.3E-02	2.5E-02	2.8E-02	3.1E-02	3.3E-02	3.6E-02
2302	7.2E-04	2.9E-03	4.6E-03	6.4E-03	4.4E-03	2.3E-03	2.1E-03	1.1E-02	1.7E-02	2.3E-02	3.0E-02	3.7E-02	4.4E-02
2303	6.7E-04	2.3E-03	3.9E-03	5.8E-03	5.2E-03	2.7E-03	2.5E-03	1.1E-02	1.7E-02	2.5E-02	3.3E-02	4.0E-02	4.8E-02
2304	6.0E-04	2.1E-03	3.6E-03	5.0E-03	5.3E-03	2.8E-03	2.6E-03	2.1E-02	2.3E-02	2.6E-02	3.0E-02	3.4E-02	3.7E-02
2305	6.5E-04	1.7E-03	3.4E-03	4.4E-03	4.8E-03	2.8E-03	2.6E-03	1.8E-02	2.0E-02	2.3E-02	2.7E-02	3.0E-02	3.4E-02
2306	6.5E-04	1.9E-03	3.0E-03	4.0E-03	4.3E-03	2.7E-03	2.6E-03	1.2E-02	1.5E-02	2.0E-02	2.5E-02	3.0E-02	3.4E-02
2307	6.0E-04	1.9E-03	2.5E-03	3.6E-03	3.9E-03	2.8E-03	2.6E-03	7.3E-03	1.1E-02	1.7E-02	2.3E-02	2.9E-02	3.5E-02
2308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2314	6.9E-04	3.3E-03	5.1E-03	5.8E-03	4.5E-03	3.7E-03	2.0E-03	1.7E-02	1.7E-02	1.9E-02	2.0E-02	2.2E-02	2.3E-02
2315	7.3E-04	3.4E-03	5.5E-03	4.7E-03	4.1E-03	2.4E-03	2.1E-03	2.3E-02	2.3E-02	2.4E-02	2.6E-02	2.7E-02	2.8E-02
2316	6.8E-04	3.0E-03	5.0E-03	5.7E-03	3.8E-03	2.4E-03	2.1E-03	2.3E-02	2.5E-02	2.7E-02	2.9E-02	3.2E-02	3.4E-02
2317	6.9E-04	2.7E-03	4.4E-03	6.0E-03	4.1E-03	2.4E-03	2.0E-03	1.2E-02	1.7E-02	2.3E-02	2.9E-02	3.5E-02	4.1E-02
2318	6.4E-04	2.3E-03	3.7E-03	5.6E-03	4.8E-03	2.6E-03	2.3E-03	1.1E-02	1.7E-02	2.4E-02	3.1E-02	3.9E-02	4.6E-02
2319	5.5E-04	1.9E-03	3.5E-03	4.9E-03	5.0E-03	3.4E-03	2.5E-03	1.9E-02	2.1E-02	2.5E-02	2.9E-02	3.2E-02	3.6E-02
2320	6.1E-04	1.8E-03	3.3E-03	4.3E-03	4.7E-03	3.0E-03	2.5E-03	1.8E-02	2.0E-02	2.4E-02	2.8E-02	3.1E-02	3.5E-02
2321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2324	6.6E-04	3.1E-03	4.7E-03	5.3E-03	4.2E-03	3.3E-03	1.9E-03	1.6E-02	1.7E-02	1.8E-02	2.0E-02	2.1E-02	2.3E-02
2325	7.0E-04	3.2E-03	5.1E-03	4.3E-03	3.8E-03	2.6E-03	2.1E-03	2.2E-02	2.2E-02	2.3E-02	2.4E-02	2.6E-02	2.7E-02
2326	6.6E-04	2.8E-03	4.7E-03	5.2E-03	3.6E-03	2.6E-03	2.0E-03	2.4E-02	2.5E-02	2.7E-02	2.8E-02	3.0E-02	3.2E-02
2327	6.6E-04	2.4E-03	4.2E-03	5.6E-03	3.7E-03	2.1E-03	1.9E-03	1.3E-02	1.7E-02	2.3E-02	2.8E-02	3.3E-02	3.8E-02
2328	6.2E-04	2.2E-03	3.5E-03	5.4E-03	4.4E-03	2.3E-03	2.2E-03	1.1E-02	1.6E-02	2.3E-02	3.0E-02	3.7E-02	4.4E-02
2329	5.1E-04	1.8E-03	3.4E-03	4.7E-03	4.7E-03	2.8E-03	2.4E-03	1.6E-02	1.9E-02	2.3E-02	2.7E-02	3.1E-02	3.5E-02
2330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2331	1.6E-03	3.6E-03	6.5E-03	7.4E-03	6.0E-03	4.9E-03	4.6E-03	-5.7E-02	-4.5E-02	-3.0E-02	-1.6E-02	-1.1E-03	1.3E-02
2332	1.8E-03	3.2E-03	6.3E-03	7.4E-03	6.8E-03	5.5E-03	5.2E-03	-6.5E-02	-5.8E-02	-4.8E-02	-3.7E-02	-2.7E-02	-1.7E-02
2333	2.1E-03	3.0E-03	6.0E-03	7.3E-03	7.6E-03	6.0E-03	5.7E-03	-5.8E-02	-5.4E-02	-4.8E-02	-4.1E-02	-3.5E-02	-2.8E-02
2334	1.9E-03	3.6E-03	5.5E-03	6.1E-03	7.1E-03	5.5E-03	5.0E-03	-6.2E-02	-5.5E-02	-4.4E-02	-3.4E-02	-2.3E-02	-1.3E-02
2335	2.2E-03	4.6E-03	6.9E-03	7.3E-03	8.0E-03	6.3E-03	5.9E-03	-8.3E-02	-6.9E-02	-5.2E-02	-3.5E-02	-1.7E-02	3.7E-04
2336	1.9E-03	3.5E-03	5.1E-03	5.8E-03	7.1E-03	5.4E-03	4.9E-03	-7.7E-02	-6.6E-02	-5.1E-02	-3.7E-02	-2.2E-02	-7.4E-03
2337	1.6E-03	3.1E-03	4.9E-03	5.1E-03	5.7E-03	4.6E-03	4.3E-03	-5.7E-02	-5.1E-02	-4.1E-02	-3.1E-02	-2.1E-02	-1.1E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2338	2.3E-03	4.1E-03	6.6E-03	7.1E-03	8.2E-03	6.5E-03	6.0E-03	-9.2E-02	-7.7E-02	-5.7E-02	-3.8E-02	-1.8E-02	1.1E-03
2339	1.8E-03	2.7E-03	4.7E-03	5.8E-03	6.7E-03	5.2E-03	4.8E-03	-7.8E-02	-6.9E-02	-5.5E-02	-4.2E-02	-2.9E-02	-1.5E-02
2340	1.7E-03	2.5E-03	3.8E-03	5.1E-03	5.0E-03	4.5E-03	4.5E-03	-6.9E-02	-6.2E-02	-5.2E-02	-4.3E-02	-3.3E-02	-2.3E-02
2341	1.9E-03	2.4E-03	3.5E-03	5.3E-03	5.3E-03	4.8E-03	4.8E-03	-6.7E-02	-5.5E-02	-4.0E-02	-2.6E-02	-1.1E-02	3.8E-03
2342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2344	8.1E-04	3.0E-03	4.6E-03	5.7E-03	6.0E-03	2.9E-03	2.7E-03	2.3E-03	-9.9E-03	-2.0E-02	-3.1E-02	-4.1E-02	-5.1E-02
2345	8.4E-04	2.5E-03	4.0E-03	4.9E-03	5.1E-03	2.7E-03	2.5E-03	-3.1E-02	-3.2E-02	-3.2E-02	-3.1E-02	-3.0E-02	-2.9E-02
2346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2349	8.7E-04	3.0E-03	4.9E-03	5.6E-03	5.8E-03	3.3E-03	3.1E-03	-2.5E-04	-1.1E-02	-1.9E-02	-2.8E-02	-3.7E-02	-4.5E-02
2350	8.8E-04	3.1E-03	4.9E-03	6.0E-03	6.1E-03	3.1E-03	2.9E-03	-3.6E-03	-1.4E-02	-2.3E-02	-3.2E-02	-4.1E-02	-4.9E-02
2351	7.6E-04	2.6E-03	4.0E-03	5.0E-03	5.2E-03	2.9E-03	2.6E-03	-4.2E-02	-4.0E-02	-3.5E-02	-3.1E-02	-2.7E-02	-2.3E-02
2352	6.1E-04	2.1E-03	4.3E-03	5.3E-03	5.4E-03	2.9E-03	2.7E-03	-7.3E-02	-6.8E-02	-6.2E-02	-5.5E-02	-4.9E-02	-4.2E-02
2353	5.8E-04	2.1E-03	3.7E-03	4.6E-03	4.8E-03	2.6E-03	2.4E-03	-7.3E-02	-7.1E-02	-6.7E-02	-6.4E-02	-6.0E-02	-5.6E-02
2354	5.2E-04	1.6E-03	2.7E-03	3.5E-03	3.6E-03	2.2E-03	1.9E-03	-5.5E-02	-5.7E-02	-5.7E-02	-5.8E-02	-5.8E-02	-5.9E-02
2355	4.8E-04	1.4E-03	2.4E-03	2.9E-03	3.4E-03	2.4E-03	1.8E-03	-4.8E-02	-5.2E-02	-5.4E-02	-5.7E-02	-5.9E-02	-6.2E-02
2356	4.2E-04	1.2E-03	2.3E-03	2.9E-03	3.3E-03	2.3E-03	1.9E-03	-4.4E-02	-4.5E-02	-4.5E-02	-4.5E-02	-4.5E-02	-4.5E-02
2357	6.2E-04	2.2E-03	4.3E-03	5.4E-03	5.5E-03	3.0E-03	2.8E-03	-7.9E-02	-7.4E-02	-6.7E-02	-6.0E-02	-5.3E-02	-4.7E-02
2358	6.0E-04	2.1E-03	3.7E-03	4.7E-03	4.8E-03	2.6E-03	2.5E-03	-6.7E-02	-6.7E-02	-6.5E-02	-6.3E-02	-6.2E-02	-6.0E-02
2359	5.4E-04	1.6E-03	2.7E-03	3.4E-03	3.6E-03	2.4E-03	1.9E-03	-5.6E-02	-6.0E-02	-6.3E-02	-6.6E-02	-6.8E-02	-7.1E-02
2360	4.9E-04	1.5E-03	2.8E-03	3.4E-03	3.8E-03	2.5E-03	2.0E-03	-4.9E-02	-5.1E-02	-5.2E-02	-5.3E-02	-5.4E-02	-5.5E-02
2361	4.4E-04	1.3E-03	2.5E-03	3.1E-03	3.5E-03	2.4E-03	2.0E-03	-4.3E-02	-4.4E-02	-4.3E-02	-4.3E-02	-4.3E-02	-4.2E-02
2362	4.2E-04	1.7E-03	2.7E-03	2.8E-03	3.2E-03	2.3E-03	1.8E-03	-2.7E-02	-2.9E-02	-2.9E-02	-2.9E-02	-3.0E-02	-3.0E-02
2363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2365	5.6E-04	1.8E-03	2.9E-03	3.3E-03	3.8E-03	2.5E-03	1.9E-03	-5.4E-02	-5.7E-02	-5.9E-02	-6.1E-02	-6.4E-02	-6.6E-02
2366	5.0E-04	1.6E-03	3.0E-03	3.6E-03	4.1E-03	2.6E-03	2.1E-03	-5.1E-02	-5.1E-02	-5.0E-02	-4.9E-02	-4.8E-02	-4.7E-02
2367	4.6E-04	1.5E-03	2.5E-03	3.1E-03	3.5E-03	2.4E-03	2.0E-03	-3.3E-02	-3.5E-02	-3.6E-02	-3.6E-02	-3.7E-02	-3.8E-02
2368	4.8E-04	2.2E-03	3.3E-03	3.6E-03	3.4E-03	2.4E-03	1.9E-03	-3.7E-02	-3.4E-02	-2.9E-02	-2.5E-02	-2.0E-02	-1.6E-02
2369	6.5E-04	2.7E-03	4.1E-03	4.4E-03	3.8E-03	2.3E-03	2.1E-03	-4.1E-02	-3.6E-02	-3.1E-02	-2.5E-02	-1.9E-02	-1.4E-02
2370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2375	5.8E-04	1.9E-03	3.1E-03	3.7E-03	4.2E-03	2.7E-03	2.1E-03	-5.8E-02	-5.8E-02	-5.8E-02	-5.7E-02	-5.6E-02	-5.5E-02
2376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2377	4.8E-04	2.0E-03	3.0E-03	3.2E-03	3.7E-03	2.5E-03	2.1E-03	-4.7E-02	-4.3E-02	-3.7E-02	-3.2E-02	-2.6E-02	-2.0E-02
2378	5.9E-04	2.8E-03	4.2E-03	4.5E-03	3.8E-03	2.6E-03	2.0E-03	-5.1E-02	-4.5E-02	-3.8E-02	-3.1E-02	-2.3E-02	-1.6E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2379	7.7E-04	3.1E-03	4.7E-03	5.1E-03	4.1E-03	2.5E-03	2.4E-03	-5.1E-02	-4.5E-02	-3.8E-02	-3.1E-02	-2.4E-02	-1.7E-02
2380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2386	5.2E-04	1.6E-03	3.0E-03	3.7E-03	4.2E-03	2.8E-03	2.3E-03	-5.7E-02	-5.2E-02	-4.5E-02	-3.9E-02	-3.3E-02	-2.6E-02
2387	5.1E-04	2.6E-03	3.9E-03	4.1E-03	3.9E-03	2.7E-03	2.1E-03	-6.3E-02	-5.6E-02	-4.6E-02	-3.7E-02	-2.8E-02	-1.9E-02
2388	7.1E-04	3.3E-03	4.9E-03	5.2E-03	4.3E-03	2.6E-03	2.3E-03	-5.7E-02	-5.0E-02	-4.2E-02	-3.4E-02	-2.6E-02	-1.9E-02
2389	8.9E-04	3.1E-03	4.9E-03	5.3E-03	4.2E-03	2.8E-03	2.7E-03	-5.6E-02	-5.1E-02	-4.4E-02	-3.8E-02	-3.1E-02	-2.5E-02
2390	1.0E-03	2.5E-03	4.3E-03	4.8E-03	3.9E-03	3.2E-03	3.0E-03	-6.2E-02	-5.9E-02	-5.4E-02	-5.0E-02	-4.5E-02	-4.0E-02
2391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2398	6.2E-04	3.3E-03	4.8E-03	5.1E-03	4.3E-03	2.8E-03	2.2E-03	-6.6E-02	-5.8E-02	-5.0E-02	-4.1E-02	-3.2E-02	-2.3E-02
2399	8.4E-04	3.5E-03	5.3E-03	5.7E-03	4.6E-03	2.7E-03	2.6E-03	-7.8E-02	-7.1E-02	-6.3E-02	-5.4E-02	-4.6E-02	-3.7E-02
2400	1.0E-03	2.8E-03	4.8E-03	5.3E-03	4.2E-03	3.2E-03	3.1E-03	-8.2E-02	-7.7E-02	-7.0E-02	-6.3E-02	-5.7E-02	-5.0E-02
2401	1.1E-03	2.1E-03	4.2E-03	4.7E-03	4.3E-03	3.5E-03	3.3E-03	-7.4E-02	-7.1E-02	-6.7E-02	-6.2E-02	-5.8E-02	-5.3E-02
2402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2404	5.7E-04	3.0E-03	4.3E-03	4.6E-03	4.4E-03	2.9E-03	2.4E-03	-8.4E-02	-7.5E-02	-6.5E-02	-5.4E-02	-4.4E-02	-3.4E-02
2405	7.5E-04	3.8E-03	5.6E-03	5.9E-03	4.9E-03	2.9E-03	2.5E-03	-9.3E-02	-8.6E-02	-7.7E-02	-6.9E-02	-6.0E-02	-5.2E-02
2406	9.8E-04	3.4E-03	5.5E-03	5.9E-03	4.6E-03	3.1E-03	3.0E-03	-9.8E-02	-9.2E-02	-8.4E-02	-7.7E-02	-7.0E-02	-6.2E-02
2407	1.1E-03	2.6E-03	4.7E-03	5.2E-03	4.3E-03	3.5E-03	3.4E-03	-7.9E-02	-7.6E-02	-7.2E-02	-6.7E-02	-6.2E-02	-5.8E-02
2408	1.2E-03	2.3E-03	4.0E-03	4.6E-03	4.7E-03	3.7E-03	3.4E-03	-6.6E-02	-6.4E-02	-6.1E-02	-5.7E-02	-5.3E-02	-5.0E-02
2409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2411	6.2E-04	2.5E-03	3.6E-03	4.4E-03	5.0E-03	3.2E-03	2.7E-03	-1.1E-01	-9.7E-02	-8.5E-02	-7.4E-02	-6.2E-02	-5.1E-02
2412	6.5E-04	3.8E-03	5.5E-03	5.8E-03	4.8E-03	3.1E-03	2.4E-03	-1.1E-01	-1.0E-01	-9.7E-02	-8.8E-02	-8.0E-02	-7.2E-02
2413	9.0E-04	3.9E-03	6.0E-03	6.4E-03	5.1E-03	3.0E-03	2.9E-03	-9.6E-02	-9.1E-02	-8.4E-02	-7.7E-02	-7.1E-02	-6.4E-02
2414	1.1E-03	3.2E-03	5.4E-03	5.9E-03	4.7E-03	3.5E-03	3.4E-03	-9.1E-02	-8.6E-02	-7.9E-02	-7.2E-02	-6.5E-02	-5.8E-02
2415	1.3E-03	2.5E-03	4.5E-03	5.1E-03	4.8E-03	3.9E-03	3.6E-03	-8.4E-02	-7.9E-02	-7.2E-02	-6.6E-02	-5.9E-02	-5.3E-02
2416	1.3E-03	2.3E-03	4.0E-03	4.6E-03	5.0E-03	3.9E-03	3.5E-03	-7.5E-02	-7.0E-02	-6.3E-02	-5.7E-02	-5.0E-02	-4.3E-02
2417	1.2E-03	1.8E-03	3.5E-03	4.0E-03	4.8E-03	3.5E-03	3.2E-03	-6.4E-02	-6.1E-02	-5.5E-02	-5.0E-02	-4.5E-02	-3.9E-02
2418	1.1E-03	1.3E-03	1.6E-03	2.1E-03	1.8E-03	1.7E-03	1.6E-03	-1.8E-02	-1.6E-02	-1.4E-02	-1.1E-02	-8.6E-03	-6.0E-03
2419	6.2E-04	3.0E-03	4.4E-03	4.7E-03	4.8E-03	3.2E-03	2.7E-03	-1.1E-01	-1.1E-01	-9.7E-02	-8.9E-02	-8.0E-02	-7.2E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2420	7.9E-04	3.6E-03	5.5E-03	5.9E-03	4.9E-03	3.2E-03	2.6E-03	-1.1E-01	-1.0E-01	-9.3E-02	-8.5E-02	-7.7E-02	-6.9E-02
2421	1.0E-03	3.5E-03	5.7E-03	6.3E-03	5.1E-03	3.4E-03	3.3E-03	-9.4E-02	-8.9E-02	-8.2E-02	-7.5E-02	-6.8E-02	-6.1E-02
2422	1.3E-03	3.1E-03	5.4E-03	6.1E-03	5.0E-03	3.9E-03	3.7E-03	-8.2E-02	-7.9E-02	-7.5E-02	-7.1E-02	-6.7E-02	-6.3E-02
2423	1.4E-03	2.6E-03	4.4E-03	5.1E-03	5.2E-03	4.1E-03	3.8E-03	-6.6E-02	-6.4E-02	-6.1E-02	-5.7E-02	-5.4E-02	-5.0E-02
2424	1.3E-03	2.0E-03	3.9E-03	4.5E-03	5.2E-03	3.9E-03	3.6E-03	-6.0E-02	-5.8E-02	-5.3E-02	-4.8E-02	-4.3E-02	-3.9E-02
2425	1.1E-03	1.8E-03	3.4E-03	3.8E-03	4.8E-03	3.4E-03	3.0E-03	-4.9E-02	-4.7E-02	-4.4E-02	-4.1E-02	-3.8E-02	-3.5E-02
2426	9.1E-04	1.5E-03	2.9E-03	3.2E-03	4.1E-03	3.1E-03	2.8E-03	-3.8E-02	-3.9E-02	-3.8E-02	-3.7E-02	-3.6E-02	-3.4E-02
2427	9.3E-04	3.9E-03	6.1E-03	6.5E-03	5.4E-03	3.2E-03	3.0E-03	-8.5E-02	-8.4E-02	-8.1E-02	-7.8E-02	-7.5E-02	-7.2E-02
2428	1.2E-03	3.4E-03	5.8E-03	6.5E-03	5.3E-03	3.8E-03	3.6E-03	-6.9E-02	-6.9E-02	-6.6E-02	-6.4E-02	-6.1E-02	-5.9E-02
2429	1.4E-03	2.9E-03	5.2E-03	6.0E-03	5.2E-03	4.1E-03	3.9E-03	-5.8E-02	-5.7E-02	-5.3E-02	-4.9E-02	-4.5E-02	-4.1E-02
2430	1.4E-03	2.5E-03	4.6E-03	5.3E-03	5.5E-03	4.2E-03	3.9E-03	-4.6E-02	-4.5E-02	-4.1E-02	-3.8E-02	-3.4E-02	-3.0E-02
2431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2432	1.1E-03	1.7E-03	3.2E-03	3.5E-03	4.7E-03	3.3E-03	3.1E-03	-2.2E-02	-2.5E-02	-2.6E-02	-2.7E-02	-2.8E-02	-2.9E-02
2433	9.3E-04	1.5E-03	2.7E-03	3.4E-03	3.8E-03	3.2E-03	2.8E-03	-2.3E-02	-2.7E-02	-2.9E-02	-3.0E-02	-3.2E-02	-3.4E-02
2434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2435	1.1E-03	4.0E-03	6.5E-03	7.1E-03	5.7E-03	3.7E-03	3.5E-03	-7.7E-02	-7.2E-02	-6.5E-02	-5.8E-02	-5.2E-02	-4.5E-02
2436	1.4E-03	3.3E-03	5.8E-03	6.6E-03	5.4E-03	4.2E-03	4.0E-03	-6.4E-02	-5.7E-02	-4.8E-02	-3.9E-02	-2.9E-02	-2.0E-02
2437	1.5E-03	2.7E-03	5.0E-03	5.8E-03	5.6E-03	4.4E-03	4.1E-03	-4.8E-02	-4.2E-02	-3.4E-02	-2.6E-02	-1.8E-02	-9.4E-03
2438	1.4E-03	2.3E-03	4.2E-03	5.0E-03	5.5E-03	4.1E-03	3.8E-03	-4.0E-02	-3.6E-02	-2.9E-02	-2.3E-02	-1.6E-02	-9.5E-03
2439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2440	9.9E-04	1.6E-03	3.0E-03	3.6E-03	4.4E-03	3.4E-03	3.1E-03	-4.0E-02	-4.1E-02	-3.9E-02	-3.7E-02	-3.5E-02	-3.3E-02
2441	1.0E-03	1.4E-03	2.8E-03	3.5E-03	3.4E-03	3.1E-03	2.9E-03	-3.9E-02	-3.7E-02	-3.3E-02	-3.0E-02	-2.6E-02	-2.2E-02
2442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2443	1.5E-03	3.1E-03	5.7E-03	6.5E-03	5.8E-03	4.7E-03	4.4E-03	-5.4E-02	-4.2E-02	-2.8E-02	-1.4E-02	-6.2E-04	1.3E-02
2444	1.5E-03	2.5E-03	4.8E-03	5.6E-03	5.9E-03	4.6E-03	4.2E-03	-5.2E-02	-4.1E-02	-2.8E-02	-1.5E-02	-1.5E-03	1.2E-02
2445	1.4E-03	2.2E-03	4.0E-03	4.6E-03	5.5E-03	4.1E-03	3.7E-03	-5.2E-02	-4.1E-02	-2.9E-02	-1.6E-02	-3.4E-03	9.2E-03
2446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2447	1.1E-03	1.8E-03	3.1E-03	3.8E-03	3.9E-03	3.4E-03	3.1E-03	-4.7E-02	-3.7E-02	-2.5E-02	-1.2E-02	-7.8E-06	1.2E-02
2448	1.1E-03	1.9E-03	3.2E-03	3.5E-03	3.3E-03	3.0E-03	2.9E-03	-4.0E-02	-3.0E-02	-1.8E-02	-6.7E-03	5.0E-03	1.7E-02
2449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2451	1.7E-03	2.8E-03	5.4E-03	6.4E-03	6.4E-03	5.0E-03	4.7E-03	-5.3E-02	-4.0E-02	-2.5E-02	-9.8E-03	5.6E-03	2.1E-02
2452	1.6E-03	2.4E-03	4.5E-03	5.4E-03	6.1E-03	4.7E-03	4.3E-03	-4.8E-02	-3.8E-02	-2.6E-02	-1.3E-02	-8.1E-04	1.2E-02
2453	1.4E-03	2.1E-03	3.7E-03	4.3E-03	5.5E-03	4.0E-03	3.7E-03	-4.6E-02	-3.8E-02	-2.7E-02	-1.6E-02	-5.3E-03	5.5E-03
2454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2459	1.6E-03	2.4E-03	4.3E-03	5.1E-03	6.2E-03	4.6E-03	4.2E-03	-5.6E-02	-4.9E-02	-4.0E-02	-3.1E-02	-2.2E-02	-1.3E-02
2460	1.2E-03	2.7E-03	4.4E-03	4.4E-03	5.3E-03	4.1E-03	3.7E-03	-4.9E-02	-4.2E-02	-3.2E-02	-2.2E-02	-1.2E-02	-1.7E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2461	1.3E-03	2.2E-03	3.9E-03	4.2E-03	4.0E-03	3.6E-03	3.5E-03	-3.8E-02	-3.1E-02	-2.2E-02	-1.2E-02	-3.1E-03	6.2E-03
2462	1.2E-03	2.0E-03	3.3E-03	3.7E-03	3.6E-03	3.2E-03	3.1E-03	-3.4E-02	-2.7E-02	-1.9E-02	-1.0E-02	-1.6E-03	7.1E-03
2463	1.1E-03	2.0E-03	3.1E-03	3.1E-03	3.1E-03	2.7E-03	2.7E-03	-3.4E-02	-2.7E-02	-1.9E-02	-1.1E-02	-2.5E-03	5.7E-03
2464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2466	1.4E-03	2.6E-03	3.9E-03	4.6E-03	4.8E-03	4.1E-03	3.8E-03	-5.5E-02	-4.9E-02	-4.1E-02	-3.2E-02	-2.4E-02	-1.5E-02
2467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2468	1.2E-03	1.9E-03	3.5E-03	3.4E-03	3.4E-03	3.0E-03	3.0E-03	-3.2E-02	-3.3E-02	-3.1E-02	-3.0E-02	-2.9E-02	-2.8E-02
2469	9.5E-04	1.4E-03	3.1E-03	3.0E-03	2.9E-03	2.6E-03	2.5E-03	-2.6E-02	-2.8E-02	-2.8E-02	-2.8E-02	-2.9E-02	-2.9E-02
2470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2472	1.5E-03	2.2E-03	4.2E-03	4.6E-03	4.4E-03	4.0E-03	4.0E-03	-5.0E-02	-4.6E-02	-3.9E-02	-3.2E-02	-2.5E-02	-1.8E-02
2473	1.3E-03	1.8E-03	3.4E-03	3.8E-03	3.8E-03	3.4E-03	3.3E-03	-5.2E-02	-4.7E-02	-4.0E-02	-3.4E-02	-2.7E-02	-2.0E-02
2474	1.1E-03	1.7E-03	2.7E-03	3.2E-03	3.2E-03	2.8E-03	2.7E-03	-4.8E-02	-4.2E-02	-3.5E-02	-2.8E-02	-2.1E-02	-1.4E-02
2475	8.6E-04	1.6E-03	2.4E-03	3.0E-03	3.4E-03	2.7E-03	2.5E-03	-3.5E-02	-3.2E-02	-2.7E-02	-2.1E-02	-1.6E-02	-1.1E-02
2476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2479	1.5E-03	2.2E-03	3.3E-03	4.3E-03	4.3E-03	3.8E-03	3.8E-03	-5.8E-02	-5.2E-02	-4.5E-02	-3.7E-02	-2.9E-02	-2.1E-02
2480	1.2E-03	1.8E-03	2.7E-03	3.4E-03	3.4E-03	3.1E-03	3.0E-03	-4.9E-02	-4.3E-02	-3.5E-02	-2.6E-02	-1.8E-02	-9.6E-03
2481	9.5E-04	1.5E-03	2.8E-03	3.4E-03	4.0E-03	3.0E-03	2.8E-03	-4.5E-02	-3.8E-02	-2.9E-02	-2.0E-02	-1.1E-02	-2.1E-03
2482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2486	1.4E-03	1.9E-03	3.1E-03	4.0E-03	4.1E-03	3.7E-03	3.7E-03	-5.5E-02	-4.3E-02	-2.9E-02	-1.4E-02	1.3E-04	1.5E-02
2487	1.1E-03	1.6E-03	3.2E-03	3.9E-03	4.7E-03	3.5E-03	3.4E-03	-4.3E-02	-3.3E-02	-2.0E-02	-8.1E-03	4.2E-03	1.6E-02
2488	1.1E-03	1.5E-03	3.5E-03	4.2E-03	5.0E-03	4.0E-03	3.8E-03	-2.5E-02	-1.9E-02	-9.8E-03	-1.2E-03	7.5E-03	1.6E-02
2489	2.2E-03	3.6E-03	3.5E-03	8.8E-04	9.6E-04	7.0E-04	6.5E-04	-1.7E-02	-1.7E-02	-1.6E-02	-1.5E-02	-1.4E-02	-1.3E-02
2490	1.1E-03	1.9E-03	3.5E-03	4.2E-03	5.4E-03	4.4E-03	4.2E-03	-2.7E-02	-1.7E-02	-3.3E-03	1.0E-02	2.3E-02	3.6E-02
2491	1.3E-03	1.8E-03	3.7E-03	4.0E-03	5.6E-03	5.0E-03	4.8E-03	-2.0E-02	-1.1E-02	-1.8E-04	1.1E-02	2.2E-02	3.3E-02
2492	7.9E-04	1.6E-03	1.9E-03	1.1E-03	1.0E-03	1.3E-03	8.1E-04	-5.6E-03	-7.0E-03	-8.1E-03	-9.3E-03	-1.0E-02	-1.2E-02
2493	7.2E-04	1.9E-03	2.2E-03	1.2E-03	1.0E-03	1.2E-03	9.3E-04	-1.2E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.6E-03	-8.9E-03
2494	7.8E-04	2.2E-03	2.5E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	-1.7E-02	-1.5E-02	-1.2E-02	-9.9E-03	-7.6E-03	-5.3E-03
2495	7.8E-04	2.2E-03	2.5E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.0E-03	-5.1E-03
2496	9.5E-04	2.1E-03	2.4E-03	1.4E-03	1.3E-03	1.1E-03	1.1E-03	-2.0E-02	-1.7E-02	-1.4E-02	-1.2E-02	-8.8E-03	-6.0E-03
2497	1.1E-03	2.0E-03	2.3E-03	1.5E-03	1.3E-03	1.2E-03	1.2E-03	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.5E-03	-6.8E-03
2498	1.3E-03	1.8E-03	2.1E-03	1.5E-03	1.4E-03	1.2E-03	1.2E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.5E-03	-5.7E-03
2499	1.3E-03	1.5E-03	1.8E-03	1.4E-03	1.5E-03	1.2E-03	1.2E-03	-1.7E-02	-1.4E-02	-1.2E-02	-9.0E-03	-6.2E-03	-3.5E-03
2500	1.3E-03	1.4E-03	1.6E-03	1.3E-03	1.8E-03	1.1E-03	1.1E-03	-1.2E-02	-1.0E-02	-7.5E-03	-4.9E-03	-2.3E-03	2.7E-04
2501	1.2E-03	1.4E-03	1.6E-03	1.1E-03	2.0E-03	9.5E-04	9.4E-04	-6.6E-03	-4.8E-03	-2.6E-03	-5.1E-04	1.6E-03	3.7E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2502	1.1E-03	1.3E-03	1.5E-03	9.6E-04	2.0E-03	9.0E-04	7.9E-04	-1.8E-03	-3.9E-04	1.3E-03	3.1E-03	4.8E-03	6.5E-03
2503	9.5E-04	1.2E-03	1.4E-03	1.0E-03	1.8E-03	1.0E-03	8.0E-04	-1.1E-04	1.2E-03	3.0E-03	4.7E-03	6.4E-03	8.2E-03
2504	8.4E-04	1.2E-03	1.3E-03	1.1E-03	1.5E-03	1.1E-03	9.5E-04	1.1E-03	2.4E-03	4.1E-03	5.9E-03	7.6E-03	9.4E-03
2505	6.2E-04	9.0E-04	1.1E-03	1.3E-03	1.6E-03	1.4E-03	1.3E-03	-1.1E-02	-9.2E-03	-7.0E-03	-4.8E-03	-2.7E-03	-5.1E-04
2506	5.2E-04	9.1E-04	1.1E-03	1.3E-03	1.7E-03	1.3E-03	1.1E-03	-1.6E-02	-1.5E-02	-1.2E-02	-1.0E-02	-8.0E-03	-5.8E-03
2507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2508	8.6E-04	1.7E-03	1.7E-03	9.4E-04	1.1E-03	1.4E-03	7.7E-04	-7.6E-03	-8.9E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02
2509	2.8E-03	3.2E-03	1.9E-03	7.8E-04	1.1E-03	7.8E-04	6.0E-04	-1.0E-02	-9.9E-03	-9.2E-03	-8.5E-03	-7.7E-03	-7.0E-03
2510	2.3E-03	2.7E-03	1.7E-03	8.2E-04	1.0E-03	6.7E-04	5.6E-04	-1.7E-02	-1.7E-02	-1.6E-02	-1.6E-02	-1.5E-02	-1.5E-02
2511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2512	2.2E-03	2.7E-03	1.7E-03	7.6E-04	1.1E-03	9.5E-04	5.5E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02
2513	1.6E-03	2.1E-03	1.6E-03	7.8E-04	1.1E-03	1.0E-03	6.3E-04	-9.3E-03	-9.8E-03	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
2514	1.2E-03	1.3E-03	1.3E-03	8.2E-04	1.1E-03	1.1E-03	6.9E-04	-8.9E-03	-9.0E-03	-8.9E-03	-8.7E-03	-8.6E-03	-8.4E-03
2515	1.3E-03	1.4E-03	1.5E-03	8.2E-04	1.0E-03	1.2E-03	7.2E-04	-8.6E-03	-8.3E-03	-7.7E-03	-7.1E-03	-6.4E-03	-5.8E-03
2516	1.2E-03	1.5E-03	1.4E-03	8.0E-04	9.9E-04	1.3E-03	7.1E-04	-6.0E-03	-5.5E-03	-4.7E-03	-3.9E-03	-3.0E-03	-2.2E-03
2517	1.6E-03	1.9E-03	1.2E-03	7.5E-04	9.7E-04	1.4E-03	7.2E-04	-1.6E-03	-1.5E-03	-1.1E-03	-5.8E-04	-9.6E-05	3.9E-04
2518	1.7E-03	2.1E-03	9.7E-04	7.6E-04	1.0E-03	1.4E-03	7.1E-04	-2.5E-03	-3.5E-03	-4.0E-03	-4.5E-03	-5.1E-03	-5.6E-03
2519	6.9E-04	1.3E-03	1.3E-03	1.0E-03	8.5E-04	9.5E-04	7.7E-04	-5.5E-03	-6.9E-03	-7.9E-03	-9.0E-03	-1.0E-02	-1.1E-02
2520	6.1E-04	1.1E-03	1.3E-03	1.1E-03	9.5E-04	8.6E-04	8.6E-04	-6.6E-03	-7.6E-03	-8.5E-03	-9.3E-03	-1.0E-02	-1.1E-02
2521	5.9E-04	1.4E-03	1.7E-03	1.2E-03	1.1E-03	9.8E-04	9.7E-04	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.0E-03	-8.0E-03
2522	1.4E-03	1.7E-03	1.2E-03	8.2E-04	9.7E-04	1.3E-03	6.3E-04	-7.5E-03	-8.2E-03	-8.5E-03	-8.8E-03	-9.0E-03	-9.3E-03
2523	2.3E-03	2.7E-03	1.5E-03	7.8E-04	1.0E-03	8.9E-04	5.3E-04	-1.7E-02	-1.7E-02	-1.6E-02	-1.6E-02	-1.6E-02	-1.5E-02
2524	9.5E-04	1.3E-03	1.3E-03	8.6E-04	8.7E-04	1.1E-03	7.0E-04	-7.9E-03	-8.8E-03	-9.4E-03	-1.0E-02	-1.1E-02	-1.1E-02
2525	5.6E-04	1.6E-03	1.9E-03	1.3E-03	1.1E-03	1.0E-03	1.0E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03	-4.8E-03
2526	6.0E-04	1.7E-03	2.0E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.0E-03	-5.3E-03
2527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2530	8.1E-04	8.8E-04	2.1E-03	2.3E-03	3.4E-03	1.7E-03	1.6E-03	-1.6E-02	-1.2E-02	-6.8E-03	-1.6E-03	3.6E-03	8.8E-03
2531	7.7E-04	9.4E-04	2.2E-03	2.5E-03	4.0E-03	1.9E-03	1.8E-03	-1.8E-02	-1.3E-02	-7.5E-03	-1.6E-03	4.3E-03	1.0E-02
2532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2533	5.5E-04	9.7E-04	2.1E-03	2.4E-03	3.2E-03	2.0E-03	1.8E-03	-2.0E-02	-1.5E-02	-8.9E-03	-2.6E-03	3.6E-03	9.9E-03
2534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2536	5.2E-04	1.0E-03	2.1E-03	2.5E-03	2.7E-03	2.9E-03	1.9E-03	-2.0E-02	-1.5E-02	-8.8E-03	-2.7E-03	3.5E-03	9.6E-03
2537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2553	5.9E-04	1.1E-03	2.1E-03	3.0E-03	6.2E-03	7.2E-03	3.7E-03	8.1E-03	8.8E-03	1.1E-02	1.3E-02	1.5E-02	1.7E-02
2554	6.0E-04	1.1E-03	2.1E-03	3.0E-03	8.1E-03	9.4E-03	3.8E-03	5.1E-03	5.8E-03	8.0E-03	1.0E-02	1.2E-02	1.4E-02
2555	5.5E-04	1.3E-03	2.2E-03	3.1E-03	7.7E-03	7.5E-03	3.1E-03	-3.4E-03	-6.5E-04	3.3E-03	7.3E-03	1.1E-02	1.5E-02
2556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2561	6.0E-04	1.2E-03	2.0E-03	3.0E-03	6.8E-03	7.5E-03	3.1E-03	9.5E-04	2.4E-03	5.1E-03	7.8E-03	1.1E-02	1.3E-02
2562	5.6E-04	1.3E-03	2.3E-03	3.0E-03	7.2E-03	7.7E-03	3.2E-03	-2.6E-03	1.7E-04	4.0E-03	7.9E-03	1.2E-02	1.6E-02
2563	6.0E-04	1.3E-03	2.4E-03	3.1E-03	7.0E-03	7.8E-03	3.3E-03	-4.1E-04	2.2E-03	5.8E-03	9.4E-03	1.3E-02	1.7E-02
2564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2573	5.8E-04	1.2E-03	2.3E-03	2.9E-03	5.5E-03	6.3E-03	2.8E-03	-1.3E-03	1.2E-03	4.7E-03	8.2E-03	1.2E-02	1.5E-02
2574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2581	6.1E-04	1.7E-03	2.0E-03	1.4E-03	1.3E-03	1.1E-03	1.1E-03	-1.9E-02	-1.6E-02	-1.4E-02	-1.1E-02	-8.7E-03	-6.1E-03
2582	5.2E-04	1.5E-03	1.7E-03	1.3E-03	1.5E-03	1.1E-03	1.1E-03	-1.8E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.7E-03	-5.2E-03
2583	7.8E-04	1.7E-03	2.0E-03	1.3E-03	1.5E-03	1.2E-03	1.1E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.9E-03	-5.3E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2584	5.0E-04	1.4E-03	1.7E-03	1.2E-03	1.6E-03	1.0E-03	1.0E-03	-1.6E-02	-1.4E-02	-1.2E-02	-9.1E-03	-6.6E-03	-4.1E-03
2585	9.1E-04	1.6E-03	1.8E-03	1.3E-03	1.7E-03	1.1E-03	1.1E-03	-1.6E-02	-1.4E-02	-1.1E-02	-8.6E-03	-6.0E-03	-3.4E-03
2586	4.4E-04	1.3E-03	1.5E-03	1.1E-03	1.3E-03	9.6E-04	9.6E-04	-1.5E-02	-1.3E-02	-1.0E-02	-8.0E-03	-5.5E-03	-3.0E-03
2587	6.2E-04	1.4E-03	1.7E-03	1.2E-03	1.5E-03	9.9E-04	9.9E-04	-1.5E-02	-1.2E-02	-9.7E-03	-7.2E-03	-4.6E-03	-2.1E-03
2588	9.8E-04	1.4E-03	1.7E-03	1.2E-03	1.8E-03	1.0E-03	1.0E-03	-1.3E-02	-1.1E-02	-8.1E-03	-5.6E-03	-3.1E-03	-6.2E-04
2589	3.9E-04	1.1E-03	1.3E-03	1.0E-03	9.7E-04	8.7E-04	8.7E-04	-1.4E-02	-1.2E-02	-9.5E-03	-7.0E-03	-4.5E-03	-2.0E-03
2590	4.3E-04	1.3E-03	1.5E-03	1.0E-03	1.0E-03	8.7E-04	8.7E-04	-1.3E-02	-1.1E-02	-8.2E-03	-5.7E-03	-3.3E-03	-8.0E-04
2591	7.2E-04	1.3E-03	1.6E-03	1.1E-03	1.4E-03	8.9E-04	8.9E-04	-1.1E-02	-9.1E-03	-6.7E-03	-4.3E-03	-1.9E-03	5.8E-04
2592	1.0E-03	1.2E-03	1.5E-03	1.0E-03	1.7E-03	8.8E-04	8.8E-04	-8.2E-03	-6.1E-03	-3.8E-03	-1.5E-03	8.0E-04	3.1E-03
2593	3.9E-04	1.1E-03	1.3E-03	9.4E-04	8.7E-04	7.8E-04	7.8E-04	-1.2E-02	-9.8E-03	-7.3E-03	-4.9E-03	-2.4E-03	2.2E-05
2594	5.0E-04	1.2E-03	1.4E-03	9.4E-04	8.7E-04	7.8E-04	7.8E-04	-1.0E-02	-7.9E-03	-5.5E-03	-3.1E-03	-7.6E-04	1.6E-03
2595	7.8E-04	1.2E-03	1.4E-03	9.3E-04	1.1E-03	8.6E-04	7.7E-04	-7.0E-03	-5.0E-03	-2.8E-03	-5.3E-04	1.7E-03	3.9E-03
2596	9.9E-04	1.2E-03	1.3E-03	9.1E-04	1.5E-03	9.3E-04	7.4E-04	-3.2E-03	-1.6E-03	3.6E-04	2.3E-03	4.2E-03	6.1E-03
2597	3.5E-04	1.0E-03	1.2E-03	8.6E-04	7.9E-04	7.1E-04	7.0E-04	-1.1E-02	-8.6E-03	-6.2E-03	-3.8E-03	-1.4E-03	9.8E-04
2598	3.8E-04	1.1E-03	1.3E-03	8.4E-04	7.7E-04	6.9E-04	6.8E-04	-8.8E-03	-6.7E-03	-4.3E-03	-2.0E-03	2.6E-04	2.6E-03
2599	5.8E-04	1.1E-03	1.4E-03	8.2E-04	8.4E-04	7.1E-04	6.6E-04	-5.6E-03	-3.7E-03	-1.6E-03	5.4E-04	2.7E-03	4.8E-03
2600	8.2E-04	1.1E-03	1.3E-03	8.3E-04	9.9E-04	8.3E-04	6.4E-04	-2.4E-03	-8.0E-04	1.1E-03	2.9E-03	4.8E-03	6.6E-03
2601	9.6E-04	1.1E-03	1.2E-03	9.4E-04	1.1E-03	9.5E-04	7.3E-04	-2.0E-05	1.2E-03	2.8E-03	4.4E-03	6.0E-03	7.6E-03
2602	3.5E-04	1.0E-03	1.2E-03	7.5E-04	7.3E-04	6.0E-04	6.0E-04	-7.5E-03	-5.5E-03	-3.2E-03	-1.0E-03	1.2E-03	3.4E-03
2603	4.1E-04	1.1E-03	1.3E-03	7.2E-04	8.4E-04	5.7E-04	5.7E-04	-4.7E-03	-2.9E-03	-7.8E-04	1.3E-03	3.4E-03	5.5E-03
2604	6.3E-04	1.0E-03	1.2E-03	8.2E-04	9.8E-04	6.3E-04	6.0E-04	-1.7E-03	-1.7E-04	1.6E-03	3.4E-03	5.2E-03	7.1E-03
2605	8.4E-04	9.8E-04	1.1E-03	9.2E-04	1.1E-03	7.7E-04	7.3E-04	2.2E-04	1.5E-03	3.1E-03	4.7E-03	6.3E-03	7.9E-03
2606	9.0E-04	1.1E-03	1.2E-03	1.0E-03	1.3E-03	9.2E-04	8.7E-04	1.2E-03	2.4E-03	4.1E-03	5.7E-03	7.4E-03	9.0E-03
2607	3.2E-04	9.1E-04	1.1E-03	6.8E-04	7.4E-04	5.3E-04	5.3E-04	-6.2E-03	-4.3E-03	-2.2E-03	-5.2E-05	2.1E-03	4.2E-03
2608	3.4E-04	9.8E-04	1.2E-03	7.2E-04	8.5E-04	5.4E-04	5.1E-04	-4.0E-03	-2.2E-03	-7.3E-05	2.0E-03	4.1E-03	6.2E-03
2609	4.7E-04	1.0E-03	1.2E-03	8.1E-04	9.7E-04	6.4E-04	6.1E-04	-1.2E-03	3.5E-04	2.2E-03	4.0E-03	5.8E-03	7.6E-03
2610	6.7E-04	9.6E-04	1.1E-03	9.0E-04	1.1E-03	7.7E-04	7.3E-04	3.1E-04	1.6E-03	3.2E-03	4.9E-03	6.5E-03	8.2E-03
2611	8.2E-04	9.6E-04	1.0E-03	1.0E-03	1.2E-03	9.1E-04	8.6E-04	1.7E-03	2.9E-03	4.4E-03	6.0E-03	7.6E-03	9.2E-03
2612	8.4E-04	1.1E-03	1.2E-03	1.1E-03	1.4E-03	1.1E-03	1.0E-03	2.0E-03	3.2E-03	5.0E-03	6.8E-03	8.5E-03	1.0E-02
2613	7.1E-04	1.0E-03	1.2E-03	1.2E-03	1.5E-03	1.2E-03	1.1E-03	-3.2E-03	-1.4E-03	1.1E-03	3.6E-03	6.1E-03	8.7E-03
2614	3.1E-04	8.8E-04	1.1E-03	7.1E-04	8.4E-04	5.4E-04	5.1E-04	-3.2E-03	-1.4E-03	6.4E-04	2.7E-03	4.8E-03	6.8E-03
2615	3.5E-04	9.5E-04	1.1E-03	8.0E-04	9.6E-04	6.5E-04	6.2E-04	-9.1E-04	6.6E-04	2.5E-03	4.4E-03	6.3E-03	8.2E-03
2616	5.3E-04	9.4E-04	1.1E-03	8.9E-04	1.1E-03	7.7E-04	7.3E-04	4.1E-04	1.7E-03	3.4E-03	5.1E-03	6.8E-03	8.5E-03
2617	6.9E-04	8.7E-04	1.0E-03	9.7E-04	1.2E-03	8.9E-04	8.4E-04	1.8E-03	2.9E-03	4.4E-03	5.9E-03	7.5E-03	9.0E-03
2618	8.0E-04	9.4E-04	1.0E-03	1.1E-03	1.3E-03	1.0E-03	9.7E-04	2.3E-03	3.5E-03	5.2E-03	6.9E-03	8.6E-03	1.0E-02
2619	7.7E-04	1.0E-03	1.2E-03	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-1.1E-03	5.1E-04	2.8E-03	5.1E-03	7.4E-03	9.7E-03
2620	6.1E-04	9.4E-04	1.1E-03	1.2E-03	1.5E-03	1.3E-03	1.2E-03	-5.8E-03	-4.3E-03	-2.0E-03	2.0E-04	2.4E-03	4.7E-03
2621	4.0E-04	9.1E-04	1.1E-03	8.8E-04	1.1E-03	7.7E-04	7.3E-04	6.5E-04	2.0E-03	3.7E-03	5.4E-03	7.2E-03	8.9E-03
2622	5.7E-04	8.7E-04	1.0E-03	9.6E-04	1.2E-03	8.8E-04	8.3E-04	2.0E-03	3.0E-03	4.5E-03	6.0E-03	7.5E-03	9.0E-03
2623	6.9E-04	8.1E-04	9.2E-04	1.0E-03	1.3E-03	9.9E-04	9.3E-04	2.7E-03	3.7E-03	5.3E-03	6.9E-03	8.4E-03	1.0E-02
2624	7.6E-04	9.2E-04	1.0E-03	1.1E-03	1.4E-03	1.1E-03	1.1E-03	1.0E-03	2.3E-03	4.2E-03	6.1E-03	8.0E-03	9.9E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2625	6.8E-04	9.6E-04	1.1E-03	1.2E-03	1.5E-03	1.2E-03	1.1E-03	-3.1E-03	-1.9E-03	-2.6E-05	1.9E-03	3.8E-03	5.7E-03
2626	5.4E-04	8.6E-04	1.0E-03	1.3E-03	1.5E-03	1.3E-03	1.2E-03	-1.0E-02	-9.0E-03	-7.1E-03	-5.2E-03	-3.3E-03	-1.4E-03
2627	5.7E-04	8.4E-04	1.1E-03	1.3E-03	1.5E-03	1.3E-03	1.3E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.8E-03
2628	4.4E-04	8.5E-04	1.0E-03	9.5E-04	1.2E-03	8.7E-04	8.2E-04	2.1E-03	3.1E-03	4.5E-03	6.0E-03	7.5E-03	8.9E-03
2629	6.0E-04	8.0E-04	9.4E-04	1.0E-03	1.2E-03	9.7E-04	9.2E-04	3.3E-03	4.2E-03	5.6E-03	7.0E-03	8.4E-03	9.9E-03
2630	6.9E-04	8.2E-04	9.1E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	3.0E-03	3.9E-03	5.4E-03	6.8E-03	8.3E-03	9.7E-03
2631	7.1E-04	9.1E-04	1.0E-03	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-9.4E-04	4.0E-05	1.7E-03	3.4E-03	5.0E-03	6.7E-03
2632	6.1E-04	9.0E-04	1.0E-03	1.2E-03	1.5E-03	1.2E-03	1.2E-03	-6.8E-03	-6.0E-03	-4.5E-03	-3.0E-03	-1.4E-03	1.1E-04
2633	5.1E-04	7.7E-04	1.0E-03	1.3E-03	1.5E-03	1.3E-03	1.2E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.2E-02	-9.8E-03	-8.0E-03
2634	5.6E-04	8.4E-04	1.1E-03	1.3E-03	1.5E-03	1.3E-03	1.2E-03	-2.2E-02	-2.1E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02
2635	4.8E-04	8.0E-04	9.5E-04	1.0E-03	1.2E-03	9.5E-04	8.9E-04	3.8E-03	4.5E-03	5.7E-03	6.9E-03	8.1E-03	9.3E-03
2636	6.2E-04	7.4E-04	8.9E-04	1.1E-03	1.3E-03	1.0E-03	9.7E-04	4.9E-03	5.3E-03	6.3E-03	7.3E-03	8.2E-03	9.2E-03
2637	6.7E-04	8.0E-04	9.2E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	1.2E-03	1.9E-03	3.4E-03	4.8E-03	6.2E-03	7.6E-03
2638	6.5E-04	8.8E-04	9.9E-04	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-4.9E-03	-4.3E-03	-3.0E-03	-1.7E-03	-3.3E-04	1.0E-03
2639	6.7E-04	1.0E-03	1.2E-03	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-1.3E-02	-1.2E-02	-1.1E-02	-9.2E-03	-7.8E-03	-6.4E-03
2640	7.1E-04	8.1E-04	9.7E-04	1.2E-03	1.3E-03	1.2E-03	1.2E-03	-2.0E-02	-1.9E-02	-1.7E-02	-1.6E-02	-1.4E-02	-1.2E-02
2641	7.7E-04	1.0E-03	1.0E-03	1.3E-03	1.5E-03	1.2E-03	1.1E-03	-2.5E-02	-2.3E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.3E-02
2642	5.0E-04	9.0E-04	1.1E-03	1.3E-03	1.5E-03	1.2E-03	1.1E-03	-2.5E-02	-2.2E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02
2643	6.2E-04	7.4E-04	8.9E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	3.1E-03	3.7E-03	5.0E-03	6.3E-03	7.5E-03	8.8E-03
2644	6.4E-04	8.0E-04	9.2E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	-3.8E-03	-3.3E-03	-2.0E-03	-8.2E-04	4.0E-04	1.6E-03
2645	7.0E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.1E-03	1.1E-03	-9.6E-03	-9.2E-03	-8.0E-03	-6.8E-03	-5.7E-03	-4.5E-03
2646	6.7E-04	9.2E-04	1.1E-03	1.2E-03	1.3E-03	1.2E-03	1.1E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.6E-03
2647	7.0E-04	7.9E-04	9.4E-04	1.2E-03	1.4E-03	1.2E-03	1.2E-03	-2.3E-02	-2.2E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02
2648	7.9E-04	9.6E-04	9.7E-04	1.2E-03	1.5E-03	1.3E-03	1.2E-03	-2.5E-02	-2.3E-02	-2.0E-02	-1.7E-02	-1.4E-02	-1.1E-02
2649	5.7E-04	1.1E-03	1.1E-03	1.3E-03	1.6E-03	1.5E-03	1.1E-03	-2.1E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03
2650	6.0E-04	7.8E-04	8.9E-04	1.1E-03	1.2E-03	1.1E-03	1.0E-03	-7.3E-03	-7.0E-03	-6.0E-03	-5.0E-03	-4.1E-03	-3.1E-03
2651	6.1E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.1E-03	1.0E-03	-1.5E-02	-1.4E-02	-1.2E-02	-1.1E-02	-9.5E-03	-8.0E-03
2652	6.2E-04	7.6E-04	9.0E-04	1.1E-03	1.3E-03	1.0E-03	9.8E-04	-2.1E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02
2653	6.9E-04	7.7E-04	1.0E-03	1.2E-03	1.5E-03	1.3E-03	1.2E-03	-2.6E-02	-2.4E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.2E-02
2654	7.2E-04	9.0E-04	1.0E-03	1.2E-03	1.5E-03	1.4E-03	1.3E-03	-2.5E-02	-2.3E-02	-2.0E-02	-1.7E-02	-1.4E-02	-1.0E-02
2655	5.8E-04	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.1E-03	-1.7E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.5E-03	-6.1E-03
2656	5.1E-04	8.9E-04	1.1E-03	1.2E-03	1.6E-03	1.7E-03	1.0E-03	-1.2E-02	-1.1E-02	-8.9E-03	-7.1E-03	-5.3E-03	-3.5E-03
2657	5.2E-04	8.7E-04	9.6E-04	1.1E-03	1.2E-03	9.6E-04	9.1E-04	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02
2658	5.5E-04	6.7E-04	8.8E-04	1.1E-03	1.2E-03	1.0E-03	9.8E-04	-2.2E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02
2659	6.7E-04	7.6E-04	9.7E-04	1.2E-03	1.5E-03	1.3E-03	1.3E-03	-2.7E-02	-2.5E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.2E-02
2660	6.7E-04	8.7E-04	9.6E-04	1.2E-03	1.4E-03	1.3E-03	1.2E-03	-2.3E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.0E-03
2661	5.8E-04	1.2E-03	1.1E-03	1.1E-03	1.5E-03	1.1E-03	9.9E-04	-1.3E-02	-1.1E-02	-9.4E-03	-7.4E-03	-5.5E-03	-3.5E-03
2662	6.7E-04	1.1E-03	1.2E-03	1.2E-03	1.9E-03	9.8E-04	9.2E-04	-8.6E-03	-7.7E-03	-6.2E-03	-4.6E-03	-3.1E-03	-1.6E-03
2663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2664	5.4E-04	6.1E-04	8.4E-04	1.1E-03	1.3E-03	1.1E-03	1.1E-03	-2.2E-02	-2.0E-02	-1.7E-02	-1.5E-02	-1.2E-02	-9.5E-03
2665	6.6E-04	7.5E-04	9.1E-04	1.2E-03	1.4E-03	1.3E-03	1.2E-03	-2.5E-02	-2.2E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2666	6.3E-04	9.0E-04	9.0E-04	1.2E-03	1.3E-03	1.2E-03	1.1E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.8E-03	-5.2E-03
2667	5.7E-04	1.1E-03	1.1E-03	1.1E-03	1.6E-03	9.4E-04	8.8E-04	-9.2E-03	-8.2E-03	-6.6E-03	-5.0E-03	-3.3E-03	-1.7E-03
2668	7.2E-04	1.0E-03	1.4E-03	1.4E-03	1.7E-03	1.1E-03	1.0E-03	-6.6E-03	-5.7E-03	-4.2E-03	-2.7E-03	-1.2E-03	3.1E-04
2669	7.1E-04	8.6E-04	1.8E-03	1.9E-03	2.1E-03	1.4E-03	1.3E-03	-9.4E-03	-7.8E-03	-5.5E-03	-3.3E-03	-1.0E-03	1.2E-03
2670	5.6E-04	6.3E-04	8.0E-04	1.0E-03	1.5E-03	1.1E-03	1.0E-03	-2.1E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03
2671	6.5E-04	7.6E-04	8.2E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	-2.0E-02	-1.7E-02	-1.5E-02	-1.2E-02	-9.0E-03	-6.2E-03
2672	5.9E-04	9.1E-04	9.2E-04	9.4E-04	1.5E-03	9.9E-04	9.2E-04	-1.1E-02	-1.0E-02	-8.4E-03	-6.5E-03	-4.7E-03	-2.8E-03
2673	5.6E-04	1.0E-03	1.1E-03	1.2E-03	1.8E-03	9.0E-04	8.0E-04	-5.9E-03	-5.1E-03	-3.8E-03	-2.5E-03	-1.2E-03	1.6E-04
2674	6.9E-04	9.7E-04	1.6E-03	1.6E-03	2.1E-03	1.1E-03	1.1E-03	-4.8E-03	-4.4E-03	-3.5E-03	-2.5E-03	-1.6E-03	-6.6E-04
2675	6.9E-04	8.2E-04	2.0E-03	2.1E-03	2.4E-03	1.5E-03	1.4E-03	-1.1E-02	-8.6E-03	-5.2E-03	-1.8E-03	1.5E-03	4.9E-03
2676	6.4E-04	7.6E-04	7.5E-04	9.7E-04	1.8E-03	9.2E-04	8.7E-04	-1.2E-02	-1.1E-02	-8.5E-03	-6.4E-03	-4.3E-03	-2.1E-03
2677	5.6E-04	9.7E-04	9.8E-04	1.0E-03	1.9E-03	9.2E-04	7.7E-04	-6.9E-03	-5.9E-03	-4.4E-03	-2.9E-03	-1.4E-03	1.3E-04
2678	5.6E-04	1.1E-03	1.3E-03	1.4E-03	2.2E-03	1.1E-03	1.0E-03	-4.2E-03	-3.3E-03	-2.0E-03	-7.5E-04	5.4E-04	1.8E-03
2679	6.5E-04	9.7E-04	1.7E-03	1.9E-03	2.6E-03	1.3E-03	1.3E-03	-6.9E-03	-5.6E-03	-3.6E-03	-1.7E-03	2.4E-04	2.2E-03
2680	6.5E-04	8.6E-04	2.0E-03	2.2E-03	2.9E-03	1.6E-03	1.6E-03	-1.4E-02	-1.0E-02	-5.5E-03	-7.8E-04	3.9E-03	8.6E-03
2681	5.8E-04	8.2E-04	8.8E-04	9.3E-04	2.3E-03	7.8E-04	7.1E-04	-7.6E-03	-6.5E-03	-5.0E-03	-3.5E-03	-1.9E-03	-4.1E-04
2682	5.1E-04	9.9E-04	1.2E-03	1.2E-03	2.3E-03	9.2E-04	8.7E-04	-4.0E-03	-3.2E-03	-2.0E-03	-7.8E-04	4.5E-04	1.7E-03
2683	5.5E-04	1.0E-03	1.5E-03	1.6E-03	2.1E-03	1.2E-03	1.1E-03	-2.6E-03	-2.4E-03	-1.6E-03	-7.6E-04	4.5E-05	8.5E-04
2684	5.9E-04	9.1E-04	1.8E-03	2.0E-03	2.2E-03	1.5E-03	1.4E-03	-9.5E-03	-7.1E-03	-4.0E-03	-8.8E-04	2.2E-03	5.4E-03
2685	6.2E-04	9.0E-04	2.1E-03	2.3E-03	2.5E-03	1.8E-03	1.7E-03	-1.7E-02	-1.2E-02	-6.4E-03	-7.8E-04	4.9E-03	1.1E-02
2686	4.4E-04	8.9E-04	1.3E-03	1.4E-03	1.5E-03	1.0E-03	9.8E-04	-2.7E-03	-1.9E-03	-7.2E-04	5.1E-04	1.7E-03	3.0E-03
2687	4.9E-04	9.1E-04	1.6E-03	1.7E-03	1.9E-03	1.3E-03	1.2E-03	-5.3E-03	-4.1E-03	-2.3E-03	-4.3E-04	1.4E-03	3.2E-03
2688	3.8E-04	8.2E-04	1.7E-03	2.0E-03	2.1E-03	1.6E-03	1.5E-03	-1.2E-02	-8.9E-03	-4.5E-03	-2.2E-04	4.1E-03	8.4E-03
2689	4.6E-04	9.1E-04	1.9E-03	2.3E-03	2.4E-03	2.8E-03	1.7E-03	-1.9E-02	-1.4E-02	-8.2E-03	-2.2E-03	3.7E-03	9.6E-03
2690	4.9E-04	1.0E-03	2.1E-03	2.5E-03	3.0E-03	3.0E-03	2.2E-03	-1.8E-02	-1.3E-02	-7.5E-03	-1.4E-03	4.6E-03	1.1E-02
2691	3.4E-04	7.4E-04	1.6E-03	1.8E-03	1.9E-03	1.8E-03	1.3E-03	-8.4E-03	-6.1E-03	-3.2E-03	-1.6E-04	2.8E-03	5.8E-03
2692	3.7E-04	8.4E-04	1.8E-03	2.0E-03	2.2E-03	2.6E-03	1.6E-03	-1.5E-02	-1.1E-02	-5.6E-03	-3.1E-04	4.9E-03	1.0E-02
2693	4.4E-04	9.3E-04	1.9E-03	2.3E-03	2.7E-03	2.5E-03	1.9E-03	-2.0E-02	-1.5E-02	-8.9E-03	-2.9E-03	3.1E-03	9.1E-03
2694	4.8E-04	1.0E-03	2.1E-03	2.6E-03	3.4E-03	3.4E-03	2.2E-03	-1.7E-02	-1.2E-02	-5.7E-03	4.3E-04	6.5E-03	1.3E-02
2695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2696	4.3E-04	9.6E-04	2.0E-03	2.4E-03	2.8E-03	2.9E-03	1.9E-03	-2.0E-02	-1.5E-02	-8.6E-03	-2.5E-03	3.6E-03	9.7E-03
2697	4.6E-04	1.0E-03	2.1E-03	2.6E-03	3.1E-03	3.2E-03	2.4E-03	-1.3E-02	-8.4E-03	-2.6E-03	3.3E-03	9.2E-03	1.5E-02
2698	4.3E-04	1.1E-03	2.1E-03	2.8E-03	4.3E-03	4.6E-03	3.0E-03	-6.0E-04	2.4E-03	6.7E-03	1.1E-02	1.5E-02	2.0E-02
2699	4.4E-04	1.0E-03	2.0E-03	2.7E-03	3.4E-03	3.4E-03	2.5E-03	-8.1E-03	-3.9E-03	1.4E-03	6.7E-03	1.2E-02	1.7E-02
2700	5.1E-04	1.1E-03	2.1E-03	2.8E-03	4.9E-03	5.5E-03	3.2E-03	3.4E-03	5.7E-03	9.2E-03	1.3E-02	1.6E-02	2.0E-02
2701	5.9E-04	1.1E-03	2.0E-03	2.9E-03	7.0E-03	8.1E-03	3.7E-03	9.5E-03	9.6E-03	1.1E-02	1.2E-02	1.4E-02	1.5E-02
2702	6.3E-04	2.8E-03	4.4E-03	4.3E-03	3.7E-03	3.3E-03	1.8E-03	1.7E-02	1.7E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02
2703	6.4E-04	2.7E-03	4.5E-03	3.7E-03	3.2E-03	2.3E-03	1.9E-03	2.3E-02	2.3E-02	2.3E-02	2.4E-02	2.5E-02	2.6E-02
2704	6.0E-04	2.4E-03	4.2E-03	4.6E-03	3.1E-03	2.2E-03	1.8E-03	2.3E-02	2.4E-02	2.6E-02	2.7E-02	2.9E-02	3.1E-02
2705	6.0E-04	2.0E-03	3.8E-03	5.0E-03	3.4E-03	2.1E-03	1.8E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.1E-02	3.6E-02
2706	5.5E-04	2.0E-03	3.2E-03	4.8E-03	4.0E-03	2.9E-03	2.0E-03	1.1E-02	1.5E-02	2.1E-02	2.7E-02	3.3E-02	3.9E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2707	5.4E-04	1.0E-03	2.0E-03	2.8E-03	5.5E-03	6.2E-03	3.2E-03	6.3E-03	7.6E-03	1.0E-02	1.3E-02	1.5E-02	1.8E-02
2708	5.9E-04	1.0E-03	1.9E-03	2.9E-03	6.6E-03	7.4E-03	3.3E-03	9.1E-03	9.0E-03	1.0E-02	1.1E-02	1.2E-02	1.3E-02
2709	6.0E-04	1.2E-03	2.0E-03	2.9E-03	5.2E-03	5.4E-03	2.5E-03	-3.0E-03	-2.4E-04	3.6E-03	7.5E-03	1.1E-02	1.5E-02
2710	5.5E-04	1.2E-03	2.2E-03	2.9E-03	7.4E-03	8.5E-03	3.2E-03	-1.6E-03	1.1E-03	4.9E-03	8.6E-03	1.2E-02	1.6E-02
2711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2713	6.1E-04	2.6E-03	4.2E-03	4.0E-03	3.4E-03	3.4E-03	1.7E-03	1.6E-02	1.7E-02	1.8E-02	2.0E-02	2.2E-02	2.3E-02
2714	6.2E-04	2.5E-03	4.3E-03	3.6E-03	3.0E-03	2.7E-03	1.8E-03	2.2E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02
2715	5.8E-04	2.3E-03	3.9E-03	4.2E-03	3.0E-03	2.0E-03	1.7E-03	2.3E-02	2.3E-02	2.5E-02	2.6E-02	2.8E-02	2.9E-02
2716	5.8E-04	1.9E-03	3.6E-03	4.6E-03	3.2E-03	2.8E-03	1.7E-03	1.4E-02	1.7E-02	2.1E-02	2.6E-02	3.0E-02	3.4E-02
2717	5.6E-04	1.2E-03	2.1E-03	2.8E-03	5.5E-03	5.0E-03	2.4E-03	-3.1E-03	-3.7E-04	3.5E-03	7.3E-03	1.1E-02	1.5E-02
2718	5.4E-04	1.2E-03	2.2E-03	2.8E-03	6.6E-03	7.3E-03	3.0E-03	-5.1E-04	2.2E-03	5.8E-03	9.4E-03	1.3E-02	1.7E-02
2719	5.6E-04	1.2E-03	2.3E-03	2.8E-03	5.1E-03	6.1E-03	2.5E-03	-1.8E-03	3.6E-04	3.6E-03	6.8E-03	1.0E-02	1.3E-02
2720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2725	3.8E-04	1.3E-03	2.9E-03	3.9E-03	4.3E-03	5.4E-03	1.9E-03	2.0E-02	1.5E-02	1.2E-02	8.2E-03	4.6E-03	1.1E-03
2726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2727	4.5E-04	1.7E-03	3.1E-03	4.3E-03	3.8E-03	5.2E-03	1.8E-03	7.7E-03	1.0E-02	1.4E-02	1.8E-02	2.1E-02	2.5E-02
2728	5.1E-04	2.0E-03	3.2E-03	4.3E-03	3.6E-03	4.3E-03	1.7E-03	1.1E-02	1.2E-02	1.4E-02	1.5E-02	1.7E-02	1.9E-02
2729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2730	5.9E-04	2.4E-03	4.1E-03	3.4E-03	2.9E-03	2.8E-03	1.8E-03	2.0E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.3E-02
2731	5.5E-04	2.2E-03	3.7E-03	3.9E-03	2.8E-03	2.7E-03	1.6E-03	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.7E-02	2.8E-02
2732	5.5E-04	1.8E-03	3.4E-03	4.4E-03	3.0E-03	2.8E-03	1.6E-03	1.6E-02	1.8E-02	2.2E-02	2.5E-02	2.8E-02	3.2E-02
2733	5.4E-04	1.2E-03	2.3E-03	2.7E-03	4.9E-03	5.9E-03	2.2E-03	-2.3E-03	-4.4E-04	2.5E-03	5.5E-03	8.4E-03	1.1E-02
2734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2743	5.6E-04	2.3E-03	3.8E-03	3.5E-03	3.1E-03	3.2E-03	1.6E-03	1.5E-02	1.5E-02	1.7E-02	1.9E-02	2.0E-02	2.2E-02
2744	5.7E-04	2.3E-03	3.9E-03	3.3E-03	2.7E-03	2.7E-03	1.7E-03	2.0E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02
2745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2751	4.2E-04	1.7E-03	2.9E-03	4.0E-03	3.4E-03	3.9E-03	1.7E-03	7.4E-03	9.9E-03	1.3E-02	1.7E-02	2.1E-02	2.4E-02
2752	4.9E-04	1.9E-03	3.0E-03	3.9E-03	3.2E-03	3.6E-03	1.5E-03	9.8E-03	1.1E-02	1.3E-02	1.5E-02	1.7E-02	1.9E-02
2753	5.5E-04	2.2E-03	3.6E-03	3.3E-03	2.9E-03	2.9E-03	1.6E-03	1.4E-02	1.5E-02	1.6E-02	1.8E-02	2.0E-02	2.1E-02
2754	3.9E-04	1.1E-03	1.3E-03	1.2E-03	1.3E-03	1.0E-03	9.9E-04	-1.7E-02	-1.4E-02	-1.2E-02	-9.2E-03	-6.7E-03	-4.2E-03
2755	3.4E-04	8.5E-04	1.1E-03	9.7E-04	9.0E-04	8.1E-04	8.1E-04	-1.4E-02	-1.2E-02	-9.2E-03	-6.6E-03	-4.0E-03	-1.5E-03
2756	2.8E-04	7.9E-04	9.8E-04	8.0E-04	7.3E-04	6.5E-04	6.4E-04	-1.1E-02	-8.7E-03	-6.2E-03	-3.8E-03	-1.3E-03	1.2E-03
2757	5.1E-04	1.0E-03	1.1E-03	1.0E-03	8.5E-04	7.6E-04	7.6E-04	-4.2E-03	-5.7E-03	-6.9E-03	-8.1E-03	-9.4E-03	-1.1E-02
2758	5.2E-04	9.0E-04	9.8E-04	1.1E-03	9.7E-04	8.8E-04	8.8E-04	-5.9E-03	-7.0E-03	-7.9E-03	-8.8E-03	-9.8E-03	-1.1E-02
2759	4.5E-04	7.9E-04	8.6E-04	1.1E-03	1.0E-03	8.9E-04	8.9E-04	-6.7E-03	-7.4E-03	-8.0E-03	-8.6E-03	-9.1E-03	-9.7E-03
2760	4.8E-04	8.2E-04	1.0E-03	1.2E-03	1.0E-03	9.5E-04	9.5E-04	-1.1E-02	-1.0E-02	-9.9E-03	-9.5E-03	-9.1E-03	-8.7E-03
2761	4.1E-04	7.2E-04	8.8E-04	1.1E-03	1.2E-03	9.2E-04	9.2E-04	-1.1E-02	-1.1E-02	-1.0E-02	-9.5E-03	-8.9E-03	-8.3E-03
2762	4.5E-04	1.0E-03	1.2E-03	1.2E-03	1.1E-03	9.8E-04	9.7E-04	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.2E-03	-6.1E-03
2763	3.9E-04	8.0E-04	1.0E-03	1.2E-03	1.3E-03	9.5E-04	9.5E-04	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.1E-03	-6.1E-03
2764	4.1E-04	1.2E-03	1.4E-03	1.3E-03	1.3E-03	1.0E-03	1.0E-03	-1.7E-02	-1.5E-02	-1.2E-02	-9.9E-03	-7.3E-03	-4.8E-03
2765	3.6E-04	9.4E-04	1.2E-03	1.2E-03	1.3E-03	1.0E-03	9.9E-04	-1.6E-02	-1.4E-02	-1.2E-02	-9.8E-03	-7.5E-03	-5.2E-03
2766	1.3E-03	1.6E-03	8.3E-04	6.8E-04	8.8E-04	1.2E-03	6.6E-04	-1.3E-03	-9.1E-04	-8.3E-05	7.4E-04	1.6E-03	2.4E-03
2767	1.1E-03	1.4E-03	7.0E-04	7.8E-04	6.8E-04	7.6E-04	6.1E-04	-3.2E-03	-4.2E-03	-4.9E-03	-5.6E-03	-6.3E-03	-7.0E-03
2768	8.4E-04	1.1E-03	9.8E-04	8.3E-04	7.5E-04	6.8E-04	6.8E-04	-5.7E-03	-6.6E-03	-7.2E-03	-7.8E-03	-8.4E-03	-8.9E-03
2769	5.9E-04	1.1E-03	1.1E-03	9.4E-04	7.8E-04	7.1E-04	7.1E-04	-5.1E-03	-6.3E-03	-7.1E-03	-8.0E-03	-8.9E-03	-9.8E-03
2770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2772	1.3E-03	1.7E-03	1.6E-03	8.4E-04	9.5E-04	7.8E-04	7.3E-04	-1.1E-02	-1.0E-02	-9.3E-03	-8.5E-03	-7.6E-03	-6.7E-03
2773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2774	1.9E-03	2.2E-03	1.1E-03	7.9E-04	9.4E-04	8.5E-04	5.4E-04	-1.3E-02	-1.2E-02	-1.1E-02	-9.6E-03	-8.4E-03	-7.2E-03
2775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2776	1.9E-03	2.3E-03	1.3E-03	7.5E-04	9.3E-04	9.2E-04	4.9E-04	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.3E-02	-1.2E-02
2777	2.1E-03	2.5E-03	1.3E-03	7.9E-04	1.0E-03	8.0E-04	5.2E-04	-1.6E-02	-1.6E-02	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02
2778	1.2E-03	1.6E-03	1.2E-03	6.8E-04	7.6E-04	1.0E-03	4.5E-04	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02
2779	1.7E-03	2.1E-03	1.3E-03	7.1E-04	9.0E-04	9.8E-04	4.8E-04	-1.5E-02	-1.6E-02	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02
2780	7.9E-04	1.2E-03	1.1E-03	6.8E-04	7.6E-04	1.1E-03	5.2E-04	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02
2781	1.2E-03	1.7E-03	1.3E-03	6.9E-04	8.8E-04	1.1E-03	5.3E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02
2782	7.5E-04	8.6E-04	8.6E-04	7.1E-04	7.7E-04	1.1E-03	5.8E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02
2783	8.1E-04	1.2E-03	1.1E-03	7.4E-04	8.5E-04	1.1E-03	6.0E-04	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.3E-02
2784	8.0E-04	8.7E-04	9.4E-04	6.9E-04	7.1E-04	9.4E-04	5.9E-04	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
2785	8.9E-04	9.6E-04	1.0E-03	7.3E-04	7.9E-04	1.1E-03	6.1E-04	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02
2786	1.0E-03	1.1E-03	1.1E-03	7.7E-04	8.4E-04	1.2E-03	6.5E-04	-9.9E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02
2787	7.9E-04	8.6E-04	1.0E-03	6.9E-04	6.9E-04	8.9E-04	5.9E-04	-8.7E-03	-8.9E-03	-8.7E-03	-8.5E-03	-8.3E-03	-8.2E-03
2788	9.0E-04	9.7E-04	1.1E-03	7.2E-04	7.9E-04	1.1E-03	6.2E-04	-8.6E-03	-8.6E-03	-8.3E-03	-8.1E-03	-7.8E-03	-7.5E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2789	1.1E-03	1.1E-03	1.3E-03	7.7E-04	8.6E-04	1.2E-03	6.7E-04	-8.7E-03	-8.7E-03	-8.3E-03	-8.0E-03	-7.6E-03	-7.2E-03
2790	7.0E-04	8.5E-04	9.7E-04	6.6E-04	7.1E-04	8.4E-04	5.9E-04	-6.4E-03	-6.3E-03	-5.9E-03	-5.4E-03	-4.9E-03	-4.5E-03
2791	8.0E-04	9.4E-04	1.1E-03	6.9E-04	7.7E-04	1.0E-03	6.2E-04	-6.4E-03	-6.2E-03	-5.7E-03	-5.1E-03	-4.6E-03	-4.0E-03
2792	9.4E-04	1.1E-03	1.2E-03	7.4E-04	8.8E-04	1.2E-03	6.5E-04	-6.5E-03	-6.2E-03	-5.5E-03	-4.9E-03	-4.2E-03	-3.5E-03
2793	8.1E-04	1.1E-03	8.3E-04	6.1E-04	7.1E-04	7.6E-04	6.1E-04	-3.2E-03	-2.9E-03	-2.2E-03	-1.5E-03	-8.1E-04	-1.2E-04
2794	9.4E-04	1.2E-03	9.0E-04	6.5E-04	7.5E-04	9.8E-04	6.3E-04	-3.2E-03	-2.8E-03	-2.0E-03	-1.1E-03	-2.8E-04	5.5E-04
2795	9.5E-04	1.2E-03	6.5E-04	6.4E-04	6.8E-04	6.7E-04	5.9E-04	-1.7E-03	-1.1E-03	-1.2E-04	8.5E-04	1.8E-03	2.8E-03
2796	1.1E-03	1.4E-03	6.9E-04	6.7E-04	7.1E-04	9.1E-04	6.2E-04	-1.8E-03	-1.1E-03	-2.7E-05	1.1E-03	2.2E-03	3.3E-03
2797	1.0E-03	1.3E-03	5.8E-04	7.1E-04	6.2E-04	5.8E-04	5.4E-04	-3.3E-03	-2.8E-03	-2.0E-03	-1.1E-03	-3.0E-04	5.4E-04
2798	9.6E-04	1.2E-03	5.9E-04	7.6E-04	6.6E-04	6.0E-04	6.0E-04	-2.7E-03	-3.4E-03	-3.8E-03	-4.3E-03	-4.7E-03	-5.1E-03
2799	7.8E-04	1.1E-03	7.5E-04	8.0E-04	7.2E-04	6.5E-04	6.5E-04	-3.2E-03	-4.2E-03	-4.9E-03	-5.6E-03	-6.3E-03	-7.0E-03
2800	5.7E-04	8.5E-04	9.2E-04	9.0E-04	7.4E-04	6.7E-04	6.7E-04	-4.5E-03	-5.4E-03	-6.1E-03	-6.8E-03	-7.5E-03	-8.2E-03
2801	4.5E-04	9.3E-04	1.0E-03	9.9E-04	8.1E-04	7.3E-04	7.3E-04	-3.9E-03	-5.3E-03	-6.4E-03	-7.6E-03	-8.7E-03	-9.9E-03
2802	1.1E-03	1.4E-03	1.6E-03	2.2E-03	2.1E-03	1.9E-03	1.9E-03	-1.6E-02	-1.3E-02	-8.7E-03	-4.7E-03	-7.1E-04	3.3E-03
2803	9.5E-04	1.1E-03	1.6E-03	2.2E-03	2.1E-03	1.9E-03	1.9E-03	-1.7E-02	-1.4E-02	-1.0E-02	-6.7E-03	-3.0E-03	7.0E-04
2804	1.4E-03	1.6E-03	1.6E-03	2.1E-03	2.1E-03	1.9E-03	1.9E-03	-1.4E-02	-1.0E-02	-6.3E-03	-2.4E-03	1.6E-03	5.5E-03
2805	1.8E-03	2.0E-03	2.0E-03	1.8E-03	1.9E-03	1.7E-03	1.6E-03	-1.4E-02	-1.0E-02	-5.2E-03	-3.8E-04	4.4E-03	9.3E-03
2806	1.6E-03	1.8E-03	1.6E-03	2.0E-03	2.1E-03	1.9E-03	1.8E-03	-1.5E-02	-1.1E-02	-5.5E-03	-4.5E-04	4.6E-03	9.6E-03
2807	1.6E-03	2.3E-03	2.4E-03	1.4E-03	1.4E-03	1.2E-03	1.2E-03	-1.7E-02	-1.3E-02	-8.7E-03	-4.2E-03	3.6E-04	4.9E-03
2808	2.0E-03	2.2E-03	2.3E-03	1.7E-03	1.7E-03	1.5E-03	1.4E-03	-1.7E-02	-1.3E-02	-8.3E-03	-3.5E-03	1.2E-03	5.9E-03
2809	8.3E-04	1.9E-03	1.9E-03	1.1E-03	1.3E-03	9.1E-04	8.5E-04	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.8E-03	-5.2E-03
2810	1.1E-03	1.6E-03	1.6E-03	9.0E-04	1.2E-03	8.5E-04	8.0E-04	-1.3E-02	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.3E-03
2811	1.5E-03	1.9E-03	1.2E-03	8.0E-04	1.2E-03	9.7E-04	6.4E-04	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
2812	1.3E-03	1.8E-03	1.1E-03	7.0E-04	7.1E-04	1.0E-03	4.5E-04	-1.3E-02	-1.2E-02	-1.1E-02	-9.9E-03	-8.9E-03	-7.8E-03
2813	5.7E-04	7.2E-04	7.4E-04	5.6E-04	6.4E-04	5.7E-04	5.4E-04	-5.1E-03	-5.0E-03	-4.5E-03	-4.1E-03	-3.7E-03	-3.3E-03
2814	6.3E-04	8.0E-04	8.1E-04	5.9E-04	6.8E-04	6.0E-04	5.7E-04	-4.9E-03	-4.8E-03	-4.3E-03	-3.8E-03	-3.3E-03	-2.8E-03
2815	5.6E-04	7.8E-04	5.8E-04	5.3E-04	5.9E-04	5.3E-04	5.0E-04	-2.6E-03	-2.3E-03	-1.7E-03	-1.1E-03	-4.9E-04	1.0E-04
2816	6.5E-04	8.8E-04	6.2E-04	5.5E-04	6.2E-04	5.6E-04	5.3E-04	-2.3E-03	-2.0E-03	-1.3E-03	-6.9E-04	-4.2E-05	6.0E-04
2817	7.4E-04	9.8E-04	6.5E-04	5.7E-04	6.5E-04	5.9E-04	5.5E-04	-2.0E-03	-1.7E-03	-1.0E-03	-3.3E-04	3.3E-04	1.0E-03
2818	6.5E-04	8.7E-04	4.7E-04	5.8E-04	5.4E-04	5.0E-04	4.7E-04	-8.1E-04	-7.7E-04	-4.3E-04	-9.1E-05	2.5E-04	5.9E-04
2819	7.2E-04	9.5E-04	4.8E-04	6.1E-04	5.7E-04	5.2E-04	4.9E-04	-1.4E-03	-1.1E-03	-5.0E-04	9.2E-05	6.8E-04	1.3E-03
2820	8.2E-04	1.1E-03	5.1E-04	6.4E-04	6.0E-04	5.5E-04	5.2E-04	-2.0E-03	-1.4E-03	-5.4E-04	3.4E-04	1.2E-03	2.1E-03
2821	6.9E-04	9.1E-04	5.0E-04	6.4E-04	5.8E-04	4.8E-04	4.7E-04	-3.1E-03	-2.6E-03	-1.8E-03	-9.7E-04	-1.6E-04	6.5E-04
2822	7.8E-04	1.0E-03	5.2E-04	6.7E-04	5.6E-04	5.0E-04	5.0E-04	-3.5E-03	-3.0E-03	-2.2E-03	-1.3E-03	-5.2E-04	3.1E-04
2823	8.8E-04	1.1E-03	5.4E-04	7.0E-04	5.9E-04	5.3E-04	5.3E-04	-3.8E-03	-3.4E-03	-2.6E-03	-1.8E-03	-1.0E-03	-2.5E-04
2824	7.1E-04	9.5E-04	5.2E-04	6.7E-04	6.9E-04	5.3E-04	5.3E-04	-3.7E-03	-3.4E-03	-2.9E-03	-2.4E-03	-1.8E-03	-1.3E-03
2825	7.8E-04	1.0E-03	5.6E-04	7.1E-04	6.2E-04	5.6E-04	5.6E-04	-3.5E-03	-3.4E-03	-3.1E-03	-2.8E-03	-2.4E-03	-2.1E-03
2826	8.4E-04	1.1E-03	5.9E-04	7.4E-04	6.6E-04	6.0E-04	5.9E-04	-2.3E-03	-3.0E-03	-3.4E-03	-3.8E-03	-4.2E-03	-4.6E-03
2827	6.6E-04	9.0E-04	5.8E-04	7.0E-04	8.0E-04	5.6E-04	5.6E-04	-1.8E-03	-2.2E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.2E-03
2828	7.0E-04	9.5E-04	6.2E-04	7.6E-04	7.4E-04	6.0E-04	6.0E-04	-3.3E-04	-1.4E-03	-2.3E-03	-3.2E-03	-4.1E-03	-4.9E-03
2829	7.1E-04	9.8E-04	6.6E-04	8.1E-04	7.0E-04	6.3E-04	6.3E-04	-1.3E-03	-2.4E-03	-3.4E-03	-4.3E-03	-5.2E-03	-6.1E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2830	5.6E-04	8.0E-04	6.3E-04	7.8E-04	9.0E-04	5.7E-04	5.7E-04	8.3E-04	-1.7E-04	-1.0E-03	-1.8E-03	-2.7E-03	-3.5E-03
2831	5.7E-04	8.1E-04	6.7E-04	8.4E-04	8.7E-04	6.1E-04	6.1E-04	-1.2E-03	-2.1E-03	-2.8E-03	-3.6E-03	-4.3E-03	-5.1E-03
2832	5.3E-04	7.8E-04	7.6E-04	8.9E-04	7.7E-04	6.3E-04	6.3E-04	-3.6E-03	-4.4E-03	-4.9E-03	-5.5E-03	-6.1E-03	-6.6E-03
2833	4.5E-04	6.7E-04	6.7E-04	8.4E-04	9.5E-04	6.1E-04	6.0E-04	-1.5E-03	-2.2E-03	-2.8E-03	-3.4E-03	-3.9E-03	-4.5E-03
2834	4.5E-04	6.8E-04	7.4E-04	9.2E-04	9.9E-04	6.7E-04	6.7E-04	-2.9E-03	-3.8E-03	-4.5E-03	-5.3E-03	-6.0E-03	-6.8E-03
2835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2836	3.7E-04	5.9E-04	7.1E-04	9.1E-04	1.0E-03	6.9E-04	6.9E-04	-2.0E-03	-3.2E-03	-4.2E-03	-5.2E-03	-6.2E-03	-7.2E-03
2837	3.5E-04	7.1E-04	7.8E-04	9.7E-04	1.1E-03	7.5E-04	7.4E-04	-2.3E-03	-3.8E-03	-5.2E-03	-6.5E-03	-7.8E-03	-9.2E-03
2838	3.7E-04	7.8E-04	8.5E-04	1.0E-03	1.0E-03	8.0E-04	7.9E-04	-2.5E-03	-4.2E-03	-5.7E-03	-7.2E-03	-8.7E-03	-1.0E-02
2839	3.3E-04	6.6E-04	7.6E-04	9.6E-04	1.0E-03	7.6E-04	7.6E-04	-1.5E-03	-3.1E-03	-4.6E-03	-6.1E-03	-7.5E-03	-9.0E-03
2840	3.4E-04	7.2E-04	8.0E-04	1.0E-03	1.1E-03	8.1E-04	8.1E-04	-2.9E-03	-4.4E-03	-5.7E-03	-7.0E-03	-8.3E-03	-9.6E-03
2841	3.9E-04	7.1E-04	8.2E-04	1.0E-03	1.2E-03	8.6E-04	8.5E-04	-5.6E-03	-6.5E-03	-7.2E-03	-7.9E-03	-8.6E-03	-9.3E-03
2842	3.1E-04	6.5E-04	7.8E-04	9.9E-04	9.6E-04	8.0E-04	7.9E-04	-3.8E-03	-5.0E-03	-5.9E-03	-6.8E-03	-7.7E-03	-8.6E-03
2843	3.5E-04	6.4E-04	8.2E-04	1.0E-03	1.1E-03	8.4E-04	8.3E-04	-6.4E-03	-7.0E-03	-7.3E-03	-7.6E-03	-8.0E-03	-8.3E-03
2844	3.7E-04	6.7E-04	8.6E-04	1.1E-03	1.2E-03	8.7E-04	8.7E-04	-9.3E-03	-9.4E-03	-9.2E-03	-9.1E-03	-8.9E-03	-8.8E-03
2845	3.1E-04	5.8E-04	8.3E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-7.3E-03	-7.5E-03	-7.6E-03	-7.6E-03	-7.7E-03	-7.7E-03
2846	3.3E-04	6.1E-04	8.6E-04	1.1E-03	1.0E-03	8.5E-04	8.5E-04	-1.0E-02	-9.9E-03	-9.6E-03	-9.3E-03	-9.0E-03	-8.8E-03
2847	3.5E-04	6.0E-04	9.0E-04	1.1E-03	1.2E-03	9.1E-04	9.0E-04	-1.4E-02	-1.3E-02	-1.1E-02	-1.0E-02	-8.8E-03	-7.5E-03
2848	3.2E-04	5.6E-04	8.6E-04	1.1E-03	9.5E-04	8.6E-04	8.5E-04	-1.0E-02	-1.0E-02	-9.7E-03	-9.5E-03	-9.2E-03	-8.9E-03
2849	3.3E-04	5.6E-04	9.0E-04	1.1E-03	9.9E-04	9.0E-04	9.0E-04	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.0E-03	-8.0E-03
2850	3.5E-04	6.4E-04	9.3E-04	1.2E-03	1.1E-03	9.4E-04	9.4E-04	-1.5E-02	-1.4E-02	-1.2E-02	-9.8E-03	-7.9E-03	-6.0E-03
2851	3.5E-04	5.3E-04	9.1E-04	1.1E-03	1.0E-03	9.1E-04	9.1E-04	-1.5E-02	-1.3E-02	-1.1E-02	-9.4E-03	-7.7E-03	-5.9E-03
2852	3.6E-04	7.7E-04	9.7E-04	1.1E-03	1.0E-03	9.4E-04	9.4E-04	-1.6E-02	-1.4E-02	-1.1E-02	-8.9E-03	-6.6E-03	-4.2E-03
2853	3.5E-04	6.4E-04	9.1E-04	1.1E-03	9.8E-04	8.9E-04	8.9E-04	-1.5E-02	-1.3E-02	-1.1E-02	-8.5E-03	-6.2E-03	-3.9E-03
2854	6.7E-04	1.3E-03	1.8E-03	1.8E-03	1.1E-03	9.4E-04	8.9E-04	-4.2E-03	-2.2E-03	3.6E-04	2.9E-03	5.4E-03	7.9E-03
2855	9.9E-04	1.3E-03	1.7E-03	2.3E-03	1.4E-03	1.1E-03	1.0E-03	-6.4E-03	-4.2E-03	-1.5E-03	1.3E-03	4.0E-03	6.8E-03
2856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2857	8.5E-04	1.2E-03	1.8E-03	1.7E-03	1.3E-03	1.1E-03	1.1E-03	-5.3E-03	-4.6E-03	-3.5E-03	-2.3E-03	-1.2E-03	-3.6E-05
2858	7.0E-04	1.3E-03	1.9E-03	1.7E-03	1.1E-03	9.6E-04	9.0E-04	-4.2E-03	-2.9E-03	-1.1E-03	7.2E-04	2.5E-03	4.4E-03
2859	1.0E-03	1.4E-03	2.0E-03	2.0E-03	1.3E-03	1.0E-03	9.5E-04	-4.6E-03	-2.8E-03	-4.8E-04	1.8E-03	4.2E-03	6.5E-03
2860	7.7E-04	1.0E-03	1.6E-03	1.9E-03	1.7E-03	1.5E-03	1.5E-03	-1.2E-02	-1.1E-02	-9.1E-03	-7.6E-03	-6.1E-03	-4.6E-03
2861	7.6E-04	9.7E-04	1.7E-03	1.8E-03	1.5E-03	1.3E-03	1.3E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.1E-03	-8.1E-03	-7.2E-03
2862	7.3E-04	1.2E-03	1.9E-03	1.7E-03	1.3E-03	1.1E-03	1.1E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.1E-03	-8.2E-03	-7.2E-03
2863	1.1E-03	1.5E-03	2.1E-03	1.9E-03	1.2E-03	1.0E-03	9.7E-04	-8.0E-03	-7.9E-03	-7.2E-03	-6.5E-03	-5.8E-03	-5.1E-03
2864	1.2E-03	1.4E-03	1.6E-03	2.0E-03	1.9E-03	1.7E-03	1.7E-03	-1.4E-02	-1.1E-02	-8.7E-03	-5.9E-03	-3.2E-03	-4.9E-04
2865	8.7E-04	1.1E-03	1.6E-03	2.0E-03	1.9E-03	1.7E-03	1.7E-03	-1.4E-02	-1.2E-02	-1.0E-02	-8.1E-03	-5.9E-03	-3.7E-03
2866	8.3E-04	9.4E-04	1.6E-03	2.0E-03	1.8E-03	1.6E-03	1.6E-03	-1.5E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.8E-03	-7.2E-03
2867	7.5E-04	9.7E-04	1.8E-03	1.9E-03	1.6E-03	1.4E-03	1.4E-03	-1.6E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02
2868	1.9E-03	2.0E-03	1.7E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.1E-02	-7.2E-03	-3.8E-03	-4.6E-04	2.9E-03
2869	1.3E-03	1.5E-03	1.6E-03	2.1E-03	2.0E-03	1.8E-03	1.8E-03	-1.5E-02	-1.2E-02	-8.2E-03	-4.6E-03	-9.1E-04	2.7E-03
2870	1.9E-03	2.1E-03	2.1E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.0E-02	-6.5E-03	-3.1E-03	3.6E-04	3.8E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2871	1.5E-03	1.7E-03	1.6E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	-1.4E-02	-1.0E-02	-6.9E-03	-3.3E-03	2.7E-04	3.9E-03
2872	1.8E-03	2.2E-03	2.3E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	-1.1E-02	-8.0E-03	-4.3E-03	-7.2E-04	2.9E-03	6.5E-03
2873	4.2E-04	1.1E-03	1.8E-03	2.3E-03	2.1E-03	1.7E-03	1.6E-03	-5.1E-03	-7.0E-03	-7.9E-03	-8.9E-03	-9.9E-03	-1.1E-02
2874	4.5E-04	1.2E-03	2.1E-03	2.3E-03	2.3E-03	1.8E-03	1.7E-03	-7.8E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
2875	5.7E-04	1.2E-03	2.2E-03	2.3E-03	2.4E-03	1.8E-03	1.7E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02
2876	6.3E-04	1.2E-03	2.3E-03	2.2E-03	2.5E-03	1.8E-03	1.7E-03	-1.2E-02	-1.5E-02	-1.6E-02	-1.8E-02	-2.0E-02	-2.1E-02
2877	6.2E-04	1.1E-03	2.3E-03	2.3E-03	2.4E-03	1.7E-03	1.6E-03	-9.9E-03	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.7E-02
2878	5.7E-04	1.1E-03	2.4E-03	2.5E-03	2.4E-03	1.8E-03	1.8E-03	-1.4E-02	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.2E-02
2879	5.7E-04	1.2E-03	2.4E-03	2.7E-03	2.2E-03	1.8E-03	1.8E-03	-1.4E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02
2880	5.3E-04	1.3E-03	2.5E-03	2.8E-03	2.1E-03	1.7E-03	1.7E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.9E-03	-7.6E-03
2881	4.9E-04	1.4E-03	2.5E-03	2.9E-03	1.9E-03	1.6E-03	1.6E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.0E-02	-8.3E-03	-6.2E-03
2882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2885	4.6E-04	1.2E-03	1.8E-03	2.4E-03	2.0E-03	1.6E-03	1.5E-03	-4.6E-03	-6.2E-03	-6.9E-03	-7.6E-03	-8.2E-03	-8.9E-03
2886	4.6E-04	1.3E-03	2.1E-03	2.4E-03	2.3E-03	1.8E-03	1.7E-03	-6.3E-03	-8.3E-03	-9.3E-03	-1.0E-02	-1.1E-02	-1.2E-02
2887	5.9E-04	1.3E-03	2.2E-03	2.3E-03	2.4E-03	1.9E-03	1.8E-03	-9.4E-03	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02
2888	6.6E-04	1.2E-03	2.3E-03	2.3E-03	2.5E-03	1.9E-03	1.8E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.8E-02	-2.0E-02
2889	6.5E-04	1.2E-03	2.4E-03	2.2E-03	2.5E-03	1.8E-03	1.7E-03	-1.3E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.1E-02	-2.2E-02
2890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2891	5.9E-04	1.2E-03	2.4E-03	2.7E-03	2.4E-03	1.9E-03	1.9E-03	-1.5E-02	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02
2892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2895	4.6E-04	1.1E-03	1.8E-03	2.4E-03	2.0E-03	1.6E-03	1.5E-03	-5.6E-03	-6.7E-03	-6.9E-03	-7.1E-03	-7.2E-03	-7.4E-03
2896	4.7E-04	1.3E-03	2.1E-03	2.5E-03	2.3E-03	1.8E-03	1.7E-03	-4.4E-03	-6.3E-03	-7.2E-03	-8.2E-03	-9.1E-03	-1.0E-02
2897	6.2E-04	1.3E-03	2.2E-03	2.4E-03	2.4E-03	1.9E-03	1.8E-03	-7.8E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
2898	6.9E-04	1.3E-03	2.3E-03	2.4E-03	2.6E-03	2.0E-03	1.9E-03	-1.1E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02	-1.8E-02
2899	6.7E-04	1.2E-03	2.4E-03	2.3E-03	2.6E-03	1.9E-03	1.8E-03	-1.4E-02	-1.6E-02	-1.8E-02	-2.0E-02	-2.1E-02	-2.3E-02
2900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2905	3.8E-04	8.9E-04	1.5E-03	2.2E-03	1.6E-03	1.2E-03	1.1E-03	-9.0E-03	-9.5E-03	-9.4E-03	-9.3E-03	-9.2E-03	-9.1E-03
2906	3.9E-04	1.1E-03	1.7E-03	2.4E-03	1.9E-03	1.5E-03	1.4E-03	-7.6E-03	-8.7E-03	-9.0E-03	-9.3E-03	-9.6E-03	-9.9E-03
2907	5.0E-04	1.2E-03	1.9E-03	2.5E-03	2.2E-03	1.7E-03	1.6E-03	-4.8E-03	-6.2E-03	-6.6E-03	-6.9E-03	-7.3E-03	-7.7E-03
2908	6.5E-04	1.3E-03	2.2E-03	2.5E-03	2.4E-03	1.9E-03	1.8E-03	-5.9E-03	-7.9E-03	-8.8E-03	-9.7E-03	-1.1E-02	-1.2E-02
2909	7.2E-04	1.3E-03	2.4E-03	2.4E-03	2.6E-03	2.0E-03	1.9E-03	-9.8E-03	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02
2910	6.9E-04	1.3E-03	2.4E-03	2.3E-03	2.6E-03	2.0E-03	1.9E-03	-1.3E-02	-1.6E-02	-1.7E-02	-1.8E-02	-1.9E-02	-2.1E-02
2911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2915	4.1E-04	8.4E-04	1.4E-03	2.1E-03	1.5E-03	1.0E-03	9.8E-04	-8.8E-03	-8.6E-03	-7.9E-03	-7.2E-03	-6.5E-03	-5.8E-03
2916	4.0E-04	1.0E-03	1.7E-03	2.3E-03	1.8E-03	1.3E-03	1.3E-03	-8.7E-03	-9.5E-03	-9.6E-03	-9.7E-03	-9.7E-03	-9.8E-03
2917	5.2E-04	1.2E-03	1.9E-03	2.6E-03	2.1E-03	1.6E-03	1.5E-03	-6.5E-03	-8.0E-03	-8.6E-03	-9.2E-03	-9.8E-03	-1.0E-02
2918	6.9E-04	1.4E-03	2.2E-03	2.6E-03	2.4E-03	1.9E-03	1.8E-03	-4.4E-03	-6.1E-03	-6.8E-03	-7.5E-03	-8.2E-03	-8.9E-03
2919	7.6E-04	1.4E-03	2.4E-03	2.6E-03	2.6E-03	2.1E-03	2.0E-03	-7.7E-03	-9.8E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
2920	7.1E-04	1.3E-03	2.4E-03	2.4E-03	2.7E-03	2.1E-03	2.0E-03	-1.2E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02	-1.8E-02
2921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2925	4.4E-04	8.0E-04	1.3E-03	2.0E-03	1.4E-03	9.3E-04	8.7E-04	-8.4E-03	-7.4E-03	-5.9E-03	-4.4E-03	-2.9E-03	-1.5E-03
2926	4.2E-04	9.4E-04	1.6E-03	2.3E-03	1.6E-03	1.2E-03	1.1E-03	-9.8E-03	-9.6E-03	-8.7E-03	-7.9E-03	-7.0E-03	-6.1E-03
2927	5.4E-04	1.2E-03	1.9E-03	2.6E-03	2.0E-03	1.5E-03	1.4E-03	-8.5E-03	-9.6E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.1E-02
2928	7.2E-04	1.4E-03	2.2E-03	2.7E-03	2.3E-03	1.9E-03	1.7E-03	-5.4E-03	-7.2E-03	-8.0E-03	-8.8E-03	-9.5E-03	-1.0E-02
2929	8.0E-04	1.5E-03	2.4E-03	2.7E-03	2.6E-03	2.1E-03	1.9E-03	-4.6E-03	-6.7E-03	-7.7E-03	-8.6E-03	-9.6E-03	-1.1E-02
2930	7.5E-04	1.4E-03	2.5E-03	2.5E-03	2.7E-03	2.2E-03	2.0E-03	-1.0E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02
2931	6.4E-04	1.3E-03	2.5E-03	2.4E-03	2.8E-03	2.2E-03	2.0E-03	-1.4E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.1E-02
2932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2937	5.1E-04	8.3E-04	1.1E-03	1.6E-03	1.0E-03	7.9E-04	7.4E-04	-5.2E-03	-3.5E-03	-1.3E-03	9.4E-04	3.1E-03	5.3E-03
2938	4.8E-04	7.7E-04	1.2E-03	1.9E-03	1.2E-03	9.0E-04	8.4E-04	-7.7E-03	-6.0E-03	-3.8E-03	-1.5E-03	6.7E-04	2.9E-03
2939	4.4E-04	8.8E-04	1.5E-03	2.2E-03	1.5E-03	1.1E-03	1.0E-03	-9.4E-03	-8.2E-03	-6.4E-03	-4.7E-03	-2.9E-03	-1.2E-03
2940	5.5E-04	1.1E-03	1.8E-03	2.5E-03	1.9E-03	1.4E-03	1.3E-03	-1.1E-02	-1.1E-02	-9.6E-03	-8.5E-03	-7.4E-03	-6.3E-03
2941	7.6E-04	1.4E-03	2.1E-03	2.8E-03	2.2E-03	1.8E-03	1.6E-03	-8.8E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02
2942	8.6E-04	1.5E-03	2.5E-03	2.8E-03	2.5E-03	2.1E-03	1.9E-03	-4.5E-03	-6.5E-03	-7.3E-03	-8.1E-03	-8.8E-03	-9.6E-03
2943	7.9E-04	1.5E-03	2.6E-03	2.7E-03	2.7E-03	2.2E-03	2.1E-03	-6.5E-03	-8.8E-03	-9.8E-03	-1.1E-02	-1.2E-02	-1.3E-02
2944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2948	5.6E-04	9.2E-04	1.3E-03	1.2E-03	9.1E-04	7.4E-04	7.0E-04	-2.2E-03	-2.0E-04	2.2E-03	4.6E-03	7.1E-03	9.5E-03
2949	5.3E-04	9.2E-04	1.3E-03	1.5E-03	9.6E-04	7.7E-04	7.3E-04	-3.5E-03	-1.6E-03	7.1E-04	3.0E-03	5.3E-03	7.6E-03
2950	5.2E-04	8.8E-04	1.2E-03	1.7E-03	1.1E-03	8.6E-04	8.1E-04	-5.9E-03	-4.0E-03	-1.6E-03	7.9E-04	3.2E-03	5.6E-03
2951	4.6E-04	8.3E-04	1.4E-03	2.1E-03	1.4E-03	9.8E-04	9.2E-04	-8.2E-03	-6.5E-03	-4.2E-03	-1.9E-03	3.5E-04	2.6E-03
2952	6.1E-04	9.0E-04	1.8E-03	2.5E-03	1.7E-03	1.3E-03	1.2E-03	-1.0E-02	-8.9E-03	-6.9E-03	-4.8E-03	-2.8E-03	-7.5E-04

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2953	9.1E-04	1.3E-03	2.2E-03	3.0E-03	2.1E-03	1.6E-03	1.5E-03	-1.2E-02	-1.2E-02	-1.0E-02	-9.0E-03	-7.6E-03	-6.2E-03
2954	9.1E-04	1.6E-03	2.4E-03	3.0E-03	2.5E-03	2.0E-03	1.9E-03	-9.3E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
2955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2960	7.8E-04	1.0E-03	1.4E-03	1.4E-03	1.0E-03	9.1E-04	9.1E-04	-2.8E-03	-1.3E-03	6.8E-04	2.6E-03	4.6E-03	6.5E-03
2961	6.4E-04	9.5E-04	1.4E-03	1.3E-03	9.0E-04	7.7E-04	7.7E-04	-3.1E-03	-1.1E-03	1.3E-03	3.7E-03	6.1E-03	8.5E-03
2962	6.7E-04	9.9E-04	1.4E-03	1.4E-03	9.7E-04	7.9E-04	7.4E-04	-2.2E-03	-2.1E-04	2.2E-03	4.6E-03	7.0E-03	9.5E-03
2963	5.5E-04	9.8E-04	1.3E-03	1.6E-03	1.0E-03	8.1E-04	7.6E-04	-3.6E-03	-1.6E-03	9.3E-04	3.4E-03	5.9E-03	8.4E-03
2964	4.9E-04	9.3E-04	1.3E-03	2.0E-03	1.3E-03	9.5E-04	8.9E-04	-6.3E-03	-4.3E-03	-1.7E-03	8.0E-04	3.3E-03	5.9E-03
2965	6.3E-04	9.0E-04	1.6E-03	2.4E-03	1.6E-03	1.1E-03	1.1E-03	-8.8E-03	-7.1E-03	-4.8E-03	-2.6E-03	-2.7E-04	2.0E-03
2966	9.4E-04	1.2E-03	2.0E-03	2.8E-03	2.0E-03	1.5E-03	1.4E-03	-1.1E-02	-9.7E-03	-7.6E-03	-5.5E-03	-3.4E-03	-1.3E-03
2967	9.7E-04	1.6E-03	2.4E-03	3.1E-03	2.3E-03	1.9E-03	1.8E-03	-1.3E-02	-1.2E-02	-1.1E-02	-9.0E-03	-7.4E-03	-5.8E-03
2968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2972	8.6E-04	1.1E-03	1.5E-03	1.5E-03	1.2E-03	1.1E-03	1.1E-03	-2.3E-03	-8.4E-04	1.0E-03	2.9E-03	4.8E-03	6.6E-03
2973	7.3E-04	9.6E-04	1.5E-03	1.5E-03	1.1E-03	9.5E-04	9.5E-04	-3.1E-03	-1.5E-03	5.1E-04	2.5E-03	4.6E-03	6.6E-03
2974	5.9E-04	1.0E-03	1.5E-03	1.4E-03	9.6E-04	8.1E-04	8.1E-04	-2.9E-03	-9.6E-04	1.4E-03	3.8E-03	6.2E-03	8.6E-03
2975	6.0E-04	1.1E-03	1.5E-03	1.5E-03	1.0E-03	8.4E-04	7.9E-04	-2.8E-03	-7.4E-04	1.8E-03	4.4E-03	6.9E-03	9.4E-03
2976	6.0E-04	1.1E-03	1.4E-03	1.8E-03	1.1E-03	9.0E-04	8.4E-04	-3.9E-03	-1.8E-03	8.0E-04	3.4E-03	6.0E-03	8.6E-03
2977	6.6E-04	9.9E-04	1.4E-03	2.2E-03	1.4E-03	1.0E-03	9.8E-04	-6.9E-03	-4.7E-03	-2.0E-03	7.6E-04	3.5E-03	6.2E-03
2978	8.9E-04	1.1E-03	1.9E-03	2.7E-03	1.8E-03	1.3E-03	1.2E-03	-9.6E-03	-7.8E-03	-5.3E-03	-2.8E-03	-2.5E-04	2.3E-03
2979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2983	1.2E-03	1.4E-03	1.4E-03	1.7E-03	1.5E-03	1.3E-03	1.3E-03	-2.7E-03	-4.2E-04	2.2E-03	4.9E-03	7.6E-03	1.0E-02
2984	9.5E-04	1.2E-03	1.5E-03	1.7E-03	1.4E-03	1.3E-03	1.3E-03	-2.9E-03	-1.0E-03	1.3E-03	3.6E-03	5.9E-03	8.2E-03
2985	9.4E-04	1.2E-03	1.5E-03	1.6E-03	1.3E-03	1.1E-03	1.1E-03	-3.3E-03	-1.8E-03	2.2E-04	2.2E-03	4.2E-03	6.1E-03
2986	7.0E-04	1.0E-03	1.6E-03	1.5E-03	1.1E-03	1.0E-03	1.0E-03	-4.0E-03	-2.3E-03	-1.3E-04	2.0E-03	4.2E-03	6.4E-03
2987	6.4E-04	1.1E-03	1.6E-03	1.4E-03	1.0E-03	8.4E-04	8.3E-04	-3.2E-03	-1.3E-03	1.2E-03	3.6E-03	6.0E-03	8.4E-03
2988	6.8E-04	1.3E-03	1.7E-03	1.6E-03	1.1E-03	8.9E-04	8.4E-04	-3.5E-03	-1.4E-03	1.2E-03	3.8E-03	6.4E-03	9.0E-03
2989	7.5E-04	1.3E-03	1.7E-03	1.9E-03	1.3E-03	9.9E-04	9.3E-04	-5.3E-03	-3.1E-03	-2.2E-04	2.6E-03	5.5E-03	8.3E-03
2990	9.4E-04	1.1E-03	1.7E-03	2.5E-03	1.6E-03	1.1E-03	1.1E-03	-8.0E-03	-5.8E-03	-3.0E-03	-1.3E-04	2.7E-03	5.5E-03
2991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2993	1.3E-03	1.4E-03	1.5E-03	1.8E-03	1.6E-03	1.4E-03	1.4E-03	-3.8E-03	-1.7E-03	6.6E-04	3.0E-03	5.4E-03	7.8E-03

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2994	1.3E-03	1.5E-03	1.4E-03	1.7E-03	1.6E-03	1.4E-03	1.4E-03	-3.1E-03	-1.2E-03	9.8E-04	3.2E-03	5.4E-03	7.6E-03
2995	1.1E-03	1.3E-03	1.3E-03	1.6E-03	1.5E-03	1.3E-03	1.3E-03	-3.6E-03	-1.9E-03	2.0E-04	2.3E-03	4.4E-03	6.4E-03
2996	7.3E-04	1.0E-03	1.5E-03	1.6E-03	1.4E-03	1.2E-03	1.2E-03	-4.2E-03	-2.8E-03	-9.0E-04	9.8E-04	2.9E-03	4.7E-03
2997	6.8E-04	1.1E-03	1.7E-03	1.6E-03	1.2E-03	1.0E-03	1.0E-03	-5.2E-03	-3.5E-03	-1.3E-03	8.6E-04	3.0E-03	5.2E-03
2998	7.7E-04	1.3E-03	1.9E-03	1.5E-03	1.1E-03	9.1E-04	8.7E-04	-4.6E-03	-2.5E-03	8.0E-05	2.7E-03	5.3E-03	7.8E-03
2999	1.3E-03	1.6E-03	1.7E-03	1.8E-03	1.7E-03	1.5E-03	1.5E-03	-1.0E-02	-7.7E-03	-4.9E-03	-2.1E-03	6.9E-04	3.5E-03
3000	1.5E-03	1.7E-03	1.4E-03	1.8E-03	1.7E-03	1.5E-03	1.5E-03	-9.3E-03	-7.1E-03	-4.4E-03	-1.8E-03	7.9E-04	3.4E-03
3001	1.3E-03	1.5E-03	1.4E-03	1.8E-03	1.7E-03	1.5E-03	1.5E-03	-8.3E-03	-6.4E-03	-4.1E-03	-1.7E-03	5.7E-04	2.9E-03
3002	9.2E-04	1.2E-03	1.6E-03	1.8E-03	1.6E-03	1.4E-03	1.4E-03	-6.6E-03	-5.3E-03	-3.6E-03	-1.9E-03	-1.8E-04	1.5E-03
3003	7.3E-04	9.5E-04	1.7E-03	1.7E-03	1.4E-03	1.3E-03	1.3E-03	-5.0E-03	-4.5E-03	-3.5E-03	-2.6E-03	-1.6E-03	-6.3E-04
3004	1.3E-03	1.8E-03	2.0E-03	1.8E-03	1.7E-03	1.6E-03	1.6E-03	-1.1E-02	-8.7E-03	-5.9E-03	-3.2E-03	-4.9E-04	2.2E-03
3005	1.6E-03	1.8E-03	1.6E-03	1.8E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-9.6E-03	-6.8E-03	-4.0E-03	-1.3E-03	1.5E-03
3006	1.5E-03	1.7E-03	1.4E-03	1.9E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-1.0E-02	-7.6E-03	-5.1E-03	-2.5E-03	1.3E-05
3007	1.0E-03	1.2E-03	1.6E-03	1.9E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-1.0E-02	-8.4E-03	-6.4E-03	-4.3E-03	-2.3E-03
3008	1.1E-03	2.0E-03	2.1E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	-1.1E-02	-8.5E-03	-5.8E-03	-3.1E-03	-3.7E-04	2.3E-03
3009	1.6E-03	1.8E-03	1.9E-03	1.9E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-9.4E-03	-6.4E-03	-3.3E-03	-3.4E-04	2.7E-03
3010	1.7E-03	1.9E-03	1.5E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.0E-02	-7.3E-03	-4.2E-03	-1.0E-03	2.1E-03
3011	8.6E-04	2.1E-03	2.1E-03	1.6E-03	1.6E-03	1.4E-03	1.4E-03	-1.1E-02	-8.8E-03	-6.0E-03	-3.3E-03	-5.8E-04	2.1E-03
3012	1.5E-03	2.1E-03	2.2E-03	1.8E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-9.7E-03	-6.7E-03	-3.8E-03	-8.0E-04	2.2E-03
3013	6.3E-04	2.0E-03	2.0E-03	1.5E-03	1.5E-03	1.3E-03	1.3E-03	-1.0E-02	-8.0E-03	-5.2E-03	-2.4E-03	4.2E-04	3.2E-03
3014	1.4E-03	2.3E-03	2.4E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	-1.2E-02	-9.1E-03	-5.8E-03	-2.6E-03	6.1E-04	3.8E-03
3015	5.3E-04	1.1E-03	1.3E-03	1.2E-03	1.2E-03	9.2E-04	9.1E-04	-9.5E-03	-7.3E-03	-4.6E-03	-1.9E-03	8.1E-04	3.5E-03
3016	5.0E-04	1.8E-03	1.8E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	-9.9E-03	-7.3E-03	-4.2E-03	-1.2E-03	1.9E-03	5.0E-03
3017	1.1E-03	2.4E-03	2.4E-03	1.5E-03	1.5E-03	1.3E-03	1.3E-03	-1.1E-02	-7.7E-03	-4.3E-03	-8.5E-04	2.6E-03	6.0E-03
3018	6.6E-04	9.8E-04	1.3E-03	1.0E-03	1.2E-03	8.2E-04	7.7E-04	-1.3E-02	-1.0E-02	-7.2E-03	-3.9E-03	-6.2E-04	2.6E-03
3019	5.3E-04	1.5E-03	1.5E-03	1.2E-03	1.3E-03	9.2E-04	9.1E-04	-1.4E-02	-1.1E-02	-7.1E-03	-3.3E-03	4.7E-04	4.2E-03
3020	8.7E-04	2.3E-03	2.3E-03	1.4E-03	1.3E-03	1.1E-03	1.1E-03	-1.5E-02	-1.1E-02	-6.8E-03	-2.6E-03	1.6E-03	5.9E-03
3021	9.2E-04	1.2E-03	1.2E-03	8.9E-04	1.1E-03	8.7E-04	7.4E-04	-1.6E-02	-1.3E-02	-9.9E-03	-6.9E-03	-3.8E-03	-7.0E-04
3022	6.5E-04	1.2E-03	1.3E-03	1.0E-03	1.4E-03	8.6E-04	8.1E-04	-1.7E-02	-1.4E-02	-1.0E-02	-6.4E-03	-2.7E-03	9.0E-04
3023	1.2E-03	1.5E-03	1.2E-03	7.9E-04	1.0E-03	1.0E-03	6.9E-04	-1.3E-02	-1.2E-02	-1.1E-02	-9.8E-03	-8.6E-03	-7.4E-03
3024	9.6E-04	1.3E-03	1.3E-03	8.8E-04	1.3E-03	8.1E-04	7.6E-04	-1.5E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.8E-03	-7.1E-03
3025	1.4E-03	1.8E-03	1.1E-03	7.8E-04	9.1E-04	1.1E-03	6.1E-04	-9.8E-03	-1.0E-02	-9.8E-03	-9.7E-03	-9.5E-03	-9.4E-03
3026	1.6E-03	2.0E-03	1.1E-03	7.5E-04	8.5E-04	1.2E-03	5.3E-04	-9.6E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
3027	1.6E-03	2.0E-03	1.1E-03	7.3E-04	7.0E-04	9.5E-04	4.5E-04	-9.6E-03	-9.3E-03	-8.8E-03	-8.2E-03	-7.6E-03	-7.0E-03
3028	1.8E-03	2.2E-03	1.1E-03	7.7E-04	8.3E-04	9.1E-04	5.2E-04	-1.0E-02	-9.9E-03	-9.1E-03	-8.4E-03	-7.6E-03	-6.8E-03
3029	6.5E-04	1.1E-03	9.4E-04	6.2E-04	6.9E-04	9.4E-04	4.3E-04	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02
3030	5.3E-04	8.0E-04	8.2E-04	6.3E-04	6.8E-04	9.2E-04	4.7E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
3031	6.4E-04	1.0E-03	9.7E-04	6.4E-04	7.4E-04	1.0E-03	4.8E-04	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.5E-02	-1.5E-02
3032	6.1E-04	6.9E-04	7.1E-04	6.5E-04	6.5E-04	8.7E-04	5.2E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
3033	6.3E-04	7.8E-04	7.9E-04	6.7E-04	7.3E-04	1.0E-03	5.4E-04	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
3034	6.5E-04	7.2E-04	8.1E-04	6.4E-04	6.0E-04	6.3E-04	5.3E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3035	6.9E-04	7.6E-04	8.2E-04	6.6E-04	6.1E-04	7.9E-04	5.5E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
3036	6.5E-04	7.2E-04	8.7E-04	6.3E-04	6.3E-04	5.6E-04	5.4E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
3037	7.1E-04	7.8E-04	9.0E-04	6.6E-04	6.4E-04	7.2E-04	5.6E-04	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02
3038	5.4E-04	6.1E-04	7.9E-04	5.8E-04	6.3E-04	5.5E-04	5.2E-04	-8.7E-03	-9.1E-03	-9.1E-03	-9.1E-03	-9.1E-03	-9.1E-03
3039	5.9E-04	6.6E-04	8.3E-04	6.1E-04	6.4E-04	5.6E-04	5.3E-04	-8.1E-03	-8.4E-03	-8.3E-03	-8.3E-03	-8.3E-03	-8.3E-03
3040	6.6E-04	7.3E-04	9.1E-04	6.4E-04	6.8E-04	6.5E-04	5.5E-04	-7.8E-03	-8.0E-03	-7.8E-03	-7.6E-03	-7.4E-03	-7.2E-03
3041	7.6E-04	2.8E-03	4.6E-03	5.3E-03	5.5E-03	2.9E-03	2.7E-03	1.2E-02	-2.9E-04	-1.0E-02	-2.1E-02	-3.1E-02	-4.1E-02
3042	2.9E-04	9.6E-04	1.5E-03	1.8E-03	1.5E-03	9.3E-04	8.6E-04	-1.9E-02	-1.4E-02	-8.7E-03	-3.1E-03	2.5E-03	8.1E-03
3043	2.9E-04	8.2E-04	1.4E-03	1.5E-03	1.5E-03	9.1E-04	8.5E-04	-1.6E-02	-1.1E-02	-5.5E-03	-2.0E-04	5.1E-03	1.0E-02
3044	2.7E-04	7.8E-04	1.4E-03	1.5E-03	1.5E-03	8.8E-04	8.4E-04	-5.8E-03	-2.7E-03	7.6E-04	4.3E-03	7.8E-03	1.1E-02
3045	2.6E-04	7.9E-04	1.4E-03	1.5E-03	1.4E-03	8.5E-04	8.5E-04	6.2E-04	2.3E-03	4.4E-03	6.5E-03	8.6E-03	1.1E-02
3046	2.4E-04	7.7E-04	1.4E-03	1.5E-03	1.4E-03	8.6E-04	8.3E-04	2.9E-03	3.7E-03	5.0E-03	6.3E-03	7.6E-03	8.9E-03
3047	2.2E-04	7.0E-04	1.3E-03	1.4E-03	1.3E-03	1.0E-03	7.7E-04	1.2E-02	8.7E-03	5.8E-03	2.8E-03	-1.1E-04	-3.1E-03
3048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3052	4.7E-04	1.4E-03	2.5E-03	2.8E-03	2.9E-03	2.1E-03	1.8E-03	-3.4E-03	-2.5E-03	-7.3E-04	1.0E-03	2.8E-03	4.6E-03
3053	4.9E-04	1.4E-03	2.6E-03	2.9E-03	3.2E-03	2.2E-03	2.0E-03	-3.5E-03	-9.9E-04	2.5E-03	5.9E-03	9.3E-03	1.3E-02
3054	3.8E-04	1.0E-03	1.8E-03	2.1E-03	1.4E-03	1.2E-03	1.2E-03	-7.2E-03	-7.2E-03	-6.8E-03	-6.4E-03	-6.0E-03	-5.6E-03
3055	3.5E-04	1.1E-03	1.8E-03	2.1E-03	1.4E-03	1.1E-03	1.1E-03	-1.2E-02	-1.1E-02	-1.0E-02	-9.3E-03	-8.3E-03	-7.4E-03
3056	3.1E-04	1.1E-03	1.8E-03	2.1E-03	1.4E-03	1.0E-03	1.0E-03	-1.5E-02	-1.3E-02	-1.1E-02	-9.5E-03	-7.6E-03	-5.6E-03
3057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3067	4.8E-04	1.4E-03	2.5E-03	2.8E-03	3.0E-03	2.2E-03	1.9E-03	-4.1E-03	-3.4E-03	-1.8E-03	-1.3E-04	1.5E-03	3.1E-03
3068	5.0E-04	1.5E-03	2.6E-03	3.0E-03	3.3E-03	2.2E-03	2.0E-03	-3.7E-03	-1.4E-03	1.9E-03	5.2E-03	8.6E-03	1.2E-02
3069	4.9E-04	1.5E-03	2.5E-03	3.0E-03	3.2E-03	2.1E-03	2.0E-03	-5.9E-03	-5.0E-03	-3.0E-03	-1.1E-03	8.6E-04	2.8E-03
3070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3071	4.5E-04	1.2E-03	2.1E-03	2.7E-03	2.8E-03	1.9E-03	1.6E-03	1.9E-02	1.3E-02	6.9E-03	1.2E-03	-4.5E-03	-1.0E-02
3072	4.8E-04	1.0E-03	2.0E-03	2.2E-03	1.9E-03	1.4E-03	1.4E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02	-9.9E-03	-9.5E-03
3073	4.6E-04	1.0E-03	2.0E-03	2.2E-03	1.7E-03	1.4E-03	1.3E-03	-8.0E-03	-8.3E-03	-8.0E-03	-7.7E-03	-7.5E-03	-7.2E-03
3074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3087	4.8E-04	1.4E-03	2.5E-03	2.9E-03	3.1E-03	2.2E-03	1.9E-03	-4.0E-03	-3.3E-03	-1.7E-03	-1.2E-04	1.5E-03	3.0E-03
3088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3091	4.7E-04	1.3E-03	2.2E-03	2.8E-03	2.9E-03	2.0E-03	1.7E-03	1.8E-02	1.1E-02	5.1E-03	-1.1E-03	-7.3E-03	-1.4E-02
3092	4.5E-04	1.1E-03	2.0E-03	2.6E-03	2.8E-03	1.9E-03	1.7E-03	1.3E-02	6.1E-03	-3.5E-04	-6.8E-03	-1.3E-02	-2.0E-02
3093	4.2E-04	1.0E-03	2.1E-03	2.7E-03	2.8E-03	1.8E-03	1.6E-03	2.2E-03	-2.9E-03	-7.0E-03	-1.1E-02	-1.5E-02	-1.9E-02
3094	4.9E-04	1.1E-03	2.1E-03	2.1E-03	2.1E-03	1.4E-03	1.4E-03	-9.4E-03	-1.0E-02	-1.0E-02	-1.0E-02	-9.9E-03	-9.9E-03
3095	5.0E-04	1.1E-03	2.1E-03	2.2E-03	2.0E-03	1.5E-03	1.5E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
3096	4.8E-04	1.0E-03	2.0E-03	2.2E-03	1.8E-03	1.4E-03	1.4E-03	-1.0E-02	-1.0E-02	-1.0E-02	-9.6E-03	-9.3E-03	-8.9E-03
3097	4.3E-04	1.1E-03	2.0E-03	2.3E-03	1.6E-03	1.3E-03	1.3E-03	-6.2E-03	-6.5E-03	-6.4E-03	-6.2E-03	-6.0E-03	-5.8E-03
3098	4.0E-04	1.1E-03	2.0E-03	2.3E-03	1.6E-03	1.3E-03	1.3E-03	-1.0E-02	-9.6E-03	-8.7E-03	-7.7E-03	-6.8E-03	-5.9E-03
3099	3.6E-04	1.2E-03	2.0E-03	2.3E-03	1.4E-03	1.2E-03	1.2E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.6E-03	-7.1E-03
3100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3114	4.9E-04	1.3E-03	2.3E-03	2.8E-03	3.0E-03	2.0E-03	1.7E-03	1.9E-02	1.1E-02	3.5E-03	-3.7E-03	-1.1E-02	-1.8E-02
3115	4.5E-04	1.2E-03	2.1E-03	2.7E-03	2.9E-03	1.9E-03	1.7E-03	1.2E-02	4.3E-03	-2.2E-03	-8.7E-03	-1.5E-02	-2.2E-02
3116	4.0E-04	1.1E-03	2.2E-03	2.8E-03	2.9E-03	1.8E-03	1.7E-03	-3.6E-03	-7.4E-03	-1.0E-02	-1.3E-02	-1.6E-02	-1.9E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3118	4.5E-04	1.1E-03	2.0E-03	1.9E-03	2.1E-03	1.6E-03	1.5E-03	-7.5E-03	-9.9E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.6E-02
3119	5.1E-04	1.1E-03	2.1E-03	2.0E-03	2.2E-03	1.5E-03	1.4E-03	-9.1E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02
3120	5.3E-04	1.1E-03	2.1E-03	2.2E-03	2.1E-03	1.5E-03	1.5E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02
3121	5.0E-04	1.0E-03	2.1E-03	2.2E-03	1.9E-03	1.5E-03	1.5E-03	-1.1E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02
3122	4.5E-04	1.1E-03	2.1E-03	2.3E-03	1.8E-03	1.4E-03	1.4E-03	-8.9E-03	-9.1E-03	-8.8E-03	-8.4E-03	-8.1E-03	-7.7E-03
3123	4.3E-04	1.2E-03	2.1E-03	2.4E-03	1.7E-03	1.4E-03	1.4E-03	-9.4E-03	-8.9E-03	-8.0E-03	-7.2E-03	-6.3E-03	-5.4E-03
3124	3.9E-04	1.2E-03	2.1E-03	2.4E-03	1.6E-03	1.3E-03	1.3E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.9E-03	-7.6E-03
3125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3134	4.5E-04	1.3E-03	2.4E-03	2.8E-03	2.9E-03	2.1E-03	1.8E-03	-2.7E-04	8.0E-04	2.7E-03	4.6E-03	6.4E-03	8.3E-03
3135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3137	5.2E-04	1.6E-03	2.7E-03	3.2E-03	3.6E-03	2.4E-03	2.1E-03	-6.3E-03	-6.0E-03	-4.6E-03	-3.2E-03	-1.8E-03	-3.9E-04
3138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3139	6.0E-04	1.4E-03	2.3E-03	2.9E-03	3.0E-03	2.0E-03	1.8E-03	1.9E-02	9.8E-03	1.6E-03	-6.7E-03	-1.5E-02	-2.3E-02
3140	5.3E-04	1.2E-03	2.2E-03	2.9E-03	3.0E-03	1.9E-03	1.7E-03	1.0E-02	2.5E-03	-4.1E-03	-1.1E-02	-1.7E-02	-2.4E-02
3141	4.2E-04	1.2E-03	2.5E-03	3.2E-03	3.2E-03	1.9E-03	1.7E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02
3142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3143	4.2E-04	1.1E-03	1.9E-03	2.5E-03	2.6E-03	1.5E-03	1.4E-03	-3.6E-02	-3.3E-02	-2.9E-02	-2.6E-02	-2.2E-02	-1.8E-02
3144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3145	3.9E-04	1.1E-03	1.9E-03	2.1E-03	2.2E-03	1.7E-03	1.6E-03	-9.3E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02
3146	4.6E-04	1.2E-03	2.1E-03	2.1E-03	2.3E-03	1.7E-03	1.6E-03	-9.0E-03	-1.2E-02	-1.3E-02	-1.5E-02	-1.6E-02	-1.8E-02
3147	5.3E-04	1.1E-03	2.2E-03	2.1E-03	2.3E-03	1.6E-03	1.5E-03	-8.2E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.5E-02
3148	5.4E-04	1.1E-03	2.1E-03	2.1E-03	2.2E-03	1.5E-03	1.5E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02	-9.9E-03
3149	5.3E-04	1.1E-03	2.2E-03	2.3E-03	2.1E-03	1.6E-03	1.5E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02
3150	4.9E-04	1.1E-03	2.2E-03	2.4E-03	1.9E-03	1.5E-03	1.5E-03	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02
3151	4.6E-04	1.2E-03	2.2E-03	2.5E-03	1.8E-03	1.5E-03	1.5E-03	-8.6E-03	-8.3E-03	-7.6E-03	-6.8E-03	-6.1E-03	-5.3E-03
3152	4.2E-04	1.3E-03	2.3E-03	2.5E-03	1.7E-03	1.4E-03	1.4E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.9E-03	-7.6E-03
3153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3164	5.5E-04	1.6E-03	2.9E-03	3.3E-03	3.7E-03	2.5E-03	2.3E-03	-4.4E-03	-2.9E-03	-1.7E-04	2.5E-03	5.2E-03	7.9E-03
3165	5.5E-04	1.7E-03	2.9E-03	3.4E-03	3.7E-03	2.4E-03	2.3E-03	-5.3E-03	-5.5E-03	-4.5E-03	-3.5E-03	-2.5E-03	-1.5E-03
3166	6.8E-04	1.7E-03	2.8E-03	3.5E-03	3.6E-03	2.2E-03	2.0E-03	1.8E-02	1.1E-02	5.2E-03	-5.3E-04	-6.3E-03	-1.2E-02
3167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3169	4.8E-04	1.4E-03	2.7E-03	3.4E-03	3.4E-03	1.9E-03	1.8E-03	-2.1E-02	-2.1E-02	-1.9E-02	-1.8E-02	-1.7E-02	-1.6E-02
3170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3171	4.7E-04	1.2E-03	2.0E-03	2.6E-03	2.6E-03	1.5E-03	1.4E-03	-3.8E-02	-3.6E-02	-3.3E-02	-3.0E-02	-2.7E-02	-2.4E-02
3172	4.4E-04	1.1E-03	1.8E-03	2.0E-03	2.0E-03	1.5E-03	1.1E-03	-2.7E-02	-2.8E-02	-2.9E-02	-2.9E-02	-2.9E-02	-2.9E-02
3173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3174	3.7E-04	1.1E-03	1.9E-03	2.2E-03	2.2E-03	1.7E-03	1.6E-03	-8.0E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
3175	4.5E-04	1.2E-03	2.1E-03	2.2E-03	2.3E-03	1.7E-03	1.6E-03	-1.0E-02	-1.2E-02	-1.3E-02	-1.5E-02	-1.6E-02	-1.7E-02
3176	5.4E-04	1.1E-03	2.2E-03	2.1E-03	2.3E-03	1.7E-03	1.6E-03	-9.8E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.9E-02
3177	5.7E-04	1.1E-03	2.2E-03	2.1E-03	2.3E-03	1.5E-03	1.5E-03	-9.1E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02
3178	5.5E-04	1.1E-03	2.2E-03	2.3E-03	2.2E-03	1.6E-03	1.6E-03	-1.3E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02
3179	5.2E-04	1.1E-03	2.3E-03	2.5E-03	2.1E-03	1.6E-03	1.6E-03	-1.3E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02
3180	5.0E-04	1.2E-03	2.3E-03	2.6E-03	1.9E-03	1.6E-03	1.6E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.2E-03	-8.3E-03	-7.4E-03
3181	4.6E-04	1.3E-03	2.3E-03	2.7E-03	1.8E-03	1.5E-03	1.5E-03	-1.3E-02	-1.2E-02	-1.0E-02	-8.8E-03	-7.2E-03	-5.6E-03
3182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3191	4.6E-04	1.3E-03	2.4E-03	2.8E-03	3.0E-03	2.2E-03	1.9E-03	-2.2E-03	-1.2E-03	6.5E-04	2.5E-03	4.3E-03	6.1E-03
3192	5.3E-04	1.5E-03	2.8E-03	3.2E-03	3.5E-03	2.5E-03	2.2E-03	-4.7E-03	-3.3E-03	-9.4E-04	1.4E-03	3.8E-03	6.2E-03
3193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3194	5.8E-04	1.7E-03	3.0E-03	3.5E-03	3.8E-03	2.5E-03	2.3E-03	-1.5E-03	-3.2E-03	-3.7E-03	-4.2E-03	-4.6E-03	-5.1E-03
3195	7.2E-04	1.9E-03	3.0E-03	3.8E-03	3.9E-03	2.2E-03	2.0E-03	2.0E-02	1.2E-02	5.0E-03	-1.6E-03	-8.3E-03	-1.5E-02
3196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3198	5.4E-04	1.4E-03	2.8E-03	3.5E-03	3.6E-03	2.0E-03	1.8E-03	-3.0E-02	-2.8E-02	-2.5E-02	-2.1E-02	-1.8E-02	-1.5E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3200	4.7E-04	1.3E-03	2.0E-03	2.5E-03	2.6E-03	1.5E-03	1.4E-03	-3.8E-02	-3.6E-02	-3.4E-02	-3.1E-02	-2.9E-02	-2.7E-02
3201	5.5E-04	1.2E-03	1.9E-03	2.0E-03	2.2E-03	1.6E-03	1.2E-03	-3.3E-02	-3.4E-02	-3.4E-02	-3.4E-02	-3.4E-02	-3.4E-02
3202	5.4E-04	9.7E-04	1.7E-03	2.1E-03	2.5E-03	1.7E-03	1.3E-03	-4.1E-02	-4.2E-02	-4.3E-02	-4.4E-02	-4.5E-02	-4.6E-02
3203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3206	3.9E-04	1.2E-03	2.3E-03	2.6E-03	2.6E-03	1.9E-03	1.6E-03	-2.4E-03	-1.2E-03	6.2E-04	2.5E-03	4.3E-03	6.2E-03
3207	4.8E-04	1.4E-03	2.6E-03	3.0E-03	3.1E-03	2.3E-03	2.0E-03	-3.7E-03	-2.8E-03	-1.0E-03	7.5E-04	2.5E-03	4.3E-03
3208	5.7E-04	1.6E-03	2.9E-03	3.3E-03	3.7E-03	2.7E-03	2.4E-03	-5.3E-03	-3.7E-03	-1.1E-03	1.6E-03	4.3E-03	7.0E-03
3209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3210	7.5E-04	2.0E-03	3.3E-03	3.9E-03	4.1E-03	2.5E-03	2.3E-03	1.9E-03	-1.5E-03	-3.5E-03	-5.5E-03	-7.5E-03	-9.5E-03
3211	6.9E-04	2.0E-03	3.2E-03	4.0E-03	4.1E-03	2.2E-03	2.0E-03	2.2E-02	1.2E-02	3.5E-03	-5.2E-03	-1.4E-02	-2.2E-02
3212	5.0E-04	1.8E-03	2.8E-03	3.5E-03	3.6E-03	2.1E-03	1.9E-03	1.4E-02	4.0E-03	-4.7E-03	-1.3E-02	-2.2E-02	-3.1E-02
3213	5.5E-04	1.3E-03	2.9E-03	3.6E-03	3.6E-03	2.1E-03	1.9E-03	-2.2E-03	-7.6E-03	-1.2E-02	-1.6E-02	-2.0E-02	-2.4E-02
3214	5.7E-04	1.5E-03	2.9E-03	3.7E-03	3.7E-03	2.0E-03	1.9E-03	-4.0E-02	-3.7E-02	-3.2E-02	-2.7E-02	-2.2E-02	-1.8E-02
3215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3216	5.5E-04	1.3E-03	2.1E-03	2.5E-03	2.6E-03	1.5E-03	1.4E-03	-3.5E-02	-3.6E-02	-3.5E-02	-3.4E-02	-3.4E-02	-3.3E-02
3217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3218	5.6E-04	9.8E-04	1.9E-03	2.3E-03	2.7E-03	1.8E-03	1.4E-03	-4.3E-02	-4.5E-02	-4.7E-02	-4.9E-02	-5.0E-02	-5.2E-02
3219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3221	4.5E-04	1.3E-03	2.3E-03	2.7E-03	2.6E-03	2.0E-03	1.6E-03	-3.5E-03	-2.4E-03	-5.3E-04	1.3E-03	3.2E-03	5.0E-03
3222	5.3E-04	1.5E-03	2.7E-03	3.2E-03	3.3E-03	2.5E-03	2.1E-03	-5.5E-03	-4.8E-03	-3.1E-03	-1.4E-03	3.1E-04	2.0E-03
3223	6.1E-04	1.7E-03	3.1E-03	3.5E-03	4.0E-03	2.9E-03	2.7E-03	-5.9E-03	-4.1E-03	-1.1E-03	1.8E-03	4.8E-03	7.8E-03
3224	7.5E-04	1.9E-03	3.3E-03	3.7E-03	4.2E-03	2.9E-03	2.7E-03	-7.5E-03	-6.5E-03	-4.3E-03	-2.0E-03	2.4E-04	2.5E-03
3225	7.8E-04	2.2E-03	3.6E-03	4.1E-03	4.4E-03	2.5E-03	2.4E-03	5.3E-03	2.8E-04	-3.4E-03	-7.0E-03	-1.1E-02	-1.4E-02
3226	6.0E-04	2.1E-03	3.4E-03	4.2E-03	4.3E-03	2.2E-03	2.1E-03	2.2E-02	1.0E-02	-5.5E-04	-1.1E-02	-2.2E-02	-3.2E-02
3227	5.5E-04	1.9E-03	2.9E-03	3.6E-03	3.8E-03	2.1E-03	1.9E-03	1.2E-02	2.0E-03	-6.7E-03	-1.5E-02	-2.4E-02	-3.3E-02
3228	6.0E-04	1.4E-03	3.0E-03	3.8E-03	3.8E-03	2.2E-03	2.0E-03	-1.3E-02	-1.6E-02	-1.7E-02	-1.9E-02	-2.1E-02	-2.2E-02
3229	5.6E-04	1.6E-03	3.0E-03	3.8E-03	3.8E-03	2.1E-03	1.9E-03	-5.0E-02	-4.5E-02	-3.9E-02	-3.3E-02	-2.7E-02	-2.1E-02
3230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3231	6.2E-04	1.3E-03	2.1E-03	2.4E-03	2.5E-03	1.6E-03	1.4E-03	-3.9E-02	-4.0E-02	-3.9E-02	-3.9E-02	-3.9E-02	-3.8E-02
3232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3233	5.2E-04	1.0E-03	2.0E-03	2.4E-03	2.8E-03	1.9E-03	1.4E-03	-4.2E-02	-4.4E-02	-4.5E-02	-4.6E-02	-4.8E-02	-4.9E-02
3234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3237	7.2E-04	2.4E-03	3.8E-03	4.3E-03	4.5E-03	2.6E-03	2.4E-03	9.0E-03	2.2E-03	-3.2E-03	-8.6E-03	-1.4E-02	-1.9E-02
3238	5.8E-04	2.2E-03	3.5E-03	4.4E-03	4.5E-03	2.3E-03	2.2E-03	2.0E-02	7.2E-03	-3.8E-03	-1.5E-02	-2.6E-02	-3.7E-02
3239	6.3E-04	1.9E-03	3.0E-03	3.8E-03	3.9E-03	2.2E-03	2.0E-03	8.8E-03	-9.2E-04	-9.3E-03	-1.8E-02	-2.6E-02	-3.5E-02

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3240	6.0E-04	1.5E-03	3.2E-03	3.9E-03	4.0E-03	2.2E-03	2.1E-03	-2.5E-02	-2.5E-02	-2.3E-02	-2.2E-02	-2.1E-02	-1.9E-02
3241	5.5E-04	1.6E-03	3.1E-03	3.8E-03	3.9E-03	2.1E-03	2.0E-03	-5.7E-02	-5.1E-02	-4.4E-02	-3.7E-02	-2.9E-02	-2.2E-02
3242	6.2E-04	1.5E-03	2.5E-03	3.2E-03	3.3E-03	1.9E-03	1.7E-03	-4.7E-02	-4.6E-02	-4.3E-02	-4.1E-02	-3.8E-02	-3.6E-02
3243	6.2E-04	1.4E-03	2.2E-03	2.4E-03	2.5E-03	1.7E-03	1.4E-03	-4.5E-02	-4.5E-02	-4.4E-02	-4.2E-02	-4.1E-02	-4.0E-02
3244	5.5E-04	1.1E-03	1.9E-03	2.3E-03	2.8E-03	1.9E-03	1.4E-03	-4.8E-02	-5.0E-02	-5.1E-02	-5.2E-02	-5.3E-02	-5.4E-02
3245	4.6E-04	1.1E-03	2.0E-03	2.5E-03	2.9E-03	1.9E-03	1.5E-03	-3.8E-02	-4.1E-02	-4.2E-02	-4.4E-02	-4.5E-02	-4.7E-02
3246	4.5E-04	9.8E-04	1.8E-03	2.3E-03	2.6E-03	1.8E-03	1.5E-03	-3.7E-02	-3.9E-02	-3.9E-02	-4.0E-02	-4.1E-02	-4.1E-02
3247	3.9E-04	9.3E-04	1.7E-03	2.1E-03	2.5E-03	1.7E-03	1.3E-03	-2.9E-02	-3.1E-02	-3.3E-02	-3.4E-02	-3.6E-02	-3.7E-02
3248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3251	6.3E-04	2.3E-03	3.7E-03	4.6E-03	4.8E-03	2.4E-03	2.2E-03	1.7E-02	4.9E-03	-6.1E-03	-1.7E-02	-2.8E-02	-3.9E-02
3252	6.6E-04	2.0E-03	3.1E-03	3.8E-03	4.0E-03	2.3E-03	2.1E-03	2.0E-03	-6.4E-03	-1.4E-02	-2.1E-02	-2.8E-02	-3.5E-02
3253	5.6E-04	1.6E-03	3.3E-03	4.1E-03	4.1E-03	2.3E-03	2.1E-03	-3.7E-02	-3.4E-02	-3.1E-02	-2.7E-02	-2.3E-02	-1.9E-02
3254	6.0E-04	1.6E-03	3.0E-03	3.8E-03	3.9E-03	2.2E-03	2.0E-03	-5.6E-02	-5.0E-02	-4.3E-02	-3.6E-02	-2.9E-02	-2.1E-02
3255	6.3E-04	1.4E-03	2.5E-03	3.2E-03	3.3E-03	1.9E-03	1.7E-03	-4.8E-02	-4.8E-02	-4.6E-02	-4.5E-02	-4.4E-02	-4.3E-02
3256	5.7E-04	1.3E-03	2.2E-03	2.4E-03	2.5E-03	1.8E-03	1.4E-03	-5.0E-02	-5.0E-02	-4.9E-02	-4.8E-02	-4.7E-02	-4.6E-02
3257	4.7E-04	1.1E-03	2.0E-03	2.4E-03	2.9E-03	2.0E-03	1.5E-03	-4.6E-02	-4.7E-02	-4.8E-02	-4.9E-02	-5.0E-02	-5.1E-02
3258	4.5E-04	1.1E-03	2.0E-03	2.5E-03	2.9E-03	2.0E-03	1.5E-03	-4.1E-02	-4.2E-02	-4.2E-02	-4.3E-02	-4.3E-02	-4.4E-02
3259	4.0E-04	9.5E-04	1.8E-03	2.3E-03	2.5E-03	1.8E-03	1.5E-03	-3.5E-02	-3.7E-02	-3.9E-02	-4.0E-02	-4.1E-02	-4.3E-02
3260	3.9E-04	1.0E-03	1.8E-03	2.1E-03	2.6E-03	1.8E-03	1.4E-03	-2.9E-02	-3.2E-02	-3.3E-02	-3.4E-02	-3.6E-02	-3.7E-02
3261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3263	7.0E-04	2.4E-03	3.8E-03	4.8E-03	5.0E-03	2.5E-03	2.3E-03	1.5E-02	2.0E-03	-9.3E-03	-2.1E-02	-3.2E-02	-4.3E-02
3264	6.4E-04	2.0E-03	3.2E-03	4.0E-03	4.2E-03	2.4E-03	2.2E-03	-7.4E-03	-1.4E-02	-1.8E-02	-2.3E-02	-2.8E-02	-3.3E-02
3265	5.9E-04	1.6E-03	3.3E-03	4.1E-03	4.2E-03	2.4E-03	2.2E-03	-4.8E-02	-4.4E-02	-3.8E-02	-3.3E-02	-2.7E-02	-2.1E-02
3266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3267	4.4E-04	1.3E-03	2.4E-03	3.1E-03	3.2E-03	1.8E-03	1.7E-03	-4.9E-02	-4.8E-02	-4.6E-02	-4.5E-02	-4.3E-02	-4.1E-02
3268	4.8E-04	1.2E-03	2.1E-03	2.4E-03	2.6E-03	1.9E-03	1.4E-03	-5.3E-02	-5.4E-02	-5.3E-02	-5.3E-02	-5.3E-02	-5.3E-02
3269	4.1E-04	1.1E-03	1.9E-03	2.4E-03	2.8E-03	2.0E-03	1.6E-03	-4.1E-02	-4.3E-02	-4.4E-02	-4.6E-02	-4.7E-02	-4.8E-02
3270	3.8E-04	9.7E-04	1.9E-03	2.4E-03	2.7E-03	2.0E-03	1.6E-03	-4.0E-02	-4.2E-02	-4.3E-02	-4.4E-02	-4.5E-02	-4.6E-02
3271	3.8E-04	9.4E-04	1.8E-03	2.2E-03	2.6E-03	1.8E-03	1.5E-03	-3.1E-02	-3.4E-02	-3.6E-02	-3.7E-02	-3.9E-02	-4.1E-02
3272	3.4E-04	1.3E-03	2.1E-03	2.2E-03	2.6E-03	1.9E-03	1.4E-03	-2.9E-02	-3.1E-02	-3.2E-02	-3.2E-02	-3.3E-02	-3.4E-02
3273	7.0E-04	2.4E-03	4.0E-03	5.0E-03	5.2E-03	2.5E-03	2.4E-03	1.0E-02	-2.4E-03	-1.3E-02	-2.4E-02	-3.5E-02	-4.6E-02
3274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3282	4.0E-04	1.4E-03	2.3E-03	2.4E-03	2.5E-03	1.9E-03	1.4E-03	-2.9E-02	-3.0E-02	-3.0E-02	-3.0E-02	-3.1E-02	-3.1E-02
3283	6.6E-04	2.5E-03	4.1E-03	5.2E-03	5.4E-03	2.6E-03	2.5E-03	2.1E-03	-9.0E-03	-1.8E-02	-2.8E-02	-3.7E-02	-4.7E-02
3284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3285	7.2E-04	1.9E-03	3.8E-03	4.6E-03	4.7E-03	2.5E-03	2.4E-03	-6.7E-02	-6.0E-02	-5.2E-02	-4.4E-02	-3.6E-02	-2.7E-02
3286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3297	4.7E-04	1.4E-03	2.4E-03	2.9E-03	3.1E-03	2.0E-03	1.9E-03	-4.6E-03	-3.8E-03	-2.0E-03	-1.9E-04	1.6E-03	3.4E-03
3298	4.2E-04	1.3E-03	2.2E-03	2.8E-03	2.9E-03	1.8E-03	1.7E-03	6.4E-03	4.9E-03	4.3E-03	3.8E-03	3.2E-03	2.7E-03
3299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3300	2.8E-04	9.0E-04	1.5E-03	1.7E-03	1.3E-03	8.5E-04	8.4E-04	-1.6E-02	-1.2E-02	-8.2E-03	-4.2E-03	-2.4E-04	3.8E-03
3301	2.6E-04	8.2E-04	1.3E-03	1.5E-03	1.4E-03	8.6E-04	7.9E-04	-1.7E-02	-1.2E-02	-7.2E-03	-2.1E-03	3.0E-03	8.1E-03
3302	2.8E-04	7.2E-04	1.3E-03	1.4E-03	1.4E-03	8.7E-04	8.1E-04	-1.3E-02	-9.2E-03	-4.7E-03	-2.8E-04	4.2E-03	8.7E-03
3303	2.7E-04	7.6E-04	1.4E-03	1.5E-03	1.4E-03	8.4E-04	8.2E-04	-4.9E-03	-2.2E-03	1.0E-03	4.2E-03	7.4E-03	1.1E-02
3304	2.5E-04	7.6E-04	1.4E-03	1.5E-03	1.3E-03	8.3E-04	8.2E-04	1.7E-03	3.3E-03	5.3E-03	7.3E-03	9.3E-03	1.1E-02
3305	2.4E-04	7.3E-04	1.3E-03	1.4E-03	1.3E-03	8.5E-04	8.0E-04	2.8E-03	3.2E-03	4.1E-03	4.9E-03	5.8E-03	6.7E-03
3306	2.2E-04	6.6E-04	1.3E-03	1.4E-03	1.3E-03	1.0E-03	7.3E-04	1.3E-02	9.2E-03	5.9E-03	2.7E-03	-5.6E-04	-3.8E-03
3307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3311	4.6E-04	1.3E-03	2.4E-03	2.7E-03	2.9E-03	2.0E-03	1.8E-03	-2.1E-03	-1.2E-03	6.3E-04	2.4E-03	4.2E-03	6.0E-03
3312	4.8E-04	1.4E-03	2.5E-03	2.8E-03	3.1E-03	2.1E-03	1.9E-03	-3.0E-03	-5.0E-04	2.9E-03	6.3E-03	9.7E-03	1.3E-02
3313	3.6E-04	9.5E-04	1.7E-03	1.9E-03	1.3E-03	1.1E-03	1.1E-03	-8.5E-03	-8.3E-03	-7.7E-03	-7.1E-03	-6.5E-03	-5.9E-03
3314	3.3E-04	9.7E-04	1.7E-03	1.9E-03	1.2E-03	1.0E-03	9.9E-04	-1.2E-02	-1.1E-02	-1.0E-02	-9.0E-03	-7.9E-03	-6.8E-03
3315	4.6E-04	1.0E-03	2.0E-03	2.1E-03	1.7E-03	1.4E-03	1.3E-03	-8.9E-03	-9.1E-03	-8.8E-03	-8.5E-03	-8.2E-03	-7.9E-03
3316	4.7E-04	1.1E-03	2.1E-03	2.1E-03	2.0E-03	1.4E-03	1.4E-03	-9.7E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
3317	2.5E-04	6.9E-04	1.3E-03	1.3E-03	1.3E-03	7.8E-04	7.4E-04	-5.6E-03	-2.9E-03	2.8E-04	3.4E-03	6.6E-03	9.8E-03
3318	2.2E-04	6.6E-04	1.2E-03	1.3E-03	1.3E-03	9.1E-04	7.2E-04	1.0E-02	7.5E-03	5.3E-03	3.2E-03	1.0E-03	-1.2E-03
3319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3327	2.7E-03	3.1E-03	6.4E-03	7.9E-03	1.2E-02	1.1E-02	1.1E-02	-1.3E-02	-1.3E-02	-6.4E-03	5.8E-04	7.5E-03	1.4E-02
3328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3333	2.2E-03	2.5E-03	5.0E-03	6.7E-03	8.9E-03	8.5E-03	8.0E-03	4.7E-03	-1.7E-04	4.3E-04	1.0E-03	1.6E-03	2.2E-03
3334	1.9E-03	2.3E-03	4.8E-03	6.0E-03	8.5E-03	7.9E-03	7.5E-03	1.9E-03	-1.2E-03	8.2E-04	2.9E-03	4.9E-03	6.9E-03
3335	1.6E-03	2.2E-03	4.5E-03	5.2E-03	7.9E-03	7.4E-03	7.0E-03	-7.3E-04	-2.9E-03	-4.1E-04	2.1E-03	4.7E-03	7.2E-03
3336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3357	1.2E-03	4.7E-03	1.0E-02	1.7E-02	1.8E-02	6.6E-03	6.1E-03	3.7E-02	4.0E-02	4.6E-02	5.3E-02	6.0E-02	6.6E-02
3358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3359	1.1E-03	1.3E-02	1.5E-02	1.5E-02	9.3E-03	4.6E-03	4.6E-03	3.2E-02	3.6E-02	4.2E-02	4.9E-02	5.5E-02	6.2E-02
3360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3364	8.9E-04	7.1E-03	1.3E-02	1.6E-02	6.9E-03	4.6E-03	4.2E-03	1.3E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
3365	8.0E-04	4.1E-03	4.9E-03	8.0E-03	5.7E-03	4.2E-03	3.9E-03	2.5E-02	2.1E-02	2.0E-02	1.9E-02	1.8E-02	1.7E-02
3366	8.2E-04	3.2E-03	4.0E-03	5.5E-03	4.8E-03	3.7E-03	3.5E-03	3.7E-02	2.7E-02	2.0E-02	1.2E-02	4.1E-03	-3.6E-03
3367	8.2E-04	3.1E-03	4.0E-03	5.5E-03	4.8E-03	3.6E-03	3.4E-03	3.7E-02	2.7E-02	2.0E-02	1.2E-02	4.3E-03	-3.3E-03
3368	8.0E-04	2.0E-03	3.9E-03	6.1E-03	4.6E-03	3.5E-03	3.3E-03	3.6E-02	2.7E-02	2.0E-02	1.3E-02	5.5E-03	-1.7E-03
3369	7.1E-04	1.9E-03	4.6E-03	7.0E-03	4.6E-03	3.5E-03	3.3E-03	3.5E-02	2.7E-02	2.0E-02	1.4E-02	7.4E-03	9.5E-04
3370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3411	7.5E-04	1.2E-03	1.2E-03	1.3E-03	2.6E-03	1.4E-03	1.3E-03	-1.2E-02	-1.1E-02	-8.1E-03	-5.6E-03	-3.1E-03	-5.9E-04
3412	7.6E-04	1.2E-03	1.2E-03	1.4E-03	2.6E-03	1.5E-03	1.4E-03	-1.4E-02	-1.2E-02	-1.0E-02	-7.8E-03	-5.4E-03	-3.1E-03
3413	9.0E-04	1.2E-03	1.2E-03	1.4E-03	2.5E-03	1.5E-03	1.5E-03	-1.7E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.4E-03
3414	9.3E-04	1.2E-03	1.2E-03	1.4E-03	2.2E-03	1.5E-03	1.4E-03	-1.5E-02	-1.4E-02	-1.2E-02	-9.9E-03	-7.8E-03	-5.6E-03
3415	1.0E-03	1.3E-03	1.3E-03	1.3E-03	1.8E-03	1.6E-03	1.3E-03	-1.3E-02	-1.1E-02	-8.0E-03	-5.0E-03	-2.1E-03	8.9E-04
3416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3424	9.9E-04	1.5E-03	1.6E-03	1.2E-03	1.6E-03	1.8E-03	9.7E-04	-9.5E-03	-6.2E-03	-2.6E-03	1.1E-03	4.7E-03	8.4E-03
3425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3428	1.0E-03	1.6E-03	1.7E-03	1.3E-03	1.6E-03	2.0E-03	1.1E-03	-5.4E-03	-3.2E-03	-6.8E-04	1.8E-03	4.3E-03	6.9E-03
3429	1.1E-03	1.6E-03	1.7E-03	1.3E-03	1.7E-03	2.1E-03	1.2E-03	-5.1E-03	-3.2E-03	-9.2E-04	1.3E-03	3.6E-03	5.9E-03
3430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3539	7.7E-04	2.8E-03	4.5E-03	5.2E-03	5.4E-03	2.9E-03	2.7E-03	1.1E-02	6.0E-05	-8.8E-03	-1.8E-02	-2.7E-02	-3.6E-02
3540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3554	9.5E-04	2.9E-03	5.0E-03	5.8E-03	6.3E-03	4.0E-03	3.8E-03	-1.0E-02	-2.0E-02	-2.7E-02	-3.5E-02	-4.3E-02	-5.0E-02
3555	9.1E-04	3.0E-03	5.0E-03	5.9E-03	6.1E-03	3.5E-03	3.3E-03	7.3E-04	-1.2E-02	-2.2E-02	-3.2E-02	-4.2E-02	-5.2E-02
3556	8.8E-04	3.0E-03	4.9E-03	5.8E-03	6.1E-03	3.5E-03	3.2E-03	-7.4E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.2E-02	-5.1E-02
3557	9.4E-04	2.9E-03	5.0E-03	5.8E-03	6.2E-03	3.9E-03	3.6E-03	-7.3E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.3E-02	-5.1E-02
3558	9.5E-04	2.8E-03	5.0E-03	5.7E-03	6.4E-03	4.2E-03	4.0E-03	-1.2E-02	-2.1E-02	-2.7E-02	-3.4E-02	-4.0E-02	-4.7E-02
3559	9.5E-04	2.8E-03	4.9E-03	5.8E-03	7.6E-03	5.5E-03	5.3E-03	-1.7E-02	-2.4E-02	-2.9E-02	-3.3E-02	-3.8E-02	-4.3E-02
3560	9.4E-04	2.7E-03	4.9E-03	6.5E-03	1.0E-02	8.0E-03	7.6E-03	-2.2E-02	-2.7E-02	-3.1E-02	-3.4E-02	-3.7E-02	-4.1E-02
3561	9.5E-04	2.9E-03	5.0E-03	6.5E-03	9.5E-03	7.2E-03	6.9E-03	-1.9E-02	-2.5E-02	-2.9E-02	-3.3E-02	-3.7E-02	-4.2E-02
3562	9.6E-04	3.0E-03	5.2E-03	6.1E-03	8.3E-03	5.9E-03	5.8E-03	-9.4E-03	-1.7E-02	-2.3E-02	-2.8E-02	-3.4E-02	-4.0E-02
3563	9.5E-04	3.1E-03	5.2E-03	6.1E-03	7.1E-03	6.2E-03	6.2E-03	3.8E-05	-9.9E-03	-1.8E-02	-2.5E-02	-3.3E-02	-4.1E-02
3564	9.6E-04	3.2E-03	5.3E-03	6.2E-03	7.2E-03	6.9E-03	6.9E-03	5.8E-03	-5.2E-03	-1.4E-02	-2.3E-02	-3.2E-02	-4.1E-02
3565	9.4E-04	3.2E-03	5.3E-03	6.3E-03	6.6E-03	5.2E-03	5.2E-03	-7.3E-03	-1.6E-02	-2.3E-02	-3.0E-02	-3.7E-02	-4.4E-02
3566	9.0E-04	3.2E-03	5.2E-03	6.2E-03	6.6E-03	3.9E-03	3.9E-03	-2.6E-02	-3.1E-02	-3.4E-02	-3.7E-02	-4.0E-02	-4.3E-02
3567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3579	9.6E-04	3.9E-03	7.4E-03	8.9E-03	9.3E-03	4.7E-03	4.4E-03	-2.3E-01	-2.1E-01	-2.0E-01	-1.9E-01	-1.7E-01	-1.6E-01
3580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3584	6.1E-03	7.6E-03	1.1E-02	1.7E-02	1.9E-02	1.6E-02	1.6E-02	6.6E-02	8.3E-02	1.1E-01	1.4E-01	1.7E-01	1.9E-01
3585	6.4E-03	7.6E-03	1.1E-02	1.8E-02	2.0E-02	1.7E-02	1.7E-02	4.8E-02	6.2E-02	8.7E-02	1.1E-01	1.4E-01	1.6E-01
3586	6.8E-03	7.9E-03	1.2E-02	1.9E-02	2.1E-02	1.8E-02	1.8E-02	4.5E-02	5.5E-02	7.9E-02	1.0E-01	1.2E-01	1.5E-01
3587	7.7E-03	8.9E-03	1.3E-02	2.2E-02	2.4E-02	2.1E-02	2.1E-02	3.8E-02	4.6E-02	6.9E-02	9.1E-02	1.1E-01	1.4E-01
3588	8.5E-03	9.6E-03	1.4E-02	2.4E-02	2.6E-02	2.3E-02	2.3E-02	2.1E-02	2.5E-02	4.4E-02	6.3E-02	8.2E-02	1.0E-01
3589	8.9E-03	1.0E-02	1.4E-02	2.5E-02	2.7E-02	2.4E-02	2.4E-02	1.6E-02	1.7E-02	3.4E-02	5.2E-02	6.9E-02	8.6E-02
3590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2	7.7E-04	1.5E-03	2.6E-03	2.6E-03	2.7E-03	2.2E-03	2.1E-03	-8.7E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.4E-02
3	3.6E-03	6.2E-03	6.7E-03	8.5E-03	1.4E-02	1.4E-02	1.3E-02	5.3E-03	7.3E-03	2.0E-02	3.3E-02	4.5E-02	5.8E-02
4	3.1E-03	5.3E-03	4.8E-03	6.0E-03	1.0E-02	9.8E-03	9.2E-03	9.5E-03	1.5E-02	2.9E-02	4.3E-02	5.7E-02	7.1E-02
5	1.4E-03	2.5E-03	3.9E-03	4.1E-03	6.7E-03	6.4E-03	6.1E-03	2.5E-03	4.2E-03	9.7E-03	1.5E-02	2.1E-02	2.6E-02
6	5.3E-04	1.4E-03	2.8E-03	3.5E-03	3.6E-03	2.0E-03	1.8E-03	-2.2E-02	-2.2E-02	-2.1E-02	-1.9E-02	-1.8E-02	-1.7E-02
7	1.1E-03	1.9E-03	3.2E-03	3.4E-03	3.3E-03	3.0E-03	2.9E-03	-3.9E-02	-2.9E-02	-1.8E-02	-6.2E-03	5.4E-03	1.7E-02
8	7.4E-04	1.1E-03	1.2E-03	1.2E-03	1.5E-03	1.2E-03	1.1E-03	-2.4E-03	-5.5E-04	1.9E-03	4.3E-03	6.8E-03	9.2E-03
9	1.6E-03	2.1E-03	3.2E-03	5.2E-03	5.3E-03	4.9E-03	4.9E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
10	5.2E-04	1.3E-03	2.1E-03	2.3E-03	2.4E-03	1.5E-03	1.3E-03	-3.3E-02	-3.3E-02	-3.3E-02	-3.2E-02	-3.2E-02	-3.1E-02
11	4.9E-04	1.7E-03	2.7E-03	3.4E-03	3.5E-03	2.1E-03	1.9E-03	1.2E-02	2.4E-03	-5.9E-03	-1.4E-02	-2.2E-02	-3.1E-02
12	4.8E-04	1.2E-03	2.0E-03	2.6E-03	2.2E-03	1.7E-03	1.6E-03	-4.7E-03	-6.1E-03	-6.7E-03	-7.2E-03	-7.7E-03	-8.2E-03
13	1.9E-03	3.3E-03	3.8E-03	4.3E-03	7.1E-03	7.0E-03	6.6E-03	-2.7E-02	-2.2E-02	-1.2E-02	-1.2E-03	9.0E-03	1.9E-02
14	4.8E-04	1.1E-03	2.2E-03	2.5E-03	1.9E-03	1.5E-03	1.5E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02	-9.6E-03
15	1.1E-03	4.2E-03	8.5E-03	1.2E-02	1.6E-02	6.1E-03	5.6E-03	3.5E-02	3.8E-02	4.4E-02	5.0E-02	5.6E-02	6.2E-02
16	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
17	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
18	1.4E-03	1.6E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	1.9E-03	-1.5E-02	-1.0E-02	-5.6E-03	-7.0E-04	4.2E-03	9.0E-03
19	1.0E-03	1.3E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.5E-02	-1.1E-02	-6.8E-03	-2.6E-03	1.7E-03	6.0E-03
20	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
21	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
22	3.5E-04	9.8E-04	1.2E-03	8.3E-04	7.6E-04	6.8E-04	6.8E-04	-1.0E-02	-8.1E-03	-5.7E-03	-3.3E-03	-9.4E-04	1.4E-03
23	1.5E-03	1.6E-03	3.1E-03	4.2E-03	4.3E-03	4.1E-03	4.1E-03	-1.9E-02	-1.5E-02	-8.4E-03	-2.1E-03	4.1E-03	1.0E-02
24	1.7E-03	2.2E-03	5.1E-03	5.9E-03	6.8E-03	5.4E-03	5.2E-03	1.9E-02	1.9E-02	2.1E-02	2.4E-02	2.6E-02	2.9E-02
25	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
26	1.5E-03	2.2E-03	4.5E-03	4.9E-03	6.8E-03	6.1E-03	5.8E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02	2.5E-02
27	9.2E-04	5.1E-03	5.2E-03	7.1E-03	8.3E-03	4.2E-03	3.9E-03	2.7E-02	3.0E-02	3.5E-02	4.0E-02	4.5E-02	5.0E-02
28	9.1E-04	1.8E-03	5.5E-03	7.2E-03	7.2E-03	5.0E-03	4.7E-03	3.3E-04	9.0E-03	2.1E-02	3.2E-02	4.4E-02	5.6E-02
29	8.5E-04	1.1E-03	2.2E-03	2.7E-03	3.4E-03	3.1E-03	3.0E-03	-2.5E-03	-1.5E-03	1.4E-03	4.3E-03	7.2E-03	1.0E-02
30	3.0E-03	3.3E-03	5.8E-03	1.0E-02	1.1E-02	1.0E-02	1.0E-02	-1.9E-02	-1.7E-02	-1.1E-02	-3.9E-03	2.9E-03	9.6E-03
31	2.0E-03	2.1E-03	2.4E-03	4.2E-03	4.5E-03	4.2E-03	4.2E-03	-2.8E-02	-2.2E-02	-1.4E-02	-6.8E-03	8.6E-04	8.5E-03
32	7.5E-04	3.6E-03	5.8E-03	5.1E-03	4.4E-03	2.5E-03	2.2E-03	2.3E-02	2.3E-02	2.5E-02	2.6E-02	2.8E-02	2.9E-02
33	1.0E-03	1.7E-03	3.6E-03	4.0E-03	6.0E-03	5.6E-03	5.2E-03	-2.5E-02	-2.4E-02	-1.9E-02	-1.5E-02	-1.1E-02	-6.2E-03
34	6.2E-04	7.9E-04	7.6E-04	9.5E-04	2.1E-03	8.5E-04	7.6E-04	-1.1E-02	-9.3E-03	-7.4E-03	-5.4E-03	-3.5E-03	-1.5E-03
35	1.9E-03	2.4E-03	2.7E-03	1.5E-03	1.4E-03	1.7E-03	1.2E-03	-2.1E-02	-1.9E-02	-1.5E-02	-1.2E-02	-9.4E-03	-6.3E-03
36	1.9E-03	2.8E-03	4.2E-03	5.7E-03	5.9E-03	5.6E-03	5.6E-03	-1.9E-02	-1.0E-02	1.1E-03	1.3E-02	2.4E-02	3.6E-02
37	1.7E-03	2.1E-03	1.1E-03	7.5E-04	8.3E-04	1.1E-03	4.9E-04	-9.7E-03	-9.6E-03	-9.2E-03	-8.8E-03	-8.4E-03	-7.9E-03
38	6.7E-04	2.8E-03	4.3E-03	4.6E-03	3.9E-03	2.4E-03	2.1E-03	-4.5E-02	-4.0E-02	-3.4E-02	-2.8E-02	-2.1E-02	-1.5E-02
39	9.0E-04	1.1E-03	1.2E-03	1.1E-03	1.3E-03	9.6E-04	9.2E-04	1.5E-03	2.7E-03	4.4E-03	6.1E-03	7.8E-03	9.5E-03
40	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
41	1.6E-03	1.8E-03	1.7E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	-1.3E-02	-1.0E-02	-6.6E-03	-3.1E-03	4.6E-04	4.0E-03

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
42	8.5E-04	1.0E-03	1.1E-03	9.5E-04	1.2E-03	8.2E-04	7.8E-04	7.9E-04	2.0E-03	3.5E-03	5.1E-03	6.6E-03	8.2E-03
43	7.4E-04	1.0E-03	1.2E-03	8.5E-04	1.0E-03	7.2E-04	6.3E-04	-1.0E-03	3.2E-04	2.0E-03	3.7E-03	5.4E-03	7.0E-03
44	1.1E-03	1.3E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.4E-02	-1.1E-02	-6.5E-03	-2.3E-03	1.8E-03	6.0E-03
45	1.4E-03	2.4E-03	2.4E-03	1.2E-03	1.1E-03	9.6E-04	9.0E-04	-1.8E-02	-1.6E-02	-1.4E-02	-1.1E-02	-9.1E-03	-6.8E-03
46	1.7E-03	3.3E-03	4.1E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-1.6E-02	-8.9E-03	1.9E-03	1.3E-02	2.4E-02	3.4E-02
47	1.7E-03	3.3E-03	4.1E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-1.6E-02	-8.9E-03	1.9E-03	1.3E-02	2.4E-02	3.4E-02
48	7.7E-04	1.9E-03	2.8E-03	3.8E-03	4.2E-03	3.6E-03	3.3E-03	-2.3E-02	-1.9E-02	-1.3E-02	-7.2E-03	-1.0E-03	5.1E-03
49	5.1E-04	2.0E-03	2.6E-03	3.9E-03	3.5E-03	3.0E-03	2.8E-03	-1.2E-02	-7.3E-03	-3.3E-04	6.6E-03	1.4E-02	2.0E-02
50	5.7E-04	1.8E-03	3.3E-03	4.1E-03	4.2E-03	2.4E-03	2.2E-03	-6.2E-02	-6.0E-02	-5.7E-02	-5.3E-02	-5.0E-02	-4.6E-02
51	2.5E-03	4.1E-03	3.7E-03	4.4E-03	7.0E-03	6.9E-03	6.5E-03	-2.8E-02	-2.8E-02	-2.3E-02	-1.8E-02	-1.2E-02	-7.2E-03
52	1.7E-03	1.8E-03	3.6E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-2.3E-02	-1.6E-02	-5.6E-03	4.5E-03	1.5E-02	2.5E-02
53	6.3E-04	8.9E-04	1.3E-03	1.4E-03	1.9E-03	2.1E-03	9.9E-04	-1.0E-02	-9.0E-03	-7.2E-03	-5.4E-03	-3.6E-03	-1.8E-03
54	9.5E-04	1.3E-03	2.6E-03	2.9E-03	4.3E-03	3.8E-03	3.6E-03	1.9E-03	3.0E-03	6.5E-03	1.0E-02	1.4E-02	1.7E-02
55	4.5E-04	1.0E-03	1.9E-03	2.4E-03	2.7E-03	1.8E-03	1.5E-03	-3.8E-02	-4.0E-02	-4.0E-02	-4.1E-02	-4.2E-02	-4.2E-02
56	2.2E-03	4.0E-03	4.9E-03	5.6E-03	9.3E-03	9.2E-03	8.7E-03	-4.6E-02	-3.8E-02	-2.3E-02	-8.3E-03	6.5E-03	2.1E-02
57	5.0E-04	8.9E-04	1.2E-03	1.2E-03	2.0E-03	9.1E-04	8.7E-04	-3.7E-03	-2.9E-03	-1.7E-03	-4.7E-04	7.4E-04	2.0E-03
58	2.5E-03	2.8E-03	2.8E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02
59	7.8E-04	1.5E-03	2.8E-03	3.2E-03	4.7E-03	4.2E-03	3.9E-03	-1.4E-02	-1.4E-02	-1.2E-02	-9.3E-03	-6.8E-03	-4.2E-03
60	3.5E-04	8.4E-04	1.0E-03	1.0E-03	9.6E-04	8.7E-04	8.7E-04	-1.5E-02	-1.3E-02	-1.0E-02	-7.6E-03	-5.0E-03	-2.5E-03
61	4.4E-04	1.3E-03	2.4E-03	2.6E-03	2.8E-03	2.0E-03	1.7E-03	2.0E-03	3.1E-03	4.9E-03	6.8E-03	8.6E-03	1.0E-02
62	3.3E-03	3.5E-03	5.8E-03	9.8E-03	1.0E-02	9.6E-03	9.6E-03	-8.6E-03	-1.1E-02	-7.5E-03	-4.2E-03	-8.5E-04	2.5E-03
63	8.6E-04	1.3E-03	2.6E-03	2.9E-03	4.1E-03	3.6E-03	3.4E-03	9.0E-04	2.5E-04	1.8E-03	3.4E-03	5.0E-03	6.5E-03
64	2.1E-03	2.3E-03	2.3E-03	1.6E-03	1.6E-03	1.4E-03	1.4E-03	-1.9E-02	-1.6E-02	-1.1E-02	-7.2E-03	-3.0E-03	1.3E-03
65	8.9E-04	1.8E-03	5.3E-03	6.8E-03	6.8E-03	5.3E-03	5.0E-03	-3.4E-03	3.7E-03	1.4E-02	2.4E-02	3.4E-02	4.5E-02
66	2.2E-03	4.0E-03	4.9E-03	5.6E-03	9.4E-03	9.2E-03	8.7E-03	-4.6E-02	-3.8E-02	-2.3E-02	-8.2E-03	6.7E-03	2.1E-02
67	1.2E-03	1.7E-03	2.7E-03	3.5E-03	3.6E-03	3.2E-03	3.0E-03	-4.5E-02	-3.9E-02	-3.0E-02	-2.1E-02	-1.3E-02	-4.1E-03
68	5.3E-04	1.4E-03	2.8E-03	3.5E-03	3.5E-03	1.9E-03	1.8E-03	-3.1E-02	-2.9E-02	-2.5E-02	-2.2E-02	-1.8E-02	-1.5E-02
69	1.8E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	1.6E-03	1.6E-03	-1.4E-02	-9.8E-03	-5.0E-03	-2.4E-04	4.6E-03	9.3E-03
70	1.7E-03	1.8E-03	3.6E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-2.3E-02	-1.6E-02	-5.5E-03	4.5E-03	1.5E-02	2.5E-02
71	9.5E-04	3.3E-03	5.2E-03	5.7E-03	4.5E-03	3.0E-03	2.9E-03	-8.6E-02	-8.0E-02	-7.3E-02	-6.5E-02	-5.8E-02	-5.1E-02
72	1.4E-03	1.8E-03	2.8E-03	3.7E-03	3.9E-03	3.7E-03	3.7E-03	-2.5E-02	-2.1E-02	-1.5E-02	-9.2E-03	-3.3E-03	2.7E-03
73	3.4E-03	5.8E-03	5.9E-03	7.5E-03	1.3E-02	1.2E-02	1.2E-02	-3.7E-03	1.3E-03	1.6E-02	3.1E-02	4.5E-02	6.0E-02
74	1.1E-03	1.4E-03	1.5E-03	1.0E-03	2.0E-03	8.6E-04	8.3E-04	-2.8E-03	-1.2E-03	6.1E-04	2.4E-03	4.3E-03	6.1E-03
75	1.1E-03	8.7E-03	8.6E-03	9.3E-03	9.4E-03	3.8E-03	3.8E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.9E-02
76	7.2E-04	1.4E-03	2.5E-03	3.5E-03	3.8E-03	3.1E-03	2.9E-03	-2.3E-02	-2.0E-02	-1.6E-02	-1.1E-02	-6.2E-03	-1.5E-03
77	1.4E-03	1.5E-03	2.4E-03	3.9E-03	4.0E-03	3.7E-03	3.7E-03	-1.6E-02	-1.9E-02	-2.0E-02	-2.0E-02	-2.1E-02	-2.2E-02
78	3.4E-03	8.0E-03	8.4E-03	8.9E-03	1.0E-02	8.3E-03	8.3E-03	-1.0E-02	4.6E-03	2.6E-02	4.7E-02	6.8E-02	9.0E-02
79	1.7E-03	2.0E-03	3.2E-03	5.0E-03	5.1E-03	4.7E-03	4.7E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
80	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
81	3.9E-04	1.1E-03	1.3E-03	1.2E-03	1.2E-03	9.7E-04	9.7E-04	-1.6E-02	-1.4E-02	-1.1E-02	-8.8E-03	-6.3E-03	-3.7E-03
82	2.5E-03	2.9E-03	5.0E-03	8.8E-03	9.3E-03	8.7E-03	8.6E-03	-8.2E-03	-1.0E-02	-7.6E-03	-5.0E-03	-2.5E-03	7.3E-05

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
83	1.9E-03	2.0E-03	2.1E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.0E-02	-6.7E-03	-3.4E-03	-1.4E-05	3.3E-03
84	7.4E-04	3.8E-03	6.2E-03	8.2E-03	5.7E-03	2.6E-03	2.5E-03	1.5E-02	1.4E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02
85	8.5E-04	4.0E-03	6.0E-03	6.4E-03	5.3E-03	3.2E-03	2.8E-03	-1.1E-01	-1.0E-01	-9.2E-02	-8.4E-02	-7.6E-02	-6.7E-02
86	3.2E-03	5.4E-03	5.0E-03	6.3E-03	1.1E-02	1.0E-02	9.7E-03	1.1E-02	1.6E-02	3.0E-02	4.3E-02	5.7E-02	7.0E-02
87	3.3E-04	7.8E-04	9.7E-04	9.4E-04	8.7E-04	7.8E-04	7.8E-04	-1.4E-02	-1.2E-02	-9.0E-03	-6.4E-03	-3.8E-03	-1.2E-03
88	1.1E-03	9.5E-03	1.3E-02	1.3E-02	1.0E-02	4.9E-03	4.3E-03	-6.7E-02	-5.9E-02	-4.8E-02	-3.8E-02	-2.7E-02	-1.6E-02
89	1.1E-03	3.5E-03	6.2E-03	8.6E-03	8.4E-03	5.1E-03	4.7E-03	2.1E-02	2.7E-02	3.7E-02	4.6E-02	5.6E-02	6.6E-02
90	1.3E-03	1.7E-03	1.1E-03	6.9E-04	7.0E-04	9.9E-04	4.4E-04	-1.3E-02	-1.2E-02	-1.0E-02	-9.2E-03	-8.0E-03	-6.8E-03
91	1.3E-03	1.7E-03	1.1E-03	7.0E-04	7.0E-04	9.9E-04	4.5E-04	-1.2E-02	-1.2E-02	-1.0E-02	-9.1E-03	-7.8E-03	-6.6E-03
92	9.6E-04	1.6E-03	3.0E-03	3.8E-03	5.0E-03	4.6E-03	4.3E-03	-2.9E-02	-2.5E-02	-1.9E-02	-1.3E-02	-6.7E-03	-5.4E-04
93	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
94	9.4E-04	1.4E-03	1.5E-03	1.1E-03	1.4E-03	1.1E-03	9.6E-04	-2.6E-03	-8.4E-04	1.3E-03	3.4E-03	5.5E-03	7.6E-03
95	1.3E-03	1.7E-03	1.1E-03	6.9E-04	7.1E-04	9.9E-04	4.4E-04	-1.3E-02	-1.2E-02	-1.0E-02	-9.3E-03	-8.1E-03	-6.9E-03
96	6.9E-04	2.3E-03	3.6E-03	4.5E-03	4.7E-03	2.3E-03	2.2E-03	5.3E-03	-5.3E-03	-1.4E-02	-2.3E-02	-3.3E-02	-4.2E-02
97	3.2E-04	6.0E-04	8.2E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-6.6E-03	-7.0E-03	-7.2E-03	-7.4E-03	-7.5E-03	-7.7E-03
98	3.2E-04	6.0E-04	8.2E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-6.7E-03	-7.1E-03	-7.2E-03	-7.4E-03	-7.5E-03	-7.7E-03
99	4.7E-04	1.0E-03	2.0E-03	2.2E-03	1.7E-03	1.4E-03	1.4E-03	-8.8E-03	-9.0E-03	-8.7E-03	-8.4E-03	-8.1E-03	-7.7E-03
100	1.4E-03	2.6E-03	3.7E-03	3.8E-03	6.4E-03	6.2E-03	5.9E-03	-8.2E-03	-3.5E-03	5.0E-03	1.3E-02	2.2E-02	3.0E-02
101	6.7E-04	2.5E-03	4.4E-03	5.7E-03	3.7E-03	2.1E-03	1.9E-03	1.5E-02	1.9E-02	2.3E-02	2.8E-02	3.3E-02	3.7E-02
102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
599	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
600	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
601	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
602	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
603	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
604	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
605	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
606	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
607	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
608	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
610	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
611	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
612	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
613	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
614	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
615	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
616	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
617	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
618	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
620	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
622	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
623	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
624	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
625	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
626	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
627	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
628	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
630	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
631	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
632	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
633	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
634	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
674	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
680	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
743	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
744	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
762	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
763	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
764	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
765	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
766	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
767	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
768	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
769	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
772	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
774	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
776	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
777	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
778	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
779	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
780	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
781	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
782	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
784	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
785	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
786	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
788	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
789	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
790	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
792	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
808	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
809	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
810	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
811	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
812	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
814	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
815	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
816	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
817	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
818	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
823	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
824	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
825	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
826	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
827	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
828	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
829	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
830	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
831	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
832	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
833	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
834	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
836	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
837	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
838	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
839	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
840	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
841	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
854	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
897	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
916	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
917	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
919	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
920	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
925	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
926	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
928	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
929	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
931	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
938	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
939	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
940	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
941	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
953	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
962	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
963	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
964	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
965	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
966	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
972	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
973	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
974	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
976	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
977	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
990	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
993	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
994	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
995	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
996	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
997	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
998	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
999	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1003	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1004	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1005	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1006	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1007	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1008	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1009	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1010	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1011	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1012	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1013	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1014	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1015	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1016	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1017	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1018	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1019	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1020	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1021	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1023	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1024	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1025	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1026	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1028	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1029	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1030	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1031	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1033	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1034	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1035	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1036	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1042	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1043	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1044	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1045	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1046	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1047	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1052	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1053	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1054	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1055	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1056	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1067	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1068	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1071	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1072	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1097	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1098	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1099	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1599	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1600	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1601	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1602	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1603	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1604	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1605	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1606	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1607	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1608	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1610	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1611	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1612	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1613	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1614	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1615	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1616	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1617	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1618	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1620	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1622	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1623	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1624	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1625	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1626	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1627	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1628	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1630	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1631	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1632	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1633	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1634	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1674	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1680	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1743	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1744	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1762	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1763	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1764	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1765	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1766	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1767	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1768	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1769	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1772	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1774	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1776	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1777	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1778	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1779	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1780	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1781	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1782	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1784	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1785	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1786	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1788	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1789	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1790	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1792	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1808	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1809	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1810	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1811	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1812	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1814	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1815	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1816	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1817	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1818	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1823	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1824	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1825	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1826	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1827	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1828	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1829	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1830	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1831	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1832	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1833	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1834	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1836	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1837	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1838	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1839	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1840	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1841	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1854	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1897	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1916	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1917	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1919	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1920	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1925	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1926	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1928	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1929	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1931	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1938	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1939	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1940	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1941	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1953	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1962	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1963	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1964	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1965	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1966	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1972	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1973	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1974	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1976	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1977	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1990	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1993	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1994	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1995	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1996	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1997	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1998	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1999	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2003	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2004	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2005	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2006	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2007	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2008	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2009	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2010	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2011	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2012	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2013	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2014	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2015	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2016	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2017	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2018	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2019	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2020	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2021	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2023	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2024	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2025	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2026	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2028	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2029	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2030	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2031	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2033	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2034	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2035	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2036	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2042	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2043	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2044	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2045	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2046	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2047	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2052	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2053	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2054	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2055	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2056	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2067	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2068	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2071	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2072	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2097	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2098	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2099	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2599	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2600	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2601	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2602	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2603	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2604	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2605	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2606	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2607	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2608	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2610	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2611	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2612	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2613	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2614	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2615	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2616	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2617	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2618	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2620	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2622	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2623	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2624	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2625	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2626	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2627	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2628	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2630	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2631	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2632	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2633	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2634	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2674	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2680	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2743	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2744	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2762	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2763	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2764	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2765	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2766	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2767	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2768	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2769	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2772	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2774	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2776	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2777	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2778	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2779	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2780	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2781	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2782	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2784	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2785	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2786	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2788	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2789	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2790	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2792	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2808	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2809	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2810	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2811	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2812	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2814	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2815	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2816	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2817	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2818	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2823	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2824	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2825	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2826	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2827	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2828	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2829	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2830	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2831	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2832	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2833	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2834	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2836	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2837	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2838	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2839	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2840	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2841	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2854	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2897	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2916	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2917	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2919	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2920	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2925	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2926	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2928	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2929	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2931	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2938	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2939	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2940	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2941	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2953	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2962	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2963	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2964	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2965	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2966	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2972	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2973	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2974	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2976	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2977	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2990	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2993	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2994	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2995	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2996	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2997	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2998	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2999	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3003	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3004	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3005	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3006	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3007	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3008	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3009	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3010	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3011	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3012	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3013	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3014	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3015	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3016	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3017	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3018	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3019	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3020	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3021	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3023	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3024	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3025	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3026	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3028	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3029	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3030	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3031	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3033	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3034	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3035	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3036	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3042	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3043	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3044	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3045	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3046	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3047	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3052	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3053	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3054	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3055	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3056	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3067	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3068	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3071	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3072	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3097	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3098	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3099	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

APPENDIX C. ANNUAL HUMAN HEALTH ACUTE HAZARDS FOR THE SEATTLE-TACOMA INTERNATIONAL AIRPORT

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1	4.2E-04	1.6E-03	2.9E-03	4.1E-03	4.0E-03	4.6E-03	1.7E-03	9.2E-03	1.1E-02	1.4E-02	1.7E-02	2.0E-02	2.3E-02
2	7.7E-04	1.5E-03	2.6E-03	2.6E-03	2.7E-03	2.2E-03	2.1E-03	-8.7E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.4E-02
3	3.6E-03	6.2E-03	6.7E-03	8.5E-03	1.4E-02	1.4E-02	1.3E-02	5.3E-03	7.3E-03	2.0E-02	3.3E-02	4.5E-02	5.8E-02
4	3.1E-03	5.3E-03	4.8E-03	6.0E-03	1.0E-02	9.8E-03	9.2E-03	9.5E-03	1.5E-02	2.9E-02	4.3E-02	5.7E-02	7.1E-02
5	1.4E-03	2.5E-03	3.9E-03	4.1E-03	6.7E-03	6.4E-03	6.1E-03	2.5E-03	4.2E-03	9.7E-03	1.5E-02	2.1E-02	2.6E-02
6	5.3E-04	1.4E-03	2.8E-03	3.5E-03	3.6E-03	2.0E-03	1.8E-03	-2.2E-02	-2.2E-02	-2.1E-02	-1.9E-02	-1.8E-02	-1.7E-02
7	1.1E-03	1.9E-03	3.2E-03	3.4E-03	3.3E-03	3.0E-03	2.9E-03	-3.9E-02	-2.9E-02	-1.8E-02	-6.2E-03	5.4E-03	1.7E-02
8	7.4E-04	1.1E-03	1.2E-03	1.2E-03	1.5E-03	1.2E-03	1.1E-03	-2.4E-03	-5.5E-04	1.9E-03	4.3E-03	6.8E-03	9.2E-03
9	1.6E-03	2.1E-03	3.2E-03	5.2E-03	5.3E-03	4.9E-03	4.9E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
10	5.2E-04	1.3E-03	2.1E-03	2.3E-03	2.4E-03	1.5E-03	1.3E-03	-3.3E-02	-3.3E-02	-3.3E-02	-3.2E-02	-3.2E-02	-3.1E-02
11	4.9E-04	1.7E-03	2.7E-03	3.4E-03	3.5E-03	2.1E-03	1.9E-03	1.2E-02	2.4E-03	-5.9E-03	-1.4E-02	-2.2E-02	-3.1E-02
12	4.8E-04	1.2E-03	2.0E-03	2.6E-03	2.2E-03	1.7E-03	1.6E-03	-4.7E-03	-6.1E-03	-6.7E-03	-7.2E-03	-7.7E-03	-8.2E-03
13	1.9E-03	3.3E-03	3.8E-03	4.3E-03	7.1E-03	7.0E-03	6.6E-03	-2.7E-02	-2.2E-02	-1.2E-02	-1.2E-03	9.0E-03	1.9E-02
14	4.8E-04	1.1E-03	2.2E-03	2.5E-03	1.9E-03	1.5E-03	1.5E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02	-9.6E-03
15	1.1E-03	4.2E-03	8.5E-03	1.2E-02	1.6E-02	6.1E-03	5.6E-03	3.5E-02	3.8E-02	4.4E-02	5.0E-02	5.6E-02	6.2E-02
16	3.6E-04	7.3E-04	9.3E-04	1.1E-03	1.0E-03	9.0E-04	9.0E-04	-1.5E-02	-1.3E-02	-1.1E-02	-8.3E-03	-5.9E-03	-3.4E-03
17	1.3E-03	1.5E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.4E-02	-1.0E-02	-6.1E-03	-2.0E-03	2.0E-03	6.1E-03
18	1.4E-03	1.6E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	1.9E-03	-1.5E-02	-1.0E-02	-5.6E-03	-7.0E-04	4.2E-03	9.0E-03
19	1.0E-03	1.3E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.5E-02	-1.1E-02	-6.8E-03	-2.6E-03	1.7E-03	6.0E-03
20	3.7E-04	1.2E-03	1.9E-03	2.1E-03	2.6E-03	1.9E-03	1.4E-03	-3.0E-02	-3.1E-02	-3.2E-02	-3.4E-02	-3.5E-02	-3.6E-02
21	1.2E-03	1.6E-03	1.8E-03	1.3E-03	1.3E-03	1.2E-03	1.1E-03	-1.1E-02	-8.6E-03	-6.2E-03	-3.7E-03	-1.3E-03	1.2E-03
22	3.5E-04	9.8E-04	1.2E-03	8.3E-04	7.6E-04	6.8E-04	6.8E-04	-1.0E-02	-8.1E-03	-5.7E-03	-3.3E-03	-9.4E-04	1.4E-03
23	1.5E-03	1.6E-03	3.1E-03	4.2E-03	4.3E-03	4.1E-03	4.1E-03	-1.9E-02	-1.5E-02	-8.4E-03	-2.1E-03	4.1E-03	1.0E-02
24	1.7E-03	2.2E-03	5.1E-03	5.9E-03	6.8E-03	5.4E-03	5.2E-03	1.9E-02	1.9E-02	2.1E-02	2.4E-02	2.6E-02	2.9E-02
25	1.5E-03	1.5E-03	2.9E-03	4.0E-03	4.1E-03	3.9E-03	3.9E-03	-1.4E-02	-1.1E-02	-6.3E-03	-1.8E-03	2.8E-03	7.4E-03
26	1.5E-03	2.2E-03	4.5E-03	4.9E-03	6.8E-03	6.1E-03	5.8E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02	2.5E-02
27	9.2E-04	5.1E-03	5.2E-03	7.1E-03	8.3E-03	4.2E-03	3.9E-03	2.7E-02	3.0E-02	3.5E-02	4.0E-02	4.5E-02	5.0E-02
28	9.1E-04	1.8E-03	5.5E-03	7.2E-03	7.2E-03	5.0E-03	4.7E-03	3.3E-04	9.0E-03	2.1E-02	3.2E-02	4.4E-02	5.6E-02
29	8.5E-04	1.1E-03	2.2E-03	2.7E-03	3.4E-03	3.1E-03	3.0E-03	-2.5E-03	-1.5E-03	1.4E-03	4.3E-03	7.2E-03	1.0E-02
30	3.0E-03	3.3E-03	5.8E-03	1.0E-02	1.1E-02	1.0E-02	1.0E-02	-1.9E-02	-1.7E-02	-1.1E-02	-3.9E-03	2.9E-03	9.6E-03
31	2.0E-03	2.1E-03	2.4E-03	4.2E-03	4.5E-03	4.2E-03	4.2E-03	-2.8E-02	-2.2E-02	-1.4E-02	-6.8E-03	8.6E-04	8.5E-03
32	7.5E-04	3.6E-03	5.8E-03	5.1E-03	4.4E-03	2.5E-03	2.2E-03	2.3E-02	2.3E-02	2.5E-02	2.6E-02	2.8E-02	2.9E-02
33	1.0E-03	1.7E-03	3.6E-03	4.0E-03	6.0E-03	5.6E-03	5.2E-03	-2.5E-02	-2.4E-02	-1.9E-02	-1.5E-02	-1.1E-02	-6.2E-03
34	6.2E-04	7.9E-04	7.6E-04	9.5E-04	2.1E-03	8.5E-04	7.6E-04	-1.1E-02	-9.3E-03	-7.4E-03	-5.4E-03	-3.5E-03	-1.5E-03
35	1.9E-03	2.4E-03	2.7E-03	1.5E-03	1.4E-03	1.7E-03	1.2E-03	-2.1E-02	-1.9E-02	-1.5E-02	-1.2E-02	-9.4E-03	-6.3E-03
36	1.9E-03	2.8E-03	4.2E-03	5.7E-03	5.9E-03	5.6E-03	5.6E-03	-1.9E-02	-1.0E-02	1.1E-03	1.3E-02	2.4E-02	3.6E-02
37	1.7E-03	2.1E-03	1.1E-03	7.5E-04	8.3E-04	1.1E-03	4.9E-04	-9.7E-03	-9.6E-03	-9.2E-03	-8.8E-03	-8.4E-03	-7.9E-03
38	6.7E-04	2.8E-03	4.3E-03	4.6E-03	3.9E-03	2.4E-03	2.1E-03	-4.5E-02	-4.0E-02	-3.4E-02	-2.8E-02	-2.1E-02	-1.5E-02
39	9.0E-04	1.1E-03	1.2E-03	1.1E-03	1.3E-03	9.6E-04	9.2E-04	1.5E-03	2.7E-03	4.4E-03	6.1E-03	7.8E-03	9.5E-03
40	6.0E-04	1.1E-03	1.1E-03	1.4E-03	1.8E-03	1.5E-03	1.4E-03	-2.1E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02
41	1.6E-03	1.8E-03	1.7E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	-1.3E-02	-1.0E-02	-6.6E-03	-3.1E-03	4.6E-04	4.0E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
42	8.5E-04	1.0E-03	1.1E-03	9.5E-04	1.2E-03	8.2E-04	7.8E-04	7.9E-04	2.0E-03	3.5E-03	5.1E-03	6.6E-03	8.2E-03
43	7.4E-04	1.0E-03	1.2E-03	8.5E-04	1.0E-03	7.2E-04	6.3E-04	-1.0E-03	3.2E-04	2.0E-03	3.7E-03	5.4E-03	7.0E-03
44	1.1E-03	1.3E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.4E-02	-1.1E-02	-6.5E-03	-2.3E-03	1.8E-03	6.0E-03
45	1.4E-03	2.4E-03	2.4E-03	1.2E-03	1.1E-03	9.6E-04	9.0E-04	-1.8E-02	-1.6E-02	-1.4E-02	-1.1E-02	-9.1E-03	-6.8E-03
46	1.7E-03	3.3E-03	4.1E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-1.6E-02	-8.9E-03	1.9E-03	1.3E-02	2.4E-02	3.4E-02
47	1.7E-03	3.3E-03	4.1E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-1.6E-02	-8.9E-03	1.9E-03	1.3E-02	2.4E-02	3.4E-02
48	7.7E-04	1.9E-03	2.8E-03	3.8E-03	4.2E-03	3.6E-03	3.3E-03	-2.3E-02	-1.9E-02	-1.3E-02	-7.2E-03	-1.0E-03	5.1E-03
49	5.1E-04	2.0E-03	2.6E-03	3.9E-03	3.5E-03	3.0E-03	2.8E-03	-1.2E-02	-7.3E-03	-3.3E-04	6.6E-03	1.4E-02	2.0E-02
50	5.7E-04	1.8E-03	3.3E-03	4.1E-03	4.2E-03	2.4E-03	2.2E-03	-6.2E-02	-6.0E-02	-5.7E-02	-5.3E-02	-5.0E-02	-4.6E-02
51	2.5E-03	4.1E-03	3.7E-03	4.4E-03	7.0E-03	6.9E-03	6.5E-03	-2.8E-02	-2.8E-02	-2.3E-02	-1.8E-02	-1.2E-02	-7.2E-03
52	1.7E-03	1.8E-03	3.6E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-2.3E-02	-1.6E-02	-5.6E-03	4.5E-03	1.5E-02	2.5E-02
53	6.3E-04	8.9E-04	1.3E-03	1.4E-03	1.9E-03	2.1E-03	9.9E-04	-1.0E-02	-9.0E-03	-7.2E-03	-5.4E-03	-3.6E-03	-1.8E-03
54	9.5E-04	1.3E-03	2.6E-03	2.9E-03	4.3E-03	3.8E-03	3.6E-03	1.9E-03	3.0E-03	6.5E-03	1.0E-02	1.4E-02	1.7E-02
55	4.5E-04	1.0E-03	1.9E-03	2.4E-03	2.7E-03	1.8E-03	1.5E-03	-3.8E-02	-4.0E-02	-4.0E-02	-4.1E-02	-4.2E-02	-4.2E-02
56	2.2E-03	4.0E-03	4.9E-03	5.6E-03	9.3E-03	9.2E-03	8.7E-03	-4.6E-02	-3.8E-02	-2.3E-02	-8.3E-03	6.5E-03	2.1E-02
57	5.0E-04	8.9E-04	1.2E-03	1.2E-03	2.0E-03	9.1E-04	8.7E-04	-3.7E-03	-2.9E-03	-1.7E-03	-4.7E-04	7.4E-04	2.0E-03
58	2.5E-03	2.8E-03	2.8E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02
59	7.8E-04	1.5E-03	2.8E-03	3.2E-03	4.7E-03	4.2E-03	3.9E-03	-1.4E-02	-1.4E-02	-1.2E-02	-9.3E-03	-6.8E-03	-4.2E-03
60	3.5E-04	8.4E-04	1.0E-03	1.0E-03	9.6E-04	8.7E-04	8.7E-04	-1.5E-02	-1.3E-02	-1.0E-02	-7.6E-03	-5.0E-03	-2.5E-03
61	4.4E-04	1.3E-03	2.4E-03	2.6E-03	2.8E-03	2.0E-03	1.7E-03	2.0E-03	3.1E-03	4.9E-03	6.8E-03	8.6E-03	1.0E-02
62	3.3E-03	3.5E-03	5.8E-03	9.8E-03	1.0E-02	9.6E-03	9.6E-03	-8.6E-03	-1.1E-02	-7.5E-03	-4.2E-03	-8.5E-04	2.5E-03
63	8.6E-04	1.3E-03	2.6E-03	2.9E-03	4.1E-03	3.6E-03	3.4E-03	9.0E-04	2.5E-04	1.8E-03	3.4E-03	5.0E-03	6.5E-03
64	2.1E-03	2.3E-03	2.3E-03	1.6E-03	1.6E-03	1.4E-03	1.4E-03	-1.9E-02	-1.6E-02	-1.1E-02	-7.2E-03	-3.0E-03	1.3E-03
65	8.9E-04	1.8E-03	5.3E-03	6.8E-03	6.8E-03	5.3E-03	5.0E-03	-3.4E-03	3.7E-03	1.4E-02	2.4E-02	3.4E-02	4.5E-02
66	2.2E-03	4.0E-03	4.9E-03	5.6E-03	9.4E-03	9.2E-03	8.7E-03	-4.6E-02	-3.8E-02	-2.3E-02	-8.2E-03	6.7E-03	2.1E-02
67	1.2E-03	1.7E-03	2.7E-03	3.5E-03	3.6E-03	3.2E-03	3.0E-03	-4.5E-02	-3.9E-02	-3.0E-02	-2.1E-02	-1.3E-02	-4.1E-03
68	5.3E-04	1.4E-03	2.8E-03	3.5E-03	3.5E-03	1.9E-03	1.8E-03	-3.1E-02	-2.9E-02	-2.5E-02	-2.2E-02	-1.8E-02	-1.5E-02
69	1.8E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	1.6E-03	1.6E-03	-1.4E-02	-9.8E-03	-5.0E-03	-2.4E-04	4.6E-03	9.3E-03
70	1.7E-03	1.8E-03	3.6E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-2.3E-02	-1.6E-02	-5.5E-03	4.5E-03	1.5E-02	2.5E-02
71	9.5E-04	3.3E-03	5.2E-03	5.7E-03	4.5E-03	3.0E-03	2.9E-03	-8.6E-02	-8.0E-02	-7.3E-02	-6.5E-02	-5.8E-02	-5.1E-02
72	1.4E-03	1.8E-03	2.8E-03	3.7E-03	3.9E-03	3.7E-03	3.7E-03	-2.5E-02	-2.1E-02	-1.5E-02	-9.2E-03	-3.3E-03	2.7E-03
73	3.4E-03	5.8E-03	5.9E-03	7.5E-03	1.3E-02	1.2E-02	1.2E-02	-3.7E-03	1.3E-03	1.6E-02	3.1E-02	4.5E-02	6.0E-02
74	1.1E-03	1.4E-03	1.5E-03	1.0E-03	2.0E-03	8.6E-04	8.3E-04	-2.8E-03	-1.2E-03	6.1E-04	2.4E-03	4.3E-03	6.1E-03
75	1.1E-03	8.7E-03	8.6E-03	9.3E-03	9.4E-03	3.8E-03	3.8E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.9E-02
76	7.2E-04	1.4E-03	2.5E-03	3.5E-03	3.8E-03	3.1E-03	2.9E-03	-2.3E-02	-2.0E-02	-1.6E-02	-1.1E-02	-6.2E-03	-1.5E-03
77	1.4E-03	1.5E-03	2.4E-03	3.9E-03	4.0E-03	3.7E-03	3.7E-03	-1.6E-02	-1.9E-02	-2.0E-02	-2.0E-02	-2.1E-02	-2.2E-02
78	3.4E-03	8.0E-03	8.4E-03	8.9E-03	1.0E-02	8.3E-03	8.3E-03	-1.0E-02	4.6E-03	2.6E-02	4.7E-02	6.8E-02	9.0E-02
79	1.7E-03	2.0E-03	3.2E-03	5.0E-03	5.1E-03	4.7E-03	4.7E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
80	7.6E-04	9.9E-04	5.1E-04	6.5E-04	5.4E-04	4.9E-04	4.8E-04	-3.2E-03	-2.6E-03	-1.8E-03	-9.1E-04	-3.8E-05	8.3E-04
81	3.9E-04	1.1E-03	1.3E-03	1.2E-03	1.2E-03	9.7E-04	9.7E-04	-1.6E-02	-1.4E-02	-1.1E-02	-8.8E-03	-6.3E-03	-3.7E-03
82	2.5E-03	2.9E-03	5.0E-03	8.8E-03	9.3E-03	8.7E-03	8.6E-03	-8.2E-03	-1.0E-02	-7.6E-03	-5.0E-03	-2.5E-03	7.3E-05

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
83	1.9E-03	2.0E-03	2.1E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.0E-02	-6.7E-03	-3.4E-03	-1.4E-05	3.3E-03
84	7.4E-04	3.8E-03	6.2E-03	8.2E-03	5.7E-03	2.6E-03	2.5E-03	1.5E-02	1.4E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02
85	8.5E-04	4.0E-03	6.0E-03	6.4E-03	5.3E-03	3.2E-03	2.8E-03	-1.1E-01	-1.0E-01	-9.2E-02	-8.4E-02	-7.6E-02	-6.7E-02
86	3.2E-03	5.4E-03	5.0E-03	6.3E-03	1.1E-02	1.0E-02	9.7E-03	1.1E-02	1.6E-02	3.0E-02	4.3E-02	5.7E-02	7.0E-02
87	3.3E-04	7.8E-04	9.7E-04	9.4E-04	8.7E-04	7.8E-04	7.8E-04	-1.4E-02	-1.2E-02	-9.0E-03	-6.4E-03	-3.8E-03	-1.2E-03
88	1.1E-03	9.5E-03	1.3E-02	1.3E-02	1.0E-02	4.9E-03	4.3E-03	-6.7E-02	-5.9E-02	-4.8E-02	-3.8E-02	-2.7E-02	-1.6E-02
89	1.1E-03	3.5E-03	6.2E-03	8.6E-03	8.4E-03	5.1E-03	4.7E-03	2.1E-02	2.7E-02	3.7E-02	4.6E-02	5.6E-02	6.6E-02
90	1.3E-03	1.7E-03	1.1E-03	6.9E-04	7.0E-04	9.9E-04	4.4E-04	-1.3E-02	-1.2E-02	-1.0E-02	-9.2E-03	-8.0E-03	-6.8E-03
91	1.3E-03	1.7E-03	1.1E-03	7.0E-04	7.0E-04	9.9E-04	4.5E-04	-1.2E-02	-1.2E-02	-1.0E-02	-9.1E-03	-7.8E-03	-6.6E-03
92	9.6E-04	1.6E-03	3.0E-03	3.8E-03	5.0E-03	4.6E-03	4.3E-03	-2.9E-02	-2.5E-02	-1.9E-02	-1.3E-02	-6.7E-03	-5.4E-04
93	3.1E-04	7.3E-04	9.2E-04	8.9E-04	8.2E-04	7.4E-04	7.3E-04	-1.3E-02	-1.1E-02	-8.3E-03	-5.7E-03	-3.2E-03	-6.4E-04
94	9.4E-04	1.4E-03	1.5E-03	1.1E-03	1.4E-03	1.1E-03	9.6E-04	-2.6E-03	-8.4E-04	1.3E-03	3.4E-03	5.5E-03	7.6E-03
95	1.3E-03	1.7E-03	1.1E-03	6.9E-04	7.1E-04	9.9E-04	4.4E-04	-1.3E-02	-1.2E-02	-1.0E-02	-9.3E-03	-8.1E-03	-6.9E-03
96	6.9E-04	2.3E-03	3.6E-03	4.5E-03	4.7E-03	2.3E-03	2.2E-03	5.3E-03	-5.3E-03	-1.4E-02	-2.3E-02	-3.3E-02	-4.2E-02
97	3.2E-04	6.0E-04	8.2E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-6.6E-03	-7.0E-03	-7.2E-03	-7.4E-03	-7.5E-03	-7.7E-03
98	3.2E-04	6.0E-04	8.2E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-6.7E-03	-7.1E-03	-7.2E-03	-7.4E-03	-7.5E-03	-7.7E-03
99	4.7E-04	1.0E-03	2.0E-03	2.2E-03	1.7E-03	1.4E-03	1.4E-03	-8.8E-03	-9.0E-03	-8.7E-03	-8.4E-03	-8.1E-03	-7.7E-03
100	1.4E-03	2.6E-03	3.7E-03	3.8E-03	6.4E-03	6.2E-03	5.9E-03	-8.2E-03	-3.5E-03	5.0E-03	1.3E-02	2.2E-02	3.0E-02
101	6.7E-04	2.5E-03	4.4E-03	5.7E-03	3.7E-03	2.1E-03	1.9E-03	1.5E-02	1.9E-02	2.3E-02	2.8E-02	3.3E-02	3.7E-02
102	3.5E-03	4.8E-03	1.1E-02	1.5E-02	1.9E-02	1.8E-02	1.6E-02	4.0E-02	4.1E-02	5.4E-02	6.7E-02	8.0E-02	9.3E-02
103	3.4E-03	4.6E-03	1.1E-02	1.4E-02	1.9E-02	1.7E-02	1.5E-02	3.3E-02	3.4E-02	4.7E-02	5.9E-02	7.1E-02	8.4E-02
104	3.3E-03	4.5E-03	1.1E-02	1.3E-02	1.9E-02	1.8E-02	1.6E-02	3.6E-02	3.6E-02	4.8E-02	6.0E-02	7.2E-02	8.4E-02
105	3.0E-03	4.2E-03	1.1E-02	1.4E-02	1.8E-02	1.7E-02	1.5E-02	2.9E-02	3.0E-02	4.3E-02	5.6E-02	6.9E-02	8.2E-02
106	2.7E-03	4.1E-03	1.0E-02	1.4E-02	1.8E-02	1.6E-02	1.4E-02	2.1E-02	2.5E-02	4.0E-02	5.5E-02	7.0E-02	8.5E-02
107	2.6E-03	4.0E-03	1.0E-02	1.5E-02	1.7E-02	1.5E-02	1.4E-02	1.1E-02	1.4E-02	2.7E-02	4.1E-02	5.4E-02	6.7E-02
108	2.5E-03	3.7E-03	1.3E-02	1.3E-02	1.6E-02	1.4E-02	1.3E-02	1.8E-03	3.5E-03	1.5E-02	2.7E-02	3.9E-02	5.1E-02
109	2.1E-03	2.8E-02	2.8E-02	2.8E-02	1.9E-02	7.3E-03	7.1E-03	-5.7E-02	-5.0E-02	-3.8E-02	-2.7E-02	-1.5E-02	-3.5E-03
110	2.2E-03	2.9E-02	2.9E-02	2.9E-02	2.0E-02	7.5E-03	7.2E-03	-6.7E-02	-5.9E-02	-4.6E-02	-3.3E-02	-2.0E-02	-7.6E-03
111	2.3E-03	2.6E-02	2.6E-02	2.6E-02	1.7E-02	7.7E-03	7.4E-03	-7.8E-02	-7.0E-02	-5.7E-02	-4.4E-02	-3.1E-02	-1.8E-02
112	2.4E-03	2.6E-02	2.6E-02	2.6E-02	2.6E-02	7.8E-03	7.6E-03	-8.7E-02	-7.7E-02	-6.3E-02	-4.9E-02	-3.5E-02	-2.1E-02
113	2.5E-03	2.4E-02	2.4E-02	2.4E-02	2.2E-02	8.0E-03	7.8E-03	-9.4E-02	-8.6E-02	-7.3E-02	-6.0E-02	-4.7E-02	-3.3E-02
114	2.6E-03	2.8E-02	2.8E-02	2.8E-02	2.3E-02	8.2E-03	7.9E-03	-9.6E-02	-8.9E-02	-7.8E-02	-6.6E-02	-5.5E-02	-4.3E-02
115	2.7E-03	2.4E-02	2.4E-02	2.4E-02	2.1E-02	8.4E-03	8.1E-03	-9.9E-02	-9.4E-02	-8.5E-02	-7.6E-02	-6.7E-02	-5.7E-02
116	2.9E-03	1.9E-02	1.9E-02	1.9E-02	1.9E-02	8.7E-03	8.4E-03	-1.0E-01	-9.7E-02	-8.9E-02	-8.1E-02	-7.3E-02	-6.5E-02
117	2.7E-03	2.5E-02	2.5E-02	2.5E-02	1.9E-02	8.5E-03	8.3E-03	-9.7E-02	-9.4E-02	-8.6E-02	-7.8E-02	-7.0E-02	-6.2E-02
118	2.9E-03	2.4E-02	2.4E-02	2.3E-02	1.8E-02	8.8E-03	8.5E-03	-9.6E-02	-9.3E-02	-8.6E-02	-7.9E-02	-7.2E-02	-6.4E-02
119	3.1E-03	2.1E-02	2.1E-02	2.0E-02	1.6E-02	9.0E-03	8.7E-03	-9.1E-02	-8.8E-02	-8.1E-02	-7.3E-02	-6.6E-02	-5.8E-02
120	3.0E-03	1.9E-02	2.0E-02	2.0E-02	2.0E-02	8.9E-03	8.6E-03	-8.2E-02	-8.1E-02	-7.5E-02	-6.9E-02	-6.3E-02	-5.7E-02
121	3.1E-03	2.0E-02	2.0E-02	1.9E-02	1.6E-02	9.2E-03	8.9E-03	-7.5E-02	-7.4E-02	-6.8E-02	-6.2E-02	-5.6E-02	-4.9E-02
122	3.3E-03	1.9E-02	1.9E-02	1.9E-02	1.4E-02	9.4E-03	9.1E-03	-6.5E-02	-6.3E-02	-5.7E-02	-5.0E-02	-4.3E-02	-3.7E-02
123	3.4E-03	1.8E-02	1.8E-02	1.7E-02	1.3E-02	9.5E-03	9.2E-03	-5.5E-02	-5.3E-02	-4.6E-02	-4.0E-02	-3.3E-02	-2.6E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
124	3.2E-03	1.7E-02	2.0E-02	2.0E-02	2.0E-02	9.3E-03	9.0E-03	-4.9E-02	-4.7E-02	-3.9E-02	-3.2E-02	-2.5E-02	-1.7E-02
125	3.3E-03	1.6E-02	1.7E-02	1.7E-02	1.7E-02	9.5E-03	9.2E-03	-4.3E-02	-4.0E-02	-3.3E-02	-2.5E-02	-1.8E-02	-1.0E-02
126	3.5E-03	1.5E-02	1.5E-02	1.5E-02	1.3E-02	9.7E-03	9.4E-03	-3.7E-02	-3.4E-02	-2.5E-02	-1.7E-02	-8.9E-03	-6.4E-04
127	3.6E-03	1.6E-02	1.6E-02	1.5E-02	1.2E-02	9.8E-03	9.5E-03	-3.2E-02	-2.8E-02	-1.9E-02	-1.0E-02	-1.4E-03	7.6E-03
128	3.4E-03	1.5E-02	1.8E-02	1.8E-02	1.8E-02	9.7E-03	9.4E-03	-8.0E-03	-1.6E-03	1.0E-02	2.2E-02	3.4E-02	4.6E-02
129	3.5E-03	1.5E-02	1.7E-02	1.7E-02	1.7E-02	9.9E-03	9.6E-03	-8.0E-03	-1.6E-03	9.7E-03	2.1E-02	3.2E-02	4.4E-02
130	3.7E-03	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.0E-02	9.8E-03	-8.2E-03	-2.7E-03	8.3E-03	1.9E-02	3.0E-02	4.1E-02
131	3.7E-03	1.3E-02	1.3E-02	1.2E-02	1.3E-02	1.0E-02	9.8E-03	-7.1E-03	-2.1E-03	8.8E-03	2.0E-02	3.1E-02	4.2E-02
132	3.6E-03	1.3E-02	1.7E-02	1.7E-02	1.7E-02	1.0E-02	9.8E-03	2.6E-02	3.9E-02	5.6E-02	7.4E-02	9.2E-02	1.1E-01
133	3.8E-03	1.3E-02	1.5E-02	1.5E-02	1.5E-02	1.0E-02	1.0E-02	2.0E-02	3.1E-02	4.7E-02	6.4E-02	8.0E-02	9.6E-02
134	3.9E-03	1.2E-02	1.4E-02	1.4E-02	1.4E-02	1.0E-02	1.0E-02	1.5E-02	2.4E-02	3.9E-02	5.4E-02	6.9E-02	8.4E-02
135	3.9E-03	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.0E-02	1.0E-02	1.1E-02	1.8E-02	3.2E-02	4.5E-02	5.9E-02	7.2E-02
136	3.9E-03	1.1E-02	1.7E-02	1.7E-02	1.6E-02	1.1E-02	1.0E-02	4.9E-02	6.3E-02	8.3E-02	1.0E-01	1.2E-01	1.4E-01
137	4.0E-03	1.1E-02	1.4E-02	1.4E-02	1.4E-02	1.1E-02	1.0E-02	3.6E-02	4.9E-02	6.8E-02	8.7E-02	1.1E-01	1.3E-01
138	4.0E-03	1.1E-02	1.3E-02	1.3E-02	1.3E-02	1.1E-02	1.0E-02	2.7E-02	3.9E-02	5.6E-02	7.4E-02	9.2E-02	1.1E-01
139	4.0E-03	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.1E-02	1.0E-02	2.0E-02	2.9E-02	4.5E-02	6.1E-02	7.6E-02	9.2E-02
140	4.1E-03	1.1E-02	1.6E-02	1.6E-02	1.5E-02	1.1E-02	1.1E-02	6.3E-02	7.5E-02	9.3E-02	1.1E-01	1.3E-01	1.5E-01
141	4.2E-03	9.6E-03	1.4E-02	1.4E-02	1.4E-02	1.1E-02	1.1E-02	4.7E-02	5.8E-02	7.5E-02	9.2E-02	1.1E-01	1.3E-01
142	4.2E-03	9.9E-03	1.3E-02	1.3E-02	1.4E-02	1.1E-02	1.1E-02	4.0E-02	4.9E-02	6.5E-02	8.1E-02	9.6E-02	1.1E-01
143	4.1E-03	9.6E-03	1.2E-02	1.2E-02	1.3E-02	1.1E-02	1.1E-02	3.1E-02	4.0E-02	5.5E-02	7.0E-02	8.6E-02	1.0E-01
144	4.4E-03	1.0E-02	1.4E-02	1.5E-02	1.5E-02	1.2E-02	1.1E-02	7.1E-02	8.5E-02	1.1E-01	1.3E-01	1.5E-01	1.7E-01
145	4.4E-03	9.1E-03	1.4E-02	1.4E-02	1.5E-02	1.2E-02	1.1E-02	5.7E-02	6.8E-02	8.6E-02	1.0E-01	1.2E-01	1.4E-01
146	4.4E-03	8.6E-03	1.2E-02	1.3E-02	1.4E-02	1.2E-02	1.1E-02	4.4E-02	5.4E-02	7.2E-02	8.9E-02	1.1E-01	1.2E-01
147	4.2E-03	8.7E-03	1.1E-02	1.2E-02	1.4E-02	1.1E-02	1.1E-02	3.4E-02	4.5E-02	6.2E-02	7.9E-02	9.7E-02	1.1E-01
148	4.6E-03	9.1E-03	1.3E-02	1.5E-02	1.5E-02	1.2E-02	1.2E-02	7.3E-02	9.0E-02	1.1E-01	1.4E-01	1.6E-01	1.9E-01
149	4.6E-03	8.7E-03	1.3E-02	1.4E-02	1.5E-02	1.2E-02	1.2E-02	6.0E-02	7.4E-02	9.6E-02	1.2E-01	1.4E-01	1.6E-01
150	4.5E-03	7.6E-03	1.2E-02	1.3E-02	1.4E-02	1.2E-02	1.2E-02	5.0E-02	6.3E-02	8.3E-02	1.0E-01	1.2E-01	1.4E-01
151	4.3E-03	7.8E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	4.1E-02	5.1E-02	7.0E-02	8.8E-02	1.1E-01	1.2E-01
152	4.8E-03	8.1E-03	1.2E-02	1.5E-02	1.6E-02	1.3E-02	1.2E-02	7.7E-02	9.7E-02	1.2E-01	1.5E-01	1.8E-01	2.1E-01
153	4.8E-03	8.2E-03	1.2E-02	1.4E-02	1.5E-02	1.3E-02	1.2E-02	6.4E-02	8.1E-02	1.1E-01	1.3E-01	1.5E-01	1.8E-01
154	4.6E-03	7.5E-03	1.1E-02	1.3E-02	1.5E-02	1.2E-02	1.2E-02	5.2E-02	6.7E-02	9.0E-02	1.1E-01	1.4E-01	1.6E-01
155	4.3E-03	6.8E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	3.9E-02	5.4E-02	7.6E-02	9.8E-02	1.2E-01	1.4E-01
156	5.0E-03	7.1E-03	1.1E-02	1.5E-02	1.6E-02	1.3E-02	1.3E-02	8.3E-02	1.0E-01	1.3E-01	1.5E-01	1.8E-01	2.1E-01
157	4.9E-03	7.5E-03	1.1E-02	1.4E-02	1.5E-02	1.3E-02	1.2E-02	6.3E-02	8.2E-02	1.1E-01	1.4E-01	1.6E-01	1.9E-01
158	4.6E-03	7.3E-03	1.1E-02	1.3E-02	1.5E-02	1.2E-02	1.2E-02	4.5E-02	6.3E-02	8.9E-02	1.1E-01	1.4E-01	1.7E-01
159	4.3E-03	6.5E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	2.8E-02	4.5E-02	7.0E-02	9.5E-02	1.2E-01	1.4E-01
160	5.2E-03	6.5E-03	1.0E-02	1.5E-02	1.6E-02	1.4E-02	1.3E-02	7.9E-02	9.4E-02	1.2E-01	1.4E-01	1.7E-01	1.9E-01
161	5.0E-03	6.8E-03	9.9E-03	1.4E-02	1.6E-02	1.3E-02	1.3E-02	5.7E-02	7.2E-02	9.7E-02	1.2E-01	1.5E-01	1.7E-01
162	4.7E-03	6.9E-03	9.9E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	3.8E-02	5.5E-02	8.1E-02	1.1E-01	1.3E-01	1.6E-01
163	4.3E-03	6.4E-03	9.6E-03	1.2E-02	1.4E-02	1.2E-02	1.1E-02	2.3E-02	4.0E-02	6.5E-02	9.0E-02	1.1E-01	1.4E-01
164	5.4E-03	6.5E-03	9.8E-03	1.5E-02	1.7E-02	1.4E-02	1.4E-02	6.5E-02	8.0E-02	1.1E-01	1.3E-01	1.6E-01	1.8E-01

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
165	5.1E-03	6.1E-03	9.5E-03	1.4E-02	1.6E-02	1.4E-02	1.3E-02	5.0E-02	6.4E-02	8.7E-02	1.1E-01	1.3E-01	1.6E-01
166	4.7E-03	6.4E-03	9.1E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	3.3E-02	4.7E-02	6.9E-02	9.1E-02	1.1E-01	1.4E-01
167	4.3E-03	7.3E-03	1.1E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	1.5E-02	3.1E-02	5.6E-02	8.0E-02	1.0E-01	1.3E-01
168	6.0E-03	7.6E-03	1.1E-02	1.7E-02	1.9E-02	1.6E-02	1.6E-02	6.1E-02	7.7E-02	1.0E-01	1.3E-01	1.6E-01	1.8E-01
169	5.5E-03	6.5E-03	9.8E-03	1.5E-02	1.7E-02	1.5E-02	1.4E-02	4.4E-02	6.0E-02	8.5E-02	1.1E-01	1.4E-01	1.6E-01
170	5.1E-03	6.1E-03	1.0E-02	1.4E-02	1.6E-02	1.4E-02	1.3E-02	3.8E-02	5.2E-02	7.5E-02	9.9E-02	1.2E-01	1.5E-01
171	4.7E-03	6.7E-03	9.8E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	2.7E-02	4.0E-02	6.1E-02	8.3E-02	1.0E-01	1.3E-01
172	4.2E-03	7.0E-03	1.0E-02	1.2E-02	1.4E-02	1.2E-02	1.1E-02	1.4E-02	2.6E-02	4.6E-02	6.7E-02	8.7E-02	1.1E-01
173	6.1E-03	7.3E-03	1.1E-02	1.7E-02	1.9E-02	1.6E-02	1.6E-02	4.0E-02	5.3E-02	7.7E-02	1.0E-01	1.2E-01	1.5E-01
174	5.5E-03	6.5E-03	9.8E-03	1.5E-02	1.7E-02	1.5E-02	1.4E-02	2.9E-02	4.2E-02	6.5E-02	8.8E-02	1.1E-01	1.3E-01
175	5.2E-03	6.2E-03	9.9E-03	1.4E-02	1.6E-02	1.4E-02	1.4E-02	2.9E-02	4.2E-02	6.4E-02	8.6E-02	1.1E-01	1.3E-01
176	4.7E-03	5.9E-03	9.7E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	3.0E-02	4.1E-02	6.2E-02	8.3E-02	1.0E-01	1.2E-01
177	4.2E-03	6.5E-03	9.1E-03	1.2E-02	1.4E-02	1.2E-02	1.1E-02	2.5E-02	3.5E-02	5.4E-02	7.4E-02	9.3E-02	1.1E-01
178	6.2E-03	7.2E-03	1.1E-02	1.7E-02	1.9E-02	1.7E-02	1.6E-02	3.4E-02	4.4E-02	6.6E-02	8.8E-02	1.1E-01	1.3E-01
179	5.5E-03	6.5E-03	9.8E-03	1.5E-02	1.7E-02	1.5E-02	1.4E-02	2.5E-02	3.6E-02	5.8E-02	7.9E-02	1.0E-01	1.2E-01
180	5.1E-03	6.2E-03	9.3E-03	1.4E-02	1.6E-02	1.4E-02	1.3E-02	2.4E-02	3.5E-02	5.7E-02	7.9E-02	1.0E-01	1.2E-01
181	4.5E-03	5.6E-03	9.4E-03	1.3E-02	1.5E-02	1.3E-02	1.2E-02	2.9E-02	4.0E-02	6.0E-02	8.1E-02	1.0E-01	1.2E-01
182	6.9E-03	8.0E-03	1.2E-02	1.9E-02	2.1E-02	1.9E-02	1.8E-02	3.4E-02	4.3E-02	6.4E-02	8.6E-02	1.1E-01	1.3E-01
183	6.3E-03	7.4E-03	1.1E-02	1.8E-02	2.0E-02	1.7E-02	1.7E-02	2.8E-02	3.8E-02	5.9E-02	8.0E-02	1.0E-01	1.2E-01
184	5.3E-03	6.4E-03	9.7E-03	1.5E-02	1.7E-02	1.5E-02	1.4E-02	1.8E-02	2.9E-02	5.0E-02	7.1E-02	9.2E-02	1.1E-01
185	5.0E-03	6.1E-03	9.3E-03	1.4E-02	1.6E-02	1.4E-02	1.3E-02	1.7E-02	2.8E-02	4.9E-02	7.0E-02	9.1E-02	1.1E-01
186	4.6E-03	5.5E-03	8.9E-03	1.3E-02	1.5E-02	1.2E-02	1.2E-02	1.8E-02	3.0E-02	5.1E-02	7.2E-02	9.3E-02	1.1E-01
187	7.8E-03	8.9E-03	1.3E-02	2.2E-02	2.4E-02	2.1E-02	2.1E-02	3.3E-02	3.9E-02	6.0E-02	8.1E-02	1.0E-01	1.2E-01
188	7.0E-03	8.0E-03	1.2E-02	2.0E-02	2.1E-02	1.9E-02	1.8E-02	2.6E-02	3.3E-02	5.3E-02	7.3E-02	9.3E-02	1.1E-01
189	6.2E-03	7.3E-03	1.1E-02	1.8E-02	2.0E-02	1.7E-02	1.7E-02	2.3E-02	3.0E-02	5.0E-02	6.9E-02	8.8E-02	1.1E-01
190	5.1E-03	6.2E-03	9.5E-03	1.5E-02	1.7E-02	1.4E-02	1.4E-02	1.6E-02	2.6E-02	4.6E-02	6.6E-02	8.6E-02	1.1E-01
191	4.9E-03	5.9E-03	9.1E-03	1.4E-02	1.6E-02	1.3E-02	1.3E-02	1.3E-02	2.3E-02	4.4E-02	6.4E-02	8.5E-02	1.1E-01
192	8.7E-03	9.8E-03	1.4E-02	2.4E-02	2.6E-02	2.4E-02	2.3E-02	1.7E-02	2.0E-02	3.9E-02	5.7E-02	7.6E-02	9.5E-02
193	7.8E-03	8.9E-03	1.3E-02	2.2E-02	2.4E-02	2.1E-02	2.1E-02	2.0E-02	2.3E-02	4.0E-02	5.8E-02	7.5E-02	9.2E-02
194	7.0E-03	8.1E-03	1.2E-02	2.0E-02	2.2E-02	1.9E-02	1.9E-02	2.0E-02	2.5E-02	4.2E-02	5.9E-02	7.7E-02	9.4E-02
195	6.1E-03	7.2E-03	1.1E-02	1.7E-02	1.9E-02	1.7E-02	1.6E-02	1.9E-02	2.5E-02	4.2E-02	6.0E-02	7.7E-02	9.4E-02
196	5.7E-03	6.8E-03	1.0E-02	1.6E-02	1.8E-02	1.6E-02	1.5E-02	1.7E-02	2.3E-02	4.1E-02	5.8E-02	7.6E-02	9.3E-02
197	4.9E-03	5.7E-03	8.9E-03	1.3E-02	1.5E-02	1.3E-02	1.3E-02	1.2E-02	2.1E-02	4.0E-02	5.9E-02	7.8E-02	9.7E-02
198	9.1E-03	1.0E-02	1.5E-02	2.6E-02	2.8E-02	2.5E-02	2.5E-02	1.4E-02	1.3E-02	2.8E-02	4.3E-02	5.8E-02	7.3E-02
199	8.1E-03	9.2E-03	1.3E-02	2.3E-02	2.5E-02	2.2E-02	2.2E-02	1.7E-02	1.8E-02	3.3E-02	4.9E-02	6.4E-02	8.0E-02
200	7.0E-03	8.1E-03	1.2E-02	2.0E-02	2.2E-02	1.9E-02	1.9E-02	1.7E-02	1.9E-02	3.4E-02	4.8E-02	6.3E-02	7.8E-02
201	6.0E-03	7.1E-03	1.1E-02	1.7E-02	1.9E-02	1.7E-02	1.6E-02	1.9E-02	2.1E-02	3.6E-02	5.0E-02	6.4E-02	7.9E-02
202	5.4E-03	6.6E-03	1.0E-02	1.6E-02	1.8E-02	1.5E-02	1.5E-02	1.8E-02	2.1E-02	3.6E-02	5.1E-02	6.6E-02	8.1E-02
203	1.1E-02	1.2E-02	1.6E-02	3.0E-02	3.2E-02	2.9E-02	2.9E-02	2.1E-02	1.4E-02	2.6E-02	3.9E-02	5.1E-02	6.4E-02
204	9.2E-03	1.0E-02	1.5E-02	2.7E-02	2.8E-02	2.6E-02	2.5E-02	1.3E-02	6.3E-03	1.7E-02	2.8E-02	3.9E-02	4.9E-02
205	8.1E-03	9.3E-03	1.4E-02	2.3E-02	2.5E-02	2.3E-02	2.2E-02	1.2E-02	8.3E-03	2.0E-02	3.2E-02	4.4E-02	5.6E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
206	7.0E-03	8.2E-03	1.2E-02	2.0E-02	2.2E-02	1.9E-02	1.9E-02	1.4E-02	1.2E-02	2.4E-02	3.5E-02	4.7E-02	5.9E-02
207	5.9E-03	7.1E-03	1.1E-02	1.7E-02	1.9E-02	1.7E-02	1.7E-02	1.6E-02	1.5E-02	2.6E-02	3.8E-02	4.9E-02	6.0E-02
208	5.3E-03	6.1E-03	9.5E-03	1.4E-02	1.7E-02	1.7E-02	1.6E-02	1.8E-02	1.7E-02	2.8E-02	3.9E-02	5.0E-02	6.1E-02
209	1.3E-02	1.4E-02	1.9E-02	3.7E-02	3.9E-02	3.6E-02	3.5E-02	4.3E-02	3.1E-02	4.7E-02	6.2E-02	7.8E-02	9.3E-02
210	1.2E-02	1.3E-02	1.8E-02	3.4E-02	3.6E-02	3.3E-02	3.3E-02	3.7E-02	2.7E-02	4.0E-02	5.3E-02	6.6E-02	7.9E-02
211	1.1E-02	1.2E-02	1.7E-02	3.0E-02	3.2E-02	2.9E-02	2.9E-02	2.2E-02	1.4E-02	2.6E-02	3.8E-02	4.9E-02	6.1E-02
212	9.2E-03	1.0E-02	1.5E-02	2.7E-02	2.9E-02	2.6E-02	2.5E-02	1.4E-02	6.6E-03	1.7E-02	2.7E-02	3.7E-02	4.7E-02
213	8.1E-03	9.3E-03	1.4E-02	2.3E-02	2.5E-02	2.2E-02	2.2E-02	1.2E-02	6.2E-03	1.6E-02	2.7E-02	3.7E-02	4.7E-02
214	6.9E-03	8.1E-03	1.2E-02	2.0E-02	2.2E-02	1.9E-02	1.9E-02	1.1E-02	8.4E-03	1.9E-02	3.1E-02	4.2E-02	5.3E-02
215	5.9E-03	7.0E-03	1.1E-02	1.7E-02	1.9E-02	1.8E-02	1.7E-02	1.3E-02	1.1E-02	2.2E-02	3.2E-02	4.3E-02	5.3E-02
216	1.4E-02	1.5E-02	2.1E-02	4.0E-02	4.2E-02	3.9E-02	3.9E-02	3.2E-02	2.1E-02	3.9E-02	5.7E-02	7.5E-02	9.4E-02
217	1.2E-02	1.3E-02	1.9E-02	3.5E-02	3.7E-02	3.4E-02	3.4E-02	3.8E-02	2.7E-02	4.0E-02	5.2E-02	6.5E-02	7.7E-02
218	1.1E-02	1.2E-02	1.7E-02	3.1E-02	3.3E-02	3.0E-02	2.9E-02	2.7E-02	1.7E-02	2.8E-02	3.8E-02	4.9E-02	5.9E-02
219	9.1E-03	1.0E-02	1.5E-02	2.6E-02	2.8E-02	2.6E-02	2.5E-02	1.7E-02	7.9E-03	1.7E-02	2.6E-02	3.4E-02	4.3E-02
220	7.8E-03	9.1E-03	1.4E-02	2.3E-02	2.5E-02	2.2E-02	2.1E-02	9.9E-03	2.2E-03	1.0E-02	1.8E-02	2.6E-02	3.4E-02
221	6.6E-03	7.9E-03	1.2E-02	1.9E-02	2.1E-02	2.0E-02	1.9E-02	9.1E-03	3.0E-03	1.2E-02	2.0E-02	2.9E-02	3.8E-02
222	5.8E-03	6.7E-03	1.0E-02	1.6E-02	1.9E-02	1.9E-02	1.8E-02	1.0E-02	5.0E-03	1.4E-02	2.2E-02	3.1E-02	3.9E-02
223	1.2E-02	1.4E-02	1.9E-02	3.6E-02	3.8E-02	3.5E-02	3.4E-02	3.1E-02	2.1E-02	3.5E-02	4.9E-02	6.3E-02	7.7E-02
224	1.0E-02	1.2E-02	1.7E-02	3.0E-02	3.3E-02	2.9E-02	2.9E-02	2.4E-02	1.5E-02	2.6E-02	3.7E-02	4.8E-02	5.9E-02
225	8.9E-03	1.0E-02	1.5E-02	2.6E-02	2.8E-02	2.5E-02	2.5E-02	1.9E-02	8.9E-03	1.7E-02	2.4E-02	3.2E-02	4.0E-02
226	7.5E-03	8.8E-03	1.3E-02	2.2E-02	2.4E-02	2.3E-02	2.1E-02	1.4E-02	2.1E-03	7.2E-03	1.2E-02	1.8E-02	2.3E-02
227	6.3E-03	7.6E-03	1.2E-02	1.8E-02	2.1E-02	2.1E-02	2.0E-02	9.8E-03	3.2E-04	6.6E-03	1.3E-02	1.9E-02	2.6E-02
228	5.7E-03	7.1E-03	1.0E-02	1.5E-02	2.0E-02	2.0E-02	1.9E-02	8.4E-03	1.2E-04	6.7E-03	1.3E-02	2.0E-02	2.6E-02
229	1.2E-02	1.3E-02	1.9E-02	3.6E-02	3.8E-02	3.5E-02	3.4E-02	2.3E-02	1.5E-02	3.1E-02	4.6E-02	6.2E-02	7.7E-02
230	1.0E-02	1.2E-02	1.7E-02	3.0E-02	3.3E-02	2.9E-02	2.9E-02	2.5E-02	1.4E-02	2.6E-02	3.7E-02	4.8E-02	6.0E-02
231	8.6E-03	9.9E-03	1.5E-02	2.5E-02	2.8E-02	2.5E-02	2.4E-02	1.9E-02	7.0E-03	1.5E-02	2.3E-02	3.1E-02	3.8E-02
232	7.2E-03	8.5E-03	1.3E-02	2.1E-02	2.4E-02	2.3E-02	2.2E-02	1.5E-02	2.3E-03	7.0E-03	1.2E-02	1.6E-02	2.1E-02
233	6.2E-03	7.8E-03	1.1E-02	1.8E-02	2.2E-02	2.2E-02	2.1E-02	1.1E-02	8.2E-05	5.3E-03	1.0E-02	1.6E-02	2.1E-02
234	1.2E-02	1.3E-02	1.9E-02	3.6E-02	3.8E-02	3.4E-02	3.4E-02	1.7E-02	9.2E-03	2.6E-02	4.4E-02	6.1E-02	7.8E-02
235	1.0E-02	1.1E-02	1.7E-02	3.0E-02	3.2E-02	2.9E-02	2.8E-02	2.2E-02	1.2E-02	2.4E-02	3.6E-02	4.8E-02	6.0E-02
236	8.3E-03	9.7E-03	1.5E-02	2.5E-02	2.7E-02	2.6E-02	2.5E-02	1.6E-02	4.5E-03	1.3E-02	2.2E-02	3.1E-02	4.0E-02
237	6.9E-03	8.6E-03	1.3E-02	2.1E-02	2.5E-02	2.4E-02	2.3E-02	1.6E-02	1.9E-03	6.6E-03	1.1E-02	1.6E-02	2.1E-02
238	1.2E-02	1.3E-02	1.9E-02	3.5E-02	3.8E-02	3.4E-02	3.4E-02	1.2E-02	4.6E-03	2.3E-02	4.2E-02	6.1E-02	8.0E-02
239	9.7E-03	1.1E-02	1.7E-02	2.9E-02	3.1E-02	3.0E-02	2.8E-02	1.8E-02	8.5E-03	2.2E-02	3.5E-02	4.9E-02	6.2E-02
240	1.3E-02	1.5E-02	2.2E-02	4.1E-02	4.4E-02	4.0E-02	3.9E-02	3.7E-03	-3.3E-03	2.1E-02	4.5E-02	6.9E-02	9.3E-02
241	1.3E-02	1.5E-02	2.2E-02	4.0E-02	4.3E-02	3.9E-02	3.8E-02	4.0E-03	-3.4E-03	2.0E-02	4.4E-02	6.7E-02	9.1E-02
242	1.3E-02	1.5E-02	2.2E-02	3.9E-02	4.2E-02	4.0E-02	3.9E-02	5.0E-03	-2.7E-03	2.1E-02	4.4E-02	6.7E-02	9.0E-02
243	7.4E-03	9.7E-03	1.4E-02	2.2E-02	2.7E-02	2.6E-02	2.5E-02	1.3E-02	1.4E-03	1.1E-02	2.0E-02	2.9E-02	3.8E-02
244	1.1E-02	1.2E-02	1.8E-02	3.3E-02	3.5E-02	3.3E-02	3.1E-02	6.9E-03	-6.1E-05	1.9E-02	3.8E-02	5.8E-02	7.7E-02
245	8.8E-03	1.1E-02	1.6E-02	2.6E-02	3.0E-02	2.9E-02	2.8E-02	1.2E-02	3.3E-03	1.8E-02	3.2E-02	4.7E-02	6.1E-02
246	7.1E-03	1.0E-02	1.3E-02	2.1E-02	2.7E-02	2.7E-02	2.5E-02	9.6E-03	-6.1E-04	9.9E-03	2.0E-02	3.1E-02	4.1E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
247	1.1E-02	1.2E-02	1.8E-02	3.2E-02	3.4E-02	3.3E-02	3.1E-02	4.2E-03	-2.1E-03	1.8E-02	3.8E-02	5.8E-02	7.8E-02
248	8.5E-03	1.1E-02	1.5E-02	2.5E-02	3.0E-02	2.9E-02	2.8E-02	6.8E-03	-6.4E-04	1.5E-02	3.1E-02	4.7E-02	6.2E-02
249	6.9E-03	1.1E-02	1.3E-02	2.2E-02	2.7E-02	2.7E-02	2.5E-02	6.4E-03	-2.6E-03	9.3E-03	2.1E-02	3.3E-02	4.5E-02
250	1.0E-02	1.3E-02	1.8E-02	3.1E-02	3.4E-02	3.3E-02	3.1E-02	2.5E-03	-3.2E-03	1.7E-02	3.8E-02	5.9E-02	7.9E-02
251	8.1E-03	1.2E-02	1.5E-02	2.5E-02	3.0E-02	2.9E-02	2.8E-02	2.3E-03	-4.0E-03	1.3E-02	3.0E-02	4.7E-02	6.3E-02
252	6.8E-03	1.1E-02	1.3E-02	2.2E-02	2.7E-02	2.6E-02	2.5E-02	2.6E-03	-5.1E-03	8.0E-03	2.1E-02	3.4E-02	4.7E-02
253	9.9E-03	1.3E-02	1.8E-02	3.0E-02	3.4E-02	3.3E-02	3.1E-02	1.2E-03	-4.1E-03	1.7E-02	3.8E-02	5.9E-02	8.0E-02
254	7.8E-03	1.2E-02	1.5E-02	2.7E-02	3.0E-02	2.9E-02	2.8E-02	5.1E-04	-5.2E-03	1.2E-02	3.0E-02	4.7E-02	6.5E-02
255	7.1E-03	1.1E-02	1.4E-02	2.3E-02	2.7E-02	2.6E-02	2.5E-02	-1.2E-03	-7.8E-03	6.3E-03	2.0E-02	3.5E-02	4.9E-02
256	9.5E-03	1.4E-02	1.7E-02	3.0E-02	3.3E-02	3.3E-02	3.1E-02	4.4E-04	-4.3E-03	1.7E-02	3.8E-02	6.0E-02	8.1E-02
257	8.0E-03	1.2E-02	1.5E-02	2.7E-02	2.9E-02	2.9E-02	2.7E-02	-8.3E-04	-6.0E-03	1.2E-02	3.0E-02	4.8E-02	6.6E-02
258	7.4E-03	1.1E-02	1.4E-02	2.4E-02	2.6E-02	2.6E-02	2.4E-02	-3.0E-03	-8.8E-03	6.1E-03	2.1E-02	3.6E-02	5.1E-02
259	9.1E-03	1.4E-02	1.7E-02	2.8E-02	3.0E-02	3.0E-02	2.8E-02	-2.1E-03	-4.2E-03	1.7E-02	3.9E-02	6.0E-02	8.1E-02
260	8.2E-03	1.3E-02	1.5E-02	2.6E-02	2.7E-02	2.7E-02	2.5E-02	-3.4E-03	-6.3E-03	1.2E-02	3.0E-02	4.9E-02	6.7E-02
261	7.6E-03	1.2E-02	1.4E-02	2.4E-02	2.5E-02	2.4E-02	2.3E-02	-4.4E-03	-8.6E-03	6.5E-03	2.2E-02	3.7E-02	5.2E-02
262	1.1E-02	1.5E-02	2.1E-02	3.1E-02	3.9E-02	3.8E-02	3.6E-02	4.9E-03	-4.6E-04	2.2E-02	4.4E-02	6.7E-02	8.9E-02
263	9.0E-03	1.4E-02	1.8E-02	2.7E-02	3.1E-02	3.1E-02	2.9E-02	-1.5E-03	-3.4E-03	1.8E-02	3.9E-02	6.0E-02	8.1E-02
264	8.4E-03	1.3E-02	1.5E-02	2.5E-02	2.6E-02	2.5E-02	2.5E-02	-3.8E-03	-5.8E-03	1.3E-02	3.2E-02	5.0E-02	6.9E-02
265	7.7E-03	1.2E-02	1.4E-02	2.3E-02	2.5E-02	2.3E-02	2.3E-02	-4.9E-03	-8.3E-03	7.2E-03	2.3E-02	3.8E-02	5.3E-02
266	1.1E-02	1.5E-02	2.1E-02	2.9E-02	4.0E-02	3.9E-02	3.7E-02	9.2E-03	3.0E-03	2.5E-02	4.7E-02	7.0E-02	9.2E-02
267	9.1E-03	1.4E-02	1.8E-02	2.6E-02	3.3E-02	3.2E-02	3.0E-02	5.3E-04	-1.5E-03	1.9E-02	4.0E-02	6.1E-02	8.2E-02
268	8.4E-03	1.2E-02	1.6E-02	2.5E-02	2.7E-02	2.7E-02	2.6E-02	-3.2E-03	-4.5E-03	1.5E-02	3.4E-02	5.3E-02	7.2E-02
269	7.7E-03	1.1E-02	1.4E-02	2.3E-02	2.4E-02	2.3E-02	2.3E-02	-5.2E-03	-7.8E-03	8.1E-03	2.4E-02	4.0E-02	5.6E-02
270	1.0E-02	1.5E-02	2.2E-02	2.9E-02	4.1E-02	4.0E-02	3.8E-02	9.4E-03	3.5E-03	2.7E-02	5.0E-02	7.3E-02	9.6E-02
271	9.1E-03	1.4E-02	1.9E-02	2.6E-02	3.4E-02	3.3E-02	3.2E-02	4.5E-03	1.4E-03	2.2E-02	4.3E-02	6.3E-02	8.4E-02
272	8.4E-03	1.2E-02	1.6E-02	2.4E-02	2.9E-02	2.8E-02	2.7E-02	-1.9E-03	-2.5E-03	1.7E-02	3.6E-02	5.6E-02	7.5E-02
273	7.7E-03	1.1E-02	1.4E-02	2.3E-02	2.4E-02	2.4E-02	2.3E-02	-5.0E-03	-6.7E-03	9.7E-03	2.6E-02	4.2E-02	5.9E-02
274	9.6E-03	1.5E-02	2.2E-02	2.9E-02	4.1E-02	4.0E-02	3.8E-02	1.0E-02	4.8E-03	2.9E-02	5.3E-02	7.7E-02	1.0E-01
275	9.1E-03	1.3E-02	1.9E-02	2.6E-02	3.5E-02	3.4E-02	3.2E-02	4.4E-03	1.5E-03	2.3E-02	4.5E-02	6.6E-02	8.8E-02
276	8.4E-03	1.1E-02	1.7E-02	2.4E-02	2.9E-02	2.9E-02	2.7E-02	1.1E-03	-1.0E-05	1.9E-02	3.9E-02	5.8E-02	7.7E-02
277	7.8E-03	9.7E-03	1.5E-02	2.2E-02	2.5E-02	2.5E-02	2.4E-02	-4.4E-03	-4.6E-03	1.2E-02	2.9E-02	4.6E-02	6.3E-02
278	9.8E-03	1.4E-02	2.3E-02	2.9E-02	4.2E-02	4.1E-02	3.9E-02	1.1E-02	6.1E-03	3.0E-02	5.4E-02	7.8E-02	1.0E-01
279	9.3E-03	1.2E-02	2.0E-02	2.6E-02	3.5E-02	3.5E-02	3.3E-02	4.4E-03	2.1E-03	2.5E-02	4.7E-02	7.0E-02	9.2E-02
280	8.5E-03	1.0E-02	1.7E-02	2.4E-02	3.0E-02	3.0E-02	2.8E-02	1.2E-03	2.4E-04	2.0E-02	4.0E-02	6.0E-02	8.0E-02
281	7.8E-03	9.0E-03	1.5E-02	2.2E-02	2.6E-02	2.6E-02	2.4E-02	-1.4E-03	-1.7E-03	1.6E-02	3.3E-02	5.0E-02	6.8E-02
282	1.0E-02	1.4E-02	2.4E-02	2.9E-02	4.2E-02	4.1E-02	3.9E-02	1.3E-02	8.2E-03	3.2E-02	5.6E-02	8.0E-02	1.0E-01
283	9.6E-03	1.2E-02	2.1E-02	2.6E-02	3.6E-02	3.5E-02	3.3E-02	5.1E-03	2.9E-03	2.6E-02	4.8E-02	7.1E-02	9.4E-02
284	8.8E-03	9.8E-03	1.8E-02	2.4E-02	3.1E-02	3.0E-02	2.9E-02	8.4E-04	4.3E-04	2.1E-02	4.2E-02	6.3E-02	8.4E-02
285	8.0E-03	8.2E-03	1.5E-02	2.2E-02	2.7E-02	2.6E-02	2.5E-02	-6.8E-04	-6.6E-04	1.8E-02	3.6E-02	5.4E-02	7.3E-02
286	1.1E-02	1.4E-02	2.5E-02	2.9E-02	4.2E-02	4.1E-02	3.9E-02	1.6E-02	1.1E-02	3.5E-02	5.9E-02	8.3E-02	1.1E-01
287	1.0E-02	1.2E-02	2.1E-02	2.6E-02	3.6E-02	3.6E-02	3.4E-02	6.4E-03	4.2E-03	2.7E-02	4.9E-02	7.2E-02	9.5E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
288	9.1E-03	1.0E-02	1.8E-02	2.3E-02	3.2E-02	3.1E-02	2.9E-02	1.0E-03	7.5E-04	2.2E-02	4.3E-02	6.4E-02	8.6E-02
289	8.2E-03	8.5E-03	1.6E-02	2.2E-02	2.8E-02	2.7E-02	2.6E-02	-1.5E-03	-9.5E-04	1.8E-02	3.8E-02	5.7E-02	7.6E-02
290	1.1E-02	1.4E-02	2.5E-02	2.9E-02	4.2E-02	4.1E-02	3.9E-02	1.9E-02	1.5E-02	3.9E-02	6.3E-02	8.7E-02	1.1E-01
291	1.1E-02	1.2E-02	2.2E-02	2.6E-02	3.7E-02	3.6E-02	3.4E-02	8.5E-03	6.2E-03	2.9E-02	5.1E-02	7.4E-02	9.7E-02
292	9.5E-03	1.0E-02	1.9E-02	2.3E-02	3.2E-02	3.1E-02	3.0E-02	1.9E-03	1.4E-03	2.3E-02	4.4E-02	6.5E-02	8.6E-02
293	8.6E-03	8.8E-03	1.6E-02	2.1E-02	2.8E-02	2.8E-02	2.6E-02	-1.7E-03	-9.4E-04	1.9E-02	3.9E-02	5.9E-02	7.9E-02
294	1.2E-02	1.5E-02	2.5E-02	2.8E-02	4.1E-02	4.0E-02	3.8E-02	2.3E-02	1.9E-02	4.3E-02	6.7E-02	9.1E-02	1.1E-01
295	1.1E-02	1.2E-02	2.2E-02	2.5E-02	3.6E-02	3.6E-02	3.4E-02	1.1E-02	8.9E-03	3.2E-02	5.4E-02	7.7E-02	9.9E-02
296	9.9E-03	1.0E-02	1.9E-02	2.3E-02	3.2E-02	3.2E-02	3.0E-02	3.4E-03	2.7E-03	2.4E-02	4.5E-02	6.6E-02	8.8E-02
297	8.9E-03	9.3E-03	1.7E-02	2.1E-02	2.9E-02	2.8E-02	2.7E-02	-1.4E-03	-8.4E-04	1.9E-02	3.9E-02	5.9E-02	7.9E-02
298	1.3E-02	1.5E-02	2.5E-02	2.7E-02	4.0E-02	3.9E-02	3.7E-02	2.8E-02	2.4E-02	4.7E-02	7.1E-02	9.4E-02	1.2E-01
299	1.1E-02	1.2E-02	2.2E-02	2.5E-02	3.6E-02	3.5E-02	3.4E-02	1.4E-02	1.2E-02	3.5E-02	5.8E-02	8.0E-02	1.0E-01
300	9.9E-03	1.1E-02	1.9E-02	2.3E-02	3.2E-02	3.2E-02	3.0E-02	5.2E-03	4.5E-03	2.6E-02	4.7E-02	6.8E-02	9.0E-02
301	8.9E-03	9.3E-03	1.7E-02	2.1E-02	2.9E-02	2.9E-02	2.7E-02	-4.9E-04	-1.6E-04	2.0E-02	4.0E-02	6.0E-02	8.0E-02
302	1.1E-02	1.5E-02	2.6E-02	2.6E-02	4.0E-02	3.9E-02	3.7E-02	3.2E-02	2.8E-02	5.2E-02	7.5E-02	9.9E-02	1.2E-01
303	1.0E-02	1.3E-02	2.2E-02	2.4E-02	3.6E-02	3.5E-02	3.4E-02	1.8E-02	1.6E-02	3.8E-02	6.1E-02	8.4E-02	1.1E-01
304	9.3E-03	1.1E-02	2.0E-02	2.2E-02	3.3E-02	3.2E-02	3.1E-02	7.4E-03	6.9E-03	2.8E-02	5.0E-02	7.1E-02	9.2E-02
305	9.9E-03	1.4E-02	2.5E-02	2.6E-02	3.8E-02	3.8E-02	3.6E-02	3.3E-02	3.0E-02	5.3E-02	7.7E-02	1.0E-01	1.2E-01
306	8.9E-03	1.2E-02	2.2E-02	2.3E-02	3.5E-02	3.5E-02	3.3E-02	1.7E-02	1.6E-02	3.9E-02	6.2E-02	8.4E-02	1.1E-01
307	7.8E-03	1.1E-02	1.9E-02	2.2E-02	3.2E-02	3.2E-02	3.0E-02	6.9E-03	7.1E-03	2.9E-02	5.1E-02	7.3E-02	9.5E-02
308	9.6E-03	1.3E-02	2.3E-02	2.6E-02	3.6E-02	3.5E-02	3.3E-02	3.6E-02	3.3E-02	5.6E-02	8.0E-02	1.0E-01	1.3E-01
309	7.9E-03	1.2E-02	2.1E-02	2.2E-02	3.4E-02	3.4E-02	3.2E-02	1.9E-02	1.9E-02	4.2E-02	6.4E-02	8.7E-02	1.1E-01
310	9.0E-03	1.2E-02	2.0E-02	2.5E-02	3.3E-02	3.3E-02	3.1E-02	3.9E-02	3.6E-02	5.9E-02	8.2E-02	1.0E-01	1.3E-01
311	7.4E-03	1.1E-02	2.0E-02	2.1E-02	3.2E-02	3.2E-02	3.0E-02	2.0E-02	2.1E-02	4.4E-02	6.7E-02	9.0E-02	1.1E-01
312	8.3E-03	1.1E-02	1.9E-02	2.4E-02	3.1E-02	3.0E-02	2.8E-02	4.2E-02	4.0E-02	6.2E-02	8.4E-02	1.1E-01	1.3E-01
313	6.9E-03	1.0E-02	1.8E-02	2.0E-02	3.0E-02	2.9E-02	2.8E-02	2.0E-02	2.3E-02	4.6E-02	6.9E-02	9.2E-02	1.2E-01
314	6.4E-03	9.5E-03	1.8E-02	1.9E-02	3.0E-02	2.9E-02	2.8E-02	1.2E-02	1.5E-02	3.6E-02	5.8E-02	7.9E-02	1.0E-01
315	7.7E-03	1.0E-02	1.7E-02	2.3E-02	3.0E-02	2.8E-02	2.7E-02	4.3E-02	4.2E-02	6.3E-02	8.5E-02	1.1E-01	1.3E-01
316	6.7E-03	9.3E-03	1.7E-02	2.0E-02	2.8E-02	2.8E-02	2.6E-02	2.2E-02	2.5E-02	4.8E-02	7.0E-02	9.3E-02	1.2E-01
317	6.0E-03	8.8E-03	1.7E-02	1.8E-02	2.7E-02	2.7E-02	2.6E-02	1.2E-02	1.6E-02	3.8E-02	5.9E-02	8.1E-02	1.0E-01
318	5.6E-03	8.4E-03	1.7E-02	1.8E-02	2.7E-02	2.7E-02	2.6E-02	6.0E-03	8.8E-03	2.9E-02	5.0E-02	7.1E-02	9.1E-02
319	5.1E-03	7.9E-03	1.5E-02	1.6E-02	2.6E-02	2.6E-02	2.4E-02	-4.9E-04	2.3E-03	2.2E-02	4.2E-02	6.2E-02	8.1E-02
320	7.0E-03	9.5E-03	1.6E-02	2.1E-02	2.9E-02	2.7E-02	2.5E-02	4.4E-02	4.3E-02	6.4E-02	8.5E-02	1.1E-01	1.3E-01
321	6.4E-03	8.8E-03	1.6E-02	1.9E-02	2.6E-02	2.6E-02	2.4E-02	2.4E-02	2.7E-02	4.9E-02	7.1E-02	9.3E-02	1.2E-01
322	5.4E-03	8.3E-03	1.6E-02	1.7E-02	2.6E-02	2.6E-02	2.4E-02	1.2E-02	1.7E-02	3.9E-02	6.1E-02	8.3E-02	1.1E-01
323	5.4E-03	7.9E-03	1.6E-02	1.7E-02	2.6E-02	2.6E-02	2.4E-02	7.4E-03	1.1E-02	3.2E-02	5.2E-02	7.2E-02	9.3E-02
324	5.0E-03	7.6E-03	1.5E-02	1.6E-02	2.6E-02	2.5E-02	2.4E-02	1.1E-03	4.2E-03	2.4E-02	4.4E-02	6.3E-02	8.3E-02
325	4.5E-03	7.0E-03	1.4E-02	1.5E-02	2.4E-02	2.4E-02	2.3E-02	-4.1E-03	-1.3E-03	1.7E-02	3.6E-02	5.4E-02	7.3E-02
326	4.8E-03	7.2E-03	1.5E-02	1.6E-02	2.5E-02	2.4E-02	2.3E-02	2.3E-03	6.1E-03	2.6E-02	4.5E-02	6.5E-02	8.4E-02
327	4.5E-03	6.9E-03	1.4E-02	1.5E-02	2.4E-02	2.4E-02	2.2E-02	-2.4E-03	7.2E-04	1.9E-02	3.8E-02	5.7E-02	7.6E-02
328	4.2E-03	6.3E-03	1.2E-02	1.4E-02	2.2E-02	2.2E-02	2.1E-02	-4.5E-03	-2.3E-03	1.5E-02	3.2E-02	4.9E-02	6.6E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
329	4.6E-03	6.6E-03	1.4E-02	1.6E-02	2.3E-02	2.3E-02	2.2E-02	3.4E-03	8.0E-03	2.7E-02	4.7E-02	6.6E-02	8.6E-02
330	4.4E-03	6.6E-03	1.3E-02	1.5E-02	2.4E-02	2.3E-02	2.2E-02	-9.8E-04	2.5E-03	2.1E-02	4.0E-02	5.8E-02	7.7E-02
331	4.0E-03	6.2E-03	1.2E-02	1.4E-02	2.2E-02	2.2E-02	2.0E-02	-3.2E-03	-8.1E-04	1.6E-02	3.4E-02	5.1E-02	6.8E-02
332	4.5E-03	6.4E-03	1.3E-02	1.5E-02	2.2E-02	2.1E-02	2.0E-02	5.3E-03	9.9E-03	2.9E-02	4.8E-02	6.8E-02	8.7E-02
333	4.2E-03	6.2E-03	1.3E-02	1.5E-02	2.3E-02	2.2E-02	2.1E-02	5.2E-05	4.1E-03	2.3E-02	4.1E-02	6.0E-02	7.8E-02
334	4.0E-03	6.0E-03	1.2E-02	1.4E-02	2.2E-02	2.1E-02	2.0E-02	-2.0E-03	7.4E-04	1.8E-02	3.6E-02	5.3E-02	7.0E-02
335	3.6E-03	5.6E-03	1.1E-02	1.3E-02	2.1E-02	2.0E-02	1.9E-02	-6.4E-03	-4.3E-03	1.2E-02	2.8E-02	4.4E-02	6.0E-02
336	4.4E-03	6.1E-03	1.2E-02	1.4E-02	2.1E-02	2.1E-02	2.0E-02	4.7E-03	1.0E-02	2.9E-02	4.9E-02	6.8E-02	8.8E-02
337	4.3E-03	5.8E-03	1.2E-02	1.4E-02	2.1E-02	2.1E-02	2.0E-02	1.2E-03	5.8E-03	2.4E-02	4.2E-02	6.1E-02	7.9E-02
338	3.9E-03	5.7E-03	1.1E-02	1.4E-02	2.1E-02	2.1E-02	2.0E-02	-1.1E-03	2.2E-03	2.0E-02	3.7E-02	5.5E-02	7.2E-02
339	3.5E-03	5.4E-03	1.1E-02	1.3E-02	2.1E-02	2.0E-02	1.9E-02	-5.6E-03	-3.0E-03	1.3E-02	3.0E-02	4.6E-02	6.3E-02
340	4.1E-03	5.8E-03	1.2E-02	1.3E-02	2.1E-02	2.0E-02	1.9E-02	3.9E-03	9.8E-03	2.9E-02	4.9E-02	6.8E-02	8.8E-02
341	4.1E-03	5.6E-03	1.2E-02	1.4E-02	2.0E-02	2.0E-02	1.9E-02	3.0E-03	7.4E-03	2.5E-02	4.3E-02	6.1E-02	8.0E-02
342	3.7E-03	5.4E-03	1.1E-02	1.3E-02	2.0E-02	2.0E-02	1.9E-02	-3.9E-04	3.4E-03	2.1E-02	3.8E-02	5.5E-02	7.2E-02
343	3.5E-03	5.2E-03	1.1E-02	1.3E-02	2.0E-02	2.0E-02	1.9E-02	-5.0E-03	-1.9E-03	1.5E-02	3.1E-02	4.8E-02	6.5E-02
344	3.6E-03	5.4E-03	1.1E-02	1.2E-02	2.0E-02	2.0E-02	1.9E-02	3.1E-03	9.7E-03	2.9E-02	4.9E-02	6.8E-02	8.8E-02
345	3.8E-03	5.4E-03	1.1E-02	1.3E-02	2.0E-02	2.0E-02	1.8E-02	6.2E-03	1.0E-02	2.8E-02	4.5E-02	6.2E-02	8.0E-02
346	3.5E-03	5.0E-03	1.0E-02	1.3E-02	1.9E-02	1.9E-02	1.8E-02	1.8E-05	4.3E-03	2.1E-02	3.8E-02	5.5E-02	7.2E-02
347	3.4E-03	5.0E-03	1.0E-02	1.2E-02	1.9E-02	1.9E-02	1.8E-02	-4.5E-03	-7.7E-04	1.6E-02	3.3E-02	4.9E-02	6.6E-02
348	3.4E-03	5.1E-03	1.1E-02	1.2E-02	1.9E-02	1.9E-02	1.8E-02	2.1E-03	9.3E-03	2.9E-02	4.8E-02	6.7E-02	8.7E-02
349	3.4E-03	5.1E-03	9.8E-03	1.1E-02	1.9E-02	1.9E-02	1.8E-02	6.2E-03	1.0E-02	2.8E-02	4.5E-02	6.2E-02	7.9E-02
350	3.3E-03	4.9E-03	9.7E-03	1.2E-02	1.8E-02	1.8E-02	1.7E-02	8.9E-04	5.0E-03	2.2E-02	3.9E-02	5.5E-02	7.2E-02
351	5.7E-03	9.1E-03	1.1E-02	1.8E-02	2.3E-02	2.3E-02	2.2E-02	1.3E-02	-2.4E-03	2.1E-04	2.8E-03	5.4E-03	8.0E-03
352	5.7E-03	9.4E-03	1.1E-02	1.9E-02	2.3E-02	2.3E-02	2.2E-02	1.1E-02	-3.5E-03	-3.7E-04	2.8E-03	6.0E-03	9.1E-03
353	5.9E-03	9.7E-03	1.1E-02	1.9E-02	2.3E-02	2.3E-02	2.2E-02	9.2E-03	-4.4E-03	1.3E-04	4.6E-03	9.1E-03	1.4E-02
354	6.1E-03	9.9E-03	1.1E-02	1.9E-02	2.3E-02	2.3E-02	2.1E-02	7.1E-03	-5.0E-03	8.2E-04	6.7E-03	1.2E-02	1.8E-02
355	6.4E-03	1.0E-02	1.2E-02	2.0E-02	2.3E-02	2.2E-02	2.1E-02	2.6E-03	-7.5E-03	2.8E-04	8.0E-03	1.6E-02	2.4E-02
356	6.6E-03	1.0E-02	1.3E-02	2.1E-02	2.2E-02	2.2E-02	2.0E-02	-1.3E-03	-9.8E-03	-7.6E-04	8.3E-03	1.7E-02	2.6E-02
357	6.7E-03	9.8E-03	1.3E-02	2.1E-02	2.2E-02	2.1E-02	2.1E-02	-7.4E-03	-1.4E-02	-2.9E-03	7.8E-03	1.8E-02	2.9E-02
358	6.8E-03	9.4E-03	1.3E-02	2.1E-02	2.2E-02	2.1E-02	2.1E-02	-1.2E-02	-1.7E-02	-4.8E-03	7.1E-03	1.9E-02	3.1E-02
359	6.8E-03	8.5E-03	1.2E-02	2.0E-02	2.2E-02	2.0E-02	2.0E-02	-1.4E-02	-1.8E-02	-5.8E-03	6.0E-03	1.8E-02	3.0E-02
360	6.8E-03	7.9E-03	1.2E-02	2.0E-02	2.1E-02	2.0E-02	2.0E-02	-1.6E-02	-1.8E-02	-5.2E-03	7.3E-03	2.0E-02	3.2E-02
361	6.8E-03	7.3E-03	1.2E-02	2.0E-02	2.1E-02	2.0E-02	2.0E-02	-1.5E-02	-1.6E-02	-3.0E-03	9.9E-03	2.3E-02	3.6E-02
362	6.9E-03	7.0E-03	1.2E-02	2.0E-02	2.1E-02	2.1E-02	2.0E-02	-1.3E-02	-1.3E-02	-4.9E-05	1.3E-02	2.6E-02	3.9E-02
363	7.1E-03	7.2E-03	1.3E-02	2.0E-02	2.2E-02	2.1E-02	2.0E-02	-9.2E-03	-1.0E-02	3.5E-03	1.7E-02	3.1E-02	4.4E-02
364	7.3E-03	7.5E-03	1.3E-02	2.0E-02	2.3E-02	2.2E-02	2.1E-02	-5.2E-03	-6.2E-03	7.7E-03	2.2E-02	3.5E-02	4.9E-02
365	7.5E-03	7.7E-03	1.3E-02	1.9E-02	2.3E-02	2.3E-02	2.2E-02	-5.2E-03	-5.5E-03	9.8E-03	2.5E-02	4.0E-02	5.5E-02
366	1.6E-03	1.6E-02	2.3E-02	2.3E-02	2.3E-02	6.0E-03	5.9E-03	-2.4E-02	-2.4E-02	-2.1E-02	-1.7E-02	-1.3E-02	-8.9E-03
367	1.7E-03	1.7E-02	2.5E-02	2.5E-02	2.5E-02	6.2E-03	6.0E-03	-2.4E-02	-2.2E-02	-1.6E-02	-1.1E-02	-4.8E-03	9.6E-04
368	1.8E-03	1.5E-02	2.3E-02	2.3E-02	2.3E-02	6.4E-03	6.2E-03	-2.9E-02	-2.7E-02	-2.1E-02	-1.5E-02	-9.1E-03	-3.2E-03
369	2.0E-03	1.2E-02	1.8E-02	1.8E-02	1.8E-02	6.8E-03	6.6E-03	-4.3E-02	-4.0E-02	-3.2E-02	-2.5E-02	-1.7E-02	-1.0E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
370	1.8E-03	1.5E-02	2.3E-02	2.3E-02	2.3E-02	6.5E-03	6.4E-03	-3.2E-02	-2.8E-02	-2.0E-02	-1.1E-02	-3.2E-03	5.1E-03
371	1.9E-03	1.4E-02	2.1E-02	2.0E-02	2.0E-02	6.7E-03	6.5E-03	-4.0E-02	-3.5E-02	-2.6E-02	-1.7E-02	-7.6E-03	1.5E-03
372	2.2E-03	1.1E-02	1.7E-02	1.6E-02	1.6E-02	7.2E-03	6.9E-03	-5.6E-02	-5.0E-02	-3.9E-02	-2.8E-02	-1.7E-02	-6.3E-03
373	2.1E-03	2.0E-02	2.0E-02	2.0E-02	1.6E-02	7.1E-03	6.9E-03	-5.2E-02	-4.4E-02	-3.3E-02	-2.1E-02	-9.4E-03	2.3E-03
374	2.3E-03	1.7E-02	1.7E-02	1.7E-02	1.2E-02	7.5E-03	7.2E-03	-7.0E-02	-6.2E-02	-5.0E-02	-3.7E-02	-2.5E-02	-1.3E-02
375	2.5E-03	2.0E-02	2.0E-02	2.0E-02	1.4E-02	7.9E-03	7.6E-03	-8.9E-02	-8.1E-02	-7.0E-02	-5.8E-02	-4.6E-02	-3.5E-02
376	2.6E-03	2.2E-02	2.2E-02	2.1E-02	1.4E-02	8.2E-03	7.9E-03	-9.7E-02	-9.1E-02	-8.0E-02	-6.9E-02	-5.8E-02	-4.7E-02
377	9.7E-04	2.0E-03	3.6E-03	4.8E-03	4.6E-03	4.2E-03	3.2E-03	1.2E-02	7.6E-03	5.6E-03	3.7E-03	1.7E-03	-2.2E-04
378	9.6E-04	2.0E-03	3.6E-03	4.8E-03	4.6E-03	4.1E-03	3.2E-03	1.3E-02	8.6E-03	5.9E-03	3.2E-03	4.8E-04	-2.2E-03
379	9.4E-04	1.9E-03	3.6E-03	4.7E-03	4.6E-03	3.8E-03	3.2E-03	1.9E-02	1.3E-02	8.4E-03	4.3E-03	1.7E-04	-4.0E-03
380	9.2E-04	1.9E-03	3.5E-03	4.6E-03	4.5E-03	3.4E-03	3.2E-03	2.4E-02	1.7E-02	1.1E-02	6.2E-03	9.8E-04	-4.2E-03
381	8.8E-04	1.9E-03	3.4E-03	4.5E-03	4.4E-03	3.4E-03	3.2E-03	2.9E-02	2.1E-02	1.5E-02	9.2E-03	3.4E-03	-2.3E-03
382	9.5E-04	2.0E-03	3.6E-03	4.7E-03	4.5E-03	4.1E-03	3.2E-03	1.4E-02	9.0E-03	6.1E-03	3.2E-03	2.1E-04	-2.7E-03
383	9.2E-04	1.9E-03	3.5E-03	4.6E-03	4.5E-03	3.8E-03	3.2E-03	1.9E-02	1.3E-02	8.6E-03	4.4E-03	1.5E-04	-4.1E-03
384	8.9E-04	1.8E-03	3.4E-03	4.5E-03	4.4E-03	3.6E-03	3.1E-03	2.4E-02	1.6E-02	1.1E-02	6.0E-03	8.1E-04	-4.4E-03
385	8.6E-04	1.8E-03	3.3E-03	4.4E-03	4.3E-03	3.3E-03	3.1E-03	2.8E-02	2.1E-02	1.5E-02	9.2E-03	3.5E-03	-2.2E-03
386	9.3E-04	1.9E-03	3.5E-03	4.6E-03	4.5E-03	4.2E-03	3.1E-03	1.5E-02	9.4E-03	6.2E-03	3.0E-03	-1.7E-04	-3.4E-03
387	9.0E-04	1.8E-03	3.4E-03	4.5E-03	4.4E-03	3.9E-03	3.1E-03	1.9E-02	1.3E-02	8.7E-03	4.4E-03	1.1E-04	-4.2E-03
388	8.7E-04	1.8E-03	3.3E-03	4.4E-03	4.3E-03	3.6E-03	3.1E-03	2.4E-02	1.6E-02	1.1E-02	5.9E-03	6.6E-04	-4.6E-03
389	8.4E-04	1.8E-03	3.2E-03	4.3E-03	4.2E-03	3.3E-03	3.0E-03	2.8E-02	2.0E-02	1.5E-02	9.1E-03	3.5E-03	-2.0E-03
390	9.1E-04	1.9E-03	3.4E-03	4.5E-03	4.4E-03	4.0E-03	3.1E-03	1.5E-02	9.7E-03	6.3E-03	3.0E-03	-3.9E-04	-3.8E-03
391	8.8E-04	1.8E-03	3.4E-03	4.4E-03	4.3E-03	3.8E-03	3.1E-03	2.0E-02	1.3E-02	8.8E-03	4.5E-03	8.4E-05	-4.3E-03
392	8.4E-04	1.8E-03	3.3E-03	4.3E-03	4.2E-03	3.6E-03	3.0E-03	2.4E-02	1.7E-02	1.1E-02	5.9E-03	6.1E-04	-4.7E-03
393	8.1E-04	1.8E-03	3.1E-03	4.2E-03	4.1E-03	3.2E-03	3.0E-03	2.8E-02	2.0E-02	1.5E-02	9.0E-03	3.6E-03	-1.9E-03
394	8.9E-04	1.8E-03	3.4E-03	4.4E-03	4.3E-03	3.9E-03	3.0E-03	1.6E-02	1.0E-02	6.5E-03	2.9E-03	-6.1E-04	-4.1E-03
395	8.6E-04	1.8E-03	3.3E-03	4.4E-03	4.3E-03	3.7E-03	3.0E-03	2.0E-02	1.3E-02	8.9E-03	4.5E-03	3.6E-05	-4.4E-03
396	8.2E-04	1.7E-03	3.2E-03	4.3E-03	4.2E-03	3.3E-03	3.0E-03	2.4E-02	1.7E-02	1.1E-02	6.1E-03	8.3E-04	-4.4E-03
397	7.9E-04	1.7E-03	3.1E-03	4.2E-03	4.1E-03	3.1E-03	2.9E-03	2.7E-02	2.0E-02	1.4E-02	8.9E-03	3.5E-03	-1.9E-03
398	8.6E-04	1.8E-03	3.3E-03	4.4E-03	4.3E-03	4.0E-03	3.0E-03	1.6E-02	1.0E-02	6.7E-03	3.1E-03	-5.9E-04	-4.2E-03
399	8.3E-04	1.7E-03	3.2E-03	4.3E-03	4.2E-03	3.9E-03	3.0E-03	2.0E-02	1.4E-02	9.0E-03	4.5E-03	-3.4E-05	-4.5E-03
400	8.0E-04	1.7E-03	3.1E-03	4.2E-03	4.1E-03	3.6E-03	2.9E-03	2.4E-02	1.7E-02	1.1E-02	6.2E-03	1.0E-03	-4.2E-03
401	7.6E-04	1.7E-03	3.0E-03	4.1E-03	4.0E-03	3.3E-03	2.9E-03	2.7E-02	1.9E-02	1.4E-02	8.6E-03	3.3E-03	-2.0E-03
402	8.4E-04	1.7E-03	3.2E-03	4.3E-03	4.2E-03	3.9E-03	2.9E-03	1.6E-02	1.1E-02	6.9E-03	3.2E-03	-5.9E-04	-4.3E-03
403	8.1E-04	1.7E-03	3.2E-03	4.2E-03	4.1E-03	3.6E-03	2.9E-03	2.0E-02	1.4E-02	9.1E-03	4.5E-03	-5.1E-05	-4.6E-03
404	7.8E-04	1.7E-03	3.0E-03	4.1E-03	4.0E-03	3.6E-03	2.9E-03	2.4E-02	1.7E-02	1.2E-02	6.4E-03	1.3E-03	-3.9E-03
405	7.4E-04	1.6E-03	2.9E-03	4.2E-03	3.9E-03	3.3E-03	2.8E-03	2.6E-02	1.9E-02	1.4E-02	8.4E-03	3.1E-03	-2.1E-03
406	8.2E-04	1.7E-03	3.2E-03	4.2E-03	4.1E-03	3.7E-03	2.9E-03	1.7E-02	1.1E-02	7.0E-03	3.2E-03	-6.5E-04	-4.5E-03
407	7.9E-04	1.7E-03	3.1E-03	4.1E-03	4.0E-03	3.4E-03	2.9E-03	2.0E-02	1.4E-02	9.1E-03	4.5E-03	-1.3E-04	-4.8E-03
408	7.6E-04	1.6E-03	3.0E-03	4.0E-03	3.9E-03	3.2E-03	2.8E-03	2.4E-02	1.7E-02	1.2E-02	6.6E-03	1.4E-03	-3.7E-03
409	7.2E-04	1.6E-03	2.9E-03	4.2E-03	3.8E-03	2.9E-03	2.7E-03	2.6E-02	1.9E-02	1.3E-02	8.2E-03	3.0E-03	-2.2E-03
410	7.7E-04	1.6E-03	3.0E-03	3.8E-03	5.5E-02	6.1E-02	7.7E-03	1.1E-03	2.3E-03	5.1E-03	7.8E-03	1.1E-02	1.3E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
411	7.9E-04	1.7E-03	3.3E-03	4.1E-03	5.3E-02	5.4E-02	7.2E-03	1.1E-03	1.9E-03	4.3E-03	6.7E-03	9.0E-03	1.1E-02
412	8.1E-04	1.7E-03	3.7E-03	4.4E-03	4.6E-02	4.8E-02	7.2E-03	4.9E-04	1.1E-03	3.1E-03	5.2E-03	7.3E-03	9.3E-03
413	8.2E-04	1.7E-03	3.9E-03	4.7E-03	3.4E-02	3.6E-02	7.6E-03	2.8E-03	2.4E-03	3.4E-03	4.5E-03	5.6E-03	6.6E-03
414	8.2E-04	1.7E-03	3.9E-03	4.7E-03	2.8E-02	2.8E-02	7.1E-03	4.6E-03	3.5E-03	3.9E-03	4.4E-03	4.8E-03	5.2E-03
415	8.3E-04	1.7E-03	3.9E-03	4.7E-03	2.3E-02	1.9E-02	7.7E-03	7.0E-03	5.1E-03	4.9E-03	4.7E-03	4.5E-03	4.3E-03
416	8.3E-04	1.7E-03	3.9E-03	4.9E-03	1.5E-02	1.2E-02	6.5E-03	7.2E-03	4.9E-03	4.4E-03	3.9E-03	3.4E-03	2.9E-03
417	8.2E-04	1.7E-03	3.6E-03	4.7E-03	1.1E-02	1.0E-02	6.1E-03	8.1E-03	4.8E-03	3.3E-03	1.9E-03	3.8E-04	-1.1E-03
418	8.1E-04	1.7E-03	3.2E-03	4.2E-03	8.3E-03	8.3E-03	5.2E-03	1.2E-02	7.4E-03	4.3E-03	1.3E-03	-1.7E-03	-4.7E-03
419	7.8E-04	1.6E-03	3.0E-03	4.0E-03	6.4E-03	6.4E-03	4.2E-03	1.6E-02	1.0E-02	6.6E-03	2.7E-03	-1.2E-03	-5.0E-03
420	7.6E-04	1.6E-03	3.0E-03	4.0E-03	5.3E-03	5.4E-03	3.6E-03	2.0E-02	1.3E-02	8.6E-03	4.0E-03	-6.5E-04	-5.3E-03
421	7.2E-04	1.6E-03	2.9E-03	4.0E-03	4.4E-03	4.2E-03	2.7E-03	2.3E-02	1.6E-02	1.1E-02	6.2E-03	1.2E-03	-3.8E-03
422	6.9E-04	1.5E-03	2.8E-03	4.3E-03	3.7E-03	3.1E-03	2.7E-03	2.5E-02	1.8E-02	1.3E-02	7.9E-03	2.7E-03	-2.4E-03
423	7.6E-04	1.6E-03	3.1E-03	3.8E-03	4.6E-02	5.1E-02	6.9E-03	1.0E-03	2.2E-03	4.8E-03	7.5E-03	1.0E-02	1.3E-02
424	7.8E-04	1.6E-03	3.3E-03	4.1E-03	4.3E-02	4.4E-02	6.5E-03	7.8E-04	1.6E-03	3.9E-03	6.2E-03	8.5E-03	1.1E-02
425	8.0E-04	1.7E-03	3.6E-03	4.3E-03	4.1E-02	4.3E-02	6.6E-03	3.1E-04	8.6E-04	2.8E-03	4.8E-03	6.8E-03	8.7E-03
426	8.1E-04	1.7E-03	3.8E-03	4.4E-03	3.6E-02	3.8E-02	6.6E-03	2.3E-03	2.0E-03	3.2E-03	4.4E-03	5.6E-03	6.8E-03
427	8.2E-04	1.7E-03	3.8E-03	4.6E-03	2.7E-02	2.8E-02	6.5E-03	5.3E-03	3.9E-03	4.1E-03	4.4E-03	4.6E-03	4.8E-03
428	8.2E-04	1.7E-03	3.7E-03	4.6E-03	2.0E-02	2.1E-02	7.0E-03	6.7E-03	4.8E-03	4.6E-03	4.4E-03	4.2E-03	4.0E-03
429	8.2E-04	1.7E-03	3.7E-03	4.7E-03	1.1E-02	1.0E-02	5.5E-03	7.0E-03	4.6E-03	4.1E-03	3.5E-03	2.9E-03	2.4E-03
430	8.1E-04	1.7E-03	3.5E-03	4.5E-03	9.5E-03	8.8E-03	5.1E-03	8.7E-03	5.1E-03	3.3E-03	1.5E-03	-2.2E-04	-2.0E-03
431	7.9E-04	1.6E-03	3.1E-03	4.1E-03	8.6E-03	7.8E-03	4.7E-03	1.3E-02	7.6E-03	4.4E-03	1.2E-03	-1.9E-03	-5.1E-03
432	7.6E-04	1.6E-03	2.9E-03	3.9E-03	8.7E-03	8.1E-03	5.0E-03	1.6E-02	1.0E-02	6.5E-03	2.6E-03	-1.3E-03	-5.2E-03
433	7.3E-04	1.6E-03	2.8E-03	3.9E-03	7.8E-03	7.8E-03	4.6E-03	1.9E-02	1.3E-02	8.3E-03	3.7E-03	-9.3E-04	-5.6E-03
434	6.9E-04	1.5E-03	2.8E-03	4.1E-03	7.3E-03	7.3E-03	4.4E-03	2.2E-02	1.6E-02	1.1E-02	5.8E-03	9.5E-04	-3.9E-03
435	6.7E-04	1.5E-03	2.8E-03	4.3E-03	3.6E-03	3.2E-03	2.6E-03	2.4E-02	1.8E-02	1.3E-02	7.5E-03	2.4E-03	-2.6E-03
436	7.7E-04	1.6E-03	3.3E-03	4.0E-03	3.5E-02	3.7E-02	5.8E-03	4.1E-04	1.2E-03	3.4E-03	5.7E-03	7.9E-03	1.0E-02
437	7.8E-04	1.6E-03	3.5E-03	4.1E-03	3.6E-02	3.8E-02	5.9E-03	3.7E-04	7.7E-04	2.6E-03	4.4E-03	6.2E-03	8.0E-03
438	8.0E-04	1.7E-03	3.7E-03	4.3E-03	3.3E-02	3.4E-02	6.0E-03	2.5E-03	2.0E-03	3.1E-03	4.1E-03	5.2E-03	6.2E-03
439	8.1E-04	1.7E-03	3.7E-03	4.4E-03	2.8E-02	2.9E-02	6.6E-03	4.5E-03	3.3E-03	3.7E-03	4.1E-03	4.5E-03	5.0E-03
440	8.0E-04	1.7E-03	3.6E-03	4.5E-03	2.2E-02	2.3E-02	6.3E-03	6.5E-03	4.6E-03	4.4E-03	4.1E-03	3.9E-03	3.7E-03
441	8.0E-04	1.7E-03	3.5E-03	4.4E-03	1.5E-02	1.6E-02	6.2E-03	6.2E-03	3.9E-03	3.4E-03	2.8E-03	2.2E-03	1.7E-03
442	7.9E-04	1.7E-03	3.3E-03	4.3E-03	8.1E-03	8.1E-03	4.4E-03	9.1E-03	5.3E-03	3.2E-03	1.2E-03	-8.7E-04	-2.9E-03
443	7.7E-04	1.6E-03	3.0E-03	4.0E-03	7.8E-03	7.6E-03	4.4E-03	1.3E-02	7.8E-03	4.6E-03	1.3E-03	-1.9E-03	-5.2E-03
444	7.4E-04	1.6E-03	2.8E-03	3.8E-03	9.1E-03	8.1E-03	4.6E-03	1.6E-02	1.1E-02	6.5E-03	2.6E-03	-1.4E-03	-5.4E-03
445	7.1E-04	1.5E-03	2.8E-03	3.9E-03	8.0E-03	7.0E-03	4.5E-03	2.0E-02	1.3E-02	8.3E-03	3.6E-03	-1.1E-03	-5.7E-03
446	6.7E-04	1.5E-03	2.7E-03	4.1E-03	7.5E-03	6.9E-03	4.2E-03	2.2E-02	1.5E-02	1.0E-02	5.7E-03	8.5E-04	-4.0E-03
447	6.4E-04	1.5E-03	2.7E-03	4.4E-03	3.7E-03	3.6E-03	2.5E-03	2.4E-02	1.7E-02	1.2E-02	7.1E-03	2.2E-03	-2.8E-03
448	7.6E-04	1.6E-03	3.3E-03	3.9E-03	2.9E-02	3.3E-02	5.4E-03	1.1E-04	9.1E-04	3.1E-03	5.2E-03	7.4E-03	9.6E-03
449	7.7E-04	1.6E-03	3.4E-03	4.0E-03	3.0E-02	3.2E-02	5.3E-03	4.7E-04	7.4E-04	2.4E-03	4.1E-03	5.8E-03	7.5E-03
450	7.9E-04	1.6E-03	3.5E-03	4.2E-03	2.9E-02	3.1E-02	5.5E-03	2.6E-03	2.0E-03	2.9E-03	3.8E-03	4.7E-03	5.6E-03
451	8.0E-04	1.7E-03	3.6E-03	4.4E-03	2.5E-02	2.6E-02	6.2E-03	5.1E-03	3.7E-03	3.9E-03	4.1E-03	4.3E-03	4.5E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
452	7.9E-04	1.6E-03	3.5E-03	4.4E-03	2.2E-02	2.3E-02	5.9E-03	6.2E-03	4.4E-03	4.2E-03	4.1E-03	3.9E-03	3.7E-03
453	7.8E-04	1.6E-03	3.3E-03	4.3E-03	1.7E-02	1.8E-02	5.8E-03	5.9E-03	3.5E-03	2.8E-03	2.1E-03	1.5E-03	7.8E-04
454	7.7E-04	1.6E-03	3.1E-03	4.1E-03	1.2E-02	1.2E-02	5.1E-03	9.4E-03	5.3E-03	3.0E-03	7.8E-04	-1.5E-03	-3.8E-03
455	7.5E-04	1.6E-03	2.9E-03	3.9E-03	8.2E-03	8.3E-03	4.6E-03	1.3E-02	8.0E-03	4.7E-03	1.3E-03	-2.0E-03	-5.3E-03
456	7.2E-04	1.5E-03	2.8E-03	3.8E-03	8.2E-03	7.9E-03	4.4E-03	1.6E-02	1.1E-02	6.6E-03	2.5E-03	-1.5E-03	-5.6E-03
457	6.9E-04	1.5E-03	2.7E-03	4.0E-03	7.9E-03	7.4E-03	4.2E-03	2.0E-02	1.3E-02	8.3E-03	3.6E-03	-1.1E-03	-5.8E-03
458	6.5E-04	1.5E-03	2.7E-03	4.1E-03	8.0E-03	7.0E-03	4.2E-03	2.2E-02	1.5E-02	1.0E-02	5.5E-03	7.3E-04	-4.0E-03
459	6.2E-04	1.4E-03	2.7E-03	4.4E-03	3.8E-03	3.8E-03	2.5E-03	2.3E-02	1.7E-02	1.2E-02	6.8E-03	1.9E-03	-3.0E-03
460	7.6E-04	1.6E-03	3.3E-03	3.9E-03	2.6E-02	2.8E-02	4.8E-03	6.1E-04	7.4E-04	2.3E-03	3.9E-03	5.4E-03	7.0E-03
461	7.7E-04	1.6E-03	3.4E-03	4.1E-03	2.7E-02	2.8E-02	5.0E-03	2.6E-03	1.9E-03	2.8E-03	3.6E-03	4.4E-03	5.2E-03
462	7.8E-04	1.6E-03	3.4E-03	4.2E-03	2.4E-02	2.5E-02	5.8E-03	5.2E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03
463	7.8E-04	1.6E-03	3.3E-03	4.2E-03	2.1E-02	2.2E-02	5.5E-03	5.9E-03	4.1E-03	3.9E-03	3.6E-03	3.4E-03	3.2E-03
464	7.6E-04	1.6E-03	3.1E-03	4.1E-03	1.7E-02	1.7E-02	5.6E-03	7.5E-03	4.3E-03	2.8E-03	1.3E-03	-2.6E-04	-1.8E-03
465	7.5E-04	1.6E-03	3.0E-03	4.0E-03	1.4E-02	1.5E-02	5.3E-03	9.7E-03	5.5E-03	3.0E-03	5.3E-04	-1.9E-03	-4.4E-03
466	7.3E-04	1.6E-03	2.9E-03	3.8E-03	1.0E-02	1.0E-02	4.5E-03	1.3E-02	8.2E-03	4.8E-03	1.3E-03	-2.1E-03	-5.5E-03
467	7.0E-04	1.5E-03	2.8E-03	3.9E-03	7.8E-03	7.9E-03	4.3E-03	1.7E-02	1.1E-02	6.6E-03	2.5E-03	-1.6E-03	-5.7E-03
468	6.7E-04	1.5E-03	2.7E-03	4.0E-03	6.9E-03	6.9E-03	3.8E-03	2.0E-02	1.3E-02	8.4E-03	3.7E-03	-9.8E-04	-5.7E-03
469	6.3E-04	1.5E-03	2.7E-03	4.2E-03	7.5E-03	7.1E-03	4.1E-03	2.1E-02	1.5E-02	1.0E-02	5.3E-03	6.1E-04	-4.1E-03
470	6.0E-04	1.5E-03	2.8E-03	4.4E-03	4.0E-03	4.0E-03	2.4E-03	2.3E-02	1.6E-02	1.1E-02	6.5E-03	1.7E-03	-3.1E-03
471	7.6E-04	1.6E-03	3.2E-03	4.0E-03	2.3E-02	2.4E-02	4.7E-03	5.1E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03	3.8E-03
472	7.6E-04	1.6E-03	3.2E-03	4.1E-03	2.0E-02	2.1E-02	5.4E-03	5.6E-03	3.7E-03	3.4E-03	3.2E-03	2.9E-03	2.7E-03
473	7.5E-04	1.6E-03	3.1E-03	4.0E-03	1.7E-02	1.9E-02	4.7E-03	6.8E-03	3.9E-03	2.7E-03	1.6E-03	4.1E-04	-7.5E-04
474	7.3E-04	1.5E-03	2.9E-03	3.8E-03	1.5E-02	1.6E-02	5.1E-03	1.1E-02	6.1E-03	3.3E-03	4.2E-04	-2.4E-03	-5.3E-03
475	7.0E-04	1.5E-03	2.8E-03	3.7E-03	1.3E-02	1.4E-02	4.8E-03	1.3E-02	8.2E-03	4.8E-03	1.3E-03	-2.2E-03	-5.6E-03
476	6.8E-04	1.5E-03	2.7E-03	3.9E-03	8.2E-03	8.3E-03	4.0E-03	1.7E-02	1.1E-02	6.6E-03	2.5E-03	-1.7E-03	-5.9E-03
477	6.5E-04	1.5E-03	2.7E-03	4.0E-03	6.6E-03	6.7E-03	3.7E-03	2.0E-02	1.3E-02	8.5E-03	3.8E-03	-8.2E-04	-5.5E-03
478	7.2E-04	1.5E-03	2.8E-03	3.6E-03	5.6E-02	6.2E-02	8.3E-03	2.3E-04	2.1E-03	5.6E-03	9.1E-03	1.3E-02	1.6E-02
479	7.2E-04	1.5E-03	2.8E-03	3.6E-03	4.5E-02	5.1E-02	7.4E-03	1.8E-04	2.0E-03	5.5E-03	8.9E-03	1.2E-02	1.6E-02
480	7.4E-04	1.6E-03	3.0E-03	3.7E-03	3.7E-02	4.0E-02	6.2E-03	7.1E-04	2.1E-03	5.0E-03	7.9E-03	1.1E-02	1.4E-02
481	5.6E-04	1.6E-03	2.9E-03	3.9E-03	2.4E-02	1.4E-02	4.3E-03	6.7E-03	8.7E-03	1.3E-02	1.7E-02	2.1E-02	2.5E-02
482	5.6E-04	1.7E-03	2.9E-03	3.9E-03	3.0E-02	2.2E-02	5.8E-03	3.0E-03	5.6E-03	1.0E-02	1.5E-02	1.9E-02	2.4E-02
483	5.6E-04	1.7E-03	2.9E-03	3.9E-03	3.6E-02	3.6E-02	8.3E-03	-1.8E-04	3.1E-03	8.5E-03	1.4E-02	1.9E-02	2.4E-02
484	5.4E-04	1.6E-03	2.9E-03	3.8E-03	1.6E-02	1.1E-02	4.1E-03	8.9E-03	1.0E-02	1.4E-02	1.7E-02	2.1E-02	2.4E-02
485	5.5E-04	1.6E-03	2.9E-03	3.8E-03	2.2E-02	1.5E-02	5.3E-03	5.8E-03	7.9E-03	1.2E-02	1.6E-02	2.0E-02	2.4E-02
486	5.5E-04	1.6E-03	2.8E-03	3.8E-03	2.9E-02	1.8E-02	7.2E-03	1.7E-03	4.6E-03	9.3E-03	1.4E-02	1.9E-02	2.4E-02
487	5.6E-04	1.6E-03	2.8E-03	3.8E-03	3.9E-02	3.1E-02	1.0E-02	-1.4E-03	2.0E-03	7.3E-03	1.3E-02	1.8E-02	2.3E-02
488	5.3E-04	1.6E-03	2.8E-03	3.8E-03	1.2E-02	1.0E-02	4.8E-03	8.0E-03	9.6E-03	1.3E-02	1.7E-02	2.0E-02	2.4E-02
489	5.4E-04	1.6E-03	2.8E-03	3.8E-03	1.8E-02	1.3E-02	6.3E-03	4.5E-03	6.8E-03	1.1E-02	1.5E-02	1.9E-02	2.4E-02
490	5.4E-04	1.6E-03	2.8E-03	3.8E-03	2.6E-02	1.8E-02	8.5E-03	5.1E-04	3.5E-03	8.5E-03	1.3E-02	1.8E-02	2.3E-02
491	5.7E-04	1.6E-03	2.8E-03	3.8E-03	3.7E-02	2.6E-02	1.2E-02	-1.9E-03	1.3E-03	6.5E-03	1.2E-02	1.7E-02	2.2E-02
492	5.2E-04	1.6E-03	2.8E-03	3.7E-03	1.2E-02	9.9E-03	5.6E-03	7.1E-03	8.9E-03	1.2E-02	1.6E-02	2.0E-02	2.3E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
493	5.3E-04	1.6E-03	2.8E-03	3.7E-03	1.5E-02	1.2E-02	7.2E-03	2.8E-03	5.3E-03	9.7E-03	1.4E-02	1.8E-02	2.3E-02
494	5.4E-04	1.6E-03	2.7E-03	3.7E-03	2.1E-02	1.6E-02	9.5E-03	-6.7E-04	2.5E-03	7.6E-03	1.3E-02	1.8E-02	2.3E-02
495	5.8E-04	1.6E-03	2.7E-03	3.7E-03	3.1E-02	2.2E-02	1.2E-02	-1.9E-03	1.1E-03	6.1E-03	1.1E-02	1.6E-02	2.1E-02
496	5.2E-04	1.6E-03	2.7E-03	3.7E-03	1.4E-02	9.5E-03	6.3E-03	6.2E-03	8.0E-03	1.2E-02	1.5E-02	1.9E-02	2.3E-02
497	5.2E-04	1.6E-03	2.7E-03	3.7E-03	1.7E-02	1.1E-02	7.9E-03	1.6E-03	4.2E-03	8.7E-03	1.3E-02	1.8E-02	2.2E-02
498	5.5E-04	1.6E-03	2.7E-03	3.7E-03	2.2E-02	1.6E-02	9.9E-03	-1.9E-03	1.5E-03	6.6E-03	1.2E-02	1.7E-02	2.2E-02
499	5.9E-04	1.6E-03	2.7E-03	3.7E-03	2.8E-02	2.7E-02	1.2E-02	-2.1E-03	8.0E-04	5.6E-03	1.0E-02	1.5E-02	2.0E-02
500	5.1E-04	1.5E-03	2.7E-03	3.7E-03	1.6E-02	1.1E-02	6.9E-03	4.8E-03	6.9E-03	1.1E-02	1.5E-02	1.9E-02	2.3E-02
501	5.2E-04	1.5E-03	2.7E-03	3.6E-03	1.9E-02	1.4E-02	8.4E-03	3.6E-04	3.2E-03	7.9E-03	1.3E-02	1.7E-02	2.2E-02
502	5.6E-04	1.5E-03	2.6E-03	3.6E-03	2.3E-02	2.1E-02	1.0E-02	-2.1E-03	1.1E-03	6.0E-03	1.1E-02	1.6E-02	2.1E-02
503	6.0E-04	1.5E-03	2.6E-03	3.6E-03	3.0E-02	3.5E-02	1.2E-02	-2.3E-03	4.8E-04	5.1E-03	9.7E-03	1.4E-02	1.9E-02
504	5.0E-04	1.5E-03	2.7E-03	3.6E-03	1.7E-02	1.3E-02	7.4E-03	3.2E-03	5.5E-03	9.7E-03	1.4E-02	1.8E-02	2.2E-02
505	5.3E-04	1.5E-03	2.6E-03	3.6E-03	2.0E-02	1.7E-02	8.7E-03	-7.9E-04	2.3E-03	7.2E-03	1.2E-02	1.7E-02	2.2E-02
506	5.7E-04	1.5E-03	2.6E-03	3.6E-03	2.4E-02	2.7E-02	1.0E-02	-2.2E-03	8.1E-04	5.6E-03	1.0E-02	1.5E-02	2.0E-02
507	6.1E-04	1.5E-03	2.5E-03	3.6E-03	3.5E-02	4.2E-02	1.1E-02	-2.4E-03	2.2E-04	4.7E-03	9.1E-03	1.4E-02	1.8E-02
508	5.0E-04	1.5E-03	2.6E-03	3.6E-03	1.5E-02	1.5E-02	7.6E-03	1.6E-03	4.1E-03	8.4E-03	1.3E-02	1.7E-02	2.1E-02
509	5.4E-04	1.5E-03	2.6E-03	3.6E-03	1.8E-02	2.2E-02	8.8E-03	-2.0E-03	1.3E-03	6.4E-03	1.1E-02	1.6E-02	2.2E-02
510	5.8E-04	1.5E-03	2.5E-03	3.5E-03	2.7E-02	3.3E-02	9.7E-03	-2.4E-03	4.8E-04	5.2E-03	9.8E-03	1.5E-02	1.9E-02
511	6.2E-04	1.5E-03	2.5E-03	3.5E-03	4.2E-02	4.9E-02	1.0E-02	-2.1E-03	4.8E-04	4.8E-03	9.1E-03	1.3E-02	1.8E-02
512	5.1E-04	1.5E-03	2.6E-03	3.5E-03	1.6E-02	1.8E-02	7.7E-03	4.0E-05	2.8E-03	7.3E-03	1.2E-02	1.6E-02	2.1E-02
513	5.5E-04	1.5E-03	2.5E-03	3.5E-03	2.1E-02	2.7E-02	8.5E-03	-2.2E-03	9.0E-04	5.8E-03	1.1E-02	1.5E-02	2.0E-02
514	5.9E-04	1.5E-03	2.5E-03	3.5E-03	3.2E-02	3.8E-02	9.0E-03	-2.6E-03	1.4E-04	4.6E-03	9.1E-03	1.4E-02	1.8E-02
515	6.3E-04	1.4E-03	2.4E-03	3.5E-03	4.7E-02	5.3E-02	9.1E-03	-1.5E-03	9.9E-04	5.2E-03	9.4E-03	1.4E-02	1.8E-02
516	6.7E-04	1.4E-03	2.6E-03	3.5E-03	6.0E-02	6.6E-02	8.8E-03	1.0E-04	2.2E-03	5.9E-03	9.7E-03	1.4E-02	1.7E-02
517	5.2E-04	1.5E-03	2.5E-03	3.5E-03	1.6E-02	2.1E-02	7.6E-03	-8.2E-04	2.1E-03	6.7E-03	1.1E-02	1.6E-02	2.1E-02
518	5.6E-04	1.4E-03	2.5E-03	3.5E-03	2.4E-02	2.9E-02	8.2E-03	-2.3E-03	6.9E-04	5.4E-03	1.0E-02	1.5E-02	2.0E-02
519	6.0E-04	1.4E-03	2.4E-03	3.5E-03	3.4E-02	3.9E-02	8.6E-03	-2.5E-03	1.8E-04	4.6E-03	8.9E-03	1.3E-02	1.8E-02
520	6.3E-04	1.4E-03	2.4E-03	3.5E-03	4.4E-02	5.0E-02	8.5E-03	-1.1E-03	1.3E-03	5.4E-03	9.5E-03	1.4E-02	1.8E-02
521	6.7E-04	1.4E-03	2.6E-03	3.5E-03	5.1E-02	5.6E-02	8.1E-03	1.2E-04	2.2E-03	6.0E-03	9.7E-03	1.3E-02	1.7E-02
522	5.7E-04	1.4E-03	2.4E-03	3.4E-03	2.6E-02	3.0E-02	7.8E-03	-2.5E-03	3.4E-04	4.9E-03	9.5E-03	1.4E-02	1.9E-02
523	6.1E-04	1.4E-03	2.4E-03	3.4E-03	3.4E-02	3.9E-02	8.0E-03	-2.1E-03	3.9E-04	4.6E-03	8.9E-03	1.3E-02	1.7E-02
524	6.4E-04	1.4E-03	2.5E-03	3.4E-03	4.0E-02	4.4E-02	7.7E-03	-7.3E-04	1.6E-03	5.6E-03	9.6E-03	1.4E-02	1.8E-02
525	6.7E-04	1.4E-03	2.6E-03	3.5E-03	4.1E-02	4.5E-02	7.3E-03	4.6E-05	2.1E-03	5.9E-03	9.6E-03	1.3E-02	1.7E-02
526	6.1E-04	1.4E-03	2.4E-03	3.4E-03	3.1E-02	3.6E-02	7.4E-03	-1.8E-03	7.3E-04	4.9E-03	9.1E-03	1.3E-02	1.8E-02
527	6.5E-04	1.4E-03	2.5E-03	3.4E-03	3.4E-02	3.8E-02	7.0E-03	-3.0E-04	2.0E-03	5.9E-03	9.8E-03	1.4E-02	1.8E-02
528	6.8E-04	1.4E-03	2.6E-03	3.5E-03	3.3E-02	3.6E-02	6.9E-03	-1.7E-05	2.1E-03	5.8E-03	9.5E-03	1.3E-02	1.7E-02
529	7.0E-04	1.5E-03	2.7E-03	3.5E-03	3.2E-02	3.7E-02	6.7E-03	1.3E-06	1.9E-03	5.4E-03	9.0E-03	1.2E-02	1.6E-02
530	6.5E-04	1.4E-03	2.5E-03	3.4E-03	2.9E-02	3.3E-02	6.4E-03	1.4E-04	2.3E-03	6.1E-03	9.9E-03	1.4E-02	1.7E-02
531	6.8E-04	1.4E-03	2.6E-03	3.5E-03	2.8E-02	3.2E-02	6.5E-03	-6.9E-05	2.0E-03	5.7E-03	9.4E-03	1.3E-02	1.7E-02
532	7.0E-04	1.5E-03	2.7E-03	3.5E-03	2.8E-02	3.2E-02	6.2E-03	-3.0E-05	1.9E-03	5.4E-03	8.8E-03	1.2E-02	1.6E-02
533	7.3E-04	1.5E-03	2.9E-03	3.6E-03	2.7E-02	3.1E-02	5.5E-03	4.9E-04	2.1E-03	5.1E-03	8.1E-03	1.1E-02	1.4E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
534	7.4E-04	1.6E-03	3.1E-03	3.7E-03	2.9E-02	3.2E-02	5.5E-03	6.0E-04	1.8E-03	4.3E-03	6.9E-03	9.5E-03	1.2E-02
535	1.5E-03	4.7E-03	2.5E-02	2.0E-02	1.3E-02	7.8E-03	7.2E-03	1.4E-02	3.8E-02	6.7E-02	9.6E-02	1.2E-01	1.5E-01
536	1.6E-03	4.3E-03	2.4E-02	1.8E-02	1.3E-02	7.7E-03	7.1E-03	3.5E-03	2.9E-02	5.9E-02	8.9E-02	1.2E-01	1.5E-01
537	1.6E-03	3.8E-03	1.9E-02	1.7E-02	1.2E-02	7.7E-03	7.1E-03	-2.0E-03	2.2E-02	5.1E-02	8.0E-02	1.1E-01	1.4E-01
538	1.6E-03	3.5E-03	1.6E-02	1.6E-02	1.1E-02	7.9E-03	7.3E-03	-1.1E-02	1.3E-02	4.1E-02	6.9E-02	9.7E-02	1.3E-01
539	1.5E-03	4.7E-03	2.1E-02	2.4E-02	1.5E-02	7.7E-03	7.1E-03	1.9E-02	4.1E-02	6.7E-02	9.4E-02	1.2E-01	1.5E-01
540	1.5E-03	4.2E-03	2.1E-02	1.8E-02	1.5E-02	7.5E-03	7.0E-03	1.7E-02	3.9E-02	6.7E-02	9.4E-02	1.2E-01	1.5E-01
541	1.6E-03	3.7E-03	2.0E-02	1.5E-02	1.3E-02	7.6E-03	7.0E-03	1.3E-02	3.5E-02	6.2E-02	8.8E-02	1.2E-01	1.4E-01
542	1.6E-03	3.7E-03	1.8E-02	1.4E-02	1.1E-02	7.8E-03	7.2E-03	3.7E-03	2.5E-02	5.1E-02	7.8E-02	1.0E-01	1.3E-01
543	1.5E-03	3.5E-03	1.6E-02	1.4E-02	9.6E-03	7.8E-03	7.2E-03	-6.1E-03	1.5E-02	4.0E-02	6.6E-02	9.2E-02	1.2E-01
544	1.5E-03	4.7E-03	2.0E-02	2.4E-02	1.7E-02	7.5E-03	6.9E-03	2.6E-02	4.4E-02	6.7E-02	9.0E-02	1.1E-01	1.4E-01
545	1.5E-03	4.2E-03	1.8E-02	2.0E-02	1.6E-02	7.4E-03	6.8E-03	2.3E-02	4.4E-02	6.9E-02	9.5E-02	1.2E-01	1.5E-01
546	1.5E-03	3.9E-03	1.7E-02	1.6E-02	1.3E-02	7.4E-03	6.8E-03	2.0E-02	4.1E-02	6.7E-02	9.3E-02	1.2E-01	1.4E-01
547	1.5E-03	3.8E-03	1.8E-02	1.4E-02	1.2E-02	7.6E-03	7.0E-03	1.8E-02	3.7E-02	6.1E-02	8.5E-02	1.1E-01	1.3E-01
548	1.5E-03	3.5E-03	1.6E-02	1.2E-02	1.2E-02	7.6E-03	7.1E-03	8.5E-03	2.7E-02	5.0E-02	7.2E-02	9.5E-02	1.2E-01
549	1.5E-03	4.8E-03	2.0E-02	2.5E-02	1.9E-02	7.4E-03	6.8E-03	2.5E-02	4.3E-02	6.5E-02	8.8E-02	1.1E-01	1.3E-01
550	1.5E-03	4.3E-03	1.8E-02	2.2E-02	1.6E-02	7.3E-03	6.7E-03	2.6E-02	4.5E-02	6.8E-02	9.2E-02	1.2E-01	1.4E-01
551	1.5E-03	4.1E-03	1.6E-02	1.8E-02	1.4E-02	7.2E-03	6.6E-03	2.6E-02	4.6E-02	7.0E-02	9.4E-02	1.2E-01	1.4E-01
552	1.5E-03	3.7E-03	1.4E-02	1.4E-02	1.5E-02	7.4E-03	6.8E-03	2.5E-02	4.3E-02	6.5E-02	8.7E-02	1.1E-01	1.3E-01
553	1.5E-03	3.4E-03	1.4E-02	1.2E-02	1.5E-02	7.4E-03	6.9E-03	1.8E-02	3.4E-02	5.5E-02	7.6E-02	9.7E-02	1.2E-01
554	1.5E-03	3.0E-03	1.3E-02	1.0E-02	1.5E-02	7.3E-03	6.8E-03	1.0E-02	2.6E-02	4.6E-02	6.6E-02	8.6E-02	1.1E-01
555	1.4E-03	4.7E-03	1.7E-02	2.5E-02	1.9E-02	7.2E-03	6.7E-03	2.8E-02	4.3E-02	6.3E-02	8.3E-02	1.0E-01	1.2E-01
556	1.5E-03	4.4E-03	1.7E-02	2.1E-02	1.7E-02	7.1E-03	6.6E-03	2.4E-02	4.2E-02	6.3E-02	8.5E-02	1.1E-01	1.3E-01
557	1.5E-03	4.1E-03	1.5E-02	1.8E-02	1.8E-02	6.9E-03	6.5E-03	2.6E-02	4.3E-02	6.5E-02	8.7E-02	1.1E-01	1.3E-01
558	1.5E-03	3.7E-03	1.4E-02	1.6E-02	1.8E-02	7.2E-03	6.7E-03	2.7E-02	4.4E-02	6.5E-02	8.6E-02	1.1E-01	1.3E-01
559	1.5E-03	3.3E-03	1.2E-02	1.3E-02	1.7E-02	7.3E-03	6.7E-03	2.4E-02	3.9E-02	5.8E-02	7.7E-02	9.6E-02	1.2E-01
560	1.4E-03	2.9E-03	1.2E-02	1.0E-02	1.6E-02	7.2E-03	6.7E-03	1.6E-02	3.0E-02	4.9E-02	6.8E-02	8.7E-02	1.1E-01
561	1.4E-03	4.8E-03	1.6E-02	2.4E-02	2.3E-02	7.0E-03	6.5E-03	3.2E-02	4.4E-02	6.1E-02	7.7E-02	9.3E-02	1.1E-01
562	1.4E-03	4.4E-03	1.4E-02	2.0E-02	2.3E-02	7.0E-03	6.5E-03	2.4E-02	3.9E-02	5.9E-02	7.8E-02	9.8E-02	1.2E-01
563	1.5E-03	4.0E-03	1.4E-02	1.8E-02	2.2E-02	6.8E-03	6.3E-03	2.4E-02	4.0E-02	6.2E-02	8.3E-02	1.0E-01	1.2E-01
564	1.5E-03	3.5E-03	1.3E-02	1.6E-02	2.0E-02	6.9E-03	6.4E-03	2.5E-02	4.1E-02	6.1E-02	8.1E-02	1.0E-01	1.2E-01
565	1.4E-03	3.1E-03	1.2E-02	1.4E-02	1.8E-02	7.0E-03	6.5E-03	2.5E-02	3.8E-02	5.5E-02	7.3E-02	9.1E-02	1.1E-01
566	1.4E-03	2.6E-03	1.0E-02	1.2E-02	1.6E-02	7.0E-03	6.5E-03	1.9E-02	3.2E-02	4.9E-02	6.7E-02	8.5E-02	1.0E-01
567	1.4E-03	4.9E-03	1.6E-02	2.2E-02	2.4E-02	6.9E-03	6.4E-03	3.5E-02	4.4E-02	5.8E-02	7.2E-02	8.5E-02	9.9E-02
568	1.4E-03	4.4E-03	1.3E-02	2.0E-02	2.3E-02	6.8E-03	6.3E-03	2.7E-02	4.0E-02	5.7E-02	7.4E-02	9.1E-02	1.1E-01
569	1.4E-03	3.9E-03	1.3E-02	1.7E-02	2.2E-02	6.7E-03	6.2E-03	2.2E-02	3.7E-02	5.7E-02	7.7E-02	9.7E-02	1.2E-01
570	1.4E-03	3.4E-03	1.2E-02	1.5E-02	2.0E-02	6.7E-03	6.2E-03	2.4E-02	3.9E-02	5.9E-02	7.8E-02	9.8E-02	1.2E-01
571	1.4E-03	2.9E-03	1.1E-02	1.4E-02	1.8E-02	6.9E-03	6.4E-03	2.5E-02	3.8E-02	5.6E-02	7.3E-02	9.0E-02	1.1E-01
572	1.4E-03	2.7E-03	1.0E-02	1.2E-02	1.5E-02	6.9E-03	6.4E-03	2.0E-02	3.2E-02	4.9E-02	6.5E-02	8.2E-02	9.8E-02
573	1.3E-03	4.8E-03	1.4E-02	2.0E-02	2.4E-02	6.7E-03	6.2E-03	3.6E-02	4.4E-02	5.5E-02	6.7E-02	7.8E-02	9.0E-02
574	1.4E-03	4.2E-03	1.3E-02	1.9E-02	2.3E-02	6.7E-03	6.2E-03	3.0E-02	4.0E-02	5.5E-02	6.9E-02	8.4E-02	9.8E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
575	1.4E-03	3.7E-03	1.1E-02	1.7E-02	2.0E-02	6.6E-03	6.1E-03	2.3E-02	3.6E-02	5.4E-02	7.2E-02	9.0E-02	1.1E-01
576	1.4E-03	3.1E-03	1.1E-02	1.5E-02	1.8E-02	6.5E-03	6.0E-03	2.2E-02	3.6E-02	5.5E-02	7.4E-02	9.3E-02	1.1E-01
577	1.4E-03	3.0E-03	1.1E-02	1.3E-02	1.6E-02	6.7E-03	6.2E-03	2.5E-02	3.8E-02	5.5E-02	7.2E-02	8.9E-02	1.1E-01
578	1.4E-03	2.9E-03	9.9E-03	1.2E-02	1.3E-02	6.7E-03	6.2E-03	2.1E-02	3.3E-02	4.9E-02	6.5E-02	8.1E-02	9.7E-02
579	1.3E-03	4.6E-03	1.3E-02	1.8E-02	2.4E-02	6.5E-03	6.1E-03	3.8E-02	4.3E-02	5.3E-02	6.2E-02	7.2E-02	8.1E-02
580	1.3E-03	4.0E-03	1.3E-02	1.8E-02	2.1E-02	6.5E-03	6.0E-03	3.2E-02	4.0E-02	5.2E-02	6.5E-02	7.7E-02	8.9E-02
581	1.4E-03	3.4E-03	1.1E-02	1.7E-02	1.8E-02	6.4E-03	6.0E-03	2.5E-02	3.6E-02	5.2E-02	6.7E-02	8.2E-02	9.8E-02
582	1.4E-03	3.3E-03	9.7E-03	1.5E-02	1.5E-02	6.3E-03	5.9E-03	2.0E-02	3.4E-02	5.2E-02	6.9E-02	8.7E-02	1.0E-01
583	1.4E-03	3.2E-03	9.8E-03	1.3E-02	1.3E-02	6.5E-03	6.0E-03	2.3E-02	3.6E-02	5.2E-02	6.9E-02	8.6E-02	1.0E-01
584	1.3E-03	3.1E-03	9.3E-03	1.2E-02	1.1E-02	6.6E-03	6.1E-03	2.2E-02	3.3E-02	4.8E-02	6.4E-02	7.9E-02	9.5E-02
585	1.3E-03	4.4E-03	1.1E-02	1.7E-02	2.1E-02	6.4E-03	5.9E-03	3.9E-02	4.2E-02	5.0E-02	5.7E-02	6.5E-02	7.2E-02
586	1.3E-03	3.8E-03	1.2E-02	1.6E-02	1.7E-02	6.4E-03	5.9E-03	3.3E-02	4.0E-02	5.0E-02	6.0E-02	7.1E-02	8.1E-02
587	1.3E-03	3.7E-03	1.1E-02	1.6E-02	1.5E-02	6.3E-03	5.8E-03	2.7E-02	3.6E-02	5.0E-02	6.3E-02	7.6E-02	8.9E-02
588	1.3E-03	3.6E-03	9.6E-03	1.5E-02	1.4E-02	6.1E-03	5.7E-03	2.2E-02	3.4E-02	5.0E-02	6.6E-02	8.2E-02	9.8E-02
589	1.3E-03	3.4E-03	8.8E-03	1.3E-02	1.3E-02	6.3E-03	5.9E-03	2.1E-02	3.3E-02	5.0E-02	6.6E-02	8.2E-02	9.8E-02
590	1.3E-03	3.2E-03	8.8E-03	1.2E-02	1.2E-02	6.4E-03	5.9E-03	2.1E-02	3.2E-02	4.7E-02	6.2E-02	7.7E-02	9.2E-02
591	1.3E-03	4.3E-03	1.0E-02	2.1E-02	2.1E-02	6.8E-03	6.4E-03	3.9E-02	4.1E-02	4.8E-02	5.5E-02	6.1E-02	6.8E-02
592	1.3E-03	4.1E-03	1.1E-02	2.0E-02	2.0E-02	6.9E-03	6.4E-03	3.5E-02	3.9E-02	4.8E-02	5.7E-02	6.5E-02	7.4E-02
593	1.3E-03	3.9E-03	1.1E-02	1.8E-02	1.8E-02	6.2E-03	5.7E-03	2.9E-02	3.6E-02	4.7E-02	5.8E-02	7.0E-02	8.1E-02
594	1.3E-03	3.7E-03	9.7E-03	1.7E-02	1.7E-02	6.0E-03	5.6E-03	2.4E-02	3.4E-02	4.8E-02	6.2E-02	7.6E-02	9.0E-02
595	1.3E-03	3.5E-03	8.2E-03	1.5E-02	1.5E-02	6.2E-03	5.7E-03	2.1E-02	3.2E-02	4.7E-02	6.3E-02	7.8E-02	9.3E-02
596	1.3E-03	3.3E-03	8.0E-03	1.3E-02	1.3E-02	6.3E-03	5.8E-03	2.1E-02	3.2E-02	4.6E-02	6.0E-02	7.5E-02	8.9E-02
597	1.2E-03	4.5E-03	1.0E-02	2.1E-02	2.1E-02	6.8E-03	6.3E-03	3.9E-02	4.1E-02	4.7E-02	5.3E-02	6.0E-02	6.6E-02
598	1.3E-03	4.3E-03	9.6E-03	2.1E-02	2.1E-02	6.8E-03	6.3E-03	3.6E-02	3.9E-02	4.6E-02	5.4E-02	6.2E-02	6.9E-02
599	1.3E-03	4.0E-03	1.0E-02	2.0E-02	2.0E-02	6.1E-03	5.6E-03	3.0E-02	3.6E-02	4.5E-02	5.5E-02	6.4E-02	7.4E-02
600	1.3E-03	3.7E-03	9.6E-03	1.8E-02	1.8E-02	5.9E-03	5.5E-03	2.4E-02	3.3E-02	4.5E-02	5.7E-02	7.0E-02	8.2E-02
601	1.3E-03	3.5E-03	8.4E-03	1.6E-02	1.6E-02	6.0E-03	5.5E-03	2.2E-02	3.2E-02	4.6E-02	6.0E-02	7.4E-02	8.7E-02
602	1.3E-03	3.2E-03	7.0E-03	1.4E-02	1.4E-02	6.1E-03	5.6E-03	2.1E-02	3.1E-02	4.4E-02	5.7E-02	7.1E-02	8.4E-02
603	1.2E-03	4.6E-03	9.7E-03	1.8E-02	1.8E-02	6.7E-03	6.1E-03	3.9E-02	4.1E-02	4.7E-02	5.3E-02	5.9E-02	6.5E-02
604	1.2E-03	4.3E-03	8.5E-03	1.8E-02	1.8E-02	6.6E-03	6.1E-03	3.6E-02	3.8E-02	4.6E-02	5.3E-02	6.0E-02	6.7E-02
605	1.3E-03	4.0E-03	9.2E-03	1.8E-02	1.8E-02	5.9E-03	5.5E-03	3.1E-02	3.6E-02	4.4E-02	5.3E-02	6.1E-02	7.0E-02
606	1.3E-03	3.7E-03	9.1E-03	1.8E-02	1.8E-02	5.8E-03	5.4E-03	2.5E-02	3.2E-02	4.3E-02	5.3E-02	6.4E-02	7.4E-02
607	1.3E-03	3.4E-03	8.4E-03	1.6E-02	1.6E-02	5.8E-03	5.4E-03	2.3E-02	3.1E-02	4.4E-02	5.6E-02	6.9E-02	8.1E-02
608	1.3E-03	3.1E-03	7.4E-03	1.4E-02	1.4E-02	5.9E-03	5.5E-03	2.2E-02	3.1E-02	4.4E-02	5.6E-02	6.8E-02	8.1E-02
609	1.4E-03	1.6E-02	1.6E-02	1.4E-02	1.4E-02	5.0E-03	5.0E-03	1.6E-02	2.5E-02	3.8E-02	5.0E-02	6.3E-02	7.5E-02
610	1.4E-03	1.3E-02	1.3E-02	1.3E-02	1.5E-02	5.1E-03	5.1E-03	1.5E-02	2.6E-02	3.9E-02	5.2E-02	6.5E-02	7.8E-02
611	1.4E-03	1.0E-02	1.2E-02	1.2E-02	1.6E-02	4.9E-03	4.9E-03	1.2E-02	2.4E-02	3.8E-02	5.2E-02	6.7E-02	8.1E-02
612	1.4E-03	7.8E-03	1.1E-02	1.4E-02	1.7E-02	4.7E-03	4.7E-03	9.1E-03	2.2E-02	3.8E-02	5.3E-02	6.9E-02	8.4E-02
613	1.4E-03	6.6E-03	1.1E-02	1.5E-02	1.7E-02	5.0E-03	4.9E-03	6.4E-03	2.0E-02	3.7E-02	5.4E-02	7.0E-02	8.7E-02
614	1.3E-03	5.7E-03	1.0E-02	1.6E-02	1.9E-02	5.5E-03	5.0E-03	7.9E-03	2.1E-02	3.7E-02	5.4E-02	7.0E-02	8.7E-02
615	1.3E-03	5.3E-03	9.9E-03	1.6E-02	2.1E-02	5.9E-03	5.4E-03	1.5E-02	2.5E-02	3.9E-02	5.3E-02	6.7E-02	8.1E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
616	1.2E-03	4.9E-03	9.9E-03	1.5E-02	2.0E-02	6.3E-03	5.7E-03	2.8E-02	3.4E-02	4.3E-02	5.2E-02	6.2E-02	7.1E-02
617	1.2E-03	4.6E-03	9.4E-03	1.4E-02	1.6E-02	6.5E-03	6.0E-03	3.9E-02	4.0E-02	4.6E-02	5.2E-02	5.8E-02	6.4E-02
618	1.2E-03	4.2E-03	8.4E-03	1.6E-02	1.6E-02	6.4E-03	6.0E-03	3.6E-02	3.8E-02	4.5E-02	5.1E-02	5.8E-02	6.5E-02
619	1.2E-03	3.9E-03	8.2E-03	1.7E-02	1.7E-02	5.8E-03	5.4E-03	3.1E-02	3.6E-02	4.4E-02	5.2E-02	6.0E-02	6.8E-02
620	1.2E-03	3.5E-03	8.4E-03	1.7E-02	1.7E-02	5.7E-03	5.3E-03	2.7E-02	3.3E-02	4.2E-02	5.1E-02	6.0E-02	7.0E-02
621	1.2E-03	3.2E-03	8.1E-03	1.4E-02	1.4E-02	5.6E-03	5.2E-03	2.3E-02	3.0E-02	4.2E-02	5.3E-02	6.4E-02	7.5E-02
622	1.2E-03	3.0E-03	7.5E-03	1.2E-02	1.2E-02	5.8E-03	5.3E-03	2.2E-02	3.0E-02	4.2E-02	5.3E-02	6.5E-02	7.6E-02
623	1.4E-03	1.6E-02	1.6E-02	1.5E-02	1.4E-02	5.0E-03	5.0E-03	1.6E-02	2.5E-02	3.7E-02	5.0E-02	6.2E-02	7.4E-02
624	1.4E-03	1.2E-02	1.4E-02	1.4E-02	1.4E-02	5.0E-03	5.0E-03	1.5E-02	2.5E-02	3.8E-02	5.1E-02	6.3E-02	7.6E-02
625	1.3E-03	9.4E-03	1.2E-02	1.2E-02	1.5E-02	4.8E-03	4.8E-03	1.3E-02	2.4E-02	3.8E-02	5.2E-02	6.5E-02	7.9E-02
626	1.3E-03	7.5E-03	1.1E-02	1.3E-02	1.5E-02	4.7E-03	4.6E-03	9.6E-03	2.2E-02	3.7E-02	5.2E-02	6.7E-02	8.3E-02
627	1.3E-03	6.3E-03	1.0E-02	1.4E-02	1.6E-02	4.8E-03	4.8E-03	7.1E-03	2.1E-02	3.7E-02	5.3E-02	6.9E-02	8.5E-02
628	1.3E-03	5.7E-03	1.0E-02	1.5E-02	1.8E-02	5.3E-03	4.9E-03	8.0E-03	2.1E-02	3.7E-02	5.3E-02	6.9E-02	8.5E-02
629	1.3E-03	5.2E-03	9.4E-03	1.6E-02	2.0E-02	5.8E-03	5.3E-03	1.4E-02	2.5E-02	3.9E-02	5.3E-02	6.7E-02	8.1E-02
630	1.2E-03	4.9E-03	9.5E-03	1.5E-02	1.9E-02	6.1E-03	5.6E-03	2.7E-02	3.3E-02	4.3E-02	5.2E-02	6.2E-02	7.1E-02
631	1.2E-03	4.5E-03	9.1E-03	1.3E-02	1.6E-02	6.4E-03	5.9E-03	3.8E-02	4.0E-02	4.6E-02	5.1E-02	5.7E-02	6.3E-02
632	1.2E-03	4.1E-03	8.3E-03	1.4E-02	1.5E-02	6.3E-03	5.9E-03	3.6E-02	3.8E-02	4.4E-02	5.1E-02	5.7E-02	6.3E-02
633	1.2E-03	3.7E-03	7.4E-03	1.5E-02	1.6E-02	5.7E-03	5.3E-03	3.2E-02	3.6E-02	4.3E-02	5.1E-02	5.9E-02	6.6E-02
634	1.2E-03	3.3E-03	7.8E-03	1.6E-02	1.6E-02	5.6E-03	5.2E-03	2.7E-02	3.3E-02	4.1E-02	5.0E-02	5.9E-02	6.8E-02
635	1.2E-03	3.0E-03	7.8E-03	1.4E-02	1.5E-02	5.5E-03	5.1E-03	2.3E-02	3.0E-02	4.1E-02	5.1E-02	6.1E-02	7.2E-02
636	1.2E-03	2.8E-03	7.4E-03	1.3E-02	1.3E-02	5.6E-03	5.2E-03	2.1E-02	2.9E-02	4.0E-02	5.1E-02	6.2E-02	7.3E-02
637	1.3E-03	1.5E-02	1.5E-02	1.5E-02	1.2E-02	5.1E-03	5.1E-03	2.0E-02	2.8E-02	3.9E-02	5.0E-02	6.1E-02	7.1E-02
638	1.3E-03	1.2E-02	1.4E-02	1.4E-02	1.3E-02	5.0E-03	5.0E-03	1.5E-02	2.5E-02	3.7E-02	5.0E-02	6.2E-02	7.5E-02
639	1.3E-03	8.7E-03	1.2E-02	1.2E-02	1.4E-02	4.8E-03	4.8E-03	1.3E-02	2.4E-02	3.7E-02	5.1E-02	6.4E-02	7.7E-02
640	1.3E-03	7.1E-03	1.1E-02	1.2E-02	1.4E-02	4.6E-03	4.6E-03	1.0E-02	2.2E-02	3.7E-02	5.2E-02	6.6E-02	8.1E-02
641	1.3E-03	6.2E-03	9.9E-03	1.3E-02	1.5E-02	4.7E-03	4.7E-03	7.8E-03	2.1E-02	3.7E-02	5.2E-02	6.8E-02	8.4E-02
642	1.3E-03	5.7E-03	9.5E-03	1.4E-02	1.7E-02	5.2E-03	4.8E-03	8.1E-03	2.1E-02	3.7E-02	5.3E-02	6.8E-02	8.4E-02
643	1.3E-03	5.2E-03	8.8E-03	1.5E-02	1.8E-02	5.6E-03	5.2E-03	1.3E-02	2.4E-02	3.8E-02	5.2E-02	6.6E-02	8.0E-02
644	1.2E-03	4.8E-03	9.0E-03	1.4E-02	1.8E-02	6.0E-03	5.5E-03	2.6E-02	3.2E-02	4.2E-02	5.2E-02	6.2E-02	7.2E-02
645	1.2E-03	4.4E-03	8.8E-03	1.2E-02	1.6E-02	6.2E-03	5.7E-03	3.6E-02	3.9E-02	4.5E-02	5.1E-02	5.7E-02	6.3E-02
646	1.2E-03	4.0E-03	8.2E-03	1.2E-02	1.5E-02	6.1E-03	5.7E-03	3.6E-02	3.8E-02	4.4E-02	5.0E-02	5.6E-02	6.2E-02
647	1.2E-03	3.5E-03	7.3E-03	1.3E-02	1.4E-02	5.6E-03	5.2E-03	3.2E-02	3.5E-02	4.3E-02	5.0E-02	5.7E-02	6.4E-02
648	1.2E-03	3.1E-03	7.2E-03	1.4E-02	1.4E-02	5.5E-03	5.1E-03	2.8E-02	3.3E-02	4.1E-02	4.9E-02	5.8E-02	6.6E-02
649	1.2E-03	2.8E-03	7.4E-03	1.3E-02	1.3E-02	5.4E-03	5.0E-03	2.4E-02	3.0E-02	4.0E-02	4.9E-02	5.9E-02	6.9E-02
650	1.3E-03	1.4E-02	1.5E-02	1.5E-02	1.1E-02	5.0E-03	5.0E-03	2.2E-02	2.9E-02	3.9E-02	4.9E-02	5.9E-02	6.9E-02
651	1.3E-03	1.1E-02	1.4E-02	1.4E-02	1.2E-02	4.9E-03	4.9E-03	1.7E-02	2.6E-02	3.8E-02	5.0E-02	6.1E-02	7.3E-02
652	1.2E-03	8.2E-03	1.2E-02	1.2E-02	1.3E-02	4.7E-03	4.7E-03	1.3E-02	2.4E-02	3.7E-02	5.0E-02	6.3E-02	7.6E-02
653	1.3E-03	6.9E-03	1.1E-02	1.2E-02	1.3E-02	4.5E-03	4.5E-03	1.0E-02	2.2E-02	3.7E-02	5.1E-02	6.5E-02	7.9E-02
654	1.3E-03	6.1E-03	9.7E-03	1.3E-02	1.4E-02	4.6E-03	4.6E-03	8.4E-03	2.1E-02	3.6E-02	5.2E-02	6.7E-02	8.2E-02
655	1.3E-03	5.6E-03	9.1E-03	1.4E-02	1.6E-02	5.0E-03	4.6E-03	8.1E-03	2.1E-02	3.6E-02	5.2E-02	6.7E-02	8.3E-02
656	1.2E-03	5.1E-03	8.5E-03	1.4E-02	1.7E-02	5.4E-03	5.0E-03	1.2E-02	2.3E-02	3.7E-02	5.2E-02	6.6E-02	8.0E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
657	1.2E-03	4.6E-03	8.6E-03	1.3E-02	1.7E-02	5.8E-03	5.3E-03	2.5E-02	3.1E-02	4.2E-02	5.2E-02	6.2E-02	7.2E-02
658	1.1E-03	4.2E-03	8.5E-03	1.2E-02	1.6E-02	6.0E-03	5.5E-03	3.5E-02	3.8E-02	4.4E-02	5.0E-02	5.6E-02	6.2E-02
659	1.1E-03	3.7E-03	8.0E-03	1.1E-02	1.4E-02	5.5E-03	5.1E-03	3.5E-02	3.7E-02	4.3E-02	4.9E-02	5.4E-02	6.0E-02
660	1.2E-03	3.3E-03	7.2E-03	1.1E-02	1.4E-02	5.5E-03	5.1E-03	3.2E-02	3.5E-02	4.2E-02	4.9E-02	5.6E-02	6.3E-02
661	1.2E-03	3.0E-03	6.5E-03	1.1E-02	1.2E-02	5.4E-03	5.0E-03	2.8E-02	3.2E-02	4.0E-02	4.8E-02	5.6E-02	6.4E-02
662	1.2E-03	2.8E-03	7.0E-03	1.1E-02	1.1E-02	5.3E-03	4.9E-03	2.4E-02	3.0E-02	3.9E-02	4.8E-02	5.7E-02	6.6E-02
663	1.2E-03	1.4E-02	1.4E-02	1.5E-02	1.0E-02	4.9E-03	4.9E-03	2.5E-02	3.1E-02	4.0E-02	4.9E-02	5.8E-02	6.8E-02
664	1.2E-03	1.0E-02	1.4E-02	1.4E-02	1.1E-02	4.9E-03	4.9E-03	1.8E-02	2.7E-02	3.8E-02	4.9E-02	6.0E-02	7.1E-02
665	1.2E-03	8.8E-03	1.2E-02	1.2E-02	1.2E-02	4.6E-03	4.6E-03	1.3E-02	2.3E-02	3.6E-02	4.9E-02	6.1E-02	7.4E-02
666	1.2E-03	7.8E-03	1.1E-02	1.1E-02	1.2E-02	4.7E-03	4.7E-03	1.1E-02	2.2E-02	3.6E-02	5.0E-02	6.4E-02	7.7E-02
667	1.3E-03	6.8E-03	9.5E-03	1.2E-02	1.3E-02	4.5E-03	4.5E-03	8.9E-03	2.1E-02	3.6E-02	5.1E-02	6.6E-02	8.0E-02
668	1.2E-03	5.9E-03	8.8E-03	1.3E-02	1.5E-02	4.9E-03	4.5E-03	8.0E-03	2.0E-02	3.6E-02	5.1E-02	6.6E-02	8.2E-02
669	1.2E-03	5.4E-03	8.2E-03	1.3E-02	1.6E-02	5.3E-03	4.9E-03	1.1E-02	2.2E-02	3.7E-02	5.1E-02	6.5E-02	7.9E-02
670	1.2E-03	5.0E-03	8.2E-03	1.3E-02	1.7E-02	5.6E-03	5.2E-03	2.3E-02	3.0E-02	4.1E-02	5.1E-02	6.2E-02	7.2E-02
671	1.1E-03	4.5E-03	8.1E-03	1.1E-02	1.6E-02	5.8E-03	5.4E-03	3.4E-02	3.7E-02	4.3E-02	4.9E-02	5.6E-02	6.2E-02
672	1.1E-03	4.0E-03	7.8E-03	1.1E-02	1.3E-02	5.4E-03	5.0E-03	3.5E-02	3.7E-02	4.2E-02	4.8E-02	5.3E-02	5.8E-02
673	1.1E-03	3.7E-03	7.1E-03	1.0E-02	1.3E-02	5.4E-03	5.0E-03	3.2E-02	3.5E-02	4.2E-02	4.9E-02	5.5E-02	6.2E-02
674	1.1E-03	3.4E-03	6.4E-03	1.0E-02	1.2E-02	5.3E-03	4.9E-03	2.8E-02	3.2E-02	4.0E-02	4.7E-02	5.4E-02	6.2E-02
675	1.2E-03	1.3E-02	1.5E-02	1.5E-02	9.9E-03	4.9E-03	4.9E-03	2.6E-02	3.2E-02	4.0E-02	4.9E-02	5.7E-02	6.6E-02
676	1.2E-03	1.1E-02	1.3E-02	1.3E-02	1.1E-02	4.7E-03	4.7E-03	1.8E-02	2.6E-02	3.7E-02	4.8E-02	5.9E-02	7.0E-02
677	1.2E-03	9.3E-03	1.2E-02	1.2E-02	1.2E-02	4.5E-03	4.5E-03	1.3E-02	2.3E-02	3.6E-02	4.8E-02	6.0E-02	7.3E-02
678	1.2E-03	8.3E-03	1.0E-02	1.1E-02	1.2E-02	4.6E-03	4.6E-03	1.1E-02	2.2E-02	3.6E-02	4.9E-02	6.2E-02	7.6E-02
679	1.2E-03	7.4E-03	9.3E-03	1.2E-02	1.3E-02	4.4E-03	4.4E-03	9.3E-03	2.1E-02	3.6E-02	5.0E-02	6.4E-02	7.9E-02
680	1.2E-03	6.6E-03	8.4E-03	1.3E-02	1.4E-02	4.7E-03	4.4E-03	8.1E-03	2.0E-02	3.5E-02	5.0E-02	6.6E-02	8.1E-02
681	1.2E-03	5.9E-03	8.0E-03	1.3E-02	1.5E-02	5.1E-03	4.7E-03	1.1E-02	2.2E-02	3.6E-02	5.0E-02	6.4E-02	7.9E-02
682	1.2E-03	5.4E-03	7.8E-03	1.2E-02	1.6E-02	5.5E-03	5.1E-03	2.2E-02	2.9E-02	4.0E-02	5.1E-02	6.2E-02	7.2E-02
683	1.1E-03	4.9E-03	7.8E-03	1.1E-02	1.5E-02	5.6E-03	5.2E-03	3.3E-02	3.6E-02	4.3E-02	4.9E-02	5.6E-02	6.3E-02
684	1.2E-03	1.2E-02	1.4E-02	1.4E-02	9.8E-03	4.7E-03	4.7E-03	2.6E-02	3.1E-02	3.9E-02	4.7E-02	5.6E-02	6.4E-02
685	1.2E-03	1.1E-02	1.3E-02	1.3E-02	1.1E-02	4.6E-03	4.6E-03	1.7E-02	2.6E-02	3.6E-02	4.7E-02	5.7E-02	6.8E-02
686	1.1E-03	9.4E-03	1.1E-02	1.1E-02	1.1E-02	4.4E-03	4.4E-03	1.5E-02	2.4E-02	3.6E-02	4.8E-02	6.0E-02	7.2E-02
687	1.1E-03	8.5E-03	9.6E-03	1.0E-02	1.1E-02	4.5E-03	4.5E-03	1.3E-02	2.4E-02	3.7E-02	4.9E-02	6.2E-02	7.5E-02
688	1.2E-03	7.7E-03	8.2E-03	1.1E-02	1.2E-02	4.3E-03	4.3E-03	9.5E-03	2.1E-02	3.5E-02	4.9E-02	6.3E-02	7.7E-02
689	1.2E-03	7.1E-03	7.9E-03	1.2E-02	1.3E-02	4.6E-03	4.3E-03	8.6E-03	2.0E-02	3.5E-02	4.9E-02	6.4E-02	7.8E-02
690	1.2E-03	1.2E-02	1.4E-02	1.4E-02	9.7E-03	4.6E-03	4.6E-03	2.6E-02	3.1E-02	3.9E-02	4.7E-02	5.4E-02	6.2E-02
691	1.1E-03	1.1E-02	1.2E-02	1.3E-02	1.0E-02	4.5E-03	4.5E-03	1.8E-02	2.6E-02	3.6E-02	4.6E-02	5.6E-02	6.7E-02
692	1.1E-03	9.6E-03	1.1E-02	1.1E-02	1.0E-02	4.3E-03	4.3E-03	1.5E-02	2.5E-02	3.6E-02	4.7E-02	5.9E-02	7.0E-02
693	1.1E-03	8.7E-03	9.0E-03	1.0E-02	1.0E-02	4.4E-03	4.4E-03	1.3E-02	2.4E-02	3.6E-02	4.9E-02	6.1E-02	7.4E-02
694	1.2E-03	7.9E-03	7.9E-03	1.1E-02	1.1E-02	4.2E-03	4.2E-03	9.9E-03	2.1E-02	3.5E-02	4.8E-02	6.2E-02	7.5E-02
695	1.2E-03	7.2E-03	7.6E-03	1.1E-02	1.3E-02	4.5E-03	4.2E-03	8.9E-03	2.0E-02	3.5E-02	4.9E-02	6.3E-02	7.7E-02
696	1.1E-03	1.2E-02	1.4E-02	1.4E-02	9.5E-03	4.6E-03	4.6E-03	2.7E-02	3.2E-02	3.9E-02	4.6E-02	5.4E-02	6.1E-02
697	1.1E-03	1.1E-02	1.2E-02	1.2E-02	1.0E-02	4.4E-03	4.4E-03	1.8E-02	2.5E-02	3.5E-02	4.5E-02	5.5E-02	6.5E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
698	1.1E-03	9.8E-03	9.8E-03	9.9E-03	9.7E-03	4.3E-03	4.3E-03	1.5E-02	2.5E-02	3.6E-02	4.7E-02	5.8E-02	6.9E-02
699	1.1E-03	8.8E-03	8.8E-03	9.9E-03	9.7E-03	4.3E-03	4.3E-03	1.3E-02	2.4E-02	3.6E-02	4.8E-02	6.0E-02	7.2E-02
700	1.2E-03	8.0E-03	8.0E-03	1.0E-02	1.1E-02	4.1E-03	4.1E-03	1.0E-02	2.1E-02	3.4E-02	4.8E-02	6.1E-02	7.4E-02
701	1.2E-03	7.4E-03	7.4E-03	1.1E-02	1.2E-02	4.4E-03	4.1E-03	9.2E-03	2.1E-02	3.4E-02	4.8E-02	6.2E-02	7.6E-02
702	1.1E-03	1.3E-02	1.5E-02	1.4E-02	9.4E-03	4.5E-03	4.5E-03	2.8E-02	3.2E-02	3.9E-02	4.6E-02	5.3E-02	6.0E-02
703	1.1E-03	1.2E-02	1.2E-02	1.1E-02	9.7E-03	4.4E-03	4.4E-03	1.9E-02	2.6E-02	3.5E-02	4.5E-02	5.4E-02	6.3E-02
704	1.1E-03	1.0E-02	1.0E-02	9.3E-03	9.5E-03	4.2E-03	4.2E-03	1.6E-02	2.5E-02	3.5E-02	4.6E-02	5.7E-02	6.7E-02
705	1.1E-03	9.2E-03	9.1E-03	9.8E-03	9.4E-03	4.2E-03	4.2E-03	1.2E-02	2.2E-02	3.4E-02	4.6E-02	5.8E-02	7.0E-02
706	1.2E-03	8.1E-03	8.0E-03	1.0E-02	1.1E-02	4.0E-03	4.0E-03	1.1E-02	2.1E-02	3.4E-02	4.7E-02	6.0E-02	7.3E-02
707	1.1E-03	7.4E-03	7.4E-03	1.1E-02	1.2E-02	4.2E-03	4.1E-03	9.5E-03	2.1E-02	3.4E-02	4.8E-02	6.1E-02	7.5E-02
708	1.1E-03	1.3E-02	1.6E-02	1.5E-02	9.3E-03	4.4E-03	4.4E-03	2.8E-02	3.2E-02	3.9E-02	4.5E-02	5.2E-02	5.8E-02
709	1.1E-03	1.2E-02	1.2E-02	1.2E-02	9.5E-03	4.3E-03	4.3E-03	2.0E-02	2.7E-02	3.6E-02	4.4E-02	5.3E-02	6.1E-02
710	1.1E-03	1.0E-02	1.0E-02	9.4E-03	9.3E-03	4.1E-03	4.1E-03	1.6E-02	2.5E-02	3.5E-02	4.5E-02	5.5E-02	6.6E-02
711	1.1E-03	9.4E-03	9.3E-03	9.6E-03	9.2E-03	4.1E-03	4.1E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.8E-02
712	1.1E-03	8.4E-03	8.3E-03	9.8E-03	1.0E-02	4.0E-03	3.9E-03	1.1E-02	2.1E-02	3.4E-02	4.6E-02	5.9E-02	7.1E-02
713	1.1E-03	7.6E-03	7.5E-03	1.0E-02	1.1E-02	4.1E-03	4.0E-03	9.8E-03	2.1E-02	3.4E-02	4.7E-02	6.0E-02	7.4E-02
714	1.1E-03	1.3E-02	1.6E-02	1.5E-02	9.2E-03	4.3E-03	4.3E-03	2.8E-02	3.2E-02	3.9E-02	4.5E-02	5.1E-02	5.7E-02
715	1.1E-03	1.2E-02	1.3E-02	1.2E-02	9.1E-03	4.3E-03	4.3E-03	2.2E-02	2.8E-02	3.6E-02	4.4E-02	5.2E-02	6.0E-02
716	1.1E-03	1.1E-02	1.1E-02	1.0E-02	8.8E-03	4.1E-03	4.0E-03	1.6E-02	2.4E-02	3.4E-02	4.4E-02	5.4E-02	6.4E-02
717	1.1E-03	9.6E-03	9.5E-03	9.4E-03	8.7E-03	4.0E-03	4.0E-03	1.1E-02	2.1E-02	3.3E-02	4.4E-02	5.6E-02	6.7E-02
718	1.1E-03	8.6E-03	8.5E-03	9.5E-03	9.7E-03	3.9E-03	3.9E-03	1.1E-02	2.1E-02	3.3E-02	4.6E-02	5.8E-02	7.0E-02
719	1.1E-03	7.8E-03	7.7E-03	1.0E-02	1.1E-02	4.0E-03	3.9E-03	1.0E-02	2.1E-02	3.4E-02	4.7E-02	6.0E-02	7.2E-02
720	1.1E-03	1.3E-02	1.7E-02	1.6E-02	9.1E-03	4.3E-03	4.3E-03	2.8E-02	3.2E-02	3.8E-02	4.4E-02	5.1E-02	5.7E-02
721	1.1E-03	1.2E-02	1.4E-02	1.3E-02	8.9E-03	4.2E-03	4.2E-03	2.3E-02	2.8E-02	3.6E-02	4.3E-02	5.1E-02	5.8E-02
722	1.0E-03	1.1E-02	1.1E-02	1.1E-02	8.6E-03	4.0E-03	4.0E-03	1.6E-02	2.4E-02	3.4E-02	4.3E-02	5.3E-02	6.3E-02
723	1.0E-03	9.7E-03	9.6E-03	9.2E-03	8.4E-03	4.0E-03	4.0E-03	1.1E-02	2.1E-02	3.2E-02	4.3E-02	5.4E-02	6.6E-02
724	1.1E-03	8.8E-03	8.7E-03	9.2E-03	9.3E-03	3.8E-03	3.8E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.9E-02
725	1.1E-03	8.0E-03	7.9E-03	9.7E-03	1.0E-02	3.9E-03	3.8E-03	1.0E-02	2.1E-02	3.3E-02	4.6E-02	5.9E-02	7.1E-02
726	1.1E-03	1.3E-02	1.7E-02	1.6E-02	8.8E-03	4.2E-03	4.2E-03	2.9E-02	3.3E-02	3.9E-02	4.4E-02	5.0E-02	5.6E-02
727	1.0E-03	1.2E-02	1.4E-02	1.3E-02	8.6E-03	4.1E-03	4.1E-03	2.3E-02	2.8E-02	3.5E-02	4.2E-02	4.9E-02	5.7E-02
728	1.0E-03	1.1E-02	1.2E-02	1.1E-02	8.3E-03	3.9E-03	3.9E-03	1.6E-02	2.4E-02	3.3E-02	4.3E-02	5.2E-02	6.1E-02
729	1.0E-03	9.7E-03	9.9E-03	9.2E-03	8.3E-03	3.6E-03	3.6E-03	1.1E-02	2.1E-02	3.2E-02	4.3E-02	5.4E-02	6.5E-02
730	1.1E-03	8.8E-03	8.8E-03	9.0E-03	8.9E-03	3.7E-03	3.7E-03	1.1E-02	2.1E-02	3.3E-02	4.4E-02	5.6E-02	6.8E-02
731	1.1E-03	8.1E-03	8.0E-03	9.4E-03	1.0E-02	3.8E-03	3.8E-03	1.0E-02	2.1E-02	3.3E-02	4.5E-02	5.8E-02	7.0E-02
732	8.1E-04	4.1E-03	5.3E-03	8.4E-03	5.8E-03	4.3E-03	4.0E-03	2.4E-02	2.1E-02	2.0E-02	2.0E-02	1.9E-02	1.9E-02
733	8.3E-04	4.4E-03	6.8E-03	9.9E-03	6.0E-03	4.3E-03	4.0E-03	1.7E-02	1.6E-02	1.8E-02	2.1E-02	2.3E-02	2.5E-02
734	8.6E-04	4.8E-03	8.7E-03	1.2E-02	6.3E-03	4.4E-03	4.1E-03	1.4E-02	1.5E-02	1.9E-02	2.2E-02	2.6E-02	3.0E-02
735	8.8E-04	5.5E-03	1.1E-02	1.4E-02	6.6E-03	4.5E-03	4.2E-03	1.0E-02	1.2E-02	1.7E-02	2.1E-02	2.6E-02	3.1E-02
736	8.9E-04	7.2E-03	1.4E-02	1.6E-02	6.9E-03	4.6E-03	4.2E-03	1.3E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
737	1.0E-03	1.3E-02	1.8E-02	1.7E-02	8.6E-03	4.1E-03	4.1E-03	3.0E-02	3.3E-02	3.9E-02	4.4E-02	5.0E-02	5.5E-02
738	1.0E-03	1.2E-02	1.5E-02	1.4E-02	8.4E-03	4.1E-03	4.1E-03	2.4E-02	2.9E-02	3.5E-02	4.2E-02	4.9E-02	5.5E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
739	1.0E-03	1.1E-02	1.2E-02	1.1E-02	8.2E-03	3.8E-03	3.8E-03	1.5E-02	2.3E-02	3.2E-02	4.2E-02	5.1E-02	6.0E-02
740	1.0E-03	9.6E-03	1.0E-02	9.6E-03	8.0E-03	3.6E-03	3.6E-03	1.1E-02	2.0E-02	3.1E-02	4.2E-02	5.3E-02	6.3E-02
741	1.1E-03	8.8E-03	8.9E-03	8.9E-03	8.7E-03	3.7E-03	3.7E-03	1.1E-02	2.1E-02	3.2E-02	4.4E-02	5.5E-02	6.6E-02
742	1.1E-03	8.1E-03	8.0E-03	9.1E-03	9.8E-03	3.7E-03	3.7E-03	1.1E-02	2.1E-02	3.3E-02	4.5E-02	5.7E-02	6.9E-02
743	8.0E-04	3.6E-03	5.9E-03	8.9E-03	5.7E-03	4.2E-03	3.9E-03	2.4E-02	2.1E-02	2.0E-02	2.0E-02	2.0E-02	1.9E-02
744	8.3E-04	3.8E-03	7.5E-03	1.0E-02	6.0E-03	4.4E-03	4.1E-03	1.7E-02	1.6E-02	1.9E-02	2.1E-02	2.3E-02	2.6E-02
745	8.5E-04	4.2E-03	9.4E-03	1.2E-02	6.3E-03	4.4E-03	4.1E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.6E-02	3.0E-02
746	8.7E-04	6.0E-03	1.2E-02	1.5E-02	6.6E-03	4.5E-03	4.1E-03	1.0E-02	1.2E-02	1.7E-02	2.1E-02	2.6E-02	3.1E-02
747	8.8E-04	7.7E-03	1.4E-02	1.7E-02	6.9E-03	4.5E-03	4.2E-03	1.3E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
748	9.3E-04	1.1E-02	1.8E-02	2.1E-02	7.3E-03	4.5E-03	4.1E-03	1.9E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02	2.6E-02
749	9.8E-04	1.3E-02	2.0E-02	2.2E-02	7.7E-03	4.4E-03	4.1E-03	2.2E-02	2.0E-02	2.2E-02	2.3E-02	2.5E-02	2.7E-02
750	1.1E-03	1.4E-02	2.2E-02	2.5E-02	8.1E-03	4.4E-03	4.0E-03	2.6E-02	2.5E-02	2.6E-02	2.8E-02	2.9E-02	3.1E-02
751	1.1E-03	1.6E-02	2.3E-02	2.7E-02	8.3E-03	4.3E-03	3.9E-03	3.0E-02	3.0E-02	3.3E-02	3.6E-02	3.9E-02	4.2E-02
752	1.0E-03	1.7E-02	2.2E-02	2.6E-02	8.1E-03	4.0E-03	3.7E-03	3.5E-02	3.7E-02	4.1E-02	4.5E-02	4.9E-02	5.3E-02
753	1.0E-03	1.7E-02	2.3E-02	2.4E-02	8.0E-03	3.8E-03	3.8E-03	3.8E-02	4.0E-02	4.3E-02	4.7E-02	5.1E-02	5.5E-02
754	1.0E-03	1.5E-02	2.2E-02	2.3E-02	8.1E-03	4.0E-03	4.0E-03	3.7E-02	3.9E-02	4.3E-02	4.6E-02	5.0E-02	5.4E-02
755	1.0E-03	1.3E-02	1.9E-02	2.0E-02	8.2E-03	4.1E-03	4.1E-03	3.5E-02	3.7E-02	4.1E-02	4.5E-02	5.0E-02	5.4E-02
756	1.0E-03	1.3E-02	1.8E-02	1.7E-02	8.3E-03	4.1E-03	4.1E-03	3.1E-02	3.4E-02	3.9E-02	4.4E-02	4.9E-02	5.4E-02
757	1.0E-03	1.1E-02	1.5E-02	1.4E-02	8.3E-03	4.0E-03	4.0E-03	2.4E-02	2.9E-02	3.5E-02	4.2E-02	4.8E-02	5.4E-02
758	1.0E-03	1.0E-02	1.3E-02	1.2E-02	7.9E-03	3.8E-03	3.8E-03	1.6E-02	2.3E-02	3.2E-02	4.1E-02	5.0E-02	5.9E-02
759	1.0E-03	9.2E-03	1.1E-02	1.0E-02	7.8E-03	3.5E-03	3.5E-03	1.1E-02	2.0E-02	3.0E-02	4.1E-02	5.2E-02	6.2E-02
760	1.1E-03	8.5E-03	9.3E-03	8.7E-03	8.4E-03	3.6E-03	3.6E-03	1.1E-02	2.1E-02	3.2E-02	4.3E-02	5.4E-02	6.5E-02
761	1.0E-03	7.9E-03	8.1E-03	8.9E-03	9.4E-03	3.6E-03	3.6E-03	1.1E-02	2.1E-02	3.2E-02	4.4E-02	5.6E-02	6.8E-02
762	7.9E-04	3.0E-03	6.4E-03	9.3E-03	5.7E-03	4.2E-03	3.9E-03	2.4E-02	2.1E-02	2.1E-02	2.0E-02	2.0E-02	2.0E-02
763	8.9E-04	3.4E-03	8.0E-03	1.1E-02	6.2E-03	4.6E-03	4.3E-03	1.7E-02	1.6E-02	1.9E-02	2.1E-02	2.4E-02	2.6E-02
764	8.9E-04	4.7E-03	1.0E-02	1.3E-02	6.5E-03	4.7E-03	4.3E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.7E-02	3.0E-02
765	8.5E-04	6.4E-03	1.2E-02	1.5E-02	6.6E-03	4.4E-03	4.1E-03	9.8E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.1E-02
766	8.6E-04	8.1E-03	1.4E-02	1.6E-02	6.8E-03	4.4E-03	4.1E-03	1.2E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
767	9.2E-04	1.1E-02	1.7E-02	1.9E-02	7.3E-03	4.4E-03	4.1E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02	2.5E-02
768	9.7E-04	1.2E-02	1.8E-02	2.1E-02	7.7E-03	4.4E-03	4.0E-03	2.1E-02	2.0E-02	2.1E-02	2.3E-02	2.5E-02	2.6E-02
769	1.0E-03	1.3E-02	2.1E-02	2.4E-02	8.0E-03	4.4E-03	4.0E-03	2.5E-02	2.4E-02	2.6E-02	2.7E-02	2.9E-02	3.0E-02
770	1.0E-03	1.4E-02	2.2E-02	2.5E-02	8.1E-03	4.2E-03	3.9E-03	3.0E-02	3.0E-02	3.3E-02	3.6E-02	3.9E-02	4.2E-02
771	1.0E-03	1.6E-02	2.0E-02	2.4E-02	7.8E-03	4.0E-03	3.6E-03	3.5E-02	3.6E-02	4.0E-02	4.4E-02	4.8E-02	5.2E-02
772	1.0E-03	1.5E-02	2.1E-02	2.2E-02	7.9E-03	3.8E-03	3.8E-03	3.8E-02	3.9E-02	4.3E-02	4.7E-02	5.1E-02	5.4E-02
773	1.0E-03	1.4E-02	2.0E-02	2.2E-02	8.0E-03	3.9E-03	3.9E-03	3.7E-02	3.8E-02	4.2E-02	4.6E-02	5.0E-02	5.4E-02
774	1.0E-03	1.3E-02	1.7E-02	1.9E-02	8.2E-03	4.0E-03	4.0E-03	3.5E-02	3.6E-02	4.1E-02	4.5E-02	4.9E-02	5.3E-02
775	1.0E-03	1.1E-02	1.6E-02	1.6E-02	8.2E-03	4.0E-03	4.0E-03	3.1E-02	3.4E-02	3.9E-02	4.4E-02	4.8E-02	5.3E-02
776	1.0E-03	1.1E-02	1.5E-02	1.4E-02	8.0E-03	3.9E-03	3.9E-03	2.5E-02	2.9E-02	3.5E-02	4.1E-02	4.8E-02	5.4E-02
777	1.0E-03	9.6E-03	1.3E-02	1.2E-02	7.7E-03	3.7E-03	3.7E-03	1.6E-02	2.3E-02	3.1E-02	4.0E-02	4.9E-02	5.7E-02
778	1.0E-03	8.6E-03	1.1E-02	1.0E-02	7.6E-03	3.5E-03	3.5E-03	1.1E-02	2.0E-02	3.0E-02	4.0E-02	5.1E-02	6.1E-02
779	1.0E-03	8.0E-03	9.6E-03	8.9E-03	8.1E-03	3.5E-03	3.5E-03	1.1E-02	2.0E-02	3.1E-02	4.2E-02	5.3E-02	6.4E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
780	1.0E-03	7.5E-03	8.4E-03	8.6E-03	9.1E-03	3.6E-03	3.5E-03	1.1E-02	2.0E-02	3.2E-02	4.4E-02	5.5E-02	6.7E-02
781	8.6E-04	2.7E-03	6.9E-03	9.6E-03	5.7E-03	4.2E-03	3.9E-03	2.4E-02	2.1E-02	2.1E-02	2.1E-02	2.1E-02	2.0E-02
782	8.8E-04	3.7E-03	8.4E-03	1.1E-02	6.2E-03	4.5E-03	4.2E-03	1.5E-02	1.6E-02	2.0E-02	2.4E-02	2.7E-02	3.1E-02
783	8.9E-04	5.1E-03	1.0E-02	1.3E-02	6.5E-03	4.6E-03	4.3E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.7E-02	3.0E-02
784	8.4E-04	6.8E-03	1.2E-02	1.4E-02	6.5E-03	4.4E-03	4.0E-03	9.6E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.1E-02
785	8.5E-04	8.2E-03	1.3E-02	1.6E-02	6.8E-03	4.4E-03	4.0E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.6E-02	3.0E-02
786	9.1E-04	1.0E-02	1.5E-02	1.7E-02	7.3E-03	4.4E-03	4.0E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02	2.5E-02
787	9.5E-04	1.1E-02	1.7E-02	2.0E-02	7.6E-03	4.3E-03	4.0E-03	2.1E-02	1.9E-02	2.1E-02	2.3E-02	2.4E-02	2.6E-02
788	1.0E-03	1.2E-02	1.9E-02	2.2E-02	7.9E-03	4.3E-03	3.9E-03	2.5E-02	2.3E-02	2.5E-02	2.7E-02	2.8E-02	3.0E-02
789	1.0E-03	1.3E-02	2.0E-02	2.3E-02	7.9E-03	4.1E-03	3.8E-03	3.0E-02	3.0E-02	3.3E-02	3.6E-02	4.0E-02	4.3E-02
790	1.0E-03	1.4E-02	1.8E-02	2.2E-02	7.7E-03	3.9E-03	3.5E-03	3.4E-02	3.5E-02	3.9E-02	4.3E-02	4.7E-02	5.1E-02
791	1.0E-03	1.4E-02	1.9E-02	2.0E-02	7.8E-03	3.7E-03	3.7E-03	3.8E-02	3.9E-02	4.2E-02	4.6E-02	5.0E-02	5.4E-02
792	1.0E-03	1.3E-02	1.8E-02	2.0E-02	7.9E-03	3.9E-03	3.9E-03	3.6E-02	3.8E-02	4.2E-02	4.5E-02	4.9E-02	5.3E-02
793	1.0E-03	1.2E-02	1.6E-02	1.8E-02	8.1E-03	4.0E-03	4.0E-03	3.4E-02	3.6E-02	4.0E-02	4.4E-02	4.8E-02	5.2E-02
794	1.0E-03	9.8E-03	1.5E-02	1.4E-02	7.9E-03	4.0E-03	4.0E-03	3.1E-02	3.4E-02	3.8E-02	4.3E-02	4.8E-02	5.3E-02
795	1.0E-03	9.6E-03	1.4E-02	1.3E-02	7.9E-03	3.9E-03	3.9E-03	2.4E-02	2.9E-02	3.5E-02	4.1E-02	4.7E-02	5.3E-02
796	1.0E-03	9.1E-03	1.3E-02	1.2E-02	7.5E-03	3.7E-03	3.7E-03	1.2E-02	2.0E-02	2.9E-02	3.8E-02	4.7E-02	5.6E-02
797	9.9E-04	8.4E-03	1.1E-02	1.0E-02	7.5E-03	3.4E-03	3.4E-03	1.1E-02	1.9E-02	2.9E-02	3.9E-02	5.0E-02	6.0E-02
798	1.0E-03	7.6E-03	9.9E-03	8.9E-03	7.8E-03	3.5E-03	3.5E-03	1.1E-02	2.0E-02	3.1E-02	4.1E-02	5.2E-02	6.3E-02
799	8.7E-04	4.1E-03	8.7E-03	1.2E-02	6.2E-03	4.5E-03	4.2E-03	1.4E-02	1.6E-02	2.0E-02	2.4E-02	2.8E-02	3.3E-02
800	8.2E-04	5.4E-03	1.0E-02	1.3E-02	6.2E-03	4.3E-03	4.0E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.7E-02	3.0E-02
801	8.3E-04	7.0E-03	1.2E-02	1.4E-02	6.5E-03	4.3E-03	4.0E-03	9.7E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.0E-02
802	8.4E-04	8.2E-03	1.2E-02	1.4E-02	6.8E-03	4.3E-03	4.0E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
803	9.0E-04	9.7E-03	1.4E-02	1.6E-02	7.2E-03	4.3E-03	3.9E-03	1.8E-02	1.7E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02
804	9.4E-04	9.8E-03	1.6E-02	1.9E-02	7.5E-03	4.2E-03	3.9E-03	2.0E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02	2.6E-02
805	1.0E-03	1.1E-02	1.7E-02	2.0E-02	7.8E-03	4.2E-03	3.9E-03	2.7E-02	2.6E-02	2.8E-02	3.1E-02	3.3E-02	3.5E-02
806	1.0E-03	1.3E-02	1.8E-02	2.1E-02	7.7E-03	4.1E-03	3.7E-03	2.9E-02	3.0E-02	3.3E-02	3.7E-02	4.1E-02	4.4E-02
807	1.0E-03	1.3E-02	1.6E-02	2.0E-02	7.6E-03	3.8E-03	3.5E-03	3.3E-02	3.4E-02	3.8E-02	4.2E-02	4.6E-02	5.0E-02
808	1.0E-03	1.3E-02	1.7E-02	1.8E-02	7.7E-03	3.7E-03	3.7E-03	3.7E-02	3.8E-02	4.2E-02	4.6E-02	4.9E-02	5.3E-02
809	1.0E-03	1.2E-02	1.7E-02	1.8E-02	7.9E-03	3.8E-03	3.8E-03	3.6E-02	3.7E-02	4.1E-02	4.5E-02	4.8E-02	5.2E-02
810	1.0E-03	1.1E-02	1.5E-02	1.7E-02	7.9E-03	3.9E-03	3.9E-03	3.4E-02	3.6E-02	4.0E-02	4.3E-02	4.7E-02	5.1E-02
811	9.9E-04	9.2E-03	1.3E-02	1.4E-02	7.8E-03	3.9E-03	3.9E-03	3.1E-02	3.4E-02	3.8E-02	4.3E-02	4.7E-02	5.2E-02
812	9.9E-04	8.5E-03	1.3E-02	1.3E-02	7.6E-03	3.8E-03	3.8E-03	2.5E-02	2.9E-02	3.5E-02	4.1E-02	4.6E-02	5.2E-02
813	9.8E-04	8.3E-03	1.2E-02	1.1E-02	7.2E-03	3.6E-03	3.6E-03	1.3E-02	2.0E-02	2.9E-02	3.8E-02	4.6E-02	5.5E-02
814	9.8E-04	8.0E-03	1.1E-02	1.0E-02	7.3E-03	3.4E-03	3.4E-03	1.0E-02	1.9E-02	2.9E-02	3.9E-02	4.9E-02	5.8E-02
815	1.0E-03	7.5E-03	1.0E-02	9.0E-03	7.6E-03	3.4E-03	3.4E-03	1.1E-02	2.0E-02	3.0E-02	4.1E-02	5.1E-02	6.2E-02
816	8.0E-04	5.6E-03	9.9E-03	1.2E-02	6.2E-03	4.2E-03	3.9E-03	1.4E-02	1.5E-02	1.9E-02	2.3E-02	2.6E-02	3.0E-02
817	8.2E-04	7.0E-03	1.1E-02	1.3E-02	6.5E-03	4.2E-03	3.9E-03	9.8E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.0E-02
818	8.3E-04	8.0E-03	1.1E-02	1.3E-02	6.7E-03	4.2E-03	3.9E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
819	8.9E-04	8.9E-03	1.3E-02	1.6E-02	7.2E-03	4.2E-03	3.9E-03	1.8E-02	1.7E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02
820	9.3E-04	8.7E-03	1.5E-02	1.7E-02	7.5E-03	4.1E-03	3.8E-03	2.0E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02	2.6E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
821	1.0E-03	1.0E-02	1.6E-02	1.9E-02	7.7E-03	4.1E-03	3.8E-03	2.6E-02	2.6E-02	2.8E-02	3.1E-02	3.3E-02	3.6E-02
822	1.0E-03	1.2E-02	1.6E-02	2.0E-02	7.6E-03	4.0E-03	3.7E-03	2.9E-02	3.0E-02	3.3E-02	3.7E-02	4.1E-02	4.4E-02
823	9.9E-04	1.2E-02	1.4E-02	1.8E-02	7.6E-03	3.7E-03	3.4E-03	3.2E-02	3.3E-02	3.7E-02	4.1E-02	4.5E-02	5.0E-02
824	1.0E-03	1.2E-02	1.6E-02	1.7E-02	7.6E-03	3.6E-03	3.6E-03	3.7E-02	3.8E-02	4.1E-02	4.5E-02	4.8E-02	5.2E-02
825	1.0E-03	1.1E-02	1.6E-02	1.7E-02	7.8E-03	3.8E-03	3.8E-03	3.5E-02	3.7E-02	4.0E-02	4.4E-02	4.8E-02	5.1E-02
826	9.9E-04	1.0E-02	1.4E-02	1.6E-02	7.8E-03	3.8E-03	3.8E-03	3.4E-02	3.5E-02	3.9E-02	4.3E-02	4.6E-02	5.0E-02
827	9.8E-04	9.0E-03	1.2E-02	1.4E-02	7.7E-03	3.8E-03	3.8E-03	3.1E-02	3.3E-02	3.8E-02	4.2E-02	4.7E-02	5.1E-02
828	9.8E-04	7.8E-03	1.2E-02	1.2E-02	7.4E-03	3.7E-03	3.7E-03	2.3E-02	2.7E-02	3.3E-02	3.9E-02	4.5E-02	5.1E-02
829	9.7E-04	7.2E-03	1.1E-02	1.1E-02	7.1E-03	3.5E-03	3.5E-03	1.4E-02	2.1E-02	2.9E-02	3.7E-02	4.6E-02	5.4E-02
830	1.0E-03	7.3E-03	1.1E-02	9.7E-03	7.2E-03	3.3E-03	3.3E-03	1.0E-02	1.9E-02	2.8E-02	3.8E-02	4.8E-02	5.7E-02
831	8.2E-04	7.7E-03	1.0E-02	1.3E-02	6.7E-03	4.2E-03	3.8E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
832	8.8E-04	8.1E-03	1.2E-02	1.5E-02	7.1E-03	4.1E-03	3.8E-03	1.7E-02	1.6E-02	1.8E-02	2.0E-02	2.2E-02	2.3E-02
833	9.2E-04	8.0E-03	1.4E-02	1.6E-02	7.4E-03	4.0E-03	3.7E-03	1.9E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02	2.5E-02
834	1.0E-03	9.5E-03	1.4E-02	1.8E-02	7.7E-03	4.1E-03	3.7E-03	2.6E-02	2.6E-02	2.8E-02	3.1E-02	3.4E-02	3.6E-02
835	9.9E-04	1.1E-02	1.5E-02	1.8E-02	7.5E-03	3.9E-03	3.6E-03	2.8E-02	2.9E-02	3.3E-02	3.7E-02	4.0E-02	4.4E-02
836	9.8E-04	1.1E-02	1.4E-02	1.7E-02	7.5E-03	3.6E-03	3.3E-03	3.1E-02	3.3E-02	3.7E-02	4.1E-02	4.5E-02	4.9E-02
837	9.9E-04	1.1E-02	1.4E-02	1.6E-02	7.6E-03	3.6E-03	3.6E-03	3.6E-02	3.7E-02	4.0E-02	4.4E-02	4.7E-02	5.1E-02
838	9.8E-04	1.0E-02	1.5E-02	1.6E-02	7.7E-03	3.7E-03	3.7E-03	3.5E-02	3.6E-02	4.0E-02	4.3E-02	4.7E-02	5.0E-02
839	9.8E-04	9.7E-03	1.4E-02	1.5E-02	7.7E-03	3.8E-03	3.8E-03	3.3E-02	3.5E-02	3.9E-02	4.2E-02	4.6E-02	4.9E-02
840	9.7E-04	8.6E-03	1.1E-02	1.3E-02	7.5E-03	3.8E-03	3.8E-03	3.0E-02	3.3E-02	3.7E-02	4.1E-02	4.6E-02	5.0E-02
841	9.7E-04	7.2E-03	1.1E-02	1.1E-02	7.2E-03	3.6E-03	3.6E-03	2.3E-02	2.7E-02	3.3E-02	3.9E-02	4.5E-02	5.1E-02
842	1.9E-03	2.5E-03	2.3E-03	2.6E-03	2.4E-03	2.2E-03	2.2E-03	-1.8E-02	-1.3E-02	-7.9E-03	-2.7E-03	2.6E-03	7.8E-03
843	2.0E-03	2.5E-03	2.4E-03	2.6E-03	2.5E-03	2.3E-03	2.3E-03	-1.8E-02	-1.3E-02	-8.4E-03	-3.3E-03	1.7E-03	6.7E-03
844	2.4E-03	3.1E-03	2.9E-03	2.9E-03	2.9E-03	2.7E-03	2.7E-03	-2.0E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.1E-03
845	2.5E-03	3.2E-03	3.0E-03	2.9E-03	2.9E-03	2.7E-03	2.7E-03	-1.9E-02	-1.7E-02	-1.5E-02	-1.2E-02	-9.4E-03	-6.8E-03
846	2.5E-03	3.3E-03	3.1E-03	2.9E-03	2.9E-03	2.7E-03	2.7E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-7.8E-03	-5.1E-03
847	6.3E-03	7.2E-03	6.9E-03	9.9E-04	1.1E-03	8.5E-04	8.5E-04	-7.1E-03	-6.4E-03	-5.4E-03	-4.4E-03	-3.4E-03	-2.4E-03
848	8.1E-03	9.9E-03	9.6E-03	1.0E-03	1.1E-03	8.8E-04	8.8E-04	-7.6E-03	-6.9E-03	-5.8E-03	-4.8E-03	-3.7E-03	-2.7E-03
849	9.2E-03	1.1E-02	1.0E-02	1.0E-03	1.0E-03	8.8E-04	8.8E-04	-7.9E-03	-7.2E-03	-6.1E-03	-5.0E-03	-3.9E-03	-2.8E-03
850	5.8E-03	6.3E-03	4.8E-03	9.8E-04	1.1E-03	8.6E-04	8.5E-04	-5.9E-03	-5.4E-03	-4.6E-03	-3.7E-03	-2.9E-03	-2.1E-03
851	6.5E-03	7.0E-03	6.4E-03	1.0E-03	1.1E-03	8.7E-04	8.7E-04	-6.4E-03	-5.8E-03	-4.9E-03	-4.0E-03	-3.2E-03	-2.3E-03
852	8.0E-03	1.0E-02	9.6E-03	1.0E-03	1.1E-03	8.9E-04	8.9E-04	-7.2E-03	-6.5E-03	-5.6E-03	-4.6E-03	-3.6E-03	-2.6E-03
853	9.1E-03	1.1E-02	1.1E-02	1.0E-03	1.1E-03	8.9E-04	8.9E-04	-7.2E-03	-6.6E-03	-5.6E-03	-4.7E-03	-3.7E-03	-2.8E-03
854	4.9E-03	5.4E-03	3.4E-03	9.8E-04	1.2E-03	8.6E-04	8.6E-04	-5.3E-03	-5.0E-03	-4.2E-03	-3.5E-03	-2.8E-03	-2.0E-03
855	5.8E-03	6.3E-03	4.4E-03	9.9E-04	1.2E-03	8.8E-04	8.7E-04	-5.5E-03	-5.2E-03	-4.4E-03	-3.7E-03	-2.9E-03	-2.2E-03
856	6.4E-03	6.8E-03	5.3E-03	1.0E-03	1.2E-03	8.8E-04	8.8E-04	-5.7E-03	-5.4E-03	-4.6E-03	-3.8E-03	-3.1E-03	-2.3E-03
857	8.1E-03	8.9E-03	8.6E-03	1.0E-03	1.1E-03	9.1E-04	9.1E-04	-6.1E-03	-5.8E-03	-5.1E-03	-4.4E-03	-3.6E-03	-2.9E-03
858	4.6E-03	5.0E-03	3.3E-03	9.8E-04	1.2E-03	8.7E-04	8.7E-04	-5.2E-03	-4.9E-03	-4.3E-03	-3.7E-03	-3.1E-03	-2.4E-03
859	5.6E-03	6.1E-03	4.0E-03	1.0E-03	1.2E-03	8.9E-04	8.9E-04	-5.3E-03	-5.1E-03	-4.6E-03	-4.0E-03	-3.4E-03	-2.9E-03
860	7.2E-03	7.7E-03	6.2E-03	1.0E-03	1.2E-03	9.1E-04	9.1E-04	-5.4E-03	-5.3E-03	-4.9E-03	-4.4E-03	-3.9E-03	-3.4E-03
861	8.2E-03	8.7E-03	8.2E-03	1.0E-03	1.1E-03	9.2E-04	9.2E-04	-5.6E-03	-5.5E-03	-5.1E-03	-4.6E-03	-4.1E-03	-3.7E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
862	4.1E-03	4.6E-03	3.2E-03	9.9E-04	1.2E-03	8.8E-04	8.8E-04	-4.6E-03	-4.6E-03	-4.3E-03	-3.9E-03	-3.6E-03	-3.2E-03
863	4.9E-03	5.4E-03	3.6E-03	1.0E-03	1.2E-03	9.0E-04	8.9E-04	-4.8E-03	-4.8E-03	-4.5E-03	-4.1E-03	-3.8E-03	-3.4E-03
864	6.7E-03	7.2E-03	5.1E-03	1.0E-03	1.2E-03	9.2E-04	9.2E-04	-4.9E-03	-5.2E-03	-5.0E-03	-4.8E-03	-4.6E-03	-4.4E-03
865	3.5E-03	4.0E-03	3.0E-03	9.9E-04	1.3E-03	8.9E-04	8.8E-04	-4.0E-03	-4.5E-03	-4.5E-03	-4.5E-03	-4.6E-03	-4.6E-03
866	5.1E-03	5.5E-03	3.9E-03	1.0E-03	1.3E-03	9.2E-04	9.1E-04	-4.2E-03	-4.8E-03	-5.1E-03	-5.3E-03	-5.5E-03	-5.7E-03
867	6.1E-03	6.6E-03	4.5E-03	1.0E-03	1.2E-03	9.2E-04	9.2E-04	-4.4E-03	-5.2E-03	-5.5E-03	-5.8E-03	-6.1E-03	-6.5E-03
868	3.6E-03	4.0E-03	2.9E-03	9.8E-04	1.3E-03	8.9E-04	8.8E-04	-3.5E-03	-4.1E-03	-4.3E-03	-4.4E-03	-4.6E-03	-4.7E-03
869	4.5E-03	4.9E-03	3.5E-03	1.0E-03	1.3E-03	9.1E-04	9.1E-04	-4.0E-03	-4.9E-03	-5.3E-03	-5.7E-03	-6.1E-03	-6.5E-03
870	5.3E-03	5.8E-03	4.1E-03	1.0E-03	1.2E-03	9.3E-04	9.2E-04	-5.5E-03	-6.4E-03	-6.9E-03	-7.4E-03	-7.9E-03	-8.4E-03
871	3.7E-03	4.1E-03	2.7E-03	9.7E-04	1.3E-03	8.8E-04	8.8E-04	-3.5E-03	-4.3E-03	-4.5E-03	-4.8E-03	-5.0E-03	-5.3E-03
872	4.8E-03	5.2E-03	3.7E-03	1.0E-03	1.3E-03	9.1E-04	9.1E-04	-6.1E-03	-7.0E-03	-7.5E-03	-8.0E-03	-8.5E-03	-8.9E-03
873	4.3E-03	4.7E-03	3.6E-03	9.7E-04	1.4E-03	9.0E-04	8.9E-04	-7.2E-03	-8.2E-03	-8.6E-03	-9.0E-03	-9.4E-03	-9.9E-03
874	4.7E-03	5.2E-03	4.3E-03	9.9E-04	1.3E-03	9.0E-04	9.0E-04	-8.3E-03	-9.2E-03	-9.6E-03	-1.0E-02	-1.0E-02	-1.1E-02
875	4.1E-03	4.5E-03	3.8E-03	9.6E-04	1.4E-03	9.2E-04	8.7E-04	-9.1E-03	-9.9E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02
876	3.8E-03	4.2E-03	4.0E-03	9.4E-04	1.4E-03	9.5E-04	8.7E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02
877	3.6E-03	4.0E-03	4.4E-03	9.2E-04	1.4E-03	9.9E-04	8.7E-04	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02
878	7.9E-03	8.0E-03	8.0E-03	9.8E-04	8.4E-04	7.5E-04	7.4E-04	-9.5E-03	-7.5E-03	-5.0E-03	-2.6E-03	-7.9E-05	2.4E-03
879	7.5E-03	9.1E-03	9.0E-03	9.8E-04	8.6E-04	7.7E-04	7.5E-04	-9.5E-03	-7.4E-03	-4.8E-03	-2.2E-03	3.7E-04	3.0E-03
880	8.5E-03	9.2E-03	9.0E-03	9.7E-04	8.5E-04	7.3E-04	7.3E-04	-8.5E-03	-7.0E-03	-5.0E-03	-3.0E-03	-1.1E-03	9.2E-04
881	8.6E-03	9.1E-03	8.9E-03	9.7E-04	8.3E-04	7.4E-04	7.4E-04	-8.8E-03	-7.1E-03	-5.0E-03	-2.9E-03	-8.5E-04	1.3E-03
882	7.5E-03	8.6E-03	8.4E-03	9.3E-04	9.3E-04	7.5E-04	7.5E-04	-8.9E-03	-7.6E-03	-5.9E-03	-4.3E-03	-2.6E-03	-9.4E-04
883	8.6E-03	9.5E-03	9.3E-03	9.6E-04	8.9E-04	7.6E-04	7.6E-04	-9.0E-03	-7.6E-03	-5.7E-03	-3.9E-03	-2.0E-03	-1.5E-04
884	9.2E-03	9.9E-03	9.8E-03	9.6E-04	8.4E-04	7.6E-04	7.6E-04	-8.9E-03	-7.5E-03	-5.6E-03	-3.8E-03	-1.9E-03	-3.7E-05
885	7.5E-03	8.7E-03	8.4E-03	9.5E-04	9.7E-04	7.8E-04	7.7E-04	-9.2E-03	-7.9E-03	-6.2E-03	-4.5E-03	-2.9E-03	-1.2E-03
886	8.8E-03	9.8E-03	9.6E-03	9.7E-04	9.2E-04	7.9E-04	7.9E-04	-9.4E-03	-8.1E-03	-6.3E-03	-4.6E-03	-2.9E-03	-1.1E-03
887	9.5E-03	1.0E-02	1.0E-02	9.7E-04	8.7E-04	7.9E-04	7.9E-04	-9.3E-03	-8.0E-03	-6.2E-03	-4.5E-03	-2.7E-03	-1.0E-03
888	8.7E-03	9.9E-03	9.6E-03	9.9E-04	9.7E-04	8.3E-04	8.2E-04	-9.5E-03	-8.3E-03	-6.8E-03	-5.2E-03	-3.7E-03	-2.1E-03
889	9.2E-03	1.0E-02	1.0E-02	9.9E-04	9.4E-04	8.2E-04	8.2E-04	-9.7E-03	-8.5E-03	-6.9E-03	-5.3E-03	-3.7E-03	-2.1E-03
890	8.7E-03	1.0E-02	9.8E-03	1.0E-03	1.0E-03	8.5E-04	8.4E-04	-8.9E-03	-8.0E-03	-6.7E-03	-5.4E-03	-4.1E-03	-2.9E-03
891	9.6E-03	1.1E-02	1.0E-02	1.0E-03	9.6E-04	8.5E-04	8.5E-04	-9.2E-03	-8.2E-03	-6.9E-03	-5.7E-03	-4.4E-03	-3.1E-03
892	5.6E-03	7.3E-03	7.1E-03	9.5E-04	1.0E-03	8.0E-04	8.0E-04	-8.8E-03	-7.7E-03	-6.3E-03	-4.9E-03	-3.5E-03	-2.0E-03
893	7.1E-03	8.6E-03	8.3E-03	9.7E-04	1.0E-03	8.1E-04	8.1E-04	-9.1E-03	-7.8E-03	-6.3E-03	-4.7E-03	-3.2E-03	-1.6E-03
894	5.4E-03	5.9E-03	5.7E-03	9.6E-04	1.1E-03	8.1E-04	8.1E-04	-8.3E-03	-7.4E-03	-6.2E-03	-5.0E-03	-3.8E-03	-2.6E-03
895	5.8E-03	7.3E-03	7.1E-03	9.7E-04	1.1E-03	8.3E-04	8.2E-04	-8.1E-03	-7.2E-03	-5.9E-03	-4.7E-03	-3.4E-03	-2.2E-03
896	6.7E-03	8.4E-03	8.2E-03	9.8E-04	1.0E-03	8.3E-04	8.3E-04	-8.2E-03	-7.3E-03	-6.1E-03	-4.8E-03	-3.6E-03	-2.3E-03
897	5.1E-03	5.6E-03	4.0E-03	9.6E-04	1.1E-03	8.3E-04	8.2E-04	-7.4E-03	-6.7E-03	-5.7E-03	-4.6E-03	-3.6E-03	-2.6E-03
898	1.9E-03	4.3E-03	2.1E-02	2.9E-02	1.1E-02	1.0E-02	9.4E-03	2.7E-03	1.8E-02	4.1E-02	6.4E-02	8.7E-02	1.1E-01
899	1.9E-03	4.2E-03	1.8E-02	2.5E-02	1.0E-02	9.6E-03	8.9E-03	-7.4E-03	9.0E-03	3.2E-02	5.4E-02	7.7E-02	9.9E-02
900	1.9E-03	4.5E-03	1.9E-02	2.9E-02	1.1E-02	9.9E-03	9.2E-03	-2.1E-02	6.0E-03	4.0E-02	7.4E-02	1.1E-01	1.4E-01
901	1.8E-03	4.2E-03	1.4E-02	2.1E-02	1.0E-02	9.2E-03	8.5E-03	-2.4E-02	-8.0E-04	2.8E-02	5.6E-02	8.5E-02	1.1E-01
902	1.8E-03	4.6E-03	2.5E-02	2.4E-02	1.0E-02	8.8E-03	8.1E-03	-4.3E-02	-5.5E-03	3.8E-02	8.1E-02	1.2E-01	1.7E-01

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
903	1.7E-03	4.1E-03	1.7E-02	1.5E-02	9.8E-03	8.7E-03	8.0E-03	-3.3E-02	-4.4E-03	2.9E-02	6.3E-02	9.7E-02	1.3E-01
904	1.7E-03	4.6E-03	2.8E-02	2.0E-02	9.8E-03	8.5E-03	7.8E-03	-5.2E-02	-1.3E-02	3.2E-02	7.7E-02	1.2E-01	1.7E-01
905	1.7E-03	4.3E-03	2.2E-02	1.6E-02	9.6E-03	8.5E-03	7.8E-03	-3.9E-02	-7.4E-03	2.9E-02	6.6E-02	1.0E-01	1.4E-01
906	1.6E-03	4.6E-03	2.9E-02	2.3E-02	1.0E-02	8.2E-03	7.6E-03	-3.8E-02	-1.6E-03	4.0E-02	8.1E-02	1.2E-01	1.6E-01
907	1.7E-03	4.3E-03	2.5E-02	1.7E-02	1.1E-02	8.2E-03	7.6E-03	-3.9E-02	-5.2E-03	3.4E-02	7.3E-02	1.1E-01	1.5E-01
908	1.6E-03	4.7E-03	2.6E-02	2.6E-02	1.1E-02	8.0E-03	7.4E-03	-1.7E-02	1.5E-02	5.1E-02	8.8E-02	1.2E-01	1.6E-01
909	1.6E-03	4.3E-03	2.2E-02	2.1E-02	1.2E-02	7.9E-03	7.3E-03	-2.3E-02	7.3E-03	4.3E-02	7.9E-02	1.1E-01	1.5E-01
910	1.1E-03	5.6E-03	7.4E-03	8.5E-03	9.3E-03	4.7E-03	4.3E-03	-1.1E-01	-9.5E-02	-7.8E-02	-6.1E-02	-4.3E-02	-2.6E-02
911	1.1E-03	6.3E-03	8.1E-03	8.8E-03	9.5E-03	4.7E-03	4.3E-03	-1.0E-01	-8.8E-02	-7.1E-02	-5.5E-02	-3.9E-02	-2.2E-02
912	1.1E-03	7.0E-03	9.1E-03	9.3E-03	9.0E-03	4.6E-03	3.9E-03	-9.2E-02	-8.1E-02	-6.7E-02	-5.3E-02	-3.9E-02	-2.5E-02
913	1.1E-03	7.1E-03	9.0E-03	9.2E-03	9.7E-03	4.7E-03	4.4E-03	-9.7E-02	-8.4E-02	-6.9E-02	-5.3E-02	-3.7E-02	-2.2E-02
914	1.1E-03	7.7E-03	1.0E-02	1.0E-02	9.2E-03	4.7E-03	4.0E-03	-8.3E-02	-7.3E-02	-6.1E-02	-4.8E-02	-3.5E-02	-2.3E-02
915	1.2E-03	7.9E-03	1.0E-02	1.0E-02	9.9E-03	4.8E-03	4.4E-03	-9.4E-02	-8.2E-02	-6.6E-02	-5.1E-02	-3.5E-02	-2.0E-02
916	1.1E-03	8.4E-03	1.1E-02	1.1E-02	9.2E-03	4.8E-03	4.1E-03	-7.9E-02	-7.0E-02	-5.8E-02	-4.6E-02	-3.4E-02	-2.2E-02
917	1.1E-03	8.5E-03	1.1E-02	1.2E-02	9.3E-03	4.8E-03	4.1E-03	-6.6E-02	-6.0E-02	-5.1E-02	-4.2E-02	-3.2E-02	-2.3E-02
918	1.2E-03	8.8E-03	1.1E-02	1.1E-02	1.0E-02	4.9E-03	4.4E-03	-1.0E-01	-8.7E-02	-7.1E-02	-5.6E-02	-4.0E-02	-2.4E-02
919	1.1E-03	9.1E-03	1.2E-02	1.2E-02	9.7E-03	4.9E-03	4.2E-03	-8.0E-02	-7.1E-02	-5.9E-02	-4.7E-02	-3.4E-02	-2.2E-02
920	1.1E-03	9.0E-03	1.2E-02	1.2E-02	9.8E-03	4.9E-03	4.2E-03	-6.6E-02	-5.9E-02	-5.0E-02	-4.1E-02	-3.2E-02	-2.3E-02
921	1.2E-03	9.7E-03	1.2E-02	1.2E-02	1.0E-02	5.0E-03	4.4E-03	-1.0E-01	-9.2E-02	-7.6E-02	-6.1E-02	-4.6E-02	-3.1E-02
922	1.2E-03	9.8E-03	1.3E-02	1.3E-02	1.0E-02	5.0E-03	4.3E-03	-8.7E-02	-7.6E-02	-6.2E-02	-4.8E-02	-3.5E-02	-2.1E-02
923	1.1E-03	9.4E-03	1.3E-02	1.3E-02	1.0E-02	4.9E-03	4.3E-03	-6.8E-02	-6.0E-02	-5.0E-02	-4.0E-02	-2.9E-02	-1.9E-02
924	1.2E-03	1.1E-02	1.3E-02	1.4E-02	1.1E-02	5.1E-03	4.3E-03	-1.0E-01	-9.1E-02	-7.8E-02	-6.4E-02	-5.1E-02	-3.8E-02
925	1.2E-03	1.0E-02	1.3E-02	1.4E-02	1.1E-02	5.1E-03	4.4E-03	-8.7E-02	-7.7E-02	-6.3E-02	-5.0E-02	-3.6E-02	-2.3E-02
926	1.1E-03	9.7E-03	1.3E-02	1.4E-02	1.0E-02	5.0E-03	4.3E-03	-6.9E-02	-6.0E-02	-4.9E-02	-3.7E-02	-2.6E-02	-1.4E-02
927	1.2E-03	1.1E-02	1.4E-02	1.5E-02	1.2E-02	5.2E-03	4.4E-03	-9.6E-02	-8.9E-02	-7.8E-02	-6.8E-02	-5.7E-02	-4.6E-02
928	1.2E-03	1.1E-02	1.4E-02	1.5E-02	1.1E-02	5.1E-03	4.4E-03	-8.3E-02	-7.4E-02	-6.3E-02	-5.1E-02	-4.0E-02	-2.8E-02
929	1.1E-03	9.8E-03	1.3E-02	1.4E-02	1.0E-02	5.0E-03	4.4E-03	-6.7E-02	-5.9E-02	-4.8E-02	-3.6E-02	-2.5E-02	-1.4E-02
930	1.2E-03	1.2E-02	1.5E-02	1.6E-02	1.2E-02	5.3E-03	4.5E-03	-8.6E-02	-8.3E-02	-7.6E-02	-6.9E-02	-6.2E-02	-5.5E-02
931	1.2E-03	1.1E-02	1.5E-02	1.5E-02	1.1E-02	5.2E-03	4.5E-03	-7.5E-02	-7.0E-02	-6.2E-02	-5.3E-02	-4.5E-02	-3.7E-02
932	1.3E-03	1.3E-02	1.7E-02	1.7E-02	1.3E-02	5.4E-03	4.6E-03	-7.1E-02	-7.4E-02	-7.3E-02	-7.3E-02	-7.2E-02	-7.2E-02
933	1.3E-03	1.3E-02	1.6E-02	1.7E-02	1.3E-02	5.4E-03	4.6E-03	-6.9E-02	-7.1E-02	-7.0E-02	-6.8E-02	-6.7E-02	-6.5E-02
934	1.2E-03	1.1E-02	1.5E-02	1.5E-02	1.1E-02	5.3E-03	4.6E-03	-6.3E-02	-6.2E-02	-5.9E-02	-5.5E-02	-5.2E-02	-4.8E-02
935	1.3E-03	1.4E-02	1.7E-02	1.8E-02	1.4E-02	5.5E-03	4.7E-03	-6.1E-02	-6.5E-02	-6.5E-02	-6.5E-02	-6.5E-02	-6.5E-02
936	1.3E-03	1.3E-02	1.7E-02	1.7E-02	1.3E-02	5.4E-03	4.7E-03	-5.5E-02	-5.9E-02	-5.9E-02	-5.9E-02	-6.0E-02	-6.0E-02
937	1.3E-03	1.4E-02	1.8E-02	1.8E-02	1.4E-02	5.6E-03	4.8E-03	-5.2E-02	-5.6E-02	-5.6E-02	-5.6E-02	-5.6E-02	-5.7E-02
938	9.8E-04	4.2E-03	7.1E-03	8.6E-03	8.9E-03	4.7E-03	4.4E-03	-2.3E-01	-2.1E-01	-1.8E-01	-1.6E-01	-1.3E-01	-1.0E-01
939	9.3E-04	3.8E-03	7.1E-03	8.5E-03	8.9E-03	4.6E-03	4.3E-03	-2.1E-01	-1.9E-01	-1.7E-01	-1.5E-01	-1.2E-01	-1.0E-01
940	9.4E-04	3.7E-03	7.1E-03	8.5E-03	9.0E-03	4.5E-03	4.2E-03	-1.9E-01	-1.8E-01	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01
941	9.3E-04	3.7E-03	6.7E-03	8.1E-03	8.6E-03	4.3E-03	4.0E-03	-1.8E-01	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01	-1.3E-01
942	9.4E-04	3.7E-03	6.8E-03	8.2E-03	8.7E-03	4.4E-03	4.1E-03	-1.9E-01	-1.8E-01	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01
943	9.6E-04	3.8E-03	6.9E-03	8.4E-03	8.9E-03	4.4E-03	4.1E-03	-2.0E-01	-1.8E-01	-1.7E-01	-1.5E-01	-1.4E-01	-1.2E-01

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
944	9.3E-04	3.6E-03	6.2E-03	7.6E-03	8.1E-03	4.1E-03	3.8E-03	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01	-1.2E-01	-1.1E-01
945	9.4E-04	3.6E-03	6.3E-03	7.7E-03	8.2E-03	4.2E-03	3.9E-03	-1.6E-01	-1.4E-01	-1.2E-01	-1.0E-01	-8.0E-02	-5.8E-02
946	9.6E-04	3.7E-03	6.4E-03	7.8E-03	8.4E-03	4.2E-03	3.9E-03	-1.5E-01	-1.3E-01	-1.1E-01	-8.9E-02	-6.7E-02	-4.6E-02
947	9.2E-04	3.5E-03	5.8E-03	7.1E-03	7.6E-03	3.9E-03	3.7E-03	-1.4E-01	-1.3E-01	-1.1E-01	-8.6E-02	-6.7E-02	-4.7E-02
948	9.7E-04	3.8E-03	6.5E-03	7.9E-03	8.5E-03	4.3E-03	4.0E-03	-1.4E-01	-1.3E-01	-1.1E-01	-9.9E-02	-8.4E-02	-6.8E-02
949	9.3E-04	3.5E-03	5.8E-03	7.1E-03	7.7E-03	4.0E-03	3.7E-03	-1.4E-01	-1.2E-01	-1.1E-01	-9.0E-02	-7.4E-02	-5.8E-02
950	9.9E-04	3.8E-03	6.6E-03	8.0E-03	8.6E-03	4.3E-03	4.0E-03	-1.3E-01	-1.2E-01	-1.0E-01	-9.0E-02	-7.6E-02	-6.2E-02
951	9.4E-04	3.6E-03	5.8E-03	7.1E-03	7.7E-03	4.0E-03	3.7E-03	-1.2E-01	-1.1E-01	-9.7E-02	-8.2E-02	-6.7E-02	-5.2E-02
952	1.0E-03	3.9E-03	6.6E-03	8.0E-03	8.7E-03	4.3E-03	4.0E-03	-1.3E-01	-1.1E-01	-9.5E-02	-7.8E-02	-6.0E-02	-4.3E-02
953	9.5E-04	3.7E-03	5.7E-03	7.1E-03	7.7E-03	4.0E-03	3.7E-03	-1.2E-01	-1.0E-01	-8.6E-02	-6.9E-02	-5.1E-02	-3.3E-02
954	1.0E-03	4.0E-03	6.6E-03	8.0E-03	8.7E-03	4.4E-03	4.1E-03	-1.2E-01	-1.0E-01	-8.1E-02	-6.2E-02	-4.2E-02	-2.3E-02
955	9.6E-04	3.7E-03	5.9E-03	7.0E-03	7.6E-03	4.0E-03	3.7E-03	-1.1E-01	-9.1E-02	-7.2E-02	-5.4E-02	-3.5E-02	-1.6E-02
956	1.0E-03	4.1E-03	6.6E-03	8.0E-03	8.7E-03	4.4E-03	4.1E-03	-1.1E-01	-9.6E-02	-7.6E-02	-5.7E-02	-3.8E-02	-1.8E-02
957	1.0E-03	4.1E-03	6.6E-03	8.0E-03	8.7E-03	4.4E-03	4.1E-03	-1.2E-01	-9.8E-02	-7.8E-02	-5.8E-02	-3.8E-02	-1.8E-02
958	1.0E-03	4.2E-03	6.6E-03	8.0E-03	8.7E-03	4.4E-03	4.1E-03	-1.2E-01	-9.8E-02	-7.9E-02	-5.9E-02	-3.9E-02	-1.9E-02
959	1.0E-03	4.7E-03	6.8E-03	7.9E-03	8.7E-03	4.4E-03	4.1E-03	-1.3E-01	-1.1E-01	-9.0E-02	-6.8E-02	-4.6E-02	-2.4E-02
960	1.1E-03	5.3E-03	7.0E-03	8.1E-03	8.8E-03	4.4E-03	4.1E-03	-1.3E-01	-1.1E-01	-9.2E-02	-7.1E-02	-4.9E-02	-2.8E-02
961	9.6E-04	4.5E-03	6.1E-03	7.0E-03	7.7E-03	4.2E-03	3.5E-03	-9.9E-02	-8.4E-02	-6.7E-02	-5.0E-02	-3.3E-02	-1.5E-02
962	9.7E-04	5.0E-03	6.6E-03	7.1E-03	7.8E-03	4.2E-03	3.5E-03	-1.0E-01	-8.7E-02	-6.9E-02	-5.1E-02	-3.4E-02	-1.6E-02
963	9.9E-04	5.5E-03	7.3E-03	7.5E-03	7.9E-03	4.3E-03	3.6E-03	-1.1E-01	-9.6E-02	-7.6E-02	-5.6E-02	-3.7E-02	-1.7E-02
964	9.5E-04	2.8E-03	5.0E-03	6.0E-03	8.1E-03	5.9E-03	5.6E-03	-1.7E-02	-2.4E-02	-2.9E-02	-3.4E-02	-3.9E-02	-4.4E-02
965	9.4E-04	2.9E-03	5.1E-03	5.8E-03	7.5E-03	5.2E-03	4.9E-03	-1.1E-02	-1.9E-02	-2.6E-02	-3.2E-02	-3.8E-02	-4.4E-02
966	9.3E-04	3.0E-03	5.1E-03	5.9E-03	7.0E-03	4.5E-03	4.3E-03	-2.1E-03	-1.3E-02	-2.1E-02	-3.0E-02	-3.8E-02	-4.6E-02
967	9.2E-04	3.1E-03	5.1E-03	6.0E-03	6.4E-03	3.8E-03	3.5E-03	4.4E-03	-7.5E-03	-1.7E-02	-2.7E-02	-3.7E-02	-4.6E-02
968	9.0E-04	3.1E-03	5.1E-03	6.0E-03	6.3E-03	3.6E-03	3.4E-03	-5.3E-03	-1.5E-02	-2.3E-02	-3.1E-02	-3.9E-02	-4.7E-02
969	8.7E-04	3.1E-03	5.0E-03	6.0E-03	6.3E-03	3.5E-03	3.5E-03	-1.9E-02	-2.5E-02	-2.9E-02	-3.3E-02	-3.8E-02	-4.2E-02
970	8.2E-04	3.0E-03	4.7E-03	5.8E-03	6.2E-03	3.4E-03	3.4E-03	-3.4E-02	-3.6E-02	-3.6E-02	-3.6E-02	-3.6E-02	-3.6E-02
971	8.0E-04	2.9E-03	4.6E-03	5.8E-03	6.1E-03	3.3E-03	3.3E-03	-3.8E-02	-4.0E-02	-3.9E-02	-3.9E-02	-3.9E-02	-3.9E-02
972	7.6E-04	2.8E-03	4.5E-03	5.6E-03	5.9E-03	3.2E-03	3.0E-03	-4.4E-02	-4.5E-02	-4.4E-02	-4.2E-02	-4.1E-02	-4.0E-02
973	9.5E-04	2.8E-03	5.0E-03	6.2E-03	8.5E-03	6.3E-03	6.1E-03	-1.9E-02	-2.5E-02	-3.0E-02	-3.4E-02	-3.9E-02	-4.3E-02
974	9.5E-04	2.9E-03	5.1E-03	6.0E-03	8.0E-03	5.7E-03	5.3E-03	-1.1E-02	-1.9E-02	-2.5E-02	-3.1E-02	-3.7E-02	-4.2E-02
975	9.4E-04	3.0E-03	5.1E-03	6.0E-03	7.1E-03	4.6E-03	4.3E-03	-1.0E-03	-1.1E-02	-2.0E-02	-2.8E-02	-3.6E-02	-4.4E-02
976	9.3E-04	3.1E-03	5.2E-03	6.1E-03	6.5E-03	4.0E-03	4.0E-03	3.8E-03	-7.5E-03	-1.7E-02	-2.6E-02	-3.5E-02	-4.4E-02
977	9.1E-04	3.1E-03	5.1E-03	6.1E-03	6.4E-03	4.0E-03	4.0E-03	-7.2E-03	-1.7E-02	-2.4E-02	-3.1E-02	-3.8E-02	-4.6E-02
978	8.8E-04	3.1E-03	5.0E-03	6.0E-03	6.3E-03	3.8E-03	3.8E-03	-2.2E-02	-2.7E-02	-3.1E-02	-3.4E-02	-3.7E-02	-4.1E-02
979	8.3E-04	3.0E-03	4.8E-03	5.9E-03	6.2E-03	3.4E-03	3.2E-03	-3.5E-02	-3.8E-02	-3.8E-02	-3.9E-02	-3.9E-02	-4.0E-02
980	8.0E-04	3.0E-03	4.7E-03	5.8E-03	6.2E-03	3.3E-03	3.1E-03	-4.0E-02	-4.2E-02	-4.2E-02	-4.1E-02	-4.1E-02	-4.1E-02
981	7.7E-04	2.8E-03	4.5E-03	5.7E-03	6.0E-03	3.3E-03	3.0E-03	-4.6E-02	-4.7E-02	-4.6E-02	-4.4E-02	-4.3E-02	-4.1E-02
982	7.4E-04	2.7E-03	4.3E-03	5.4E-03	5.8E-03	3.4E-03	3.0E-03	-5.1E-02	-5.0E-02	-4.8E-02	-4.5E-02	-4.3E-02	-4.0E-02
983	9.5E-04	3.0E-03	5.1E-03	6.1E-03	8.3E-03	5.9E-03	5.6E-03	-1.1E-02	-1.8E-02	-2.4E-02	-2.9E-02	-3.5E-02	-4.0E-02
984	9.5E-04	3.1E-03	5.2E-03	6.1E-03	7.0E-03	5.3E-03	5.3E-03	3.2E-04	-9.9E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.2E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
985	9.3E-04	3.1E-03	5.2E-03	6.1E-03	6.6E-03	5.2E-03	5.2E-03	3.0E-03	-7.8E-03	-1.6E-02	-2.5E-02	-3.4E-02	-4.3E-02
986	9.1E-04	3.1E-03	5.1E-03	6.1E-03	6.5E-03	4.7E-03	4.7E-03	-9.8E-03	-1.8E-02	-2.5E-02	-3.1E-02	-3.8E-02	-4.4E-02
987	8.8E-04	3.1E-03	5.1E-03	6.1E-03	6.5E-03	4.0E-03	4.0E-03	-2.5E-02	-3.0E-02	-3.3E-02	-3.5E-02	-3.8E-02	-4.1E-02
988	8.3E-04	3.1E-03	4.8E-03	6.0E-03	6.4E-03	3.5E-03	3.2E-03	-3.8E-02	-4.0E-02	-4.1E-02	-4.1E-02	-4.2E-02	-4.2E-02
989	8.1E-04	3.0E-03	4.7E-03	5.9E-03	6.3E-03	3.4E-03	3.1E-03	-4.3E-02	-4.5E-02	-4.4E-02	-4.4E-02	-4.3E-02	-4.3E-02
990	7.7E-04	2.9E-03	4.6E-03	5.7E-03	6.1E-03	3.4E-03	3.0E-03	-4.8E-02	-4.9E-02	-4.7E-02	-4.6E-02	-4.4E-02	-4.3E-02
991	7.4E-04	2.7E-03	4.4E-03	5.5E-03	5.9E-03	3.4E-03	3.0E-03	-5.3E-02	-5.2E-02	-5.0E-02	-4.7E-02	-4.4E-02	-4.2E-02
992	7.1E-04	2.6E-03	4.4E-03	5.5E-03	5.6E-03	3.4E-03	3.1E-03	-6.4E-02	-6.0E-02	-5.5E-02	-4.9E-02	-4.3E-02	-3.8E-02
993	9.4E-04	3.2E-03	5.3E-03	6.2E-03	6.6E-03	6.1E-03	6.1E-03	1.9E-03	-8.6E-03	-1.7E-02	-2.5E-02	-3.4E-02	-4.2E-02
994	9.2E-04	3.2E-03	5.2E-03	6.2E-03	6.6E-03	4.8E-03	4.8E-03	-1.3E-02	-2.1E-02	-2.6E-02	-3.2E-02	-3.8E-02	-4.3E-02
995	8.9E-04	3.2E-03	5.1E-03	6.2E-03	6.5E-03	3.8E-03	3.8E-03	-2.7E-02	-3.2E-02	-3.5E-02	-3.7E-02	-3.9E-02	-4.2E-02
996	8.4E-04	3.1E-03	4.9E-03	6.1E-03	6.5E-03	3.5E-03	3.2E-03	-4.1E-02	-4.4E-02	-4.4E-02	-4.4E-02	-4.4E-02	-4.5E-02
997	8.2E-04	3.1E-03	4.8E-03	6.0E-03	6.3E-03	3.4E-03	3.2E-03	-4.6E-02	-4.7E-02	-4.7E-02	-4.6E-02	-4.6E-02	-4.5E-02
998	7.8E-04	2.9E-03	4.6E-03	5.8E-03	6.2E-03	3.4E-03	3.0E-03	-5.1E-02	-5.1E-02	-4.9E-02	-4.8E-02	-4.6E-02	-4.4E-02
999	7.5E-04	2.7E-03	4.5E-03	5.6E-03	5.9E-03	3.4E-03	3.1E-03	-5.5E-02	-5.4E-02	-5.2E-02	-4.9E-02	-4.6E-02	-4.3E-02
1000	7.2E-04	2.7E-03	4.5E-03	5.6E-03	5.8E-03	3.4E-03	3.1E-03	-6.8E-02	-6.3E-02	-5.7E-02	-5.1E-02	-4.4E-02	-3.8E-02
1001	9.0E-04	3.2E-03	5.2E-03	6.3E-03	6.7E-03	3.7E-03	3.4E-03	-3.1E-02	-3.5E-02	-3.7E-02	-3.9E-02	-4.2E-02	-4.4E-02
1002	8.5E-04	3.2E-03	5.0E-03	6.1E-03	6.6E-03	3.6E-03	3.3E-03	-4.4E-02	-4.6E-02	-4.6E-02	-4.6E-02	-4.6E-02	-4.6E-02
1003	8.2E-04	3.1E-03	4.9E-03	6.1E-03	6.4E-03	3.4E-03	3.2E-03	-4.9E-02	-5.0E-02	-4.9E-02	-4.8E-02	-4.8E-02	-4.7E-02
1004	7.9E-04	3.0E-03	4.7E-03	5.9E-03	6.3E-03	3.4E-03	3.1E-03	-5.3E-02	-5.3E-02	-5.1E-02	-5.0E-02	-4.8E-02	-4.6E-02
1005	7.6E-04	2.8E-03	4.5E-03	5.6E-03	6.0E-03	3.4E-03	3.1E-03	-5.7E-02	-5.6E-02	-5.3E-02	-5.0E-02	-4.7E-02	-4.4E-02
1006	7.2E-04	2.7E-03	4.6E-03	5.7E-03	5.9E-03	3.5E-03	3.2E-03	-7.0E-02	-6.6E-02	-5.9E-02	-5.2E-02	-4.6E-02	-3.9E-02
1007	8.6E-04	3.2E-03	5.0E-03	6.2E-03	6.6E-03	3.5E-03	3.3E-03	-4.8E-02	-5.0E-02	-5.0E-02	-5.0E-02	-4.9E-02	-4.9E-02
1008	8.3E-04	3.2E-03	4.9E-03	6.1E-03	6.5E-03	3.5E-03	3.2E-03	-5.1E-02	-5.2E-02	-5.1E-02	-5.1E-02	-5.0E-02	-4.9E-02
1009	8.0E-04	3.0E-03	4.8E-03	5.9E-03	6.3E-03	3.4E-03	3.1E-03	-5.5E-02	-5.5E-02	-5.3E-02	-5.1E-02	-5.0E-02	-4.8E-02
1010	7.6E-04	2.8E-03	4.6E-03	5.7E-03	6.1E-03	3.5E-03	3.2E-03	-6.0E-02	-5.9E-02	-5.5E-02	-5.1E-02	-4.7E-02	-4.4E-02
1011	7.3E-04	2.7E-03	4.7E-03	5.8E-03	6.0E-03	3.5E-03	3.2E-03	-7.4E-02	-6.9E-02	-6.2E-02	-5.5E-02	-4.8E-02	-4.0E-02
1012	8.7E-04	3.3E-03	5.1E-03	6.3E-03	6.7E-03	3.6E-03	3.4E-03	-5.1E-02	-5.3E-02	-5.3E-02	-5.2E-02	-5.2E-02	-5.1E-02
1013	8.4E-04	3.2E-03	5.0E-03	6.2E-03	6.6E-03	3.5E-03	3.3E-03	-5.3E-02	-5.4E-02	-5.4E-02	-5.3E-02	-5.2E-02	-5.1E-02
1014	8.1E-04	3.1E-03	4.9E-03	6.0E-03	6.4E-03	3.5E-03	3.2E-03	-5.7E-02	-5.7E-02	-5.5E-02	-5.3E-02	-5.1E-02	-4.9E-02
1015	7.7E-04	2.9E-03	4.6E-03	5.8E-03	6.2E-03	3.5E-03	3.2E-03	-6.3E-02	-6.1E-02	-5.7E-02	-5.2E-02	-4.8E-02	-4.3E-02
1016	7.4E-04	2.8E-03	4.8E-03	5.9E-03	6.1E-03	3.5E-03	3.3E-03	-7.7E-02	-7.1E-02	-6.4E-02	-5.7E-02	-4.9E-02	-4.2E-02
1017	8.8E-04	3.4E-03	5.2E-03	6.5E-03	6.9E-03	3.6E-03	3.4E-03	-5.5E-02	-5.7E-02	-5.6E-02	-5.6E-02	-5.5E-02	-5.4E-02
1018	8.6E-04	3.3E-03	5.2E-03	6.4E-03	6.8E-03	3.6E-03	3.3E-03	-5.7E-02	-5.8E-02	-5.7E-02	-5.6E-02	-5.5E-02	-5.4E-02
1019	8.3E-04	3.1E-03	5.0E-03	6.2E-03	6.6E-03	3.5E-03	3.2E-03	-6.1E-02	-6.1E-02	-5.8E-02	-5.6E-02	-5.4E-02	-5.2E-02
1020	7.9E-04	3.0E-03	4.8E-03	5.9E-03	6.3E-03	3.6E-03	3.3E-03	-6.9E-02	-6.6E-02	-6.0E-02	-5.5E-02	-4.9E-02	-4.4E-02
1021	7.5E-04	2.8E-03	4.9E-03	6.1E-03	6.2E-03	3.6E-03	3.3E-03	-7.9E-02	-7.4E-02	-6.7E-02	-6.0E-02	-5.3E-02	-4.6E-02
1022	9.5E-04	3.5E-03	5.6E-03	6.8E-03	7.1E-03	3.8E-03	3.6E-03	-5.2E-02	-5.5E-02	-5.6E-02	-5.7E-02	-5.7E-02	-5.8E-02
1023	8.8E-04	3.4E-03	5.3E-03	6.5E-03	6.9E-03	3.6E-03	3.4E-03	-6.0E-02	-6.1E-02	-6.0E-02	-5.9E-02	-5.8E-02	-5.6E-02
1024	8.4E-04	3.2E-03	5.1E-03	6.3E-03	6.7E-03	3.6E-03	3.3E-03	-6.3E-02	-6.3E-02	-6.0E-02	-5.8E-02	-5.5E-02	-5.2E-02
1025	8.0E-04	3.0E-03	4.9E-03	6.1E-03	6.5E-03	3.6E-03	3.3E-03	-7.4E-02	-7.0E-02	-6.3E-02	-5.7E-02	-5.0E-02	-4.4E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1026	7.5E-04	2.9E-03	5.0E-03	6.2E-03	6.4E-03	3.6E-03	3.4E-03	-8.0E-02	-7.6E-02	-7.0E-02	-6.4E-02	-5.7E-02	-5.1E-02
1027	9.7E-04	3.6E-03	5.7E-03	6.9E-03	7.3E-03	3.9E-03	3.7E-03	-5.8E-02	-6.0E-02	-6.1E-02	-6.1E-02	-6.1E-02	-6.2E-02
1028	8.9E-04	3.5E-03	5.4E-03	6.7E-03	7.1E-03	3.7E-03	3.4E-03	-6.3E-02	-6.4E-02	-6.3E-02	-6.1E-02	-6.0E-02	-5.9E-02
1029	8.5E-04	3.3E-03	5.2E-03	6.4E-03	6.8E-03	3.6E-03	3.4E-03	-6.7E-02	-6.6E-02	-6.2E-02	-5.9E-02	-5.6E-02	-5.2E-02
1030	8.1E-04	3.1E-03	5.0E-03	6.2E-03	6.5E-03	3.7E-03	3.4E-03	-7.8E-02	-7.3E-02	-6.6E-02	-5.8E-02	-5.1E-02	-4.3E-02
1031	7.6E-04	2.9E-03	5.1E-03	6.3E-03	6.5E-03	3.7E-03	3.4E-03	-8.3E-02	-8.0E-02	-7.4E-02	-6.8E-02	-6.3E-02	-5.7E-02
1032	9.8E-04	3.7E-03	5.8E-03	7.1E-03	7.5E-03	4.0E-03	3.7E-03	-6.2E-02	-6.5E-02	-6.5E-02	-6.5E-02	-6.5E-02	-6.5E-02
1033	9.0E-04	3.5E-03	5.5E-03	6.8E-03	7.2E-03	3.7E-03	3.5E-03	-6.5E-02	-6.6E-02	-6.5E-02	-6.4E-02	-6.2E-02	-6.1E-02
1034	8.6E-04	3.3E-03	5.3E-03	6.5E-03	7.0E-03	3.7E-03	3.4E-03	-7.1E-02	-6.9E-02	-6.5E-02	-6.1E-02	-5.6E-02	-5.2E-02
1035	8.2E-04	3.1E-03	5.1E-03	6.3E-03	6.6E-03	3.7E-03	3.5E-03	-7.9E-02	-7.4E-02	-6.7E-02	-6.1E-02	-5.4E-02	-4.7E-02
1036	7.7E-04	2.9E-03	5.2E-03	6.4E-03	6.6E-03	3.7E-03	3.5E-03	-8.6E-02	-8.3E-02	-7.8E-02	-7.4E-02	-6.9E-02	-6.4E-02
1037	1.0E-03	3.8E-03	5.9E-03	7.2E-03	7.6E-03	4.0E-03	3.8E-03	-6.6E-02	-6.8E-02	-6.8E-02	-6.8E-02	-6.8E-02	-6.8E-02
1038	9.2E-04	3.6E-03	5.6E-03	6.9E-03	7.4E-03	3.8E-03	3.6E-03	-6.9E-02	-7.0E-02	-6.8E-02	-6.6E-02	-6.4E-02	-6.2E-02
1039	8.7E-04	3.4E-03	5.4E-03	6.6E-03	7.1E-03	3.8E-03	3.5E-03	-7.5E-02	-7.2E-02	-6.7E-02	-6.2E-02	-5.7E-02	-5.2E-02
1040	8.3E-04	3.2E-03	5.3E-03	6.5E-03	6.8E-03	3.8E-03	3.5E-03	-8.2E-02	-7.8E-02	-7.1E-02	-6.5E-02	-5.8E-02	-5.1E-02
1041	7.8E-04	3.0E-03	5.3E-03	6.6E-03	6.8E-03	3.8E-03	3.5E-03	-8.9E-02	-8.7E-02	-8.3E-02	-7.8E-02	-7.4E-02	-7.0E-02
1042	9.3E-04	3.7E-03	5.7E-03	7.0E-03	7.5E-03	3.9E-03	3.6E-03	-7.3E-02	-7.3E-02	-7.0E-02	-6.7E-02	-6.4E-02	-6.2E-02
1043	8.9E-04	3.5E-03	5.5E-03	6.8E-03	7.2E-03	3.8E-03	3.6E-03	-7.8E-02	-7.5E-02	-7.0E-02	-6.5E-02	-6.0E-02	-5.5E-02
1044	8.4E-04	3.2E-03	5.4E-03	6.6E-03	6.9E-03	3.9E-03	3.6E-03	-8.5E-02	-8.2E-02	-7.6E-02	-7.0E-02	-6.4E-02	-5.8E-02
1045	9.4E-04	3.8E-03	5.8E-03	7.2E-03	7.6E-03	3.9E-03	3.6E-03	-7.6E-02	-7.5E-02	-7.2E-02	-6.8E-02	-6.5E-02	-6.2E-02
1046	9.0E-04	3.5E-03	5.6E-03	6.9E-03	7.4E-03	3.9E-03	3.6E-03	-8.0E-02	-7.7E-02	-7.3E-02	-6.8E-02	-6.3E-02	-5.8E-02
1047	1.0E-03	4.5E-03	6.9E-03	8.4E-03	9.0E-03	4.6E-03	4.3E-03	-1.8E-01	-1.6E-01	-1.4E-01	-1.2E-01	-1.0E-01	-8.5E-02
1048	9.6E-04	4.1E-03	6.9E-03	8.4E-03	8.7E-03	4.6E-03	4.3E-03	-1.7E-01	-1.6E-01	-1.4E-01	-1.3E-01	-1.1E-01	-9.8E-02
1049	1.1E-03	4.5E-03	6.8E-03	8.3E-03	8.9E-03	4.4E-03	4.1E-03	-1.1E-01	-1.0E-01	-1.0E-01	-9.6E-02	-9.1E-02	-8.7E-02
1050	9.9E-04	4.2E-03	6.5E-03	7.9E-03	8.5E-03	4.4E-03	4.1E-03	-1.2E-01	-1.1E-01	-1.0E-01	-9.5E-02	-8.6E-02	-7.8E-02
1051	9.2E-04	3.8E-03	6.5E-03	7.9E-03	8.1E-03	4.4E-03	4.1E-03	-1.3E-01	-1.2E-01	-1.1E-01	-1.1E-01	-9.8E-02	-9.1E-02
1052	1.0E-03	4.3E-03	6.6E-03	8.1E-03	8.7E-03	4.5E-03	4.2E-03	-1.4E-01	-1.3E-01	-1.2E-01	-1.0E-01	-9.1E-02	-7.8E-02
1053	9.3E-04	3.9E-03	6.7E-03	8.1E-03	8.4E-03	4.4E-03	4.1E-03	-1.4E-01	-1.3E-01	-1.2E-01	-1.1E-01	-1.0E-01	-9.6E-02
1054	8.8E-04	3.6E-03	6.7E-03	8.1E-03	8.4E-03	4.4E-03	4.1E-03	-1.3E-01	-1.3E-01	-1.1E-01	-1.0E-01	-9.1E-02	-7.9E-02
1055	8.9E-04	3.4E-03	6.5E-03	7.9E-03	8.3E-03	4.3E-03	4.0E-03	-1.3E-01	-1.2E-01	-1.1E-01	-9.4E-02	-8.0E-02	-6.6E-02
1056	9.0E-04	3.6E-03	6.8E-03	8.2E-03	8.6E-03	4.4E-03	4.1E-03	-1.6E-01	-1.4E-01	-1.2E-01	-1.1E-01	-9.0E-02	-7.2E-02
1057	9.0E-04	3.5E-03	6.7E-03	8.0E-03	8.4E-03	4.3E-03	4.0E-03	-1.6E-01	-1.4E-01	-1.3E-01	-1.1E-01	-9.7E-02	-8.1E-02
1058	9.2E-04	3.6E-03	6.8E-03	8.2E-03	8.6E-03	4.4E-03	4.1E-03	-1.7E-01	-1.6E-01	-1.5E-01	-1.4E-01	-1.2E-01	-1.1E-01
1059	9.1E-04	3.5E-03	6.5E-03	7.9E-03	8.3E-03	4.2E-03	3.9E-03	-1.7E-01	-1.6E-01	-1.5E-01	-1.3E-01	-1.2E-01	-1.1E-01
1060	8.4E-04	3.3E-03	5.6E-03	6.9E-03	7.1E-03	3.9E-03	3.7E-03	-9.1E-02	-8.9E-02	-8.5E-02	-8.0E-02	-7.6E-02	-7.1E-02
1061	1.0E-03	4.0E-03	6.1E-03	7.5E-03	8.0E-03	4.1E-03	3.9E-03	-7.7E-02	-7.8E-02	-7.6E-02	-7.3E-02	-7.1E-02	-6.9E-02
1062	9.4E-04	3.8E-03	5.9E-03	7.2E-03	7.8E-03	3.9E-03	3.6E-03	-7.8E-02	-7.7E-02	-7.4E-02	-7.1E-02	-6.8E-02	-6.4E-02
1063	9.0E-04	3.6E-03	5.6E-03	6.9E-03	7.4E-03	4.0E-03	3.7E-03	-8.6E-02	-8.4E-02	-7.9E-02	-7.5E-02	-7.0E-02	-6.5E-02
1064	8.4E-04	3.3E-03	5.7E-03	7.0E-03	7.2E-03	4.0E-03	3.7E-03	-9.5E-02	-9.3E-02	-8.8E-02	-8.3E-02	-7.9E-02	-7.4E-02
1065	1.0E-03	4.1E-03	6.3E-03	7.7E-03	8.2E-03	4.2E-03	3.9E-03	-7.8E-02	-7.9E-02	-7.7E-02	-7.5E-02	-7.3E-02	-7.2E-02
1066	9.5E-04	3.9E-03	6.0E-03	7.4E-03	7.9E-03	4.0E-03	3.7E-03	-8.3E-02	-8.2E-02	-7.9E-02	-7.6E-02	-7.3E-02	-7.0E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1067	9.0E-04	3.6E-03	5.7E-03	7.0E-03	7.6E-03	4.0E-03	3.8E-03	-8.9E-02	-8.6E-02	-8.1E-02	-7.7E-02	-7.2E-02	-6.7E-02
1068	8.5E-04	3.4E-03	5.8E-03	7.1E-03	7.4E-03	4.1E-03	3.8E-03	-1.0E-01	-9.8E-02	-9.2E-02	-8.7E-02	-8.2E-02	-7.6E-02
1069	1.0E-03	4.2E-03	6.4E-03	7.8E-03	8.4E-03	4.2E-03	4.0E-03	-7.7E-02	-7.9E-02	-7.9E-02	-7.8E-02	-7.7E-02	-7.7E-02
1070	9.7E-04	4.0E-03	6.2E-03	7.5E-03	8.1E-03	4.1E-03	3.8E-03	-9.0E-02	-8.9E-02	-8.5E-02	-8.1E-02	-7.7E-02	-7.4E-02
1071	9.1E-04	3.7E-03	5.9E-03	7.2E-03	7.7E-03	4.1E-03	3.8E-03	-9.1E-02	-8.9E-02	-8.4E-02	-7.9E-02	-7.3E-02	-6.8E-02
1072	8.6E-04	3.4E-03	6.0E-03	7.3E-03	7.5E-03	4.1E-03	3.8E-03	-1.1E-01	-1.0E-01	-9.7E-02	-9.1E-02	-8.6E-02	-8.0E-02
1073	1.1E-03	4.3E-03	6.5E-03	8.0E-03	8.5E-03	4.3E-03	4.0E-03	-8.1E-02	-8.3E-02	-8.2E-02	-8.1E-02	-8.0E-02	-7.9E-02
1074	9.9E-04	4.1E-03	6.3E-03	7.7E-03	8.3E-03	4.2E-03	3.9E-03	-9.4E-02	-9.2E-02	-8.8E-02	-8.4E-02	-8.0E-02	-7.6E-02
1075	9.2E-04	3.8E-03	6.0E-03	7.3E-03	7.8E-03	4.2E-03	3.9E-03	-9.6E-02	-9.3E-02	-8.7E-02	-8.1E-02	-7.6E-02	-7.0E-02
1076	8.6E-04	3.5E-03	6.1E-03	7.5E-03	7.7E-03	4.2E-03	3.9E-03	-1.1E-01	-1.1E-01	-1.0E-01	-9.4E-02	-8.8E-02	-8.3E-02
1077	1.1E-03	4.4E-03	6.7E-03	8.1E-03	8.7E-03	4.4E-03	4.1E-03	-8.5E-02	-8.7E-02	-8.5E-02	-8.3E-02	-8.2E-02	-8.0E-02
1078	1.0E-03	4.2E-03	6.4E-03	7.8E-03	8.4E-03	4.2E-03	4.0E-03	-9.7E-02	-9.5E-02	-9.1E-02	-8.7E-02	-8.3E-02	-7.8E-02
1079	9.3E-04	3.8E-03	6.1E-03	7.5E-03	7.9E-03	4.2E-03	3.9E-03	-1.0E-01	-9.9E-02	-9.2E-02	-8.6E-02	-7.9E-02	-7.2E-02
1080	8.7E-04	3.6E-03	6.2E-03	7.6E-03	7.9E-03	4.2E-03	3.9E-03	-1.1E-01	-1.1E-01	-1.0E-01	-9.8E-02	-9.4E-02	-9.0E-02
1081	3.0E-03	4.5E-03	9.7E-03	1.2E-02	1.7E-02	1.6E-02	1.4E-02	3.5E-02	3.6E-02	4.8E-02	6.0E-02	7.2E-02	8.4E-02
1082	3.1E-03	4.2E-03	9.1E-03	1.1E-02	1.6E-02	1.5E-02	1.4E-02	2.3E-02	2.4E-02	3.7E-02	4.9E-02	6.1E-02	7.3E-02
1083	3.1E-03	4.3E-03	8.8E-03	1.1E-02	1.6E-02	1.5E-02	1.4E-02	1.3E-02	1.6E-02	2.9E-02	4.3E-02	5.6E-02	6.9E-02
1084	2.8E-03	4.3E-03	8.6E-03	1.2E-02	1.6E-02	1.5E-02	1.3E-02	3.1E-02	3.2E-02	4.4E-02	5.5E-02	6.7E-02	7.8E-02
1085	3.0E-03	4.1E-03	8.8E-03	1.1E-02	1.6E-02	1.5E-02	1.4E-02	2.2E-02	2.4E-02	3.6E-02	4.8E-02	6.0E-02	7.3E-02
1086	2.9E-03	4.1E-03	8.5E-03	1.1E-02	1.6E-02	1.5E-02	1.4E-02	1.5E-02	1.8E-02	3.2E-02	4.5E-02	5.8E-02	7.1E-02
1087	2.8E-03	4.0E-03	7.9E-03	1.1E-02	1.5E-02	1.4E-02	1.3E-02	2.6E-02	2.9E-02	4.2E-02	5.5E-02	6.8E-02	8.1E-02
1088	2.8E-03	4.0E-03	9.8E-03	1.1E-02	1.5E-02	1.4E-02	1.3E-02	1.6E-02	2.0E-02	3.4E-02	4.8E-02	6.1E-02	7.5E-02
1089	2.7E-03	3.9E-03	1.1E-02	1.0E-02	1.5E-02	1.3E-02	1.2E-02	8.3E-03	1.3E-02	2.8E-02	4.3E-02	5.7E-02	7.2E-02
1090	2.6E-03	3.8E-03	8.9E-03	1.1E-02	1.5E-02	1.4E-02	1.2E-02	2.1E-02	2.6E-02	4.0E-02	5.5E-02	6.9E-02	8.4E-02
1091	2.6E-03	3.7E-03	1.1E-02	1.0E-02	1.4E-02	1.3E-02	1.2E-02	2.1E-02	2.6E-02	3.9E-02	5.3E-02	6.7E-02	8.0E-02
1092	2.6E-03	3.7E-03	1.3E-02	1.1E-02	1.4E-02	1.3E-02	1.2E-02	1.0E-02	1.6E-02	3.1E-02	4.5E-02	6.0E-02	7.5E-02
1093	2.5E-03	3.5E-03	1.3E-02	1.1E-02	1.4E-02	1.3E-02	1.2E-02	1.6E-02	2.0E-02	3.2E-02	4.4E-02	5.7E-02	6.9E-02
1094	2.5E-03	3.6E-03	1.4E-02	1.2E-02	1.4E-02	1.2E-02	1.2E-02	8.2E-03	1.3E-02	2.7E-02	4.0E-02	5.4E-02	6.8E-02
1095	2.5E-03	3.5E-03	1.6E-02	1.3E-02	1.4E-02	1.3E-02	1.2E-02	6.4E-03	9.1E-03	2.0E-02	3.1E-02	4.2E-02	5.3E-02
1096	2.4E-03	3.5E-03	1.9E-02	1.6E-02	1.4E-02	1.3E-02	1.2E-02	-1.8E-03	-7.5E-04	9.4E-03	2.0E-02	3.0E-02	4.0E-02
1097	8.1E-04	3.1E-03	5.9E-03	7.2E-03	7.5E-03	4.0E-03	3.8E-03	-9.8E-02	-9.8E-02	-9.5E-02	-9.2E-02	-8.9E-02	-8.6E-02
1098	8.3E-04	3.2E-03	6.0E-03	7.3E-03	7.6E-03	4.1E-03	3.8E-03	-9.4E-02	-9.5E-02	-9.4E-02	-9.3E-02	-9.2E-02	-9.1E-02
1099	8.4E-04	3.2E-03	6.1E-03	7.5E-03	7.8E-03	4.1E-03	3.8E-03	-9.2E-02	-9.5E-02	-9.5E-02	-9.5E-02	-9.5E-02	-9.5E-02
1100	8.5E-04	3.3E-03	6.3E-03	7.6E-03	7.9E-03	4.2E-03	3.9E-03	-1.0E-01	-1.0E-01	-1.0E-01	-9.8E-02	-9.5E-02	-9.3E-02
1101	8.7E-04	3.3E-03	6.4E-03	7.8E-03	8.1E-03	4.2E-03	3.9E-03	-1.1E-01	-1.1E-01	-1.0E-01	-9.7E-02	-9.0E-02	-8.4E-02
1102	5.4E-04	1.6E-03	2.9E-03	3.8E-03	1.4E-02	9.6E-03	3.3E-03	1.0E-02	1.1E-02	1.4E-02	1.8E-02	2.1E-02	2.4E-02
1103	5.3E-04	1.6E-03	2.9E-03	3.8E-03	1.1E-02	8.8E-03	3.5E-03	9.9E-03	1.1E-02	1.4E-02	1.7E-02	2.0E-02	2.3E-02
1104	5.2E-04	1.6E-03	2.8E-03	3.8E-03	8.6E-03	8.0E-03	4.0E-03	9.8E-03	1.1E-02	1.4E-02	1.7E-02	2.0E-02	2.3E-02
1105	5.1E-04	1.6E-03	2.8E-03	3.7E-03	1.0E-02	8.3E-03	4.5E-03	9.6E-03	1.1E-02	1.4E-02	1.7E-02	2.0E-02	2.3E-02
1106	5.0E-04	1.5E-03	2.8E-03	3.7E-03	1.2E-02	7.9E-03	5.1E-03	9.4E-03	1.1E-02	1.4E-02	1.7E-02	2.0E-02	2.3E-02
1107	4.9E-04	1.5E-03	2.7E-03	3.6E-03	1.4E-02	8.2E-03	5.6E-03	8.6E-03	9.8E-03	1.3E-02	1.6E-02	1.9E-02	2.2E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1108	4.8E-04	1.5E-03	2.7E-03	3.6E-03	1.4E-02	1.0E-02	6.1E-03	7.7E-03	9.1E-03	1.2E-02	1.6E-02	1.9E-02	2.2E-02
1109	4.8E-04	1.5E-03	2.6E-03	3.6E-03	1.3E-02	1.2E-02	6.5E-03	6.8E-03	8.3E-03	1.2E-02	1.5E-02	1.8E-02	2.2E-02
1110	4.7E-04	1.5E-03	2.6E-03	3.5E-03	1.2E-02	1.4E-02	6.7E-03	5.1E-03	6.9E-03	1.0E-02	1.4E-02	1.8E-02	2.1E-02
1111	4.8E-04	1.5E-03	2.6E-03	3.5E-03	1.3E-02	1.5E-02	6.9E-03	3.7E-03	5.7E-03	9.6E-03	1.3E-02	1.7E-02	2.1E-02
1112	5.3E-04	1.4E-03	2.5E-03	3.5E-03	1.9E-02	2.3E-02	7.4E-03	-1.8E-03	1.3E-03	6.0E-03	1.1E-02	1.6E-02	2.0E-02
1113	5.4E-04	1.4E-03	2.4E-03	3.4E-03	2.0E-02	2.4E-02	7.1E-03	-2.2E-03	8.8E-04	5.7E-03	1.0E-02	1.5E-02	2.0E-02
1114	5.8E-04	1.4E-03	2.4E-03	3.4E-03	2.6E-02	3.0E-02	7.3E-03	-2.7E-03	3.6E-05	4.5E-03	8.9E-03	1.3E-02	1.8E-02
1115	6.2E-04	1.3E-03	2.4E-03	3.4E-03	2.8E-02	3.2E-02	6.7E-03	-1.5E-03	1.0E-03	5.2E-03	9.4E-03	1.4E-02	1.8E-02
1116	6.4E-03	6.8E-03	6.7E-03	9.4E-04	8.3E-04	7.3E-04	7.0E-04	-1.0E-02	-8.1E-03	-5.7E-03	-3.3E-03	-8.2E-04	1.6E-03
1117	6.5E-03	6.7E-03	6.5E-03	9.7E-04	8.8E-04	7.9E-04	7.3E-04	-1.0E-02	-8.2E-03	-5.5E-03	-2.8E-03	-1.8E-04	2.5E-03
1118	6.3E-03	7.7E-03	7.7E-03	1.0E-03	9.4E-04	8.5E-04	7.9E-04	-1.1E-02	-8.2E-03	-5.2E-03	-2.2E-03	7.8E-04	3.8E-03
1119	6.8E-03	8.4E-03	8.3E-03	1.0E-03	9.7E-04	8.8E-04	8.2E-04	-1.1E-02	-8.1E-03	-5.0E-03	-1.9E-03	1.2E-03	4.3E-03
1120	6.3E-03	7.1E-03	7.0E-03	9.2E-04	8.8E-04	6.9E-04	6.9E-04	-1.0E-02	-8.3E-03	-6.1E-03	-3.9E-03	-1.7E-03	4.6E-04
1121	6.8E-03	7.4E-03	7.2E-03	9.3E-04	8.4E-04	7.1E-04	7.0E-04	-1.0E-02	-8.2E-03	-5.8E-03	-3.4E-03	-1.0E-03	1.3E-03
1122	5.8E-03	7.0E-03	6.8E-03	9.0E-04	9.3E-04	6.7E-04	6.7E-04	-9.1E-03	-7.8E-03	-6.1E-03	-4.3E-03	-2.6E-03	-9.2E-04
1123	6.5E-03	7.5E-03	7.3E-03	9.1E-04	9.0E-04	6.9E-04	6.8E-04	-9.2E-03	-7.7E-03	-5.8E-03	-3.9E-03	-2.0E-03	-5.5E-05
1124	5.8E-03	7.1E-03	6.9E-03	8.9E-04	9.5E-04	7.1E-04	7.1E-04	-8.0E-03	-6.9E-03	-5.5E-03	-4.1E-03	-2.7E-03	-1.3E-03
1125	4.9E-03	6.5E-03	6.3E-03	9.0E-04	1.0E-03	7.3E-04	7.3E-04	-8.6E-03	-7.6E-03	-6.4E-03	-5.1E-03	-3.8E-03	-2.5E-03
1126	5.9E-03	7.3E-03	7.1E-03	9.1E-04	9.8E-04	7.4E-04	7.4E-04	-8.6E-03	-7.6E-03	-6.1E-03	-4.7E-03	-3.3E-03	-1.8E-03
1127	4.9E-03	6.5E-03	6.3E-03	9.2E-04	1.0E-03	7.6E-04	7.6E-04	-8.8E-03	-7.8E-03	-6.4E-03	-5.1E-03	-3.8E-03	-2.5E-03
1128	6.0E-03	7.5E-03	7.3E-03	9.3E-04	1.0E-03	7.7E-04	7.7E-04	-8.9E-03	-7.8E-03	-6.3E-03	-4.8E-03	-3.4E-03	-1.9E-03
1129	4.9E-03	5.4E-03	5.0E-03	9.3E-04	1.1E-03	7.8E-04	7.8E-04	-8.5E-03	-7.7E-03	-6.6E-03	-5.4E-03	-4.3E-03	-3.1E-03
1130	3.3E-03	3.7E-03	2.7E-03	9.6E-04	1.2E-03	8.5E-04	8.5E-04	-5.3E-03	-4.9E-03	-4.2E-03	-3.5E-03	-2.8E-03	-2.1E-03
1131	2.8E-03	3.3E-03	2.5E-03	9.6E-04	1.3E-03	8.6E-04	8.5E-04	-4.5E-03	-4.4E-03	-4.0E-03	-3.5E-03	-3.0E-03	-2.6E-03
1132	2.6E-03	3.0E-03	2.6E-03	9.6E-04	1.3E-03	8.6E-04	8.6E-04	-3.9E-03	-4.2E-03	-4.0E-03	-3.8E-03	-3.6E-03	-3.4E-03
1133	2.9E-03	3.3E-03	2.5E-03	9.6E-04	1.3E-03	8.9E-04	8.6E-04	-3.3E-03	-3.7E-03	-3.7E-03	-3.8E-03	-3.8E-03	-3.8E-03
1134	3.2E-03	3.5E-03	2.4E-03	9.5E-04	1.3E-03	9.2E-04	8.6E-04	-2.9E-03	-3.5E-03	-3.7E-03	-3.9E-03	-4.1E-03	-4.3E-03
1135	3.3E-03	3.7E-03	2.3E-03	9.4E-04	1.4E-03	9.6E-04	8.5E-04	-3.9E-03	-4.7E-03	-5.0E-03	-5.3E-03	-5.6E-03	-5.9E-03
1136	3.4E-03	3.8E-03	2.6E-03	9.3E-04	1.4E-03	1.0E-03	8.4E-04	-6.2E-03	-7.1E-03	-7.5E-03	-7.8E-03	-8.2E-03	-8.6E-03
1137	3.3E-03	3.7E-03	2.9E-03	9.1E-04	1.4E-03	1.0E-03	8.4E-04	-8.2E-03	-9.0E-03	-9.3E-03	-9.6E-03	-9.9E-03	-1.0E-02
1138	3.1E-03	3.5E-03	2.9E-03	8.9E-04	1.4E-03	1.1E-03	8.4E-04	-9.5E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
1139	3.1E-03	3.5E-03	3.5E-03	8.8E-04	1.5E-03	1.1E-03	8.6E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
1140	2.9E-03	3.4E-03	3.4E-03	8.6E-04	1.5E-03	1.2E-03	8.5E-04	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02
1141	2.6E-03	3.4E-03	3.8E-03	8.7E-04	1.5E-03	1.2E-03	8.4E-04	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.5E-02
1142	2.3E-03	3.7E-03	4.1E-03	8.9E-04	1.5E-03	1.2E-03	8.2E-04	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.5E-02	-1.5E-02
1143	3.0E-03	6.3E-03	6.7E-03	9.9E-04	1.5E-03	1.2E-03	7.9E-04	-1.1E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
1144	3.2E-03	4.4E-03	9.3E-03	1.1E-02	1.7E-02	1.7E-02	1.6E-02	-1.0E-02	-6.1E-03	9.2E-03	2.4E-02	4.0E-02	5.5E-02
1145	3.3E-03	4.6E-03	1.0E-02	1.2E-02	1.8E-02	1.6E-02	1.5E-02	3.9E-02	4.1E-02	5.3E-02	6.5E-02	7.8E-02	9.0E-02
1146	2.3E-03	3.5E-03	1.2E-02	1.0E-02	1.4E-02	1.4E-02	1.3E-02	-4.2E-03	2.6E-03	1.8E-02	3.3E-02	4.9E-02	6.4E-02
1147	2.3E-03	3.4E-03	1.4E-02	1.1E-02	1.3E-02	1.2E-02	1.1E-02	-8.9E-04	5.1E-03	1.9E-02	3.3E-02	4.7E-02	6.2E-02
1148	1.9E-03	3.3E-03	1.0E-02	9.3E-03	1.3E-02	1.2E-02	1.2E-02	-8.9E-03	-3.3E-03	1.0E-02	2.4E-02	3.8E-02	5.1E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1149	2.1E-03	3.1E-03	1.2E-02	1.1E-02	1.2E-02	1.1E-02	9.8E-03	8.3E-04	3.7E-03	1.4E-02	2.4E-02	3.5E-02	4.5E-02
1150	1.8E-03	3.0E-03	9.4E-03	8.0E-03	1.2E-02	1.1E-02	1.1E-02	-7.1E-03	-4.6E-03	5.3E-03	1.5E-02	2.5E-02	3.5E-02
1151	1.9E-03	3.0E-03	6.6E-03	7.2E-03	1.2E-02	1.1E-02	1.0E-02	-1.6E-02	-1.2E-02	-1.2E-03	1.0E-02	2.1E-02	3.2E-02
1152	2.3E-03	3.6E-03	2.1E-02	1.8E-02	1.3E-02	1.2E-02	1.1E-02	5.4E-03	5.9E-03	1.5E-02	2.3E-02	3.2E-02	4.1E-02
1153	2.0E-03	3.1E-03	1.2E-02	1.0E-02	1.1E-02	1.0E-02	9.5E-03	5.6E-03	5.6E-03	1.3E-02	2.0E-02	2.7E-02	3.4E-02
1154	1.7E-03	3.1E-03	7.6E-03	9.2E-03	1.1E-02	1.0E-02	9.5E-03	-5.7E-03	-3.3E-03	5.5E-03	1.4E-02	2.3E-02	3.2E-02
1155	1.7E-03	3.0E-03	7.1E-03	1.0E-02	1.1E-02	1.1E-02	9.9E-03	-1.3E-02	-1.2E-02	-4.0E-03	4.1E-03	1.2E-02	2.0E-02
1156	1.9E-03	3.4E-03	9.6E-03	1.4E-02	1.1E-02	9.8E-03	9.1E-03	1.6E-03	3.8E-03	1.3E-02	2.2E-02	3.0E-02	3.9E-02
1157	1.7E-03	3.2E-03	9.1E-03	1.2E-02	9.6E-03	8.8E-03	8.1E-03	7.7E-04	2.3E-03	9.8E-03	1.7E-02	2.5E-02	3.2E-02
1158	1.4E-03	2.9E-03	7.6E-03	1.1E-02	1.0E-02	9.8E-03	9.1E-03	-7.6E-03	-7.3E-03	-6.9E-04	5.9E-03	1.3E-02	1.9E-02
1159	1.9E-03	3.6E-03	1.3E-02	1.8E-02	1.0E-02	9.5E-03	8.8E-03	-6.7E-03	2.4E-04	1.3E-02	2.7E-02	4.0E-02	5.3E-02
1160	1.7E-03	3.3E-03	8.5E-03	1.2E-02	9.5E-03	8.4E-03	7.9E-03	-3.1E-03	1.4E-03	1.2E-02	2.2E-02	3.2E-02	4.3E-02
1161	1.3E-03	2.6E-03	5.7E-03	8.5E-03	9.5E-03	8.9E-03	8.3E-03	1.1E-03	1.2E-03	6.9E-03	1.3E-02	1.8E-02	2.4E-02
1162	1.8E-03	3.8E-03	1.0E-02	1.6E-02	9.9E-03	9.1E-03	8.4E-03	-2.7E-02	-9.6E-03	1.3E-02	3.6E-02	5.9E-02	8.2E-02
1163	1.7E-03	3.3E-03	7.0E-03	1.1E-02	9.5E-03	8.5E-03	7.9E-03	-1.2E-02	-2.0E-03	1.4E-02	3.1E-02	4.7E-02	6.3E-02
1164	1.7E-03	4.0E-03	1.9E-02	1.3E-02	9.7E-03	8.7E-03	8.1E-03	-3.4E-02	-8.0E-03	2.3E-02	5.4E-02	8.5E-02	1.2E-01
1165	1.6E-03	3.2E-03	1.4E-02	9.5E-03	9.2E-03	8.3E-03	7.7E-03	-2.5E-02	-9.4E-03	1.2E-02	3.2E-02	5.3E-02	7.4E-02
1166	1.6E-03	3.9E-03	2.0E-02	1.5E-02	1.1E-02	8.2E-03	7.6E-03	-3.0E-02	-8.4E-04	3.3E-02	6.7E-02	1.0E-01	1.4E-01
1167	1.3E-03	1.1E-02	1.5E-02	1.6E-02	1.2E-02	5.5E-03	4.8E-03	-3.8E-02	-4.1E-02	-4.1E-02	-4.0E-02	-4.0E-02	-4.0E-02
1168	1.5E-03	9.9E-03	1.5E-02	1.4E-02	1.4E-02	5.6E-03	5.4E-03	-3.1E-02	-3.3E-02	-3.2E-02	-3.1E-02	-2.9E-02	-2.8E-02
1169	1.9E-03	9.3E-03	1.4E-02	1.3E-02	1.3E-02	6.2E-03	6.0E-03	-3.8E-02	-3.9E-02	-3.6E-02	-3.3E-02	-3.0E-02	-2.6E-02
1170	1.8E-03	1.3E-02	1.9E-02	1.9E-02	1.9E-02	6.2E-03	6.0E-03	-3.1E-02	-3.2E-02	-2.8E-02	-2.5E-02	-2.2E-02	-1.8E-02
1171	2.1E-03	9.7E-03	1.4E-02	1.4E-02	1.4E-02	7.0E-03	6.7E-03	-4.5E-02	-4.4E-02	-3.9E-02	-3.5E-02	-3.0E-02	-2.5E-02
1172	2.4E-03	7.0E-03	1.1E-02	1.0E-02	1.0E-02	7.4E-03	7.2E-03	-6.3E-02	-5.7E-02	-4.9E-02	-4.0E-02	-3.1E-02	-2.2E-02
1173	2.4E-03	7.8E-03	1.3E-02	1.2E-02	1.2E-02	7.6E-03	7.3E-03	-8.0E-02	-7.2E-02	-6.0E-02	-4.9E-02	-3.7E-02	-2.5E-02
1174	2.7E-03	6.0E-03	9.1E-03	1.0E-02	9.8E-03	7.9E-03	7.6E-03	-8.1E-02	-7.6E-02	-6.8E-02	-5.9E-02	-5.0E-02	-4.1E-02
1175	2.7E-03	1.3E-02	1.3E-02	1.3E-02	1.0E-02	8.1E-03	7.8E-03	-9.5E-02	-8.9E-02	-7.9E-02	-6.8E-02	-5.8E-02	-4.8E-02
1176	2.9E-03	1.0E-02	1.0E-02	1.1E-02	1.0E-02	8.4E-03	8.0E-03	-8.4E-02	-8.2E-02	-7.6E-02	-7.1E-02	-6.5E-02	-5.9E-02
1177	3.0E-03	1.6E-02	1.6E-02	1.6E-02	1.1E-02	8.7E-03	8.4E-03	-9.9E-02	-9.5E-02	-8.7E-02	-7.9E-02	-7.1E-02	-6.3E-02
1178	3.1E-03	1.2E-02	1.2E-02	1.2E-02	1.1E-02	8.8E-03	8.5E-03	-8.4E-02	-8.2E-02	-7.5E-02	-6.8E-02	-6.1E-02	-5.4E-02
1179	3.1E-03	9.7E-03	9.7E-03	9.8E-03	1.1E-02	8.7E-03	8.3E-03	-6.9E-02	-6.8E-02	-6.2E-02	-5.6E-02	-5.0E-02	-4.4E-02
1180	3.3E-03	1.3E-02	1.4E-02	1.4E-02	1.4E-02	9.3E-03	8.9E-03	-7.8E-02	-7.5E-02	-6.8E-02	-6.0E-02	-5.3E-02	-4.5E-02
1181	3.3E-03	1.1E-02	1.1E-02	1.1E-02	1.1E-02	9.2E-03	8.8E-03	-5.9E-02	-5.8E-02	-5.1E-02	-4.4E-02	-3.7E-02	-3.0E-02
1182	3.2E-03	9.6E-03	9.6E-03	9.6E-03	1.1E-02	8.8E-03	8.4E-03	-4.2E-02	-4.1E-02	-3.5E-02	-2.9E-02	-2.4E-02	-1.8E-02
1183	3.5E-03	1.5E-02	1.5E-02	1.5E-02	1.2E-02	9.7E-03	9.3E-03	-3.3E-02	-3.0E-02	-2.1E-02	-1.2E-02	-3.4E-03	5.4E-03
1184	3.5E-03	1.2E-02	1.2E-02	1.2E-02	1.2E-02	9.5E-03	9.0E-03	-2.6E-02	-2.3E-02	-1.5E-02	-7.1E-03	1.1E-03	9.2E-03
1185	3.8E-03	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.0E-02	9.7E-03	3.1E-03	8.3E-03	2.0E-02	3.1E-02	4.2E-02	5.4E-02
1186	3.5E-03	1.1E-02	1.1E-02	1.1E-02	1.2E-02	9.6E-03	9.1E-03	-3.0E-03	1.1E-03	1.1E-02	2.1E-02	3.2E-02	4.2E-02
1187	3.9E-03	9.5E-03	1.0E-02	1.1E-02	1.3E-02	1.1E-02	1.0E-02	2.1E-02	2.9E-02	4.4E-02	5.8E-02	7.3E-02	8.7E-02
1188	3.5E-03	8.0E-03	8.0E-03	1.0E-02	1.2E-02	9.6E-03	9.1E-03	1.5E-02	2.1E-02	3.5E-02	4.8E-02	6.1E-02	7.4E-02
1189	4.0E-03	8.0E-03	9.7E-03	1.1E-02	1.3E-02	1.1E-02	1.0E-02	3.0E-02	4.1E-02	5.8E-02	7.6E-02	9.3E-02	1.1E-01

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1190	1.7E-03	6.2E-03	9.9E-03	1.1E-02	8.5E-03	5.7E-03	5.5E-03	-4.4E-02	-4.2E-02	-3.7E-02	-3.1E-02	-2.6E-02	-2.1E-02
1191	2.2E-03	7.2E-03	1.0E-02	1.0E-02	1.0E-02	6.8E-03	6.5E-03	-5.3E-02	-4.9E-02	-4.1E-02	-3.3E-02	-2.5E-02	-1.7E-02
1192	2.6E-03	5.2E-03	8.2E-03	9.2E-03	9.3E-03	7.5E-03	7.2E-03	-6.3E-02	-5.6E-02	-4.6E-02	-3.6E-02	-2.5E-02	-1.5E-02
1193	2.7E-03	4.0E-03	7.3E-03	9.3E-03	9.7E-03	7.8E-03	7.4E-03	-5.5E-02	-5.5E-02	-5.0E-02	-4.5E-02	-4.0E-02	-3.6E-02
1194	2.9E-03	7.1E-03	7.1E-03	9.3E-03	1.0E-02	8.0E-03	7.6E-03	-6.2E-02	-6.3E-02	-6.0E-02	-5.6E-02	-5.3E-02	-5.0E-02
1195	2.8E-03	6.6E-03	6.6E-03	8.7E-03	9.8E-03	7.9E-03	7.4E-03	-5.4E-02	-5.4E-02	-5.0E-02	-4.6E-02	-4.2E-02	-3.8E-02
1196	2.9E-03	8.9E-03	8.9E-03	8.9E-03	9.9E-03	7.9E-03	7.4E-03	-4.6E-02	-4.7E-02	-4.2E-02	-3.7E-02	-3.3E-02	-2.8E-02
1197	2.8E-03	9.5E-03	9.5E-03	9.5E-03	9.8E-03	7.8E-03	7.3E-03	-2.8E-02	-2.9E-02	-2.5E-02	-2.1E-02	-1.7E-02	-1.3E-02
1198	2.5E-03	6.3E-03	6.3E-03	7.1E-03	8.6E-03	6.8E-03	6.4E-03	-8.4E-03	-9.7E-03	-5.9E-03	-2.2E-03	1.6E-03	5.4E-03
1199	2.7E-03	7.9E-03	7.9E-03	7.9E-03	9.5E-03	7.5E-03	7.0E-03	-8.0E-03	-7.9E-03	-2.3E-03	3.4E-03	9.0E-03	1.5E-02
1200	2.6E-03	6.0E-03	6.0E-03	7.2E-03	8.1E-03	6.6E-03	6.6E-03	1.3E-03	1.6E-03	7.0E-03	1.2E-02	1.8E-02	2.3E-02
1201	3.1E-03	9.1E-03	9.1E-03	8.8E-03	1.1E-02	8.5E-03	8.0E-03	-1.3E-03	6.3E-04	8.6E-03	1.6E-02	2.4E-02	3.2E-02
1202	2.8E-03	6.2E-03	7.8E-03	7.8E-03	9.1E-03	7.3E-03	7.0E-03	1.8E-03	3.2E-03	1.0E-02	1.7E-02	2.4E-02	3.1E-02
1203	2.7E-03	4.9E-03	5.9E-03	7.2E-03	7.5E-03	6.7E-03	6.6E-03	8.5E-03	9.3E-03	1.5E-02	2.1E-02	2.7E-02	3.2E-02
1204	3.0E-03	9.9E-03	9.9E-03	9.4E-03	1.0E-02	8.2E-03	7.6E-03	1.7E-02	2.2E-02	3.2E-02	4.2E-02	5.2E-02	6.3E-02
1205	3.0E-03	7.5E-03	7.6E-03	7.8E-03	8.5E-03	7.2E-03	7.2E-03	2.1E-02	2.4E-02	3.3E-02	4.2E-02	5.1E-02	5.9E-02
1206	2.8E-03	4.8E-03	5.4E-03	7.1E-03	8.2E-03	6.6E-03	6.6E-03	2.0E-02	2.3E-02	3.2E-02	4.0E-02	4.9E-02	5.7E-02
1207	3.2E-03	6.2E-03	6.2E-03	8.4E-03	9.6E-03	7.8E-03	7.8E-03	1.8E-02	2.6E-02	4.1E-02	5.6E-02	7.0E-02	8.5E-02
1208	3.0E-03	6.7E-03	6.7E-03	7.7E-03	9.0E-03	7.2E-03	7.2E-03	1.3E-02	2.0E-02	3.4E-02	4.7E-02	6.0E-02	7.3E-02
1209	2.7E-03	5.3E-03	5.7E-03	6.8E-03	8.8E-03	7.1E-03	6.7E-03	7.1E-03	1.5E-02	2.6E-02	3.8E-02	5.0E-02	6.2E-02
1210	3.4E-03	8.4E-03	8.8E-03	8.9E-03	1.1E-02	8.6E-03	8.3E-03	-1.7E-03	1.2E-02	3.3E-02	5.4E-02	7.5E-02	9.6E-02
1211	3.2E-03	6.0E-03	6.5E-03	8.4E-03	9.7E-03	7.8E-03	7.8E-03	-6.6E-03	6.5E-03	2.5E-02	4.5E-02	6.4E-02	8.3E-02
1212	2.9E-03	4.1E-03	6.2E-03	7.5E-03	9.6E-03	7.9E-03	7.5E-03	-1.2E-02	-7.1E-04	1.6E-02	3.2E-02	4.9E-02	6.5E-02
1213	2.5E-03	3.8E-03	6.0E-03	6.7E-03	9.0E-03	8.0E-03	7.6E-03	-2.0E-02	-9.4E-03	5.8E-03	2.1E-02	3.6E-02	5.1E-02
1214	3.6E-03	6.7E-03	9.9E-03	1.0E-02	1.2E-02	9.9E-03	9.3E-03	-2.7E-03	1.4E-02	3.8E-02	6.1E-02	8.5E-02	1.1E-01
1215	3.5E-03	7.3E-03	8.9E-03	9.1E-03	1.1E-02	8.5E-03	8.5E-03	-1.7E-02	-1.2E-03	2.1E-02	4.3E-02	6.5E-02	8.7E-02
1216	3.2E-03	6.6E-03	6.9E-03	8.1E-03	1.0E-02	8.8E-03	8.3E-03	-3.7E-02	-2.1E-02	7.5E-04	2.2E-02	4.4E-02	6.5E-02
1217	2.7E-03	4.4E-03	6.3E-03	7.0E-03	1.0E-02	9.1E-03	8.6E-03	-4.9E-02	-3.2E-02	-1.1E-02	1.0E-02	3.2E-02	5.3E-02
1218	2.3E-03	3.3E-03	6.0E-03	6.3E-03	9.8E-03	9.2E-03	8.7E-03	-4.5E-02	-3.1E-02	-1.1E-02	9.0E-03	2.9E-02	4.9E-02
1219	3.8E-03	5.3E-03	9.1E-03	9.9E-03	1.2E-02	9.3E-03	9.3E-03	-1.2E-02	3.4E-03	2.6E-02	4.9E-02	7.1E-02	9.4E-02
1220	3.5E-03	5.8E-03	8.0E-03	9.0E-03	1.1E-02	9.9E-03	9.3E-03	-2.6E-02	-9.7E-03	1.3E-02	3.6E-02	5.8E-02	8.1E-02
1221	3.0E-03	5.5E-03	6.7E-03	7.8E-03	1.1E-02	1.0E-02	9.6E-03	-3.3E-02	-1.7E-02	4.9E-03	2.7E-02	4.8E-02	7.0E-02
1222	2.5E-03	4.7E-03	6.4E-03	6.5E-03	1.1E-02	1.0E-02	9.6E-03	-3.5E-02	-2.1E-02	-6.1E-04	1.9E-02	3.9E-02	5.9E-02
1223	2.1E-03	3.8E-03	6.0E-03	6.2E-03	1.1E-02	1.0E-02	9.7E-03	-4.2E-02	-2.9E-02	-1.0E-02	8.8E-03	2.8E-02	4.7E-02
1224	4.3E-03	5.9E-03	8.6E-03	1.1E-02	1.3E-02	1.1E-02	1.1E-02	3.0E-02	4.0E-02	6.0E-02	7.9E-02	9.8E-02	1.2E-01
1225	3.8E-03	5.7E-03	8.8E-03	9.9E-03	1.2E-02	1.1E-02	1.0E-02	1.9E-02	2.9E-02	4.6E-02	6.3E-02	8.0E-02	9.7E-02
1226	3.3E-03	3.9E-03	7.3E-03	8.6E-03	1.2E-02	1.1E-02	1.1E-02	-2.1E-03	9.4E-03	2.7E-02	4.5E-02	6.3E-02	8.1E-02
1227	2.7E-03	4.8E-03	6.6E-03	7.1E-03	1.2E-02	1.1E-02	1.1E-02	-2.1E-02	-8.5E-03	1.1E-02	3.0E-02	5.0E-02	6.9E-02
1228	2.3E-03	4.3E-03	6.3E-03	6.6E-03	1.1E-02	1.1E-02	1.0E-02	-2.7E-02	-1.6E-02	3.1E-03	2.2E-02	4.0E-02	5.9E-02
1229	2.3E-03	4.2E-03	5.9E-03	6.6E-03	1.1E-02	1.1E-02	1.0E-02	-2.5E-02	-1.7E-02	-5.8E-04	1.5E-02	3.1E-02	4.7E-02
1230	4.3E-03	4.9E-03	8.3E-03	1.1E-02	1.3E-02	1.3E-02	1.2E-02	1.4E-02	2.6E-02	4.6E-02	6.7E-02	8.7E-02	1.1E-01

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1231	3.7E-03	5.4E-03	7.6E-03	9.6E-03	1.3E-02	1.3E-02	1.2E-02	2.8E-02	3.8E-02	5.5E-02	7.3E-02	9.0E-02	1.1E-01
1232	3.0E-03	4.5E-03	6.9E-03	7.9E-03	1.3E-02	1.2E-02	1.2E-02	2.7E-02	3.3E-02	4.8E-02	6.3E-02	7.7E-02	9.2E-02
1233	2.6E-03	4.6E-03	6.6E-03	7.3E-03	1.2E-02	1.2E-02	1.1E-02	1.1E-02	1.8E-02	3.4E-02	4.9E-02	6.4E-02	8.0E-02
1234	2.7E-03	4.7E-03	6.2E-03	7.1E-03	1.2E-02	1.2E-02	1.1E-02	-5.2E-03	1.4E-03	1.6E-02	3.1E-02	4.6E-02	6.1E-02
1235	4.9E-03	5.5E-03	8.6E-03	1.3E-02	1.5E-02	1.4E-02	1.4E-02	1.1E-02	1.8E-02	3.5E-02	5.1E-02	6.8E-02	8.5E-02
1236	4.1E-03	4.9E-03	7.6E-03	1.1E-02	1.5E-02	1.4E-02	1.3E-02	4.6E-03	1.4E-02	3.4E-02	5.3E-02	7.3E-02	9.2E-02
1237	3.4E-03	5.1E-03	7.2E-03	8.9E-03	1.4E-02	1.4E-02	1.3E-02	1.1E-02	2.0E-02	3.9E-02	5.8E-02	7.8E-02	9.7E-02
1238	2.9E-03	5.2E-03	6.8E-03	8.0E-03	1.3E-02	1.3E-02	1.2E-02	2.3E-02	3.0E-02	4.7E-02	6.4E-02	8.1E-02	9.8E-02
1239	3.0E-03	5.2E-03	6.4E-03	7.5E-03	1.3E-02	1.2E-02	1.2E-02	2.3E-02	2.8E-02	4.2E-02	5.6E-02	7.1E-02	8.5E-02
1240	2.9E-03	5.0E-03	6.0E-03	7.1E-03	1.2E-02	1.2E-02	1.1E-02	9.0E-03	1.5E-02	2.9E-02	4.4E-02	5.8E-02	7.3E-02
1241	4.6E-03	5.7E-03	8.1E-03	1.2E-02	1.6E-02	1.6E-02	1.5E-02	1.8E-02	1.7E-02	2.7E-02	3.7E-02	4.7E-02	5.7E-02
1242	3.7E-03	5.7E-03	7.5E-03	1.0E-02	1.5E-02	1.5E-02	1.4E-02	8.9E-03	1.2E-02	2.6E-02	4.0E-02	5.4E-02	6.8E-02
1243	3.3E-03	5.6E-03	7.0E-03	8.6E-03	1.4E-02	1.4E-02	1.3E-02	4.0E-05	7.1E-03	2.5E-02	4.2E-02	6.0E-02	7.7E-02
1244	3.3E-03	5.7E-03	6.7E-03	8.2E-03	1.4E-02	1.4E-02	1.3E-02	8.9E-03	1.6E-02	3.4E-02	5.2E-02	6.9E-02	8.7E-02
1245	3.2E-03	5.5E-03	6.2E-03	7.6E-03	1.3E-02	1.3E-02	1.2E-02	1.6E-02	2.2E-02	3.9E-02	5.5E-02	7.1E-02	8.7E-02
1246	3.1E-03	5.2E-03	5.7E-03	7.0E-03	1.2E-02	1.2E-02	1.1E-02	1.7E-02	2.1E-02	3.5E-02	4.8E-02	6.2E-02	7.6E-02
1247	4.6E-03	6.8E-03	8.5E-03	1.2E-02	1.8E-02	1.8E-02	1.7E-02	1.1E-02	3.8E-03	9.7E-03	1.6E-02	2.2E-02	2.7E-02
1248	3.7E-03	6.3E-03	7.4E-03	9.5E-03	1.6E-02	1.6E-02	1.5E-02	1.8E-02	1.3E-02	1.9E-02	2.5E-02	3.1E-02	3.7E-02
1249	3.6E-03	6.1E-03	6.8E-03	8.7E-03	1.5E-02	1.4E-02	1.4E-02	9.8E-03	9.5E-03	2.0E-02	3.1E-02	4.1E-02	5.2E-02
1250	3.5E-03	6.0E-03	6.5E-03	8.2E-03	1.4E-02	1.3E-02	1.3E-02	-1.3E-03	3.9E-03	2.0E-02	3.5E-02	5.1E-02	6.6E-02
1251	3.3E-03	5.6E-03	5.9E-03	7.4E-03	1.2E-02	1.2E-02	1.1E-02	5.3E-03	1.2E-02	2.8E-02	4.4E-02	6.0E-02	7.6E-02
1252	5.3E-03	8.0E-03	9.6E-03	1.4E-02	2.1E-02	2.1E-02	2.0E-02	1.2E-02	1.3E-04	4.7E-03	9.2E-03	1.4E-02	1.8E-02
1253	4.3E-03	7.2E-03	8.2E-03	1.1E-02	1.8E-02	1.8E-02	1.7E-02	7.9E-03	-1.6E-03	2.5E-03	6.7E-03	1.1E-02	1.5E-02
1254	4.0E-03	6.8E-03	7.3E-03	9.9E-03	1.6E-02	1.6E-02	1.5E-02	1.5E-02	5.0E-03	7.1E-03	9.1E-03	1.1E-02	1.3E-02
1255	3.8E-03	6.4E-03	6.6E-03	9.0E-03	1.5E-02	1.4E-02	1.3E-02	1.7E-02	9.8E-03	1.4E-02	1.7E-02	2.1E-02	2.5E-02
1256	3.6E-03	6.0E-03	6.1E-03	8.2E-03	1.3E-02	1.3E-02	1.2E-02	9.9E-03	8.1E-03	1.6E-02	2.5E-02	3.3E-02	4.2E-02
1257	3.3E-03	5.5E-03	5.5E-03	7.5E-03	1.2E-02	1.1E-02	1.1E-02	-4.1E-03	-2.1E-04	1.3E-02	2.6E-02	3.9E-02	5.2E-02
1258	5.1E-03	8.5E-03	1.0E-02	1.6E-02	2.1E-02	2.1E-02	2.0E-02	7.0E-03	-5.7E-03	-2.3E-03	1.1E-03	4.5E-03	7.9E-03
1259	4.6E-03	7.7E-03	8.8E-03	1.4E-02	1.8E-02	1.8E-02	1.7E-02	4.8E-03	-4.7E-03	-2.1E-04	4.2E-03	8.7E-03	1.3E-02
1260	4.1E-03	6.9E-03	7.7E-03	1.2E-02	1.6E-02	1.5E-02	1.4E-02	1.1E-02	6.7E-04	2.9E-03	5.1E-03	7.3E-03	9.5E-03
1261	3.8E-03	6.3E-03	7.1E-03	1.0E-02	1.4E-02	1.4E-02	1.3E-02	1.7E-02	5.6E-03	5.3E-03	5.0E-03	4.6E-03	4.3E-03
1262	3.4E-03	5.8E-03	6.4E-03	9.4E-03	1.2E-02	1.2E-02	1.1E-02	1.6E-02	7.9E-03	9.5E-03	1.1E-02	1.3E-02	1.4E-02
1263	5.4E-03	8.9E-03	1.0E-02	1.7E-02	2.1E-02	2.0E-02	1.9E-02	9.2E-03	-6.1E-03	-5.2E-03	-4.4E-03	-3.5E-03	-2.6E-03
1264	4.7E-03	7.8E-03	8.9E-03	1.5E-02	1.8E-02	1.7E-02	1.6E-02	-7.8E-04	-9.8E-03	-5.0E-03	-1.3E-04	4.7E-03	9.5E-03
1265	4.0E-03	6.6E-03	7.8E-03	1.3E-02	1.4E-02	1.4E-02	1.3E-02	1.2E-03	-6.6E-03	-3.0E-03	6.0E-04	4.2E-03	7.8E-03
1266	3.6E-03	5.9E-03	7.4E-03	1.2E-02	1.3E-02	1.2E-02	1.1E-02	9.9E-03	8.6E-04	1.9E-03	3.0E-03	4.1E-03	5.1E-03
1267	3.3E-03	5.3E-03	6.9E-03	1.1E-02	1.1E-02	1.1E-02	1.0E-02	1.8E-02	7.0E-03	4.7E-03	2.4E-03	1.8E-04	-2.1E-03
1268	5.8E-03	8.9E-03	1.0E-02	1.7E-02	2.0E-02	1.9E-02	1.8E-02	6.6E-03	-7.6E-03	-5.9E-03	-4.2E-03	-2.5E-03	-7.5E-04
1269	5.1E-03	7.4E-03	8.4E-03	1.5E-02	1.6E-02	1.6E-02	1.5E-02	-6.1E-04	-1.0E-02	-7.1E-03	-3.7E-03	-3.7E-04	3.0E-03
1270	4.5E-03	6.2E-03	7.6E-03	1.3E-02	1.4E-02	1.3E-02	1.3E-02	-7.6E-03	-1.3E-02	-8.4E-03	-3.3E-03	1.7E-03	6.7E-03
1271	4.1E-03	5.2E-03	7.3E-03	1.2E-02	1.3E-02	1.2E-02	1.2E-02	-1.0E-03	-6.8E-03	-3.7E-03	-5.5E-04	2.6E-03	5.7E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1272	6.1E-03	8.4E-03	1.1E-02	1.9E-02	2.0E-02	1.9E-02	1.9E-02	1.2E-03	-9.1E-03	-4.3E-03	4.6E-04	5.3E-03	1.0E-02
1273	5.3E-03	6.6E-03	9.4E-03	1.6E-02	1.6E-02	1.5E-02	1.5E-02	2.8E-03	-8.5E-03	-7.9E-03	-7.3E-03	-6.7E-03	-6.1E-03
1274	4.7E-03	5.4E-03	7.8E-03	1.3E-02	1.4E-02	1.3E-02	1.3E-02	-1.2E-02	-1.6E-02	-1.0E-02	-4.8E-03	6.8E-04	6.1E-03
1275	5.5E-03	6.1E-03	9.9E-03	1.7E-02	1.8E-02	1.7E-02	1.7E-02	9.5E-04	-9.2E-03	-9.2E-03	-9.2E-03	-9.2E-03	-9.3E-03
1276	5.5E-03	5.6E-03	9.8E-03	1.7E-02	1.8E-02	1.7E-02	1.7E-02	-3.1E-03	-1.1E-02	-9.3E-03	-7.3E-03	-5.4E-03	-3.5E-03
1277	5.6E-03	5.7E-03	9.5E-03	1.8E-02	1.8E-02	1.7E-02	1.7E-02	-9.5E-03	-1.6E-02	-1.2E-02	-7.5E-03	-3.4E-03	6.2E-04
1278	7.5E-03	7.9E-03	1.4E-02	1.8E-02	2.4E-02	2.4E-02	2.2E-02	-5.2E-03	-4.1E-03	1.3E-02	3.1E-02	4.8E-02	6.5E-02
1279	6.3E-03	8.7E-03	1.7E-02	1.9E-02	2.8E-02	2.7E-02	2.6E-02	-1.3E-03	3.3E-04	2.0E-02	4.1E-02	6.1E-02	8.1E-02
1280	4.4E-03	4.5E-03	6.9E-03	1.2E-02	1.3E-02	1.2E-02	1.2E-02	-1.1E-02	-1.3E-02	-7.8E-03	-3.0E-03	1.7E-03	6.5E-03
1281	4.4E-03	4.5E-03	7.6E-03	1.3E-02	1.3E-02	1.2E-02	1.2E-02	-1.2E-02	-1.5E-02	-1.1E-02	-6.4E-03	-2.1E-03	2.2E-03
1282	4.5E-03	4.5E-03	7.4E-03	1.2E-02	1.2E-02	1.2E-02	1.2E-02	-1.5E-02	-1.6E-02	-1.1E-02	-5.1E-03	4.7E-04	6.0E-03
1283	4.6E-03	4.7E-03	7.7E-03	1.3E-02	1.4E-02	1.3E-02	1.3E-02	-5.4E-03	-1.1E-02	-9.0E-03	-6.9E-03	-4.9E-03	-2.8E-03
1284	4.5E-03	4.6E-03	7.5E-03	1.3E-02	1.3E-02	1.2E-02	1.2E-02	-1.7E-02	-1.8E-02	-1.1E-02	-5.2E-03	1.1E-03	7.4E-03
1285	4.6E-03	4.8E-03	7.5E-03	1.3E-02	1.4E-02	1.3E-02	1.3E-02	-4.1E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.7E-03	-9.2E-03
1286	4.5E-03	4.7E-03	7.4E-03	1.3E-02	1.4E-02	1.3E-02	1.3E-02	-8.2E-03	-1.2E-02	-8.3E-03	-4.7E-03	-9.9E-04	2.7E-03
1287	6.1E-03	6.4E-03	1.1E-02	1.8E-02	2.0E-02	1.9E-02	1.8E-02	-1.3E-02	-1.6E-02	-5.3E-03	5.0E-03	1.5E-02	2.5E-02
1288	5.2E-03	5.5E-03	8.4E-03	1.5E-02	1.6E-02	1.5E-02	1.5E-02	-1.1E-02	-1.6E-02	-1.2E-02	-8.3E-03	-4.3E-03	-3.2E-04
1289	4.5E-03	4.8E-03	7.0E-03	1.3E-02	1.4E-02	1.3E-02	1.3E-02	-6.3E-03	-1.4E-02	-1.5E-02	-1.5E-02	-1.6E-02	-1.6E-02
1290	4.3E-03	4.6E-03	6.9E-03	1.2E-02	1.3E-02	1.2E-02	1.2E-02	-5.6E-03	-1.0E-02	-7.9E-03	-5.5E-03	-3.1E-03	-6.4E-04
1291	5.5E-03	6.0E-03	1.1E-02	1.7E-02	2.1E-02	2.0E-02	1.9E-02	-1.6E-02	-1.6E-02	-2.7E-03	1.1E-02	2.4E-02	3.7E-02
1292	4.8E-03	5.2E-03	9.1E-03	1.5E-02	1.7E-02	1.6E-02	1.5E-02	-1.0E-02	-1.5E-02	-9.7E-03	-4.1E-03	1.5E-03	7.1E-03
1293	4.3E-03	4.6E-03	7.2E-03	1.3E-02	1.4E-02	1.3E-02	1.3E-02	-5.6E-03	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02
1294	4.0E-03	4.3E-03	6.3E-03	1.2E-02	1.2E-02	1.1E-02	1.1E-02	-7.0E-03	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.3E-03
1295	5.2E-03	5.8E-03	1.2E-02	1.6E-02	2.1E-02	2.1E-02	2.0E-02	-1.5E-02	-1.4E-02	4.0E-04	1.5E-02	3.0E-02	4.5E-02
1296	4.4E-03	4.8E-03	9.6E-03	1.4E-02	1.8E-02	1.7E-02	1.6E-02	-1.1E-02	-1.5E-02	-7.0E-03	7.6E-04	8.6E-03	1.6E-02
1297	3.8E-03	4.2E-03	7.8E-03	1.2E-02	1.4E-02	1.4E-02	1.3E-02	-6.3E-03	-1.3E-02	-1.0E-02	-7.8E-03	-5.4E-03	-2.9E-03
1298	3.5E-03	3.8E-03	6.3E-03	1.1E-02	1.2E-02	1.1E-02	1.1E-02	-5.8E-03	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
1299	3.4E-03	3.7E-03	5.8E-03	1.1E-02	1.1E-02	1.1E-02	1.1E-02	-7.6E-03	-1.1E-02	-9.3E-03	-7.2E-03	-5.2E-03	-3.1E-03
1300	5.0E-03	7.1E-03	1.4E-02	1.6E-02	2.4E-02	2.4E-02	2.3E-02	-5.5E-03	-3.1E-03	1.5E-02	3.4E-02	5.2E-02	7.1E-02
1301	4.5E-03	5.9E-03	1.2E-02	1.6E-02	2.2E-02	2.1E-02	2.0E-02	-1.3E-02	-1.2E-02	3.3E-03	1.9E-02	3.4E-02	5.0E-02
1302	4.1E-03	4.7E-03	9.6E-03	1.4E-02	1.8E-02	1.8E-02	1.7E-02	-1.6E-02	-1.7E-02	-6.6E-03	4.2E-03	1.5E-02	2.6E-02
1303	3.8E-03	4.1E-03	8.2E-03	1.2E-02	1.5E-02	1.5E-02	1.4E-02	-5.1E-03	-1.1E-02	-6.5E-03	-2.4E-03	1.7E-03	5.8E-03
1304	3.5E-03	3.8E-03	6.9E-03	1.0E-02	1.2E-02	1.2E-02	1.1E-02	-2.2E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02
1305	3.3E-03	3.7E-03	6.0E-03	1.0E-02	1.1E-02	1.0E-02	1.0E-02	-6.1E-03	-1.1E-02	-9.7E-03	-8.3E-03	-7.0E-03	-5.6E-03
1306	4.1E-03	5.7E-03	1.1E-02	1.4E-02	2.1E-02	2.1E-02	2.0E-02	-1.0E-02	-8.6E-03	7.1E-03	2.3E-02	3.9E-02	5.4E-02
1307	3.9E-03	4.9E-03	9.9E-03	1.3E-02	1.8E-02	1.8E-02	1.7E-02	-1.9E-02	-1.9E-02	-6.0E-03	6.6E-03	1.9E-02	3.2E-02
1308	3.6E-03	4.0E-03	8.3E-03	1.2E-02	1.5E-02	1.5E-02	1.4E-02	-1.0E-02	-1.3E-02	-5.6E-03	1.5E-03	8.7E-03	1.6E-02
1309	3.4E-03	3.6E-03	7.1E-03	1.0E-02	1.3E-02	1.2E-02	1.2E-02	-2.5E-03	-9.3E-03	-7.9E-03	-6.6E-03	-5.2E-03	-3.9E-03
1310	3.2E-03	3.5E-03	6.3E-03	9.4E-03	1.1E-02	1.1E-02	1.0E-02	-3.6E-03	-1.0E-02	-1.0E-02	-9.7E-03	-9.5E-03	-9.3E-03
1311	3.1E-03	3.4E-03	5.4E-03	8.9E-03	9.5E-03	8.8E-03	8.8E-03	-7.7E-03	-1.0E-02	-6.9E-03	-3.7E-03	-5.0E-04	2.7E-03
1312	3.6E-03	4.8E-03	9.6E-03	1.2E-02	1.8E-02	1.7E-02	1.6E-02	-2.1E-02	-1.9E-02	-5.1E-03	8.6E-03	2.2E-02	3.6E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1313	3.5E-03	4.1E-03	8.6E-03	1.2E-02	1.6E-02	1.5E-02	1.4E-02	-1.5E-02	-1.6E-02	-6.8E-03	2.5E-03	1.2E-02	2.1E-02
1314	3.2E-03	3.4E-03	7.1E-03	9.9E-03	1.3E-02	1.3E-02	1.2E-02	-3.3E-03	-8.2E-03	-4.8E-03	-1.5E-03	1.9E-03	5.3E-03
1315	3.1E-03	3.3E-03	6.4E-03	9.4E-03	1.2E-02	1.1E-02	1.1E-02	6.3E-05	-7.6E-03	-8.1E-03	-8.5E-03	-9.0E-03	-9.4E-03
1316	3.0E-03	3.2E-03	5.8E-03	8.8E-03	1.0E-02	9.9E-03	9.4E-03	-4.2E-03	-9.5E-03	-8.5E-03	-7.4E-03	-6.4E-03	-5.4E-03
1317	3.4E-03	4.5E-03	9.1E-03	1.0E-02	1.7E-02	1.7E-02	1.6E-02	-2.0E-02	-1.7E-02	-2.3E-03	1.2E-02	2.6E-02	4.0E-02
1318	3.3E-03	4.0E-03	8.3E-03	1.1E-02	1.5E-02	1.5E-02	1.4E-02	-2.0E-02	-1.9E-02	-7.9E-03	3.0E-03	1.4E-02	2.5E-02
1319	3.1E-03	3.4E-03	7.2E-03	9.9E-03	1.3E-02	1.3E-02	1.2E-02	-8.7E-03	-1.1E-02	-4.6E-03	1.6E-03	7.9E-03	1.4E-02
1320	3.0E-03	3.2E-03	6.3E-03	8.9E-03	1.2E-02	1.1E-02	1.1E-02	1.4E-03	-5.4E-03	-4.8E-03	-4.2E-03	-3.6E-03	-3.0E-03
1321	2.9E-03	3.1E-03	5.8E-03	8.5E-03	1.1E-02	1.0E-02	9.5E-03	-1.9E-03	-7.8E-03	-7.3E-03	-6.7E-03	-6.2E-03	-5.6E-03
1322	3.1E-03	3.8E-03	7.8E-03	9.2E-03	1.4E-02	1.4E-02	1.3E-02	-2.2E-02	-2.0E-02	-8.7E-03	2.6E-03	1.4E-02	2.5E-02
1323	3.0E-03	3.4E-03	7.3E-03	9.4E-03	1.3E-02	1.3E-02	1.2E-02	-1.4E-02	-1.4E-02	-6.4E-03	1.5E-03	9.4E-03	1.7E-02
1324	2.8E-03	3.1E-03	6.2E-03	8.6E-03	1.1E-02	1.1E-02	1.0E-02	-2.9E-03	-7.0E-03	-3.9E-03	-8.8E-04	2.2E-03	5.3E-03
1325	2.8E-03	3.0E-03	5.8E-03	8.1E-03	1.1E-02	1.0E-02	9.6E-03	1.8E-03	-4.8E-03	-4.9E-03	-5.0E-03	-5.1E-03	-5.1E-03
1326	2.7E-03	3.0E-03	6.3E-03	8.2E-03	1.1E-02	1.1E-02	1.0E-02	-8.4E-03	-1.0E-02	-5.2E-03	-5.8E-05	5.1E-03	1.0E-02
1327	4.0E-03	4.4E-03	6.8E-03	1.1E-02	1.2E-02	1.1E-02	1.1E-02	8.2E-03	7.6E-04	1.6E-04	-4.3E-04	-1.0E-03	-1.6E-03
1328	1.2E-03	7.8E-03	1.2E-02	1.2E-02	8.9E-03	4.7E-03	4.4E-03	-4.0E-02	-3.6E-02	-3.0E-02	-2.3E-02	-1.7E-02	-1.0E-02
1329	1.4E-03	7.1E-03	1.1E-02	1.2E-02	8.4E-03	5.0E-03	4.8E-03	-4.8E-02	-4.3E-02	-3.4E-02	-2.6E-02	-1.8E-02	-9.2E-03
1330	1.7E-03	5.2E-03	8.9E-03	9.9E-03	7.2E-03	5.6E-03	5.4E-03	-4.2E-02	-4.0E-02	-3.5E-02	-3.0E-02	-2.5E-02	-2.0E-02
1331	1.9E-03	5.6E-03	8.4E-03	9.5E-03	8.0E-03	6.1E-03	5.9E-03	-5.3E-02	-4.8E-02	-4.1E-02	-3.3E-02	-2.6E-02	-1.8E-02
1332	2.1E-03	5.5E-03	8.1E-03	8.8E-03	8.0E-03	6.5E-03	6.2E-03	-5.4E-02	-5.0E-02	-4.3E-02	-3.6E-02	-2.9E-02	-2.2E-02
1333	2.3E-03	5.9E-03	8.8E-03	9.0E-03	8.6E-03	7.0E-03	6.7E-03	-7.1E-02	-6.2E-02	-5.0E-02	-3.8E-02	-2.5E-02	-1.3E-02
1334	2.4E-03	4.6E-03	7.3E-03	8.4E-03	8.6E-03	6.9E-03	6.6E-03	-8.6E-02	-7.5E-02	-6.1E-02	-4.6E-02	-3.1E-02	-1.6E-02
1335	2.6E-03	4.3E-03	7.0E-03	8.8E-03	9.3E-03	7.5E-03	7.1E-03	-7.8E-02	-6.9E-02	-5.6E-02	-4.2E-02	-2.9E-02	-1.6E-02
1336	2.7E-03	3.7E-03	6.7E-03	8.7E-03	9.5E-03	7.6E-03	7.2E-03	-6.1E-02	-5.8E-02	-5.1E-02	-4.4E-02	-3.6E-02	-2.9E-02
1337	8.2E-04	3.0E-03	4.0E-03	5.5E-03	4.8E-03	3.6E-03	3.4E-03	3.7E-02	2.7E-02	2.0E-02	1.2E-02	4.6E-03	-2.9E-03
1338	7.4E-04	3.3E-03	4.4E-03	6.8E-03	5.3E-03	4.0E-03	3.7E-03	3.2E-02	2.5E-02	2.1E-02	1.7E-02	1.2E-02	8.1E-03
1339	8.2E-04	2.3E-03	4.0E-03	5.8E-03	4.7E-03	3.5E-03	3.3E-03	3.6E-02	2.7E-02	2.0E-02	1.2E-02	5.2E-03	-2.1E-03
1340	7.5E-04	2.5E-03	4.8E-03	7.5E-03	5.2E-03	3.9E-03	3.7E-03	3.1E-02	2.5E-02	2.1E-02	1.8E-02	1.4E-02	1.0E-02
1341	7.7E-04	2.1E-03	5.4E-03	8.0E-03	5.2E-03	3.8E-03	3.6E-03	3.1E-02	2.5E-02	2.2E-02	1.8E-02	1.5E-02	1.1E-02
1342	5.3E-04	1.5E-03	2.9E-03	3.7E-03	1.2E-02	7.4E-03	2.9E-03	5.2E-03	8.0E-03	1.2E-02	1.7E-02	2.2E-02	2.6E-02
1343	7.7E-04	2.4E-03	5.9E-03	8.3E-03	5.1E-03	3.7E-03	3.5E-03	3.1E-02	2.5E-02	2.2E-02	1.9E-02	1.6E-02	1.2E-02
1344	7.5E-04	4.0E-03	7.8E-03	1.0E-02	5.6E-03	3.9E-03	3.7E-03	2.1E-02	2.0E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02
1345	5.1E-04	1.5E-03	2.9E-03	3.7E-03	7.5E-03	6.5E-03	3.0E-03	7.5E-03	9.6E-03	1.4E-02	1.7E-02	2.1E-02	2.5E-02
1346	6.5E-04	1.7E-03	3.6E-03	5.8E-03	4.2E-03	3.2E-03	3.0E-03	4.0E-02	3.0E-02	2.2E-02	1.4E-02	5.4E-03	-2.8E-03
1347	6.8E-04	1.9E-03	4.8E-03	7.0E-03	4.6E-03	3.4E-03	3.2E-03	3.5E-02	2.7E-02	2.0E-02	1.4E-02	7.5E-03	1.2E-03
1348	7.3E-04	2.9E-03	6.1E-03	8.2E-03	5.1E-03	3.6E-03	3.4E-03	3.0E-02	2.5E-02	2.2E-02	1.9E-02	1.6E-02	1.4E-02
1349	7.4E-04	4.4E-03	7.2E-03	9.1E-03	5.6E-03	3.8E-03	3.5E-03	2.1E-02	2.0E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02
1350	4.9E-04	1.5E-03	2.8E-03	3.7E-03	7.3E-03	6.4E-03	3.3E-03	9.6E-03	1.1E-02	1.4E-02	1.8E-02	2.1E-02	2.4E-02
1351	6.2E-04	1.7E-03	3.9E-03	6.0E-03	4.1E-03	3.1E-03	2.9E-03	3.9E-02	2.9E-02	2.1E-02	1.3E-02	5.5E-03	-2.4E-03
1352	6.3E-04	2.1E-03	4.9E-03	7.0E-03	4.4E-03	3.2E-03	3.0E-03	3.4E-02	2.6E-02	2.0E-02	1.4E-02	8.4E-03	2.4E-03
1353	7.1E-04	3.1E-03	5.9E-03	7.9E-03	4.8E-03	3.3E-03	3.1E-03	3.0E-02	2.5E-02	2.3E-02	2.0E-02	1.7E-02	1.4E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1354	7.5E-04	4.4E-03	6.5E-03	8.3E-03	5.2E-03	3.3E-03	3.1E-03	2.0E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02
1355	4.7E-04	1.5E-03	2.8E-03	3.6E-03	9.8E-03	5.9E-03	3.9E-03	1.0E-02	1.1E-02	1.4E-02	1.7E-02	2.0E-02	2.3E-02
1356	5.9E-04	1.7E-03	4.1E-03	6.0E-03	4.1E-03	3.0E-03	2.8E-03	3.7E-02	2.8E-02	2.1E-02	1.3E-02	5.5E-03	-2.1E-03
1357	6.0E-04	2.3E-03	4.9E-03	6.8E-03	4.4E-03	3.1E-03	3.0E-03	3.3E-02	2.6E-02	2.0E-02	1.5E-02	9.4E-03	3.9E-03
1358	6.8E-04	3.3E-03	5.5E-03	7.3E-03	4.8E-03	3.2E-03	3.0E-03	2.9E-02	2.5E-02	2.2E-02	2.0E-02	1.8E-02	1.5E-02
1359	7.3E-04	4.3E-03	6.2E-03	8.1E-03	5.2E-03	3.3E-03	3.1E-03	2.0E-02	1.9E-02	2.0E-02	2.1E-02	2.3E-02	2.4E-02
1360	4.5E-04	1.5E-03	2.7E-03	3.6E-03	1.1E-02	7.2E-03	4.6E-03	1.0E-02	1.1E-02	1.4E-02	1.6E-02	1.9E-02	2.2E-02
1361	5.6E-04	1.9E-03	4.1E-03	6.0E-03	4.1E-03	3.0E-03	2.8E-03	3.6E-02	2.7E-02	2.0E-02	1.3E-02	5.5E-03	-1.7E-03
1362	5.9E-04	2.5E-03	4.7E-03	6.4E-03	4.5E-03	3.1E-03	2.9E-03	3.2E-02	2.6E-02	2.0E-02	1.5E-02	1.0E-02	5.1E-03
1363	6.4E-04	3.3E-03	5.1E-03	6.7E-03	4.9E-03	3.1E-03	3.0E-03	2.8E-02	2.5E-02	2.2E-02	2.0E-02	1.8E-02	1.6E-02
1364	7.0E-04	4.0E-03	6.0E-03	7.9E-03	5.3E-03	3.2E-03	3.0E-03	1.9E-02	1.9E-02	2.0E-02	2.2E-02	2.3E-02	2.4E-02
1365	4.3E-04	1.5E-03	2.6E-03	3.5E-03	9.8E-03	1.0E-02	5.3E-03	9.7E-03	1.1E-02	1.3E-02	1.6E-02	1.9E-02	2.1E-02
1366	5.5E-04	2.0E-03	4.1E-03	5.8E-03	4.1E-03	2.9E-03	2.7E-03	3.4E-02	2.6E-02	1.9E-02	1.2E-02	5.5E-03	-1.2E-03
1367	5.8E-04	2.7E-03	4.4E-03	6.0E-03	4.5E-03	3.0E-03	2.8E-03	3.2E-02	2.5E-02	2.1E-02	1.6E-02	1.1E-02	6.1E-03
1368	6.2E-04	3.3E-03	5.0E-03	6.6E-03	4.8E-03	3.1E-03	2.9E-03	2.8E-02	2.4E-02	2.2E-02	2.1E-02	1.9E-02	1.7E-02
1369	6.6E-04	3.7E-03	5.9E-03	7.7E-03	5.2E-03	3.1E-03	2.9E-03	1.9E-02	1.8E-02	2.0E-02	2.2E-02	2.3E-02	2.5E-02
1370	4.3E-04	1.4E-03	2.6E-03	3.5E-03	1.0E-02	1.1E-02	5.7E-03	9.0E-03	1.0E-02	1.3E-02	1.5E-02	1.8E-02	2.0E-02
1371	5.5E-04	2.2E-03	3.9E-03	5.5E-03	4.1E-03	2.8E-03	2.7E-03	3.3E-02	2.5E-02	1.8E-02	1.2E-02	5.4E-03	-1.0E-03
1372	5.7E-04	2.8E-03	4.3E-03	5.7E-03	4.4E-03	2.9E-03	2.8E-03	3.1E-02	2.5E-02	2.1E-02	1.6E-02	1.2E-02	7.1E-03
1373	6.1E-04	3.3E-03	5.0E-03	6.6E-03	4.8E-03	3.0E-03	2.8E-03	2.7E-02	2.4E-02	2.2E-02	2.1E-02	1.9E-02	1.8E-02
1374	6.5E-04	3.5E-03	5.8E-03	7.5E-03	5.1E-03	3.0E-03	2.8E-03	1.8E-02	1.8E-02	2.0E-02	2.2E-02	2.3E-02	2.5E-02
1375	5.2E-04	1.4E-03	2.4E-03	3.4E-03	1.8E-02	2.2E-02	6.6E-03	-1.7E-03	1.2E-03	5.8E-03	1.0E-02	1.5E-02	2.0E-02
1376	5.4E-04	1.9E-03	3.5E-03	5.1E-03	3.7E-03	2.8E-03	2.5E-03	3.2E-02	2.3E-02	1.6E-02	8.5E-03	1.1E-03	-6.3E-03
1377	5.5E-04	2.3E-03	3.8E-03	5.2E-03	4.0E-03	2.9E-03	2.6E-03	3.2E-02	2.4E-02	1.8E-02	1.2E-02	5.4E-03	-8.6E-04
1378	5.6E-04	2.8E-03	4.3E-03	5.7E-03	4.4E-03	2.9E-03	2.7E-03	3.0E-02	2.5E-02	2.0E-02	1.6E-02	1.2E-02	8.0E-03
1379	6.0E-04	3.2E-03	5.0E-03	6.6E-03	4.8E-03	2.9E-03	2.7E-03	2.6E-02	2.3E-02	2.2E-02	2.1E-02	2.0E-02	1.8E-02
1380	5.5E-04	1.3E-03	2.3E-03	3.4E-03	1.9E-02	2.2E-02	6.2E-03	-2.5E-03	4.6E-04	5.0E-03	9.6E-03	1.4E-02	1.9E-02
1381	6.0E-04	1.3E-03	2.3E-03	3.4E-03	2.2E-02	2.5E-02	5.9E-03	-1.7E-03	8.8E-04	5.0E-03	9.2E-03	1.3E-02	1.7E-02
1382	6.6E-04	1.4E-03	2.6E-03	3.4E-03	2.1E-02	2.5E-02	5.7E-03	-1.3E-06	2.2E-03	5.9E-03	9.5E-03	1.3E-02	1.7E-02
1383	7.1E-04	1.5E-03	2.8E-03	3.5E-03	2.0E-02	2.4E-02	5.1E-03	2.9E-04	2.1E-03	5.2E-03	8.4E-03	1.2E-02	1.5E-02
1384	7.3E-04	1.5E-03	3.1E-03	3.6E-03	2.1E-02	2.4E-02	4.6E-03	3.0E-05	1.1E-03	3.4E-03	5.7E-03	8.1E-03	1.0E-02
1385	7.5E-04	1.6E-03	3.2E-03	3.9E-03	2.0E-02	2.3E-02	4.1E-03	9.1E-04	7.8E-04	2.1E-03	3.4E-03	4.7E-03	6.0E-03
1386	7.4E-04	1.6E-03	3.1E-03	3.9E-03	2.0E-02	2.2E-02	4.3E-03	5.2E-03	3.6E-03	3.6E-03	3.5E-03	3.5E-03	3.5E-03
1387	7.3E-04	1.5E-03	3.0E-03	3.9E-03	1.8E-02	1.9E-02	4.6E-03	7.3E-03	4.1E-03	2.6E-03	1.1E-03	-4.1E-04	-1.9E-03
1388	6.8E-04	1.5E-03	2.7E-03	3.8E-03	1.4E-02	1.5E-02	4.7E-03	1.4E-02	8.5E-03	4.9E-03	1.4E-03	-2.2E-03	-5.8E-03
1389	6.3E-04	1.5E-03	2.7E-03	4.0E-03	7.0E-03	7.0E-03	3.5E-03	2.0E-02	1.3E-02	8.6E-03	3.9E-03	-6.9E-04	-5.3E-03
1390	5.7E-04	1.5E-03	2.8E-03	4.3E-03	5.4E-03	5.4E-03	3.2E-03	2.1E-02	1.5E-02	1.1E-02	5.9E-03	1.3E-03	-3.3E-03
1391	5.2E-04	1.9E-03	3.4E-03	4.8E-03	3.7E-03	3.0E-03	2.5E-03	3.2E-02	2.3E-02	1.6E-02	8.2E-03	9.2E-04	-6.4E-03
1392	5.3E-04	2.3E-03	3.8E-03	5.0E-03	4.0E-03	3.2E-03	2.6E-03	3.1E-02	2.4E-02	1.8E-02	1.1E-02	5.4E-03	-7.2E-04
1393	5.5E-04	2.8E-03	4.3E-03	5.7E-03	4.3E-03	2.9E-03	2.6E-03	3.0E-02	2.4E-02	2.0E-02	1.6E-02	1.3E-02	8.8E-03
1394	5.9E-04	3.0E-03	4.9E-03	6.5E-03	4.7E-03	2.9E-03	2.7E-03	2.6E-02	2.3E-02	2.2E-02	2.1E-02	2.0E-02	1.9E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1395	6.1E-04	1.3E-03	2.4E-03	3.3E-03	1.8E-02	2.0E-02	5.1E-03	-9.4E-04	1.6E-03	5.7E-03	9.8E-03	1.4E-02	1.8E-02
1396	6.7E-04	1.4E-03	2.6E-03	3.4E-03	1.7E-02	2.0E-02	5.2E-03	-1.8E-04	2.0E-03	5.6E-03	9.3E-03	1.3E-02	1.6E-02
1397	7.0E-04	1.5E-03	2.8E-03	3.5E-03	1.6E-02	1.9E-02	4.5E-03	8.4E-05	1.8E-03	4.8E-03	7.8E-03	1.1E-02	1.4E-02
1398	7.2E-04	1.5E-03	3.0E-03	3.5E-03	1.6E-02	1.9E-02	4.1E-03	-4.7E-04	4.7E-04	2.7E-03	4.9E-03	7.2E-03	9.4E-03
1399	7.2E-04	1.5E-03	3.1E-03	3.7E-03	1.7E-02	1.9E-02	3.6E-03	1.1E-03	7.9E-04	1.9E-03	3.0E-03	4.2E-03	5.3E-03
1400	7.3E-04	1.5E-03	3.0E-03	3.8E-03	1.8E-02	2.0E-02	3.7E-03	4.8E-03	3.2E-03	3.2E-03	3.2E-03	3.2E-03	3.2E-03
1401	7.0E-04	1.5E-03	2.8E-03	3.7E-03	1.6E-02	1.7E-02	4.4E-03	8.2E-03	4.5E-03	2.5E-03	4.3E-04	-1.6E-03	-3.6E-03
1402	6.5E-04	1.5E-03	2.7E-03	3.7E-03	1.4E-02	1.6E-02	4.4E-03	1.4E-02	8.5E-03	4.9E-03	1.2E-03	-2.4E-03	-6.1E-03
1403	5.8E-04	1.5E-03	2.6E-03	3.9E-03	1.2E-02	1.3E-02	4.0E-03	1.8E-02	1.2E-02	7.8E-03	3.4E-03	-1.0E-03	-5.4E-03
1404	5.4E-04	1.5E-03	2.8E-03	4.2E-03	6.0E-03	6.0E-03	2.9E-03	2.0E-02	1.4E-02	1.0E-02	5.6E-03	1.2E-03	-3.1E-03
1405	5.2E-04	1.7E-03	3.0E-03	4.4E-03	4.0E-03	4.0E-03	2.3E-03	2.5E-02	1.8E-02	1.2E-02	6.6E-03	8.5E-04	-4.9E-03
1406	4.8E-04	2.0E-03	3.4E-03	4.5E-03	3.6E-03	3.7E-03	2.4E-03	3.1E-02	2.2E-02	1.5E-02	7.8E-03	6.8E-04	-6.4E-03
1407	5.0E-04	2.4E-03	3.7E-03	4.9E-03	4.0E-03	3.8E-03	2.5E-03	3.0E-02	2.3E-02	1.7E-02	1.1E-02	5.3E-03	-5.6E-04
1408	5.3E-04	2.6E-03	4.2E-03	5.6E-03	4.2E-03	3.9E-03	2.6E-03	2.8E-02	2.3E-02	2.0E-02	1.7E-02	1.3E-02	9.6E-03
1409	6.2E-04	1.3E-03	2.4E-03	3.3E-03	1.5E-02	1.7E-02	4.7E-03	-2.0E-04	2.2E-03	6.1E-03	1.0E-02	1.4E-02	1.8E-02
1410	6.7E-04	1.4E-03	2.6E-03	3.4E-03	1.4E-02	1.6E-02	4.7E-03	-3.3E-04	1.9E-03	5.4E-03	8.9E-03	1.2E-02	1.6E-02
1411	6.9E-04	1.5E-03	2.8E-03	3.4E-03	1.3E-02	1.6E-02	4.0E-03	-1.8E-04	1.5E-03	4.3E-03	7.2E-03	1.0E-02	1.3E-02
1412	7.1E-04	1.5E-03	2.9E-03	3.4E-03	1.3E-02	1.5E-02	3.7E-03	-9.7E-04	-1.5E-04	2.0E-03	4.1E-03	6.3E-03	8.4E-03
1413	7.0E-04	1.5E-03	2.9E-03	3.6E-03	1.4E-02	1.6E-02	3.3E-03	1.3E-03	8.7E-04	1.8E-03	2.8E-03	3.8E-03	4.8E-03
1414	7.0E-04	1.5E-03	2.9E-03	3.7E-03	1.4E-02	1.5E-02	3.3E-03	4.0E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
1415	6.7E-04	1.5E-03	2.7E-03	3.6E-03	1.5E-02	1.5E-02	4.1E-03	8.8E-03	4.9E-03	2.5E-03	1.3E-04	-2.2E-03	-4.6E-03
1416	6.1E-04	1.4E-03	2.6E-03	3.7E-03	1.3E-02	1.4E-02	3.8E-03	1.4E-02	8.7E-03	4.9E-03	1.2E-03	-2.5E-03	-6.2E-03
1417	5.4E-04	1.5E-03	2.6E-03	3.9E-03	1.2E-02	1.4E-02	3.9E-03	1.8E-02	1.2E-02	7.4E-03	3.1E-03	-1.2E-03	-5.5E-03
1418	5.3E-04	1.6E-03	2.8E-03	4.1E-03	7.1E-03	7.8E-03	3.1E-03	2.0E-02	1.4E-02	9.5E-03	5.3E-03	1.1E-03	-3.1E-03
1419	5.0E-04	1.8E-03	3.0E-03	4.2E-03	5.3E-03	5.3E-03	2.4E-03	2.5E-02	1.8E-02	1.2E-02	6.1E-03	2.2E-04	-5.7E-03
1420	4.6E-04	2.1E-03	3.4E-03	4.3E-03	4.0E-03	4.1E-03	2.4E-03	3.0E-02	2.1E-02	1.4E-02	7.5E-03	5.8E-04	-6.4E-03
1421	4.8E-04	2.3E-03	3.7E-03	4.9E-03	3.9E-03	3.9E-03	2.5E-03	2.9E-02	2.2E-02	1.7E-02	1.1E-02	5.2E-03	-4.1E-04
1422	5.2E-04	2.5E-03	4.1E-03	5.4E-03	4.6E-03	4.5E-03	2.5E-03	2.8E-02	2.3E-02	2.0E-02	1.7E-02	1.3E-02	1.0E-02
1423	6.6E-04	1.4E-03	2.6E-03	3.3E-03	1.2E-02	1.3E-02	4.3E-03	-2.1E-04	1.9E-03	5.3E-03	8.7E-03	1.2E-02	1.6E-02
1424	6.9E-04	1.4E-03	2.8E-03	3.4E-03	1.1E-02	1.4E-02	3.7E-03	-4.1E-04	1.1E-03	3.8E-03	6.5E-03	9.3E-03	1.2E-02
1425	6.9E-04	1.4E-03	2.9E-03	3.4E-03	1.1E-02	1.3E-02	3.4E-03	-1.4E-03	-7.1E-04	1.3E-03	3.3E-03	5.4E-03	7.4E-03
1426	6.8E-04	1.4E-03	2.8E-03	3.5E-03	1.1E-02	1.4E-02	3.1E-03	1.6E-03	9.9E-04	1.8E-03	2.6E-03	3.4E-03	4.2E-03
1427	6.6E-04	1.4E-03	2.7E-03	3.5E-03	1.1E-02	1.4E-02	3.0E-03	4.1E-03	2.3E-03	2.1E-03	1.9E-03	1.7E-03	1.5E-03
1428	6.3E-04	1.4E-03	2.6E-03	3.5E-03	1.3E-02	1.5E-02	3.6E-03	9.3E-03	5.2E-03	2.6E-03	5.3E-05	-2.5E-03	-5.1E-03
1429	5.8E-04	1.4E-03	2.6E-03	3.7E-03	1.3E-02	1.4E-02	3.2E-03	1.4E-02	8.7E-03	4.9E-03	1.1E-03	-2.6E-03	-6.4E-03
1430	5.2E-04	1.5E-03	2.6E-03	3.8E-03	1.1E-02	1.2E-02	3.6E-03	1.7E-02	1.1E-02	7.0E-03	2.9E-03	-1.3E-03	-5.4E-03
1431	5.0E-04	1.6E-03	2.9E-03	4.0E-03	8.2E-03	8.7E-03	2.9E-03	1.8E-02	1.3E-02	9.0E-03	4.9E-03	8.9E-04	-3.1E-03
1432	4.7E-04	1.8E-03	3.1E-03	4.0E-03	6.2E-03	7.0E-03	2.8E-03	2.5E-02	1.7E-02	1.1E-02	5.5E-03	-4.5E-04	-6.4E-03
1433	4.3E-04	2.1E-03	3.4E-03	4.3E-03	5.3E-03	5.4E-03	2.5E-03	2.9E-02	2.1E-02	1.4E-02	7.5E-03	8.9E-04	-5.7E-03
1434	4.7E-04	2.2E-03	3.6E-03	4.8E-03	4.9E-03	5.0E-03	2.6E-03	2.8E-02	2.1E-02	1.6E-02	1.1E-02	5.8E-03	5.5E-04
1435	6.8E-04	1.4E-03	2.8E-03	3.4E-03	1.0E-02	1.1E-02	3.2E-03	-1.3E-03	-7.7E-04	1.1E-03	2.9E-03	4.7E-03	6.5E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1436	6.6E-04	1.4E-03	2.7E-03	3.4E-03	9.9E-03	1.2E-02	2.9E-03	1.9E-03	1.1E-03	1.7E-03	2.4E-03	3.0E-03	3.6E-03
1437	6.3E-04	1.4E-03	2.6E-03	3.4E-03	1.0E-02	1.2E-02	2.6E-03	4.5E-03	2.5E-03	2.0E-03	1.5E-03	9.5E-04	4.4E-04
1438	6.0E-04	1.4E-03	2.6E-03	3.5E-03	1.2E-02	1.4E-02	2.7E-03	9.8E-03	5.5E-03	2.8E-03	-7.9E-06	-2.8E-03	-5.6E-03
1439	5.4E-04	1.4E-03	2.6E-03	3.6E-03	1.2E-02	1.2E-02	3.1E-03	1.4E-02	8.6E-03	4.8E-03	1.0E-03	-2.8E-03	-6.6E-03
1440	5.0E-04	1.5E-03	2.6E-03	3.7E-03	1.1E-02	1.2E-02	3.3E-03	1.6E-02	1.1E-02	6.6E-03	2.6E-03	-1.4E-03	-5.3E-03
1441	4.8E-04	1.7E-03	2.8E-03	3.7E-03	9.3E-03	1.0E-02	3.0E-03	1.7E-02	1.2E-02	8.2E-03	4.4E-03	5.9E-04	-3.2E-03
1442	4.5E-04	1.9E-03	3.1E-03	3.9E-03	8.1E-03	8.7E-03	3.1E-03	2.4E-02	1.7E-02	1.1E-02	5.2E-03	-6.0E-04	-6.4E-03
1443	4.4E-04	1.4E-03	2.5E-03	3.4E-03	1.1E-02	1.3E-02	5.8E-03	7.9E-03	8.9E-03	1.2E-02	1.4E-02	1.7E-02	2.0E-02
1444	4.3E-04	1.4E-03	2.4E-03	3.3E-03	1.1E-02	1.3E-02	5.4E-03	8.5E-03	9.3E-03	1.2E-02	1.4E-02	1.7E-02	1.9E-02
1445	5.4E-04	1.3E-03	2.3E-03	3.3E-03	1.6E-02	1.9E-02	5.6E-03	-2.6E-03	3.1E-04	4.8E-03	9.3E-03	1.4E-02	1.8E-02
1446	5.5E-04	1.1E-03	2.6E-03	3.0E-03	3.3E-03	2.9E-03	2.3E-03	-1.4E-02	-9.6E-03	-3.7E-03	2.2E-03	8.1E-03	1.4E-02
1447	5.0E-04	1.3E-03	2.7E-03	3.3E-03	4.1E-03	4.0E-03	2.5E-03	-7.9E-03	-3.8E-03	1.8E-03	7.3E-03	1.3E-02	1.8E-02
1448	4.8E-04	1.4E-03	2.8E-03	3.5E-03	6.9E-03	5.3E-03	2.7E-03	-3.4E-03	3.2E-04	5.6E-03	1.1E-02	1.6E-02	2.1E-02
1449	5.4E-04	1.2E-03	2.6E-03	3.1E-03	3.4E-03	3.4E-03	2.4E-03	-1.2E-02	-7.6E-03	-1.6E-03	4.3E-03	1.0E-02	1.6E-02
1450	4.9E-04	1.3E-03	2.7E-03	3.4E-03	4.1E-03	3.9E-03	2.6E-03	-5.6E-03	-1.7E-03	3.7E-03	9.2E-03	1.5E-02	2.0E-02
1451	4.6E-04	1.4E-03	2.8E-03	3.5E-03	4.8E-03	4.4E-03	2.7E-03	-1.1E-03	2.4E-03	7.5E-03	1.3E-02	1.8E-02	2.3E-02
1452	5.3E-04	1.2E-03	2.6E-03	3.1E-03	3.9E-03	3.5E-03	2.4E-03	-1.0E-02	-6.0E-03	-2.0E-04	5.6E-03	1.1E-02	1.7E-02
1453	4.9E-04	1.3E-03	2.7E-03	3.3E-03	4.6E-03	4.1E-03	2.6E-03	-4.8E-03	-1.1E-03	4.2E-03	9.5E-03	1.5E-02	2.0E-02
1454	4.4E-04	1.4E-03	2.8E-03	3.5E-03	5.5E-03	5.0E-03	2.8E-03	1.9E-03	5.1E-03	9.9E-03	1.5E-02	2.0E-02	2.4E-02
1455	5.3E-04	1.3E-03	2.6E-03	3.2E-03	4.9E-03	3.0E-03	2.5E-03	-8.8E-03	-4.7E-03	9.3E-04	6.5E-03	1.2E-02	1.8E-02
1456	4.8E-04	1.3E-03	2.7E-03	3.4E-03	5.8E-03	3.7E-03	2.7E-03	-3.0E-03	5.3E-04	5.7E-03	1.1E-02	1.6E-02	2.1E-02
1457	4.4E-04	1.4E-03	2.7E-03	3.5E-03	6.9E-03	4.4E-03	2.9E-03	3.5E-03	6.4E-03	1.1E-02	1.6E-02	2.0E-02	2.5E-02
1458	5.1E-04	1.3E-03	2.6E-03	3.2E-03	5.8E-03	2.7E-03	2.6E-03	-6.5E-03	-2.6E-03	2.7E-03	8.0E-03	1.3E-02	1.9E-02
1459	4.8E-04	1.4E-03	2.7E-03	3.4E-03	6.9E-03	3.0E-03	2.9E-03	-1.8E-04	3.1E-03	8.0E-03	1.3E-02	1.8E-02	2.3E-02
1460	4.3E-04	1.4E-03	2.7E-03	3.5E-03	8.5E-03	4.0E-03	3.4E-03	6.6E-03	8.7E-03	1.3E-02	1.6E-02	2.0E-02	2.4E-02
1461	5.1E-04	1.3E-03	2.6E-03	3.2E-03	6.2E-03	2.9E-03	2.7E-03	-4.9E-03	-1.2E-03	4.0E-03	9.2E-03	1.4E-02	2.0E-02
1462	4.7E-04	1.4E-03	2.6E-03	3.4E-03	7.1E-03	4.3E-03	3.2E-03	3.0E-03	5.9E-03	1.0E-02	1.5E-02	1.9E-02	2.4E-02
1463	4.3E-04	1.4E-03	2.7E-03	3.5E-03	8.3E-03	6.4E-03	3.9E-03	8.8E-03	1.0E-02	1.3E-02	1.6E-02	2.0E-02	2.3E-02
1464	5.0E-04	1.3E-03	2.6E-03	3.3E-03	5.8E-03	4.1E-03	2.9E-03	-2.1E-03	1.3E-03	6.2E-03	1.1E-02	1.6E-02	2.1E-02
1465	4.7E-04	1.4E-03	2.6E-03	3.4E-03	6.3E-03	5.8E-03	3.5E-03	5.1E-03	7.5E-03	1.2E-02	1.6E-02	2.0E-02	2.4E-02
1466	4.2E-04	1.4E-03	2.6E-03	3.4E-03	6.9E-03	8.0E-03	4.4E-03	9.9E-03	1.1E-02	1.3E-02	1.6E-02	1.9E-02	2.1E-02
1467	4.9E-04	1.3E-03	2.5E-03	3.2E-03	4.7E-03	5.3E-03	3.2E-03	5.5E-04	3.6E-03	8.2E-03	1.3E-02	1.7E-02	2.2E-02
1468	4.6E-04	1.4E-03	2.5E-03	3.3E-03	5.9E-03	6.9E-03	3.8E-03	6.9E-03	8.8E-03	1.2E-02	1.6E-02	1.9E-02	2.3E-02
1469	4.8E-04	1.3E-03	2.5E-03	3.2E-03	5.2E-03	6.0E-03	3.4E-03	3.1E-03	5.9E-03	1.0E-02	1.4E-02	1.9E-02	2.3E-02
1470	4.5E-04	1.4E-03	2.5E-03	3.3E-03	6.5E-03	7.1E-03	4.1E-03	8.5E-03	9.8E-03	1.3E-02	1.5E-02	1.8E-02	2.1E-02
1471	4.5E-04	1.3E-03	2.4E-03	3.3E-03	6.7E-03	7.9E-03	4.3E-03	9.5E-03	1.0E-02	1.3E-02	1.5E-02	1.7E-02	2.0E-02
1472	4.3E-04	1.3E-03	2.3E-03	3.3E-03	1.1E-02	1.2E-02	4.9E-03	8.4E-03	9.1E-03	1.1E-02	1.4E-02	1.6E-02	1.8E-02
1473	5.1E-04	1.3E-03	2.2E-03	3.3E-03	1.3E-02	1.5E-02	4.8E-03	-1.0E-03	1.4E-03	5.3E-03	9.2E-03	1.3E-02	1.7E-02
1474	5.8E-04	1.2E-03	2.2E-03	3.3E-03	1.4E-02	1.5E-02	4.6E-03	-2.6E-03	4.7E-06	4.1E-03	8.2E-03	1.2E-02	1.6E-02
1475	1.6E-03	2.5E-03	5.0E-03	6.0E-03	9.2E-03	8.5E-03	8.0E-03	-1.8E-02	-1.8E-02	-1.2E-02	-7.1E-03	-1.7E-03	3.6E-03
1476	1.3E-03	2.4E-03	4.9E-03	5.4E-03	8.8E-03	8.2E-03	7.6E-03	-1.5E-03	2.5E-04	7.3E-03	1.4E-02	2.1E-02	2.8E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1477	1.4E-03	2.4E-03	5.2E-03	5.4E-03	8.9E-03	8.3E-03	7.7E-03	-9.5E-03	-9.0E-03	-3.0E-03	2.9E-03	8.8E-03	1.5E-02
1478	1.5E-03	2.4E-03	4.8E-03	5.8E-03	8.5E-03	8.1E-03	7.5E-03	-1.7E-02	-1.6E-02	-9.2E-03	-2.6E-03	3.9E-03	1.0E-02
1479	1.2E-03	2.5E-03	8.1E-03	5.6E-03	8.3E-03	7.9E-03	7.3E-03	-8.5E-03	-1.4E-03	1.1E-02	2.3E-02	3.5E-02	4.7E-02
1480	1.3E-03	2.1E-03	6.4E-03	4.8E-03	8.2E-03	7.6E-03	7.1E-03	-1.2E-02	-9.3E-03	-2.0E-03	5.3E-03	1.3E-02	2.0E-02
1481	1.3E-03	2.1E-03	5.8E-03	5.2E-03	7.9E-03	7.1E-03	6.7E-03	-2.0E-02	-1.8E-02	-1.0E-02	-2.7E-03	4.7E-03	1.2E-02
1482	1.4E-03	3.0E-03	1.2E-02	8.0E-03	8.3E-03	7.3E-03	6.8E-03	-2.2E-02	-8.0E-03	1.1E-02	3.0E-02	4.9E-02	6.8E-02
1483	1.2E-03	2.5E-03	9.5E-03	6.4E-03	8.0E-03	7.5E-03	7.0E-03	-1.7E-02	-7.1E-03	6.8E-03	2.1E-02	3.5E-02	4.9E-02
1484	1.2E-03	2.1E-03	7.8E-03	5.2E-03	8.4E-03	7.7E-03	7.2E-03	-1.4E-02	-9.4E-03	2.8E-04	1.0E-02	2.0E-02	2.9E-02
1485	1.2E-03	2.0E-03	6.3E-03	4.6E-03	8.2E-03	7.1E-03	6.6E-03	-2.3E-02	-2.0E-02	-1.2E-02	-4.0E-03	4.0E-03	1.2E-02
1486	1.3E-03	2.0E-03	5.1E-03	5.0E-03	7.4E-03	6.9E-03	6.4E-03	-2.6E-02	-2.2E-02	-1.5E-02	-7.2E-03	2.8E-04	7.8E-03
1487	1.4E-03	2.9E-03	1.0E-02	1.1E-02	1.1E-02	7.2E-03	6.7E-03	-1.3E-02	3.0E-03	2.4E-02	4.4E-02	6.5E-02	8.6E-02
1488	1.2E-03	2.3E-03	8.2E-03	8.3E-03	1.1E-02	7.0E-03	6.5E-03	-1.8E-02	-6.4E-03	9.6E-03	2.6E-02	4.2E-02	5.8E-02
1489	1.1E-03	2.0E-03	7.5E-03	6.4E-03	1.0E-02	7.4E-03	6.9E-03	-1.7E-02	-1.1E-02	-5.2E-04	1.0E-02	2.1E-02	3.1E-02
1490	1.2E-03	2.0E-03	6.5E-03	4.8E-03	9.0E-03	7.1E-03	6.7E-03	-2.6E-02	-2.2E-02	-1.3E-02	-4.9E-03	3.7E-03	1.2E-02
1491	1.3E-03	2.0E-03	5.8E-03	4.8E-03	7.9E-03	6.5E-03	6.1E-03	-3.3E-02	-2.8E-02	-1.9E-02	-1.0E-02	-1.4E-03	7.5E-03
1492	1.4E-03	2.6E-03	1.2E-02	9.1E-03	1.4E-02	7.1E-03	6.6E-03	5.3E-03	1.9E-02	3.8E-02	5.6E-02	7.5E-02	9.3E-02
1493	1.2E-03	2.1E-03	9.5E-03	8.1E-03	1.2E-02	6.4E-03	5.9E-03	-5.2E-03	6.4E-03	2.2E-02	3.8E-02	5.4E-02	7.0E-02
1494	1.1E-03	2.1E-03	7.2E-03	7.2E-03	1.0E-02	7.0E-03	6.5E-03	-1.2E-02	-4.3E-03	7.4E-03	1.9E-02	3.1E-02	4.3E-02
1495	1.1E-03	2.1E-03	5.3E-03	5.9E-03	8.4E-03	6.9E-03	6.4E-03	-2.5E-02	-2.0E-02	-1.1E-02	-1.6E-03	7.7E-03	1.7E-02
1496	1.2E-03	2.0E-03	4.9E-03	5.0E-03	7.1E-03	6.5E-03	6.1E-03	-3.5E-02	-2.9E-02	-2.0E-02	-1.0E-02	-9.9E-04	8.5E-03
1497	1.4E-03	2.5E-03	9.3E-03	9.6E-03	1.4E-02	6.8E-03	6.4E-03	1.2E-02	2.5E-02	4.2E-02	6.0E-02	7.7E-02	9.4E-02
1498	1.2E-03	2.5E-03	9.4E-03	7.3E-03	1.1E-02	6.2E-03	5.8E-03	4.2E-03	1.5E-02	3.1E-02	4.6E-02	6.2E-02	7.7E-02
1499	1.0E-03	2.4E-03	8.2E-03	6.0E-03	8.3E-03	6.5E-03	6.0E-03	-7.2E-03	1.4E-03	1.4E-02	2.6E-02	3.9E-02	5.1E-02
1500	1.1E-03	2.2E-03	6.7E-03	5.4E-03	7.1E-03	6.6E-03	6.2E-03	-1.5E-02	-9.8E-03	-6.5E-04	8.5E-03	1.8E-02	2.7E-02
1501	1.1E-03	2.1E-03	5.5E-03	5.1E-03	7.0E-03	6.4E-03	6.0E-03	-2.9E-02	-2.4E-02	-1.6E-02	-6.8E-03	1.9E-03	1.1E-02
1502	1.3E-03	2.9E-03	9.1E-03	1.1E-02	1.1E-02	6.6E-03	6.1E-03	1.5E-02	2.6E-02	4.2E-02	5.8E-02	7.4E-02	9.0E-02
1503	1.2E-03	2.8E-03	7.4E-03	8.3E-03	8.0E-03	6.2E-03	5.7E-03	5.9E-03	1.7E-02	3.2E-02	4.7E-02	6.2E-02	7.6E-02
1504	1.0E-03	2.5E-03	7.3E-03	6.2E-03	6.4E-03	6.0E-03	5.6E-03	-3.5E-03	6.1E-03	1.9E-02	3.3E-02	4.6E-02	5.9E-02
1505	1.0E-03	2.3E-03	6.7E-03	5.1E-03	6.7E-03	6.3E-03	5.9E-03	-1.0E-02	-4.8E-03	4.5E-03	1.4E-02	2.3E-02	3.2E-02
1506	1.1E-03	2.0E-03	6.1E-03	4.5E-03	6.8E-03	6.3E-03	5.9E-03	-2.5E-02	-2.0E-02	-1.1E-02	-2.1E-03	6.9E-03	1.6E-02
1507	1.3E-03	3.1E-03	8.5E-03	1.1E-02	1.1E-02	6.4E-03	5.9E-03	1.7E-02	2.8E-02	4.3E-02	5.8E-02	7.3E-02	8.9E-02
1508	1.2E-03	2.8E-03	7.7E-03	9.1E-03	8.9E-03	6.1E-03	5.7E-03	7.8E-03	1.9E-02	3.3E-02	4.8E-02	6.3E-02	7.8E-02
1509	1.0E-03	2.4E-03	6.3E-03	7.3E-03	7.3E-03	5.6E-03	5.1E-03	1.5E-03	1.1E-02	2.3E-02	3.6E-02	4.9E-02	6.1E-02
1510	9.6E-04	2.1E-03	5.6E-03	6.2E-03	6.3E-03	5.9E-03	5.5E-03	-7.9E-03	-1.1E-03	9.2E-03	2.0E-02	3.0E-02	4.0E-02
1511	1.0E-03	1.8E-03	5.7E-03	5.4E-03	6.5E-03	6.1E-03	5.7E-03	-2.1E-02	-1.6E-02	-6.9E-03	2.1E-03	1.1E-02	2.0E-02
1512	1.3E-03	3.0E-03	7.4E-03	1.3E-02	1.3E-02	6.1E-03	5.7E-03	1.8E-02	2.8E-02	4.2E-02	5.6E-02	7.0E-02	8.4E-02
1513	1.2E-03	2.7E-03	7.2E-03	1.0E-02	1.0E-02	5.9E-03	5.5E-03	9.2E-03	2.0E-02	3.4E-02	4.9E-02	6.3E-02	7.8E-02
1514	1.0E-03	2.2E-03	6.4E-03	8.2E-03	8.2E-03	5.3E-03	4.9E-03	2.6E-03	1.2E-02	2.6E-02	3.9E-02	5.2E-02	6.6E-02
1515	9.1E-04	1.9E-03	5.6E-03	7.0E-03	7.0E-03	5.6E-03	5.2E-03	-3.5E-03	4.2E-03	1.5E-02	2.6E-02	3.7E-02	4.9E-02
1516	9.8E-04	1.8E-03	4.7E-03	6.1E-03	6.2E-03	5.8E-03	5.4E-03	-1.6E-02	-1.1E-02	-1.3E-03	7.9E-03	1.7E-02	2.6E-02
1517	1.2E-03	2.7E-03	6.6E-03	1.1E-02	1.1E-02	5.9E-03	5.4E-03	2.0E-02	2.9E-02	4.1E-02	5.3E-02	6.5E-02	7.7E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1518	1.2E-03	2.3E-03	6.4E-03	9.8E-03	9.8E-03	5.8E-03	5.4E-03	1.0E-02	2.0E-02	3.4E-02	4.8E-02	6.1E-02	7.5E-02
1519	1.0E-03	2.0E-03	6.1E-03	8.5E-03	8.5E-03	5.3E-03	4.9E-03	3.9E-03	1.4E-02	2.7E-02	4.1E-02	5.4E-02	6.8E-02
1520	9.0E-04	1.8E-03	5.6E-03	7.4E-03	7.4E-03	5.2E-03	4.8E-03	-1.4E-04	8.4E-03	2.0E-02	3.2E-02	4.3E-02	5.5E-02
1521	9.2E-04	1.8E-03	5.0E-03	6.5E-03	6.5E-03	5.5E-03	5.1E-03	-8.1E-03	-2.2E-03	7.1E-03	1.6E-02	2.6E-02	3.5E-02
1522	1.2E-03	2.5E-03	6.8E-03	1.2E-02	1.2E-02	5.6E-03	5.2E-03	2.2E-02	2.9E-02	3.9E-02	5.0E-02	6.0E-02	7.0E-02
1523	1.1E-03	2.1E-03	5.4E-03	9.2E-03	9.2E-03	5.6E-03	5.2E-03	1.1E-02	2.0E-02	3.3E-02	4.5E-02	5.8E-02	7.0E-02
1524	1.0E-03	1.9E-03	5.6E-03	7.7E-03	7.3E-03	5.2E-03	4.9E-03	4.4E-03	1.4E-02	2.7E-02	4.0E-02	5.3E-02	6.6E-02
1525	9.1E-04	1.8E-03	5.4E-03	6.8E-03	6.4E-03	4.8E-03	4.5E-03	5.0E-04	9.3E-03	2.1E-02	3.3E-02	4.5E-02	5.7E-02
1526	8.8E-04	1.8E-03	5.0E-03	6.1E-03	5.9E-03	5.2E-03	4.9E-03	-4.1E-03	2.4E-03	1.2E-02	2.2E-02	3.1E-02	4.1E-02
1527	1.2E-03	3.2E-03	6.5E-03	9.9E-03	1.1E-02	5.2E-03	4.9E-03	2.5E-02	3.0E-02	3.8E-02	4.7E-02	5.5E-02	6.4E-02
1528	1.2E-03	2.9E-03	6.7E-03	9.9E-03	9.9E-03	5.4E-03	5.0E-03	2.1E-02	2.8E-02	3.8E-02	4.7E-02	5.7E-02	6.7E-02
1529	1.1E-03	2.6E-03	5.7E-03	9.3E-03	9.3E-03	5.4E-03	5.0E-03	1.4E-02	2.2E-02	3.2E-02	4.3E-02	5.4E-02	6.5E-02
1530	1.0E-03	2.4E-03	4.9E-03	8.0E-03	8.1E-03	5.2E-03	4.8E-03	4.9E-03	1.4E-02	2.6E-02	3.9E-02	5.1E-02	6.3E-02
1531	9.1E-04	2.2E-03	5.0E-03	6.9E-03	6.6E-03	4.6E-03	4.3E-03	7.6E-04	9.6E-03	2.2E-02	3.4E-02	4.5E-02	5.7E-02
1532	8.3E-04	2.0E-03	4.8E-03	6.2E-03	5.5E-03	4.9E-03	4.6E-03	-2.7E-03	4.7E-03	1.5E-02	2.5E-02	3.6E-02	4.6E-02
1533	1.1E-03	5.2E-03	7.5E-03	1.0E-02	1.5E-02	5.4E-03	5.1E-03	3.2E-02	3.5E-02	4.2E-02	4.9E-02	5.6E-02	6.3E-02
1534	1.1E-03	4.2E-03	6.9E-03	9.4E-03	1.1E-02	5.2E-03	4.8E-03	3.2E-02	3.5E-02	4.1E-02	4.7E-02	5.3E-02	5.9E-02
1535	1.1E-03	3.8E-03	5.8E-03	9.3E-03	9.9E-03	5.1E-03	4.7E-03	2.5E-02	3.0E-02	3.7E-02	4.5E-02	5.3E-02	6.0E-02
1536	1.1E-03	3.5E-03	6.2E-03	8.5E-03	8.3E-03	5.1E-03	4.7E-03	2.1E-02	2.7E-02	3.7E-02	4.6E-02	5.6E-02	6.6E-02
1537	1.1E-03	3.0E-03	5.7E-03	8.4E-03	7.6E-03	5.2E-03	4.8E-03	1.7E-02	2.3E-02	3.3E-02	4.2E-02	5.2E-02	6.1E-02
1538	1.0E-03	2.8E-03	4.8E-03	7.7E-03	7.5E-03	5.0E-03	4.7E-03	6.2E-03	1.4E-02	2.6E-02	3.7E-02	4.8E-02	5.9E-02
1539	9.1E-04	2.6E-03	4.5E-03	6.9E-03	6.9E-03	4.6E-03	4.3E-03	-3.0E-04	8.5E-03	2.0E-02	3.2E-02	4.4E-02	5.6E-02
1540	7.9E-04	2.4E-03	4.5E-03	6.2E-03	6.0E-03	4.6E-03	4.3E-03	-3.0E-03	5.0E-03	1.6E-02	2.6E-02	3.7E-02	4.8E-02
1541	1.1E-03	5.7E-03	7.0E-03	9.7E-03	1.4E-02	4.8E-03	4.5E-03	2.8E-02	3.3E-02	4.1E-02	4.9E-02	5.6E-02	6.4E-02
1542	1.0E-03	4.8E-03	6.6E-03	9.0E-03	1.1E-02	5.0E-03	4.6E-03	3.2E-02	3.4E-02	4.0E-02	4.5E-02	5.0E-02	5.6E-02
1543	1.1E-03	4.3E-03	5.8E-03	8.5E-03	9.0E-03	4.9E-03	4.6E-03	2.6E-02	3.0E-02	3.6E-02	4.3E-02	5.0E-02	5.6E-02
1544	1.1E-03	3.8E-03	5.5E-03	8.4E-03	8.0E-03	4.8E-03	4.5E-03	2.1E-02	2.7E-02	3.6E-02	4.5E-02	5.4E-02	6.4E-02
1545	1.1E-03	3.4E-03	5.5E-03	7.8E-03	6.7E-03	5.0E-03	4.7E-03	1.8E-02	2.4E-02	3.3E-02	4.2E-02	5.1E-02	6.0E-02
1546	1.0E-03	3.1E-03	5.0E-03	7.6E-03	6.0E-03	4.9E-03	4.6E-03	8.2E-03	1.5E-02	2.6E-02	3.6E-02	4.6E-02	5.7E-02
1547	9.1E-04	2.9E-03	4.2E-03	6.9E-03	6.2E-03	4.6E-03	4.3E-03	1.5E-04	8.4E-03	2.0E-02	3.1E-02	4.2E-02	5.4E-02
1548	1.0E-03	5.9E-03	6.4E-03	9.2E-03	1.3E-02	4.6E-03	4.3E-03	2.6E-02	3.1E-02	3.9E-02	4.8E-02	5.6E-02	6.4E-02
1549	1.0E-03	5.1E-03	6.3E-03	8.6E-03	1.0E-02	4.8E-03	4.4E-03	3.2E-02	3.4E-02	3.9E-02	4.3E-02	4.8E-02	5.3E-02
1550	1.0E-03	4.6E-03	5.7E-03	7.7E-03	8.4E-03	4.7E-03	4.4E-03	2.6E-02	3.0E-02	3.6E-02	4.2E-02	4.8E-02	5.4E-02
1551	1.1E-03	4.2E-03	4.8E-03	8.0E-03	7.4E-03	4.6E-03	4.2E-03	2.0E-02	2.5E-02	3.4E-02	4.2E-02	5.1E-02	6.0E-02
1552	1.0E-03	3.8E-03	5.2E-03	7.3E-03	6.6E-03	4.8E-03	4.5E-03	2.0E-02	2.6E-02	3.4E-02	4.3E-02	5.1E-02	5.9E-02
1553	9.9E-04	3.5E-03	5.0E-03	7.3E-03	5.6E-03	4.8E-03	4.5E-03	1.0E-02	1.7E-02	2.7E-02	3.7E-02	4.6E-02	5.6E-02
1554	1.0E-03	5.9E-03	6.0E-03	8.8E-03	1.2E-02	4.4E-03	4.1E-03	2.3E-02	2.9E-02	3.8E-02	4.7E-02	5.5E-02	6.4E-02
1555	9.6E-04	5.1E-03	6.0E-03	8.1E-03	1.0E-02	4.6E-03	4.3E-03	3.2E-02	3.3E-02	3.8E-02	4.2E-02	4.7E-02	5.1E-02
1556	1.0E-03	4.7E-03	5.6E-03	7.6E-03	8.4E-03	4.6E-03	4.3E-03	2.7E-02	3.0E-02	3.5E-02	4.1E-02	4.7E-02	5.3E-02
1557	1.0E-03	4.3E-03	4.9E-03	7.5E-03	6.9E-03	4.4E-03	4.1E-03	2.0E-02	2.5E-02	3.2E-02	4.0E-02	4.7E-02	5.4E-02
1558	1.0E-03	4.0E-03	4.7E-03	7.2E-03	6.2E-03	4.6E-03	4.3E-03	2.1E-02	2.6E-02	3.4E-02	4.2E-02	5.0E-02	5.8E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1559	9.8E-04	6.3E-03	6.2E-03	8.4E-03	1.1E-02	4.2E-03	3.9E-03	2.0E-02	2.7E-02	3.6E-02	4.6E-02	5.5E-02	6.4E-02
1560	9.3E-04	5.2E-03	5.7E-03	7.8E-03	9.7E-03	4.4E-03	4.1E-03	3.1E-02	3.3E-02	3.7E-02	4.2E-02	4.6E-02	5.1E-02
1561	9.7E-04	4.4E-03	5.4E-03	7.4E-03	8.3E-03	4.4E-03	4.1E-03	2.7E-02	2.9E-02	3.5E-02	4.1E-02	4.6E-02	5.2E-02
1562	9.7E-04	4.2E-03	4.8E-03	6.5E-03	6.9E-03	4.2E-03	3.9E-03	2.1E-02	2.4E-02	3.0E-02	3.7E-02	4.3E-02	4.9E-02
1563	9.9E-04	6.6E-03	7.7E-03	8.4E-03	9.5E-03	3.8E-03	3.5E-03	1.0E-02	2.0E-02	3.2E-02	4.4E-02	5.5E-02	6.7E-02
1564	9.3E-04	6.0E-03	6.0E-03	7.7E-03	9.9E-03	3.9E-03	3.7E-03	1.7E-02	2.5E-02	3.4E-02	4.4E-02	5.3E-02	6.3E-02
1565	8.7E-04	5.5E-03	5.4E-03	7.3E-03	9.2E-03	4.1E-03	3.8E-03	3.0E-02	3.2E-02	3.7E-02	4.1E-02	4.6E-02	5.0E-02
1566	9.2E-04	5.0E-03	5.1E-03	6.9E-03	8.0E-03	4.2E-03	3.9E-03	2.6E-02	2.9E-02	3.4E-02	3.9E-02	4.4E-02	4.9E-02
1567	9.4E-04	4.5E-03	4.7E-03	6.4E-03	7.0E-03	4.1E-03	3.8E-03	2.1E-02	2.4E-02	3.0E-02	3.6E-02	4.2E-02	4.8E-02
1568	9.9E-04	7.1E-03	9.9E-03	8.8E-03	7.3E-03	3.3E-03	3.3E-03	1.1E-02	1.9E-02	3.0E-02	4.0E-02	5.0E-02	6.0E-02
1569	9.7E-04	6.2E-03	8.0E-03	8.0E-03	8.9E-03	3.6E-03	3.3E-03	1.1E-02	2.0E-02	3.1E-02	4.3E-02	5.4E-02	6.6E-02
1570	9.1E-04	5.1E-03	6.4E-03	7.4E-03	9.3E-03	3.8E-03	3.5E-03	1.5E-02	2.3E-02	3.2E-02	4.2E-02	5.2E-02	6.2E-02
1571	8.4E-04	5.0E-03	5.3E-03	7.1E-03	8.9E-03	4.0E-03	3.7E-03	3.0E-02	3.2E-02	3.7E-02	4.1E-02	4.6E-02	5.1E-02
1572	8.8E-04	4.8E-03	4.9E-03	6.6E-03	7.8E-03	4.0E-03	3.8E-03	2.6E-02	2.9E-02	3.3E-02	3.8E-02	4.3E-02	4.8E-02
1573	9.1E-04	4.6E-03	4.6E-03	6.3E-03	6.6E-03	4.0E-03	3.7E-03	2.2E-02	2.5E-02	3.0E-02	3.6E-02	4.1E-02	4.7E-02
1574	8.0E-04	6.8E-03	9.3E-03	1.2E-02	6.4E-03	4.1E-03	3.8E-03	1.0E-02	1.2E-02	1.7E-02	2.1E-02	2.6E-02	3.0E-02
1575	8.7E-04	7.4E-03	1.2E-02	1.4E-02	7.1E-03	4.0E-03	3.7E-03	1.7E-02	1.6E-02	1.8E-02	2.0E-02	2.1E-02	2.3E-02
1576	9.8E-04	8.9E-03	1.3E-02	1.6E-02	7.6E-03	4.0E-03	3.6E-03	2.5E-02	2.5E-02	2.7E-02	2.9E-02	3.2E-02	3.4E-02
1577	9.7E-04	1.0E-02	1.3E-02	1.6E-02	7.4E-03	3.5E-03	3.3E-03	3.0E-02	3.2E-02	3.6E-02	4.0E-02	4.4E-02	4.8E-02
1578	9.7E-04	9.5E-03	1.4E-02	1.5E-02	7.7E-03	3.6E-03	3.6E-03	3.4E-02	3.6E-02	3.9E-02	4.3E-02	4.6E-02	4.9E-02
1579	9.6E-04	8.3E-03	1.1E-02	1.3E-02	7.4E-03	3.7E-03	3.7E-03	3.0E-02	3.2E-02	3.6E-02	4.1E-02	4.5E-02	4.9E-02
1580	9.5E-04	6.5E-03	9.7E-03	1.0E-02	6.8E-03	3.4E-03	3.4E-03	1.5E-02	2.1E-02	2.9E-02	3.6E-02	4.4E-02	5.2E-02
1581	9.7E-04	6.0E-03	9.0E-03	8.5E-03	6.9E-03	3.2E-03	3.2E-03	1.0E-02	1.9E-02	2.9E-02	3.9E-02	4.8E-02	5.8E-02
1582	9.4E-04	5.9E-03	8.1E-03	7.6E-03	8.3E-03	3.4E-03	3.2E-03	1.1E-02	2.0E-02	3.1E-02	4.2E-02	5.3E-02	6.4E-02
1583	8.9E-04	5.2E-03	6.6E-03	7.2E-03	8.8E-03	3.7E-03	3.4E-03	1.3E-02	2.1E-02	3.1E-02	4.1E-02	5.1E-02	6.1E-02
1584	8.2E-04	4.5E-03	5.7E-03	6.9E-03	8.5E-03	3.8E-03	3.6E-03	2.8E-02	3.1E-02	3.6E-02	4.1E-02	4.6E-02	5.1E-02
1585	8.5E-04	4.2E-03	4.8E-03	6.5E-03	7.6E-03	3.9E-03	3.7E-03	2.7E-02	2.9E-02	3.3E-02	3.8E-02	4.3E-02	4.7E-02
1586	7.7E-04	5.9E-03	8.6E-03	1.1E-02	5.9E-03	3.4E-03	3.2E-03	1.1E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
1587	8.5E-04	6.1E-03	1.1E-02	1.3E-02	6.9E-03	3.9E-03	3.6E-03	1.7E-02	1.6E-02	1.7E-02	1.9E-02	2.1E-02	2.3E-02
1588	9.6E-04	7.9E-03	1.2E-02	1.5E-02	7.4E-03	3.8E-03	3.5E-03	2.4E-02	2.4E-02	2.7E-02	3.0E-02	3.2E-02	3.5E-02
1589	9.5E-04	9.2E-03	1.2E-02	1.4E-02	7.4E-03	3.4E-03	3.2E-03	2.8E-02	3.0E-02	3.4E-02	3.7E-02	4.1E-02	4.5E-02
1590	9.4E-04	8.5E-03	1.2E-02	1.3E-02	7.5E-03	3.5E-03	3.5E-03	3.3E-02	3.5E-02	3.8E-02	4.1E-02	4.4E-02	4.7E-02
1591	9.4E-04	7.2E-03	1.0E-02	1.2E-02	7.0E-03	3.6E-03	3.6E-03	2.9E-02	3.1E-02	3.5E-02	3.9E-02	4.3E-02	4.8E-02
1592	9.3E-04	5.6E-03	8.3E-03	1.0E-02	6.6E-03	3.3E-03	3.3E-03	1.6E-02	2.2E-02	2.9E-02	3.6E-02	4.3E-02	5.0E-02
1593	9.4E-04	5.3E-03	8.1E-03	8.5E-03	6.5E-03	3.1E-03	3.1E-03	1.0E-02	1.8E-02	2.8E-02	3.7E-02	4.7E-02	5.6E-02
1594	9.2E-04	5.1E-03	7.6E-03	7.6E-03	7.8E-03	3.3E-03	3.1E-03	1.1E-02	2.0E-02	3.0E-02	4.1E-02	5.1E-02	6.2E-02
1595	8.7E-04	5.0E-03	6.8E-03	7.1E-03	8.4E-03	3.5E-03	3.3E-03	1.1E-02	1.9E-02	2.9E-02	4.0E-02	5.0E-02	6.0E-02
1596	8.0E-04	4.6E-03	5.8E-03	6.8E-03	8.2E-03	3.7E-03	3.4E-03	2.6E-02	2.9E-02	3.5E-02	4.0E-02	4.6E-02	5.1E-02
1597	8.2E-04	4.0E-03	5.1E-03	6.3E-03	7.5E-03	3.8E-03	3.5E-03	2.7E-02	2.9E-02	3.3E-02	3.8E-02	4.2E-02	4.6E-02
1598	7.5E-04	5.3E-03	8.3E-03	1.0E-02	5.9E-03	3.3E-03	3.1E-03	1.1E-02	1.3E-02	1.7E-02	2.1E-02	2.5E-02	2.9E-02
1599	8.3E-04	5.5E-03	9.8E-03	1.2E-02	6.8E-03	3.8E-03	3.5E-03	1.6E-02	1.5E-02	1.7E-02	1.9E-02	2.0E-02	2.2E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1600	9.4E-04	7.4E-03	1.1E-02	1.4E-02	7.2E-03	3.7E-03	3.4E-03	2.4E-02	2.4E-02	2.7E-02	3.0E-02	3.3E-02	3.6E-02
1601	9.3E-04	8.3E-03	1.1E-02	1.2E-02	7.3E-03	3.3E-03	3.1E-03	2.6E-02	2.8E-02	3.2E-02	3.6E-02	3.9E-02	4.3E-02
1602	9.2E-04	7.3E-03	9.8E-03	1.1E-02	7.2E-03	3.4E-03	3.4E-03	3.2E-02	3.3E-02	3.6E-02	3.9E-02	4.2E-02	4.5E-02
1603	9.2E-04	6.4E-03	9.2E-03	1.1E-02	6.8E-03	3.4E-03	3.4E-03	2.4E-02	2.7E-02	3.2E-02	3.6E-02	4.1E-02	4.5E-02
1604	9.1E-04	5.4E-03	7.5E-03	9.9E-03	6.3E-03	3.2E-03	3.2E-03	1.7E-02	2.2E-02	2.8E-02	3.5E-02	4.1E-02	4.8E-02
1605	9.2E-04	4.9E-03	7.3E-03	8.5E-03	6.2E-03	3.0E-03	3.0E-03	1.0E-02	1.8E-02	2.7E-02	3.6E-02	4.5E-02	5.4E-02
1606	9.0E-04	4.3E-03	6.8E-03	7.5E-03	7.4E-03	3.1E-03	3.0E-03	1.1E-02	1.9E-02	2.9E-02	4.0E-02	5.0E-02	6.0E-02
1607	8.5E-04	4.4E-03	6.5E-03	7.0E-03	7.9E-03	3.4E-03	3.2E-03	1.0E-02	1.9E-02	2.9E-02	3.9E-02	4.9E-02	5.9E-02
1608	7.9E-04	4.4E-03	5.8E-03	6.6E-03	7.9E-03	3.6E-03	3.3E-03	2.3E-02	2.7E-02	3.3E-02	3.9E-02	4.5E-02	5.1E-02
1609	7.3E-04	4.6E-03	7.8E-03	1.0E-02	5.9E-03	3.2E-03	3.0E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.4E-02	2.8E-02
1610	8.1E-04	5.1E-03	9.0E-03	1.1E-02	6.7E-03	3.6E-03	3.3E-03	1.6E-02	1.5E-02	1.7E-02	1.8E-02	2.0E-02	2.2E-02
1611	9.2E-04	6.8E-03	9.7E-03	1.3E-02	7.0E-03	3.6E-03	3.3E-03	2.3E-02	2.4E-02	2.7E-02	3.0E-02	3.3E-02	3.6E-02
1612	9.2E-04	7.4E-03	1.0E-02	1.1E-02	7.1E-03	3.1E-03	3.0E-03	2.5E-02	2.6E-02	3.0E-02	3.3E-02	3.7E-02	4.1E-02
1613	9.1E-04	6.6E-03	9.2E-03	9.9E-03	7.0E-03	3.3E-03	3.3E-03	2.8E-02	2.9E-02	3.2E-02	3.5E-02	3.8E-02	4.1E-02
1614	9.2E-04	5.7E-03	8.5E-03	1.0E-02	6.6E-03	3.2E-03	3.2E-03	2.5E-02	2.7E-02	3.2E-02	3.6E-02	4.0E-02	4.4E-02
1615	8.8E-04	5.2E-03	7.3E-03	9.5E-03	6.1E-03	3.1E-03	3.1E-03	1.8E-02	2.2E-02	2.8E-02	3.4E-02	4.0E-02	4.6E-02
1616	8.9E-04	4.3E-03	6.4E-03	8.4E-03	5.9E-03	2.9E-03	2.9E-03	1.0E-02	1.8E-02	2.6E-02	3.5E-02	4.3E-02	5.2E-02
1617	8.7E-04	4.1E-03	6.3E-03	7.5E-03	6.9E-03	3.0E-03	2.8E-03	1.1E-02	1.9E-02	2.8E-02	3.8E-02	4.8E-02	5.8E-02
1618	8.3E-04	3.6E-03	6.0E-03	6.9E-03	7.5E-03	3.3E-03	3.0E-03	1.1E-02	1.9E-02	2.8E-02	3.8E-02	4.8E-02	5.8E-02
1619	7.2E-04	3.9E-03	7.3E-03	9.4E-03	5.7E-03	3.1E-03	2.9E-03	1.2E-02	1.3E-02	1.7E-02	2.1E-02	2.4E-02	2.8E-02
1620	8.0E-04	4.8E-03	8.3E-03	1.1E-02	6.6E-03	3.5E-03	3.2E-03	1.6E-02	1.5E-02	1.6E-02	1.8E-02	1.9E-02	2.1E-02
1621	9.0E-04	6.2E-03	8.7E-03	1.2E-02	6.9E-03	3.4E-03	3.2E-03	2.2E-02	2.3E-02	2.5E-02	2.8E-02	3.1E-02	3.4E-02
1622	9.0E-04	6.4E-03	8.9E-03	1.0E-02	6.9E-03	3.0E-03	2.9E-03	2.3E-02	2.5E-02	2.8E-02	3.1E-02	3.5E-02	3.8E-02
1623	9.1E-04	5.9E-03	8.5E-03	9.0E-03	6.8E-03	3.0E-03	3.0E-03	2.8E-02	2.9E-02	3.1E-02	3.4E-02	3.7E-02	3.9E-02
1624	9.0E-04	5.1E-03	7.8E-03	9.5E-03	6.2E-03	3.1E-03	3.1E-03	2.6E-02	2.8E-02	3.1E-02	3.5E-02	3.9E-02	4.2E-02
1625	8.6E-04	4.9E-03	7.0E-03	9.1E-03	5.9E-03	3.0E-03	3.0E-03	1.8E-02	2.2E-02	2.8E-02	3.4E-02	3.9E-02	4.5E-02
1626	8.7E-04	4.1E-03	5.9E-03	8.3E-03	5.7E-03	2.8E-03	2.8E-03	1.1E-02	1.8E-02	2.6E-02	3.4E-02	4.2E-02	5.0E-02
1627	8.5E-04	3.8E-03	5.7E-03	7.4E-03	6.5E-03	2.9E-03	2.7E-03	1.0E-02	1.8E-02	2.8E-02	3.7E-02	4.6E-02	5.6E-02
1628	8.9E-04	1.4E-03	1.4E-03	1.3E-03	1.6E-03	1.3E-03	1.1E-03	-1.1E-02	-8.6E-03	-5.2E-03	-1.8E-03	1.7E-03	5.1E-03
1629	9.9E-04	1.3E-03	1.4E-03	1.3E-03	1.7E-03	1.6E-03	1.2E-03	-1.3E-02	-9.7E-03	-6.2E-03	-2.7E-03	8.5E-04	4.4E-03
1630	8.6E-04	1.3E-03	1.4E-03	1.3E-03	1.8E-03	1.3E-03	1.2E-03	-1.2E-02	-8.9E-03	-5.5E-03	-2.1E-03	1.2E-03	4.6E-03
1631	9.9E-04	1.3E-03	1.3E-03	1.3E-03	1.7E-03	1.5E-03	1.3E-03	-1.3E-02	-1.1E-02	-7.4E-03	-4.4E-03	-1.3E-03	1.8E-03
1632	8.2E-04	1.3E-03	1.3E-03	1.3E-03	2.1E-03	1.4E-03	1.3E-03	-1.2E-02	-9.8E-03	-6.7E-03	-3.7E-03	-6.4E-04	2.4E-03
1633	9.5E-04	1.3E-03	1.3E-03	1.4E-03	1.9E-03	1.5E-03	1.4E-03	-1.3E-02	-1.2E-02	-9.2E-03	-6.7E-03	-4.2E-03	-1.6E-03
1634	7.8E-04	1.2E-03	1.3E-03	1.3E-03	2.4E-03	1.4E-03	1.3E-03	-1.2E-02	-1.1E-02	-8.1E-03	-5.6E-03	-3.0E-03	-5.1E-04
1635	9.1E-04	1.2E-03	1.2E-03	1.4E-03	2.2E-03	1.5E-03	1.4E-03	-1.5E-02	-1.4E-02	-1.1E-02	-9.3E-03	-7.0E-03	-4.8E-03
1636	7.0E-04	1.1E-03	1.1E-03	1.4E-03	3.0E-03	1.5E-03	1.4E-03	-2.1E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02
1637	8.5E-04	1.0E-03	1.2E-03	1.5E-03	3.5E-03	1.5E-03	1.4E-03	-2.4E-02	-2.2E-02	-2.0E-02	-1.7E-02	-1.5E-02	-1.2E-02
1638	8.7E-04	1.0E-03	1.2E-03	1.5E-03	3.7E-03	1.5E-03	1.4E-03	-2.2E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.3E-02	-1.0E-02
1639	8.3E-04	1.0E-03	1.2E-03	1.5E-03	3.7E-03	1.7E-03	1.4E-03	-2.1E-02	-2.0E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02
1640	8.2E-04	1.1E-03	1.3E-03	1.5E-03	3.5E-03	2.0E-03	1.4E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1641	8.2E-04	1.3E-03	1.3E-03	1.6E-03	3.3E-03	2.7E-03	1.4E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-9.3E-03
1642	8.4E-04	1.0E-03	1.2E-03	1.5E-03	3.6E-03	1.7E-03	1.3E-03	-2.3E-02	-2.2E-02	-1.9E-02	-1.6E-02	-1.4E-02	-1.1E-02
1643	8.5E-04	1.0E-03	1.2E-03	1.5E-03	3.9E-03	1.7E-03	1.3E-03	-2.1E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.2E-02	-1.0E-02
1644	8.1E-04	1.0E-03	1.2E-03	1.5E-03	4.0E-03	1.7E-03	1.4E-03	-2.0E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.8E-03
1645	7.9E-04	1.1E-03	1.3E-03	1.5E-03	4.0E-03	1.9E-03	1.4E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.3E-03
1646	7.9E-04	1.2E-03	1.3E-03	1.6E-03	3.8E-03	2.2E-03	1.4E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-8.1E-03
1647	8.2E-04	1.0E-03	1.2E-03	1.4E-03	3.9E-03	1.9E-03	1.3E-03	-2.0E-02	-1.9E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.2E-03
1648	7.8E-04	1.0E-03	1.2E-03	1.5E-03	4.2E-03	1.9E-03	1.3E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.9E-03
1649	7.7E-04	1.1E-03	1.3E-03	1.5E-03	4.4E-03	1.8E-03	1.4E-03	-1.7E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.0E-03
1650	7.7E-04	1.1E-03	1.4E-03	1.5E-03	4.4E-03	2.2E-03	1.4E-03	-1.7E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.4E-03	-7.2E-03
1651	7.5E-04	1.0E-03	1.3E-03	1.5E-03	4.6E-03	2.1E-03	1.3E-03	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.8E-03	-6.7E-03
1652	7.5E-04	1.1E-03	1.5E-03	1.5E-03	4.9E-03	2.1E-03	1.3E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.8E-03	-6.7E-03
1653	1.5E-03	1.9E-03	2.1E-03	2.0E-03	1.4E-03	1.2E-03	1.2E-03	-2.0E-02	-2.0E-02	-1.8E-02	-1.7E-02	-1.5E-02	-1.4E-02
1654	1.4E-03	2.0E-03	2.4E-03	2.1E-03	1.4E-03	1.2E-03	1.1E-03	-2.1E-02	-2.1E-02	-2.0E-02	-1.9E-02	-1.8E-02	-1.7E-02
1655	1.2E-03	2.1E-03	2.9E-03	2.4E-03	1.5E-03	1.2E-03	1.2E-03	-2.2E-02	-2.2E-02	-2.2E-02	-2.1E-02	-2.0E-02	-2.0E-02
1656	1.1E-03	2.6E-03	3.3E-03	2.7E-03	1.7E-03	1.3E-03	1.3E-03	-2.4E-02	-2.4E-02	-2.3E-02	-2.3E-02	-2.2E-02	-2.1E-02
1657	1.5E-03	1.8E-03	1.7E-03	2.1E-03	1.8E-03	1.6E-03	1.6E-03	-1.9E-02	-1.7E-02	-1.5E-02	-1.2E-02	-9.4E-03	-6.8E-03
1658	1.6E-03	1.9E-03	1.8E-03	2.0E-03	1.7E-03	1.5E-03	1.5E-03	-2.0E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.1E-02	-9.0E-03
1659	1.6E-03	2.0E-03	1.9E-03	2.0E-03	1.6E-03	1.4E-03	1.4E-03	-2.0E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02
1660	1.5E-03	2.0E-03	2.1E-03	2.1E-03	1.5E-03	1.3E-03	1.3E-03	-2.1E-02	-2.1E-02	-1.9E-02	-1.7E-02	-1.6E-02	-1.4E-02
1661	1.3E-03	2.1E-03	2.6E-03	2.3E-03	1.5E-03	1.2E-03	1.2E-03	-2.2E-02	-2.2E-02	-2.1E-02	-1.9E-02	-1.8E-02	-1.7E-02
1662	1.1E-03	2.4E-03	3.2E-03	2.5E-03	1.7E-03	1.3E-03	1.2E-03	-2.4E-02	-2.3E-02	-2.2E-02	-2.1E-02	-2.0E-02	-1.9E-02
1663	1.4E-03	1.6E-03	1.7E-03	2.3E-03	2.1E-03	1.9E-03	1.9E-03	-1.8E-02	-1.5E-02	-1.2E-02	-8.4E-03	-4.9E-03	-1.4E-03
1664	1.6E-03	1.9E-03	1.8E-03	2.2E-03	2.0E-03	1.8E-03	1.8E-03	-1.9E-02	-1.6E-02	-1.3E-02	-9.8E-03	-6.6E-03	-3.4E-03
1665	1.7E-03	2.0E-03	1.9E-03	2.2E-03	1.9E-03	1.7E-03	1.7E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.5E-03	-5.6E-03
1666	1.7E-03	2.1E-03	1.9E-03	2.1E-03	1.8E-03	1.6E-03	1.6E-03	-2.0E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.0E-03
1667	1.5E-03	2.1E-03	1.9E-03	2.0E-03	1.7E-03	1.5E-03	1.5E-03	-2.1E-02	-2.0E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02
1668	1.3E-03	2.1E-03	2.1E-03	2.2E-03	1.5E-03	1.3E-03	1.3E-03	-2.2E-02	-2.1E-02	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02
1669	1.5E-03	1.7E-03	1.7E-03	2.3E-03	2.2E-03	2.0E-03	2.0E-03	-1.7E-02	-1.3E-02	-9.3E-03	-5.3E-03	-1.2E-03	2.8E-03
1670	1.7E-03	2.0E-03	1.9E-03	2.4E-03	2.2E-03	2.0E-03	2.0E-03	-1.8E-02	-1.4E-02	-1.1E-02	-6.7E-03	-2.8E-03	1.0E-03
1671	1.8E-03	2.2E-03	2.0E-03	2.3E-03	2.1E-03	1.9E-03	1.9E-03	-1.8E-02	-1.5E-02	-1.2E-02	-8.3E-03	-4.7E-03	-1.2E-03
1672	1.8E-03	2.2E-03	2.1E-03	2.2E-03	2.0E-03	1.8E-03	1.8E-03	-1.9E-02	-1.7E-02	-1.3E-02	-1.0E-02	-6.9E-03	-3.7E-03
1673	1.6E-03	2.2E-03	1.9E-03	2.2E-03	1.9E-03	1.7E-03	1.7E-03	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02	-8.9E-03	-6.0E-03
1674	1.2E-03	1.4E-03	1.7E-03	2.4E-03	2.3E-03	2.1E-03	2.1E-03	-1.6E-02	-1.1E-02	-6.5E-03	-1.8E-03	2.9E-03	7.7E-03
1675	1.6E-03	1.8E-03	1.8E-03	2.5E-03	2.4E-03	2.2E-03	2.2E-03	-1.6E-02	-1.2E-02	-7.0E-03	-2.3E-03	2.3E-03	7.0E-03
1676	1.8E-03	2.1E-03	2.0E-03	2.4E-03	2.3E-03	2.1E-03	2.1E-03	-1.6E-02	-1.2E-02	-7.4E-03	-2.9E-03	1.6E-03	6.1E-03
1677	1.9E-03	2.2E-03	2.1E-03	2.4E-03	2.2E-03	2.0E-03	2.0E-03	-1.6E-02	-1.2E-02	-8.0E-03	-3.8E-03	4.9E-04	4.7E-03
1678	1.9E-03	2.3E-03	2.2E-03	2.4E-03	2.2E-03	1.9E-03	1.9E-03	-1.6E-02	-1.3E-02	-9.0E-03	-5.1E-03	-1.3E-03	2.6E-03
1679	1.7E-03	2.3E-03	2.0E-03	2.3E-03	2.1E-03	1.8E-03	1.8E-03	-1.7E-02	-1.4E-02	-1.1E-02	-7.1E-03	-3.6E-03	4.6E-05
1680	1.2E-03	1.5E-03	1.8E-03	2.5E-03	2.4E-03	2.2E-03	2.2E-03	-1.7E-02	-1.2E-02	-6.4E-03	-1.0E-03	4.3E-03	9.7E-03
1681	1.6E-03	1.9E-03	1.8E-03	2.5E-03	2.5E-03	2.3E-03	2.3E-03	-1.7E-02	-1.2E-02	-6.6E-03	-1.1E-03	4.5E-03	1.0E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1682	1.9E-03	2.1E-03	2.0E-03	2.5E-03	2.4E-03	2.2E-03	2.2E-03	-1.7E-02	-1.2E-02	-6.8E-03	-1.4E-03	3.9E-03	9.3E-03
1683	2.0E-03	2.4E-03	2.3E-03	2.5E-03	2.4E-03	2.2E-03	2.2E-03	-1.7E-02	-1.2E-02	-7.2E-03	-1.9E-03	3.3E-03	8.6E-03
1684	2.0E-03	2.4E-03	2.3E-03	2.5E-03	2.3E-03	2.1E-03	2.1E-03	-1.7E-02	-1.3E-02	-7.6E-03	-2.5E-03	2.6E-03	7.7E-03
1685	1.3E-03	1.5E-03	1.8E-03	2.5E-03	2.5E-03	2.2E-03	2.2E-03	-1.8E-02	-1.3E-02	-7.9E-03	-2.8E-03	2.4E-03	7.5E-03
1686	1.8E-03	2.0E-03	2.0E-03	2.6E-03	2.5E-03	2.3E-03	2.3E-03	-1.9E-02	-1.4E-02	-8.7E-03	-3.4E-03	2.0E-03	7.3E-03
1687	2.0E-03	2.3E-03	2.2E-03	2.6E-03	2.6E-03	2.3E-03	2.3E-03	-1.8E-02	-1.3E-02	-7.7E-03	-2.4E-03	2.9E-03	8.1E-03
1688	2.1E-03	2.5E-03	2.4E-03	2.6E-03	2.6E-03	2.3E-03	2.3E-03	-1.8E-02	-1.3E-02	-7.8E-03	-2.6E-03	2.7E-03	7.9E-03
1689	2.1E-03	2.6E-03	2.4E-03	2.6E-03	2.5E-03	2.3E-03	2.3E-03	-1.8E-02	-1.3E-02	-8.1E-03	-3.0E-03	2.0E-03	7.1E-03
1690	1.3E-03	1.6E-03	1.8E-03	2.5E-03	2.5E-03	2.2E-03	2.2E-03	-2.2E-02	-1.7E-02	-1.2E-02	-6.9E-03	-1.8E-03	3.4E-03
1691	1.7E-03	2.0E-03	1.9E-03	2.5E-03	2.5E-03	2.3E-03	2.3E-03	-2.2E-02	-1.7E-02	-1.2E-02	-7.3E-03	-2.2E-03	2.9E-03
1692	2.2E-03	2.5E-03	2.4E-03	2.7E-03	2.6E-03	2.4E-03	2.4E-03	-2.2E-02	-1.8E-02	-1.3E-02	-7.8E-03	-2.8E-03	2.2E-03
1693	2.3E-03	2.7E-03	2.6E-03	2.7E-03	2.7E-03	2.4E-03	2.4E-03	-2.2E-02	-1.7E-02	-1.3E-02	-7.9E-03	-3.1E-03	1.7E-03
1694	2.2E-03	2.7E-03	2.5E-03	2.7E-03	2.7E-03	2.4E-03	2.4E-03	-2.1E-02	-1.7E-02	-1.3E-02	-8.0E-03	-3.5E-03	9.5E-04
1695	1.4E-03	1.6E-03	1.8E-03	2.4E-03	2.4E-03	2.2E-03	2.2E-03	-2.4E-02	-2.0E-02	-1.6E-02	-1.1E-02	-6.4E-03	-1.7E-03
1696	1.9E-03	2.2E-03	2.1E-03	2.6E-03	2.6E-03	2.4E-03	2.3E-03	-2.5E-02	-2.1E-02	-1.7E-02	-1.2E-02	-7.2E-03	-2.5E-03
1697	2.2E-03	2.6E-03	2.5E-03	2.6E-03	2.6E-03	2.4E-03	2.4E-03	-2.5E-02	-2.1E-02	-1.7E-02	-1.2E-02	-7.8E-03	-3.3E-03
1698	2.4E-03	2.9E-03	2.7E-03	2.8E-03	2.7E-03	2.5E-03	2.5E-03	-2.6E-02	-2.3E-02	-1.8E-02	-1.4E-02	-9.2E-03	-4.8E-03
1699	2.3E-03	2.8E-03	2.7E-03	2.8E-03	2.8E-03	2.5E-03	2.5E-03	-2.6E-02	-2.2E-02	-1.8E-02	-1.4E-02	-9.9E-03	-5.7E-03
1700	1.4E-03	1.7E-03	1.8E-03	2.3E-03	2.4E-03	2.2E-03	2.2E-03	-2.2E-02	-1.9E-02	-1.6E-02	-1.3E-02	-9.6E-03	-6.4E-03
1701	1.9E-03	2.2E-03	2.2E-03	2.5E-03	2.5E-03	2.3E-03	2.3E-03	-2.2E-02	-2.0E-02	-1.7E-02	-1.3E-02	-1.0E-02	-6.8E-03
1702	2.4E-03	2.7E-03	2.6E-03	2.6E-03	2.7E-03	2.4E-03	2.4E-03	-2.3E-02	-2.0E-02	-1.7E-02	-1.4E-02	-1.1E-02	-7.5E-03
1703	2.5E-03	3.0E-03	2.9E-03	2.7E-03	2.8E-03	2.5E-03	2.5E-03	-2.4E-02	-2.1E-02	-1.8E-02	-1.4E-02	-1.1E-02	-7.9E-03
1704	2.4E-03	3.0E-03	2.8E-03	2.8E-03	2.8E-03	2.6E-03	2.6E-03	-2.4E-02	-2.2E-02	-1.8E-02	-1.5E-02	-1.2E-02	-8.3E-03
1705	1.5E-03	1.8E-03	1.8E-03	2.3E-03	2.3E-03	2.1E-03	2.1E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.4E-03
1706	2.0E-03	2.4E-03	2.3E-03	2.4E-03	2.5E-03	2.2E-03	2.2E-03	-1.9E-02	-1.7E-02	-1.5E-02	-1.4E-02	-1.2E-02	-9.6E-03
1707	2.5E-03	2.9E-03	2.8E-03	2.6E-03	2.6E-03	2.4E-03	2.4E-03	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.3E-03
1708	2.7E-03	3.1E-03	3.0E-03	2.7E-03	2.7E-03	2.5E-03	2.5E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.9E-03
1709	2.6E-03	3.2E-03	3.0E-03	2.8E-03	2.9E-03	2.6E-03	2.6E-03	-2.0E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.3E-03
1710	1.6E-03	1.8E-03	1.8E-03	2.1E-03	2.2E-03	2.0E-03	2.0E-03	-1.7E-02	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.3E-03
1711	2.1E-03	2.5E-03	2.4E-03	2.3E-03	2.4E-03	2.1E-03	2.1E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.8E-03
1712	2.7E-03	3.1E-03	3.0E-03	2.5E-03	2.5E-03	2.3E-03	2.3E-03	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.9E-03	-7.8E-03
1713	2.9E-03	3.4E-03	3.3E-03	2.6E-03	2.7E-03	2.5E-03	2.5E-03	-1.7E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.9E-03	-6.7E-03
1714	2.7E-03	3.4E-03	3.2E-03	2.8E-03	2.8E-03	2.6E-03	2.6E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.2E-03	-5.6E-03
1715	1.8E-03	1.9E-03	1.8E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	-1.7E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.8E-03	-6.4E-03
1716	2.2E-03	2.6E-03	2.6E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.0E-03	-5.4E-03
1717	2.8E-03	3.3E-03	3.2E-03	2.4E-03	2.4E-03	2.2E-03	2.2E-03	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.3E-03	-4.6E-03
1718	3.1E-03	3.7E-03	3.6E-03	2.6E-03	2.6E-03	2.4E-03	2.4E-03	-1.7E-02	-1.5E-02	-1.2E-02	-9.5E-03	-6.7E-03	-3.9E-03
1719	2.8E-03	3.5E-03	3.4E-03	2.7E-03	2.8E-03	2.5E-03	2.5E-03	-1.7E-02	-1.5E-02	-1.2E-02	-9.2E-03	-6.6E-03	-3.9E-03
1720	1.9E-03	2.1E-03	2.0E-03	1.8E-03	1.9E-03	1.7E-03	1.7E-03	-1.6E-02	-1.5E-02	-1.2E-02	-9.4E-03	-6.8E-03	-4.2E-03
1721	2.4E-03	2.8E-03	2.7E-03	2.0E-03	2.1E-03	1.9E-03	1.8E-03	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.4E-03	-4.9E-03
1722	3.0E-03	3.5E-03	3.4E-03	2.2E-03	2.3E-03	2.1E-03	2.1E-03	-1.7E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.0E-03	-5.5E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1723	3.3E-03	4.0E-03	3.8E-03	2.4E-03	2.5E-03	2.3E-03	2.3E-03	-1.7E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.7E-03	-6.4E-03
1724	3.0E-03	3.7E-03	3.6E-03	2.6E-03	2.7E-03	2.4E-03	2.4E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.5E-03	-6.4E-03
1725	2.5E-03	2.9E-03	2.9E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.7E-02	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.2E-03
1726	3.2E-03	3.8E-03	3.7E-03	2.1E-03	2.1E-03	1.9E-03	1.9E-03	-1.7E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.8E-03
1727	3.6E-03	4.3E-03	4.1E-03	2.3E-03	2.3E-03	2.1E-03	2.1E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.4E-02	-1.2E-02	-1.0E-02
1728	3.1E-03	3.9E-03	3.7E-03	2.5E-03	2.5E-03	2.3E-03	2.3E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.6E-03
1729	3.5E-03	4.0E-03	3.9E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-2.0E-02	-2.0E-02	-1.8E-02	-1.7E-02	-1.6E-02	-1.4E-02
1730	3.9E-03	4.6E-03	4.5E-03	2.1E-03	2.2E-03	1.9E-03	1.9E-03	-2.0E-02	-2.0E-02	-1.9E-02	-1.8E-02	-1.6E-02	-1.5E-02
1731	3.2E-03	4.1E-03	4.0E-03	2.3E-03	2.4E-03	2.1E-03	2.1E-03	-2.0E-02	-1.9E-02	-1.8E-02	-1.7E-02	-1.6E-02	-1.5E-02
1732	4.2E-03	5.0E-03	4.9E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-2.3E-02	-2.3E-02	-2.2E-02	-2.1E-02	-2.0E-02	-1.9E-02
1733	3.4E-03	4.4E-03	4.2E-03	2.1E-03	2.1E-03	1.9E-03	1.9E-03	-2.2E-02	-2.2E-02	-2.1E-02	-2.0E-02	-1.9E-02	-1.8E-02
1734	7.5E-04	1.9E-03	3.5E-03	3.9E-03	4.5E-03	3.4E-03	3.2E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02
1735	7.3E-04	1.8E-03	3.3E-03	3.8E-03	4.3E-03	3.4E-03	3.2E-03	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02
1736	8.0E-04	1.8E-03	3.7E-03	4.1E-03	4.9E-03	3.8E-03	3.6E-03	-9.8E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02
1737	9.4E-04	2.9E-03	5.0E-03	5.8E-03	6.3E-03	3.9E-03	3.7E-03	-8.0E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.3E-02	-5.1E-02
1738	9.4E-04	2.9E-03	5.1E-03	5.9E-03	6.7E-03	4.3E-03	4.0E-03	-6.9E-03	-1.7E-02	-2.5E-02	-3.2E-02	-4.0E-02	-4.8E-02
1739	3.4E-03	4.9E-03	4.7E-03	8.8E-04	9.8E-04	6.4E-04	6.4E-04	-1.1E-02	-9.5E-03	-7.6E-03	-5.8E-03	-3.9E-03	-2.1E-03
1740	4.7E-03	5.9E-03	5.7E-03	9.0E-04	9.2E-04	6.7E-04	6.6E-04	-1.1E-02	-9.1E-03	-7.0E-03	-5.0E-03	-2.9E-03	-8.3E-04
1741	5.7E-03	6.4E-03	6.3E-03	9.3E-04	8.5E-04	7.3E-04	6.9E-04	-1.1E-02	-8.8E-03	-6.5E-03	-4.1E-03	-1.8E-03	6.0E-04
1742	3.3E-03	3.7E-03	2.1E-03	8.1E-04	1.1E-03	6.7E-04	6.3E-04	-9.0E-03	-8.5E-03	-7.6E-03	-6.7E-03	-5.9E-03	-5.0E-03
1743	3.5E-03	3.9E-03	3.2E-03	8.4E-04	1.1E-03	6.4E-04	6.4E-04	-9.1E-03	-8.3E-03	-7.3E-03	-6.2E-03	-5.1E-03	-4.0E-03
1744	3.6E-03	4.8E-03	4.6E-03	8.6E-04	1.0E-03	6.4E-04	6.4E-04	-9.4E-03	-8.3E-03	-7.0E-03	-5.6E-03	-4.2E-03	-2.8E-03
1745	4.7E-03	6.1E-03	5.9E-03	8.9E-04	9.6E-04	6.6E-04	6.6E-04	-9.7E-03	-8.3E-03	-6.6E-03	-4.9E-03	-3.2E-03	-1.5E-03
1746	2.8E-03	3.2E-03	2.0E-03	8.3E-04	1.1E-03	8.1E-04	6.7E-04	-8.5E-03	-8.6E-03	-8.4E-03	-8.2E-03	-7.9E-03	-7.7E-03
1747	3.3E-03	3.7E-03	2.2E-03	8.4E-04	1.1E-03	7.2E-04	6.8E-04	-8.5E-03	-8.4E-03	-8.0E-03	-7.6E-03	-7.2E-03	-6.8E-03
1748	3.7E-03	4.2E-03	2.7E-03	8.6E-04	1.1E-03	6.9E-04	6.9E-04	-8.6E-03	-8.3E-03	-7.6E-03	-6.9E-03	-6.2E-03	-5.6E-03
1749	4.1E-03	4.5E-03	4.3E-03	8.7E-04	1.0E-03	7.0E-04	7.0E-04	-8.7E-03	-8.0E-03	-7.0E-03	-6.0E-03	-5.0E-03	-4.0E-03
1750	2.5E-03	2.9E-03	2.0E-03	8.5E-04	1.2E-03	8.7E-04	7.1E-04	-9.0E-03	-8.8E-03	-8.3E-03	-7.8E-03	-7.3E-03	-6.9E-03
1751	3.2E-03	3.6E-03	2.3E-03	8.7E-04	1.2E-03	7.8E-04	7.3E-04	-9.2E-03	-8.7E-03	-8.0E-03	-7.2E-03	-6.5E-03	-5.7E-03
1752	3.8E-03	4.3E-03	2.5E-03	8.9E-04	1.1E-03	7.4E-04	7.4E-04	-9.1E-03	-8.5E-03	-7.5E-03	-6.6E-03	-5.6E-03	-4.7E-03
1753	4.4E-03	4.9E-03	3.8E-03	9.1E-04	1.1E-03	7.5E-04	7.5E-04	-8.5E-03	-7.8E-03	-6.7E-03	-5.7E-03	-4.6E-03	-3.6E-03
1754	1.5E-03	1.9E-03	1.6E-03	8.5E-04	1.2E-03	1.0E-03	7.3E-04	-8.7E-03	-8.6E-03	-8.2E-03	-7.8E-03	-7.4E-03	-7.1E-03
1755	2.0E-03	2.5E-03	1.9E-03	8.7E-04	1.2E-03	9.3E-04	7.5E-04	-8.6E-03	-8.4E-03	-7.9E-03	-7.4E-03	-6.9E-03	-6.4E-03
1756	2.8E-03	3.2E-03	2.2E-03	8.9E-04	1.2E-03	8.4E-04	7.6E-04	-8.3E-03	-8.0E-03	-7.4E-03	-6.9E-03	-6.3E-03	-5.7E-03
1757	3.7E-03	4.1E-03	2.6E-03	9.1E-04	1.2E-03	7.8E-04	7.8E-04	-7.9E-03	-7.5E-03	-6.9E-03	-6.3E-03	-5.6E-03	-5.0E-03
1758	4.6E-03	5.0E-03	3.1E-03	9.4E-04	1.1E-03	8.0E-04	8.0E-04	-8.0E-03	-7.4E-03	-6.5E-03	-5.6E-03	-4.7E-03	-3.8E-03
1759	1.5E-03	1.6E-03	1.6E-03	8.6E-04	1.2E-03	1.1E-03	7.5E-04	-8.5E-03	-8.2E-03	-7.6E-03	-7.0E-03	-6.4E-03	-5.8E-03
1760	1.7E-03	2.0E-03	1.7E-03	8.8E-04	1.2E-03	9.9E-04	7.7E-04	-8.3E-03	-8.0E-03	-7.3E-03	-6.6E-03	-5.9E-03	-5.2E-03
1761	2.2E-03	2.7E-03	2.0E-03	9.1E-04	1.2E-03	9.0E-04	7.9E-04	-8.1E-03	-7.7E-03	-6.9E-03	-6.1E-03	-5.2E-03	-4.4E-03
1762	3.2E-03	3.6E-03	2.5E-03	9.3E-04	1.2E-03	8.1E-04	8.1E-04	-7.4E-03	-6.8E-03	-5.9E-03	-5.0E-03	-4.2E-03	-3.3E-03
1763	4.4E-03	4.8E-03	3.1E-03	9.6E-04	1.2E-03	8.4E-04	8.3E-04	-6.5E-03	-5.8E-03	-4.9E-03	-3.9E-03	-3.0E-03	-2.0E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1764	1.6E-03	1.6E-03	1.7E-03	8.6E-04	1.2E-03	1.1E-03	7.6E-04	-8.1E-03	-7.5E-03	-6.7E-03	-5.8E-03	-4.9E-03	-4.0E-03
1765	1.7E-03	1.8E-03	1.8E-03	8.9E-04	1.2E-03	1.1E-03	7.8E-04	-7.4E-03	-6.9E-03	-6.0E-03	-5.2E-03	-4.3E-03	-3.4E-03
1766	1.9E-03	2.0E-03	2.0E-03	9.1E-04	1.3E-03	9.6E-04	8.1E-04	-6.5E-03	-6.0E-03	-5.1E-03	-4.2E-03	-3.3E-03	-2.4E-03
1767	2.4E-03	2.9E-03	2.2E-03	9.4E-04	1.3E-03	8.6E-04	8.3E-04	-5.7E-03	-5.3E-03	-4.4E-03	-3.6E-03	-2.8E-03	-2.0E-03
1768	1.5E-03	1.7E-03	1.7E-03	8.5E-04	1.2E-03	1.2E-03	7.6E-04	-6.2E-03	-5.7E-03	-4.9E-03	-4.1E-03	-3.3E-03	-2.4E-03
1769	1.7E-03	1.9E-03	1.8E-03	8.8E-04	1.2E-03	1.1E-03	7.9E-04	-5.3E-03	-5.0E-03	-4.3E-03	-3.7E-03	-3.0E-03	-2.3E-03
1770	1.9E-03	2.2E-03	2.1E-03	9.1E-04	1.3E-03	1.0E-03	8.1E-04	-4.3E-03	-4.3E-03	-3.9E-03	-3.5E-03	-3.1E-03	-2.7E-03
1771	2.3E-03	2.7E-03	2.3E-03	9.4E-04	1.3E-03	9.3E-04	8.4E-04	-3.7E-03	-3.9E-03	-3.7E-03	-3.5E-03	-3.3E-03	-3.1E-03
1772	1.7E-03	2.0E-03	1.6E-03	8.4E-04	1.2E-03	1.3E-03	7.5E-04	-3.4E-03	-3.3E-03	-2.8E-03	-2.3E-03	-1.8E-03	-1.3E-03
1773	1.9E-03	2.3E-03	1.8E-03	8.7E-04	1.3E-03	1.2E-03	7.8E-04	-2.4E-03	-2.5E-03	-2.2E-03	-2.0E-03	-1.7E-03	-1.4E-03
1774	2.2E-03	2.6E-03	1.9E-03	8.9E-04	1.3E-03	1.1E-03	8.0E-04	-2.3E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.3E-03
1775	2.7E-03	3.1E-03	2.2E-03	9.2E-04	1.3E-03	1.0E-03	8.3E-04	-2.5E-03	-3.0E-03	-3.2E-03	-3.3E-03	-3.4E-03	-3.5E-03
1776	1.9E-03	2.2E-03	1.5E-03	8.2E-04	1.2E-03	1.3E-03	7.6E-04	-2.0E-03	-2.2E-03	-1.9E-03	-1.6E-03	-1.4E-03	-1.1E-03
1777	2.2E-03	2.5E-03	1.6E-03	8.4E-04	1.3E-03	1.3E-03	7.7E-04	-2.0E-03	-2.5E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.4E-03
1778	2.5E-03	2.8E-03	1.7E-03	8.7E-04	1.3E-03	1.2E-03	7.9E-04	-2.5E-03	-3.2E-03	-3.5E-03	-3.7E-03	-3.9E-03	-4.1E-03
1779	3.0E-03	3.3E-03	2.0E-03	9.0E-04	1.4E-03	1.1E-03	8.2E-04	-4.6E-03	-5.4E-03	-5.7E-03	-6.0E-03	-6.3E-03	-6.6E-03
1780	2.1E-03	2.4E-03	1.3E-03	7.9E-04	1.2E-03	1.4E-03	7.7E-04	-1.8E-03	-2.5E-03	-2.8E-03	-3.1E-03	-3.4E-03	-3.7E-03
1781	2.3E-03	2.6E-03	1.4E-03	8.1E-04	1.3E-03	1.3E-03	7.8E-04	-3.4E-03	-4.3E-03	-4.7E-03	-5.1E-03	-5.5E-03	-5.9E-03
1782	2.6E-03	2.9E-03	1.9E-03	8.4E-04	1.4E-03	1.3E-03	8.0E-04	-6.2E-03	-7.0E-03	-7.4E-03	-7.7E-03	-8.1E-03	-8.4E-03
1783	2.9E-03	3.3E-03	2.6E-03	8.7E-04	1.4E-03	1.1E-03	8.2E-04	-9.0E-03	-9.7E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02
1784	2.0E-03	2.4E-03	1.3E-03	7.7E-04	1.1E-03	1.4E-03	7.5E-04	-4.7E-03	-5.6E-03	-6.1E-03	-6.5E-03	-7.0E-03	-7.4E-03
1785	2.2E-03	2.6E-03	1.8E-03	7.9E-04	1.3E-03	1.4E-03	7.8E-04	-7.8E-03	-8.6E-03	-8.8E-03	-9.1E-03	-9.4E-03	-9.7E-03
1786	2.4E-03	2.8E-03	2.3E-03	8.1E-04	1.4E-03	1.3E-03	8.0E-04	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02
1787	2.6E-03	3.0E-03	2.9E-03	8.3E-04	1.4E-03	1.2E-03	8.2E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
1788	1.9E-03	2.3E-03	1.7E-03	8.2E-04	1.1E-03	1.5E-03	7.4E-04	-9.2E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
1789	2.0E-03	2.4E-03	2.1E-03	8.4E-04	1.2E-03	1.5E-03	7.6E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
1790	2.1E-03	2.5E-03	2.5E-03	8.6E-04	1.4E-03	1.4E-03	7.8E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
1791	2.2E-03	3.1E-03	3.4E-03	8.9E-04	1.5E-03	1.3E-03	8.2E-04	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.5E-02
1792	1.5E-03	2.2E-03	2.3E-03	9.0E-04	1.2E-03	1.5E-03	7.2E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02
1793	1.5E-03	2.5E-03	2.5E-03	9.2E-04	1.3E-03	1.5E-03	7.4E-04	-1.1E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.5E-02
1794	1.8E-03	3.1E-03	3.5E-03	9.2E-04	1.4E-03	1.4E-03	7.8E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.5E-02
1795	1.3E-03	2.4E-03	2.6E-03	9.4E-04	1.3E-03	1.5E-03	7.5E-04	-1.0E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02
1796	1.5E-03	3.7E-03	4.1E-03	9.7E-04	1.4E-03	1.5E-03	7.8E-04	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02
1797	2.1E-03	5.2E-03	5.6E-03	9.9E-04	1.5E-03	1.3E-03	8.0E-04	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02
1798	1.4E-03	4.0E-03	4.4E-03	1.0E-03	1.4E-03	1.5E-03	8.3E-04	-8.8E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.3E-02
1799	2.4E-03	5.2E-03	5.6E-03	1.0E-03	1.5E-03	1.4E-03	8.6E-04	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02
1800	3.8E-03	6.1E-03	6.4E-03	1.1E-03	1.6E-03	1.3E-03	8.9E-04	-1.2E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02
1801	3.7E-03	5.3E-03	5.7E-03	1.1E-03	1.6E-03	1.4E-03	9.3E-04	-1.4E-02	-1.3E-02	-1.1E-02	-9.7E-03	-8.2E-03	-6.7E-03
1802	2.6E-03	4.7E-03	5.0E-03	1.2E-03	1.5E-03	1.6E-03	9.2E-04	-1.3E-02	-1.2E-02	-1.1E-02	-9.9E-03	-8.8E-03	-7.7E-03
1803	3.3E-03	4.2E-03	4.6E-03	1.3E-03	1.6E-03	1.6E-03	9.8E-04	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.8E-03	-6.8E-03
1804	4.4E-03	4.6E-03	4.1E-03	1.0E-03	1.1E-03	1.0E-03	9.7E-04	-1.9E-02	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.2E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1805	3.7E-03	4.1E-03	4.0E-03	1.0E-03	1.2E-03	1.1E-03	1.1E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02
1806	4.8E-03	5.7E-03	5.6E-03	1.1E-03	1.3E-03	1.2E-03	1.1E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.7E-03
1807	5.1E-03	6.3E-03	6.1E-03	1.2E-03	1.4E-03	1.3E-03	1.2E-03	-1.8E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.8E-03	-6.2E-03
1808	3.8E-03	4.8E-03	4.7E-03	9.2E-04	9.1E-04	7.7E-04	7.2E-04	-1.7E-02	-1.6E-02	-1.4E-02	-1.3E-02	-1.1E-02	-9.4E-03
1809	4.5E-03	5.0E-03	5.0E-03	9.5E-04	9.4E-04	8.5E-04	7.9E-04	-1.7E-02	-1.5E-02	-1.4E-02	-1.2E-02	-9.8E-03	-8.0E-03
1810	4.8E-03	5.0E-03	4.8E-03	9.9E-04	1.0E-03	9.4E-04	8.8E-04	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.7E-03	-6.5E-03
1811	4.2E-03	4.4E-03	4.1E-03	1.0E-03	1.1E-03	1.0E-03	9.6E-04	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.7E-03	-5.3E-03
1812	5.1E-03	6.1E-03	6.0E-03	1.1E-03	1.2E-03	1.1E-03	1.1E-03	-1.6E-02	-1.4E-02	-1.2E-02	-9.3E-03	-6.7E-03	-4.1E-03
1813	5.7E-03	6.9E-03	6.8E-03	1.1E-03	1.3E-03	1.2E-03	1.1E-03	-1.6E-02	-1.4E-02	-1.1E-02	-8.1E-03	-5.4E-03	-2.7E-03
1814	2.6E-03	4.0E-03	3.9E-03	8.7E-04	9.8E-04	6.2E-04	6.2E-04	-1.4E-02	-1.3E-02	-1.2E-02	-9.9E-03	-8.2E-03	-6.6E-03
1815	3.7E-03	4.9E-03	4.8E-03	9.0E-04	9.4E-04	6.9E-04	6.4E-04	-1.4E-02	-1.3E-02	-1.1E-02	-8.9E-03	-6.9E-03	-5.0E-03
1816	4.7E-03	5.5E-03	5.4E-03	9.3E-04	8.8E-04	7.6E-04	7.1E-04	-1.4E-02	-1.3E-02	-1.0E-02	-8.2E-03	-6.0E-03	-3.8E-03
1817	5.3E-03	5.5E-03	5.5E-03	9.7E-04	9.4E-04	8.5E-04	7.9E-04	-1.4E-02	-1.2E-02	-1.0E-02	-7.5E-03	-5.1E-03	-2.6E-03
1818	4.9E-03	5.1E-03	4.6E-03	9.8E-04	1.0E-03	9.2E-04	8.6E-04	-1.4E-02	-1.2E-02	-8.9E-03	-6.3E-03	-3.6E-03	-9.4E-04
1819	5.3E-03	6.5E-03	6.4E-03	1.0E-03	1.1E-03	1.0E-03	9.6E-04	-1.4E-02	-1.2E-02	-8.8E-03	-6.0E-03	-3.1E-03	-2.5E-04
1820	6.2E-03	7.5E-03	7.4E-03	1.1E-03	1.2E-03	1.1E-03	1.0E-03	-1.3E-02	-1.1E-02	-7.5E-03	-4.4E-03	-1.3E-03	1.8E-03
1821	5.9E-03	6.0E-03	5.8E-03	9.6E-04	9.1E-04	8.2E-04	7.6E-04	-1.1E-02	-8.8E-03	-6.2E-03	-3.6E-03	-9.3E-04	1.7E-03
1822	5.2E-03	6.2E-03	6.1E-03	1.0E-03	1.0E-03	9.2E-04	8.5E-04	-1.2E-02	-9.7E-03	-6.9E-03	-4.1E-03	-1.3E-03	1.5E-03
1823	3.0E-03	3.5E-03	2.5E-03	8.3E-04	1.1E-03	6.2E-04	5.9E-04	-1.2E-02	-1.1E-02	-9.2E-03	-7.9E-03	-6.6E-03	-5.3E-03
1824	9.0E-04	3.0E-03	5.0E-03	5.9E-03	6.1E-03	3.5E-03	3.3E-03	-1.5E-03	-1.3E-02	-2.3E-02	-3.3E-02	-4.3E-02	-5.2E-02
1825	9.0E-04	3.1E-03	5.0E-03	6.0E-03	6.2E-03	3.6E-03	3.3E-03	-4.6E-03	-1.5E-02	-2.4E-02	-3.3E-02	-4.2E-02	-5.0E-02
1826	8.2E-04	2.9E-03	4.7E-03	5.8E-03	6.1E-03	3.3E-03	3.1E-03	-3.2E-02	-3.5E-02	-3.5E-02	-3.5E-02	-3.6E-02	-3.6E-02
1827	9.3E-04	3.1E-03	5.1E-03	5.8E-03	6.0E-03	3.6E-03	3.4E-03	-4.4E-03	-1.5E-02	-2.4E-02	-3.3E-02	-4.1E-02	-5.0E-02
1828	9.7E-04	6.4E-03	8.5E-03	8.8E-03	7.7E-03	4.4E-03	3.7E-03	-1.1E-01	-9.7E-02	-7.8E-02	-6.0E-02	-4.2E-02	-2.3E-02
1829	9.8E-04	7.3E-03	9.8E-03	1.0E-02	8.1E-03	4.5E-03	3.9E-03	-9.5E-02	-8.5E-02	-7.2E-02	-5.9E-02	-4.6E-02	-3.3E-02
1830	9.9E-04	8.0E-03	1.1E-02	1.1E-02	8.9E-03	4.6E-03	4.0E-03	-6.4E-02	-5.7E-02	-4.8E-02	-3.9E-02	-3.0E-02	-2.1E-02
1831	1.0E-03	8.6E-03	1.2E-02	1.2E-02	9.5E-03	4.7E-03	4.1E-03	-5.2E-02	-4.8E-02	-4.1E-02	-3.4E-02	-2.7E-02	-2.0E-02
1832	8.7E-04	3.3E-03	6.1E-03	7.5E-03	7.9E-03	4.1E-03	3.8E-03	-1.3E-01	-1.2E-01	-1.0E-01	-9.0E-02	-7.6E-02	-6.2E-02
1833	8.7E-04	3.2E-03	5.3E-03	6.6E-03	7.1E-03	3.7E-03	3.5E-03	-1.6E-01	-1.5E-01	-1.4E-01	-1.3E-01	-1.2E-01	-1.0E-01
1834	8.7E-04	3.2E-03	5.7E-03	7.0E-03	7.5E-03	3.9E-03	3.6E-03	-1.6E-01	-1.5E-01	-1.3E-01	-1.2E-01	-1.1E-01	-9.8E-02
1835	9.2E-04	3.3E-03	5.5E-03	6.4E-03	7.1E-03	3.9E-03	3.4E-03	-1.2E-01	-1.1E-01	-9.2E-02	-7.6E-02	-6.0E-02	-4.5E-02
1836	9.4E-04	4.1E-03	5.8E-03	6.8E-03	7.4E-03	4.1E-03	3.4E-03	-1.0E-01	-8.7E-02	-6.9E-02	-5.1E-02	-3.3E-02	-1.5E-02
1837	8.1E-04	3.8E-03	5.3E-03	5.6E-03	6.3E-03	3.8E-03	3.1E-03	-1.1E-01	-9.6E-02	-8.1E-02	-6.5E-02	-5.0E-02	-3.5E-02
1838	8.2E-04	4.5E-03	6.2E-03	6.4E-03	6.5E-03	3.9E-03	3.3E-03	-9.0E-02	-7.6E-02	-5.9E-02	-4.3E-02	-2.6E-02	-9.9E-03
1839	8.3E-04	5.1E-03	7.0E-03	7.3E-03	6.5E-03	4.0E-03	3.4E-03	-9.0E-02	-7.6E-02	-5.9E-02	-4.3E-02	-2.7E-02	-1.1E-02
1840	8.3E-04	5.7E-03	7.9E-03	8.2E-03	6.7E-03	4.0E-03	3.4E-03	-8.7E-02	-7.3E-02	-5.8E-02	-4.3E-02	-2.7E-02	-1.2E-02
1841	8.3E-04	6.3E-03	8.8E-03	9.1E-03	7.4E-03	4.1E-03	3.5E-03	-9.7E-02	-8.2E-02	-6.6E-02	-4.9E-02	-3.3E-02	-1.6E-02
1842	1.0E-03	5.9E-03	8.7E-03	9.2E-03	7.3E-03	3.9E-03	3.6E-03	-8.4E-02	-7.2E-02	-5.8E-02	-4.3E-02	-2.9E-02	-1.5E-02
1843	9.6E-04	6.8E-03	9.7E-03	1.0E-02	8.0E-03	4.2E-03	3.7E-03	-8.5E-02	-7.5E-02	-6.3E-02	-5.1E-02	-3.9E-02	-2.8E-02
1844	1.1E-03	6.9E-03	1.0E-02	1.1E-02	8.1E-03	4.2E-03	3.8E-03	-6.4E-02	-5.6E-02	-4.5E-02	-3.5E-02	-2.4E-02	-1.3E-02
1845	1.2E-03	6.7E-03	1.0E-02	1.1E-02	8.1E-03	4.4E-03	4.2E-03	-4.0E-02	-3.6E-02	-2.9E-02	-2.3E-02	-1.6E-02	-9.2E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1846	8.1E-04	2.9E-03	5.0E-03	6.2E-03	6.7E-03	3.5E-03	3.3E-03	-1.1E-01	-1.1E-01	-9.7E-02	-8.8E-02	-7.9E-02	-7.0E-02
1847	7.9E-04	2.7E-03	4.5E-03	5.3E-03	5.9E-03	3.5E-03	2.9E-03	-1.3E-01	-1.3E-01	-1.2E-01	-1.2E-01	-1.1E-01	-1.1E-01
1848	8.1E-04	2.9E-03	4.7E-03	5.6E-03	6.2E-03	3.6E-03	3.0E-03	-1.3E-01	-1.3E-01	-1.2E-01	-1.1E-01	-1.0E-01	-9.8E-02
1849	7.4E-04	3.6E-03	5.1E-03	5.3E-03	5.8E-03	3.6E-03	3.0E-03	-1.2E-01	-1.1E-01	-1.1E-01	-1.0E-01	-9.5E-02	-8.9E-02
1850	9.2E-04	5.2E-03	7.6E-03	8.1E-03	6.5E-03	3.6E-03	3.2E-03	-7.4E-02	-6.1E-02	-4.5E-02	-2.9E-02	-1.4E-02	2.0E-03
1851	1.0E-03	5.3E-03	8.1E-03	8.6E-03	6.8E-03	3.7E-03	3.5E-03	-7.7E-02	-6.5E-02	-5.1E-02	-3.7E-02	-2.3E-02	-8.8E-03
1852	8.2E-04	3.0E-03	5.5E-03	6.7E-03	7.1E-03	3.7E-03	3.5E-03	-8.6E-02	-8.0E-02	-7.2E-02	-6.4E-02	-5.6E-02	-4.8E-02
1853	7.8E-04	2.8E-03	4.9E-03	6.0E-03	6.4E-03	3.4E-03	3.2E-03	-1.0E-01	-9.4E-02	-8.2E-02	-7.0E-02	-5.9E-02	-4.7E-02
1854	7.5E-04	2.6E-03	4.0E-03	5.0E-03	5.4E-03	3.2E-03	2.7E-03	-1.1E-01	-1.0E-01	-9.4E-02	-8.4E-02	-7.4E-02	-6.4E-02
1855	7.6E-04	2.6E-03	4.2E-03	5.0E-03	5.6E-03	3.3E-03	2.7E-03	-1.3E-01	-1.2E-01	-1.1E-01	-1.0E-01	-9.4E-02	-8.4E-02
1856	7.2E-04	2.9E-03	4.2E-03	5.0E-03	5.6E-03	3.5E-03	2.9E-03	-1.2E-01	-1.2E-01	-1.1E-01	-1.1E-01	-1.0E-01	-9.8E-02
1857	6.9E-04	4.3E-03	6.2E-03	6.5E-03	5.4E-03	3.5E-03	3.0E-03	-1.0E-01	-9.6E-02	-8.8E-02	-8.0E-02	-7.2E-02	-6.4E-02
1858	7.7E-04	4.7E-03	6.8E-03	7.2E-03	5.9E-03	3.5E-03	3.0E-03	-8.1E-02	-6.8E-02	-5.3E-02	-3.8E-02	-2.3E-02	-8.6E-03
1859	1.3E-03	4.8E-03	8.0E-03	8.7E-03	6.7E-03	4.5E-03	4.3E-03	-7.0E-02	-6.1E-02	-4.9E-02	-3.7E-02	-2.5E-02	-1.3E-02
1860	1.3E-03	5.4E-03	8.7E-03	9.3E-03	7.1E-03	4.4E-03	4.2E-03	-7.1E-02	-6.3E-02	-5.2E-02	-4.1E-02	-3.0E-02	-1.9E-02
1861	1.5E-03	4.5E-03	7.8E-03	8.7E-03	6.6E-03	4.8E-03	4.6E-03	-6.4E-02	-5.6E-02	-4.6E-02	-3.6E-02	-2.6E-02	-1.6E-02
1862	1.4E-03	5.1E-03	8.6E-03	9.4E-03	7.0E-03	4.8E-03	4.6E-03	-5.3E-02	-4.8E-02	-4.0E-02	-3.3E-02	-2.5E-02	-1.8E-02
1863	1.6E-03	4.1E-03	7.6E-03	8.5E-03	6.6E-03	5.2E-03	5.0E-03	-4.7E-02	-4.4E-02	-4.0E-02	-3.6E-02	-3.1E-02	-2.7E-02
1864	1.8E-03	3.6E-03	7.0E-03	8.1E-03	7.0E-03	5.7E-03	5.4E-03	-5.2E-02	-5.1E-02	-4.7E-02	-4.3E-02	-3.9E-02	-3.5E-02
1865	1.6E-03	4.6E-03	8.3E-03	9.2E-03	6.9E-03	5.2E-03	5.0E-03	-3.6E-02	-3.4E-02	-2.9E-02	-2.4E-02	-1.9E-02	-1.4E-02
1866	1.8E-03	3.8E-03	7.3E-03	8.4E-03	6.9E-03	5.6E-03	5.3E-03	-3.8E-02	-3.8E-02	-3.6E-02	-3.4E-02	-3.2E-02	-3.0E-02
1867	2.0E-03	3.4E-03	6.9E-03	8.1E-03	7.4E-03	6.0E-03	5.8E-03	-4.6E-02	-4.6E-02	-4.2E-02	-3.9E-02	-3.6E-02	-3.3E-02
1868	1.5E-03	5.5E-03	9.3E-03	1.0E-02	7.4E-03	5.1E-03	4.9E-03	-3.5E-02	-3.3E-02	-2.8E-02	-2.3E-02	-1.8E-02	-1.3E-02
1869	1.8E-03	4.2E-03	7.9E-03	9.0E-03	6.9E-03	5.6E-03	5.4E-03	-4.0E-02	-3.9E-02	-3.5E-02	-3.0E-02	-2.6E-02	-2.2E-02
1870	1.9E-03	3.5E-03	7.0E-03	8.2E-03	7.3E-03	5.9E-03	5.6E-03	-4.5E-02	-4.2E-02	-3.7E-02	-3.1E-02	-2.6E-02	-2.0E-02
1871	2.2E-03	3.7E-03	6.6E-03	7.9E-03	7.9E-03	6.4E-03	6.1E-03	-5.9E-02	-5.3E-02	-4.4E-02	-3.6E-02	-2.7E-02	-1.8E-02
1872	1.9E-03	3.9E-03	7.6E-03	8.8E-03	7.4E-03	6.0E-03	5.8E-03	-4.4E-02	-4.3E-02	-3.9E-02	-3.5E-02	-3.1E-02	-2.7E-02
1873	2.1E-03	4.1E-03	6.8E-03	8.2E-03	7.7E-03	6.2E-03	5.9E-03	-5.5E-02	-5.0E-02	-4.2E-02	-3.4E-02	-2.6E-02	-1.8E-02
1874	2.3E-03	5.0E-03	7.5E-03	8.0E-03	8.2E-03	6.6E-03	6.3E-03	-7.2E-02	-6.2E-02	-4.8E-02	-3.4E-02	-2.0E-02	-6.5E-03
1875	2.2E-03	4.8E-03	7.1E-03	8.2E-03	8.1E-03	6.5E-03	6.2E-03	-7.0E-02	-6.2E-02	-5.2E-02	-4.1E-02	-3.0E-02	-1.9E-02
1876	8.0E-04	3.0E-03	5.8E-03	7.1E-03	7.3E-03	4.0E-03	3.7E-03	-9.7E-02	-9.6E-02	-9.3E-02	-9.0E-02	-8.7E-02	-8.4E-02
1877	8.0E-04	2.9E-03	5.6E-03	6.8E-03	7.1E-03	3.8E-03	3.5E-03	-8.2E-02	-8.4E-02	-8.3E-02	-8.3E-02	-8.2E-02	-8.2E-02
1878	7.7E-04	2.7E-03	4.9E-03	6.1E-03	6.5E-03	3.5E-03	3.2E-03	-7.5E-02	-7.3E-02	-6.8E-02	-6.4E-02	-5.9E-02	-5.5E-02
1879	6.7E-04	2.9E-03	4.2E-03	4.7E-03	5.3E-03	3.4E-03	2.8E-03	-1.2E-01	-1.1E-01	-1.0E-01	-9.3E-02	-8.4E-02	-7.5E-02
1880	7.1E-04	4.0E-03	5.9E-03	6.2E-03	5.2E-03	3.2E-03	2.8E-03	-9.4E-02	-9.3E-02	-9.0E-02	-8.7E-02	-8.4E-02	-8.1E-02
1881	1.2E-03	4.4E-03	7.2E-03	7.9E-03	6.2E-03	4.1E-03	3.9E-03	-6.2E-02	-5.0E-02	-3.6E-02	-2.1E-02	-7.0E-03	7.2E-03
1882	1.4E-03	4.3E-03	7.3E-03	8.0E-03	6.3E-03	4.4E-03	4.2E-03	-6.2E-02	-4.9E-02	-3.4E-02	-1.8E-02	-3.3E-03	1.2E-02
1883	1.5E-03	4.1E-03	7.2E-03	8.1E-03	6.3E-03	4.8E-03	4.6E-03	-6.3E-02	-5.4E-02	-4.3E-02	-3.1E-02	-2.0E-02	-9.2E-03
1884	9.0E-04	3.4E-03	5.3E-03	6.2E-03	6.4E-03	3.5E-03	3.3E-03	3.2E-04	-1.2E-02	-2.3E-02	-3.4E-02	-4.4E-02	-5.5E-02
1885	8.2E-04	2.9E-03	4.6E-03	5.7E-03	6.0E-03	3.3E-03	3.1E-03	-2.8E-02	-3.2E-02	-3.4E-02	-3.6E-02	-3.8E-02	-4.0E-02
1886	7.5E-04	2.7E-03	4.4E-03	5.5E-03	5.8E-03	3.2E-03	2.9E-03	-4.3E-02	-4.4E-02	-4.2E-02	-4.1E-02	-3.9E-02	-3.8E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1887	7.7E-04	3.0E-03	5.5E-03	6.7E-03	7.0E-03	3.9E-03	3.6E-03	-9.6E-02	-9.4E-02	-9.1E-02	-8.7E-02	-8.3E-02	-8.0E-02
1888	6.6E-04	2.3E-03	4.5E-03	5.6E-03	5.8E-03	3.4E-03	3.1E-03	-7.5E-02	-7.2E-02	-6.6E-02	-6.0E-02	-5.5E-02	-4.9E-02
1889	6.9E-04	2.4E-03	4.7E-03	5.8E-03	6.0E-03	3.4E-03	3.2E-03	-8.1E-02	-7.7E-02	-7.2E-02	-6.6E-02	-6.0E-02	-5.5E-02
1890	7.0E-04	2.4E-03	4.8E-03	5.9E-03	6.1E-03	3.5E-03	3.2E-03	-8.3E-02	-8.0E-02	-7.5E-02	-6.9E-02	-6.4E-02	-5.9E-02
1891	7.2E-04	2.5E-03	5.0E-03	6.1E-03	6.4E-03	3.6E-03	3.3E-03	-8.7E-02	-8.5E-02	-8.1E-02	-7.7E-02	-7.4E-02	-7.0E-02
1892	7.5E-04	2.6E-03	5.2E-03	6.4E-03	6.6E-03	3.6E-03	3.4E-03	-9.1E-02	-9.0E-02	-8.7E-02	-8.4E-02	-8.1E-02	-7.8E-02
1893	7.8E-04	2.8E-03	5.3E-03	6.5E-03	6.8E-03	3.7E-03	3.4E-03	-7.7E-02	-8.0E-02	-8.1E-02	-8.2E-02	-8.2E-02	-8.3E-02
1894	9.0E-04	3.4E-03	5.2E-03	6.1E-03	6.3E-03	3.3E-03	3.1E-03	2.1E-03	-1.1E-02	-2.2E-02	-3.3E-02	-4.5E-02	-5.6E-02
1895	8.4E-04	3.2E-03	4.9E-03	6.0E-03	6.3E-03	3.2E-03	3.0E-03	-1.9E-02	-2.5E-02	-3.0E-02	-3.4E-02	-3.9E-02	-4.4E-02
1896	7.4E-04	2.8E-03	4.5E-03	5.5E-03	5.8E-03	2.9E-03	2.7E-03	-3.9E-02	-3.8E-02	-3.6E-02	-3.4E-02	-3.2E-02	-3.0E-02
1897	6.6E-04	2.6E-03	4.2E-03	5.2E-03	5.3E-03	3.0E-03	2.8E-03	-5.0E-02	-4.7E-02	-4.3E-02	-3.8E-02	-3.3E-02	-2.8E-02
1898	8.0E-04	3.2E-03	4.9E-03	6.1E-03	6.3E-03	3.2E-03	3.0E-03	-2.5E-02	-3.0E-02	-3.3E-02	-3.5E-02	-3.8E-02	-4.1E-02
1899	7.3E-04	2.9E-03	4.6E-03	5.6E-03	5.9E-03	3.0E-03	2.8E-03	-4.5E-02	-4.3E-02	-3.9E-02	-3.6E-02	-3.2E-02	-2.9E-02
1900	6.6E-04	2.5E-03	4.2E-03	5.2E-03	5.3E-03	3.1E-03	2.8E-03	-5.4E-02	-5.2E-02	-4.7E-02	-4.2E-02	-3.8E-02	-3.3E-02
1901	6.2E-04	2.0E-03	4.1E-03	5.1E-03	5.2E-03	3.1E-03	2.9E-03	-7.7E-02	-7.2E-02	-6.5E-02	-5.8E-02	-5.1E-02	-4.4E-02
1902	6.3E-04	2.2E-03	4.3E-03	5.3E-03	5.5E-03	3.0E-03	2.8E-03	-7.9E-02	-7.5E-02	-6.9E-02	-6.3E-02	-5.7E-02	-5.2E-02
1903	7.3E-04	2.5E-03	4.1E-03	5.2E-03	5.5E-03	3.1E-03	2.8E-03	-4.4E-02	-4.3E-02	-4.0E-02	-3.7E-02	-3.4E-02	-3.1E-02
1904	6.6E-04	2.3E-03	4.1E-03	5.1E-03	5.2E-03	3.1E-03	2.9E-03	-6.0E-02	-5.6E-02	-5.0E-02	-4.5E-02	-4.0E-02	-3.4E-02
1905	6.3E-04	2.0E-03	4.2E-03	5.2E-03	5.4E-03	3.1E-03	2.9E-03	-7.7E-02	-7.2E-02	-6.5E-02	-5.8E-02	-5.1E-02	-4.4E-02
1906	6.4E-04	2.1E-03	4.1E-03	5.1E-03	5.3E-03	3.0E-03	2.8E-03	-8.1E-02	-7.7E-02	-7.2E-02	-6.6E-02	-6.1E-02	-5.6E-02
1907	6.4E-04	2.3E-03	4.1E-03	5.2E-03	5.3E-03	2.9E-03	2.7E-03	-7.0E-02	-7.0E-02	-6.8E-02	-6.5E-02	-6.3E-02	-6.1E-02
1908	6.6E-04	2.4E-03	4.2E-03	5.2E-03	5.3E-03	3.2E-03	2.9E-03	-6.3E-02	-6.0E-02	-5.4E-02	-4.8E-02	-4.3E-02	-3.7E-02
1909	6.5E-04	2.1E-03	4.3E-03	5.3E-03	5.5E-03	3.2E-03	2.9E-03	-7.8E-02	-7.3E-02	-6.7E-02	-6.1E-02	-5.4E-02	-4.8E-02
1910	6.5E-04	2.1E-03	4.2E-03	5.2E-03	5.4E-03	3.1E-03	2.9E-03	-7.6E-02	-7.4E-02	-7.0E-02	-6.6E-02	-6.2E-02	-5.8E-02
1911	6.5E-04	2.3E-03	4.1E-03	5.2E-03	5.4E-03	2.9E-03	2.7E-03	-7.1E-02	-7.2E-02	-7.0E-02	-6.9E-02	-6.7E-02	-6.6E-02
1912	6.6E-04	2.4E-03	4.3E-03	5.3E-03	5.5E-03	3.3E-03	3.0E-03	-6.7E-02	-6.3E-02	-5.7E-02	-5.1E-02	-4.5E-02	-3.9E-02
1913	6.6E-04	2.2E-03	4.4E-03	5.4E-03	5.6E-03	3.2E-03	3.0E-03	-7.8E-02	-7.4E-02	-6.9E-02	-6.3E-02	-5.7E-02	-5.1E-02
1914	6.7E-04	2.2E-03	4.2E-03	5.3E-03	5.5E-03	3.1E-03	2.9E-03	-7.3E-02	-7.2E-02	-6.9E-02	-6.6E-02	-6.3E-02	-6.0E-02
1915	6.6E-04	2.3E-03	4.1E-03	5.2E-03	5.4E-03	2.9E-03	2.7E-03	-7.1E-02	-7.3E-02	-7.4E-02	-7.4E-02	-7.5E-02	-7.5E-02
1916	6.2E-04	2.1E-03	3.5E-03	4.5E-03	4.7E-03	2.6E-03	2.4E-03	-6.2E-02	-6.7E-02	-6.9E-02	-7.2E-02	-7.5E-02	-7.7E-02
1917	6.7E-04	2.2E-03	4.3E-03	5.4E-03	5.6E-03	3.1E-03	2.9E-03	-7.4E-02	-7.3E-02	-7.1E-02	-6.9E-02	-6.6E-02	-6.4E-02
1918	6.6E-04	2.2E-03	4.0E-03	5.0E-03	5.2E-03	2.9E-03	2.7E-03	-6.6E-02	-7.0E-02	-7.3E-02	-7.5E-02	-7.8E-02	-8.0E-02
1919	6.2E-04	2.0E-03	3.5E-03	4.4E-03	4.7E-03	2.6E-03	2.4E-03	-6.0E-02	-6.4E-02	-6.6E-02	-6.8E-02	-6.9E-02	-7.1E-02
1920	6.8E-04	2.3E-03	4.4E-03	5.4E-03	5.7E-03	3.2E-03	2.9E-03	-7.4E-02	-7.5E-02	-7.5E-02	-7.5E-02	-7.4E-02	-7.4E-02
1921	6.7E-04	2.2E-03	4.0E-03	5.0E-03	5.3E-03	2.9E-03	2.7E-03	-6.4E-02	-6.8E-02	-7.0E-02	-7.2E-02	-7.4E-02	-7.6E-02
1922	6.3E-04	2.0E-03	3.5E-03	4.4E-03	4.7E-03	2.6E-03	2.4E-03	-6.3E-02	-6.6E-02	-6.6E-02	-6.7E-02	-6.7E-02	-6.8E-02
1923	7.0E-04	2.4E-03	4.4E-03	5.5E-03	5.8E-03	3.2E-03	3.0E-03	-7.2E-02	-7.5E-02	-7.5E-02	-7.6E-02	-7.7E-02	-7.8E-02
1924	6.7E-04	2.2E-03	4.0E-03	5.0E-03	5.3E-03	2.9E-03	2.7E-03	-6.3E-02	-6.7E-02	-6.8E-02	-7.0E-02	-7.1E-02	-7.3E-02
1925	6.4E-04	2.1E-03	3.4E-03	4.4E-03	4.7E-03	2.7E-03	2.4E-03	-6.2E-02	-6.3E-02	-6.1E-02	-6.0E-02	-5.9E-02	-5.8E-02
1926	7.1E-04	2.4E-03	4.5E-03	5.6E-03	5.9E-03	3.2E-03	3.0E-03	-6.7E-02	-7.1E-02	-7.3E-02	-7.4E-02	-7.6E-02	-7.8E-02
1927	6.8E-04	2.3E-03	4.0E-03	5.1E-03	5.4E-03	3.0E-03	2.8E-03	-6.6E-02	-6.8E-02	-6.8E-02	-6.8E-02	-6.7E-02	-6.7E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1928	6.5E-04	2.1E-03	3.4E-03	4.4E-03	4.6E-03	2.8E-03	2.4E-03	-6.0E-02	-6.0E-02	-5.9E-02	-5.8E-02	-5.7E-02	-5.6E-02
1929	7.3E-04	2.5E-03	4.6E-03	5.7E-03	6.0E-03	3.3E-03	3.1E-03	-6.8E-02	-7.1E-02	-7.3E-02	-7.4E-02	-7.5E-02	-7.6E-02
1930	7.0E-04	2.3E-03	4.1E-03	5.1E-03	5.4E-03	3.0E-03	2.8E-03	-6.6E-02	-6.6E-02	-6.5E-02	-6.3E-02	-6.1E-02	-6.0E-02
1931	6.7E-04	2.2E-03	3.5E-03	4.4E-03	4.6E-03	2.9E-03	2.4E-03	-5.7E-02	-5.8E-02	-5.6E-02	-5.4E-02	-5.2E-02	-5.1E-02
1932	7.4E-04	2.6E-03	4.7E-03	5.8E-03	6.1E-03	3.3E-03	3.1E-03	-7.1E-02	-7.2E-02	-7.1E-02	-7.1E-02	-7.0E-02	-6.9E-02
1933	7.0E-04	2.3E-03	4.1E-03	5.1E-03	5.4E-03	3.0E-03	2.8E-03	-6.3E-02	-6.4E-02	-6.2E-02	-6.1E-02	-5.9E-02	-5.7E-02
1934	6.8E-04	2.2E-03	3.5E-03	4.3E-03	4.6E-03	3.0E-03	2.4E-03	-6.6E-02	-6.2E-02	-5.5E-02	-4.9E-02	-4.3E-02	-3.7E-02
1935	7.0E-04	2.4E-03	4.0E-03	5.1E-03	5.4E-03	3.0E-03	2.8E-03	-6.7E-02	-6.3E-02	-5.7E-02	-5.1E-02	-4.5E-02	-3.9E-02
1936	6.8E-04	2.2E-03	3.5E-03	4.2E-03	4.8E-03	3.0E-03	2.4E-03	-9.0E-02	-8.1E-02	-7.0E-02	-5.8E-02	-4.7E-02	-3.6E-02
1937	7.1E-04	2.4E-03	4.0E-03	5.0E-03	5.4E-03	3.0E-03	2.7E-03	-9.4E-02	-8.5E-02	-7.4E-02	-6.3E-02	-5.2E-02	-4.0E-02
1938	6.9E-04	2.2E-03	3.7E-03	4.4E-03	5.0E-03	3.1E-03	2.5E-03	-9.9E-02	-8.8E-02	-7.6E-02	-6.4E-02	-5.2E-02	-4.0E-02
1939	7.3E-04	2.5E-03	3.9E-03	5.0E-03	5.4E-03	3.1E-03	2.7E-03	-1.1E-01	-1.0E-01	-8.6E-02	-7.3E-02	-6.0E-02	-4.7E-02
1940	9.1E-04	2.9E-03	4.9E-03	5.6E-03	5.8E-03	3.5E-03	3.3E-03	-4.9E-03	-1.5E-02	-2.3E-02	-3.0E-02	-3.8E-02	-4.6E-02
1941	7.0E-04	2.2E-03	3.9E-03	4.7E-03	5.3E-03	3.3E-03	2.7E-03	-1.1E-01	-1.0E-01	-9.6E-02	-8.7E-02	-7.9E-02	-7.0E-02
1942	8.8E-04	2.8E-03	3.8E-03	4.5E-03	2.5E-03	2.0E-03	1.9E-03	-1.5E-02	-1.4E-02	-1.2E-02	-9.5E-03	-7.4E-03	-5.3E-03
1943	8.3E-04	3.2E-03	4.3E-03	4.4E-03	2.8E-03	2.3E-03	2.2E-03	-1.7E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.2E-03	-4.4E-03
1944	7.6E-04	2.9E-03	4.1E-03	4.0E-03	3.1E-03	2.6E-03	2.4E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.0E-02	-7.0E-03	-3.7E-03
1945	7.2E-04	2.2E-03	3.5E-03	3.4E-03	3.3E-03	2.9E-03	2.7E-03	-2.0E-02	-1.8E-02	-1.5E-02	-1.1E-02	-7.5E-03	-4.0E-03
1946	6.8E-04	2.5E-03	3.2E-03	3.2E-03	3.6E-03	3.2E-03	3.0E-03	-2.1E-02	-1.9E-02	-1.6E-02	-1.2E-02	-8.1E-03	-4.4E-03
1947	9.1E-04	2.7E-03	3.9E-03	4.6E-03	2.4E-03	1.9E-03	1.8E-03	-1.6E-02	-1.5E-02	-1.4E-02	-1.2E-02	-1.1E-02	-9.7E-03
1948	8.6E-04	3.6E-03	4.7E-03	5.0E-03	2.7E-03	2.2E-03	2.1E-03	-1.6E-02	-1.6E-02	-1.4E-02	-1.3E-02	-1.1E-02	-9.8E-03
1949	8.0E-04	3.5E-03	4.8E-03	4.5E-03	3.0E-03	2.5E-03	2.4E-03	-1.7E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.5E-03
1950	7.6E-04	2.7E-03	4.0E-03	3.8E-03	3.3E-03	2.8E-03	2.7E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-8.0E-03
1951	1.1E-03	2.3E-03	2.9E-03	2.7E-03	1.7E-03	1.3E-03	1.2E-03	-2.2E-02	-2.2E-02	-2.2E-02	-2.1E-02	-2.1E-02	-2.1E-02
1952	1.3E-03	2.0E-03	2.7E-03	2.3E-03	1.5E-03	1.2E-03	1.1E-03	-2.1E-02	-2.1E-02	-2.1E-02	-2.0E-02	-2.0E-02	-2.0E-02
1953	2.7E-03	3.1E-03	2.1E-03	8.2E-04	1.1E-03	6.5E-04	5.8E-04	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02	-9.9E-03	-8.8E-03
1954	1.4E-03	1.8E-03	1.8E-03	8.8E-04	1.1E-03	1.5E-03	6.9E-04	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02
1955	1.0E-03	2.0E-03	2.0E-03	9.3E-04	1.1E-03	1.6E-03	7.6E-04	-9.0E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
1956	1.0E-03	1.8E-03	2.0E-03	9.7E-04	1.1E-03	1.5E-03	8.0E-04	-7.4E-03	-8.9E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02
1957	1.1E-03	2.1E-03	2.4E-03	9.9E-04	1.1E-03	1.6E-03	8.1E-04	-7.5E-03	-8.9E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02
1958	1.2E-03	3.5E-03	3.8E-03	1.1E-03	1.2E-03	1.6E-03	8.7E-04	-9.2E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02
1959	1.3E-03	3.6E-03	3.9E-03	1.2E-03	1.2E-03	1.7E-03	9.0E-04	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.4E-03	-8.4E-03
1960	2.1E-03	4.0E-03	4.4E-03	1.2E-03	1.4E-03	1.7E-03	9.2E-04	-1.4E-02	-1.3E-02	-1.2E-02	-9.9E-03	-8.4E-03	-6.8E-03
1961	2.8E-03	3.7E-03	4.0E-03	1.3E-03	1.5E-03	1.7E-03	1.0E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.5E-03	-6.1E-03
1962	4.2E-03	4.3E-03	6.5E-03	1.1E-02	1.1E-02	1.0E-02	1.0E-02	-8.8E-03	-1.1E-02	-7.4E-03	-3.5E-03	3.2E-04	4.2E-03
1963	3.9E-03	4.1E-03	6.6E-03	1.1E-02	1.2E-02	1.1E-02	1.1E-02	-1.8E-02	-1.7E-02	-1.1E-02	-4.4E-03	2.1E-03	8.7E-03
1964	3.5E-03	3.7E-03	5.9E-03	9.7E-03	1.0E-02	9.5E-03	9.5E-03	-7.1E-03	-1.0E-02	-7.5E-03	-4.9E-03	-2.3E-03	3.1E-04
1965	3.0E-03	3.2E-03	5.7E-03	1.0E-02	1.1E-02	9.9E-03	9.8E-03	-1.8E-02	-1.6E-02	-9.5E-03	-2.5E-03	4.4E-03	1.1E-02
1966	2.8E-03	2.9E-03	5.3E-03	9.0E-03	9.4E-03	8.8E-03	8.8E-03	-5.7E-03	-9.3E-03	-7.9E-03	-6.5E-03	-5.1E-03	-3.8E-03
1967	2.8E-03	3.3E-03	4.6E-03	8.6E-03	9.1E-03	8.5E-03	8.5E-03	-1.8E-02	-1.6E-02	-9.6E-03	-2.8E-03	3.9E-03	1.1E-02
1968	2.6E-03	3.1E-03	4.8E-03	8.5E-03	9.0E-03	8.4E-03	8.4E-03	-1.6E-02	-1.4E-02	-8.0E-03	-1.9E-03	4.2E-03	1.0E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
1969	2.7E-03	2.8E-03	4.6E-03	7.1E-03	8.1E-03	7.4E-03	7.1E-03	-1.1E-02	-1.0E-02	-5.0E-03	2.6E-04	5.5E-03	1.1E-02
1970	2.6E-03	2.8E-03	3.8E-03	6.7E-03	7.1E-03	6.6E-03	6.6E-03	-2.0E-02	-1.7E-02	-9.6E-03	-2.7E-03	4.2E-03	1.1E-02
1971	2.3E-03	2.7E-03	3.9E-03	7.1E-03	7.5E-03	6.9E-03	6.9E-03	-1.4E-02	-1.2E-02	-7.4E-03	-2.5E-03	2.5E-03	7.4E-03
1972	2.4E-03	2.6E-03	4.7E-03	6.8E-03	8.4E-03	7.9E-03	7.5E-03	-5.5E-03	-7.2E-03	-3.9E-03	-5.0E-04	2.9E-03	6.2E-03
1973	2.4E-03	2.5E-03	3.9E-03	6.1E-03	6.8E-03	6.3E-03	6.0E-03	-1.1E-02	-9.0E-03	-3.2E-03	2.5E-03	8.3E-03	1.4E-02
1974	2.3E-03	2.5E-03	3.3E-03	5.1E-03	5.5E-03	5.2E-03	4.9E-03	-2.0E-02	-1.7E-02	-9.4E-03	-2.3E-03	4.9E-03	1.2E-02
1975	2.1E-03	2.4E-03	4.7E-03	6.4E-03	8.3E-03	8.0E-03	7.5E-03	2.0E-03	-1.6E-03	-5.3E-05	1.5E-03	3.0E-03	4.5E-03
1976	2.2E-03	2.4E-03	4.2E-03	6.0E-03	7.4E-03	6.9E-03	6.6E-03	-9.1E-03	-8.3E-03	-3.1E-03	2.1E-03	7.4E-03	1.3E-02
1977	2.2E-03	2.3E-03	3.6E-03	5.4E-03	6.0E-03	5.6E-03	5.3E-03	-1.4E-02	-1.1E-02	-4.5E-03	2.0E-03	8.5E-03	1.5E-02
1978	1.9E-03	2.2E-03	4.1E-03	5.6E-03	7.3E-03	6.9E-03	6.5E-03	-3.4E-03	-4.1E-03	-3.5E-04	3.4E-03	7.2E-03	1.1E-02
1979	1.9E-03	2.2E-03	3.7E-03	5.3E-03	6.5E-03	6.0E-03	5.6E-03	-6.0E-03	-4.8E-03	1.3E-04	5.1E-03	1.0E-02	1.5E-02
1980	1.5E-03	2.2E-03	4.3E-03	4.6E-03	7.6E-03	7.2E-03	6.7E-03	-5.8E-03	-7.4E-03	-4.5E-03	-1.5E-03	1.4E-03	4.4E-03
1981	1.5E-03	2.0E-03	4.1E-03	5.1E-03	7.1E-03	6.5E-03	6.2E-03	6.1E-03	3.7E-03	5.4E-03	7.2E-03	8.9E-03	1.1E-02
1982	1.6E-03	2.0E-03	3.6E-03	4.9E-03	6.4E-03	6.0E-03	5.7E-03	-5.9E-03	-4.8E-03	1.1E-04	5.0E-03	9.9E-03	1.5E-02
1983	1.3E-03	2.1E-03	4.7E-03	5.3E-03	7.9E-03	7.5E-03	7.0E-03	-1.9E-02	-1.7E-02	-1.1E-02	-4.8E-03	1.4E-03	7.5E-03
1984	1.3E-03	2.0E-03	4.2E-03	4.5E-03	7.4E-03	6.8E-03	6.4E-03	-1.3E-02	-1.3E-02	-9.2E-03	-5.2E-03	-1.3E-03	2.6E-03
1985	1.3E-03	1.8E-03	3.7E-03	4.0E-03	6.5E-03	6.0E-03	5.7E-03	-5.5E-05	-1.6E-03	5.9E-04	2.8E-03	5.1E-03	7.3E-03
1986	1.2E-03	2.0E-03	4.5E-03	4.8E-03	7.4E-03	6.9E-03	6.5E-03	-2.2E-02	-2.0E-02	-1.4E-02	-8.1E-03	-1.9E-03	4.2E-03
1987	1.2E-03	1.9E-03	3.8E-03	4.1E-03	6.6E-03	5.9E-03	5.6E-03	-8.2E-03	-8.9E-03	-5.7E-03	-2.6E-03	5.5E-04	3.7E-03
1988	1.2E-03	1.9E-03	3.9E-03	4.6E-03	6.8E-03	6.4E-03	6.0E-03	-3.6E-02	-3.2E-02	-2.4E-02	-1.6E-02	-8.5E-03	-7.0E-04
1989	1.1E-03	1.8E-03	3.6E-03	3.9E-03	6.3E-03	5.7E-03	5.4E-03	-2.4E-02	-2.3E-02	-1.8E-02	-1.3E-02	-7.6E-03	-2.6E-03
1990	1.1E-03	1.8E-03	4.8E-03	4.1E-03	5.9E-03	5.5E-03	5.1E-03	-3.3E-02	-2.9E-02	-2.1E-02	-1.3E-02	-5.2E-03	2.6E-03
1991	2.3E-03	3.2E-03	5.2E-03	6.7E-03	8.2E-03	6.4E-03	5.9E-03	-7.7E-02	-7.3E-02	-6.5E-02	-5.6E-02	-4.7E-02	-3.8E-02
1992	2.1E-03	2.6E-03	4.2E-03	6.3E-03	6.4E-03	5.7E-03	5.7E-03	-6.8E-02	-6.1E-02	-5.0E-02	-4.0E-02	-2.9E-02	-1.8E-02
1993	2.3E-03	4.7E-03	4.8E-03	6.6E-03	7.4E-03	6.1E-03	5.9E-03	-3.4E-02	-3.1E-02	-2.3E-02	-1.6E-02	-8.3E-03	-7.7E-04
1994	2.2E-03	2.7E-03	4.2E-03	6.1E-03	6.2E-03	5.6E-03	5.6E-03	-2.9E-02	-2.4E-02	-1.5E-02	-6.4E-03	2.2E-03	1.1E-02
1995	1.6E-03	2.2E-03	4.2E-03	5.1E-03	5.4E-03	4.2E-03	4.2E-03	-2.5E-02	-1.7E-02	-6.3E-03	4.4E-03	1.5E-02	2.6E-02
1996	1.2E-03	2.5E-03	4.2E-03	5.0E-03	5.8E-03	4.6E-03	4.3E-03	-2.5E-02	-1.5E-02	-1.7E-03	1.1E-02	2.4E-02	3.7E-02
1997	2.5E-03	3.2E-03	4.7E-03	7.2E-03	7.3E-03	6.7E-03	6.7E-03	1.3E-02	1.4E-02	1.9E-02	2.4E-02	2.9E-02	3.4E-02
1998	2.0E-03	2.5E-03	5.1E-03	6.1E-03	6.7E-03	4.9E-03	4.9E-03	1.8E-02	1.8E-02	2.2E-02	2.6E-02	2.9E-02	3.3E-02
1999	1.4E-03	2.0E-03	4.9E-03	5.5E-03	6.7E-03	5.6E-03	5.3E-03	2.3E-02	2.1E-02	2.3E-02	2.5E-02	2.7E-02	2.9E-02
2000	1.4E-03	2.1E-03	4.4E-03	4.8E-03	6.7E-03	6.0E-03	5.7E-03	1.1E-02	1.3E-02	1.8E-02	2.3E-02	2.8E-02	3.3E-02
2001	1.4E-03	2.3E-03	4.0E-03	4.2E-03	6.5E-03	6.1E-03	5.8E-03	-1.9E-03	3.0E-03	1.1E-02	2.0E-02	2.8E-02	3.6E-02
2002	1.4E-03	2.5E-03	3.6E-03	3.7E-03	6.2E-03	6.0E-03	5.7E-03	-1.2E-02	-6.0E-03	4.0E-03	1.4E-02	2.4E-02	3.4E-02
2003	2.4E-03	3.0E-03	5.2E-03	6.6E-03	7.5E-03	6.1E-03	6.1E-03	1.9E-02	2.2E-02	3.0E-02	3.7E-02	4.5E-02	5.2E-02
2004	1.6E-03	2.3E-03	5.3E-03	5.7E-03	7.6E-03	6.7E-03	6.4E-03	1.3E-02	1.7E-02	2.5E-02	3.3E-02	4.0E-02	4.8E-02
2005	1.8E-03	2.5E-03	4.7E-03	4.8E-03	7.3E-03	6.8E-03	6.5E-03	6.7E-03	9.6E-03	1.6E-02	2.3E-02	2.9E-02	3.6E-02
2006	1.5E-03	2.8E-03	4.2E-03	4.3E-03	7.2E-03	6.9E-03	6.6E-03	-9.9E-03	-7.5E-03	-9.2E-04	5.7E-03	1.2E-02	1.9E-02
2007	1.7E-03	3.0E-03	3.7E-03	4.1E-03	6.8E-03	6.6E-03	6.3E-03	-2.3E-02	-1.9E-02	-9.6E-03	-4.3E-04	8.7E-03	1.8E-02
2008	1.8E-03	3.0E-03	3.4E-03	3.9E-03	6.4E-03	6.3E-03	5.9E-03	-3.3E-02	-2.5E-02	-1.3E-02	-3.7E-04	1.2E-02	2.4E-02
2009	2.0E-03	3.4E-03	5.6E-03	5.9E-03	8.7E-03	8.0E-03	7.5E-03	-1.9E-02	-9.9E-03	2.9E-03	1.6E-02	2.9E-02	4.2E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2010	1.9E-03	2.9E-03	4.9E-03	4.9E-03	8.2E-03	7.9E-03	7.5E-03	-2.0E-02	-1.5E-02	-4.5E-03	5.9E-03	1.6E-02	2.6E-02
2011	1.8E-03	3.3E-03	4.3E-03	4.7E-03	7.7E-03	7.6E-03	7.2E-03	-1.2E-02	-7.3E-03	2.6E-03	1.3E-02	2.3E-02	3.2E-02
2012	2.0E-03	3.5E-03	3.9E-03	4.5E-03	7.3E-03	7.1E-03	6.8E-03	-4.3E-03	-4.7E-04	8.5E-03	1.8E-02	2.7E-02	3.6E-02
2013	2.0E-03	3.4E-03	3.4E-03	4.0E-03	6.5E-03	6.4E-03	6.1E-03	-1.7E-02	-1.2E-02	-1.8E-03	8.0E-03	1.8E-02	2.8E-02
2014	1.9E-03	3.1E-03	2.9E-03	3.6E-03	5.7E-03	5.6E-03	5.3E-03	-2.4E-02	-1.7E-02	-5.3E-03	6.4E-03	1.8E-02	3.0E-02
2015	2.1E-03	3.8E-03	5.4E-03	5.8E-03	9.8E-03	9.5E-03	9.0E-03	-4.6E-02	-3.6E-02	-2.0E-02	-3.2E-03	1.3E-02	2.9E-02
2016	2.3E-03	4.0E-03	4.7E-03	5.3E-03	8.8E-03	8.6E-03	8.2E-03	-3.2E-02	-2.8E-02	-1.9E-02	-8.7E-03	1.2E-03	1.1E-02
2017	2.4E-03	4.0E-03	4.0E-03	4.7E-03	7.6E-03	7.5E-03	7.1E-03	-2.2E-02	-1.9E-02	-9.9E-03	-1.2E-03	7.6E-03	1.6E-02
2018	2.2E-03	3.7E-03	3.5E-03	4.1E-03	6.7E-03	6.5E-03	6.2E-03	-1.1E-02	-8.4E-03	-7.9E-04	6.8E-03	1.4E-02	2.2E-02
2019	1.9E-03	3.2E-03	2.9E-03	3.7E-03	5.5E-03	5.4E-03	5.1E-03	-3.0E-03	-1.3E-03	4.7E-03	1.1E-02	1.7E-02	2.3E-02
2020	1.5E-03	2.6E-03	2.7E-03	3.6E-03	4.9E-03	4.8E-03	4.6E-03	-4.7E-03	-1.7E-03	4.8E-03	1.1E-02	1.8E-02	2.5E-02
2021	2.7E-03	4.6E-03	5.0E-03	5.9E-03	9.8E-03	9.6E-03	9.1E-03	-2.4E-02	-1.9E-02	-7.7E-03	4.0E-03	1.6E-02	2.7E-02
2022	2.7E-03	4.6E-03	4.3E-03	5.1E-03	8.2E-03	8.1E-03	7.6E-03	-2.5E-02	-2.4E-02	-1.7E-02	-1.0E-02	-3.0E-03	4.1E-03
2023	2.4E-03	3.9E-03	3.4E-03	4.2E-03	6.6E-03	6.5E-03	6.1E-03	-2.5E-02	-2.6E-02	-2.2E-02	-1.8E-02	-1.3E-02	-9.0E-03
2024	1.8E-03	3.1E-03	3.2E-03	4.0E-03	5.5E-03	5.4E-03	5.2E-03	-2.1E-02	-2.1E-02	-1.7E-02	-1.3E-02	-8.5E-03	-4.3E-03
2025	1.7E-03	2.7E-03	2.7E-03	3.8E-03	4.9E-03	4.9E-03	4.6E-03	-1.2E-02	-1.3E-02	-1.0E-02	-7.4E-03	-4.8E-03	-2.1E-03
2026	1.6E-03	2.7E-03	2.4E-03	3.7E-03	4.5E-03	4.4E-03	4.2E-03	-1.3E-02	-1.3E-02	-1.0E-02	-7.4E-03	-4.5E-03	-1.5E-03
2027	3.0E-03	5.0E-03	4.5E-03	5.4E-03	8.9E-03	8.7E-03	8.2E-03	-9.4E-03	-2.5E-03	1.1E-02	2.5E-02	3.9E-02	5.3E-02
2028	2.4E-03	4.0E-03	3.6E-03	4.5E-03	6.6E-03	6.5E-03	6.1E-03	-3.1E-02	-2.7E-02	-1.7E-02	-7.6E-03	2.1E-03	1.2E-02
2029	2.1E-03	3.3E-03	3.6E-03	4.4E-03	5.8E-03	5.7E-03	5.4E-03	-2.7E-02	-2.6E-02	-2.2E-02	-1.7E-02	-1.3E-02	-8.3E-03
2030	1.8E-03	3.1E-03	2.9E-03	4.2E-03	4.9E-03	4.9E-03	4.6E-03	-1.4E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.3E-03
2031	1.5E-03	2.8E-03	2.6E-03	3.9E-03	4.1E-03	4.0E-03	3.8E-03	-1.5E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.1E-03
2032	1.2E-03	2.4E-03	2.2E-03	3.4E-03	3.4E-03	3.3E-03	3.2E-03	-1.3E-02	-1.3E-02	-1.1E-02	-8.6E-03	-6.3E-03	-4.1E-03
2033	2.9E-03	4.9E-03	4.9E-03	6.4E-03	1.0E-02	1.0E-02	9.4E-03	3.4E-03	9.9E-03	2.4E-02	3.9E-02	5.4E-02	6.8E-02
2034	2.6E-03	4.2E-03	4.5E-03	5.6E-03	7.2E-03	7.1E-03	6.7E-03	-2.4E-03	4.0E-03	1.6E-02	2.8E-02	4.0E-02	5.2E-02
2035	2.2E-03	3.8E-03	3.9E-03	4.9E-03	5.8E-03	5.7E-03	5.4E-03	-1.7E-02	-1.0E-02	1.4E-03	1.3E-02	2.5E-02	3.6E-02
2036	1.8E-03	3.3E-03	3.5E-03	4.7E-03	4.8E-03	4.7E-03	4.5E-03	-2.7E-02	-2.2E-02	-1.3E-02	-3.4E-03	5.9E-03	1.5E-02
2037	1.3E-03	2.7E-03	3.1E-03	4.1E-03	3.9E-03	3.7E-03	3.6E-03	-3.1E-02	-3.0E-02	-2.6E-02	-2.3E-02	-1.9E-02	-1.5E-02
2038	1.1E-03	1.9E-03	2.6E-03	3.2E-03	3.2E-03	3.2E-03	3.0E-03	-1.6E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.6E-03
2039	1.1E-03	1.5E-03	2.6E-03	3.1E-03	3.2E-03	3.2E-03	3.0E-03	-1.2E-02	-1.3E-02	-1.1E-02	-9.2E-03	-7.5E-03	-5.8E-03
2040	2.8E-03	4.6E-03	6.2E-03	8.6E-03	8.9E-03	8.4E-03	8.4E-03	-5.9E-03	-5.4E-03	1.5E-03	8.5E-03	1.5E-02	2.2E-02
2041	2.3E-03	4.0E-03	5.1E-03	6.7E-03	7.0E-03	6.6E-03	6.6E-03	-5.3E-03	3.2E-04	1.1E-02	2.1E-02	3.2E-02	4.2E-02
2042	2.0E-03	3.0E-03	4.3E-03	5.8E-03	6.0E-03	5.7E-03	5.7E-03	-1.1E-02	-3.9E-03	7.1E-03	1.8E-02	2.9E-02	4.0E-02
2043	1.7E-03	2.2E-03	3.9E-03	5.3E-03	5.4E-03	5.1E-03	5.1E-03	-2.0E-02	-1.2E-02	-1.7E-03	8.9E-03	2.0E-02	3.0E-02
2044	1.5E-03	1.7E-03	3.4E-03	4.4E-03	4.5E-03	4.3E-03	4.3E-03	-2.8E-02	-2.2E-02	-1.3E-02	-4.7E-03	3.8E-03	1.2E-02
2045	1.3E-03	1.5E-03	2.9E-03	3.7E-03	3.8E-03	3.6E-03	3.6E-03	-2.6E-02	-2.4E-02	-2.0E-02	-1.5E-02	-1.1E-02	-7.2E-03
2046	1.2E-03	1.5E-03	2.7E-03	3.5E-03	3.7E-03	3.5E-03	3.5E-03	-2.2E-02	-2.1E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.2E-02
2047	3.5E-03	3.6E-03	6.2E-03	9.9E-03	1.0E-02	9.7E-03	9.7E-03	1.7E-02	8.7E-03	5.5E-03	2.2E-03	-1.0E-03	-4.3E-03
2048	3.0E-03	3.1E-03	5.4E-03	8.6E-03	9.0E-03	8.4E-03	8.4E-03	-1.1E-02	-1.0E-02	-5.6E-03	-1.1E-03	3.4E-03	7.9E-03
2049	2.3E-03	2.4E-03	4.9E-03	6.9E-03	7.2E-03	6.8E-03	6.8E-03	-1.6E-02	-1.1E-02	-2.8E-03	5.2E-03	1.3E-02	2.1E-02
2050	2.0E-03	2.3E-03	4.4E-03	5.9E-03	6.1E-03	5.8E-03	5.8E-03	-2.3E-02	-1.4E-02	-3.4E-03	7.4E-03	1.8E-02	2.9E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2051	1.8E-03	2.1E-03	3.7E-03	4.7E-03	4.9E-03	4.6E-03	4.6E-03	-3.0E-02	-2.2E-02	-1.2E-02	-2.8E-03	6.9E-03	1.7E-02
2052	1.5E-03	1.9E-03	3.0E-03	3.8E-03	3.9E-03	3.7E-03	3.7E-03	-3.1E-02	-2.5E-02	-1.7E-02	-9.6E-03	-1.8E-03	5.9E-03
2053	1.4E-03	1.8E-03	2.7E-03	3.7E-03	3.8E-03	3.6E-03	3.6E-03	-2.0E-02	-1.7E-02	-1.2E-02	-6.7E-03	-1.6E-03	3.5E-03
2054	1.5E-03	1.7E-03	2.7E-03	3.9E-03	4.1E-03	3.9E-03	3.9E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.4E-03	-4.8E-03
2055	3.9E-03	3.9E-03	5.8E-03	9.8E-03	1.0E-02	9.7E-03	9.6E-03	1.5E-03	-3.8E-03	-4.0E-03	-4.2E-03	-4.4E-03	-4.6E-03
2056	3.4E-03	3.5E-03	5.1E-03	8.7E-03	9.2E-03	8.6E-03	8.6E-03	1.2E-02	4.5E-03	1.3E-03	-1.8E-03	-5.0E-03	-8.1E-03
2057	3.0E-03	3.0E-03	4.5E-03	7.2E-03	7.6E-03	7.2E-03	7.1E-03	-4.0E-03	-6.0E-03	-4.7E-03	-3.4E-03	-2.1E-03	-8.0E-04
2058	2.5E-03	2.6E-03	4.1E-03	6.3E-03	6.5E-03	6.2E-03	6.2E-03	-1.9E-02	-1.6E-02	-1.1E-02	-4.9E-03	9.2E-04	6.7E-03
2059	2.0E-03	2.1E-03	3.5E-03	5.0E-03	5.2E-03	5.0E-03	5.0E-03	-3.5E-02	-2.7E-02	-1.8E-02	-7.7E-03	2.2E-03	1.2E-02
2060	1.7E-03	1.8E-03	3.2E-03	4.4E-03	4.6E-03	4.4E-03	4.4E-03	-3.7E-02	-3.0E-02	-2.0E-02	-1.1E-02	-9.2E-04	8.7E-03
2061	1.6E-03	1.6E-03	3.1E-03	4.3E-03	4.5E-03	4.2E-03	4.2E-03	-3.0E-02	-2.4E-02	-1.6E-02	-8.3E-03	-5.0E-04	7.3E-03
2062	1.5E-03	1.5E-03	3.0E-03	4.1E-03	4.3E-03	4.0E-03	4.0E-03	-1.8E-02	-1.3E-02	-6.7E-03	-2.2E-04	6.3E-03	1.3E-02
2063	1.5E-03	1.5E-03	2.9E-03	4.0E-03	4.1E-03	3.9E-03	3.9E-03	-1.3E-02	-1.2E-02	-8.0E-03	-4.2E-03	-5.3E-04	3.2E-03
2064	3.5E-03	3.5E-03	5.6E-03	8.3E-03	8.8E-03	8.3E-03	8.2E-03	3.6E-03	-3.1E-03	-4.7E-03	-6.4E-03	-8.1E-03	-9.8E-03
2065	3.1E-03	3.2E-03	4.7E-03	7.4E-03	7.8E-03	7.3E-03	7.3E-03	1.0E-02	3.2E-03	-7.5E-05	-3.3E-03	-6.6E-03	-9.9E-03
2066	2.8E-03	2.8E-03	4.1E-03	6.5E-03	6.8E-03	6.4E-03	6.4E-03	-2.6E-03	-6.2E-03	-6.6E-03	-7.1E-03	-7.5E-03	-8.0E-03
2067	2.4E-03	2.4E-03	3.3E-03	5.3E-03	5.6E-03	5.3E-03	5.2E-03	-2.1E-02	-1.9E-02	-1.4E-02	-9.9E-03	-5.4E-03	-8.1E-04
2068	2.1E-03	2.2E-03	3.1E-03	4.9E-03	5.1E-03	4.8E-03	4.8E-03	-4.2E-02	-3.5E-02	-2.6E-02	-1.7E-02	-8.2E-03	8.0E-04
2069	2.0E-03	2.0E-03	3.0E-03	4.6E-03	4.8E-03	4.6E-03	4.5E-03	-4.0E-02	-3.3E-02	-2.4E-02	-1.5E-02	-6.5E-03	2.5E-03
2070	1.8E-03	1.9E-03	2.9E-03	4.3E-03	4.5E-03	4.3E-03	4.3E-03	-2.9E-02	-2.4E-02	-1.7E-02	-1.0E-02	-3.0E-03	4.1E-03
2071	1.8E-03	1.9E-03	3.0E-03	4.6E-03	4.8E-03	4.5E-03	4.5E-03	-1.4E-02	-9.3E-03	-2.3E-03	4.7E-03	1.2E-02	1.9E-02
2072	1.7E-03	2.9E-03	3.3E-03	1.4E-03	1.3E-03	1.7E-03	1.1E-03	-2.0E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.2E-03	-5.2E-03
2073	2.3E-03	2.8E-03	3.0E-03	1.5E-03	1.4E-03	1.9E-03	1.2E-03	-2.3E-02	-1.9E-02	-1.6E-02	-1.3E-02	-9.3E-03	-5.9E-03
2074	3.1E-03	3.3E-03	5.4E-03	8.2E-03	8.5E-03	8.0E-03	8.0E-03	6.5E-03	-9.7E-04	-3.7E-03	-6.5E-03	-9.2E-03	-1.2E-02
2075	2.9E-03	3.0E-03	4.4E-03	6.3E-03	6.8E-03	6.6E-03	6.4E-03	4.2E-03	-2.5E-03	-5.0E-03	-7.5E-03	-1.0E-02	-1.3E-02
2076	2.6E-03	2.7E-03	3.8E-03	5.6E-03	5.9E-03	5.8E-03	5.6E-03	-5.7E-03	-9.4E-03	-9.7E-03	-1.0E-02	-1.0E-02	-1.1E-02
2077	2.4E-03	2.5E-03	3.5E-03	5.2E-03	5.5E-03	5.2E-03	5.1E-03	-2.0E-02	-1.9E-02	-1.6E-02	-1.3E-02	-9.3E-03	-5.9E-03
2078	2.3E-03	2.3E-03	3.1E-03	5.0E-03	5.3E-03	5.0E-03	5.0E-03	-4.0E-02	-3.5E-02	-2.7E-02	-2.0E-02	-1.2E-02	-4.0E-03
2079	2.0E-03	2.1E-03	2.7E-03	4.5E-03	4.7E-03	4.5E-03	4.4E-03	-4.2E-02	-3.5E-02	-2.7E-02	-1.9E-02	-1.0E-02	-1.6E-03
2080	2.0E-03	2.0E-03	2.8E-03	4.6E-03	4.8E-03	4.5E-03	4.5E-03	-2.8E-02	-2.4E-02	-1.7E-02	-1.0E-02	-3.1E-03	3.7E-03
2081	1.9E-03	2.0E-03	2.7E-03	4.5E-03	4.7E-03	4.4E-03	4.4E-03	-1.9E-02	-1.4E-02	-6.9E-03	3.2E-05	7.0E-03	1.4E-02
2082	1.8E-03	2.5E-03	2.8E-03	1.4E-03	1.3E-03	1.7E-03	1.2E-03	-2.1E-02	-1.9E-02	-1.5E-02	-1.2E-02	-9.1E-03	-5.9E-03
2083	2.0E-03	2.5E-03	2.7E-03	1.6E-03	1.5E-03	2.0E-03	1.3E-03	-2.2E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03
2084	2.8E-03	3.0E-03	5.0E-03	7.9E-03	8.3E-03	7.8E-03	7.8E-03	6.9E-03	-9.3E-04	-4.2E-03	-7.6E-03	-1.1E-02	-1.4E-02
2085	2.6E-03	2.8E-03	4.4E-03	6.5E-03	6.8E-03	6.3E-03	6.3E-03	-2.1E-03	-8.0E-03	-9.8E-03	-1.2E-02	-1.4E-02	-1.5E-02
2086	2.5E-03	2.7E-03	3.6E-03	5.1E-03	5.9E-03	5.8E-03	5.6E-03	-1.0E-02	-1.4E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02
2087	2.4E-03	2.5E-03	3.4E-03	4.5E-03	5.4E-03	5.3E-03	5.1E-03	-1.7E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.5E-03
2088	2.2E-03	2.3E-03	3.1E-03	4.2E-03	4.7E-03	4.6E-03	4.5E-03	-3.6E-02	-3.3E-02	-2.7E-02	-2.2E-02	-1.6E-02	-1.0E-02
2089	2.1E-03	2.2E-03	2.8E-03	4.3E-03	4.5E-03	4.2E-03	4.2E-03	-3.7E-02	-3.2E-02	-2.4E-02	-1.6E-02	-8.8E-03	-1.2E-03
2090	2.0E-03	2.1E-03	2.4E-03	4.2E-03	4.5E-03	4.2E-03	4.2E-03	-3.0E-02	-2.4E-02	-1.7E-02	-9.7E-03	-2.3E-03	5.0E-03
2091	1.8E-03	2.1E-03	2.4E-03	1.5E-03	1.4E-03	1.6E-03	1.3E-03	-2.1E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2092	1.6E-03	2.2E-03	2.4E-03	1.6E-03	1.5E-03	2.0E-03	1.4E-03	-2.1E-02	-1.9E-02	-1.6E-02	-1.4E-02	-1.1E-02	-8.7E-03
2093	2.3E-03	2.8E-03	4.6E-03	8.2E-03	8.6E-03	8.0E-03	8.0E-03	-5.1E-03	-8.8E-03	-8.5E-03	-8.1E-03	-7.8E-03	-7.4E-03
2094	2.3E-03	2.5E-03	4.3E-03	7.3E-03	7.7E-03	7.1E-03	7.1E-03	1.1E-03	-5.8E-03	-8.7E-03	-1.2E-02	-1.4E-02	-1.7E-02
2095	2.2E-03	2.4E-03	3.8E-03	6.3E-03	6.5E-03	6.0E-03	6.0E-03	-6.7E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.8E-02	-2.0E-02
2096	2.1E-03	2.3E-03	3.6E-03	5.5E-03	5.6E-03	5.4E-03	5.2E-03	-1.3E-02	-1.6E-02	-1.6E-02	-1.5E-02	-1.5E-02	-1.5E-02
2097	2.0E-03	2.2E-03	3.1E-03	4.4E-03	5.2E-03	5.1E-03	4.8E-03	-1.3E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02
2098	2.0E-03	2.2E-03	3.1E-03	3.8E-03	4.9E-03	4.8E-03	4.6E-03	-2.7E-02	-2.6E-02	-2.3E-02	-1.9E-02	-1.5E-02	-1.2E-02
2099	2.0E-03	2.1E-03	2.9E-03	3.8E-03	4.5E-03	4.4E-03	4.2E-03	-3.1E-02	-2.7E-02	-2.1E-02	-1.5E-02	-9.5E-03	-3.6E-03
2100	1.9E-03	2.0E-03	2.6E-03	3.7E-03	4.0E-03	3.8E-03	3.7E-03	-2.9E-02	-2.4E-02	-1.7E-02	-9.3E-03	-2.1E-03	5.1E-03
2101	1.7E-03	2.0E-03	2.2E-03	1.6E-03	1.5E-03	1.4E-03	1.3E-03	-2.1E-02	-1.8E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.4E-03
2102	2.1E-03	2.6E-03	4.0E-03	6.9E-03	7.3E-03	6.8E-03	6.8E-03	-5.3E-03	-8.9E-03	-9.2E-03	-9.6E-03	-9.9E-03	-1.0E-02
2103	1.8E-03	2.5E-03	3.8E-03	6.5E-03	6.8E-03	6.3E-03	6.3E-03	-1.6E-03	-7.4E-03	-1.0E-02	-1.3E-02	-1.6E-02	-1.8E-02
2104	1.8E-03	2.2E-03	3.6E-03	5.9E-03	6.1E-03	5.7E-03	5.7E-03	-9.3E-03	-1.4E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.1E-02
2105	1.8E-03	2.0E-03	3.3E-03	5.3E-03	5.4E-03	5.0E-03	5.0E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02	-1.7E-02
2106	1.8E-03	1.9E-03	2.9E-03	4.4E-03	4.7E-03	4.6E-03	4.3E-03	-1.6E-02	-1.9E-02	-1.9E-02	-1.8E-02	-1.8E-02	-1.8E-02
2107	1.8E-03	1.9E-03	2.8E-03	3.9E-03	4.6E-03	4.5E-03	4.3E-03	-1.6E-02	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02	-1.7E-02
2108	1.7E-03	1.8E-03	2.6E-03	3.2E-03	4.4E-03	4.3E-03	4.1E-03	-2.4E-02	-2.3E-02	-1.9E-02	-1.4E-02	-1.0E-02	-5.9E-03
2109	1.5E-03	1.9E-03	2.1E-03	1.5E-03	1.5E-03	1.3E-03	1.3E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-7.9E-03	-5.0E-03
2110	1.2E-03	1.6E-03	1.8E-03	1.6E-03	1.5E-03	1.7E-03	1.4E-03	-1.6E-02	-1.4E-02	-1.1E-02	-8.4E-03	-5.6E-03	-2.8E-03
2111	2.2E-03	2.3E-03	3.2E-03	5.6E-03	6.0E-03	5.6E-03	5.5E-03	-1.2E-02	-1.1E-02	-6.8E-03	-2.7E-03	1.4E-03	5.5E-03
2112	2.0E-03	2.3E-03	3.4E-03	5.9E-03	6.2E-03	5.8E-03	5.8E-03	-5.6E-03	-9.0E-03	-9.5E-03	-1.0E-02	-1.0E-02	-1.1E-02
2113	1.7E-03	2.3E-03	3.5E-03	5.8E-03	6.1E-03	5.7E-03	5.6E-03	-4.2E-03	-9.2E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.9E-02
2114	1.5E-03	2.2E-03	3.3E-03	5.5E-03	5.6E-03	5.2E-03	5.2E-03	-1.1E-02	-1.5E-02	-1.7E-02	-1.8E-02	-2.0E-02	-2.1E-02
2115	1.5E-03	2.0E-03	3.1E-03	5.0E-03	5.1E-03	4.7E-03	4.7E-03	-1.6E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
2116	1.5E-03	1.8E-03	2.8E-03	4.4E-03	4.4E-03	4.1E-03	4.1E-03	-1.7E-02	-1.9E-02	-1.9E-02	-1.8E-02	-1.8E-02	-1.8E-02
2117	1.5E-03	1.7E-03	2.6E-03	3.9E-03	4.0E-03	4.0E-03	3.7E-03	-1.5E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.8E-02
2118	1.3E-03	1.7E-03	1.9E-03	1.4E-03	1.4E-03	1.3E-03	1.2E-03	-1.5E-02	-1.2E-02	-9.6E-03	-6.9E-03	-4.1E-03	-1.4E-03
2119	1.1E-03	1.6E-03	1.6E-03	1.5E-03	1.4E-03	1.5E-03	1.3E-03	-1.1E-02	-8.8E-03	-6.3E-03	-3.7E-03	-1.1E-03	1.4E-03
2120	2.1E-03	2.2E-03	3.0E-03	4.5E-03	4.9E-03	4.5E-03	4.3E-03	-1.9E-02	-1.5E-02	-8.8E-03	-2.2E-03	4.4E-03	1.1E-02
2121	2.0E-03	2.1E-03	2.6E-03	4.4E-03	4.7E-03	4.4E-03	4.3E-03	-1.1E-02	-1.0E-02	-7.2E-03	-3.9E-03	-5.5E-04	2.8E-03
2122	1.9E-03	2.0E-03	2.9E-03	4.9E-03	5.2E-03	4.8E-03	4.8E-03	-6.8E-03	-9.8E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02
2123	1.7E-03	1.8E-03	2.9E-03	5.0E-03	5.2E-03	4.8E-03	4.8E-03	-7.1E-03	-1.1E-02	-1.3E-02	-1.5E-02	-1.7E-02	-1.8E-02
2124	1.5E-03	2.0E-03	3.0E-03	4.9E-03	5.1E-03	4.7E-03	4.7E-03	-1.2E-02	-1.6E-02	-1.7E-02	-1.9E-02	-2.0E-02	-2.2E-02
2125	1.3E-03	1.9E-03	2.9E-03	4.7E-03	4.8E-03	4.4E-03	4.4E-03	-1.7E-02	-1.9E-02	-1.9E-02	-1.9E-02	-1.9E-02	-1.9E-02
2126	1.2E-03	1.8E-03	2.7E-03	4.3E-03	4.3E-03	3.9E-03	3.9E-03	-1.6E-02	-1.8E-02	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02
2127	1.2E-03	1.7E-03	2.5E-03	3.8E-03	3.8E-03	3.4E-03	3.4E-03	-1.5E-02	-1.7E-02	-1.7E-02	-1.7E-02	-1.8E-02	-1.8E-02
2128	1.1E-03	1.5E-03	1.7E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	-8.7E-03	-6.7E-03	-4.4E-03	-2.1E-03	1.9E-04	2.5E-03
2129	1.0E-03	1.5E-03	1.6E-03	1.3E-03	1.2E-03	1.2E-03	1.1E-03	-4.6E-03	-2.9E-03	-9.8E-04	9.5E-04	2.9E-03	4.8E-03
2130	1.9E-03	2.1E-03	3.1E-03	4.7E-03	5.2E-03	4.8E-03	4.6E-03	-1.6E-02	-1.3E-02	-6.1E-03	5.6E-04	7.2E-03	1.4E-02
2131	1.9E-03	2.0E-03	2.7E-03	4.0E-03	4.4E-03	4.0E-03	3.8E-03	-1.7E-02	-1.4E-02	-8.1E-03	-2.3E-03	3.6E-03	9.4E-03
2132	1.8E-03	2.0E-03	2.3E-03	3.6E-03	3.9E-03	3.7E-03	3.5E-03	-1.1E-02	-1.0E-02	-7.7E-03	-5.1E-03	-2.6E-03	-1.1E-05

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2133	1.8E-03	1.9E-03	2.4E-03	4.0E-03	4.2E-03	3.9E-03	3.9E-03	-8.4E-03	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02
2134	1.6E-03	1.7E-03	2.6E-03	4.2E-03	4.4E-03	4.1E-03	4.1E-03	-9.4E-03	-1.3E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.9E-02
2135	1.5E-03	1.6E-03	2.6E-03	4.2E-03	4.4E-03	4.0E-03	4.0E-03	-1.4E-02	-1.7E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.2E-02
2136	1.3E-03	1.6E-03	2.5E-03	4.1E-03	4.2E-03	3.9E-03	3.9E-03	-1.7E-02	-1.9E-02	-1.9E-02	-1.9E-02	-1.9E-02	-2.0E-02
2137	1.2E-03	1.5E-03	2.4E-03	3.9E-03	3.9E-03	3.6E-03	3.6E-03	-1.6E-02	-1.7E-02	-1.7E-02	-1.7E-02	-1.7E-02	-1.7E-02
2138	9.3E-04	1.4E-03	1.5E-03	1.1E-03	1.7E-03	9.7E-04	9.6E-04	-2.7E-03	-1.3E-03	5.2E-04	2.3E-03	4.1E-03	5.8E-03
2139	9.3E-04	1.4E-03	1.5E-03	1.1E-03	1.5E-03	1.1E-03	9.4E-04	-2.4E-03	-7.0E-04	1.4E-03	3.5E-03	5.6E-03	7.7E-03
2140	1.6E-03	1.9E-03	3.1E-03	4.4E-03	5.4E-03	4.9E-03	4.6E-03	-7.4E-03	-5.5E-03	-4.6E-04	4.6E-03	9.6E-03	1.5E-02
2141	1.7E-03	1.9E-03	2.8E-03	4.2E-03	4.6E-03	4.2E-03	4.0E-03	-1.7E-02	-1.3E-02	-6.9E-03	-3.8E-04	6.2E-03	1.3E-02
2142	1.6E-03	1.8E-03	2.3E-03	3.5E-03	3.8E-03	3.4E-03	3.2E-03	-1.6E-02	-1.3E-02	-8.1E-03	-3.1E-03	1.9E-03	6.9E-03
2143	1.7E-03	1.8E-03	2.1E-03	3.0E-03	3.4E-03	3.2E-03	3.1E-03	-1.1E-02	-1.1E-02	-8.7E-03	-6.7E-03	-4.8E-03	-2.8E-03
2144	1.6E-03	1.7E-03	2.2E-03	3.3E-03	3.5E-03	3.2E-03	3.2E-03	-9.9E-03	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02
2145	1.5E-03	1.6E-03	2.3E-03	3.6E-03	3.8E-03	3.5E-03	3.5E-03	-1.1E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.8E-02	-1.9E-02
2146	1.5E-03	1.6E-03	2.3E-03	3.8E-03	3.9E-03	3.6E-03	3.6E-03	-1.5E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.1E-02	-2.2E-02
2147	1.3E-03	1.4E-03	2.3E-03	3.7E-03	3.8E-03	3.5E-03	3.5E-03	-1.7E-02	-1.9E-02	-1.9E-02	-1.9E-02	-2.0E-02	-2.0E-02
2148	8.0E-04	1.2E-03	1.4E-03	1.0E-03	2.1E-03	9.0E-04	8.1E-04	-1.2E-03	3.1E-04	2.2E-03	4.0E-03	5.9E-03	7.8E-03
2149	8.4E-04	1.3E-03	1.4E-03	1.2E-03	2.0E-03	1.1E-03	1.0E-03	-5.7E-03	-3.2E-03	-1.7E-04	2.8E-03	5.8E-03	8.8E-03
2150	1.3E-03	1.7E-03	3.1E-03	4.2E-03	5.4E-03	5.0E-03	4.8E-03	-2.6E-03	-2.0E-03	1.8E-03	5.6E-03	9.4E-03	1.3E-02
2151	1.4E-03	1.7E-03	2.8E-03	4.0E-03	4.8E-03	4.3E-03	4.1E-03	-9.1E-03	-6.4E-03	-1.1E-03	4.2E-03	9.5E-03	1.5E-02
2152	1.4E-03	1.7E-03	2.5E-03	3.6E-03	4.0E-03	3.6E-03	3.5E-03	-1.7E-02	-1.3E-02	-7.3E-03	-1.4E-03	4.5E-03	1.0E-02
2153	1.5E-03	1.7E-03	2.2E-03	3.2E-03	3.5E-03	3.1E-03	2.9E-03	-1.5E-02	-1.2E-02	-8.1E-03	-3.8E-03	3.9E-04	4.6E-03
2154	1.5E-03	1.6E-03	1.9E-03	2.7E-03	3.0E-03	2.8E-03	2.7E-03	-1.1E-02	-1.1E-02	-9.6E-03	-8.1E-03	-6.6E-03	-5.1E-03
2155	1.5E-03	1.6E-03	1.9E-03	2.7E-03	2.9E-03	2.6E-03	2.6E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.5E-02
2156	1.5E-03	1.6E-03	2.1E-03	3.1E-03	3.3E-03	3.0E-03	3.0E-03	-1.2E-02	-1.5E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.0E-02
2157	1.4E-03	1.5E-03	2.1E-03	3.3E-03	3.5E-03	3.2E-03	3.2E-03	-1.5E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.2E-02	-2.3E-02
2158	7.6E-04	1.1E-03	1.2E-03	1.1E-03	2.4E-03	1.0E-03	9.9E-04	-2.6E-03	-6.1E-04	1.8E-03	4.2E-03	6.7E-03	9.1E-03
2159	7.7E-04	1.2E-03	1.3E-03	1.2E-03	2.4E-03	1.2E-03	1.2E-03	-9.1E-03	-6.7E-03	-3.7E-03	-6.5E-04	2.4E-03	5.4E-03
2160	1.2E-03	1.7E-03	3.4E-03	3.8E-03	5.8E-03	5.3E-03	5.0E-03	4.8E-03	3.0E-03	4.6E-03	6.2E-03	7.7E-03	9.3E-03
2161	1.2E-03	1.7E-03	3.1E-03	4.0E-03	5.3E-03	4.9E-03	4.6E-03	-3.2E-03	-2.0E-03	2.2E-03	6.4E-03	1.1E-02	1.5E-02
2162	1.2E-03	1.6E-03	2.8E-03	3.8E-03	4.8E-03	4.5E-03	4.2E-03	-3.2E-03	-2.3E-03	1.4E-03	5.1E-03	8.8E-03	1.2E-02
2163	1.2E-03	1.6E-03	2.6E-03	3.6E-03	4.3E-03	3.8E-03	3.6E-03	-1.1E-02	-8.0E-03	-2.6E-03	2.7E-03	8.1E-03	1.3E-02
2164	1.3E-03	1.5E-03	2.3E-03	3.3E-03	3.6E-03	3.3E-03	3.1E-03	-1.6E-02	-1.3E-02	-7.7E-03	-2.6E-03	2.5E-03	7.6E-03
2165	1.3E-03	1.5E-03	2.0E-03	2.9E-03	3.1E-03	2.8E-03	2.6E-03	-1.3E-02	-1.1E-02	-8.1E-03	-4.7E-03	-1.3E-03	2.0E-03
2166	1.3E-03	1.5E-03	1.8E-03	2.5E-03	2.7E-03	2.6E-03	2.4E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.1E-03	-8.1E-03	-7.0E-03
2167	1.4E-03	1.5E-03	1.8E-03	2.3E-03	2.7E-03	2.5E-03	2.3E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.5E-02	-1.6E-02
2168	7.2E-04	1.0E-03	1.1E-03	1.2E-03	2.4E-03	1.2E-03	1.1E-03	-6.2E-03	-4.1E-03	-1.3E-03	1.5E-03	4.2E-03	7.0E-03
2169	7.1E-04	1.2E-03	1.2E-03	1.3E-03	2.7E-03	1.4E-03	1.3E-03	-1.1E-02	-8.6E-03	-5.9E-03	-3.1E-03	-3.7E-04	2.4E-03
2170	1.1E-03	1.7E-03	3.3E-03	3.5E-03	5.5E-03	5.0E-03	4.7E-03	-7.3E-03	-7.3E-03	-4.2E-03	-1.1E-03	2.0E-03	5.2E-03
2171	1.1E-03	1.5E-03	3.0E-03	3.4E-03	5.2E-03	4.7E-03	4.4E-03	6.0E-04	7.7E-04	3.9E-03	7.0E-03	1.0E-02	1.3E-02
2172	1.1E-03	1.5E-03	2.8E-03	3.5E-03	4.6E-03	4.3E-03	4.0E-03	-5.1E-04	1.7E-04	3.5E-03	6.9E-03	1.0E-02	1.4E-02
2173	1.0E-03	1.5E-03	2.6E-03	3.4E-03	4.3E-03	4.0E-03	3.7E-03	-3.7E-03	-2.5E-03	1.2E-03	4.8E-03	8.5E-03	1.2E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2174	1.1E-03	1.4E-03	2.3E-03	3.2E-03	3.8E-03	3.3E-03	3.1E-03	-1.2E-02	-9.1E-03	-3.9E-03	1.3E-03	6.5E-03	1.2E-02
2175	1.1E-03	1.4E-03	2.1E-03	3.0E-03	3.2E-03	2.9E-03	2.8E-03	-1.4E-02	-1.2E-02	-7.4E-03	-3.1E-03	1.3E-03	5.7E-03
2176	1.2E-03	1.4E-03	1.8E-03	2.6E-03	2.8E-03	2.5E-03	2.4E-03	-1.2E-02	-1.1E-02	-7.9E-03	-5.1E-03	-2.3E-03	5.2E-04
2177	1.2E-03	1.4E-03	1.7E-03	2.3E-03	2.5E-03	2.3E-03	2.2E-03	-1.0E-02	-1.1E-02	-1.0E-02	-9.5E-03	-8.7E-03	-7.9E-03
2178	6.9E-04	1.0E-03	1.1E-03	1.3E-03	2.1E-03	1.3E-03	1.3E-03	-9.0E-03	-7.1E-03	-4.4E-03	-1.7E-03	9.9E-04	3.7E-03
2179	6.5E-04	1.1E-03	1.2E-03	1.4E-03	2.6E-03	1.4E-03	1.4E-03	-1.4E-02	-1.3E-02	-1.0E-02	-8.1E-03	-5.7E-03	-3.3E-03
2180	9.9E-04	1.7E-03	3.5E-03	4.0E-03	6.1E-03	5.6E-03	5.2E-03	-2.5E-02	-2.4E-02	-1.9E-02	-1.5E-02	-1.0E-02	-6.0E-03
2181	1.0E-03	1.6E-03	3.2E-03	3.5E-03	5.5E-03	4.9E-03	4.6E-03	-1.3E-02	-1.2E-02	-9.0E-03	-5.7E-03	-2.4E-03	9.7E-04
2182	1.0E-03	1.5E-03	2.9E-03	3.3E-03	4.9E-03	4.5E-03	4.2E-03	3.0E-04	-2.9E-04	1.9E-03	4.2E-03	6.4E-03	8.6E-03
2183	1.0E-03	1.4E-03	2.8E-03	3.3E-03	4.7E-03	4.2E-03	3.9E-03	-1.7E-03	-1.1E-04	4.1E-03	8.2E-03	1.2E-02	1.7E-02
2184	1.0E-03	1.4E-03	2.6E-03	3.3E-03	4.2E-03	3.9E-03	3.7E-03	-3.1E-04	8.7E-05	2.9E-03	5.8E-03	8.6E-03	1.1E-02
2185	9.4E-04	1.4E-03	2.4E-03	3.0E-03	3.9E-03	3.5E-03	3.3E-03	-5.7E-03	-3.9E-03	1.1E-04	4.1E-03	8.1E-03	1.2E-02
2186	9.5E-04	1.3E-03	2.1E-03	2.9E-03	3.4E-03	3.0E-03	2.8E-03	-1.3E-02	-9.5E-03	-4.5E-03	5.5E-04	5.6E-03	1.1E-02
2187	1.0E-03	1.3E-03	1.9E-03	2.7E-03	3.0E-03	2.7E-03	2.6E-03	-1.4E-02	-1.1E-02	-7.4E-03	-3.4E-03	5.6E-04	4.6E-03
2188	1.0E-03	1.3E-03	1.7E-03	2.4E-03	2.6E-03	2.3E-03	2.2E-03	-1.1E-02	-1.0E-02	-7.8E-03	-5.4E-03	-3.1E-03	-7.5E-04
2189	6.1E-04	1.1E-03	1.1E-03	1.4E-03	2.3E-03	1.5E-03	1.4E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.5E-03
2190	1.0E-03	1.7E-03	3.9E-03	4.9E-03	5.8E-03	5.3E-03	4.9E-03	-3.0E-02	-2.5E-02	-1.7E-02	-8.8E-03	-4.7E-04	7.9E-03
2191	9.9E-04	1.7E-03	3.8E-03	3.8E-03	5.5E-03	5.1E-03	4.8E-03	-2.9E-02	-2.6E-02	-2.0E-02	-1.4E-02	-8.5E-03	-2.7E-03
2192	9.1E-04	1.6E-03	3.2E-03	3.4E-03	5.4E-03	4.9E-03	4.6E-03	-1.4E-02	-1.4E-02	-1.1E-02	-8.2E-03	-5.2E-03	-2.3E-03
2193	9.7E-04	1.5E-03	2.9E-03	3.2E-03	4.9E-03	4.2E-03	4.0E-03	-2.2E-03	-3.1E-03	-1.3E-03	5.6E-04	2.4E-03	4.2E-03
2194	9.8E-04	1.4E-03	2.7E-03	3.1E-03	4.6E-03	4.1E-03	3.8E-03	-2.2E-04	3.6E-04	3.5E-03	6.6E-03	9.8E-03	1.3E-02
2195	9.5E-04	1.3E-03	2.6E-03	3.0E-03	4.2E-03	3.6E-03	3.4E-03	3.1E-04	1.2E-03	4.4E-03	7.6E-03	1.1E-02	1.4E-02
2196	9.2E-04	1.2E-03	2.3E-03	3.0E-03	3.8E-03	3.5E-03	3.3E-03	-3.0E-03	-1.9E-03	1.3E-03	4.6E-03	7.8E-03	1.1E-02
2197	8.6E-04	1.2E-03	2.2E-03	2.8E-03	3.6E-03	3.2E-03	3.0E-03	-8.9E-03	-6.2E-03	-1.5E-03	3.2E-03	7.9E-03	1.3E-02
2198	8.3E-04	1.2E-03	2.0E-03	2.6E-03	3.1E-03	2.7E-03	2.5E-03	-1.3E-02	-1.0E-02	-5.3E-03	-6.4E-04	4.0E-03	8.7E-03
2199	6.0E-04	1.0E-03	1.1E-03	1.4E-03	1.6E-03	1.4E-03	1.3E-03	-2.4E-02	-2.2E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.3E-02
2200	6.8E-04	1.0E-03	1.1E-03	1.4E-03	2.5E-03	1.6E-03	1.3E-03	-2.5E-02	-2.3E-02	-2.0E-02	-1.7E-02	-1.5E-02	-1.2E-02
2201	9.5E-04	1.7E-03	4.1E-03	4.8E-03	5.6E-03	5.1E-03	4.8E-03	-2.5E-02	-1.9E-02	-1.1E-02	-1.9E-03	6.9E-03	1.6E-02
2202	9.4E-04	1.6E-03	3.1E-03	3.7E-03	5.0E-03	4.5E-03	4.2E-03	-2.8E-02	-2.5E-02	-1.9E-02	-1.3E-02	-7.1E-03	-1.1E-03
2203	8.5E-04	1.6E-03	3.0E-03	3.4E-03	5.1E-03	4.7E-03	4.4E-03	-2.3E-02	-2.2E-02	-1.8E-02	-1.4E-02	-9.9E-03	-6.0E-03
2204	8.8E-04	1.5E-03	2.9E-03	3.2E-03	4.9E-03	4.3E-03	4.1E-03	-8.9E-03	-9.5E-03	-7.3E-03	-5.2E-03	-3.0E-03	-8.4E-04
2205	9.2E-04	1.4E-03	2.6E-03	3.0E-03	4.3E-03	3.9E-03	3.6E-03	1.8E-03	1.1E-03	2.8E-03	4.4E-03	6.1E-03	7.8E-03
2206	9.0E-04	1.3E-03	2.5E-03	2.8E-03	4.1E-03	3.6E-03	3.4E-03	2.5E-03	3.4E-03	6.6E-03	9.8E-03	1.3E-02	1.6E-02
2207	8.8E-04	1.2E-03	2.3E-03	2.7E-03	3.7E-03	3.3E-03	3.1E-03	1.8E-03	2.0E-03	4.4E-03	6.7E-03	9.0E-03	1.1E-02
2208	8.5E-04	1.1E-03	2.1E-03	2.7E-03	3.5E-03	3.2E-03	3.0E-03	-4.8E-03	-3.4E-03	-2.7E-05	3.3E-03	6.7E-03	1.0E-02
2209	5.5E-04	9.6E-04	1.1E-03	1.4E-03	1.5E-03	1.3E-03	1.2E-03	-2.5E-02	-2.3E-02	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02
2210	6.5E-04	9.8E-04	1.1E-03	1.4E-03	1.6E-03	1.5E-03	1.2E-03	-2.2E-02	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.7E-03
2211	7.8E-04	9.8E-04	1.2E-03	1.4E-03	2.7E-03	1.9E-03	1.3E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.2E-02	-1.0E-02	-7.9E-03
2212	7.4E-04	1.0E-03	1.3E-03	1.5E-03	4.1E-03	2.3E-03	1.3E-03	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.2E-03	-6.1E-03
2213	7.2E-04	1.0E-03	1.7E-03	1.6E-03	5.2E-03	2.5E-03	1.2E-03	-1.7E-02	-1.5E-02	-1.2E-02	-9.6E-03	-6.8E-03	-4.0E-03
2214	8.6E-04	2.2E-03	3.9E-03	5.1E-03	5.2E-03	4.8E-03	4.5E-03	-1.5E-02	-9.4E-03	-3.9E-04	8.6E-03	1.8E-02	2.7E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2215	8.7E-04	1.8E-03	3.3E-03	4.0E-03	4.9E-03	4.2E-03	3.9E-03	-2.7E-02	-2.3E-02	-1.6E-02	-9.2E-03	-2.3E-03	4.5E-03
2216	8.5E-04	1.6E-03	2.8E-03	3.4E-03	4.6E-03	4.3E-03	4.0E-03	-2.6E-02	-2.4E-02	-2.0E-02	-1.5E-02	-1.1E-02	-6.1E-03
2217	7.8E-04	1.5E-03	2.9E-03	3.2E-03	4.8E-03	4.3E-03	4.0E-03	-1.5E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03	-4.9E-03
2218	8.3E-04	1.4E-03	2.7E-03	3.0E-03	4.4E-03	3.7E-03	3.5E-03	-3.2E-03	-3.9E-03	-2.2E-03	-5.7E-04	1.1E-03	2.8E-03
2219	8.5E-04	1.3E-03	2.4E-03	2.8E-03	3.9E-03	3.5E-03	3.3E-03	1.8E-04	7.0E-04	3.4E-03	6.0E-03	8.7E-03	1.1E-02
2220	8.4E-04	1.2E-03	2.3E-03	2.6E-03	3.7E-03	3.3E-03	3.1E-03	4.4E-03	4.8E-03	7.2E-03	9.7E-03	1.2E-02	1.5E-02
2221	6.5E-04	9.7E-04	1.1E-03	1.4E-03	1.6E-03	1.3E-03	1.2E-03	-1.9E-02	-1.7E-02	-1.5E-02	-1.2E-02	-1.0E-02	-7.6E-03
2222	7.6E-04	9.7E-04	1.2E-03	1.4E-03	1.5E-03	1.7E-03	1.2E-03	-1.5E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.0E-03	-6.1E-03
2223	7.2E-04	9.7E-04	1.5E-03	1.4E-03	2.9E-03	2.3E-03	1.2E-03	-1.3E-02	-1.2E-02	-1.0E-02	-8.7E-03	-6.8E-03	-5.0E-03
2224	6.9E-04	9.2E-04	1.9E-03	1.9E-03	4.8E-03	2.9E-03	1.4E-03	-1.8E-02	-1.5E-02	-1.1E-02	-7.5E-03	-3.6E-03	2.6E-04
2225	7.9E-04	3.0E-03	3.7E-03	6.1E-03	4.9E-03	4.0E-03	3.8E-03	-4.1E-03	3.2E-03	1.3E-02	2.3E-02	3.3E-02	4.3E-02
2226	7.7E-04	2.5E-03	3.6E-03	5.1E-03	4.8E-03	4.4E-03	4.1E-03	-1.0E-02	-4.0E-03	4.7E-03	1.3E-02	2.2E-02	3.1E-02
2227	8.0E-04	2.0E-03	3.2E-03	4.2E-03	4.7E-03	4.1E-03	3.9E-03	-2.4E-02	-1.9E-02	-1.1E-02	-3.0E-03	5.0E-03	1.3E-02
2228	8.2E-04	1.8E-03	2.9E-03	3.7E-03	4.3E-03	3.8E-03	3.6E-03	-2.5E-02	-2.2E-02	-1.8E-02	-1.3E-02	-8.3E-03	-3.6E-03
2229	7.7E-04	1.6E-03	2.7E-03	3.3E-03	4.5E-03	4.1E-03	3.8E-03	-2.0E-02	-1.9E-02	-1.6E-02	-1.2E-02	-9.0E-03	-5.5E-03
2230	7.5E-04	1.4E-03	2.6E-03	3.0E-03	4.3E-03	3.8E-03	3.6E-03	-9.9E-03	-1.0E-02	-8.3E-03	-6.3E-03	-4.4E-03	-2.4E-03
2231	7.9E-04	1.3E-03	2.4E-03	2.8E-03	3.8E-03	3.2E-03	3.0E-03	-1.1E-04	-4.0E-04	1.3E-03	3.0E-03	4.7E-03	6.4E-03
2232	7.2E-04	9.4E-04	1.3E-03	1.4E-03	1.5E-03	1.3E-03	1.1E-03	-1.3E-02	-1.1E-02	-9.6E-03	-7.7E-03	-5.8E-03	-3.9E-03
2233	6.9E-04	9.2E-04	1.7E-03	1.7E-03	1.9E-03	1.8E-03	1.2E-03	-1.4E-02	-1.2E-02	-9.9E-03	-7.6E-03	-5.2E-03	-2.9E-03
2234	6.5E-04	8.5E-04	2.1E-03	2.1E-03	3.0E-03	2.7E-03	1.6E-03	-2.0E-02	-1.5E-02	-1.0E-02	-5.0E-03	1.2E-04	5.2E-03
2235	9.3E-04	3.3E-03	4.2E-03	6.3E-03	5.4E-03	4.4E-03	4.1E-03	1.4E-02	2.0E-02	2.8E-02	3.7E-02	4.5E-02	5.3E-02
2236	7.9E-04	2.9E-03	4.0E-03	6.0E-03	4.8E-03	4.0E-03	3.7E-03	-1.6E-03	5.7E-03	1.6E-02	2.5E-02	3.5E-02	4.5E-02
2237	7.1E-04	2.5E-03	3.0E-03	5.0E-03	4.3E-03	3.9E-03	3.6E-03	-1.1E-02	-4.6E-03	4.0E-03	1.3E-02	2.1E-02	3.0E-02
2238	7.3E-04	2.2E-03	2.9E-03	4.3E-03	4.5E-03	4.0E-03	3.7E-03	-1.9E-02	-1.3E-02	-5.1E-03	3.0E-03	1.1E-02	1.9E-02
2239	7.9E-04	2.0E-03	2.9E-03	3.8E-03	4.3E-03	3.6E-03	3.4E-03	-2.4E-02	-2.0E-02	-1.4E-02	-7.9E-03	-1.8E-03	4.3E-03
2240	7.7E-04	1.8E-03	2.6E-03	3.4E-03	4.1E-03	3.8E-03	3.5E-03	-2.3E-02	-2.2E-02	-1.8E-02	-1.4E-02	-1.0E-02	-6.4E-03
2241	6.7E-04	1.5E-03	2.5E-03	3.0E-03	4.2E-03	3.7E-03	3.5E-03	-1.6E-02	-1.6E-02	-1.3E-02	-9.9E-03	-7.1E-03	-4.4E-03
2242	6.8E-04	9.0E-04	1.5E-03	1.5E-03	2.1E-03	1.7E-03	1.1E-03	-1.0E-02	-9.4E-03	-7.8E-03	-6.2E-03	-4.6E-03	-3.0E-03
2243	6.6E-04	8.8E-04	1.9E-03	1.9E-03	2.4E-03	1.9E-03	1.4E-03	-1.5E-02	-1.2E-02	-8.9E-03	-5.5E-03	-2.1E-03	1.2E-03
2244	6.4E-04	9.1E-04	2.3E-03	2.4E-03	2.7E-03	2.0E-03	1.8E-03	-2.1E-02	-1.6E-02	-9.5E-03	-3.1E-03	3.2E-03	9.6E-03
2245	9.0E-04	3.7E-03	3.6E-03	6.0E-03	5.3E-03	4.1E-03	3.8E-03	1.8E-02	2.3E-02	3.0E-02	3.7E-02	4.4E-02	5.1E-02
2246	7.9E-04	2.9E-03	3.8E-03	5.3E-03	4.7E-03	3.9E-03	3.6E-03	1.1E-03	8.4E-03	1.8E-02	2.8E-02	3.7E-02	4.7E-02
2247	6.2E-04	2.0E-03	3.1E-03	4.9E-03	4.1E-03	3.4E-03	3.2E-03	-8.2E-03	-2.4E-03	5.4E-03	1.3E-02	2.1E-02	2.9E-02
2248	6.8E-04	1.8E-03	2.6E-03	4.1E-03	4.2E-03	3.8E-03	3.5E-03	-1.8E-02	-1.2E-02	-4.4E-03	3.5E-03	1.1E-02	1.9E-02
2249	7.4E-04	1.7E-03	2.7E-03	3.9E-03	4.2E-03	3.6E-03	3.4E-03	-2.3E-02	-1.8E-02	-1.1E-02	-3.9E-03	3.1E-03	1.0E-02
2250	7.5E-04	1.6E-03	2.6E-03	3.5E-03	3.8E-03	3.4E-03	3.1E-03	-2.4E-02	-2.2E-02	-1.8E-02	-1.4E-02	-9.4E-03	-5.3E-03
2251	6.3E-04	8.4E-04	2.0E-03	2.1E-03	2.4E-03	2.6E-03	1.6E-03	-1.7E-02	-1.3E-02	-8.1E-03	-3.5E-03	1.2E-03	5.9E-03
2252	6.1E-04	9.9E-04	2.3E-03	2.6E-03	3.1E-03	3.2E-03	2.0E-03	-2.1E-02	-1.6E-02	-9.3E-03	-2.9E-03	3.5E-03	9.9E-03
2253	8.6E-04	3.5E-03	4.4E-03	6.0E-03	6.5E-03	3.8E-03	3.5E-03	2.2E-02	2.5E-02	3.0E-02	3.5E-02	4.0E-02	4.4E-02
2254	8.6E-04	3.5E-03	3.7E-03	5.5E-03	5.4E-03	3.8E-03	3.5E-03	1.6E-02	2.1E-02	2.7E-02	3.4E-02	4.1E-02	4.7E-02
2255	7.7E-04	3.1E-03	3.3E-03	5.1E-03	4.7E-03	3.7E-03	3.5E-03	4.0E-03	1.1E-02	2.0E-02	2.8E-02	3.7E-02	4.6E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2256	6.1E-04	2.5E-03	3.1E-03	4.6E-03	4.0E-03	3.1E-03	2.9E-03	-6.4E-03	-4.4E-04	7.5E-03	1.6E-02	2.4E-02	3.1E-02
2257	6.0E-04	2.0E-03	2.7E-03	4.3E-03	3.9E-03	3.5E-03	3.2E-03	-1.3E-02	-8.1E-03	-1.1E-03	5.8E-03	1.3E-02	2.0E-02
2258	6.8E-04	1.5E-03	2.5E-03	3.7E-03	4.1E-03	3.5E-03	3.3E-03	-2.2E-02	-1.7E-02	-9.6E-03	-2.3E-03	5.1E-03	1.2E-02
2259	7.1E-04	1.3E-03	2.4E-03	3.5E-03	3.8E-03	3.1E-03	2.9E-03	-2.2E-02	-1.9E-02	-1.4E-02	-8.5E-03	-3.4E-03	1.7E-03
2260	5.8E-04	1.1E-03	2.4E-03	2.8E-03	3.7E-03	2.3E-03	2.1E-03	-1.9E-02	-1.4E-02	-8.1E-03	-1.9E-03	4.3E-03	1.1E-02
2261	8.0E-04	3.6E-03	4.6E-03	5.7E-03	6.4E-03	3.6E-03	3.3E-03	2.3E-02	2.5E-02	3.0E-02	3.4E-02	3.8E-02	4.2E-02
2262	8.2E-04	2.8E-03	3.7E-03	5.0E-03	5.3E-03	3.4E-03	3.2E-03	1.4E-02	1.8E-02	2.4E-02	3.0E-02	3.6E-02	4.2E-02
2263	7.5E-04	2.5E-03	2.9E-03	4.8E-03	4.6E-03	3.5E-03	3.3E-03	8.0E-03	1.3E-02	2.1E-02	2.9E-02	3.6E-02	4.4E-02
2264	6.2E-04	2.4E-03	2.9E-03	4.2E-03	4.0E-03	3.1E-03	2.9E-03	-4.4E-03	1.8E-03	9.9E-03	1.8E-02	2.6E-02	3.4E-02
2265	5.3E-04	2.2E-03	2.8E-03	4.2E-03	3.6E-03	3.1E-03	2.9E-03	-1.1E-02	-5.9E-03	1.3E-03	8.5E-03	1.6E-02	2.3E-02
2266	6.2E-04	1.9E-03	2.4E-03	3.9E-03	3.9E-03	3.3E-03	3.1E-03	-2.0E-02	-1.5E-02	-8.0E-03	-1.1E-03	5.9E-03	1.3E-02
2267	7.4E-04	2.9E-03	5.0E-03	6.3E-03	7.0E-03	3.2E-03	3.0E-03	1.7E-02	2.2E-02	2.9E-02	3.6E-02	4.3E-02	5.1E-02
2268	7.5E-04	3.2E-03	4.6E-03	5.5E-03	6.2E-03	3.4E-03	3.2E-03	2.3E-02	2.6E-02	3.0E-02	3.5E-02	3.9E-02	4.4E-02
2269	7.7E-04	2.9E-03	3.7E-03	4.9E-03	5.2E-03	3.2E-03	3.0E-03	1.6E-02	1.9E-02	2.4E-02	2.9E-02	3.4E-02	3.9E-02
2270	7.2E-04	2.3E-03	2.9E-03	4.4E-03	4.5E-03	3.3E-03	3.1E-03	1.1E-02	1.5E-02	2.2E-02	2.8E-02	3.4E-02	4.0E-02
2271	6.1E-04	1.9E-03	2.7E-03	4.2E-03	3.9E-03	3.0E-03	2.8E-03	-3.1E-03	3.2E-03	1.1E-02	2.0E-02	2.8E-02	3.6E-02
2272	4.9E-04	2.0E-03	2.7E-03	4.0E-03	3.4E-03	2.8E-03	2.6E-03	-8.5E-03	-3.3E-03	3.6E-03	1.0E-02	1.7E-02	2.4E-02
2273	5.6E-04	1.9E-03	2.4E-03	3.8E-03	3.6E-03	3.1E-03	2.9E-03	-1.7E-02	-1.2E-02	-5.2E-03	1.6E-03	8.4E-03	1.5E-02
2274	6.7E-04	3.4E-03	6.3E-03	8.3E-03	5.4E-03	2.8E-03	2.7E-03	1.3E-02	1.4E-02	1.7E-02	2.0E-02	2.3E-02	2.6E-02
2275	8.0E-04	4.8E-03	6.8E-03	8.5E-03	6.3E-03	2.9E-03	2.7E-03	1.9E-02	1.9E-02	2.0E-02	2.2E-02	2.4E-02	2.6E-02
2276	8.5E-04	4.6E-03	7.2E-03	6.9E-03	5.8E-03	2.5E-03	2.5E-03	2.7E-02	2.7E-02	2.9E-02	3.1E-02	3.3E-02	3.5E-02
2277	7.9E-04	3.9E-03	6.1E-03	7.8E-03	5.2E-03	2.7E-03	2.7E-03	2.0E-02	2.3E-02	2.8E-02	3.2E-02	3.7E-02	4.1E-02
2278	7.9E-04	3.1E-03	4.9E-03	7.0E-03	5.4E-03	2.6E-03	2.4E-03	9.9E-03	1.7E-02	2.5E-02	3.4E-02	4.2E-02	5.1E-02
2279	7.1E-04	2.8E-03	4.4E-03	6.1E-03	6.1E-03	3.0E-03	2.8E-03	1.3E-02	1.9E-02	2.7E-02	3.5E-02	4.3E-02	5.1E-02
2280	7.0E-04	2.5E-03	4.2E-03	5.3E-03	5.9E-03	3.2E-03	3.0E-03	2.3E-02	2.5E-02	2.9E-02	3.3E-02	3.8E-02	4.2E-02
2281	7.2E-04	2.6E-03	3.6E-03	4.8E-03	5.0E-03	3.0E-03	2.8E-03	1.7E-02	1.9E-02	2.4E-02	2.8E-02	3.2E-02	3.6E-02
2282	7.0E-04	2.3E-03	3.0E-03	4.0E-03	4.5E-03	3.1E-03	2.9E-03	1.3E-02	1.6E-02	2.2E-02	2.7E-02	3.2E-02	3.7E-02
2283	6.2E-04	2.0E-03	2.4E-03	4.1E-03	4.0E-03	3.0E-03	2.8E-03	2.1E-04	6.4E-03	1.4E-02	2.3E-02	3.1E-02	3.9E-02
2284	5.0E-04	1.7E-03	2.6E-03	3.8E-03	3.4E-03	2.6E-03	2.4E-03	-6.8E-03	-1.7E-03	4.9E-03	1.2E-02	1.8E-02	2.5E-02
2285	5.8E-04	2.5E-03	4.8E-03	6.4E-03	4.6E-03	3.7E-03	2.6E-03	2.1E-02	2.0E-02	2.1E-02	2.1E-02	2.2E-02	2.2E-02
2286	6.5E-04	3.2E-03	5.8E-03	7.6E-03	5.2E-03	2.7E-03	2.5E-03	1.3E-02	1.4E-02	1.7E-02	2.0E-02	2.3E-02	2.6E-02
2287	7.6E-04	4.2E-03	6.1E-03	7.4E-03	5.3E-03	2.4E-03	2.3E-03	1.8E-02	1.8E-02	2.0E-02	2.2E-02	2.3E-02	2.5E-02
2288	8.0E-04	4.1E-03	6.5E-03	5.9E-03	5.2E-03	2.4E-03	2.4E-03	2.6E-02	2.6E-02	2.8E-02	2.9E-02	3.1E-02	3.3E-02
2289	7.6E-04	3.4E-03	5.7E-03	7.1E-03	4.6E-03	2.3E-03	2.3E-03	2.1E-02	2.4E-02	2.8E-02	3.1E-02	3.5E-02	3.9E-02
2290	7.6E-04	3.1E-03	4.7E-03	6.7E-03	4.8E-03	2.4E-03	2.3E-03	1.0E-02	1.7E-02	2.4E-02	3.2E-02	4.0E-02	4.7E-02
2291	6.9E-04	2.5E-03	4.0E-03	6.0E-03	5.6E-03	2.8E-03	2.6E-03	1.1E-02	1.7E-02	2.5E-02	3.3E-02	4.1E-02	4.9E-02
2292	6.5E-04	2.2E-03	3.7E-03	5.2E-03	5.6E-03	3.0E-03	2.8E-03	2.2E-02	2.4E-02	2.8E-02	3.2E-02	3.6E-02	3.9E-02
2293	6.8E-04	2.1E-03	3.5E-03	4.6E-03	4.9E-03	2.9E-03	2.7E-03	1.8E-02	2.0E-02	2.3E-02	2.7E-02	3.1E-02	3.5E-02
2294	6.8E-04	2.2E-03	3.0E-03	4.1E-03	4.4E-03	2.9E-03	2.7E-03	1.2E-02	1.6E-02	2.0E-02	2.5E-02	3.0E-02	3.5E-02
2295	6.1E-04	2.0E-03	2.5E-03	3.9E-03	4.0E-03	2.9E-03	2.7E-03	3.6E-03	8.8E-03	1.6E-02	2.3E-02	3.0E-02	3.7E-02
2296	5.1E-04	1.8E-03	2.3E-03	3.7E-03	3.4E-03	2.5E-03	2.4E-03	-5.6E-03	-3.1E-04	6.6E-03	1.4E-02	2.0E-02	2.7E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2297	5.6E-04	2.1E-03	4.4E-03	5.8E-03	5.7E-03	5.2E-03	2.4E-03	1.9E-02	1.9E-02	2.0E-02	2.1E-02	2.1E-02	2.2E-02
2298	6.2E-04	2.9E-03	5.1E-03	6.8E-03	4.8E-03	3.2E-03	2.4E-03	1.3E-02	1.4E-02	1.7E-02	1.9E-02	2.2E-02	2.5E-02
2299	7.2E-04	3.7E-03	5.5E-03	6.4E-03	4.9E-03	2.9E-03	2.1E-03	1.8E-02	1.8E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02
2300	7.6E-04	3.7E-03	5.9E-03	5.2E-03	4.4E-03	2.7E-03	2.2E-03	2.4E-02	2.4E-02	2.6E-02	2.7E-02	2.9E-02	3.0E-02
2301	7.2E-04	3.2E-03	5.3E-03	6.3E-03	4.1E-03	2.5E-03	2.2E-03	2.3E-02	2.5E-02	2.8E-02	3.1E-02	3.3E-02	3.6E-02
2302	7.2E-04	2.9E-03	4.6E-03	6.4E-03	4.4E-03	2.3E-03	2.1E-03	1.1E-02	1.7E-02	2.3E-02	3.0E-02	3.7E-02	4.4E-02
2303	6.7E-04	2.3E-03	3.9E-03	5.8E-03	5.2E-03	2.7E-03	2.5E-03	1.1E-02	1.7E-02	2.5E-02	3.3E-02	4.0E-02	4.8E-02
2304	6.0E-04	2.1E-03	3.6E-03	5.0E-03	5.3E-03	2.8E-03	2.6E-03	2.1E-02	2.3E-02	2.6E-02	3.0E-02	3.4E-02	3.7E-02
2305	6.5E-04	1.7E-03	3.4E-03	4.4E-03	4.8E-03	2.8E-03	2.6E-03	1.8E-02	2.0E-02	2.3E-02	2.7E-02	3.0E-02	3.4E-02
2306	6.5E-04	1.9E-03	3.0E-03	4.0E-03	4.3E-03	2.7E-03	2.6E-03	1.2E-02	1.5E-02	2.0E-02	2.5E-02	3.0E-02	3.4E-02
2307	6.0E-04	1.9E-03	2.5E-03	3.6E-03	3.9E-03	2.8E-03	2.6E-03	7.3E-03	1.1E-02	1.7E-02	2.3E-02	2.9E-02	3.5E-02
2308	5.4E-04	1.4E-03	2.5E-03	3.4E-03	8.8E-03	1.0E-02	2.4E-03	1.2E-02	7.0E-03	3.7E-03	4.0E-04	-2.9E-03	-6.2E-03
2309	4.7E-04	1.6E-03	2.7E-03	3.5E-03	1.0E-02	1.2E-02	3.0E-03	1.5E-02	1.0E-02	6.6E-03	2.9E-03	-7.9E-04	-4.5E-03
2310	4.1E-04	1.9E-03	3.1E-03	3.9E-03	8.0E-03	9.3E-03	3.0E-03	2.5E-02	1.7E-02	1.2E-02	5.6E-03	-3.5E-04	-6.3E-03
2311	4.6E-04	2.0E-03	3.4E-03	4.6E-03	7.1E-03	8.0E-03	2.6E-03	2.6E-02	2.0E-02	1.6E-02	1.2E-02	8.3E-03	4.3E-03
2312	5.4E-04	2.0E-03	4.2E-03	5.6E-03	4.5E-03	4.8E-03	2.3E-03	1.7E-02	1.7E-02	1.9E-02	2.0E-02	2.1E-02	2.3E-02
2313	6.0E-04	2.7E-03	4.7E-03	6.4E-03	4.6E-03	2.8E-03	2.2E-03	1.3E-02	1.4E-02	1.7E-02	1.9E-02	2.1E-02	2.4E-02
2314	6.9E-04	3.3E-03	5.1E-03	5.8E-03	4.5E-03	3.7E-03	2.0E-03	1.7E-02	1.7E-02	1.9E-02	2.0E-02	2.2E-02	2.3E-02
2315	7.3E-04	3.4E-03	5.5E-03	4.7E-03	4.1E-03	2.4E-03	2.1E-03	2.3E-02	2.3E-02	2.4E-02	2.6E-02	2.7E-02	2.8E-02
2316	6.8E-04	3.0E-03	5.0E-03	5.7E-03	3.8E-03	2.4E-03	2.1E-03	2.3E-02	2.5E-02	2.7E-02	2.9E-02	3.2E-02	3.4E-02
2317	6.9E-04	2.7E-03	4.4E-03	6.0E-03	4.1E-03	2.4E-03	2.0E-03	1.2E-02	1.7E-02	2.3E-02	2.9E-02	3.5E-02	4.1E-02
2318	6.4E-04	2.3E-03	3.7E-03	5.6E-03	4.8E-03	2.6E-03	2.3E-03	1.1E-02	1.7E-02	2.4E-02	3.1E-02	3.9E-02	4.6E-02
2319	5.5E-04	1.9E-03	3.5E-03	4.9E-03	5.0E-03	3.4E-03	2.5E-03	1.9E-02	2.1E-02	2.5E-02	2.9E-02	3.2E-02	3.6E-02
2320	6.1E-04	1.8E-03	3.3E-03	4.3E-03	4.7E-03	3.0E-03	2.5E-03	1.8E-02	2.0E-02	2.4E-02	2.8E-02	3.1E-02	3.5E-02
2321	6.3E-04	1.5E-03	3.0E-03	4.0E-03	4.2E-03	2.6E-03	2.4E-03	1.3E-02	1.5E-02	1.9E-02	2.3E-02	2.7E-02	3.1E-02
2322	5.2E-04	2.1E-03	4.2E-03	5.6E-03	4.2E-03	4.1E-03	2.2E-03	1.6E-02	1.6E-02	1.8E-02	2.0E-02	2.1E-02	2.3E-02
2323	5.7E-04	2.5E-03	4.3E-03	5.8E-03	4.4E-03	3.3E-03	2.1E-03	1.3E-02	1.4E-02	1.6E-02	1.8E-02	2.1E-02	2.3E-02
2324	6.6E-04	3.1E-03	4.7E-03	5.3E-03	4.2E-03	3.3E-03	1.9E-03	1.6E-02	1.7E-02	1.8E-02	2.0E-02	2.1E-02	2.3E-02
2325	7.0E-04	3.2E-03	5.1E-03	4.3E-03	3.8E-03	2.6E-03	2.1E-03	2.2E-02	2.2E-02	2.3E-02	2.4E-02	2.6E-02	2.7E-02
2326	6.6E-04	2.8E-03	4.7E-03	5.2E-03	3.6E-03	2.6E-03	2.0E-03	2.4E-02	2.5E-02	2.7E-02	2.8E-02	3.0E-02	3.2E-02
2327	6.6E-04	2.4E-03	4.2E-03	5.6E-03	3.7E-03	2.1E-03	1.9E-03	1.3E-02	1.7E-02	2.3E-02	2.8E-02	3.3E-02	3.8E-02
2328	6.2E-04	2.2E-03	3.5E-03	5.4E-03	4.4E-03	2.3E-03	2.2E-03	1.1E-02	1.6E-02	2.3E-02	3.0E-02	3.7E-02	4.4E-02
2329	5.1E-04	1.8E-03	3.4E-03	4.7E-03	4.7E-03	2.8E-03	2.4E-03	1.6E-02	1.9E-02	2.3E-02	2.7E-02	3.1E-02	3.5E-02
2330	1.8E-03	3.4E-03	3.8E-03	1.3E-03	1.3E-03	1.8E-03	1.0E-03	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-8.1E-03	-5.9E-03
2331	1.6E-03	3.6E-03	6.5E-03	7.4E-03	6.0E-03	4.9E-03	4.6E-03	-5.7E-02	-4.5E-02	-3.0E-02	-1.6E-02	-1.1E-03	1.3E-02
2332	1.8E-03	3.2E-03	6.3E-03	7.4E-03	6.8E-03	5.5E-03	5.2E-03	-6.5E-02	-5.8E-02	-4.8E-02	-3.7E-02	-2.7E-02	-1.7E-02
2333	2.1E-03	3.0E-03	6.0E-03	7.3E-03	7.6E-03	6.0E-03	5.7E-03	-5.8E-02	-5.4E-02	-4.8E-02	-4.1E-02	-3.5E-02	-2.8E-02
2334	1.9E-03	3.6E-03	5.5E-03	6.1E-03	7.1E-03	5.5E-03	5.0E-03	-6.2E-02	-5.5E-02	-4.4E-02	-3.4E-02	-2.3E-02	-1.3E-02
2335	2.2E-03	4.6E-03	6.9E-03	7.3E-03	8.0E-03	6.3E-03	5.9E-03	-8.3E-02	-6.9E-02	-5.2E-02	-3.5E-02	-1.7E-02	3.7E-04
2336	1.9E-03	3.5E-03	5.1E-03	5.8E-03	7.1E-03	5.4E-03	4.9E-03	-7.7E-02	-6.6E-02	-5.1E-02	-3.7E-02	-2.2E-02	-7.4E-03
2337	1.6E-03	3.1E-03	4.9E-03	5.1E-03	5.7E-03	4.6E-03	4.3E-03	-5.7E-02	-5.1E-02	-4.1E-02	-3.1E-02	-2.1E-02	-1.1E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2338	2.3E-03	4.1E-03	6.6E-03	7.1E-03	8.2E-03	6.5E-03	6.0E-03	-9.2E-02	-7.7E-02	-5.7E-02	-3.8E-02	-1.8E-02	1.1E-03
2339	1.8E-03	2.7E-03	4.7E-03	5.8E-03	6.7E-03	5.2E-03	4.8E-03	-7.8E-02	-6.9E-02	-5.5E-02	-4.2E-02	-2.9E-02	-1.5E-02
2340	1.7E-03	2.5E-03	3.8E-03	5.1E-03	5.0E-03	4.5E-03	4.5E-03	-6.9E-02	-6.2E-02	-5.2E-02	-4.3E-02	-3.3E-02	-2.3E-02
2341	1.9E-03	2.4E-03	3.5E-03	5.3E-03	5.3E-03	4.8E-03	4.8E-03	-6.7E-02	-5.5E-02	-4.0E-02	-2.6E-02	-1.1E-02	3.8E-03
2342	8.3E-04	2.1E-03	4.0E-03	4.5E-03	5.0E-03	3.5E-03	3.3E-03	-9.1E-03	-1.2E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.8E-02
2343	8.4E-04	2.8E-03	4.7E-03	5.4E-03	5.5E-03	3.2E-03	3.0E-03	9.0E-05	-9.3E-03	-1.7E-02	-2.4E-02	-3.2E-02	-3.9E-02
2344	8.1E-04	3.0E-03	4.6E-03	5.7E-03	6.0E-03	2.9E-03	2.7E-03	2.3E-03	-9.9E-03	-2.0E-02	-3.1E-02	-4.1E-02	-5.1E-02
2345	8.4E-04	2.5E-03	4.0E-03	4.9E-03	5.1E-03	2.7E-03	2.5E-03	-3.1E-02	-3.2E-02	-3.2E-02	-3.1E-02	-3.0E-02	-2.9E-02
2346	7.2E-04	2.0E-03	4.1E-03	5.1E-03	5.1E-03	2.8E-03	2.6E-03	-6.7E-02	-6.2E-02	-5.5E-02	-4.7E-02	-4.0E-02	-3.3E-02
2347	5.7E-04	2.0E-03	3.7E-03	4.6E-03	4.7E-03	2.5E-03	2.4E-03	-6.9E-02	-6.6E-02	-6.2E-02	-5.8E-02	-5.4E-02	-5.0E-02
2348	4.9E-04	1.5E-03	2.7E-03	3.5E-03	3.6E-03	2.1E-03	1.9E-03	-5.8E-02	-5.8E-02	-5.7E-02	-5.7E-02	-5.6E-02	-5.5E-02
2349	8.7E-04	3.0E-03	4.9E-03	5.6E-03	5.8E-03	3.3E-03	3.1E-03	-2.5E-04	-1.1E-02	-1.9E-02	-2.8E-02	-3.7E-02	-4.5E-02
2350	8.8E-04	3.1E-03	4.9E-03	6.0E-03	6.1E-03	3.1E-03	2.9E-03	-3.6E-03	-1.4E-02	-2.3E-02	-3.2E-02	-4.1E-02	-4.9E-02
2351	7.6E-04	2.6E-03	4.0E-03	5.0E-03	5.2E-03	2.9E-03	2.6E-03	-4.2E-02	-4.0E-02	-3.5E-02	-3.1E-02	-2.7E-02	-2.3E-02
2352	6.1E-04	2.1E-03	4.3E-03	5.3E-03	5.4E-03	2.9E-03	2.7E-03	-7.3E-02	-6.8E-02	-6.2E-02	-5.5E-02	-4.9E-02	-4.2E-02
2353	5.8E-04	2.1E-03	3.7E-03	4.6E-03	4.8E-03	2.6E-03	2.4E-03	-7.3E-02	-7.1E-02	-6.7E-02	-6.4E-02	-6.0E-02	-5.6E-02
2354	5.2E-04	1.6E-03	2.7E-03	3.5E-03	3.6E-03	2.2E-03	1.9E-03	-5.5E-02	-5.7E-02	-5.7E-02	-5.8E-02	-5.8E-02	-5.9E-02
2355	4.8E-04	1.4E-03	2.4E-03	2.9E-03	3.4E-03	2.4E-03	1.8E-03	-4.8E-02	-5.2E-02	-5.4E-02	-5.7E-02	-5.9E-02	-6.2E-02
2356	4.2E-04	1.2E-03	2.3E-03	2.9E-03	3.3E-03	2.3E-03	1.9E-03	-4.4E-02	-4.5E-02	-4.5E-02	-4.5E-02	-4.5E-02	-4.5E-02
2357	6.2E-04	2.2E-03	4.3E-03	5.4E-03	5.5E-03	3.0E-03	2.8E-03	-7.9E-02	-7.4E-02	-6.7E-02	-6.0E-02	-5.3E-02	-4.7E-02
2358	6.0E-04	2.1E-03	3.7E-03	4.7E-03	4.8E-03	2.6E-03	2.5E-03	-6.7E-02	-6.7E-02	-6.5E-02	-6.3E-02	-6.2E-02	-6.0E-02
2359	5.4E-04	1.6E-03	2.7E-03	3.4E-03	3.6E-03	2.4E-03	1.9E-03	-5.6E-02	-6.0E-02	-6.3E-02	-6.6E-02	-6.8E-02	-7.1E-02
2360	4.9E-04	1.5E-03	2.8E-03	3.4E-03	3.8E-03	2.5E-03	2.0E-03	-4.9E-02	-5.1E-02	-5.2E-02	-5.3E-02	-5.4E-02	-5.5E-02
2361	4.4E-04	1.3E-03	2.5E-03	3.1E-03	3.5E-03	2.4E-03	2.0E-03	-4.3E-02	-4.4E-02	-4.3E-02	-4.3E-02	-4.3E-02	-4.2E-02
2362	4.2E-04	1.7E-03	2.7E-03	2.8E-03	3.2E-03	2.3E-03	1.8E-03	-2.7E-02	-2.9E-02	-2.9E-02	-2.9E-02	-3.0E-02	-3.0E-02
2363	5.4E-04	2.2E-03	3.4E-03	3.7E-03	3.2E-03	2.3E-03	1.8E-03	-2.9E-02	-2.7E-02	-2.3E-02	-2.0E-02	-1.7E-02	-1.4E-02
2364	7.0E-04	1.2E-03	2.6E-03	2.8E-03	3.2E-03	2.5E-03	2.3E-03	-1.2E-02	-1.6E-02	-1.9E-02	-2.1E-02	-2.4E-02	-2.6E-02
2365	5.6E-04	1.8E-03	2.9E-03	3.3E-03	3.8E-03	2.5E-03	1.9E-03	-5.4E-02	-5.7E-02	-5.9E-02	-6.1E-02	-6.4E-02	-6.6E-02
2366	5.0E-04	1.6E-03	3.0E-03	3.6E-03	4.1E-03	2.6E-03	2.1E-03	-5.1E-02	-5.1E-02	-5.0E-02	-4.9E-02	-4.8E-02	-4.7E-02
2367	4.6E-04	1.5E-03	2.5E-03	3.1E-03	3.5E-03	2.4E-03	2.0E-03	-3.3E-02	-3.5E-02	-3.6E-02	-3.6E-02	-3.7E-02	-3.8E-02
2368	4.8E-04	2.2E-03	3.3E-03	3.6E-03	3.4E-03	2.4E-03	1.9E-03	-3.7E-02	-3.4E-02	-2.9E-02	-2.5E-02	-2.0E-02	-1.6E-02
2369	6.5E-04	2.7E-03	4.1E-03	4.4E-03	3.8E-03	2.3E-03	2.1E-03	-4.1E-02	-3.6E-02	-3.1E-02	-2.5E-02	-1.9E-02	-1.4E-02
2370	8.0E-04	2.8E-03	4.3E-03	4.7E-03	3.9E-03	2.6E-03	2.4E-03	-4.3E-02	-3.9E-02	-3.3E-02	-2.8E-02	-2.2E-02	-1.7E-02
2371	6.8E-04	1.9E-03	3.0E-03	3.0E-03	2.9E-03	2.4E-03	2.3E-03	-1.6E-02	-1.4E-02	-1.2E-02	-9.6E-03	-7.1E-03	-4.6E-03
2372	6.6E-04	1.5E-03	2.8E-03	2.7E-03	3.2E-03	2.7E-03	2.5E-03	-1.1E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
2373	7.1E-04	1.2E-03	2.7E-03	2.7E-03	3.3E-03	2.7E-03	2.5E-03	-9.1E-03	-1.3E-02	-1.6E-02	-1.8E-02	-2.1E-02	-2.3E-02
2374	7.7E-04	1.2E-03	2.8E-03	3.1E-03	3.3E-03	2.5E-03	2.5E-03	-1.6E-02	-1.8E-02	-2.0E-02	-2.1E-02	-2.2E-02	-2.4E-02
2375	5.8E-04	1.9E-03	3.1E-03	3.7E-03	4.2E-03	2.7E-03	2.1E-03	-5.8E-02	-5.8E-02	-5.8E-02	-5.7E-02	-5.6E-02	-5.5E-02
2376	5.1E-04	1.6E-03	3.1E-03	3.7E-03	4.2E-03	2.7E-03	2.2E-03	-4.2E-02	-4.4E-02	-4.4E-02	-4.5E-02	-4.6E-02	-4.6E-02
2377	4.8E-04	2.0E-03	3.0E-03	3.2E-03	3.7E-03	2.5E-03	2.1E-03	-4.7E-02	-4.3E-02	-3.7E-02	-3.2E-02	-2.6E-02	-2.0E-02
2378	5.9E-04	2.8E-03	4.2E-03	4.5E-03	3.8E-03	2.6E-03	2.0E-03	-5.1E-02	-4.5E-02	-3.8E-02	-3.1E-02	-2.3E-02	-1.6E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2379	7.7E-04	3.1E-03	4.7E-03	5.1E-03	4.1E-03	2.5E-03	2.4E-03	-5.1E-02	-4.5E-02	-3.8E-02	-3.1E-02	-2.4E-02	-1.7E-02
2380	9.1E-04	2.7E-03	4.4E-03	4.9E-03	3.9E-03	2.9E-03	2.7E-03	-3.6E-02	-3.3E-02	-2.9E-02	-2.4E-02	-2.0E-02	-1.6E-02
2381	8.8E-04	2.0E-03	2.8E-03	3.4E-03	2.4E-03	1.9E-03	1.8E-03	-1.3E-02	-1.1E-02	-8.2E-03	-5.2E-03	-2.2E-03	7.4E-04
2382	7.3E-04	2.1E-03	3.2E-03	3.3E-03	2.8E-03	2.4E-03	2.2E-03	-1.6E-02	-1.4E-02	-1.1E-02	-7.5E-03	-4.3E-03	-1.1E-03
2383	6.9E-04	1.7E-03	3.0E-03	2.9E-03	3.2E-03	2.7E-03	2.6E-03	-1.7E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.2E-03	-4.4E-03
2384	7.1E-04	1.4E-03	2.8E-03	2.8E-03	3.5E-03	2.9E-03	2.7E-03	-1.4E-02	-1.6E-02	-1.6E-02	-1.6E-02	-1.6E-02	-1.6E-02
2385	6.0E-04	1.8E-03	3.4E-03	4.1E-03	4.6E-03	2.8E-03	2.3E-03	-5.2E-02	-5.3E-02	-5.3E-02	-5.3E-02	-5.3E-02	-5.3E-02
2386	5.2E-04	1.6E-03	3.0E-03	3.7E-03	4.2E-03	2.8E-03	2.3E-03	-5.7E-02	-5.2E-02	-4.5E-02	-3.9E-02	-3.3E-02	-2.6E-02
2387	5.1E-04	2.6E-03	3.9E-03	4.1E-03	3.9E-03	2.7E-03	2.1E-03	-6.3E-02	-5.6E-02	-4.6E-02	-3.7E-02	-2.8E-02	-1.9E-02
2388	7.1E-04	3.3E-03	4.9E-03	5.2E-03	4.3E-03	2.6E-03	2.3E-03	-5.7E-02	-5.0E-02	-4.2E-02	-3.4E-02	-2.6E-02	-1.9E-02
2389	8.9E-04	3.1E-03	4.9E-03	5.3E-03	4.2E-03	2.8E-03	2.7E-03	-5.6E-02	-5.1E-02	-4.4E-02	-3.8E-02	-3.1E-02	-2.5E-02
2390	1.0E-03	2.5E-03	4.3E-03	4.8E-03	3.9E-03	3.2E-03	3.0E-03	-6.2E-02	-5.9E-02	-5.4E-02	-5.0E-02	-4.5E-02	-4.0E-02
2391	1.2E-03	1.6E-03	1.9E-03	2.8E-03	1.7E-03	1.3E-03	1.2E-03	-8.2E-03	-6.6E-03	-4.2E-03	-1.9E-03	4.9E-04	2.8E-03
2392	9.4E-04	1.9E-03	2.8E-03	3.5E-03	2.2E-03	1.7E-03	1.6E-03	-1.2E-02	-1.0E-02	-7.5E-03	-4.6E-03	-1.8E-03	1.0E-03
2393	7.9E-04	2.5E-03	3.5E-03	3.8E-03	2.7E-03	2.2E-03	2.1E-03	-1.6E-02	-1.4E-02	-1.0E-02	-7.2E-03	-4.0E-03	-7.4E-04
2394	7.1E-04	2.0E-03	3.3E-03	3.2E-03	3.2E-03	2.7E-03	2.5E-03	-1.9E-02	-1.7E-02	-1.3E-02	-9.2E-03	-5.4E-03	-1.6E-03
2395	7.0E-04	1.7E-03	2.9E-03	2.9E-03	3.6E-03	3.1E-03	2.9E-03	-2.0E-02	-1.9E-02	-1.5E-02	-1.2E-02	-8.8E-03	-5.6E-03
2396	6.1E-04	1.9E-03	3.6E-03	4.3E-03	4.9E-03	3.0E-03	2.4E-03	-6.2E-02	-5.7E-02	-5.1E-02	-4.5E-02	-3.9E-02	-3.2E-02
2397	5.5E-04	2.1E-03	3.2E-03	3.7E-03	4.3E-03	2.8E-03	2.4E-03	-7.8E-02	-6.8E-02	-5.7E-02	-4.6E-02	-3.5E-02	-2.4E-02
2398	6.2E-04	3.3E-03	4.8E-03	5.1E-03	4.3E-03	2.8E-03	2.2E-03	-6.6E-02	-5.8E-02	-5.0E-02	-4.1E-02	-3.2E-02	-2.3E-02
2399	8.4E-04	3.5E-03	5.3E-03	5.7E-03	4.6E-03	2.7E-03	2.6E-03	-7.8E-02	-7.1E-02	-6.3E-02	-5.4E-02	-4.6E-02	-3.7E-02
2400	1.0E-03	2.8E-03	4.8E-03	5.3E-03	4.2E-03	3.2E-03	3.1E-03	-8.2E-02	-7.7E-02	-7.0E-02	-6.3E-02	-5.7E-02	-5.0E-02
2401	1.1E-03	2.1E-03	4.2E-03	4.7E-03	4.3E-03	3.5E-03	3.3E-03	-7.4E-02	-7.1E-02	-6.7E-02	-6.2E-02	-5.8E-02	-5.3E-02
2402	1.2E-03	1.7E-03	2.2E-03	2.4E-03	1.6E-03	1.2E-03	1.1E-03	-8.6E-03	-8.3E-03	-7.3E-03	-6.3E-03	-5.3E-03	-4.3E-03
2403	6.1E-04	1.9E-03	3.7E-03	4.4E-03	5.0E-03	3.1E-03	2.6E-03	-9.1E-02	-8.0E-02	-6.7E-02	-5.5E-02	-4.3E-02	-3.0E-02
2404	5.7E-04	3.0E-03	4.3E-03	4.6E-03	4.4E-03	2.9E-03	2.4E-03	-8.4E-02	-7.5E-02	-6.5E-02	-5.4E-02	-4.4E-02	-3.4E-02
2405	7.5E-04	3.8E-03	5.6E-03	5.9E-03	4.9E-03	2.9E-03	2.5E-03	-9.3E-02	-8.6E-02	-7.7E-02	-6.9E-02	-6.0E-02	-5.2E-02
2406	9.8E-04	3.4E-03	5.5E-03	5.9E-03	4.6E-03	3.1E-03	3.0E-03	-9.8E-02	-9.2E-02	-8.4E-02	-7.7E-02	-7.0E-02	-6.2E-02
2407	1.1E-03	2.6E-03	4.7E-03	5.2E-03	4.3E-03	3.5E-03	3.4E-03	-7.9E-02	-7.6E-02	-7.2E-02	-6.7E-02	-6.2E-02	-5.8E-02
2408	1.2E-03	2.3E-03	4.0E-03	4.6E-03	4.7E-03	3.7E-03	3.4E-03	-6.6E-02	-6.4E-02	-6.1E-02	-5.7E-02	-5.3E-02	-5.0E-02
2409	1.2E-03	2.1E-03	3.6E-03	4.1E-03	4.7E-03	3.6E-03	3.2E-03	-6.6E-02	-6.3E-02	-5.8E-02	-5.3E-02	-4.8E-02	-4.3E-02
2410	1.4E-03	1.6E-03	2.0E-03	1.8E-03	1.3E-03	1.1E-03	1.1E-03	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02	-1.6E-02	-1.6E-02
2411	6.2E-04	2.5E-03	3.6E-03	4.4E-03	5.0E-03	3.2E-03	2.7E-03	-1.1E-01	-9.7E-02	-8.5E-02	-7.4E-02	-6.2E-02	-5.1E-02
2412	6.5E-04	3.8E-03	5.5E-03	5.8E-03	4.8E-03	3.1E-03	2.4E-03	-1.1E-01	-1.0E-01	-9.7E-02	-8.8E-02	-8.0E-02	-7.2E-02
2413	9.0E-04	3.9E-03	6.0E-03	6.4E-03	5.1E-03	3.0E-03	2.9E-03	-9.6E-02	-9.1E-02	-8.4E-02	-7.7E-02	-7.1E-02	-6.4E-02
2414	1.1E-03	3.2E-03	5.4E-03	5.9E-03	4.7E-03	3.5E-03	3.4E-03	-9.1E-02	-8.6E-02	-7.9E-02	-7.2E-02	-6.5E-02	-5.8E-02
2415	1.3E-03	2.5E-03	4.5E-03	5.1E-03	4.8E-03	3.9E-03	3.6E-03	-8.4E-02	-7.9E-02	-7.2E-02	-6.6E-02	-5.9E-02	-5.3E-02
2416	1.3E-03	2.3E-03	4.0E-03	4.6E-03	5.0E-03	3.9E-03	3.5E-03	-7.5E-02	-7.0E-02	-6.3E-02	-5.7E-02	-5.0E-02	-4.3E-02
2417	1.2E-03	1.8E-03	3.5E-03	4.0E-03	4.8E-03	3.5E-03	3.2E-03	-6.4E-02	-6.1E-02	-5.5E-02	-5.0E-02	-4.5E-02	-3.9E-02
2418	1.1E-03	1.3E-03	1.6E-03	2.1E-03	1.8E-03	1.7E-03	1.6E-03	-1.8E-02	-1.6E-02	-1.4E-02	-1.1E-02	-8.6E-03	-6.0E-03
2419	6.2E-04	3.0E-03	4.4E-03	4.7E-03	4.8E-03	3.2E-03	2.7E-03	-1.1E-01	-1.1E-01	-9.7E-02	-8.9E-02	-8.0E-02	-7.2E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2420	7.9E-04	3.6E-03	5.5E-03	5.9E-03	4.9E-03	3.2E-03	2.6E-03	-1.1E-01	-1.0E-01	-9.3E-02	-8.5E-02	-7.7E-02	-6.9E-02
2421	1.0E-03	3.5E-03	5.7E-03	6.3E-03	5.1E-03	3.4E-03	3.3E-03	-9.4E-02	-8.9E-02	-8.2E-02	-7.5E-02	-6.8E-02	-6.1E-02
2422	1.3E-03	3.1E-03	5.4E-03	6.1E-03	5.0E-03	3.9E-03	3.7E-03	-8.2E-02	-7.9E-02	-7.5E-02	-7.1E-02	-6.7E-02	-6.3E-02
2423	1.4E-03	2.6E-03	4.4E-03	5.1E-03	5.2E-03	4.1E-03	3.8E-03	-6.6E-02	-6.4E-02	-6.1E-02	-5.7E-02	-5.4E-02	-5.0E-02
2424	1.3E-03	2.0E-03	3.9E-03	4.5E-03	5.2E-03	3.9E-03	3.6E-03	-6.0E-02	-5.8E-02	-5.3E-02	-4.8E-02	-4.3E-02	-3.9E-02
2425	1.1E-03	1.8E-03	3.4E-03	3.8E-03	4.8E-03	3.4E-03	3.0E-03	-4.9E-02	-4.7E-02	-4.4E-02	-4.1E-02	-3.8E-02	-3.5E-02
2426	9.1E-04	1.5E-03	2.9E-03	3.2E-03	4.1E-03	3.1E-03	2.8E-03	-3.8E-02	-3.9E-02	-3.8E-02	-3.7E-02	-3.6E-02	-3.4E-02
2427	9.3E-04	3.9E-03	6.1E-03	6.5E-03	5.4E-03	3.2E-03	3.0E-03	-8.5E-02	-8.4E-02	-8.1E-02	-7.8E-02	-7.5E-02	-7.2E-02
2428	1.2E-03	3.4E-03	5.8E-03	6.5E-03	5.3E-03	3.8E-03	3.6E-03	-6.9E-02	-6.9E-02	-6.6E-02	-6.4E-02	-6.1E-02	-5.9E-02
2429	1.4E-03	2.9E-03	5.2E-03	6.0E-03	5.2E-03	4.1E-03	3.9E-03	-5.8E-02	-5.7E-02	-5.3E-02	-4.9E-02	-4.5E-02	-4.1E-02
2430	1.4E-03	2.5E-03	4.6E-03	5.3E-03	5.5E-03	4.2E-03	3.9E-03	-4.6E-02	-4.5E-02	-4.1E-02	-3.8E-02	-3.4E-02	-3.0E-02
2431	1.3E-03	2.0E-03	3.8E-03	4.3E-03	5.3E-03	3.9E-03	3.5E-03	-3.2E-02	-3.2E-02	-3.0E-02	-2.9E-02	-2.7E-02	-2.5E-02
2432	1.1E-03	1.7E-03	3.2E-03	3.5E-03	4.7E-03	3.3E-03	3.1E-03	-2.2E-02	-2.5E-02	-2.6E-02	-2.7E-02	-2.8E-02	-2.9E-02
2433	9.3E-04	1.5E-03	2.7E-03	3.4E-03	3.8E-03	3.2E-03	2.8E-03	-2.3E-02	-2.7E-02	-2.9E-02	-3.0E-02	-3.2E-02	-3.4E-02
2434	1.1E-03	1.2E-03	1.7E-03	2.3E-03	2.3E-03	2.1E-03	2.1E-03	-1.5E-02	-1.1E-02	-6.2E-03	-1.3E-03	3.5E-03	8.3E-03
2435	1.1E-03	4.0E-03	6.5E-03	7.1E-03	5.7E-03	3.7E-03	3.5E-03	-7.7E-02	-7.2E-02	-6.5E-02	-5.8E-02	-5.2E-02	-4.5E-02
2436	1.4E-03	3.3E-03	5.8E-03	6.6E-03	5.4E-03	4.2E-03	4.0E-03	-6.4E-02	-5.7E-02	-4.8E-02	-3.9E-02	-2.9E-02	-2.0E-02
2437	1.5E-03	2.7E-03	5.0E-03	5.8E-03	5.6E-03	4.4E-03	4.1E-03	-4.8E-02	-4.2E-02	-3.4E-02	-2.6E-02	-1.8E-02	-9.4E-03
2438	1.4E-03	2.3E-03	4.2E-03	5.0E-03	5.5E-03	4.1E-03	3.8E-03	-4.0E-02	-3.6E-02	-2.9E-02	-2.3E-02	-1.6E-02	-9.5E-03
2439	1.2E-03	1.9E-03	3.6E-03	4.0E-03	5.2E-03	3.7E-03	3.3E-03	-3.9E-02	-3.6E-02	-3.2E-02	-2.7E-02	-2.3E-02	-1.9E-02
2440	9.9E-04	1.6E-03	3.0E-03	3.6E-03	4.4E-03	3.4E-03	3.1E-03	-4.0E-02	-4.1E-02	-3.9E-02	-3.7E-02	-3.5E-02	-3.3E-02
2441	1.0E-03	1.4E-03	2.8E-03	3.5E-03	3.4E-03	3.1E-03	2.9E-03	-3.9E-02	-3.7E-02	-3.3E-02	-3.0E-02	-2.6E-02	-2.2E-02
2442	1.2E-03	1.4E-03	1.7E-03	2.3E-03	2.3E-03	2.1E-03	2.1E-03	-1.8E-02	-1.3E-02	-7.8E-03	-2.5E-03	2.8E-03	8.1E-03
2443	1.5E-03	3.1E-03	5.7E-03	6.5E-03	5.8E-03	4.7E-03	4.4E-03	-5.4E-02	-4.2E-02	-2.8E-02	-1.4E-02	-6.2E-04	1.3E-02
2444	1.5E-03	2.5E-03	4.8E-03	5.6E-03	5.9E-03	4.6E-03	4.2E-03	-5.2E-02	-4.1E-02	-2.8E-02	-1.5E-02	-1.5E-03	1.2E-02
2445	1.4E-03	2.2E-03	4.0E-03	4.6E-03	5.5E-03	4.1E-03	3.7E-03	-5.2E-02	-4.1E-02	-2.9E-02	-1.6E-02	-3.4E-03	9.2E-03
2446	1.1E-03	1.8E-03	3.3E-03	3.9E-03	4.9E-03	3.7E-03	3.4E-03	-5.2E-02	-4.2E-02	-3.0E-02	-1.9E-02	-6.8E-03	5.0E-03
2447	1.1E-03	1.8E-03	3.1E-03	3.8E-03	3.9E-03	3.4E-03	3.1E-03	-4.7E-02	-3.7E-02	-2.5E-02	-1.2E-02	-7.8E-06	1.2E-02
2448	1.1E-03	1.9E-03	3.2E-03	3.5E-03	3.3E-03	3.0E-03	2.9E-03	-4.0E-02	-3.0E-02	-1.8E-02	-6.7E-03	5.0E-03	1.7E-02
2449	1.9E-03	2.1E-03	1.8E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-2.1E-02	-1.7E-02	-1.3E-02	-9.1E-03	-5.1E-03	-1.1E-03
2450	1.4E-03	1.6E-03	1.7E-03	2.2E-03	2.2E-03	2.0E-03	2.0E-03	-2.3E-02	-1.9E-02	-1.5E-02	-1.1E-02	-6.7E-03	-2.6E-03
2451	1.7E-03	2.8E-03	5.4E-03	6.4E-03	6.4E-03	5.0E-03	4.7E-03	-5.3E-02	-4.0E-02	-2.5E-02	-9.8E-03	5.6E-03	2.1E-02
2452	1.6E-03	2.4E-03	4.5E-03	5.4E-03	6.1E-03	4.7E-03	4.3E-03	-4.8E-02	-3.8E-02	-2.6E-02	-1.3E-02	-8.1E-04	1.2E-02
2453	1.4E-03	2.1E-03	3.7E-03	4.3E-03	5.5E-03	4.0E-03	3.7E-03	-4.6E-02	-3.8E-02	-2.7E-02	-1.6E-02	-5.3E-03	5.5E-03
2454	1.2E-03	2.2E-03	3.7E-03	4.1E-03	4.5E-03	3.7E-03	3.3E-03	-4.1E-02	-3.2E-02	-2.1E-02	-8.9E-03	2.7E-03	1.4E-02
2455	1.2E-03	2.1E-03	3.6E-03	3.8E-03	3.6E-03	3.3E-03	3.2E-03	-3.6E-02	-2.7E-02	-1.6E-02	-5.1E-03	6.0E-03	1.7E-02
2456	1.1E-03	1.7E-03	3.3E-03	3.3E-03	3.4E-03	2.9E-03	2.9E-03	-3.3E-02	-2.5E-02	-1.6E-02	-6.3E-03	3.2E-03	1.3E-02
2457	2.3E-03	2.5E-03	2.3E-03	1.7E-03	1.7E-03	1.5E-03	1.4E-03	-1.9E-02	-1.8E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.3E-03
2458	1.8E-03	2.0E-03	1.7E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.4E-03
2459	1.6E-03	2.4E-03	4.3E-03	5.1E-03	6.2E-03	4.6E-03	4.2E-03	-5.6E-02	-4.9E-02	-4.0E-02	-3.1E-02	-2.2E-02	-1.3E-02
2460	1.2E-03	2.7E-03	4.4E-03	4.4E-03	5.3E-03	4.1E-03	3.7E-03	-4.9E-02	-4.2E-02	-3.2E-02	-2.2E-02	-1.2E-02	-1.7E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2461	1.3E-03	2.2E-03	3.9E-03	4.2E-03	4.0E-03	3.6E-03	3.5E-03	-3.8E-02	-3.1E-02	-2.2E-02	-1.2E-02	-3.1E-03	6.2E-03
2462	1.2E-03	2.0E-03	3.3E-03	3.7E-03	3.6E-03	3.2E-03	3.1E-03	-3.4E-02	-2.7E-02	-1.9E-02	-1.0E-02	-1.6E-03	7.1E-03
2463	1.1E-03	2.0E-03	3.1E-03	3.1E-03	3.1E-03	2.7E-03	2.7E-03	-3.4E-02	-2.7E-02	-1.9E-02	-1.1E-02	-2.5E-03	5.7E-03
2464	2.7E-03	2.9E-03	2.8E-03	1.4E-03	1.4E-03	1.2E-03	1.2E-03	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02	-9.6E-03
2465	2.3E-03	2.5E-03	2.0E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.3E-03	-7.3E-03
2466	1.4E-03	2.6E-03	3.9E-03	4.6E-03	4.8E-03	4.1E-03	3.8E-03	-5.5E-02	-4.9E-02	-4.1E-02	-3.2E-02	-2.4E-02	-1.5E-02
2467	1.4E-03	2.3E-03	3.7E-03	4.1E-03	3.9E-03	3.5E-03	3.5E-03	-4.0E-02	-3.9E-02	-3.5E-02	-3.1E-02	-2.7E-02	-2.4E-02
2468	1.2E-03	1.9E-03	3.5E-03	3.4E-03	3.4E-03	3.0E-03	3.0E-03	-3.2E-02	-3.3E-02	-3.1E-02	-3.0E-02	-2.9E-02	-2.8E-02
2469	9.5E-04	1.4E-03	3.1E-03	3.0E-03	2.9E-03	2.6E-03	2.5E-03	-2.6E-02	-2.8E-02	-2.8E-02	-2.8E-02	-2.9E-02	-2.9E-02
2470	2.9E-03	3.2E-03	3.3E-03	1.1E-03	1.2E-03	1.1E-03	1.0E-03	-1.4E-02	-1.3E-02	-1.1E-02	-9.5E-03	-7.8E-03	-6.1E-03
2471	2.9E-03	3.1E-03	2.6E-03	1.4E-03	1.4E-03	1.2E-03	1.2E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.0E-03	-7.1E-03
2472	1.5E-03	2.2E-03	4.2E-03	4.6E-03	4.4E-03	4.0E-03	4.0E-03	-5.0E-02	-4.6E-02	-3.9E-02	-3.2E-02	-2.5E-02	-1.8E-02
2473	1.3E-03	1.8E-03	3.4E-03	3.8E-03	3.8E-03	3.4E-03	3.3E-03	-5.2E-02	-4.7E-02	-4.0E-02	-3.4E-02	-2.7E-02	-2.0E-02
2474	1.1E-03	1.7E-03	2.7E-03	3.2E-03	3.2E-03	2.8E-03	2.7E-03	-4.8E-02	-4.2E-02	-3.5E-02	-2.8E-02	-2.1E-02	-1.4E-02
2475	8.6E-04	1.6E-03	2.4E-03	3.0E-03	3.4E-03	2.7E-03	2.5E-03	-3.5E-02	-3.2E-02	-2.7E-02	-2.1E-02	-1.6E-02	-1.1E-02
2476	3.0E-03	3.8E-03	3.8E-03	9.5E-04	1.1E-03	9.9E-04	9.2E-04	-1.8E-02	-1.7E-02	-1.5E-02	-1.4E-02	-1.2E-02	-1.0E-02
2477	3.5E-03	3.7E-03	3.4E-03	1.1E-03	1.2E-03	1.1E-03	1.1E-03	-2.0E-02	-1.9E-02	-1.8E-02	-1.7E-02	-1.5E-02	-1.4E-02
2478	2.6E-03	2.8E-03	2.6E-03	1.4E-03	1.4E-03	1.3E-03	1.2E-03	-2.2E-02	-2.1E-02	-2.0E-02	-1.9E-02	-1.8E-02	-1.7E-02
2479	1.5E-03	2.2E-03	3.3E-03	4.3E-03	4.3E-03	3.8E-03	3.8E-03	-5.8E-02	-5.2E-02	-4.5E-02	-3.7E-02	-2.9E-02	-2.1E-02
2480	1.2E-03	1.8E-03	2.7E-03	3.4E-03	3.4E-03	3.1E-03	3.0E-03	-4.9E-02	-4.3E-02	-3.5E-02	-2.6E-02	-1.8E-02	-9.6E-03
2481	9.5E-04	1.5E-03	2.8E-03	3.4E-03	4.0E-03	3.0E-03	2.8E-03	-4.5E-02	-3.8E-02	-2.9E-02	-2.0E-02	-1.1E-02	-2.1E-03
2482	2.7E-03	3.8E-03	3.8E-03	9.1E-04	9.4E-04	8.5E-04	7.9E-04	-1.9E-02	-1.9E-02	-1.8E-02	-1.7E-02	-1.6E-02	-1.5E-02
2483	4.0E-03	4.3E-03	4.3E-03	9.8E-04	1.1E-03	1.0E-03	9.4E-04	-2.1E-02	-2.0E-02	-1.9E-02	-1.8E-02	-1.7E-02	-1.6E-02
2484	3.5E-03	3.7E-03	3.1E-03	1.1E-03	1.3E-03	1.2E-03	1.1E-03	-2.2E-02	-2.1E-02	-2.0E-02	-1.9E-02	-1.7E-02	-1.6E-02
2485	4.7E-03	5.5E-03	5.4E-03	1.4E-03	1.4E-03	1.3E-03	1.3E-03	-2.3E-02	-2.2E-02	-2.0E-02	-1.9E-02	-1.7E-02	-1.6E-02
2486	1.4E-03	1.9E-03	3.1E-03	4.0E-03	4.1E-03	3.7E-03	3.7E-03	-5.5E-02	-4.3E-02	-2.9E-02	-1.4E-02	1.3E-04	1.5E-02
2487	1.1E-03	1.6E-03	3.2E-03	3.9E-03	4.7E-03	3.5E-03	3.4E-03	-4.3E-02	-3.3E-02	-2.0E-02	-8.1E-03	4.2E-03	1.6E-02
2488	1.1E-03	1.5E-03	3.5E-03	4.2E-03	5.0E-03	4.0E-03	3.8E-03	-2.5E-02	-1.9E-02	-9.8E-03	-1.2E-03	7.5E-03	1.6E-02
2489	2.2E-03	3.6E-03	3.5E-03	8.8E-04	9.6E-04	7.0E-04	6.5E-04	-1.7E-02	-1.7E-02	-1.6E-02	-1.5E-02	-1.4E-02	-1.3E-02
2490	1.1E-03	1.9E-03	3.5E-03	4.2E-03	5.4E-03	4.4E-03	4.2E-03	-2.7E-02	-1.7E-02	-3.3E-03	1.0E-02	2.3E-02	3.6E-02
2491	1.3E-03	1.8E-03	3.7E-03	4.0E-03	5.6E-03	5.0E-03	4.8E-03	-2.0E-02	-1.1E-02	-1.8E-04	1.1E-02	2.2E-02	3.3E-02
2492	7.9E-04	1.6E-03	1.9E-03	1.1E-03	1.0E-03	1.3E-03	8.1E-04	-5.6E-03	-7.0E-03	-8.1E-03	-9.3E-03	-1.0E-02	-1.2E-02
2493	7.2E-04	1.9E-03	2.2E-03	1.2E-03	1.0E-03	1.2E-03	9.3E-04	-1.2E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.6E-03	-8.9E-03
2494	7.8E-04	2.2E-03	2.5E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	-1.7E-02	-1.5E-02	-1.2E-02	-9.9E-03	-7.6E-03	-5.3E-03
2495	7.8E-04	2.2E-03	2.5E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.0E-03	-5.1E-03
2496	9.5E-04	2.1E-03	2.4E-03	1.4E-03	1.3E-03	1.1E-03	1.1E-03	-2.0E-02	-1.7E-02	-1.4E-02	-1.2E-02	-8.8E-03	-6.0E-03
2497	1.1E-03	2.0E-03	2.3E-03	1.5E-03	1.3E-03	1.2E-03	1.2E-03	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.5E-03	-6.8E-03
2498	1.3E-03	1.8E-03	2.1E-03	1.5E-03	1.4E-03	1.2E-03	1.2E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.5E-03	-5.7E-03
2499	1.3E-03	1.5E-03	1.8E-03	1.4E-03	1.5E-03	1.2E-03	1.2E-03	-1.7E-02	-1.4E-02	-1.2E-02	-9.0E-03	-6.2E-03	-3.5E-03
2500	1.3E-03	1.4E-03	1.6E-03	1.3E-03	1.8E-03	1.1E-03	1.1E-03	-1.2E-02	-1.0E-02	-7.5E-03	-4.9E-03	-2.3E-03	2.7E-04
2501	1.2E-03	1.4E-03	1.6E-03	1.1E-03	2.0E-03	9.5E-04	9.4E-04	-6.6E-03	-4.8E-03	-2.6E-03	-5.1E-04	1.6E-03	3.7E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2502	1.1E-03	1.3E-03	1.5E-03	9.6E-04	2.0E-03	9.0E-04	7.9E-04	-1.8E-03	-3.9E-04	1.3E-03	3.1E-03	4.8E-03	6.5E-03
2503	9.5E-04	1.2E-03	1.4E-03	1.0E-03	1.8E-03	1.0E-03	8.0E-04	-1.1E-04	1.2E-03	3.0E-03	4.7E-03	6.4E-03	8.2E-03
2504	8.4E-04	1.2E-03	1.3E-03	1.1E-03	1.5E-03	1.1E-03	9.5E-04	1.1E-03	2.4E-03	4.1E-03	5.9E-03	7.6E-03	9.4E-03
2505	6.2E-04	9.0E-04	1.1E-03	1.3E-03	1.6E-03	1.4E-03	1.3E-03	-1.1E-02	-9.2E-03	-7.0E-03	-4.8E-03	-2.7E-03	-5.1E-04
2506	5.2E-04	9.1E-04	1.1E-03	1.3E-03	1.7E-03	1.3E-03	1.1E-03	-1.6E-02	-1.5E-02	-1.2E-02	-1.0E-02	-8.0E-03	-5.8E-03
2507	5.2E-04	1.2E-03	2.4E-03	3.0E-03	4.9E-03	2.6E-03	2.4E-03	-1.2E-02	-7.6E-03	-1.7E-03	4.3E-03	1.0E-02	1.6E-02
2508	8.6E-04	1.7E-03	1.7E-03	9.4E-04	1.1E-03	1.4E-03	7.7E-04	-7.6E-03	-8.9E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02
2509	2.8E-03	3.2E-03	1.9E-03	7.8E-04	1.1E-03	7.8E-04	6.0E-04	-1.0E-02	-9.9E-03	-9.2E-03	-8.5E-03	-7.7E-03	-7.0E-03
2510	2.3E-03	2.7E-03	1.7E-03	8.2E-04	1.0E-03	6.7E-04	5.6E-04	-1.7E-02	-1.7E-02	-1.6E-02	-1.6E-02	-1.5E-02	-1.5E-02
2511	1.6E-03	2.8E-03	2.8E-03	8.8E-04	9.3E-04	8.2E-04	7.7E-04	-1.6E-02	-1.5E-02	-1.4E-02	-1.2E-02	-1.1E-02	-9.0E-03
2512	2.2E-03	2.7E-03	1.7E-03	7.6E-04	1.1E-03	9.5E-04	5.5E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02
2513	1.6E-03	2.1E-03	1.6E-03	7.8E-04	1.1E-03	1.0E-03	6.3E-04	-9.3E-03	-9.8E-03	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
2514	1.2E-03	1.3E-03	1.3E-03	8.2E-04	1.1E-03	1.1E-03	6.9E-04	-8.9E-03	-9.0E-03	-8.9E-03	-8.7E-03	-8.6E-03	-8.4E-03
2515	1.3E-03	1.4E-03	1.5E-03	8.2E-04	1.0E-03	1.2E-03	7.2E-04	-8.6E-03	-8.3E-03	-7.7E-03	-7.1E-03	-6.4E-03	-5.8E-03
2516	1.2E-03	1.5E-03	1.4E-03	8.0E-04	9.9E-04	1.3E-03	7.1E-04	-6.0E-03	-5.5E-03	-4.7E-03	-3.9E-03	-3.0E-03	-2.2E-03
2517	1.6E-03	1.9E-03	1.2E-03	7.5E-04	9.7E-04	1.4E-03	7.2E-04	-1.6E-03	-1.5E-03	-1.1E-03	-5.8E-04	-9.6E-05	3.9E-04
2518	1.7E-03	2.1E-03	9.7E-04	7.6E-04	1.0E-03	1.4E-03	7.1E-04	-2.5E-03	-3.5E-03	-4.0E-03	-4.5E-03	-5.1E-03	-5.6E-03
2519	6.9E-04	1.3E-03	1.3E-03	1.0E-03	8.5E-04	9.5E-04	7.7E-04	-5.5E-03	-6.9E-03	-7.9E-03	-9.0E-03	-1.0E-02	-1.1E-02
2520	6.1E-04	1.1E-03	1.3E-03	1.1E-03	9.5E-04	8.6E-04	8.6E-04	-6.6E-03	-7.6E-03	-8.5E-03	-9.3E-03	-1.0E-02	-1.1E-02
2521	5.9E-04	1.4E-03	1.7E-03	1.2E-03	1.1E-03	9.8E-04	9.7E-04	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.0E-03	-8.0E-03
2522	1.4E-03	1.7E-03	1.2E-03	8.2E-04	9.7E-04	1.3E-03	6.3E-04	-7.5E-03	-8.2E-03	-8.5E-03	-8.8E-03	-9.0E-03	-9.3E-03
2523	2.3E-03	2.7E-03	1.5E-03	7.8E-04	1.0E-03	8.9E-04	5.3E-04	-1.7E-02	-1.7E-02	-1.6E-02	-1.6E-02	-1.6E-02	-1.5E-02
2524	9.5E-04	1.3E-03	1.3E-03	8.6E-04	8.7E-04	1.1E-03	7.0E-04	-7.9E-03	-8.8E-03	-9.4E-03	-1.0E-02	-1.1E-02	-1.1E-02
2525	5.6E-04	1.6E-03	1.9E-03	1.3E-03	1.1E-03	1.0E-03	1.0E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03	-4.8E-03
2526	6.0E-04	1.7E-03	2.0E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.0E-03	-5.3E-03
2527	8.1E-04	1.9E-03	3.4E-03	3.8E-03	4.3E-03	3.2E-03	3.0E-03	-1.1E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02
2528	4.2E-04	1.2E-03	2.2E-03	2.7E-03	3.1E-03	2.2E-03	1.7E-03	-4.4E-02	-4.7E-02	-4.9E-02	-5.1E-02	-5.3E-02	-5.5E-02
2529	3.9E-04	1.6E-03	2.4E-03	2.6E-03	2.8E-03	2.1E-03	1.6E-03	-2.6E-02	-2.8E-02	-2.9E-02	-3.0E-02	-3.1E-02	-3.2E-02
2530	8.1E-04	8.8E-04	2.1E-03	2.3E-03	3.4E-03	1.7E-03	1.6E-03	-1.6E-02	-1.2E-02	-6.8E-03	-1.6E-03	3.6E-03	8.8E-03
2531	7.7E-04	9.4E-04	2.2E-03	2.5E-03	4.0E-03	1.9E-03	1.8E-03	-1.8E-02	-1.3E-02	-7.5E-03	-1.6E-03	4.3E-03	1.0E-02
2532	5.2E-04	1.1E-03	2.3E-03	2.7E-03	4.8E-03	2.2E-03	2.1E-03	-1.9E-02	-1.4E-02	-8.1E-03	-2.0E-03	4.1E-03	1.0E-02
2533	5.5E-04	9.7E-04	2.1E-03	2.4E-03	3.2E-03	2.0E-03	1.8E-03	-2.0E-02	-1.5E-02	-8.9E-03	-2.6E-03	3.6E-03	9.9E-03
2534	4.9E-04	1.1E-03	2.2E-03	2.7E-03	3.0E-03	3.0E-03	2.2E-03	-1.7E-02	-1.2E-02	-6.1E-03	-9.4E-05	5.9E-03	1.2E-02
2535	4.8E-04	1.2E-03	2.4E-03	3.0E-03	3.9E-03	4.5E-03	2.8E-03	-6.9E-03	-3.0E-03	2.2E-03	7.4E-03	1.3E-02	1.8E-02
2536	5.2E-04	1.0E-03	2.1E-03	2.5E-03	2.7E-03	2.9E-03	1.9E-03	-2.0E-02	-1.5E-02	-8.8E-03	-2.7E-03	3.5E-03	9.6E-03
2537	4.7E-04	1.1E-03	2.2E-03	2.7E-03	3.2E-03	3.6E-03	2.4E-03	-1.4E-02	-9.6E-03	-3.7E-03	2.3E-03	8.3E-03	1.4E-02
2538	4.6E-04	1.2E-03	2.3E-03	3.0E-03	4.4E-03	4.6E-03	3.1E-03	-2.0E-03	1.3E-03	6.0E-03	1.1E-02	1.5E-02	2.0E-02
2539	4.5E-04	1.3E-03	2.3E-03	3.1E-03	7.0E-03	8.0E-03	4.0E-03	8.8E-03	9.6E-03	1.2E-02	1.4E-02	1.7E-02	1.9E-02
2540	4.6E-04	1.1E-03	2.2E-03	2.8E-03	3.8E-03	3.7E-03	2.7E-03	-1.0E-02	-6.1E-03	-4.7E-04	5.1E-03	1.1E-02	1.6E-02
2541	4.6E-04	1.2E-03	2.3E-03	3.0E-03	4.6E-03	5.0E-03	3.3E-03	2.7E-03	5.4E-03	9.4E-03	1.3E-02	1.8E-02	2.2E-02
2542	4.5E-04	1.2E-03	2.2E-03	3.1E-03	8.0E-03	9.5E-03	4.3E-03	1.0E-02	1.0E-02	1.2E-02	1.4E-02	1.5E-02	1.7E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2543	5.0E-04	1.2E-03	2.2E-03	3.2E-03	1.2E-02	1.4E-02	4.6E-03	-2.6E-04	1.8E-03	5.3E-03	8.8E-03	1.2E-02	1.6E-02
2544	6.0E-04	1.3E-03	2.4E-03	3.3E-03	1.2E-02	1.3E-02	3.9E-03	-1.1E-03	1.5E-03	5.5E-03	9.5E-03	1.4E-02	1.7E-02
2545	6.5E-04	1.4E-03	2.6E-03	3.2E-03	8.8E-03	1.1E-02	3.6E-03	-5.8E-04	1.5E-03	4.7E-03	7.8E-03	1.1E-02	1.4E-02
2546	6.6E-04	1.4E-03	2.7E-03	3.3E-03	8.9E-03	9.4E-03	2.9E-03	-1.0E-03	-6.8E-04	1.0E-03	2.7E-03	4.4E-03	6.0E-03
2547	4.5E-04	1.2E-03	2.2E-03	3.0E-03	5.5E-03	6.3E-03	3.6E-03	6.6E-03	8.1E-03	1.1E-02	1.4E-02	1.7E-02	2.0E-02
2548	5.6E-04	1.2E-03	2.2E-03	3.1E-03	8.7E-03	1.0E-02	4.4E-03	9.1E-03	9.3E-03	1.1E-02	1.3E-02	1.4E-02	1.6E-02
2549	5.3E-04	1.1E-03	2.1E-03	3.2E-03	1.0E-02	1.2E-02	3.9E-03	-3.4E-03	-4.2E-04	3.9E-03	8.3E-03	1.3E-02	1.7E-02
2550	6.2E-04	1.3E-03	2.4E-03	3.2E-03	1.1E-02	1.2E-02	4.1E-03	-2.7E-05	2.6E-03	6.4E-03	1.0E-02	1.4E-02	1.8E-02
2551	6.4E-04	1.3E-03	2.6E-03	3.2E-03	7.3E-03	8.8E-03	3.2E-03	-1.0E-03	7.5E-04	3.7E-03	6.6E-03	9.5E-03	1.2E-02
2552	6.2E-04	1.4E-03	2.6E-03	3.2E-03	7.2E-03	7.5E-03	2.6E-03	-5.1E-04	-4.8E-04	8.8E-04	2.2E-03	3.6E-03	5.0E-03
2553	5.9E-04	1.1E-03	2.1E-03	3.0E-03	6.2E-03	7.2E-03	3.7E-03	8.1E-03	8.8E-03	1.1E-02	1.3E-02	1.5E-02	1.7E-02
2554	6.0E-04	1.1E-03	2.1E-03	3.0E-03	8.1E-03	9.4E-03	3.8E-03	5.1E-03	5.8E-03	8.0E-03	1.0E-02	1.2E-02	1.4E-02
2555	5.5E-04	1.3E-03	2.2E-03	3.1E-03	7.7E-03	7.5E-03	3.1E-03	-3.4E-03	-6.5E-04	3.3E-03	7.3E-03	1.1E-02	1.5E-02
2556	6.2E-04	1.3E-03	2.4E-03	3.1E-03	8.4E-03	9.6E-03	3.6E-03	-1.8E-04	2.4E-03	6.0E-03	9.7E-03	1.3E-02	1.7E-02
2557	6.2E-04	1.3E-03	2.5E-03	3.1E-03	6.2E-03	7.4E-03	2.9E-03	-1.2E-03	1.9E-04	2.8E-03	5.4E-03	8.0E-03	1.1E-02
2558	5.9E-04	1.3E-03	2.5E-03	3.1E-03	6.0E-03	6.3E-03	2.4E-03	-4.8E-05	-3.5E-04	6.8E-04	1.7E-03	2.7E-03	3.8E-03
2559	5.0E-04	1.3E-03	2.4E-03	3.1E-03	5.6E-03	7.2E-03	2.2E-03	7.4E-03	3.9E-03	1.8E-03	-2.9E-04	-2.4E-03	-4.5E-03
2560	4.3E-04	1.4E-03	2.5E-03	3.2E-03	5.4E-03	6.9E-03	2.0E-03	1.2E-02	7.5E-03	3.9E-03	3.2E-04	-3.3E-03	-6.8E-03
2561	6.0E-04	1.2E-03	2.0E-03	3.0E-03	6.8E-03	7.5E-03	3.1E-03	9.5E-04	2.4E-03	5.1E-03	7.8E-03	1.1E-02	1.3E-02
2562	5.6E-04	1.3E-03	2.3E-03	3.0E-03	7.2E-03	7.7E-03	3.2E-03	-2.6E-03	1.7E-04	4.0E-03	7.9E-03	1.2E-02	1.6E-02
2563	6.0E-04	1.3E-03	2.4E-03	3.1E-03	7.0E-03	7.8E-03	3.3E-03	-4.1E-04	2.2E-03	5.8E-03	9.4E-03	1.3E-02	1.7E-02
2564	5.9E-04	1.3E-03	2.5E-03	3.0E-03	5.3E-03	6.4E-03	2.6E-03	-1.9E-03	-7.3E-04	1.6E-03	4.0E-03	6.3E-03	8.7E-03
2565	5.5E-04	1.3E-03	2.4E-03	3.1E-03	6.0E-03	5.6E-03	2.2E-03	6.5E-04	4.2E-05	7.4E-04	1.4E-03	2.1E-03	2.8E-03
2566	4.8E-04	1.4E-03	2.4E-03	3.1E-03	6.4E-03	7.9E-03	2.1E-03	7.3E-03	3.9E-03	1.8E-03	-3.5E-04	-2.5E-03	-4.6E-03
2567	4.2E-04	1.5E-03	2.6E-03	3.3E-03	6.0E-03	7.7E-03	2.1E-03	1.2E-02	7.2E-03	3.8E-03	4.4E-04	-2.9E-03	-6.3E-03
2568	3.6E-04	1.6E-03	2.7E-03	3.4E-03	6.2E-03	7.3E-03	1.9E-03	1.6E-02	1.1E-02	6.7E-03	2.5E-03	-1.7E-03	-5.9E-03
2569	3.9E-04	1.5E-03	2.9E-03	4.0E-03	6.0E-03	6.9E-03	2.0E-03	2.2E-02	1.6E-02	1.2E-02	7.4E-03	2.9E-03	-1.6E-03
2570	4.5E-04	1.6E-03	3.6E-03	4.8E-03	4.1E-03	4.5E-03	2.1E-03	2.1E-02	1.9E-02	1.8E-02	1.7E-02	1.6E-02	1.5E-02
2571	4.9E-04	2.0E-03	3.8E-03	5.1E-03	4.0E-03	4.4E-03	2.0E-03	9.7E-03	1.2E-02	1.5E-02	1.9E-02	2.3E-02	2.6E-02
2572	5.4E-04	2.2E-03	3.5E-03	4.8E-03	4.4E-03	5.4E-03	1.9E-03	1.2E-02	1.2E-02	1.4E-02	1.6E-02	1.8E-02	2.0E-02
2573	5.8E-04	1.2E-03	2.3E-03	2.9E-03	5.5E-03	6.3E-03	2.8E-03	-1.3E-03	1.2E-03	4.7E-03	8.2E-03	1.2E-02	1.5E-02
2574	5.7E-04	1.3E-03	2.4E-03	2.9E-03	6.0E-03	7.2E-03	2.4E-03	-2.8E-03	-1.7E-03	5.3E-04	2.8E-03	5.0E-03	7.3E-03
2575	5.1E-04	1.3E-03	2.4E-03	3.1E-03	5.8E-03	4.9E-03	2.3E-03	2.4E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.8E-03
2576	4.2E-04	1.4E-03	2.5E-03	3.1E-03	5.8E-03	7.2E-03	1.8E-03	9.2E-03	5.2E-03	2.4E-03	-3.4E-04	-3.1E-03	-5.9E-03
2577	3.9E-04	1.5E-03	2.5E-03	3.3E-03	5.4E-03	6.6E-03	1.9E-03	1.1E-02	6.4E-03	3.3E-03	2.2E-04	-2.9E-03	-6.0E-03
2578	3.3E-04	1.6E-03	2.5E-03	3.4E-03	4.7E-03	5.3E-03	1.8E-03	1.6E-02	1.1E-02	6.5E-03	2.5E-03	-1.5E-03	-5.6E-03
2579	3.8E-04	1.4E-03	2.9E-03	3.9E-03	4.1E-03	5.6E-03	1.9E-03	2.1E-02	1.6E-02	1.2E-02	7.8E-03	3.8E-03	-2.1E-04
2580	4.4E-04	1.6E-03	3.4E-03	4.6E-03	3.7E-03	4.5E-03	2.0E-03	2.0E-02	1.8E-02	1.8E-02	1.7E-02	1.7E-02	1.6E-02
2581	6.1E-04	1.7E-03	2.0E-03	1.4E-03	1.3E-03	1.1E-03	1.1E-03	-1.9E-02	-1.6E-02	-1.4E-02	-1.1E-02	-8.7E-03	-6.1E-03
2582	5.2E-04	1.5E-03	1.7E-03	1.3E-03	1.5E-03	1.1E-03	1.1E-03	-1.8E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.7E-03	-5.2E-03
2583	7.8E-04	1.7E-03	2.0E-03	1.3E-03	1.5E-03	1.2E-03	1.1E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.9E-03	-5.3E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2584	5.0E-04	1.4E-03	1.7E-03	1.2E-03	1.6E-03	1.0E-03	1.0E-03	-1.6E-02	-1.4E-02	-1.2E-02	-9.1E-03	-6.6E-03	-4.1E-03
2585	9.1E-04	1.6E-03	1.8E-03	1.3E-03	1.7E-03	1.1E-03	1.1E-03	-1.6E-02	-1.4E-02	-1.1E-02	-8.6E-03	-6.0E-03	-3.4E-03
2586	4.4E-04	1.3E-03	1.5E-03	1.1E-03	1.3E-03	9.6E-04	9.6E-04	-1.5E-02	-1.3E-02	-1.0E-02	-8.0E-03	-5.5E-03	-3.0E-03
2587	6.2E-04	1.4E-03	1.7E-03	1.2E-03	1.5E-03	9.9E-04	9.9E-04	-1.5E-02	-1.2E-02	-9.7E-03	-7.2E-03	-4.6E-03	-2.1E-03
2588	9.8E-04	1.4E-03	1.7E-03	1.2E-03	1.8E-03	1.0E-03	1.0E-03	-1.3E-02	-1.1E-02	-8.1E-03	-5.6E-03	-3.1E-03	-6.2E-04
2589	3.9E-04	1.1E-03	1.3E-03	1.0E-03	9.7E-04	8.7E-04	8.7E-04	-1.4E-02	-1.2E-02	-9.5E-03	-7.0E-03	-4.5E-03	-2.0E-03
2590	4.3E-04	1.3E-03	1.5E-03	1.0E-03	1.0E-03	8.7E-04	8.7E-04	-1.3E-02	-1.1E-02	-8.2E-03	-5.7E-03	-3.3E-03	-8.0E-04
2591	7.2E-04	1.3E-03	1.6E-03	1.1E-03	1.4E-03	8.9E-04	8.9E-04	-1.1E-02	-9.1E-03	-6.7E-03	-4.3E-03	-1.9E-03	5.8E-04
2592	1.0E-03	1.2E-03	1.5E-03	1.0E-03	1.7E-03	8.8E-04	8.8E-04	-8.2E-03	-6.1E-03	-3.8E-03	-1.5E-03	8.0E-04	3.1E-03
2593	3.9E-04	1.1E-03	1.3E-03	9.4E-04	8.7E-04	7.8E-04	7.8E-04	-1.2E-02	-9.8E-03	-7.3E-03	-4.9E-03	-2.4E-03	2.2E-05
2594	5.0E-04	1.2E-03	1.4E-03	9.4E-04	8.7E-04	7.8E-04	7.8E-04	-1.0E-02	-7.9E-03	-5.5E-03	-3.1E-03	-7.6E-04	1.6E-03
2595	7.8E-04	1.2E-03	1.4E-03	9.3E-04	1.1E-03	8.6E-04	7.7E-04	-7.0E-03	-5.0E-03	-2.8E-03	-5.3E-04	1.7E-03	3.9E-03
2596	9.9E-04	1.2E-03	1.3E-03	9.1E-04	1.5E-03	9.3E-04	7.4E-04	-3.2E-03	-1.6E-03	3.6E-04	2.3E-03	4.2E-03	6.1E-03
2597	3.5E-04	1.0E-03	1.2E-03	8.6E-04	7.9E-04	7.1E-04	7.0E-04	-1.1E-02	-8.6E-03	-6.2E-03	-3.8E-03	-1.4E-03	9.8E-04
2598	3.8E-04	1.1E-03	1.3E-03	8.4E-04	7.7E-04	6.9E-04	6.8E-04	-8.8E-03	-6.7E-03	-4.3E-03	-2.0E-03	2.6E-04	2.6E-03
2599	5.8E-04	1.1E-03	1.4E-03	8.2E-04	8.4E-04	7.1E-04	6.6E-04	-5.6E-03	-3.7E-03	-1.6E-03	5.4E-04	2.7E-03	4.8E-03
2600	8.2E-04	1.1E-03	1.3E-03	8.3E-04	9.9E-04	8.3E-04	6.4E-04	-2.4E-03	-8.0E-04	1.1E-03	2.9E-03	4.8E-03	6.6E-03
2601	9.6E-04	1.1E-03	1.2E-03	9.4E-04	1.1E-03	9.5E-04	7.3E-04	-2.0E-05	1.2E-03	2.8E-03	4.4E-03	6.0E-03	7.6E-03
2602	3.5E-04	1.0E-03	1.2E-03	7.5E-04	7.3E-04	6.0E-04	6.0E-04	-7.5E-03	-5.5E-03	-3.2E-03	-1.0E-03	1.2E-03	3.4E-03
2603	4.1E-04	1.1E-03	1.3E-03	7.2E-04	8.4E-04	5.7E-04	5.7E-04	-4.7E-03	-2.9E-03	-7.8E-04	1.3E-03	3.4E-03	5.5E-03
2604	6.3E-04	1.0E-03	1.2E-03	8.2E-04	9.8E-04	6.3E-04	6.0E-04	-1.7E-03	-1.7E-04	1.6E-03	3.4E-03	5.2E-03	7.1E-03
2605	8.4E-04	9.8E-04	1.1E-03	9.2E-04	1.1E-03	7.7E-04	7.3E-04	2.2E-04	1.5E-03	3.1E-03	4.7E-03	6.3E-03	7.9E-03
2606	9.0E-04	1.1E-03	1.2E-03	1.0E-03	1.3E-03	9.2E-04	8.7E-04	1.2E-03	2.4E-03	4.1E-03	5.7E-03	7.4E-03	9.0E-03
2607	3.2E-04	9.1E-04	1.1E-03	6.8E-04	7.4E-04	5.3E-04	5.3E-04	-6.2E-03	-4.3E-03	-2.2E-03	-5.2E-05	2.1E-03	4.2E-03
2608	3.4E-04	9.8E-04	1.2E-03	7.2E-04	8.5E-04	5.4E-04	5.1E-04	-4.0E-03	-2.2E-03	-7.3E-05	2.0E-03	4.1E-03	6.2E-03
2609	4.7E-04	1.0E-03	1.2E-03	8.1E-04	9.7E-04	6.4E-04	6.1E-04	-1.2E-03	3.5E-04	2.2E-03	4.0E-03	5.8E-03	7.6E-03
2610	6.7E-04	9.6E-04	1.1E-03	9.0E-04	1.1E-03	7.7E-04	7.3E-04	3.1E-04	1.6E-03	3.2E-03	4.9E-03	6.5E-03	8.2E-03
2611	8.2E-04	9.6E-04	1.0E-03	1.0E-03	1.2E-03	9.1E-04	8.6E-04	1.7E-03	2.9E-03	4.4E-03	6.0E-03	7.6E-03	9.2E-03
2612	8.4E-04	1.1E-03	1.2E-03	1.1E-03	1.4E-03	1.1E-03	1.0E-03	2.0E-03	3.2E-03	5.0E-03	6.8E-03	8.5E-03	1.0E-02
2613	7.1E-04	1.0E-03	1.2E-03	1.2E-03	1.5E-03	1.2E-03	1.1E-03	-3.2E-03	-1.4E-03	1.1E-03	3.6E-03	6.1E-03	8.7E-03
2614	3.1E-04	8.8E-04	1.1E-03	7.1E-04	8.4E-04	5.4E-04	5.1E-04	-3.2E-03	-1.4E-03	6.4E-04	2.7E-03	4.8E-03	6.8E-03
2615	3.5E-04	9.5E-04	1.1E-03	8.0E-04	9.6E-04	6.5E-04	6.2E-04	-9.1E-04	6.6E-04	2.5E-03	4.4E-03	6.3E-03	8.2E-03
2616	5.3E-04	9.4E-04	1.1E-03	8.9E-04	1.1E-03	7.7E-04	7.3E-04	4.1E-04	1.7E-03	3.4E-03	5.1E-03	6.8E-03	8.5E-03
2617	6.9E-04	8.7E-04	1.0E-03	9.7E-04	1.2E-03	8.9E-04	8.4E-04	1.8E-03	2.9E-03	4.4E-03	5.9E-03	7.5E-03	9.0E-03
2618	8.0E-04	9.4E-04	1.0E-03	1.1E-03	1.3E-03	1.0E-03	9.7E-04	2.3E-03	3.5E-03	5.2E-03	6.9E-03	8.6E-03	1.0E-02
2619	7.7E-04	1.0E-03	1.2E-03	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-1.1E-03	5.1E-04	2.8E-03	5.1E-03	7.4E-03	9.7E-03
2620	6.1E-04	9.4E-04	1.1E-03	1.2E-03	1.5E-03	1.3E-03	1.2E-03	-5.8E-03	-4.3E-03	-2.0E-03	2.0E-04	2.4E-03	4.7E-03
2621	4.0E-04	9.1E-04	1.1E-03	8.8E-04	1.1E-03	7.7E-04	7.3E-04	6.5E-04	2.0E-03	3.7E-03	5.4E-03	7.2E-03	8.9E-03
2622	5.7E-04	8.7E-04	1.0E-03	9.6E-04	1.2E-03	8.8E-04	8.3E-04	2.0E-03	3.0E-03	4.5E-03	6.0E-03	7.5E-03	9.0E-03
2623	6.9E-04	8.1E-04	9.2E-04	1.0E-03	1.3E-03	9.9E-04	9.3E-04	2.7E-03	3.7E-03	5.3E-03	6.9E-03	8.4E-03	1.0E-02
2624	7.6E-04	9.2E-04	1.0E-03	1.1E-03	1.4E-03	1.1E-03	1.1E-03	1.0E-03	2.3E-03	4.2E-03	6.1E-03	8.0E-03	9.9E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2625	6.8E-04	9.6E-04	1.1E-03	1.2E-03	1.5E-03	1.2E-03	1.1E-03	-3.1E-03	-1.9E-03	-2.6E-05	1.9E-03	3.8E-03	5.7E-03
2626	5.4E-04	8.6E-04	1.0E-03	1.3E-03	1.5E-03	1.3E-03	1.2E-03	-1.0E-02	-9.0E-03	-7.1E-03	-5.2E-03	-3.3E-03	-1.4E-03
2627	5.7E-04	8.4E-04	1.1E-03	1.3E-03	1.5E-03	1.3E-03	1.3E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-8.8E-03
2628	4.4E-04	8.5E-04	1.0E-03	9.5E-04	1.2E-03	8.7E-04	8.2E-04	2.1E-03	3.1E-03	4.5E-03	6.0E-03	7.5E-03	8.9E-03
2629	6.0E-04	8.0E-04	9.4E-04	1.0E-03	1.2E-03	9.7E-04	9.2E-04	3.3E-03	4.2E-03	5.6E-03	7.0E-03	8.4E-03	9.9E-03
2630	6.9E-04	8.2E-04	9.1E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	3.0E-03	3.9E-03	5.4E-03	6.8E-03	8.3E-03	9.7E-03
2631	7.1E-04	9.1E-04	1.0E-03	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-9.4E-04	4.0E-05	1.7E-03	3.4E-03	5.0E-03	6.7E-03
2632	6.1E-04	9.0E-04	1.0E-03	1.2E-03	1.5E-03	1.2E-03	1.2E-03	-6.8E-03	-6.0E-03	-4.5E-03	-3.0E-03	-1.4E-03	1.1E-04
2633	5.1E-04	7.7E-04	1.0E-03	1.3E-03	1.5E-03	1.3E-03	1.2E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.2E-02	-9.8E-03	-8.0E-03
2634	5.6E-04	8.4E-04	1.1E-03	1.3E-03	1.5E-03	1.3E-03	1.2E-03	-2.2E-02	-2.1E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02
2635	4.8E-04	8.0E-04	9.5E-04	1.0E-03	1.2E-03	9.5E-04	8.9E-04	3.8E-03	4.5E-03	5.7E-03	6.9E-03	8.1E-03	9.3E-03
2636	6.2E-04	7.4E-04	8.9E-04	1.1E-03	1.3E-03	1.0E-03	9.7E-04	4.9E-03	5.3E-03	6.3E-03	7.3E-03	8.2E-03	9.2E-03
2637	6.7E-04	8.0E-04	9.2E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	1.2E-03	1.9E-03	3.4E-03	4.8E-03	6.2E-03	7.6E-03
2638	6.5E-04	8.8E-04	9.9E-04	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-4.9E-03	-4.3E-03	-3.0E-03	-1.7E-03	-3.3E-04	1.0E-03
2639	6.7E-04	1.0E-03	1.2E-03	1.2E-03	1.4E-03	1.2E-03	1.1E-03	-1.3E-02	-1.2E-02	-1.1E-02	-9.2E-03	-7.8E-03	-6.4E-03
2640	7.1E-04	8.1E-04	9.7E-04	1.2E-03	1.3E-03	1.2E-03	1.2E-03	-2.0E-02	-1.9E-02	-1.7E-02	-1.6E-02	-1.4E-02	-1.2E-02
2641	7.7E-04	1.0E-03	1.0E-03	1.3E-03	1.5E-03	1.2E-03	1.1E-03	-2.5E-02	-2.3E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.3E-02
2642	5.0E-04	9.0E-04	1.1E-03	1.3E-03	1.5E-03	1.2E-03	1.1E-03	-2.5E-02	-2.2E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02
2643	6.2E-04	7.4E-04	8.9E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	3.1E-03	3.7E-03	5.0E-03	6.3E-03	7.5E-03	8.8E-03
2644	6.4E-04	8.0E-04	9.2E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	-3.8E-03	-3.3E-03	-2.0E-03	-8.2E-04	4.0E-04	1.6E-03
2645	7.0E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.1E-03	1.1E-03	-9.6E-03	-9.2E-03	-8.0E-03	-6.8E-03	-5.7E-03	-4.5E-03
2646	6.7E-04	9.2E-04	1.1E-03	1.2E-03	1.3E-03	1.2E-03	1.1E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.6E-03
2647	7.0E-04	7.9E-04	9.4E-04	1.2E-03	1.4E-03	1.2E-03	1.2E-03	-2.3E-02	-2.2E-02	-1.9E-02	-1.7E-02	-1.5E-02	-1.3E-02
2648	7.9E-04	9.6E-04	9.7E-04	1.2E-03	1.5E-03	1.3E-03	1.2E-03	-2.5E-02	-2.3E-02	-2.0E-02	-1.7E-02	-1.4E-02	-1.1E-02
2649	5.7E-04	1.1E-03	1.1E-03	1.3E-03	1.6E-03	1.5E-03	1.1E-03	-2.1E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03
2650	6.0E-04	7.8E-04	8.9E-04	1.1E-03	1.2E-03	1.1E-03	1.0E-03	-7.3E-03	-7.0E-03	-6.0E-03	-5.0E-03	-4.1E-03	-3.1E-03
2651	6.1E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.1E-03	1.0E-03	-1.5E-02	-1.4E-02	-1.2E-02	-1.1E-02	-9.5E-03	-8.0E-03
2652	6.2E-04	7.6E-04	9.0E-04	1.1E-03	1.3E-03	1.0E-03	9.8E-04	-2.1E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02
2653	6.9E-04	7.7E-04	1.0E-03	1.2E-03	1.5E-03	1.3E-03	1.2E-03	-2.6E-02	-2.4E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.2E-02
2654	7.2E-04	9.0E-04	1.0E-03	1.2E-03	1.5E-03	1.4E-03	1.3E-03	-2.5E-02	-2.3E-02	-2.0E-02	-1.7E-02	-1.4E-02	-1.0E-02
2655	5.8E-04	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.1E-03	-1.7E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.5E-03	-6.1E-03
2656	5.1E-04	8.9E-04	1.1E-03	1.2E-03	1.6E-03	1.7E-03	1.0E-03	-1.2E-02	-1.1E-02	-8.9E-03	-7.1E-03	-5.3E-03	-3.5E-03
2657	5.2E-04	8.7E-04	9.6E-04	1.1E-03	1.2E-03	9.6E-04	9.1E-04	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02
2658	5.5E-04	6.7E-04	8.8E-04	1.1E-03	1.2E-03	1.0E-03	9.8E-04	-2.2E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.1E-02
2659	6.7E-04	7.6E-04	9.7E-04	1.2E-03	1.5E-03	1.3E-03	1.3E-03	-2.7E-02	-2.5E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.2E-02
2660	6.7E-04	8.7E-04	9.6E-04	1.2E-03	1.4E-03	1.3E-03	1.2E-03	-2.3E-02	-2.1E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.0E-03
2661	5.8E-04	1.2E-03	1.1E-03	1.1E-03	1.5E-03	1.1E-03	9.9E-04	-1.3E-02	-1.1E-02	-9.4E-03	-7.4E-03	-5.5E-03	-3.5E-03
2662	6.7E-04	1.1E-03	1.2E-03	1.2E-03	1.9E-03	9.8E-04	9.2E-04	-8.6E-03	-7.7E-03	-6.2E-03	-4.6E-03	-3.1E-03	-1.6E-03
2663	6.9E-04	9.4E-04	1.5E-03	1.6E-03	2.3E-03	1.2E-03	1.2E-03	-7.7E-03	-7.0E-03	-5.8E-03	-4.6E-03	-3.4E-03	-2.1E-03
2664	5.4E-04	6.1E-04	8.4E-04	1.1E-03	1.3E-03	1.1E-03	1.1E-03	-2.2E-02	-2.0E-02	-1.7E-02	-1.5E-02	-1.2E-02	-9.5E-03
2665	6.6E-04	7.5E-04	9.1E-04	1.2E-03	1.4E-03	1.3E-03	1.2E-03	-2.5E-02	-2.2E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.0E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2666	6.3E-04	9.0E-04	9.0E-04	1.2E-03	1.3E-03	1.2E-03	1.1E-03	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.8E-03	-5.2E-03
2667	5.7E-04	1.1E-03	1.1E-03	1.1E-03	1.6E-03	9.4E-04	8.8E-04	-9.2E-03	-8.2E-03	-6.6E-03	-5.0E-03	-3.3E-03	-1.7E-03
2668	7.2E-04	1.0E-03	1.4E-03	1.4E-03	1.7E-03	1.1E-03	1.0E-03	-6.6E-03	-5.7E-03	-4.2E-03	-2.7E-03	-1.2E-03	3.1E-04
2669	7.1E-04	8.6E-04	1.8E-03	1.9E-03	2.1E-03	1.4E-03	1.3E-03	-9.4E-03	-7.8E-03	-5.5E-03	-3.3E-03	-1.0E-03	1.2E-03
2670	5.6E-04	6.3E-04	8.0E-04	1.0E-03	1.5E-03	1.1E-03	1.0E-03	-2.1E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.5E-03
2671	6.5E-04	7.6E-04	8.2E-04	1.1E-03	1.3E-03	1.1E-03	1.0E-03	-2.0E-02	-1.7E-02	-1.5E-02	-1.2E-02	-9.0E-03	-6.2E-03
2672	5.9E-04	9.1E-04	9.2E-04	9.4E-04	1.5E-03	9.9E-04	9.2E-04	-1.1E-02	-1.0E-02	-8.4E-03	-6.5E-03	-4.7E-03	-2.8E-03
2673	5.6E-04	1.0E-03	1.1E-03	1.2E-03	1.8E-03	9.0E-04	8.0E-04	-5.9E-03	-5.1E-03	-3.8E-03	-2.5E-03	-1.2E-03	1.6E-04
2674	6.9E-04	9.7E-04	1.6E-03	1.6E-03	2.1E-03	1.1E-03	1.1E-03	-4.8E-03	-4.4E-03	-3.5E-03	-2.5E-03	-1.6E-03	-6.6E-04
2675	6.9E-04	8.2E-04	2.0E-03	2.1E-03	2.4E-03	1.5E-03	1.4E-03	-1.1E-02	-8.6E-03	-5.2E-03	-1.8E-03	1.5E-03	4.9E-03
2676	6.4E-04	7.6E-04	7.5E-04	9.7E-04	1.8E-03	9.2E-04	8.7E-04	-1.2E-02	-1.1E-02	-8.5E-03	-6.4E-03	-4.3E-03	-2.1E-03
2677	5.6E-04	9.7E-04	9.8E-04	1.0E-03	1.9E-03	9.2E-04	7.7E-04	-6.9E-03	-5.9E-03	-4.4E-03	-2.9E-03	-1.4E-03	1.3E-04
2678	5.6E-04	1.1E-03	1.3E-03	1.4E-03	2.2E-03	1.1E-03	1.0E-03	-4.2E-03	-3.3E-03	-2.0E-03	-7.5E-04	5.4E-04	1.8E-03
2679	6.5E-04	9.7E-04	1.7E-03	1.9E-03	2.6E-03	1.3E-03	1.3E-03	-6.9E-03	-5.6E-03	-3.6E-03	-1.7E-03	2.4E-04	2.2E-03
2680	6.5E-04	8.6E-04	2.0E-03	2.2E-03	2.9E-03	1.6E-03	1.6E-03	-1.4E-02	-1.0E-02	-5.5E-03	-7.8E-04	3.9E-03	8.6E-03
2681	5.8E-04	8.2E-04	8.8E-04	9.3E-04	2.3E-03	7.8E-04	7.1E-04	-7.6E-03	-6.5E-03	-5.0E-03	-3.5E-03	-1.9E-03	-4.1E-04
2682	5.1E-04	9.9E-04	1.2E-03	1.2E-03	2.3E-03	9.2E-04	8.7E-04	-4.0E-03	-3.2E-03	-2.0E-03	-7.8E-04	4.5E-04	1.7E-03
2683	5.5E-04	1.0E-03	1.5E-03	1.6E-03	2.1E-03	1.2E-03	1.1E-03	-2.6E-03	-2.4E-03	-1.6E-03	-7.6E-04	4.5E-05	8.5E-04
2684	5.9E-04	9.1E-04	1.8E-03	2.0E-03	2.2E-03	1.5E-03	1.4E-03	-9.5E-03	-7.1E-03	-4.0E-03	-8.8E-04	2.2E-03	5.4E-03
2685	6.2E-04	9.0E-04	2.1E-03	2.3E-03	2.5E-03	1.8E-03	1.7E-03	-1.7E-02	-1.2E-02	-6.4E-03	-7.8E-04	4.9E-03	1.1E-02
2686	4.4E-04	8.9E-04	1.3E-03	1.4E-03	1.5E-03	1.0E-03	9.8E-04	-2.7E-03	-1.9E-03	-7.2E-04	5.1E-04	1.7E-03	3.0E-03
2687	4.9E-04	9.1E-04	1.6E-03	1.7E-03	1.9E-03	1.3E-03	1.2E-03	-5.3E-03	-4.1E-03	-2.3E-03	-4.3E-04	1.4E-03	3.2E-03
2688	3.8E-04	8.2E-04	1.7E-03	2.0E-03	2.1E-03	1.6E-03	1.5E-03	-1.2E-02	-8.9E-03	-4.5E-03	-2.2E-04	4.1E-03	8.4E-03
2689	4.6E-04	9.1E-04	1.9E-03	2.3E-03	2.4E-03	2.8E-03	1.7E-03	-1.9E-02	-1.4E-02	-8.2E-03	-2.2E-03	3.7E-03	9.6E-03
2690	4.9E-04	1.0E-03	2.1E-03	2.5E-03	3.0E-03	3.0E-03	2.2E-03	-1.8E-02	-1.3E-02	-7.5E-03	-1.4E-03	4.6E-03	1.1E-02
2691	3.4E-04	7.4E-04	1.6E-03	1.8E-03	1.9E-03	1.8E-03	1.3E-03	-8.4E-03	-6.1E-03	-3.2E-03	-1.6E-04	2.8E-03	5.8E-03
2692	3.7E-04	8.4E-04	1.8E-03	2.0E-03	2.2E-03	2.6E-03	1.6E-03	-1.5E-02	-1.1E-02	-5.6E-03	-3.1E-04	4.9E-03	1.0E-02
2693	4.4E-04	9.3E-04	1.9E-03	2.3E-03	2.7E-03	2.5E-03	1.9E-03	-2.0E-02	-1.5E-02	-8.9E-03	-2.9E-03	3.1E-03	9.1E-03
2694	4.8E-04	1.0E-03	2.1E-03	2.6E-03	3.4E-03	3.4E-03	2.2E-03	-1.7E-02	-1.2E-02	-5.7E-03	4.3E-04	6.5E-03	1.3E-02
2695	4.5E-04	1.1E-03	2.2E-03	2.8E-03	3.7E-03	3.8E-03	2.8E-03	-4.8E-03	-1.2E-03	3.7E-03	8.6E-03	1.4E-02	1.8E-02
2696	4.3E-04	9.6E-04	2.0E-03	2.4E-03	2.8E-03	2.9E-03	1.9E-03	-2.0E-02	-1.5E-02	-8.6E-03	-2.5E-03	3.6E-03	9.7E-03
2697	4.6E-04	1.0E-03	2.1E-03	2.6E-03	3.1E-03	3.2E-03	2.4E-03	-1.3E-02	-8.4E-03	-2.6E-03	3.3E-03	9.2E-03	1.5E-02
2698	4.3E-04	1.1E-03	2.1E-03	2.8E-03	4.3E-03	4.6E-03	3.0E-03	-6.0E-04	2.4E-03	6.7E-03	1.1E-02	1.5E-02	2.0E-02
2699	4.4E-04	1.0E-03	2.0E-03	2.7E-03	3.4E-03	3.4E-03	2.5E-03	-8.1E-03	-3.9E-03	1.4E-03	6.7E-03	1.2E-02	1.7E-02
2700	5.1E-04	1.1E-03	2.1E-03	2.8E-03	4.9E-03	5.5E-03	3.2E-03	3.4E-03	5.7E-03	9.2E-03	1.3E-02	1.6E-02	2.0E-02
2701	5.9E-04	1.1E-03	2.0E-03	2.9E-03	7.0E-03	8.1E-03	3.7E-03	9.5E-03	9.6E-03	1.1E-02	1.2E-02	1.4E-02	1.5E-02
2702	6.3E-04	2.8E-03	4.4E-03	4.3E-03	3.7E-03	3.3E-03	1.8E-03	1.7E-02	1.7E-02	1.9E-02	2.1E-02	2.2E-02	2.4E-02
2703	6.4E-04	2.7E-03	4.5E-03	3.7E-03	3.2E-03	2.3E-03	1.9E-03	2.3E-02	2.3E-02	2.3E-02	2.4E-02	2.5E-02	2.6E-02
2704	6.0E-04	2.4E-03	4.2E-03	4.6E-03	3.1E-03	2.2E-03	1.8E-03	2.3E-02	2.4E-02	2.6E-02	2.7E-02	2.9E-02	3.1E-02
2705	6.0E-04	2.0E-03	3.8E-03	5.0E-03	3.4E-03	2.1E-03	1.8E-03	1.2E-02	1.6E-02	2.1E-02	2.6E-02	3.1E-02	3.6E-02
2706	5.5E-04	2.0E-03	3.2E-03	4.8E-03	4.0E-03	2.9E-03	2.0E-03	1.1E-02	1.5E-02	2.1E-02	2.7E-02	3.3E-02	3.9E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2707	5.4E-04	1.0E-03	2.0E-03	2.8E-03	5.5E-03	6.2E-03	3.2E-03	6.3E-03	7.6E-03	1.0E-02	1.3E-02	1.5E-02	1.8E-02
2708	5.9E-04	1.0E-03	1.9E-03	2.9E-03	6.6E-03	7.4E-03	3.3E-03	9.1E-03	9.0E-03	1.0E-02	1.1E-02	1.2E-02	1.3E-02
2709	6.0E-04	1.2E-03	2.0E-03	2.9E-03	5.2E-03	5.4E-03	2.5E-03	-3.0E-03	-2.4E-04	3.6E-03	7.5E-03	1.1E-02	1.5E-02
2710	5.5E-04	1.2E-03	2.2E-03	2.9E-03	7.4E-03	8.5E-03	3.2E-03	-1.6E-03	1.1E-03	4.9E-03	8.6E-03	1.2E-02	1.6E-02
2711	4.7E-04	1.9E-03	3.4E-03	4.7E-03	4.4E-03	5.3E-03	1.9E-03	8.7E-03	1.1E-02	1.5E-02	1.8E-02	2.2E-02	2.6E-02
2712	5.3E-04	2.1E-03	3.4E-03	4.6E-03	3.9E-03	4.6E-03	1.8E-03	1.1E-02	1.2E-02	1.4E-02	1.6E-02	1.8E-02	2.0E-02
2713	6.1E-04	2.6E-03	4.2E-03	4.0E-03	3.4E-03	3.4E-03	1.7E-03	1.6E-02	1.7E-02	1.8E-02	2.0E-02	2.2E-02	2.3E-02
2714	6.2E-04	2.5E-03	4.3E-03	3.6E-03	3.0E-03	2.7E-03	1.8E-03	2.2E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02
2715	5.8E-04	2.3E-03	3.9E-03	4.2E-03	3.0E-03	2.0E-03	1.7E-03	2.3E-02	2.3E-02	2.5E-02	2.6E-02	2.8E-02	2.9E-02
2716	5.8E-04	1.9E-03	3.6E-03	4.6E-03	3.2E-03	2.8E-03	1.7E-03	1.4E-02	1.7E-02	2.1E-02	2.6E-02	3.0E-02	3.4E-02
2717	5.6E-04	1.2E-03	2.1E-03	2.8E-03	5.5E-03	5.0E-03	2.4E-03	-3.1E-03	-3.7E-04	3.5E-03	7.3E-03	1.1E-02	1.5E-02
2718	5.4E-04	1.2E-03	2.2E-03	2.8E-03	6.6E-03	7.3E-03	3.0E-03	-5.1E-04	2.2E-03	5.8E-03	9.4E-03	1.3E-02	1.7E-02
2719	5.6E-04	1.2E-03	2.3E-03	2.8E-03	5.1E-03	6.1E-03	2.5E-03	-1.8E-03	3.6E-04	3.6E-03	6.8E-03	1.0E-02	1.3E-02
2720	5.4E-04	1.3E-03	2.4E-03	2.9E-03	5.5E-03	6.6E-03	2.4E-03	-3.5E-03	-2.6E-03	-4.3E-04	1.7E-03	3.8E-03	6.0E-03
2721	4.7E-04	1.3E-03	2.4E-03	3.0E-03	5.2E-03	4.3E-03	2.1E-03	3.7E-03	1.9E-03	1.4E-03	8.9E-04	3.8E-04	-1.3E-04
2722	4.0E-04	1.4E-03	2.4E-03	3.1E-03	5.0E-03	6.1E-03	1.8E-03	9.5E-03	5.4E-03	2.5E-03	-3.9E-04	-3.3E-03	-6.2E-03
2723	3.7E-04	1.5E-03	2.5E-03	3.2E-03	4.7E-03	5.6E-03	1.8E-03	9.6E-03	5.7E-03	2.8E-03	-2.9E-05	-2.9E-03	-5.8E-03
2724	3.9E-04	1.5E-03	2.5E-03	3.3E-03	3.4E-03	4.7E-03	1.8E-03	1.5E-02	1.0E-02	6.4E-03	2.5E-03	-1.4E-03	-5.4E-03
2725	3.8E-04	1.3E-03	2.9E-03	3.9E-03	4.3E-03	5.4E-03	1.9E-03	2.0E-02	1.5E-02	1.2E-02	8.2E-03	4.6E-03	1.1E-03
2726	4.3E-04	1.5E-03	3.2E-03	4.4E-03	4.0E-03	4.5E-03	1.9E-03	1.9E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02
2727	4.5E-04	1.7E-03	3.1E-03	4.3E-03	3.8E-03	5.2E-03	1.8E-03	7.7E-03	1.0E-02	1.4E-02	1.8E-02	2.1E-02	2.5E-02
2728	5.1E-04	2.0E-03	3.2E-03	4.3E-03	3.6E-03	4.3E-03	1.7E-03	1.1E-02	1.2E-02	1.4E-02	1.5E-02	1.7E-02	1.9E-02
2729	5.9E-04	2.5E-03	4.0E-03	3.8E-03	3.3E-03	3.2E-03	1.7E-03	1.5E-02	1.6E-02	1.8E-02	1.9E-02	2.1E-02	2.2E-02
2730	5.9E-04	2.4E-03	4.1E-03	3.4E-03	2.9E-03	2.8E-03	1.8E-03	2.0E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.3E-02
2731	5.5E-04	2.2E-03	3.7E-03	3.9E-03	2.8E-03	2.7E-03	1.6E-03	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.7E-02	2.8E-02
2732	5.5E-04	1.8E-03	3.4E-03	4.4E-03	3.0E-03	2.8E-03	1.6E-03	1.6E-02	1.8E-02	2.2E-02	2.5E-02	2.8E-02	3.2E-02
2733	5.4E-04	1.2E-03	2.3E-03	2.7E-03	4.9E-03	5.9E-03	2.2E-03	-2.3E-03	-4.4E-04	2.5E-03	5.5E-03	8.4E-03	1.1E-02
2734	5.0E-04	1.3E-03	2.3E-03	2.9E-03	4.9E-03	5.9E-03	2.2E-03	-3.2E-03	-2.6E-03	-8.1E-04	9.7E-04	2.7E-03	4.5E-03
2735	4.3E-04	1.3E-03	2.3E-03	3.0E-03	4.7E-03	3.8E-03	2.0E-03	4.6E-03	2.5E-03	1.5E-03	5.4E-04	-4.3E-04	-1.4E-03
2736	3.8E-04	1.4E-03	2.4E-03	3.1E-03	4.3E-03	5.1E-03	1.7E-03	9.6E-03	5.5E-03	2.5E-03	-4.8E-04	-3.5E-03	-6.5E-03
2737	4.6E-04	1.4E-03	2.3E-03	3.1E-03	3.9E-03	5.4E-03	1.6E-03	8.6E-03	5.1E-03	2.4E-03	-2.1E-04	-2.9E-03	-5.5E-03
2738	4.0E-04	1.3E-03	2.5E-03	3.3E-03	3.6E-03	4.8E-03	1.7E-03	1.5E-02	1.0E-02	6.2E-03	2.4E-03	-1.5E-03	-5.4E-03
2739	3.7E-04	1.2E-03	2.8E-03	3.7E-03	4.1E-03	4.9E-03	1.8E-03	1.9E-02	1.5E-02	1.2E-02	8.6E-03	5.6E-03	2.7E-03
2740	4.1E-04	1.5E-03	2.9E-03	4.0E-03	3.4E-03	4.5E-03	1.8E-03	1.7E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02
2741	4.3E-04	1.7E-03	3.0E-03	4.2E-03	4.0E-03	4.9E-03	1.7E-03	7.5E-03	1.0E-02	1.4E-02	1.7E-02	2.1E-02	2.5E-02
2742	5.0E-04	2.0E-03	3.1E-03	4.1E-03	3.4E-03	3.4E-03	1.6E-03	1.0E-02	1.1E-02	1.3E-02	1.5E-02	1.7E-02	1.9E-02
2743	5.6E-04	2.3E-03	3.8E-03	3.5E-03	3.1E-03	3.2E-03	1.6E-03	1.5E-02	1.5E-02	1.7E-02	1.9E-02	2.0E-02	2.2E-02
2744	5.7E-04	2.3E-03	3.9E-03	3.3E-03	2.7E-03	2.7E-03	1.7E-03	2.0E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02
2745	3.9E-04	1.3E-03	2.3E-03	2.9E-03	4.2E-03	3.4E-03	1.9E-03	5.4E-03	2.9E-03	1.4E-03	3.1E-05	-1.4E-03	-2.8E-03
2746	3.6E-04	1.4E-03	2.3E-03	3.0E-03	4.1E-03	4.3E-03	1.7E-03	9.5E-03	5.4E-03	2.4E-03	-7.0E-04	-3.8E-03	-6.8E-03
2747	4.7E-04	1.3E-03	2.2E-03	2.9E-03	3.7E-03	5.1E-03	1.6E-03	7.8E-03	4.5E-03	2.1E-03	-3.8E-04	-2.8E-03	-5.3E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2748	4.0E-04	1.2E-03	2.4E-03	3.3E-03	3.7E-03	4.8E-03	1.7E-03	1.4E-02	9.7E-03	5.9E-03	2.1E-03	-1.6E-03	-5.4E-03
2749	3.6E-04	1.2E-03	2.7E-03	3.6E-03	3.4E-03	4.0E-03	1.7E-03	1.7E-02	1.4E-02	1.1E-02	9.1E-03	6.6E-03	4.2E-03
2750	4.0E-04	1.4E-03	2.8E-03	3.9E-03	3.6E-03	4.7E-03	1.7E-03	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02
2751	4.2E-04	1.7E-03	2.9E-03	4.0E-03	3.4E-03	3.9E-03	1.7E-03	7.4E-03	9.9E-03	1.3E-02	1.7E-02	2.1E-02	2.4E-02
2752	4.9E-04	1.9E-03	3.0E-03	3.9E-03	3.2E-03	3.6E-03	1.5E-03	9.8E-03	1.1E-02	1.3E-02	1.5E-02	1.7E-02	1.9E-02
2753	5.5E-04	2.2E-03	3.6E-03	3.3E-03	2.9E-03	2.9E-03	1.6E-03	1.4E-02	1.5E-02	1.6E-02	1.8E-02	2.0E-02	2.1E-02
2754	3.9E-04	1.1E-03	1.3E-03	1.2E-03	1.3E-03	1.0E-03	9.9E-04	-1.7E-02	-1.4E-02	-1.2E-02	-9.2E-03	-6.7E-03	-4.2E-03
2755	3.4E-04	8.5E-04	1.1E-03	9.7E-04	9.0E-04	8.1E-04	8.1E-04	-1.4E-02	-1.2E-02	-9.2E-03	-6.6E-03	-4.0E-03	-1.5E-03
2756	2.8E-04	7.9E-04	9.8E-04	8.0E-04	7.3E-04	6.5E-04	6.4E-04	-1.1E-02	-8.7E-03	-6.2E-03	-3.8E-03	-1.3E-03	1.2E-03
2757	5.1E-04	1.0E-03	1.1E-03	1.0E-03	8.5E-04	7.6E-04	7.6E-04	-4.2E-03	-5.7E-03	-6.9E-03	-8.1E-03	-9.4E-03	-1.1E-02
2758	5.2E-04	9.0E-04	9.8E-04	1.1E-03	9.7E-04	8.8E-04	8.8E-04	-5.9E-03	-7.0E-03	-7.9E-03	-8.8E-03	-9.8E-03	-1.1E-02
2759	4.5E-04	7.9E-04	8.6E-04	1.1E-03	1.0E-03	8.9E-04	8.9E-04	-6.7E-03	-7.4E-03	-8.0E-03	-8.6E-03	-9.1E-03	-9.7E-03
2760	4.8E-04	8.2E-04	1.0E-03	1.2E-03	1.0E-03	9.5E-04	9.5E-04	-1.1E-02	-1.0E-02	-9.9E-03	-9.5E-03	-9.1E-03	-8.7E-03
2761	4.1E-04	7.2E-04	8.8E-04	1.1E-03	1.2E-03	9.2E-04	9.2E-04	-1.1E-02	-1.1E-02	-1.0E-02	-9.5E-03	-8.9E-03	-8.3E-03
2762	4.5E-04	1.0E-03	1.2E-03	1.2E-03	1.1E-03	9.8E-04	9.7E-04	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.2E-03	-6.1E-03
2763	3.9E-04	8.0E-04	1.0E-03	1.2E-03	1.3E-03	9.5E-04	9.5E-04	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.1E-03	-6.1E-03
2764	4.1E-04	1.2E-03	1.4E-03	1.3E-03	1.3E-03	1.0E-03	1.0E-03	-1.7E-02	-1.5E-02	-1.2E-02	-9.9E-03	-7.3E-03	-4.8E-03
2765	3.6E-04	9.4E-04	1.2E-03	1.2E-03	1.3E-03	1.0E-03	9.9E-04	-1.6E-02	-1.4E-02	-1.2E-02	-9.8E-03	-7.5E-03	-5.2E-03
2766	1.3E-03	1.6E-03	8.3E-04	6.8E-04	8.8E-04	1.2E-03	6.6E-04	-1.3E-03	-9.1E-04	-8.3E-05	7.4E-04	1.6E-03	2.4E-03
2767	1.1E-03	1.4E-03	7.0E-04	7.8E-04	6.8E-04	7.6E-04	6.1E-04	-3.2E-03	-4.2E-03	-4.9E-03	-5.6E-03	-6.3E-03	-7.0E-03
2768	8.4E-04	1.1E-03	9.8E-04	8.3E-04	7.5E-04	6.8E-04	6.8E-04	-5.7E-03	-6.6E-03	-7.2E-03	-7.8E-03	-8.4E-03	-8.9E-03
2769	5.9E-04	1.1E-03	1.1E-03	9.4E-04	7.8E-04	7.1E-04	7.1E-04	-5.1E-03	-6.3E-03	-7.1E-03	-8.0E-03	-8.9E-03	-9.8E-03
2770	2.0E-03	2.7E-03	2.7E-03	1.3E-03	1.2E-03	1.0E-03	1.0E-03	-1.8E-02	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.2E-03
2771	1.8E-03	2.8E-03	2.8E-03	1.0E-03	1.1E-03	9.7E-04	9.1E-04	-1.3E-02	-1.3E-02	-1.2E-02	-1.1E-02	-1.1E-02	-9.9E-03
2772	1.3E-03	1.7E-03	1.6E-03	8.4E-04	9.5E-04	7.8E-04	7.3E-04	-1.1E-02	-1.0E-02	-9.3E-03	-8.5E-03	-7.6E-03	-6.7E-03
2773	1.4E-03	2.6E-03	2.5E-03	8.8E-04	9.8E-04	8.8E-04	8.3E-04	-1.2E-02	-1.1E-02	-9.6E-03	-8.3E-03	-7.0E-03	-5.7E-03
2774	1.9E-03	2.2E-03	1.1E-03	7.9E-04	9.4E-04	8.5E-04	5.4E-04	-1.3E-02	-1.2E-02	-1.1E-02	-9.6E-03	-8.4E-03	-7.2E-03
2775	1.7E-03	2.1E-03	1.3E-03	8.2E-04	9.8E-04	7.0E-04	6.4E-04	-1.3E-02	-1.3E-02	-1.2E-02	-1.0E-02	-9.1E-03	-7.9E-03
2776	1.9E-03	2.3E-03	1.3E-03	7.5E-04	9.3E-04	9.2E-04	4.9E-04	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.3E-02	-1.2E-02
2777	2.1E-03	2.5E-03	1.3E-03	7.9E-04	1.0E-03	8.0E-04	5.2E-04	-1.6E-02	-1.6E-02	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02
2778	1.2E-03	1.6E-03	1.2E-03	6.8E-04	7.6E-04	1.0E-03	4.5E-04	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02
2779	1.7E-03	2.1E-03	1.3E-03	7.1E-04	9.0E-04	9.8E-04	4.8E-04	-1.5E-02	-1.6E-02	-1.5E-02	-1.5E-02	-1.5E-02	-1.5E-02
2780	7.9E-04	1.2E-03	1.1E-03	6.8E-04	7.6E-04	1.1E-03	5.2E-04	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02
2781	1.2E-03	1.7E-03	1.3E-03	6.9E-04	8.8E-04	1.1E-03	5.3E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02
2782	7.5E-04	8.6E-04	8.6E-04	7.1E-04	7.7E-04	1.1E-03	5.8E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02
2783	8.1E-04	1.2E-03	1.1E-03	7.4E-04	8.5E-04	1.1E-03	6.0E-04	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.3E-02
2784	8.0E-04	8.7E-04	9.4E-04	6.9E-04	7.1E-04	9.4E-04	5.9E-04	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
2785	8.9E-04	9.6E-04	1.0E-03	7.3E-04	7.9E-04	1.1E-03	6.1E-04	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02
2786	1.0E-03	1.1E-03	1.1E-03	7.7E-04	8.4E-04	1.2E-03	6.5E-04	-9.9E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02
2787	7.9E-04	8.6E-04	1.0E-03	6.9E-04	6.9E-04	8.9E-04	5.9E-04	-8.7E-03	-8.9E-03	-8.7E-03	-8.5E-03	-8.3E-03	-8.2E-03
2788	9.0E-04	9.7E-04	1.1E-03	7.2E-04	7.9E-04	1.1E-03	6.2E-04	-8.6E-03	-8.6E-03	-8.3E-03	-8.1E-03	-7.8E-03	-7.5E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2789	1.1E-03	1.1E-03	1.3E-03	7.7E-04	8.6E-04	1.2E-03	6.7E-04	-8.7E-03	-8.7E-03	-8.3E-03	-8.0E-03	-7.6E-03	-7.2E-03
2790	7.0E-04	8.5E-04	9.7E-04	6.6E-04	7.1E-04	8.4E-04	5.9E-04	-6.4E-03	-6.3E-03	-5.9E-03	-5.4E-03	-4.9E-03	-4.5E-03
2791	8.0E-04	9.4E-04	1.1E-03	6.9E-04	7.7E-04	1.0E-03	6.2E-04	-6.4E-03	-6.2E-03	-5.7E-03	-5.1E-03	-4.6E-03	-4.0E-03
2792	9.4E-04	1.1E-03	1.2E-03	7.4E-04	8.8E-04	1.2E-03	6.5E-04	-6.5E-03	-6.2E-03	-5.5E-03	-4.9E-03	-4.2E-03	-3.5E-03
2793	8.1E-04	1.1E-03	8.3E-04	6.1E-04	7.1E-04	7.6E-04	6.1E-04	-3.2E-03	-2.9E-03	-2.2E-03	-1.5E-03	-8.1E-04	-1.2E-04
2794	9.4E-04	1.2E-03	9.0E-04	6.5E-04	7.5E-04	9.8E-04	6.3E-04	-3.2E-03	-2.8E-03	-2.0E-03	-1.1E-03	-2.8E-04	5.5E-04
2795	9.5E-04	1.2E-03	6.5E-04	6.4E-04	6.8E-04	6.7E-04	5.9E-04	-1.7E-03	-1.1E-03	-1.2E-04	8.5E-04	1.8E-03	2.8E-03
2796	1.1E-03	1.4E-03	6.9E-04	6.7E-04	7.1E-04	9.1E-04	6.2E-04	-1.8E-03	-1.1E-03	-2.7E-05	1.1E-03	2.2E-03	3.3E-03
2797	1.0E-03	1.3E-03	5.8E-04	7.1E-04	6.2E-04	5.8E-04	5.4E-04	-3.3E-03	-2.8E-03	-2.0E-03	-1.1E-03	-3.0E-04	5.4E-04
2798	9.6E-04	1.2E-03	5.9E-04	7.6E-04	6.6E-04	6.0E-04	6.0E-04	-2.7E-03	-3.4E-03	-3.8E-03	-4.3E-03	-4.7E-03	-5.1E-03
2799	7.8E-04	1.1E-03	7.5E-04	8.0E-04	7.2E-04	6.5E-04	6.5E-04	-3.2E-03	-4.2E-03	-4.9E-03	-5.6E-03	-6.3E-03	-7.0E-03
2800	5.7E-04	8.5E-04	9.2E-04	9.0E-04	7.4E-04	6.7E-04	6.7E-04	-4.5E-03	-5.4E-03	-6.1E-03	-6.8E-03	-7.5E-03	-8.2E-03
2801	4.5E-04	9.3E-04	1.0E-03	9.9E-04	8.1E-04	7.3E-04	7.3E-04	-3.9E-03	-5.3E-03	-6.4E-03	-7.6E-03	-8.7E-03	-9.9E-03
2802	1.1E-03	1.4E-03	1.6E-03	2.2E-03	2.1E-03	1.9E-03	1.9E-03	-1.6E-02	-1.3E-02	-8.7E-03	-4.7E-03	-7.1E-04	3.3E-03
2803	9.5E-04	1.1E-03	1.6E-03	2.2E-03	2.1E-03	1.9E-03	1.9E-03	-1.7E-02	-1.4E-02	-1.0E-02	-6.7E-03	-3.0E-03	7.0E-04
2804	1.4E-03	1.6E-03	1.6E-03	2.1E-03	2.1E-03	1.9E-03	1.9E-03	-1.4E-02	-1.0E-02	-6.3E-03	-2.4E-03	1.6E-03	5.5E-03
2805	1.8E-03	2.0E-03	2.0E-03	1.8E-03	1.9E-03	1.7E-03	1.6E-03	-1.4E-02	-1.0E-02	-5.2E-03	-3.8E-04	4.4E-03	9.3E-03
2806	1.6E-03	1.8E-03	1.6E-03	2.0E-03	2.1E-03	1.9E-03	1.8E-03	-1.5E-02	-1.1E-02	-5.5E-03	-4.5E-04	4.6E-03	9.6E-03
2807	1.6E-03	2.3E-03	2.4E-03	1.4E-03	1.4E-03	1.2E-03	1.2E-03	-1.7E-02	-1.3E-02	-8.7E-03	-4.2E-03	3.6E-04	4.9E-03
2808	2.0E-03	2.2E-03	2.3E-03	1.7E-03	1.7E-03	1.5E-03	1.4E-03	-1.7E-02	-1.3E-02	-8.3E-03	-3.5E-03	1.2E-03	5.9E-03
2809	8.3E-04	1.9E-03	1.9E-03	1.1E-03	1.3E-03	9.1E-04	8.5E-04	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.8E-03	-5.2E-03
2810	1.1E-03	1.6E-03	1.6E-03	9.0E-04	1.2E-03	8.5E-04	8.0E-04	-1.3E-02	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.3E-03
2811	1.5E-03	1.9E-03	1.2E-03	8.0E-04	1.2E-03	9.7E-04	6.4E-04	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
2812	1.3E-03	1.8E-03	1.1E-03	7.0E-04	7.1E-04	1.0E-03	4.5E-04	-1.3E-02	-1.2E-02	-1.1E-02	-9.9E-03	-8.9E-03	-7.8E-03
2813	5.7E-04	7.2E-04	7.4E-04	5.6E-04	6.4E-04	5.7E-04	5.4E-04	-5.1E-03	-5.0E-03	-4.5E-03	-4.1E-03	-3.7E-03	-3.3E-03
2814	6.3E-04	8.0E-04	8.1E-04	5.9E-04	6.8E-04	6.0E-04	5.7E-04	-4.9E-03	-4.8E-03	-4.3E-03	-3.8E-03	-3.3E-03	-2.8E-03
2815	5.6E-04	7.8E-04	5.8E-04	5.3E-04	5.9E-04	5.3E-04	5.0E-04	-2.6E-03	-2.3E-03	-1.7E-03	-1.1E-03	-4.9E-04	1.0E-04
2816	6.5E-04	8.8E-04	6.2E-04	5.5E-04	6.2E-04	5.6E-04	5.3E-04	-2.3E-03	-2.0E-03	-1.3E-03	-6.9E-04	-4.2E-05	6.0E-04
2817	7.4E-04	9.8E-04	6.5E-04	5.7E-04	6.5E-04	5.9E-04	5.5E-04	-2.0E-03	-1.7E-03	-1.0E-03	-3.3E-04	3.3E-04	1.0E-03
2818	6.5E-04	8.7E-04	4.7E-04	5.8E-04	5.4E-04	5.0E-04	4.7E-04	-8.1E-04	-7.7E-04	-4.3E-04	-9.1E-05	2.5E-04	5.9E-04
2819	7.2E-04	9.5E-04	4.8E-04	6.1E-04	5.7E-04	5.2E-04	4.9E-04	-1.4E-03	-1.1E-03	-5.0E-04	9.2E-05	6.8E-04	1.3E-03
2820	8.2E-04	1.1E-03	5.1E-04	6.4E-04	6.0E-04	5.5E-04	5.2E-04	-2.0E-03	-1.4E-03	-5.4E-04	3.4E-04	1.2E-03	2.1E-03
2821	6.9E-04	9.1E-04	5.0E-04	6.4E-04	5.8E-04	4.8E-04	4.7E-04	-3.1E-03	-2.6E-03	-1.8E-03	-9.7E-04	-1.6E-04	6.5E-04
2822	7.8E-04	1.0E-03	5.2E-04	6.7E-04	5.6E-04	5.0E-04	5.0E-04	-3.5E-03	-3.0E-03	-2.2E-03	-1.3E-03	-5.2E-04	3.1E-04
2823	8.8E-04	1.1E-03	5.4E-04	7.0E-04	5.9E-04	5.3E-04	5.3E-04	-3.8E-03	-3.4E-03	-2.6E-03	-1.8E-03	-1.0E-03	-2.5E-04
2824	7.1E-04	9.5E-04	5.2E-04	6.7E-04	6.9E-04	5.3E-04	5.3E-04	-3.7E-03	-3.4E-03	-2.9E-03	-2.4E-03	-1.8E-03	-1.3E-03
2825	7.8E-04	1.0E-03	5.6E-04	7.1E-04	6.2E-04	5.6E-04	5.6E-04	-3.5E-03	-3.4E-03	-3.1E-03	-2.8E-03	-2.4E-03	-2.1E-03
2826	8.4E-04	1.1E-03	5.9E-04	7.4E-04	6.6E-04	6.0E-04	5.9E-04	-2.3E-03	-3.0E-03	-3.4E-03	-3.8E-03	-4.2E-03	-4.6E-03
2827	6.6E-04	9.0E-04	5.8E-04	7.0E-04	8.0E-04	5.6E-04	5.6E-04	-1.8E-03	-2.2E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.2E-03
2828	7.0E-04	9.5E-04	6.2E-04	7.6E-04	7.4E-04	6.0E-04	6.0E-04	-3.3E-04	-1.4E-03	-2.3E-03	-3.2E-03	-4.1E-03	-4.9E-03
2829	7.1E-04	9.8E-04	6.6E-04	8.1E-04	7.0E-04	6.3E-04	6.3E-04	-1.3E-03	-2.4E-03	-3.4E-03	-4.3E-03	-5.2E-03	-6.1E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2830	5.6E-04	8.0E-04	6.3E-04	7.8E-04	9.0E-04	5.7E-04	5.7E-04	8.3E-04	-1.7E-04	-1.0E-03	-1.8E-03	-2.7E-03	-3.5E-03
2831	5.7E-04	8.1E-04	6.7E-04	8.4E-04	8.7E-04	6.1E-04	6.1E-04	-1.2E-03	-2.1E-03	-2.8E-03	-3.6E-03	-4.3E-03	-5.1E-03
2832	5.3E-04	7.8E-04	7.6E-04	8.9E-04	7.7E-04	6.3E-04	6.3E-04	-3.6E-03	-4.4E-03	-4.9E-03	-5.5E-03	-6.1E-03	-6.6E-03
2833	4.5E-04	6.7E-04	6.7E-04	8.4E-04	9.5E-04	6.1E-04	6.0E-04	-1.5E-03	-2.2E-03	-2.8E-03	-3.4E-03	-3.9E-03	-4.5E-03
2834	4.5E-04	6.8E-04	7.4E-04	9.2E-04	9.9E-04	6.7E-04	6.7E-04	-2.9E-03	-3.8E-03	-4.5E-03	-5.3E-03	-6.0E-03	-6.8E-03
2835	4.0E-04	7.7E-04	8.3E-04	9.5E-04	9.0E-04	7.1E-04	7.1E-04	-3.0E-03	-4.3E-03	-5.4E-03	-6.5E-03	-7.6E-03	-8.7E-03
2836	3.7E-04	5.9E-04	7.1E-04	9.1E-04	1.0E-03	6.9E-04	6.9E-04	-2.0E-03	-3.2E-03	-4.2E-03	-5.2E-03	-6.2E-03	-7.2E-03
2837	3.5E-04	7.1E-04	7.8E-04	9.7E-04	1.1E-03	7.5E-04	7.4E-04	-2.3E-03	-3.8E-03	-5.2E-03	-6.5E-03	-7.8E-03	-9.2E-03
2838	3.7E-04	7.8E-04	8.5E-04	1.0E-03	1.0E-03	8.0E-04	7.9E-04	-2.5E-03	-4.2E-03	-5.7E-03	-7.2E-03	-8.7E-03	-1.0E-02
2839	3.3E-04	6.6E-04	7.6E-04	9.6E-04	1.0E-03	7.6E-04	7.6E-04	-1.5E-03	-3.1E-03	-4.6E-03	-6.1E-03	-7.5E-03	-9.0E-03
2840	3.4E-04	7.2E-04	8.0E-04	1.0E-03	1.1E-03	8.1E-04	8.1E-04	-2.9E-03	-4.4E-03	-5.7E-03	-7.0E-03	-8.3E-03	-9.6E-03
2841	3.9E-04	7.1E-04	8.2E-04	1.0E-03	1.2E-03	8.6E-04	8.5E-04	-5.6E-03	-6.5E-03	-7.2E-03	-7.9E-03	-8.6E-03	-9.3E-03
2842	3.1E-04	6.5E-04	7.8E-04	9.9E-04	9.6E-04	8.0E-04	7.9E-04	-3.8E-03	-5.0E-03	-5.9E-03	-6.8E-03	-7.7E-03	-8.6E-03
2843	3.5E-04	6.4E-04	8.2E-04	1.0E-03	1.1E-03	8.4E-04	8.3E-04	-6.4E-03	-7.0E-03	-7.3E-03	-7.6E-03	-8.0E-03	-8.3E-03
2844	3.7E-04	6.7E-04	8.6E-04	1.1E-03	1.2E-03	8.7E-04	8.7E-04	-9.3E-03	-9.4E-03	-9.2E-03	-9.1E-03	-8.9E-03	-8.8E-03
2845	3.1E-04	5.8E-04	8.3E-04	1.0E-03	8.8E-04	8.0E-04	8.0E-04	-7.3E-03	-7.5E-03	-7.6E-03	-7.6E-03	-7.7E-03	-7.7E-03
2846	3.3E-04	6.1E-04	8.6E-04	1.1E-03	1.0E-03	8.5E-04	8.5E-04	-1.0E-02	-9.9E-03	-9.6E-03	-9.3E-03	-9.0E-03	-8.8E-03
2847	3.5E-04	6.0E-04	9.0E-04	1.1E-03	1.2E-03	9.1E-04	9.0E-04	-1.4E-02	-1.3E-02	-1.1E-02	-1.0E-02	-8.8E-03	-7.5E-03
2848	3.2E-04	5.6E-04	8.6E-04	1.1E-03	9.5E-04	8.6E-04	8.5E-04	-1.0E-02	-1.0E-02	-9.7E-03	-9.5E-03	-9.2E-03	-8.9E-03
2849	3.3E-04	5.6E-04	9.0E-04	1.1E-03	9.9E-04	9.0E-04	9.0E-04	-1.3E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.0E-03	-8.0E-03
2850	3.5E-04	6.4E-04	9.3E-04	1.2E-03	1.1E-03	9.4E-04	9.4E-04	-1.5E-02	-1.4E-02	-1.2E-02	-9.8E-03	-7.9E-03	-6.0E-03
2851	3.5E-04	5.3E-04	9.1E-04	1.1E-03	1.0E-03	9.1E-04	9.1E-04	-1.5E-02	-1.3E-02	-1.1E-02	-9.4E-03	-7.7E-03	-5.9E-03
2852	3.6E-04	7.7E-04	9.7E-04	1.1E-03	1.0E-03	9.4E-04	9.4E-04	-1.6E-02	-1.4E-02	-1.1E-02	-8.9E-03	-6.6E-03	-4.2E-03
2853	3.5E-04	6.4E-04	9.1E-04	1.1E-03	9.8E-04	8.9E-04	8.9E-04	-1.5E-02	-1.3E-02	-1.1E-02	-8.5E-03	-6.2E-03	-3.9E-03
2854	6.7E-04	1.3E-03	1.8E-03	1.8E-03	1.1E-03	9.4E-04	8.9E-04	-4.2E-03	-2.2E-03	3.6E-04	2.9E-03	5.4E-03	7.9E-03
2855	9.9E-04	1.3E-03	1.7E-03	2.3E-03	1.4E-03	1.1E-03	1.0E-03	-6.4E-03	-4.2E-03	-1.5E-03	1.3E-03	4.0E-03	6.8E-03
2856	1.1E-03	1.4E-03	2.0E-03	2.8E-03	1.8E-03	1.3E-03	1.2E-03	-9.2E-03	-7.2E-03	-4.4E-03	-1.6E-03	1.2E-03	4.0E-03
2857	8.5E-04	1.2E-03	1.8E-03	1.7E-03	1.3E-03	1.1E-03	1.1E-03	-5.3E-03	-4.6E-03	-3.5E-03	-2.3E-03	-1.2E-03	-3.6E-05
2858	7.0E-04	1.3E-03	1.9E-03	1.7E-03	1.1E-03	9.6E-04	9.0E-04	-4.2E-03	-2.9E-03	-1.1E-03	7.2E-04	2.5E-03	4.4E-03
2859	1.0E-03	1.4E-03	2.0E-03	2.0E-03	1.3E-03	1.0E-03	9.5E-04	-4.6E-03	-2.8E-03	-4.8E-04	1.8E-03	4.2E-03	6.5E-03
2860	7.7E-04	1.0E-03	1.6E-03	1.9E-03	1.7E-03	1.5E-03	1.5E-03	-1.2E-02	-1.1E-02	-9.1E-03	-7.6E-03	-6.1E-03	-4.6E-03
2861	7.6E-04	9.7E-04	1.7E-03	1.8E-03	1.5E-03	1.3E-03	1.3E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.1E-03	-8.1E-03	-7.2E-03
2862	7.3E-04	1.2E-03	1.9E-03	1.7E-03	1.3E-03	1.1E-03	1.1E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.1E-03	-8.2E-03	-7.2E-03
2863	1.1E-03	1.5E-03	2.1E-03	1.9E-03	1.2E-03	1.0E-03	9.7E-04	-8.0E-03	-7.9E-03	-7.2E-03	-6.5E-03	-5.8E-03	-5.1E-03
2864	1.2E-03	1.4E-03	1.6E-03	2.0E-03	1.9E-03	1.7E-03	1.7E-03	-1.4E-02	-1.1E-02	-8.7E-03	-5.9E-03	-3.2E-03	-4.9E-04
2865	8.7E-04	1.1E-03	1.6E-03	2.0E-03	1.9E-03	1.7E-03	1.7E-03	-1.4E-02	-1.2E-02	-1.0E-02	-8.1E-03	-5.9E-03	-3.7E-03
2866	8.3E-04	9.4E-04	1.6E-03	2.0E-03	1.8E-03	1.6E-03	1.6E-03	-1.5E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.8E-03	-7.2E-03
2867	7.5E-04	9.7E-04	1.8E-03	1.9E-03	1.6E-03	1.4E-03	1.4E-03	-1.6E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02
2868	1.9E-03	2.0E-03	1.7E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.1E-02	-7.2E-03	-3.8E-03	-4.6E-04	2.9E-03
2869	1.3E-03	1.5E-03	1.6E-03	2.1E-03	2.0E-03	1.8E-03	1.8E-03	-1.5E-02	-1.2E-02	-8.2E-03	-4.6E-03	-9.1E-04	2.7E-03
2870	1.9E-03	2.1E-03	2.1E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.0E-02	-6.5E-03	-3.1E-03	3.6E-04	3.8E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2871	1.5E-03	1.7E-03	1.6E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	-1.4E-02	-1.0E-02	-6.9E-03	-3.3E-03	2.7E-04	3.9E-03
2872	1.8E-03	2.2E-03	2.3E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	-1.1E-02	-8.0E-03	-4.3E-03	-7.2E-04	2.9E-03	6.5E-03
2873	4.2E-04	1.1E-03	1.8E-03	2.3E-03	2.1E-03	1.7E-03	1.6E-03	-5.1E-03	-7.0E-03	-7.9E-03	-8.9E-03	-9.9E-03	-1.1E-02
2874	4.5E-04	1.2E-03	2.1E-03	2.3E-03	2.3E-03	1.8E-03	1.7E-03	-7.8E-03	-9.9E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
2875	5.7E-04	1.2E-03	2.2E-03	2.3E-03	2.4E-03	1.8E-03	1.7E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02
2876	6.3E-04	1.2E-03	2.3E-03	2.2E-03	2.5E-03	1.8E-03	1.7E-03	-1.2E-02	-1.5E-02	-1.6E-02	-1.8E-02	-2.0E-02	-2.1E-02
2877	6.2E-04	1.1E-03	2.3E-03	2.3E-03	2.4E-03	1.7E-03	1.6E-03	-9.9E-03	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.7E-02
2878	5.7E-04	1.1E-03	2.4E-03	2.5E-03	2.4E-03	1.8E-03	1.8E-03	-1.4E-02	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.2E-02
2879	5.7E-04	1.2E-03	2.4E-03	2.7E-03	2.2E-03	1.8E-03	1.8E-03	-1.4E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.3E-02	-1.2E-02
2880	5.3E-04	1.3E-03	2.5E-03	2.8E-03	2.1E-03	1.7E-03	1.7E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.9E-03	-7.6E-03
2881	4.9E-04	1.4E-03	2.5E-03	2.9E-03	1.9E-03	1.6E-03	1.6E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.0E-02	-8.3E-03	-6.2E-03
2882	4.3E-04	1.6E-03	2.6E-03	2.9E-03	1.7E-03	1.4E-03	1.4E-03	-1.7E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.5E-03	-7.5E-03
2883	3.6E-04	1.5E-03	2.4E-03	2.8E-03	1.9E-03	1.2E-03	1.2E-03	-2.1E-02	-1.8E-02	-1.4E-02	-9.5E-03	-5.3E-03	-1.2E-03
2884	3.4E-04	1.4E-03	2.1E-03	2.4E-03	2.0E-03	1.2E-03	1.1E-03	-2.2E-02	-1.6E-02	-9.1E-03	-2.2E-03	4.8E-03	1.2E-02
2885	4.6E-04	1.2E-03	1.8E-03	2.4E-03	2.0E-03	1.6E-03	1.5E-03	-4.6E-03	-6.2E-03	-6.9E-03	-7.6E-03	-8.2E-03	-8.9E-03
2886	4.6E-04	1.3E-03	2.1E-03	2.4E-03	2.3E-03	1.8E-03	1.7E-03	-6.3E-03	-8.3E-03	-9.3E-03	-1.0E-02	-1.1E-02	-1.2E-02
2887	5.9E-04	1.3E-03	2.2E-03	2.3E-03	2.4E-03	1.9E-03	1.8E-03	-9.4E-03	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02
2888	6.6E-04	1.2E-03	2.3E-03	2.3E-03	2.5E-03	1.9E-03	1.8E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.8E-02	-2.0E-02
2889	6.5E-04	1.2E-03	2.4E-03	2.2E-03	2.5E-03	1.8E-03	1.7E-03	-1.3E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.1E-02	-2.2E-02
2890	5.9E-04	1.2E-03	2.4E-03	2.5E-03	2.5E-03	1.8E-03	1.8E-03	-1.2E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02
2891	5.9E-04	1.2E-03	2.4E-03	2.7E-03	2.4E-03	1.9E-03	1.9E-03	-1.5E-02	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02
2892	5.7E-04	1.3E-03	2.5E-03	2.9E-03	2.2E-03	1.8E-03	1.8E-03	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02
2893	5.7E-04	1.3E-03	2.5E-03	2.9E-03	2.3E-03	1.7E-03	1.7E-03	-1.6E-02	-1.4E-02	-1.2E-02	-9.6E-03	-7.3E-03	-5.1E-03
2894	5.3E-04	1.6E-03	2.7E-03	3.1E-03	2.1E-03	1.5E-03	1.5E-03	-1.9E-02	-1.7E-02	-1.5E-02	-1.2E-02	-9.7E-03	-7.2E-03
2895	4.6E-04	1.1E-03	1.8E-03	2.4E-03	2.0E-03	1.6E-03	1.5E-03	-5.6E-03	-6.7E-03	-6.9E-03	-7.1E-03	-7.2E-03	-7.4E-03
2896	4.7E-04	1.3E-03	2.1E-03	2.5E-03	2.3E-03	1.8E-03	1.7E-03	-4.4E-03	-6.3E-03	-7.2E-03	-8.2E-03	-9.1E-03	-1.0E-02
2897	6.2E-04	1.3E-03	2.2E-03	2.4E-03	2.4E-03	1.9E-03	1.8E-03	-7.8E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
2898	6.9E-04	1.3E-03	2.3E-03	2.4E-03	2.6E-03	2.0E-03	1.9E-03	-1.1E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02	-1.8E-02
2899	6.7E-04	1.2E-03	2.4E-03	2.3E-03	2.6E-03	1.9E-03	1.8E-03	-1.4E-02	-1.6E-02	-1.8E-02	-2.0E-02	-2.1E-02	-2.3E-02
2900	5.9E-04	1.2E-03	2.4E-03	2.4E-03	2.6E-03	1.8E-03	1.8E-03	-1.3E-02	-1.5E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.0E-02
2901	6.2E-04	1.2E-03	2.5E-03	2.7E-03	2.5E-03	1.9E-03	1.9E-03	-1.6E-02	-1.7E-02	-1.6E-02	-1.5E-02	-1.4E-02	-1.3E-02
2902	6.1E-04	1.2E-03	2.5E-03	2.9E-03	2.4E-03	1.9E-03	1.9E-03	-1.6E-02	-1.6E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.3E-02
2903	6.4E-04	1.2E-03	2.4E-03	2.8E-03	2.5E-03	1.8E-03	1.8E-03	-1.7E-02	-1.6E-02	-1.4E-02	-1.1E-02	-9.3E-03	-7.0E-03
2904	5.7E-04	1.5E-03	2.7E-03	3.1E-03	2.3E-03	1.7E-03	1.7E-03	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.2E-03	-6.4E-03
2905	3.8E-04	8.9E-04	1.5E-03	2.2E-03	1.6E-03	1.2E-03	1.1E-03	-9.0E-03	-9.5E-03	-9.4E-03	-9.3E-03	-9.2E-03	-9.1E-03
2906	3.9E-04	1.1E-03	1.7E-03	2.4E-03	1.9E-03	1.5E-03	1.4E-03	-7.6E-03	-8.7E-03	-9.0E-03	-9.3E-03	-9.6E-03	-9.9E-03
2907	5.0E-04	1.2E-03	1.9E-03	2.5E-03	2.2E-03	1.7E-03	1.6E-03	-4.8E-03	-6.2E-03	-6.6E-03	-6.9E-03	-7.3E-03	-7.7E-03
2908	6.5E-04	1.3E-03	2.2E-03	2.5E-03	2.4E-03	1.9E-03	1.8E-03	-5.9E-03	-7.9E-03	-8.8E-03	-9.7E-03	-1.1E-02	-1.2E-02
2909	7.2E-04	1.3E-03	2.4E-03	2.4E-03	2.6E-03	2.0E-03	1.9E-03	-9.8E-03	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02
2910	6.9E-04	1.3E-03	2.4E-03	2.3E-03	2.6E-03	2.0E-03	1.9E-03	-1.3E-02	-1.6E-02	-1.7E-02	-1.8E-02	-1.9E-02	-2.1E-02
2911	6.0E-04	1.2E-03	2.4E-03	2.4E-03	2.7E-03	1.9E-03	1.8E-03	-1.6E-02	-1.8E-02	-2.0E-02	-2.2E-02	-2.3E-02	-2.5E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2912	6.3E-04	1.2E-03	2.5E-03	2.7E-03	2.6E-03	2.0E-03	1.9E-03	-1.4E-02	-1.6E-02	-1.6E-02	-1.6E-02	-1.7E-02	-1.7E-02
2913	6.4E-04	1.2E-03	2.6E-03	2.9E-03	2.5E-03	2.0E-03	2.0E-03	-1.8E-02	-1.7E-02	-1.6E-02	-1.5E-02	-1.4E-02	-1.3E-02
2914	6.0E-04	1.2E-03	2.5E-03	2.9E-03	2.5E-03	2.0E-03	2.0E-03	-1.7E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.6E-03
2915	4.1E-04	8.4E-04	1.4E-03	2.1E-03	1.5E-03	1.0E-03	9.8E-04	-8.8E-03	-8.6E-03	-7.9E-03	-7.2E-03	-6.5E-03	-5.8E-03
2916	4.0E-04	1.0E-03	1.7E-03	2.3E-03	1.8E-03	1.3E-03	1.3E-03	-8.7E-03	-9.5E-03	-9.6E-03	-9.7E-03	-9.7E-03	-9.8E-03
2917	5.2E-04	1.2E-03	1.9E-03	2.6E-03	2.1E-03	1.6E-03	1.5E-03	-6.5E-03	-8.0E-03	-8.6E-03	-9.2E-03	-9.8E-03	-1.0E-02
2918	6.9E-04	1.4E-03	2.2E-03	2.6E-03	2.4E-03	1.9E-03	1.8E-03	-4.4E-03	-6.1E-03	-6.8E-03	-7.5E-03	-8.2E-03	-8.9E-03
2919	7.6E-04	1.4E-03	2.4E-03	2.6E-03	2.6E-03	2.1E-03	2.0E-03	-7.7E-03	-9.8E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
2920	7.1E-04	1.3E-03	2.4E-03	2.4E-03	2.7E-03	2.1E-03	2.0E-03	-1.2E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02	-1.8E-02
2921	6.2E-04	1.2E-03	2.5E-03	2.3E-03	2.7E-03	2.1E-03	1.9E-03	-1.5E-02	-1.8E-02	-1.9E-02	-2.1E-02	-2.3E-02	-2.4E-02
2922	6.3E-04	1.2E-03	2.5E-03	2.6E-03	2.7E-03	1.9E-03	1.9E-03	-1.6E-02	-1.8E-02	-2.0E-02	-2.1E-02	-2.2E-02	-2.4E-02
2923	6.5E-04	1.2E-03	2.6E-03	2.9E-03	2.6E-03	2.1E-03	2.1E-03	-1.9E-02	-1.9E-02	-1.8E-02	-1.6E-02	-1.5E-02	-1.4E-02
2924	6.1E-04	1.3E-03	2.6E-03	3.0E-03	2.5E-03	2.0E-03	2.0E-03	-1.5E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02
2925	4.4E-04	8.0E-04	1.3E-03	2.0E-03	1.4E-03	9.3E-04	8.7E-04	-8.4E-03	-7.4E-03	-5.9E-03	-4.4E-03	-2.9E-03	-1.5E-03
2926	4.2E-04	9.4E-04	1.6E-03	2.3E-03	1.6E-03	1.2E-03	1.1E-03	-9.8E-03	-9.6E-03	-8.7E-03	-7.9E-03	-7.0E-03	-6.1E-03
2927	5.4E-04	1.2E-03	1.9E-03	2.6E-03	2.0E-03	1.5E-03	1.4E-03	-8.5E-03	-9.6E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.1E-02
2928	7.2E-04	1.4E-03	2.2E-03	2.7E-03	2.3E-03	1.9E-03	1.7E-03	-5.4E-03	-7.2E-03	-8.0E-03	-8.8E-03	-9.5E-03	-1.0E-02
2929	8.0E-04	1.5E-03	2.4E-03	2.7E-03	2.6E-03	2.1E-03	1.9E-03	-4.6E-03	-6.7E-03	-7.7E-03	-8.6E-03	-9.6E-03	-1.1E-02
2930	7.5E-04	1.4E-03	2.5E-03	2.5E-03	2.7E-03	2.2E-03	2.0E-03	-1.0E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02
2931	6.4E-04	1.3E-03	2.5E-03	2.4E-03	2.8E-03	2.2E-03	2.0E-03	-1.4E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.1E-02
2932	6.3E-04	1.2E-03	2.5E-03	2.5E-03	2.8E-03	2.1E-03	1.9E-03	-1.8E-02	-2.1E-02	-2.2E-02	-2.4E-02	-2.5E-02	-2.7E-02
2933	6.5E-04	1.1E-03	2.5E-03	2.8E-03	2.7E-03	2.0E-03	2.0E-03	-1.7E-02	-1.8E-02	-1.8E-02	-1.9E-02	-1.9E-02	-1.9E-02
2934	6.3E-04	1.2E-03	2.5E-03	3.0E-03	2.5E-03	2.1E-03	2.1E-03	-1.8E-02	-1.7E-02	-1.6E-02	-1.5E-02	-1.3E-02	-1.2E-02
2935	8.4E-04	1.7E-03	3.4E-03	3.8E-03	4.4E-03	3.3E-03	3.1E-03	-6.8E-03	-6.7E-03	-5.2E-03	-3.7E-03	-2.2E-03	-7.6E-04
2936	7.9E-04	2.2E-03	4.0E-03	4.4E-03	4.8E-03	3.2E-03	3.0E-03	-9.8E-03	-1.2E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.4E-02
2937	5.1E-04	8.3E-04	1.1E-03	1.6E-03	1.0E-03	7.9E-04	7.4E-04	-5.2E-03	-3.5E-03	-1.3E-03	9.4E-04	3.1E-03	5.3E-03
2938	4.8E-04	7.7E-04	1.2E-03	1.9E-03	1.2E-03	9.0E-04	8.4E-04	-7.7E-03	-6.0E-03	-3.8E-03	-1.5E-03	6.7E-04	2.9E-03
2939	4.4E-04	8.8E-04	1.5E-03	2.2E-03	1.5E-03	1.1E-03	1.0E-03	-9.4E-03	-8.2E-03	-6.4E-03	-4.7E-03	-2.9E-03	-1.2E-03
2940	5.5E-04	1.1E-03	1.8E-03	2.5E-03	1.9E-03	1.4E-03	1.3E-03	-1.1E-02	-1.1E-02	-9.6E-03	-8.5E-03	-7.4E-03	-6.3E-03
2941	7.6E-04	1.4E-03	2.1E-03	2.8E-03	2.2E-03	1.8E-03	1.6E-03	-8.8E-03	-1.0E-02	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02
2942	8.6E-04	1.5E-03	2.5E-03	2.8E-03	2.5E-03	2.1E-03	1.9E-03	-4.5E-03	-6.5E-03	-7.3E-03	-8.1E-03	-8.8E-03	-9.6E-03
2943	7.9E-04	1.5E-03	2.6E-03	2.7E-03	2.7E-03	2.2E-03	2.1E-03	-6.5E-03	-8.8E-03	-9.8E-03	-1.1E-02	-1.2E-02	-1.3E-02
2944	6.6E-04	1.3E-03	2.5E-03	2.5E-03	2.8E-03	2.2E-03	2.1E-03	-1.3E-02	-1.5E-02	-1.6E-02	-1.7E-02	-1.7E-02	-1.8E-02
2945	6.2E-04	1.2E-03	2.5E-03	2.4E-03	2.9E-03	2.2E-03	2.1E-03	-1.7E-02	-2.0E-02	-2.1E-02	-2.2E-02	-2.4E-02	-2.5E-02
2946	6.4E-04	1.1E-03	2.5E-03	2.7E-03	2.7E-03	2.0E-03	2.0E-03	-1.9E-02	-2.1E-02	-2.2E-02	-2.3E-02	-2.3E-02	-2.4E-02
2947	6.4E-04	1.1E-03	2.5E-03	2.9E-03	2.6E-03	2.1E-03	2.1E-03	-2.1E-02	-2.0E-02	-1.9E-02	-1.7E-02	-1.6E-02	-1.4E-02
2948	5.6E-04	9.2E-04	1.3E-03	1.2E-03	9.1E-04	7.4E-04	7.0E-04	-2.2E-03	-2.0E-04	2.2E-03	4.6E-03	7.1E-03	9.5E-03
2949	5.3E-04	9.2E-04	1.3E-03	1.5E-03	9.6E-04	7.7E-04	7.3E-04	-3.5E-03	-1.6E-03	7.1E-04	3.0E-03	5.3E-03	7.6E-03
2950	5.2E-04	8.8E-04	1.2E-03	1.7E-03	1.1E-03	8.6E-04	8.1E-04	-5.9E-03	-4.0E-03	-1.6E-03	7.9E-04	3.2E-03	5.6E-03
2951	4.6E-04	8.3E-04	1.4E-03	2.1E-03	1.4E-03	9.8E-04	9.2E-04	-8.2E-03	-6.5E-03	-4.2E-03	-1.9E-03	3.5E-04	2.6E-03
2952	6.1E-04	9.0E-04	1.8E-03	2.5E-03	1.7E-03	1.3E-03	1.2E-03	-1.0E-02	-8.9E-03	-6.9E-03	-4.8E-03	-2.8E-03	-7.5E-04

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2953	9.1E-04	1.3E-03	2.2E-03	3.0E-03	2.1E-03	1.6E-03	1.5E-03	-1.2E-02	-1.2E-02	-1.0E-02	-9.0E-03	-7.6E-03	-6.2E-03
2954	9.1E-04	1.6E-03	2.4E-03	3.0E-03	2.5E-03	2.0E-03	1.9E-03	-9.3E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
2955	8.3E-04	1.6E-03	2.6E-03	2.8E-03	2.7E-03	2.2E-03	2.0E-03	-3.9E-03	-6.2E-03	-7.2E-03	-8.3E-03	-9.3E-03	-1.0E-02
2956	6.9E-04	1.4E-03	2.6E-03	2.6E-03	2.8E-03	2.3E-03	2.2E-03	-8.6E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.6E-02
2957	6.0E-04	1.2E-03	2.5E-03	2.4E-03	2.9E-03	2.3E-03	2.1E-03	-1.5E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.1E-02	-2.2E-02
2958	6.5E-04	1.1E-03	2.5E-03	2.6E-03	2.9E-03	2.1E-03	2.0E-03	-2.0E-02	-2.3E-02	-2.4E-02	-2.5E-02	-2.6E-02	-2.7E-02
2959	6.6E-04	1.1E-03	2.5E-03	2.9E-03	2.7E-03	2.1E-03	2.1E-03	-2.0E-02	-2.1E-02	-2.1E-02	-2.1E-02	-2.0E-02	-2.0E-02
2960	7.8E-04	1.0E-03	1.4E-03	1.4E-03	1.0E-03	9.1E-04	9.1E-04	-2.8E-03	-1.3E-03	6.8E-04	2.6E-03	4.6E-03	6.5E-03
2961	6.4E-04	9.5E-04	1.4E-03	1.3E-03	9.0E-04	7.7E-04	7.7E-04	-3.1E-03	-1.1E-03	1.3E-03	3.7E-03	6.1E-03	8.5E-03
2962	6.7E-04	9.9E-04	1.4E-03	1.4E-03	9.7E-04	7.9E-04	7.4E-04	-2.2E-03	-2.1E-04	2.2E-03	4.6E-03	7.0E-03	9.5E-03
2963	5.5E-04	9.8E-04	1.3E-03	1.6E-03	1.0E-03	8.1E-04	7.6E-04	-3.6E-03	-1.6E-03	9.3E-04	3.4E-03	5.9E-03	8.4E-03
2964	4.9E-04	9.3E-04	1.3E-03	2.0E-03	1.3E-03	9.5E-04	8.9E-04	-6.3E-03	-4.3E-03	-1.7E-03	8.0E-04	3.3E-03	5.9E-03
2965	6.3E-04	9.0E-04	1.6E-03	2.4E-03	1.6E-03	1.1E-03	1.1E-03	-8.8E-03	-7.1E-03	-4.8E-03	-2.6E-03	-2.7E-04	2.0E-03
2966	9.4E-04	1.2E-03	2.0E-03	2.8E-03	2.0E-03	1.5E-03	1.4E-03	-1.1E-02	-9.7E-03	-7.6E-03	-5.5E-03	-3.4E-03	-1.3E-03
2967	9.7E-04	1.6E-03	2.4E-03	3.1E-03	2.3E-03	1.9E-03	1.8E-03	-1.3E-02	-1.2E-02	-1.1E-02	-9.0E-03	-7.4E-03	-5.8E-03
2968	8.6E-04	1.7E-03	2.6E-03	2.9E-03	2.6E-03	2.1E-03	2.0E-03	-8.8E-03	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
2969	7.1E-04	1.6E-03	2.7E-03	2.7E-03	2.8E-03	2.3E-03	2.2E-03	-3.2E-03	-6.2E-03	-7.8E-03	-9.5E-03	-1.1E-02	-1.3E-02
2970	5.9E-04	1.3E-03	2.6E-03	2.5E-03	3.0E-03	2.4E-03	2.3E-03	-9.4E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.9E-02
2971	6.6E-04	1.2E-03	2.5E-03	2.6E-03	3.0E-03	2.3E-03	2.2E-03	-1.8E-02	-2.1E-02	-2.2E-02	-2.4E-02	-2.5E-02	-2.6E-02
2972	8.6E-04	1.1E-03	1.5E-03	1.5E-03	1.2E-03	1.1E-03	1.1E-03	-2.3E-03	-8.4E-04	1.0E-03	2.9E-03	4.8E-03	6.6E-03
2973	7.3E-04	9.6E-04	1.5E-03	1.5E-03	1.1E-03	9.5E-04	9.5E-04	-3.1E-03	-1.5E-03	5.1E-04	2.5E-03	4.6E-03	6.6E-03
2974	5.9E-04	1.0E-03	1.5E-03	1.4E-03	9.6E-04	8.1E-04	8.1E-04	-2.9E-03	-9.6E-04	1.4E-03	3.8E-03	6.2E-03	8.6E-03
2975	6.0E-04	1.1E-03	1.5E-03	1.5E-03	1.0E-03	8.4E-04	7.9E-04	-2.8E-03	-7.4E-04	1.8E-03	4.4E-03	6.9E-03	9.4E-03
2976	6.0E-04	1.1E-03	1.4E-03	1.8E-03	1.1E-03	9.0E-04	8.4E-04	-3.9E-03	-1.8E-03	8.0E-04	3.4E-03	6.0E-03	8.6E-03
2977	6.6E-04	9.9E-04	1.4E-03	2.2E-03	1.4E-03	1.0E-03	9.8E-04	-6.9E-03	-4.7E-03	-2.0E-03	7.6E-04	3.5E-03	6.2E-03
2978	8.9E-04	1.1E-03	1.9E-03	2.7E-03	1.8E-03	1.3E-03	1.2E-03	-9.6E-03	-7.8E-03	-5.3E-03	-2.8E-03	-2.5E-04	2.3E-03
2979	1.0E-03	1.5E-03	2.3E-03	3.1E-03	2.2E-03	1.7E-03	1.6E-03	-1.2E-02	-1.1E-02	-8.4E-03	-6.2E-03	-4.0E-03	-1.9E-03
2980	9.0E-04	1.7E-03	2.6E-03	3.0E-03	2.4E-03	2.0E-03	1.9E-03	-1.3E-02	-1.2E-02	-1.0E-02	-8.5E-03	-6.7E-03	-4.9E-03
2981	7.4E-04	1.7E-03	2.8E-03	2.9E-03	2.8E-03	2.3E-03	2.2E-03	-9.1E-03	-1.0E-02	-9.7E-03	-9.4E-03	-9.2E-03	-8.9E-03
2982	6.2E-04	1.4E-03	2.7E-03	2.6E-03	3.0E-03	2.5E-03	2.3E-03	-3.4E-03	-7.1E-03	-9.3E-03	-1.2E-02	-1.4E-02	-1.6E-02
2983	1.2E-03	1.4E-03	1.4E-03	1.7E-03	1.5E-03	1.3E-03	1.3E-03	-2.7E-03	-4.2E-04	2.2E-03	4.9E-03	7.6E-03	1.0E-02
2984	9.5E-04	1.2E-03	1.5E-03	1.7E-03	1.4E-03	1.3E-03	1.3E-03	-2.9E-03	-1.0E-03	1.3E-03	3.6E-03	5.9E-03	8.2E-03
2985	9.4E-04	1.2E-03	1.5E-03	1.6E-03	1.3E-03	1.1E-03	1.1E-03	-3.3E-03	-1.8E-03	2.2E-04	2.2E-03	4.2E-03	6.1E-03
2986	7.0E-04	1.0E-03	1.6E-03	1.5E-03	1.1E-03	1.0E-03	1.0E-03	-4.0E-03	-2.3E-03	-1.3E-04	2.0E-03	4.2E-03	6.4E-03
2987	6.4E-04	1.1E-03	1.6E-03	1.4E-03	1.0E-03	8.4E-04	8.3E-04	-3.2E-03	-1.3E-03	1.2E-03	3.6E-03	6.0E-03	8.4E-03
2988	6.8E-04	1.3E-03	1.7E-03	1.6E-03	1.1E-03	8.9E-04	8.4E-04	-3.5E-03	-1.4E-03	1.2E-03	3.8E-03	6.4E-03	9.0E-03
2989	7.5E-04	1.3E-03	1.7E-03	1.9E-03	1.3E-03	9.9E-04	9.3E-04	-5.3E-03	-3.1E-03	-2.2E-04	2.6E-03	5.5E-03	8.3E-03
2990	9.4E-04	1.1E-03	1.7E-03	2.5E-03	1.6E-03	1.1E-03	1.1E-03	-8.0E-03	-5.8E-03	-3.0E-03	-1.3E-04	2.7E-03	5.5E-03
2991	1.1E-03	1.4E-03	2.2E-03	3.0E-03	2.0E-03	1.5E-03	1.4E-03	-1.0E-02	-8.5E-03	-5.8E-03	-3.0E-03	-3.1E-04	2.4E-03
2992	9.5E-04	1.7E-03	2.5E-03	3.1E-03	2.3E-03	1.9E-03	1.7E-03	-1.3E-02	-1.1E-02	-8.6E-03	-6.2E-03	-3.7E-03	-1.2E-03
2993	1.3E-03	1.4E-03	1.5E-03	1.8E-03	1.6E-03	1.4E-03	1.4E-03	-3.8E-03	-1.7E-03	6.6E-04	3.0E-03	5.4E-03	7.8E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
2994	1.3E-03	1.5E-03	1.4E-03	1.7E-03	1.6E-03	1.4E-03	1.4E-03	-3.1E-03	-1.2E-03	9.8E-04	3.2E-03	5.4E-03	7.6E-03
2995	1.1E-03	1.3E-03	1.3E-03	1.6E-03	1.5E-03	1.3E-03	1.3E-03	-3.6E-03	-1.9E-03	2.0E-04	2.3E-03	4.4E-03	6.4E-03
2996	7.3E-04	1.0E-03	1.5E-03	1.6E-03	1.4E-03	1.2E-03	1.2E-03	-4.2E-03	-2.8E-03	-9.0E-04	9.8E-04	2.9E-03	4.7E-03
2997	6.8E-04	1.1E-03	1.7E-03	1.6E-03	1.2E-03	1.0E-03	1.0E-03	-5.2E-03	-3.5E-03	-1.3E-03	8.6E-04	3.0E-03	5.2E-03
2998	7.7E-04	1.3E-03	1.9E-03	1.5E-03	1.1E-03	9.1E-04	8.7E-04	-4.6E-03	-2.5E-03	8.0E-05	2.7E-03	5.3E-03	7.8E-03
2999	1.3E-03	1.6E-03	1.7E-03	1.8E-03	1.7E-03	1.5E-03	1.5E-03	-1.0E-02	-7.7E-03	-4.9E-03	-2.1E-03	6.9E-04	3.5E-03
3000	1.5E-03	1.7E-03	1.4E-03	1.8E-03	1.7E-03	1.5E-03	1.5E-03	-9.3E-03	-7.1E-03	-4.4E-03	-1.8E-03	7.9E-04	3.4E-03
3001	1.3E-03	1.5E-03	1.4E-03	1.8E-03	1.7E-03	1.5E-03	1.5E-03	-8.3E-03	-6.4E-03	-4.1E-03	-1.7E-03	5.7E-04	2.9E-03
3002	9.2E-04	1.2E-03	1.6E-03	1.8E-03	1.6E-03	1.4E-03	1.4E-03	-6.6E-03	-5.3E-03	-3.6E-03	-1.9E-03	-1.8E-04	1.5E-03
3003	7.3E-04	9.5E-04	1.7E-03	1.7E-03	1.4E-03	1.3E-03	1.3E-03	-5.0E-03	-4.5E-03	-3.5E-03	-2.6E-03	-1.6E-03	-6.3E-04
3004	1.3E-03	1.8E-03	2.0E-03	1.8E-03	1.7E-03	1.6E-03	1.6E-03	-1.1E-02	-8.7E-03	-5.9E-03	-3.2E-03	-4.9E-04	2.2E-03
3005	1.6E-03	1.8E-03	1.6E-03	1.8E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-9.6E-03	-6.8E-03	-4.0E-03	-1.3E-03	1.5E-03
3006	1.5E-03	1.7E-03	1.4E-03	1.9E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-1.0E-02	-7.6E-03	-5.1E-03	-2.5E-03	1.3E-05
3007	1.0E-03	1.2E-03	1.6E-03	1.9E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-1.0E-02	-8.4E-03	-6.4E-03	-4.3E-03	-2.3E-03
3008	1.1E-03	2.0E-03	2.1E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	-1.1E-02	-8.5E-03	-5.8E-03	-3.1E-03	-3.7E-04	2.3E-03
3009	1.6E-03	1.8E-03	1.9E-03	1.9E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-9.4E-03	-6.4E-03	-3.3E-03	-3.4E-04	2.7E-03
3010	1.7E-03	1.9E-03	1.5E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	-1.3E-02	-1.0E-02	-7.3E-03	-4.2E-03	-1.0E-03	2.1E-03
3011	8.6E-04	2.1E-03	2.1E-03	1.6E-03	1.6E-03	1.4E-03	1.4E-03	-1.1E-02	-8.8E-03	-6.0E-03	-3.3E-03	-5.8E-04	2.1E-03
3012	1.5E-03	2.1E-03	2.2E-03	1.8E-03	1.8E-03	1.6E-03	1.6E-03	-1.2E-02	-9.7E-03	-6.7E-03	-3.8E-03	-8.0E-04	2.2E-03
3013	6.3E-04	2.0E-03	2.0E-03	1.5E-03	1.5E-03	1.3E-03	1.3E-03	-1.0E-02	-8.0E-03	-5.2E-03	-2.4E-03	4.2E-04	3.2E-03
3014	1.4E-03	2.3E-03	2.4E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	-1.2E-02	-9.1E-03	-5.8E-03	-2.6E-03	6.1E-04	3.8E-03
3015	5.3E-04	1.1E-03	1.3E-03	1.2E-03	1.2E-03	9.2E-04	9.1E-04	-9.5E-03	-7.3E-03	-4.6E-03	-1.9E-03	8.1E-04	3.5E-03
3016	5.0E-04	1.8E-03	1.8E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	-9.9E-03	-7.3E-03	-4.2E-03	-1.2E-03	1.9E-03	5.0E-03
3017	1.1E-03	2.4E-03	2.4E-03	1.5E-03	1.5E-03	1.3E-03	1.3E-03	-1.1E-02	-7.7E-03	-4.3E-03	-8.5E-04	2.6E-03	6.0E-03
3018	6.6E-04	9.8E-04	1.3E-03	1.0E-03	1.2E-03	8.2E-04	7.7E-04	-1.3E-02	-1.0E-02	-7.2E-03	-3.9E-03	-6.2E-04	2.6E-03
3019	5.3E-04	1.5E-03	1.5E-03	1.2E-03	1.3E-03	9.2E-04	9.1E-04	-1.4E-02	-1.1E-02	-7.1E-03	-3.3E-03	4.7E-04	4.2E-03
3020	8.7E-04	2.3E-03	2.3E-03	1.4E-03	1.3E-03	1.1E-03	1.1E-03	-1.5E-02	-1.1E-02	-6.8E-03	-2.6E-03	1.6E-03	5.9E-03
3021	9.2E-04	1.2E-03	1.2E-03	8.9E-04	1.1E-03	8.7E-04	7.4E-04	-1.6E-02	-1.3E-02	-9.9E-03	-6.9E-03	-3.8E-03	-7.0E-04
3022	6.5E-04	1.2E-03	1.3E-03	1.0E-03	1.4E-03	8.6E-04	8.1E-04	-1.7E-02	-1.4E-02	-1.0E-02	-6.4E-03	-2.7E-03	9.0E-04
3023	1.2E-03	1.5E-03	1.2E-03	7.9E-04	1.0E-03	1.0E-03	6.9E-04	-1.3E-02	-1.2E-02	-1.1E-02	-9.8E-03	-8.6E-03	-7.4E-03
3024	9.6E-04	1.3E-03	1.3E-03	8.8E-04	1.3E-03	8.1E-04	7.6E-04	-1.5E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.8E-03	-7.1E-03
3025	1.4E-03	1.8E-03	1.1E-03	7.8E-04	9.1E-04	1.1E-03	6.1E-04	-9.8E-03	-1.0E-02	-9.8E-03	-9.7E-03	-9.5E-03	-9.4E-03
3026	1.6E-03	2.0E-03	1.1E-03	7.5E-04	8.5E-04	1.2E-03	5.3E-04	-9.6E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.0E-02	-1.0E-02
3027	1.6E-03	2.0E-03	1.1E-03	7.3E-04	7.0E-04	9.5E-04	4.5E-04	-9.6E-03	-9.3E-03	-8.8E-03	-8.2E-03	-7.6E-03	-7.0E-03
3028	1.8E-03	2.2E-03	1.1E-03	7.7E-04	8.3E-04	9.1E-04	5.2E-04	-1.0E-02	-9.9E-03	-9.1E-03	-8.4E-03	-7.6E-03	-6.8E-03
3029	6.5E-04	1.1E-03	9.4E-04	6.2E-04	6.9E-04	9.4E-04	4.3E-04	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02
3030	5.3E-04	8.0E-04	8.2E-04	6.3E-04	6.8E-04	9.2E-04	4.7E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
3031	6.4E-04	1.0E-03	9.7E-04	6.4E-04	7.4E-04	1.0E-03	4.8E-04	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.5E-02	-1.5E-02
3032	6.1E-04	6.9E-04	7.1E-04	6.5E-04	6.5E-04	8.7E-04	5.2E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
3033	6.3E-04	7.8E-04	7.9E-04	6.7E-04	7.3E-04	1.0E-03	5.4E-04	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02
3034	6.5E-04	7.2E-04	8.1E-04	6.4E-04	6.0E-04	6.3E-04	5.3E-04	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.4E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3035	6.9E-04	7.6E-04	8.2E-04	6.6E-04	6.1E-04	7.9E-04	5.5E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
3036	6.5E-04	7.2E-04	8.7E-04	6.3E-04	6.3E-04	5.6E-04	5.4E-04	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
3037	7.1E-04	7.8E-04	9.0E-04	6.6E-04	6.4E-04	7.2E-04	5.6E-04	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02
3038	5.4E-04	6.1E-04	7.9E-04	5.8E-04	6.3E-04	5.5E-04	5.2E-04	-8.7E-03	-9.1E-03	-9.1E-03	-9.1E-03	-9.1E-03	-9.1E-03
3039	5.9E-04	6.6E-04	8.3E-04	6.1E-04	6.4E-04	5.6E-04	5.3E-04	-8.1E-03	-8.4E-03	-8.3E-03	-8.3E-03	-8.3E-03	-8.3E-03
3040	6.6E-04	7.3E-04	9.1E-04	6.4E-04	6.8E-04	6.5E-04	5.5E-04	-7.8E-03	-8.0E-03	-7.8E-03	-7.6E-03	-7.4E-03	-7.2E-03
3041	7.6E-04	2.8E-03	4.6E-03	5.3E-03	5.5E-03	2.9E-03	2.7E-03	1.2E-02	-2.9E-04	-1.0E-02	-2.1E-02	-3.1E-02	-4.1E-02
3042	2.9E-04	9.6E-04	1.5E-03	1.8E-03	1.5E-03	9.3E-04	8.6E-04	-1.9E-02	-1.4E-02	-8.7E-03	-3.1E-03	2.5E-03	8.1E-03
3043	2.9E-04	8.2E-04	1.4E-03	1.5E-03	1.5E-03	9.1E-04	8.5E-04	-1.6E-02	-1.1E-02	-5.5E-03	-2.0E-04	5.1E-03	1.0E-02
3044	2.7E-04	7.8E-04	1.4E-03	1.5E-03	1.5E-03	8.8E-04	8.4E-04	-5.8E-03	-2.7E-03	7.6E-04	4.3E-03	7.8E-03	1.1E-02
3045	2.6E-04	7.9E-04	1.4E-03	1.5E-03	1.4E-03	8.5E-04	8.5E-04	6.2E-04	2.3E-03	4.4E-03	6.5E-03	8.6E-03	1.1E-02
3046	2.4E-04	7.7E-04	1.4E-03	1.5E-03	1.4E-03	8.6E-04	8.3E-04	2.9E-03	3.7E-03	5.0E-03	6.3E-03	7.6E-03	8.9E-03
3047	2.2E-04	7.0E-04	1.3E-03	1.4E-03	1.3E-03	1.0E-03	7.7E-04	1.2E-02	8.7E-03	5.8E-03	2.8E-03	-1.1E-04	-3.1E-03
3048	2.2E-04	8.2E-04	1.4E-03	1.6E-03	1.5E-03	1.2E-03	8.8E-04	1.5E-02	1.0E-02	6.1E-03	2.1E-03	-2.0E-03	-6.1E-03
3049	2.9E-04	1.0E-03	1.8E-03	2.0E-03	1.9E-03	1.5E-03	1.1E-03	1.6E-02	1.3E-02	9.9E-03	7.0E-03	4.0E-03	1.1E-03
3050	3.6E-04	1.1E-03	2.0E-03	2.3E-03	2.3E-03	1.7E-03	1.4E-03	1.7E-03	3.5E-03	5.9E-03	8.3E-03	1.1E-02	1.3E-02
3051	4.2E-04	1.3E-03	2.3E-03	2.6E-03	2.6E-03	1.9E-03	1.6E-03	3.0E-03	4.0E-03	5.7E-03	7.4E-03	9.2E-03	1.1E-02
3052	4.7E-04	1.4E-03	2.5E-03	2.8E-03	2.9E-03	2.1E-03	1.8E-03	-3.4E-03	-2.5E-03	-7.3E-04	1.0E-03	2.8E-03	4.6E-03
3053	4.9E-04	1.4E-03	2.6E-03	2.9E-03	3.2E-03	2.2E-03	2.0E-03	-3.5E-03	-9.9E-04	2.5E-03	5.9E-03	9.3E-03	1.3E-02
3054	3.8E-04	1.0E-03	1.8E-03	2.1E-03	1.4E-03	1.2E-03	1.2E-03	-7.2E-03	-7.2E-03	-6.8E-03	-6.4E-03	-6.0E-03	-5.6E-03
3055	3.5E-04	1.1E-03	1.8E-03	2.1E-03	1.4E-03	1.1E-03	1.1E-03	-1.2E-02	-1.1E-02	-1.0E-02	-9.3E-03	-8.3E-03	-7.4E-03
3056	3.1E-04	1.1E-03	1.8E-03	2.1E-03	1.4E-03	1.0E-03	1.0E-03	-1.5E-02	-1.3E-02	-1.1E-02	-9.5E-03	-7.6E-03	-5.6E-03
3057	3.0E-04	1.0E-03	1.7E-03	1.9E-03	1.5E-03	9.6E-04	9.1E-04	-1.9E-02	-1.4E-02	-8.7E-03	-3.3E-03	2.1E-03	7.5E-03
3058	3.0E-04	9.0E-04	1.4E-03	1.6E-03	1.5E-03	9.4E-04	8.8E-04	-1.8E-02	-1.2E-02	-6.6E-03	-8.7E-04	4.9E-03	1.1E-02
3059	2.8E-04	7.9E-04	1.5E-03	1.5E-03	1.5E-03	9.1E-04	8.5E-04	-6.5E-03	-3.5E-03	7.8E-05	3.6E-03	7.2E-03	1.1E-02
3060	2.7E-04	8.1E-04	1.5E-03	1.6E-03	1.4E-03	8.7E-04	8.7E-04	-8.9E-04	1.2E-03	3.7E-03	6.2E-03	8.8E-03	1.1E-02
3061	2.5E-04	7.9E-04	1.4E-03	1.6E-03	1.4E-03	8.8E-04	8.6E-04	2.9E-03	4.0E-03	5.5E-03	7.1E-03	8.6E-03	1.0E-02
3062	2.2E-04	7.2E-04	1.3E-03	1.4E-03	1.4E-03	1.0E-03	7.8E-04	1.1E-02	7.8E-03	5.4E-03	3.0E-03	6.6E-04	-1.7E-03
3063	2.2E-04	8.3E-04	1.5E-03	1.6E-03	1.5E-03	1.2E-03	8.9E-04	1.5E-02	1.0E-02	6.0E-03	1.8E-03	-2.3E-03	-6.4E-03
3064	2.9E-04	1.0E-03	1.8E-03	2.0E-03	1.9E-03	1.5E-03	1.1E-03	1.6E-02	1.2E-02	9.4E-03	6.4E-03	3.4E-03	4.4E-04
3065	3.6E-04	1.1E-03	2.1E-03	2.3E-03	2.3E-03	1.7E-03	1.4E-03	1.3E-03	3.1E-03	5.4E-03	7.7E-03	1.0E-02	1.2E-02
3066	4.2E-04	1.3E-03	2.3E-03	2.6E-03	2.6E-03	1.9E-03	1.6E-03	1.8E-03	2.9E-03	4.8E-03	6.6E-03	8.5E-03	1.0E-02
3067	4.8E-04	1.4E-03	2.5E-03	2.8E-03	3.0E-03	2.2E-03	1.9E-03	-4.1E-03	-3.4E-03	-1.8E-03	-1.3E-04	1.5E-03	3.1E-03
3068	5.0E-04	1.5E-03	2.6E-03	3.0E-03	3.3E-03	2.2E-03	2.0E-03	-3.7E-03	-1.4E-03	1.9E-03	5.2E-03	8.6E-03	1.2E-02
3069	4.9E-04	1.5E-03	2.5E-03	3.0E-03	3.2E-03	2.1E-03	2.0E-03	-5.9E-03	-5.0E-03	-3.0E-03	-1.1E-03	8.6E-04	2.8E-03
3070	4.5E-04	1.4E-03	2.4E-03	2.9E-03	3.1E-03	2.0E-03	1.8E-03	5.3E-03	3.8E-03	3.3E-03	2.9E-03	2.4E-03	1.9E-03
3071	4.5E-04	1.2E-03	2.1E-03	2.7E-03	2.8E-03	1.9E-03	1.6E-03	1.9E-02	1.3E-02	6.9E-03	1.2E-03	-4.5E-03	-1.0E-02
3072	4.8E-04	1.0E-03	2.0E-03	2.2E-03	1.9E-03	1.4E-03	1.4E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02	-9.9E-03	-9.5E-03
3073	4.6E-04	1.0E-03	2.0E-03	2.2E-03	1.7E-03	1.4E-03	1.3E-03	-8.0E-03	-8.3E-03	-8.0E-03	-7.7E-03	-7.5E-03	-7.2E-03
3074	4.1E-04	1.1E-03	1.9E-03	2.2E-03	1.6E-03	1.3E-03	1.2E-03	-6.4E-03	-6.5E-03	-6.2E-03	-5.8E-03	-5.5E-03	-5.2E-03
3075	3.7E-04	1.1E-03	1.9E-03	2.2E-03	1.5E-03	1.2E-03	1.2E-03	-1.1E-02	-1.1E-02	-9.9E-03	-9.0E-03	-8.2E-03	-7.4E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3076	3.3E-04	1.1E-03	1.9E-03	2.2E-03	1.4E-03	1.1E-03	1.1E-03	-1.4E-02	-1.3E-02	-1.1E-02	-9.5E-03	-8.0E-03	-6.4E-03
3077	3.2E-04	1.1E-03	1.8E-03	2.1E-03	1.5E-03	9.8E-04	9.8E-04	-1.8E-02	-1.4E-02	-1.0E-02	-5.6E-03	-1.1E-03	3.3E-03
3078	3.1E-04	1.0E-03	1.6E-03	1.8E-03	1.6E-03	9.9E-04	9.2E-04	-2.0E-02	-1.5E-02	-8.6E-03	-2.5E-03	3.6E-03	9.6E-03
3079	2.8E-04	8.1E-04	1.5E-03	1.5E-03	1.5E-03	9.4E-04	8.8E-04	-9.2E-03	-5.7E-03	-1.7E-03	2.3E-03	6.3E-03	1.0E-02
3080	2.8E-04	8.4E-04	1.5E-03	1.6E-03	1.5E-03	9.1E-04	9.0E-04	-2.5E-03	-6.1E-05	2.9E-03	5.9E-03	8.8E-03	1.2E-02
3081	2.6E-04	8.2E-04	1.5E-03	1.6E-03	1.4E-03	9.1E-04	8.9E-04	2.7E-03	4.0E-03	5.8E-03	7.6E-03	9.4E-03	1.1E-02
3082	2.3E-04	7.7E-04	1.4E-03	1.5E-03	1.4E-03	1.0E-03	8.4E-04	8.8E-03	6.5E-03	4.8E-03	3.0E-03	1.2E-03	-5.4E-04
3083	2.2E-04	8.5E-04	1.5E-03	1.7E-03	1.6E-03	1.3E-03	9.0E-04	1.5E-02	9.9E-03	5.8E-03	1.6E-03	-2.6E-03	-6.7E-03
3084	2.9E-04	1.0E-03	1.8E-03	2.1E-03	1.9E-03	1.5E-03	1.2E-03	1.5E-02	1.2E-02	8.8E-03	5.8E-03	2.7E-03	-4.0E-04
3085	3.7E-04	1.2E-03	2.1E-03	2.4E-03	2.4E-03	1.8E-03	1.4E-03	9.3E-04	2.5E-03	4.7E-03	7.0E-03	9.2E-03	1.1E-02
3086	4.4E-04	1.3E-03	2.4E-03	2.7E-03	2.8E-03	2.0E-03	1.7E-03	1.4E-03	2.3E-03	4.1E-03	5.8E-03	7.5E-03	9.3E-03
3087	4.8E-04	1.4E-03	2.5E-03	2.9E-03	3.1E-03	2.2E-03	1.9E-03	-4.0E-03	-3.3E-03	-1.7E-03	-1.2E-04	1.5E-03	3.0E-03
3088	5.1E-04	1.5E-03	2.6E-03	3.0E-03	3.3E-03	2.3E-03	2.0E-03	-3.8E-03	-1.7E-03	1.4E-03	4.5E-03	7.7E-03	1.1E-02
3089	4.9E-04	1.5E-03	2.6E-03	3.0E-03	3.4E-03	2.2E-03	2.0E-03	-6.4E-03	-5.6E-03	-3.7E-03	-1.8E-03	4.3E-05	1.9E-03
3090	4.6E-04	1.4E-03	2.4E-03	3.0E-03	3.3E-03	2.1E-03	1.9E-03	9.4E-03	6.3E-03	4.2E-03	2.2E-03	1.3E-04	-1.9E-03
3091	4.7E-04	1.3E-03	2.2E-03	2.8E-03	2.9E-03	2.0E-03	1.7E-03	1.8E-02	1.1E-02	5.1E-03	-1.1E-03	-7.3E-03	-1.4E-02
3092	4.5E-04	1.1E-03	2.0E-03	2.6E-03	2.8E-03	1.9E-03	1.7E-03	1.3E-02	6.1E-03	-3.5E-04	-6.8E-03	-1.3E-02	-2.0E-02
3093	4.2E-04	1.0E-03	2.1E-03	2.7E-03	2.8E-03	1.8E-03	1.6E-03	2.2E-03	-2.9E-03	-7.0E-03	-1.1E-02	-1.5E-02	-1.9E-02
3094	4.9E-04	1.1E-03	2.1E-03	2.1E-03	2.1E-03	1.4E-03	1.4E-03	-9.4E-03	-1.0E-02	-1.0E-02	-1.0E-02	-9.9E-03	-9.9E-03
3095	5.0E-04	1.1E-03	2.1E-03	2.2E-03	2.0E-03	1.5E-03	1.5E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
3096	4.8E-04	1.0E-03	2.0E-03	2.2E-03	1.8E-03	1.4E-03	1.4E-03	-1.0E-02	-1.0E-02	-1.0E-02	-9.6E-03	-9.3E-03	-8.9E-03
3097	4.3E-04	1.1E-03	2.0E-03	2.3E-03	1.6E-03	1.3E-03	1.3E-03	-6.2E-03	-6.5E-03	-6.4E-03	-6.2E-03	-6.0E-03	-5.8E-03
3098	4.0E-04	1.1E-03	2.0E-03	2.3E-03	1.6E-03	1.3E-03	1.3E-03	-1.0E-02	-9.6E-03	-8.7E-03	-7.7E-03	-6.8E-03	-5.9E-03
3099	3.6E-04	1.2E-03	2.0E-03	2.3E-03	1.4E-03	1.2E-03	1.2E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.6E-03	-7.1E-03
3100	3.3E-04	1.2E-03	1.9E-03	2.2E-03	1.5E-03	1.1E-03	1.1E-03	-1.7E-02	-1.5E-02	-1.2E-02	-8.6E-03	-5.5E-03	-2.4E-03
3101	3.2E-04	1.1E-03	1.7E-03	2.0E-03	1.6E-03	1.0E-03	9.4E-04	-2.1E-02	-1.5E-02	-9.4E-03	-3.5E-03	2.4E-03	8.3E-03
3102	2.8E-04	9.0E-04	1.5E-03	1.6E-03	1.6E-03	9.8E-04	9.1E-04	-1.5E-02	-9.9E-03	-4.8E-03	2.6E-04	5.4E-03	1.0E-02
3103	2.9E-04	8.7E-04	1.6E-03	1.7E-03	1.6E-03	9.6E-04	9.3E-04	-3.8E-03	-9.9E-04	2.3E-03	5.7E-03	9.0E-03	1.2E-02
3104	2.7E-04	8.6E-04	1.5E-03	1.7E-03	1.5E-03	9.3E-04	9.2E-04	1.4E-03	3.2E-03	5.5E-03	7.8E-03	1.0E-02	1.2E-02
3105	2.5E-04	8.0E-04	1.4E-03	1.6E-03	1.5E-03	1.0E-03	8.7E-04	6.9E-03	5.5E-03	4.5E-03	3.6E-03	2.7E-03	1.7E-03
3106	2.2E-04	8.4E-04	1.5E-03	1.7E-03	1.5E-03	1.2E-03	8.8E-04	1.4E-02	9.7E-03	5.7E-03	1.6E-03	-2.5E-03	-6.5E-03
3107	3.0E-04	1.1E-03	1.9E-03	2.1E-03	2.0E-03	1.5E-03	1.2E-03	1.5E-02	1.1E-02	8.4E-03	5.2E-03	2.1E-03	-9.8E-04
3108	3.7E-04	1.2E-03	2.2E-03	2.5E-03	2.4E-03	1.8E-03	1.5E-03	4.4E-04	1.9E-03	4.0E-03	6.1E-03	8.1E-03	1.0E-02
3109	4.4E-04	1.3E-03	2.4E-03	2.7E-03	2.8E-03	2.1E-03	1.8E-03	5.1E-04	1.5E-03	3.3E-03	5.0E-03	6.8E-03	8.6E-03
3110	4.9E-04	1.4E-03	2.6E-03	2.9E-03	3.2E-03	2.2E-03	2.0E-03	-3.7E-03	-2.9E-03	-1.3E-03	4.2E-04	2.1E-03	3.8E-03
3111	5.1E-04	1.5E-03	2.7E-03	3.1E-03	3.4E-03	2.3E-03	2.1E-03	-3.7E-03	-1.8E-03	1.1E-03	4.0E-03	6.9E-03	9.8E-03
3112	5.0E-04	1.5E-03	2.6E-03	3.1E-03	3.4E-03	2.3E-03	2.0E-03	-6.4E-03	-5.8E-03	-4.2E-03	-2.5E-03	-8.0E-04	8.9E-04
3113	4.8E-04	1.5E-03	2.5E-03	3.1E-03	3.3E-03	2.1E-03	1.9E-03	1.2E-02	7.7E-03	4.4E-03	1.1E-03	-2.2E-03	-5.5E-03
3114	4.9E-04	1.3E-03	2.3E-03	2.8E-03	3.0E-03	2.0E-03	1.7E-03	1.9E-02	1.1E-02	3.5E-03	-3.7E-03	-1.1E-02	-1.8E-02
3115	4.5E-04	1.2E-03	2.1E-03	2.7E-03	2.9E-03	1.9E-03	1.7E-03	1.2E-02	4.3E-03	-2.2E-03	-8.7E-03	-1.5E-02	-2.2E-02
3116	4.0E-04	1.1E-03	2.2E-03	2.8E-03	2.9E-03	1.8E-03	1.7E-03	-3.6E-03	-7.4E-03	-1.0E-02	-1.3E-02	-1.6E-02	-1.9E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3117	3.7E-04	1.1E-03	2.1E-03	2.8E-03	2.8E-03	1.7E-03	1.6E-03	-3.4E-02	-3.1E-02	-2.6E-02	-2.2E-02	-1.8E-02	-1.4E-02
3118	4.5E-04	1.1E-03	2.0E-03	1.9E-03	2.1E-03	1.6E-03	1.5E-03	-7.5E-03	-9.9E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.6E-02
3119	5.1E-04	1.1E-03	2.1E-03	2.0E-03	2.2E-03	1.5E-03	1.4E-03	-9.1E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02
3120	5.3E-04	1.1E-03	2.1E-03	2.2E-03	2.1E-03	1.5E-03	1.5E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02
3121	5.0E-04	1.0E-03	2.1E-03	2.2E-03	1.9E-03	1.5E-03	1.5E-03	-1.1E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02
3122	4.5E-04	1.1E-03	2.1E-03	2.3E-03	1.8E-03	1.4E-03	1.4E-03	-8.9E-03	-9.1E-03	-8.8E-03	-8.4E-03	-8.1E-03	-7.7E-03
3123	4.3E-04	1.2E-03	2.1E-03	2.4E-03	1.7E-03	1.4E-03	1.4E-03	-9.4E-03	-8.9E-03	-8.0E-03	-7.2E-03	-6.3E-03	-5.4E-03
3124	3.9E-04	1.2E-03	2.1E-03	2.4E-03	1.6E-03	1.3E-03	1.3E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.9E-03	-7.6E-03
3125	3.4E-04	1.2E-03	2.1E-03	2.3E-03	1.6E-03	1.1E-03	1.1E-03	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.9E-03	-5.7E-03
3126	3.3E-04	1.1E-03	1.8E-03	2.1E-03	1.6E-03	1.0E-03	9.6E-04	-2.0E-02	-1.5E-02	-9.3E-03	-3.7E-03	2.0E-03	7.6E-03
3127	2.9E-04	1.0E-03	1.6E-03	1.8E-03	1.7E-03	1.0E-03	9.5E-04	-1.8E-02	-1.3E-02	-6.5E-03	-3.5E-04	5.8E-03	1.2E-02
3128	3.0E-04	8.9E-04	1.7E-03	1.7E-03	1.7E-03	1.0E-03	9.5E-04	-4.7E-03	-1.5E-03	2.2E-03	5.9E-03	9.7E-03	1.3E-02
3129	2.9E-04	9.0E-04	1.6E-03	1.8E-03	1.6E-03	9.7E-04	9.6E-04	5.0E-04	2.6E-03	5.2E-03	7.7E-03	1.0E-02	1.3E-02
3130	2.6E-04	8.5E-04	1.5E-03	1.7E-03	1.6E-03	1.1E-03	9.3E-04	4.6E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.6E-03
3131	2.2E-04	8.3E-04	1.5E-03	1.7E-03	1.5E-03	1.2E-03	8.7E-04	1.4E-02	9.4E-03	5.5E-03	1.5E-03	-2.4E-03	-6.4E-03
3132	2.9E-04	1.0E-03	1.8E-03	2.1E-03	2.0E-03	1.5E-03	1.2E-03	1.5E-02	1.1E-02	8.1E-03	5.1E-03	2.1E-03	-8.5E-04
3133	3.7E-04	1.2E-03	2.1E-03	2.5E-03	2.4E-03	1.8E-03	1.5E-03	1.1E-04	1.4E-03	3.4E-03	5.4E-03	7.3E-03	9.3E-03
3134	4.5E-04	1.3E-03	2.4E-03	2.8E-03	2.9E-03	2.1E-03	1.8E-03	-2.7E-04	8.0E-04	2.7E-03	4.6E-03	6.4E-03	8.3E-03
3135	5.1E-04	1.5E-03	2.7E-03	3.1E-03	3.3E-03	2.4E-03	2.1E-03	-4.1E-03	-3.1E-03	-1.2E-03	7.6E-04	2.7E-03	4.6E-03
3136	5.2E-04	1.5E-03	2.7E-03	3.1E-03	3.5E-03	2.4E-03	2.1E-03	-3.9E-03	-2.2E-03	5.5E-04	3.3E-03	6.0E-03	8.8E-03
3137	5.2E-04	1.6E-03	2.7E-03	3.2E-03	3.6E-03	2.4E-03	2.1E-03	-6.3E-03	-6.0E-03	-4.6E-03	-3.2E-03	-1.8E-03	-3.9E-04
3138	5.1E-04	1.5E-03	2.6E-03	3.2E-03	3.4E-03	2.1E-03	1.9E-03	1.5E-02	9.2E-03	4.6E-03	4.3E-05	-4.5E-03	-9.1E-03
3139	6.0E-04	1.4E-03	2.3E-03	2.9E-03	3.0E-03	2.0E-03	1.8E-03	1.9E-02	9.8E-03	1.6E-03	-6.7E-03	-1.5E-02	-2.3E-02
3140	5.3E-04	1.2E-03	2.2E-03	2.9E-03	3.0E-03	1.9E-03	1.7E-03	1.0E-02	2.5E-03	-4.1E-03	-1.1E-02	-1.7E-02	-2.4E-02
3141	4.2E-04	1.2E-03	2.5E-03	3.2E-03	3.2E-03	1.9E-03	1.7E-03	-1.1E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02
3142	4.5E-04	1.3E-03	2.4E-03	3.0E-03	3.1E-03	1.7E-03	1.6E-03	-4.1E-02	-3.7E-02	-3.2E-02	-2.7E-02	-2.1E-02	-1.6E-02
3143	4.2E-04	1.1E-03	1.9E-03	2.5E-03	2.6E-03	1.5E-03	1.4E-03	-3.6E-02	-3.3E-02	-2.9E-02	-2.6E-02	-2.2E-02	-1.8E-02
3144	4.0E-04	1.0E-03	1.7E-03	2.1E-03	2.1E-03	1.4E-03	1.2E-03	-2.8E-02	-2.8E-02	-2.6E-02	-2.5E-02	-2.3E-02	-2.2E-02
3145	3.9E-04	1.1E-03	1.9E-03	2.1E-03	2.2E-03	1.7E-03	1.6E-03	-9.3E-03	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02
3146	4.6E-04	1.2E-03	2.1E-03	2.1E-03	2.3E-03	1.7E-03	1.6E-03	-9.0E-03	-1.2E-02	-1.3E-02	-1.5E-02	-1.6E-02	-1.8E-02
3147	5.3E-04	1.1E-03	2.2E-03	2.1E-03	2.3E-03	1.6E-03	1.5E-03	-8.2E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.5E-02
3148	5.4E-04	1.1E-03	2.1E-03	2.1E-03	2.2E-03	1.5E-03	1.5E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02	-9.9E-03
3149	5.3E-04	1.1E-03	2.2E-03	2.3E-03	2.1E-03	1.6E-03	1.5E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02
3150	4.9E-04	1.1E-03	2.2E-03	2.4E-03	1.9E-03	1.5E-03	1.5E-03	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02
3151	4.6E-04	1.2E-03	2.2E-03	2.5E-03	1.8E-03	1.5E-03	1.5E-03	-8.6E-03	-8.3E-03	-7.6E-03	-6.8E-03	-6.1E-03	-5.3E-03
3152	4.2E-04	1.3E-03	2.3E-03	2.5E-03	1.7E-03	1.4E-03	1.4E-03	-1.4E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.9E-03	-7.6E-03
3153	3.6E-04	1.3E-03	2.2E-03	2.5E-03	1.6E-03	1.2E-03	1.2E-03	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.5E-03	-6.6E-03
3154	3.4E-04	1.2E-03	2.0E-03	2.3E-03	1.7E-03	1.1E-03	1.0E-03	-2.0E-02	-1.5E-02	-1.1E-02	-6.0E-03	-1.3E-03	3.4E-03
3155	3.1E-04	1.1E-03	1.7E-03	2.0E-03	1.7E-03	1.1E-03	1.0E-03	-2.1E-02	-1.5E-02	-8.4E-03	-2.0E-03	4.5E-03	1.1E-02
3156	3.1E-04	9.2E-04	1.7E-03	1.8E-03	1.7E-03	1.0E-03	9.8E-04	-6.4E-03	-2.7E-03	1.5E-03	5.7E-03	9.9E-03	1.4E-02
3157	3.0E-04	9.4E-04	1.7E-03	1.8E-03	1.7E-03	1.0E-03	1.0E-03	-3.1E-04	1.9E-03	4.6E-03	7.4E-03	1.0E-02	1.3E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3158	2.8E-04	8.9E-04	1.6E-03	1.8E-03	1.6E-03	1.1E-03	9.7E-04	2.4E-03	3.0E-03	4.1E-03	5.2E-03	6.3E-03	7.5E-03
3159	2.3E-04	8.6E-04	1.6E-03	1.7E-03	1.6E-03	1.3E-03	8.8E-04	1.4E-02	9.2E-03	5.3E-03	1.3E-03	-2.6E-03	-6.5E-03
3160	2.9E-04	1.0E-03	1.8E-03	2.1E-03	2.0E-03	1.5E-03	1.2E-03	1.4E-02	1.1E-02	7.7E-03	4.8E-03	1.9E-03	-1.0E-03
3161	3.7E-04	1.2E-03	2.2E-03	2.5E-03	2.4E-03	1.8E-03	1.5E-03	-6.2E-04	6.3E-04	2.5E-03	4.4E-03	6.3E-03	8.2E-03
3162	4.5E-04	1.3E-03	2.4E-03	2.8E-03	2.9E-03	2.1E-03	1.8E-03	-1.2E-03	-3.0E-05	1.9E-03	3.8E-03	5.8E-03	7.7E-03
3163	5.2E-04	1.5E-03	2.7E-03	3.1E-03	3.4E-03	2.4E-03	2.1E-03	-4.3E-03	-3.1E-03	-9.7E-04	1.2E-03	3.4E-03	5.5E-03
3164	5.5E-04	1.6E-03	2.9E-03	3.3E-03	3.7E-03	2.5E-03	2.3E-03	-4.4E-03	-2.9E-03	-1.7E-04	2.5E-03	5.2E-03	7.9E-03
3165	5.5E-04	1.7E-03	2.9E-03	3.4E-03	3.7E-03	2.4E-03	2.3E-03	-5.3E-03	-5.5E-03	-4.5E-03	-3.5E-03	-2.5E-03	-1.5E-03
3166	6.8E-04	1.7E-03	2.8E-03	3.5E-03	3.6E-03	2.2E-03	2.0E-03	1.8E-02	1.1E-02	5.2E-03	-5.3E-04	-6.3E-03	-1.2E-02
3167	6.3E-04	1.6E-03	2.6E-03	3.3E-03	3.4E-03	2.0E-03	1.8E-03	1.8E-02	7.9E-03	-6.3E-04	-9.2E-03	-1.8E-02	-2.6E-02
3168	5.0E-04	1.3E-03	2.5E-03	3.2E-03	3.2E-03	2.0E-03	1.8E-03	8.5E-03	8.1E-04	-5.8E-03	-1.2E-02	-1.9E-02	-2.6E-02
3169	4.8E-04	1.4E-03	2.7E-03	3.4E-03	3.4E-03	1.9E-03	1.8E-03	-2.1E-02	-2.1E-02	-1.9E-02	-1.8E-02	-1.7E-02	-1.6E-02
3170	5.3E-04	1.4E-03	2.5E-03	3.2E-03	3.2E-03	1.8E-03	1.7E-03	-4.4E-02	-3.9E-02	-3.4E-02	-2.8E-02	-2.3E-02	-1.7E-02
3171	4.7E-04	1.2E-03	2.0E-03	2.6E-03	2.6E-03	1.5E-03	1.4E-03	-3.8E-02	-3.6E-02	-3.3E-02	-3.0E-02	-2.7E-02	-2.4E-02
3172	4.4E-04	1.1E-03	1.8E-03	2.0E-03	2.0E-03	1.5E-03	1.1E-03	-2.7E-02	-2.8E-02	-2.9E-02	-2.9E-02	-2.9E-02	-2.9E-02
3173	4.8E-04	9.7E-04	1.6E-03	1.9E-03	2.3E-03	1.7E-03	1.2E-03	-3.6E-02	-3.7E-02	-3.7E-02	-3.8E-02	-3.8E-02	-3.9E-02
3174	3.7E-04	1.1E-03	1.9E-03	2.2E-03	2.2E-03	1.7E-03	1.6E-03	-8.0E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02
3175	4.5E-04	1.2E-03	2.1E-03	2.2E-03	2.3E-03	1.7E-03	1.6E-03	-1.0E-02	-1.2E-02	-1.3E-02	-1.5E-02	-1.6E-02	-1.7E-02
3176	5.4E-04	1.1E-03	2.2E-03	2.1E-03	2.3E-03	1.7E-03	1.6E-03	-9.8E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.9E-02
3177	5.7E-04	1.1E-03	2.2E-03	2.1E-03	2.3E-03	1.5E-03	1.5E-03	-9.1E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02
3178	5.5E-04	1.1E-03	2.2E-03	2.3E-03	2.2E-03	1.6E-03	1.6E-03	-1.3E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02
3179	5.2E-04	1.1E-03	2.3E-03	2.5E-03	2.1E-03	1.6E-03	1.6E-03	-1.3E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02
3180	5.0E-04	1.2E-03	2.3E-03	2.6E-03	1.9E-03	1.6E-03	1.6E-03	-1.1E-02	-1.1E-02	-1.0E-02	-9.2E-03	-8.3E-03	-7.4E-03
3181	4.6E-04	1.3E-03	2.3E-03	2.7E-03	1.8E-03	1.5E-03	1.5E-03	-1.3E-02	-1.2E-02	-1.0E-02	-8.8E-03	-7.2E-03	-5.6E-03
3182	4.0E-04	1.4E-03	2.3E-03	2.6E-03	1.6E-03	1.3E-03	1.3E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.2E-03	-7.3E-03
3183	3.5E-04	1.3E-03	2.2E-03	2.5E-03	1.7E-03	1.1E-03	1.1E-03	-1.9E-02	-1.7E-02	-1.3E-02	-9.7E-03	-6.2E-03	-2.8E-03
3184	3.2E-04	1.2E-03	2.0E-03	2.2E-03	1.8E-03	1.1E-03	1.0E-03	-2.2E-02	-1.7E-02	-1.0E-02	-3.4E-03	3.1E-03	9.7E-03
3185	3.2E-04	1.0E-03	1.8E-03	1.8E-03	1.8E-03	1.1E-03	1.0E-03	-1.0E-02	-5.8E-03	-7.1E-04	4.3E-03	9.4E-03	1.4E-02
3186	3.2E-04	9.8E-04	1.8E-03	1.9E-03	1.8E-03	1.1E-03	1.0E-03	-1.6E-03	8.1E-04	3.8E-03	6.8E-03	9.8E-03	1.3E-02
3187	2.9E-04	9.5E-04	1.7E-03	1.9E-03	1.7E-03	1.1E-03	1.0E-03	-1.8E-04	1.2E-03	3.2E-03	5.1E-03	7.1E-03	9.0E-03
3188	2.4E-04	8.9E-04	1.6E-03	1.8E-03	1.6E-03	1.3E-03	9.1E-04	1.3E-02	9.2E-03	5.5E-03	1.8E-03	-1.9E-03	-5.6E-03
3189	3.0E-04	1.1E-03	1.9E-03	2.2E-03	2.0E-03	1.5E-03	1.2E-03	1.4E-02	1.0E-02	7.1E-03	4.2E-03	1.3E-03	-1.7E-03
3190	3.8E-04	1.2E-03	2.2E-03	2.6E-03	2.5E-03	1.9E-03	1.5E-03	-1.4E-03	-1.8E-04	1.7E-03	3.5E-03	5.4E-03	7.2E-03
3191	4.6E-04	1.3E-03	2.4E-03	2.8E-03	3.0E-03	2.2E-03	1.9E-03	-2.2E-03	-1.2E-03	6.5E-04	2.5E-03	4.3E-03	6.1E-03
3192	5.3E-04	1.5E-03	2.8E-03	3.2E-03	3.5E-03	2.5E-03	2.2E-03	-4.7E-03	-3.3E-03	-9.4E-04	1.4E-03	3.8E-03	6.2E-03
3193	5.8E-04	1.7E-03	3.0E-03	3.4E-03	3.9E-03	2.7E-03	2.4E-03	-5.5E-03	-4.0E-03	-1.4E-03	1.2E-03	3.9E-03	6.5E-03
3194	5.8E-04	1.7E-03	3.0E-03	3.5E-03	3.8E-03	2.5E-03	2.3E-03	-1.5E-03	-3.2E-03	-3.7E-03	-4.2E-03	-4.6E-03	-5.1E-03
3195	7.2E-04	1.9E-03	3.0E-03	3.8E-03	3.9E-03	2.2E-03	2.0E-03	2.0E-02	1.2E-02	5.0E-03	-1.6E-03	-8.3E-03	-1.5E-02
3196	5.9E-04	1.7E-03	2.7E-03	3.4E-03	3.5E-03	2.0E-03	1.8E-03	1.5E-02	5.7E-03	-2.8E-03	-1.1E-02	-2.0E-02	-2.8E-02
3197	4.7E-04	1.3E-03	2.7E-03	3.4E-03	3.4E-03	2.0E-03	1.9E-03	5.2E-03	-1.9E-03	-7.9E-03	-1.4E-02	-2.0E-02	-2.6E-02
3198	5.4E-04	1.4E-03	2.8E-03	3.5E-03	3.6E-03	2.0E-03	1.8E-03	-3.0E-02	-2.8E-02	-2.5E-02	-2.1E-02	-1.8E-02	-1.5E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3199	5.5E-04	1.4E-03	2.5E-03	3.2E-03	3.3E-03	1.8E-03	1.7E-03	-4.5E-02	-4.1E-02	-3.5E-02	-3.0E-02	-2.4E-02	-1.9E-02
3200	4.7E-04	1.3E-03	2.0E-03	2.5E-03	2.6E-03	1.5E-03	1.4E-03	-3.8E-02	-3.6E-02	-3.4E-02	-3.1E-02	-2.9E-02	-2.7E-02
3201	5.5E-04	1.2E-03	1.9E-03	2.0E-03	2.2E-03	1.6E-03	1.2E-03	-3.3E-02	-3.4E-02	-3.4E-02	-3.4E-02	-3.4E-02	-3.4E-02
3202	5.4E-04	9.7E-04	1.7E-03	2.1E-03	2.5E-03	1.7E-03	1.3E-03	-4.1E-02	-4.2E-02	-4.3E-02	-4.4E-02	-4.5E-02	-4.6E-02
3203	3.1E-04	9.9E-04	1.8E-03	2.0E-03	1.8E-03	1.1E-03	1.0E-03	-2.9E-03	-7.1E-04	2.1E-03	4.8E-03	7.6E-03	1.0E-02
3204	2.6E-04	9.3E-04	1.7E-03	1.9E-03	1.7E-03	1.3E-03	9.7E-04	1.2E-02	8.5E-03	5.3E-03	2.1E-03	-1.1E-03	-4.3E-03
3205	3.1E-04	1.1E-03	2.0E-03	2.3E-03	2.0E-03	1.6E-03	1.2E-03	1.3E-02	9.6E-03	6.6E-03	3.6E-03	5.6E-04	-2.4E-03
3206	3.9E-04	1.2E-03	2.3E-03	2.6E-03	2.6E-03	1.9E-03	1.6E-03	-2.4E-03	-1.2E-03	6.2E-04	2.5E-03	4.3E-03	6.2E-03
3207	4.8E-04	1.4E-03	2.6E-03	3.0E-03	3.1E-03	2.3E-03	2.0E-03	-3.7E-03	-2.8E-03	-1.0E-03	7.5E-04	2.5E-03	4.3E-03
3208	5.7E-04	1.6E-03	2.9E-03	3.3E-03	3.7E-03	2.7E-03	2.4E-03	-5.3E-03	-3.7E-03	-1.1E-03	1.6E-03	4.3E-03	7.0E-03
3209	6.1E-04	1.8E-03	3.1E-03	3.6E-03	4.1E-03	2.8E-03	2.6E-03	-6.6E-03	-5.4E-03	-2.9E-03	-3.8E-04	2.1E-03	4.6E-03
3210	7.5E-04	2.0E-03	3.3E-03	3.9E-03	4.1E-03	2.5E-03	2.3E-03	1.9E-03	-1.5E-03	-3.5E-03	-5.5E-03	-7.5E-03	-9.5E-03
3211	6.9E-04	2.0E-03	3.2E-03	4.0E-03	4.1E-03	2.2E-03	2.0E-03	2.2E-02	1.2E-02	3.5E-03	-5.2E-03	-1.4E-02	-2.2E-02
3212	5.0E-04	1.8E-03	2.8E-03	3.5E-03	3.6E-03	2.1E-03	1.9E-03	1.4E-02	4.0E-03	-4.7E-03	-1.3E-02	-2.2E-02	-3.1E-02
3213	5.5E-04	1.3E-03	2.9E-03	3.6E-03	3.6E-03	2.1E-03	1.9E-03	-2.2E-03	-7.6E-03	-1.2E-02	-1.6E-02	-2.0E-02	-2.4E-02
3214	5.7E-04	1.5E-03	2.9E-03	3.7E-03	3.7E-03	2.0E-03	1.9E-03	-4.0E-02	-3.7E-02	-3.2E-02	-2.7E-02	-2.2E-02	-1.8E-02
3215	5.2E-04	1.4E-03	2.5E-03	3.2E-03	3.3E-03	1.8E-03	1.7E-03	-4.5E-02	-4.1E-02	-3.6E-02	-3.1E-02	-2.6E-02	-2.0E-02
3216	5.5E-04	1.3E-03	2.1E-03	2.5E-03	2.6E-03	1.5E-03	1.4E-03	-3.5E-02	-3.6E-02	-3.5E-02	-3.4E-02	-3.4E-02	-3.3E-02
3217	5.8E-04	1.2E-03	1.9E-03	2.0E-03	2.4E-03	1.7E-03	1.3E-03	-4.0E-02	-4.1E-02	-4.0E-02	-4.0E-02	-3.9E-02	-3.9E-02
3218	5.6E-04	9.8E-04	1.9E-03	2.3E-03	2.7E-03	1.8E-03	1.4E-03	-4.3E-02	-4.5E-02	-4.7E-02	-4.9E-02	-5.0E-02	-5.2E-02
3219	4.3E-04	9.1E-04	1.7E-03	2.2E-03	2.5E-03	1.8E-03	1.4E-03	-3.6E-02	-3.8E-02	-3.9E-02	-4.0E-02	-4.2E-02	-4.3E-02
3220	3.6E-04	1.2E-03	2.0E-03	2.4E-03	2.1E-03	1.6E-03	1.2E-03	1.3E-02	9.2E-03	6.1E-03	2.9E-03	-2.1E-04	-3.4E-03
3221	4.5E-04	1.3E-03	2.3E-03	2.7E-03	2.6E-03	2.0E-03	1.6E-03	-3.5E-03	-2.4E-03	-5.3E-04	1.3E-03	3.2E-03	5.0E-03
3222	5.3E-04	1.5E-03	2.7E-03	3.2E-03	3.3E-03	2.5E-03	2.1E-03	-5.5E-03	-4.8E-03	-3.1E-03	-1.4E-03	3.1E-04	2.0E-03
3223	6.1E-04	1.7E-03	3.1E-03	3.5E-03	4.0E-03	2.9E-03	2.7E-03	-5.9E-03	-4.1E-03	-1.1E-03	1.8E-03	4.8E-03	7.8E-03
3224	7.5E-04	1.9E-03	3.3E-03	3.7E-03	4.2E-03	2.9E-03	2.7E-03	-7.5E-03	-6.5E-03	-4.3E-03	-2.0E-03	2.4E-04	2.5E-03
3225	7.8E-04	2.2E-03	3.6E-03	4.1E-03	4.4E-03	2.5E-03	2.4E-03	5.3E-03	2.8E-04	-3.4E-03	-7.0E-03	-1.1E-02	-1.4E-02
3226	6.0E-04	2.1E-03	3.4E-03	4.2E-03	4.3E-03	2.2E-03	2.1E-03	2.2E-02	1.0E-02	-5.5E-04	-1.1E-02	-2.2E-02	-3.2E-02
3227	5.5E-04	1.9E-03	2.9E-03	3.6E-03	3.8E-03	2.1E-03	1.9E-03	1.2E-02	2.0E-03	-6.7E-03	-1.5E-02	-2.4E-02	-3.3E-02
3228	6.0E-04	1.4E-03	3.0E-03	3.8E-03	3.8E-03	2.2E-03	2.0E-03	-1.3E-02	-1.6E-02	-1.7E-02	-1.9E-02	-2.1E-02	-2.2E-02
3229	5.6E-04	1.6E-03	3.0E-03	3.8E-03	3.8E-03	2.1E-03	1.9E-03	-5.0E-02	-4.5E-02	-3.9E-02	-3.3E-02	-2.7E-02	-2.1E-02
3230	5.6E-04	1.5E-03	2.5E-03	3.2E-03	3.3E-03	1.8E-03	1.7E-03	-4.6E-02	-4.3E-02	-3.8E-02	-3.4E-02	-3.0E-02	-2.6E-02
3231	6.2E-04	1.3E-03	2.1E-03	2.4E-03	2.5E-03	1.6E-03	1.4E-03	-3.9E-02	-4.0E-02	-3.9E-02	-3.9E-02	-3.9E-02	-3.8E-02
3232	5.9E-04	1.2E-03	1.9E-03	2.1E-03	2.6E-03	1.8E-03	1.3E-03	-4.6E-02	-4.7E-02	-4.7E-02	-4.7E-02	-4.7E-02	-4.7E-02
3233	5.2E-04	1.0E-03	2.0E-03	2.4E-03	2.8E-03	1.9E-03	1.4E-03	-4.2E-02	-4.4E-02	-4.5E-02	-4.6E-02	-4.8E-02	-4.9E-02
3234	4.3E-04	9.6E-04	1.8E-03	2.3E-03	2.6E-03	1.8E-03	1.4E-03	-3.6E-02	-3.7E-02	-3.8E-02	-3.9E-02	-4.0E-02	-4.0E-02
3235	6.4E-04	1.8E-03	3.2E-03	3.7E-03	4.2E-03	3.0E-03	2.8E-03	-6.2E-03	-4.4E-03	-1.3E-03	1.7E-03	4.7E-03	7.7E-03
3236	8.4E-04	2.1E-03	3.5E-03	4.0E-03	4.5E-03	2.9E-03	2.8E-03	-8.3E-03	-7.8E-03	-6.0E-03	-4.1E-03	-2.3E-03	-4.2E-04
3237	7.2E-04	2.4E-03	3.8E-03	4.3E-03	4.5E-03	2.6E-03	2.4E-03	9.0E-03	2.2E-03	-3.2E-03	-8.6E-03	-1.4E-02	-1.9E-02
3238	5.8E-04	2.2E-03	3.5E-03	4.4E-03	4.5E-03	2.3E-03	2.2E-03	2.0E-02	7.2E-03	-3.8E-03	-1.5E-02	-2.6E-02	-3.7E-02
3239	6.3E-04	1.9E-03	3.0E-03	3.8E-03	3.9E-03	2.2E-03	2.0E-03	8.8E-03	-9.2E-04	-9.3E-03	-1.8E-02	-2.6E-02	-3.5E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3240	6.0E-04	1.5E-03	3.2E-03	3.9E-03	4.0E-03	2.2E-03	2.1E-03	-2.5E-02	-2.5E-02	-2.3E-02	-2.2E-02	-2.1E-02	-1.9E-02
3241	5.5E-04	1.6E-03	3.1E-03	3.8E-03	3.9E-03	2.1E-03	2.0E-03	-5.7E-02	-5.1E-02	-4.4E-02	-3.7E-02	-2.9E-02	-2.2E-02
3242	6.2E-04	1.5E-03	2.5E-03	3.2E-03	3.3E-03	1.9E-03	1.7E-03	-4.7E-02	-4.6E-02	-4.3E-02	-4.1E-02	-3.8E-02	-3.6E-02
3243	6.2E-04	1.4E-03	2.2E-03	2.4E-03	2.5E-03	1.7E-03	1.4E-03	-4.5E-02	-4.5E-02	-4.4E-02	-4.2E-02	-4.1E-02	-4.0E-02
3244	5.5E-04	1.1E-03	1.9E-03	2.3E-03	2.8E-03	1.9E-03	1.4E-03	-4.8E-02	-5.0E-02	-5.1E-02	-5.2E-02	-5.3E-02	-5.4E-02
3245	4.6E-04	1.1E-03	2.0E-03	2.5E-03	2.9E-03	1.9E-03	1.5E-03	-3.8E-02	-4.1E-02	-4.2E-02	-4.4E-02	-4.5E-02	-4.7E-02
3246	4.5E-04	9.8E-04	1.8E-03	2.3E-03	2.6E-03	1.8E-03	1.5E-03	-3.7E-02	-3.9E-02	-3.9E-02	-4.0E-02	-4.1E-02	-4.1E-02
3247	3.9E-04	9.3E-04	1.7E-03	2.1E-03	2.5E-03	1.7E-03	1.3E-03	-2.9E-02	-3.1E-02	-3.3E-02	-3.4E-02	-3.6E-02	-3.7E-02
3248	8.4E-04	1.8E-03	3.3E-03	3.7E-03	4.3E-03	3.1E-03	2.9E-03	-6.4E-03	-4.8E-03	-1.9E-03	9.8E-04	3.9E-03	6.8E-03
3249	8.4E-04	2.1E-03	3.7E-03	4.1E-03	4.5E-03	3.0E-03	2.8E-03	-8.6E-03	-8.5E-03	-6.9E-03	-5.3E-03	-3.7E-03	-2.2E-03
3250	6.8E-04	2.5E-03	4.0E-03	4.6E-03	4.7E-03	2.6E-03	2.5E-03	1.1E-02	3.2E-03	-3.1E-03	-9.5E-03	-1.6E-02	-2.2E-02
3251	6.3E-04	2.3E-03	3.7E-03	4.6E-03	4.8E-03	2.4E-03	2.2E-03	1.7E-02	4.9E-03	-6.1E-03	-1.7E-02	-2.8E-02	-3.9E-02
3252	6.6E-04	2.0E-03	3.1E-03	3.8E-03	4.0E-03	2.3E-03	2.1E-03	2.0E-03	-6.4E-03	-1.4E-02	-2.1E-02	-2.8E-02	-3.5E-02
3253	5.6E-04	1.6E-03	3.3E-03	4.1E-03	4.1E-03	2.3E-03	2.1E-03	-3.7E-02	-3.4E-02	-3.1E-02	-2.7E-02	-2.3E-02	-1.9E-02
3254	6.0E-04	1.6E-03	3.0E-03	3.8E-03	3.9E-03	2.2E-03	2.0E-03	-5.6E-02	-5.0E-02	-4.3E-02	-3.6E-02	-2.9E-02	-2.1E-02
3255	6.3E-04	1.4E-03	2.5E-03	3.2E-03	3.3E-03	1.9E-03	1.7E-03	-4.8E-02	-4.8E-02	-4.6E-02	-4.5E-02	-4.4E-02	-4.3E-02
3256	5.7E-04	1.3E-03	2.2E-03	2.4E-03	2.5E-03	1.8E-03	1.4E-03	-5.0E-02	-5.0E-02	-4.9E-02	-4.8E-02	-4.7E-02	-4.6E-02
3257	4.7E-04	1.1E-03	2.0E-03	2.4E-03	2.9E-03	2.0E-03	1.5E-03	-4.6E-02	-4.7E-02	-4.8E-02	-4.9E-02	-5.0E-02	-5.1E-02
3258	4.5E-04	1.1E-03	2.0E-03	2.5E-03	2.9E-03	2.0E-03	1.5E-03	-4.1E-02	-4.2E-02	-4.2E-02	-4.3E-02	-4.3E-02	-4.4E-02
3259	4.0E-04	9.5E-04	1.8E-03	2.3E-03	2.5E-03	1.8E-03	1.5E-03	-3.5E-02	-3.7E-02	-3.9E-02	-4.0E-02	-4.1E-02	-4.3E-02
3260	3.9E-04	1.0E-03	1.8E-03	2.1E-03	2.6E-03	1.8E-03	1.4E-03	-2.9E-02	-3.2E-02	-3.3E-02	-3.4E-02	-3.6E-02	-3.7E-02
3261	7.6E-04	2.2E-03	3.8E-03	4.2E-03	4.6E-03	3.0E-03	2.9E-03	-8.9E-03	-9.7E-03	-9.1E-03	-8.4E-03	-7.7E-03	-7.0E-03
3262	7.1E-04	2.6E-03	4.2E-03	4.8E-03	5.0E-03	2.7E-03	2.5E-03	1.1E-02	2.9E-03	-4.0E-03	-1.1E-02	-1.8E-02	-2.5E-02
3263	7.0E-04	2.4E-03	3.8E-03	4.8E-03	5.0E-03	2.5E-03	2.3E-03	1.5E-02	2.0E-03	-9.3E-03	-2.1E-02	-3.2E-02	-4.3E-02
3264	6.4E-04	2.0E-03	3.2E-03	4.0E-03	4.2E-03	2.4E-03	2.2E-03	-7.4E-03	-1.4E-02	-1.8E-02	-2.3E-02	-2.8E-02	-3.3E-02
3265	5.9E-04	1.6E-03	3.3E-03	4.1E-03	4.2E-03	2.4E-03	2.2E-03	-4.8E-02	-4.4E-02	-3.8E-02	-3.3E-02	-2.7E-02	-2.1E-02
3266	4.7E-04	1.5E-03	2.8E-03	3.6E-03	3.7E-03	2.2E-03	2.0E-03	-5.2E-02	-4.8E-02	-4.2E-02	-3.7E-02	-3.1E-02	-2.6E-02
3267	4.4E-04	1.3E-03	2.4E-03	3.1E-03	3.2E-03	1.8E-03	1.7E-03	-4.9E-02	-4.8E-02	-4.6E-02	-4.5E-02	-4.3E-02	-4.1E-02
3268	4.8E-04	1.2E-03	2.1E-03	2.4E-03	2.6E-03	1.9E-03	1.4E-03	-5.3E-02	-5.4E-02	-5.3E-02	-5.3E-02	-5.3E-02	-5.3E-02
3269	4.1E-04	1.1E-03	1.9E-03	2.4E-03	2.8E-03	2.0E-03	1.6E-03	-4.1E-02	-4.3E-02	-4.4E-02	-4.6E-02	-4.7E-02	-4.8E-02
3270	3.8E-04	9.7E-04	1.9E-03	2.4E-03	2.7E-03	2.0E-03	1.6E-03	-4.0E-02	-4.2E-02	-4.3E-02	-4.4E-02	-4.5E-02	-4.6E-02
3271	3.8E-04	9.4E-04	1.8E-03	2.2E-03	2.6E-03	1.8E-03	1.5E-03	-3.1E-02	-3.4E-02	-3.6E-02	-3.7E-02	-3.9E-02	-4.1E-02
3272	3.4E-04	1.3E-03	2.1E-03	2.2E-03	2.6E-03	1.9E-03	1.4E-03	-2.9E-02	-3.1E-02	-3.2E-02	-3.2E-02	-3.3E-02	-3.4E-02
3273	7.0E-04	2.4E-03	4.0E-03	5.0E-03	5.2E-03	2.5E-03	2.4E-03	1.0E-02	-2.4E-03	-1.3E-02	-2.4E-02	-3.5E-02	-4.6E-02
3274	6.6E-04	2.0E-03	3.3E-03	4.2E-03	4.2E-03	2.5E-03	2.3E-03	-2.0E-02	-2.3E-02	-2.4E-02	-2.6E-02	-2.7E-02	-2.9E-02
3275	6.7E-04	1.8E-03	3.5E-03	4.4E-03	4.4E-03	2.5E-03	2.3E-03	-5.8E-02	-5.3E-02	-4.5E-02	-3.8E-02	-3.1E-02	-2.4E-02
3276	4.9E-04	1.5E-03	2.9E-03	3.7E-03	3.8E-03	2.2E-03	2.0E-03	-5.4E-02	-5.2E-02	-4.9E-02	-4.5E-02	-4.2E-02	-3.8E-02
3277	4.4E-04	1.3E-03	2.3E-03	3.1E-03	3.2E-03	1.8E-03	1.7E-03	-5.3E-02	-5.2E-02	-5.0E-02	-4.8E-02	-4.6E-02	-4.3E-02
3278	4.2E-04	1.2E-03	2.1E-03	2.3E-03	2.7E-03	2.0E-03	1.5E-03	-4.6E-02	-4.8E-02	-4.9E-02	-5.0E-02	-5.1E-02	-5.2E-02
3279	3.7E-04	1.1E-03	2.0E-03	2.5E-03	2.9E-03	2.0E-03	1.6E-03	-4.3E-02	-4.5E-02	-4.6E-02	-4.7E-02	-4.8E-02	-4.9E-02
3280	3.5E-04	9.9E-04	1.9E-03	2.4E-03	2.8E-03	2.0E-03	1.6E-03	-3.4E-02	-3.7E-02	-3.9E-02	-4.0E-02	-4.2E-02	-4.4E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3281	3.4E-04	1.1E-03	1.8E-03	2.2E-03	2.5E-03	1.8E-03	1.4E-03	-3.1E-02	-3.3E-02	-3.4E-02	-3.4E-02	-3.5E-02	-3.6E-02
3282	4.0E-04	1.4E-03	2.3E-03	2.4E-03	2.5E-03	1.9E-03	1.4E-03	-2.9E-02	-3.0E-02	-3.0E-02	-3.0E-02	-3.1E-02	-3.1E-02
3283	6.6E-04	2.5E-03	4.1E-03	5.2E-03	5.4E-03	2.6E-03	2.5E-03	2.1E-03	-9.0E-03	-1.8E-02	-2.8E-02	-3.7E-02	-4.7E-02
3284	7.7E-04	2.0E-03	3.6E-03	4.6E-03	4.6E-03	2.6E-03	2.4E-03	-3.6E-02	-3.4E-02	-3.1E-02	-2.8E-02	-2.5E-02	-2.2E-02
3285	7.2E-04	1.9E-03	3.8E-03	4.6E-03	4.7E-03	2.5E-03	2.4E-03	-6.7E-02	-6.0E-02	-5.2E-02	-4.4E-02	-3.6E-02	-2.7E-02
3286	5.0E-04	1.6E-03	2.9E-03	3.7E-03	3.9E-03	2.2E-03	2.1E-03	-5.9E-02	-5.7E-02	-5.4E-02	-5.1E-02	-4.8E-02	-4.5E-02
3287	4.6E-04	1.4E-03	2.3E-03	3.1E-03	3.2E-03	1.9E-03	1.7E-03	-5.7E-02	-5.7E-02	-5.6E-02	-5.4E-02	-5.3E-02	-5.2E-02
3288	4.3E-04	1.3E-03	2.1E-03	2.5E-03	2.9E-03	2.1E-03	1.6E-03	-4.6E-02	-4.8E-02	-4.8E-02	-4.9E-02	-5.0E-02	-5.1E-02
3289	3.7E-04	1.1E-03	2.1E-03	2.6E-03	3.0E-03	2.1E-03	1.7E-03	-4.1E-02	-4.3E-02	-4.5E-02	-4.7E-02	-4.8E-02	-5.0E-02
3290	3.7E-04	1.0E-03	1.9E-03	2.5E-03	2.8E-03	2.0E-03	1.6E-03	-3.5E-02	-3.7E-02	-3.8E-02	-3.9E-02	-4.0E-02	-4.1E-02
3291	3.4E-04	1.3E-03	2.1E-03	2.2E-03	2.6E-03	1.9E-03	1.5E-03	-3.1E-02	-3.2E-02	-3.2E-02	-3.2E-02	-3.3E-02	-3.3E-02
3292	4.6E-04	1.6E-03	2.6E-03	2.8E-03	2.5E-03	1.9E-03	1.5E-03	-2.2E-02	-2.3E-02	-2.4E-02	-2.5E-02	-2.6E-02	-2.7E-02
3293	3.7E-04	1.2E-03	1.9E-03	2.5E-03	2.8E-03	2.0E-03	1.6E-03	-3.4E-02	-3.5E-02	-3.5E-02	-3.6E-02	-3.6E-02	-3.6E-02
3294	4.1E-04	1.5E-03	2.4E-03	2.6E-03	2.7E-03	2.0E-03	1.5E-03	-2.6E-02	-2.7E-02	-2.8E-02	-2.9E-02	-3.0E-02	-3.1E-02
3295	5.3E-04	1.8E-03	2.9E-03	3.1E-03	2.8E-03	1.9E-03	1.7E-03	-1.6E-02	-1.8E-02	-1.8E-02	-1.9E-02	-1.9E-02	-2.0E-02
3296	6.1E-04	2.0E-03	3.2E-03	3.5E-03	3.1E-03	2.0E-03	1.9E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02
3297	4.7E-04	1.4E-03	2.4E-03	2.9E-03	3.1E-03	2.0E-03	1.9E-03	-4.6E-03	-3.8E-03	-2.0E-03	-1.9E-04	1.6E-03	3.4E-03
3298	4.2E-04	1.3E-03	2.2E-03	2.8E-03	2.9E-03	1.8E-03	1.7E-03	6.4E-03	4.9E-03	4.3E-03	3.8E-03	3.2E-03	2.7E-03
3299	4.4E-04	1.1E-03	1.9E-03	2.5E-03	2.7E-03	1.9E-03	1.6E-03	1.4E-02	7.2E-03	1.1E-03	-5.1E-03	-1.1E-02	-1.7E-02
3300	2.8E-04	9.0E-04	1.5E-03	1.7E-03	1.3E-03	8.5E-04	8.4E-04	-1.6E-02	-1.2E-02	-8.2E-03	-4.2E-03	-2.4E-04	3.8E-03
3301	2.6E-04	8.2E-04	1.3E-03	1.5E-03	1.4E-03	8.6E-04	7.9E-04	-1.7E-02	-1.2E-02	-7.2E-03	-2.1E-03	3.0E-03	8.1E-03
3302	2.8E-04	7.2E-04	1.3E-03	1.4E-03	1.4E-03	8.7E-04	8.1E-04	-1.3E-02	-9.2E-03	-4.7E-03	-2.8E-04	4.2E-03	8.7E-03
3303	2.7E-04	7.6E-04	1.4E-03	1.5E-03	1.4E-03	8.4E-04	8.2E-04	-4.9E-03	-2.2E-03	1.0E-03	4.2E-03	7.4E-03	1.1E-02
3304	2.5E-04	7.6E-04	1.4E-03	1.5E-03	1.3E-03	8.3E-04	8.2E-04	1.7E-03	3.3E-03	5.3E-03	7.3E-03	9.3E-03	1.1E-02
3305	2.4E-04	7.3E-04	1.3E-03	1.4E-03	1.3E-03	8.5E-04	8.0E-04	2.8E-03	3.2E-03	4.1E-03	4.9E-03	5.8E-03	6.7E-03
3306	2.2E-04	6.6E-04	1.3E-03	1.4E-03	1.3E-03	1.0E-03	7.3E-04	1.3E-02	9.2E-03	5.9E-03	2.7E-03	-5.6E-04	-3.8E-03
3307	2.2E-04	8.0E-04	1.4E-03	1.6E-03	1.5E-03	1.2E-03	8.7E-04	1.5E-02	1.0E-02	6.4E-03	2.4E-03	-1.6E-03	-5.7E-03
3308	2.8E-04	9.7E-04	1.7E-03	1.9E-03	1.9E-03	1.4E-03	1.1E-03	1.6E-02	1.3E-02	1.0E-02	7.7E-03	5.0E-03	2.3E-03
3309	3.5E-04	1.1E-03	2.0E-03	2.2E-03	2.2E-03	1.7E-03	1.3E-03	2.0E-03	4.1E-03	6.7E-03	9.3E-03	1.2E-02	1.5E-02
3310	4.1E-04	1.2E-03	2.2E-03	2.5E-03	2.5E-03	1.9E-03	1.6E-03	4.4E-03	5.3E-03	6.9E-03	8.5E-03	1.0E-02	1.2E-02
3311	4.6E-04	1.3E-03	2.4E-03	2.7E-03	2.9E-03	2.0E-03	1.8E-03	-2.1E-03	-1.2E-03	6.3E-04	2.4E-03	4.2E-03	6.0E-03
3312	4.8E-04	1.4E-03	2.5E-03	2.8E-03	3.1E-03	2.1E-03	1.9E-03	-3.0E-03	-5.0E-04	2.9E-03	6.3E-03	9.7E-03	1.3E-02
3313	3.6E-04	9.5E-04	1.7E-03	1.9E-03	1.3E-03	1.1E-03	1.1E-03	-8.5E-03	-8.3E-03	-7.7E-03	-7.1E-03	-6.5E-03	-5.9E-03
3314	3.3E-04	9.7E-04	1.7E-03	1.9E-03	1.2E-03	1.0E-03	9.9E-04	-1.2E-02	-1.1E-02	-1.0E-02	-9.0E-03	-7.9E-03	-6.8E-03
3315	4.6E-04	1.0E-03	2.0E-03	2.1E-03	1.7E-03	1.4E-03	1.3E-03	-8.9E-03	-9.1E-03	-8.8E-03	-8.5E-03	-8.2E-03	-7.9E-03
3316	4.7E-04	1.1E-03	2.1E-03	2.1E-03	2.0E-03	1.4E-03	1.4E-03	-9.7E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
3317	2.5E-04	6.9E-04	1.3E-03	1.3E-03	1.3E-03	7.8E-04	7.4E-04	-5.6E-03	-2.9E-03	2.8E-04	3.4E-03	6.6E-03	9.8E-03
3318	2.2E-04	6.6E-04	1.2E-03	1.3E-03	1.3E-03	9.1E-04	7.2E-04	1.0E-02	7.5E-03	5.3E-03	3.2E-03	1.0E-03	-1.2E-03
3319	3.1E-04	1.0E-03	1.8E-03	2.0E-03	2.0E-03	1.5E-03	1.2E-03	7.5E-03	7.3E-03	7.5E-03	7.8E-03	8.1E-03	8.4E-03
3320	6.8E-03	9.5E-03	1.5E-02	2.1E-02	3.0E-02	2.8E-02	2.7E-02	5.1E-02	4.9E-02	6.9E-02	8.9E-02	1.1E-01	1.3E-01
3321	5.1E-03	7.5E-03	1.5E-02	1.6E-02	2.5E-02	2.5E-02	2.4E-02	3.6E-03	7.3E-03	2.7E-02	4.7E-02	6.7E-02	8.7E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3322	4.3E-03	6.0E-03	1.2E-02	1.3E-02	2.1E-02	2.1E-02	2.0E-02	4.4E-03	1.1E-02	3.1E-02	5.0E-02	7.0E-02	9.0E-02
3323	3.3E-03	4.8E-03	1.0E-02	1.2E-02	1.9E-02	1.8E-02	1.7E-02	1.3E-03	8.4E-03	2.7E-02	4.6E-02	6.5E-02	8.4E-02
3324	3.1E-03	4.3E-03	9.1E-03	1.1E-02	1.7E-02	1.6E-02	1.5E-02	-9.1E-03	-4.5E-03	1.1E-02	2.6E-02	4.2E-02	5.7E-02
3325	3.0E-03	3.6E-03	7.4E-03	8.9E-03	1.4E-02	1.3E-02	1.2E-02	-2.1E-02	-1.9E-02	-8.7E-03	1.6E-03	1.2E-02	2.2E-02
3326	2.9E-03	3.2E-03	6.8E-03	8.8E-03	1.2E-02	1.2E-02	1.1E-02	-1.1E-02	-1.2E-02	-5.7E-03	8.4E-04	7.4E-03	1.4E-02
3327	2.7E-03	3.1E-03	6.4E-03	7.9E-03	1.2E-02	1.1E-02	1.1E-02	-1.3E-02	-1.3E-02	-6.4E-03	5.8E-04	7.5E-03	1.4E-02
3328	2.6E-03	3.0E-03	6.2E-03	7.4E-03	1.1E-02	1.1E-02	1.0E-02	-1.5E-02	-1.4E-02	-7.0E-03	4.9E-04	8.0E-03	1.5E-02
3329	2.4E-03	2.7E-03	5.4E-03	7.3E-03	9.8E-03	9.3E-03	8.8E-03	1.7E-03	-3.3E-03	-2.3E-03	-1.3E-03	-2.9E-04	7.2E-04
3330	2.4E-03	2.7E-03	5.2E-03	7.2E-03	9.4E-03	9.0E-03	8.6E-03	3.8E-03	-1.8E-03	-1.5E-03	-1.3E-03	-9.9E-04	-7.2E-04
3331	2.4E-03	2.7E-03	5.1E-03	7.1E-03	9.3E-03	8.9E-03	8.5E-03	3.3E-03	-2.1E-03	-1.8E-03	-1.4E-03	-9.8E-04	-5.9E-04
3332	2.3E-03	2.6E-03	5.1E-03	7.0E-03	9.1E-03	8.8E-03	8.3E-03	3.8E-03	-1.4E-03	-9.5E-04	-4.8E-04	-1.8E-05	4.5E-04
3333	2.2E-03	2.5E-03	5.0E-03	6.7E-03	8.9E-03	8.5E-03	8.0E-03	4.7E-03	-1.7E-04	4.3E-04	1.0E-03	1.6E-03	2.2E-03
3334	1.9E-03	2.3E-03	4.8E-03	6.0E-03	8.5E-03	7.9E-03	7.5E-03	1.9E-03	-1.2E-03	8.2E-04	2.9E-03	4.9E-03	6.9E-03
3335	1.6E-03	2.2E-03	4.5E-03	5.2E-03	7.9E-03	7.4E-03	7.0E-03	-7.3E-04	-2.9E-03	-4.1E-04	2.1E-03	4.7E-03	7.2E-03
3336	1.4E-03	2.2E-03	4.7E-03	5.1E-03	8.5E-03	7.9E-03	7.5E-03	-1.7E-02	-1.7E-02	-1.1E-02	-4.6E-03	1.4E-03	7.4E-03
3337	1.4E-03	2.2E-03	4.7E-03	5.5E-03	8.4E-03	7.9E-03	7.5E-03	-2.1E-02	-1.9E-02	-1.2E-02	-5.2E-03	1.7E-03	8.5E-03
3338	1.5E-03	2.3E-03	4.9E-03	5.8E-03	8.8E-03	8.3E-03	7.8E-03	-2.5E-02	-2.3E-02	-1.5E-02	-7.2E-03	5.3E-04	8.2E-03
3339	1.6E-03	2.4E-03	5.1E-03	6.1E-03	9.1E-03	8.7E-03	8.1E-03	-2.7E-02	-2.5E-02	-1.8E-02	-1.0E-02	-2.5E-03	5.2E-03
3340	1.7E-03	2.5E-03	5.3E-03	6.6E-03	9.5E-03	9.1E-03	8.5E-03	-3.1E-02	-2.9E-02	-2.1E-02	-1.2E-02	-4.3E-03	3.9E-03
3341	1.8E-03	2.8E-03	6.3E-03	8.8E-03	1.1E-02	1.0E-02	9.5E-03	-2.3E-02	-2.0E-02	-1.0E-02	-3.1E-04	9.4E-03	1.9E-02
3342	1.9E-03	3.2E-03	8.9E-03	8.3E-03	1.3E-02	1.2E-02	1.1E-02	-1.1E-02	-5.6E-03	8.0E-03	2.2E-02	3.5E-02	4.9E-02
3343	2.4E-03	3.7E-03	1.2E-02	1.0E-02	1.4E-02	1.4E-02	1.3E-02	-4.1E-03	2.8E-03	1.9E-02	3.4E-02	5.0E-02	6.6E-02
3344	2.8E-03	4.1E-03	9.5E-03	1.1E-02	1.6E-02	1.6E-02	1.5E-02	-8.5E-04	5.2E-03	2.2E-02	3.8E-02	5.5E-02	7.1E-02
3345	3.1E-03	4.3E-03	8.9E-03	1.1E-02	1.6E-02	1.5E-02	1.4E-02	1.5E-02	1.7E-02	3.0E-02	4.4E-02	5.7E-02	7.0E-02
3346	3.6E-03	4.9E-03	1.1E-02	1.5E-02	1.9E-02	1.8E-02	1.6E-02	4.2E-02	4.4E-02	5.7E-02	7.0E-02	8.3E-02	9.7E-02
3347	3.6E-03	5.0E-03	1.1E-02	1.5E-02	1.9E-02	1.7E-02	1.5E-02	4.6E-02	4.8E-02	6.0E-02	7.3E-02	8.5E-02	9.7E-02
3348	3.0E-03	4.2E-03	1.1E-02	1.4E-02	1.8E-02	1.7E-02	1.5E-02	2.9E-02	3.1E-02	4.3E-02	5.6E-02	6.9E-02	8.2E-02
3349	2.4E-03	3.6E-03	1.7E-02	1.4E-02	1.5E-02	1.4E-02	1.3E-02	2.9E-04	1.4E-03	1.2E-02	2.3E-02	3.4E-02	4.5E-02
3350	2.3E-03	3.6E-03	2.2E-02	1.8E-02	1.3E-02	1.3E-02	1.2E-02	2.6E-03	3.4E-03	1.3E-02	2.2E-02	3.1E-02	4.1E-02
3351	2.2E-03	3.5E-03	1.8E-02	1.7E-02	1.3E-02	1.2E-02	1.1E-02	1.0E-02	1.1E-02	2.0E-02	2.9E-02	3.8E-02	4.7E-02
3352	2.1E-03	3.7E-03	1.7E-02	1.9E-02	1.2E-02	1.1E-02	1.1E-02	1.5E-02	1.7E-02	2.7E-02	3.6E-02	4.6E-02	5.6E-02
3353	1.9E-03	4.3E-03	2.1E-02	2.9E-02	1.1E-02	1.0E-02	9.4E-03	3.3E-03	1.9E-02	4.1E-02	6.4E-02	8.6E-02	1.1E-01
3354	1.8E-03	4.7E-03	2.5E-02	2.7E-02	1.1E-02	9.8E-03	9.1E-03	-4.3E-02	-5.3E-03	3.9E-02	8.3E-02	1.3E-01	1.7E-01
3355	1.6E-03	4.7E-03	3.3E-02	2.6E-02	9.6E-03	8.4E-03	7.7E-03	-4.2E-02	-3.6E-03	4.0E-02	8.3E-02	1.3E-01	1.7E-01
3356	1.5E-03	4.9E-03	2.1E-02	2.5E-02	1.6E-02	7.5E-03	7.0E-03	2.6E-02	4.4E-02	6.7E-02	9.1E-02	1.1E-01	1.4E-01
3357	1.2E-03	4.7E-03	1.0E-02	1.7E-02	1.8E-02	6.6E-03	6.1E-03	3.7E-02	4.0E-02	4.6E-02	5.3E-02	6.0E-02	6.6E-02
3358	1.4E-03	1.6E-02	1.6E-02	1.3E-02	1.2E-02	4.9E-03	4.9E-03	2.0E-02	2.9E-02	4.0E-02	5.2E-02	6.4E-02	7.5E-02
3359	1.1E-03	1.3E-02	1.5E-02	1.5E-02	9.3E-03	4.6E-03	4.6E-03	3.2E-02	3.6E-02	4.2E-02	4.9E-02	5.5E-02	6.2E-02
3360	1.0E-03	1.4E-02	1.9E-02	1.8E-02	8.4E-03	4.1E-03	4.1E-03	3.3E-02	3.6E-02	4.1E-02	4.5E-02	5.0E-02	5.4E-02
3361	1.0E-03	1.4E-02	2.0E-02	2.2E-02	8.2E-03	4.1E-03	4.1E-03	3.6E-02	3.8E-02	4.2E-02	4.6E-02	5.0E-02	5.4E-02
3362	1.1E-03	1.5E-02	2.4E-02	2.7E-02	8.3E-03	4.4E-03	4.0E-03	2.8E-02	2.7E-02	2.8E-02	3.0E-02	3.1E-02	3.3E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3363	9.4E-04	1.1E-02	1.8E-02	2.1E-02	7.3E-03	4.5E-03	4.2E-03	1.8E-02	1.8E-02	2.0E-02	2.2E-02	2.4E-02	2.7E-02
3364	8.9E-04	7.1E-03	1.3E-02	1.6E-02	6.9E-03	4.6E-03	4.2E-03	1.3E-02	1.4E-02	1.8E-02	2.2E-02	2.6E-02	3.0E-02
3365	8.0E-04	4.1E-03	4.9E-03	8.0E-03	5.7E-03	4.2E-03	3.9E-03	2.5E-02	2.1E-02	2.0E-02	1.9E-02	1.8E-02	1.7E-02
3366	8.2E-04	3.2E-03	4.0E-03	5.5E-03	4.8E-03	3.7E-03	3.5E-03	3.7E-02	2.7E-02	2.0E-02	1.2E-02	4.1E-03	-3.6E-03
3367	8.2E-04	3.1E-03	4.0E-03	5.5E-03	4.8E-03	3.6E-03	3.4E-03	3.7E-02	2.7E-02	2.0E-02	1.2E-02	4.3E-03	-3.3E-03
3368	8.0E-04	2.0E-03	3.9E-03	6.1E-03	4.6E-03	3.5E-03	3.3E-03	3.6E-02	2.7E-02	2.0E-02	1.3E-02	5.5E-03	-1.7E-03
3369	7.1E-04	1.9E-03	4.6E-03	7.0E-03	4.6E-03	3.5E-03	3.3E-03	3.5E-02	2.7E-02	2.0E-02	1.4E-02	7.4E-03	9.5E-04
3370	7.1E-04	1.7E-03	3.1E-03	4.7E-03	3.8E-03	3.0E-03	2.8E-03	3.7E-02	2.8E-02	2.1E-02	1.4E-02	6.8E-03	-4.9E-05
3371	6.5E-04	1.6E-03	3.2E-03	5.2E-03	3.7E-03	2.9E-03	2.7E-03	3.5E-02	2.6E-02	1.9E-02	1.1E-02	3.7E-03	-3.8E-03
3372	5.9E-04	1.6E-03	3.6E-03	5.4E-03	3.8E-03	2.8E-03	2.6E-03	3.4E-02	2.4E-02	1.7E-02	9.2E-03	1.6E-03	-6.1E-03
3373	5.5E-04	1.8E-03	3.6E-03	5.2E-03	3.7E-03	2.7E-03	2.5E-03	3.3E-02	2.4E-02	1.6E-02	8.6E-03	1.2E-03	-6.3E-03
3374	4.9E-04	2.0E-03	3.4E-03	4.6E-03	3.7E-03	3.6E-03	2.4E-03	3.1E-02	2.2E-02	1.5E-02	7.9E-03	7.1E-04	-6.5E-03
3375	5.5E-04	1.5E-03	2.8E-03	4.3E-03	5.0E-03	5.0E-03	2.7E-03	2.1E-02	1.5E-02	1.1E-02	6.0E-03	1.5E-03	-2.9E-03
3376	5.6E-04	1.5E-03	2.8E-03	4.3E-03	5.3E-03	5.4E-03	3.0E-03	2.1E-02	1.5E-02	1.0E-02	5.9E-03	1.4E-03	-3.2E-03
3377	5.7E-04	1.5E-03	2.8E-03	4.3E-03	5.1E-03	5.2E-03	3.1E-03	2.2E-02	1.5E-02	1.1E-02	6.1E-03	1.4E-03	-3.3E-03
3378	6.1E-04	1.4E-03	2.7E-03	4.4E-03	3.8E-03	3.6E-03	2.4E-03	2.3E-02	1.7E-02	1.2E-02	6.8E-03	1.9E-03	-3.0E-03
3379	7.1E-04	1.6E-03	2.9E-03	4.3E-03	3.8E-03	2.9E-03	2.7E-03	2.6E-02	1.9E-02	1.3E-02	8.2E-03	3.0E-03	-2.2E-03
3380	8.0E-04	1.7E-03	3.1E-03	4.2E-03	4.1E-03	3.2E-03	3.0E-03	2.8E-02	2.0E-02	1.5E-02	9.2E-03	3.7E-03	-1.7E-03
3381	9.0E-04	1.9E-03	3.5E-03	4.6E-03	4.5E-03	3.4E-03	3.2E-03	2.9E-02	2.1E-02	1.5E-02	9.4E-03	3.6E-03	-2.2E-03
3382	9.8E-04	2.1E-03	3.7E-03	4.7E-03	5.4E-03	4.9E-03	3.2E-03	1.1E-02	7.8E-03	6.1E-03	4.4E-03	2.7E-03	1.1E-03
3383	8.3E-04	1.7E-03	3.1E-03	4.3E-03	4.3E-03	4.3E-03	2.9E-03	1.4E-02	9.0E-03	5.6E-03	2.2E-03	-1.2E-03	-4.6E-03
3384	8.3E-04	1.7E-03	3.9E-03	4.7E-03	2.8E-02	2.3E-02	7.7E-03	5.7E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03
3385	7.9E-04	1.6E-03	3.1E-03	3.8E-03	6.9E-02	7.0E-02	8.5E-03	1.3E-03	2.4E-03	5.0E-03	7.6E-03	1.0E-02	1.3E-02
3386	6.7E-04	1.4E-03	2.6E-03	3.5E-03	7.1E-02	7.8E-02	1.0E-02	-1.4E-04	2.0E-03	5.8E-03	9.6E-03	1.3E-02	1.7E-02
3387	5.8E-04	1.7E-03	2.9E-03	3.9E-03	4.3E-02	4.3E-02	9.4E-03	-1.6E-03	1.8E-03	7.2E-03	1.3E-02	1.8E-02	2.3E-02
3388	5.6E-04	1.7E-03	2.9E-03	3.9E-03	3.8E-02	3.8E-02	7.3E-03	1.8E-04	3.5E-03	8.8E-03	1.4E-02	1.9E-02	2.5E-02
3389	5.6E-04	1.6E-03	2.9E-03	3.9E-03	2.1E-02	1.2E-02	3.6E-03	9.1E-03	1.1E-02	1.4E-02	1.7E-02	2.1E-02	2.4E-02
3390	5.4E-04	1.6E-03	2.9E-03	3.8E-03	1.3E-02	8.8E-03	3.1E-03	1.0E-02	1.2E-02	1.5E-02	1.8E-02	2.1E-02	2.5E-02
3391	5.5E-04	1.5E-03	2.9E-03	3.8E-03	1.4E-02	8.1E-03	2.9E-03	7.4E-03	9.6E-03	1.4E-02	1.8E-02	2.2E-02	2.6E-02
3392	4.7E-04	1.3E-03	2.8E-03	3.4E-03	5.4E-03	4.6E-03	2.6E-03	-5.7E-03	-1.7E-03	3.7E-03	9.2E-03	1.5E-02	2.0E-02
3393	5.3E-04	1.2E-03	2.7E-03	3.2E-03	3.4E-03	3.5E-03	2.4E-03	-1.1E-02	-6.5E-03	-7.0E-04	5.1E-03	1.1E-02	1.7E-02
3394	5.6E-04	1.1E-03	2.6E-03	3.0E-03	3.8E-03	3.5E-03	2.3E-03	-1.5E-02	-1.1E-02	-4.9E-03	9.9E-04	6.9E-03	1.3E-02
3395	6.2E-04	9.6E-04	2.4E-03	2.5E-03	4.2E-03	3.3E-03	1.9E-03	-2.2E-02	-1.6E-02	-9.8E-03	-3.4E-03	3.1E-03	9.5E-03
3396	6.6E-04	1.1E-03	2.3E-03	2.3E-03	6.0E-03	3.3E-03	1.7E-03	-2.2E-02	-1.7E-02	-1.1E-02	-4.8E-03	1.3E-03	7.5E-03
3397	6.7E-04	1.1E-03	2.2E-03	2.2E-03	6.1E-03	3.2E-03	1.6E-03	-2.2E-02	-1.7E-02	-1.1E-02	-5.6E-03	4.9E-05	5.7E-03
3398	6.9E-04	1.0E-03	2.1E-03	2.1E-03	5.8E-03	3.1E-03	1.5E-03	-2.1E-02	-1.7E-02	-1.2E-02	-6.8E-03	-1.8E-03	3.2E-03
3399	7.0E-04	1.1E-03	2.0E-03	1.9E-03	5.8E-03	2.8E-03	1.4E-03	-2.0E-02	-1.7E-02	-1.2E-02	-8.0E-03	-3.6E-03	7.1E-04
3400	7.3E-04	1.2E-03	1.8E-03	1.7E-03	4.9E-03	2.5E-03	1.3E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.0E-02	-7.1E-03	-3.9E-03
3401	7.6E-04	1.3E-03	1.5E-03	1.6E-03	3.5E-03	3.5E-03	1.4E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.2E-02	-1.0E-02	-7.9E-03
3402	7.9E-04	1.4E-03	1.4E-03	1.6E-03	3.5E-03	3.9E-03	1.5E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-8.3E-03
3403	8.3E-04	1.3E-03	1.3E-03	1.6E-03	3.3E-03	2.5E-03	1.4E-03	-1.9E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.6E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3404	8.5E-04	1.0E-03	1.2E-03	1.5E-03	3.6E-03	1.7E-03	1.4E-03	-2.1E-02	-2.0E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02
3405	8.5E-04	1.0E-03	1.2E-03	1.5E-03	3.5E-03	1.5E-03	1.4E-03	-2.4E-02	-2.3E-02	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02
3406	8.2E-04	1.1E-03	1.2E-03	1.5E-03	3.4E-03	1.5E-03	1.4E-03	-2.5E-02	-2.3E-02	-2.1E-02	-1.8E-02	-1.6E-02	-1.3E-02
3407	7.6E-04	1.1E-03	1.2E-03	1.5E-03	3.2E-03	1.5E-03	1.4E-03	-2.2E-02	-2.1E-02	-1.9E-02	-1.7E-02	-1.4E-02	-1.2E-02
3408	7.1E-04	1.1E-03	1.2E-03	1.4E-03	3.0E-03	1.5E-03	1.4E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.2E-03
3409	7.2E-04	1.2E-03	1.2E-03	1.4E-03	2.9E-03	1.5E-03	1.4E-03	-1.5E-02	-1.4E-02	-1.2E-02	-9.6E-03	-7.3E-03	-5.1E-03
3410	7.3E-04	1.2E-03	1.2E-03	1.4E-03	2.8E-03	1.4E-03	1.4E-03	-1.4E-02	-1.2E-02	-9.6E-03	-7.3E-03	-4.9E-03	-2.5E-03
3411	7.5E-04	1.2E-03	1.2E-03	1.3E-03	2.6E-03	1.4E-03	1.3E-03	-1.2E-02	-1.1E-02	-8.1E-03	-5.6E-03	-3.1E-03	-5.9E-04
3412	7.6E-04	1.2E-03	1.2E-03	1.4E-03	2.6E-03	1.5E-03	1.4E-03	-1.4E-02	-1.2E-02	-1.0E-02	-7.8E-03	-5.4E-03	-3.1E-03
3413	9.0E-04	1.2E-03	1.2E-03	1.4E-03	2.5E-03	1.5E-03	1.5E-03	-1.7E-02	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.4E-03
3414	9.3E-04	1.2E-03	1.2E-03	1.4E-03	2.2E-03	1.5E-03	1.4E-03	-1.5E-02	-1.4E-02	-1.2E-02	-9.9E-03	-7.8E-03	-5.6E-03
3415	1.0E-03	1.3E-03	1.3E-03	1.3E-03	1.8E-03	1.6E-03	1.3E-03	-1.3E-02	-1.1E-02	-8.0E-03	-5.0E-03	-2.1E-03	8.9E-04
3416	1.0E-03	1.3E-03	1.3E-03	1.3E-03	1.7E-03	1.6E-03	1.3E-03	-1.3E-02	-1.1E-02	-7.4E-03	-4.3E-03	-1.1E-03	2.0E-03
3417	1.0E-03	1.3E-03	1.3E-03	1.3E-03	1.7E-03	1.7E-03	1.3E-03	-1.3E-02	-1.0E-02	-6.9E-03	-3.5E-03	-1.6E-04	3.2E-03
3418	1.1E-03	1.4E-03	1.4E-03	1.3E-03	1.7E-03	2.0E-03	1.3E-03	-1.3E-02	-1.0E-02	-6.8E-03	-3.2E-03	4.1E-04	4.0E-03
3419	1.0E-03	1.4E-03	1.4E-03	1.3E-03	1.6E-03	1.7E-03	1.2E-03	-1.3E-02	-9.7E-03	-6.0E-03	-2.4E-03	1.2E-03	4.9E-03
3420	9.2E-04	1.4E-03	1.5E-03	1.2E-03	1.6E-03	1.5E-03	1.1E-03	-1.1E-02	-8.4E-03	-5.0E-03	-1.6E-03	1.8E-03	5.2E-03
3421	8.9E-04	1.4E-03	1.5E-03	1.2E-03	1.5E-03	1.3E-03	1.0E-03	-9.3E-03	-6.4E-03	-2.9E-03	5.7E-04	4.0E-03	7.5E-03
3422	9.1E-04	1.4E-03	1.5E-03	1.2E-03	1.5E-03	1.3E-03	9.8E-04	-8.4E-03	-5.4E-03	-1.8E-03	1.7E-03	5.2E-03	8.7E-03
3423	9.5E-04	1.5E-03	1.6E-03	1.2E-03	1.3E-03	1.5E-03	9.9E-04	-5.4E-03	-3.0E-03	-1.1E-04	2.7E-03	5.6E-03	8.4E-03
3424	9.9E-04	1.5E-03	1.6E-03	1.2E-03	1.6E-03	1.8E-03	9.7E-04	-9.5E-03	-6.2E-03	-2.6E-03	1.1E-03	4.7E-03	8.4E-03
3425	1.0E-03	1.5E-03	1.6E-03	1.2E-03	1.7E-03	2.0E-03	9.6E-04	-1.1E-02	-7.6E-03	-3.9E-03	-1.0E-04	3.7E-03	7.4E-03
3426	1.1E-03	1.6E-03	1.6E-03	1.2E-03	1.8E-03	2.2E-03	1.1E-03	-9.2E-03	-6.0E-03	-2.5E-03	1.1E-03	4.7E-03	8.3E-03
3427	1.0E-03	1.6E-03	1.7E-03	1.3E-03	1.6E-03	2.0E-03	1.1E-03	-6.2E-03	-3.7E-03	-9.3E-04	1.9E-03	4.7E-03	7.5E-03
3428	1.0E-03	1.6E-03	1.7E-03	1.3E-03	1.6E-03	2.0E-03	1.1E-03	-5.4E-03	-3.2E-03	-6.8E-04	1.8E-03	4.3E-03	6.9E-03
3429	1.1E-03	1.6E-03	1.7E-03	1.3E-03	1.7E-03	2.1E-03	1.2E-03	-5.1E-03	-3.2E-03	-9.2E-04	1.3E-03	3.6E-03	5.9E-03
3430	1.1E-03	1.7E-03	1.8E-03	1.4E-03	1.8E-03	2.2E-03	1.2E-03	-5.8E-03	-3.8E-03	-1.5E-03	7.1E-04	3.0E-03	5.2E-03
3431	1.0E-03	1.7E-03	1.7E-03	1.4E-03	1.6E-03	1.9E-03	1.2E-03	-5.8E-03	-4.0E-03	-1.9E-03	1.8E-04	2.3E-03	4.4E-03
3432	1.2E-03	1.8E-03	1.9E-03	1.6E-03	1.7E-03	2.1E-03	1.4E-03	-1.2E-02	-9.5E-03	-6.8E-03	-4.1E-03	-1.4E-03	1.3E-03
3433	1.2E-03	1.8E-03	1.9E-03	1.6E-03	1.7E-03	2.2E-03	1.4E-03	-1.4E-02	-1.1E-02	-8.5E-03	-5.8E-03	-3.1E-03	-3.6E-04
3434	1.2E-03	1.8E-03	1.9E-03	1.6E-03	1.7E-03	2.1E-03	1.4E-03	-1.5E-02	-1.2E-02	-9.7E-03	-7.0E-03	-4.3E-03	-1.5E-03
3435	1.3E-03	1.9E-03	1.9E-03	1.6E-03	1.6E-03	2.1E-03	1.4E-03	-1.7E-02	-1.5E-02	-1.2E-02	-9.3E-03	-6.6E-03	-3.8E-03
3436	1.4E-03	2.0E-03	2.2E-03	1.6E-03	1.5E-03	1.9E-03	1.4E-03	-2.1E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.6E-03
3437	1.4E-03	2.0E-03	2.1E-03	1.7E-03	1.6E-03	2.2E-03	1.5E-03	-2.0E-02	-1.8E-02	-1.5E-02	-1.3E-02	-9.9E-03	-7.2E-03
3438	1.4E-03	2.0E-03	2.1E-03	1.7E-03	1.6E-03	2.2E-03	1.5E-03	-2.1E-02	-1.8E-02	-1.6E-02	-1.3E-02	-1.0E-02	-7.7E-03
3439	1.6E-03	2.3E-03	2.4E-03	1.7E-03	1.6E-03	2.2E-03	1.4E-03	-2.3E-02	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.5E-03
3440	2.0E-03	2.7E-03	2.9E-03	1.6E-03	1.6E-03	2.1E-03	1.4E-03	-2.3E-02	-2.1E-02	-1.7E-02	-1.4E-02	-1.1E-02	-7.6E-03
3441	2.6E-03	3.3E-03	3.5E-03	1.5E-03	1.7E-03	1.9E-03	1.3E-03	-2.3E-02	-2.0E-02	-1.6E-02	-1.3E-02	-9.5E-03	-6.0E-03
3442	3.1E-03	3.8E-03	4.0E-03	1.4E-03	1.7E-03	1.7E-03	1.1E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.2E-02	-8.8E-03	-6.1E-03
3443	3.6E-03	4.8E-03	5.1E-03	1.2E-03	1.6E-03	1.5E-03	9.6E-04	-1.5E-02	-1.3E-02	-1.2E-02	-1.0E-02	-8.2E-03	-6.5E-03
3444	3.9E-03	6.3E-03	6.6E-03	1.1E-03	1.6E-03	1.3E-03	8.8E-04	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3445	3.0E-03	6.7E-03	7.1E-03	9.7E-04	1.5E-03	1.2E-03	8.3E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.5E-02
3446	1.8E-03	3.5E-03	3.9E-03	9.2E-04	1.5E-03	1.3E-03	7.9E-04	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.5E-02
3447	1.9E-03	3.7E-03	4.1E-03	9.2E-04	1.5E-03	1.3E-03	8.0E-04	-1.2E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.5E-02	-1.5E-02
3448	3.1E-03	3.9E-03	4.3E-03	8.8E-04	1.5E-03	1.1E-03	8.6E-04	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02
3449	4.5E-03	5.0E-03	4.5E-03	9.8E-04	1.4E-03	9.1E-04	8.9E-04	-9.8E-03	-1.1E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02
3450	6.9E-03	7.4E-03	5.3E-03	1.0E-03	1.2E-03	9.3E-04	9.2E-04	-4.6E-03	-5.5E-03	-5.9E-03	-6.3E-03	-6.8E-03	-7.2E-03
3451	1.0E-02	1.2E-02	1.2E-02	1.0E-03	1.1E-03	9.2E-04	9.2E-04	-6.4E-03	-6.1E-03	-5.4E-03	-4.8E-03	-4.1E-03	-3.4E-03
3452	9.5E-03	1.1E-02	1.0E-02	9.9E-04	9.1E-04	8.2E-04	8.2E-04	-9.9E-03	-8.6E-03	-7.0E-03	-5.3E-03	-3.7E-03	-2.1E-03
3453	9.4E-03	9.8E-03	9.7E-03	9.6E-04	8.3E-04	7.5E-04	7.5E-04	-8.7E-03	-7.2E-03	-5.2E-03	-3.3E-03	-1.4E-03	5.2E-04
3454	7.8E-03	9.7E-03	9.6E-03	9.8E-04	8.5E-04	7.5E-04	7.5E-04	-9.3E-03	-7.3E-03	-4.8E-03	-2.3E-03	1.9E-04	2.7E-03
3455	6.8E-03	8.3E-03	8.1E-03	1.0E-03	1.1E-03	1.0E-03	9.4E-04	-1.1E-02	-8.6E-03	-5.4E-03	-2.3E-03	8.4E-04	4.0E-03
3456	6.3E-03	7.7E-03	7.5E-03	1.0E-03	1.2E-03	1.1E-03	1.0E-03	-1.2E-02	-1.0E-02	-6.9E-03	-3.8E-03	-6.7E-04	2.4E-03
3457	5.7E-03	7.1E-03	6.9E-03	1.2E-03	1.4E-03	1.3E-03	1.2E-03	-1.6E-02	-1.4E-02	-1.1E-02	-8.3E-03	-5.6E-03	-2.9E-03
3458	4.3E-03	5.6E-03	5.4E-03	1.6E-03	1.6E-03	1.5E-03	1.4E-03	-2.1E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02
3459	3.3E-03	4.5E-03	4.5E-03	2.1E-03	2.2E-03	2.0E-03	2.0E-03	-2.3E-02	-2.3E-02	-2.2E-02	-2.1E-02	-1.9E-02	-1.8E-02
3460	2.9E-03	3.9E-03	3.9E-03	2.5E-03	2.6E-03	2.3E-03	2.3E-03	-2.1E-02	-2.0E-02	-1.9E-02	-1.8E-02	-1.7E-02	-1.6E-02
3461	2.8E-03	3.8E-03	3.8E-03	2.5E-03	2.6E-03	2.4E-03	2.4E-03	-2.0E-02	-2.0E-02	-1.8E-02	-1.7E-02	-1.5E-02	-1.4E-02
3462	2.6E-03	3.5E-03	3.3E-03	2.8E-03	2.8E-03	2.6E-03	2.6E-03	-1.6E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.5E-03	-7.7E-03
3463	2.5E-03	3.4E-03	3.2E-03	2.8E-03	2.9E-03	2.6E-03	2.6E-03	-1.6E-02	-1.5E-02	-1.2E-02	-1.0E-02	-8.0E-03	-5.8E-03
3464	2.4E-03	3.2E-03	3.0E-03	2.9E-03	2.9E-03	2.7E-03	2.7E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.1E-02	-8.7E-03	-5.9E-03
3465	2.3E-03	2.9E-03	2.8E-03	2.9E-03	2.8E-03	2.6E-03	2.6E-03	-2.6E-02	-2.3E-02	-1.9E-02	-1.5E-02	-1.2E-02	-8.0E-03
3466	2.1E-03	2.6E-03	2.5E-03	2.7E-03	2.6E-03	2.4E-03	2.4E-03	-2.0E-02	-1.6E-02	-1.1E-02	-6.6E-03	-2.0E-03	2.6E-03
3467	1.8E-03	2.3E-03	2.2E-03	2.4E-03	2.2E-03	2.0E-03	2.0E-03	-1.8E-02	-1.3E-02	-8.6E-03	-3.8E-03	1.0E-03	5.8E-03
3468	1.5E-03	2.2E-03	1.9E-03	2.1E-03	1.8E-03	1.6E-03	1.6E-03	-2.1E-02	-1.9E-02	-1.6E-02	-1.3E-02	-1.1E-02	-8.0E-03
3469	1.1E-03	2.2E-03	2.8E-03	2.4E-03	1.6E-03	1.3E-03	1.2E-03	-2.3E-02	-2.3E-02	-2.1E-02	-2.0E-02	-1.9E-02	-1.7E-02
3470	1.1E-03	3.3E-03	4.0E-03	3.2E-03	1.9E-03	1.5E-03	1.4E-03	-2.5E-02	-2.5E-02	-2.4E-02	-2.3E-02	-2.2E-02	-2.1E-02
3471	1.1E-03	3.0E-03	3.8E-03	3.1E-03	1.9E-03	1.4E-03	1.3E-03	-2.5E-02	-2.5E-02	-2.4E-02	-2.4E-02	-2.3E-02	-2.2E-02
3472	1.0E-03	2.6E-03	3.3E-03	3.0E-03	1.9E-03	1.4E-03	1.3E-03	-2.4E-02	-2.4E-02	-2.3E-02	-2.3E-02	-2.3E-02	-2.2E-02
3473	1.0E-03	2.3E-03	2.9E-03	3.0E-03	1.8E-03	1.4E-03	1.3E-03	-2.1E-02	-2.2E-02	-2.1E-02	-2.1E-02	-2.1E-02	-2.0E-02
3474	1.0E-03	2.1E-03	2.7E-03	3.1E-03	1.9E-03	1.4E-03	1.3E-03	-1.8E-02	-1.8E-02	-1.8E-02	-1.7E-02	-1.7E-02	-1.6E-02
3475	1.0E-03	1.8E-03	2.3E-03	3.2E-03	1.9E-03	1.4E-03	1.3E-03	-1.2E-02	-1.2E-02	-1.1E-02	-9.9E-03	-8.9E-03	-7.9E-03
3476	1.0E-03	1.7E-03	2.4E-03	3.3E-03	1.9E-03	1.4E-03	1.3E-03	-1.1E-02	-1.0E-02	-8.9E-03	-7.7E-03	-6.5E-03	-5.3E-03
3477	9.8E-04	1.7E-03	2.7E-03	3.4E-03	2.1E-03	1.6E-03	1.5E-03	-1.1E-02	-9.3E-03	-6.8E-03	-4.3E-03	-1.8E-03	6.7E-04
3478	9.6E-04	1.8E-03	2.8E-03	3.5E-03	2.1E-03	1.6E-03	1.5E-03	-1.1E-02	-9.7E-03	-7.2E-03	-4.6E-03	-2.1E-03	4.6E-04
3479	8.2E-04	2.6E-03	3.7E-03	4.0E-03	2.6E-03	2.2E-03	2.0E-03	-1.6E-02	-1.4E-02	-1.0E-02	-7.2E-03	-3.9E-03	-6.6E-04
3480	8.6E-04	2.9E-03	3.9E-03	4.4E-03	2.6E-03	2.1E-03	2.0E-03	-1.5E-02	-1.4E-02	-1.1E-02	-8.9E-03	-6.4E-03	-3.8E-03
3481	8.7E-04	2.7E-03	3.7E-03	4.3E-03	2.5E-03	2.0E-03	1.9E-03	-1.5E-02	-1.3E-02	-1.1E-02	-8.8E-03	-6.5E-03	-4.2E-03
3482	8.6E-04	2.3E-03	3.4E-03	4.1E-03	2.3E-03	1.8E-03	1.7E-03	-1.3E-02	-1.2E-02	-1.0E-02	-8.4E-03	-6.5E-03	-4.5E-03
3483	9.2E-04	2.2E-03	3.4E-03	4.2E-03	2.2E-03	1.7E-03	1.6E-03	-1.6E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02
3484	8.2E-04	3.7E-03	4.9E-03	4.9E-03	2.8E-03	2.4E-03	2.2E-03	-1.7E-02	-1.6E-02	-1.5E-02	-1.3E-02	-1.2E-02	-1.0E-02
3485	7.8E-04	3.1E-03	4.4E-03	4.1E-03	3.2E-03	2.7E-03	2.6E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.3E-02	-1.1E-02	-9.3E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3486	7.4E-04	2.7E-03	4.0E-03	3.8E-03	3.4E-03	2.9E-03	2.7E-03	-1.7E-02	-1.7E-02	-1.6E-02	-1.4E-02	-1.3E-02	-1.1E-02
3487	6.8E-04	2.7E-03	3.5E-03	3.2E-03	3.7E-03	3.2E-03	3.0E-03	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.3E-03	-6.3E-03
3488	7.4E-04	2.1E-03	3.1E-03	3.1E-03	3.8E-03	3.3E-03	3.1E-03	-2.2E-02	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02	-8.7E-03
3489	8.0E-04	2.1E-03	3.0E-03	3.1E-03	4.0E-03	3.4E-03	3.2E-03	-2.3E-02	-2.3E-02	-2.0E-02	-1.8E-02	-1.5E-02	-1.3E-02
3490	8.1E-04	1.7E-03	3.0E-03	3.0E-03	3.9E-03	3.3E-03	3.1E-03	-2.4E-02	-2.3E-02	-2.0E-02	-1.7E-02	-1.4E-02	-1.2E-02
3491	7.9E-04	1.4E-03	2.9E-03	3.0E-03	3.7E-03	3.1E-03	2.9E-03	-1.8E-02	-1.9E-02	-1.8E-02	-1.6E-02	-1.5E-02	-1.4E-02
3492	7.7E-04	1.2E-03	2.8E-03	3.0E-03	3.5E-03	2.9E-03	2.7E-03	-1.2E-02	-1.5E-02	-1.6E-02	-1.8E-02	-1.9E-02	-2.1E-02
3493	7.8E-04	1.2E-03	2.8E-03	3.1E-03	3.5E-03	2.8E-03	2.6E-03	-1.3E-02	-1.5E-02	-1.7E-02	-1.8E-02	-1.9E-02	-2.0E-02
3494	7.9E-04	1.2E-03	2.9E-03	3.2E-03	3.5E-03	2.8E-03	2.6E-03	-1.4E-02	-1.6E-02	-1.7E-02	-1.8E-02	-1.8E-02	-1.9E-02
3495	7.8E-04	1.2E-03	2.8E-03	3.2E-03	3.3E-03	2.6E-03	2.5E-03	-1.6E-02	-1.8E-02	-2.0E-02	-2.1E-02	-2.2E-02	-2.4E-02
3496	7.5E-04	1.2E-03	2.7E-03	3.1E-03	3.1E-03	2.4E-03	2.4E-03	-1.8E-02	-2.1E-02	-2.1E-02	-2.2E-02	-2.3E-02	-2.4E-02
3497	7.4E-04	1.2E-03	2.7E-03	3.0E-03	3.2E-03	2.4E-03	2.3E-03	-1.6E-02	-1.9E-02	-2.0E-02	-2.2E-02	-2.4E-02	-2.6E-02
3498	7.2E-04	1.1E-03	2.7E-03	3.0E-03	3.0E-03	2.3E-03	2.3E-03	-2.1E-02	-2.3E-02	-2.3E-02	-2.4E-02	-2.5E-02	-2.5E-02
3499	7.0E-04	1.1E-03	2.6E-03	3.0E-03	2.9E-03	2.3E-03	2.3E-03	-2.3E-02	-2.4E-02	-2.3E-02	-2.3E-02	-2.2E-02	-2.2E-02
3500	6.6E-04	1.1E-03	2.5E-03	3.0E-03	2.7E-03	2.2E-03	2.2E-03	-2.2E-02	-2.2E-02	-2.0E-02	-1.8E-02	-1.6E-02	-1.4E-02
3501	6.3E-04	1.2E-03	2.5E-03	3.0E-03	2.5E-03	2.1E-03	2.1E-03	-1.8E-02	-1.7E-02	-1.5E-02	-1.4E-02	-1.2E-02	-1.1E-02
3502	6.0E-04	1.3E-03	2.6E-03	3.1E-03	2.4E-03	2.0E-03	2.0E-03	-1.5E-02	-1.4E-02	-1.3E-02	-1.1E-02	-9.6E-03	-7.9E-03
3503	5.9E-04	1.3E-03	2.6E-03	3.1E-03	2.4E-03	1.9E-03	1.9E-03	-1.6E-02	-1.4E-02	-1.2E-02	-1.0E-02	-8.5E-03	-6.6E-03
3504	5.8E-04	1.4E-03	2.7E-03	3.1E-03	2.3E-03	1.9E-03	1.9E-03	-1.6E-02	-1.5E-02	-1.2E-02	-1.0E-02	-8.2E-03	-6.0E-03
3505	5.7E-04	1.5E-03	2.7E-03	3.2E-03	2.3E-03	1.8E-03	1.8E-03	-1.6E-02	-1.5E-02	-1.2E-02	-9.9E-03	-7.6E-03	-5.2E-03
3506	5.6E-04	1.5E-03	2.7E-03	3.1E-03	2.2E-03	1.8E-03	1.8E-03	-1.7E-02	-1.5E-02	-1.3E-02	-1.0E-02	-7.9E-03	-5.4E-03
3507	5.7E-04	1.5E-03	2.7E-03	3.1E-03	2.3E-03	1.7E-03	1.7E-03	-2.0E-02	-1.8E-02	-1.5E-02	-1.2E-02	-9.1E-03	-6.2E-03
3508	5.2E-04	1.7E-03	2.8E-03	3.1E-03	2.0E-03	1.5E-03	1.5E-03	-1.9E-02	-1.7E-02	-1.5E-02	-1.2E-02	-9.6E-03	-7.1E-03
3509	4.7E-04	1.6E-03	2.7E-03	3.0E-03	1.8E-03	1.4E-03	1.4E-03	-1.8E-02	-1.6E-02	-1.4E-02	-1.2E-02	-9.6E-03	-7.4E-03
3510	4.1E-04	1.6E-03	2.6E-03	2.9E-03	1.9E-03	1.3E-03	1.3E-03	-1.9E-02	-1.7E-02	-1.4E-02	-1.2E-02	-9.2E-03	-6.7E-03
3511	3.4E-04	1.5E-03	2.4E-03	2.7E-03	2.0E-03	1.2E-03	1.2E-03	-2.2E-02	-1.7E-02	-1.1E-02	-5.7E-03	9.3E-05	5.8E-03
3512	3.5E-04	1.5E-03	2.3E-03	2.6E-03	2.0E-03	1.2E-03	1.1E-03	-2.3E-02	-1.7E-02	-1.0E-02	-3.6E-03	3.0E-03	9.5E-03
3513	3.5E-04	1.3E-03	2.0E-03	2.3E-03	2.0E-03	1.2E-03	1.1E-03	-1.7E-02	-1.1E-02	-4.1E-03	2.6E-03	9.3E-03	1.6E-02
3514	3.5E-04	1.2E-03	2.0E-03	2.1E-03	2.0E-03	1.2E-03	1.1E-03	-8.9E-03	-4.3E-03	1.0E-03	6.3E-03	1.2E-02	1.7E-02
3515	3.5E-04	1.1E-03	2.0E-03	2.1E-03	2.0E-03	1.2E-03	1.1E-03	-6.5E-03	-2.5E-03	2.1E-03	6.7E-03	1.1E-02	1.6E-02
3516	3.3E-04	1.0E-03	1.9E-03	2.0E-03	1.9E-03	1.1E-03	1.1E-03	-3.9E-03	-7.6E-04	2.9E-03	6.6E-03	1.0E-02	1.4E-02
3517	3.3E-04	1.0E-03	1.9E-03	2.0E-03	1.8E-03	1.1E-03	1.1E-03	-3.2E-03	-4.5E-04	2.9E-03	6.3E-03	9.7E-03	1.3E-02
3518	3.2E-04	1.0E-03	1.8E-03	2.0E-03	1.8E-03	1.1E-03	1.1E-03	-1.7E-03	1.1E-03	4.4E-03	7.7E-03	1.1E-02	1.4E-02
3519	3.0E-04	9.7E-04	1.7E-03	1.9E-03	1.7E-03	1.1E-03	1.0E-03	-2.3E-03	-2.1E-04	2.4E-03	5.1E-03	7.7E-03	1.0E-02
3520	3.1E-04	9.9E-04	1.8E-03	2.0E-03	1.8E-03	1.1E-03	1.0E-03	-2.8E-03	-4.6E-04	2.4E-03	5.3E-03	8.2E-03	1.1E-02
3521	3.3E-04	1.1E-03	1.9E-03	2.1E-03	1.9E-03	1.1E-03	1.1E-03	-4.4E-03	-1.4E-03	2.2E-03	5.8E-03	9.4E-03	1.3E-02
3522	3.3E-04	1.1E-03	2.0E-03	2.1E-03	1.9E-03	1.1E-03	1.1E-03	-4.4E-03	-1.2E-03	2.6E-03	6.5E-03	1.0E-02	1.4E-02
3523	3.2E-04	1.0E-03	1.9E-03	2.1E-03	1.9E-03	1.1E-03	1.1E-03	-4.6E-03	-2.1E-03	1.0E-03	4.1E-03	7.2E-03	1.0E-02
3524	3.3E-04	1.1E-03	1.8E-03	2.1E-03	1.8E-03	1.4E-03	1.0E-03	1.2E-02	7.9E-03	4.7E-03	1.5E-03	-1.7E-03	-4.9E-03
3525	4.2E-04	1.2E-03	2.2E-03	2.6E-03	2.3E-03	1.7E-03	1.3E-03	1.2E-02	9.3E-03	6.8E-03	4.2E-03	1.7E-03	-8.7E-04
3526	5.1E-04	1.4E-03	2.5E-03	2.9E-03	2.9E-03	2.1E-03	1.8E-03	-7.7E-03	-6.0E-03	-3.5E-03	-9.5E-04	1.6E-03	4.1E-03

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3527	5.8E-04	1.6E-03	2.9E-03	3.3E-03	3.6E-03	2.7E-03	2.3E-03	-8.5E-03	-8.3E-03	-7.0E-03	-5.8E-03	-4.5E-03	-3.3E-03
3528	6.2E-04	1.7E-03	3.1E-03	3.6E-03	4.0E-03	2.9E-03	2.7E-03	-6.4E-03	-4.8E-03	-2.1E-03	6.7E-04	3.4E-03	6.1E-03
3529	6.3E-04	1.7E-03	3.2E-03	3.6E-03	4.1E-03	2.9E-03	2.7E-03	-6.6E-03	-5.0E-03	-2.3E-03	4.5E-04	3.2E-03	5.9E-03
3530	6.8E-04	1.8E-03	3.2E-03	3.6E-03	4.2E-03	3.1E-03	2.9E-03	-7.0E-03	-5.6E-03	-3.0E-03	-3.7E-04	2.2E-03	4.9E-03
3531	8.7E-04	1.7E-03	3.2E-03	3.6E-03	4.2E-03	3.1E-03	3.0E-03	-7.0E-03	-5.9E-03	-3.6E-03	-1.2E-03	1.1E-03	3.5E-03
3532	9.0E-04	1.7E-03	3.2E-03	3.6E-03	4.2E-03	3.1E-03	3.0E-03	-7.1E-03	-6.1E-03	-3.8E-03	-1.6E-03	7.2E-04	3.0E-03
3533	8.5E-04	2.0E-03	3.6E-03	4.0E-03	4.5E-03	3.2E-03	3.0E-03	-6.9E-03	-6.4E-03	-4.5E-03	-2.5E-03	-6.1E-04	1.3E-03
3534	7.4E-04	2.4E-03	4.1E-03	4.6E-03	4.8E-03	2.9E-03	2.7E-03	-6.8E-04	-5.7E-03	-9.3E-03	-1.3E-02	-1.6E-02	-2.0E-02
3535	6.9E-04	2.6E-03	4.2E-03	5.0E-03	5.2E-03	2.7E-03	2.5E-03	1.8E-02	6.1E-03	-4.4E-03	-1.5E-02	-2.5E-02	-3.6E-02
3536	7.0E-04	2.7E-03	4.2E-03	5.0E-03	5.2E-03	2.7E-03	2.5E-03	1.8E-02	5.7E-03	-5.2E-03	-1.6E-02	-2.7E-02	-3.8E-02
3537	7.4E-04	2.7E-03	4.4E-03	5.2E-03	5.4E-03	2.8E-03	2.6E-03	1.6E-02	2.6E-03	-9.2E-03	-2.1E-02	-3.3E-02	-4.5E-02
3538	7.4E-04	2.8E-03	4.5E-03	5.3E-03	5.5E-03	2.8E-03	2.6E-03	1.4E-02	3.9E-04	-1.2E-02	-2.4E-02	-3.6E-02	-4.8E-02
3539	7.7E-04	2.8E-03	4.5E-03	5.2E-03	5.4E-03	2.9E-03	2.7E-03	1.1E-02	6.0E-05	-8.8E-03	-1.8E-02	-2.7E-02	-3.6E-02
3540	7.9E-04	2.2E-03	4.0E-03	4.5E-03	4.8E-03	3.2E-03	3.0E-03	-1.0E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02
3541	8.3E-04	1.8E-03	3.4E-03	3.8E-03	4.4E-03	3.3E-03	3.2E-03	-6.7E-03	-6.7E-03	-5.2E-03	-3.8E-03	-2.4E-03	-9.6E-04
3542	7.6E-04	1.7E-03	3.1E-03	3.6E-03	3.8E-03	2.8E-03	2.6E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.3E-02
3543	9.0E-04	1.9E-03	3.1E-03	3.6E-03	3.8E-03	2.8E-03	2.6E-03	-1.1E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.4E-02
3544	8.9E-04	2.0E-03	3.1E-03	3.6E-03	3.7E-03	2.8E-03	2.6E-03	-8.6E-03	-1.1E-02	-1.2E-02	-1.4E-02	-1.5E-02	-1.6E-02
3545	7.2E-04	1.9E-03	3.2E-03	3.8E-03	4.0E-03	3.0E-03	2.7E-03	-1.1E-02	-1.4E-02	-1.5E-02	-1.7E-02	-1.8E-02	-2.0E-02
3546	7.0E-04	2.0E-03	3.3E-03	3.9E-03	4.1E-03	3.1E-03	2.8E-03	-1.2E-02	-1.4E-02	-1.6E-02	-1.7E-02	-1.9E-02	-2.0E-02
3547	7.4E-04	1.8E-03	3.4E-03	3.9E-03	4.4E-03	3.4E-03	3.2E-03	-1.2E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02
3548	8.4E-04	2.1E-03	4.0E-03	4.5E-03	5.2E-03	3.7E-03	3.5E-03	-8.0E-03	-1.1E-02	-1.3E-02	-1.5E-02	-1.6E-02	-1.8E-02
3549	8.8E-04	2.7E-03	4.7E-03	5.3E-03	5.5E-03	3.4E-03	3.2E-03	-8.7E-03	-1.6E-02	-2.2E-02	-2.7E-02	-3.3E-02	-3.8E-02
3550	9.2E-04	2.8E-03	4.9E-03	5.5E-03	5.8E-03	3.5E-03	3.3E-03	-6.3E-03	-1.6E-02	-2.3E-02	-3.0E-02	-3.8E-02	-4.5E-02
3551	9.2E-04	2.9E-03	4.9E-03	5.6E-03	5.8E-03	3.6E-03	3.4E-03	-6.6E-03	-1.6E-02	-2.4E-02	-3.2E-02	-3.9E-02	-4.7E-02
3552	9.4E-04	3.0E-03	5.1E-03	5.8E-03	6.2E-03	3.8E-03	3.6E-03	-9.3E-03	-1.9E-02	-2.7E-02	-3.4E-02	-4.2E-02	-5.0E-02
3553	9.4E-04	2.9E-03	5.0E-03	5.7E-03	6.2E-03	3.8E-03	3.6E-03	-9.6E-03	-1.9E-02	-2.7E-02	-3.5E-02	-4.2E-02	-5.0E-02
3554	9.5E-04	2.9E-03	5.0E-03	5.8E-03	6.3E-03	4.0E-03	3.8E-03	-1.0E-02	-2.0E-02	-2.7E-02	-3.5E-02	-4.3E-02	-5.0E-02
3555	9.1E-04	3.0E-03	5.0E-03	5.9E-03	6.1E-03	3.5E-03	3.3E-03	7.3E-04	-1.2E-02	-2.2E-02	-3.2E-02	-4.2E-02	-5.2E-02
3556	8.8E-04	3.0E-03	4.9E-03	5.8E-03	6.1E-03	3.5E-03	3.2E-03	-7.4E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.2E-02	-5.1E-02
3557	9.4E-04	2.9E-03	5.0E-03	5.8E-03	6.2E-03	3.9E-03	3.6E-03	-7.3E-03	-1.8E-02	-2.6E-02	-3.4E-02	-4.3E-02	-5.1E-02
3558	9.5E-04	2.8E-03	5.0E-03	5.7E-03	6.4E-03	4.2E-03	4.0E-03	-1.2E-02	-2.1E-02	-2.7E-02	-3.4E-02	-4.0E-02	-4.7E-02
3559	9.5E-04	2.8E-03	4.9E-03	5.8E-03	7.6E-03	5.5E-03	5.3E-03	-1.7E-02	-2.4E-02	-2.9E-02	-3.3E-02	-3.8E-02	-4.3E-02
3560	9.4E-04	2.7E-03	4.9E-03	6.5E-03	1.0E-02	8.0E-03	7.6E-03	-2.2E-02	-2.7E-02	-3.1E-02	-3.4E-02	-3.7E-02	-4.1E-02
3561	9.5E-04	2.9E-03	5.0E-03	6.5E-03	9.5E-03	7.2E-03	6.9E-03	-1.9E-02	-2.5E-02	-2.9E-02	-3.3E-02	-3.7E-02	-4.2E-02
3562	9.6E-04	3.0E-03	5.2E-03	6.1E-03	8.3E-03	5.9E-03	5.8E-03	-9.4E-03	-1.7E-02	-2.3E-02	-2.8E-02	-3.4E-02	-4.0E-02
3563	9.5E-04	3.1E-03	5.2E-03	6.1E-03	7.1E-03	6.2E-03	6.2E-03	3.8E-05	-9.9E-03	-1.8E-02	-2.5E-02	-3.3E-02	-4.1E-02
3564	9.6E-04	3.2E-03	5.3E-03	6.2E-03	7.2E-03	6.9E-03	6.9E-03	5.8E-03	-5.2E-03	-1.4E-02	-2.3E-02	-3.2E-02	-4.1E-02
3565	9.4E-04	3.2E-03	5.3E-03	6.3E-03	6.6E-03	5.2E-03	5.2E-03	-7.3E-03	-1.6E-02	-2.3E-02	-3.0E-02	-3.7E-02	-4.4E-02
3566	9.0E-04	3.2E-03	5.2E-03	6.2E-03	6.6E-03	3.9E-03	3.9E-03	-2.6E-02	-3.1E-02	-3.4E-02	-3.7E-02	-4.0E-02	-4.3E-02
3567	9.1E-04	3.3E-03	5.2E-03	6.3E-03	6.7E-03	3.7E-03	3.4E-03	-3.3E-02	-3.7E-02	-3.9E-02	-4.1E-02	-4.3E-02	-4.5E-02

Location	Adult Worker												
	2025 - Construction	2026 - Construction	2027 - Construction	2028 - Construction	2029 - Construction	2030 - Construction	2031 - Construction	2032 - Construction and Operations	2033 - Operations	2034 - Operations	2035 - Operations	2036 - Operations	2037 - Operations
3568	9.3E-04	3.4E-03	5.4E-03	6.5E-03	6.9E-03	3.8E-03	3.7E-03	-4.1E-02	-4.4E-02	-4.6E-02	-4.8E-02	-4.9E-02	-5.1E-02
3569	1.0E-03	3.7E-03	5.9E-03	7.1E-03	7.5E-03	4.0E-03	3.8E-03	-6.2E-02	-6.5E-02	-6.5E-02	-6.6E-02	-6.6E-02	-6.7E-02
3570	1.0E-03	3.9E-03	6.1E-03	7.4E-03	7.8E-03	4.2E-03	3.9E-03	-7.0E-02	-7.3E-02	-7.3E-02	-7.3E-02	-7.3E-02	-7.3E-02
3571	9.9E-04	3.8E-03	5.9E-03	7.3E-03	7.7E-03	4.0E-03	3.8E-03	-7.0E-02	-7.2E-02	-7.1E-02	-7.0E-02	-7.0E-02	-6.9E-02
3572	1.0E-03	3.9E-03	6.0E-03	7.4E-03	7.9E-03	4.1E-03	3.8E-03	-7.3E-02	-7.5E-02	-7.4E-02	-7.3E-02	-7.2E-02	-7.1E-02
3573	1.1E-03	4.3E-03	6.5E-03	8.0E-03	8.5E-03	4.3E-03	4.0E-03	-7.9E-02	-8.1E-02	-8.1E-02	-8.0E-02	-8.0E-02	-7.9E-02
3574	1.1E-03	4.7E-03	7.1E-03	8.6E-03	9.2E-03	4.5E-03	4.2E-03	-1.1E-01	-1.1E-01	-1.1E-01	-1.0E-01	-9.7E-02	-9.3E-02
3575	1.1E-03	5.0E-03	7.6E-03	9.1E-03	9.7E-03	4.6E-03	4.3E-03	-1.8E-01	-1.6E-01	-1.5E-01	-1.3E-01	-1.1E-01	-9.2E-02
3576	1.0E-03	4.8E-03	7.5E-03	9.0E-03	9.6E-03	4.7E-03	4.4E-03	-2.4E-01	-2.1E-01	-1.8E-01	-1.5E-01	-1.2E-01	-9.3E-02
3577	1.0E-03	4.7E-03	7.8E-03	9.3E-03	9.6E-03	4.8E-03	4.4E-03	-2.6E-01	-2.4E-01	-2.0E-01	-1.7E-01	-1.4E-01	-1.1E-01
3578	9.7E-04	4.1E-03	7.4E-03	8.9E-03	9.3E-03	4.8E-03	4.4E-03	-2.5E-01	-2.3E-01	-2.1E-01	-1.9E-01	-1.7E-01	-1.5E-01
3579	9.6E-04	3.9E-03	7.4E-03	8.9E-03	9.3E-03	4.7E-03	4.4E-03	-2.3E-01	-2.1E-01	-2.0E-01	-1.9E-01	-1.7E-01	-1.6E-01
3580	9.7E-04	3.9E-03	7.1E-03	8.6E-03	9.1E-03	4.5E-03	4.2E-03	-2.0E-01	-1.8E-01	-1.6E-01	-1.5E-01	-1.3E-01	-1.1E-01
3581	1.0E-03	4.2E-03	7.5E-03	9.0E-03	9.6E-03	4.7E-03	4.3E-03	-1.4E-01	-1.3E-01	-1.2E-01	-1.0E-01	-9.0E-02	-7.6E-02
3582	1.1E-03	4.7E-03	8.1E-03	9.6E-03	1.0E-02	4.9E-03	4.6E-03	-1.3E-01	-1.1E-01	-8.6E-02	-6.5E-02	-4.3E-02	-2.1E-02
3583	1.2E-03	5.1E-03	8.6E-03	1.0E-02	1.1E-02	5.1E-03	4.7E-03	-1.2E-01	-1.0E-01	-8.3E-02	-6.2E-02	-4.2E-02	-2.1E-02
3584	6.1E-03	7.6E-03	1.1E-02	1.7E-02	1.9E-02	1.6E-02	1.6E-02	6.6E-02	8.3E-02	1.1E-01	1.4E-01	1.7E-01	1.9E-01
3585	6.4E-03	7.6E-03	1.1E-02	1.8E-02	2.0E-02	1.7E-02	1.7E-02	4.8E-02	6.2E-02	8.7E-02	1.1E-01	1.4E-01	1.6E-01
3586	6.8E-03	7.9E-03	1.2E-02	1.9E-02	2.1E-02	1.8E-02	1.8E-02	4.5E-02	5.5E-02	7.9E-02	1.0E-01	1.2E-01	1.5E-01
3587	7.7E-03	8.9E-03	1.3E-02	2.2E-02	2.4E-02	2.1E-02	2.1E-02	3.8E-02	4.6E-02	6.9E-02	9.1E-02	1.1E-01	1.4E-01
3588	8.5E-03	9.6E-03	1.4E-02	2.4E-02	2.6E-02	2.3E-02	2.3E-02	2.1E-02	2.5E-02	4.4E-02	6.3E-02	8.2E-02	1.0E-01
3589	8.9E-03	1.0E-02	1.4E-02	2.5E-02	2.7E-02	2.4E-02	2.4E-02	1.6E-02	1.7E-02	3.4E-02	5.2E-02	6.9E-02	8.6E-02
3590	9.7E-03	1.1E-02	1.5E-02	2.8E-02	3.0E-02	2.7E-02	2.6E-02	1.5E-02	8.8E-03	2.0E-02	3.2E-02	4.3E-02	5.5E-02
3591	1.2E-02	1.3E-02	1.8E-02	3.4E-02	3.6E-02	3.3E-02	3.3E-02	4.1E-02	3.2E-02	4.6E-02	5.9E-02	7.3E-02	8.7E-02
3592	1.5E-02	1.6E-02	2.1E-02	4.2E-02	4.4E-02	4.0E-02	4.0E-02	1.8E-02	1.1E-02	3.1E-02	5.2E-02	7.3E-02	9.3E-02
3593	1.4E-02	1.5E-02	2.2E-02	4.3E-02	4.5E-02	4.1E-02	4.1E-02	4.7E-03	-1.0E-03	2.4E-02	4.8E-02	7.3E-02	9.7E-02
3594	1.3E-02	1.5E-02	2.2E-02	3.9E-02	4.2E-02	4.0E-02	3.8E-02	4.6E-03	-3.0E-03	2.0E-02	4.4E-02	6.7E-02	9.0E-02
3595	1.1E-02	1.5E-02	2.3E-02	3.0E-02	4.3E-02	4.2E-02	4.0E-02	1.2E-02	4.7E-03	2.9E-02	5.3E-02	7.7E-02	1.0E-01
3596	1.1E-02	1.5E-02	2.6E-02	3.0E-02	4.4E-02	4.3E-02	4.1E-02	2.0E-02	1.5E-02	3.9E-02	6.4E-02	8.8E-02	1.1E-01
3597	1.2E-02	1.6E-02	2.7E-02	2.9E-02	4.1E-02	4.0E-02	3.8E-02	4.2E-02	3.5E-02	5.8E-02	8.2E-02	1.1E-01	1.3E-01
3598	8.6E-03	1.2E-02	1.9E-02	2.5E-02	3.4E-02	3.1E-02	3.0E-02	5.1E-02	4.7E-02	6.9E-02	9.1E-02	1.1E-01	1.3E-01

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1	6.7E-04	7.1E-04	8.0E-04	8.6E-04	9.5E-04	1.0E-03	1.1E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03
2	2.3E-04	2.4E-04	1.8E-04	1.3E-04	1.3E-04	1.6E-04	2.4E-04	3.5E-04	5.0E-04	6.3E-04	7.2E-04	7.9E-04	8.2E-04
3	4.2E-03	4.8E-03	6.6E-03	8.0E-03	9.4E-03	1.1E-02	1.3E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02
4	2.6E-03	2.9E-03	3.8E-03	4.4E-03	5.0E-03	5.8E-03	7.0E-03	8.3E-03	8.9E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02
5	7.4E-04	8.2E-04	8.6E-04	8.5E-04	8.8E-04	1.0E-03	1.2E-03	1.5E-03	1.8E-03	2.1E-03	2.3E-03	2.4E-03	2.5E-03
6	2.7E-04	2.9E-04	1.4E-04	-1.2E-05	-1.4E-04	-2.1E-04	-2.4E-04	-2.3E-04	-6.9E-05	7.0E-05	1.7E-04	2.4E-04	2.8E-04
7	3.6E-04	4.0E-04	1.9E-04	-3.5E-05	-2.2E-04	-3.3E-04	-3.8E-04	-3.8E-04	-1.7E-04	4.0E-06	1.4E-04	2.3E-04	2.7E-04
8	2.4E-04	2.5E-04	2.5E-04	2.7E-04	3.3E-04	4.2E-04	5.5E-04	7.2E-04	8.6E-04	9.7E-04	1.1E-03	1.1E-03	1.1E-03
9	7.3E-04	8.1E-04	9.2E-04	9.7E-04	1.0E-03	1.2E-03	1.4E-03	1.7E-03	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03
10	2.3E-04	2.6E-04	1.4E-04	2.6E-05	-6.7E-05	-1.2E-04	-1.3E-04	-1.1E-04	2.2E-05	1.4E-04	2.2E-04	2.8E-04	3.1E-04
11	3.0E-04	3.3E-04	8.9E-05	-1.4E-04	-3.2E-04	-4.5E-04	-5.0E-04	-5.0E-04	-2.5E-04	-4.4E-05	1.1E-04	2.1E-04	2.6E-04
12	1.6E-04	1.7E-04	1.5E-04	1.3E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.5E-04	5.4E-04	6.1E-04	6.5E-04	6.7E-04
13	8.3E-04	9.3E-04	1.0E-03	1.0E-03	1.1E-03	1.3E-03	1.6E-03	1.9E-03	2.2E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03
14	1.9E-04	2.0E-04	1.2E-04	4.5E-05	1.1E-05	1.3E-05	5.5E-05	1.3E-04	2.9E-04	4.1E-04	5.1E-04	5.7E-04	6.0E-04
15	5.3E-03	5.5E-03	6.4E-03	6.6E-03	6.5E-03	5.3E-03	6.5E-03	7.8E-03	8.2E-03	8.5E-03	8.8E-03	9.0E-03	9.1E-03
16	1.4E-04	1.5E-04	8.1E-05	3.7E-05	2.8E-05	4.6E-05	9.9E-05	1.8E-04	3.2E-04	4.3E-04	5.2E-04	5.7E-04	6.0E-04
17	2.2E-04	2.1E-04	1.6E-04	1.3E-04	1.5E-04	1.9E-04	2.6E-04	3.6E-04	4.8E-04	5.7E-04	6.4E-04	6.9E-04	7.2E-04
18	2.2E-04	2.1E-04	1.6E-04	1.3E-04	1.5E-04	1.9E-04	2.6E-04	3.6E-04	4.8E-04	5.8E-04	6.5E-04	7.0E-04	7.2E-04
19	2.3E-04	2.2E-04	1.7E-04	1.4E-04	1.6E-04	2.0E-04	2.8E-04	3.9E-04	5.1E-04	6.1E-04	6.8E-04	7.3E-04	7.5E-04
20	2.2E-04	2.4E-04	1.5E-04	6.5E-05	1.2E-05	4.1E-06	4.5E-05	1.3E-04	3.0E-04	4.5E-04	5.6E-04	6.3E-04	6.7E-04
21	3.0E-04	2.9E-04	2.6E-04	2.5E-04	3.1E-04	3.8E-04	5.0E-04	6.7E-04	8.2E-04	9.5E-04	1.0E-03	1.1E-03	1.1E-03
22	1.5E-04	1.5E-04	8.9E-05	4.8E-05	4.5E-05	7.1E-05	1.3E-04	2.3E-04	3.8E-04	5.0E-04	5.9E-04	6.5E-04	6.8E-04
23	7.3E-04	8.2E-04	9.1E-04	9.4E-04	1.0E-03	1.2E-03	1.4E-03	1.7E-03	2.0E-03	2.2E-03	2.4E-03	2.5E-03	2.5E-03
24	1.0E-03	1.1E-03	1.0E-03	8.9E-04	8.1E-04	8.8E-04	1.1E-03	1.5E-03	1.9E-03	2.3E-03	2.6E-03	2.8E-03	2.9E-03
25	6.3E-04	7.1E-04	7.7E-04	8.0E-04	8.5E-04	9.7E-04	1.2E-03	1.5E-03	1.7E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03
26	8.6E-04	9.6E-04	9.6E-04	9.0E-04	8.9E-04	1.0E-03	1.2E-03	1.6E-03	1.9E-03	2.2E-03	2.5E-03	2.6E-03	2.7E-03
27	2.0E-03	2.1E-03	2.6E-03	2.7E-03	3.0E-03	3.2E-03	3.9E-03	4.8E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.7E-03
28	2.0E-03	2.1E-03	2.7E-03	3.1E-03	3.4E-03	3.8E-03	4.6E-03	5.6E-03	5.9E-03	6.3E-03	6.5E-03	6.7E-03	6.8E-03
29	6.2E-04	6.9E-04	8.1E-04	8.7E-04	9.7E-04	1.1E-03	1.4E-03	1.7E-03	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03
30	2.4E-03	2.7E-03	3.5E-03	4.0E-03	4.6E-03	5.2E-03	6.1E-03	7.2E-03	7.6E-03	8.1E-03	8.4E-03	8.7E-03	8.8E-03
31	5.5E-04	6.1E-04	6.5E-04	6.5E-04	6.7E-04	7.7E-04	9.5E-04	1.2E-03	1.4E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03
32	1.0E-03	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.7E-03	2.0E-03	2.5E-03	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.1E-03
33	1.3E-03	1.5E-03	1.8E-03	2.1E-03	2.3E-03	2.7E-03	3.3E-03	4.0E-03	4.4E-03	4.8E-03	5.1E-03	5.3E-03	5.4E-03
34	2.1E-04	2.3E-04	2.3E-04	2.5E-04	3.1E-04	3.7E-04	4.9E-04	6.4E-04	7.8E-04	8.9E-04	9.7E-04	1.0E-03	1.1E-03
35	3.6E-04	3.3E-04	2.3E-04	1.8E-04	2.2E-04	2.8E-04	3.9E-04	5.6E-04	7.4E-04	9.0E-04	1.0E-03	1.1E-03	1.1E-03
36	1.5E-03	1.7E-03	2.0E-03	2.2E-03	2.4E-03	2.8E-03	3.3E-03	4.0E-03	4.4E-03	4.8E-03	5.1E-03	5.3E-03	5.4E-03
37	1.3E-04	1.3E-04	8.6E-05	5.7E-05	5.1E-05	5.7E-05	8.4E-05	1.3E-04	2.0E-04	2.6E-04	3.0E-04	3.3E-04	3.5E-04
38	3.2E-04	3.6E-04	2.2E-04	6.4E-05	-5.8E-05	-1.3E-04	-1.6E-04	-1.4E-04	1.7E-05	1.5E-04	2.6E-04	3.2E-04	3.6E-04
39	2.2E-04	2.2E-04	2.1E-04	2.3E-04	2.8E-04	3.5E-04	4.7E-04	6.2E-04	7.6E-04	8.8E-04	9.6E-04	1.0E-03	1.0E-03
40	3.0E-04	3.0E-04	3.2E-04	3.6E-04	4.4E-04	5.4E-04	7.0E-04	9.0E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
41	1.7E-04	1.7E-04	1.3E-04	1.2E-04	1.3E-04	1.7E-04	2.3E-04	3.2E-04	4.2E-04	5.0E-04	5.6E-04	6.0E-04	6.2E-04
42	2.0E-04	2.0E-04	1.8E-04	1.9E-04	2.3E-04	3.0E-04	4.0E-04	5.5E-04	6.9E-04	8.1E-04	9.0E-04	9.6E-04	9.8E-04
43	1.9E-04	1.9E-04	1.6E-04	1.6E-04	1.9E-04	2.5E-04	3.5E-04	4.9E-04	6.4E-04	7.7E-04	8.6E-04	9.2E-04	9.5E-04
44	2.3E-04	2.2E-04	1.7E-04	1.4E-04	1.6E-04	2.0E-04	2.8E-04	3.8E-04	5.1E-04	6.1E-04	6.8E-04	7.3E-04	7.5E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
45	1.8E-04	1.7E-04	1.2E-04	8.9E-05	9.3E-05	1.2E-04	1.7E-04	2.4E-04	3.4E-04	4.2E-04	4.8E-04	5.2E-04	5.4E-04
46	1.5E-03	1.7E-03	2.0E-03	2.2E-03	2.4E-03	2.7E-03	3.3E-03	3.9E-03	4.3E-03	4.8E-03	5.1E-03	5.3E-03	5.4E-03
47	1.5E-03	1.7E-03	2.0E-03	2.2E-03	2.4E-03	2.8E-03	3.3E-03	4.0E-03	4.4E-03	4.8E-03	5.1E-03	5.3E-03	5.4E-03
48	9.3E-04	1.0E-03	1.3E-03	1.4E-03	1.6E-03	1.9E-03	2.3E-03	2.8E-03	3.1E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03
49	8.6E-04	9.3E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	2.0E-03	2.5E-03	2.7E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03
50	3.9E-04	4.3E-04	2.0E-04	-5.6E-05	-2.8E-04	-4.4E-04	-5.5E-04	-6.1E-04	-4.3E-04	-2.8E-04	-1.7E-04	-9.7E-05	-5.9E-05
51	1.2E-03	1.3E-03	1.5E-03	1.5E-03	1.6E-03	1.9E-03	2.3E-03	2.8E-03	3.2E-03	3.6E-03	3.9E-03	4.1E-03	4.2E-03
52	1.2E-03	1.3E-03	1.6E-03	1.7E-03	1.8E-03	2.1E-03	2.5E-03	3.0E-03	3.3E-03	3.6E-03	3.9E-03	4.0E-03	4.1E-03
53	3.2E-04	3.4E-04	3.8E-04	4.4E-04	5.5E-04	6.8E-04	8.5E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03
54	8.2E-04	9.1E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	2.0E-03	2.4E-03	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03
55	2.3E-04	2.5E-04	1.1E-04	-2.3E-05	-1.2E-04	-1.6E-04	-1.5E-04	-1.0E-04	9.7E-05	2.6E-04	3.8E-04	4.7E-04	5.1E-04
56	1.6E-03	1.8E-03	2.1E-03	2.2E-03	2.5E-03	2.9E-03	3.5E-03	4.3E-03	4.8E-03	5.3E-03	5.7E-03	6.0E-03	6.1E-03
57	2.3E-04	2.4E-04	2.5E-04	2.8E-04	3.3E-04	4.0E-04	5.2E-04	6.8E-04	8.1E-04	9.3E-04	1.0E-03	1.1E-03	1.1E-03
58	2.6E-04	2.4E-04	1.0E-04	9.0E-06	-1.7E-05	-9.0E-06	4.4E-05	1.4E-04	3.1E-04	4.5E-04	5.6E-04	6.3E-04	6.6E-04
59	9.0E-04	1.0E-03	1.1E-03	1.2E-03	1.4E-03	1.6E-03	2.0E-03	2.5E-03	2.9E-03	3.3E-03	3.5E-03	3.7E-03	3.8E-03
60	1.4E-04	1.5E-04	7.2E-05	1.9E-05	5.0E-06	2.0E-05	7.4E-05	1.6E-04	3.2E-04	4.4E-04	5.3E-04	5.9E-04	6.3E-04
61	2.2E-04	2.5E-04	7.7E-05	-7.7E-05	-1.9E-04	-2.5E-04	-2.5E-04	-2.1E-04	6.0E-06	1.8E-04	3.1E-04	4.0E-04	4.4E-04
62	2.1E-03	2.4E-03	3.0E-03	3.5E-03	3.9E-03	4.5E-03	5.4E-03	6.3E-03	6.7E-03	7.2E-03	7.5E-03	7.7E-03	7.8E-03
63	8.2E-04	9.1E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	2.0E-03	2.5E-03	2.7E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03
64	2.1E-04	2.0E-04	1.4E-04	1.0E-04	1.1E-04	1.4E-04	2.0E-04	2.9E-04	4.0E-04	5.0E-04	5.6E-04	6.1E-04	6.3E-04
65	1.9E-03	2.0E-03	2.6E-03	2.9E-03	3.3E-03	3.7E-03	4.5E-03	5.4E-03	5.7E-03	6.1E-03	6.3E-03	6.5E-03	6.6E-03
66	1.6E-03	1.8E-03	2.1E-03	2.2E-03	2.5E-03	2.9E-03	3.5E-03	4.3E-03	4.9E-03	5.4E-03	5.7E-03	6.0E-03	6.1E-03
67	6.0E-04	6.7E-04	5.3E-04	3.6E-04	2.5E-04	2.4E-04	3.3E-04	5.0E-04	8.1E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03
68	2.6E-04	2.8E-04	1.5E-04	3.6E-06	-1.1E-04	-1.8E-04	-2.1E-04	-1.9E-04	-3.9E-05	9.1E-05	1.9E-04	2.5E-04	2.9E-04
69	1.9E-04	1.8E-04	1.4E-04	1.2E-04	1.3E-04	1.7E-04	2.3E-04	3.2E-04	4.2E-04	5.0E-04	5.7E-04	6.1E-04	6.3E-04
70	1.2E-03	1.3E-03	1.6E-03	1.7E-03	1.8E-03	2.1E-03	2.5E-03	3.0E-03	3.3E-03	3.6E-03	3.9E-03	4.0E-03	4.1E-03
71	3.8E-04	4.2E-04	1.3E-04	-1.7E-04	-4.1E-04	-5.9E-04	-6.9E-04	-7.3E-04	-4.7E-04	-2.6E-04	-9.3E-05	1.6E-05	7.0E-05
72	8.2E-04	9.2E-04	1.0E-03	1.1E-03	1.1E-03	1.3E-03	1.5E-03	1.9E-03	2.1E-03	2.4E-03	2.6E-03	2.7E-03	2.8E-03
73	3.5E-03	4.0E-03	5.5E-03	6.5E-03	7.6E-03	9.0E-03	1.1E-02	1.3E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02
74	2.5E-04	2.5E-04	2.3E-04	2.4E-04	2.9E-04	3.6E-04	4.7E-04	6.3E-04	7.7E-04	8.9E-04	9.7E-04	1.0E-03	1.1E-03
75	3.6E-03	3.7E-03	4.2E-03	3.7E-03	3.9E-03	4.1E-03	5.0E-03	6.0E-03	6.3E-03	6.6E-03	6.8E-03	7.0E-03	7.1E-03
76	8.2E-04	9.0E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	2.0E-03	2.5E-03	2.7E-03	3.0E-03	3.2E-03	3.3E-03	3.3E-03
77	5.4E-04	5.9E-04	6.5E-04	6.5E-04	6.9E-04	7.7E-04	9.4E-04	1.2E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03
78	3.0E-03	3.3E-03	3.9E-03	4.3E-03	4.7E-03	5.7E-03	7.1E-03	8.7E-03	9.6E-03	1.0E-02	1.1E-02	1.2E-02	1.2E-02
79	7.2E-04	8.0E-04	9.1E-04	9.5E-04	1.0E-03	1.2E-03	1.4E-03	1.7E-03	1.9E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03
80	1.2E-04	1.2E-04	7.1E-05	3.6E-05	2.2E-05	2.0E-05	3.8E-05	7.3E-05	1.4E-04	1.9E-04	2.3E-04	2.6E-04	2.8E-04
81	1.7E-04	1.7E-04	9.0E-05	3.8E-05	3.1E-05	5.4E-05	1.2E-04	2.2E-04	3.9E-04	5.3E-04	6.3E-04	6.9E-04	7.3E-04
82	1.6E-03	1.8E-03	2.3E-03	2.6E-03	2.9E-03	3.4E-03	4.0E-03	4.8E-03	5.2E-03	5.5E-03	5.8E-03	6.0E-03	6.1E-03
83	1.6E-04	1.5E-04	1.2E-04	1.1E-04	1.3E-04	1.6E-04	2.2E-04	3.1E-04	4.0E-04	4.7E-04	5.3E-04	5.6E-04	5.8E-04
84	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.6E-03	1.8E-03	2.1E-03	2.6E-03	2.9E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03
85	5.3E-04	5.9E-04	7.5E-05	-4.5E-04	-9.0E-04	-1.3E-03	-1.5E-03	-1.7E-03	-1.4E-03	-1.1E-03	-8.7E-04	-7.3E-04	-6.6E-04
86	2.6E-03	2.9E-03	3.7E-03	4.3E-03	4.9E-03	5.7E-03	6.8E-03	8.2E-03	8.8E-03	9.4E-03	9.9E-03	1.0E-02	1.0E-02
87	1.4E-04	1.4E-04	1.1E-04	8.9E-05	1.0E-04	1.3E-04	1.9E-04	2.8E-04	3.9E-04	4.8E-04	5.4E-04	5.9E-04	6.1E-04
88	1.6E-03	1.8E-03	-8.2E-05	-2.0E-03	-3.7E-03	-5.1E-03	-6.2E-03	-7.1E-03	-6.2E-03	-5.4E-03	-4.9E-03	-4.5E-03	-4.3E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
89	2.6E-03	2.8E-03	3.4E-03	3.6E-03	3.9E-03	4.0E-03	4.8E-03	5.8E-03	6.2E-03	6.5E-03	6.7E-03	6.9E-03	7.0E-03
90	1.2E-04	1.2E-04	7.9E-05	4.6E-05	3.5E-05	3.5E-05	5.6E-05	9.7E-05	1.6E-04	2.2E-04	2.6E-04	2.9E-04	3.0E-04
91	1.2E-04	1.2E-04	7.9E-05	4.7E-05	3.6E-05	3.6E-05	5.8E-05	9.8E-05	1.7E-04	2.2E-04	2.6E-04	2.9E-04	3.1E-04
92	1.3E-03	1.4E-03	1.7E-03	2.0E-03	2.2E-03	2.6E-03	3.2E-03	3.8E-03	4.2E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03
93	1.3E-04	1.4E-04	1.1E-04	9.3E-05	1.1E-04	1.4E-04	2.0E-04	2.8E-04	3.8E-04	4.7E-04	5.3E-04	5.7E-04	5.9E-04
94	3.4E-04	3.4E-04	3.2E-04	3.4E-04	4.2E-04	5.3E-04	7.0E-04	9.1E-04	1.1E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03
95	1.2E-04	1.2E-04	7.9E-05	4.6E-05	3.5E-05	3.5E-05	5.5E-05	9.5E-05	1.6E-04	2.2E-04	2.6E-04	2.9E-04	3.0E-04
96	3.8E-04	4.2E-04	5.1E-05	-3.0E-04	-6.0E-04	-8.1E-04	-9.5E-04	-1.0E-03	-7.0E-04	-4.4E-04	-2.5E-04	-1.2E-04	-5.4E-05
97	1.2E-04	1.3E-04	9.0E-05	6.7E-05	6.9E-05	8.6E-05	1.3E-04	1.9E-04	2.8E-04	3.5E-04	4.0E-04	4.4E-04	4.6E-04
98	1.2E-04	1.3E-04	9.0E-05	6.7E-05	6.9E-05	8.6E-05	1.3E-04	1.9E-04	2.8E-04	3.5E-04	4.1E-04	4.4E-04	4.6E-04
99	1.6E-04	1.7E-04	4.8E-05	-5.2E-05	-1.1E-04	-1.2E-04	-8.3E-05	-2.7E-06	1.9E-04	3.5E-04	4.7E-04	5.5E-04	5.9E-04
100	6.8E-04	7.6E-04	8.0E-04	7.9E-04	8.2E-04	9.5E-04	1.2E-03	1.5E-03	1.7E-03	2.0E-03	2.2E-03	2.3E-03	2.4E-03
101	9.0E-04	9.6E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	1.9E-03	2.3E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03
102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
111	6.8E-03	7.0E-03	4.7E-03	1.4E-03	-1.6E-03	-2.8E-03	-3.2E-03	-3.3E-03	-1.9E-03	-6.6E-04	2.5E-04	8.5E-04	1.2E-03
112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
113	6.9E-03	7.1E-03	4.9E-03	1.8E-03	-1.1E-03	-2.3E-03	-2.6E-03	-2.5E-03	-1.1E-03	1.2E-04	1.0E-03	1.6E-03	1.9E-03
114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
115	6.9E-03	7.1E-03	5.1E-03	2.2E-03	-5.5E-04	-1.5E-03	-1.6E-03	-1.4E-03	2.0E-05	1.2E-03	2.1E-03	2.7E-03	3.0E-03
116	5.4E-03	5.6E-03	4.1E-03	1.8E-03	-2.3E-04	-9.8E-04	-1.0E-03	-8.2E-04	3.8E-04	1.4E-03	2.2E-03	2.7E-03	2.9E-03
117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
118	6.9E-03	7.1E-03	5.3E-03	2.7E-03	1.8E-04	-5.8E-04	-4.6E-04	-8.8E-07	1.4E-03	2.7E-03	3.6E-03	4.2E-03	4.5E-03
119	5.5E-03	5.7E-03	4.3E-03	2.3E-03	4.3E-04	-1.2E-04	3.1E-05	4.7E-04	1.7E-03	2.7E-03	3.5E-03	4.1E-03	4.3E-03
120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
121	6.8E-03	7.1E-03	5.6E-03	3.2E-03	1.1E-03	6.0E-04	1.0E-03	1.8E-03	3.3E-03	4.5E-03	5.5E-03	6.1E-03	6.4E-03
122	5.5E-03	5.7E-03	4.7E-03	2.9E-03	1.2E-03	9.3E-04	1.4E-03	2.1E-03	3.3E-03	4.4E-03	5.2E-03	5.8E-03	6.0E-03
123	4.6E-03	4.8E-03	3.9E-03	2.5E-03	1.2E-03	1.0E-03	1.4E-03	2.1E-03	3.2E-03	4.2E-03	4.9E-03	5.4E-03	5.6E-03
124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
125	6.7E-03	7.0E-03	5.9E-03	3.9E-03	2.2E-03	2.1E-03	2.9E-03	4.0E-03	5.5E-03	6.8E-03	7.8E-03	8.5E-03	8.8E-03
126	5.5E-03	5.7E-03	5.0E-03	3.5E-03	2.2E-03	2.2E-03	2.9E-03	3.9E-03	5.2E-03	6.4E-03	7.2E-03	7.8E-03	8.0E-03
127	4.6E-03	4.8E-03	4.2E-03	3.0E-03	2.0E-03	2.1E-03	2.7E-03	3.7E-03	4.8E-03	5.8E-03	6.6E-03	7.1E-03	7.3E-03
128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
129	6.5E-03	6.8E-03	6.2E-03	4.7E-03	3.5E-03	3.8E-03	5.0E-03	6.6E-03	8.2E-03	9.5E-03	1.1E-02	1.1E-02	1.2E-02
130	5.5E-03	5.7E-03	5.3E-03	4.2E-03	3.3E-03	3.6E-03	4.7E-03	6.1E-03	7.4E-03	8.6E-03	9.4E-03	1.0E-02	1.0E-02
131	4.6E-03	4.9E-03	4.6E-03	3.7E-03	2.9E-03	3.2E-03	4.2E-03	5.4E-03	6.6E-03	7.7E-03	8.4E-03	9.0E-03	9.2E-03
132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
133	6.4E-03	6.7E-03	6.6E-03	5.6E-03	5.0E-03	5.7E-03	7.4E-03	9.5E-03	1.1E-02	1.2E-02	1.4E-02	1.4E-02	1.5E-02
134	5.4E-03	5.7E-03	5.7E-03	4.9E-03	4.4E-03	5.1E-03	6.5E-03	8.3E-03	9.7E-03	1.1E-02	1.2E-02	1.2E-02	1.3E-02
135	4.7E-03	4.9E-03	4.9E-03	4.3E-03	3.9E-03	4.4E-03	5.7E-03	7.2E-03	8.5E-03	9.5E-03	1.0E-02	1.1E-02	1.1E-02
136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
137	6.2E-03	6.5E-03	6.9E-03	6.5E-03	6.4E-03	7.6E-03	9.8E-03	1.2E-02	1.4E-02	1.5E-02	1.7E-02	1.7E-02	1.8E-02
138	5.4E-03	5.6E-03	6.0E-03	5.6E-03	5.5E-03	6.5E-03	8.4E-03	1.1E-02	1.2E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02
139	4.7E-03	4.9E-03	5.2E-03	4.9E-03	4.8E-03	5.6E-03	7.2E-03	9.0E-03	1.0E-02	1.1E-02	1.2E-02	1.3E-02	1.3E-02
140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
141	6.1E-03	6.4E-03	7.3E-03	7.4E-03	7.8E-03	9.5E-03	1.2E-02	1.5E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02
142	5.3E-03	5.6E-03	6.3E-03	6.4E-03	6.7E-03	8.0E-03	1.0E-02	1.3E-02	1.4E-02	1.5E-02	1.6E-02	1.7E-02	1.7E-02
143	4.7E-03	4.9E-03	5.5E-03	5.5E-03	5.7E-03	6.8E-03	8.6E-03	1.1E-02	1.2E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02
144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
145	6.0E-03	6.4E-03	7.6E-03	8.2E-03	9.1E-03	1.1E-02	1.4E-02	1.8E-02	1.9E-02	2.1E-02	2.2E-02	2.3E-02	2.3E-02
146	5.3E-03	5.6E-03	6.6E-03	7.0E-03	7.7E-03	9.3E-03	1.2E-02	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	1.9E-02
147	4.7E-03	5.0E-03	5.8E-03	6.0E-03	6.5E-03	7.9E-03	9.9E-03	1.2E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02
148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
149	6.0E-03	6.3E-03	8.0E-03	9.0E-03	1.0E-02	1.3E-02	1.6E-02	2.0E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.5E-02
150	5.2E-03	5.6E-03	6.9E-03	7.6E-03	8.5E-03	1.0E-02	1.3E-02	1.6E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.1E-02
151	4.7E-03	5.0E-03	6.0E-03	6.5E-03	7.2E-03	8.7E-03	1.1E-02	1.4E-02	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02
152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
153	5.9E-03	6.3E-03	8.3E-03	9.6E-03	1.1E-02	1.4E-02	1.8E-02	2.2E-02	2.3E-02	2.5E-02	2.6E-02	2.7E-02	2.7E-02
154	5.2E-03	5.6E-03	7.1E-03	8.1E-03	9.3E-03	1.1E-02	1.4E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.2E-02
155	4.7E-03	5.0E-03	6.2E-03	6.9E-03	7.8E-03	9.5E-03	1.2E-02	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	1.9E-02
156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
157	5.9E-03	6.2E-03	8.5E-03	1.0E-02	1.2E-02	1.5E-02	1.9E-02	2.3E-02	2.5E-02	2.6E-02	2.8E-02	2.8E-02	2.9E-02
158	5.2E-03	5.6E-03	7.4E-03	8.6E-03	1.0E-02	1.2E-02	1.5E-02	1.9E-02	2.0E-02	2.2E-02	2.3E-02	2.3E-02	2.4E-02
159	4.7E-03	5.0E-03	6.4E-03	7.3E-03	8.4E-03	1.0E-02	1.3E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02
160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
161	5.8E-03	6.3E-03	8.8E-03	1.1E-02	1.3E-02	1.6E-02	2.0E-02	2.4E-02	2.6E-02	2.8E-02	2.9E-02	3.0E-02	3.0E-02
162	5.2E-03	5.6E-03	7.6E-03	8.9E-03	1.1E-02	1.3E-02	1.6E-02	2.0E-02	2.1E-02	2.3E-02	2.4E-02	2.4E-02	2.5E-02
163	4.7E-03	5.0E-03	6.6E-03	7.7E-03	8.9E-03	1.1E-02	1.4E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.1E-02
164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
165	5.9E-03	6.3E-03	9.0E-03	1.1E-02	1.3E-02	1.7E-02	2.1E-02	2.6E-02	2.7E-02	2.9E-02	3.0E-02	3.1E-02	3.1E-02
166	5.2E-03	5.6E-03	7.8E-03	9.4E-03	1.1E-02	1.4E-02	1.7E-02	2.1E-02	2.3E-02	2.4E-02	2.5E-02	2.6E-02	2.6E-02
167	4.7E-03	5.1E-03	6.9E-03	8.1E-03	9.5E-03	1.2E-02	1.5E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.2E-02
168	8.0E-03	8.6E-03	1.4E-02	1.9E-02	2.4E-02	3.1E-02	3.8E-02	4.7E-02	4.9E-02	5.1E-02	5.2E-02	5.3E-02	5.4E-02
169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
170	5.9E-03	6.4E-03	9.2E-03	1.1E-02	1.4E-02	1.7E-02	2.2E-02	2.6E-02	2.8E-02	3.0E-02	3.1E-02	3.2E-02	3.2E-02
171	5.2E-03	5.7E-03	8.0E-03	9.8E-03	1.2E-02	1.4E-02	1.8E-02	2.2E-02	2.3E-02	2.5E-02	2.6E-02	2.6E-02	2.7E-02
172	4.7E-03	5.2E-03	7.1E-03	8.5E-03	1.0E-02	1.2E-02	1.5E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.3E-02
173	7.9E-03	8.5E-03	1.4E-02	1.8E-02	2.3E-02	2.9E-02	3.6E-02	4.4E-02	4.6E-02	4.8E-02	4.9E-02	5.0E-02	5.0E-02
174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
178	7.8E-03	8.4E-03	1.4E-02	1.8E-02	2.3E-02	2.8E-02	3.5E-02	4.3E-02	4.5E-02	4.6E-02	4.8E-02	4.9E-02	4.9E-02
179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
180	6.0E-03	6.5E-03	9.6E-03	1.2E-02	1.5E-02	1.8E-02	2.3E-02	2.8E-02	2.9E-02	3.1E-02	3.2E-02	3.3E-02	3.3E-02
181	5.3E-03	5.8E-03	8.5E-03	1.1E-02	1.3E-02	1.6E-02	1.9E-02	2.4E-02	2.5E-02	2.6E-02	2.7E-02	2.8E-02	2.8E-02
182	9.1E-03	9.9E-03	1.7E-02	2.2E-02	2.8E-02	3.5E-02	4.4E-02	5.2E-02	5.5E-02	5.7E-02	5.8E-02	5.9E-02	6.0E-02
183	7.8E-03	8.5E-03	1.4E-02	1.8E-02	2.2E-02	2.8E-02	3.4E-02	4.2E-02	4.4E-02	4.6E-02	4.7E-02	4.8E-02	4.8E-02
184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
185	6.0E-03	6.6E-03	9.7E-03	1.2E-02	1.5E-02	1.8E-02	2.3E-02	2.8E-02	2.9E-02	3.1E-02	3.2E-02	3.3E-02	3.3E-02
186	5.4E-03	5.9E-03	8.7E-03	1.1E-02	1.3E-02	1.6E-02	2.0E-02	2.4E-02	2.6E-02	2.7E-02	2.8E-02	2.9E-02	2.9E-02
187	1.1E-02	1.2E-02	2.0E-02	2.7E-02	3.4E-02	4.2E-02	5.1E-02	6.2E-02	6.4E-02	6.6E-02	6.8E-02	6.9E-02	6.9E-02
188	9.0E-03	9.8E-03	1.6E-02	2.1E-02	2.7E-02	3.3E-02	4.1E-02	4.9E-02	5.1E-02	5.3E-02	5.4E-02	5.5E-02	5.6E-02
189	7.7E-03	8.5E-03	1.3E-02	1.8E-02	2.2E-02	2.7E-02	3.3E-02	4.0E-02	4.2E-02	4.4E-02	4.5E-02	4.6E-02	4.7E-02
190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
191	6.1E-03	6.7E-03	9.7E-03	1.2E-02	1.5E-02	1.8E-02	2.2E-02	2.7E-02	2.9E-02	3.1E-02	3.2E-02	3.3E-02	3.3E-02
192	1.3E-02	1.4E-02	2.3E-02	3.0E-02	3.7E-02	4.6E-02	5.6E-02	6.7E-02	6.9E-02	7.2E-02	7.3E-02	7.4E-02	7.5E-02
193	1.0E-02	1.1E-02	1.9E-02	2.5E-02	3.1E-02	3.8E-02	4.6E-02	5.5E-02	5.7E-02	5.9E-02	6.1E-02	6.2E-02	6.2E-02
194	8.9E-03	9.9E-03	1.6E-02	2.1E-02	2.6E-02	3.1E-02	3.9E-02	4.6E-02	4.8E-02	5.0E-02	5.2E-02	5.3E-02	5.3E-02
195	7.8E-03	8.6E-03	1.3E-02	1.7E-02	2.1E-02	2.6E-02	3.2E-02	3.9E-02	4.1E-02	4.2E-02	4.4E-02	4.5E-02	4.5E-02
196	7.3E-03	8.1E-03	1.2E-02	1.6E-02	1.9E-02	2.4E-02	2.9E-02	3.5E-02	3.7E-02	3.9E-02	4.0E-02	4.1E-02	4.1E-02
197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
198	1.3E-02	1.4E-02	2.2E-02	2.8E-02	3.5E-02	4.2E-02	5.1E-02	6.1E-02	6.4E-02	6.6E-02	6.8E-02	6.9E-02	6.9E-02
199	1.1E-02	1.2E-02	1.9E-02	2.4E-02	3.0E-02	3.6E-02	4.4E-02	5.2E-02	5.5E-02	5.7E-02	5.8E-02	5.9E-02	6.0E-02
200	9.1E-03	1.0E-02	1.6E-02	2.0E-02	2.5E-02	3.0E-02	3.7E-02	4.4E-02	4.6E-02	4.8E-02	4.9E-02	5.0E-02	5.1E-02
201	7.9E-03	8.8E-03	1.3E-02	1.7E-02	2.0E-02	2.5E-02	3.0E-02	3.6E-02	3.8E-02	4.0E-02	4.2E-02	4.2E-02	4.3E-02
202	7.3E-03	8.1E-03	1.2E-02	1.5E-02	1.8E-02	2.2E-02	2.7E-02	3.3E-02	3.4E-02	3.6E-02	3.8E-02	3.9E-02	3.9E-02
203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
369	4.5E-03	4.6E-03	2.7E-03	2.9E-04	-2.0E-03	-3.1E-03	-3.8E-03	-4.1E-03	-3.1E-03	-2.1E-03	-1.5E-03	-1.0E-03	-7.8E-04
370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
372	4.8E-03	5.0E-03	3.1E-03	5.5E-04	-1.8E-03	-2.9E-03	-3.5E-03	-3.8E-03	-2.7E-03	-1.8E-03	-1.1E-03	-6.1E-04	-3.8E-04
373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
374	5.0E-03	5.2E-03	3.3E-03	8.1E-04	-1.6E-03	-2.7E-03	-3.1E-03	-3.4E-03	-2.3E-03	-1.4E-03	-6.5E-04	-1.9E-04	4.6E-05
375	5.2E-03	5.4E-03	3.6E-03	1.1E-03	-1.2E-03	-2.3E-03	-2.7E-03	-2.8E-03	-1.7E-03	-7.1E-04	1.4E-05	5.0E-04	7.4E-04
376	5.3E-03	5.5E-03	3.7E-03	1.3E-03	-1.0E-03	-2.0E-03	-2.3E-03	-2.3E-03	-1.1E-03	-1.4E-04	6.0E-04	1.1E-03	1.4E-03
377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
512	2.2E-03	2.3E-03	2.7E-03	3.1E-03	3.5E-03	2.9E-03	2.7E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03
513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
517	2.2E-03	2.3E-03	2.8E-03	3.3E-03	3.9E-03	3.4E-03	3.3E-03	3.9E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.2E-03
518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
548	3.8E-03	4.0E-03	5.0E-03	5.3E-03	5.5E-03	6.0E-03	7.3E-03	8.8E-03	9.3E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02
549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
551	4.8E-03	5.0E-03	6.0E-03	6.2E-03	6.0E-03	6.3E-03	7.7E-03	9.2E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02
552	4.3E-03	4.5E-03	5.4E-03	5.7E-03	5.7E-03	6.0E-03	7.3E-03	8.8E-03	9.4E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02
553	3.8E-03	4.0E-03	5.0E-03	5.3E-03	5.4E-03	5.8E-03	7.1E-03	8.5E-03	9.1E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02
554	3.5E-03	3.7E-03	4.6E-03	5.0E-03	5.2E-03	5.6E-03	6.8E-03	8.2E-03	8.7E-03	9.2E-03	9.6E-03	9.8E-03	1.0E-02
555	6.7E-03	6.9E-03	8.0E-03	8.0E-03	7.2E-03	6.6E-03	8.1E-03	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02
556	5.7E-03	5.9E-03	6.9E-03	7.0E-03	6.6E-03	6.4E-03	7.8E-03	9.4E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02
557	4.9E-03	5.2E-03	6.2E-03	6.4E-03	6.1E-03	6.2E-03	7.5E-03	9.0E-03	9.5E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02
558	4.3E-03	4.6E-03	5.5E-03	5.8E-03	5.8E-03	6.0E-03	7.2E-03	8.7E-03	9.2E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02
559	3.9E-03	4.1E-03	5.0E-03	5.4E-03	5.4E-03	5.7E-03	7.0E-03	8.4E-03	8.9E-03	9.4E-03	9.7E-03	9.9E-03	1.0E-02
560	3.5E-03	3.7E-03	4.6E-03	5.0E-03	5.2E-03	5.6E-03	6.7E-03	8.1E-03	8.6E-03	9.0E-03	9.4E-03	9.6E-03	9.7E-03
561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
567	8.1E-03	8.3E-03	9.3E-03	9.4E-03	8.6E-03	6.3E-03	7.7E-03	9.2E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02
568	6.3E-03	6.5E-03	7.4E-03	7.6E-03	7.2E-03	6.1E-03	7.4E-03	8.9E-03	9.4E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02
569	5.2E-03	5.4E-03	6.3E-03	6.6E-03	6.4E-03	5.8E-03	7.1E-03	8.6E-03	9.1E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02
570	4.5E-03	4.7E-03	5.6E-03	5.9E-03	5.8E-03	5.6E-03	6.9E-03	8.3E-03	8.8E-03	9.2E-03	9.6E-03	9.8E-03	1.0E-02
571	4.0E-03	4.2E-03	5.1E-03	5.3E-03	5.4E-03	5.4E-03	6.6E-03	7.9E-03	8.4E-03	8.9E-03	9.3E-03	9.5E-03	9.6E-03
572	3.6E-03	3.8E-03	4.6E-03	4.9E-03	5.1E-03	5.2E-03	6.4E-03	7.7E-03	8.2E-03	8.6E-03	9.0E-03	9.2E-03	9.3E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
573	8.8E-03	9.0E-03	1.0E-02	1.0E-02	9.4E-03	6.2E-03	7.6E-03	9.1E-03	9.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02
574	6.6E-03	6.8E-03	7.8E-03	8.0E-03	7.6E-03	6.0E-03	7.3E-03	8.8E-03	9.3E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02
575	5.3E-03	5.5E-03	6.5E-03	6.7E-03	6.6E-03	5.8E-03	7.1E-03	8.5E-03	9.0E-03	9.4E-03	9.8E-03	1.0E-02	1.0E-02
576	4.6E-03	4.8E-03	5.7E-03	6.0E-03	5.9E-03	5.6E-03	6.8E-03	8.1E-03	8.6E-03	9.1E-03	9.4E-03	9.6E-03	9.7E-03
577	4.0E-03	4.2E-03	5.1E-03	5.4E-03	5.5E-03	5.4E-03	6.5E-03	7.8E-03	8.3E-03	8.7E-03	9.1E-03	9.3E-03	9.4E-03
578	3.6E-03	3.8E-03	4.6E-03	4.9E-03	5.1E-03	5.2E-03	6.3E-03	7.6E-03	8.0E-03	8.5E-03	8.8E-03	9.0E-03	9.1E-03
579	9.5E-03	9.7E-03	1.1E-02	1.1E-02	1.0E-02	6.2E-03	7.5E-03	9.0E-03	9.5E-03	9.9E-03	1.0E-02	1.0E-02	1.1E-02
580	6.9E-03	7.1E-03	8.1E-03	8.3E-03	8.0E-03	5.9E-03	7.2E-03	8.7E-03	9.1E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02
581	5.5E-03	5.7E-03	6.6E-03	6.9E-03	6.7E-03	5.7E-03	6.9E-03	8.3E-03	8.8E-03	9.2E-03	9.6E-03	9.8E-03	9.9E-03
582	4.6E-03	4.8E-03	5.7E-03	6.0E-03	6.0E-03	5.5E-03	6.7E-03	8.0E-03	8.5E-03	8.9E-03	9.2E-03	9.4E-03	9.5E-03
583	4.1E-03	4.3E-03	5.1E-03	5.4E-03	5.5E-03	5.3E-03	6.4E-03	7.7E-03	8.2E-03	8.6E-03	8.9E-03	9.1E-03	9.2E-03
584	3.6E-03	3.8E-03	4.6E-03	4.9E-03	5.1E-03	5.1E-03	6.2E-03	7.4E-03	7.9E-03	8.3E-03	8.6E-03	8.8E-03	8.9E-03
585	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	6.1E-03	7.4E-03	8.9E-03	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02
586	7.2E-03	7.4E-03	8.3E-03	8.6E-03	8.3E-03	5.8E-03	7.1E-03	8.5E-03	9.0E-03	9.4E-03	9.7E-03	9.9E-03	1.0E-02
587	5.6E-03	5.8E-03	6.7E-03	7.0E-03	6.9E-03	5.6E-03	6.8E-03	8.2E-03	8.6E-03	9.0E-03	9.4E-03	9.6E-03	9.7E-03
588	4.7E-03	4.9E-03	5.7E-03	6.0E-03	6.0E-03	5.4E-03	6.5E-03	7.9E-03	8.3E-03	8.7E-03	9.0E-03	9.2E-03	9.3E-03
589	4.1E-03	4.2E-03	5.1E-03	5.4E-03	5.5E-03	5.2E-03	6.3E-03	7.6E-03	8.0E-03	8.4E-03	8.7E-03	8.9E-03	9.0E-03
590	3.6E-03	3.8E-03	4.6E-03	4.9E-03	5.0E-03	5.0E-03	6.1E-03	7.3E-03	7.7E-03	8.1E-03	8.4E-03	8.6E-03	8.7E-03
591	1.0E-02	1.0E-02	1.1E-02	1.2E-02	1.1E-02	6.0E-03	7.3E-03	8.8E-03	9.2E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02
592	7.3E-03	7.5E-03	8.4E-03	8.7E-03	8.4E-03	5.7E-03	7.0E-03	8.4E-03	8.8E-03	9.2E-03	9.5E-03	9.7E-03	9.8E-03
593	5.6E-03	5.8E-03	6.7E-03	7.0E-03	6.9E-03	5.5E-03	6.7E-03	8.0E-03	8.5E-03	8.9E-03	9.2E-03	9.4E-03	9.5E-03
594	4.6E-03	4.8E-03	5.7E-03	6.0E-03	6.0E-03	5.3E-03	6.4E-03	7.7E-03	8.2E-03	8.6E-03	8.9E-03	9.1E-03	9.2E-03
595	4.0E-03	4.2E-03	5.0E-03	5.3E-03	5.4E-03	5.1E-03	6.2E-03	7.5E-03	7.9E-03	8.3E-03	8.6E-03	8.8E-03	8.9E-03
596	3.5E-03	3.7E-03	4.5E-03	4.8E-03	5.0E-03	4.9E-03	6.0E-03	7.2E-03	7.6E-03	8.0E-03	8.3E-03	8.5E-03	8.6E-03
597	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	5.9E-03	7.2E-03	8.6E-03	9.1E-03	9.5E-03	9.8E-03	1.0E-02	1.0E-02
598	7.1E-03	7.3E-03	8.2E-03	8.5E-03	8.2E-03	5.6E-03	6.9E-03	8.3E-03	8.7E-03	9.1E-03	9.4E-03	9.6E-03	9.7E-03
599	5.5E-03	5.7E-03	6.6E-03	6.9E-03	6.8E-03	5.4E-03	6.6E-03	7.9E-03	8.3E-03	8.7E-03	9.0E-03	9.2E-03	9.3E-03
600	4.6E-03	4.7E-03	5.6E-03	5.9E-03	5.9E-03	5.2E-03	6.3E-03	7.6E-03	8.0E-03	8.4E-03	8.7E-03	8.9E-03	9.0E-03
601	3.9E-03	4.1E-03	4.9E-03	5.3E-03	5.4E-03	5.0E-03	6.1E-03	7.4E-03	7.8E-03	8.1E-03	8.4E-03	8.6E-03	8.7E-03
602	3.5E-03	3.7E-03	4.4E-03	4.8E-03	4.9E-03	4.9E-03	5.9E-03	7.1E-03	7.5E-03	7.9E-03	8.1E-03	8.3E-03	8.4E-03
603	9.1E-03	9.2E-03	1.0E-02	1.0E-02	9.8E-03	5.8E-03	7.0E-03	8.4E-03	8.9E-03	9.2E-03	9.5E-03	9.7E-03	9.8E-03
604	6.8E-03	7.0E-03	7.9E-03	8.1E-03	7.9E-03	5.5E-03	6.7E-03	8.0E-03	8.5E-03	8.8E-03	9.1E-03	9.3E-03	9.4E-03
605	5.3E-03	5.5E-03	6.4E-03	6.7E-03	6.6E-03	5.3E-03	6.4E-03	7.7E-03	8.1E-03	8.5E-03	8.8E-03	9.0E-03	9.1E-03
606	4.4E-03	4.6E-03	5.4E-03	5.7E-03	5.8E-03	5.1E-03	6.2E-03	7.4E-03	7.8E-03	8.2E-03	8.5E-03	8.7E-03	8.8E-03
607	3.9E-03	4.0E-03	4.8E-03	5.1E-03	5.2E-03	4.9E-03	5.9E-03	7.1E-03	7.5E-03	7.9E-03	8.2E-03	8.4E-03	8.5E-03
608	3.4E-03	3.6E-03	4.3E-03	4.7E-03	4.8E-03	4.8E-03	5.8E-03	6.9E-03	7.3E-03	7.7E-03	8.0E-03	8.2E-03	8.3E-03
609	9.2E-03	9.4E-03	1.0E-02	9.3E-03	8.9E-03	7.1E-03	8.7E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02
610	9.1E-03	9.3E-03	1.0E-02	1.0E-02	9.8E-03	7.6E-03	9.3E-03	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02
611	9.3E-03	9.4E-03	1.1E-02	1.1E-02	1.1E-02	8.2E-03	1.0E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
612	9.6E-03	9.8E-03	1.1E-02	1.2E-02	1.2E-02	8.6E-03	1.1E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
613	9.7E-03	9.9E-03	1.1E-02	1.2E-02	1.2E-02	8.3E-03	1.0E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02
614	9.8E-03	1.0E-02	1.1E-02	1.2E-02	1.1E-02	7.4E-03	9.1E-03	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
615	9.7E-03	9.9E-03	1.1E-02	1.1E-02	1.1E-02	6.6E-03	8.1E-03	9.7E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02
616	8.9E-03	9.1E-03	1.0E-02	1.0E-02	9.7E-03	6.0E-03	7.4E-03	8.9E-03	9.3E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
617	7.6E-03	7.8E-03	8.7E-03	9.0E-03	8.6E-03	5.7E-03	6.9E-03	8.3E-03	8.7E-03	9.1E-03	9.4E-03	9.5E-03	9.6E-03
618	6.2E-03	6.4E-03	7.2E-03	7.5E-03	7.3E-03	5.4E-03	6.6E-03	7.9E-03	8.3E-03	8.7E-03	8.9E-03	9.1E-03	9.2E-03
619	5.1E-03	5.2E-03	6.1E-03	6.4E-03	6.3E-03	5.2E-03	6.3E-03	7.5E-03	7.9E-03	8.3E-03	8.6E-03	8.8E-03	8.9E-03
620	4.3E-03	4.5E-03	5.3E-03	5.6E-03	5.6E-03	4.9E-03	6.0E-03	7.2E-03	7.6E-03	8.0E-03	8.3E-03	8.4E-03	8.5E-03
621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
622	3.3E-03	3.5E-03	4.2E-03	4.5E-03	4.7E-03	4.7E-03	5.7E-03	6.8E-03	7.2E-03	7.5E-03	7.8E-03	8.0E-03	8.1E-03
623	9.0E-03	9.2E-03	9.9E-03	8.3E-03	7.9E-03	6.7E-03	8.3E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
624	8.3E-03	8.5E-03	9.4E-03	8.8E-03	8.5E-03	7.0E-03	8.6E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02
625	8.2E-03	8.3E-03	9.5E-03	9.4E-03	9.2E-03	7.4E-03	9.0E-03	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
626	8.2E-03	8.3E-03	9.6E-03	9.9E-03	9.7E-03	7.6E-03	9.3E-03	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
627	8.2E-03	8.4E-03	9.7E-03	1.0E-02	9.8E-03	7.5E-03	9.2E-03	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
628	8.2E-03	8.4E-03	9.6E-03	1.0E-02	9.6E-03	7.0E-03	8.6E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02
629	8.1E-03	8.3E-03	9.4E-03	9.7E-03	9.2E-03	6.4E-03	7.9E-03	9.5E-03	9.9E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02
630	7.5E-03	7.7E-03	8.7E-03	9.0E-03	8.6E-03	6.0E-03	7.3E-03	8.8E-03	9.2E-03	9.5E-03	9.8E-03	1.0E-02	1.0E-02
631	6.7E-03	6.8E-03	7.8E-03	8.1E-03	7.8E-03	5.6E-03	6.9E-03	8.2E-03	8.6E-03	9.0E-03	9.3E-03	9.4E-03	9.5E-03
632	5.7E-03	5.9E-03	6.8E-03	7.1E-03	6.9E-03	5.4E-03	6.5E-03	7.8E-03	8.2E-03	8.6E-03	8.9E-03	9.0E-03	9.1E-03
633	4.9E-03	5.0E-03	5.9E-03	6.1E-03	6.1E-03	5.1E-03	6.2E-03	7.5E-03	7.9E-03	8.2E-03	8.5E-03	8.7E-03	8.8E-03
634	4.2E-03	4.4E-03	5.2E-03	5.5E-03	5.5E-03	4.9E-03	6.0E-03	7.2E-03	7.6E-03	7.9E-03	8.2E-03	8.4E-03	8.5E-03
635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
636	3.3E-03	3.4E-03	4.2E-03	4.5E-03	4.7E-03	4.6E-03	5.6E-03	6.8E-03	7.1E-03	7.5E-03	7.7E-03	7.9E-03	8.0E-03
637	9.0E-03	9.2E-03	9.7E-03	7.4E-03	7.0E-03	6.3E-03	7.7E-03	9.3E-03	9.7E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02
638	7.8E-03	8.0E-03	8.8E-03	7.7E-03	7.5E-03	6.5E-03	8.0E-03	9.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02
639	7.3E-03	7.5E-03	8.5E-03	8.1E-03	7.9E-03	6.7E-03	8.2E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
640	7.1E-03	7.3E-03	8.4E-03	8.4E-03	8.2E-03	6.8E-03	8.3E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
641	7.0E-03	7.2E-03	8.3E-03	8.5E-03	8.3E-03	6.7E-03	8.3E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
642	7.0E-03	7.2E-03	8.3E-03	8.5E-03	8.3E-03	6.5E-03	8.0E-03	9.5E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02
643	6.8E-03	7.0E-03	8.0E-03	8.2E-03	8.0E-03	6.1E-03	7.5E-03	9.0E-03	9.4E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02
644	6.4E-03	6.6E-03	7.5E-03	7.8E-03	7.5E-03	5.7E-03	7.0E-03	8.4E-03	8.8E-03	9.2E-03	9.4E-03	9.6E-03	9.7E-03
645	5.8E-03	6.0E-03	6.9E-03	7.2E-03	7.0E-03	5.4E-03	6.7E-03	8.0E-03	8.4E-03	8.7E-03	9.0E-03	9.2E-03	9.3E-03
646	5.2E-03	5.4E-03	6.2E-03	6.5E-03	6.4E-03	5.2E-03	6.3E-03	7.6E-03	8.0E-03	8.4E-03	8.6E-03	8.8E-03	8.9E-03
647	4.6E-03	4.7E-03	5.5E-03	5.8E-03	5.8E-03	5.0E-03	6.0E-03	7.3E-03	7.6E-03	8.0E-03	8.3E-03	8.4E-03	8.5E-03
648	4.0E-03	4.2E-03	4.9E-03	5.2E-03	5.3E-03	4.8E-03	5.8E-03	6.9E-03	7.3E-03	7.7E-03	7.9E-03	8.1E-03	8.2E-03
649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
650	9.0E-03	9.2E-03	9.5E-03	6.9E-03	6.4E-03	6.1E-03	7.4E-03	8.9E-03	9.3E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02
651	7.5E-03	7.6E-03	8.3E-03	6.9E-03	6.7E-03	6.1E-03	7.5E-03	9.0E-03	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02
652	6.8E-03	6.9E-03	7.8E-03	7.2E-03	7.0E-03	6.2E-03	7.6E-03	9.2E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
653	6.4E-03	6.6E-03	7.5E-03	7.3E-03	7.2E-03	6.3E-03	7.7E-03	9.2E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
654	6.3E-03	6.4E-03	7.4E-03	7.4E-03	7.3E-03	6.2E-03	7.6E-03	9.2E-03	9.5E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
655	6.2E-03	6.3E-03	7.3E-03	7.4E-03	7.3E-03	6.1E-03	7.4E-03	8.9E-03	9.3E-03	9.7E-03	9.9E-03	1.0E-02	1.0E-02
656	5.9E-03	6.1E-03	7.0E-03	7.2E-03	7.1E-03	5.8E-03	7.1E-03	8.5E-03	8.9E-03	9.3E-03	9.5E-03	9.7E-03	9.8E-03
657	5.6E-03	5.8E-03	6.7E-03	6.9E-03	6.8E-03	5.5E-03	6.8E-03	8.1E-03	8.5E-03	8.8E-03	9.1E-03	9.3E-03	9.4E-03
658	5.2E-03	5.4E-03	6.2E-03	6.5E-03	6.4E-03	5.3E-03	6.5E-03	7.7E-03	8.1E-03	8.5E-03	8.7E-03	8.9E-03	9.0E-03
659	4.8E-03	4.9E-03	5.7E-03	6.0E-03	6.0E-03	5.0E-03	6.2E-03	7.4E-03	7.8E-03	8.1E-03	8.4E-03	8.6E-03	8.7E-03
660	4.3E-03	4.4E-03	5.2E-03	5.5E-03	5.5E-03	4.8E-03	5.9E-03	7.1E-03	7.4E-03	7.8E-03	8.1E-03	8.2E-03	8.3E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
661	3.8E-03	4.0E-03	4.7E-03	5.0E-03	5.1E-03	4.6E-03	5.6E-03	6.8E-03	7.1E-03	7.5E-03	7.7E-03	7.9E-03	8.0E-03
662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
663	9.0E-03	9.1E-03	9.4E-03	6.4E-03	6.0E-03	5.8E-03	7.1E-03	8.6E-03	8.9E-03	9.3E-03	9.6E-03	9.7E-03	9.8E-03
664	7.3E-03	7.4E-03	8.0E-03	6.4E-03	6.2E-03	5.9E-03	7.2E-03	8.6E-03	9.0E-03	9.3E-03	9.6E-03	9.7E-03	9.8E-03
665	6.4E-03	6.6E-03	7.3E-03	6.5E-03	6.4E-03	5.9E-03	7.2E-03	8.7E-03	9.0E-03	9.4E-03	9.6E-03	9.8E-03	9.9E-03
666	5.9E-03	6.1E-03	6.9E-03	6.5E-03	6.5E-03	5.9E-03	7.2E-03	8.6E-03	9.0E-03	9.3E-03	9.6E-03	9.8E-03	9.9E-03
667	5.7E-03	5.9E-03	6.8E-03	6.6E-03	6.6E-03	5.8E-03	7.1E-03	8.6E-03	8.9E-03	9.3E-03	9.5E-03	9.7E-03	9.8E-03
668	5.6E-03	5.7E-03	6.6E-03	6.6E-03	6.6E-03	5.7E-03	7.0E-03	8.4E-03	8.8E-03	9.1E-03	9.4E-03	9.6E-03	9.7E-03
669	5.3E-03	5.5E-03	6.3E-03	6.5E-03	6.4E-03	5.5E-03	6.8E-03	8.1E-03	8.5E-03	8.8E-03	9.1E-03	9.3E-03	9.4E-03
670	5.1E-03	5.2E-03	6.1E-03	6.2E-03	6.2E-03	5.3E-03	6.5E-03	7.8E-03	8.2E-03	8.5E-03	8.8E-03	9.0E-03	9.0E-03
671	4.8E-03	4.9E-03	5.7E-03	5.9E-03	5.9E-03	5.1E-03	6.3E-03	7.5E-03	7.9E-03	8.2E-03	8.5E-03	8.7E-03	8.7E-03
672	4.4E-03	4.6E-03	5.3E-03	5.6E-03	5.6E-03	4.9E-03	6.0E-03	7.2E-03	7.5E-03	7.9E-03	8.1E-03	8.3E-03	8.4E-03
673	4.0E-03	4.2E-03	4.9E-03	5.2E-03	5.2E-03	4.7E-03	5.7E-03	6.9E-03	7.2E-03	7.6E-03	7.8E-03	8.0E-03	8.1E-03
674	3.6E-03	3.8E-03	4.5E-03	4.7E-03	4.9E-03	4.5E-03	5.5E-03	6.6E-03	7.0E-03	7.3E-03	7.6E-03	7.7E-03	7.8E-03
675	8.9E-03	9.0E-03	9.2E-03	6.1E-03	5.7E-03	5.7E-03	7.0E-03	8.4E-03	8.7E-03	9.1E-03	9.3E-03	9.5E-03	9.6E-03
676	7.1E-03	7.2E-03	7.7E-03	6.0E-03	5.8E-03	5.7E-03	6.9E-03	8.3E-03	8.7E-03	9.0E-03	9.3E-03	9.4E-03	9.5E-03
677	6.1E-03	6.3E-03	7.0E-03	6.0E-03	5.9E-03	5.6E-03	6.9E-03	8.3E-03	8.6E-03	9.0E-03	9.2E-03	9.4E-03	9.5E-03
678	5.6E-03	5.7E-03	6.5E-03	6.0E-03	6.0E-03	5.6E-03	6.8E-03	8.2E-03	8.6E-03	8.9E-03	9.1E-03	9.3E-03	9.4E-03
679	5.3E-03	5.4E-03	6.2E-03	6.0E-03	6.0E-03	5.5E-03	6.8E-03	8.1E-03	8.5E-03	8.8E-03	9.1E-03	9.2E-03	9.3E-03
680	5.1E-03	5.2E-03	6.1E-03	6.0E-03	6.0E-03	5.4E-03	6.7E-03	8.0E-03	8.4E-03	8.7E-03	8.9E-03	9.1E-03	9.2E-03
681	4.9E-03	5.0E-03	5.8E-03	5.9E-03	5.9E-03	5.3E-03	6.5E-03	7.8E-03	8.1E-03	8.5E-03	8.7E-03	8.9E-03	9.0E-03
682	4.6E-03	4.8E-03	5.6E-03	5.7E-03	5.7E-03	5.1E-03	6.3E-03	7.5E-03	7.9E-03	8.2E-03	8.5E-03	8.6E-03	8.7E-03
683	4.4E-03	4.5E-03	5.3E-03	5.5E-03	5.5E-03	5.0E-03	6.0E-03	7.3E-03	7.6E-03	8.0E-03	8.2E-03	8.4E-03	8.5E-03
684	8.3E-03	8.4E-03	8.6E-03	5.6E-03	5.2E-03	5.4E-03	6.6E-03	7.9E-03	8.3E-03	8.6E-03	8.9E-03	9.0E-03	9.1E-03
685	6.6E-03	6.7E-03	7.1E-03	5.4E-03	5.2E-03	5.3E-03	6.5E-03	7.8E-03	8.1E-03	8.5E-03	8.7E-03	8.9E-03	9.0E-03
686	5.6E-03	5.8E-03	6.3E-03	5.3E-03	5.2E-03	5.2E-03	6.4E-03	7.6E-03	8.0E-03	8.3E-03	8.6E-03	8.7E-03	8.8E-03
687	5.1E-03	5.2E-03	5.9E-03	5.2E-03	5.3E-03	5.1E-03	6.3E-03	7.5E-03	7.9E-03	8.2E-03	8.5E-03	8.6E-03	8.7E-03
688	4.7E-03	4.9E-03	5.6E-03	5.2E-03	5.3E-03	5.1E-03	6.2E-03	7.5E-03	7.8E-03	8.1E-03	8.4E-03	8.5E-03	8.6E-03
689	4.5E-03	4.6E-03	5.3E-03	5.2E-03	5.3E-03	5.0E-03	6.1E-03	7.3E-03	7.7E-03	8.0E-03	8.3E-03	8.4E-03	8.5E-03
690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
696	8.2E-03	8.4E-03	8.4E-03	5.1E-03	4.7E-03	5.1E-03	6.2E-03	7.4E-03	7.8E-03	8.1E-03	8.3E-03	8.5E-03	8.6E-03
697	6.4E-03	6.5E-03	6.8E-03	4.9E-03	4.7E-03	4.9E-03	6.0E-03	7.2E-03	7.6E-03	7.9E-03	8.1E-03	8.3E-03	8.4E-03
698	5.3E-03	5.5E-03	5.9E-03	4.7E-03	4.6E-03	4.8E-03	5.8E-03	7.0E-03	7.4E-03	7.7E-03	7.9E-03	8.1E-03	8.2E-03
699	4.7E-03	4.8E-03	5.4E-03	4.6E-03	4.6E-03	4.7E-03	5.8E-03	6.9E-03	7.3E-03	7.6E-03	7.8E-03	8.0E-03	8.1E-03
700	4.3E-03	4.4E-03	5.0E-03	4.6E-03	4.7E-03	4.7E-03	5.7E-03	6.9E-03	7.2E-03	7.5E-03	7.8E-03	7.9E-03	8.0E-03
701	4.0E-03	4.1E-03	4.8E-03	4.5E-03	4.6E-03	4.6E-03	5.6E-03	6.8E-03	7.1E-03	7.4E-03	7.7E-03	7.8E-03	7.9E-03
702	8.2E-03	8.4E-03	8.4E-03	5.0E-03	4.6E-03	5.0E-03	6.1E-03	7.3E-03	7.7E-03	8.0E-03	8.2E-03	8.4E-03	8.4E-03
703	6.3E-03	6.4E-03	6.7E-03	4.7E-03	4.5E-03	4.8E-03	5.8E-03	7.0E-03	7.4E-03	7.7E-03	7.9E-03	8.1E-03	8.1E-03
704	5.2E-03	5.3E-03	5.7E-03	4.4E-03	4.4E-03	4.6E-03	5.7E-03	6.8E-03	7.1E-03	7.4E-03	7.7E-03	7.8E-03	7.9E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
705	4.6E-03	4.7E-03	5.2E-03	4.4E-03	4.4E-03	4.6E-03	5.6E-03	6.7E-03	7.0E-03	7.4E-03	7.6E-03	7.7E-03	7.8E-03
706	4.1E-03	4.3E-03	4.8E-03	4.3E-03	4.4E-03	4.5E-03	5.5E-03	6.6E-03	7.0E-03	7.3E-03	7.5E-03	7.7E-03	7.7E-03
707	3.8E-03	4.0E-03	4.6E-03	4.3E-03	4.4E-03	4.5E-03	5.4E-03	6.5E-03	6.9E-03	7.2E-03	7.4E-03	7.6E-03	7.6E-03
708	8.1E-03	8.3E-03	8.2E-03	4.9E-03	4.5E-03	4.9E-03	6.0E-03	7.2E-03	7.5E-03	7.9E-03	8.1E-03	8.2E-03	8.3E-03
709	6.2E-03	6.3E-03	6.5E-03	4.5E-03	4.3E-03	4.7E-03	5.7E-03	6.9E-03	7.2E-03	7.5E-03	7.7E-03	7.9E-03	7.9E-03
710	5.1E-03	5.2E-03	5.6E-03	4.3E-03	4.3E-03	4.5E-03	5.5E-03	6.6E-03	7.0E-03	7.3E-03	7.5E-03	7.6E-03	7.7E-03
711	4.4E-03	4.6E-03	5.0E-03	4.2E-03	4.2E-03	4.4E-03	5.4E-03	6.5E-03	6.9E-03	7.2E-03	7.4E-03	7.5E-03	7.6E-03
712	4.0E-03	4.1E-03	4.6E-03	4.1E-03	4.2E-03	4.4E-03	5.3E-03	6.4E-03	6.8E-03	7.1E-03	7.3E-03	7.4E-03	7.5E-03
713	3.7E-03	3.8E-03	4.4E-03	4.0E-03	4.2E-03	4.3E-03	5.3E-03	6.3E-03	6.7E-03	7.0E-03	7.2E-03	7.3E-03	7.4E-03
714	7.9E-03	8.1E-03	8.0E-03	4.7E-03	4.3E-03	4.8E-03	5.9E-03	7.1E-03	7.4E-03	7.7E-03	7.9E-03	8.0E-03	8.1E-03
715	6.0E-03	6.1E-03	6.4E-03	4.3E-03	4.2E-03	4.6E-03	5.6E-03	6.7E-03	7.0E-03	7.3E-03	7.5E-03	7.7E-03	7.8E-03
716	4.9E-03	5.1E-03	5.4E-03	4.1E-03	4.1E-03	4.4E-03	5.4E-03	6.5E-03	6.8E-03	7.1E-03	7.3E-03	7.5E-03	7.5E-03
717	4.3E-03	4.4E-03	4.8E-03	4.0E-03	4.1E-03	4.3E-03	5.3E-03	6.3E-03	6.7E-03	7.0E-03	7.2E-03	7.3E-03	7.4E-03
718	3.8E-03	4.0E-03	4.5E-03	3.9E-03	4.0E-03	4.2E-03	5.2E-03	6.2E-03	6.6E-03	6.9E-03	7.1E-03	7.2E-03	7.3E-03
719	3.5E-03	3.6E-03	4.2E-03	3.9E-03	4.0E-03	4.2E-03	5.1E-03	6.1E-03	6.5E-03	6.8E-03	7.0E-03	7.1E-03	7.2E-03
720	7.6E-03	7.8E-03	7.7E-03	4.6E-03	4.2E-03	4.7E-03	5.7E-03	6.8E-03	7.2E-03	7.4E-03	7.7E-03	7.8E-03	7.9E-03
721	5.8E-03	5.9E-03	6.1E-03	4.2E-03	4.0E-03	4.4E-03	5.4E-03	6.5E-03	6.8E-03	7.1E-03	7.3E-03	7.5E-03	7.6E-03
722	4.8E-03	4.9E-03	5.2E-03	4.0E-03	4.0E-03	4.3E-03	5.2E-03	6.3E-03	6.6E-03	6.9E-03	7.1E-03	7.3E-03	7.3E-03
723	4.1E-03	4.2E-03	4.7E-03	3.8E-03	3.9E-03	4.2E-03	5.1E-03	6.2E-03	6.5E-03	6.8E-03	7.0E-03	7.1E-03	7.2E-03
724	3.7E-03	3.8E-03	4.3E-03	3.7E-03	3.9E-03	4.1E-03	5.0E-03	6.0E-03	6.4E-03	6.7E-03	6.9E-03	7.0E-03	7.1E-03
725	3.4E-03	3.5E-03	4.0E-03	3.7E-03	3.8E-03	4.1E-03	4.9E-03	6.0E-03	6.3E-03	6.6E-03	6.8E-03	6.9E-03	7.0E-03
726	7.3E-03	7.4E-03	7.3E-03	4.4E-03	4.0E-03	4.5E-03	5.5E-03	6.6E-03	6.9E-03	7.2E-03	7.4E-03	7.5E-03	7.6E-03
727	5.5E-03	5.6E-03	5.8E-03	4.0E-03	3.9E-03	4.3E-03	5.3E-03	6.3E-03	6.6E-03	6.9E-03	7.1E-03	7.3E-03	7.3E-03
728	4.6E-03	4.7E-03	5.0E-03	3.8E-03	3.8E-03	4.2E-03	5.1E-03	6.1E-03	6.4E-03	6.7E-03	6.9E-03	7.1E-03	7.2E-03
729	4.0E-03	4.1E-03	4.5E-03	3.7E-03	3.8E-03	4.1E-03	5.0E-03	6.0E-03	6.3E-03	6.6E-03	6.8E-03	7.0E-03	7.0E-03
730	3.5E-03	3.7E-03	4.1E-03	3.6E-03	3.7E-03	4.0E-03	4.9E-03	5.9E-03	6.2E-03	6.5E-03	6.7E-03	6.8E-03	6.9E-03
731	3.3E-03	3.4E-03	3.9E-03	3.5E-03	3.7E-03	3.9E-03	4.8E-03	5.8E-03	6.1E-03	6.4E-03	6.6E-03	6.8E-03	6.8E-03
732	2.0E-03	2.1E-03	2.5E-03	2.6E-03	3.0E-03	3.5E-03	4.1E-03	5.0E-03	5.3E-03	5.5E-03	5.8E-03	5.9E-03	6.0E-03
733	2.2E-03	2.3E-03	2.7E-03	2.8E-03	3.1E-03	3.6E-03	4.3E-03	5.2E-03	5.5E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03
734	2.5E-03	2.6E-03	3.0E-03	2.9E-03	3.3E-03	3.8E-03	4.6E-03	5.5E-03	5.8E-03	6.1E-03	6.3E-03	6.4E-03	6.5E-03
735	2.9E-03	3.0E-03	3.4E-03	3.2E-03	3.5E-03	4.2E-03	5.0E-03	6.0E-03	6.3E-03	6.6E-03	6.8E-03	6.9E-03	7.0E-03
736	3.3E-03	3.4E-03	3.8E-03	3.4E-03	3.6E-03	4.3E-03	5.2E-03	6.2E-03	6.5E-03	6.8E-03	7.0E-03	7.1E-03	7.2E-03
737	6.7E-03	6.8E-03	6.8E-03	4.1E-03	3.8E-03	4.3E-03	5.2E-03	6.3E-03	6.6E-03	6.9E-03	7.1E-03	7.2E-03	7.3E-03
738	5.2E-03	5.3E-03	5.5E-03	3.8E-03	3.7E-03	4.2E-03	5.1E-03	6.1E-03	6.4E-03	6.7E-03	6.9E-03	7.0E-03	7.1E-03
739	4.3E-03	4.5E-03	4.8E-03	3.7E-03	3.7E-03	4.1E-03	5.0E-03	6.0E-03	6.3E-03	6.6E-03	6.8E-03	6.9E-03	7.0E-03
740	3.8E-03	3.9E-03	4.3E-03	3.5E-03	3.6E-03	4.0E-03	4.9E-03	5.8E-03	6.2E-03	6.4E-03	6.6E-03	6.8E-03	6.9E-03
741	3.4E-03	3.5E-03	4.0E-03	3.5E-03	3.6E-03	3.9E-03	4.8E-03	5.7E-03	6.0E-03	6.3E-03	6.5E-03	6.7E-03	6.7E-03
742	3.1E-03	3.2E-03	3.7E-03	3.4E-03	3.6E-03	3.8E-03	4.7E-03	5.6E-03	6.0E-03	6.2E-03	6.4E-03	6.6E-03	6.7E-03
743	2.0E-03	2.1E-03	2.5E-03	2.6E-03	2.9E-03	3.3E-03	4.0E-03	4.8E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.7E-03
744	2.2E-03	2.3E-03	2.6E-03	2.7E-03	3.0E-03	3.5E-03	4.1E-03	5.0E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	5.9E-03
745	2.4E-03	2.5E-03	2.9E-03	2.9E-03	3.2E-03	3.7E-03	4.4E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.2E-03	6.2E-03
746	2.8E-03	2.9E-03	3.3E-03	3.1E-03	3.4E-03	4.0E-03	4.8E-03	5.8E-03	6.1E-03	6.3E-03	6.5E-03	6.7E-03	6.7E-03
747	3.2E-03	3.3E-03	3.6E-03	3.3E-03	3.5E-03	4.1E-03	5.0E-03	6.0E-03	6.2E-03	6.5E-03	6.7E-03	6.8E-03	6.9E-03
748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
762	1.9E-03	2.0E-03	2.4E-03	2.5E-03	2.8E-03	3.3E-03	3.9E-03	4.7E-03	4.9E-03	5.2E-03	5.4E-03	5.5E-03	5.5E-03
763	2.1E-03	2.2E-03	2.6E-03	2.6E-03	2.9E-03	3.4E-03	4.0E-03	4.8E-03	5.1E-03	5.4E-03	5.5E-03	5.7E-03	5.7E-03
764	2.3E-03	2.4E-03	2.8E-03	2.8E-03	3.1E-03	3.5E-03	4.2E-03	5.1E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03
765	2.6E-03	2.8E-03	3.1E-03	3.0E-03	3.3E-03	3.9E-03	4.7E-03	5.6E-03	5.9E-03	6.1E-03	6.3E-03	6.4E-03	6.5E-03
766	3.0E-03	3.1E-03	3.4E-03	3.2E-03	3.4E-03	4.0E-03	4.8E-03	5.7E-03	6.0E-03	6.3E-03	6.4E-03	6.6E-03	6.6E-03
767	3.8E-03	3.9E-03	4.1E-03	3.4E-03	3.5E-03	4.1E-03	5.0E-03	6.0E-03	6.3E-03	6.5E-03	6.7E-03	6.8E-03	6.9E-03
768	4.7E-03	4.8E-03	4.8E-03	3.7E-03	3.6E-03	4.2E-03	5.1E-03	6.1E-03	6.4E-03	6.6E-03	6.8E-03	6.9E-03	7.0E-03
769	5.6E-03	5.7E-03	5.5E-03	3.8E-03	3.5E-03	4.1E-03	4.9E-03	5.9E-03	6.2E-03	6.4E-03	6.6E-03	6.8E-03	6.8E-03
770	6.3E-03	6.4E-03	6.1E-03	3.9E-03	3.5E-03	4.0E-03	4.9E-03	5.9E-03	6.1E-03	6.4E-03	6.6E-03	6.7E-03	6.8E-03
771	6.7E-03	6.8E-03	6.4E-03	3.9E-03	3.5E-03	4.0E-03	4.8E-03	5.8E-03	6.1E-03	6.3E-03	6.5E-03	6.7E-03	6.7E-03
772	6.8E-03	6.9E-03	6.6E-03	4.0E-03	3.5E-03	4.0E-03	4.8E-03	5.8E-03	6.1E-03	6.4E-03	6.5E-03	6.7E-03	6.7E-03
773	6.6E-03	6.7E-03	6.5E-03	3.9E-03	3.5E-03	4.0E-03	4.8E-03	5.8E-03	6.1E-03	6.4E-03	6.6E-03	6.7E-03	6.8E-03
774	6.1E-03	6.2E-03	6.1E-03	3.8E-03	3.5E-03	4.0E-03	4.8E-03	5.8E-03	6.1E-03	6.4E-03	6.6E-03	6.7E-03	6.8E-03
775	5.2E-03	5.3E-03	5.4E-03	3.6E-03	3.5E-03	3.9E-03	4.8E-03	5.8E-03	6.0E-03	6.3E-03	6.5E-03	6.6E-03	6.7E-03
776	4.4E-03	4.5E-03	4.7E-03	3.5E-03	3.5E-03	3.9E-03	4.7E-03	5.7E-03	6.0E-03	6.2E-03	6.4E-03	6.6E-03	6.6E-03
777	3.8E-03	4.0E-03	4.3E-03	3.4E-03	3.4E-03	3.8E-03	4.7E-03	5.6E-03	5.9E-03	6.2E-03	6.4E-03	6.5E-03	6.6E-03
778	3.4E-03	3.5E-03	3.9E-03	3.3E-03	3.4E-03	3.8E-03	4.6E-03	5.5E-03	5.8E-03	6.1E-03	6.3E-03	6.4E-03	6.5E-03
779	3.1E-03	3.2E-03	3.6E-03	3.2E-03	3.4E-03	3.7E-03	4.5E-03	5.4E-03	5.7E-03	6.0E-03	6.2E-03	6.3E-03	6.4E-03
780	2.9E-03	3.0E-03	3.4E-03	3.1E-03	3.3E-03	3.6E-03	4.4E-03	5.3E-03	5.6E-03	5.9E-03	6.1E-03	6.3E-03	6.3E-03
781	1.9E-03	2.0E-03	2.4E-03	2.5E-03	2.8E-03	3.2E-03	3.8E-03	4.5E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03
782	2.0E-03	2.1E-03	2.5E-03	2.6E-03	2.9E-03	3.3E-03	3.9E-03	4.7E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03
783	2.2E-03	2.3E-03	2.7E-03	2.7E-03	3.0E-03	3.5E-03	4.1E-03	5.0E-03	5.2E-03	5.5E-03	5.6E-03	5.8E-03	5.8E-03
784	2.5E-03	2.6E-03	3.0E-03	3.0E-03	3.3E-03	3.8E-03	4.6E-03	5.5E-03	5.7E-03	6.0E-03	6.2E-03	6.3E-03	6.3E-03
785	2.8E-03	2.9E-03	3.2E-03	3.0E-03	3.3E-03	3.9E-03	4.6E-03	5.6E-03	5.8E-03	6.1E-03	6.2E-03	6.4E-03	6.4E-03
786	3.4E-03	3.5E-03	3.7E-03	3.3E-03	3.4E-03	4.0E-03	4.8E-03	5.8E-03	6.1E-03	6.3E-03	6.5E-03	6.6E-03	6.6E-03
787	4.0E-03	4.1E-03	4.2E-03	3.4E-03	3.5E-03	4.1E-03	4.9E-03	5.9E-03	6.1E-03	6.4E-03	6.5E-03	6.7E-03	6.7E-03
788	4.6E-03	4.7E-03	4.6E-03	3.5E-03	3.4E-03	3.9E-03	4.7E-03	5.7E-03	5.9E-03	6.2E-03	6.3E-03	6.5E-03	6.5E-03
789	5.1E-03	5.2E-03	5.0E-03	3.5E-03	3.3E-03	3.8E-03	4.6E-03	5.6E-03	5.8E-03	6.1E-03	6.3E-03	6.4E-03	6.5E-03
790	5.3E-03	5.4E-03	5.3E-03	3.5E-03	3.3E-03	3.8E-03	4.6E-03	5.5E-03	5.8E-03	6.0E-03	6.2E-03	6.4E-03	6.4E-03
791	5.4E-03	5.5E-03	5.4E-03	3.6E-03	3.3E-03	3.8E-03	4.6E-03	5.5E-03	5.8E-03	6.1E-03	6.3E-03	6.4E-03	6.4E-03
792	5.3E-03	5.5E-03	5.4E-03	3.6E-03	3.3E-03	3.8E-03	4.6E-03	5.6E-03	5.8E-03	6.1E-03	6.3E-03	6.4E-03	6.5E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
793	5.0E-03	5.1E-03	5.1E-03	3.5E-03	3.3E-03	3.8E-03	4.6E-03	5.6E-03	5.8E-03	6.1E-03	6.3E-03	6.4E-03	6.5E-03
794	4.5E-03	4.6E-03	4.8E-03	3.4E-03	3.3E-03	3.8E-03	4.6E-03	5.5E-03	5.8E-03	6.1E-03	6.3E-03	6.4E-03	6.4E-03
795	4.0E-03	4.1E-03	4.4E-03	3.3E-03	3.3E-03	3.7E-03	4.5E-03	5.5E-03	5.8E-03	6.0E-03	6.2E-03	6.3E-03	6.4E-03
796	3.6E-03	3.7E-03	4.0E-03	3.2E-03	3.3E-03	3.7E-03	4.5E-03	5.4E-03	5.7E-03	6.0E-03	6.2E-03	6.3E-03	6.4E-03
797	3.2E-03	3.4E-03	3.7E-03	3.2E-03	3.3E-03	3.6E-03	4.4E-03	5.3E-03	5.6E-03	5.9E-03	6.1E-03	6.2E-03	6.3E-03
798	3.0E-03	3.1E-03	3.5E-03	3.1E-03	3.3E-03	3.6E-03	4.4E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.2E-03	6.2E-03
799	2.0E-03	2.1E-03	2.4E-03	2.5E-03	2.8E-03	3.2E-03	3.8E-03	4.6E-03	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.4E-03
800	2.2E-03	2.3E-03	2.6E-03	2.7E-03	2.9E-03	3.4E-03	4.1E-03	4.9E-03	5.1E-03	5.4E-03	5.5E-03	5.6E-03	5.7E-03
801	2.4E-03	2.5E-03	2.9E-03	2.9E-03	3.2E-03	3.7E-03	4.5E-03	5.4E-03	5.6E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03
802	2.6E-03	2.7E-03	3.1E-03	2.9E-03	3.2E-03	3.8E-03	4.5E-03	5.4E-03	5.7E-03	5.9E-03	6.1E-03	6.2E-03	6.2E-03
803	3.0E-03	3.1E-03	3.4E-03	3.1E-03	3.3E-03	3.9E-03	4.7E-03	5.6E-03	5.9E-03	6.1E-03	6.3E-03	6.4E-03	6.4E-03
804	3.4E-03	3.5E-03	3.8E-03	3.2E-03	3.4E-03	3.9E-03	4.7E-03	5.7E-03	5.9E-03	6.1E-03	6.3E-03	6.4E-03	6.5E-03
805	3.9E-03	4.0E-03	4.1E-03	3.2E-03	3.2E-03	3.7E-03	4.5E-03	5.4E-03	5.7E-03	5.9E-03	6.1E-03	6.2E-03	6.3E-03
806	4.2E-03	4.3E-03	4.3E-03	3.2E-03	3.2E-03	3.7E-03	4.4E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03
807	4.4E-03	4.5E-03	4.5E-03	3.3E-03	3.2E-03	3.6E-03	4.4E-03	5.3E-03	5.5E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03
808	4.5E-03	4.6E-03	4.6E-03	3.3E-03	3.2E-03	3.6E-03	4.4E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03
809	4.5E-03	4.6E-03	4.6E-03	3.3E-03	3.2E-03	3.7E-03	4.4E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.2E-03	6.2E-03
810	4.3E-03	4.4E-03	4.5E-03	3.3E-03	3.2E-03	3.7E-03	4.4E-03	5.3E-03	5.6E-03	5.9E-03	6.0E-03	6.2E-03	6.2E-03
811	4.0E-03	4.1E-03	4.3E-03	3.2E-03	3.2E-03	3.6E-03	4.4E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03
812	3.7E-03	3.8E-03	4.0E-03	3.2E-03	3.2E-03	3.6E-03	4.4E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03
813	3.4E-03	3.5E-03	3.8E-03	3.1E-03	3.2E-03	3.6E-03	4.3E-03	5.2E-03	5.5E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03
814	3.1E-03	3.2E-03	3.5E-03	3.0E-03	3.2E-03	3.5E-03	4.3E-03	5.2E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03
815	2.8E-03	2.9E-03	3.3E-03	3.0E-03	3.1E-03	3.5E-03	4.2E-03	5.1E-03	5.4E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03
816	2.1E-03	2.2E-03	2.6E-03	2.6E-03	2.9E-03	3.4E-03	4.0E-03	4.8E-03	5.1E-03	5.3E-03	5.4E-03	5.6E-03	5.6E-03
817	2.3E-03	2.4E-03	2.8E-03	2.8E-03	3.1E-03	3.7E-03	4.4E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.0E-03
818	2.4E-03	2.5E-03	2.9E-03	2.9E-03	3.2E-03	3.7E-03	4.4E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03
819	2.8E-03	2.9E-03	3.2E-03	3.0E-03	3.2E-03	3.8E-03	4.5E-03	5.4E-03	5.7E-03	5.9E-03	6.1E-03	6.2E-03	6.2E-03
820	3.1E-03	3.2E-03	3.4E-03	3.1E-03	3.2E-03	3.8E-03	4.5E-03	5.5E-03	5.7E-03	5.9E-03	6.1E-03	6.2E-03	6.3E-03
821	3.4E-03	3.5E-03	3.6E-03	3.0E-03	3.1E-03	3.6E-03	4.3E-03	5.2E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.0E-03
822	3.6E-03	3.7E-03	3.8E-03	3.0E-03	3.0E-03	3.5E-03	4.2E-03	5.1E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	5.9E-03
823	3.8E-03	3.9E-03	3.9E-03	3.1E-03	3.0E-03	3.5E-03	4.2E-03	5.1E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	5.9E-03
824	3.9E-03	4.0E-03	4.0E-03	3.1E-03	3.0E-03	3.5E-03	4.2E-03	5.1E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03
825	3.9E-03	4.0E-03	4.1E-03	3.1E-03	3.1E-03	3.5E-03	4.3E-03	5.1E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03
826	3.8E-03	3.9E-03	4.0E-03	3.1E-03	3.1E-03	3.5E-03	4.3E-03	5.1E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03
827	3.6E-03	3.7E-03	3.9E-03	3.1E-03	3.1E-03	3.5E-03	4.2E-03	5.1E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03
828	3.4E-03	3.5E-03	3.7E-03	3.0E-03	3.1E-03	3.5E-03	4.2E-03	5.1E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03
829	3.1E-03	3.2E-03	3.5E-03	3.0E-03	3.1E-03	3.5E-03	4.2E-03	5.1E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03
830	2.9E-03	3.0E-03	3.3E-03	2.9E-03	3.1E-03	3.4E-03	4.2E-03	5.0E-03	5.3E-03	5.6E-03	5.7E-03	5.9E-03	5.9E-03
831	2.3E-03	2.4E-03	2.8E-03	2.8E-03	3.1E-03	3.6E-03	4.3E-03	5.2E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03
832	2.5E-03	2.6E-03	3.0E-03	2.9E-03	3.2E-03	3.7E-03	4.4E-03	5.3E-03	5.5E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03
833	2.8E-03	2.9E-03	3.2E-03	2.9E-03	3.1E-03	3.7E-03	4.4E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03
834	3.0E-03	3.1E-03	3.3E-03	2.9E-03	3.0E-03	3.5E-03	4.2E-03	5.0E-03	5.3E-03	5.5E-03	5.7E-03	5.8E-03	5.8E-03
835	3.2E-03	3.3E-03	3.4E-03	2.9E-03	2.9E-03	3.4E-03	4.1E-03	4.9E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.7E-03
836	3.3E-03	3.4E-03	3.5E-03	2.9E-03	2.9E-03	3.4E-03	4.1E-03	4.9E-03	5.1E-03	5.4E-03	5.5E-03	5.7E-03	5.7E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
837	3.4E-03	3.5E-03	3.6E-03	2.9E-03	2.9E-03	3.4E-03	4.1E-03	4.9E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.7E-03
838	3.4E-03	3.5E-03	3.7E-03	2.9E-03	3.0E-03	3.4E-03	4.1E-03	4.9E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03
839	3.4E-03	3.5E-03	3.6E-03	2.9E-03	3.0E-03	3.4E-03	4.1E-03	4.9E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03
840	3.2E-03	3.3E-03	3.6E-03	2.9E-03	3.0E-03	3.4E-03	4.1E-03	4.9E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03
841	3.1E-03	3.2E-03	3.4E-03	2.9E-03	3.0E-03	3.4E-03	4.1E-03	4.9E-03	5.2E-03	5.4E-03	5.6E-03	5.8E-03	5.8E-03
842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
854	7.3E-04	5.9E-04	2.4E-04	3.6E-05	-4.8E-07	-7.7E-06	3.0E-05	1.1E-04	2.7E-04	4.0E-04	4.9E-04	5.6E-04	5.9E-04
855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
894	8.3E-04	6.5E-04	2.9E-04	7.2E-05	5.0E-05	5.7E-05	1.1E-04	2.0E-04	3.4E-04	4.7E-04	5.6E-04	6.2E-04	6.5E-04
895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
897	7.0E-04	5.6E-04	2.4E-04	5.4E-05	2.4E-05	2.1E-05	6.0E-05	1.4E-04	2.8E-04	4.0E-04	4.9E-04	5.5E-04	5.8E-04
898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
912	1.5E-03	1.6E-03	-7.8E-04	-3.2E-03	-5.4E-03	-7.2E-03	-8.8E-03	-1.0E-02	-9.0E-03	-8.1E-03	-7.4E-03	-7.0E-03	-6.7E-03
913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
914	1.5E-03	1.7E-03	-6.8E-04	-3.0E-03	-5.2E-03	-7.0E-03	-8.5E-03	-9.7E-03	-8.7E-03	-7.8E-03	-7.1E-03	-6.7E-03	-6.4E-03
915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
916	1.6E-03	1.7E-03	-5.7E-04	-2.9E-03	-5.0E-03	-6.8E-03	-8.2E-03	-9.4E-03	-8.3E-03	-7.4E-03	-6.8E-03	-6.3E-03	-6.1E-03
917	1.5E-03	1.6E-03	-3.5E-04	-2.4E-03	-4.2E-03	-5.7E-03	-7.0E-03	-8.0E-03	-7.0E-03	-6.3E-03	-5.7E-03	-5.3E-03	-5.1E-03
918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
919	1.6E-03	1.8E-03	-4.4E-04	-2.7E-03	-4.8E-03	-6.5E-03	-7.8E-03	-9.0E-03	-7.9E-03	-7.0E-03	-6.4E-03	-5.9E-03	-5.7E-03
920	1.5E-03	1.7E-03	-2.6E-04	-2.2E-03	-4.1E-03	-5.5E-03	-6.7E-03	-7.7E-03	-6.8E-03	-6.0E-03	-5.4E-03	-5.0E-03	-4.8E-03
921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
922	1.7E-03	1.8E-03	-3.2E-04	-2.5E-03	-4.6E-03	-6.2E-03	-7.5E-03	-8.6E-03	-7.5E-03	-6.6E-03	-6.0E-03	-5.6E-03	-5.3E-03
923	1.6E-03	1.7E-03	-1.6E-04	-2.1E-03	-3.9E-03	-5.3E-03	-6.5E-03	-7.4E-03	-6.5E-03	-5.7E-03	-5.1E-03	-4.8E-03	-4.6E-03
924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
925	1.8E-03	1.9E-03	-1.9E-04	-2.4E-03	-4.3E-03	-5.9E-03	-7.1E-03	-8.2E-03	-7.1E-03	-6.3E-03	-5.6E-03	-5.2E-03	-5.0E-03
926	1.7E-03	1.8E-03	-5.2E-05	-2.0E-03	-3.7E-03	-5.1E-03	-6.2E-03	-7.1E-03	-6.2E-03	-5.4E-03	-4.8E-03	-4.5E-03	-4.3E-03
927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
928	1.9E-03	2.0E-03	-4.2E-05	-2.2E-03	-4.1E-03	-5.6E-03	-6.8E-03	-7.7E-03	-6.7E-03	-5.9E-03	-5.2E-03	-4.8E-03	-4.6E-03
929	1.7E-03	1.9E-03	6.5E-05	-1.8E-03	-3.5E-03	-4.9E-03	-5.9E-03	-6.8E-03	-5.9E-03	-5.1E-03	-4.5E-03	-4.2E-03	-4.0E-03
930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
931	1.9E-03	2.1E-03	1.1E-04	-2.0E-03	-3.9E-03	-5.3E-03	-6.5E-03	-7.3E-03	-6.3E-03	-5.5E-03	-4.8E-03	-4.4E-03	-4.2E-03
932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
934	2.0E-03	2.2E-03	2.6E-04	-1.8E-03	-3.7E-03	-5.1E-03	-6.1E-03	-6.9E-03	-5.9E-03	-5.1E-03	-4.5E-03	-4.0E-03	-3.8E-03
935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
938	1.2E-03	1.3E-03	-3.2E-03	-7.7E-03	-1.2E-02	-1.6E-02	-2.0E-02	-2.3E-02	-2.2E-02	-2.1E-02	-2.1E-02	-2.0E-02	-2.0E-02
939	1.1E-03	1.3E-03	-2.1E-03	-5.5E-03	-8.7E-03	-1.2E-02	-1.4E-02	-1.7E-02	-1.6E-02	-1.5E-02	-1.5E-02	-1.4E-02	-1.4E-02
940	1.1E-03	1.3E-03	-1.9E-03	-5.0E-03	-8.0E-03	-1.1E-02	-1.3E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.3E-02	-1.3E-02	-1.3E-02
941	1.1E-03	1.2E-03	-1.4E-03	-4.0E-03	-6.5E-03	-8.7E-03	-1.1E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.0E-02	-9.9E-03	-9.7E-03
942	1.1E-03	1.2E-03	-1.6E-03	-4.5E-03	-7.2E-03	-9.6E-03	-1.2E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02
943	1.1E-03	1.3E-03	-1.8E-03	-4.9E-03	-7.7E-03	-1.0E-02	-1.3E-02	-1.5E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.2E-02
944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
947	1.1E-03	1.2E-03	-1.2E-03	-3.5E-03	-5.7E-03	-7.6E-03	-9.2E-03	-1.1E-02	-9.7E-03	-8.9E-03	-8.3E-03	-7.9E-03	-7.7E-03
948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
949	1.1E-03	1.2E-03	-1.2E-03	-3.6E-03	-5.8E-03	-7.7E-03	-9.3E-03	-1.1E-02	-9.8E-03	-9.0E-03	-8.4E-03	-8.0E-03	-7.8E-03
950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
951	1.1E-03	1.3E-03	-1.2E-03	-3.6E-03	-5.8E-03	-7.8E-03	-9.4E-03	-1.1E-02	-9.9E-03	-9.1E-03	-8.5E-03	-8.1E-03	-7.9E-03
952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
953	1.2E-03	1.3E-03	-1.2E-03	-3.6E-03	-5.8E-03	-7.8E-03	-9.5E-03	-1.1E-02	-1.0E-02	-9.1E-03	-8.5E-03	-8.1E-03	-7.9E-03
954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
955	1.2E-03	1.3E-03	-1.1E-03	-3.6E-03	-5.8E-03	-7.8E-03	-9.5E-03	-1.1E-02	-9.9E-03	-9.1E-03	-8.5E-03	-8.1E-03	-7.9E-03
956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
961	1.2E-03	1.3E-03	-8.1E-04	-2.9E-03	-4.9E-03	-6.6E-03	-8.0E-03	-9.2E-03	-8.3E-03	-7.6E-03	-7.1E-03	-6.7E-03	-6.5E-03
962	1.2E-03	1.3E-03	-7.6E-04	-2.9E-03	-4.8E-03	-6.4E-03	-7.8E-03	-9.0E-03	-8.2E-03	-7.4E-03	-6.9E-03	-6.5E-03	-6.3E-03
963	1.2E-03	1.4E-03	-7.1E-04	-2.8E-03	-4.7E-03	-6.3E-03	-7.7E-03	-8.9E-03	-8.0E-03	-7.3E-03	-6.7E-03	-6.3E-03	-6.1E-03
964	1.5E-03	1.9E-03	8.9E-04	-1.8E-04	-1.2E-03	-2.4E-03	-3.4E-03	-4.3E-03	-3.9E-03	-3.6E-03	-3.3E-03	-3.1E-03	-3.0E-03
965	1.4E-03	1.7E-03	7.5E-04	-2.8E-04	-1.3E-03	-2.3E-03	-3.3E-03	-4.2E-03	-3.8E-03	-3.4E-03	-3.1E-03	-3.0E-03	-2.9E-03
966	1.2E-03	1.6E-03	6.0E-04	-3.9E-04	-1.3E-03	-2.3E-03	-3.2E-03	-4.0E-03	-3.6E-03	-3.3E-03	-3.0E-03	-2.8E-03	-2.7E-03
967	1.1E-03	1.4E-03	4.4E-04	-5.2E-04	-1.4E-03	-2.3E-03	-3.1E-03	-3.8E-03	-3.4E-03	-3.1E-03	-2.8E-03	-2.7E-03	-2.6E-03
968	1.0E-03	1.3E-03	3.5E-04	-5.8E-04	-1.4E-03	-2.3E-03	-3.0E-03	-3.7E-03	-3.3E-03	-2.9E-03	-2.7E-03	-2.5E-03	-2.4E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
970	9.0E-04	1.1E-03	2.3E-04	-6.3E-04	-1.4E-03	-2.2E-03	-2.8E-03	-3.3E-03	-2.9E-03	-2.5E-03	-2.3E-03	-2.1E-03	-2.0E-03
971	8.8E-04	1.0E-03	2.3E-04	-6.0E-04	-1.4E-03	-2.1E-03	-2.7E-03	-3.2E-03	-2.8E-03	-2.4E-03	-2.2E-03	-2.0E-03	-1.9E-03
972	8.4E-04	9.9E-04	2.5E-04	-5.2E-04	-1.2E-03	-1.9E-03	-2.4E-03	-2.9E-03	-2.5E-03	-2.2E-03	-2.0E-03	-1.8E-03	-1.7E-03
973	1.8E-03	2.3E-03	1.3E-03	1.5E-04	-9.3E-04	-2.3E-03	-3.5E-03	-4.6E-03	-4.1E-03	-3.8E-03	-3.5E-03	-3.3E-03	-3.2E-03
974	1.6E-03	2.1E-03	1.1E-03	1.0E-05	-1.0E-03	-2.2E-03	-3.4E-03	-4.4E-03	-3.9E-03	-3.6E-03	-3.3E-03	-3.1E-03	-3.1E-03
975	1.4E-03	1.8E-03	8.0E-04	-2.3E-04	-1.2E-03	-2.3E-03	-3.3E-03	-4.2E-03	-3.8E-03	-3.4E-03	-3.2E-03	-3.0E-03	-2.9E-03
976	1.2E-03	1.6E-03	6.0E-04	-4.0E-04	-1.3E-03	-2.3E-03	-3.2E-03	-4.0E-03	-3.6E-03	-3.3E-03	-3.0E-03	-2.8E-03	-2.8E-03
977	1.1E-03	1.4E-03	4.7E-04	-5.0E-04	-1.4E-03	-2.3E-03	-3.1E-03	-3.9E-03	-3.4E-03	-3.1E-03	-2.8E-03	-2.7E-03	-2.6E-03
978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
979	9.5E-04	1.2E-03	3.0E-04	-5.7E-04	-1.4E-03	-2.2E-03	-2.8E-03	-3.4E-03	-3.0E-03	-2.6E-03	-2.4E-03	-2.2E-03	-2.1E-03
980	9.2E-04	1.1E-03	2.7E-04	-5.9E-04	-1.4E-03	-2.1E-03	-2.8E-03	-3.3E-03	-2.9E-03	-2.5E-03	-2.3E-03	-2.1E-03	-2.0E-03
981	8.7E-04	1.0E-03	2.7E-04	-5.3E-04	-1.3E-03	-1.9E-03	-2.5E-03	-3.0E-03	-2.6E-03	-2.3E-03	-2.1E-03	-1.9E-03	-1.9E-03
982	8.3E-04	9.7E-04	2.7E-04	-4.7E-04	-1.1E-03	-1.8E-03	-2.3E-03	-2.7E-03	-2.4E-03	-2.1E-03	-1.9E-03	-1.7E-03	-1.6E-03
983	2.0E-03	2.6E-03	1.6E-03	4.6E-04	-6.3E-04	-2.1E-03	-3.4E-03	-4.6E-03	-4.2E-03	-3.8E-03	-3.5E-03	-3.3E-03	-3.3E-03
984	1.6E-03	2.1E-03	1.1E-03	1.6E-05	-1.0E-03	-2.3E-03	-3.4E-03	-4.4E-03	-4.0E-03	-3.6E-03	-3.4E-03	-3.2E-03	-3.1E-03
985	1.4E-03	1.8E-03	7.8E-04	-2.5E-04	-1.2E-03	-2.3E-03	-3.3E-03	-4.2E-03	-3.8E-03	-3.5E-03	-3.2E-03	-3.0E-03	-2.9E-03
986	1.2E-03	1.6E-03	5.9E-04	-4.1E-04	-1.3E-03	-2.4E-03	-3.2E-03	-4.0E-03	-3.6E-03	-3.3E-03	-3.0E-03	-2.8E-03	-2.7E-03
987	1.1E-03	1.4E-03	4.5E-04	-5.2E-04	-1.4E-03	-2.4E-03	-3.2E-03	-3.9E-03	-3.4E-03	-3.1E-03	-2.8E-03	-2.6E-03	-2.5E-03
988	1.0E-03	1.2E-03	3.4E-04	-5.6E-04	-1.4E-03	-2.2E-03	-2.9E-03	-3.5E-03	-3.1E-03	-2.8E-03	-2.5E-03	-2.4E-03	-2.3E-03
989	9.6E-04	1.2E-03	2.9E-04	-6.0E-04	-1.4E-03	-2.2E-03	-2.9E-03	-3.5E-03	-3.0E-03	-2.7E-03	-2.4E-03	-2.2E-03	-2.2E-03
990	9.0E-04	1.1E-03	2.8E-04	-5.3E-04	-1.3E-03	-2.0E-03	-2.6E-03	-3.1E-03	-2.8E-03	-2.4E-03	-2.2E-03	-2.0E-03	-2.0E-03
991	8.5E-04	1.0E-03	2.7E-04	-4.9E-04	-1.2E-03	-1.9E-03	-2.4E-03	-2.9E-03	-2.5E-03	-2.2E-03	-2.0E-03	-1.8E-03	-1.8E-03
992	8.1E-04	9.5E-04	2.6E-04	-4.6E-04	-1.1E-03	-1.7E-03	-2.2E-03	-2.7E-03	-2.3E-03	-2.0E-03	-1.8E-03	-1.7E-03	-1.6E-03
993	1.6E-03	2.1E-03	1.0E-03	-3.9E-05	-1.1E-03	-2.3E-03	-3.4E-03	-4.5E-03	-4.0E-03	-3.7E-03	-3.4E-03	-3.2E-03	-3.1E-03
994	1.4E-03	1.7E-03	7.4E-04	-3.0E-04	-1.3E-03	-2.4E-03	-3.4E-03	-4.2E-03	-3.8E-03	-3.5E-03	-3.2E-03	-3.0E-03	-2.9E-03
995	1.2E-03	1.5E-03	5.3E-04	-4.8E-04	-1.4E-03	-2.4E-03	-3.3E-03	-4.1E-03	-3.6E-03	-3.3E-03	-3.0E-03	-2.8E-03	-2.7E-03
996	1.1E-03	1.3E-03	3.6E-04	-5.8E-04	-1.5E-03	-2.3E-03	-3.1E-03	-3.8E-03	-3.3E-03	-3.0E-03	-2.7E-03	-2.5E-03	-2.5E-03
997	1.0E-03	1.2E-03	3.0E-04	-6.2E-04	-1.5E-03	-2.3E-03	-3.0E-03	-3.6E-03	-3.2E-03	-2.8E-03	-2.6E-03	-2.4E-03	-2.3E-03
998	9.3E-04	1.1E-03	2.9E-04	-5.6E-04	-1.3E-03	-2.1E-03	-2.7E-03	-3.3E-03	-2.9E-03	-2.6E-03	-2.3E-03	-2.2E-03	-2.1E-03
999	8.7E-04	1.0E-03	2.7E-04	-5.2E-04	-1.3E-03	-1.9E-03	-2.5E-03	-3.0E-03	-2.6E-03	-2.3E-03	-2.1E-03	-2.0E-03	-1.9E-03
1000	8.2E-04	9.6E-04	2.4E-04	-5.2E-04	-1.2E-03	-1.8E-03	-2.4E-03	-2.8E-03	-2.5E-03	-2.2E-03	-1.9E-03	-1.8E-03	-1.7E-03
1001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1002	1.1E-03	1.3E-03	3.8E-04	-6.0E-04	-1.5E-03	-2.4E-03	-3.2E-03	-3.9E-03	-3.5E-03	-3.1E-03	-2.9E-03	-2.7E-03	-2.6E-03
1003	1.0E-03	1.2E-03	3.1E-04	-6.5E-04	-1.5E-03	-2.4E-03	-3.2E-03	-3.8E-03	-3.4E-03	-3.0E-03	-2.7E-03	-2.6E-03	-2.5E-03
1004	9.5E-04	1.1E-03	2.8E-04	-6.0E-04	-1.4E-03	-2.2E-03	-2.9E-03	-3.5E-03	-3.1E-03	-2.7E-03	-2.5E-03	-2.3E-03	-2.2E-03
1005	8.9E-04	1.1E-03	2.6E-04	-5.6E-04	-1.3E-03	-2.0E-03	-2.6E-03	-3.2E-03	-2.8E-03	-2.5E-03	-2.2E-03	-2.1E-03	-2.0E-03
1006	8.4E-04	9.8E-04	2.3E-04	-5.4E-04	-1.3E-03	-1.9E-03	-2.5E-03	-2.9E-03	-2.6E-03	-2.3E-03	-2.0E-03	-1.9E-03	-1.8E-03
1007	1.1E-03	1.3E-03	3.6E-04	-6.6E-04	-1.6E-03	-2.6E-03	-3.4E-03	-4.1E-03	-3.7E-03	-3.3E-03	-3.1E-03	-2.9E-03	-2.8E-03
1008	1.0E-03	1.3E-03	3.0E-04	-7.0E-04	-1.6E-03	-2.6E-03	-3.3E-03	-4.0E-03	-3.6E-03	-3.2E-03	-2.9E-03	-2.7E-03	-2.7E-03
1009	9.7E-04	1.2E-03	2.7E-04	-6.5E-04	-1.5E-03	-2.3E-03	-3.0E-03	-3.6E-03	-3.2E-03	-2.9E-03	-2.6E-03	-2.5E-03	-2.4E-03
1010	9.1E-04	1.1E-03	2.5E-04	-6.1E-04	-1.4E-03	-2.1E-03	-2.8E-03	-3.3E-03	-2.9E-03	-2.6E-03	-2.4E-03	-2.2E-03	-2.1E-03
1011	8.5E-04	1.0E-03	2.2E-04	-5.9E-04	-1.3E-03	-2.0E-03	-2.6E-03	-3.1E-03	-2.7E-03	-2.4E-03	-2.2E-03	-2.0E-03	-1.9E-03
1012	1.1E-03	1.4E-03	3.2E-04	-7.4E-04	-1.7E-03	-2.7E-03	-3.6E-03	-4.4E-03	-3.9E-03	-3.6E-03	-3.3E-03	-3.1E-03	-3.0E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1013	1.1E-03	1.3E-03	2.7E-04	-7.7E-04	-1.7E-03	-2.7E-03	-3.5E-03	-4.3E-03	-3.8E-03	-3.4E-03	-3.1E-03	-2.9E-03	-2.8E-03
1014	9.9E-04	1.2E-03	2.5E-04	-7.1E-04	-1.6E-03	-2.5E-03	-3.2E-03	-3.8E-03	-3.4E-03	-3.1E-03	-2.8E-03	-2.7E-03	-2.6E-03
1015	9.2E-04	1.1E-03	2.3E-04	-6.6E-04	-1.5E-03	-2.3E-03	-2.9E-03	-3.5E-03	-3.1E-03	-2.8E-03	-2.5E-03	-2.4E-03	-2.3E-03
1016	8.7E-04	1.0E-03	1.9E-04	-6.6E-04	-1.4E-03	-2.2E-03	-2.8E-03	-3.3E-03	-2.9E-03	-2.6E-03	-2.3E-03	-2.2E-03	-2.1E-03
1017	1.1E-03	1.3E-03	2.3E-04	-9.0E-04	-2.0E-03	-3.0E-03	-3.9E-03	-4.7E-03	-4.3E-03	-3.9E-03	-3.6E-03	-3.4E-03	-3.3E-03
1018	1.1E-03	1.3E-03	2.0E-04	-9.1E-04	-1.9E-03	-2.9E-03	-3.8E-03	-4.6E-03	-4.1E-03	-3.7E-03	-3.4E-03	-3.2E-03	-3.1E-03
1019	9.9E-04	1.2E-03	1.7E-04	-8.6E-04	-1.8E-03	-2.7E-03	-3.5E-03	-4.2E-03	-3.8E-03	-3.4E-03	-3.1E-03	-2.9E-03	-2.8E-03
1020	9.3E-04	1.1E-03	1.6E-04	-8.0E-04	-1.7E-03	-2.5E-03	-3.2E-03	-3.8E-03	-3.4E-03	-3.1E-03	-2.8E-03	-2.6E-03	-2.5E-03
1021	8.8E-04	1.0E-03	1.6E-04	-7.4E-04	-1.6E-03	-2.3E-03	-3.0E-03	-3.5E-03	-3.1E-03	-2.7E-03	-2.5E-03	-2.3E-03	-2.2E-03
1022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1023	1.1E-03	1.3E-03	1.1E-04	-1.1E-03	-2.2E-03	-3.2E-03	-4.1E-03	-4.9E-03	-4.5E-03	-4.0E-03	-3.7E-03	-3.5E-03	-3.4E-03
1024	9.9E-04	1.2E-03	1.1E-04	-9.9E-04	-2.0E-03	-3.0E-03	-3.8E-03	-4.5E-03	-4.0E-03	-3.7E-03	-3.4E-03	-3.2E-03	-3.1E-03
1025	9.3E-04	1.1E-03	1.1E-04	-9.1E-04	-1.8E-03	-2.7E-03	-3.5E-03	-4.1E-03	-3.7E-03	-3.3E-03	-3.0E-03	-2.8E-03	-2.7E-03
1026	8.9E-04	1.0E-03	1.1E-04	-8.3E-04	-1.7E-03	-2.5E-03	-3.2E-03	-3.7E-03	-3.3E-03	-2.9E-03	-2.7E-03	-2.5E-03	-2.4E-03
1027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1028	1.1E-03	1.3E-03	3.0E-05	-1.2E-03	-2.4E-03	-3.5E-03	-4.5E-03	-5.3E-03	-4.8E-03	-4.4E-03	-4.1E-03	-3.8E-03	-3.7E-03
1029	9.9E-04	1.2E-03	3.4E-05	-1.1E-03	-2.2E-03	-3.2E-03	-4.1E-03	-4.8E-03	-4.4E-03	-3.9E-03	-3.6E-03	-3.4E-03	-3.3E-03
1030	9.4E-04	1.1E-03	4.7E-05	-1.0E-03	-2.0E-03	-2.9E-03	-3.7E-03	-4.4E-03	-3.9E-03	-3.5E-03	-3.2E-03	-3.0E-03	-2.9E-03
1031	8.9E-04	1.0E-03	5.9E-05	-9.4E-04	-1.9E-03	-2.7E-03	-3.4E-03	-4.0E-03	-3.5E-03	-3.1E-03	-2.9E-03	-2.7E-03	-2.6E-03
1032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1033	1.1E-03	1.3E-03	-6.9E-05	-1.4E-03	-2.7E-03	-3.9E-03	-4.9E-03	-5.8E-03	-5.2E-03	-4.8E-03	-4.4E-03	-4.2E-03	-4.1E-03
1034	1.0E-03	1.2E-03	-5.4E-05	-1.3E-03	-2.5E-03	-3.5E-03	-4.5E-03	-5.3E-03	-4.7E-03	-4.3E-03	-3.9E-03	-3.7E-03	-3.6E-03
1035	9.5E-04	1.1E-03	-2.8E-05	-1.2E-03	-2.2E-03	-3.2E-03	-4.0E-03	-4.7E-03	-4.2E-03	-3.8E-03	-3.5E-03	-3.3E-03	-3.2E-03
1036	9.0E-04	1.0E-03	-1.8E-05	-1.1E-03	-2.1E-03	-3.0E-03	-3.7E-03	-4.3E-03	-3.8E-03	-3.4E-03	-3.1E-03	-2.9E-03	-2.8E-03
1037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1042	1.1E-03	1.3E-03	-2.5E-04	-1.8E-03	-3.2E-03	-4.6E-03	-5.8E-03	-6.8E-03	-6.2E-03	-5.7E-03	-5.3E-03	-5.1E-03	-4.9E-03
1043	1.0E-03	1.2E-03	-2.0E-04	-1.6E-03	-2.9E-03	-4.2E-03	-5.2E-03	-6.1E-03	-5.6E-03	-5.1E-03	-4.7E-03	-4.5E-03	-4.4E-03
1044	9.8E-04	1.1E-03	-2.0E-04	-1.5E-03	-2.8E-03	-3.9E-03	-4.8E-03	-5.6E-03	-5.0E-03	-4.5E-03	-4.2E-03	-3.9E-03	-3.8E-03
1045	1.1E-03	1.3E-03	-3.6E-04	-2.0E-03	-3.6E-03	-5.0E-03	-6.3E-03	-7.4E-03	-6.7E-03	-6.1E-03	-5.7E-03	-5.5E-03	-5.3E-03
1046	1.0E-03	1.2E-03	-3.1E-04	-1.8E-03	-3.3E-03	-4.6E-03	-5.7E-03	-6.7E-03	-6.0E-03	-5.5E-03	-5.1E-03	-4.8E-03	-4.7E-03
1047	1.2E-03	1.3E-03	-3.2E-03	-7.6E-03	-1.2E-02	-1.6E-02	-2.0E-02	-2.3E-02	-2.2E-02	-2.1E-02	-2.1E-02	-2.0E-02	-2.0E-02
1048	1.1E-03	1.3E-03	-2.3E-03	-5.9E-03	-9.3E-03	-1.2E-02	-1.5E-02	-1.8E-02	-1.7E-02	-1.6E-02	-1.6E-02	-1.5E-02	-1.5E-02
1049	1.2E-03	1.3E-03	-1.9E-03	-5.2E-03	-8.3E-03	-1.1E-02	-1.4E-02	-1.6E-02	-1.6E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.4E-02
1050	1.1E-03	1.3E-03	-1.6E-03	-4.4E-03	-7.1E-03	-9.7E-03	-1.2E-02	-1.4E-02	-1.3E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.2E-02
1051	1.1E-03	1.3E-03	-1.2E-03	-3.6E-03	-5.9E-03	-8.1E-03	-1.0E-02	-1.2E-02	-1.1E-02	-1.0E-02	-1.0E-02	-9.7E-03	-9.5E-03
1052	1.2E-03	1.3E-03	-2.0E-03	-5.3E-03	-8.5E-03	-1.1E-02	-1.4E-02	-1.7E-02	-1.6E-02	-1.5E-02	-1.5E-02	-1.4E-02	-1.4E-02
1053	1.1E-03	1.3E-03	-1.5E-03	-4.3E-03	-6.9E-03	-9.4E-03	-1.2E-02	-1.4E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02
1054	1.1E-03	1.2E-03	-1.1E-03	-3.5E-03	-5.7E-03	-7.7E-03	-9.6E-03	-1.1E-02	-1.0E-02	-9.9E-03	-9.4E-03	-9.1E-03	-8.9E-03
1055	1.0E-03	1.2E-03	-8.9E-04	-3.0E-03	-4.9E-03	-6.6E-03	-8.2E-03	-9.6E-03	-8.8E-03	-8.2E-03	-7.7E-03	-7.4E-03	-7.3E-03
1056	1.1E-03	1.3E-03	-1.4E-03	-4.1E-03	-6.6E-03	-8.9E-03	-1.1E-02	-1.3E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1057	1.1E-03	1.2E-03	-1.1E-03	-3.4E-03	-5.5E-03	-7.5E-03	-9.2E-03	-1.1E-02	-1.0E-02	-9.3E-03	-8.8E-03	-8.5E-03	-8.3E-03
1058	1.1E-03	1.2E-03	-1.4E-03	-3.9E-03	-6.3E-03	-8.5E-03	-1.0E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-9.8E-03	-9.6E-03
1059	1.0E-03	1.2E-03	-1.1E-03	-3.3E-03	-5.4E-03	-7.3E-03	-8.9E-03	-1.0E-02	-9.5E-03	-8.9E-03	-8.3E-03	-8.0E-03	-7.8E-03
1060	9.8E-04	1.1E-03	-2.5E-04	-1.6E-03	-2.9E-03	-4.1E-03	-5.1E-03	-6.0E-03	-5.4E-03	-4.9E-03	-4.5E-03	-4.3E-03	-4.2E-03
1061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1062	1.1E-03	1.3E-03	-4.3E-04	-2.2E-03	-3.8E-03	-5.3E-03	-6.7E-03	-7.9E-03	-7.3E-03	-6.7E-03	-6.3E-03	-6.1E-03	-5.9E-03
1063	1.0E-03	1.2E-03	-3.6E-04	-2.0E-03	-3.4E-03	-4.8E-03	-6.0E-03	-7.1E-03	-6.5E-03	-6.0E-03	-5.6E-03	-5.4E-03	-5.2E-03
1064	1.0E-03	1.2E-03	-2.9E-04	-1.8E-03	-3.1E-03	-4.3E-03	-5.4E-03	-6.4E-03	-5.8E-03	-5.3E-03	-4.9E-03	-4.7E-03	-4.5E-03
1065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1066	1.1E-03	1.3E-03	-5.5E-04	-2.4E-03	-4.2E-03	-5.8E-03	-7.3E-03	-8.6E-03	-7.9E-03	-7.4E-03	-7.0E-03	-6.7E-03	-6.6E-03
1067	1.1E-03	1.2E-03	-4.5E-04	-2.2E-03	-3.7E-03	-5.2E-03	-6.5E-03	-7.7E-03	-7.1E-03	-6.5E-03	-6.2E-03	-5.9E-03	-5.8E-03
1068	1.0E-03	1.2E-03	-3.6E-04	-1.9E-03	-3.3E-03	-4.7E-03	-5.8E-03	-6.8E-03	-6.2E-03	-5.7E-03	-5.4E-03	-5.1E-03	-5.0E-03
1069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1070	1.1E-03	1.3E-03	-7.4E-04	-2.8E-03	-4.7E-03	-6.5E-03	-8.1E-03	-9.6E-03	-8.9E-03	-8.4E-03	-8.0E-03	-7.7E-03	-7.6E-03
1071	1.1E-03	1.3E-03	-5.6E-04	-2.4E-03	-4.1E-03	-5.7E-03	-7.1E-03	-8.4E-03	-7.7E-03	-7.2E-03	-6.8E-03	-6.5E-03	-6.4E-03
1072	1.0E-03	1.2E-03	-4.5E-04	-2.1E-03	-3.6E-03	-5.1E-03	-6.3E-03	-7.4E-03	-6.8E-03	-6.3E-03	-5.9E-03	-5.7E-03	-5.5E-03
1073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1074	1.1E-03	1.3E-03	-9.4E-04	-3.2E-03	-5.3E-03	-7.3E-03	-9.1E-03	-1.1E-02	-1.0E-02	-9.5E-03	-9.0E-03	-8.7E-03	-8.6E-03
1075	1.1E-03	1.3E-03	-6.9E-04	-2.7E-03	-4.5E-03	-6.2E-03	-7.7E-03	-9.1E-03	-8.5E-03	-8.0E-03	-7.6E-03	-7.3E-03	-7.2E-03
1076	1.0E-03	1.2E-03	-5.6E-04	-2.3E-03	-4.0E-03	-5.5E-03	-6.9E-03	-8.1E-03	-7.5E-03	-6.9E-03	-6.5E-03	-6.3E-03	-6.2E-03
1077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1078	1.1E-03	1.3E-03	-1.2E-03	-3.6E-03	-6.0E-03	-8.2E-03	-1.0E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.0E-02	-9.9E-03	-9.8E-03
1079	1.1E-03	1.3E-03	-8.6E-04	-3.0E-03	-5.0E-03	-6.9E-03	-8.6E-03	-1.0E-02	-9.5E-03	-8.9E-03	-8.5E-03	-8.2E-03	-8.1E-03
1080	1.1E-03	1.2E-03	-6.9E-04	-2.6E-03	-4.4E-03	-6.0E-03	-7.5E-03	-8.8E-03	-8.2E-03	-7.7E-03	-7.3E-03	-7.0E-03	-6.8E-03
1081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1097	9.7E-04	1.1E-03	-3.0E-04	-1.7E-03	-3.1E-03	-4.3E-03	-5.3E-03	-6.2E-03	-5.6E-03	-5.1E-03	-4.7E-03	-4.5E-03	-4.4E-03
1098	9.9E-04	1.1E-03	-3.7E-04	-1.9E-03	-3.3E-03	-4.6E-03	-5.7E-03	-6.6E-03	-6.0E-03	-5.5E-03	-5.2E-03	-4.9E-03	-4.8E-03
1099	1.0E-03	1.2E-03	-4.6E-04	-2.1E-03	-3.6E-03	-4.9E-03	-6.1E-03	-7.2E-03	-6.6E-03	-6.0E-03	-5.7E-03	-5.4E-03	-5.3E-03
1100	1.0E-03	1.2E-03	-5.6E-04	-2.3E-03	-3.9E-03	-5.4E-03	-6.7E-03	-7.8E-03	-7.2E-03	-6.6E-03	-6.2E-03	-6.0E-03	-5.8E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1101	1.0E-03	1.2E-03	-7.0E-04	-2.6E-03	-4.3E-03	-5.9E-03	-7.4E-03	-8.6E-03	-7.9E-03	-7.4E-03	-7.0E-03	-6.7E-03	-6.5E-03
1102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1110	1.7E-03	1.8E-03	2.2E-03	2.5E-03	2.9E-03	2.6E-03	2.5E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.4E-03
1111	1.7E-03	1.8E-03	2.3E-03	2.8E-03	3.2E-03	3.0E-03	3.0E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03
1112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1120	9.4E-04	7.2E-04	3.2E-04	7.1E-05	4.6E-05	5.2E-05	1.0E-04	1.9E-04	3.5E-04	4.7E-04	5.7E-04	6.3E-04	6.6E-04
1121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1122	8.5E-04	6.6E-04	3.0E-04	7.2E-05	4.7E-05	5.1E-05	9.7E-05	1.8E-04	3.3E-04	4.5E-04	5.4E-04	5.9E-04	6.2E-04
1123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1124	8.9E-04	6.9E-04	3.1E-04	7.1E-05	4.6E-05	5.1E-05	9.9E-05	1.9E-04	3.3E-04	4.6E-04	5.5E-04	6.1E-04	6.4E-04
1125	7.8E-04	6.1E-04	2.8E-04	7.0E-05	4.5E-05	4.7E-05	9.0E-05	1.7E-04	3.1E-04	4.3E-04	5.1E-04	5.7E-04	6.0E-04
1126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1127	8.1E-04	6.4E-04	2.8E-04	7.1E-05	4.8E-05	5.1E-05	9.7E-05	1.8E-04	3.3E-04	4.4E-04	5.3E-04	5.9E-04	6.2E-04
1128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1129	7.0E-04	5.5E-04	2.5E-04	6.1E-05	3.3E-05	3.1E-05	6.9E-05	1.5E-04	2.9E-04	4.0E-04	4.9E-04	5.4E-04	5.7E-04
1130	5.5E-04	4.5E-04	1.9E-04	3.3E-05	-6.2E-06	-1.9E-05	8.8E-06	7.6E-05	2.2E-04	3.4E-04	4.2E-04	4.8E-04	5.1E-04
1131	5.6E-04	4.6E-04	1.9E-04	2.4E-05	-1.7E-05	-3.3E-05	-5.8E-06	6.1E-05	2.1E-04	3.3E-04	4.2E-04	4.8E-04	5.1E-04
1132	5.8E-04	4.8E-04	1.9E-04	6.3E-06	-4.2E-05	-6.3E-05	-4.0E-05	2.6E-05	1.8E-04	3.1E-04	4.1E-04	4.7E-04	5.0E-04
1133	6.0E-04	4.9E-04	1.8E-04	-1.7E-05	-7.4E-05	-1.0E-04	-8.3E-05	-2.1E-05	1.5E-04	2.8E-04	3.9E-04	4.5E-04	4.9E-04
1134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1144	5.0E-03	5.7E-03	7.8E-03	9.2E-03	1.0E-02	1.2E-02	1.4E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1167	2.6E-03	2.8E-03	8.4E-04	-1.3E-03	-3.2E-03	-4.5E-03	-5.5E-03	-6.1E-03	-5.1E-03	-4.2E-03	-3.5E-03	-3.1E-03	-2.8E-03
1168	3.1E-03	3.3E-03	1.4E-03	-7.7E-04	-2.8E-03	-4.0E-03	-4.8E-03	-5.4E-03	-4.3E-03	-3.4E-03	-2.8E-03	-2.3E-03	-2.1E-03
1169	2.5E-03	2.7E-03	1.1E-03	-6.8E-04	-2.3E-03	-3.4E-03	-4.2E-03	-4.7E-03	-3.9E-03	-3.2E-03	-2.6E-03	-2.3E-03	-2.1E-03
1170	3.8E-03	4.0E-03	2.1E-03	-2.0E-04	-2.3E-03	-3.5E-03	-4.2E-03	-4.7E-03	-3.6E-03	-2.7E-03	-2.1E-03	-1.6E-03	-1.4E-03
1171	2.9E-03	3.1E-03	1.5E-03	-3.5E-04	-2.1E-03	-3.2E-03	-3.8E-03	-4.3E-03	-3.5E-03	-2.7E-03	-2.2E-03	-1.8E-03	-1.6E-03
1172	2.4E-03	2.5E-03	1.2E-03	-4.0E-04	-1.8E-03	-2.8E-03	-3.4E-03	-3.8E-03	-3.1E-03	-2.4E-03	-1.9E-03	-1.6E-03	-1.5E-03
1173	3.3E-03	3.5E-03	1.9E-03	6.3E-07	-1.8E-03	-2.8E-03	-3.4E-03	-3.7E-03	-2.8E-03	-2.1E-03	-1.5E-03	-1.1E-03	-9.5E-04
1174	2.6E-03	2.7E-03	1.4E-03	-1.1E-04	-1.5E-03	-2.4E-03	-2.9E-03	-3.2E-03	-2.4E-03	-1.8E-03	-1.3E-03	-9.2E-04	-7.5E-04
1175	3.5E-03	3.7E-03	2.2E-03	3.6E-04	-1.4E-03	-2.3E-03	-2.7E-03	-3.0E-03	-2.1E-03	-1.3E-03	-7.0E-04	-3.1E-04	-1.2E-04
1176	2.7E-03	2.9E-03	1.7E-03	2.1E-04	-1.1E-03	-1.9E-03	-2.2E-03	-2.4E-03	-1.6E-03	-9.1E-04	-3.9E-04	-4.3E-05	1.3E-04
1177	3.7E-03	3.9E-03	2.6E-03	8.9E-04	-6.6E-04	-1.3E-03	-1.6E-03	-1.5E-03	-5.7E-04	2.7E-04	8.9E-04	1.3E-03	1.5E-03
1178	2.8E-03	3.0E-03	2.0E-03	7.1E-04	-4.4E-04	-9.6E-04	-1.1E-03	-1.0E-03	-1.8E-04	5.6E-04	1.1E-03	1.5E-03	1.7E-03
1179	2.3E-03	2.4E-03	1.6E-03	6.6E-04	-2.1E-04	-5.9E-04	-6.5E-04	-5.2E-04	2.6E-04	9.3E-04	1.4E-03	1.8E-03	1.9E-03
1180	3.7E-03	3.9E-03	3.0E-03	1.6E-03	3.5E-04	-4.3E-05	6.9E-05	4.2E-04	1.4E-03	2.3E-03	2.9E-03	3.4E-03	3.6E-03
1181	2.9E-03	3.1E-03	2.3E-03	1.3E-03	4.2E-04	1.6E-04	2.9E-04	6.4E-04	1.5E-03	2.3E-03	2.8E-03	3.2E-03	3.4E-03
1182	2.3E-03	2.5E-03	1.9E-03	1.2E-03	5.3E-04	3.5E-04	5.2E-04	8.8E-04	1.7E-03	2.4E-03	2.9E-03	3.2E-03	3.4E-03
1183	3.9E-03	4.1E-03	3.5E-03	2.5E-03	1.6E-03	1.6E-03	2.2E-03	2.9E-03	4.0E-03	4.9E-03	5.6E-03	6.0E-03	6.2E-03
1184	3.0E-03	3.2E-03	2.8E-03	2.0E-03	1.5E-03	1.5E-03	2.0E-03	2.6E-03	3.6E-03	4.3E-03	4.9E-03	5.3E-03	5.5E-03
1185	4.0E-03	4.2E-03	4.1E-03	3.5E-03	3.1E-03	3.5E-03	4.5E-03	5.8E-03	6.9E-03	7.8E-03	8.6E-03	9.0E-03	9.3E-03
1186	3.1E-03	3.3E-03	3.2E-03	2.8E-03	2.5E-03	2.9E-03	3.7E-03	4.7E-03	5.7E-03	6.5E-03	7.1E-03	7.5E-03	7.7E-03
1187	4.1E-03	4.3E-03	4.7E-03	4.6E-03	4.6E-03	5.5E-03	7.0E-03	8.7E-03	9.8E-03	1.1E-02	1.2E-02	1.2E-02	1.2E-02
1188	3.2E-03	3.5E-03	3.7E-03	3.6E-03	3.6E-03	4.3E-03	5.4E-03	6.8E-03	7.7E-03	8.6E-03	9.2E-03	9.7E-03	9.9E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1189	4.1E-03	4.4E-03	5.2E-03	5.4E-03	5.9E-03	7.1E-03	8.9E-03	1.1E-02	1.2E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02
1190	2.0E-03	2.1E-03	6.3E-04	-9.8E-04	-2.5E-03	-3.5E-03	-4.3E-03	-4.9E-03	-4.1E-03	-3.5E-03	-3.0E-03	-2.6E-03	-2.5E-03
1191	1.9E-03	2.0E-03	7.8E-04	-6.5E-04	-2.0E-03	-2.9E-03	-3.5E-03	-4.0E-03	-3.3E-03	-2.7E-03	-2.3E-03	-2.0E-03	-1.9E-03
1192	1.8E-03	1.9E-03	8.5E-04	-3.6E-04	-1.5E-03	-2.2E-03	-2.7E-03	-3.0E-03	-2.4E-03	-1.8E-03	-1.4E-03	-1.1E-03	-9.9E-04
1193	1.9E-03	2.0E-03	1.0E-03	-1.3E-04	-1.2E-03	-1.8E-03	-2.2E-03	-2.5E-03	-1.8E-03	-1.2E-03	-8.0E-04	-5.2E-04	-3.8E-04
1194	2.0E-03	2.1E-03	1.2E-03	1.5E-04	-8.1E-04	-1.4E-03	-1.6E-03	-1.7E-03	-1.0E-03	-4.3E-04	1.3E-05	3.1E-04	4.6E-04
1195	1.7E-03	1.8E-03	1.1E-03	2.3E-04	-5.2E-04	-9.2E-04	-1.1E-03	-1.1E-03	-4.3E-04	1.3E-04	5.4E-04	8.2E-04	9.6E-04
1196	1.7E-03	1.9E-03	1.3E-03	5.5E-04	-6.8E-05	-3.4E-04	-3.5E-04	-2.0E-04	4.7E-04	1.1E-03	1.5E-03	1.8E-03	1.9E-03
1197	1.8E-03	1.9E-03	1.5E-03	9.3E-04	4.7E-04	3.5E-04	5.0E-04	8.1E-04	1.5E-03	2.1E-03	2.5E-03	2.8E-03	3.0E-03
1198	1.5E-03	1.7E-03	1.3E-03	9.0E-04	5.5E-04	4.9E-04	6.7E-04	9.9E-04	1.6E-03	2.2E-03	2.6E-03	2.8E-03	3.0E-03
1199	1.8E-03	2.0E-03	1.7E-03	1.3E-03	1.1E-03	1.1E-03	1.4E-03	1.9E-03	2.6E-03	3.2E-03	3.7E-03	4.0E-03	4.1E-03
1200	1.6E-03	1.7E-03	1.5E-03	1.2E-03	1.0E-03	1.1E-03	1.4E-03	1.8E-03	2.5E-03	3.0E-03	3.4E-03	3.7E-03	3.8E-03
1201	2.2E-03	2.4E-03	2.3E-03	2.0E-03	1.9E-03	2.1E-03	2.7E-03	3.5E-03	4.3E-03	5.0E-03	5.5E-03	5.8E-03	6.0E-03
1202	1.9E-03	2.0E-03	2.0E-03	1.8E-03	1.6E-03	1.9E-03	2.4E-03	3.0E-03	3.7E-03	4.4E-03	4.8E-03	5.1E-03	5.3E-03
1203	1.6E-03	1.8E-03	1.7E-03	1.6E-03	1.5E-03	1.7E-03	2.1E-03	2.7E-03	3.3E-03	3.9E-03	4.3E-03	4.6E-03	4.7E-03
1204	2.3E-03	2.5E-03	2.7E-03	2.6E-03	2.7E-03	3.1E-03	3.9E-03	5.0E-03	5.8E-03	6.5E-03	7.0E-03	7.4E-03	7.6E-03
1205	2.0E-03	2.2E-03	2.3E-03	2.2E-03	2.2E-03	2.6E-03	3.3E-03	4.2E-03	4.9E-03	5.5E-03	6.0E-03	6.3E-03	6.5E-03
1206	1.7E-03	1.9E-03	2.0E-03	1.9E-03	1.9E-03	2.3E-03	2.8E-03	3.6E-03	4.2E-03	4.8E-03	5.2E-03	5.5E-03	5.6E-03
1207	2.5E-03	2.7E-03	3.0E-03	3.1E-03	3.4E-03	4.0E-03	5.0E-03	6.2E-03	7.1E-03	7.8E-03	8.4E-03	8.7E-03	8.9E-03
1208	2.1E-03	2.3E-03	2.5E-03	2.6E-03	2.8E-03	3.3E-03	4.1E-03	5.2E-03	5.9E-03	6.5E-03	7.0E-03	7.4E-03	7.5E-03
1209	1.8E-03	2.0E-03	2.2E-03	2.2E-03	2.4E-03	2.8E-03	3.5E-03	4.3E-03	5.0E-03	5.6E-03	6.0E-03	6.3E-03	6.5E-03
1210	3.1E-03	3.4E-03	4.0E-03	4.3E-03	4.8E-03	5.7E-03	7.1E-03	8.8E-03	9.8E-03	1.1E-02	1.1E-02	1.2E-02	1.2E-02
1211	2.6E-03	2.8E-03	3.3E-03	3.6E-03	3.9E-03	4.7E-03	5.9E-03	7.2E-03	8.1E-03	8.8E-03	9.4E-03	9.8E-03	1.0E-02
1212	2.2E-03	2.4E-03	2.8E-03	3.0E-03	3.3E-03	3.9E-03	4.8E-03	6.0E-03	6.7E-03	7.4E-03	7.9E-03	8.2E-03	8.4E-03
1213	1.9E-03	2.1E-03	2.4E-03	2.5E-03	2.7E-03	3.3E-03	4.0E-03	5.0E-03	5.7E-03	6.3E-03	6.7E-03	7.0E-03	7.2E-03
1214	3.9E-03	4.2E-03	5.3E-03	6.0E-03	6.8E-03	8.2E-03	1.0E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02
1215	3.2E-03	3.5E-03	4.3E-03	4.8E-03	5.4E-03	6.6E-03	8.2E-03	1.0E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02
1216	2.7E-03	3.0E-03	3.6E-03	4.0E-03	4.4E-03	5.3E-03	6.6E-03	8.1E-03	8.9E-03	9.7E-03	1.0E-02	1.1E-02	1.1E-02
1217	2.3E-03	2.5E-03	3.0E-03	3.3E-03	3.7E-03	4.4E-03	5.4E-03	6.6E-03	7.4E-03	8.1E-03	8.6E-03	8.9E-03	9.1E-03
1218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1219	3.9E-03	4.3E-03	5.7E-03	6.6E-03	7.6E-03	9.2E-03	1.1E-02	1.4E-02	1.5E-02	1.6E-02	1.7E-02	1.7E-02	1.8E-02
1220	3.3E-03	3.6E-03	4.6E-03	5.3E-03	6.1E-03	7.3E-03	9.0E-03	1.1E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02
1221	2.8E-03	3.1E-03	3.9E-03	4.3E-03	4.9E-03	5.9E-03	7.3E-03	8.8E-03	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02
1222	2.4E-03	2.7E-03	3.2E-03	3.6E-03	4.0E-03	4.8E-03	5.9E-03	7.2E-03	8.0E-03	8.7E-03	9.2E-03	9.5E-03	9.7E-03
1223	2.1E-03	2.3E-03	2.7E-03	3.0E-03	3.4E-03	4.0E-03	4.9E-03	6.0E-03	6.6E-03	7.3E-03	7.7E-03	8.0E-03	8.2E-03
1224	4.8E-03	5.3E-03	7.5E-03	9.2E-03	1.1E-02	1.3E-02	1.7E-02	2.0E-02	2.1E-02	2.3E-02	2.4E-02	2.4E-02	2.4E-02
1225	4.0E-03	4.4E-03	6.0E-03	7.1E-03	8.4E-03	1.0E-02	1.2E-02	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.9E-02
1226	3.4E-03	3.8E-03	4.9E-03	5.7E-03	6.6E-03	8.0E-03	9.8E-03	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02
1227	2.9E-03	3.2E-03	4.1E-03	4.7E-03	5.3E-03	6.4E-03	7.8E-03	9.5E-03	1.0E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02
1228	2.5E-03	2.8E-03	3.5E-03	3.9E-03	4.4E-03	5.2E-03	6.4E-03	7.8E-03	8.5E-03	9.2E-03	9.7E-03	1.0E-02	1.0E-02
1229	2.2E-03	2.4E-03	2.9E-03	3.2E-03	3.6E-03	4.3E-03	5.3E-03	6.4E-03	7.1E-03	7.7E-03	8.1E-03	8.5E-03	8.6E-03
1230	5.0E-03	5.5E-03	7.9E-03	9.8E-03	1.2E-02	1.4E-02	1.8E-02	2.1E-02	2.2E-02	2.4E-02	2.5E-02	2.5E-02	2.5E-02
1231	4.2E-03	4.6E-03	6.4E-03	7.7E-03	9.1E-03	1.1E-02	1.3E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	1.9E-02	2.0E-02
1232	3.5E-03	3.9E-03	5.2E-03	6.1E-03	7.2E-03	8.6E-03	1.0E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1233	3.0E-03	3.4E-03	4.3E-03	5.0E-03	5.8E-03	6.9E-03	8.4E-03	1.0E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02
1234	2.6E-03	2.9E-03	3.6E-03	4.1E-03	4.7E-03	5.6E-03	6.8E-03	8.2E-03	9.0E-03	9.7E-03	1.0E-02	1.1E-02	1.1E-02
1235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1236	5.1E-03	5.7E-03	8.2E-03	1.0E-02	1.2E-02	1.5E-02	1.8E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.6E-02	2.6E-02
1237	4.3E-03	4.8E-03	6.7E-03	8.1E-03	9.6E-03	1.2E-02	1.4E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02
1238	3.6E-03	4.1E-03	5.5E-03	6.6E-03	7.7E-03	9.1E-03	1.1E-02	1.3E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02
1239	3.1E-03	3.5E-03	4.6E-03	5.3E-03	6.2E-03	7.3E-03	8.9E-03	1.1E-02	1.1E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02
1240	2.7E-03	3.0E-03	3.8E-03	4.4E-03	5.0E-03	5.9E-03	7.2E-03	8.6E-03	9.3E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02
1241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1242	5.3E-03	6.0E-03	8.5E-03	1.0E-02	1.2E-02	1.5E-02	1.8E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.6E-02	2.6E-02
1243	4.4E-03	5.0E-03	7.0E-03	8.4E-03	1.0E-02	1.2E-02	1.4E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.1E-02
1244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1245	3.2E-03	3.6E-03	4.8E-03	5.6E-03	6.5E-03	7.7E-03	9.3E-03	1.1E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02
1246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1248	5.6E-03	6.3E-03	9.0E-03	1.1E-02	1.3E-02	1.5E-02	1.8E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.5E-02	2.6E-02
1249	4.6E-03	5.2E-03	7.3E-03	8.9E-03	1.0E-02	1.2E-02	1.5E-02	1.8E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.1E-02
1250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1251	3.3E-03	3.7E-03	5.0E-03	6.0E-03	6.9E-03	8.2E-03	9.8E-03	1.2E-02	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02
1252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1254	5.8E-03	6.6E-03	9.3E-03	1.1E-02	1.3E-02	1.6E-02	1.8E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.5E-02	2.6E-02
1255	4.8E-03	5.5E-03	7.6E-03	9.2E-03	1.1E-02	1.3E-02	1.5E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.1E-02	2.1E-02
1256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1257	3.4E-03	3.9E-03	5.2E-03	6.2E-03	7.2E-03	8.5E-03	1.0E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02
1258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1260	6.0E-03	6.9E-03	9.6E-03	1.2E-02	1.3E-02	1.6E-02	1.8E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.5E-02
1261	4.9E-03	5.7E-03	7.8E-03	9.4E-03	1.1E-02	1.3E-02	1.5E-02	1.8E-02	1.9E-02	1.9E-02	2.0E-02	2.1E-02	2.1E-02
1262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1266	5.1E-03	5.8E-03	8.0E-03	9.5E-03	1.1E-02	1.3E-02	1.5E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02
1267	4.2E-03	4.8E-03	6.6E-03	7.9E-03	9.1E-03	1.1E-02	1.2E-02	1.5E-02	1.5E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02
1268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1280	4.6E-03	5.4E-03	7.1E-03	8.3E-03	9.3E-03	1.1E-02	1.2E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02
1281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1282	4.6E-03	5.4E-03	7.0E-03	8.1E-03	9.1E-03	1.0E-02	1.2E-02	1.4E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02
1283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1293	5.2E-03	6.1E-03	7.9E-03	9.1E-03	1.0E-02	1.1E-02	1.3E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.7E-02
1294	4.3E-03	4.9E-03	6.4E-03	7.3E-03	8.1E-03	9.1E-03	1.0E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02
1295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1297	5.1E-03	5.9E-03	7.8E-03	9.0E-03	1.0E-02	1.1E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02
1298	4.2E-03	4.8E-03	6.3E-03	7.2E-03	8.1E-03	9.0E-03	1.0E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02
1299	3.6E-03	4.2E-03	5.4E-03	6.2E-03	6.9E-03	7.8E-03	9.0E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02
1300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1304	4.1E-03	4.8E-03	6.2E-03	7.2E-03	8.1E-03	9.1E-03	1.0E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02
1305	3.5E-03	4.0E-03	5.2E-03	6.0E-03	6.7E-03	7.6E-03	8.8E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02
1306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1309	4.0E-03	4.6E-03	6.1E-03	7.0E-03	7.9E-03	8.9E-03	1.0E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02
1310	3.4E-03	3.9E-03	5.1E-03	5.9E-03	6.6E-03	7.5E-03	8.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02
1311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1312	5.4E-03	6.3E-03	8.4E-03	9.9E-03	1.1E-02	1.3E-02	1.4E-02	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02
1313	4.6E-03	5.3E-03	7.2E-03	8.4E-03	9.5E-03	1.1E-02	1.2E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02
1314	3.9E-03	4.4E-03	5.9E-03	6.9E-03	7.7E-03	8.7E-03	1.0E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02
1315	3.3E-03	3.8E-03	5.0E-03	5.8E-03	6.5E-03	7.4E-03	8.6E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02
1316	3.0E-03	3.4E-03	4.4E-03	5.1E-03	5.7E-03	6.5E-03	7.5E-03	8.8E-03	9.2E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02
1317	5.1E-03	5.8E-03	7.9E-03	9.3E-03	1.1E-02	1.2E-02	1.4E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.8E-02
1318	4.4E-03	5.1E-03	6.8E-03	8.0E-03	9.1E-03	1.0E-02	1.2E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
1319	3.8E-03	4.3E-03	5.8E-03	6.8E-03	7.7E-03	8.7E-03	1.0E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
1320	3.2E-03	3.7E-03	4.9E-03	5.7E-03	6.4E-03	7.3E-03	8.4E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1321	2.8E-03	3.3E-03	4.2E-03	4.9E-03	5.5E-03	6.2E-03	7.3E-03	8.5E-03	8.9E-03	9.5E-03	9.8E-03	1.0E-02	1.0E-02
1322	4.1E-03	4.8E-03	6.5E-03	7.6E-03	8.7E-03	9.9E-03	1.1E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02
1323	3.6E-03	4.2E-03	5.6E-03	6.6E-03	7.5E-03	8.6E-03	9.9E-03	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02
1324	3.1E-03	3.6E-03	4.8E-03	5.6E-03	6.3E-03	7.2E-03	8.3E-03	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
1325	2.8E-03	3.2E-03	4.1E-03	4.7E-03	5.3E-03	6.1E-03	7.1E-03	8.3E-03	8.8E-03	9.3E-03	9.7E-03	1.0E-02	1.0E-02
1326	3.0E-03	3.5E-03	4.6E-03	5.4E-03	6.2E-03	7.1E-03	8.2E-03	9.6E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
1327	3.9E-03	4.4E-03	6.0E-03	7.1E-03	8.1E-03	9.4E-03	1.1E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02
1328	1.5E-03	1.7E-03	1.5E-04	-1.4E-03	-2.9E-03	-4.0E-03	-4.9E-03	-5.6E-03	-4.8E-03	-4.2E-03	-3.7E-03	-3.4E-03	-3.2E-03
1329	1.7E-03	1.8E-03	3.3E-04	-1.2E-03	-2.7E-03	-3.8E-03	-4.6E-03	-5.3E-03	-4.5E-03	-3.8E-03	-3.4E-03	-3.0E-03	-2.9E-03
1330	1.5E-03	1.6E-03	3.7E-04	-9.8E-04	-2.2E-03	-3.1E-03	-3.8E-03	-4.4E-03	-3.7E-03	-3.1E-03	-2.7E-03	-2.4E-03	-2.3E-03
1331	1.7E-03	1.8E-03	5.3E-04	-8.5E-04	-2.1E-03	-3.0E-03	-3.7E-03	-4.2E-03	-3.6E-03	-3.0E-03	-2.6E-03	-2.3E-03	-2.1E-03
1332	1.5E-03	1.6E-03	5.1E-04	-6.7E-04	-1.8E-03	-2.5E-03	-3.1E-03	-3.5E-03	-2.9E-03	-2.4E-03	-2.0E-03	-1.8E-03	-1.7E-03
1333	1.6E-03	1.7E-03	6.5E-04	-5.6E-04	-1.7E-03	-2.4E-03	-3.0E-03	-3.4E-03	-2.8E-03	-2.3E-03	-1.9E-03	-1.6E-03	-1.5E-03
1334	1.4E-03	1.5E-03	6.1E-04	-4.1E-04	-1.3E-03	-2.0E-03	-2.4E-03	-2.7E-03	-2.1E-03	-1.7E-03	-1.3E-03	-1.1E-03	-9.5E-04
1335	1.5E-03	1.6E-03	7.2E-04	-2.8E-04	-1.2E-03	-1.8E-03	-2.2E-03	-2.4E-03	-1.8E-03	-1.3E-03	-9.5E-04	-6.9E-04	-5.7E-04
1336	1.6E-03	1.7E-03	8.7E-04	-8.9E-05	-9.4E-04	-1.5E-03	-1.8E-03	-1.9E-03	-1.3E-03	-8.1E-04	-4.2E-04	-1.6E-04	-2.8E-05
1337	1.6E-03	1.7E-03	2.1E-03	2.4E-03	2.7E-03	3.1E-03	3.6E-03	4.4E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.3E-03
1338	1.8E-03	1.9E-03	2.3E-03	2.4E-03	2.8E-03	3.2E-03	3.8E-03	4.5E-03	4.8E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03
1339	1.6E-03	1.7E-03	2.1E-03	2.3E-03	2.7E-03	3.0E-03	3.5E-03	4.2E-03	4.5E-03	4.8E-03	5.0E-03	5.1E-03	5.1E-03
1340	1.7E-03	1.8E-03	2.2E-03	2.4E-03	2.7E-03	3.1E-03	3.6E-03	4.3E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03
1341	1.7E-03	1.8E-03	2.1E-03	2.3E-03	2.7E-03	3.0E-03	3.6E-03	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03
1342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1343	1.6E-03	1.7E-03	2.2E-03	2.4E-03	2.8E-03	3.2E-03	3.7E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.2E-03
1344	1.8E-03	1.8E-03	2.3E-03	2.5E-03	2.9E-03	3.3E-03	3.9E-03	4.6E-03	4.9E-03	5.0E-03	5.2E-03	5.3E-03	5.3E-03
1345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1360	1.2E-03	1.3E-03	1.8E-03	2.2E-03	2.6E-03	2.7E-03	2.9E-03	3.4E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03	3.8E-03
1361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1365	1.3E-03	1.4E-03	1.8E-03	2.2E-03	2.6E-03	2.6E-03	2.8E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03
1366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1407	1.2E-03	1.3E-03	1.5E-03	1.6E-03	1.8E-03	1.8E-03	2.0E-03	2.4E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03
1408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1421	1.2E-03	1.3E-03	1.5E-03	1.6E-03	1.8E-03	1.8E-03	1.9E-03	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03
1422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1487	3.1E-03	3.4E-03	4.3E-03	4.8E-03	5.1E-03	5.8E-03	7.0E-03	8.4E-03	8.9E-03	9.4E-03	9.8E-03	1.0E-02	1.0E-02
1488	2.7E-03	3.0E-03	3.8E-03	4.3E-03	4.7E-03	5.4E-03	6.5E-03	7.8E-03	8.3E-03	8.8E-03	9.1E-03	9.4E-03	9.5E-03
1489	2.5E-03	2.7E-03	3.5E-03	4.0E-03	4.4E-03	5.0E-03	6.1E-03	7.3E-03	7.7E-03	8.2E-03	8.6E-03	8.8E-03	8.9E-03
1490	2.2E-03	2.4E-03	3.2E-03	3.6E-03	4.0E-03	4.6E-03	5.6E-03	6.7E-03	7.2E-03	7.6E-03	7.9E-03	8.2E-03	8.3E-03
1491	2.0E-03	2.3E-03	2.9E-03	3.3E-03	3.7E-03	4.3E-03	5.2E-03	6.2E-03	6.7E-03	7.1E-03	7.4E-03	7.7E-03	7.8E-03
1492	3.2E-03	3.4E-03	4.3E-03	4.7E-03	5.0E-03	5.5E-03	6.6E-03	7.9E-03	8.5E-03	8.9E-03	9.3E-03	9.5E-03	9.7E-03
1493	2.7E-03	3.0E-03	3.8E-03	4.2E-03	4.6E-03	5.1E-03	6.2E-03	7.5E-03	7.9E-03	8.4E-03	8.8E-03	9.0E-03	9.1E-03
1494	2.4E-03	2.7E-03	3.4E-03	3.8E-03	4.3E-03	4.8E-03	5.8E-03	7.0E-03	7.5E-03	7.9E-03	8.3E-03	8.5E-03	8.6E-03
1495	2.2E-03	2.4E-03	3.1E-03	3.5E-03	3.9E-03	4.4E-03	5.4E-03	6.4E-03	6.9E-03	7.3E-03	7.7E-03	7.9E-03	8.0E-03
1496	2.0E-03	2.2E-03	2.8E-03	3.2E-03	3.6E-03	4.1E-03	5.0E-03	6.0E-03	6.4E-03	6.9E-03	7.2E-03	7.4E-03	7.5E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1502	3.2E-03	3.4E-03	4.2E-03	4.6E-03	4.8E-03	5.0E-03	6.1E-03	7.3E-03	7.8E-03	8.2E-03	8.5E-03	8.7E-03	8.8E-03
1503	2.7E-03	2.9E-03	3.7E-03	4.1E-03	4.4E-03	4.8E-03	5.8E-03	7.0E-03	7.4E-03	7.8E-03	8.1E-03	8.3E-03	8.4E-03
1504	2.4E-03	2.6E-03	3.3E-03	3.7E-03	4.1E-03	4.5E-03	5.5E-03	6.6E-03	7.0E-03	7.4E-03	7.7E-03	7.9E-03	8.0E-03
1505	2.1E-03	2.3E-03	3.0E-03	3.3E-03	3.7E-03	4.2E-03	5.1E-03	6.1E-03	6.5E-03	6.9E-03	7.2E-03	7.4E-03	7.5E-03
1506	1.9E-03	2.1E-03	2.7E-03	3.0E-03	3.4E-03	3.9E-03	4.7E-03	5.7E-03	6.1E-03	6.5E-03	6.8E-03	7.0E-03	7.1E-03
1507	3.2E-03	3.4E-03	4.2E-03	4.5E-03	4.7E-03	4.9E-03	5.9E-03	7.1E-03	7.5E-03	7.9E-03	8.2E-03	8.4E-03	8.5E-03
1508	2.7E-03	2.9E-03	3.6E-03	4.0E-03	4.3E-03	4.7E-03	5.6E-03	6.8E-03	7.2E-03	7.5E-03	7.8E-03	8.0E-03	8.1E-03
1509	2.3E-03	2.5E-03	3.2E-03	3.6E-03	4.0E-03	4.4E-03	5.3E-03	6.4E-03	6.8E-03	7.2E-03	7.4E-03	7.6E-03	7.7E-03
1510	2.1E-03	2.3E-03	2.9E-03	3.3E-03	3.6E-03	4.1E-03	5.0E-03	5.9E-03	6.3E-03	6.7E-03	7.0E-03	7.1E-03	7.2E-03
1511	1.9E-03	2.1E-03	2.6E-03	3.0E-03	3.4E-03	3.8E-03	4.6E-03	5.5E-03	5.9E-03	6.3E-03	6.6E-03	6.8E-03	6.8E-03
1512	3.1E-03	3.3E-03	4.1E-03	4.4E-03	4.6E-03	4.7E-03	5.8E-03	6.9E-03	7.3E-03	7.7E-03	8.0E-03	8.1E-03	8.2E-03
1513	2.6E-03	2.8E-03	3.5E-03	3.9E-03	4.2E-03	4.5E-03	5.5E-03	6.6E-03	7.0E-03	7.3E-03	7.6E-03	7.8E-03	7.9E-03
1514	2.3E-03	2.5E-03	3.1E-03	3.5E-03	3.9E-03	4.3E-03	5.2E-03	6.2E-03	6.6E-03	6.9E-03	7.2E-03	7.4E-03	7.5E-03
1515	2.0E-03	2.2E-03	2.8E-03	3.2E-03	3.6E-03	4.0E-03	4.8E-03	5.8E-03	6.2E-03	6.5E-03	6.8E-03	6.9E-03	7.0E-03
1516	1.9E-03	2.0E-03	2.6E-03	2.9E-03	3.3E-03	3.7E-03	4.5E-03	5.4E-03	5.8E-03	6.1E-03	6.4E-03	6.6E-03	6.7E-03
1517	3.0E-03	3.2E-03	3.9E-03	4.2E-03	4.4E-03	4.5E-03	5.5E-03	6.6E-03	7.0E-03	7.4E-03	7.6E-03	7.8E-03	7.9E-03
1518	2.5E-03	2.7E-03	3.4E-03	3.7E-03	4.0E-03	4.3E-03	5.2E-03	6.3E-03	6.7E-03	7.0E-03	7.3E-03	7.5E-03	7.5E-03
1519	2.2E-03	2.4E-03	3.0E-03	3.4E-03	3.7E-03	4.1E-03	5.0E-03	6.0E-03	6.3E-03	6.7E-03	6.9E-03	7.1E-03	7.2E-03
1520	2.0E-03	2.1E-03	2.7E-03	3.1E-03	3.4E-03	3.8E-03	4.6E-03	5.6E-03	5.9E-03	6.3E-03	6.5E-03	6.7E-03	6.8E-03
1521	1.8E-03	2.0E-03	2.5E-03	2.8E-03	3.2E-03	3.6E-03	4.3E-03	5.2E-03	5.6E-03	5.9E-03	6.2E-03	6.3E-03	6.4E-03
1522	2.9E-03	3.0E-03	3.7E-03	4.0E-03	4.3E-03	4.4E-03	5.3E-03	6.4E-03	6.7E-03	7.1E-03	7.3E-03	7.5E-03	7.6E-03
1523	2.5E-03	2.6E-03	3.3E-03	3.6E-03	3.9E-03	4.1E-03	5.0E-03	6.0E-03	6.4E-03	6.7E-03	7.0E-03	7.2E-03	7.2E-03
1524	2.2E-03	2.3E-03	2.9E-03	3.2E-03	3.6E-03	3.9E-03	4.7E-03	5.7E-03	6.1E-03	6.4E-03	6.6E-03	6.8E-03	6.9E-03
1525	1.9E-03	2.1E-03	2.7E-03	3.0E-03	3.3E-03	3.7E-03	4.5E-03	5.4E-03	5.7E-03	6.1E-03	6.3E-03	6.5E-03	6.5E-03
1526	1.8E-03	1.9E-03	2.4E-03	2.7E-03	3.1E-03	3.5E-03	4.2E-03	5.1E-03	5.4E-03	5.7E-03	6.0E-03	6.2E-03	6.2E-03
1527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1528	2.7E-03	2.9E-03	3.5E-03	3.8E-03	4.1E-03	4.1E-03	5.0E-03	6.1E-03	6.4E-03	6.8E-03	7.0E-03	7.2E-03	7.3E-03
1529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1531	1.9E-03	2.0E-03	2.6E-03	2.8E-03	3.1E-03	3.5E-03	4.3E-03	5.1E-03	5.5E-03	5.8E-03	6.1E-03	6.2E-03	6.3E-03
1532	1.7E-03	1.8E-03	2.4E-03	2.6E-03	3.0E-03	3.3E-03	4.1E-03	4.9E-03	5.2E-03	5.5E-03	5.8E-03	5.9E-03	6.0E-03
1533	4.1E-03	4.2E-03	5.0E-03	5.1E-03	5.2E-03	4.8E-03	5.8E-03	7.0E-03	7.4E-03	7.7E-03	8.0E-03	8.1E-03	8.2E-03
1534	3.6E-03	3.7E-03	4.4E-03	4.6E-03	4.7E-03	4.4E-03	5.4E-03	6.5E-03	6.8E-03	7.2E-03	7.4E-03	7.6E-03	7.7E-03
1535	3.0E-03	3.2E-03	3.8E-03	4.1E-03	4.3E-03	4.2E-03	5.1E-03	6.1E-03	6.5E-03	6.8E-03	7.0E-03	7.2E-03	7.3E-03
1536	2.6E-03	2.7E-03	3.4E-03	3.6E-03	3.9E-03	4.0E-03	4.8E-03	5.8E-03	6.1E-03	6.5E-03	6.7E-03	6.9E-03	7.0E-03
1537	2.3E-03	2.4E-03	3.0E-03	3.2E-03	3.5E-03	3.7E-03	4.5E-03	5.5E-03	5.8E-03	6.1E-03	6.4E-03	6.5E-03	6.6E-03
1538	2.0E-03	2.2E-03	2.7E-03	3.0E-03	3.2E-03	3.5E-03	4.3E-03	5.2E-03	5.5E-03	5.9E-03	6.1E-03	6.3E-03	6.3E-03
1539	1.8E-03	1.9E-03	2.5E-03	2.7E-03	3.0E-03	3.4E-03	4.1E-03	4.9E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.1E-03
1540	1.7E-03	1.8E-03	2.3E-03	2.5E-03	2.8E-03	3.2E-03	3.9E-03	4.7E-03	5.0E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1541	3.6E-03	3.7E-03	4.4E-03	4.5E-03	4.6E-03	4.5E-03	5.5E-03	6.6E-03	6.9E-03	7.2E-03	7.5E-03	7.6E-03	7.7E-03
1542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1548	3.2E-03	3.3E-03	4.0E-03	4.0E-03	4.2E-03	4.2E-03	5.1E-03	6.1E-03	6.5E-03	6.8E-03	7.0E-03	7.2E-03	7.3E-03
1549	2.9E-03	3.0E-03	3.6E-03	3.7E-03	4.0E-03	4.0E-03	4.9E-03	5.8E-03	6.2E-03	6.5E-03	6.7E-03	6.9E-03	6.9E-03
1550	2.6E-03	2.7E-03	3.3E-03	3.5E-03	3.7E-03	3.8E-03	4.6E-03	5.6E-03	5.9E-03	6.2E-03	6.4E-03	6.6E-03	6.7E-03
1551	2.3E-03	2.4E-03	3.0E-03	3.2E-03	3.4E-03	3.6E-03	4.4E-03	5.3E-03	5.6E-03	5.9E-03	6.2E-03	6.3E-03	6.4E-03
1552	2.1E-03	2.2E-03	2.7E-03	2.9E-03	3.2E-03	3.4E-03	4.2E-03	5.0E-03	5.4E-03	5.7E-03	5.9E-03	6.1E-03	6.1E-03
1553	1.9E-03	2.0E-03	2.5E-03	2.7E-03	3.0E-03	3.3E-03	4.0E-03	4.8E-03	5.1E-03	5.4E-03	5.7E-03	5.8E-03	5.9E-03
1554	2.9E-03	3.1E-03	3.6E-03	3.6E-03	3.8E-03	4.0E-03	4.8E-03	5.8E-03	6.1E-03	6.4E-03	6.6E-03	6.8E-03	6.9E-03
1555	2.6E-03	2.8E-03	3.3E-03	3.4E-03	3.6E-03	3.8E-03	4.6E-03	5.5E-03	5.8E-03	6.1E-03	6.4E-03	6.5E-03	6.6E-03
1556	2.4E-03	2.5E-03	3.0E-03	3.2E-03	3.5E-03	3.6E-03	4.4E-03	5.3E-03	5.6E-03	5.9E-03	6.1E-03	6.3E-03	6.4E-03
1557	2.2E-03	2.3E-03	2.8E-03	3.0E-03	3.3E-03	3.5E-03	4.2E-03	5.1E-03	5.4E-03	5.7E-03	5.9E-03	6.1E-03	6.1E-03
1558	2.0E-03	2.1E-03	2.6E-03	2.8E-03	3.1E-03	3.3E-03	4.0E-03	4.9E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03
1559	2.7E-03	2.8E-03	3.3E-03	3.3E-03	3.5E-03	3.7E-03	4.6E-03	5.5E-03	5.8E-03	6.1E-03	6.3E-03	6.4E-03	6.5E-03
1560	2.4E-03	2.5E-03	3.1E-03	3.2E-03	3.4E-03	3.6E-03	4.4E-03	5.2E-03	5.6E-03	5.8E-03	6.1E-03	6.2E-03	6.3E-03
1561	2.2E-03	2.3E-03	2.8E-03	3.0E-03	3.3E-03	3.4E-03	4.2E-03	5.1E-03	5.4E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03
1562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1563	2.6E-03	2.7E-03	3.1E-03	3.0E-03	3.2E-03	3.5E-03	4.3E-03	5.1E-03	5.4E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03
1564	2.3E-03	2.4E-03	2.9E-03	2.9E-03	3.1E-03	3.4E-03	4.1E-03	4.9E-03	5.2E-03	5.5E-03	5.7E-03	5.9E-03	5.9E-03
1565	2.1E-03	2.2E-03	2.7E-03	2.8E-03	3.0E-03	3.3E-03	4.0E-03	4.8E-03	5.1E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03
1566	1.9E-03	2.1E-03	2.5E-03	2.6E-03	2.9E-03	3.2E-03	3.8E-03	4.6E-03	4.9E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03
1567	1.8E-03	1.9E-03	2.4E-03	2.5E-03	2.8E-03	3.0E-03	3.7E-03	4.5E-03	4.8E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03
1568	2.7E-03	2.8E-03	3.2E-03	2.9E-03	3.0E-03	3.4E-03	4.1E-03	5.0E-03	5.3E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03
1569	2.4E-03	2.5E-03	2.9E-03	2.8E-03	3.0E-03	3.3E-03	4.0E-03	4.9E-03	5.1E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03
1570	2.2E-03	2.3E-03	2.7E-03	2.7E-03	2.9E-03	3.2E-03	3.9E-03	4.7E-03	5.0E-03	5.3E-03	5.4E-03	5.6E-03	5.6E-03
1571	2.0E-03	2.1E-03	2.5E-03	2.6E-03	2.8E-03	3.1E-03	3.8E-03	4.6E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.5E-03
1572	1.8E-03	1.9E-03	2.4E-03	2.5E-03	2.8E-03	3.0E-03	3.7E-03	4.4E-03	4.7E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03
1573	1.7E-03	1.8E-03	2.2E-03	2.4E-03	2.7E-03	2.9E-03	3.6E-03	4.3E-03	4.6E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03
1574	2.1E-03	2.1E-03	2.6E-03	2.8E-03	3.1E-03	3.7E-03	4.4E-03	5.3E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03
1575	2.4E-03	2.5E-03	2.8E-03	2.8E-03	3.1E-03	3.6E-03	4.3E-03	5.2E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	5.9E-03
1576	2.7E-03	2.8E-03	3.0E-03	2.7E-03	2.9E-03	3.4E-03	4.0E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.6E-03	5.7E-03
1577	3.0E-03	3.0E-03	3.2E-03	2.7E-03	2.8E-03	3.2E-03	3.9E-03	4.7E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.5E-03
1578	3.1E-03	3.2E-03	3.3E-03	2.8E-03	2.9E-03	3.3E-03	3.9E-03	4.7E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03
1579	3.0E-03	3.1E-03	3.3E-03	2.8E-03	2.9E-03	3.3E-03	4.0E-03	4.8E-03	5.0E-03	5.3E-03	5.4E-03	5.6E-03	5.6E-03
1580	2.7E-03	2.8E-03	3.1E-03	2.7E-03	2.9E-03	3.2E-03	3.9E-03	4.7E-03	5.0E-03	5.3E-03	5.4E-03	5.6E-03	5.6E-03
1581	2.5E-03	2.6E-03	2.9E-03	2.7E-03	2.9E-03	3.2E-03	3.9E-03	4.7E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03
1582	2.2E-03	2.3E-03	2.7E-03	2.6E-03	2.8E-03	3.1E-03	3.8E-03	4.6E-03	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03
1583	2.0E-03	2.1E-03	2.5E-03	2.5E-03	2.8E-03	3.1E-03	3.7E-03	4.5E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03
1584	1.9E-03	2.0E-03	2.4E-03	2.5E-03	2.7E-03	3.0E-03	3.6E-03	4.4E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1585	1.7E-03	1.8E-03	2.2E-03	2.4E-03	2.6E-03	2.9E-03	3.5E-03	4.3E-03	4.5E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03
1586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1599	1.9E-03	2.0E-03	2.3E-03	2.3E-03	2.6E-03	3.0E-03	3.6E-03	4.3E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03
1600	2.0E-03	2.1E-03	2.4E-03	2.3E-03	2.5E-03	2.9E-03	3.4E-03	4.1E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	4.9E-03
1601	2.1E-03	2.2E-03	2.4E-03	2.3E-03	2.5E-03	2.8E-03	3.4E-03	4.1E-03	4.3E-03	4.6E-03	4.7E-03	4.8E-03	4.9E-03
1602	2.2E-03	2.3E-03	2.5E-03	2.3E-03	2.5E-03	2.9E-03	3.4E-03	4.1E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03	4.9E-03
1603	2.2E-03	2.3E-03	2.5E-03	2.4E-03	2.5E-03	2.9E-03	3.5E-03	4.2E-03	4.4E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03
1604	2.1E-03	2.2E-03	2.5E-03	2.4E-03	2.5E-03	2.9E-03	3.5E-03	4.2E-03	4.4E-03	4.7E-03	4.8E-03	5.0E-03	5.0E-03
1605	2.0E-03	2.1E-03	2.4E-03	2.3E-03	2.5E-03	2.9E-03	3.5E-03	4.2E-03	4.4E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03
1606	1.9E-03	2.0E-03	2.3E-03	2.3E-03	2.5E-03	2.8E-03	3.4E-03	4.1E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03
1607	1.8E-03	1.9E-03	2.2E-03	2.3E-03	2.5E-03	2.8E-03	3.4E-03	4.1E-03	4.3E-03	4.6E-03	4.7E-03	4.9E-03	4.9E-03
1608	1.7E-03	1.8E-03	2.1E-03	2.2E-03	2.4E-03	2.7E-03	3.3E-03	4.0E-03	4.2E-03	4.5E-03	4.7E-03	4.8E-03	4.8E-03
1609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1610	1.7E-03	1.8E-03	2.0E-03	2.0E-03	2.3E-03	2.6E-03	3.1E-03	3.7E-03	4.0E-03	4.3E-03	4.4E-03	4.6E-03	4.6E-03
1611	1.8E-03	1.9E-03	2.1E-03	2.1E-03	2.3E-03	2.6E-03	3.2E-03	3.8E-03	4.0E-03	4.3E-03	4.4E-03	4.5E-03	4.6E-03
1612	1.9E-03	2.0E-03	2.2E-03	2.1E-03	2.3E-03	2.7E-03	3.2E-03	3.8E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.6E-03
1613	1.9E-03	2.0E-03	2.3E-03	2.2E-03	2.4E-03	2.7E-03	3.2E-03	3.9E-03	4.1E-03	4.4E-03	4.5E-03	4.6E-03	4.7E-03
1614	1.9E-03	2.0E-03	2.3E-03	2.2E-03	2.4E-03	2.7E-03	3.3E-03	3.9E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.7E-03
1615	1.9E-03	2.0E-03	2.3E-03	2.2E-03	2.4E-03	2.7E-03	3.3E-03	4.0E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03
1616	1.8E-03	1.9E-03	2.2E-03	2.2E-03	2.4E-03	2.7E-03	3.3E-03	3.9E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03
1617	1.8E-03	1.8E-03	2.2E-03	2.2E-03	2.4E-03	2.7E-03	3.2E-03	3.9E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.7E-03
1618	1.7E-03	1.8E-03	2.1E-03	2.1E-03	2.3E-03	2.6E-03	3.2E-03	3.9E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03
1619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1620	1.6E-03	1.6E-03	1.9E-03	1.9E-03	2.1E-03	2.3E-03	2.8E-03	3.4E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03
1621	1.6E-03	1.7E-03	1.9E-03	2.0E-03	2.2E-03	2.5E-03	2.9E-03	3.5E-03	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.3E-03
1622	1.7E-03	1.8E-03	2.0E-03	2.0E-03	2.2E-03	2.5E-03	3.0E-03	3.6E-03	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03
1623	1.7E-03	1.8E-03	2.1E-03	2.0E-03	2.2E-03	2.5E-03	3.0E-03	3.7E-03	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.4E-03
1624	1.8E-03	1.8E-03	2.1E-03	2.1E-03	2.2E-03	2.6E-03	3.1E-03	3.7E-03	3.9E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03
1625	1.7E-03	1.8E-03	2.1E-03	2.1E-03	2.3E-03	2.6E-03	3.1E-03	3.7E-03	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.5E-03
1626	1.7E-03	1.8E-03	2.1E-03	2.1E-03	2.3E-03	2.6E-03	3.1E-03	3.7E-03	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.5E-03
1627	1.6E-03	1.7E-03	2.0E-03	2.0E-03	2.2E-03	2.5E-03	3.1E-03	3.7E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.5E-03
1628	3.6E-04	3.6E-04	3.5E-04	3.8E-04	4.8E-04	6.1E-04	8.1E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03	1.8E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1630	3.6E-04	3.6E-04	3.5E-04	3.8E-04	4.8E-04	6.1E-04	8.0E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03	1.8E-03
1631	3.8E-04	3.8E-04	3.6E-04	3.8E-04	4.6E-04	5.8E-04	7.5E-04	9.9E-04	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03
1632	3.5E-04	3.6E-04	3.6E-04	4.0E-04	5.0E-04	6.3E-04	8.2E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03
1633	3.8E-04	3.8E-04	3.7E-04	4.1E-04	5.1E-04	6.3E-04	8.0E-04	1.0E-03	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03
1634	3.5E-04	3.5E-04	3.6E-04	4.1E-04	5.1E-04	6.4E-04	8.3E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03
1635	3.7E-04	3.8E-04	3.8E-04	4.2E-04	5.2E-04	6.4E-04	8.2E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03
1636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1663	2.7E-04	2.6E-04	2.0E-04	1.7E-04	2.0E-04	2.6E-04	3.6E-04	4.9E-04	6.4E-04	7.6E-04	8.5E-04	9.1E-04	9.4E-04
1664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1674	2.7E-04	2.6E-04	2.3E-04	2.2E-04	2.7E-04	3.5E-04	4.7E-04	6.3E-04	7.7E-04	8.9E-04	9.7E-04	1.0E-03	1.1E-03
1675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1680	2.8E-04	2.7E-04	2.6E-04	2.9E-04	3.7E-04	4.9E-04	6.4E-04	8.3E-04	9.8E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03
1681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1737	9.0E-04	1.1E-03	1.8E-04	-7.3E-04	-1.6E-03	-2.4E-03	-3.1E-03	-3.7E-03	-3.3E-03	-2.9E-03	-2.7E-03	-2.5E-03	-2.4E-03
1738	1.1E-03	1.3E-03	3.8E-04	-5.8E-04	-1.5E-03	-2.4E-03	-3.2E-03	-3.9E-03	-3.5E-03	-3.1E-03	-2.9E-03	-2.7E-03	-2.6E-03
1739	5.0E-04	4.1E-04	2.0E-04	6.1E-05	3.3E-05	2.9E-05	6.0E-05	1.3E-04	2.5E-04	3.5E-04	4.2E-04	4.7E-04	5.0E-04
1740	6.3E-04	5.1E-04	2.4E-04	6.9E-05	4.2E-05	4.2E-05	8.0E-05	1.5E-04	2.8E-04	3.9E-04	4.7E-04	5.3E-04	5.5E-04
1741	8.1E-04	6.3E-04	2.9E-04	7.2E-05	4.6E-05	4.9E-05	9.4E-05	1.8E-04	3.2E-04	4.4E-04	5.3E-04	5.9E-04	6.2E-04
1742	3.3E-04	2.9E-04	1.5E-04	4.6E-05	1.5E-05	5.4E-06	2.9E-05	8.5E-05	2.0E-04	2.9E-04	3.6E-04	4.1E-04	4.3E-04
1743	4.1E-04	3.5E-04	1.7E-04	5.2E-05	2.1E-05	1.3E-05	3.9E-05	9.8E-05	2.2E-04	3.1E-04	3.8E-04	4.3E-04	4.6E-04
1744	5.1E-04	4.2E-04	2.0E-04	5.9E-05	3.0E-05	2.4E-05	5.6E-05	1.2E-04	2.4E-04	3.5E-04	4.2E-04	4.7E-04	5.0E-04
1745	6.7E-04	5.4E-04	2.5E-04	6.8E-05	4.1E-05	4.1E-05	7.9E-05	1.5E-04	2.9E-04	4.0E-04	4.8E-04	5.3E-04	5.6E-04
1746	2.9E-04	2.6E-04	1.3E-04	3.8E-05	6.5E-06	-4.8E-06	1.8E-05	7.1E-05	1.8E-04	2.8E-04	3.5E-04	3.9E-04	4.2E-04
1747	3.4E-04	3.0E-04	1.5E-04	4.4E-05	1.2E-05	1.1E-06	2.5E-05	8.0E-05	1.9E-04	2.9E-04	3.6E-04	4.1E-04	4.3E-04
1748	4.1E-04	3.5E-04	1.7E-04	4.9E-05	1.8E-05	8.3E-06	3.4E-05	9.3E-05	2.1E-04	3.1E-04	3.8E-04	4.3E-04	4.6E-04
1749	5.3E-04	4.4E-04	2.1E-04	5.7E-05	2.7E-05	2.0E-05	5.2E-05	1.2E-04	2.4E-04	3.5E-04	4.2E-04	4.8E-04	5.0E-04
1750	2.9E-04	2.6E-04	1.3E-04	3.5E-05	3.2E-06	-9.0E-06	1.3E-05	6.7E-05	1.8E-04	2.8E-04	3.5E-04	3.9E-04	4.2E-04
1751	3.4E-04	3.0E-04	1.5E-04	4.1E-05	8.8E-06	-3.1E-06	2.0E-05	7.5E-05	1.9E-04	2.9E-04	3.6E-04	4.1E-04	4.3E-04
1752	4.2E-04	3.6E-04	1.7E-04	4.7E-05	1.5E-05	4.1E-06	3.0E-05	9.0E-05	2.1E-04	3.1E-04	3.9E-04	4.4E-04	4.6E-04
1753	5.5E-04	4.5E-04	2.1E-04	5.4E-05	2.3E-05	1.6E-05	4.7E-05	1.1E-04	2.4E-04	3.5E-04	4.3E-04	4.8E-04	5.1E-04
1754	2.5E-04	2.3E-04	1.1E-04	2.2E-05	-1.1E-05	-2.2E-05	3.2E-06	6.2E-05	1.9E-04	2.9E-04	3.7E-04	4.2E-04	4.4E-04
1755	2.9E-04	2.6E-04	1.3E-04	3.3E-05	1.0E-07	-1.3E-05	9.6E-06	6.4E-05	1.8E-04	2.8E-04	3.5E-04	4.0E-04	4.2E-04
1756	3.5E-04	3.0E-04	1.5E-04	3.9E-05	5.6E-06	-7.0E-06	1.6E-05	7.2E-05	1.9E-04	2.9E-04	3.6E-04	4.1E-04	4.4E-04
1757	4.3E-04	3.6E-04	1.7E-04	4.4E-05	1.0E-05	-8.0E-07	2.5E-05	8.5E-05	2.1E-04	3.1E-04	3.9E-04	4.4E-04	4.7E-04
1758	5.7E-04	4.6E-04	2.1E-04	5.0E-05	1.8E-05	1.0E-05	4.2E-05	1.1E-04	2.4E-04	3.5E-04	4.4E-04	4.9E-04	5.2E-04
1759	2.6E-04	2.4E-04	1.1E-04	1.8E-05	-1.5E-05	-2.6E-05	1.3E-06	6.4E-05	2.0E-04	3.0E-04	3.9E-04	4.4E-04	4.7E-04
1760	3.0E-04	2.7E-04	1.3E-04	3.1E-05	-2.3E-06	-1.5E-05	7.6E-06	6.4E-05	1.9E-04	2.9E-04	3.6E-04	4.1E-04	4.3E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1761	3.5E-04	3.1E-04	1.5E-04	3.7E-05	2.7E-06	-1.0E-05	1.3E-05	7.0E-05	1.9E-04	2.9E-04	3.7E-04	4.2E-04	4.4E-04
1762	4.4E-04	3.7E-04	1.7E-04	4.1E-05	5.7E-06	-6.5E-06	1.9E-05	8.1E-05	2.1E-04	3.2E-04	4.0E-04	4.5E-04	4.7E-04
1763	5.9E-04	4.8E-04	2.1E-04	4.3E-05	8.7E-06	-4.8E-07	3.1E-05	1.0E-04	2.4E-04	3.6E-04	4.4E-04	5.0E-04	5.3E-04
1764	2.7E-04	2.5E-04	1.1E-04	1.3E-05	-2.1E-05	-3.0E-05	4.7E-07	6.8E-05	2.1E-04	3.3E-04	4.1E-04	4.7E-04	5.0E-04
1765	3.1E-04	2.8E-04	1.3E-04	3.0E-05	-4.3E-06	-1.7E-05	7.0E-06	6.5E-05	1.9E-04	2.9E-04	3.7E-04	4.2E-04	4.5E-04
1766	3.7E-04	3.2E-04	1.5E-04	3.5E-05	1.4E-07	-1.3E-05	1.1E-05	7.0E-05	2.0E-04	3.0E-04	3.8E-04	4.3E-04	4.6E-04
1767	4.6E-04	3.9E-04	1.7E-04	3.6E-05	-1.2E-06	-1.4E-05	1.2E-05	7.4E-05	2.1E-04	3.2E-04	4.0E-04	4.6E-04	4.8E-04
1768	2.8E-04	2.5E-04	1.1E-04	7.1E-06	-2.7E-05	-3.3E-05	2.0E-06	7.7E-05	2.3E-04	3.6E-04	4.5E-04	5.2E-04	5.5E-04
1769	3.2E-04	2.9E-04	1.3E-04	2.9E-05	-4.9E-06	-1.7E-05	9.2E-06	7.1E-05	2.0E-04	3.1E-04	3.9E-04	4.4E-04	4.7E-04
1770	3.8E-04	3.3E-04	1.5E-04	3.4E-05	-1.8E-06	-1.5E-05	1.1E-05	7.2E-05	2.0E-04	3.1E-04	3.9E-04	4.5E-04	4.7E-04
1771	4.8E-04	4.1E-04	1.7E-04	2.7E-05	-1.3E-05	-2.8E-05	-2.3E-06	6.2E-05	2.0E-04	3.2E-04	4.1E-04	4.7E-04	4.9E-04
1772	2.9E-04	2.6E-04	1.1E-04	8.0E-06	-2.4E-05	-2.9E-05	1.1E-05	9.1E-05	2.5E-04	3.8E-04	4.8E-04	5.5E-04	5.8E-04
1773	3.4E-04	3.0E-04	1.4E-04	3.0E-05	-2.8E-06	-1.3E-05	1.7E-05	8.3E-05	2.2E-04	3.3E-04	4.1E-04	4.7E-04	5.0E-04
1774	4.0E-04	3.5E-04	1.5E-04	3.0E-05	-6.3E-06	-2.0E-05	6.7E-06	7.0E-05	2.1E-04	3.2E-04	4.0E-04	4.6E-04	4.9E-04
1775	5.1E-04	4.3E-04	1.7E-04	1.1E-05	-3.4E-05	-5.4E-05	-3.0E-05	3.4E-05	1.9E-04	3.1E-04	4.0E-04	4.7E-04	5.0E-04
1776	3.1E-04	2.8E-04	1.2E-04	2.2E-05	-7.9E-06	-1.2E-05	2.6E-05	1.0E-04	2.6E-04	3.8E-04	4.7E-04	5.3E-04	5.7E-04
1777	3.5E-04	3.1E-04	1.4E-04	3.1E-05	-1.9E-07	-7.3E-06	2.6E-05	9.8E-05	2.4E-04	3.6E-04	4.5E-04	5.0E-04	5.3E-04
1778	4.2E-04	3.6E-04	1.6E-04	2.4E-05	-1.4E-05	-2.8E-05	-6.9E-07	6.5E-05	2.1E-04	3.3E-04	4.1E-04	4.7E-04	5.0E-04
1779	5.3E-04	4.5E-04	1.6E-04	-2.0E-05	-7.8E-05	-1.1E-04	-8.9E-05	-2.7E-05	1.4E-04	2.8E-04	3.8E-04	4.5E-04	4.8E-04
1780	3.3E-04	2.9E-04	1.3E-04	2.8E-05	1.5E-06	1.3E-06	4.4E-05	1.3E-04	2.8E-04	4.1E-04	5.1E-04	5.7E-04	6.0E-04
1781	3.7E-04	3.2E-04	1.5E-04	3.5E-05	7.6E-06	5.2E-06	4.5E-05	1.3E-04	2.8E-04	4.0E-04	4.9E-04	5.5E-04	5.8E-04
1782	4.4E-04	3.8E-04	1.6E-04	2.6E-05	-1.0E-05	-2.1E-05	1.2E-05	8.6E-05	2.4E-04	3.6E-04	4.6E-04	5.2E-04	5.5E-04
1783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1784	3.2E-04	2.9E-04	1.4E-04	4.4E-05	2.3E-05	2.8E-05	7.3E-05	1.6E-04	3.1E-04	4.3E-04	5.2E-04	5.8E-04	6.1E-04
1785	3.8E-04	3.3E-04	1.6E-04	5.4E-05	3.6E-05	4.6E-05	9.9E-05	1.9E-04	3.5E-04	4.8E-04	5.8E-04	6.5E-04	6.8E-04
1786	4.6E-04	3.9E-04	1.7E-04	3.3E-05	1.7E-06	-1.8E-06	4.0E-05	1.2E-04	2.9E-04	4.2E-04	5.2E-04	5.9E-04	6.2E-04
1787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1788	3.3E-04	3.0E-04	1.5E-04	6.1E-05	4.8E-05	6.1E-05	1.2E-04	2.1E-04	3.6E-04	4.9E-04	5.8E-04	6.4E-04	6.7E-04
1789	3.9E-04	3.4E-04	1.6E-04	6.3E-05	5.4E-05	7.5E-05	1.4E-04	2.6E-04	4.3E-04	5.8E-04	6.8E-04	7.6E-04	7.9E-04
1790	4.6E-04	4.0E-04	1.3E-04	-3.8E-05	-9.6E-05	-1.2E-04	-9.4E-05	-1.8E-05	1.8E-04	3.3E-04	4.5E-04	5.3E-04	5.7E-04
1791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1792	3.9E-04	3.4E-04	1.6E-04	5.0E-05	3.5E-05	5.2E-05	1.2E-04	2.3E-04	4.2E-04	5.7E-04	6.8E-04	7.6E-04	7.9E-04
1793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1808	4.7E-04	3.9E-04	2.0E-04	6.8E-05	4.4E-05	4.3E-05	7.9E-05	1.5E-04	2.7E-04	3.7E-04	4.4E-04	4.9E-04	5.2E-04
1809	5.6E-04	4.6E-04	2.2E-04	7.4E-05	4.9E-05	5.1E-05	9.1E-05	1.7E-04	3.0E-04	4.0E-04	4.8E-04	5.4E-04	5.6E-04
1810	6.9E-04	5.5E-04	2.6E-04	7.4E-05	4.7E-05	5.1E-05	9.5E-05	1.8E-04	3.2E-04	4.4E-04	5.2E-04	5.8E-04	6.1E-04
1811	8.2E-04	6.4E-04	2.8E-04	4.1E-05	-1.8E-06	-9.2E-06	3.0E-05	1.1E-04	2.8E-04	4.1E-04	5.1E-04	5.8E-04	6.1E-04
1812	9.4E-04	7.3E-04	1.9E-04	-2.0E-04	-3.5E-04	-4.5E-04	-4.8E-04	-4.5E-04	-2.0E-04	1.6E-06	1.5E-04	2.5E-04	3.0E-04
1813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1814	4.0E-04	3.4E-04	1.7E-04	5.7E-05	3.0E-05	2.5E-05	5.5E-05	1.2E-04	2.3E-04	3.3E-04	4.0E-04	4.4E-04	4.7E-04
1815	4.8E-04	4.0E-04	2.0E-04	6.5E-05	3.8E-05	3.6E-05	6.9E-05	1.4E-04	2.6E-04	3.6E-04	4.3E-04	4.8E-04	5.1E-04
1816	6.0E-04	4.8E-04	2.3E-04	7.1E-05	4.5E-05	4.6E-05	8.4E-05	1.6E-04	2.9E-04	3.9E-04	4.8E-04	5.3E-04	5.6E-04
1817	7.5E-04	5.9E-04	2.7E-04	7.2E-05	4.5E-05	4.8E-05	9.3E-05	1.8E-04	3.2E-04	4.4E-04	5.3E-04	5.9E-04	6.2E-04
1818	9.0E-04	6.9E-04	3.0E-04	4.1E-05	3.0E-08	-5.7E-06	3.5E-05	1.2E-04	2.9E-04	4.2E-04	5.3E-04	6.0E-04	6.3E-04
1819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1823	3.3E-04	2.9E-04	1.5E-04	4.8E-05	1.9E-05	1.1E-05	3.6E-05	9.2E-05	2.0E-04	3.0E-04	3.6E-04	4.1E-04	4.3E-04
1824	8.0E-04	9.4E-04	1.1E-04	-7.3E-04	-1.5E-03	-2.2E-03	-2.8E-03	-3.3E-03	-2.9E-03	-2.6E-03	-2.3E-03	-2.2E-03	-2.1E-03
1825	9.0E-04	1.1E-03	2.0E-04	-6.9E-04	-1.5E-03	-2.3E-03	-3.0E-03	-3.5E-03	-3.1E-03	-2.8E-03	-2.6E-03	-2.4E-03	-2.3E-03
1826	8.3E-04	9.8E-04	1.9E-04	-6.2E-04	-1.4E-03	-2.0E-03	-2.6E-03	-3.1E-03	-2.7E-03	-2.4E-03	-2.1E-03	-2.0E-03	-1.9E-03
1827	7.1E-04	8.2E-04	4.9E-05	-7.4E-04	-1.5E-03	-2.1E-03	-2.6E-03	-3.1E-03	-2.7E-03	-2.4E-03	-2.2E-03	-2.0E-03	-2.0E-03
1828	1.2E-03	1.4E-03	-4.9E-04	-2.3E-03	-4.1E-03	-5.5E-03	-6.7E-03	-7.7E-03	-6.9E-03	-6.2E-03	-5.6E-03	-5.3E-03	-5.1E-03
1829	1.3E-03	1.4E-03	-3.6E-04	-2.2E-03	-3.8E-03	-5.2E-03	-6.3E-03	-7.3E-03	-6.4E-03	-5.7E-03	-5.2E-03	-4.9E-03	-4.7E-03
1830	1.4E-03	1.5E-03	-2.2E-04	-2.0E-03	-3.6E-03	-4.9E-03	-6.0E-03	-6.8E-03	-6.0E-03	-5.3E-03	-4.8E-03	-4.5E-03	-4.3E-03
1831	1.5E-03	1.6E-03	-8.9E-05	-1.8E-03	-3.4E-03	-4.7E-03	-5.7E-03	-6.5E-03	-5.7E-03	-5.0E-03	-4.5E-03	-4.1E-03	-4.0E-03
1832	9.9E-04	1.1E-03	-6.2E-04	-2.3E-03	-3.9E-03	-5.3E-03	-6.5E-03	-7.6E-03	-6.8E-03	-6.2E-03	-5.8E-03	-5.5E-03	-5.3E-03
1833	1.0E-03	1.1E-03	-8.9E-04	-2.9E-03	-4.8E-03	-6.4E-03	-7.8E-03	-9.0E-03	-8.2E-03	-7.5E-03	-7.0E-03	-6.7E-03	-6.5E-03
1834	9.8E-04	1.1E-03	-8.1E-04	-2.7E-03	-4.4E-03	-5.9E-03	-7.1E-03	-8.2E-03	-7.3E-03	-6.6E-03	-6.1E-03	-5.7E-03	-5.5E-03
1835	1.1E-03	1.2E-03	-8.3E-04	-2.9E-03	-4.7E-03	-6.4E-03	-7.7E-03	-9.0E-03	-8.1E-03	-7.4E-03	-6.9E-03	-6.6E-03	-6.4E-03
1836	1.1E-03	1.3E-03	-8.0E-04	-2.8E-03	-4.7E-03	-6.4E-03	-7.8E-03	-9.0E-03	-8.1E-03	-7.4E-03	-6.9E-03	-6.6E-03	-6.4E-03
1837	9.4E-04	1.0E-03	-3.3E-04	-1.7E-03	-3.0E-03	-4.1E-03	-5.0E-03	-5.7E-03	-5.1E-03	-4.6E-03	-4.3E-03	-4.0E-03	-3.9E-03
1838	9.7E-04	1.1E-03	-3.1E-04	-1.7E-03	-3.0E-03	-4.1E-03	-5.0E-03	-5.8E-03	-5.2E-03	-4.6E-03	-4.2E-03	-4.0E-03	-3.9E-03
1839	1.0E-03	1.1E-03	-2.6E-04	-1.7E-03	-2.9E-03	-4.0E-03	-4.9E-03	-5.7E-03	-5.1E-03	-4.5E-03	-4.1E-03	-3.9E-03	-3.7E-03
1840	1.0E-03	1.2E-03	-2.1E-04	-1.6E-03	-2.9E-03	-3.9E-03	-4.8E-03	-5.5E-03	-4.9E-03	-4.4E-03	-4.0E-03	-3.7E-03	-3.6E-03
1841	1.1E-03	1.2E-03	-1.6E-04	-1.5E-03	-2.8E-03	-3.9E-03	-4.7E-03	-5.4E-03	-4.7E-03	-4.2E-03	-3.8E-03	-3.5E-03	-3.4E-03
1842	9.9E-04	1.1E-03	3.0E-06	-1.1E-03	-2.1E-03	-3.0E-03	-3.6E-03	-4.1E-03	-3.6E-03	-3.1E-03	-2.7E-03	-2.5E-03	-2.4E-03
1843	1.1E-03	1.3E-03	-1.0E-04	-1.5E-03	-2.8E-03	-3.8E-03	-4.6E-03	-5.3E-03	-4.6E-03	-4.1E-03	-3.6E-03	-3.3E-03	-3.2E-03
1844	1.2E-03	1.3E-03	-1.2E-05	-1.4E-03	-2.6E-03	-3.6E-03	-4.4E-03	-5.1E-03	-4.4E-03	-3.8E-03	-3.4E-03	-3.1E-03	-2.9E-03
1845	1.3E-03	1.4E-03	7.8E-05	-1.3E-03	-2.5E-03	-3.5E-03	-4.3E-03	-4.9E-03	-4.2E-03	-3.6E-03	-3.2E-03	-2.9E-03	-2.8E-03
1846	8.9E-04	1.0E-03	-3.5E-04	-1.7E-03	-2.9E-03	-4.0E-03	-4.8E-03	-5.6E-03	-4.9E-03	-4.4E-03	-4.0E-03	-3.7E-03	-3.5E-03
1847	8.9E-04	9.9E-04	-3.3E-04	-1.7E-03	-2.9E-03	-3.9E-03	-4.8E-03	-5.6E-03	-5.0E-03	-4.5E-03	-4.2E-03	-3.9E-03	-3.8E-03
1848	9.2E-04	1.0E-03	-3.9E-04	-1.8E-03	-3.1E-03	-4.2E-03	-5.2E-03	-6.0E-03	-5.4E-03	-4.9E-03	-4.5E-03	-4.3E-03	-4.1E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1849	8.5E-04	9.4E-04	-1.9E-04	-1.3E-03	-2.4E-03	-3.3E-03	-4.0E-03	-4.7E-03	-4.1E-03	-3.7E-03	-3.4E-03	-3.2E-03	-3.1E-03
1850	8.6E-04	9.5E-04	-4.8E-06	-9.8E-04	-1.9E-03	-2.6E-03	-3.2E-03	-3.7E-03	-3.2E-03	-2.8E-03	-2.5E-03	-2.2E-03	-2.1E-03
1851	8.9E-04	9.8E-04	3.1E-05	-9.5E-04	-1.8E-03	-2.6E-03	-3.1E-03	-3.6E-03	-3.1E-03	-2.7E-03	-2.3E-03	-2.1E-03	-2.0E-03
1852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1853	8.3E-04	9.4E-04	-1.4E-04	-1.2E-03	-2.2E-03	-3.0E-03	-3.7E-03	-4.2E-03	-3.6E-03	-3.1E-03	-2.8E-03	-2.5E-03	-2.4E-03
1854	8.0E-04	9.0E-04	-9.8E-05	-1.1E-03	-2.0E-03	-2.8E-03	-3.4E-03	-3.9E-03	-3.4E-03	-3.0E-03	-2.7E-03	-2.5E-03	-2.4E-03
1855	8.3E-04	9.3E-04	-1.8E-04	-1.3E-03	-2.3E-03	-3.2E-03	-3.9E-03	-4.5E-03	-4.0E-03	-3.5E-03	-3.2E-03	-3.0E-03	-2.9E-03
1856	7.9E-04	8.8E-04	-1.3E-04	-1.2E-03	-2.1E-03	-2.9E-03	-3.5E-03	-4.1E-03	-3.6E-03	-3.2E-03	-2.9E-03	-2.7E-03	-2.6E-03
1857	7.8E-04	8.7E-04	-6.3E-05	-1.0E-03	-1.9E-03	-2.6E-03	-3.2E-03	-3.7E-03	-3.2E-03	-2.8E-03	-2.5E-03	-2.3E-03	-2.2E-03
1858	8.1E-04	8.9E-04	-4.7E-05	-1.0E-03	-1.9E-03	-2.6E-03	-3.2E-03	-3.7E-03	-3.2E-03	-2.8E-03	-2.5E-03	-2.3E-03	-2.2E-03
1859	8.8E-04	9.7E-04	1.2E-04	-7.6E-04	-1.6E-03	-2.2E-03	-2.7E-03	-3.1E-03	-2.6E-03	-2.2E-03	-1.9E-03	-1.7E-03	-1.6E-03
1860	1.0E-03	1.1E-03	8.9E-05	-9.5E-04	-1.9E-03	-2.7E-03	-3.2E-03	-3.7E-03	-3.1E-03	-2.7E-03	-2.3E-03	-2.1E-03	-2.0E-03
1861	9.2E-04	1.0E-03	1.5E-04	-7.4E-04	-1.5E-03	-2.2E-03	-2.7E-03	-3.0E-03	-2.5E-03	-2.1E-03	-1.8E-03	-1.6E-03	-1.5E-03
1862	1.0E-03	1.1E-03	1.4E-04	-9.1E-04	-1.9E-03	-2.6E-03	-3.2E-03	-3.6E-03	-3.1E-03	-2.6E-03	-2.2E-03	-2.0E-03	-1.9E-03
1863	9.6E-04	1.1E-03	1.9E-04	-7.1E-04	-1.5E-03	-2.2E-03	-2.6E-03	-3.0E-03	-2.5E-03	-2.1E-03	-1.7E-03	-1.5E-03	-1.4E-03
1864	9.0E-04	9.8E-04	2.1E-04	-6.0E-04	-1.3E-03	-1.9E-03	-2.3E-03	-2.6E-03	-2.1E-03	-1.7E-03	-1.4E-03	-1.2E-03	-1.1E-03
1865	1.1E-03	1.2E-03	2.0E-04	-8.7E-04	-1.8E-03	-2.6E-03	-3.2E-03	-3.6E-03	-3.0E-03	-2.5E-03	-2.2E-03	-1.9E-03	-1.8E-03
1866	1.0E-03	1.1E-03	2.4E-04	-6.8E-04	-1.5E-03	-2.2E-03	-2.6E-03	-3.0E-03	-2.5E-03	-2.0E-03	-1.7E-03	-1.5E-03	-1.4E-03
1867	9.5E-04	1.0E-03	2.5E-04	-5.7E-04	-1.3E-03	-1.9E-03	-2.3E-03	-2.6E-03	-2.1E-03	-1.7E-03	-1.4E-03	-1.2E-03	-1.1E-03
1868	1.3E-03	1.4E-03	2.2E-04	-1.0E-03	-2.2E-03	-3.1E-03	-3.8E-03	-4.3E-03	-3.7E-03	-3.1E-03	-2.7E-03	-2.4E-03	-2.3E-03
1869	1.2E-03	1.3E-03	2.7E-04	-8.2E-04	-1.8E-03	-2.6E-03	-3.1E-03	-3.5E-03	-3.0E-03	-2.5E-03	-2.1E-03	-1.9E-03	-1.7E-03
1870	1.1E-03	1.2E-03	3.0E-04	-6.4E-04	-1.5E-03	-2.1E-03	-2.6E-03	-2.9E-03	-2.4E-03	-2.0E-03	-1.6E-03	-1.4E-03	-1.3E-03
1871	1.0E-03	1.1E-03	3.1E-04	-5.3E-04	-1.3E-03	-1.9E-03	-2.3E-03	-2.5E-03	-2.0E-03	-1.6E-03	-1.3E-03	-1.1E-03	-9.8E-04
1872	1.3E-03	1.4E-03	3.6E-04	-7.5E-04	-1.8E-03	-2.5E-03	-3.1E-03	-3.5E-03	-2.9E-03	-2.4E-03	-2.1E-03	-1.8E-03	-1.7E-03
1873	1.2E-03	1.3E-03	3.8E-04	-5.8E-04	-1.5E-03	-2.1E-03	-2.6E-03	-2.9E-03	-2.4E-03	-1.9E-03	-1.6E-03	-1.3E-03	-1.2E-03
1874	1.1E-03	1.2E-03	3.8E-04	-4.7E-04	-1.2E-03	-1.8E-03	-2.2E-03	-2.4E-03	-1.9E-03	-1.5E-03	-1.2E-03	-9.6E-04	-8.5E-04
1875	1.3E-03	1.4E-03	4.7E-04	-5.1E-04	-1.4E-03	-2.0E-03	-2.5E-03	-2.8E-03	-2.3E-03	-1.8E-03	-1.5E-03	-1.2E-03	-1.1E-03
1876	9.5E-04	1.1E-03	-2.3E-04	-1.6E-03	-2.8E-03	-3.9E-03	-4.8E-03	-5.6E-03	-5.0E-03	-4.5E-03	-4.2E-03	-3.9E-03	-3.8E-03
1877	8.8E-04	1.0E-03	-2.9E-04	-1.6E-03	-2.7E-03	-3.6E-03	-4.4E-03	-5.0E-03	-4.3E-03	-3.7E-03	-3.3E-03	-3.0E-03	-2.8E-03
1878	8.1E-04	9.1E-04	-1.1E-04	-1.1E-03	-2.0E-03	-2.8E-03	-3.4E-03	-3.8E-03	-3.2E-03	-2.7E-03	-2.3E-03	-2.1E-03	-1.9E-03
1879	7.1E-04	7.9E-04	-2.2E-05	-8.5E-04	-1.6E-03	-2.2E-03	-2.7E-03	-3.1E-03	-2.7E-03	-2.3E-03	-2.0E-03	-1.9E-03	-1.8E-03
1880	7.0E-04	7.8E-04	-4.9E-07	-7.9E-04	-1.5E-03	-2.1E-03	-2.6E-03	-3.0E-03	-2.6E-03	-2.2E-03	-2.0E-03	-1.8E-03	-1.7E-03
1881	7.3E-04	8.1E-04	8.9E-05	-6.5E-04	-1.3E-03	-1.9E-03	-2.3E-03	-2.6E-03	-2.2E-03	-1.9E-03	-1.6E-03	-1.5E-03	-1.4E-03
1882	7.6E-04	8.4E-04	1.2E-04	-6.3E-04	-1.3E-03	-1.8E-03	-2.3E-03	-2.6E-03	-2.2E-03	-1.8E-03	-1.6E-03	-1.4E-03	-1.3E-03
1883	7.9E-04	8.7E-04	1.4E-04	-6.1E-04	-1.3E-03	-1.8E-03	-2.2E-03	-2.5E-03	-2.1E-03	-1.8E-03	-1.5E-03	-1.3E-03	-1.2E-03
1884	7.1E-04	8.1E-04	3.0E-05	-7.7E-04	-1.5E-03	-2.1E-03	-2.7E-03	-3.1E-03	-2.7E-03	-2.4E-03	-2.2E-03	-2.0E-03	-1.9E-03
1885	7.4E-04	8.6E-04	1.0E-04	-6.7E-04	-1.4E-03	-2.0E-03	-2.5E-03	-2.9E-03	-2.5E-03	-2.2E-03	-2.0E-03	-1.8E-03	-1.7E-03
1886	7.8E-04	9.1E-04	2.1E-04	-5.2E-04	-1.2E-03	-1.8E-03	-2.3E-03	-2.7E-03	-2.3E-03	-2.0E-03	-1.8E-03	-1.6E-03	-1.6E-03
1887	9.2E-04	1.1E-03	-1.5E-04	-1.4E-03	-2.5E-03	-3.5E-03	-4.3E-03	-5.0E-03	-4.4E-03	-3.9E-03	-3.6E-03	-3.3E-03	-3.2E-03
1888	7.3E-04	8.5E-04	2.3E-04	-4.2E-04	-1.0E-03	-1.5E-03	-1.9E-03	-2.3E-03	-1.9E-03	-1.6E-03	-1.4E-03	-1.3E-03	-1.2E-03
1889	7.6E-04	8.8E-04	2.0E-04	-5.1E-04	-1.2E-03	-1.7E-03	-2.2E-03	-2.5E-03	-2.2E-03	-1.9E-03	-1.6E-03	-1.5E-03	-1.4E-03
1890	7.9E-04	9.2E-04	2.0E-04	-5.5E-04	-1.2E-03	-1.8E-03	-2.3E-03	-2.7E-03	-2.3E-03	-2.0E-03	-1.8E-03	-1.6E-03	-1.5E-03
1891	8.1E-04	9.4E-04	1.2E-04	-7.1E-04	-1.5E-03	-2.1E-03	-2.7E-03	-3.1E-03	-2.7E-03	-2.3E-03	-2.0E-03	-1.9E-03	-1.8E-03
1892	8.3E-04	9.5E-04	9.2E-06	-9.4E-04	-1.8E-03	-2.5E-03	-3.1E-03	-3.6E-03	-3.1E-03	-2.7E-03	-2.4E-03	-2.2E-03	-2.0E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1894	6.1E-04	6.9E-04	6.1E-06	-6.9E-04	-1.3E-03	-1.9E-03	-2.3E-03	-2.6E-03	-2.3E-03	-1.9E-03	-1.7E-03	-1.6E-03	-1.5E-03
1895	5.9E-04	6.7E-04	6.7E-06	-6.6E-04	-1.3E-03	-1.7E-03	-2.1E-03	-2.4E-03	-2.0E-03	-1.7E-03	-1.5E-03	-1.3E-03	-1.3E-03
1896	5.8E-04	6.5E-04	8.0E-05	-5.1E-04	-1.0E-03	-1.5E-03	-1.8E-03	-2.1E-03	-1.8E-03	-1.5E-03	-1.3E-03	-1.2E-03	-1.1E-03
1897	5.6E-04	6.3E-04	1.1E-04	-4.3E-04	-9.2E-04	-1.3E-03	-1.6E-03	-1.8E-03	-1.5E-03	-1.3E-03	-1.1E-03	-9.6E-04	-9.0E-04
1898	6.3E-04	7.1E-04	2.1E-05	-6.8E-04	-1.3E-03	-1.8E-03	-2.3E-03	-2.6E-03	-2.2E-03	-1.9E-03	-1.7E-03	-1.5E-03	-1.4E-03
1899	6.1E-04	6.9E-04	8.7E-05	-5.3E-04	-1.1E-03	-1.6E-03	-1.9E-03	-2.2E-03	-1.9E-03	-1.6E-03	-1.4E-03	-1.3E-03	-1.2E-03
1900	5.9E-04	6.7E-04	1.3E-04	-4.4E-04	-9.4E-04	-1.4E-03	-1.7E-03	-1.9E-03	-1.6E-03	-1.4E-03	-1.2E-03	-1.0E-03	-9.8E-04
1901	5.7E-04	6.5E-04	1.3E-04	-4.0E-04	-8.7E-04	-1.3E-03	-1.5E-03	-1.8E-03	-1.4E-03	-1.2E-03	-9.5E-04	-8.2E-04	-7.5E-04
1902	5.5E-04	6.2E-04	1.3E-04	-3.6E-04	-8.0E-04	-1.1E-03	-1.4E-03	-1.6E-03	-1.2E-03	-9.7E-04	-7.6E-04	-6.2E-04	-5.6E-04
1903	6.6E-04	7.6E-04	1.3E-04	-5.1E-04	-1.1E-03	-1.6E-03	-2.0E-03	-2.3E-03	-2.0E-03	-1.7E-03	-1.5E-03	-1.3E-03	-1.3E-03
1904	6.4E-04	7.2E-04	1.7E-04	-4.1E-04	-9.3E-04	-1.4E-03	-1.7E-03	-2.0E-03	-1.7E-03	-1.4E-03	-1.2E-03	-1.1E-03	-1.0E-03
1905	6.1E-04	6.9E-04	1.5E-04	-4.0E-04	-9.0E-04	-1.3E-03	-1.6E-03	-1.9E-03	-1.5E-03	-1.2E-03	-1.0E-03	-8.9E-04	-8.2E-04
1906	5.8E-04	6.5E-04	1.3E-04	-4.0E-04	-8.6E-04	-1.2E-03	-1.5E-03	-1.7E-03	-1.4E-03	-1.1E-03	-8.4E-04	-6.9E-04	-6.2E-04
1907	5.5E-04	6.2E-04	2.3E-04	-1.8E-04	-5.4E-04	-8.4E-04	-1.1E-03	-1.2E-03	-9.8E-04	-7.8E-04	-6.2E-04	-5.2E-04	-4.7E-04
1908	6.8E-04	7.8E-04	2.0E-04	-4.0E-04	-9.4E-04	-1.4E-03	-1.8E-03	-2.1E-03	-1.8E-03	-1.5E-03	-1.3E-03	-1.1E-03	-1.1E-03
1909	6.4E-04	7.3E-04	1.5E-04	-4.5E-04	-9.8E-04	-1.4E-03	-1.8E-03	-2.0E-03	-1.6E-03	-1.3E-03	-1.1E-03	-9.6E-04	-8.8E-04
1910	6.0E-04	6.8E-04	1.3E-04	-4.2E-04	-9.1E-04	-1.3E-03	-1.6E-03	-1.8E-03	-1.4E-03	-1.1E-03	-9.1E-04	-7.6E-04	-6.8E-04
1911	5.7E-04	6.4E-04	2.4E-04	-1.8E-04	-5.7E-04	-8.8E-04	-1.1E-03	-1.3E-03	-1.0E-03	-8.2E-04	-6.6E-04	-5.5E-04	-5.0E-04
1912	7.2E-04	8.3E-04	2.4E-04	-3.9E-04	-9.5E-04	-1.5E-03	-1.9E-03	-2.2E-03	-1.9E-03	-1.6E-03	-1.4E-03	-1.2E-03	-1.2E-03
1913	6.7E-04	7.7E-04	1.7E-04	-4.4E-04	-9.9E-04	-1.5E-03	-1.8E-03	-2.1E-03	-1.7E-03	-1.4E-03	-1.2E-03	-1.0E-03	-9.6E-04
1914	6.3E-04	7.1E-04	1.5E-04	-4.3E-04	-9.3E-04	-1.4E-03	-1.7E-03	-1.9E-03	-1.5E-03	-1.2E-03	-9.7E-04	-8.2E-04	-7.4E-04
1915	5.9E-04	6.6E-04	2.4E-04	-2.0E-04	-6.0E-04	-9.2E-04	-1.2E-03	-1.3E-03	-1.1E-03	-8.7E-04	-7.0E-04	-5.9E-04	-5.4E-04
1916	5.5E-04	6.2E-04	2.8E-04	-9.6E-05	-4.3E-04	-7.0E-04	-8.9E-04	-1.0E-03	-8.0E-04	-6.0E-04	-4.6E-04	-3.6E-04	-3.1E-04
1917	6.5E-04	7.4E-04	1.6E-04	-4.3E-04	-9.5E-04	-1.4E-03	-1.7E-03	-1.9E-03	-1.6E-03	-1.2E-03	-1.0E-03	-8.5E-04	-7.7E-04
1918	6.0E-04	6.8E-04	2.5E-04	-2.1E-04	-6.2E-04	-9.6E-04	-1.2E-03	-1.4E-03	-1.1E-03	-9.0E-04	-7.2E-04	-6.1E-04	-5.5E-04
1919	5.7E-04	6.4E-04	2.8E-04	-1.1E-04	-4.6E-04	-7.4E-04	-9.3E-04	-1.1E-03	-8.4E-04	-6.3E-04	-4.8E-04	-3.8E-04	-3.3E-04
1920	6.7E-04	7.6E-04	1.7E-04	-4.4E-04	-9.7E-04	-1.4E-03	-1.8E-03	-2.0E-03	-1.6E-03	-1.3E-03	-1.1E-03	-9.1E-04	-8.3E-04
1921	6.3E-04	7.1E-04	2.5E-04	-2.3E-04	-6.6E-04	-1.0E-03	-1.3E-03	-1.5E-03	-1.2E-03	-9.4E-04	-7.5E-04	-6.3E-04	-5.7E-04
1922	5.9E-04	6.6E-04	2.8E-04	-1.3E-04	-5.0E-04	-7.9E-04	-1.0E-03	-1.1E-03	-8.9E-04	-6.7E-04	-5.1E-04	-4.0E-04	-3.4E-04
1923	6.9E-04	7.9E-04	1.7E-04	-4.6E-04	-1.0E-03	-1.5E-03	-1.8E-03	-2.1E-03	-1.7E-03	-1.4E-03	-1.2E-03	-9.9E-04	-9.1E-04
1924	6.5E-04	7.3E-04	2.5E-04	-2.6E-04	-7.2E-04	-1.1E-03	-1.4E-03	-1.6E-03	-1.3E-03	-1.0E-03	-8.1E-04	-6.8E-04	-6.1E-04
1925	6.1E-04	6.8E-04	2.7E-04	-1.6E-04	-5.5E-04	-8.6E-04	-1.1E-03	-1.2E-03	-9.6E-04	-7.3E-04	-5.5E-04	-4.3E-04	-3.8E-04
1926	7.2E-04	8.2E-04	1.6E-04	-5.2E-04	-1.1E-03	-1.6E-03	-2.0E-03	-2.3E-03	-1.9E-03	-1.5E-03	-1.3E-03	-1.1E-03	-1.0E-03
1927	6.7E-04	7.6E-04	2.3E-04	-3.2E-04	-8.1E-04	-1.2E-03	-1.5E-03	-1.7E-03	-1.4E-03	-1.1E-03	-9.1E-04	-7.7E-04	-7.0E-04
1928	6.3E-04	7.1E-04	2.6E-04	-2.1E-04	-6.3E-04	-9.7E-04	-1.2E-03	-1.4E-03	-1.1E-03	-8.2E-04	-6.3E-04	-5.0E-04	-4.4E-04
1929	7.3E-04	8.3E-04	1.1E-04	-6.3E-04	-1.3E-03	-1.8E-03	-2.2E-03	-2.5E-03	-2.1E-03	-1.7E-03	-1.4E-03	-1.3E-03	-1.2E-03
1930	6.9E-04	7.7E-04	1.8E-04	-4.3E-04	-9.7E-04	-1.4E-03	-1.7E-03	-2.0E-03	-1.6E-03	-1.3E-03	-1.1E-03	-9.0E-04	-8.2E-04
1931	6.4E-04	7.2E-04	2.1E-04	-3.2E-04	-7.9E-04	-1.2E-03	-1.4E-03	-1.6E-03	-1.3E-03	-9.9E-04	-7.7E-04	-6.3E-04	-5.6E-04
1932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1935	7.2E-04	8.1E-04	5.2E-05	-7.0E-04	-1.4E-03	-1.9E-03	-2.3E-03	-2.6E-03	-2.1E-03	-1.7E-03	-1.4E-03	-1.2E-03	-1.1E-03
1936	6.7E-04	7.5E-04	9.3E-05	-5.7E-04	-1.2E-03	-1.6E-03	-2.0E-03	-2.2E-03	-1.8E-03	-1.4E-03	-1.1E-03	-9.4E-04	-8.5E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1937	7.4E-04	8.3E-04	5.5E-05	-7.3E-04	-1.4E-03	-2.0E-03	-2.5E-03	-2.8E-03	-2.3E-03	-2.0E-03	-1.7E-03	-1.5E-03	-1.4E-03
1938	6.9E-04	7.7E-04	9.2E-05	-6.0E-04	-1.2E-03	-1.7E-03	-2.1E-03	-2.4E-03	-2.0E-03	-1.6E-03	-1.4E-03	-1.2E-03	-1.1E-03
1939	7.7E-04	8.6E-04	-3.0E-07	-8.7E-04	-1.7E-03	-2.3E-03	-2.8E-03	-3.2E-03	-2.8E-03	-2.4E-03	-2.1E-03	-1.9E-03	-1.8E-03
1940	6.6E-04	7.6E-04	3.8E-05	-6.9E-04	-1.4E-03	-1.9E-03	-2.4E-03	-2.8E-03	-2.5E-03	-2.2E-03	-1.9E-03	-1.8E-03	-1.7E-03
1941	7.2E-04	8.1E-04	4.2E-06	-8.1E-04	-1.5E-03	-2.2E-03	-2.6E-03	-3.0E-03	-2.6E-03	-2.2E-03	-1.9E-03	-1.8E-03	-1.7E-03
1942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1953	2.9E-04	2.6E-04	1.3E-04	4.5E-05	1.8E-05	1.1E-05	3.6E-05	9.1E-05	2.0E-04	2.9E-04	3.6E-04	4.0E-04	4.3E-04
1954	3.1E-04	2.8E-04	1.6E-04	8.5E-05	7.7E-05	9.0E-05	1.4E-04	2.2E-04	3.4E-04	4.5E-04	5.2E-04	5.7E-04	6.0E-04
1955	3.4E-04	3.1E-04	1.5E-04	5.5E-05	4.0E-05	5.3E-05	1.1E-04	2.1E-04	3.8E-04	5.2E-04	6.2E-04	6.9E-04	7.2E-04
1956	3.4E-04	3.1E-04	1.1E-04	-3.4E-05	-8.9E-05	-1.1E-04	-8.8E-05	-1.7E-05	1.7E-04	3.2E-04	4.3E-04	5.0E-04	5.4E-04
1957	3.6E-04	3.3E-04	3.3E-05	-1.9E-04	-3.0E-04	-3.8E-04	-3.9E-04	-3.5E-04	-1.1E-04	9.0E-05	2.4E-04	3.4E-04	3.8E-04
1958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1962	2.9E-03	3.3E-03	4.3E-03	5.0E-03	5.7E-03	6.5E-03	7.7E-03	9.0E-03	9.4E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02
1963	2.9E-03	3.3E-03	4.3E-03	5.0E-03	5.6E-03	6.4E-03	7.5E-03	8.7E-03	9.2E-03	9.7E-03	1.0E-02	1.0E-02	1.1E-02
1964	2.2E-03	2.4E-03	3.1E-03	3.6E-03	4.1E-03	4.7E-03	5.5E-03	6.5E-03	6.9E-03	7.4E-03	7.7E-03	7.9E-03	8.0E-03
1965	2.2E-03	2.5E-03	3.2E-03	3.7E-03	4.1E-03	4.8E-03	5.6E-03	6.6E-03	7.0E-03	7.5E-03	7.8E-03	8.0E-03	8.1E-03
1966	1.7E-03	1.9E-03	2.4E-03	2.7E-03	3.1E-03	3.6E-03	4.3E-03	5.1E-03	5.4E-03	5.8E-03	6.1E-03	6.3E-03	6.4E-03
1967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1971	1.4E-03	1.6E-03	2.0E-03	2.2E-03	2.5E-03	2.8E-03	3.4E-03	4.1E-03	4.4E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03
1972	2.0E-03	2.3E-03	2.9E-03	3.2E-03	3.6E-03	4.1E-03	4.9E-03	5.8E-03	6.3E-03	6.7E-03	7.1E-03	7.3E-03	7.5E-03
1973	1.7E-03	1.9E-03	2.4E-03	2.6E-03	2.9E-03	3.4E-03	4.0E-03	4.8E-03	5.2E-03	5.6E-03	5.9E-03	6.1E-03	6.2E-03
1974	1.4E-03	1.6E-03	1.9E-03	2.1E-03	2.4E-03	2.7E-03	3.2E-03	3.9E-03	4.2E-03	4.6E-03	4.9E-03	5.0E-03	5.1E-03
1975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1976	1.6E-03	1.9E-03	2.3E-03	2.6E-03	2.9E-03	3.4E-03	4.0E-03	4.8E-03	5.1E-03	5.5E-03	5.8E-03	6.0E-03	6.1E-03
1977	1.4E-03	1.6E-03	1.9E-03	2.1E-03	2.4E-03	2.7E-03	3.3E-03	3.9E-03	4.2E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03
1978	1.6E-03	1.8E-03	2.3E-03	2.5E-03	2.8E-03	3.2E-03	3.9E-03	4.6E-03	5.0E-03	5.4E-03	5.7E-03	5.9E-03	6.0E-03
1979	1.4E-03	1.5E-03	1.9E-03	2.1E-03	2.4E-03	2.7E-03	3.2E-03	3.9E-03	4.2E-03	4.5E-03	4.8E-03	4.9E-03	5.0E-03
1980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
1981	1.6E-03	1.8E-03	2.1E-03	2.4E-03	2.6E-03	3.0E-03	3.6E-03	4.4E-03	4.8E-03	5.3E-03	5.6E-03	5.9E-03	6.0E-03
1982	1.3E-03	1.5E-03	1.9E-03	2.1E-03	2.3E-03	2.7E-03	3.2E-03	3.8E-03	4.2E-03	4.5E-03	4.8E-03	5.0E-03	5.1E-03
1983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1990	1.6E-03	1.7E-03	2.2E-03	2.5E-03	2.8E-03	3.3E-03	4.0E-03	4.8E-03	5.2E-03	5.5E-03	5.8E-03	6.0E-03	6.1E-03
1991	1.1E-03	1.3E-03	7.5E-04	1.6E-04	-3.3E-04	-6.0E-04	-6.9E-04	-6.5E-04	-1.2E-04	3.4E-04	6.8E-04	9.1E-04	1.0E-03
1992	9.3E-04	1.0E-03	6.9E-04	3.0E-04	-1.4E-05	-1.5E-04	-1.3E-04	4.4E-07	4.7E-04	8.6E-04	1.2E-03	1.4E-03	1.5E-03
1993	1.3E-03	1.4E-03	1.0E-03	5.8E-04	2.2E-04	9.7E-05	1.8E-04	3.8E-04	9.4E-04	1.4E-03	1.8E-03	2.0E-03	2.1E-03
1994	1.0E-03	1.1E-03	8.7E-04	5.8E-04	3.6E-04	3.2E-04	4.4E-04	6.8E-04	1.1E-03	1.5E-03	1.8E-03	2.0E-03	2.1E-03
1995	8.6E-04	9.5E-04	8.0E-04	5.9E-04	4.6E-04	4.6E-04	6.2E-04	8.6E-04	1.3E-03	1.6E-03	1.9E-03	2.1E-03	2.2E-03
1996	7.8E-04	8.7E-04	7.8E-04	6.4E-04	5.7E-04	6.2E-04	7.9E-04	1.1E-03	1.4E-03	1.7E-03	2.0E-03	2.1E-03	2.2E-03
1997	1.3E-03	1.4E-03	1.3E-03	1.0E-03	8.7E-04	9.3E-04	1.2E-03	1.6E-03	2.1E-03	2.6E-03	3.0E-03	3.2E-03	3.3E-03
1998	1.1E-03	1.2E-03	1.1E-03	9.1E-04	8.1E-04	8.7E-04	1.1E-03	1.4E-03	1.9E-03	2.3E-03	2.6E-03	2.8E-03	2.9E-03
1999	9.3E-04	1.0E-03	9.7E-04	8.4E-04	7.8E-04	8.5E-04	1.1E-03	1.4E-03	1.8E-03	2.2E-03	2.4E-03	2.6E-03	2.7E-03
2000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2003	1.4E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.8E-03	2.3E-03	2.9E-03	3.4E-03	3.9E-03	4.3E-03	4.6E-03	4.7E-03
2004	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.5E-03	1.8E-03	2.3E-03	2.8E-03	3.2E-03	3.5E-03	3.7E-03	3.8E-03
2005	9.8E-04	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.5E-03	1.9E-03	2.3E-03	2.7E-03	3.0E-03	3.1E-03	3.2E-03
2006	8.6E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.2E-03	1.5E-03	1.8E-03	2.2E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03
2007	7.5E-04	8.4E-04	9.1E-04	9.2E-04	9.7E-04	1.1E-03	1.4E-03	1.7E-03	2.0E-03	2.2E-03	2.4E-03	2.5E-03	2.6E-03
2008	6.7E-04	7.5E-04	8.1E-04	8.4E-04	8.9E-04	1.0E-03	1.3E-03	1.6E-03	1.8E-03	2.0E-03	2.2E-03	2.3E-03	2.4E-03
2009	1.6E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.6E-03	3.2E-03	4.0E-03	4.6E-03	5.1E-03	5.5E-03	5.7E-03	5.9E-03
2010	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03	2.0E-03	2.4E-03	3.0E-03	3.5E-03	3.9E-03	4.2E-03	4.4E-03	4.5E-03
2011	1.0E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.5E-03	1.9E-03	2.3E-03	2.7E-03	3.1E-03	3.4E-03	3.5E-03	3.6E-03
2012	9.0E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.4E-03	1.7E-03	2.1E-03	2.4E-03	2.7E-03	2.9E-03	3.1E-03	3.1E-03
2013	7.8E-04	8.7E-04	9.7E-04	1.0E-03	1.1E-03	1.3E-03	1.5E-03	1.9E-03	2.1E-03	2.4E-03	2.6E-03	2.7E-03	2.8E-03
2014	6.8E-04	7.7E-04	8.6E-04	9.1E-04	9.9E-04	1.1E-03	1.4E-03	1.7E-03	1.9E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03
2015	1.7E-03	1.9E-03	2.2E-03	2.4E-03	2.7E-03	3.1E-03	3.8E-03	4.7E-03	5.3E-03	5.8E-03	6.2E-03	6.5E-03	6.6E-03
2016	1.4E-03	1.5E-03	1.7E-03	1.8E-03	1.9E-03	2.3E-03	2.8E-03	3.4E-03	3.9E-03	4.3E-03	4.6E-03	4.9E-03	5.0E-03
2017	1.1E-03	1.2E-03	1.4E-03	1.4E-03	1.5E-03	1.7E-03	2.1E-03	2.6E-03	3.0E-03	3.4E-03	3.6E-03	3.8E-03	3.9E-03
2018	9.4E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.5E-03	1.9E-03	2.3E-03	2.6E-03	2.9E-03	3.1E-03	3.3E-03	3.3E-03
2019	8.0E-04	9.0E-04	1.0E-03	1.1E-03	1.2E-03	1.4E-03	1.6E-03	2.0E-03	2.3E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03
2020	7.0E-04	7.8E-04	9.0E-04	9.7E-04	1.1E-03	1.2E-03	1.5E-03	1.8E-03	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03
2021	1.9E-03	2.1E-03	2.5E-03	2.7E-03	3.0E-03	3.5E-03	4.3E-03	5.2E-03	5.8E-03	6.3E-03	6.7E-03	7.0E-03	7.1E-03
2022	1.4E-03	1.6E-03	1.9E-03	2.0E-03	2.1E-03	2.5E-03	3.0E-03	3.7E-03	4.2E-03	4.6E-03	4.9E-03	5.2E-03	5.3E-03
2023	1.2E-03	1.3E-03	1.5E-03	1.5E-03	1.6E-03	1.9E-03	2.3E-03	2.8E-03	3.2E-03	3.6E-03	3.9E-03	4.0E-03	4.1E-03
2024	9.8E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.6E-03	2.0E-03	2.4E-03	2.7E-03	3.0E-03	3.3E-03	3.4E-03	3.5E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2025	8.2E-04	9.3E-04	1.1E-03	1.1E-03	1.2E-03	1.4E-03	1.7E-03	2.1E-03	2.3E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03
2026	7.1E-04	8.0E-04	9.2E-04	9.9E-04	1.1E-03	1.3E-03	1.5E-03	1.9E-03	2.1E-03	2.3E-03	2.5E-03	2.6E-03	2.6E-03
2027	2.0E-03	2.2E-03	2.7E-03	3.0E-03	3.4E-03	3.9E-03	4.7E-03	5.7E-03	6.2E-03	6.8E-03	7.2E-03	7.4E-03	7.6E-03
2028	1.5E-03	1.7E-03	2.0E-03	2.1E-03	2.3E-03	2.6E-03	3.2E-03	3.9E-03	4.4E-03	4.8E-03	5.2E-03	5.4E-03	5.5E-03
2029	1.2E-03	1.4E-03	1.6E-03	1.6E-03	1.8E-03	2.0E-03	2.5E-03	3.0E-03	3.4E-03	3.8E-03	4.1E-03	4.3E-03	4.4E-03
2030	1.0E-03	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.7E-03	2.1E-03	2.5E-03	2.8E-03	3.1E-03	3.4E-03	3.5E-03	3.6E-03
2031	8.4E-04	9.5E-04	1.1E-03	1.1E-03	1.2E-03	1.4E-03	1.7E-03	2.1E-03	2.4E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03
2032	7.2E-04	8.1E-04	9.2E-04	9.8E-04	1.1E-03	1.2E-03	1.5E-03	1.8E-03	2.0E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03
2033	2.8E-03	3.2E-03	4.1E-03	4.8E-03	5.5E-03	6.5E-03	7.7E-03	9.2E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02
2034	2.0E-03	2.3E-03	2.9E-03	3.2E-03	3.6E-03	4.2E-03	5.0E-03	5.9E-03	6.4E-03	6.9E-03	7.3E-03	7.6E-03	7.7E-03
2035	1.6E-03	1.8E-03	2.1E-03	2.3E-03	2.5E-03	2.9E-03	3.4E-03	4.1E-03	4.6E-03	5.0E-03	5.4E-03	5.6E-03	5.7E-03
2036	1.3E-03	1.4E-03	1.6E-03	1.7E-03	1.9E-03	2.2E-03	2.6E-03	3.2E-03	3.6E-03	3.9E-03	4.2E-03	4.4E-03	4.5E-03
2037	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.8E-03	2.1E-03	2.6E-03	2.9E-03	3.2E-03	3.4E-03	3.6E-03	3.7E-03
2038	8.5E-04	9.6E-04	1.1E-03	1.1E-03	1.2E-03	1.4E-03	1.7E-03	2.0E-03	2.3E-03	2.5E-03	2.7E-03	2.9E-03	2.9E-03
2039	7.5E-04	8.4E-04	9.5E-04	9.9E-04	1.1E-03	1.2E-03	1.5E-03	1.8E-03	2.0E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03
2040	2.9E-03	3.3E-03	4.3E-03	5.1E-03	5.8E-03	6.8E-03	8.1E-03	9.5E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02
2041	2.1E-03	2.3E-03	3.0E-03	3.4E-03	3.8E-03	4.4E-03	5.2E-03	6.2E-03	6.7E-03	7.1E-03	7.5E-03	7.7E-03	7.8E-03
2042	1.6E-03	1.8E-03	2.2E-03	2.4E-03	2.7E-03	3.1E-03	3.7E-03	4.4E-03	4.8E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03
2043	1.3E-03	1.5E-03	1.7E-03	1.8E-03	2.0E-03	2.3E-03	2.7E-03	3.3E-03	3.7E-03	4.0E-03	4.3E-03	4.5E-03	4.6E-03
2044	1.1E-03	1.2E-03	1.4E-03	1.4E-03	1.5E-03	1.8E-03	2.1E-03	2.6E-03	2.9E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03
2045	8.7E-04	9.8E-04	1.1E-03	1.1E-03	1.2E-03	1.4E-03	1.7E-03	2.0E-03	2.3E-03	2.6E-03	2.8E-03	2.9E-03	2.9E-03
2046	7.5E-04	8.5E-04	9.4E-04	9.7E-04	1.0E-03	1.2E-03	1.4E-03	1.7E-03	2.0E-03	2.2E-03	2.4E-03	2.5E-03	2.6E-03
2047	2.9E-03	3.3E-03	4.3E-03	5.1E-03	5.8E-03	6.8E-03	8.0E-03	9.4E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02
2048	2.2E-03	2.5E-03	3.2E-03	3.7E-03	4.2E-03	4.9E-03	5.8E-03	6.8E-03	7.3E-03	7.8E-03	8.1E-03	8.4E-03	8.5E-03
2049	1.6E-03	1.8E-03	2.3E-03	2.5E-03	2.8E-03	3.2E-03	3.8E-03	4.5E-03	4.9E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03
2050	1.3E-03	1.5E-03	1.7E-03	1.9E-03	2.0E-03	2.3E-03	2.8E-03	3.3E-03	3.7E-03	4.0E-03	4.3E-03	4.4E-03	4.5E-03
2051	1.1E-03	1.2E-03	1.4E-03	1.4E-03	1.5E-03	1.8E-03	2.1E-03	2.5E-03	2.8E-03	3.1E-03	3.4E-03	3.5E-03	3.6E-03
2052	8.7E-04	9.8E-04	1.1E-03	1.1E-03	1.2E-03	1.4E-03	1.6E-03	2.0E-03	2.3E-03	2.5E-03	2.7E-03	2.9E-03	2.9E-03
2053	7.6E-04	8.5E-04	9.4E-04	9.7E-04	1.0E-03	1.2E-03	1.4E-03	1.7E-03	2.0E-03	2.2E-03	2.4E-03	2.5E-03	2.6E-03
2054	6.8E-04	7.6E-04	8.5E-04	8.8E-04	9.4E-04	1.1E-03	1.3E-03	1.6E-03	1.8E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03
2055	2.9E-03	3.3E-03	4.3E-03	5.0E-03	5.7E-03	6.6E-03	7.8E-03	9.1E-03	9.6E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02
2056	2.2E-03	2.5E-03	3.2E-03	3.6E-03	4.1E-03	4.8E-03	5.6E-03	6.7E-03	7.1E-03	7.5E-03	7.9E-03	8.1E-03	8.2E-03
2057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2058	1.3E-03	1.5E-03	1.8E-03	1.9E-03	2.1E-03	2.4E-03	2.9E-03	3.4E-03	3.8E-03	4.1E-03	4.4E-03	4.5E-03	4.6E-03
2059	1.1E-03	1.2E-03	1.4E-03	1.4E-03	1.5E-03	1.8E-03	2.1E-03	2.5E-03	2.8E-03	3.1E-03	3.3E-03	3.5E-03	3.5E-03
2060	8.8E-04	9.9E-04	1.1E-03	1.1E-03	1.2E-03	1.4E-03	1.7E-03	2.0E-03	2.3E-03	2.6E-03	2.7E-03	2.9E-03	2.9E-03
2061	7.7E-04	8.6E-04	9.5E-04	9.8E-04	1.0E-03	1.2E-03	1.4E-03	1.8E-03	2.0E-03	2.2E-03	2.4E-03	2.5E-03	2.6E-03
2062	6.8E-04	7.6E-04	8.3E-04	8.6E-04	9.1E-04	1.0E-03	1.3E-03	1.6E-03	1.8E-03	2.0E-03	2.2E-03	2.3E-03	2.3E-03
2063	6.1E-04	6.8E-04	7.5E-04	7.7E-04	8.1E-04	9.4E-04	1.1E-03	1.4E-03	1.6E-03	1.8E-03	2.0E-03	2.1E-03	2.1E-03
2064	2.1E-03	2.4E-03	3.1E-03	3.6E-03	4.0E-03	4.7E-03	5.5E-03	6.5E-03	6.9E-03	7.4E-03	7.7E-03	7.9E-03	8.0E-03
2065	1.7E-03	1.9E-03	2.3E-03	2.6E-03	2.9E-03	3.4E-03	4.0E-03	4.8E-03	5.1E-03	5.5E-03	5.8E-03	6.0E-03	6.1E-03
2066	1.3E-03	1.5E-03	1.8E-03	2.0E-03	2.1E-03	2.5E-03	2.9E-03	3.5E-03	3.9E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03
2067	1.1E-03	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.8E-03	2.2E-03	2.6E-03	2.9E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03
2068	9.0E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.7E-03	2.1E-03	2.4E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2071	6.2E-04	6.9E-04	7.5E-04	7.6E-04	8.0E-04	9.2E-04	1.1E-03	1.4E-03	1.6E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03
2072	3.7E-04	3.4E-04	2.2E-04	1.5E-04	1.7E-04	2.1E-04	3.1E-04	4.5E-04	6.2E-04	7.7E-04	8.8E-04	9.5E-04	9.8E-04
2073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2074	1.7E-03	1.9E-03	2.4E-03	2.7E-03	3.0E-03	3.5E-03	4.1E-03	4.9E-03	5.2E-03	5.6E-03	5.9E-03	6.1E-03	6.2E-03
2075	1.3E-03	1.5E-03	1.8E-03	2.0E-03	2.2E-03	2.6E-03	3.1E-03	3.7E-03	4.0E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03
2076	1.1E-03	1.2E-03	1.4E-03	1.6E-03	1.7E-03	2.0E-03	2.4E-03	2.8E-03	3.1E-03	3.4E-03	3.6E-03	3.8E-03	3.8E-03
2077	9.2E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.6E-03	1.9E-03	2.3E-03	2.5E-03	2.8E-03	3.0E-03	3.1E-03	3.1E-03
2078	8.0E-04	8.9E-04	1.0E-03	1.0E-03	1.1E-03	1.3E-03	1.5E-03	1.9E-03	2.1E-03	2.3E-03	2.5E-03	2.6E-03	2.7E-03
2079	6.9E-04	7.6E-04	8.4E-04	8.5E-04	9.0E-04	1.0E-03	1.2E-03	1.5E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03
2080	6.2E-04	6.9E-04	7.2E-04	7.2E-04	7.5E-04	8.7E-04	1.1E-03	1.3E-03	1.6E-03	1.8E-03	2.0E-03	2.1E-03	2.1E-03
2081	5.6E-04	6.2E-04	6.5E-04	6.5E-04	6.8E-04	7.8E-04	9.6E-04	1.2E-03	1.4E-03	1.6E-03	1.8E-03	1.8E-03	1.9E-03
2082	3.6E-04	3.3E-04	2.3E-04	1.8E-04	2.0E-04	2.6E-04	3.7E-04	5.2E-04	7.0E-04	8.5E-04	9.6E-04	1.0E-03	1.1E-03
2083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2084	1.4E-03	1.5E-03	1.9E-03	2.1E-03	2.3E-03	2.7E-03	3.2E-03	3.9E-03	4.2E-03	4.5E-03	4.8E-03	5.0E-03	5.0E-03
2085	1.1E-03	1.3E-03	1.5E-03	1.7E-03	1.8E-03	2.1E-03	2.5E-03	3.1E-03	3.4E-03	3.6E-03	3.8E-03	4.0E-03	4.1E-03
2086	9.5E-04	1.1E-03	1.2E-03	1.3E-03	1.5E-03	1.7E-03	2.0E-03	2.4E-03	2.7E-03	3.0E-03	3.1E-03	3.3E-03	3.3E-03
2087	8.1E-04	9.0E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.6E-03	2.0E-03	2.2E-03	2.5E-03	2.6E-03	2.8E-03	2.8E-03
2088	7.0E-04	7.7E-04	8.5E-04	8.6E-04	9.1E-04	1.1E-03	1.3E-03	1.6E-03	1.8E-03	2.1E-03	2.2E-03	2.4E-03	2.4E-03
2089	6.3E-04	6.9E-04	7.3E-04	7.3E-04	7.7E-04	8.8E-04	1.1E-03	1.4E-03	1.6E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03
2090	5.6E-04	6.2E-04	6.6E-04	6.6E-04	6.9E-04	7.8E-04	9.6E-04	1.2E-03	1.4E-03	1.6E-03	1.7E-03	1.8E-03	1.9E-03
2091	3.4E-04	3.2E-04	2.4E-04	2.0E-04	2.3E-04	2.9E-04	4.0E-04	5.5E-04	7.2E-04	8.5E-04	9.6E-04	1.0E-03	1.1E-03
2092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2097	7.3E-04	8.1E-04	8.9E-04	9.2E-04	9.8E-04	1.1E-03	1.4E-03	1.7E-03	2.0E-03	2.2E-03	2.4E-03	2.5E-03	2.5E-03
2098	6.4E-04	7.1E-04	7.8E-04	7.9E-04	8.4E-04	9.6E-04	1.2E-03	1.5E-03	1.7E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03
2099	5.7E-04	6.3E-04	6.8E-04	6.9E-04	7.2E-04	8.2E-04	1.0E-03	1.3E-03	1.5E-03	1.6E-03	1.8E-03	1.9E-03	1.9E-03
2100	5.1E-04	5.6E-04	6.0E-04	6.0E-04	6.2E-04	7.1E-04	8.7E-04	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.7E-03	1.7E-03
2101	3.3E-04	3.2E-04	2.5E-04	2.4E-04	2.9E-04	3.6E-04	4.9E-04	6.6E-04	8.2E-04	9.6E-04	1.1E-03	1.1E-03	1.2E-03
2102	1.2E-03	1.3E-03	1.6E-03	1.8E-03	2.0E-03	2.3E-03	2.7E-03	3.3E-03	3.6E-03	3.9E-03	4.1E-03	4.3E-03	4.4E-03
2103	1.0E-03	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.2E-03	2.7E-03	3.0E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03
2104	8.7E-04	9.7E-04	1.1E-03	1.2E-03	1.3E-03	1.5E-03	1.8E-03	2.2E-03	2.5E-03	2.7E-03	2.9E-03	3.1E-03	3.1E-03
2105	7.6E-04	8.4E-04	9.6E-04	1.0E-03	1.1E-03	1.2E-03	1.5E-03	1.8E-03	2.1E-03	2.3E-03	2.5E-03	2.6E-03	2.6E-03
2106	6.7E-04	7.4E-04	8.2E-04	8.5E-04	9.1E-04	1.0E-03	1.3E-03	1.5E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03
2107	5.9E-04	6.5E-04	7.2E-04	7.4E-04	7.8E-04	8.8E-04	1.1E-03	1.3E-03	1.5E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03
2108	5.3E-04	5.8E-04	6.2E-04	6.3E-04	6.6E-04	7.5E-04	9.1E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03
2109	3.2E-04	3.1E-04	2.9E-04	3.0E-04	3.9E-04	5.0E-04	6.6E-04	8.7E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2110	3.6E-04	3.5E-04	3.3E-04	3.7E-04	4.7E-04	6.1E-04	8.0E-04	1.1E-03	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03
2111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2112	1.0E-03	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.8E-03	2.2E-03	2.7E-03	3.0E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2113	8.8E-04	9.8E-04	1.2E-03	1.2E-03	1.3E-03	1.5E-03	1.8E-03	2.2E-03	2.5E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03
2114	7.7E-04	8.6E-04	9.9E-04	1.0E-03	1.1E-03	1.3E-03	1.5E-03	1.9E-03	2.1E-03	2.3E-03	2.5E-03	2.6E-03	2.6E-03
2115	6.8E-04	7.6E-04	8.5E-04	8.9E-04	9.5E-04	1.1E-03	1.3E-03	1.6E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03
2116	6.1E-04	6.7E-04	7.5E-04	7.7E-04	8.1E-04	9.2E-04	1.1E-03	1.4E-03	1.6E-03	1.7E-03	1.9E-03	2.0E-03	2.0E-03
2117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2118	3.1E-04	3.1E-04	2.6E-04	2.6E-04	3.1E-04	3.9E-04	5.1E-04	6.8E-04	8.4E-04	9.8E-04	1.1E-03	1.1E-03	1.2E-03
2119	3.5E-04	3.4E-04	3.1E-04	3.1E-04	3.9E-04	4.9E-04	6.4E-04	8.4E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2120	1.2E-03	1.3E-03	1.6E-03	1.8E-03	1.9E-03	2.2E-03	2.6E-03	3.2E-03	3.5E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03
2121	1.0E-03	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.2E-03	2.6E-03	2.9E-03	3.1E-03	3.3E-03	3.5E-03	3.5E-03
2122	8.8E-04	9.9E-04	1.2E-03	1.2E-03	1.3E-03	1.5E-03	1.8E-03	2.2E-03	2.4E-03	2.7E-03	2.9E-03	3.0E-03	3.0E-03
2123	7.7E-04	8.6E-04	9.9E-04	1.0E-03	1.1E-03	1.3E-03	1.5E-03	1.9E-03	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03
2124	6.8E-04	7.6E-04	8.6E-04	9.0E-04	9.6E-04	1.1E-03	1.3E-03	1.6E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03
2125	6.1E-04	6.7E-04	7.5E-04	7.8E-04	8.3E-04	9.3E-04	1.1E-03	1.4E-03	1.6E-03	1.7E-03	1.9E-03	2.0E-03	2.0E-03
2126	5.5E-04	6.0E-04	6.6E-04	6.8E-04	7.1E-04	8.0E-04	9.8E-04	1.2E-03	1.4E-03	1.5E-03	1.7E-03	1.7E-03	1.8E-03
2127	4.9E-04	5.4E-04	5.9E-04	6.0E-04	6.3E-04	7.1E-04	8.6E-04	1.1E-03	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03
2128	3.1E-04	3.0E-04	2.7E-04	2.7E-04	3.2E-04	4.0E-04	5.3E-04	7.0E-04	8.5E-04	9.8E-04	1.1E-03	1.1E-03	1.2E-03
2129	3.4E-04	3.4E-04	3.1E-04	3.2E-04	4.0E-04	5.0E-04	6.5E-04	8.6E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2130	1.2E-03	1.3E-03	1.6E-03	1.7E-03	1.9E-03	2.2E-03	2.6E-03	3.1E-03	3.4E-03	3.7E-03	3.9E-03	4.1E-03	4.1E-03
2131	1.0E-03	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.2E-03	2.6E-03	2.9E-03	3.1E-03	3.3E-03	3.5E-03	3.5E-03
2132	8.8E-04	9.8E-04	1.1E-03	1.2E-03	1.3E-03	1.5E-03	1.8E-03	2.2E-03	2.4E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03
2133	7.7E-04	8.5E-04	9.8E-04	1.0E-03	1.1E-03	1.3E-03	1.5E-03	1.8E-03	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03
2134	6.8E-04	7.5E-04	8.5E-04	8.8E-04	9.4E-04	1.1E-03	1.3E-03	1.6E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03
2135	6.0E-04	6.7E-04	7.4E-04	7.6E-04	8.0E-04	9.0E-04	1.1E-03	1.3E-03	1.5E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03
2136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2137	4.9E-04	5.4E-04	5.8E-04	5.8E-04	6.0E-04	6.8E-04	8.2E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03
2138	3.0E-04	3.0E-04	2.7E-04	2.8E-04	3.4E-04	4.3E-04	5.6E-04	7.3E-04	8.9E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03
2139	3.4E-04	3.3E-04	3.1E-04	3.4E-04	4.2E-04	5.2E-04	6.8E-04	8.9E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2142	8.5E-04	9.5E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.7E-03	2.1E-03	2.4E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03
2143	7.6E-04	8.4E-04	9.6E-04	1.0E-03	1.1E-03	1.2E-03	1.5E-03	1.8E-03	2.1E-03	2.3E-03	2.5E-03	2.6E-03	2.6E-03
2144	6.7E-04	7.5E-04	8.4E-04	8.6E-04	9.2E-04	1.0E-03	1.3E-03	1.5E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03
2145	6.0E-04	6.6E-04	7.3E-04	7.5E-04	7.9E-04	8.9E-04	1.1E-03	1.3E-03	1.5E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03
2146	5.4E-04	6.0E-04	6.5E-04	6.6E-04	6.9E-04	7.8E-04	9.5E-04	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03	1.8E-03
2147	4.9E-04	5.4E-04	5.8E-04	5.7E-04	6.0E-04	6.7E-04	8.2E-04	1.0E-03	1.2E-03	1.3E-03	1.5E-03	1.5E-03	1.6E-03
2148	2.9E-04	2.9E-04	2.8E-04	3.0E-04	3.6E-04	4.5E-04	5.9E-04	7.7E-04	9.2E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03
2149	3.3E-04	3.3E-04	3.2E-04	3.5E-04	4.3E-04	5.4E-04	7.1E-04	9.2E-04	1.1E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03
2150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2154	6.5E-04	7.3E-04	7.9E-04	8.1E-04	8.7E-04	1.0E-03	1.2E-03	1.5E-03	1.8E-03	2.0E-03	2.2E-03	2.3E-03	2.4E-03
2155	5.9E-04	6.5E-04	7.1E-04	7.2E-04	7.6E-04	8.7E-04	1.1E-03	1.3E-03	1.5E-03	1.7E-03	1.9E-03	2.0E-03	2.0E-03
2156	5.4E-04	6.0E-04	6.5E-04	6.5E-04	6.9E-04	7.8E-04	9.5E-04	1.2E-03	1.4E-03	1.5E-03	1.7E-03	1.8E-03	1.8E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2158	2.9E-04	2.9E-04	2.9E-04	3.1E-04	3.8E-04	4.8E-04	6.1E-04	8.0E-04	9.5E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03
2159	3.2E-04	3.2E-04	3.2E-04	3.6E-04	4.5E-04	5.6E-04	7.3E-04	9.5E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03
2160	1.3E-03	1.4E-03	1.7E-03	1.8E-03	2.1E-03	2.4E-03	2.9E-03	3.6E-03	4.0E-03	4.4E-03	4.7E-03	4.9E-03	5.0E-03
2161	1.1E-03	1.2E-03	1.5E-03	1.6E-03	1.8E-03	2.1E-03	2.6E-03	3.1E-03	3.5E-03	3.8E-03	4.1E-03	4.2E-03	4.3E-03
2162	9.5E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.8E-03	2.1E-03	2.6E-03	2.9E-03	3.2E-03	3.4E-03	3.6E-03	3.6E-03
2163	8.3E-04	9.3E-04	1.1E-03	1.2E-03	1.3E-03	1.5E-03	1.8E-03	2.2E-03	2.5E-03	2.7E-03	2.9E-03	3.1E-03	3.1E-03
2164	7.3E-04	8.1E-04	9.1E-04	9.6E-04	1.0E-03	1.2E-03	1.5E-03	1.8E-03	2.1E-03	2.3E-03	2.5E-03	2.7E-03	2.7E-03
2165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2166	5.8E-04	6.4E-04	6.8E-04	6.8E-04	7.3E-04	8.5E-04	1.1E-03	1.4E-03	1.7E-03	1.9E-03	2.1E-03	2.2E-03	2.3E-03
2167	5.3E-04	5.9E-04	6.3E-04	6.3E-04	6.6E-04	7.6E-04	9.4E-04	1.2E-03	1.4E-03	1.6E-03	1.7E-03	1.8E-03	1.9E-03
2168	2.8E-04	2.9E-04	2.9E-04	3.2E-04	4.0E-04	4.9E-04	6.4E-04	8.2E-04	9.7E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03
2169	3.1E-04	3.2E-04	3.3E-04	3.7E-04	4.6E-04	5.7E-04	7.4E-04	9.6E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03
2170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2172	9.3E-04	1.0E-03	1.2E-03	1.3E-03	1.5E-03	1.7E-03	2.1E-03	2.6E-03	2.9E-03	3.2E-03	3.4E-03	3.6E-03	3.6E-03
2173	8.2E-04	9.1E-04	1.1E-03	1.1E-03	1.3E-03	1.5E-03	1.8E-03	2.2E-03	2.5E-03	2.7E-03	2.9E-03	3.1E-03	3.1E-03
2174	7.2E-04	8.0E-04	9.0E-04	9.4E-04	1.0E-03	1.2E-03	1.4E-03	1.8E-03	2.1E-03	2.3E-03	2.5E-03	2.7E-03	2.7E-03
2175	6.4E-04	7.1E-04	7.7E-04	7.9E-04	8.5E-04	9.9E-04	1.2E-03	1.6E-03	1.8E-03	2.1E-03	2.3E-03	2.4E-03	2.5E-03
2176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2178	2.8E-04	2.9E-04	2.9E-04	3.3E-04	4.1E-04	5.0E-04	6.5E-04	8.4E-04	9.9E-04	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2179	3.1E-04	3.2E-04	3.2E-04	3.6E-04	4.5E-04	5.6E-04	7.2E-04	9.4E-04	1.1E-03	1.2E-03	1.4E-03	1.4E-03	1.5E-03
2180	1.4E-03	1.5E-03	1.8E-03	2.1E-03	2.3E-03	2.7E-03	3.3E-03	4.0E-03	4.4E-03	4.8E-03	5.1E-03	5.3E-03	5.4E-03
2181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2182	1.0E-03	1.2E-03	1.4E-03	1.5E-03	1.7E-03	2.0E-03	2.4E-03	3.0E-03	3.4E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03
2183	9.2E-04	1.0E-03	1.2E-03	1.4E-03	1.5E-03	1.8E-03	2.2E-03	2.6E-03	2.9E-03	3.2E-03	3.4E-03	3.6E-03	3.7E-03
2184	8.1E-04	9.0E-04	1.1E-03	1.2E-03	1.3E-03	1.5E-03	1.8E-03	2.2E-03	2.5E-03	2.8E-03	3.0E-03	3.1E-03	3.2E-03
2185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2186	6.3E-04	7.0E-04	7.5E-04	7.6E-04	8.2E-04	9.5E-04	1.2E-03	1.5E-03	1.8E-03	2.1E-03	2.3E-03	2.4E-03	2.5E-03
2187	5.7E-04	6.3E-04	6.5E-04	6.5E-04	7.0E-04	8.1E-04	1.0E-03	1.3E-03	1.6E-03	1.9E-03	2.1E-03	2.2E-03	2.3E-03
2188	5.1E-04	5.6E-04	5.5E-04	5.2E-04	5.6E-04	6.6E-04	8.8E-04	1.2E-03	1.5E-03	1.8E-03	2.0E-03	2.2E-03	2.2E-03
2189	3.0E-04	3.1E-04	3.2E-04	3.6E-04	4.5E-04	5.5E-04	7.1E-04	9.2E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2190	1.5E-03	1.6E-03	2.1E-03	2.4E-03	2.7E-03	3.1E-03	3.8E-03	4.6E-03	4.9E-03	5.3E-03	5.5E-03	5.7E-03	5.8E-03
2191	1.3E-03	1.4E-03	1.8E-03	2.0E-03	2.3E-03	2.7E-03	3.3E-03	4.0E-03	4.3E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03
2192	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.7E-03	1.9E-03	2.4E-03	3.1E-03	3.6E-03	4.1E-03	4.4E-03	4.6E-03	4.7E-03
2193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2199	3.0E-04	3.1E-04	3.2E-04	3.6E-04	4.4E-04	5.5E-04	7.1E-04	9.1E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2201	1.4E-03	1.6E-03	2.0E-03	2.3E-03	2.6E-03	3.0E-03	3.6E-03	4.4E-03	4.7E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03
2202	1.2E-03	1.4E-03	1.7E-03	1.9E-03	2.2E-03	2.5E-03	3.1E-03	3.7E-03	4.1E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03
2203	1.1E-03	1.2E-03	1.4E-03	1.6E-03	1.8E-03	2.1E-03	2.6E-03	3.2E-03	3.6E-03	3.9E-03	4.2E-03	4.3E-03	4.4E-03
2204	9.7E-04	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.2E-03	2.8E-03	3.2E-03	3.5E-03	3.8E-03	3.9E-03	4.0E-03
2205	8.7E-04	9.6E-04	1.2E-03	1.3E-03	1.5E-03	1.7E-03	2.1E-03	2.6E-03	2.9E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03
2206	7.7E-04	8.6E-04	1.0E-03	1.1E-03	1.3E-03	1.5E-03	1.9E-03	2.3E-03	2.5E-03	2.8E-03	3.0E-03	3.1E-03	3.1E-03
2207	6.9E-04	7.7E-04	9.1E-04	1.0E-03	1.1E-03	1.3E-03	1.6E-03	2.0E-03	2.2E-03	2.4E-03	2.6E-03	2.7E-03	2.8E-03
2208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2209	2.9E-04	3.0E-04	3.1E-04	3.4E-04	4.2E-04	5.3E-04	6.9E-04	9.1E-04	1.1E-03	1.2E-03	1.4E-03	1.4E-03	1.5E-03
2210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2225	1.5E-03	1.6E-03	2.0E-03	2.3E-03	2.5E-03	2.9E-03	3.5E-03	4.2E-03	4.5E-03	4.8E-03	5.1E-03	5.2E-03	5.3E-03
2226	1.3E-03	1.4E-03	1.8E-03	2.0E-03	2.3E-03	2.6E-03	3.2E-03	3.9E-03	4.2E-03	4.4E-03	4.7E-03	4.8E-03	4.9E-03
2227	1.1E-03	1.2E-03	1.5E-03	1.7E-03	1.9E-03	2.2E-03	2.7E-03	3.3E-03	3.7E-03	3.9E-03	4.2E-03	4.3E-03	4.4E-03
2228	1.0E-03	1.1E-03	1.4E-03	1.5E-03	1.7E-03	2.0E-03	2.5E-03	3.0E-03	3.3E-03	3.6E-03	3.8E-03	4.0E-03	4.0E-03
2229	9.0E-04	1.0E-03	1.2E-03	1.3E-03	1.5E-03	1.7E-03	2.1E-03	2.6E-03	3.0E-03	3.3E-03	3.5E-03	3.7E-03	3.7E-03
2230	8.1E-04	9.0E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	2.0E-03	2.4E-03	2.7E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03
2231	7.3E-04	8.1E-04	9.8E-04	1.1E-03	1.2E-03	1.5E-03	1.8E-03	2.2E-03	2.4E-03	2.7E-03	2.8E-03	3.0E-03	3.0E-03
2232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2236	1.4E-03	1.5E-03	1.9E-03	2.1E-03	2.4E-03	2.7E-03	3.3E-03	3.9E-03	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03
2237	1.2E-03	1.3E-03	1.7E-03	1.9E-03	2.1E-03	2.4E-03	3.0E-03	3.6E-03	3.9E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03
2238	1.1E-03	1.2E-03	1.5E-03	1.6E-03	1.8E-03	2.1E-03	2.6E-03	3.2E-03	3.5E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03
2239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2241	7.9E-04	8.7E-04	1.0E-03	1.1E-03	1.2E-03	1.5E-03	1.8E-03	2.3E-03	2.6E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03
2242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2245	1.5E-03	1.6E-03	2.0E-03	2.2E-03	2.4E-03	2.7E-03	3.3E-03	4.0E-03	4.3E-03	4.5E-03	4.7E-03	4.9E-03	4.9E-03
2246	1.3E-03	1.4E-03	1.8E-03	2.0E-03	2.2E-03	2.5E-03	3.0E-03	3.7E-03	4.0E-03	4.2E-03	4.4E-03	4.6E-03	4.6E-03
2247	1.2E-03	1.2E-03	1.6E-03	1.7E-03	2.0E-03	2.3E-03	2.7E-03	3.3E-03	3.6E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03
2248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2249	9.3E-04	1.0E-03	1.3E-03	1.4E-03	1.6E-03	1.9E-03	2.3E-03	2.8E-03	3.1E-03	3.3E-03	3.5E-03	3.7E-03	3.7E-03
2250	8.4E-04	9.3E-04	1.1E-03	1.3E-03	1.5E-03	1.7E-03	2.1E-03	2.6E-03	2.8E-03	3.1E-03	3.3E-03	3.4E-03	3.4E-03
2251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2253	1.5E-03	1.6E-03	2.0E-03	2.2E-03	2.4E-03	2.7E-03	3.3E-03	4.0E-03	4.2E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03
2254	1.4E-03	1.5E-03	1.8E-03	2.0E-03	2.2E-03	2.5E-03	3.1E-03	3.7E-03	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03
2255	1.2E-03	1.3E-03	1.6E-03	1.8E-03	2.0E-03	2.3E-03	2.8E-03	3.4E-03	3.7E-03	4.0E-03	4.1E-03	4.3E-03	4.3E-03
2256	1.1E-03	1.2E-03	1.5E-03	1.6E-03	1.8E-03	2.1E-03	2.5E-03	3.1E-03	3.4E-03	3.7E-03	3.8E-03	4.0E-03	4.0E-03
2257	9.8E-04	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.3E-03	2.8E-03	3.1E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03
2258	8.9E-04	9.7E-04	1.2E-03	1.3E-03	1.5E-03	1.8E-03	2.2E-03	2.7E-03	2.9E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03
2259	8.1E-04	8.9E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	2.0E-03	2.5E-03	2.7E-03	3.0E-03	3.1E-03	3.3E-03	3.3E-03
2260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2261	1.4E-03	1.5E-03	1.8E-03	2.0E-03	2.2E-03	2.5E-03	3.0E-03	3.6E-03	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03
2262	1.3E-03	1.4E-03	1.7E-03	1.8E-03	2.1E-03	2.3E-03	2.8E-03	3.4E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03
2263	1.1E-03	1.2E-03	1.5E-03	1.7E-03	1.9E-03	2.1E-03	2.6E-03	3.2E-03	3.4E-03	3.7E-03	3.9E-03	4.0E-03	4.0E-03
2264	1.0E-03	1.1E-03	1.3E-03	1.5E-03	1.7E-03	1.9E-03	2.3E-03	2.9E-03	3.2E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03
2265	9.3E-04	1.0E-03	1.2E-03	1.4E-03	1.5E-03	1.8E-03	2.2E-03	2.7E-03	3.0E-03	3.2E-03	3.4E-03	3.6E-03	3.6E-03
2266	8.5E-04	9.3E-04	1.1E-03	1.3E-03	1.5E-03	1.7E-03	2.1E-03	2.5E-03	2.8E-03	3.1E-03	3.2E-03	3.4E-03	3.4E-03
2267	1.4E-03	1.5E-03	1.8E-03	1.9E-03	2.1E-03	2.4E-03	2.9E-03	3.5E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03
2268	1.3E-03	1.4E-03	1.7E-03	1.8E-03	2.0E-03	2.3E-03	2.8E-03	3.4E-03	3.6E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03
2269	1.2E-03	1.3E-03	1.5E-03	1.7E-03	1.9E-03	2.1E-03	2.6E-03	3.2E-03	3.4E-03	3.6E-03	3.8E-03	3.9E-03	4.0E-03
2270	1.1E-03	1.1E-03	1.4E-03	1.5E-03	1.7E-03	2.0E-03	2.4E-03	2.9E-03	3.2E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03
2271	9.6E-04	1.0E-03	1.2E-03	1.3E-03	1.5E-03	1.7E-03	2.1E-03	2.6E-03	2.9E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03
2272	8.9E-04	9.6E-04	1.2E-03	1.3E-03	1.4E-03	1.7E-03	2.1E-03	2.5E-03	2.8E-03	3.1E-03	3.3E-03	3.4E-03	3.4E-03
2273	8.2E-04	8.9E-04	1.1E-03	1.2E-03	1.3E-03	1.5E-03	1.9E-03	2.4E-03	2.6E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03
2274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2275	1.3E-03	1.4E-03	1.6E-03	1.6E-03	1.8E-03	2.0E-03	2.4E-03	3.0E-03	3.2E-03	3.4E-03	3.6E-03	3.7E-03	3.7E-03
2276	1.3E-03	1.4E-03	1.7E-03	1.7E-03	1.9E-03	2.2E-03	2.6E-03	3.1E-03	3.3E-03	3.5E-03	3.7E-03	3.8E-03	3.8E-03
2277	1.4E-03	1.4E-03	1.7E-03	1.7E-03	1.9E-03	2.2E-03	2.6E-03	3.2E-03	3.4E-03	3.6E-03	3.8E-03	3.9E-03	3.9E-03
2278	1.3E-03	1.4E-03	1.7E-03	1.7E-03	1.9E-03	2.2E-03	2.6E-03	3.2E-03	3.4E-03	3.6E-03	3.8E-03	3.9E-03	3.9E-03
2279	1.2E-03	1.3E-03	1.6E-03	1.7E-03	1.9E-03	2.2E-03	2.6E-03	3.2E-03	3.4E-03	3.6E-03	3.8E-03	3.9E-03	3.9E-03
2280	1.2E-03	1.2E-03	1.5E-03	1.6E-03	1.8E-03	2.1E-03	2.5E-03	3.1E-03	3.3E-03	3.5E-03	3.7E-03	3.8E-03	3.8E-03
2281	1.1E-03	1.1E-03	1.4E-03	1.5E-03	1.7E-03	1.9E-03	2.4E-03	2.9E-03	3.1E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03
2282	9.9E-04	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.2E-03	2.7E-03	2.9E-03	3.2E-03	3.3E-03	3.5E-03	3.5E-03
2283	9.2E-04	9.9E-04	1.2E-03	1.3E-03	1.4E-03	1.6E-03	2.0E-03	2.5E-03	2.8E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03
2284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2290	1.2E-03	1.2E-03	1.5E-03	1.6E-03	1.7E-03	2.0E-03	2.4E-03	2.9E-03	3.1E-03	3.3E-03	3.5E-03	3.6E-03	3.6E-03
2291	1.1E-03	1.2E-03	1.4E-03	1.5E-03	1.7E-03	2.0E-03	2.4E-03	2.9E-03	3.1E-03	3.3E-03	3.5E-03	3.6E-03	3.6E-03
2292	1.1E-03	1.1E-03	1.4E-03	1.5E-03	1.7E-03	1.9E-03	2.3E-03	2.8E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03
2293	9.9E-04	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.2E-03	2.7E-03	2.9E-03	3.1E-03	3.3E-03	3.4E-03	3.4E-03
2294	9.3E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.7E-03	2.0E-03	2.5E-03	2.8E-03	3.0E-03	3.2E-03	3.3E-03	3.3E-03
2295	8.6E-04	9.3E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	2.0E-03	2.4E-03	2.6E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03
2296	8.0E-04	8.6E-04	1.0E-03	1.2E-03	1.3E-03	1.5E-03	1.9E-03	2.3E-03	2.5E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03
2297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2298	1.1E-03	1.1E-03	1.3E-03	1.3E-03	1.5E-03	1.6E-03	1.9E-03	2.3E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03
2299	1.1E-03	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.7E-03	2.0E-03	2.4E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03
2300	1.1E-03	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.1E-03	2.5E-03	2.7E-03	2.9E-03	3.1E-03	3.1E-03	3.2E-03
2301	1.1E-03	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.2E-03	2.6E-03	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03
2302	1.0E-03	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.2E-03	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03
2303	1.0E-03	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.2E-03	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03
2304	9.6E-04	1.0E-03	1.3E-03	1.4E-03	1.5E-03	1.8E-03	2.1E-03	2.6E-03	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03
2305	9.1E-04	9.8E-04	1.2E-03	1.3E-03	1.4E-03	1.6E-03	2.0E-03	2.4E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03
2306	8.6E-04	9.3E-04	1.1E-03	1.2E-03	1.3E-03	1.5E-03	1.9E-03	2.3E-03	2.5E-03	2.8E-03	2.9E-03	3.1E-03	3.1E-03
2307	8.0E-04	8.7E-04	1.1E-03	1.2E-03	1.3E-03	1.5E-03	1.9E-03	2.3E-03	2.5E-03	2.7E-03	2.9E-03	3.0E-03	3.0E-03
2308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2314	9.8E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.6E-03	1.8E-03	2.2E-03	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03
2315	9.8E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.6E-03	1.9E-03	2.3E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03
2316	9.7E-04	1.0E-03	1.2E-03	1.3E-03	1.5E-03	1.7E-03	2.0E-03	2.4E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03
2317	9.5E-04	1.0E-03	1.2E-03	1.3E-03	1.5E-03	1.7E-03	2.0E-03	2.5E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03
2318	9.3E-04	9.9E-04	1.2E-03	1.3E-03	1.5E-03	1.7E-03	2.0E-03	2.5E-03	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.1E-03
2319	8.9E-04	9.5E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	1.9E-03	2.4E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03
2320	8.5E-04	9.1E-04	1.1E-03	1.2E-03	1.3E-03	1.5E-03	1.8E-03	2.3E-03	2.5E-03	2.7E-03	2.9E-03	3.0E-03	3.0E-03
2321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2324	9.2E-04	9.8E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.7E-03	2.0E-03	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03
2325	9.0E-04	9.6E-04	1.1E-03	1.2E-03	1.3E-03	1.5E-03	1.8E-03	2.2E-03	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03
2326	8.9E-04	9.5E-04	1.1E-03	1.2E-03	1.4E-03	1.5E-03	1.8E-03	2.2E-03	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03
2327	8.8E-04	9.4E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	1.9E-03	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03
2328	8.6E-04	9.1E-04	1.1E-03	1.2E-03	1.4E-03	1.6E-03	1.9E-03	2.3E-03	2.5E-03	2.6E-03	2.8E-03	2.8E-03	2.9E-03
2329	8.2E-04	8.8E-04	1.1E-03	1.1E-03	1.3E-03	1.5E-03	1.8E-03	2.2E-03	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03
2330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2331	7.1E-04	7.8E-04	1.5E-04	-5.0E-04	-1.1E-03	-1.6E-03	-1.9E-03	-2.2E-03	-1.8E-03	-1.5E-03	-1.2E-03	-1.1E-03	-1.0E-03
2332	7.8E-04	8.5E-04	2.1E-04	-4.6E-04	-1.1E-03	-1.5E-03	-1.9E-03	-2.1E-03	-1.7E-03	-1.4E-03	-1.1E-03	-9.3E-04	-8.5E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2333	8.6E-04	9.5E-04	2.8E-04	-4.2E-04	-1.0E-03	-1.5E-03	-1.8E-03	-2.0E-03	-1.6E-03	-1.2E-03	-9.4E-04	-7.5E-04	-6.6E-04
2334	7.5E-04	8.2E-04	3.2E-04	-2.2E-04	-6.9E-04	-1.0E-03	-1.2E-03	-1.3E-03	-9.5E-04	-6.2E-04	-3.7E-04	-2.1E-04	-1.2E-04
2335	9.6E-04	1.0E-03	4.0E-04	-3.1E-04	-9.3E-04	-1.4E-03	-1.6E-03	-1.8E-03	-1.3E-03	-9.5E-04	-6.5E-04	-4.5E-04	-3.5E-04
2336	8.1E-04	8.9E-04	4.1E-04	-1.1E-04	-5.5E-04	-8.4E-04	-9.8E-04	-1.0E-03	-6.1E-04	-2.5E-04	1.7E-05	2.0E-04	2.9E-04
2337	7.0E-04	7.6E-04	4.2E-04	4.0E-05	-2.7E-04	-4.5E-04	-5.1E-04	-4.7E-04	-9.6E-05	2.2E-04	4.6E-04	6.2E-04	7.0E-04
2338	1.0E-03	1.1E-03	5.2E-04	-1.4E-04	-7.2E-04	-1.1E-03	-1.3E-03	-1.4E-03	-8.9E-04	-4.7E-04	-1.6E-04	5.6E-05	1.6E-04
2339	8.5E-04	9.3E-04	5.2E-04	5.5E-05	-3.3E-04	-5.5E-04	-6.2E-04	-5.9E-04	-1.5E-04	2.2E-04	5.1E-04	7.0E-04	7.9E-04
2340	7.3E-04	8.0E-04	5.1E-04	1.9E-04	-6.9E-05	-1.9E-04	-1.8E-04	-8.1E-05	3.1E-04	6.5E-04	9.0E-04	1.1E-03	1.2E-03
2341	7.6E-04	8.4E-04	6.1E-04	3.5E-04	1.6E-04	1.0E-04	1.8E-04	3.5E-04	7.4E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03
2342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2344	4.9E-04	5.5E-04	2.0E-05	-5.0E-04	-9.6E-04	-1.3E-03	-1.6E-03	-1.8E-03	-1.4E-03	-1.1E-03	-8.9E-04	-7.4E-04	-6.7E-04
2345	4.7E-04	5.2E-04	7.2E-05	-3.8E-04	-7.8E-04	-1.1E-03	-1.3E-03	-1.5E-03	-1.2E-03	-9.3E-04	-7.4E-04	-6.2E-04	-5.6E-04
2346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2349	5.8E-04	6.6E-04	4.0E-05	-5.9E-04	-1.1E-03	-1.6E-03	-2.0E-03	-2.3E-03	-2.0E-03	-1.7E-03	-1.5E-03	-1.4E-03	-1.3E-03
2350	5.3E-04	6.0E-04	2.5E-05	-5.5E-04	-1.1E-03	-1.5E-03	-1.8E-03	-2.1E-03	-1.7E-03	-1.4E-03	-1.2E-03	-1.1E-03	-1.0E-03
2351	5.1E-04	5.7E-04	8.9E-05	-4.1E-04	-8.4E-04	-1.2E-03	-1.5E-03	-1.7E-03	-1.4E-03	-1.1E-03	-9.1E-04	-7.9E-04	-7.3E-04
2352	4.8E-04	5.4E-04	9.0E-05	-3.6E-04	-7.5E-04	-1.1E-03	-1.3E-03	-1.4E-03	-1.1E-03	-8.3E-04	-6.3E-04	-5.0E-04	-4.4E-04
2353	4.5E-04	5.0E-04	2.2E-04	-9.6E-05	-3.7E-04	-5.9E-04	-7.4E-04	-8.4E-04	-6.4E-04	-4.8E-04	-3.5E-04	-2.7E-04	-2.3E-04
2354	4.2E-04	4.7E-04	2.7E-04	3.5E-05	-1.7E-04	-3.2E-04	-4.2E-04	-4.7E-04	-3.2E-04	-1.8E-04	-8.0E-05	-1.2E-05	2.2E-05
2355	3.9E-04	4.3E-04	2.8E-04	1.0E-04	-4.9E-05	-1.6E-04	-2.1E-04	-2.3E-04	-9.5E-05	2.5E-05	1.2E-04	1.8E-04	2.1E-04
2356	3.5E-04	3.9E-04	2.8E-04	1.4E-04	2.4E-05	-5.1E-05	-7.8E-05	-7.2E-05	5.7E-05	1.7E-04	2.5E-04	3.1E-04	3.4E-04
2357	5.3E-04	5.9E-04	9.4E-05	-4.1E-04	-8.5E-04	-1.2E-03	-1.4E-03	-1.6E-03	-1.3E-03	-9.6E-04	-7.4E-04	-5.9E-04	-5.2E-04
2358	4.9E-04	5.5E-04	2.4E-04	-9.0E-05	-3.9E-04	-6.2E-04	-7.9E-04	-9.1E-04	-7.0E-04	-5.3E-04	-4.0E-04	-3.2E-04	-2.7E-04
2359	4.5E-04	5.0E-04	2.9E-04	4.2E-05	-1.7E-04	-3.4E-04	-4.4E-04	-5.1E-04	-3.4E-04	-2.0E-04	-9.4E-05	-2.3E-05	1.3E-05
2360	4.1E-04	4.5E-04	2.9E-04	1.0E-04	-5.6E-05	-1.7E-04	-2.3E-04	-2.5E-04	-1.1E-04	2.1E-05	1.2E-04	1.8E-04	2.1E-04
2361	3.7E-04	4.1E-04	2.8E-04	1.3E-04	8.2E-06	-7.4E-05	-1.1E-04	-1.0E-04	3.6E-05	1.6E-04	2.4E-04	3.0E-04	3.3E-04
2362	3.4E-04	3.7E-04	2.6E-04	1.3E-04	3.1E-05	-3.2E-05	-4.8E-05	-2.9E-05	1.0E-04	2.2E-04	3.1E-04	3.7E-04	3.9E-04
2363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2365	4.7E-04	5.3E-04	3.0E-04	3.7E-05	-1.9E-04	-3.7E-04	-4.8E-04	-5.5E-04	-3.7E-04	-2.2E-04	-1.0E-04	-2.5E-05	1.3E-05
2366	4.2E-04	4.7E-04	2.9E-04	9.0E-05	-8.4E-05	-2.1E-04	-2.7E-04	-3.0E-04	-1.4E-04	-1.4E-06	1.0E-04	1.7E-04	2.1E-04
2367	3.8E-04	4.2E-04	2.8E-04	1.1E-04	-3.1E-05	-1.2E-04	-1.6E-04	-1.7E-04	-1.4E-05	1.2E-04	2.1E-04	2.8E-04	3.1E-04
2368	3.5E-04	3.8E-04	2.5E-04	1.0E-04	-2.0E-05	-9.8E-05	-1.2E-04	-1.1E-04	3.8E-05	1.7E-04	2.6E-04	3.3E-04	3.6E-04
2369	3.2E-04	3.5E-04	2.2E-04	7.7E-05	-3.6E-05	-1.1E-04	-1.2E-04	-1.1E-04	4.8E-05	1.8E-04	2.8E-04	3.4E-04	3.8E-04
2370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2375	4.9E-04	5.5E-04	3.0E-04	1.2E-05	-2.4E-04	-4.3E-04	-5.5E-04	-6.2E-04	-4.2E-04	-2.6E-04	-1.3E-04	-4.5E-05	-2.5E-06
2376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2377	4.0E-04	4.4E-04	2.6E-04	6.5E-05	-1.0E-04	-2.2E-04	-2.7E-04	-2.8E-04	-1.1E-04	3.8E-05	1.5E-04	2.2E-04	2.6E-04
2378	3.6E-04	4.0E-04	2.3E-04	4.8E-05	-1.0E-04	-2.0E-04	-2.5E-04	-2.5E-04	-7.3E-05	7.5E-05	1.9E-04	2.6E-04	3.0E-04
2379	3.3E-04	3.6E-04	2.0E-04	2.3E-05	-1.2E-04	-2.1E-04	-2.5E-04	-2.4E-04	-6.1E-05	9.0E-05	2.0E-04	2.8E-04	3.2E-04
2380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2386	4.6E-04	5.1E-04	2.6E-04	-7.3E-06	-2.4E-04	-4.1E-04	-5.2E-04	-5.7E-04	-3.6E-04	-1.9E-04	-5.4E-05	3.4E-05	7.8E-05
2387	4.1E-04	4.6E-04	2.3E-04	-8.1E-06	-2.1E-04	-3.6E-04	-4.4E-04	-4.7E-04	-2.7E-04	-9.9E-05	3.0E-05	1.2E-04	1.6E-04
2388	3.7E-04	4.1E-04	2.0E-04	-2.5E-05	-2.1E-04	-3.4E-04	-4.1E-04	-4.3E-04	-2.2E-04	-5.0E-05	8.0E-05	1.7E-04	2.1E-04
2389	3.4E-04	3.8E-04	1.7E-04	-4.5E-05	-2.2E-04	-3.4E-04	-4.0E-04	-4.1E-04	-2.0E-04	-3.0E-05	9.9E-05	1.8E-04	2.3E-04
2390	3.1E-04	3.4E-04	1.4E-04	-6.0E-05	-2.2E-04	-3.4E-04	-3.9E-04	-4.0E-04	-2.0E-04	-3.3E-05	9.2E-05	1.8E-04	2.2E-04
2391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2398	4.4E-04	4.8E-04	1.9E-04	-1.2E-04	-3.8E-04	-5.7E-04	-6.9E-04	-7.4E-04	-5.0E-04	-2.9E-04	-1.3E-04	-2.3E-05	2.9E-05
2399	3.9E-04	4.3E-04	1.6E-04	-1.2E-04	-3.6E-04	-5.3E-04	-6.3E-04	-6.7E-04	-4.2E-04	-2.2E-04	-6.0E-05	4.3E-05	9.5E-05
2400	3.5E-04	3.9E-04	1.3E-04	-1.3E-04	-3.5E-04	-5.0E-04	-5.9E-04	-6.2E-04	-3.8E-04	-1.9E-04	-3.7E-05	6.2E-05	1.1E-04
2401	3.2E-04	3.5E-04	1.1E-04	-1.3E-04	-3.4E-04	-4.8E-04	-5.6E-04	-5.9E-04	-3.7E-04	-1.9E-04	-4.6E-05	4.7E-05	9.3E-05
2402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2404	5.1E-04	5.7E-04	1.1E-04	-3.4E-04	-7.3E-04	-1.0E-03	-1.2E-03	-1.3E-03	-9.9E-04	-7.0E-04	-4.9E-04	-3.4E-04	-2.7E-04
2405	4.5E-04	5.0E-04	1.2E-04	-2.6E-04	-5.9E-04	-8.3E-04	-9.9E-04	-1.1E-03	-7.7E-04	-5.1E-04	-3.2E-04	-1.9E-04	-1.3E-04
2406	4.1E-04	4.5E-04	1.0E-04	-2.4E-04	-5.3E-04	-7.5E-04	-8.8E-04	-9.4E-04	-6.5E-04	-4.1E-04	-2.3E-04	-1.1E-04	-4.4E-05
2407	3.7E-04	4.1E-04	8.4E-05	-2.3E-04	-5.0E-04	-6.9E-04	-8.1E-04	-8.6E-04	-5.9E-04	-3.6E-04	-1.9E-04	-7.8E-05	-2.1E-05
2408	3.3E-04	3.7E-04	6.5E-05	-2.3E-04	-4.8E-04	-6.6E-04	-7.7E-04	-8.2E-04	-5.6E-04	-3.5E-04	-1.9E-04	-7.9E-05	-2.5E-05
2409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2411	6.0E-04	6.7E-04	7.7E-05	-5.3E-04	-1.1E-03	-1.5E-03	-1.8E-03	-2.0E-03	-1.6E-03	-1.3E-03	-1.1E-03	-9.3E-04	-8.5E-04
2412	5.3E-04	5.9E-04	8.0E-05	-4.3E-04	-8.8E-04	-1.2E-03	-1.5E-03	-1.6E-03	-1.3E-03	-9.9E-04	-7.7E-04	-6.2E-04	-5.4E-04
2413	4.7E-04	5.2E-04	8.4E-05	-3.5E-04	-7.3E-04	-1.0E-03	-1.2E-03	-1.3E-03	-1.0E-03	-7.4E-04	-5.3E-04	-4.0E-04	-3.3E-04
2414	4.2E-04	4.7E-04	7.9E-05	-3.1E-04	-6.3E-04	-8.9E-04	-1.1E-03	-1.1E-03	-8.5E-04	-6.0E-04	-4.1E-04	-2.9E-04	-2.3E-04
2415	3.8E-04	4.2E-04	6.9E-05	-2.8E-04	-5.7E-04	-8.0E-04	-9.4E-04	-1.0E-03	-7.5E-04	-5.3E-04	-3.6E-04	-2.4E-04	-1.9E-04
2416	3.5E-04	3.8E-04	6.2E-05	-2.5E-04	-5.2E-04	-7.2E-04	-8.5E-04	-9.3E-04	-6.8E-04	-4.7E-04	-3.2E-04	-2.1E-04	-1.6E-04
2417	3.2E-04	3.5E-04	6.3E-05	-2.2E-04	-4.6E-04	-6.4E-04	-7.5E-04	-8.1E-04	-5.8E-04	-3.9E-04	-2.5E-04	-1.5E-04	-1.0E-04
2418	2.5E-04	2.4E-04	1.9E-04	1.6E-04	1.7E-04	2.2E-04	3.1E-04	4.3E-04	5.7E-04	6.8E-04	7.6E-04	8.2E-04	8.5E-04
2419	6.4E-04	7.1E-04	4.8E-05	-6.3E-04	-1.2E-03	-1.7E-03	-2.1E-03	-2.4E-03	-2.0E-03	-1.7E-03	-1.4E-03	-1.3E-03	-1.2E-03
2420	5.6E-04	6.2E-04	6.9E-05	-4.9E-04	-9.9E-04	-1.4E-03	-1.7E-03	-1.9E-03	-1.5E-03	-1.2E-03	-1.0E-03	-8.7E-04	-8.0E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2421	4.9E-04	5.5E-04	9.2E-05	-3.7E-04	-7.7E-04	-1.1E-03	-1.3E-03	-1.5E-03	-1.2E-03	-9.0E-04	-7.1E-04	-5.8E-04	-5.2E-04
2422	4.4E-04	4.9E-04	9.3E-05	-3.1E-04	-6.5E-04	-9.3E-04	-1.1E-03	-1.2E-03	-9.7E-04	-7.4E-04	-5.7E-04	-4.5E-04	-3.9E-04
2423	3.9E-04	4.3E-04	8.5E-05	-2.7E-04	-5.7E-04	-8.1E-04	-9.8E-04	-1.1E-03	-8.4E-04	-6.3E-04	-4.8E-04	-3.8E-04	-3.2E-04
2424	3.6E-04	3.9E-04	8.4E-05	-2.3E-04	-5.0E-04	-7.1E-04	-8.5E-04	-9.4E-04	-7.2E-04	-5.3E-04	-3.9E-04	-3.0E-04	-2.5E-04
2425	3.3E-04	3.7E-04	9.2E-05	-1.8E-04	-4.2E-04	-6.0E-04	-7.1E-04	-7.8E-04	-5.7E-04	-4.0E-04	-2.7E-04	-1.8E-04	-1.3E-04
2426	3.1E-04	3.4E-04	1.0E-04	-1.4E-04	-3.4E-04	-4.9E-04	-5.8E-04	-6.2E-04	-4.3E-04	-2.6E-04	-1.4E-04	-5.4E-05	-1.2E-05
2427	5.9E-04	6.5E-04	7.4E-05	-5.2E-04	-1.0E-03	-1.5E-03	-1.8E-03	-2.0E-03	-1.7E-03	-1.4E-03	-1.2E-03	-1.0E-03	-9.7E-04
2428	5.2E-04	5.7E-04	9.9E-05	-3.8E-04	-8.1E-04	-1.2E-03	-1.4E-03	-1.6E-03	-1.3E-03	-1.0E-03	-8.5E-04	-7.3E-04	-6.6E-04
2429	4.6E-04	5.1E-04	1.0E-04	-3.1E-04	-6.7E-04	-9.6E-04	-1.2E-03	-1.3E-03	-1.1E-03	-8.4E-04	-6.7E-04	-5.6E-04	-5.1E-04
2430	4.2E-04	4.6E-04	1.0E-04	-2.6E-04	-5.8E-04	-8.3E-04	-1.0E-03	-1.1E-03	-9.0E-04	-7.0E-04	-5.5E-04	-4.5E-04	-4.0E-04
2431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2432	3.5E-04	3.8E-04	1.1E-04	-1.6E-04	-4.0E-04	-5.7E-04	-6.8E-04	-7.5E-04	-5.4E-04	-3.7E-04	-2.4E-04	-1.6E-04	-1.1E-04
2433	3.3E-04	3.6E-04	1.3E-04	-1.1E-04	-3.1E-04	-4.5E-04	-5.3E-04	-5.7E-04	-3.7E-04	-2.1E-04	-8.5E-05	-3.3E-06	3.8E-05
2434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2435	6.2E-04	6.9E-04	7.6E-05	-5.5E-04	-1.1E-03	-1.6E-03	-1.9E-03	-2.2E-03	-1.9E-03	-1.6E-03	-1.4E-03	-1.2E-03	-1.1E-03
2436	5.4E-04	6.0E-04	1.0E-04	-4.1E-04	-8.7E-04	-1.2E-03	-1.5E-03	-1.7E-03	-1.4E-03	-1.2E-03	-9.8E-04	-8.6E-04	-8.0E-04
2437	4.8E-04	5.3E-04	1.1E-04	-3.2E-04	-7.0E-04	-1.0E-03	-1.2E-03	-1.4E-03	-1.1E-03	-9.2E-04	-7.5E-04	-6.4E-04	-5.9E-04
2438	4.4E-04	4.8E-04	1.2E-04	-2.5E-04	-5.8E-04	-8.4E-04	-1.0E-03	-1.1E-03	-9.1E-04	-7.1E-04	-5.6E-04	-4.5E-04	-4.0E-04
2439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2440	3.7E-04	4.0E-04	1.4E-04	-1.3E-04	-3.7E-04	-5.4E-04	-6.4E-04	-6.9E-04	-4.8E-04	-3.0E-04	-1.7E-04	-8.2E-05	-3.8E-05
2441	3.4E-04	3.8E-04	1.5E-04	-7.9E-05	-2.7E-04	-4.1E-04	-4.7E-04	-5.0E-04	-3.0E-04	-1.3E-04	-1.5E-06	8.3E-05	1.3E-04
2442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2443	5.8E-04	6.4E-04	1.3E-04	-4.0E-04	-8.8E-04	-1.3E-03	-1.5E-03	-1.8E-03	-1.4E-03	-1.2E-03	-9.9E-04	-8.6E-04	-8.0E-04
2444	5.2E-04	5.7E-04	1.4E-04	-3.1E-04	-7.0E-04	-1.0E-03	-1.2E-03	-1.4E-03	-1.1E-03	-9.0E-04	-7.2E-04	-6.1E-04	-5.5E-04
2445	4.7E-04	5.1E-04	1.5E-04	-2.3E-04	-5.6E-04	-8.1E-04	-9.8E-04	-1.1E-03	-8.4E-04	-6.3E-04	-4.7E-04	-3.7E-04	-3.1E-04
2446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2447	3.9E-04	4.3E-04	1.7E-04	-9.4E-05	-3.2E-04	-4.8E-04	-5.6E-04	-6.0E-04	-3.7E-04	-1.8E-04	-4.3E-05	5.1E-05	9.8E-05
2448	3.7E-04	4.0E-04	1.9E-04	-4.0E-05	-2.3E-04	-3.5E-04	-4.0E-04	-4.0E-04	-1.9E-04	-1.3E-05	1.2E-04	2.1E-04	2.5E-04
2449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2451	6.2E-04	6.9E-04	1.8E-04	-3.6E-04	-8.3E-04	-1.2E-03	-1.5E-03	-1.7E-03	-1.3E-03	-1.1E-03	-8.7E-04	-7.3E-04	-6.6E-04
2452	5.6E-04	6.1E-04	1.9E-04	-2.6E-04	-6.5E-04	-9.4E-04	-1.1E-03	-1.3E-03	-9.9E-04	-7.4E-04	-5.6E-04	-4.3E-04	-3.7E-04
2453	5.0E-04	5.5E-04	2.0E-04	-1.7E-04	-4.9E-04	-7.2E-04	-8.7E-04	-9.5E-04	-6.8E-04	-4.5E-04	-2.8E-04	-1.6E-04	-1.1E-04
2454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2459	6.0E-04	6.6E-04	2.5E-04	-1.8E-04	-5.5E-04	-8.2E-04	-9.8E-04	-1.1E-03	-7.5E-04	-4.9E-04	-2.8E-04	-1.5E-04	-8.3E-05
2460	5.4E-04	5.9E-04	2.7E-04	-8.0E-05	-3.7E-04	-5.7E-04	-6.7E-04	-7.1E-04	-4.2E-04	-1.7E-04	1.7E-05	1.4E-04	2.0E-04
2461	4.9E-04	5.4E-04	2.8E-04	-2.9E-06	-2.3E-04	-3.8E-04	-4.3E-04	-4.2E-04	-1.5E-04	7.4E-05	2.4E-04	3.6E-04	4.1E-04
2462	4.5E-04	4.9E-04	2.8E-04	5.5E-05	-1.2E-04	-2.3E-04	-2.5E-04	-2.1E-04	3.9E-05	2.5E-04	4.1E-04	5.1E-04	5.6E-04
2463	4.1E-04	4.5E-04	2.8E-04	9.9E-05	-4.2E-05	-1.1E-04	-1.1E-04	-4.8E-05	1.8E-04	3.8E-04	5.2E-04	6.2E-04	6.7E-04
2464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2466	5.8E-04	6.3E-04	3.4E-04	2.7E-05	-2.3E-04	-3.9E-04	-4.4E-04	-4.1E-04	-9.9E-05	1.7E-04	3.7E-04	5.0E-04	5.7E-04
2467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2468	4.7E-04	5.2E-04	3.5E-04	1.6E-04	1.2E-05	-5.2E-05	-3.1E-05	5.1E-05	3.1E-04	5.3E-04	6.9E-04	8.0E-04	8.5E-04
2469	4.3E-04	4.8E-04	3.4E-04	1.9E-04	8.2E-05	4.5E-05	8.5E-05	1.8E-04	4.2E-04	6.2E-04	7.7E-04	8.7E-04	9.2E-04
2470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2472	6.1E-04	6.7E-04	4.2E-04	1.5E-04	-6.9E-05	-1.7E-04	-1.7E-04	-8.7E-05	2.5E-04	5.3E-04	7.5E-04	8.9E-04	9.6E-04
2473	5.5E-04	6.0E-04	4.2E-04	2.2E-04	6.3E-05	4.2E-06	4.3E-05	1.5E-04	4.5E-04	7.0E-04	8.9E-04	1.0E-03	1.1E-03
2474	5.0E-04	5.5E-04	4.2E-04	2.6E-04	1.5E-04	1.2E-04	1.8E-04	3.1E-04	5.7E-04	8.0E-04	9.7E-04	1.1E-03	1.1E-03
2475	4.6E-04	5.1E-04	4.0E-04	2.8E-04	2.0E-04	2.0E-04	2.7E-04	4.0E-04	6.4E-04	8.5E-04	1.0E-03	1.1E-03	1.2E-03
2476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2479	6.5E-04	7.1E-04	5.1E-04	2.8E-04	1.1E-04	5.2E-05	1.1E-04	2.5E-04	6.0E-04	8.9E-04	1.1E-03	1.3E-03	1.3E-03
2480	5.9E-04	6.5E-04	5.1E-04	3.4E-04	2.2E-04	2.0E-04	2.8E-04	4.4E-04	7.4E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03
2481	5.3E-04	5.9E-04	4.9E-04	3.6E-04	2.8E-04	2.9E-04	3.9E-04	5.5E-04	8.3E-04	1.1E-03	1.2E-03	1.4E-03	1.4E-03
2482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2486	6.9E-04	7.6E-04	6.1E-04	4.2E-04	3.0E-04	2.9E-04	4.0E-04	6.0E-04	9.5E-04	1.3E-03	1.5E-03	1.6E-03	1.7E-03
2487	6.3E-04	7.0E-04	6.0E-04	4.7E-04	3.8E-04	4.0E-04	5.3E-04	7.3E-04	1.0E-03	1.3E-03	1.5E-03	1.7E-03	1.7E-03
2488	5.7E-04	6.3E-04	5.6E-04	4.7E-04	4.2E-04	4.6E-04	6.0E-04	8.0E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03
2489	3.4E-04	3.0E-04	1.5E-04	5.8E-05	3.3E-05	3.1E-05	6.1E-05	1.2E-04	2.4E-04	3.3E-04	4.0E-04	4.4E-04	4.7E-04
2490	6.8E-04	7.5E-04	6.8E-04	5.8E-04	5.4E-04	5.9E-04	7.7E-04	1.0E-03	1.3E-03	1.6E-03	1.9E-03	2.0E-03	2.1E-03
2491	5.9E-04	6.6E-04	6.3E-04	5.7E-04	5.6E-04	6.3E-04	8.0E-04	1.0E-03	1.3E-03	1.6E-03	1.8E-03	1.9E-03	1.9E-03
2492	2.8E-04	2.6E-04	1.5E-04	7.0E-05	5.8E-05	6.9E-05	1.2E-04	2.1E-04	3.5E-04	4.7E-04	5.6E-04	6.2E-04	6.5E-04
2493	2.8E-04	2.6E-04	1.5E-04	8.2E-05	7.8E-05	1.0E-04	1.7E-04	2.7E-04	4.3E-04	5.6E-04	6.6E-04	7.2E-04	7.5E-04
2494	2.8E-04	2.6E-04	1.8E-04	1.5E-04	1.9E-04	2.5E-04	3.7E-04	5.3E-04	7.1E-04	8.6E-04	9.7E-04	1.0E-03	1.1E-03
2495	2.7E-04	2.6E-04	1.8E-04	1.4E-04	1.6E-04	2.1E-04	3.0E-04	4.3E-04	6.0E-04	7.4E-04	8.4E-04	9.1E-04	9.4E-04
2496	2.7E-04	2.6E-04	1.8E-04	1.4E-04	1.6E-04	2.0E-04	3.0E-04	4.3E-04	5.9E-04	7.3E-04	8.3E-04	8.9E-04	9.3E-04
2497	2.6E-04	2.6E-04	1.9E-04	1.6E-04	1.8E-04	2.4E-04	3.5E-04	5.0E-04	6.7E-04	8.1E-04	9.2E-04	9.9E-04	1.0E-03
2498	2.6E-04	2.6E-04	2.0E-04	1.8E-04	2.1E-04	2.7E-04	3.8E-04	5.3E-04	6.9E-04	8.3E-04	9.3E-04	1.0E-03	1.0E-03
2499	2.6E-04	2.6E-04	2.1E-04	1.9E-04	2.3E-04	2.9E-04	3.9E-04	5.4E-04	6.9E-04	8.1E-04	9.0E-04	9.7E-04	1.0E-03
2500	2.6E-04	2.5E-04	2.2E-04	2.1E-04	2.5E-04	3.1E-04	4.2E-04	5.6E-04	7.1E-04	8.3E-04	9.2E-04	9.8E-04	1.0E-03
2501	2.5E-04	2.5E-04	2.2E-04	2.2E-04	2.7E-04	3.4E-04	4.5E-04	6.0E-04	7.4E-04	8.6E-04	9.5E-04	1.0E-03	1.0E-03
2502	2.5E-04	2.5E-04	2.3E-04	2.4E-04	2.9E-04	3.6E-04	4.8E-04	6.3E-04	7.7E-04	8.9E-04	9.8E-04	1.0E-03	1.1E-03
2503	2.4E-04	2.5E-04	2.4E-04	2.5E-04	3.1E-04	3.8E-04	5.0E-04	6.6E-04	8.0E-04	9.2E-04	1.0E-03	1.1E-03	1.1E-03
2504	2.4E-04	2.5E-04	2.4E-04	2.6E-04	3.2E-04	4.0E-04	5.3E-04	6.9E-04	8.3E-04	9.4E-04	1.0E-03	1.1E-03	1.1E-03
2505	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.8E-04	4.7E-04	6.1E-04	8.0E-04	9.4E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03
2506	2.9E-04	3.1E-04	3.2E-04	3.5E-04	4.3E-04	5.4E-04	7.0E-04	9.2E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03
2507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2508	2.8E-04	2.6E-04	1.5E-04	7.2E-05	5.9E-05	6.5E-05	1.1E-04	1.8E-04	3.1E-04	4.1E-04	4.9E-04	5.4E-04	5.6E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2509	2.7E-04	2.4E-04	1.2E-04	3.8E-05	8.5E-06	-9.3E-07	2.3E-05	7.6E-05	1.9E-04	2.8E-04	3.5E-04	3.9E-04	4.2E-04
2510	2.4E-04	2.2E-04	1.2E-04	3.9E-05	1.5E-05	1.1E-05	4.0E-05	1.0E-04	2.1E-04	3.0E-04	3.7E-04	4.2E-04	4.4E-04
2511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2512	2.0E-04	1.9E-04	9.3E-05	2.1E-05	-5.5E-06	-1.0E-05	2.0E-05	8.2E-05	2.0E-04	3.1E-04	3.8E-04	4.3E-04	4.6E-04
2513	2.1E-04	1.9E-04	8.7E-05	1.1E-05	-1.8E-05	-2.3E-05	8.2E-06	7.4E-05	2.1E-04	3.2E-04	4.0E-04	4.5E-04	4.8E-04
2514	2.1E-04	2.0E-04	9.0E-05	1.3E-05	-1.8E-05	-2.6E-05	4.2E-07	6.1E-05	1.9E-04	2.9E-04	3.7E-04	4.2E-04	4.5E-04
2515	2.2E-04	2.0E-04	9.7E-05	2.0E-05	-1.1E-05	-2.3E-05	-2.9E-07	5.4E-05	1.7E-04	2.7E-04	3.4E-04	3.9E-04	4.1E-04
2516	2.3E-04	2.2E-04	1.0E-04	2.8E-05	-3.0E-06	-1.5E-05	6.0E-06	5.8E-05	1.7E-04	2.6E-04	3.3E-04	3.8E-04	4.0E-04
2517	2.5E-04	2.3E-04	1.1E-04	3.7E-05	9.0E-06	-4.8E-07	2.3E-05	7.7E-05	1.9E-04	2.8E-04	3.5E-04	3.9E-04	4.2E-04
2518	2.6E-04	2.4E-04	1.3E-04	5.0E-05	2.8E-05	2.3E-05	5.1E-05	1.1E-04	2.2E-04	3.1E-04	3.8E-04	4.3E-04	4.5E-04
2519	2.3E-04	2.2E-04	1.3E-04	7.5E-05	6.5E-05	7.5E-05	1.2E-04	1.9E-04	3.1E-04	4.0E-04	4.7E-04	5.2E-04	5.4E-04
2520	2.3E-04	2.2E-04	1.4E-04	8.1E-05	7.5E-05	9.0E-05	1.4E-04	2.2E-04	3.4E-04	4.4E-04	5.2E-04	5.7E-04	5.9E-04
2521	2.3E-04	2.2E-04	1.4E-04	8.4E-05	8.2E-05	1.0E-04	1.6E-04	2.6E-04	4.0E-04	5.1E-04	6.0E-04	6.5E-04	6.8E-04
2522	2.4E-04	2.2E-04	1.2E-04	5.4E-05	3.4E-05	3.1E-05	5.9E-05	1.2E-04	2.2E-04	3.1E-04	3.7E-04	4.2E-04	4.4E-04
2523	1.9E-04	1.8E-04	9.3E-05	2.9E-05	5.2E-06	1.7E-06	3.0E-05	8.7E-05	2.0E-04	2.9E-04	3.6E-04	4.0E-04	4.3E-04
2524	2.3E-04	2.1E-04	1.2E-04	6.2E-05	4.5E-05	4.7E-05	7.9E-05	1.4E-04	2.4E-04	3.3E-04	3.9E-04	4.4E-04	4.6E-04
2525	2.2E-04	2.2E-04	1.4E-04	9.5E-05	1.0E-04	1.4E-04	2.3E-04	3.5E-04	5.1E-04	6.5E-04	7.5E-04	8.2E-04	8.5E-04
2526	2.2E-04	2.2E-04	1.2E-04	6.1E-05	6.4E-05	1.0E-04	2.0E-04	3.4E-04	5.4E-04	7.1E-04	8.4E-04	9.2E-04	9.6E-04
2527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2530	3.6E-04	3.8E-04	4.4E-04	5.1E-04	6.2E-04	7.2E-04	8.8E-04	1.1E-03	1.2E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03
2531	3.6E-04	3.9E-04	4.5E-04	5.2E-04	6.3E-04	7.2E-04	8.7E-04	1.1E-03	1.2E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
2532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2533	3.7E-04	3.9E-04	4.5E-04	5.2E-04	6.3E-04	7.1E-04	8.6E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03
2534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2536	3.7E-04	3.9E-04	4.5E-04	5.2E-04	6.2E-04	7.0E-04	8.4E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03
2537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2553	4.4E-04	4.7E-04	5.4E-04	6.1E-04	7.2E-04	7.8E-04	9.0E-04	1.1E-03	1.2E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
2554	5.0E-04	5.4E-04	6.2E-04	6.9E-04	8.0E-04	8.4E-04	9.6E-04	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03
2555	6.0E-04	6.4E-04	7.2E-04	8.0E-04	9.1E-04	9.1E-04	1.0E-03	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03
2556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2561	4.7E-04	5.1E-04	5.7E-04	6.3E-04	7.3E-04	7.7E-04	8.8E-04	1.1E-03	1.2E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
2562	5.5E-04	5.9E-04	6.6E-04	7.2E-04	8.1E-04	8.2E-04	9.2E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03
2563	6.3E-04	6.8E-04	7.0E-04	7.2E-04	7.9E-04	7.4E-04	8.1E-04	1.0E-03	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03
2564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2573	5.9E-04	6.3E-04	6.6E-04	6.9E-04	7.6E-04	7.3E-04	8.0E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03
2574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2581	2.2E-04	2.2E-04	1.4E-04	9.7E-05	1.2E-04	1.8E-04	3.0E-04	4.7E-04	6.9E-04	8.7E-04	1.0E-03	1.1E-03	1.1E-03
2582	2.0E-04	2.0E-04	1.1E-04	6.7E-05	7.7E-05	1.2E-04	2.2E-04	3.7E-04	5.7E-04	7.4E-04	8.6E-04	9.5E-04	9.9E-04
2583	2.3E-04	2.2E-04	1.6E-04	1.3E-04	1.5E-04	2.0E-04	3.0E-04	4.3E-04	5.9E-04	7.3E-04	8.3E-04	8.9E-04	9.3E-04
2584	2.0E-04	2.0E-04	1.3E-04	9.0E-05	1.1E-04	1.6E-04	2.7E-04	4.2E-04	6.3E-04	7.9E-04	9.1E-04	9.9E-04	1.0E-03
2585	2.3E-04	2.3E-04	1.8E-04	1.6E-04	1.8E-04	2.4E-04	3.3E-04	4.6E-04	6.1E-04	7.3E-04	8.2E-04	8.8E-04	9.1E-04
2586	1.8E-04	1.8E-04	1.1E-04	6.8E-05	8.2E-05	1.3E-04	2.3E-04	3.8E-04	5.8E-04	7.4E-04	8.7E-04	9.5E-04	9.9E-04
2587	2.0E-04	2.0E-04	1.5E-04	1.3E-04	1.5E-04	2.0E-04	3.0E-04	4.3E-04	6.0E-04	7.3E-04	8.3E-04	9.0E-04	9.3E-04
2588	2.2E-04	2.3E-04	1.9E-04	1.7E-04	2.1E-04	2.6E-04	3.6E-04	4.9E-04	6.4E-04	7.6E-04	8.4E-04	9.0E-04	9.3E-04
2589	1.6E-04	1.7E-04	7.2E-05	1.0E-05	-5.3E-06	1.4E-05	8.0E-05	1.9E-04	3.7E-04	5.2E-04	6.4E-04	7.1E-04	7.5E-04
2590	1.8E-04	1.8E-04	1.1E-04	8.1E-05	1.0E-04	1.6E-04	2.7E-04	4.3E-04	6.4E-04	8.1E-04	9.3E-04	1.0E-03	1.1E-03
2591	2.0E-04	2.0E-04	1.6E-04	1.5E-04	1.7E-04	2.3E-04	3.3E-04	4.6E-04	6.1E-04	7.3E-04	8.2E-04	8.9E-04	9.2E-04
2592	2.2E-04	2.2E-04	1.9E-04	1.9E-04	2.3E-04	2.9E-04	3.9E-04	5.3E-04	6.7E-04	7.8E-04	8.7E-04	9.3E-04	9.6E-04
2593	1.6E-04	1.7E-04	7.6E-05	1.8E-05	7.8E-06	3.5E-05	1.1E-04	2.3E-04	4.2E-04	5.8E-04	6.9E-04	7.7E-04	8.1E-04
2594	1.8E-04	1.8E-04	1.2E-04	9.8E-05	1.2E-04	1.8E-04	2.9E-04	4.4E-04	6.3E-04	7.8E-04	9.0E-04	9.7E-04	1.0E-03
2595	2.0E-04	2.0E-04	1.7E-04	1.6E-04	1.9E-04	2.5E-04	3.5E-04	4.9E-04	6.3E-04	7.5E-04	8.4E-04	9.0E-04	9.3E-04
2596	2.2E-04	2.2E-04	2.0E-04	2.0E-04	2.4E-04	3.1E-04	4.2E-04	5.6E-04	7.0E-04	8.1E-04	9.0E-04	9.6E-04	9.8E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2597	1.5E-04	1.5E-04	4.8E-05	-2.7E-05	-5.5E-05	-4.6E-05	1.1E-05	1.1E-04	3.0E-04	4.6E-04	5.8E-04	6.5E-04	6.9E-04
2598	1.6E-04	1.7E-04	7.8E-05	2.2E-05	1.6E-05	5.0E-05	1.4E-04	2.7E-04	4.7E-04	6.4E-04	7.6E-04	8.5E-04	8.9E-04
2599	1.8E-04	1.8E-04	1.3E-04	1.1E-04	1.4E-04	2.0E-04	3.0E-04	4.5E-04	6.3E-04	7.7E-04	8.8E-04	9.5E-04	9.9E-04
2600	2.0E-04	2.0E-04	1.8E-04	1.7E-04	2.1E-04	2.7E-04	3.7E-04	5.1E-04	6.5E-04	7.7E-04	8.6E-04	9.2E-04	9.5E-04
2601	2.2E-04	2.2E-04	2.1E-04	2.1E-04	2.6E-04	3.3E-04	4.4E-04	5.9E-04	7.2E-04	8.4E-04	9.2E-04	9.8E-04	1.0E-03
2602	1.5E-04	1.6E-04	5.0E-05	-2.3E-05	-5.0E-05	-3.8E-05	2.1E-05	1.2E-04	3.2E-04	4.8E-04	6.0E-04	6.8E-04	7.2E-04
2603	1.6E-04	1.7E-04	8.3E-05	3.2E-05	3.2E-05	7.3E-05	1.6E-04	3.0E-04	5.1E-04	6.8E-04	8.1E-04	9.0E-04	9.4E-04
2604	1.8E-04	1.8E-04	1.4E-04	1.2E-04	1.5E-04	2.1E-04	3.2E-04	4.6E-04	6.3E-04	7.8E-04	8.8E-04	9.5E-04	9.9E-04
2605	2.0E-04	2.0E-04	1.8E-04	1.8E-04	2.2E-04	2.8E-04	3.9E-04	5.3E-04	6.8E-04	7.9E-04	8.8E-04	9.4E-04	9.7E-04
2606	2.2E-04	2.2E-04	2.1E-04	2.2E-04	2.7E-04	3.4E-04	4.6E-04	6.1E-04	7.5E-04	8.6E-04	9.5E-04	1.0E-03	1.0E-03
2607	1.4E-04	1.4E-04	1.2E-04	1.0E-04	1.2E-04	1.6E-04	2.3E-04	3.2E-04	4.3E-04	5.2E-04	5.9E-04	6.4E-04	6.6E-04
2608	1.5E-04	1.6E-04	5.2E-05	-2.1E-05	-4.5E-05	-3.2E-05	3.0E-05	1.4E-04	3.3E-04	5.0E-04	6.2E-04	7.0E-04	7.4E-04
2609	1.6E-04	1.7E-04	8.7E-05	3.9E-05	3.9E-05	7.9E-05	1.7E-04	3.1E-04	5.1E-04	6.7E-04	8.0E-04	8.8E-04	9.2E-04
2610	1.8E-04	1.8E-04	1.4E-04	1.3E-04	1.6E-04	2.2E-04	3.3E-04	4.8E-04	6.5E-04	8.0E-04	9.0E-04	9.7E-04	1.0E-03
2611	2.0E-04	2.0E-04	1.8E-04	1.8E-04	2.3E-04	2.9E-04	4.0E-04	5.5E-04	7.0E-04	8.2E-04	9.1E-04	9.7E-04	1.0E-03
2612	2.1E-04	2.2E-04	2.1E-04	2.3E-04	2.8E-04	3.6E-04	4.8E-04	6.3E-04	7.7E-04	8.9E-04	9.8E-04	1.0E-03	1.1E-03
2613	2.3E-04	2.4E-04	2.4E-04	2.6E-04	3.3E-04	4.1E-04	5.4E-04	7.1E-04	8.5E-04	9.7E-04	1.1E-03	1.1E-03	1.1E-03
2614	1.4E-04	1.5E-04	1.2E-04	1.1E-04	1.3E-04	1.7E-04	2.4E-04	3.4E-04	4.5E-04	5.4E-04	6.0E-04	6.5E-04	6.7E-04
2615	1.5E-04	1.6E-04	5.6E-05	-1.4E-05	-3.7E-05	-2.1E-05	4.4E-05	1.5E-04	3.5E-04	5.1E-04	6.4E-04	7.2E-04	7.6E-04
2616	1.6E-04	1.7E-04	9.1E-05	4.3E-05	4.5E-05	8.6E-05	1.8E-04	3.1E-04	5.2E-04	6.8E-04	8.1E-04	8.9E-04	9.3E-04
2617	1.8E-04	1.8E-04	1.4E-04	1.3E-04	1.6E-04	2.2E-04	3.4E-04	4.9E-04	6.7E-04	8.2E-04	9.3E-04	1.0E-03	1.0E-03
2618	2.0E-04	2.0E-04	1.8E-04	1.8E-04	2.3E-04	3.0E-04	4.1E-04	5.6E-04	7.2E-04	8.5E-04	9.4E-04	1.0E-03	1.0E-03
2619	2.1E-04	2.2E-04	2.1E-04	2.3E-04	2.8E-04	3.6E-04	4.9E-04	6.5E-04	8.0E-04	9.2E-04	1.0E-03	1.1E-03	1.1E-03
2620	2.3E-04	2.4E-04	2.4E-04	2.6E-04	3.3E-04	4.2E-04	5.5E-04	7.2E-04	8.7E-04	9.9E-04	1.1E-03	1.1E-03	1.2E-03
2621	1.5E-04	1.6E-04	5.5E-05	-1.5E-05	-3.6E-05	-1.9E-05	4.8E-05	1.6E-04	3.6E-04	5.3E-04	6.5E-04	7.4E-04	7.8E-04
2622	1.6E-04	1.7E-04	8.6E-05	3.4E-05	3.4E-05	7.5E-05	1.7E-04	3.1E-04	5.3E-04	7.0E-04	8.3E-04	9.2E-04	9.7E-04
2623	1.8E-04	1.9E-04	1.3E-04	1.1E-04	1.4E-04	2.0E-04	3.2E-04	4.8E-04	6.8E-04	8.5E-04	9.7E-04	1.1E-03	1.1E-03
2624	1.9E-04	2.0E-04	1.7E-04	1.6E-04	2.0E-04	2.8E-04	4.0E-04	5.6E-04	7.4E-04	8.9E-04	1.0E-03	1.1E-03	1.1E-03
2625	2.1E-04	2.2E-04	2.0E-04	2.1E-04	2.7E-04	3.6E-04	4.9E-04	6.7E-04	8.4E-04	9.8E-04	1.1E-03	1.2E-03	1.2E-03
2626	2.3E-04	2.4E-04	2.3E-04	2.5E-04	3.1E-04	4.1E-04	5.6E-04	7.5E-04	9.2E-04	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2627	2.5E-04	2.6E-04	2.6E-04	2.8E-04	3.6E-04	4.6E-04	6.1E-04	8.1E-04	9.9E-04	1.1E-03	1.3E-03	1.3E-03	1.4E-03
2628	1.5E-04	1.6E-04	5.4E-05	-1.7E-05	-3.9E-05	-2.0E-05	5.0E-05	1.7E-04	3.8E-04	5.5E-04	6.8E-04	7.6E-04	8.0E-04
2629	1.6E-04	1.7E-04	3.9E-05	-4.7E-05	-7.0E-05	-3.9E-05	5.7E-05	2.1E-04	4.9E-04	7.2E-04	8.9E-04	1.0E-03	1.1E-03
2630	1.8E-04	1.9E-04	6.0E-05	-1.4E-05	-1.6E-05	4.1E-05	1.7E-04	3.7E-04	6.8E-04	9.4E-04	1.1E-03	1.3E-03	1.3E-03
2631	1.9E-04	2.0E-04	6.4E-05	-1.2E-05	-9.0E-06	6.1E-05	2.1E-04	4.4E-04	7.9E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03
2632	2.1E-04	2.2E-04	1.6E-04	1.6E-04	2.2E-04	3.4E-04	5.4E-04	8.0E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03
2633	2.3E-04	2.4E-04	2.1E-04	2.3E-04	3.0E-04	4.1E-04	5.8E-04	8.0E-04	1.0E-03	1.2E-03	1.4E-03	1.5E-03	1.5E-03
2634	2.5E-04	2.6E-04	2.5E-04	2.7E-04	3.4E-04	4.5E-04	6.2E-04	8.5E-04	1.1E-03	1.2E-03	1.4E-03	1.5E-03	1.5E-03
2635	1.5E-04	1.6E-04	9.0E-05	4.6E-05	4.6E-05	8.0E-05	1.6E-04	2.8E-04	4.6E-04	6.1E-04	7.2E-04	7.9E-04	8.3E-04
2636	1.6E-04	1.7E-04	-5.1E-05	-2.0E-04	-2.7E-04	-2.7E-04	-1.7E-04	7.5E-06	4.0E-04	7.1E-04	9.5E-04	1.1E-03	1.2E-03
2637	1.8E-04	1.9E-04	-8.7E-06	-1.2E-04	-1.4E-04	-8.0E-05	8.5E-05	3.4E-04	7.8E-04	1.1E-03	1.4E-03	1.6E-03	1.7E-03
2638	1.9E-04	2.0E-04	1.0E-04	4.7E-05	6.2E-05	1.3E-04	2.7E-04	4.8E-04	7.8E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03
2639	2.1E-04	2.2E-04	2.0E-04	2.1E-04	2.7E-04	3.6E-04	5.1E-04	7.0E-04	9.0E-04	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2640	2.2E-04	2.3E-04	2.4E-04	2.7E-04	3.3E-04	4.3E-04	5.7E-04	7.5E-04	9.1E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2641	2.4E-04	2.5E-04	2.6E-04	2.8E-04	3.5E-04	4.5E-04	6.1E-04	8.0E-04	9.8E-04	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2642	2.7E-04	2.8E-04	2.8E-04	3.0E-04	3.8E-04	4.9E-04	6.5E-04	8.6E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03
2643	1.7E-04	1.7E-04	1.2E-04	9.9E-05	1.2E-04	1.7E-04	2.8E-04	4.2E-04	6.0E-04	7.5E-04	8.7E-04	9.4E-04	9.8E-04
2644	1.8E-04	1.9E-04	1.1E-04	8.0E-05	1.2E-04	2.1E-04	3.7E-04	5.9E-04	8.8E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03
2645	1.9E-04	2.0E-04	1.7E-04	1.7E-04	2.2E-04	3.0E-04	4.4E-04	6.2E-04	8.2E-04	9.8E-04	1.1E-03	1.2E-03	1.2E-03
2646	2.1E-04	2.2E-04	2.2E-04	2.4E-04	3.1E-04	4.0E-04	5.3E-04	7.0E-04	8.5E-04	9.8E-04	1.1E-03	1.1E-03	1.2E-03
2647	2.2E-04	2.3E-04	2.5E-04	2.8E-04	3.5E-04	4.5E-04	5.8E-04	7.5E-04	8.9E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03
2648	2.4E-04	2.5E-04	2.7E-04	3.1E-04	3.8E-04	4.8E-04	6.2E-04	8.0E-04	9.4E-04	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2649	2.6E-04	2.8E-04	2.9E-04	3.2E-04	4.0E-04	5.0E-04	6.5E-04	8.4E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2650	1.8E-04	1.9E-04	1.3E-04	1.2E-04	1.7E-04	2.8E-04	4.6E-04	7.0E-04	9.9E-04	1.2E-03	1.4E-03	1.5E-03	1.6E-03
2651	1.9E-04	2.0E-04	1.9E-04	2.1E-04	2.8E-04	3.9E-04	5.5E-04	7.6E-04	9.7E-04	1.1E-03	1.3E-03	1.4E-03	1.4E-03
2652	2.0E-04	2.2E-04	2.5E-04	3.0E-04	3.9E-04	5.0E-04	6.6E-04	8.6E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2653	2.2E-04	2.3E-04	2.8E-04	3.4E-04	4.3E-04	5.5E-04	7.2E-04	9.1E-04	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2654	2.4E-04	2.5E-04	2.8E-04	3.2E-04	4.1E-04	5.1E-04	6.5E-04	8.3E-04	9.6E-04	1.1E-03	1.2E-03	1.2E-03	1.2E-03
2655	2.6E-04	2.8E-04	3.1E-04	3.6E-04	4.4E-04	5.5E-04	7.0E-04	9.0E-04	1.0E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03
2656	2.9E-04	3.0E-04	3.4E-04	4.0E-04	5.0E-04	6.1E-04	7.8E-04	9.9E-04	1.1E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03
2657	1.9E-04	2.0E-04	1.7E-04	1.8E-04	2.3E-04	3.3E-04	4.8E-04	6.8E-04	8.9E-04	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2658	2.0E-04	2.1E-04	2.2E-04	2.4E-04	3.0E-04	3.8E-04	5.0E-04	6.6E-04	8.0E-04	9.1E-04	1.0E-03	1.1E-03	1.1E-03
2659	2.2E-04	2.3E-04	2.4E-04	2.7E-04	3.3E-04	4.1E-04	5.3E-04	6.9E-04	8.1E-04	9.1E-04	9.9E-04	1.0E-03	1.1E-03
2660	2.3E-04	2.5E-04	2.7E-04	3.0E-04	3.6E-04	4.4E-04	5.7E-04	7.3E-04	8.5E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03
2661	2.6E-04	2.7E-04	3.0E-04	3.3E-04	4.1E-04	4.9E-04	6.3E-04	8.0E-04	9.4E-04	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2662	2.9E-04	3.0E-04	3.3E-04	3.7E-04	4.6E-04	5.5E-04	6.9E-04	8.8E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2664	2.0E-04	2.1E-04	2.2E-04	2.4E-04	2.9E-04	3.6E-04	4.8E-04	6.3E-04	7.6E-04	8.8E-04	9.6E-04	1.0E-03	1.0E-03
2665	2.1E-04	2.3E-04	2.4E-04	2.6E-04	3.2E-04	3.9E-04	5.0E-04	6.5E-04	7.7E-04	8.7E-04	9.5E-04	1.0E-03	1.0E-03
2666	2.3E-04	2.5E-04	2.6E-04	2.9E-04	3.5E-04	4.3E-04	5.4E-04	7.0E-04	8.2E-04	9.3E-04	1.0E-03	1.1E-03	1.1E-03
2667	2.6E-04	2.7E-04	2.9E-04	3.3E-04	4.0E-04	4.8E-04	6.0E-04	7.7E-04	9.0E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03
2668	2.8E-04	3.0E-04	3.3E-04	3.7E-04	4.5E-04	5.4E-04	6.7E-04	8.6E-04	9.9E-04	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2669	3.2E-04	3.3E-04	3.8E-04	4.3E-04	5.2E-04	6.2E-04	7.6E-04	9.6E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2670	2.0E-04	2.1E-04	2.1E-04	2.3E-04	2.8E-04	3.6E-04	4.7E-04	6.2E-04	7.6E-04	8.8E-04	9.7E-04	1.0E-03	1.1E-03
2671	2.1E-04	2.3E-04	2.4E-04	2.6E-04	3.1E-04	3.8E-04	4.9E-04	6.4E-04	7.6E-04	8.6E-04	9.4E-04	9.9E-04	1.0E-03
2672	2.3E-04	2.5E-04	2.6E-04	2.9E-04	3.5E-04	4.2E-04	5.3E-04	6.8E-04	8.1E-04	9.1E-04	9.9E-04	1.0E-03	1.1E-03
2673	2.6E-04	2.7E-04	2.9E-04	3.3E-04	3.9E-04	4.7E-04	5.9E-04	7.6E-04	8.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03
2674	2.8E-04	3.0E-04	3.3E-04	3.8E-04	4.5E-04	5.4E-04	6.7E-04	8.5E-04	9.8E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03
2675	3.2E-04	3.3E-04	3.8E-04	4.4E-04	5.3E-04	6.2E-04	7.6E-04	9.6E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2676	2.2E-04	2.3E-04	2.4E-04	2.6E-04	3.1E-04	3.8E-04	4.9E-04	6.4E-04	7.7E-04	8.8E-04	9.6E-04	1.0E-03	1.0E-03
2677	2.3E-04	2.5E-04	2.6E-04	2.9E-04	3.5E-04	4.2E-04	5.4E-04	6.9E-04	8.2E-04	9.3E-04	1.0E-03	1.1E-03	1.1E-03
2678	2.6E-04	2.7E-04	3.0E-04	3.3E-04	4.0E-04	4.7E-04	6.0E-04	7.6E-04	8.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03
2679	2.8E-04	3.0E-04	3.4E-04	3.8E-04	4.6E-04	5.4E-04	6.7E-04	8.5E-04	9.8E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03
2680	3.2E-04	3.4E-04	3.9E-04	4.4E-04	5.3E-04	6.2E-04	7.6E-04	9.5E-04	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03
2681	2.2E-04	2.3E-04	2.3E-04	2.5E-04	3.1E-04	3.8E-04	4.9E-04	6.5E-04	7.9E-04	9.1E-04	1.0E-03	1.1E-03	1.1E-03
2682	2.3E-04	2.5E-04	2.6E-04	2.9E-04	3.5E-04	4.2E-04	5.3E-04	6.9E-04	8.2E-04	9.3E-04	1.0E-03	1.1E-03	1.1E-03
2683	2.6E-04	2.7E-04	3.0E-04	3.3E-04	4.0E-04	4.7E-04	6.0E-04	7.6E-04	8.9E-04	9.9E-04	1.1E-03	1.1E-03	1.2E-03
2684	2.8E-04	3.0E-04	3.4E-04	3.8E-04	4.6E-04	5.4E-04	6.7E-04	8.5E-04	9.7E-04	1.1E-03	1.2E-03	1.2E-03	1.2E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2685	3.2E-04	3.4E-04	3.9E-04	4.4E-04	5.3E-04	6.2E-04	7.5E-04	9.4E-04	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03
2686	2.3E-04	2.5E-04	2.6E-04	2.9E-04	3.5E-04	4.2E-04	5.4E-04	6.9E-04	8.3E-04	9.4E-04	1.0E-03	1.1E-03	1.1E-03
2687	2.5E-04	2.7E-04	3.0E-04	3.3E-04	4.0E-04	4.7E-04	5.9E-04	7.6E-04	8.8E-04	9.9E-04	1.1E-03	1.1E-03	1.2E-03
2688	2.8E-04	3.0E-04	3.4E-04	3.8E-04	4.6E-04	5.4E-04	6.6E-04	8.4E-04	9.6E-04	1.1E-03	1.2E-03	1.2E-03	1.2E-03
2689	3.2E-04	3.4E-04	3.9E-04	4.4E-04	5.3E-04	6.1E-04	7.3E-04	9.2E-04	1.0E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
2690	3.6E-04	3.8E-04	4.4E-04	5.1E-04	6.1E-04	6.8E-04	8.1E-04	1.0E-03	1.1E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03
2691	2.5E-04	2.7E-04	3.0E-04	3.3E-04	4.0E-04	4.7E-04	5.9E-04	7.5E-04	8.7E-04	9.8E-04	1.1E-03	1.1E-03	1.1E-03
2692	2.8E-04	3.0E-04	3.4E-04	3.8E-04	4.6E-04	5.3E-04	6.5E-04	8.2E-04	9.4E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03
2693	3.1E-04	3.3E-04	3.8E-04	4.4E-04	5.2E-04	5.9E-04	7.2E-04	9.0E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2694	3.5E-04	3.8E-04	4.4E-04	5.0E-04	6.0E-04	6.7E-04	8.0E-04	9.9E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2696	3.1E-04	3.3E-04	3.8E-04	4.3E-04	5.1E-04	5.8E-04	7.1E-04	8.9E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03
2697	3.4E-04	3.7E-04	4.2E-04	4.8E-04	5.7E-04	6.4E-04	7.7E-04	9.6E-04	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03
2698	3.9E-04	4.1E-04	4.8E-04	5.4E-04	6.4E-04	7.1E-04	8.3E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2699	3.3E-04	3.5E-04	4.0E-04	4.5E-04	5.4E-04	6.1E-04	7.3E-04	9.2E-04	1.0E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
2700	3.7E-04	4.0E-04	4.5E-04	5.1E-04	6.0E-04	6.6E-04	7.8E-04	9.8E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2701	4.2E-04	4.5E-04	5.1E-04	5.7E-04	6.6E-04	7.2E-04	8.4E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03
2702	8.0E-04	8.5E-04	9.8E-04	1.0E-03	1.2E-03	1.3E-03	1.5E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03
2703	7.8E-04	8.4E-04	9.8E-04	1.0E-03	1.2E-03	1.3E-03	1.5E-03	1.9E-03	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03
2704	7.7E-04	8.2E-04	9.7E-04	1.0E-03	1.2E-03	1.3E-03	1.6E-03	1.9E-03	2.1E-03	2.2E-03	2.4E-03	2.4E-03	2.5E-03
2705	7.6E-04	8.1E-04	9.6E-04	1.0E-03	1.2E-03	1.3E-03	1.6E-03	1.9E-03	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03
2706	7.4E-04	7.9E-04	9.3E-04	1.0E-03	1.1E-03	1.3E-03	1.6E-03	1.9E-03	2.1E-03	2.2E-03	2.4E-03	2.5E-03	2.5E-03
2707	3.6E-04	3.8E-04	4.2E-04	4.5E-04	5.3E-04	5.9E-04	7.1E-04	8.9E-04	1.0E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03
2708	4.0E-04	4.3E-04	4.8E-04	5.3E-04	6.1E-04	6.7E-04	7.8E-04	9.8E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2709	4.5E-04	4.8E-04	5.3E-04	5.8E-04	6.7E-04	7.1E-04	8.2E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03
2710	5.3E-04	5.6E-04	6.1E-04	6.5E-04	7.3E-04	7.2E-04	8.1E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03
2711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2713	7.5E-04	8.0E-04	9.1E-04	9.8E-04	1.1E-03	1.2E-03	1.4E-03	1.7E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03
2714	7.3E-04	7.9E-04	9.1E-04	9.9E-04	1.1E-03	1.2E-03	1.4E-03	1.8E-03	1.9E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03
2715	7.2E-04	7.7E-04	9.1E-04	9.9E-04	1.1E-03	1.3E-03	1.5E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03
2716	7.1E-04	7.6E-04	9.0E-04	9.8E-04	1.1E-03	1.2E-03	1.5E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03
2717	4.3E-04	4.6E-04	5.1E-04	5.6E-04	6.4E-04	6.8E-04	7.8E-04	9.7E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2718	4.9E-04	5.3E-04	5.8E-04	6.2E-04	7.0E-04	7.0E-04	7.9E-04	9.8E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03
2719	5.4E-04	5.8E-04	5.9E-04	6.1E-04	6.6E-04	6.4E-04	7.1E-04	9.1E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03
2720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2725	7.3E-04	7.8E-04	8.7E-04	9.3E-04	1.0E-03	1.0E-03	1.1E-03	1.4E-03	1.5E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03
2726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2727	7.3E-04	7.8E-04	8.7E-04	9.3E-04	1.0E-03	1.1E-03	1.2E-03	1.5E-03	1.6E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03
2728	7.2E-04	7.7E-04	8.4E-04	8.9E-04	9.8E-04	1.0E-03	1.2E-03	1.5E-03	1.6E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2730	6.9E-04	7.4E-04	8.6E-04	9.3E-04	1.0E-03	1.2E-03	1.4E-03	1.6E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03
2731	6.8E-04	7.3E-04	8.6E-04	9.3E-04	1.0E-03	1.2E-03	1.4E-03	1.7E-03	1.8E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03
2732	6.7E-04	7.2E-04	8.4E-04	9.1E-04	1.0E-03	1.2E-03	1.4E-03	1.7E-03	1.8E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03
2733	5.0E-04	5.3E-04	5.5E-04	5.7E-04	6.2E-04	6.2E-04	6.9E-04	8.7E-04	1.0E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03
2734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2743	6.6E-04	7.0E-04	8.0E-04	8.6E-04	9.6E-04	1.0E-03	1.2E-03	1.5E-03	1.6E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03
2744	6.5E-04	6.9E-04	8.1E-04	8.7E-04	9.8E-04	1.1E-03	1.3E-03	1.5E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03
2745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2751	6.3E-04	6.7E-04	7.6E-04	8.1E-04	9.0E-04	9.5E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03
2752	6.3E-04	6.7E-04	7.3E-04	7.6E-04	8.3E-04	8.9E-04	1.0E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03
2753	6.2E-04	6.6E-04	7.5E-04	8.1E-04	9.0E-04	9.9E-04	1.1E-03	1.4E-03	1.6E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03
2754	1.7E-04	1.7E-04	9.1E-05	3.9E-05	3.1E-05	5.4E-05	1.2E-04	2.2E-04	3.9E-04	5.2E-04	6.2E-04	6.9E-04	7.2E-04
2755	1.4E-04	1.5E-04	9.8E-05	6.8E-05	7.2E-05	9.9E-05	1.6E-04	2.5E-04	3.7E-04	4.8E-04	5.5E-04	6.0E-04	6.3E-04
2756	1.3E-04	1.4E-04	1.1E-04	1.0E-04	1.2E-04	1.5E-04	2.2E-04	3.0E-04	4.0E-04	4.9E-04	5.5E-04	5.9E-04	6.1E-04
2757	1.8E-04	1.8E-04	1.1E-04	6.7E-05	5.9E-05	6.9E-05	1.1E-04	1.7E-04	2.8E-04	3.6E-04	4.3E-04	4.7E-04	4.9E-04
2758	1.8E-04	1.8E-04	1.1E-04	7.0E-05	6.5E-05	8.0E-05	1.3E-04	2.0E-04	3.2E-04	4.1E-04	4.8E-04	5.3E-04	5.5E-04
2759	1.6E-04	1.6E-04	9.8E-05	5.3E-05	4.5E-05	5.8E-05	1.0E-04	1.8E-04	2.9E-04	3.9E-04	4.6E-04	5.1E-04	5.4E-04
2760	1.8E-04	1.8E-04	1.1E-04	6.8E-05	6.4E-05	8.3E-05	1.4E-04	2.2E-04	3.5E-04	4.6E-04	5.4E-04	5.9E-04	6.2E-04
2761	1.7E-04	1.7E-04	8.1E-05	2.3E-05	7.0E-06	1.7E-05	6.5E-05	1.5E-04	2.9E-04	4.1E-04	5.0E-04	5.6E-04	5.9E-04
2762	1.9E-04	1.8E-04	9.8E-05	4.1E-05	3.3E-05	5.4E-05	1.2E-04	2.2E-04	3.8E-04	5.2E-04	6.1E-04	6.8E-04	7.1E-04
2763	1.7E-04	1.7E-04	3.2E-05	-6.5E-05	-1.1E-04	-1.1E-04	-5.8E-05	4.2E-05	2.6E-04	4.3E-04	5.6E-04	6.5E-04	6.9E-04
2764	1.9E-04	1.9E-04	5.9E-05	-2.6E-05	-4.9E-05	-2.8E-05	4.8E-05	1.8E-04	4.1E-04	6.0E-04	7.4E-04	8.3E-04	8.8E-04
2765	1.7E-04	1.7E-04	6.4E-05	-7.4E-06	-3.1E-05	-2.0E-05	3.6E-05	1.3E-04	3.2E-04	4.7E-04	5.8E-04	6.5E-04	6.9E-04
2766	1.9E-04	1.8E-04	1.0E-04	4.0E-05	1.5E-05	6.0E-06	2.4E-05	6.7E-05	1.6E-04	2.3E-04	2.9E-04	3.3E-04	3.4E-04
2767	1.8E-04	1.7E-04	9.9E-05	4.9E-05	3.2E-05	3.0E-05	5.5E-05	1.0E-04	1.9E-04	2.7E-04	3.2E-04	3.6E-04	3.8E-04
2768	1.8E-04	1.7E-04	1.0E-04	5.6E-05	4.2E-05	4.5E-05	7.4E-05	1.3E-04	2.2E-04	3.0E-04	3.5E-04	3.9E-04	4.1E-04
2769	1.8E-04	1.8E-04	1.1E-04	6.2E-05	5.1E-05	5.8E-05	9.2E-05	1.5E-04	2.5E-04	3.3E-04	3.9E-04	4.3E-04	4.5E-04
2770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2772	1.8E-04	1.7E-04	7.4E-05	1.9E-06	-2.4E-05	-2.6E-05	9.2E-06	7.8E-05	2.1E-04	3.2E-04	4.1E-04	4.6E-04	4.9E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2774	1.6E-04	1.5E-04	9.2E-05	4.7E-05	3.3E-05	3.5E-05	6.3E-05	1.1E-04	2.0E-04	2.8E-04	3.3E-04	3.7E-04	3.9E-04
2775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2776	1.6E-04	1.5E-04	9.0E-05	4.2E-05	2.5E-05	2.2E-05	4.5E-05	9.2E-05	1.8E-04	2.5E-04	3.0E-04	3.4E-04	3.5E-04
2777	1.9E-04	1.8E-04	8.6E-05	2.0E-05	-2.1E-06	-2.3E-06	3.1E-05	9.6E-05	2.2E-04	3.2E-04	3.9E-04	4.4E-04	4.7E-04
2778	1.4E-04	1.4E-04	8.3E-05	4.0E-05	2.3E-05	1.7E-05	3.4E-05	7.2E-05	1.5E-04	2.1E-04	2.5E-04	2.8E-04	3.0E-04
2779	1.6E-04	1.5E-04	8.9E-05	3.9E-05	1.9E-05	1.3E-05	3.2E-05	7.4E-05	1.6E-04	2.2E-04	2.7E-04	3.1E-04	3.2E-04
2780	1.4E-04	1.4E-04	8.2E-05	3.7E-05	1.6E-05	8.1E-06	2.2E-05	5.7E-05	1.3E-04	1.9E-04	2.3E-04	2.6E-04	2.8E-04
2781	1.6E-04	1.6E-04	8.8E-05	3.7E-05	1.4E-05	5.0E-06	2.1E-05	6.0E-05	1.4E-04	2.1E-04	2.6E-04	2.9E-04	3.1E-04
2782	1.4E-04	1.4E-04	8.0E-05	3.3E-05	1.1E-05	4.0E-07	1.2E-05	4.4E-05	1.2E-04	1.7E-04	2.2E-04	2.5E-04	2.6E-04
2783	1.6E-04	1.6E-04	8.9E-05	3.5E-05	1.1E-05	-2.7E-07	1.4E-05	5.1E-05	1.3E-04	2.0E-04	2.5E-04	2.8E-04	3.0E-04
2784	1.3E-04	1.3E-04	7.3E-05	3.0E-05	8.2E-06	-2.6E-06	7.0E-06	3.6E-05	1.0E-04	1.6E-04	2.0E-04	2.2E-04	2.4E-04
2785	1.4E-04	1.4E-04	8.0E-05	3.1E-05	7.4E-06	-4.8E-06	5.7E-06	3.7E-05	1.1E-04	1.7E-04	2.1E-04	2.4E-04	2.6E-04
2786	1.7E-04	1.6E-04	8.9E-05	3.3E-05	7.5E-06	-5.1E-06	7.7E-06	4.4E-05	1.3E-04	1.9E-04	2.4E-04	2.8E-04	2.9E-04
2787	1.3E-04	1.3E-04	7.4E-05	2.9E-05	5.9E-06	-5.5E-06	3.8E-06	3.3E-05	1.0E-04	1.6E-04	2.0E-04	2.3E-04	2.4E-04
2788	1.5E-04	1.4E-04	8.0E-05	3.0E-05	5.2E-06	-7.5E-06	2.6E-06	3.4E-05	1.1E-04	1.7E-04	2.1E-04	2.4E-04	2.6E-04
2789	1.7E-04	1.7E-04	9.0E-05	3.2E-05	5.0E-06	-8.4E-06	3.9E-06	4.0E-05	1.2E-04	1.9E-04	2.4E-04	2.8E-04	2.9E-04
2790	1.4E-04	1.3E-04	7.5E-05	2.9E-05	6.1E-06	-5.0E-06	5.4E-06	3.6E-05	1.1E-04	1.6E-04	2.1E-04	2.4E-04	2.5E-04
2791	1.5E-04	1.5E-04	8.2E-05	3.0E-05	5.6E-06	-6.6E-06	4.5E-06	3.7E-05	1.1E-04	1.8E-04	2.2E-04	2.5E-04	2.7E-04
2792	1.8E-04	1.7E-04	9.2E-05	3.3E-05	5.7E-06	-7.2E-06	6.0E-06	4.3E-05	1.3E-04	2.0E-04	2.5E-04	2.9E-04	3.0E-04
2793	1.4E-04	1.4E-04	7.8E-05	3.1E-05	9.1E-06	-4.5E-07	1.2E-05	4.5E-05	1.2E-04	1.8E-04	2.2E-04	2.5E-04	2.7E-04
2794	1.6E-04	1.5E-04	8.5E-05	3.3E-05	9.0E-06	-1.6E-06	1.2E-05	4.7E-05	1.3E-04	1.9E-04	2.4E-04	2.7E-04	2.9E-04
2795	1.5E-04	1.4E-04	8.1E-05	3.5E-05	1.5E-05	7.6E-06	2.3E-05	5.9E-05	1.4E-04	2.0E-04	2.4E-04	2.8E-04	2.9E-04
2796	1.7E-04	1.6E-04	9.0E-05	3.8E-05	1.6E-05	8.2E-06	2.5E-05	6.5E-05	1.5E-04	2.2E-04	2.7E-04	3.0E-04	3.2E-04
2797	1.5E-04	1.5E-04	8.5E-05	4.0E-05	2.2E-05	1.8E-05	3.7E-05	7.7E-05	1.6E-04	2.2E-04	2.7E-04	3.0E-04	3.2E-04
2798	1.5E-04	1.5E-04	9.0E-05	4.6E-05	3.1E-05	3.0E-05	5.3E-05	9.9E-05	1.8E-04	2.5E-04	3.0E-04	3.3E-04	3.5E-04
2799	1.6E-04	1.5E-04	9.4E-05	5.1E-05	3.9E-05	4.1E-05	6.9E-05	1.2E-04	2.1E-04	2.8E-04	3.3E-04	3.6E-04	3.8E-04
2800	1.6E-04	1.6E-04	9.7E-05	5.6E-05	4.5E-05	5.1E-05	8.2E-05	1.4E-04	2.3E-04	3.0E-04	3.6E-04	4.0E-04	4.1E-04
2801	1.6E-04	1.6E-04	1.0E-04	5.9E-05	5.0E-05	5.9E-05	9.5E-05	1.6E-04	2.5E-04	3.3E-04	3.9E-04	4.3E-04	4.5E-04
2802	2.0E-04	1.9E-04	1.5E-04	1.3E-04	1.5E-04	1.9E-04	2.6E-04	3.5E-04	4.6E-04	5.5E-04	6.2E-04	6.6E-04	6.9E-04
2803	2.2E-04	2.1E-04	1.6E-04	1.4E-04	1.6E-04	2.0E-04	2.8E-04	3.9E-04	5.1E-04	6.1E-04	6.8E-04	7.3E-04	7.5E-04
2804	2.0E-04	2.0E-04	1.5E-04	1.3E-04	1.4E-04	1.8E-04	2.5E-04	3.5E-04	4.6E-04	5.5E-04	6.2E-04	6.7E-04	6.9E-04
2805	1.9E-04	1.8E-04	1.4E-04	1.2E-04	1.3E-04	1.7E-04	2.3E-04	3.2E-04	4.2E-04	5.1E-04	5.7E-04	6.1E-04	6.3E-04
2806	2.1E-04	2.0E-04	1.5E-04	1.2E-04	1.4E-04	1.8E-04	2.4E-04	3.4E-04	4.6E-04	5.5E-04	6.2E-04	6.7E-04	6.9E-04
2807	1.8E-04	1.7E-04	1.3E-04	1.0E-04	1.2E-04	1.4E-04	2.0E-04	2.8E-04	3.7E-04	4.5E-04	5.1E-04	5.5E-04	5.7E-04
2808	2.0E-04	1.9E-04	1.4E-04	1.1E-04	1.2E-04	1.5E-04	2.1E-04	3.0E-04	4.0E-04	4.9E-04	5.6E-04	6.0E-04	6.2E-04
2809	1.6E-04	1.5E-04	1.1E-04	9.2E-05	1.0E-04	1.2E-04	1.7E-04	2.4E-04	3.3E-04	4.0E-04	4.5E-04	4.8E-04	5.0E-04
2810	1.6E-04	1.5E-04	1.1E-04	8.1E-05	8.4E-05	1.0E-04	1.5E-04	2.1E-04	3.0E-04	3.7E-04	4.2E-04	4.6E-04	4.7E-04
2811	1.4E-04	1.4E-04	9.7E-05	6.9E-05	6.7E-05	7.8E-05	1.1E-04	1.7E-04	2.5E-04	3.1E-04	3.6E-04	3.9E-04	4.0E-04
2812	1.3E-04	1.3E-04	8.0E-05	4.6E-05	3.4E-05	3.3E-05	5.4E-05	9.4E-05	1.6E-04	2.2E-04	2.6E-04	2.9E-04	3.1E-04
2813	1.1E-04	1.1E-04	6.4E-05	2.7E-05	8.0E-06	1.0E-07	1.0E-05	3.7E-05	9.7E-05	1.5E-04	1.8E-04	2.1E-04	2.2E-04
2814	1.2E-04	1.2E-04	6.9E-05	2.8E-05	7.5E-06	-1.5E-06	9.0E-06	3.8E-05	1.0E-04	1.6E-04	2.0E-04	2.2E-04	2.4E-04
2815	1.0E-04	1.0E-04	6.1E-05	2.8E-05	1.2E-05	6.1E-06	1.8E-05	4.5E-05	1.0E-04	1.5E-04	1.9E-04	2.1E-04	2.2E-04
2816	1.1E-04	1.1E-04	6.6E-05	2.9E-05	1.1E-05	5.0E-06	1.7E-05	4.6E-05	1.1E-04	1.6E-04	2.0E-04	2.2E-04	2.4E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2817	1.2E-04	1.2E-04	7.1E-05	3.0E-05	1.1E-05	3.7E-06	1.6E-05	4.7E-05	1.1E-04	1.7E-04	2.1E-04	2.4E-04	2.5E-04
2818	1.0E-04	1.1E-04	6.4E-05	3.1E-05	1.7E-05	1.3E-05	2.7E-05	5.7E-05	1.2E-04	1.7E-04	2.0E-04	2.3E-04	2.4E-04
2819	1.1E-04	1.1E-04	6.8E-05	3.3E-05	1.7E-05	1.2E-05	2.7E-05	5.9E-05	1.2E-04	1.7E-04	2.1E-04	2.4E-04	2.5E-04
2820	1.3E-04	1.3E-04	7.4E-05	3.4E-05	1.7E-05	1.2E-05	2.8E-05	6.2E-05	1.3E-04	1.9E-04	2.3E-04	2.6E-04	2.8E-04
2821	1.1E-04	1.1E-04	6.7E-05	3.6E-05	2.3E-05	2.2E-05	3.9E-05	7.3E-05	1.4E-04	1.9E-04	2.3E-04	2.5E-04	2.6E-04
2822	1.2E-04	1.2E-04	7.2E-05	3.8E-05	2.4E-05	2.2E-05	4.0E-05	7.7E-05	1.4E-04	2.0E-04	2.4E-04	2.7E-04	2.8E-04
2823	1.3E-04	1.3E-04	7.8E-05	4.0E-05	2.5E-05	2.3E-05	4.2E-05	8.1E-05	1.5E-04	2.1E-04	2.6E-04	2.9E-04	3.1E-04
2824	1.1E-04	1.1E-04	7.0E-05	4.1E-05	3.0E-05	3.1E-05	5.1E-05	8.9E-05	1.5E-04	2.1E-04	2.5E-04	2.7E-04	2.9E-04
2825	1.2E-04	1.2E-04	7.6E-05	4.3E-05	3.1E-05	3.3E-05	5.4E-05	9.5E-05	1.7E-04	2.2E-04	2.7E-04	3.0E-04	3.1E-04
2826	1.4E-04	1.3E-04	8.3E-05	4.5E-05	3.3E-05	3.4E-05	5.8E-05	1.0E-04	1.8E-04	2.4E-04	2.9E-04	3.2E-04	3.4E-04
2827	1.1E-04	1.1E-04	7.4E-05	4.5E-05	3.7E-05	4.0E-05	6.4E-05	1.0E-04	1.7E-04	2.3E-04	2.7E-04	3.0E-04	3.1E-04
2828	1.2E-04	1.2E-04	8.0E-05	4.8E-05	3.8E-05	4.2E-05	6.7E-05	1.1E-04	1.9E-04	2.5E-04	2.9E-04	3.2E-04	3.4E-04
2829	1.4E-04	1.4E-04	8.6E-05	5.0E-05	4.0E-05	4.4E-05	7.2E-05	1.2E-04	2.0E-04	2.7E-04	3.2E-04	3.5E-04	3.7E-04
2830	1.1E-04	1.2E-04	7.7E-05	5.0E-05	4.3E-05	4.9E-05	7.5E-05	1.2E-04	1.9E-04	2.5E-04	2.9E-04	3.2E-04	3.3E-04
2831	1.3E-04	1.3E-04	8.3E-05	5.1E-05	4.4E-05	5.0E-05	7.9E-05	1.3E-04	2.0E-04	2.7E-04	3.2E-04	3.5E-04	3.6E-04
2832	1.4E-04	1.4E-04	8.8E-05	5.3E-05	4.4E-05	5.0E-05	8.0E-05	1.3E-04	2.2E-04	2.9E-04	3.4E-04	3.7E-04	3.9E-04
2833	1.1E-04	1.2E-04	7.9E-05	5.3E-05	4.8E-05	5.6E-05	8.5E-05	1.3E-04	2.0E-04	2.6E-04	3.1E-04	3.4E-04	3.5E-04
2834	1.3E-04	1.3E-04	8.5E-05	5.5E-05	4.9E-05	5.7E-05	8.9E-05	1.4E-04	2.2E-04	2.9E-04	3.4E-04	3.7E-04	3.9E-04
2835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2836	1.2E-04	1.2E-04	8.3E-05	5.8E-05	5.4E-05	6.5E-05	9.7E-05	1.5E-04	2.2E-04	2.9E-04	3.3E-04	3.6E-04	3.8E-04
2837	1.3E-04	1.3E-04	8.7E-05	5.6E-05	5.1E-05	6.2E-05	9.6E-05	1.5E-04	2.4E-04	3.1E-04	3.6E-04	4.0E-04	4.1E-04
2838	1.4E-04	1.4E-04	9.0E-05	5.3E-05	4.5E-05	5.5E-05	9.2E-05	1.5E-04	2.5E-04	3.3E-04	3.9E-04	4.3E-04	4.5E-04
2839	1.2E-04	1.2E-04	8.6E-05	6.1E-05	6.0E-05	7.3E-05	1.1E-04	1.6E-04	2.4E-04	3.1E-04	3.6E-04	3.9E-04	4.1E-04
2840	1.3E-04	1.3E-04	8.8E-05	5.7E-05	5.3E-05	6.6E-05	1.0E-04	1.7E-04	2.6E-04	3.3E-04	3.9E-04	4.3E-04	4.5E-04
2841	1.5E-04	1.5E-04	8.3E-05	3.9E-05	2.8E-05	3.7E-05	7.7E-05	1.5E-04	2.6E-04	3.5E-04	4.2E-04	4.7E-04	4.9E-04
2842	1.2E-04	1.2E-04	8.9E-05	6.5E-05	6.5E-05	8.1E-05	1.2E-04	1.8E-04	2.6E-04	3.3E-04	3.9E-04	4.2E-04	4.4E-04
2843	1.3E-04	1.4E-04	8.8E-05	5.6E-05	5.3E-05	6.7E-05	1.1E-04	1.7E-04	2.7E-04	3.5E-04	4.2E-04	4.6E-04	4.8E-04
2844	1.5E-04	1.5E-04	3.2E-05	-5.3E-05	-9.3E-05	-1.0E-04	-6.3E-05	1.4E-05	1.9E-04	3.3E-04	4.4E-04	5.1E-04	5.5E-04
2845	1.2E-04	1.3E-04	9.1E-05	6.8E-05	7.0E-05	8.8E-05	1.3E-04	1.9E-04	2.8E-04	3.5E-04	4.1E-04	4.4E-04	4.6E-04
2846	1.3E-04	1.4E-04	8.8E-05	5.5E-05	5.1E-05	6.7E-05	1.1E-04	1.8E-04	2.9E-04	3.8E-04	4.4E-04	4.8E-04	5.1E-04
2847	1.5E-04	1.5E-04	2.9E-05	-5.8E-05	-1.0E-04	-1.1E-04	-6.9E-05	1.1E-05	1.9E-04	3.4E-04	4.5E-04	5.3E-04	5.7E-04
2848	1.2E-04	1.3E-04	9.3E-05	7.1E-05	7.5E-05	9.6E-05	1.4E-04	2.1E-04	3.0E-04	3.8E-04	4.3E-04	4.7E-04	4.9E-04
2849	1.4E-04	1.4E-04	8.9E-05	5.7E-05	5.5E-05	7.3E-05	1.2E-04	2.0E-04	3.1E-04	4.0E-04	4.7E-04	5.1E-04	5.3E-04
2850	1.5E-04	1.5E-04	3.2E-05	-5.4E-05	-9.4E-05	-9.9E-05	-5.8E-05	2.5E-05	2.1E-04	3.6E-04	4.7E-04	5.5E-04	5.9E-04
2851	1.4E-04	1.4E-04	9.2E-05	6.1E-05	6.0E-05	8.1E-05	1.3E-04	2.1E-04	3.2E-04	4.2E-04	4.9E-04	5.3E-04	5.6E-04
2852	1.5E-04	1.5E-04	7.3E-06	-1.0E-04	-1.5E-04	-1.7E-04	-1.3E-04	-4.2E-05	1.7E-04	3.5E-04	4.8E-04	5.7E-04	6.1E-04
2853	1.4E-04	1.4E-04	9.5E-05	6.6E-05	6.8E-05	9.1E-05	1.5E-04	2.3E-04	3.4E-04	4.4E-04	5.1E-04	5.5E-04	5.8E-04
2854	2.0E-04	2.0E-04	1.6E-04	1.3E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.6E-04	5.5E-04	6.2E-04	6.7E-04	6.9E-04
2855	2.2E-04	2.2E-04	1.8E-04	1.4E-04	1.5E-04	1.9E-04	2.7E-04	3.7E-04	5.0E-04	6.0E-04	6.7E-04	7.2E-04	7.5E-04
2856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2857	1.8E-04	1.8E-04	1.5E-04	1.3E-04	1.4E-04	1.8E-04	2.4E-04	3.4E-04	4.4E-04	5.3E-04	5.9E-04	6.4E-04	6.6E-04
2858	2.0E-04	2.0E-04	1.6E-04	1.4E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.6E-04	5.6E-04	6.3E-04	6.8E-04	7.0E-04
2859	2.3E-04	2.3E-04	1.8E-04	1.4E-04	1.5E-04	1.9E-04	2.7E-04	3.7E-04	5.0E-04	6.0E-04	6.8E-04	7.3E-04	7.6E-04
2860	1.7E-04	1.7E-04	1.4E-04	1.2E-04	1.4E-04	1.8E-04	2.4E-04	3.3E-04	4.3E-04	5.1E-04	5.7E-04	6.1E-04	6.3E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2861	1.9E-04	1.9E-04	1.5E-04	1.3E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.5E-04	5.4E-04	6.1E-04	6.5E-04	6.8E-04
2862	2.1E-04	2.1E-04	1.6E-04	1.4E-04	1.5E-04	1.9E-04	2.6E-04	3.6E-04	4.8E-04	5.8E-04	6.5E-04	7.0E-04	7.2E-04
2863	2.4E-04	2.3E-04	1.8E-04	1.4E-04	1.5E-04	1.9E-04	2.7E-04	3.8E-04	5.1E-04	6.2E-04	7.0E-04	7.5E-04	7.8E-04
2864	1.7E-04	1.6E-04	1.3E-04	1.2E-04	1.4E-04	1.7E-04	2.3E-04	3.2E-04	4.1E-04	4.9E-04	5.5E-04	5.9E-04	6.1E-04
2865	1.8E-04	1.8E-04	1.4E-04	1.3E-04	1.4E-04	1.8E-04	2.5E-04	3.4E-04	4.4E-04	5.2E-04	5.9E-04	6.3E-04	6.5E-04
2866	2.0E-04	1.9E-04	1.6E-04	1.3E-04	1.5E-04	1.9E-04	2.6E-04	3.6E-04	4.7E-04	5.6E-04	6.3E-04	6.8E-04	7.0E-04
2867	2.2E-04	2.1E-04	1.7E-04	1.4E-04	1.6E-04	2.0E-04	2.7E-04	3.8E-04	5.0E-04	6.0E-04	6.8E-04	7.3E-04	7.5E-04
2868	1.5E-04	1.5E-04	1.2E-04	1.1E-04	1.3E-04	1.7E-04	2.3E-04	3.1E-04	4.0E-04	4.7E-04	5.3E-04	5.6E-04	5.8E-04
2869	1.7E-04	1.7E-04	1.3E-04	1.2E-04	1.4E-04	1.7E-04	2.4E-04	3.3E-04	4.2E-04	5.0E-04	5.6E-04	6.0E-04	6.2E-04
2870	1.6E-04	1.6E-04	1.3E-04	1.1E-04	1.3E-04	1.7E-04	2.3E-04	3.1E-04	4.0E-04	4.8E-04	5.3E-04	5.7E-04	5.9E-04
2871	1.8E-04	1.7E-04	1.4E-04	1.2E-04	1.4E-04	1.7E-04	2.4E-04	3.3E-04	4.3E-04	5.1E-04	5.7E-04	6.1E-04	6.3E-04
2872	1.6E-04	1.6E-04	1.3E-04	1.1E-04	1.3E-04	1.6E-04	2.2E-04	3.1E-04	4.0E-04	4.7E-04	5.3E-04	5.7E-04	5.8E-04
2873	1.5E-04	1.6E-04	1.4E-04	1.2E-04	1.4E-04	1.7E-04	2.4E-04	3.3E-04	4.3E-04	5.1E-04	5.7E-04	6.1E-04	6.3E-04
2874	1.6E-04	1.7E-04	1.4E-04	1.3E-04	1.4E-04	1.7E-04	2.4E-04	3.4E-04	4.4E-04	5.3E-04	6.0E-04	6.5E-04	6.7E-04
2875	1.7E-04	1.8E-04	1.4E-04	1.2E-04	1.3E-04	1.6E-04	2.3E-04	3.2E-04	4.4E-04	5.4E-04	6.1E-04	6.6E-04	6.9E-04
2876	1.8E-04	1.9E-04	1.4E-04	9.8E-05	9.4E-05	1.2E-04	1.9E-04	2.9E-04	4.2E-04	5.4E-04	6.3E-04	6.8E-04	7.1E-04
2877	1.9E-04	2.0E-04	7.0E-05	-3.4E-05	-8.5E-05	-8.6E-05	-3.2E-05	7.3E-05	3.0E-04	4.8E-04	6.2E-04	7.1E-04	7.6E-04
2878	2.1E-04	2.2E-04	1.2E-04	3.6E-05	5.0E-07	6.3E-06	6.0E-05	1.6E-04	3.4E-04	4.9E-04	6.0E-04	6.7E-04	7.1E-04
2879	2.2E-04	2.3E-04	1.2E-04	2.9E-05	-1.6E-05	-1.8E-05	2.9E-05	1.2E-04	3.0E-04	4.6E-04	5.7E-04	6.5E-04	6.9E-04
2880	2.3E-04	2.4E-04	1.2E-04	8.7E-06	-5.2E-05	-6.6E-05	-2.8E-05	5.4E-05	2.5E-04	4.1E-04	5.3E-04	6.1E-04	6.5E-04
2881	2.4E-04	2.6E-04	1.1E-04	-1.1E-05	-8.8E-05	-1.1E-04	-8.7E-05	-1.4E-05	1.9E-04	3.5E-04	4.7E-04	5.6E-04	6.0E-04
2882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2885	1.5E-04	1.6E-04	1.4E-04	1.3E-04	1.4E-04	1.8E-04	2.4E-04	3.3E-04	4.3E-04	5.1E-04	5.7E-04	6.1E-04	6.4E-04
2886	1.6E-04	1.7E-04	1.4E-04	1.3E-04	1.4E-04	1.8E-04	2.5E-04	3.4E-04	4.5E-04	5.4E-04	6.1E-04	6.5E-04	6.8E-04
2887	1.7E-04	1.8E-04	1.5E-04	1.2E-04	1.3E-04	1.7E-04	2.4E-04	3.3E-04	4.5E-04	5.5E-04	6.3E-04	6.8E-04	7.0E-04
2888	1.9E-04	1.9E-04	1.4E-04	1.1E-04	1.1E-04	1.4E-04	2.0E-04	3.0E-04	4.4E-04	5.6E-04	6.4E-04	7.0E-04	7.3E-04
2889	2.0E-04	2.1E-04	7.6E-05	-2.6E-05	-7.5E-05	-7.4E-05	-1.7E-05	9.0E-05	3.1E-04	5.0E-04	6.4E-04	7.3E-04	7.7E-04
2890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2891	2.2E-04	2.4E-04	1.1E-04	1.2E-06	-5.4E-05	-6.1E-05	-1.4E-05	8.1E-05	2.9E-04	4.6E-04	5.9E-04	6.8E-04	7.2E-04
2892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2895	1.5E-04	1.6E-04	1.4E-04	1.3E-04	1.4E-04	1.8E-04	2.4E-04	3.3E-04	4.3E-04	5.1E-04	5.7E-04	6.1E-04	6.3E-04
2896	1.7E-04	1.7E-04	1.5E-04	1.3E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.6E-04	5.5E-04	6.1E-04	6.6E-04	6.8E-04
2897	1.8E-04	1.8E-04	1.5E-04	1.3E-04	1.4E-04	1.8E-04	2.5E-04	3.5E-04	4.6E-04	5.6E-04	6.4E-04	6.8E-04	7.1E-04
2898	1.9E-04	2.0E-04	1.5E-04	1.2E-04	1.2E-04	1.5E-04	2.2E-04	3.2E-04	4.6E-04	5.7E-04	6.6E-04	7.1E-04	7.4E-04
2899	2.0E-04	2.1E-04	1.1E-04	3.1E-05	1.0E-07	1.3E-05	7.6E-05	1.8E-04	3.8E-04	5.4E-04	6.6E-04	7.4E-04	7.8E-04
2900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2905	1.4E-04	1.5E-04	1.3E-04	1.2E-04	1.3E-04	1.6E-04	2.2E-04	3.0E-04	3.9E-04	4.7E-04	5.2E-04	5.6E-04	5.8E-04
2906	1.6E-04	1.6E-04	1.4E-04	1.3E-04	1.4E-04	1.8E-04	2.4E-04	3.3E-04	4.3E-04	5.1E-04	5.7E-04	6.1E-04	6.3E-04
2907	1.7E-04	1.7E-04	1.5E-04	1.3E-04	1.5E-04	1.9E-04	2.5E-04	3.5E-04	4.6E-04	5.4E-04	6.1E-04	6.6E-04	6.8E-04
2908	1.8E-04	1.9E-04	1.6E-04	1.3E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.7E-04	5.7E-04	6.4E-04	6.9E-04	7.2E-04
2909	2.0E-04	2.0E-04	1.6E-04	1.3E-04	1.3E-04	1.7E-04	2.4E-04	3.4E-04	4.7E-04	5.8E-04	6.7E-04	7.2E-04	7.5E-04
2910	2.1E-04	2.2E-04	1.4E-04	8.4E-05	7.1E-05	9.4E-05	1.6E-04	2.7E-04	4.3E-04	5.7E-04	6.7E-04	7.4E-04	7.8E-04
2911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2915	1.4E-04	1.5E-04	1.3E-04	1.2E-04	1.3E-04	1.6E-04	2.2E-04	3.0E-04	3.9E-04	4.6E-04	5.2E-04	5.5E-04	5.7E-04
2916	1.6E-04	1.6E-04	1.4E-04	1.3E-04	1.4E-04	1.7E-04	2.4E-04	3.2E-04	4.2E-04	5.0E-04	5.6E-04	6.0E-04	6.2E-04
2917	1.7E-04	1.8E-04	1.5E-04	1.3E-04	1.5E-04	1.9E-04	2.5E-04	3.5E-04	4.6E-04	5.4E-04	6.1E-04	6.5E-04	6.8E-04
2918	1.9E-04	1.9E-04	1.6E-04	1.4E-04	1.5E-04	1.9E-04	2.6E-04	3.6E-04	4.8E-04	5.8E-04	6.5E-04	7.0E-04	7.2E-04
2919	2.0E-04	2.1E-04	1.7E-04	1.4E-04	1.4E-04	1.8E-04	2.6E-04	3.6E-04	4.9E-04	6.0E-04	6.8E-04	7.4E-04	7.6E-04
2920	2.1E-04	2.2E-04	1.6E-04	1.1E-04	1.0E-04	1.3E-04	2.0E-04	3.1E-04	4.7E-04	5.9E-04	6.9E-04	7.5E-04	7.8E-04
2921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2925	1.5E-04	1.5E-04	1.3E-04	1.1E-04	1.3E-04	1.6E-04	2.2E-04	3.0E-04	3.9E-04	4.6E-04	5.2E-04	5.5E-04	5.7E-04
2926	1.6E-04	1.6E-04	1.4E-04	1.2E-04	1.4E-04	1.7E-04	2.3E-04	3.2E-04	4.2E-04	5.0E-04	5.6E-04	6.0E-04	6.2E-04
2927	1.7E-04	1.8E-04	1.5E-04	1.3E-04	1.5E-04	1.9E-04	2.5E-04	3.5E-04	4.5E-04	5.4E-04	6.1E-04	6.5E-04	6.8E-04
2928	1.9E-04	2.0E-04	1.6E-04	1.4E-04	1.6E-04	2.0E-04	2.7E-04	3.7E-04	4.9E-04	5.9E-04	6.6E-04	7.1E-04	7.3E-04
2929	2.1E-04	2.1E-04	1.7E-04	1.4E-04	1.5E-04	1.9E-04	2.6E-04	3.7E-04	5.0E-04	6.1E-04	6.9E-04	7.4E-04	7.7E-04
2930	2.2E-04	2.3E-04	1.7E-04	1.3E-04	1.2E-04	1.6E-04	2.3E-04	3.4E-04	4.9E-04	6.1E-04	7.1E-04	7.7E-04	8.0E-04
2931	2.4E-04	2.4E-04	1.4E-04	6.4E-05	3.7E-05	5.5E-05	1.2E-04	2.4E-04	4.3E-04	5.9E-04	7.1E-04	7.9E-04	8.3E-04
2932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2937	1.4E-04	1.4E-04	1.2E-04	1.1E-04	1.2E-04	1.5E-04	2.0E-04	2.8E-04	3.6E-04	4.3E-04	4.8E-04	5.2E-04	5.4E-04
2938	1.5E-04	1.5E-04	1.3E-04	1.1E-04	1.3E-04	1.6E-04	2.1E-04	3.0E-04	3.9E-04	4.6E-04	5.2E-04	5.5E-04	5.7E-04
2939	1.6E-04	1.7E-04	1.4E-04	1.2E-04	1.4E-04	1.7E-04	2.3E-04	3.2E-04	4.2E-04	5.0E-04	5.6E-04	6.0E-04	6.2E-04
2940	1.8E-04	1.8E-04	1.5E-04	1.3E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.6E-04	5.5E-04	6.1E-04	6.6E-04	6.8E-04
2941	1.9E-04	2.0E-04	1.7E-04	1.4E-04	1.6E-04	2.0E-04	2.7E-04	3.7E-04	4.9E-04	5.9E-04	6.6E-04	7.1E-04	7.4E-04
2942	2.1E-04	2.2E-04	1.8E-04	1.5E-04	1.6E-04	2.0E-04	2.8E-04	3.9E-04	5.2E-04	6.2E-04	7.0E-04	7.6E-04	7.9E-04
2943	2.3E-04	2.4E-04	1.8E-04	1.4E-04	1.4E-04	1.7E-04	2.5E-04	3.6E-04	5.1E-04	6.3E-04	7.2E-04	7.8E-04	8.1E-04
2944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2948	1.3E-04	1.3E-04	1.1E-04	1.0E-04	1.2E-04	1.4E-04	2.0E-04	2.7E-04	3.4E-04	4.1E-04	4.6E-04	4.9E-04	5.0E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2949	1.4E-04	1.4E-04	1.2E-04	1.1E-04	1.2E-04	1.5E-04	2.0E-04	2.8E-04	3.6E-04	4.3E-04	4.9E-04	5.2E-04	5.4E-04
2950	1.5E-04	1.5E-04	1.3E-04	1.1E-04	1.3E-04	1.6E-04	2.2E-04	3.0E-04	3.9E-04	4.6E-04	5.2E-04	5.6E-04	5.8E-04
2951	1.7E-04	1.7E-04	1.4E-04	1.2E-04	1.4E-04	1.7E-04	2.3E-04	3.2E-04	4.2E-04	5.0E-04	5.6E-04	6.0E-04	6.2E-04
2952	1.8E-04	1.8E-04	1.5E-04	1.3E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.6E-04	5.5E-04	6.2E-04	6.6E-04	6.8E-04
2953	2.0E-04	2.0E-04	1.7E-04	1.4E-04	1.6E-04	2.0E-04	2.7E-04	3.8E-04	5.0E-04	6.0E-04	6.7E-04	7.2E-04	7.4E-04
2954	2.2E-04	2.2E-04	1.8E-04	1.5E-04	1.6E-04	2.0E-04	2.8E-04	3.9E-04	5.2E-04	6.3E-04	7.1E-04	7.7E-04	8.0E-04
2955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2960	1.2E-04	1.3E-04	1.1E-04	1.0E-04	1.2E-04	1.4E-04	1.9E-04	2.6E-04	3.3E-04	3.9E-04	4.4E-04	4.7E-04	4.8E-04
2961	1.3E-04	1.3E-04	1.2E-04	1.1E-04	1.2E-04	1.5E-04	2.0E-04	2.7E-04	3.5E-04	4.1E-04	4.6E-04	4.9E-04	5.1E-04
2962	1.4E-04	1.4E-04	1.2E-04	1.1E-04	1.2E-04	1.5E-04	2.1E-04	2.9E-04	3.7E-04	4.4E-04	4.9E-04	5.3E-04	5.5E-04
2963	1.5E-04	1.6E-04	1.3E-04	1.2E-04	1.3E-04	1.6E-04	2.2E-04	3.0E-04	3.9E-04	4.6E-04	5.2E-04	5.6E-04	5.8E-04
2964	1.7E-04	1.7E-04	1.4E-04	1.2E-04	1.4E-04	1.7E-04	2.3E-04	3.2E-04	4.2E-04	5.0E-04	5.7E-04	6.1E-04	6.3E-04
2965	1.8E-04	1.9E-04	1.5E-04	1.3E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.6E-04	5.5E-04	6.2E-04	6.6E-04	6.8E-04
2966	2.0E-04	2.1E-04	1.7E-04	1.4E-04	1.6E-04	2.0E-04	2.7E-04	3.8E-04	5.0E-04	6.0E-04	6.7E-04	7.2E-04	7.4E-04
2967	2.3E-04	2.3E-04	1.9E-04	1.5E-04	1.6E-04	2.1E-04	2.9E-04	4.0E-04	5.3E-04	6.4E-04	7.2E-04	7.8E-04	8.1E-04
2968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2972	1.3E-04	1.3E-04	1.1E-04	1.0E-04	1.2E-04	1.5E-04	2.0E-04	2.7E-04	3.4E-04	4.0E-04	4.4E-04	4.7E-04	4.9E-04
2973	1.4E-04	1.4E-04	1.2E-04	1.1E-04	1.2E-04	1.5E-04	2.0E-04	2.8E-04	3.6E-04	4.2E-04	4.7E-04	5.0E-04	5.2E-04
2974	1.5E-04	1.5E-04	1.2E-04	1.1E-04	1.3E-04	1.6E-04	2.1E-04	2.9E-04	3.8E-04	4.5E-04	5.0E-04	5.3E-04	5.5E-04
2975	1.6E-04	1.6E-04	1.3E-04	1.2E-04	1.3E-04	1.6E-04	2.2E-04	3.0E-04	3.9E-04	4.7E-04	5.3E-04	5.6E-04	5.8E-04
2976	1.7E-04	1.7E-04	1.4E-04	1.2E-04	1.4E-04	1.7E-04	2.3E-04	3.2E-04	4.2E-04	5.1E-04	5.7E-04	6.1E-04	6.3E-04
2977	1.9E-04	1.9E-04	1.6E-04	1.3E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.6E-04	5.5E-04	6.2E-04	6.6E-04	6.8E-04
2978	2.1E-04	2.1E-04	1.7E-04	1.5E-04	1.6E-04	2.0E-04	2.7E-04	3.8E-04	5.0E-04	6.0E-04	6.7E-04	7.2E-04	7.5E-04
2979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2983	1.2E-04	1.2E-04	1.1E-04	1.0E-04	1.2E-04	1.4E-04	1.9E-04	2.6E-04	3.3E-04	3.8E-04	4.3E-04	4.5E-04	4.7E-04
2984	1.3E-04	1.3E-04	1.1E-04	1.1E-04	1.2E-04	1.5E-04	2.0E-04	2.7E-04	3.4E-04	4.0E-04	4.5E-04	4.8E-04	5.0E-04
2985	1.4E-04	1.4E-04	1.2E-04	1.1E-04	1.2E-04	1.6E-04	2.1E-04	2.8E-04	3.6E-04	4.3E-04	4.8E-04	5.1E-04	5.3E-04
2986	1.5E-04	1.5E-04	1.3E-04	1.1E-04	1.3E-04	1.6E-04	2.2E-04	3.0E-04	3.8E-04	4.5E-04	5.0E-04	5.4E-04	5.6E-04
2987	1.6E-04	1.6E-04	1.3E-04	1.2E-04	1.3E-04	1.6E-04	2.2E-04	3.1E-04	4.0E-04	4.8E-04	5.3E-04	5.7E-04	5.9E-04
2988	1.8E-04	1.8E-04	1.5E-04	1.3E-04	1.4E-04	1.7E-04	2.4E-04	3.3E-04	4.3E-04	5.1E-04	5.7E-04	6.2E-04	6.4E-04
2989	1.9E-04	1.9E-04	1.6E-04	1.3E-04	1.5E-04	1.8E-04	2.5E-04	3.5E-04	4.6E-04	5.5E-04	6.2E-04	6.7E-04	6.9E-04
2990	2.1E-04	2.2E-04	1.7E-04	1.5E-04	1.6E-04	2.0E-04	2.7E-04	3.8E-04	5.0E-04	6.0E-04	6.7E-04	7.2E-04	7.5E-04
2991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
2993	1.2E-04	1.2E-04	1.1E-04	1.0E-04	1.2E-04	1.4E-04	1.9E-04	2.6E-04	3.3E-04	3.9E-04	4.3E-04	4.6E-04	4.7E-04
2994	1.3E-04	1.3E-04	1.1E-04	1.1E-04	1.2E-04	1.5E-04	2.0E-04	2.7E-04	3.5E-04	4.1E-04	4.6E-04	4.9E-04	5.0E-04
2995	1.4E-04	1.4E-04	1.2E-04	1.1E-04	1.3E-04	1.6E-04	2.1E-04	2.9E-04	3.7E-04	4.4E-04	4.9E-04	5.2E-04	5.4E-04
2996	1.5E-04	1.5E-04	1.3E-04	1.2E-04	1.3E-04	1.6E-04	2.2E-04	3.0E-04	3.9E-04	4.6E-04	5.1E-04	5.5E-04	5.7E-04
2997	1.7E-04	1.7E-04	1.4E-04	1.2E-04	1.3E-04	1.7E-04	2.3E-04	3.1E-04	4.1E-04	4.8E-04	5.4E-04	5.8E-04	6.0E-04
2998	1.8E-04	1.8E-04	1.5E-04	1.3E-04	1.4E-04	1.7E-04	2.4E-04	3.3E-04	4.3E-04	5.2E-04	5.8E-04	6.2E-04	6.4E-04
2999	1.2E-04	1.2E-04	1.1E-04	1.0E-04	1.2E-04	1.4E-04	1.9E-04	2.6E-04	3.3E-04	3.9E-04	4.3E-04	4.6E-04	4.8E-04
3000	1.3E-04	1.3E-04	1.1E-04	1.1E-04	1.2E-04	1.5E-04	2.0E-04	2.8E-04	3.5E-04	4.2E-04	4.6E-04	4.9E-04	5.1E-04
3001	1.4E-04	1.4E-04	1.2E-04	1.1E-04	1.3E-04	1.6E-04	2.1E-04	2.9E-04	3.7E-04	4.4E-04	4.9E-04	5.3E-04	5.4E-04
3002	1.6E-04	1.5E-04	1.3E-04	1.2E-04	1.3E-04	1.7E-04	2.2E-04	3.1E-04	3.9E-04	4.7E-04	5.2E-04	5.6E-04	5.8E-04
3003	1.7E-04	1.7E-04	1.4E-04	1.2E-04	1.4E-04	1.7E-04	2.3E-04	3.2E-04	4.2E-04	4.9E-04	5.5E-04	5.9E-04	6.1E-04
3004	1.2E-04	1.2E-04	1.1E-04	1.0E-04	1.2E-04	1.5E-04	2.0E-04	2.7E-04	3.4E-04	4.0E-04	4.4E-04	4.7E-04	4.9E-04
3005	1.4E-04	1.3E-04	1.1E-04	1.1E-04	1.2E-04	1.5E-04	2.1E-04	2.8E-04	3.6E-04	4.2E-04	4.7E-04	5.0E-04	5.2E-04
3006	1.5E-04	1.4E-04	1.2E-04	1.1E-04	1.3E-04	1.6E-04	2.2E-04	3.0E-04	3.8E-04	4.5E-04	5.0E-04	5.4E-04	5.6E-04
3007	1.6E-04	1.6E-04	1.3E-04	1.2E-04	1.3E-04	1.7E-04	2.3E-04	3.1E-04	4.0E-04	4.8E-04	5.3E-04	5.7E-04	5.9E-04
3008	1.3E-04	1.3E-04	1.1E-04	1.0E-04	1.2E-04	1.5E-04	2.0E-04	2.7E-04	3.4E-04	4.0E-04	4.5E-04	4.8E-04	5.0E-04
3009	1.4E-04	1.4E-04	1.1E-04	1.1E-04	1.2E-04	1.5E-04	2.1E-04	2.9E-04	3.7E-04	4.3E-04	4.8E-04	5.2E-04	5.3E-04
3010	1.5E-04	1.5E-04	1.2E-04	1.1E-04	1.3E-04	1.6E-04	2.2E-04	3.0E-04	3.9E-04	4.6E-04	5.1E-04	5.5E-04	5.7E-04
3011	1.3E-04	1.3E-04	1.1E-04	1.0E-04	1.2E-04	1.5E-04	2.0E-04	2.7E-04	3.5E-04	4.1E-04	4.6E-04	4.9E-04	5.0E-04
3012	1.4E-04	1.4E-04	1.2E-04	1.1E-04	1.2E-04	1.6E-04	2.1E-04	2.9E-04	3.7E-04	4.4E-04	4.9E-04	5.3E-04	5.4E-04
3013	1.3E-04	1.3E-04	1.1E-04	1.0E-04	1.2E-04	1.5E-04	2.0E-04	2.7E-04	3.5E-04	4.1E-04	4.6E-04	4.9E-04	5.1E-04
3014	1.4E-04	1.4E-04	1.2E-04	1.1E-04	1.2E-04	1.6E-04	2.1E-04	2.9E-04	3.7E-04	4.4E-04	4.9E-04	5.3E-04	5.5E-04
3015	1.2E-04	1.2E-04	1.0E-04	9.3E-05	1.1E-04	1.3E-04	1.8E-04	2.5E-04	3.2E-04	3.8E-04	4.2E-04	4.5E-04	4.6E-04
3016	1.3E-04	1.3E-04	1.1E-04	9.9E-05	1.2E-04	1.4E-04	2.0E-04	2.7E-04	3.4E-04	4.1E-04	4.6E-04	4.9E-04	5.0E-04
3017	1.5E-04	1.4E-04	1.2E-04	1.1E-04	1.2E-04	1.5E-04	2.1E-04	2.9E-04	3.7E-04	4.4E-04	4.9E-04	5.3E-04	5.4E-04
3018	1.2E-04	1.2E-04	1.0E-04	9.0E-05	1.0E-04	1.3E-04	1.7E-04	2.4E-04	3.1E-04	3.7E-04	4.1E-04	4.4E-04	4.5E-04
3019	1.3E-04	1.3E-04	1.1E-04	9.6E-05	1.1E-04	1.4E-04	1.9E-04	2.6E-04	3.3E-04	4.0E-04	4.4E-04	4.8E-04	4.9E-04
3020	1.5E-04	1.5E-04	1.2E-04	1.0E-04	1.2E-04	1.5E-04	2.0E-04	2.8E-04	3.6E-04	4.3E-04	4.8E-04	5.2E-04	5.3E-04
3021	1.2E-04	1.2E-04	9.8E-05	8.5E-05	9.5E-05	1.2E-04	1.6E-04	2.2E-04	2.9E-04	3.5E-04	3.9E-04	4.2E-04	4.4E-04
3022	1.3E-04	1.3E-04	1.1E-04	9.1E-05	1.0E-04	1.3E-04	1.7E-04	2.4E-04	3.2E-04	3.8E-04	4.3E-04	4.6E-04	4.7E-04
3023	1.2E-04	1.2E-04	9.4E-05	7.8E-05	8.4E-05	1.0E-04	1.4E-04	2.0E-04	2.7E-04	3.3E-04	3.7E-04	4.0E-04	4.1E-04
3024	1.3E-04	1.3E-04	1.0E-04	8.4E-05	9.2E-05	1.1E-04	1.5E-04	2.2E-04	2.9E-04	3.6E-04	4.0E-04	4.4E-04	4.5E-04
3025	1.2E-04	1.2E-04	9.0E-05	7.0E-05	7.2E-05	8.5E-05	1.2E-04	1.7E-04	2.4E-04	3.0E-04	3.4E-04	3.7E-04	3.9E-04
3026	1.2E-04	1.2E-04	8.6E-05	6.2E-05	5.9E-05	6.8E-05	9.8E-05	1.5E-04	2.2E-04	2.7E-04	3.2E-04	3.5E-04	3.6E-04
3027	1.2E-04	1.2E-04	8.2E-05	5.3E-05	4.7E-05	5.1E-05	7.7E-05	1.2E-04	1.9E-04	2.5E-04	2.9E-04	3.2E-04	3.3E-04
3028	1.4E-04	1.4E-04	9.0E-05	5.7E-05	5.0E-05	5.5E-05	8.3E-05	1.3E-04	2.1E-04	2.7E-04	3.2E-04	3.5E-04	3.6E-04
3029	1.1E-04	1.1E-04	7.1E-05	4.0E-05	2.8E-05	2.6E-05	4.3E-05	7.7E-05	1.4E-04	1.9E-04	2.3E-04	2.5E-04	2.7E-04
3030	1.1E-04	1.1E-04	7.0E-05	3.7E-05	2.2E-05	1.8E-05	3.3E-05	6.5E-05	1.3E-04	1.8E-04	2.1E-04	2.4E-04	2.5E-04
3031	1.2E-04	1.2E-04	7.6E-05	3.8E-05	2.2E-05	1.6E-05	3.1E-05	6.5E-05	1.3E-04	1.9E-04	2.3E-04	2.5E-04	2.7E-04
3032	1.1E-04	1.1E-04	6.9E-05	3.3E-05	1.7E-05	9.8E-06	2.2E-05	5.1E-05	1.1E-04	1.6E-04	2.0E-04	2.2E-04	2.4E-04
3033	1.2E-04	1.2E-04	7.4E-05	3.5E-05	1.6E-05	7.9E-06	2.0E-05	5.1E-05	1.2E-04	1.7E-04	2.1E-04	2.4E-04	2.5E-04
3034	1.0E-04	1.0E-04	6.3E-05	2.9E-05	1.2E-05	5.1E-06	1.5E-05	4.2E-05	9.8E-05	1.5E-04	1.8E-04	2.0E-04	2.2E-04
3035	1.1E-04	1.1E-04	6.7E-05	3.0E-05	1.1E-05	2.5E-06	1.3E-05	4.0E-05	9.9E-05	1.5E-04	1.9E-04	2.1E-04	2.2E-04
3036	1.0E-04	1.1E-04	6.2E-05	2.7E-05	8.9E-06	7.4E-07	1.0E-05	3.6E-05	9.3E-05	1.4E-04	1.8E-04	2.0E-04	2.1E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3037	1.1E-04	1.1E-04	6.7E-05	2.8E-05	7.9E-06	-1.7E-06	7.4E-06	3.4E-05	9.4E-05	1.4E-04	1.8E-04	2.1E-04	2.2E-04
3038	9.7E-05	9.9E-05	5.9E-05	2.5E-05	8.2E-06	8.3E-07	1.0E-05	3.5E-05	8.9E-05	1.3E-04	1.7E-04	1.9E-04	2.0E-04
3039	1.1E-04	1.1E-04	6.2E-05	2.6E-05	7.1E-06	-1.5E-06	7.4E-06	3.3E-05	9.0E-05	1.4E-04	1.7E-04	2.0E-04	2.1E-04
3040	1.2E-04	1.2E-04	6.8E-05	2.7E-05	6.5E-06	-3.4E-06	5.8E-06	3.3E-05	9.5E-05	1.5E-04	1.9E-04	2.1E-04	2.2E-04
3041	4.4E-04	5.0E-04	6.0E-05	-3.7E-04	-7.5E-04	-1.0E-03	-1.3E-03	-1.4E-03	-1.1E-03	-8.4E-04	-6.5E-04	-5.2E-04	-4.6E-04
3042	1.8E-04	1.9E-04	1.1E-04	3.7E-05	-4.9E-06	-1.6E-05	7.7E-06	6.2E-05	1.9E-04	2.9E-04	3.7E-04	4.2E-04	4.5E-04
3043	1.8E-04	1.9E-04	1.1E-04	3.6E-05	-8.8E-06	-2.3E-05	-1.6E-06	5.0E-05	1.8E-04	2.8E-04	3.6E-04	4.1E-04	4.4E-04
3044	1.8E-04	2.0E-04	1.1E-04	3.3E-05	-1.6E-05	-3.4E-05	-1.5E-05	3.4E-05	1.6E-04	2.7E-04	3.5E-04	4.0E-04	4.3E-04
3045	1.9E-04	2.0E-04	1.1E-04	2.9E-05	-2.5E-05	-4.7E-05	-3.2E-05	1.5E-05	1.4E-04	2.5E-04	3.3E-04	3.9E-04	4.1E-04
3046	1.9E-04	2.1E-04	1.1E-04	2.4E-05	-3.6E-05	-6.3E-05	-5.2E-05	-8.6E-06	1.2E-04	2.3E-04	3.2E-04	3.7E-04	4.0E-04
3047	2.0E-04	2.2E-04	1.2E-04	2.0E-05	-4.5E-05	-7.7E-05	-7.0E-05	-3.0E-05	1.0E-04	2.2E-04	3.0E-04	3.6E-04	3.8E-04
3048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3052	2.3E-04	2.5E-04	1.1E-04	-2.3E-05	-1.2E-04	-1.7E-04	-1.8E-04	-1.4E-04	3.0E-05	1.8E-04	2.8E-04	3.6E-04	3.9E-04
3053	2.3E-04	2.5E-04	1.2E-04	-1.5E-05	-1.1E-04	-1.7E-04	-1.7E-04	-1.4E-04	3.6E-05	1.8E-04	2.9E-04	3.6E-04	4.0E-04
3054	1.6E-04	1.7E-04	9.8E-05	3.6E-05	5.0E-06	4.0E-06	3.8E-05	1.0E-04	2.3E-04	3.4E-04	4.2E-04	4.7E-04	5.0E-04
3055	1.7E-04	1.8E-04	1.0E-04	3.8E-05	3.4E-06	-1.1E-06	3.0E-05	9.1E-05	2.2E-04	3.2E-04	4.0E-04	4.6E-04	4.8E-04
3056	1.8E-04	1.9E-04	1.1E-04	3.7E-05	-3.7E-06	-1.3E-05	1.5E-05	7.3E-05	2.0E-04	3.1E-04	3.9E-04	4.4E-04	4.7E-04
3057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3067	2.4E-04	2.6E-04	1.1E-04	-2.9E-05	-1.3E-04	-1.9E-04	-2.1E-04	-1.7E-04	3.8E-06	1.5E-04	2.6E-04	3.4E-04	3.7E-04
3068	2.4E-04	2.6E-04	1.2E-04	-2.1E-05	-1.3E-04	-1.9E-04	-2.0E-04	-1.7E-04	9.7E-06	1.6E-04	2.7E-04	3.4E-04	3.8E-04
3069	2.4E-04	2.6E-04	1.1E-04	-3.2E-05	-1.4E-04	-2.0E-04	-2.1E-04	-1.8E-04	7.9E-06	1.6E-04	2.8E-04	3.5E-04	3.9E-04
3070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3071	2.3E-04	2.6E-04	1.0E-04	-3.8E-05	-1.4E-04	-2.0E-04	-2.1E-04	-1.7E-04	1.7E-05	1.7E-04	2.9E-04	3.7E-04	4.1E-04
3072	1.6E-04	1.7E-04	1.0E-04	5.4E-05	3.5E-05	4.6E-05	9.2E-05	1.7E-04	3.0E-04	4.1E-04	4.9E-04	5.4E-04	5.7E-04
3073	1.6E-04	1.7E-04	4.9E-05	-4.9E-05	-1.0E-04	-1.2E-04	-8.0E-05	-1.3E-06	1.9E-04	3.5E-04	4.7E-04	5.5E-04	5.9E-04
3074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3087	2.5E-04	2.7E-04	1.1E-04	-3.7E-05	-1.5E-04	-2.2E-04	-2.3E-04	-2.1E-04	-2.4E-05	1.3E-04	2.4E-04	3.2E-04	3.6E-04
3088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3091	2.4E-04	2.7E-04	1.0E-04	-5.2E-05	-1.7E-04	-2.4E-04	-2.5E-04	-2.1E-04	-1.5E-05	1.5E-04	2.7E-04	3.6E-04	4.0E-04
3092	2.3E-04	2.6E-04	1.3E-04	2.8E-06	-9.3E-05	-1.5E-04	-1.5E-04	-1.2E-04	3.9E-05	1.8E-04	2.8E-04	3.4E-04	3.8E-04
3093	2.3E-04	2.5E-04	1.4E-04	2.8E-05	-5.6E-05	-1.0E-04	-1.1E-04	-7.6E-05	6.7E-05	1.9E-04	2.8E-04	3.4E-04	3.7E-04
3094	1.6E-04	1.6E-04	1.2E-04	8.9E-05	8.5E-05	1.1E-04	1.6E-04	2.5E-04	3.7E-04	4.6E-04	5.4E-04	5.9E-04	6.1E-04
3095	1.6E-04	1.7E-04	1.1E-04	5.9E-05	4.1E-05	5.4E-05	1.0E-04	1.8E-04	3.2E-04	4.3E-04	5.1E-04	5.7E-04	5.9E-04
3096	1.7E-04	1.8E-04	6.1E-05	-3.3E-05	-8.3E-05	-9.1E-05	-5.2E-05	2.9E-05	2.2E-04	3.7E-04	4.9E-04	5.7E-04	6.0E-04
3097	1.7E-04	1.8E-04	1.0E-04	3.6E-05	2.1E-06	1.5E-06	4.0E-05	1.1E-04	2.5E-04	3.7E-04	4.6E-04	5.2E-04	5.5E-04
3098	1.8E-04	1.9E-04	1.1E-04	3.8E-05	-9.4E-07	-6.0E-06	2.8E-05	9.4E-05	2.3E-04	3.5E-04	4.4E-04	4.9E-04	5.2E-04
3099	1.9E-04	2.0E-04	1.1E-04	3.3E-05	-1.3E-05	-2.4E-05	4.9E-06	6.7E-05	2.1E-04	3.3E-04	4.1E-04	4.7E-04	5.0E-04
3100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3114	2.5E-04	2.8E-04	1.0E-04	-6.8E-05	-2.0E-04	-2.7E-04	-2.9E-04	-2.6E-04	-5.3E-05	1.2E-04	2.5E-04	3.4E-04	3.8E-04
3115	2.4E-04	2.7E-04	1.3E-04	-5.1E-06	-1.1E-04	-1.7E-04	-1.8E-04	-1.6E-04	1.2E-05	1.5E-04	2.6E-04	3.3E-04	3.6E-04
3116	2.3E-04	2.6E-04	1.4E-04	2.2E-05	-6.9E-05	-1.2E-04	-1.3E-04	-1.0E-04	4.3E-05	1.7E-04	2.6E-04	3.2E-04	3.5E-04
3117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3118	1.5E-04	1.6E-04	1.3E-04	1.1E-04	1.1E-04	1.4E-04	2.0E-04	2.9E-04	4.0E-04	4.9E-04	5.6E-04	6.1E-04	6.3E-04
3119	1.6E-04	1.7E-04	1.3E-04	9.6E-05	9.4E-05	1.2E-04	1.8E-04	2.7E-04	3.9E-04	4.8E-04	5.6E-04	6.1E-04	6.3E-04
3120	1.7E-04	1.7E-04	1.1E-04	6.4E-05	4.8E-05	6.3E-05	1.1E-04	2.0E-04	3.4E-04	4.5E-04	5.3E-04	5.9E-04	6.2E-04
3121	1.7E-04	1.8E-04	7.2E-05	-1.7E-05	-6.2E-05	-6.7E-05	-2.4E-05	6.0E-05	2.5E-04	4.0E-04	5.1E-04	5.9E-04	6.2E-04
3122	1.8E-04	1.9E-04	1.1E-04	4.0E-05	6.5E-06	7.4E-06	4.8E-05	1.2E-04	2.7E-04	3.9E-04	4.8E-04	5.4E-04	5.7E-04
3123	1.9E-04	2.0E-04	1.1E-04	3.9E-05	-1.2E-06	-5.9E-06	3.0E-05	1.0E-04	2.5E-04	3.7E-04	4.6E-04	5.2E-04	5.5E-04
3124	2.0E-04	2.1E-04	1.2E-04	3.2E-05	-1.6E-05	-2.8E-05	1.7E-06	6.6E-05	2.1E-04	3.4E-04	4.3E-04	4.9E-04	5.2E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3134	2.6E-04	2.9E-04	1.1E-04	-5.6E-05	-1.9E-04	-2.7E-04	-3.0E-04	-2.8E-04	-9.3E-05	6.4E-05	1.8E-04	2.6E-04	3.0E-04
3135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3137	2.7E-04	3.0E-04	1.2E-04	-5.0E-05	-1.8E-04	-2.7E-04	-3.0E-04	-2.8E-04	-8.4E-05	7.9E-05	2.0E-04	2.8E-04	3.2E-04
3138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3139	2.6E-04	2.9E-04	9.6E-05	-8.8E-05	-2.3E-04	-3.2E-04	-3.4E-04	-3.2E-04	-9.6E-05	8.7E-05	2.3E-04	3.2E-04	3.6E-04
3140	2.5E-04	2.8E-04	1.3E-04	-1.5E-05	-1.3E-04	-2.0E-04	-2.2E-04	-1.9E-04	-2.0E-05	1.3E-04	2.3E-04	3.1E-04	3.4E-04
3141	2.4E-04	2.7E-04	1.4E-04	1.5E-05	-8.5E-05	-1.4E-04	-1.6E-04	-1.4E-04	1.4E-05	1.4E-04	2.4E-04	3.0E-04	3.3E-04
3142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3143	2.2E-04	2.4E-04	1.4E-04	4.0E-05	-3.9E-05	-8.3E-05	-8.7E-05	-5.9E-05	7.1E-05	1.8E-04	2.6E-04	3.2E-04	3.5E-04
3144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3145	1.4E-04	1.5E-04	1.3E-04	1.1E-04	1.2E-04	1.6E-04	2.2E-04	3.1E-04	4.1E-04	4.9E-04	5.6E-04	6.0E-04	6.2E-04
3146	1.5E-04	1.6E-04	1.3E-04	1.1E-04	1.2E-04	1.5E-04	2.1E-04	3.0E-04	4.1E-04	5.1E-04	5.8E-04	6.2E-04	6.4E-04
3147	1.6E-04	1.7E-04	1.3E-04	1.0E-04	1.0E-04	1.3E-04	1.9E-04	2.8E-04	4.0E-04	5.0E-04	5.8E-04	6.3E-04	6.5E-04
3148	1.7E-04	1.8E-04	1.2E-04	6.5E-05	4.9E-05	6.5E-05	1.2E-04	2.1E-04	3.5E-04	4.7E-04	5.5E-04	6.1E-04	6.4E-04
3149	1.8E-04	1.9E-04	7.6E-05	-1.4E-05	-5.9E-05	-6.2E-05	-1.6E-05	7.3E-05	2.6E-04	4.2E-04	5.4E-04	6.2E-04	6.6E-04
3150	1.9E-04	2.0E-04	1.1E-04	4.4E-05	1.2E-05	1.4E-05	5.8E-05	1.4E-04	2.9E-04	4.2E-04	5.1E-04	5.7E-04	6.0E-04
3151	2.0E-04	2.1E-04	1.2E-04	4.1E-05	2.4E-07	-3.7E-06	3.4E-05	1.1E-04	2.6E-04	3.9E-04	4.8E-04	5.5E-04	5.8E-04
3152	2.1E-04	2.2E-04	1.2E-04	3.1E-05	-2.0E-05	-3.2E-05	-1.1E-06	6.7E-05	2.2E-04	3.5E-04	4.5E-04	5.1E-04	5.5E-04
3153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3164	2.8E-04	3.1E-04	1.1E-04	-8.0E-05	-2.3E-04	-3.3E-04	-3.7E-04	-3.5E-04	-1.4E-04	4.0E-05	1.7E-04	2.6E-04	3.1E-04
3165	2.8E-04	3.2E-04	1.2E-04	-6.8E-05	-2.2E-04	-3.1E-04	-3.5E-04	-3.5E-04	-1.4E-04	3.3E-05	1.6E-04	2.5E-04	2.9E-04
3166	2.8E-04	3.1E-04	7.9E-05	-1.4E-04	-3.1E-04	-4.2E-04	-4.6E-04	-4.4E-04	-1.9E-04	1.5E-05	1.7E-04	2.8E-04	3.3E-04
3167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3169	2.5E-04	2.8E-04	1.4E-04	7.3E-06	-1.0E-04	-1.7E-04	-1.9E-04	-1.7E-04	-1.9E-05	1.1E-04	2.1E-04	2.7E-04	3.0E-04
3170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3171	2.3E-04	2.5E-04	1.4E-04	3.3E-05	-5.3E-05	-1.0E-04	-1.1E-04	-8.5E-05	4.9E-05	1.6E-04	2.5E-04	3.1E-04	3.3E-04
3172	2.2E-04	2.4E-04	1.1E-04	-2.8E-06	-7.8E-05	-1.0E-04	-7.2E-05	5.4E-06	2.1E-04	3.8E-04	5.1E-04	6.0E-04	6.4E-04
3173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3174	1.5E-04	1.5E-04	1.3E-04	1.2E-04	1.3E-04	1.6E-04	2.3E-04	3.2E-04	4.2E-04	5.0E-04	5.6E-04	6.1E-04	6.3E-04
3175	1.6E-04	1.6E-04	1.4E-04	1.2E-04	1.2E-04	1.6E-04	2.2E-04	3.1E-04	4.2E-04	5.2E-04	5.8E-04	6.3E-04	6.5E-04
3176	1.7E-04	1.7E-04	1.3E-04	1.0E-04	1.1E-04	1.3E-04	2.0E-04	2.9E-04	4.1E-04	5.1E-04	5.8E-04	6.3E-04	6.6E-04
3177	1.7E-04	1.8E-04	1.2E-04	7.0E-05	5.6E-05	7.4E-05	1.3E-04	2.2E-04	3.7E-04	4.9E-04	5.8E-04	6.4E-04	6.7E-04
3178	1.8E-04	1.9E-04	8.5E-05	-1.6E-06	-4.3E-05	-4.2E-05	7.6E-06	1.0E-04	2.9E-04	4.5E-04	5.7E-04	6.4E-04	6.8E-04
3179	1.9E-04	2.1E-04	1.2E-04	5.0E-05	1.9E-05	2.4E-05	7.1E-05	1.6E-04	3.1E-04	4.4E-04	5.4E-04	6.1E-04	6.4E-04
3180	2.1E-04	2.2E-04	1.2E-04	4.3E-05	2.1E-06	-2.7E-07	4.1E-05	1.2E-04	2.8E-04	4.1E-04	5.1E-04	5.8E-04	6.1E-04
3181	2.2E-04	2.3E-04	1.2E-04	3.0E-05	-2.3E-05	-3.5E-05	-2.3E-06	6.9E-05	2.3E-04	3.7E-04	4.7E-04	5.4E-04	5.7E-04
3182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3191	2.9E-04	3.2E-04	1.3E-04	-6.3E-05	-2.1E-04	-3.1E-04	-3.6E-04	-3.7E-04	-1.8E-04	-2.5E-05	9.1E-05	1.7E-04	2.1E-04
3192	3.0E-04	3.3E-04	1.2E-04	-8.5E-05	-2.5E-04	-3.6E-04	-4.1E-04	-4.1E-04	-2.0E-04	-3.0E-05	9.9E-05	1.8E-04	2.3E-04
3193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3194	3.0E-04	3.3E-04	1.2E-04	-9.2E-05	-2.6E-04	-3.7E-04	-4.3E-04	-4.3E-04	-2.1E-04	-2.7E-05	1.1E-04	2.0E-04	2.5E-04
3195	2.9E-04	3.3E-04	8.6E-05	-1.4E-04	-3.2E-04	-4.4E-04	-4.9E-04	-4.8E-04	-2.3E-04	-2.7E-05	1.3E-04	2.3E-04	2.8E-04
3196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3198	2.6E-04	2.9E-04	1.4E-04	-3.8E-06	-1.2E-04	-2.0E-04	-2.3E-04	-2.2E-04	-5.7E-05	7.7E-05	1.8E-04	2.4E-04	2.8E-04
3199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3200	2.4E-04	2.6E-04	1.5E-04	2.8E-05	-6.5E-05	-1.2E-04	-1.4E-04	-1.2E-04	1.7E-05	1.3E-04	2.2E-04	2.7E-04	3.0E-04
3201	2.2E-04	2.5E-04	1.3E-04	1.2E-05	-7.3E-05	-1.2E-04	-1.1E-04	-7.1E-05	9.0E-05	2.3E-04	3.3E-04	3.9E-04	4.3E-04
3202	2.1E-04	2.3E-04	-4.6E-07	-1.8E-04	-2.9E-04	-3.0E-04	-2.3E-04	-6.5E-05	3.3E-04	6.5E-04	8.9E-04	1.1E-03	1.1E-03
3203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3206	3.0E-04	3.3E-04	1.3E-04	-7.9E-05	-2.4E-04	-3.6E-04	-4.1E-04	-4.2E-04	-2.3E-04	-7.6E-05	4.2E-05	1.2E-04	1.6E-04
3207	3.1E-04	3.4E-04	1.2E-04	-9.2E-05	-2.7E-04	-3.9E-04	-4.5E-04	-4.7E-04	-2.7E-04	-1.0E-04	2.0E-05	1.0E-04	1.4E-04
3208	3.2E-04	3.5E-04	1.2E-04	-1.1E-04	-3.0E-04	-4.3E-04	-5.0E-04	-5.2E-04	-3.0E-04	-1.2E-04	1.8E-05	1.1E-04	1.5E-04
3209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3210	3.2E-04	3.5E-04	1.1E-04	-1.2E-04	-3.1E-04	-4.4E-04	-5.1E-04	-5.2E-04	-2.9E-04	-9.5E-05	5.1E-05	1.5E-04	2.0E-04
3211	3.1E-04	3.4E-04	8.7E-05	-1.6E-04	-3.5E-04	-4.8E-04	-5.5E-04	-5.5E-04	-2.9E-04	-8.2E-05	7.7E-05	1.8E-04	2.4E-04
3212	3.0E-04	3.3E-04	6.5E-05	-1.9E-04	-3.8E-04	-5.1E-04	-5.7E-04	-5.7E-04	-2.9E-04	-6.4E-05	1.1E-04	2.2E-04	2.8E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3213	2.9E-04	3.2E-04	1.3E-04	-6.4E-05	-2.2E-04	-3.2E-04	-3.6E-04	-3.6E-04	-1.6E-04	5.7E-06	1.3E-04	2.1E-04	2.5E-04
3214	2.7E-04	3.0E-04	1.4E-04	-2.2E-05	-1.5E-04	-2.4E-04	-2.8E-04	-2.7E-04	-1.0E-04	3.7E-05	1.4E-04	2.1E-04	2.5E-04
3215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3216	2.4E-04	2.7E-04	1.5E-04	1.9E-05	-8.3E-05	-1.5E-04	-1.7E-04	-1.5E-04	-1.1E-05	1.1E-04	2.0E-04	2.5E-04	2.8E-04
3217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3218	2.2E-04	2.4E-04	1.5E-05	-1.8E-04	-3.3E-04	-4.2E-04	-4.3E-04	-3.9E-04	-1.2E-04	9.6E-05	2.6E-04	3.7E-04	4.3E-04
3219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3221	3.2E-04	3.5E-04	1.1E-04	-1.3E-04	-3.3E-04	-4.6E-04	-5.4E-04	-5.6E-04	-3.5E-04	-1.7E-04	-3.5E-05	5.4E-05	9.9E-05
3222	3.3E-04	3.7E-04	1.1E-04	-1.5E-04	-3.7E-04	-5.2E-04	-6.0E-04	-6.4E-04	-4.1E-04	-2.2E-04	-7.9E-05	1.6E-05	6.3E-05
3223	3.4E-04	3.8E-04	9.6E-05	-1.8E-04	-4.0E-04	-5.7E-04	-6.6E-04	-7.0E-04	-4.5E-04	-2.5E-04	-9.3E-05	9.4E-06	6.0E-05
3224	3.4E-04	3.8E-04	6.5E-05	-2.3E-04	-4.7E-04	-6.3E-04	-7.2E-04	-7.4E-04	-4.5E-04	-2.1E-04	-2.3E-05	9.8E-05	1.6E-04
3225	3.3E-04	3.7E-04	8.3E-05	-1.9E-04	-4.2E-04	-5.7E-04	-6.6E-04	-6.8E-04	-4.2E-04	-1.9E-04	-2.8E-05	8.3E-05	1.4E-04
3226	3.2E-04	3.6E-04	6.1E-05	-2.2E-04	-4.5E-04	-6.0E-04	-6.8E-04	-6.9E-04	-4.1E-04	-1.7E-04	7.1E-06	1.3E-04	1.9E-04
3227	3.1E-04	3.5E-04	1.8E-05	-2.8E-04	-5.2E-04	-6.8E-04	-7.5E-04	-7.5E-04	-4.2E-04	-1.5E-04	5.8E-05	2.0E-04	2.6E-04
3228	3.0E-04	3.3E-04	1.0E-04	-1.2E-04	-3.0E-04	-4.2E-04	-4.8E-04	-4.8E-04	-2.5E-04	-5.2E-05	9.3E-05	1.9E-04	2.4E-04
3229	2.8E-04	3.1E-04	1.2E-04	-7.5E-05	-2.3E-04	-3.4E-04	-3.8E-04	-3.8E-04	-1.8E-04	-1.1E-05	1.2E-04	2.0E-04	2.4E-04
3230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3231	2.5E-04	2.8E-04	1.3E-04	-1.6E-05	-1.3E-04	-2.1E-04	-2.3E-04	-2.1E-04	-4.5E-05	9.5E-05	2.0E-04	2.7E-04	3.0E-04
3232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3233	2.3E-04	2.5E-04	3.4E-05	-1.6E-04	-3.1E-04	-4.0E-04	-4.3E-04	-4.0E-04	-1.5E-04	5.1E-05	2.0E-04	3.0E-04	3.6E-04
3234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3237	3.5E-04	3.9E-04	6.6E-05	-2.4E-04	-4.9E-04	-6.8E-04	-7.8E-04	-8.2E-04	-5.3E-04	-2.9E-04	-1.1E-04	1.0E-05	7.0E-05
3238	3.4E-04	3.8E-04	5.1E-05	-2.6E-04	-5.1E-04	-6.8E-04	-7.8E-04	-8.1E-04	-5.0E-04	-2.5E-04	-6.6E-05	5.9E-05	1.2E-04
3239	3.3E-04	3.6E-04	-1.7E-05	-3.6E-04	-6.4E-04	-8.3E-04	-9.2E-04	-9.3E-04	-5.5E-04	-2.4E-04	-1.0E-05	1.4E-04	2.2E-04
3240	3.1E-04	3.5E-04	9.5E-05	-1.5E-04	-3.5E-04	-4.9E-04	-5.5E-04	-5.6E-04	-3.2E-04	-1.1E-04	4.1E-05	1.4E-04	1.9E-04
3241	3.0E-04	3.3E-04	1.2E-04	-9.4E-05	-2.7E-04	-3.8E-04	-4.4E-04	-4.4E-04	-2.3E-04	-5.7E-05	7.5E-05	1.6E-04	2.1E-04
3242	2.8E-04	3.1E-04	1.2E-04	-6.2E-05	-2.1E-04	-3.1E-04	-3.5E-04	-3.5E-04	-1.5E-04	1.1E-05	1.3E-04	2.1E-04	2.6E-04
3243	2.7E-04	2.9E-04	1.3E-04	-2.8E-05	-1.6E-04	-2.3E-04	-2.6E-04	-2.4E-04	-6.6E-05	8.4E-05	2.0E-04	2.7E-04	3.1E-04
3244	2.5E-04	2.8E-04	1.3E-04	-2.3E-05	-1.4E-04	-2.0E-04	-2.1E-04	-1.8E-04	2.9E-06	1.6E-04	2.7E-04	3.5E-04	3.9E-04
3245	2.4E-04	2.6E-04	9.7E-05	-5.5E-05	-1.7E-04	-2.2E-04	-2.2E-04	-1.7E-04	3.8E-05	2.1E-04	3.5E-04	4.3E-04	4.8E-04
3246	2.2E-04	2.5E-04	9.9E-05	-3.6E-05	-1.3E-04	-1.7E-04	-1.6E-04	-9.4E-05	1.2E-04	2.9E-04	4.3E-04	5.1E-04	5.6E-04
3247	2.1E-04	2.3E-04	1.1E-04	2.0E-06	-5.2E-05	-4.8E-05	1.9E-05	1.4E-04	3.9E-04	6.0E-04	7.5E-04	8.5E-04	9.0E-04
3248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3251	3.6E-04	4.0E-04	8.0E-05	-2.3E-04	-4.8E-04	-6.7E-04	-7.7E-04	-8.2E-04	-5.4E-04	-3.1E-04	-1.4E-04	-2.0E-05	3.8E-05
3252	3.4E-04	3.8E-04	8.0E-07	-3.5E-04	-6.4E-04	-8.4E-04	-9.5E-04	-9.7E-04	-6.2E-04	-3.2E-04	-1.0E-04	4.6E-05	1.2E-04
3253	3.3E-04	3.7E-04	1.3E-04	-1.1E-04	-3.1E-04	-4.6E-04	-5.4E-04	-5.6E-04	-3.5E-04	-1.7E-04	-3.6E-05	5.3E-05	9.8E-05
3254	3.1E-04	3.5E-04	1.5E-04	-4.5E-05	-2.1E-04	-3.3E-04	-3.9E-04	-4.2E-04	-2.4E-04	-9.3E-05	1.8E-05	9.2E-05	1.3E-04
3255	3.0E-04	3.3E-04	1.7E-04	-4.9E-06	-1.5E-04	-2.5E-04	-2.9E-04	-3.1E-04	-1.5E-04	-2.5E-05	7.2E-05	1.4E-04	1.7E-04
3256	2.8E-04	3.1E-04	1.7E-04	2.7E-05	-9.2E-05	-1.7E-04	-2.0E-04	-2.0E-04	-6.3E-05	5.4E-05	1.4E-04	2.0E-04	2.3E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3257	2.6E-04	2.9E-04	1.7E-04	4.7E-05	-5.2E-05	-1.1E-04	-1.3E-04	-1.1E-04	2.5E-05	1.4E-04	2.3E-04	2.9E-04	3.1E-04
3258	2.5E-04	2.7E-04	1.6E-04	5.1E-05	-3.3E-05	-7.7E-05	-7.6E-05	-4.0E-05	1.1E-04	2.3E-04	3.2E-04	3.8E-04	4.1E-04
3259	2.3E-04	2.5E-04	1.5E-04	4.6E-05	-2.5E-05	-5.3E-05	-3.3E-05	2.6E-05	1.9E-04	3.3E-04	4.3E-04	5.0E-04	5.4E-04
3260	2.2E-04	2.4E-04	1.2E-04	4.9E-06	-6.3E-05	-7.9E-05	-3.7E-05	5.3E-05	2.7E-04	4.5E-04	5.8E-04	6.7E-04	7.1E-04
3261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3263	3.8E-04	4.2E-04	7.6E-05	-2.6E-04	-5.4E-04	-7.5E-04	-8.8E-04	-9.4E-04	-6.5E-04	-4.1E-04	-2.3E-04	-1.1E-04	-5.4E-05
3264	3.6E-04	4.0E-04	2.4E-05	-3.3E-04	-6.3E-04	-8.4E-04	-9.6E-04	-1.0E-03	-6.8E-04	-4.0E-04	-1.9E-04	-5.4E-05	1.5E-05
3265	3.5E-04	3.9E-04	1.4E-04	-1.1E-04	-3.2E-04	-4.7E-04	-5.7E-04	-6.1E-04	-4.0E-04	-2.3E-04	-9.8E-05	-1.1E-05	3.2E-05
3266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3267	3.1E-04	3.4E-04	1.9E-04	1.9E-05	-1.3E-04	-2.3E-04	-2.8E-04	-2.9E-04	-1.5E-04	-3.1E-05	6.0E-05	1.2E-04	1.5E-04
3268	2.9E-04	3.2E-04	1.9E-04	5.1E-05	-6.9E-05	-1.5E-04	-1.8E-04	-1.9E-04	-5.7E-05	5.4E-05	1.4E-04	1.9E-04	2.2E-04
3269	2.8E-04	3.0E-04	2.0E-04	7.7E-05	-1.9E-05	-7.8E-05	-9.3E-05	-7.7E-05	4.7E-05	1.5E-04	2.3E-04	2.9E-04	3.2E-04
3270	2.6E-04	2.8E-04	1.9E-04	9.1E-05	1.3E-05	-2.6E-05	-2.4E-05	1.1E-05	1.4E-04	2.5E-04	3.3E-04	3.9E-04	4.2E-04
3271	2.4E-04	2.7E-04	1.8E-04	9.3E-05	3.1E-05	7.9E-06	2.8E-05	8.2E-05	2.2E-04	3.4E-04	4.3E-04	4.9E-04	5.2E-04
3272	2.3E-04	2.5E-04	1.7E-04	8.8E-05	3.9E-05	3.1E-05	6.9E-05	1.4E-04	3.0E-04	4.4E-04	5.3E-04	6.0E-04	6.3E-04
3273	4.0E-04	4.4E-04	6.9E-05	-3.0E-04	-6.1E-04	-8.5E-04	-1.0E-03	-1.1E-03	-7.9E-04	-5.4E-04	-3.6E-04	-2.4E-04	-1.7E-04
3274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3282	2.4E-04	2.6E-04	1.9E-04	1.2E-04	6.9E-05	5.9E-05	9.2E-05	1.6E-04	3.0E-04	4.1E-04	5.0E-04	5.6E-04	5.9E-04
3283	4.3E-04	4.7E-04	6.5E-05	-3.4E-04	-6.9E-04	-9.6E-04	-1.1E-03	-1.3E-03	-9.6E-04	-7.1E-04	-5.2E-04	-4.0E-04	-3.4E-04
3284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3285	3.9E-04	4.4E-04	1.5E-04	-1.5E-04	-4.0E-04	-6.0E-04	-7.2E-04	-8.0E-04	-5.9E-04	-4.0E-04	-2.7E-04	-1.8E-04	-1.3E-04
3286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3297	2.2E-04	2.5E-04	9.8E-05	-4.1E-05	-1.4E-04	-2.0E-04	-2.0E-04	-1.6E-04	3.5E-05	1.9E-04	3.1E-04	3.9E-04	4.3E-04
3298	2.2E-04	2.4E-04	4.0E-05	-1.4E-04	-2.7E-04	-3.4E-04	-3.4E-04	-2.9E-04	-3.0E-05	1.8E-04	3.4E-04	4.5E-04	5.0E-04
3299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3300	1.6E-04	1.7E-04	1.0E-04	4.1E-05	7.9E-06	2.2E-06	2.9E-05	8.4E-05	2.0E-04	3.0E-04	3.7E-04	4.2E-04	4.4E-04

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3301	1.7E-04	1.8E-04	1.1E-04	4.1E-05	4.6E-06	-3.6E-06	2.1E-05	7.5E-05	1.9E-04	2.9E-04	3.6E-04	4.1E-04	4.3E-04
3302	1.7E-04	1.8E-04	1.1E-04	3.9E-05	-1.8E-06	-1.3E-05	9.1E-06	6.1E-05	1.8E-04	2.8E-04	3.6E-04	4.0E-04	4.3E-04
3303	1.8E-04	1.9E-04	1.1E-04	3.6E-05	-8.7E-06	-2.3E-05	-3.6E-06	4.6E-05	1.7E-04	2.7E-04	3.5E-04	4.0E-04	4.2E-04
3304	1.8E-04	1.9E-04	1.1E-04	3.2E-05	-1.7E-05	-3.5E-05	-1.8E-05	2.9E-05	1.5E-04	2.6E-04	3.4E-04	3.9E-04	4.1E-04
3305	1.9E-04	2.0E-04	1.1E-04	2.8E-05	-2.7E-05	-5.0E-05	-3.6E-05	8.2E-06	1.4E-04	2.4E-04	3.2E-04	3.8E-04	4.0E-04
3306	1.9E-04	2.1E-04	1.1E-04	2.6E-05	-3.4E-05	-6.0E-05	-5.0E-05	-7.9E-06	1.2E-04	2.3E-04	3.1E-04	3.6E-04	3.9E-04
3307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3311	2.2E-04	2.4E-04	1.1E-04	-1.6E-05	-1.1E-04	-1.5E-04	-1.5E-04	-1.1E-04	5.9E-05	2.0E-04	3.1E-04	3.8E-04	4.1E-04
3312	2.2E-04	2.4E-04	1.1E-04	-9.0E-06	-9.8E-05	-1.4E-04	-1.4E-04	-1.0E-04	6.5E-05	2.1E-04	3.1E-04	3.8E-04	4.2E-04
3313	1.5E-04	1.6E-04	9.6E-05	3.9E-05	1.0E-05	9.6E-06	4.2E-05	1.0E-04	2.2E-04	3.2E-04	4.0E-04	4.5E-04	4.7E-04
3314	1.6E-04	1.7E-04	1.0E-04	4.0E-05	8.3E-06	4.8E-06	3.5E-05	9.3E-05	2.1E-04	3.1E-04	3.9E-04	4.3E-04	4.6E-04
3315	1.5E-04	1.6E-04	9.4E-05	3.9E-05	1.6E-05	2.2E-05	6.4E-05	1.4E-04	2.7E-04	3.8E-04	4.6E-04	5.2E-04	5.4E-04
3316	1.5E-04	1.6E-04	1.2E-04	8.0E-05	7.4E-05	9.4E-05	1.5E-04	2.3E-04	3.4E-04	4.4E-04	5.1E-04	5.6E-04	5.9E-04
3317	1.6E-04	1.7E-04	1.0E-04	4.1E-05	4.0E-06	-5.5E-06	1.7E-05	6.8E-05	1.8E-04	2.8E-04	3.5E-04	3.9E-04	4.2E-04
3318	1.8E-04	1.9E-04	1.1E-04	3.0E-05	-2.1E-05	-4.2E-05	-2.8E-05	1.7E-05	1.4E-04	2.4E-04	3.2E-04	3.7E-04	4.0E-04
3319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3327	3.1E-03	3.6E-03	4.8E-03	5.6E-03	6.4E-03	7.4E-03	8.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02
3328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3333	2.2E-03	2.5E-03	3.1E-03	3.5E-03	3.9E-03	4.5E-03	5.4E-03	6.4E-03	6.9E-03	7.4E-03	7.8E-03	8.1E-03	8.2E-03
3334	2.0E-03	2.3E-03	2.8E-03	3.2E-03	3.5E-03	4.1E-03	4.9E-03	5.8E-03	6.3E-03	6.8E-03	7.2E-03	7.4E-03	7.5E-03
3335	1.9E-03	2.1E-03	2.6E-03	2.8E-03	3.1E-03	3.6E-03	4.3E-03	5.2E-03	5.7E-03	6.2E-03	6.6E-03	6.8E-03	6.9E-03
3336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3357	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.0E-02	5.9E-03	7.2E-03	8.6E-03	9.0E-03	9.4E-03	9.7E-03	9.9E-03	1.0E-02
3358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3359	1.0E-02	1.0E-02	9.9E-03	5.6E-03	4.9E-03	5.3E-03	6.5E-03	7.8E-03	8.2E-03	8.5E-03	8.7E-03	8.9E-03	9.0E-03
3360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3364	3.4E-03	3.5E-03	3.8E-03	3.4E-03	3.7E-03	4.3E-03	5.2E-03	6.3E-03	6.6E-03	6.9E-03	7.1E-03	7.2E-03	7.3E-03
3365	2.0E-03	2.1E-03	2.5E-03	2.6E-03	3.0E-03	3.5E-03	4.2E-03	5.0E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.0E-03
3366	1.7E-03	1.8E-03	2.2E-03	2.4E-03	2.8E-03	3.2E-03	3.7E-03	4.5E-03	4.8E-03	5.1E-03	5.3E-03	5.5E-03	5.5E-03
3367	1.7E-03	1.8E-03	2.1E-03	2.4E-03	2.7E-03	3.1E-03	3.7E-03	4.4E-03	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.4E-03
3368	1.6E-03	1.7E-03	2.1E-03	2.3E-03	2.7E-03	3.0E-03	3.5E-03	4.2E-03	4.4E-03	4.7E-03	4.9E-03	5.0E-03	5.0E-03
3369	1.5E-03	1.6E-03	2.0E-03	2.2E-03	2.6E-03	2.9E-03	3.4E-03	4.0E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.7E-03
3370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3411	3.4E-04	3.4E-04	3.5E-04	4.0E-04	5.0E-04	6.4E-04	8.3E-04	1.1E-03	1.3E-03	1.4E-03	1.6E-03	1.7E-03	1.7E-03
3412	3.5E-04	3.5E-04	3.6E-04	4.1E-04	5.2E-04	6.5E-04	8.4E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03
3413	3.7E-04	3.8E-04	3.9E-04	4.3E-04	5.3E-04	6.6E-04	8.4E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03
3414	3.7E-04	3.8E-04	3.8E-04	4.3E-04	5.3E-04	6.5E-04	8.3E-04	1.1E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03
3415	3.9E-04	3.9E-04	3.6E-04	3.8E-04	4.6E-04	5.7E-04	7.5E-04	9.9E-04	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03
3416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3424	3.8E-04	3.8E-04	3.4E-04	3.6E-04	4.5E-04	5.6E-04	7.4E-04	9.8E-04	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03
3425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3428	3.9E-04	3.8E-04	3.4E-04	3.6E-04	4.5E-04	5.7E-04	7.5E-04	9.9E-04	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03
3429	3.9E-04	3.8E-04	3.5E-04	3.7E-04	4.7E-04	5.9E-04	7.7E-04	1.0E-03	1.2E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03
3430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3539	4.4E-04	4.9E-04	6.6E-05	-3.6E-04	-7.3E-04	-1.0E-03	-1.2E-03	-1.4E-03	-1.1E-03	-8.2E-04	-6.4E-04	-5.1E-04	-4.5E-04
3540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3554	9.1E-04	1.1E-03	1.9E-04	-7.3E-04	-1.6E-03	-2.4E-03	-3.1E-03	-3.7E-03	-3.3E-03	-3.0E-03	-2.7E-03	-2.6E-03	-2.5E-03
3555	8.0E-04	9.3E-04	1.1E-04	-7.3E-04	-1.5E-03	-2.2E-03	-2.8E-03	-3.3E-03	-2.9E-03	-2.6E-03	-2.4E-03	-2.2E-03	-2.1E-03
3556	7.7E-04	9.0E-04	7.7E-05	-7.6E-04	-1.5E-03	-2.2E-03	-2.8E-03	-3.2E-03	-2.8E-03	-2.5E-03	-2.2E-03	-2.1E-03	-2.0E-03
3557	8.8E-04	1.0E-03	1.7E-04	-7.4E-04	-1.6E-03	-2.4E-03	-3.0E-03	-3.6E-03	-3.2E-03	-2.9E-03	-2.7E-03	-2.5E-03	-2.4E-03
3558	9.5E-04	1.1E-03	2.4E-04	-7.0E-04	-1.6E-03	-2.4E-03	-3.1E-03	-3.8E-03	-3.4E-03	-3.0E-03	-2.8E-03	-2.6E-03	-2.5E-03
3559	1.3E-03	1.6E-03	6.4E-04	-3.9E-04	-1.4E-03	-2.4E-03	-3.4E-03	-4.2E-03	-3.8E-03	-3.4E-03	-3.2E-03	-3.0E-03	-2.9E-03
3560	2.3E-03	3.1E-03	2.0E-03	8.3E-04	-3.3E-04	-1.9E-03	-3.4E-03	-4.8E-03	-4.3E-03	-3.9E-03	-3.7E-03	-3.5E-03	-3.4E-03
3561	2.3E-03	3.1E-03	2.0E-03	9.0E-04	-2.4E-04	-1.9E-03	-3.3E-03	-4.7E-03	-4.3E-03	-3.9E-03	-3.6E-03	-3.5E-03	-3.4E-03
3562	2.2E-03	2.9E-03	1.8E-03	7.0E-04	-4.1E-04	-2.0E-03	-3.4E-03	-4.7E-03	-4.2E-03	-3.9E-03	-3.6E-03	-3.4E-03	-3.3E-03
3563	1.8E-03	2.4E-03	1.4E-03	2.6E-04	-8.1E-04	-2.2E-03	-3.4E-03	-4.6E-03	-4.1E-03	-3.8E-03	-3.5E-03	-3.3E-03	-3.2E-03
3564	1.9E-03	2.5E-03	1.4E-03	3.1E-04	-7.7E-04	-2.2E-03	-3.5E-03	-4.7E-03	-4.2E-03	-3.9E-03	-3.6E-03	-3.4E-03	-3.3E-03

Location	Child Resident												
	2025-2030	2026-2031	2027-2032	2028-2033	2029-2034	2030-2035	2031-2036	2032-2037	2033-2038	2034-2039	2035-2040	2036-2041	2037-2042
3565	1.6E-03	2.0E-03	9.6E-04	-1.2E-04	-1.2E-03	-2.4E-03	-3.5E-03	-4.5E-03	-4.0E-03	-3.7E-03	-3.4E-03	-3.2E-03	-3.1E-03
3566	1.3E-03	1.6E-03	6.1E-04	-4.2E-04	-1.4E-03	-2.5E-03	-3.4E-03	-4.2E-03	-3.8E-03	-3.4E-03	-3.1E-03	-3.0E-03	-2.9E-03
3567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3579	1.2E-03	1.3E-03	-3.1E-03	-7.4E-03	-1.1E-02	-1.5E-02	-1.9E-02	-2.2E-02	-2.1E-02	-2.0E-02	-1.9E-02	-1.9E-02	-1.9E-02
3580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3584	8.1E-03	8.7E-03	1.5E-02	2.0E-02	2.5E-02	3.2E-02	4.0E-02	4.8E-02	5.0E-02	5.2E-02	5.4E-02	5.5E-02	5.5E-02
3585	8.6E-03	9.2E-03	1.6E-02	2.1E-02	2.7E-02	3.4E-02	4.2E-02	5.1E-02	5.3E-02	5.5E-02	5.7E-02	5.8E-02	5.8E-02
3586	9.2E-03	1.0E-02	1.7E-02	2.3E-02	2.9E-02	3.7E-02	4.6E-02	5.5E-02	5.8E-02	6.0E-02	6.1E-02	6.2E-02	6.3E-02
3587	1.1E-02	1.2E-02	2.0E-02	2.7E-02	3.4E-02	4.2E-02	5.3E-02	6.3E-02	6.5E-02	6.8E-02	6.9E-02	7.0E-02	7.1E-02
3588	1.2E-02	1.4E-02	2.3E-02	3.0E-02	3.8E-02	4.6E-02	5.7E-02	6.8E-02	7.0E-02	7.3E-02	7.4E-02	7.5E-02	7.6E-02
3589	1.3E-02	1.4E-02	2.3E-02	3.1E-02	3.8E-02	4.7E-02	5.7E-02	6.8E-02	7.1E-02	7.3E-02	7.5E-02	7.6E-02	7.6E-02
3590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
2	4.7E-04	5.0E-04	5.3E-04	5.6E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.2E-04	7.6E-04	7.9E-04	8.1E-04	8.2E-04
3	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02	1.9E-02
4	7.1E-03	7.6E-03	8.0E-03	8.4E-03	8.7E-03	9.0E-03	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
5	1.6E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03
6	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.7E-04	2.2E-04	2.5E-04	2.7E-04	2.8E-04
7	1.0E-04	1.1E-04	1.1E-04	9.9E-05	8.5E-05	7.6E-05	7.4E-05	7.4E-05	1.4E-04	1.9E-04	2.3E-04	2.6E-04	2.7E-04
8	7.0E-04	7.5E-04	7.9E-04	8.3E-04	8.8E-04	9.2E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
9	1.6E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03
10	1.5E-04	1.7E-04	1.7E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	2.2E-04	2.6E-04	2.9E-04	3.0E-04	3.1E-04
11	4.4E-05	5.5E-05	5.7E-05	5.0E-05	4.1E-05	3.5E-05	3.4E-05	3.5E-05	1.1E-04	1.7E-04	2.2E-04	2.5E-04	2.6E-04
12	3.9E-04	4.2E-04	4.5E-04	4.7E-04	4.9E-04	5.2E-04	5.5E-04	5.7E-04	6.1E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04
13	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03
14	3.1E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.1E-04	4.4E-04	4.6E-04	5.1E-04	5.4E-04	5.7E-04	5.9E-04	6.0E-04
15	7.2E-03	7.6E-03	8.0E-03	8.2E-03	8.2E-03	7.9E-03	8.3E-03	8.7E-03	8.8E-03	8.9E-03	9.0E-03	9.0E-03	9.1E-03
16	3.1E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.3E-04	4.5E-04	4.8E-04	5.2E-04	5.5E-04	5.7E-04	5.9E-04	6.0E-04
17	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.7E-04	6.9E-04	7.1E-04	7.2E-04
18	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.1E-04	6.5E-04	6.8E-04	7.0E-04	7.1E-04	7.2E-04
19	4.5E-04	4.8E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.5E-04
20	3.5E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.6E-04	6.0E-04	6.3E-04	6.6E-04	6.7E-04
21	7.0E-04	7.5E-04	7.8E-04	8.2E-04	8.6E-04	9.1E-04	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
22	3.6E-04	3.9E-04	4.1E-04	4.4E-04	4.6E-04	4.9E-04	5.2E-04	5.5E-04	5.9E-04	6.3E-04	6.6E-04	6.7E-04	6.8E-04
23	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03
24	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03
25	1.4E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
26	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03
27	4.1E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03
28	4.7E-03	5.0E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.1E-03	6.4E-03	6.5E-03	6.6E-03	6.7E-03	6.7E-03	6.8E-03
29	1.6E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03
30	6.1E-03	6.5E-03	6.8E-03	7.2E-03	7.4E-03	7.7E-03	8.0E-03	8.3E-03	8.4E-03	8.6E-03	8.7E-03	8.7E-03	8.8E-03
31	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
32	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
33	3.5E-03	3.8E-03	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	5.0E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03	5.4E-03
34	6.3E-04	6.8E-04	7.3E-04	7.7E-04	8.1E-04	8.4E-04	8.9E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03
35	6.8E-04	7.2E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.1E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
36	3.6E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03	5.4E-03
37	2.0E-04	2.2E-04	2.3E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.2E-04	3.4E-04	3.4E-04	3.5E-04
38	1.9E-04	2.1E-04	2.1E-04	2.1E-04	2.0E-04	2.0E-04	2.0E-04	2.1E-04	2.6E-04	3.0E-04	3.3E-04	3.5E-04	3.6E-04
39	6.3E-04	6.7E-04	7.1E-04	7.5E-04	7.9E-04	8.3E-04	8.8E-04	9.2E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
40	8.6E-04	9.2E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
41	3.7E-04	4.0E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04
42	5.7E-04	6.2E-04	6.6E-04	6.9E-04	7.3E-04	7.7E-04	8.1E-04	8.5E-04	9.0E-04	9.3E-04	9.6E-04	9.8E-04	9.8E-04
43	5.4E-04	5.9E-04	6.2E-04	6.6E-04	7.0E-04	7.3E-04	7.7E-04	8.1E-04	8.6E-04	9.0E-04	9.2E-04	9.4E-04	9.5E-04
44	4.5E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.5E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
45	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.4E-04
46	3.6E-03	3.8E-03	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03	5.4E-03
47	3.6E-03	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03	5.3E-03	5.4E-03	5.4E-03
48	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03
49	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03
50	-7.1E-05	-7.8E-05	-9.5E-05	-1.3E-04	-1.6E-04	-1.8E-04	-2.1E-04	-2.2E-04	-1.7E-04	-1.3E-04	-9.3E-05	-7.1E-05	-5.9E-05
51	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.2E-03
52	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03
53	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03
54	2.2E-03	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03
55	2.3E-04	2.5E-04	2.7E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.3E-04	3.8E-04	4.3E-04	4.7E-04	5.0E-04	5.1E-04
56	4.0E-03	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.6E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03
57	6.6E-04	7.1E-04	7.6E-04	8.0E-04	8.4E-04	8.8E-04	9.2E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
58	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.3E-04	4.5E-04	4.8E-04	5.1E-04	5.6E-04	6.0E-04	6.3E-04	6.5E-04	6.6E-04
59	2.4E-03	2.6E-03	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03
60	3.2E-04	3.4E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.9E-04	5.3E-04	5.7E-04	6.0E-04	6.2E-04	6.3E-04
61	1.7E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	3.1E-04	3.6E-04	4.0E-04	4.3E-04	4.4E-04
62	5.3E-03	5.7E-03	6.0E-03	6.3E-03	6.5E-03	6.8E-03	7.1E-03	7.4E-03	7.5E-03	7.6E-03	7.7E-03	7.8E-03	7.8E-03
63	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03	3.4E-03
64	3.8E-04	4.0E-04	4.2E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.3E-04
65	4.5E-03	4.8E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.3E-03	6.4E-03	6.5E-03	6.6E-03	6.6E-03
66	4.0E-03	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.6E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03
67	8.7E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
68	1.3E-04	1.4E-04	1.5E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04	1.9E-04	2.3E-04	2.6E-04	2.8E-04	2.9E-04
69	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04
70	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03
71	-6.5E-05	-6.5E-05	-7.6E-05	-9.9E-05	-1.2E-04	-1.4E-04	-1.6E-04	-1.7E-04	-9.3E-05	-2.8E-05	2.1E-05	5.4E-05	7.0E-05
72	1.8E-03	1.9E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03
73	1.0E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
74	6.4E-04	6.9E-04	7.2E-04	7.6E-04	8.0E-04	8.4E-04	8.8E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03
75	5.4E-03	5.7E-03	6.0E-03	5.9E-03	6.0E-03	6.1E-03	6.4E-03	6.7E-03	6.8E-03	6.9E-03	7.0E-03	7.0E-03	7.1E-03
76	2.2E-03	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03
77	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
78	7.7E-03	8.3E-03	8.8E-03	9.1E-03	9.4E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02
79	1.6E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03
80	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04
81	3.8E-04	4.1E-04	4.4E-04	4.6E-04	4.9E-04	5.2E-04	5.5E-04	5.8E-04	6.3E-04	6.7E-04	7.0E-04	7.2E-04	7.3E-04
82	4.1E-03	4.4E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03
83	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.3E-04	5.5E-04	5.6E-04	5.8E-04	5.8E-04
84	2.4E-03	2.5E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03	3.5E-03
85	-5.6E-04	-6.0E-04	-6.5E-04	-7.2E-04	-8.0E-04	-8.6E-04	-9.2E-04	-9.8E-04	-8.7E-04	-7.9E-04	-7.3E-04	-6.8E-04	-6.6E-04
86	7.0E-03	7.5E-03	7.9E-03	8.3E-03	8.6E-03	8.9E-03	9.3E-03	9.7E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02
87	3.4E-04	3.7E-04	3.9E-04	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.4E-04	5.7E-04	5.9E-04	6.0E-04	6.1E-04
88	-3.1E-03	-3.3E-03	-3.6E-03	-3.9E-03	-4.3E-03	-4.6E-03	-4.9E-03	-5.1E-03	-4.9E-03	-4.6E-03	-4.5E-03	-4.4E-03	-4.3E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
89	5.0E-03	5.4E-03	5.7E-03	5.8E-03	6.0E-03	6.1E-03	6.3E-03	6.6E-03	6.7E-03	6.8E-03	6.9E-03	7.0E-03	7.0E-03
90	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04
91	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04
92	3.3E-03	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03
93	3.4E-04	3.6E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.3E-04	5.6E-04	5.7E-04	5.9E-04	5.9E-04
94	9.0E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
95	1.7E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04
96	-1.9E-04	-2.0E-04	-2.2E-04	-2.4E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-2.5E-04	-1.7E-04	-1.1E-04	-7.3E-05	-5.4E-05
97	2.6E-04	2.8E-04	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04
98	2.6E-04	2.8E-04	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04
99	2.6E-04	2.9E-04	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.7E-04	5.2E-04	5.6E-04	5.8E-04	5.9E-04
100	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03
101	2.0E-03	2.1E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03
102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
111	1.5E-03	1.6E-03	1.3E-03	6.9E-04	5.8E-05	-1.3E-04	-1.6E-04	-1.8E-04	2.5E-04	6.1E-04	8.8E-04	1.1E-03	1.2E-03
112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
113	2.1E-03	2.1E-03	1.9E-03	1.3E-03	7.3E-04	5.8E-04	5.8E-04	6.0E-04	1.0E-03	1.4E-03	1.7E-03	1.8E-03	1.9E-03
114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
115	2.8E-03	2.9E-03	2.8E-03	2.2E-03	1.7E-03	1.6E-03	1.6E-03	1.7E-03	2.1E-03	2.5E-03	2.8E-03	3.0E-03	3.0E-03
116	2.5E-03	2.6E-03	2.5E-03	2.1E-03	1.8E-03	1.7E-03	1.7E-03	1.8E-03	2.2E-03	2.5E-03	2.7E-03	2.9E-03	2.9E-03
117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
118	3.7E-03	3.9E-03	3.8E-03	3.4E-03	2.9E-03	2.9E-03	3.0E-03	3.2E-03	3.6E-03	4.0E-03	4.2E-03	4.4E-03	4.5E-03
119	3.4E-03	3.6E-03	3.5E-03	3.2E-03	2.9E-03	2.9E-03	3.0E-03	3.2E-03	3.5E-03	3.8E-03	4.1E-03	4.2E-03	4.3E-03
120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
121	4.9E-03	5.2E-03	5.2E-03	4.9E-03	4.6E-03	4.6E-03	4.8E-03	5.0E-03	5.5E-03	5.9E-03	6.2E-03	6.3E-03	6.4E-03
122	4.5E-03	4.8E-03	4.8E-03	4.6E-03	4.4E-03	4.4E-03	4.6E-03	4.8E-03	5.2E-03	5.5E-03	5.8E-03	6.0E-03	6.0E-03
123	4.0E-03	4.3E-03	4.4E-03	4.2E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.9E-03	5.2E-03	5.4E-03	5.6E-03	5.6E-03
124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
125	6.4E-03	6.8E-03	6.9E-03	6.8E-03	6.5E-03	6.7E-03	7.0E-03	7.4E-03	7.8E-03	8.2E-03	8.5E-03	8.7E-03	8.8E-03
126	5.7E-03	6.1E-03	6.3E-03	6.2E-03	6.0E-03	6.2E-03	6.5E-03	6.8E-03	7.2E-03	7.5E-03	7.8E-03	8.0E-03	8.0E-03
127	5.1E-03	5.5E-03	5.7E-03	5.6E-03	5.5E-03	5.7E-03	6.0E-03	6.2E-03	6.6E-03	6.9E-03	7.1E-03	7.3E-03	7.3E-03
128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
129	8.1E-03	8.7E-03	8.9E-03	8.9E-03	8.8E-03	9.1E-03	9.6E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02
130	7.2E-03	7.7E-03	7.9E-03	7.9E-03	7.9E-03	8.2E-03	8.6E-03	9.0E-03	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02
131	6.3E-03	6.8E-03	7.0E-03	7.1E-03	7.1E-03	7.3E-03	7.7E-03	8.1E-03	8.4E-03	8.7E-03	9.0E-03	9.1E-03	9.2E-03
132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
133	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02
134	8.7E-03	9.3E-03	9.7E-03	9.8E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02
135	7.5E-03	8.1E-03	8.4E-03	8.6E-03	8.7E-03	9.0E-03	9.5E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
137	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.8E-02
138	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02
139	8.7E-03	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02
140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
141	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.1E-02
142	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02
143	9.9E-03	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02
144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
145	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.2E-02	2.3E-02	2.3E-02	2.3E-02
146	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02
147	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.7E-02
148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
149	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.1E-02	2.3E-02	2.4E-02	2.4E-02	2.5E-02	2.5E-02	2.5E-02	2.5E-02
150	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.1E-02	2.1E-02	2.1E-02
151	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02
152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
153	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.6E-02	2.6E-02	2.6E-02	2.7E-02	2.7E-02	2.7E-02
154	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.1E-02	2.2E-02	2.2E-02	2.2E-02	2.2E-02
155	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02	1.9E-02
156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
157	1.9E-02	2.0E-02	2.2E-02	2.2E-02	2.3E-02	2.4E-02	2.6E-02	2.7E-02	2.8E-02	2.8E-02	2.8E-02	2.9E-02	2.9E-02
158	1.6E-02	1.7E-02	1.8E-02	1.9E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.3E-02	2.3E-02	2.4E-02	2.4E-02
159	1.3E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	1.9E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02
160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
161	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.6E-02	2.7E-02	2.8E-02	2.9E-02	2.9E-02	3.0E-02	3.0E-02	3.0E-02
162	1.6E-02	1.7E-02	1.9E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.4E-02	2.4E-02	2.5E-02	2.5E-02
163	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.1E-02	2.1E-02	2.1E-02
164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
165	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.6E-02	2.7E-02	2.8E-02	2.9E-02	3.0E-02	3.0E-02	3.1E-02	3.1E-02	3.1E-02
166	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.5E-02	2.6E-02	2.6E-02	2.6E-02
167	1.5E-02	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.1E-02	2.2E-02	2.2E-02	2.2E-02	2.2E-02
168	3.5E-02	3.8E-02	4.0E-02	4.2E-02	4.4E-02	4.7E-02	4.9E-02	5.1E-02	5.2E-02	5.3E-02	5.3E-02	5.3E-02	5.4E-02
169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
170	2.1E-02	2.3E-02	2.4E-02	2.5E-02	2.6E-02	2.8E-02	2.9E-02	3.0E-02	3.1E-02	3.1E-02	3.2E-02	3.2E-02	3.2E-02
171	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.6E-02	2.6E-02	2.6E-02	2.7E-02	2.7E-02
172	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.2E-02	2.2E-02	2.3E-02	2.3E-02	2.3E-02
173	3.3E-02	3.6E-02	3.8E-02	4.0E-02	4.2E-02	4.4E-02	4.6E-02	4.8E-02	4.9E-02	4.9E-02	5.0E-02	5.0E-02	5.0E-02
174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
178	3.3E-02	3.5E-02	3.7E-02	3.9E-02	4.1E-02	4.3E-02	4.5E-02	4.7E-02	4.8E-02	4.8E-02	4.9E-02	4.9E-02	4.9E-02
179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
180	2.2E-02	2.4E-02	2.5E-02	2.6E-02	2.7E-02	2.9E-02	3.0E-02	3.2E-02	3.2E-02	3.3E-02	3.3E-02	3.3E-02	3.3E-02
181	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.5E-02	2.6E-02	2.7E-02	2.7E-02	2.8E-02	2.8E-02	2.8E-02	2.8E-02
182	4.0E-02	4.3E-02	4.5E-02	4.7E-02	5.0E-02	5.2E-02	5.5E-02	5.7E-02	5.8E-02	5.9E-02	5.9E-02	5.9E-02	6.0E-02
183	3.2E-02	3.4E-02	3.7E-02	3.8E-02	4.0E-02	4.2E-02	4.4E-02	4.6E-02	4.7E-02	4.7E-02	4.8E-02	4.8E-02	4.8E-02
184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
185	2.2E-02	2.4E-02	2.5E-02	2.6E-02	2.7E-02	2.9E-02	3.0E-02	3.2E-02	3.2E-02	3.3E-02	3.3E-02	3.3E-02	3.3E-02
186	1.9E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.6E-02	2.7E-02	2.8E-02	2.8E-02	2.9E-02	2.9E-02	2.9E-02
187	4.6E-02	5.0E-02	5.3E-02	5.6E-02	5.8E-02	6.1E-02	6.4E-02	6.7E-02	6.8E-02	6.8E-02	6.9E-02	6.9E-02	6.9E-02
188	3.7E-02	4.0E-02	4.3E-02	4.5E-02	4.7E-02	4.9E-02	5.1E-02	5.4E-02	5.4E-02	5.5E-02	5.5E-02	5.6E-02	5.6E-02
189	3.1E-02	3.3E-02	3.5E-02	3.7E-02	3.9E-02	4.1E-02	4.3E-02	4.5E-02	4.5E-02	4.6E-02	4.6E-02	4.6E-02	4.7E-02
190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
191	2.2E-02	2.3E-02	2.5E-02	2.6E-02	2.7E-02	2.8E-02	3.0E-02	3.1E-02	3.2E-02	3.2E-02	3.3E-02	3.3E-02	3.3E-02
192	5.1E-02	5.4E-02	5.8E-02	6.1E-02	6.3E-02	6.6E-02	6.9E-02	7.3E-02	7.3E-02	7.4E-02	7.5E-02	7.5E-02	7.5E-02
193	4.2E-02	4.5E-02	4.8E-02	5.0E-02	5.2E-02	5.5E-02	5.8E-02	6.0E-02	6.1E-02	6.1E-02	6.2E-02	6.2E-02	6.2E-02
194	3.5E-02	3.8E-02	4.0E-02	4.2E-02	4.4E-02	4.6E-02	4.9E-02	5.1E-02	5.2E-02	5.2E-02	5.3E-02	5.3E-02	5.3E-02
195	3.0E-02	3.2E-02	3.4E-02	3.6E-02	3.7E-02	3.9E-02	4.1E-02	4.3E-02	4.4E-02	4.4E-02	4.5E-02	4.5E-02	4.5E-02
196	2.8E-02	3.0E-02	3.1E-02	3.3E-02	3.4E-02	3.6E-02	3.8E-02	4.0E-02	4.0E-02	4.1E-02	4.1E-02	4.1E-02	4.1E-02
197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
198	4.7E-02	5.0E-02	5.3E-02	5.6E-02	5.9E-02	6.1E-02	6.4E-02	6.7E-02	6.8E-02	6.8E-02	6.9E-02	6.9E-02	6.9E-02
199	4.0E-02	4.3E-02	4.6E-02	4.8E-02	5.0E-02	5.3E-02	5.5E-02	5.8E-02	5.8E-02	5.9E-02	5.9E-02	6.0E-02	6.0E-02
200	3.4E-02	3.6E-02	3.9E-02	4.1E-02	4.2E-02	4.4E-02	4.6E-02	4.8E-02	4.9E-02	5.0E-02	5.0E-02	5.0E-02	5.1E-02
201	2.9E-02	3.1E-02	3.3E-02	3.4E-02	3.6E-02	3.7E-02	3.9E-02	4.1E-02	4.2E-02	4.2E-02	4.2E-02	4.3E-02	4.3E-02
202	2.6E-02	2.8E-02	3.0E-02	3.1E-02	3.2E-02	3.4E-02	3.5E-02	3.7E-02	3.8E-02	3.8E-02	3.9E-02	3.9E-02	3.9E-02
203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
369	-1.0E-04	-1.6E-04	-4.1E-04	-8.7E-04	-1.3E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.5E-03	-1.2E-03	-9.9E-04	-8.5E-04	-7.8E-04
370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
372	2.4E-04	2.1E-04	-4.0E-05	-5.2E-04	-1.0E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.1E-03	-7.9E-04	-5.9E-04	-4.5E-04	-3.8E-04
373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
374	5.9E-04	5.8E-04	3.3E-04	-1.5E-04	-6.5E-04	-8.3E-04	-9.1E-04	-9.8E-04	-6.5E-04	-3.7E-04	-1.6E-04	-2.4E-05	4.6E-05
375	1.1E-03	1.1E-03	8.7E-04	4.1E-04	-7.6E-05	-2.4E-04	-2.8E-04	-3.2E-04	1.4E-05	3.0E-04	5.2E-04	6.6E-04	7.4E-04
376	1.4E-03	1.5E-03	1.3E-03	8.7E-04	4.2E-04	2.8E-04	2.7E-04	2.6E-04	6.0E-04	9.0E-04	1.1E-03	1.3E-03	1.4E-03
377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
512	2.9E-03	3.1E-03	3.3E-03	3.4E-03	3.6E-03	3.4E-03	3.3E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03	3.6E-03
513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
517	3.3E-03	3.5E-03	3.7E-03	3.9E-03	4.1E-03	3.9E-03	3.9E-03	4.1E-03	4.1E-03	4.1E-03	4.1E-03	4.2E-03	4.2E-03
518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
548	7.6E-03	8.1E-03	8.5E-03	8.8E-03	8.9E-03	9.2E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02
549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
551	8.2E-03	8.7E-03	9.2E-03	9.4E-03	9.4E-03	9.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
552	7.7E-03	8.3E-03	8.7E-03	8.9E-03	9.0E-03	9.2E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02
553	7.4E-03	7.9E-03	8.3E-03	8.6E-03	8.7E-03	8.9E-03	9.3E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02
554	7.1E-03	7.6E-03	8.0E-03	8.2E-03	8.4E-03	8.6E-03	9.0E-03	9.4E-03	9.6E-03	9.8E-03	9.9E-03	9.9E-03	1.0E-02
555	9.0E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02
556	8.5E-03	9.0E-03	9.5E-03	9.7E-03	9.7E-03	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
557	8.0E-03	8.6E-03	9.0E-03	9.2E-03	9.3E-03	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
558	7.6E-03	8.1E-03	8.6E-03	8.8E-03	8.9E-03	9.0E-03	9.5E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
559	7.3E-03	7.8E-03	8.2E-03	8.4E-03	8.6E-03	8.7E-03	9.1E-03	9.6E-03	9.7E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02
560	7.0E-03	7.4E-03	7.9E-03	8.1E-03	8.3E-03	8.5E-03	8.8E-03	9.2E-03	9.4E-03	9.5E-03	9.6E-03	9.7E-03	9.7E-03
561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
567	9.1E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02	9.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
568	8.4E-03	8.9E-03	9.3E-03	9.5E-03	9.5E-03	9.2E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02
569	7.8E-03	8.3E-03	8.8E-03	9.0E-03	9.0E-03	8.9E-03	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
570	7.4E-03	7.9E-03	8.3E-03	8.5E-03	8.6E-03	8.6E-03	9.0E-03	9.5E-03	9.6E-03	9.8E-03	9.9E-03	9.9E-03	1.0E-02
571	7.0E-03	7.5E-03	7.9E-03	8.1E-03	8.3E-03	8.3E-03	8.7E-03	9.1E-03	9.3E-03	9.4E-03	9.5E-03	9.6E-03	9.6E-03
572	6.7E-03	7.2E-03	7.6E-03	7.8E-03	7.9E-03	8.1E-03	8.4E-03	8.8E-03	9.0E-03	9.1E-03	9.2E-03	9.3E-03	9.3E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
573	9.2E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
574	8.4E-03	8.9E-03	9.3E-03	9.5E-03	9.5E-03	9.1E-03	9.5E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
575	7.8E-03	8.2E-03	8.7E-03	8.9E-03	8.9E-03	8.8E-03	9.2E-03	9.6E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
576	7.3E-03	7.8E-03	8.2E-03	8.4E-03	8.5E-03	8.5E-03	8.9E-03	9.3E-03	9.4E-03	9.5E-03	9.6E-03	9.7E-03	9.7E-03
577	6.9E-03	7.4E-03	7.8E-03	8.0E-03	8.1E-03	8.2E-03	8.5E-03	8.9E-03	9.1E-03	9.2E-03	9.3E-03	9.4E-03	9.4E-03
578	6.6E-03	7.0E-03	7.4E-03	7.7E-03	7.8E-03	7.9E-03	8.3E-03	8.6E-03	8.8E-03	8.9E-03	9.0E-03	9.1E-03	9.1E-03
579	9.3E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	9.2E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02
580	8.3E-03	8.8E-03	9.3E-03	9.5E-03	9.5E-03	8.9E-03	9.3E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02
581	7.7E-03	8.2E-03	8.6E-03	8.8E-03	8.8E-03	8.6E-03	9.0E-03	9.4E-03	9.6E-03	9.7E-03	9.8E-03	9.9E-03	9.9E-03
582	7.2E-03	7.7E-03	8.1E-03	8.3E-03	8.4E-03	8.3E-03	8.7E-03	9.1E-03	9.2E-03	9.3E-03	9.4E-03	9.5E-03	9.5E-03
583	6.8E-03	7.3E-03	7.7E-03	7.9E-03	8.0E-03	8.0E-03	8.4E-03	8.8E-03	8.9E-03	9.0E-03	9.1E-03	9.2E-03	9.2E-03
584	6.5E-03	6.9E-03	7.3E-03	7.5E-03	7.7E-03	7.7E-03	8.1E-03	8.5E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	8.9E-03
585	9.4E-03	9.9E-03	1.0E-02	1.1E-02	1.0E-02	9.1E-03	9.5E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
586	8.3E-03	8.8E-03	9.2E-03	9.4E-03	9.4E-03	8.7E-03	9.2E-03	9.6E-03	9.7E-03	9.9E-03	9.9E-03	1.0E-02	1.0E-02
587	7.6E-03	8.1E-03	8.5E-03	8.7E-03	8.7E-03	8.4E-03	8.8E-03	9.2E-03	9.4E-03	9.5E-03	9.6E-03	9.6E-03	9.7E-03
588	7.1E-03	7.6E-03	7.9E-03	8.2E-03	8.2E-03	8.1E-03	8.5E-03	8.9E-03	9.0E-03	9.1E-03	9.2E-03	9.3E-03	9.3E-03
589	6.7E-03	7.2E-03	7.5E-03	7.8E-03	7.9E-03	7.8E-03	8.2E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	9.0E-03	9.0E-03
590	6.4E-03	6.8E-03	7.2E-03	7.4E-03	7.5E-03	7.6E-03	7.9E-03	8.3E-03	8.4E-03	8.6E-03	8.6E-03	8.7E-03	8.7E-03
591	9.4E-03	9.9E-03	1.0E-02	1.1E-02	1.0E-02	8.9E-03	9.3E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02
592	8.2E-03	8.7E-03	9.1E-03	9.3E-03	9.3E-03	8.6E-03	9.0E-03	9.4E-03	9.5E-03	9.7E-03	9.8E-03	9.8E-03	9.8E-03
593	7.5E-03	7.9E-03	8.3E-03	8.6E-03	8.6E-03	8.3E-03	8.6E-03	9.0E-03	9.2E-03	9.3E-03	9.4E-03	9.4E-03	9.5E-03
594	7.0E-03	7.4E-03	7.8E-03	8.0E-03	8.1E-03	8.0E-03	8.3E-03	8.7E-03	8.9E-03	9.0E-03	9.1E-03	9.1E-03	9.2E-03
595	6.6E-03	7.0E-03	7.4E-03	7.6E-03	7.7E-03	7.7E-03	8.1E-03	8.4E-03	8.6E-03	8.7E-03	8.8E-03	8.8E-03	8.9E-03
596	6.3E-03	6.7E-03	7.1E-03	7.3E-03	7.4E-03	7.5E-03	7.8E-03	8.2E-03	8.3E-03	8.4E-03	8.5E-03	8.6E-03	8.6E-03
597	9.2E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02	8.8E-03	9.2E-03	9.6E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
598	8.1E-03	8.5E-03	8.9E-03	9.1E-03	9.1E-03	8.4E-03	8.8E-03	9.2E-03	9.4E-03	9.5E-03	9.6E-03	9.6E-03	9.7E-03
599	7.4E-03	7.8E-03	8.2E-03	8.4E-03	8.5E-03	8.1E-03	8.5E-03	8.9E-03	9.0E-03	9.1E-03	9.2E-03	9.3E-03	9.3E-03
600	6.9E-03	7.3E-03	7.7E-03	7.9E-03	8.0E-03	7.8E-03	8.2E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	9.0E-03	9.0E-03
601	6.5E-03	6.9E-03	7.3E-03	7.5E-03	7.6E-03	7.6E-03	7.9E-03	8.3E-03	8.4E-03	8.5E-03	8.6E-03	8.7E-03	8.7E-03
602	6.2E-03	6.6E-03	6.9E-03	7.2E-03	7.3E-03	7.3E-03	7.7E-03	8.0E-03	8.1E-03	8.3E-03	8.3E-03	8.4E-03	8.4E-03
603	8.8E-03	9.2E-03	9.6E-03	9.9E-03	9.7E-03	8.6E-03	9.0E-03	9.4E-03	9.5E-03	9.7E-03	9.7E-03	9.8E-03	9.8E-03
604	7.8E-03	8.3E-03	8.7E-03	8.9E-03	8.9E-03	8.2E-03	8.6E-03	9.0E-03	9.1E-03	9.2E-03	9.3E-03	9.4E-03	9.4E-03
605	7.2E-03	7.6E-03	8.0E-03	8.2E-03	8.2E-03	7.9E-03	8.3E-03	8.7E-03	8.8E-03	8.9E-03	9.0E-03	9.0E-03	9.1E-03
606	6.7E-03	7.1E-03	7.5E-03	7.7E-03	7.8E-03	7.6E-03	8.0E-03	8.3E-03	8.5E-03	8.6E-03	8.7E-03	8.7E-03	8.8E-03
607	6.3E-03	6.7E-03	7.1E-03	7.3E-03	7.4E-03	7.4E-03	7.7E-03	8.1E-03	8.2E-03	8.3E-03	8.4E-03	8.4E-03	8.5E-03
608	6.1E-03	6.5E-03	6.8E-03	7.0E-03	7.1E-03	7.2E-03	7.5E-03	7.9E-03	8.0E-03	8.1E-03	8.2E-03	8.2E-03	8.3E-03
609	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
610	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02
611	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
612	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
613	1.1E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02
614	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
615	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
616	9.0E-03	9.5E-03	9.9E-03	1.0E-02	1.0E-02	8.9E-03	9.3E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
617	8.2E-03	8.7E-03	9.1E-03	9.3E-03	9.2E-03	8.4E-03	8.8E-03	9.2E-03	9.4E-03	9.5E-03	9.5E-03	9.6E-03	9.6E-03
618	7.5E-03	8.0E-03	8.3E-03	8.5E-03	8.6E-03	8.0E-03	8.4E-03	8.8E-03	8.9E-03	9.1E-03	9.1E-03	9.2E-03	9.2E-03
619	6.9E-03	7.4E-03	7.7E-03	7.9E-03	8.0E-03	7.7E-03	8.1E-03	8.5E-03	8.6E-03	8.7E-03	8.8E-03	8.8E-03	8.9E-03
620	6.5E-03	6.9E-03	7.3E-03	7.5E-03	7.6E-03	7.4E-03	7.8E-03	8.1E-03	8.3E-03	8.4E-03	8.5E-03	8.5E-03	8.5E-03
621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
622	5.9E-03	6.3E-03	6.7E-03	6.9E-03	7.0E-03	7.0E-03	7.4E-03	7.7E-03	7.8E-03	7.9E-03	8.0E-03	8.1E-03	8.1E-03
623	9.7E-03	1.0E-02	1.1E-02	1.0E-02	1.0E-02	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
624	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02
625	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
626	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
627	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
628	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02
629	9.1E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02	9.4E-03	9.9E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
630	8.5E-03	9.0E-03	9.4E-03	9.6E-03	9.5E-03	8.8E-03	9.2E-03	9.7E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
631	7.9E-03	8.3E-03	8.7E-03	8.9E-03	8.9E-03	8.3E-03	8.7E-03	9.1E-03	9.3E-03	9.4E-03	9.5E-03	9.5E-03	9.5E-03
632	7.3E-03	7.8E-03	8.2E-03	8.4E-03	8.4E-03	8.0E-03	8.4E-03	8.7E-03	8.9E-03	9.0E-03	9.1E-03	9.1E-03	9.1E-03
633	6.8E-03	7.3E-03	7.6E-03	7.8E-03	7.9E-03	7.7E-03	8.0E-03	8.4E-03	8.5E-03	8.6E-03	8.7E-03	8.8E-03	8.8E-03
634	6.4E-03	6.9E-03	7.2E-03	7.4E-03	7.5E-03	7.4E-03	7.7E-03	8.1E-03	8.2E-03	8.3E-03	8.4E-03	8.4E-03	8.5E-03
635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
636	5.9E-03	6.3E-03	6.6E-03	6.8E-03	6.9E-03	7.0E-03	7.3E-03	7.6E-03	7.7E-03	7.8E-03	7.9E-03	8.0E-03	8.0E-03
637	9.3E-03	9.8E-03	1.0E-02	9.5E-03	9.4E-03	9.3E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02
638	9.1E-03	9.6E-03	1.0E-02	9.8E-03	9.8E-03	9.5E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
639	9.1E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
640	9.2E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
641	9.1E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
642	8.8E-03	9.3E-03	9.8E-03	1.0E-02	1.0E-02	9.5E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
643	8.4E-03	8.9E-03	9.3E-03	9.5E-03	9.5E-03	9.0E-03	9.4E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
644	7.9E-03	8.4E-03	8.8E-03	9.0E-03	9.0E-03	8.5E-03	8.9E-03	9.3E-03	9.4E-03	9.5E-03	9.6E-03	9.7E-03	9.7E-03
645	7.5E-03	7.9E-03	8.3E-03	8.5E-03	8.5E-03	8.1E-03	8.5E-03	8.9E-03	9.0E-03	9.1E-03	9.2E-03	9.2E-03	9.3E-03
646	7.0E-03	7.5E-03	7.8E-03	8.0E-03	8.1E-03	7.8E-03	8.1E-03	8.5E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	8.9E-03
647	6.6E-03	7.0E-03	7.4E-03	7.5E-03	7.6E-03	7.4E-03	7.8E-03	8.1E-03	8.3E-03	8.4E-03	8.4E-03	8.5E-03	8.5E-03
648	6.2E-03	6.6E-03	7.0E-03	7.1E-03	7.3E-03	7.1E-03	7.5E-03	7.8E-03	7.9E-03	8.0E-03	8.1E-03	8.2E-03	8.2E-03
649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
650	9.0E-03	9.5E-03	9.7E-03	9.0E-03	9.0E-03	8.9E-03	9.3E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02
651	8.6E-03	9.1E-03	9.4E-03	9.1E-03	9.1E-03	9.0E-03	9.5E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
652	8.5E-03	9.0E-03	9.4E-03	9.3E-03	9.3E-03	9.1E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
653	8.4E-03	8.9E-03	9.3E-03	9.4E-03	9.4E-03	9.2E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
654	8.3E-03	8.8E-03	9.2E-03	9.4E-03	9.4E-03	9.1E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
655	8.2E-03	8.6E-03	9.1E-03	9.2E-03	9.2E-03	8.9E-03	9.4E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02
656	7.8E-03	8.3E-03	8.7E-03	8.9E-03	8.9E-03	8.6E-03	9.0E-03	9.4E-03	9.5E-03	9.6E-03	9.7E-03	9.8E-03	9.8E-03
657	7.5E-03	7.9E-03	8.3E-03	8.5E-03	8.5E-03	8.2E-03	8.6E-03	9.0E-03	9.1E-03	9.2E-03	9.3E-03	9.3E-03	9.4E-03
658	7.1E-03	7.5E-03	7.9E-03	8.1E-03	8.2E-03	7.9E-03	8.2E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	9.0E-03	9.0E-03
659	6.7E-03	7.2E-03	7.5E-03	7.7E-03	7.8E-03	7.5E-03	7.9E-03	8.3E-03	8.4E-03	8.5E-03	8.6E-03	8.6E-03	8.7E-03
660	6.4E-03	6.8E-03	7.1E-03	7.3E-03	7.4E-03	7.2E-03	7.6E-03	7.9E-03	8.1E-03	8.2E-03	8.2E-03	8.3E-03	8.3E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
661	6.0E-03	6.4E-03	6.8E-03	6.9E-03	7.0E-03	7.0E-03	7.3E-03	7.6E-03	7.7E-03	7.8E-03	7.9E-03	8.0E-03	8.0E-03
662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
663	8.8E-03	9.2E-03	9.4E-03	8.6E-03	8.6E-03	8.6E-03	9.0E-03	9.4E-03	9.6E-03	9.7E-03	9.7E-03	9.8E-03	9.8E-03
664	8.3E-03	8.7E-03	9.0E-03	8.6E-03	8.7E-03	8.6E-03	9.0E-03	9.5E-03	9.6E-03	9.7E-03	9.8E-03	9.8E-03	9.8E-03
665	8.0E-03	8.5E-03	8.9E-03	8.7E-03	8.8E-03	8.7E-03	9.1E-03	9.5E-03	9.6E-03	9.7E-03	9.8E-03	9.9E-03	9.9E-03
666	7.9E-03	8.4E-03	8.7E-03	8.7E-03	8.8E-03	8.6E-03	9.1E-03	9.5E-03	9.6E-03	9.7E-03	9.8E-03	9.8E-03	9.9E-03
667	7.8E-03	8.3E-03	8.6E-03	8.7E-03	8.8E-03	8.6E-03	9.0E-03	9.4E-03	9.5E-03	9.6E-03	9.7E-03	9.8E-03	9.8E-03
668	7.6E-03	8.1E-03	8.5E-03	8.6E-03	8.7E-03	8.5E-03	8.9E-03	9.3E-03	9.4E-03	9.5E-03	9.6E-03	9.6E-03	9.7E-03
669	7.4E-03	7.8E-03	8.2E-03	8.3E-03	8.4E-03	8.2E-03	8.6E-03	9.0E-03	9.1E-03	9.2E-03	9.3E-03	9.3E-03	9.4E-03
670	7.1E-03	7.5E-03	7.9E-03	8.0E-03	8.1E-03	7.9E-03	8.3E-03	8.7E-03	8.8E-03	8.9E-03	9.0E-03	9.0E-03	9.0E-03
671	6.8E-03	7.2E-03	7.6E-03	7.7E-03	7.8E-03	7.6E-03	8.0E-03	8.4E-03	8.5E-03	8.6E-03	8.7E-03	8.7E-03	8.7E-03
672	6.5E-03	6.9E-03	7.2E-03	7.4E-03	7.5E-03	7.3E-03	7.7E-03	8.0E-03	8.1E-03	8.2E-03	8.3E-03	8.4E-03	8.4E-03
673	6.2E-03	6.6E-03	6.9E-03	7.1E-03	7.2E-03	7.0E-03	7.4E-03	7.7E-03	7.8E-03	7.9E-03	8.0E-03	8.1E-03	8.1E-03
674	5.9E-03	6.2E-03	6.6E-03	6.7E-03	6.9E-03	6.8E-03	7.1E-03	7.4E-03	7.6E-03	7.7E-03	7.7E-03	7.8E-03	7.8E-03
675	8.6E-03	9.1E-03	9.2E-03	8.4E-03	8.3E-03	8.4E-03	8.8E-03	9.2E-03	9.3E-03	9.4E-03	9.5E-03	9.6E-03	9.6E-03
676	8.0E-03	8.5E-03	8.7E-03	8.3E-03	8.3E-03	8.3E-03	8.7E-03	9.2E-03	9.3E-03	9.4E-03	9.4E-03	9.5E-03	9.5E-03
677	7.7E-03	8.2E-03	8.5E-03	8.3E-03	8.3E-03	8.3E-03	8.7E-03	9.1E-03	9.2E-03	9.3E-03	9.4E-03	9.5E-03	9.5E-03
678	7.5E-03	7.9E-03	8.3E-03	8.2E-03	8.3E-03	8.2E-03	8.6E-03	9.0E-03	9.1E-03	9.2E-03	9.3E-03	9.4E-03	9.4E-03
679	7.3E-03	7.8E-03	8.1E-03	8.2E-03	8.3E-03	8.2E-03	8.5E-03	9.0E-03	9.1E-03	9.2E-03	9.2E-03	9.3E-03	9.3E-03
680	7.2E-03	7.6E-03	8.0E-03	8.1E-03	8.2E-03	8.0E-03	8.4E-03	8.8E-03	8.9E-03	9.0E-03	9.1E-03	9.2E-03	9.2E-03
681	7.0E-03	7.4E-03	7.8E-03	7.9E-03	8.0E-03	7.8E-03	8.2E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	8.9E-03	9.0E-03
682	6.8E-03	7.2E-03	7.5E-03	7.7E-03	7.8E-03	7.6E-03	8.0E-03	8.4E-03	8.5E-03	8.6E-03	8.6E-03	8.7E-03	8.7E-03
683	6.5E-03	6.9E-03	7.3E-03	7.4E-03	7.5E-03	7.4E-03	7.7E-03	8.1E-03	8.2E-03	8.3E-03	8.4E-03	8.5E-03	8.5E-03
684	8.1E-03	8.5E-03	8.7E-03	7.9E-03	7.9E-03	8.0E-03	8.4E-03	8.8E-03	8.9E-03	9.0E-03	9.0E-03	9.1E-03	9.1E-03
685	7.5E-03	7.9E-03	8.2E-03	7.7E-03	7.8E-03	7.8E-03	8.2E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	8.9E-03	9.0E-03
686	7.1E-03	7.6E-03	7.8E-03	7.6E-03	7.7E-03	7.7E-03	8.1E-03	8.5E-03	8.6E-03	8.7E-03	8.7E-03	8.8E-03	8.8E-03
687	6.9E-03	7.3E-03	7.6E-03	7.5E-03	7.6E-03	7.6E-03	8.0E-03	8.3E-03	8.5E-03	8.5E-03	8.6E-03	8.7E-03	8.7E-03
688	6.7E-03	7.1E-03	7.5E-03	7.5E-03	7.5E-03	7.5E-03	7.9E-03	8.3E-03	8.4E-03	8.5E-03	8.5E-03	8.6E-03	8.6E-03
689	6.6E-03	7.0E-03	7.3E-03	7.4E-03	7.5E-03	7.4E-03	7.8E-03	8.2E-03	8.3E-03	8.4E-03	8.4E-03	8.5E-03	8.5E-03
690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
696	7.8E-03	8.2E-03	8.3E-03	7.4E-03	7.3E-03	7.5E-03	7.9E-03	8.2E-03	8.3E-03	8.4E-03	8.5E-03	8.5E-03	8.6E-03
697	7.1E-03	7.5E-03	7.7E-03	7.2E-03	7.2E-03	7.3E-03	7.7E-03	8.0E-03	8.1E-03	8.2E-03	8.3E-03	8.3E-03	8.4E-03
698	6.6E-03	7.0E-03	7.2E-03	7.0E-03	7.0E-03	7.1E-03	7.5E-03	7.8E-03	7.9E-03	8.0E-03	8.1E-03	8.1E-03	8.2E-03
699	6.4E-03	6.8E-03	7.0E-03	6.9E-03	7.0E-03	7.0E-03	7.4E-03	7.7E-03	7.8E-03	7.9E-03	8.0E-03	8.0E-03	8.1E-03
700	6.2E-03	6.6E-03	6.9E-03	6.8E-03	6.9E-03	7.0E-03	7.3E-03	7.7E-03	7.8E-03	7.8E-03	7.9E-03	8.0E-03	8.0E-03
701	6.0E-03	6.4E-03	6.7E-03	6.7E-03	6.8E-03	6.9E-03	7.2E-03	7.6E-03	7.7E-03	7.8E-03	7.8E-03	7.9E-03	7.9E-03
702	7.7E-03	8.1E-03	8.2E-03	7.3E-03	7.2E-03	7.4E-03	7.7E-03	8.1E-03	8.2E-03	8.3E-03	8.4E-03	8.4E-03	8.4E-03
703	6.9E-03	7.3E-03	7.5E-03	7.0E-03	7.0E-03	7.1E-03	7.5E-03	7.8E-03	7.9E-03	8.0E-03	8.1E-03	8.1E-03	8.1E-03
704	6.4E-03	6.8E-03	7.0E-03	6.7E-03	6.8E-03	6.9E-03	7.2E-03	7.6E-03	7.7E-03	7.8E-03	7.8E-03	7.9E-03	7.9E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
705	6.2E-03	6.5E-03	6.8E-03	6.6E-03	6.7E-03	6.8E-03	7.1E-03	7.5E-03	7.6E-03	7.7E-03	7.7E-03	7.8E-03	7.8E-03
706	6.0E-03	6.4E-03	6.6E-03	6.6E-03	6.7E-03	6.8E-03	7.1E-03	7.4E-03	7.5E-03	7.6E-03	7.7E-03	7.7E-03	7.7E-03
707	5.8E-03	6.2E-03	6.5E-03	6.5E-03	6.6E-03	6.7E-03	7.0E-03	7.3E-03	7.4E-03	7.5E-03	7.6E-03	7.6E-03	7.6E-03
708	7.6E-03	8.0E-03	8.1E-03	7.1E-03	7.1E-03	7.3E-03	7.6E-03	8.0E-03	8.1E-03	8.2E-03	8.2E-03	8.3E-03	8.3E-03
709	6.7E-03	7.1E-03	7.3E-03	6.8E-03	6.8E-03	6.9E-03	7.3E-03	7.6E-03	7.7E-03	7.8E-03	7.9E-03	7.9E-03	7.9E-03
710	6.3E-03	6.6E-03	6.8E-03	6.5E-03	6.6E-03	6.7E-03	7.0E-03	7.4E-03	7.5E-03	7.6E-03	7.6E-03	7.7E-03	7.7E-03
711	6.0E-03	6.4E-03	6.6E-03	6.4E-03	6.5E-03	6.6E-03	7.0E-03	7.3E-03	7.4E-03	7.5E-03	7.5E-03	7.6E-03	7.6E-03
712	5.8E-03	6.2E-03	6.4E-03	6.4E-03	6.5E-03	6.5E-03	6.9E-03	7.2E-03	7.3E-03	7.4E-03	7.4E-03	7.5E-03	7.5E-03
713	5.6E-03	6.0E-03	6.3E-03	6.3E-03	6.4E-03	6.5E-03	6.8E-03	7.1E-03	7.2E-03	7.3E-03	7.3E-03	7.4E-03	7.4E-03
714	7.4E-03	7.8E-03	7.9E-03	7.0E-03	6.9E-03	7.1E-03	7.4E-03	7.8E-03	7.9E-03	8.0E-03	8.1E-03	8.1E-03	8.1E-03
715	6.6E-03	6.9E-03	7.1E-03	6.6E-03	6.6E-03	6.8E-03	7.1E-03	7.4E-03	7.5E-03	7.6E-03	7.7E-03	7.7E-03	7.8E-03
716	6.1E-03	6.5E-03	6.7E-03	6.4E-03	6.4E-03	6.6E-03	6.9E-03	7.2E-03	7.3E-03	7.4E-03	7.5E-03	7.5E-03	7.5E-03
717	5.8E-03	6.2E-03	6.4E-03	6.3E-03	6.3E-03	6.5E-03	6.8E-03	7.1E-03	7.2E-03	7.3E-03	7.3E-03	7.4E-03	7.4E-03
718	5.6E-03	6.0E-03	6.2E-03	6.2E-03	6.3E-03	6.4E-03	6.7E-03	7.0E-03	7.1E-03	7.2E-03	7.2E-03	7.3E-03	7.3E-03
719	5.5E-03	5.8E-03	6.1E-03	6.1E-03	6.2E-03	6.3E-03	6.6E-03	6.9E-03	7.0E-03	7.1E-03	7.1E-03	7.2E-03	7.2E-03
720	7.2E-03	7.5E-03	7.6E-03	6.7E-03	6.7E-03	6.9E-03	7.2E-03	7.6E-03	7.7E-03	7.7E-03	7.8E-03	7.9E-03	7.9E-03
721	6.4E-03	6.8E-03	6.9E-03	6.4E-03	6.4E-03	6.6E-03	6.9E-03	7.2E-03	7.3E-03	7.4E-03	7.5E-03	7.5E-03	7.6E-03
722	5.9E-03	6.3E-03	6.5E-03	6.2E-03	6.3E-03	6.4E-03	6.7E-03	7.0E-03	7.1E-03	7.2E-03	7.3E-03	7.3E-03	7.3E-03
723	5.7E-03	6.0E-03	6.2E-03	6.1E-03	6.2E-03	6.3E-03	6.6E-03	6.9E-03	7.0E-03	7.1E-03	7.1E-03	7.2E-03	7.2E-03
724	5.5E-03	5.8E-03	6.0E-03	6.0E-03	6.1E-03	6.2E-03	6.5E-03	6.8E-03	6.9E-03	7.0E-03	7.0E-03	7.1E-03	7.1E-03
725	5.3E-03	5.6E-03	5.9E-03	5.9E-03	6.0E-03	6.1E-03	6.4E-03	6.7E-03	6.8E-03	6.9E-03	6.9E-03	7.0E-03	7.0E-03
726	6.9E-03	7.2E-03	7.3E-03	6.5E-03	6.4E-03	6.6E-03	6.9E-03	7.3E-03	7.4E-03	7.5E-03	7.5E-03	7.6E-03	7.6E-03
727	6.2E-03	6.5E-03	6.7E-03	6.2E-03	6.2E-03	6.4E-03	6.7E-03	7.0E-03	7.1E-03	7.2E-03	7.3E-03	7.3E-03	7.3E-03
728	5.8E-03	6.1E-03	6.3E-03	6.0E-03	6.1E-03	6.2E-03	6.5E-03	6.9E-03	6.9E-03	7.0E-03	7.1E-03	7.1E-03	7.2E-03
729	5.5E-03	5.8E-03	6.1E-03	5.9E-03	6.0E-03	6.1E-03	6.4E-03	6.7E-03	6.8E-03	6.9E-03	7.0E-03	7.0E-03	7.0E-03
730	5.3E-03	5.6E-03	5.9E-03	5.8E-03	5.9E-03	6.0E-03	6.3E-03	6.6E-03	6.7E-03	6.8E-03	6.9E-03	6.9E-03	6.9E-03
731	5.2E-03	5.5E-03	5.7E-03	5.7E-03	5.8E-03	5.9E-03	6.2E-03	6.5E-03	6.6E-03	6.7E-03	6.8E-03	6.8E-03	6.8E-03
732	4.2E-03	4.5E-03	4.7E-03	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.7E-03	5.8E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03
733	4.4E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.4E-03	5.6E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03	6.2E-03
734	4.7E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03	6.5E-03
735	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	6.1E-03	6.4E-03	6.7E-03	6.8E-03	6.9E-03	6.9E-03	7.0E-03	7.0E-03
736	5.4E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03	6.3E-03	6.6E-03	6.9E-03	7.0E-03	7.0E-03	7.1E-03	7.1E-03	7.2E-03
737	6.5E-03	6.8E-03	6.9E-03	6.2E-03	6.2E-03	6.4E-03	6.7E-03	7.0E-03	7.1E-03	7.2E-03	7.2E-03	7.3E-03	7.3E-03
738	5.9E-03	6.3E-03	6.4E-03	6.0E-03	6.0E-03	6.2E-03	6.5E-03	6.8E-03	6.9E-03	7.0E-03	7.0E-03	7.1E-03	7.1E-03
739	5.6E-03	5.9E-03	6.1E-03	5.9E-03	5.9E-03	6.1E-03	6.4E-03	6.7E-03	6.8E-03	6.9E-03	6.9E-03	7.0E-03	7.0E-03
740	5.3E-03	5.7E-03	5.9E-03	5.7E-03	5.8E-03	6.0E-03	6.3E-03	6.6E-03	6.6E-03	6.7E-03	6.8E-03	6.8E-03	6.9E-03
741	5.1E-03	5.5E-03	5.7E-03	5.6E-03	5.7E-03	5.9E-03	6.1E-03	6.4E-03	6.5E-03	6.6E-03	6.7E-03	6.7E-03	6.7E-03
742	5.0E-03	5.3E-03	5.6E-03	5.6E-03	5.7E-03	5.8E-03	6.1E-03	6.4E-03	6.4E-03	6.5E-03	6.6E-03	6.6E-03	6.7E-03
743	4.1E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03
744	4.3E-03	4.5E-03	4.7E-03	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03
745	4.5E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03	5.4E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.2E-03
746	5.0E-03	5.3E-03	5.5E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.5E-03	6.5E-03	6.6E-03	6.7E-03	6.7E-03	6.7E-03
747	5.2E-03	5.5E-03	5.7E-03	5.7E-03	5.8E-03	6.0E-03	6.3E-03	6.6E-03	6.7E-03	6.8E-03	6.8E-03	6.8E-03	6.9E-03
748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
762	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	5.0E-03	5.3E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03	5.5E-03
763	4.1E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	5.0E-03	5.2E-03	5.5E-03	5.5E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03
764	4.4E-03	4.7E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03
765	4.8E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03	5.7E-03	6.0E-03	6.2E-03	6.3E-03	6.4E-03	6.5E-03	6.5E-03	6.5E-03
766	5.0E-03	5.3E-03	5.5E-03	5.5E-03	5.6E-03	5.8E-03	6.1E-03	6.4E-03	6.4E-03	6.5E-03	6.6E-03	6.6E-03	6.6E-03
767	5.4E-03	5.7E-03	5.9E-03	5.7E-03	5.8E-03	6.0E-03	6.3E-03	6.6E-03	6.7E-03	6.8E-03	6.8E-03	6.9E-03	6.9E-03
768	5.7E-03	6.1E-03	6.2E-03	5.9E-03	5.9E-03	6.1E-03	6.4E-03	6.7E-03	6.8E-03	6.9E-03	6.9E-03	7.0E-03	7.0E-03
769	5.9E-03	6.2E-03	6.2E-03	5.8E-03	5.8E-03	6.0E-03	6.2E-03	6.5E-03	6.6E-03	6.7E-03	6.8E-03	6.8E-03	6.8E-03
770	6.1E-03	6.4E-03	6.4E-03	5.8E-03	5.7E-03	5.9E-03	6.2E-03	6.5E-03	6.6E-03	6.7E-03	6.7E-03	6.7E-03	6.8E-03
771	6.1E-03	6.5E-03	6.4E-03	5.8E-03	5.7E-03	5.9E-03	6.2E-03	6.4E-03	6.5E-03	6.6E-03	6.7E-03	6.7E-03	6.7E-03
772	6.2E-03	6.5E-03	6.5E-03	5.8E-03	5.7E-03	5.9E-03	6.2E-03	6.5E-03	6.5E-03	6.6E-03	6.7E-03	6.7E-03	6.7E-03
773	6.2E-03	6.5E-03	6.5E-03	5.8E-03	5.7E-03	5.9E-03	6.2E-03	6.5E-03	6.6E-03	6.6E-03	6.7E-03	6.7E-03	6.8E-03
774	6.0E-03	6.3E-03	6.4E-03	5.8E-03	5.7E-03	5.9E-03	6.2E-03	6.5E-03	6.6E-03	6.6E-03	6.7E-03	6.7E-03	6.8E-03
775	5.7E-03	6.0E-03	6.1E-03	5.7E-03	5.7E-03	5.9E-03	6.1E-03	6.4E-03	6.5E-03	6.6E-03	6.6E-03	6.7E-03	6.7E-03
776	5.4E-03	5.7E-03	5.9E-03	5.6E-03	5.6E-03	5.8E-03	6.1E-03	6.3E-03	6.4E-03	6.5E-03	6.6E-03	6.6E-03	6.6E-03
777	5.2E-03	5.5E-03	5.7E-03	5.5E-03	5.6E-03	5.7E-03	6.0E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03	6.5E-03	6.6E-03
778	5.0E-03	5.3E-03	5.5E-03	5.4E-03	5.5E-03	5.6E-03	5.9E-03	6.2E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03	6.5E-03
779	4.8E-03	5.2E-03	5.4E-03	5.3E-03	5.4E-03	5.6E-03	5.8E-03	6.1E-03	6.2E-03	6.3E-03	6.3E-03	6.4E-03	6.4E-03
780	4.7E-03	5.0E-03	5.3E-03	5.3E-03	5.4E-03	5.5E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03	6.3E-03	6.3E-03	6.3E-03
781	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03	5.4E-03	5.4E-03
782	4.0E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03	5.5E-03	5.6E-03	5.6E-03
783	4.2E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.1E-03	5.3E-03	5.6E-03	5.6E-03	5.7E-03	5.8E-03	5.8E-03	5.8E-03
784	4.7E-03	5.0E-03	5.2E-03	5.2E-03	5.4E-03	5.6E-03	5.8E-03	6.1E-03	6.2E-03	6.2E-03	6.3E-03	6.3E-03	6.3E-03
785	4.8E-03	5.1E-03	5.3E-03	5.3E-03	5.4E-03	5.6E-03	5.9E-03	6.2E-03	6.2E-03	6.3E-03	6.4E-03	6.4E-03	6.4E-03
786	5.1E-03	5.4E-03	5.6E-03	5.5E-03	5.6E-03	5.8E-03	6.1E-03	6.4E-03	6.5E-03	6.5E-03	6.6E-03	6.6E-03	6.6E-03
787	5.3E-03	5.7E-03	5.8E-03	5.6E-03	5.7E-03	5.9E-03	6.2E-03	6.5E-03	6.5E-03	6.6E-03	6.7E-03	6.7E-03	6.7E-03
788	5.4E-03	5.7E-03	5.8E-03	5.5E-03	5.5E-03	5.7E-03	6.0E-03	6.3E-03	6.3E-03	6.4E-03	6.5E-03	6.5E-03	6.5E-03
789	5.5E-03	5.8E-03	5.8E-03	5.5E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.3E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03
790	5.5E-03	5.9E-03	5.9E-03	5.4E-03	5.4E-03	5.6E-03	5.9E-03	6.1E-03	6.2E-03	6.3E-03	6.4E-03	6.4E-03	6.4E-03
791	5.6E-03	5.9E-03	5.9E-03	5.5E-03	5.4E-03	5.6E-03	5.9E-03	6.2E-03	6.3E-03	6.3E-03	6.4E-03	6.4E-03	6.4E-03
792	5.6E-03	5.9E-03	6.0E-03	5.5E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03	6.5E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
793	5.5E-03	5.8E-03	5.9E-03	5.5E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03	6.5E-03
794	5.3E-03	5.6E-03	5.7E-03	5.4E-03	5.5E-03	5.6E-03	5.9E-03	6.2E-03	6.3E-03	6.3E-03	6.4E-03	6.4E-03	6.4E-03
795	5.1E-03	5.4E-03	5.6E-03	5.4E-03	5.4E-03	5.6E-03	5.9E-03	6.1E-03	6.2E-03	6.3E-03	6.4E-03	6.4E-03	6.4E-03
796	5.0E-03	5.3E-03	5.5E-03	5.3E-03	5.4E-03	5.5E-03	5.8E-03	6.1E-03	6.2E-03	6.3E-03	6.3E-03	6.3E-03	6.4E-03
797	4.8E-03	5.1E-03	5.3E-03	5.2E-03	5.3E-03	5.5E-03	5.7E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.3E-03	6.3E-03
798	4.7E-03	5.0E-03	5.2E-03	5.2E-03	5.3E-03	5.4E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.2E-03
799	3.9E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.3E-03	5.4E-03	5.4E-03	5.4E-03
800	4.1E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	5.0E-03	5.2E-03	5.5E-03	5.5E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03
801	4.5E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03	5.4E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03	6.2E-03
802	4.6E-03	4.9E-03	5.1E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03	6.2E-03	6.2E-03
803	4.9E-03	5.2E-03	5.4E-03	5.3E-03	5.4E-03	5.6E-03	5.9E-03	6.2E-03	6.3E-03	6.3E-03	6.4E-03	6.4E-03	6.4E-03
804	5.0E-03	5.4E-03	5.5E-03	5.4E-03	5.5E-03	5.7E-03	6.0E-03	6.2E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03	6.5E-03
805	5.0E-03	5.3E-03	5.4E-03	5.3E-03	5.3E-03	5.5E-03	5.7E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.3E-03	6.3E-03
806	5.1E-03	5.4E-03	5.4E-03	5.2E-03	5.2E-03	5.4E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03	6.2E-03
807	5.1E-03	5.4E-03	5.5E-03	5.2E-03	5.2E-03	5.4E-03	5.6E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03
808	5.1E-03	5.4E-03	5.5E-03	5.2E-03	5.2E-03	5.4E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03	6.2E-03
809	5.2E-03	5.5E-03	5.6E-03	5.2E-03	5.3E-03	5.4E-03	5.7E-03	6.0E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.2E-03
810	5.1E-03	5.4E-03	5.5E-03	5.2E-03	5.3E-03	5.4E-03	5.7E-03	6.0E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.2E-03
811	5.0E-03	5.3E-03	5.4E-03	5.2E-03	5.3E-03	5.4E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.2E-03
812	4.9E-03	5.2E-03	5.3E-03	5.2E-03	5.2E-03	5.4E-03	5.6E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03	6.2E-03
813	4.8E-03	5.1E-03	5.3E-03	5.1E-03	5.2E-03	5.4E-03	5.6E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.1E-03	6.2E-03
814	4.7E-03	4.9E-03	5.1E-03	5.1E-03	5.2E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.1E-03
815	4.5E-03	4.8E-03	5.0E-03	5.0E-03	5.1E-03	5.3E-03	5.5E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03
816	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.8E-03	4.9E-03	5.1E-03	5.4E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03	5.6E-03
817	4.4E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.3E-03	5.5E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03	6.0E-03
818	4.5E-03	4.8E-03	5.0E-03	5.0E-03	5.2E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03
819	4.7E-03	5.0E-03	5.2E-03	5.2E-03	5.3E-03	5.5E-03	5.7E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03	6.2E-03	6.2E-03
820	4.8E-03	5.1E-03	5.2E-03	5.2E-03	5.3E-03	5.5E-03	5.7E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.2E-03	6.3E-03
821	4.7E-03	5.0E-03	5.1E-03	5.0E-03	5.1E-03	5.3E-03	5.5E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03	6.0E-03
822	4.7E-03	5.0E-03	5.1E-03	5.0E-03	5.0E-03	5.2E-03	5.4E-03	5.7E-03	5.8E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03
823	4.8E-03	5.1E-03	5.2E-03	5.0E-03	5.0E-03	5.2E-03	5.4E-03	5.7E-03	5.8E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03
824	4.8E-03	5.1E-03	5.2E-03	5.0E-03	5.0E-03	5.2E-03	5.4E-03	5.7E-03	5.8E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03
825	4.8E-03	5.1E-03	5.2E-03	5.0E-03	5.1E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03
826	4.8E-03	5.1E-03	5.2E-03	5.0E-03	5.1E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.0E-03
827	4.7E-03	5.0E-03	5.2E-03	5.0E-03	5.1E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03
828	4.7E-03	5.0E-03	5.1E-03	5.0E-03	5.1E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.0E-03
829	4.6E-03	4.9E-03	5.1E-03	5.0E-03	5.1E-03	5.2E-03	5.4E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03
830	4.5E-03	4.8E-03	5.0E-03	4.9E-03	5.0E-03	5.2E-03	5.4E-03	5.7E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03
831	4.4E-03	4.7E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03	6.0E-03
832	4.5E-03	4.8E-03	5.0E-03	5.0E-03	5.2E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03
833	4.6E-03	4.9E-03	5.0E-03	5.0E-03	5.1E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03
834	4.5E-03	4.8E-03	4.9E-03	4.8E-03	4.9E-03	5.1E-03	5.3E-03	5.6E-03	5.7E-03	5.7E-03	5.8E-03	5.8E-03	5.8E-03
835	4.5E-03	4.8E-03	4.9E-03	4.8E-03	4.8E-03	5.0E-03	5.2E-03	5.5E-03	5.6E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03
836	4.5E-03	4.8E-03	4.9E-03	4.8E-03	4.8E-03	5.0E-03	5.2E-03	5.5E-03	5.5E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
837	4.5E-03	4.8E-03	4.9E-03	4.8E-03	4.9E-03	5.0E-03	5.2E-03	5.5E-03	5.6E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03
838	4.6E-03	4.8E-03	5.0E-03	4.8E-03	4.9E-03	5.0E-03	5.3E-03	5.5E-03	5.6E-03	5.7E-03	5.7E-03	5.8E-03	5.8E-03
839	4.6E-03	4.8E-03	5.0E-03	4.8E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.6E-03	5.7E-03	5.7E-03	5.8E-03	5.8E-03
840	4.5E-03	4.8E-03	4.9E-03	4.8E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.6E-03	5.7E-03	5.8E-03	5.8E-03	5.8E-03
841	4.5E-03	4.8E-03	4.9E-03	4.8E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.6E-03	5.7E-03	5.8E-03	5.8E-03	5.8E-03
842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
854	4.6E-04	4.4E-04	3.9E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.5E-04	4.9E-04	5.3E-04	5.6E-04	5.8E-04	5.9E-04
855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
894	5.4E-04	5.1E-04	4.5E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.6E-04	6.0E-04	6.2E-04	6.4E-04	6.5E-04
895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
897	4.6E-04	4.4E-04	3.9E-04	3.7E-04	3.9E-04	4.0E-04	4.2E-04	4.5E-04	4.9E-04	5.2E-04	5.5E-04	5.7E-04	5.8E-04
898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
912	-4.9E-03	-5.2E-03	-5.6E-03	-6.1E-03	-6.5E-03	-6.9E-03	-7.3E-03	-7.7E-03	-7.4E-03	-7.1E-03	-6.9E-03	-6.8E-03	-6.7E-03
913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
914	-4.7E-03	-5.0E-03	-5.4E-03	-5.8E-03	-6.3E-03	-6.7E-03	-7.0E-03	-7.4E-03	-7.1E-03	-6.8E-03	-6.6E-03	-6.5E-03	-6.4E-03
915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
916	-4.4E-03	-4.7E-03	-5.1E-03	-5.5E-03	-6.0E-03	-6.4E-03	-6.7E-03	-7.1E-03	-6.8E-03	-6.5E-03	-6.3E-03	-6.2E-03	-6.1E-03
917	-3.7E-03	-3.9E-03	-4.3E-03	-4.6E-03	-5.0E-03	-5.3E-03	-5.7E-03	-6.0E-03	-5.7E-03	-5.5E-03	-5.3E-03	-5.2E-03	-5.1E-03
918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
919	-4.1E-03	-4.4E-03	-4.8E-03	-5.2E-03	-5.6E-03	-6.0E-03	-6.4E-03	-6.7E-03	-6.4E-03	-6.1E-03	-5.9E-03	-5.8E-03	-5.7E-03
920	-3.5E-03	-3.7E-03	-4.0E-03	-4.4E-03	-4.8E-03	-5.1E-03	-5.4E-03	-5.7E-03	-5.4E-03	-5.2E-03	-5.0E-03	-4.9E-03	-4.8E-03
921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
922	-3.9E-03	-4.1E-03	-4.5E-03	-4.9E-03	-5.3E-03	-5.7E-03	-6.0E-03	-6.3E-03	-6.0E-03	-5.7E-03	-5.5E-03	-5.4E-03	-5.3E-03
923	-3.3E-03	-3.5E-03	-3.8E-03	-4.2E-03	-4.5E-03	-4.9E-03	-5.1E-03	-5.4E-03	-5.1E-03	-4.9E-03	-4.7E-03	-4.6E-03	-4.6E-03
924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
925	-3.6E-03	-3.9E-03	-4.2E-03	-4.6E-03	-5.0E-03	-5.3E-03	-5.6E-03	-5.9E-03	-5.6E-03	-5.4E-03	-5.2E-03	-5.0E-03	-5.0E-03
926	-3.1E-03	-3.3E-03	-3.6E-03	-3.9E-03	-4.3E-03	-4.6E-03	-4.8E-03	-5.1E-03	-4.8E-03	-4.6E-03	-4.4E-03	-4.3E-03	-4.3E-03
927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
928	-3.3E-03	-3.5E-03	-3.9E-03	-4.2E-03	-4.6E-03	-4.9E-03	-5.2E-03	-5.5E-03	-5.2E-03	-5.0E-03	-4.8E-03	-4.6E-03	-4.6E-03
929	-2.8E-03	-3.1E-03	-3.3E-03	-3.7E-03	-4.0E-03	-4.3E-03	-4.6E-03	-4.8E-03	-4.5E-03	-4.3E-03	-4.1E-03	-4.0E-03	-4.0E-03
930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
931	-3.0E-03	-3.2E-03	-3.5E-03	-3.9E-03	-4.3E-03	-4.6E-03	-4.9E-03	-5.1E-03	-4.8E-03	-4.6E-03	-4.4E-03	-4.3E-03	-4.2E-03
932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
934	-2.7E-03	-2.9E-03	-3.2E-03	-3.6E-03	-4.0E-03	-4.3E-03	-4.5E-03	-4.8E-03	-4.5E-03	-4.2E-03	-4.0E-03	-3.9E-03	-3.8E-03
935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
938	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.1E-02	-2.1E-02	-2.0E-02	-2.0E-02	-2.0E-02	-2.0E-02
939	-9.7E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.5E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.4E-02
940	-8.6E-03	-9.2E-03	-9.9E-03	-1.1E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02	-1.3E-02
941	-6.8E-03	-7.2E-03	-7.8E-03	-8.3E-03	-8.9E-03	-9.4E-03	-1.0E-02	-1.1E-02	-1.0E-02	-1.0E-02	-9.9E-03	-9.7E-03	-9.7E-03
942	-7.5E-03	-8.0E-03	-8.6E-03	-9.2E-03	-9.8E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
943	-8.1E-03	-8.7E-03	-9.3E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
947	-5.5E-03	-5.9E-03	-6.3E-03	-6.8E-03	-7.3E-03	-7.7E-03	-8.1E-03	-8.6E-03	-8.3E-03	-8.0E-03	-7.9E-03	-7.7E-03	-7.7E-03
948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
949	-5.6E-03	-6.0E-03	-6.4E-03	-6.9E-03	-7.4E-03	-7.8E-03	-8.3E-03	-8.7E-03	-8.4E-03	-8.2E-03	-8.0E-03	-7.9E-03	-7.8E-03
950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
951	-5.6E-03	-6.0E-03	-6.5E-03	-7.0E-03	-7.4E-03	-7.9E-03	-8.4E-03	-8.8E-03	-8.5E-03	-8.3E-03	-8.1E-03	-7.9E-03	-7.9E-03
952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
953	-5.7E-03	-6.1E-03	-6.5E-03	-7.0E-03	-7.5E-03	-7.9E-03	-8.4E-03	-8.8E-03	-8.5E-03	-8.3E-03	-8.1E-03	-8.0E-03	-7.9E-03
954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
955	-5.6E-03	-6.0E-03	-6.5E-03	-7.0E-03	-7.5E-03	-7.9E-03	-8.4E-03	-8.8E-03	-8.5E-03	-8.3E-03	-8.1E-03	-8.0E-03	-7.9E-03
956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
961	-4.7E-03	-5.0E-03	-5.4E-03	-5.8E-03	-6.2E-03	-6.6E-03	-7.0E-03	-7.3E-03	-7.1E-03	-6.9E-03	-6.7E-03	-6.6E-03	-6.5E-03
962	-4.5E-03	-4.8E-03	-5.2E-03	-5.6E-03	-6.0E-03	-6.4E-03	-6.8E-03	-7.1E-03	-6.9E-03	-6.7E-03	-6.5E-03	-6.4E-03	-6.3E-03
963	-4.4E-03	-4.7E-03	-5.1E-03	-5.5E-03	-5.9E-03	-6.3E-03	-6.6E-03	-7.0E-03	-6.7E-03	-6.5E-03	-6.3E-03	-6.2E-03	-6.1E-03
964	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.6E-03	-2.9E-03	-3.1E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.1E-03	-3.0E-03
965	-1.7E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-3.0E-03	-3.3E-03	-3.1E-03	-3.0E-03	-3.0E-03	-2.9E-03	-2.9E-03
966	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.9E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.8E-03	-2.7E-03
967	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.8E-03	-3.0E-03	-2.8E-03	-2.7E-03	-2.7E-03	-2.6E-03	-2.6E-03
968	-1.6E-03	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.5E-03	-2.4E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
970	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.4E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.0E-03	-2.0E-03
971	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.9E-03
972	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.8E-03	-1.7E-03
973	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-3.0E-03	-3.3E-03	-3.6E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.3E-03	-3.2E-03
974	-1.7E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.8E-03	-3.1E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.1E-03	-3.1E-03
975	-1.7E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.8E-03	-3.0E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.9E-03
976	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.7E-03	-2.9E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.8E-03	-2.8E-03
977	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-3.0E-03	-2.8E-03	-2.7E-03	-2.7E-03	-2.6E-03	-2.6E-03
978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
979	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.2E-03	-2.2E-03	-2.1E-03
980	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.4E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.0E-03	-2.0E-03
981	-1.2E-03	-1.3E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.9E-03
982	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.6E-03	-1.7E-03	-1.8E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.7E-03	-1.7E-03	-1.6E-03
983	-1.7E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.9E-03	-3.3E-03	-3.7E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.3E-03	-3.3E-03
984	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.6E-03	-2.9E-03	-3.2E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.1E-03
985	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.8E-03	-3.0E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.0E-03	-3.0E-03	-2.9E-03
986	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.9E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.8E-03	-2.7E-03
987	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.9E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.6E-03	-2.5E-03
988	-1.5E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.3E-03
989	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.2E-03	-2.2E-03	-2.2E-03
990	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.0E-03	-2.0E-03	-2.0E-03
991	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.8E-03	-1.8E-03
992	-1.1E-03	-1.1E-03	-1.2E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-1.8E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03
993	-1.8E-03	-2.0E-03	-2.1E-03	-2.4E-03	-2.6E-03	-2.9E-03	-3.2E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.1E-03
994	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.8E-03	-3.1E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.9E-03
995	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.7E-03	-2.9E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.7E-03	-2.7E-03
996	-1.6E-03	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.5E-03	-2.5E-03
997	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.3E-03
998	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.3E-03	-2.2E-03	-2.2E-03	-2.1E-03	-2.1E-03
999	-1.2E-03	-1.3E-03	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.1E-03	-2.0E-03	-2.0E-03	-1.9E-03	-1.9E-03
1000	-1.1E-03	-1.2E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.8E-03	-1.7E-03	-1.7E-03
1001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1002	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.6E-03
1003	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.9E-03	-2.7E-03	-2.6E-03	-2.6E-03	-2.5E-03	-2.5E-03
1004	-1.5E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.2E-03
1005	-1.3E-03	-1.4E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.2E-03	-2.1E-03	-2.1E-03	-2.0E-03	-2.0E-03
1006	-1.2E-03	-1.3E-03	-1.4E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.8E-03	-1.8E-03
1007	-1.8E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-3.0E-03	-3.2E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.8E-03
1008	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.9E-03	-3.1E-03	-2.9E-03	-2.8E-03	-2.7E-03	-2.7E-03	-2.7E-03
1009	-1.6E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-2.6E-03	-2.5E-03	-2.5E-03	-2.4E-03	-2.4E-03
1010	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.2E-03	-2.2E-03	-2.1E-03
1011	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.0E-03	-2.0E-03	-1.9E-03
1012	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.2E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.0E-03	-3.0E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1013	-1.9E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-3.1E-03	-3.3E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.9E-03	-2.8E-03
1014	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-2.9E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.6E-03	-2.6E-03
1015	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.3E-03	-2.3E-03
1016	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.4E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.1E-03	-2.1E-03
1017	-2.2E-03	-2.3E-03	-2.5E-03	-2.8E-03	-3.0E-03	-3.2E-03	-3.5E-03	-3.7E-03	-3.6E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.3E-03
1018	-2.1E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.9E-03	-3.1E-03	-3.3E-03	-3.6E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.2E-03	-3.1E-03
1019	-1.9E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-3.0E-03	-3.2E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.9E-03	-2.8E-03
1020	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.7E-03	-2.9E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.6E-03	-2.5E-03
1021	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.2E-03
1022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1023	-2.3E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.1E-03	-3.4E-03	-3.6E-03	-3.9E-03	-3.7E-03	-3.6E-03	-3.5E-03	-3.5E-03	-3.4E-03
1024	-2.1E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-3.1E-03	-3.3E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.1E-03
1025	-1.9E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.5E-03	-2.8E-03	-3.0E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.8E-03	-2.7E-03
1026	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.4E-03
1027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1028	-2.5E-03	-2.7E-03	-2.9E-03	-3.2E-03	-3.4E-03	-3.7E-03	-4.0E-03	-4.2E-03	-4.1E-03	-3.9E-03	-3.8E-03	-3.8E-03	-3.7E-03
1029	-2.3E-03	-2.4E-03	-2.6E-03	-2.9E-03	-3.1E-03	-3.3E-03	-3.6E-03	-3.8E-03	-3.6E-03	-3.5E-03	-3.4E-03	-3.4E-03	-3.3E-03
1030	-2.0E-03	-2.2E-03	-2.3E-03	-2.5E-03	-2.7E-03	-3.0E-03	-3.2E-03	-3.4E-03	-3.2E-03	-3.1E-03	-3.0E-03	-3.0E-03	-2.9E-03
1031	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.8E-03	-3.0E-03	-2.9E-03	-2.7E-03	-2.7E-03	-2.6E-03	-2.6E-03
1032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1033	-2.8E-03	-3.0E-03	-3.2E-03	-3.5E-03	-3.7E-03	-4.0E-03	-4.3E-03	-4.6E-03	-4.4E-03	-4.3E-03	-4.2E-03	-4.1E-03	-4.1E-03
1034	-2.5E-03	-2.7E-03	-2.9E-03	-3.1E-03	-3.4E-03	-3.6E-03	-3.9E-03	-4.1E-03	-3.9E-03	-3.8E-03	-3.7E-03	-3.6E-03	-3.6E-03
1035	-2.2E-03	-2.4E-03	-2.5E-03	-2.8E-03	-3.0E-03	-3.2E-03	-3.4E-03	-3.6E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.2E-03
1036	-2.0E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.1E-03	-3.2E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.8E-03
1037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1042	-3.4E-03	-3.6E-03	-3.9E-03	-4.2E-03	-4.5E-03	-4.9E-03	-5.2E-03	-5.5E-03	-5.3E-03	-5.2E-03	-5.1E-03	-5.0E-03	-4.9E-03
1043	-3.0E-03	-3.2E-03	-3.5E-03	-3.8E-03	-4.0E-03	-4.3E-03	-4.6E-03	-4.9E-03	-4.7E-03	-4.6E-03	-4.5E-03	-4.4E-03	-4.4E-03
1044	-2.7E-03	-2.9E-03	-3.1E-03	-3.3E-03	-3.6E-03	-3.9E-03	-4.1E-03	-4.3E-03	-4.2E-03	-4.0E-03	-3.9E-03	-3.8E-03	-3.8E-03
1045	-3.7E-03	-3.9E-03	-4.2E-03	-4.6E-03	-4.9E-03	-5.3E-03	-5.6E-03	-5.9E-03	-5.7E-03	-5.6E-03	-5.4E-03	-5.4E-03	-5.3E-03
1046	-3.3E-03	-3.5E-03	-3.8E-03	-4.1E-03	-4.4E-03	-4.7E-03	-5.0E-03	-5.3E-03	-5.1E-03	-4.9E-03	-4.8E-03	-4.7E-03	-4.7E-03
1047	-1.3E-02	-1.5E-02	-1.6E-02	-1.7E-02	-1.8E-02	-1.9E-02	-2.0E-02	-2.1E-02	-2.1E-02	-2.0E-02	-2.0E-02	-2.0E-02	-2.0E-02
1048	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.6E-02	-1.6E-02	-1.5E-02	-1.5E-02	-1.5E-02
1049	-9.4E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02
1050	-7.9E-03	-8.5E-03	-9.2E-03	-9.8E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02	-1.2E-02
1051	-6.5E-03	-7.0E-03	-7.5E-03	-8.0E-03	-8.6E-03	-9.1E-03	-9.7E-03	-1.0E-02	-1.0E-02	-9.8E-03	-9.6E-03	-9.6E-03	-9.5E-03
1052	-9.5E-03	-1.0E-02	-1.1E-02	-1.2E-02	-1.3E-02	-1.3E-02	-1.4E-02	-1.5E-02	-1.5E-02	-1.4E-02	-1.4E-02	-1.4E-02	-1.4E-02
1053	-7.6E-03	-8.2E-03	-8.8E-03	-9.4E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.2E-02	-1.2E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02
1054	-6.1E-03	-6.6E-03	-7.1E-03	-7.6E-03	-8.1E-03	-8.6E-03	-9.1E-03	-9.6E-03	-9.4E-03	-9.2E-03	-9.1E-03	-9.0E-03	-8.9E-03
1055	-5.0E-03	-5.4E-03	-5.8E-03	-6.2E-03	-6.7E-03	-7.1E-03	-7.5E-03	-7.9E-03	-7.7E-03	-7.5E-03	-7.4E-03	-7.3E-03	-7.3E-03
1056	-7.1E-03	-7.7E-03	-8.2E-03	-8.8E-03	-9.4E-03	-1.0E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.1E-02	-1.0E-02	-1.0E-02

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1057	-5.8E-03	-6.2E-03	-6.6E-03	-7.1E-03	-7.6E-03	-8.1E-03	-8.6E-03	-9.0E-03	-8.8E-03	-8.6E-03	-8.5E-03	-8.4E-03	-8.3E-03
1058	-6.7E-03	-7.2E-03	-7.7E-03	-8.2E-03	-8.8E-03	-9.3E-03	-9.9E-03	-1.0E-02	-1.0E-02	-9.9E-03	-9.8E-03	-9.7E-03	-9.6E-03
1059	-5.5E-03	-5.9E-03	-6.3E-03	-6.8E-03	-7.3E-03	-7.7E-03	-8.2E-03	-8.6E-03	-8.3E-03	-8.1E-03	-8.0E-03	-7.9E-03	-7.8E-03
1060	-2.9E-03	-3.1E-03	-3.4E-03	-3.6E-03	-3.9E-03	-4.2E-03	-4.4E-03	-4.7E-03	-4.5E-03	-4.4E-03	-4.3E-03	-4.2E-03	-4.2E-03
1061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1062	-4.1E-03	-4.4E-03	-4.7E-03	-5.0E-03	-5.4E-03	-5.8E-03	-6.2E-03	-6.5E-03	-6.3E-03	-6.2E-03	-6.1E-03	-6.0E-03	-5.9E-03
1063	-3.6E-03	-3.9E-03	-4.1E-03	-4.5E-03	-4.8E-03	-5.1E-03	-5.5E-03	-5.8E-03	-5.6E-03	-5.5E-03	-5.3E-03	-5.3E-03	-5.2E-03
1064	-3.1E-03	-3.4E-03	-3.6E-03	-3.9E-03	-4.2E-03	-4.5E-03	-4.8E-03	-5.1E-03	-4.9E-03	-4.8E-03	-4.7E-03	-4.6E-03	-4.5E-03
1065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1066	-4.5E-03	-4.8E-03	-5.2E-03	-5.6E-03	-6.0E-03	-6.4E-03	-6.8E-03	-7.2E-03	-7.0E-03	-6.9E-03	-6.7E-03	-6.7E-03	-6.6E-03
1067	-3.9E-03	-4.2E-03	-4.6E-03	-4.9E-03	-5.3E-03	-5.6E-03	-6.0E-03	-6.3E-03	-6.2E-03	-6.0E-03	-5.9E-03	-5.8E-03	-5.8E-03
1068	-3.4E-03	-3.7E-03	-4.0E-03	-4.3E-03	-4.6E-03	-4.9E-03	-5.2E-03	-5.6E-03	-5.4E-03	-5.2E-03	-5.1E-03	-5.0E-03	-5.0E-03
1069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1070	-5.1E-03	-5.5E-03	-5.9E-03	-6.4E-03	-6.8E-03	-7.3E-03	-7.7E-03	-8.2E-03	-8.0E-03	-7.8E-03	-7.7E-03	-7.6E-03	-7.6E-03
1071	-4.4E-03	-4.7E-03	-5.1E-03	-5.4E-03	-5.8E-03	-6.2E-03	-6.6E-03	-7.0E-03	-6.8E-03	-6.6E-03	-6.5E-03	-6.5E-03	-6.4E-03
1072	-3.8E-03	-4.1E-03	-4.4E-03	-4.7E-03	-5.1E-03	-5.4E-03	-5.8E-03	-6.1E-03	-5.9E-03	-5.8E-03	-5.6E-03	-5.6E-03	-5.5E-03
1073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1074	-5.8E-03	-6.3E-03	-6.7E-03	-7.2E-03	-7.7E-03	-8.2E-03	-8.7E-03	-9.2E-03	-9.0E-03	-8.9E-03	-8.7E-03	-8.6E-03	-8.6E-03
1075	-4.9E-03	-5.2E-03	-5.6E-03	-6.0E-03	-6.5E-03	-6.9E-03	-7.3E-03	-7.7E-03	-7.6E-03	-7.4E-03	-7.3E-03	-7.2E-03	-7.2E-03
1076	-4.2E-03	-4.5E-03	-4.9E-03	-5.2E-03	-5.6E-03	-6.0E-03	-6.4E-03	-6.7E-03	-6.5E-03	-6.4E-03	-6.3E-03	-6.2E-03	-6.2E-03
1077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1078	-6.6E-03	-7.1E-03	-7.7E-03	-8.2E-03	-8.8E-03	-9.4E-03	-9.9E-03	-1.0E-02	-1.0E-02	-1.0E-02	-9.9E-03	-9.8E-03	-9.8E-03
1079	-5.5E-03	-5.9E-03	-6.3E-03	-6.8E-03	-7.3E-03	-7.8E-03	-8.2E-03	-8.7E-03	-8.5E-03	-8.3E-03	-8.2E-03	-8.1E-03	-8.1E-03
1080	-4.7E-03	-5.0E-03	-5.4E-03	-5.8E-03	-6.2E-03	-6.6E-03	-7.0E-03	-7.4E-03	-7.3E-03	-7.1E-03	-7.0E-03	-6.9E-03	-6.8E-03
1081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1097	-3.0E-03	-3.3E-03	-3.5E-03	-3.8E-03	-4.1E-03	-4.4E-03	-4.6E-03	-4.9E-03	-4.7E-03	-4.6E-03	-4.5E-03	-4.4E-03	-4.4E-03
1098	-3.3E-03	-3.6E-03	-3.8E-03	-4.1E-03	-4.4E-03	-4.8E-03	-5.0E-03	-5.3E-03	-5.2E-03	-5.0E-03	-4.9E-03	-4.8E-03	-4.8E-03
1099	-3.6E-03	-3.9E-03	-4.2E-03	-4.5E-03	-4.9E-03	-5.2E-03	-5.5E-03	-5.8E-03	-5.7E-03	-5.5E-03	-5.4E-03	-5.3E-03	-5.3E-03
1100	-4.0E-03	-4.3E-03	-4.7E-03	-5.0E-03	-5.4E-03	-5.7E-03	-6.1E-03	-6.4E-03	-6.2E-03	-6.1E-03	-6.0E-03	-5.9E-03	-5.8E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1101	-4.5E-03	-4.8E-03	-5.2E-03	-5.6E-03	-6.0E-03	-6.4E-03	-6.8E-03	-7.2E-03	-7.0E-03	-6.8E-03	-6.7E-03	-6.6E-03	-6.5E-03
1102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1110	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.3E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03	3.4E-03
1111	3.0E-03	3.2E-03	3.4E-03	3.5E-03	3.7E-03	3.6E-03	3.6E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03	3.9E-03
1112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1120	5.8E-04	5.4E-04	4.6E-04	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.2E-04	5.7E-04	6.0E-04	6.3E-04	6.5E-04	6.6E-04
1121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1122	5.3E-04	5.0E-04	4.4E-04	4.1E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.4E-04	5.7E-04	6.0E-04	6.2E-04	6.2E-04
1123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1124	5.5E-04	5.2E-04	4.5E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.5E-04	5.8E-04	6.1E-04	6.3E-04	6.4E-04
1125	5.0E-04	4.8E-04	4.2E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.1E-04	5.5E-04	5.8E-04	5.9E-04	6.0E-04
1126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1127	5.2E-04	4.9E-04	4.3E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.3E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04
1128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1129	4.6E-04	4.4E-04	3.9E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.9E-04	5.2E-04	5.5E-04	5.6E-04	5.7E-04
1130	3.7E-04	3.6E-04	3.3E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.2E-04	4.6E-04	4.9E-04	5.0E-04	5.1E-04
1131	3.7E-04	3.6E-04	3.3E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.2E-04	4.6E-04	4.9E-04	5.0E-04	5.1E-04
1132	3.7E-04	3.5E-04	3.1E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.6E-04	4.1E-04	4.5E-04	4.8E-04	4.9E-04	5.0E-04
1133	3.5E-04	3.4E-04	2.9E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.4E-04	3.9E-04	4.3E-04	4.6E-04	4.8E-04	4.9E-04
1134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1144	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1167	-2.0E-03	-2.1E-03	-2.4E-03	-2.8E-03	-3.2E-03	-3.4E-03	-3.6E-03	-3.8E-03	-3.5E-03	-3.2E-03	-3.0E-03	-2.9E-03	-2.8E-03
1168	-1.3E-03	-1.5E-03	-1.7E-03	-2.1E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.1E-03	-2.8E-03	-2.5E-03	-2.3E-03	-2.2E-03	-2.1E-03
1169	-1.3E-03	-1.4E-03	-1.7E-03	-2.0E-03	-2.3E-03	-2.6E-03	-2.7E-03	-2.9E-03	-2.6E-03	-2.4E-03	-2.3E-03	-2.2E-03	-2.1E-03
1170	-6.8E-04	-7.7E-04	-1.0E-03	-1.4E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.4E-03	-2.1E-03	-1.8E-03	-1.6E-03	-1.5E-03	-1.4E-03
1171	-9.2E-04	-1.0E-03	-1.2E-03	-1.6E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.4E-03	-2.2E-03	-2.0E-03	-1.8E-03	-1.7E-03	-1.6E-03
1172	-8.9E-04	-9.7E-04	-1.1E-03	-1.4E-03	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-1.9E-03	-1.7E-03	-1.6E-03	-1.5E-03	-1.5E-03
1173	-4.0E-04	-4.6E-04	-6.6E-04	-1.0E-03	-1.4E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.5E-03	-1.3E-03	-1.1E-03	-1.0E-03	-9.5E-04
1174	-4.0E-04	-4.5E-04	-6.0E-04	-8.6E-04	-1.1E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.3E-03	-1.1E-03	-9.0E-04	-8.0E-04	-7.5E-04
1175	1.9E-04	1.7E-04	2.6E-06	-3.3E-04	-6.7E-04	-8.2E-04	-9.0E-04	-9.7E-04	-7.0E-04	-4.7E-04	-2.9E-04	-1.8E-04	-1.2E-04
1176	1.9E-04	1.9E-04	7.5E-05	-1.6E-04	-4.0E-04	-5.2E-04	-5.8E-04	-6.3E-04	-3.9E-04	-1.8E-04	-2.6E-05	7.8E-05	1.3E-04
1177	1.2E-03	1.3E-03	1.2E-03	9.5E-04	6.8E-04	6.0E-04	6.0E-04	6.0E-04	8.9E-04	1.1E-03	1.3E-03	1.5E-03	1.5E-03
1178	1.2E-03	1.2E-03	1.2E-03	1.0E-03	8.7E-04	8.2E-04	8.4E-04	8.6E-04	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03
1179	1.3E-03	1.3E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.4E-03	1.6E-03	1.8E-03	1.9E-03	1.9E-03
1180	2.6E-03	2.7E-03	2.8E-03	2.6E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.9E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03
1181	2.3E-03	2.5E-03	2.5E-03	2.4E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.8E-03	3.1E-03	3.2E-03	3.4E-03	3.4E-03
1182	2.2E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03
1183	4.3E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03	4.8E-03	5.0E-03	5.2E-03	5.6E-03	5.8E-03	6.0E-03	6.2E-03	6.2E-03
1184	3.7E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.2E-03	5.4E-03	5.5E-03	5.5E-03
1185	6.3E-03	6.7E-03	7.0E-03	7.1E-03	7.2E-03	7.5E-03	7.9E-03	8.2E-03	8.6E-03	8.8E-03	9.1E-03	9.2E-03	9.3E-03
1186	5.1E-03	5.5E-03	5.8E-03	5.9E-03	6.0E-03	6.2E-03	6.5E-03	6.8E-03	7.1E-03	7.4E-03	7.6E-03	7.7E-03	7.7E-03
1187	8.2E-03	8.8E-03	9.3E-03	9.6E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
1188	6.5E-03	7.0E-03	7.4E-03	7.6E-03	7.8E-03	8.1E-03	8.5E-03	8.9E-03	9.2E-03	9.5E-03	9.7E-03	9.8E-03	9.9E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1189	9.8E-03	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02
1190	-1.7E-03	-1.8E-03	-2.0E-03	-2.3E-03	-2.6E-03	-2.8E-03	-3.0E-03	-3.2E-03	-3.0E-03	-2.8E-03	-2.6E-03	-2.5E-03	-2.5E-03
1191	-1.2E-03	-1.3E-03	-1.5E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.5E-03	-2.3E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.9E-03
1192	-6.6E-04	-7.2E-04	-8.5E-04	-1.0E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.4E-03	-1.2E-03	-1.1E-03	-1.0E-03	-9.9E-04
1193	-2.6E-04	-2.8E-04	-3.8E-04	-5.6E-04	-7.5E-04	-8.6E-04	-9.3E-04	-1.0E-03	-8.0E-04	-6.3E-04	-5.1E-04	-4.2E-04	-3.8E-04
1194	2.9E-04	3.0E-04	2.4E-04	9.9E-05	-5.7E-05	-1.3E-04	-1.7E-04	-1.9E-04	1.3E-05	1.9E-04	3.2E-04	4.1E-04	4.6E-04
1195	5.6E-04	6.0E-04	5.8E-04	4.9E-04	3.9E-04	3.5E-04	3.5E-04	3.5E-04	5.4E-04	7.1E-04	8.4E-04	9.2E-04	9.6E-04
1196	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.5E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03
1197	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03
1198	1.8E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03
1199	2.6E-03	2.8E-03	3.0E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03
1200	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03
1201	3.9E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.8E-03	5.0E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.0E-03
1202	3.4E-03	3.6E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.2E-03	5.3E-03
1203	3.0E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.7E-03
1204	4.9E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	6.2E-03	6.5E-03	6.8E-03	7.0E-03	7.2E-03	7.4E-03	7.5E-03	7.6E-03
1205	4.2E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.8E-03	6.0E-03	6.2E-03	6.3E-03	6.4E-03	6.5E-03
1206	3.6E-03	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03
1207	5.8E-03	6.2E-03	6.6E-03	6.8E-03	7.1E-03	7.4E-03	7.7E-03	8.1E-03	8.4E-03	8.6E-03	8.7E-03	8.9E-03	8.9E-03
1208	4.9E-03	5.2E-03	5.5E-03	5.8E-03	6.0E-03	6.2E-03	6.5E-03	6.8E-03	7.0E-03	7.2E-03	7.4E-03	7.5E-03	7.5E-03
1209	4.2E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.2E-03	6.3E-03	6.4E-03	6.5E-03
1210	7.8E-03	8.4E-03	8.9E-03	9.2E-03	9.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
1211	6.5E-03	7.0E-03	7.4E-03	7.7E-03	8.0E-03	8.3E-03	8.7E-03	9.1E-03	9.4E-03	9.6E-03	9.8E-03	9.9E-03	1.0E-02
1212	5.5E-03	5.9E-03	6.2E-03	6.5E-03	6.7E-03	7.0E-03	7.3E-03	7.7E-03	7.9E-03	8.1E-03	8.2E-03	8.3E-03	8.4E-03
1213	4.6E-03	5.0E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.5E-03	6.7E-03	6.9E-03	7.0E-03	7.1E-03	7.2E-03
1214	1.1E-02	1.1E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
1215	8.7E-03	9.3E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
1216	7.1E-03	7.6E-03	8.1E-03	8.4E-03	8.7E-03	9.1E-03	9.5E-03	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02
1217	6.0E-03	6.4E-03	6.8E-03	7.1E-03	7.3E-03	7.6E-03	8.0E-03	8.4E-03	8.6E-03	8.8E-03	9.0E-03	9.1E-03	9.1E-03
1218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1219	1.2E-02	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.8E-02
1220	9.4E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
1221	7.7E-03	8.2E-03	8.7E-03	9.1E-03	9.4E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02
1222	6.4E-03	6.9E-03	7.3E-03	7.6E-03	7.9E-03	8.2E-03	8.6E-03	9.0E-03	9.2E-03	9.4E-03	9.6E-03	9.7E-03	9.7E-03
1223	5.4E-03	5.8E-03	6.1E-03	6.4E-03	6.6E-03	6.9E-03	7.2E-03	7.5E-03	7.7E-03	7.9E-03	8.0E-03	8.1E-03	8.2E-03
1224	1.6E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.4E-02	2.4E-02	2.4E-02	2.4E-02
1225	1.2E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02	1.9E-02
1226	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
1227	8.1E-03	8.7E-03	9.2E-03	9.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
1228	6.8E-03	7.3E-03	7.7E-03	8.0E-03	8.3E-03	8.7E-03	9.1E-03	9.5E-03	9.7E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
1229	5.7E-03	6.1E-03	6.4E-03	6.7E-03	7.0E-03	7.3E-03	7.6E-03	7.9E-03	8.1E-03	8.3E-03	8.5E-03	8.6E-03	8.6E-03
1230	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.5E-02	2.5E-02	2.5E-02	2.5E-02
1231	1.3E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	2.0E-02	2.0E-02
1232	1.0E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1233	8.6E-03	9.2E-03	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
1234	7.1E-03	7.6E-03	8.1E-03	8.4E-03	8.8E-03	9.1E-03	9.5E-03	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02
1235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1236	1.7E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.2E-02	2.4E-02	2.5E-02	2.5E-02	2.5E-02	2.6E-02	2.6E-02	2.6E-02
1237	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.9E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02
1238	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
1239	9.0E-03	9.6E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
1240	7.4E-03	7.9E-03	8.4E-03	8.8E-03	9.1E-03	9.5E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
1241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1242	1.7E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.2E-02	2.3E-02	2.5E-02	2.5E-02	2.5E-02	2.6E-02	2.6E-02	2.6E-02
1243	1.4E-02	1.5E-02	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.1E-02	2.1E-02
1244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1245	9.3E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
1246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1248	1.7E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.5E-02	2.5E-02	2.5E-02	2.6E-02	2.6E-02
1249	1.4E-02	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.1E-02	2.1E-02	2.1E-02
1250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1251	9.6E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
1252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1254	1.8E-02	1.9E-02	2.0E-02	2.1E-02	2.2E-02	2.2E-02	2.3E-02	2.4E-02	2.5E-02	2.5E-02	2.5E-02	2.5E-02	2.6E-02
1255	1.4E-02	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.1E-02	2.1E-02	2.1E-02	2.1E-02
1256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1257	9.8E-03	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
1258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1260	1.7E-02	1.8E-02	2.0E-02	2.0E-02	2.1E-02	2.2E-02	2.3E-02	2.4E-02	2.4E-02	2.4E-02	2.5E-02	2.5E-02	2.5E-02
1261	1.4E-02	1.5E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.1E-02	2.1E-02	2.1E-02
1262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1266	1.4E-02	1.5E-02	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02
1267	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02
1268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1280	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02
1281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1282	1.1E-02	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
1283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1293	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.7E-02
1294	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
1295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1297	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
1298	9.9E-03	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
1299	8.8E-03	9.3E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
1300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1304	9.9E-03	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
1305	8.6E-03	9.1E-03	9.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
1306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1309	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02
1310	8.4E-03	8.9E-03	9.4E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
1311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1312	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02
1313	1.1E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
1314	9.5E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
1315	8.3E-03	8.8E-03	9.3E-03	9.7E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02
1316	7.4E-03	7.9E-03	8.3E-03	8.7E-03	9.0E-03	9.3E-03	9.7E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02
1317	1.3E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02
1318	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
1319	9.5E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
1320	8.1E-03	8.6E-03	9.1E-03	9.5E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1321	7.1E-03	7.6E-03	8.0E-03	8.4E-03	8.7E-03	9.0E-03	9.4E-03	9.7E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02
1322	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
1323	9.3E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
1324	8.0E-03	8.5E-03	9.0E-03	9.4E-03	9.7E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
1325	7.0E-03	7.5E-03	7.9E-03	8.2E-03	8.5E-03	8.9E-03	9.2E-03	9.6E-03	9.7E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
1326	7.9E-03	8.5E-03	8.9E-03	9.3E-03	9.7E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
1327	1.1E-02	1.1E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
1328	-2.3E-03	-2.5E-03	-2.7E-03	-3.0E-03	-3.3E-03	-3.5E-03	-3.7E-03	-3.9E-03	-3.7E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.2E-03
1329	-2.0E-03	-2.2E-03	-2.4E-03	-2.7E-03	-3.0E-03	-3.2E-03	-3.4E-03	-3.6E-03	-3.4E-03	-3.2E-03	-3.0E-03	-2.9E-03	-2.9E-03
1330	-1.6E-03	-1.7E-03	-1.9E-03	-2.1E-03	-2.4E-03	-2.6E-03	-2.7E-03	-2.9E-03	-2.7E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.3E-03
1331	-1.5E-03	-1.6E-03	-1.8E-03	-2.0E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.8E-03	-2.6E-03	-2.4E-03	-2.3E-03	-2.2E-03	-2.1E-03
1332	-1.2E-03	-1.3E-03	-1.4E-03	-1.6E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.7E-03	-1.7E-03
1333	-1.0E-03	-1.1E-03	-1.2E-03	-1.4E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.0E-03	-1.9E-03	-1.7E-03	-1.6E-03	-1.5E-03	-1.5E-03
1334	-6.8E-04	-7.4E-04	-8.4E-04	-1.0E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.3E-03	-1.2E-03	-1.1E-03	-9.8E-04	-9.5E-04
1335	-4.3E-04	-4.7E-04	-5.6E-04	-7.1E-04	-8.7E-04	-9.7E-04	-1.1E-03	-1.1E-03	-9.5E-04	-7.9E-04	-6.8E-04	-6.1E-04	-5.7E-04
1336	-7.5E-05	-8.5E-05	-1.5E-04	-2.8E-04	-4.2E-04	-5.0E-04	-5.5E-04	-6.0E-04	-4.2E-04	-2.6E-04	-1.5E-04	-6.7E-05	-2.8E-05
1337	3.7E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.6E-03	4.8E-03	5.1E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03	5.3E-03
1338	3.8E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03
1339	3.6E-03	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.0E-03	5.1E-03	5.1E-03	5.1E-03
1340	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.1E-03	5.2E-03	5.2E-03
1341	3.6E-03	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03	5.1E-03
1342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1343	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.1E-03	5.1E-03	5.2E-03
1344	3.8E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.2E-03	5.3E-03	5.3E-03	5.3E-03
1345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1360	2.8E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.7E-03	3.7E-03	3.8E-03	3.8E-03	3.8E-03	3.8E-03
1361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1365	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.4E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03	3.8E-03	3.8E-03
1366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1407	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	3.0E-03
1408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1421	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03
1422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1487	7.1E-03	7.6E-03	8.0E-03	8.3E-03	8.5E-03	8.8E-03	9.2E-03	9.6E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
1488	6.6E-03	7.0E-03	7.4E-03	7.7E-03	8.0E-03	8.2E-03	8.6E-03	9.0E-03	9.1E-03	9.3E-03	9.4E-03	9.5E-03	9.5E-03
1489	6.1E-03	6.5E-03	6.9E-03	7.2E-03	7.4E-03	7.7E-03	8.0E-03	8.4E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	8.9E-03
1490	5.7E-03	6.1E-03	6.4E-03	6.7E-03	6.9E-03	7.2E-03	7.5E-03	7.8E-03	7.9E-03	8.1E-03	8.2E-03	8.3E-03	8.3E-03
1491	5.3E-03	5.6E-03	6.0E-03	6.2E-03	6.5E-03	6.7E-03	7.0E-03	7.3E-03	7.4E-03	7.6E-03	7.7E-03	7.7E-03	7.8E-03
1492	6.8E-03	7.3E-03	7.7E-03	7.9E-03	8.1E-03	8.4E-03	8.7E-03	9.1E-03	9.3E-03	9.4E-03	9.6E-03	9.6E-03	9.7E-03
1493	6.3E-03	6.8E-03	7.2E-03	7.4E-03	7.6E-03	7.9E-03	8.2E-03	8.6E-03	8.8E-03	8.9E-03	9.0E-03	9.1E-03	9.1E-03
1494	5.9E-03	6.3E-03	6.7E-03	7.0E-03	7.2E-03	7.4E-03	7.8E-03	8.1E-03	8.3E-03	8.4E-03	8.5E-03	8.6E-03	8.6E-03
1495	5.5E-03	5.9E-03	6.2E-03	6.5E-03	6.7E-03	6.9E-03	7.2E-03	7.5E-03	7.7E-03	7.8E-03	7.9E-03	8.0E-03	8.0E-03
1496	5.1E-03	5.5E-03	5.8E-03	6.0E-03	6.2E-03	6.5E-03	6.8E-03	7.1E-03	7.2E-03	7.3E-03	7.4E-03	7.5E-03	7.5E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1502	6.3E-03	6.8E-03	7.1E-03	7.4E-03	7.5E-03	7.6E-03	8.0E-03	8.4E-03	8.5E-03	8.6E-03	8.7E-03	8.8E-03	8.8E-03
1503	5.9E-03	6.3E-03	6.7E-03	6.9E-03	7.1E-03	7.3E-03	7.6E-03	8.0E-03	8.1E-03	8.2E-03	8.3E-03	8.4E-03	8.4E-03
1504	5.6E-03	5.9E-03	6.3E-03	6.5E-03	6.7E-03	6.9E-03	7.2E-03	7.6E-03	7.7E-03	7.8E-03	7.9E-03	8.0E-03	8.0E-03
1505	5.1E-03	5.5E-03	5.8E-03	6.1E-03	6.3E-03	6.5E-03	6.8E-03	7.1E-03	7.2E-03	7.3E-03	7.4E-03	7.5E-03	7.5E-03
1506	4.8E-03	5.2E-03	5.5E-03	5.7E-03	5.9E-03	6.1E-03	6.4E-03	6.6E-03	6.8E-03	6.9E-03	7.0E-03	7.0E-03	7.1E-03
1507	6.1E-03	6.5E-03	6.9E-03	7.1E-03	7.3E-03	7.4E-03	7.7E-03	8.1E-03	8.2E-03	8.3E-03	8.4E-03	8.5E-03	8.5E-03
1508	5.8E-03	6.1E-03	6.5E-03	6.7E-03	6.9E-03	7.1E-03	7.4E-03	7.7E-03	7.8E-03	8.0E-03	8.0E-03	8.1E-03	8.1E-03
1509	5.4E-03	5.8E-03	6.1E-03	6.3E-03	6.5E-03	6.7E-03	7.0E-03	7.3E-03	7.4E-03	7.5E-03	7.6E-03	7.7E-03	7.7E-03
1510	5.0E-03	5.4E-03	5.7E-03	5.9E-03	6.1E-03	6.3E-03	6.6E-03	6.9E-03	7.0E-03	7.1E-03	7.2E-03	7.2E-03	7.2E-03
1511	4.7E-03	5.0E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.5E-03	6.6E-03	6.7E-03	6.8E-03	6.8E-03	6.8E-03
1512	6.0E-03	6.4E-03	6.7E-03	6.9E-03	7.1E-03	7.2E-03	7.5E-03	7.8E-03	8.0E-03	8.1E-03	8.2E-03	8.2E-03	8.2E-03
1513	5.6E-03	6.0E-03	6.3E-03	6.5E-03	6.7E-03	6.9E-03	7.2E-03	7.5E-03	7.6E-03	7.7E-03	7.8E-03	7.9E-03	7.9E-03
1514	5.2E-03	5.6E-03	5.9E-03	6.1E-03	6.3E-03	6.5E-03	6.8E-03	7.1E-03	7.2E-03	7.3E-03	7.4E-03	7.4E-03	7.5E-03
1515	4.9E-03	5.2E-03	5.5E-03	5.7E-03	5.9E-03	6.1E-03	6.4E-03	6.7E-03	6.8E-03	6.9E-03	7.0E-03	7.0E-03	7.0E-03
1516	4.6E-03	4.9E-03	5.2E-03	5.4E-03	5.6E-03	5.8E-03	6.0E-03	6.3E-03	6.4E-03	6.5E-03	6.6E-03	6.6E-03	6.7E-03
1517	5.7E-03	6.1E-03	6.4E-03	6.6E-03	6.8E-03	6.9E-03	7.2E-03	7.5E-03	7.6E-03	7.7E-03	7.8E-03	7.9E-03	7.9E-03
1518	5.4E-03	5.7E-03	6.0E-03	6.2E-03	6.4E-03	6.6E-03	6.9E-03	7.2E-03	7.3E-03	7.4E-03	7.5E-03	7.5E-03	7.5E-03
1519	5.0E-03	5.4E-03	5.7E-03	5.9E-03	6.1E-03	6.2E-03	6.5E-03	6.8E-03	6.9E-03	7.0E-03	7.1E-03	7.2E-03	7.2E-03
1520	4.7E-03	5.0E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.1E-03	6.4E-03	6.5E-03	6.6E-03	6.7E-03	6.7E-03	6.8E-03
1521	4.4E-03	4.7E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.8E-03	6.1E-03	6.2E-03	6.3E-03	6.3E-03	6.4E-03	6.4E-03
1522	5.5E-03	5.9E-03	6.2E-03	6.4E-03	6.5E-03	6.6E-03	6.9E-03	7.2E-03	7.3E-03	7.4E-03	7.5E-03	7.6E-03	7.6E-03
1523	5.1E-03	5.5E-03	5.8E-03	6.0E-03	6.2E-03	6.3E-03	6.6E-03	6.9E-03	7.0E-03	7.1E-03	7.2E-03	7.2E-03	7.2E-03
1524	4.8E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	6.0E-03	6.3E-03	6.5E-03	6.6E-03	6.7E-03	6.8E-03	6.9E-03	6.9E-03
1525	4.5E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.3E-03	6.4E-03	6.5E-03	6.5E-03	6.5E-03
1526	4.3E-03	4.6E-03	4.9E-03	5.0E-03	5.2E-03	5.4E-03	5.6E-03	5.9E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.2E-03
1527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1528	5.2E-03	5.6E-03	5.9E-03	6.1E-03	6.2E-03	6.3E-03	6.6E-03	6.9E-03	7.0E-03	7.1E-03	7.2E-03	7.2E-03	7.3E-03
1529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1531	4.4E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.7E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.3E-03	6.3E-03
1532	4.1E-03	4.4E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.4E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.0E-03
1533	6.3E-03	6.7E-03	7.0E-03	7.1E-03	7.2E-03	7.2E-03	7.5E-03	7.9E-03	8.0E-03	8.1E-03	8.1E-03	8.2E-03	8.2E-03
1534	5.8E-03	6.1E-03	6.4E-03	6.6E-03	6.7E-03	6.7E-03	7.0E-03	7.3E-03	7.4E-03	7.5E-03	7.6E-03	7.7E-03	7.7E-03
1535	5.3E-03	5.7E-03	6.0E-03	6.2E-03	6.3E-03	6.3E-03	6.6E-03	6.9E-03	7.0E-03	7.1E-03	7.2E-03	7.3E-03	7.3E-03
1536	5.0E-03	5.4E-03	5.6E-03	5.8E-03	6.0E-03	6.0E-03	6.3E-03	6.6E-03	6.7E-03	6.8E-03	6.9E-03	6.9E-03	7.0E-03
1537	4.7E-03	5.0E-03	5.3E-03	5.5E-03	5.6E-03	5.7E-03	6.0E-03	6.3E-03	6.4E-03	6.5E-03	6.5E-03	6.6E-03	6.6E-03
1538	4.4E-03	4.7E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.7E-03	6.0E-03	6.1E-03	6.2E-03	6.3E-03	6.3E-03	6.3E-03
1539	4.2E-03	4.5E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03
1540	4.0E-03	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.5E-03	5.6E-03	5.7E-03	5.8E-03	5.8E-03	5.8E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1541	5.8E-03	6.2E-03	6.5E-03	6.6E-03	6.7E-03	6.7E-03	7.0E-03	7.4E-03	7.5E-03	7.6E-03	7.6E-03	7.7E-03	7.7E-03
1542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1548	5.4E-03	5.7E-03	6.0E-03	6.1E-03	6.3E-03	6.3E-03	6.6E-03	6.9E-03	7.0E-03	7.1E-03	7.2E-03	7.2E-03	7.3E-03
1549	5.1E-03	5.4E-03	5.7E-03	5.8E-03	6.0E-03	6.0E-03	6.3E-03	6.6E-03	6.7E-03	6.8E-03	6.9E-03	6.9E-03	6.9E-03
1550	4.8E-03	5.1E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03	6.0E-03	6.3E-03	6.4E-03	6.5E-03	6.6E-03	6.6E-03	6.7E-03
1551	4.6E-03	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03	5.8E-03	6.1E-03	6.2E-03	6.3E-03	6.3E-03	6.4E-03	6.4E-03
1552	4.3E-03	4.6E-03	4.9E-03	5.0E-03	5.2E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.1E-03
1553	4.1E-03	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.3E-03	5.6E-03	5.7E-03	5.8E-03	5.8E-03	5.9E-03	5.9E-03
1554	5.1E-03	5.4E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.3E-03	6.5E-03	6.6E-03	6.7E-03	6.8E-03	6.8E-03	6.9E-03
1555	4.8E-03	5.1E-03	5.4E-03	5.5E-03	5.6E-03	5.7E-03	6.0E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03	6.6E-03	6.6E-03
1556	4.6E-03	4.9E-03	5.2E-03	5.3E-03	5.4E-03	5.5E-03	5.8E-03	6.1E-03	6.1E-03	6.2E-03	6.3E-03	6.4E-03	6.4E-03
1557	4.4E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.1E-03
1558	4.2E-03	4.4E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03
1559	4.8E-03	5.1E-03	5.3E-03	5.4E-03	5.6E-03	5.7E-03	5.9E-03	6.2E-03	6.3E-03	6.4E-03	6.5E-03	6.5E-03	6.5E-03
1560	4.5E-03	4.8E-03	5.1E-03	5.2E-03	5.3E-03	5.4E-03	5.7E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03	6.3E-03	6.3E-03
1561	4.4E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03
1562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1563	4.5E-03	4.8E-03	5.0E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03
1564	4.3E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03	5.1E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03
1565	4.1E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.5E-03	5.6E-03	5.6E-03	5.7E-03	5.7E-03	5.8E-03
1566	4.0E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03	5.6E-03
1567	3.8E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.9E-03	5.2E-03	5.3E-03	5.3E-03	5.4E-03	5.4E-03	5.5E-03
1568	4.4E-03	4.7E-03	4.9E-03	4.9E-03	5.0E-03	5.1E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03	5.8E-03	5.9E-03	5.9E-03
1569	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.3E-03	5.5E-03	5.6E-03	5.7E-03	5.7E-03	5.8E-03	5.8E-03
1570	4.1E-03	4.3E-03	4.6E-03	4.6E-03	4.8E-03	4.9E-03	5.1E-03	5.4E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03	5.6E-03
1571	3.9E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03	5.5E-03	5.5E-03	5.5E-03
1572	3.8E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03	5.4E-03	5.4E-03
1573	3.7E-03	3.9E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	5.0E-03	5.1E-03	5.1E-03	5.2E-03	5.2E-03	5.3E-03
1574	4.3E-03	4.6E-03	4.8E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03	5.9E-03
1575	4.4E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03
1576	4.3E-03	4.6E-03	4.7E-03	4.7E-03	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03	5.7E-03	5.7E-03
1577	4.3E-03	4.5E-03	4.7E-03	4.6E-03	4.7E-03	4.8E-03	5.0E-03	5.3E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03	5.5E-03
1578	4.3E-03	4.6E-03	4.7E-03	4.6E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03	5.5E-03	5.6E-03	5.6E-03
1579	4.3E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03	4.9E-03	5.1E-03	5.4E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03	5.6E-03
1580	4.2E-03	4.5E-03	4.7E-03	4.7E-03	4.7E-03	4.9E-03	5.1E-03	5.4E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03	5.6E-03
1581	4.1E-03	4.4E-03	4.6E-03	4.6E-03	4.7E-03	4.8E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03	5.5E-03	5.6E-03	5.6E-03
1582	4.0E-03	4.3E-03	4.5E-03	4.5E-03	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03	5.5E-03	5.5E-03	5.5E-03
1583	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03	5.4E-03	5.4E-03
1584	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03	5.2E-03	5.3E-03	5.3E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1585	3.6E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.1E-03	5.2E-03	5.2E-03
1586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1599	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.1E-03	5.1E-03	5.2E-03
1600	3.6E-03	3.8E-03	4.0E-03	4.0E-03	4.1E-03	4.3E-03	4.5E-03	4.7E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	4.9E-03
1601	3.6E-03	3.8E-03	4.0E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03
1602	3.7E-03	3.9E-03	4.1E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03	4.9E-03
1603	3.7E-03	3.9E-03	4.1E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	5.0E-03	5.0E-03
1604	3.7E-03	3.9E-03	4.1E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.8E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03
1605	3.6E-03	3.9E-03	4.1E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.8E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03
1606	3.6E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	5.0E-03	5.0E-03
1607	3.5E-03	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.3E-03	4.5E-03	4.7E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	4.9E-03
1608	3.4E-03	3.7E-03	3.9E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03
1609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1610	3.3E-03	3.5E-03	3.7E-03	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.4E-03	4.4E-03	4.5E-03	4.6E-03	4.6E-03	4.6E-03
1611	3.3E-03	3.5E-03	3.7E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.5E-03	4.6E-03	4.6E-03
1612	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.2E-03	4.4E-03	4.4E-03	4.5E-03	4.6E-03	4.6E-03	4.6E-03
1613	3.4E-03	3.6E-03	3.8E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.6E-03	4.7E-03	4.7E-03
1614	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03
1615	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03	4.8E-03
1616	3.4E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03	4.8E-03
1617	3.4E-03	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03
1618	3.3E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.6E-03	4.7E-03	4.7E-03
1619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1620	3.0E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.2E-03	4.3E-03	4.3E-03
1621	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	4.1E-03	4.1E-03	4.2E-03	4.3E-03	4.3E-03	4.3E-03
1622	3.1E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.3E-03	4.3E-03	4.4E-03
1623	3.2E-03	3.4E-03	3.6E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.3E-03	4.4E-03	4.4E-03	4.4E-03
1624	3.2E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.3E-03	4.3E-03	4.4E-03	4.4E-03	4.5E-03	4.5E-03
1625	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.4E-03	4.5E-03	4.5E-03	4.5E-03
1626	3.2E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.4E-03	4.5E-03	4.5E-03	4.5E-03
1627	3.2E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.3E-03	4.3E-03	4.4E-03	4.5E-03	4.5E-03	4.5E-03
1628	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1630	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03
1631	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03
1632	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
1633	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03
1634	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
1635	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1663	5.7E-04	6.0E-04	6.3E-04	6.6E-04	6.9E-04	7.3E-04	7.7E-04	8.1E-04	8.5E-04	8.9E-04	9.2E-04	9.4E-04	9.4E-04
1664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1674	6.5E-04	6.9E-04	7.2E-04	7.6E-04	8.0E-04	8.4E-04	8.8E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03
1675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1680	7.9E-04	8.4E-04	8.8E-04	9.2E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
1681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1737	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.5E-03	-2.4E-03
1738	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.7E-03	-2.7E-03	-2.6E-03
1739	3.7E-04	3.6E-04	3.3E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.2E-04	4.5E-04	4.8E-04	4.9E-04	5.0E-04
1740	4.3E-04	4.2E-04	3.8E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.3E-04	4.7E-04	5.0E-04	5.3E-04	5.4E-04	5.5E-04
1741	5.2E-04	4.9E-04	4.3E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.3E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04
1742	2.8E-04	2.9E-04	2.8E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.6E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04
1743	3.2E-04	3.2E-04	3.0E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.6E-04
1744	3.7E-04	3.6E-04	3.3E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	4.2E-04	4.5E-04	4.8E-04	4.9E-04	5.0E-04
1745	4.5E-04	4.3E-04	3.8E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.8E-04	5.1E-04	5.4E-04	5.5E-04	5.6E-04
1746	2.6E-04	2.6E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.2E-04
1747	2.8E-04	2.8E-04	2.7E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.6E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04
1748	3.2E-04	3.2E-04	3.0E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.8E-04	4.1E-04	4.4E-04	4.5E-04	4.6E-04
1749	3.8E-04	3.7E-04	3.4E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.2E-04	4.6E-04	4.8E-04	4.9E-04	5.0E-04
1750	2.6E-04	2.7E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.5E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04
1751	2.8E-04	2.9E-04	2.7E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.3E-04	3.6E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04
1752	3.2E-04	3.2E-04	3.0E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.9E-04	4.2E-04	4.4E-04	4.5E-04	4.6E-04
1753	3.8E-04	3.7E-04	3.4E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.3E-04	4.6E-04	4.9E-04	5.0E-04	5.1E-04
1754	2.5E-04	2.7E-04	2.7E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.4E-04
1755	2.6E-04	2.7E-04	2.6E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.5E-04	3.8E-04	4.0E-04	4.2E-04	4.2E-04
1756	2.8E-04	2.9E-04	2.8E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.6E-04	3.9E-04	4.2E-04	4.3E-04	4.4E-04
1757	3.2E-04	3.2E-04	3.0E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.9E-04	4.2E-04	4.4E-04	4.6E-04	4.7E-04
1758	3.9E-04	3.8E-04	3.4E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.4E-04	4.7E-04	5.0E-04	5.1E-04	5.2E-04
1759	2.7E-04	2.8E-04	2.8E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.5E-04	3.9E-04	4.2E-04	4.4E-04	4.6E-04	4.7E-04
1760	2.7E-04	2.7E-04	2.7E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.6E-04	3.9E-04	4.1E-04	4.3E-04	4.3E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1761	2.9E-04	2.9E-04	2.8E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.4E-04
1762	3.3E-04	3.3E-04	3.0E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.6E-04	4.0E-04	4.3E-04	4.5E-04	4.7E-04	4.7E-04
1763	4.0E-04	3.9E-04	3.5E-04	3.3E-04	3.5E-04	3.6E-04	3.8E-04	4.0E-04	4.4E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04
1764	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	4.1E-04	4.5E-04	4.7E-04	4.9E-04	5.0E-04
1765	2.7E-04	2.8E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.5E-04
1766	3.0E-04	3.0E-04	2.9E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.6E-04
1767	3.3E-04	3.3E-04	3.1E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	4.0E-04	4.3E-04	4.6E-04	4.8E-04	4.8E-04
1768	3.0E-04	3.2E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.8E-04	4.1E-04	4.5E-04	4.9E-04	5.2E-04	5.4E-04	5.5E-04
1769	2.9E-04	2.9E-04	2.9E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.5E-04	3.9E-04	4.2E-04	4.4E-04	4.6E-04	4.7E-04
1770	3.1E-04	3.1E-04	3.0E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.9E-04	4.2E-04	4.5E-04	4.6E-04	4.7E-04
1771	3.4E-04	3.4E-04	3.1E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	4.1E-04	4.4E-04	4.7E-04	4.9E-04	4.9E-04
1772	3.2E-04	3.4E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.4E-04	4.8E-04	5.2E-04	5.5E-04	5.7E-04	5.8E-04
1773	3.1E-04	3.1E-04	3.1E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	4.1E-04	4.5E-04	4.7E-04	4.9E-04	5.0E-04
1774	3.2E-04	3.2E-04	3.0E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	4.0E-04	4.4E-04	4.6E-04	4.8E-04	4.9E-04
1775	3.4E-04	3.4E-04	3.1E-04	2.9E-04	3.1E-04	3.2E-04	3.4E-04	3.6E-04	4.0E-04	4.4E-04	4.7E-04	4.9E-04	5.0E-04
1776	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.3E-04	4.7E-04	5.1E-04	5.4E-04	5.6E-04	5.7E-04
1777	3.3E-04	3.4E-04	3.3E-04	3.3E-04	3.5E-04	3.6E-04	3.8E-04	4.0E-04	4.5E-04	4.8E-04	5.1E-04	5.2E-04	5.3E-04
1778	3.3E-04	3.3E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	4.1E-04	4.5E-04	4.8E-04	4.9E-04	5.0E-04
1779	3.3E-04	3.2E-04	2.8E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.8E-04	4.2E-04	4.5E-04	4.7E-04	4.8E-04
1780	3.5E-04	3.7E-04	3.6E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	5.1E-04	5.4E-04	5.7E-04	5.9E-04	6.0E-04
1781	3.6E-04	3.7E-04	3.6E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.5E-04	4.9E-04	5.3E-04	5.6E-04	5.8E-04	5.8E-04
1782	3.6E-04	3.6E-04	3.4E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.1E-04	4.6E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04
1783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1784	3.6E-04	3.8E-04	3.8E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.2E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04
1785	4.2E-04	4.3E-04	4.3E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.8E-04	6.2E-04	6.5E-04	6.7E-04	6.8E-04
1786	4.0E-04	4.0E-04	3.9E-04	3.8E-04	4.1E-04	4.2E-04	4.5E-04	4.7E-04	5.2E-04	5.6E-04	5.9E-04	6.1E-04	6.2E-04
1787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1788	4.1E-04	4.2E-04	4.2E-04	4.3E-04	4.6E-04	4.8E-04	5.1E-04	5.4E-04	5.8E-04	6.2E-04	6.5E-04	6.7E-04	6.7E-04
1789	4.8E-04	5.0E-04	5.0E-04	5.1E-04	5.4E-04	5.7E-04	6.0E-04	6.3E-04	6.8E-04	7.3E-04	7.6E-04	7.8E-04	7.9E-04
1790	3.4E-04	3.4E-04	3.2E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	4.0E-04	4.5E-04	5.0E-04	5.4E-04	5.6E-04	5.7E-04
1791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1792	4.7E-04	4.9E-04	4.9E-04	5.0E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.8E-04	7.3E-04	7.6E-04	7.8E-04	7.9E-04
1793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1808	3.7E-04	3.7E-04	3.5E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.4E-04	4.7E-04	5.0E-04	5.1E-04	5.2E-04
1809	4.2E-04	4.1E-04	3.8E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.8E-04	5.1E-04	5.4E-04	5.5E-04	5.6E-04
1810	4.8E-04	4.6E-04	4.2E-04	4.0E-04	4.2E-04	4.3E-04	4.6E-04	4.8E-04	5.2E-04	5.6E-04	5.9E-04	6.0E-04	6.1E-04
1811	5.0E-04	4.7E-04	4.1E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	5.1E-04	5.5E-04	5.8E-04	6.0E-04	6.1E-04
1812	2.6E-04	2.1E-04	1.2E-04	6.1E-05	6.2E-05	6.4E-05	7.0E-05	7.9E-05	1.5E-04	2.1E-04	2.6E-04	2.9E-04	3.0E-04
1813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1814	3.2E-04	3.2E-04	3.1E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	4.0E-04	4.3E-04	4.5E-04	4.6E-04	4.7E-04
1815	3.7E-04	3.6E-04	3.4E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04
1816	4.3E-04	4.1E-04	3.8E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.4E-04	4.8E-04	5.1E-04	5.3E-04	5.5E-04	5.6E-04
1817	5.0E-04	4.8E-04	4.2E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.3E-04	5.6E-04	5.9E-04	6.1E-04	6.2E-04
1818	5.3E-04	5.0E-04	4.3E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.3E-04	5.7E-04	6.0E-04	6.2E-04	6.3E-04
1819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1823	2.8E-04	2.9E-04	2.8E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.6E-04	3.9E-04	4.1E-04	4.3E-04	4.3E-04
1824	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.5E-03	-2.3E-03	-2.2E-03	-2.2E-03	-2.1E-03	-2.1E-03
1825	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.3E-03
1826	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.1E-03	-2.0E-03	-2.0E-03	-1.9E-03	-1.9E-03
1827	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.0E-03	-2.0E-03	-2.0E-03
1828	-3.7E-03	-3.9E-03	-4.3E-03	-4.6E-03	-5.0E-03	-5.3E-03	-5.6E-03	-5.9E-03	-5.6E-03	-5.4E-03	-5.3E-03	-5.2E-03	-5.1E-03
1829	-3.4E-03	-3.6E-03	-3.9E-03	-4.2E-03	-4.6E-03	-4.9E-03	-5.2E-03	-5.5E-03	-5.2E-03	-5.0E-03	-4.8E-03	-4.7E-03	-4.7E-03
1830	-3.1E-03	-3.3E-03	-3.6E-03	-3.9E-03	-4.2E-03	-4.5E-03	-4.8E-03	-5.0E-03	-4.8E-03	-4.6E-03	-4.4E-03	-4.3E-03	-4.3E-03
1831	-2.9E-03	-3.1E-03	-3.3E-03	-3.6E-03	-4.0E-03	-4.2E-03	-4.5E-03	-4.7E-03	-4.5E-03	-4.3E-03	-4.1E-03	-4.0E-03	-4.0E-03
1832	-3.8E-03	-4.1E-03	-4.4E-03	-4.7E-03	-5.0E-03	-5.4E-03	-5.7E-03	-6.0E-03	-5.8E-03	-5.6E-03	-5.4E-03	-5.4E-03	-5.3E-03
1833	-4.6E-03	-5.0E-03	-5.3E-03	-5.7E-03	-6.1E-03	-6.5E-03	-6.9E-03	-7.3E-03	-7.0E-03	-6.8E-03	-6.7E-03	-6.6E-03	-6.5E-03
1834	-4.1E-03	-4.3E-03	-4.7E-03	-5.0E-03	-5.4E-03	-5.7E-03	-6.0E-03	-6.3E-03	-6.1E-03	-5.9E-03	-5.7E-03	-5.6E-03	-5.5E-03
1835	-4.6E-03	-4.9E-03	-5.2E-03	-5.6E-03	-6.1E-03	-6.4E-03	-6.8E-03	-7.2E-03	-6.9E-03	-6.7E-03	-6.6E-03	-6.5E-03	-6.4E-03
1836	-4.5E-03	-4.9E-03	-5.2E-03	-5.6E-03	-6.1E-03	-6.4E-03	-6.8E-03	-7.2E-03	-6.9E-03	-6.7E-03	-6.6E-03	-6.4E-03	-6.4E-03
1837	-2.8E-03	-3.0E-03	-3.2E-03	-3.5E-03	-3.7E-03	-4.0E-03	-4.2E-03	-4.4E-03	-4.3E-03	-4.1E-03	-4.0E-03	-3.9E-03	-3.9E-03
1838	-2.8E-03	-3.0E-03	-3.2E-03	-3.4E-03	-3.7E-03	-4.0E-03	-4.2E-03	-4.4E-03	-4.2E-03	-4.1E-03	-4.0E-03	-3.9E-03	-3.9E-03
1839	-2.7E-03	-2.9E-03	-3.1E-03	-3.3E-03	-3.6E-03	-3.9E-03	-4.1E-03	-4.3E-03	-4.1E-03	-4.0E-03	-3.8E-03	-3.8E-03	-3.7E-03
1840	-2.6E-03	-2.7E-03	-3.0E-03	-3.2E-03	-3.5E-03	-3.7E-03	-3.9E-03	-4.2E-03	-4.0E-03	-3.8E-03	-3.7E-03	-3.6E-03	-3.6E-03
1841	-2.4E-03	-2.6E-03	-2.8E-03	-3.1E-03	-3.3E-03	-3.6E-03	-3.8E-03	-4.0E-03	-3.8E-03	-3.6E-03	-3.5E-03	-3.4E-03	-3.4E-03
1842	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.7E-03	-2.9E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.4E-03
1843	-2.3E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.2E-03	-3.4E-03	-3.6E-03	-3.8E-03	-3.6E-03	-3.5E-03	-3.3E-03	-3.2E-03	-3.2E-03
1844	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-3.0E-03	-3.2E-03	-3.4E-03	-3.6E-03	-3.4E-03	-3.2E-03	-3.1E-03	-3.0E-03	-2.9E-03
1845	-2.0E-03	-2.2E-03	-2.3E-03	-2.6E-03	-2.8E-03	-3.0E-03	-3.2E-03	-3.4E-03	-3.2E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.8E-03
1846	-2.6E-03	-2.8E-03	-3.0E-03	-3.2E-03	-3.5E-03	-3.7E-03	-3.9E-03	-4.1E-03	-4.0E-03	-3.8E-03	-3.7E-03	-3.6E-03	-3.5E-03
1847	-2.7E-03	-2.9E-03	-3.1E-03	-3.4E-03	-3.6E-03	-3.9E-03	-4.1E-03	-4.3E-03	-4.2E-03	-4.0E-03	-3.9E-03	-3.8E-03	-3.8E-03
1848	-2.9E-03	-3.2E-03	-3.4E-03	-3.7E-03	-3.9E-03	-4.2E-03	-4.5E-03	-4.7E-03	-4.5E-03	-4.4E-03	-4.3E-03	-4.2E-03	-4.1E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1849	-2.2E-03	-2.3E-03	-2.5E-03	-2.7E-03	-3.0E-03	-3.2E-03	-3.4E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.1E-03
1850	-1.6E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.5E-03	-2.6E-03	-2.5E-03	-2.3E-03	-2.2E-03	-2.2E-03	-2.1E-03
1851	-1.5E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.4E-03	-2.5E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.1E-03	-2.0E-03
1852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1853	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.8E-03	-2.9E-03	-2.8E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.4E-03
1854	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.8E-03	-2.7E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.4E-03
1855	-2.1E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-3.0E-03	-3.2E-03	-3.4E-03	-3.2E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.9E-03
1856	-1.9E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.0E-03	-2.9E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.6E-03
1857	-1.6E-03	-1.7E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.4E-03	-2.5E-03	-2.7E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.2E-03
1858	-1.6E-03	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.5E-03	-2.7E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.2E-03
1859	-1.2E-03	-1.2E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.0E-03	-1.9E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03
1860	-1.5E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.5E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.0E-03	-2.0E-03
1861	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-1.8E-03	-1.7E-03	-1.6E-03	-1.5E-03	-1.5E-03
1862	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.4E-03	-2.2E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.9E-03
1863	-1.1E-03	-1.1E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-1.9E-03	-1.7E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.4E-03
1864	-8.6E-04	-9.3E-04	-1.0E-03	-1.1E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.1E-03
1865	-1.3E-03	-1.4E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.2E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.8E-03
1866	-1.0E-03	-1.1E-03	-1.2E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.7E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.4E-03
1867	-8.3E-04	-8.8E-04	-9.8E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.4E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.1E-03
1868	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.7E-03	-2.9E-03	-2.7E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.3E-03
1869	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.7E-03
1870	-9.8E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.3E-03
1871	-7.6E-04	-8.2E-04	-9.1E-04	-1.0E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.0E-03	-9.8E-04
1872	-1.2E-03	-1.3E-03	-1.4E-03	-1.6E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.1E-03	-1.9E-03	-1.8E-03	-1.7E-03	-1.7E-03
1873	-9.1E-04	-9.8E-04	-1.1E-03	-1.2E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.6E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.2E-03
1874	-6.7E-04	-7.2E-04	-8.0E-04	-9.3E-04	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.0E-03	-9.5E-04	-8.8E-04	-8.5E-04
1875	-8.1E-04	-8.7E-04	-9.8E-04	-1.1E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.5E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.1E-03
1876	-2.7E-03	-2.9E-03	-3.1E-03	-3.3E-03	-3.6E-03	-3.9E-03	-4.1E-03	-4.3E-03	-4.2E-03	-4.0E-03	-3.9E-03	-3.8E-03	-3.8E-03
1877	-2.2E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.1E-03	-3.3E-03	-3.5E-03	-3.3E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.8E-03
1878	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.4E-03	-2.5E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.0E-03	-1.9E-03
1879	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.8E-03	-1.8E-03
1880	-1.2E-03	-1.3E-03	-1.4E-03	-1.6E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.7E-03	-1.7E-03
1881	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.6E-03	-1.5E-03	-1.5E-03	-1.4E-03	-1.4E-03
1882	-9.6E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.6E-03	-1.4E-03	-1.4E-03	-1.3E-03	-1.3E-03
1883	-9.2E-04	-9.8E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.2E-03
1884	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.9E-03
1885	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.7E-03	-1.7E-03
1886	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-1.9E-03	-1.8E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03
1887	-2.3E-03	-2.5E-03	-2.7E-03	-2.9E-03	-3.1E-03	-3.3E-03	-3.5E-03	-3.7E-03	-3.6E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.2E-03
1888	-8.5E-04	-9.2E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03
1889	-9.9E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-1.6E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.4E-03
1890	-1.1E-03	-1.1E-03	-1.2E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-1.8E-03	-1.7E-03	-1.6E-03	-1.5E-03	-1.5E-03
1891	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.8E-03	-1.8E-03
1892	-1.5E-03	-1.6E-03	-1.7E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.4E-03	-2.5E-03	-2.4E-03	-2.2E-03	-2.1E-03	-2.1E-03	-2.0E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1894	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.5E-03	-1.5E-03
1895	-9.6E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03
1896	-8.0E-04	-8.6E-04	-9.4E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.1E-03
1897	-6.7E-04	-7.2E-04	-7.9E-04	-8.7E-04	-9.6E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.1E-03	-1.0E-03	-9.6E-04	-9.2E-04	-9.0E-04
1898	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.7E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.4E-03
1899	-8.9E-04	-9.5E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03
1900	-7.2E-04	-7.7E-04	-8.4E-04	-9.3E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.0E-03	-1.0E-03	-9.8E-04
1901	-5.9E-04	-6.3E-04	-6.9E-04	-7.7E-04	-8.5E-04	-9.2E-04	-9.9E-04	-1.1E-03	-9.5E-04	-8.7E-04	-8.1E-04	-7.7E-04	-7.5E-04
1902	-4.8E-04	-5.1E-04	-5.6E-04	-6.2E-04	-6.9E-04	-7.5E-04	-8.1E-04	-8.6E-04	-7.6E-04	-6.8E-04	-6.2E-04	-5.8E-04	-5.6E-04
1903	-9.1E-04	-9.7E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03
1904	-7.4E-04	-7.9E-04	-8.7E-04	-9.6E-04	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03
1905	-6.3E-04	-6.8E-04	-7.4E-04	-8.2E-04	-9.0E-04	-9.9E-04	-1.1E-03	-1.1E-03	-1.0E-03	-9.4E-04	-8.8E-04	-8.4E-04	-8.2E-04
1906	-5.3E-04	-5.6E-04	-6.1E-04	-6.8E-04	-7.6E-04	-8.2E-04	-8.8E-04	-9.4E-04	-8.4E-04	-7.5E-04	-6.8E-04	-6.4E-04	-6.2E-04
1907	-3.4E-04	-3.7E-04	-4.1E-04	-4.7E-04	-5.4E-04	-5.9E-04	-6.4E-04	-6.9E-04	-6.2E-04	-5.6E-04	-5.1E-04	-4.8E-04	-4.7E-04
1908	-7.6E-04	-8.2E-04	-9.0E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.1E-03
1909	-6.9E-04	-7.4E-04	-8.0E-04	-8.9E-04	-9.8E-04	-1.1E-03	-1.1E-03	-1.2E-03	-1.1E-03	-1.0E-03	-9.5E-04	-9.0E-04	-8.8E-04
1910	-5.7E-04	-6.1E-04	-6.7E-04	-7.4E-04	-8.2E-04	-8.9E-04	-9.6E-04	-1.0E-03	-9.1E-04	-8.2E-04	-7.5E-04	-7.0E-04	-6.8E-04
1911	-3.6E-04	-3.9E-04	-4.4E-04	-5.0E-04	-5.7E-04	-6.3E-04	-6.8E-04	-7.3E-04	-6.6E-04	-5.9E-04	-5.5E-04	-5.1E-04	-5.0E-04
1912	-8.1E-04	-8.8E-04	-9.6E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.2E-03
1913	-7.3E-04	-7.8E-04	-8.5E-04	-9.5E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.0E-03	-9.9E-04	-9.6E-04
1914	-6.1E-04	-6.5E-04	-7.1E-04	-7.8E-04	-8.7E-04	-9.4E-04	-1.0E-03	-1.1E-03	-9.7E-04	-8.8E-04	-8.1E-04	-7.6E-04	-7.4E-04
1915	-3.9E-04	-4.2E-04	-4.7E-04	-5.3E-04	-6.0E-04	-6.7E-04	-7.3E-04	-7.8E-04	-7.0E-04	-6.4E-04	-5.9E-04	-5.5E-04	-5.4E-04
1916	-2.3E-04	-2.5E-04	-2.8E-04	-3.4E-04	-3.9E-04	-4.4E-04	-4.9E-04	-5.3E-04	-4.6E-04	-4.0E-04	-3.6E-04	-3.3E-04	-3.1E-04
1917	-6.2E-04	-6.6E-04	-7.3E-04	-8.1E-04	-8.9E-04	-9.7E-04	-1.0E-03	-1.1E-03	-1.0E-03	-9.1E-04	-8.4E-04	-7.9E-04	-7.7E-04
1918	-4.0E-04	-4.3E-04	-4.8E-04	-5.5E-04	-6.2E-04	-6.9E-04	-7.5E-04	-8.0E-04	-7.2E-04	-6.5E-04	-6.0E-04	-5.7E-04	-5.5E-04
1919	-2.4E-04	-2.6E-04	-3.0E-04	-3.5E-04	-4.1E-04	-4.6E-04	-5.1E-04	-5.5E-04	-4.8E-04	-4.2E-04	-3.7E-04	-3.4E-04	-3.3E-04
1920	-6.6E-04	-7.0E-04	-7.7E-04	-8.5E-04	-9.4E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.1E-03	-9.7E-04	-9.0E-04	-8.5E-04	-8.3E-04
1921	-4.2E-04	-4.6E-04	-5.1E-04	-5.8E-04	-6.5E-04	-7.2E-04	-7.8E-04	-8.4E-04	-7.5E-04	-6.8E-04	-6.3E-04	-5.9E-04	-5.7E-04
1922	-2.6E-04	-2.8E-04	-3.2E-04	-3.8E-04	-4.4E-04	-4.9E-04	-5.4E-04	-5.8E-04	-5.1E-04	-4.4E-04	-3.9E-04	-3.6E-04	-3.4E-04
1923	-7.1E-04	-7.6E-04	-8.3E-04	-9.2E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.1E-03	-9.8E-04	-9.3E-04	-9.1E-04
1924	-4.6E-04	-5.0E-04	-5.5E-04	-6.3E-04	-7.0E-04	-7.8E-04	-8.4E-04	-9.0E-04	-8.1E-04	-7.3E-04	-6.7E-04	-6.3E-04	-6.1E-04
1925	-2.9E-04	-3.2E-04	-3.6E-04	-4.2E-04	-4.8E-04	-5.4E-04	-5.9E-04	-6.3E-04	-5.5E-04	-4.8E-04	-4.3E-04	-3.9E-04	-3.8E-04
1926	-7.9E-04	-8.5E-04	-9.2E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.0E-03	-1.0E-03
1927	-5.3E-04	-5.7E-04	-6.3E-04	-7.1E-04	-7.9E-04	-8.7E-04	-9.4E-04	-1.0E-03	-9.1E-04	-8.2E-04	-7.6E-04	-7.2E-04	-7.0E-04
1928	-3.5E-04	-3.8E-04	-4.2E-04	-4.9E-04	-5.5E-04	-6.2E-04	-6.7E-04	-7.2E-04	-6.3E-04	-5.5E-04	-5.0E-04	-4.6E-04	-4.4E-04
1929	-9.1E-04	-9.8E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.2E-03
1930	-6.5E-04	-6.9E-04	-7.6E-04	-8.5E-04	-9.4E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.1E-03	-9.6E-04	-8.9E-04	-8.4E-04	-8.2E-04
1931	-4.6E-04	-4.9E-04	-5.4E-04	-6.2E-04	-6.9E-04	-7.6E-04	-8.2E-04	-8.8E-04	-7.7E-04	-6.9E-04	-6.2E-04	-5.8E-04	-5.6E-04
1932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1935	-9.2E-04	-9.8E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.1E-03
1936	-7.3E-04	-7.7E-04	-8.4E-04	-9.3E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.1E-03	-1.0E-03	-9.3E-04	-8.8E-04	-8.5E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1937	-1.1E-03	-1.2E-03	-1.2E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.7E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.4E-03
1938	-8.7E-04	-9.3E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.1E-03
1939	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.8E-03
1940	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-1.9E-03	-1.8E-03	-1.8E-03	-1.7E-03	-1.7E-03
1941	-1.2E-03	-1.3E-03	-1.4E-03	-1.6E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.1E-03	-1.9E-03	-1.8E-03	-1.7E-03	-1.7E-03	-1.7E-03
1942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1953	2.7E-04	2.8E-04	2.7E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.3E-04	3.6E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04
1954	3.7E-04	3.9E-04	3.9E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.2E-04	5.5E-04	5.8E-04	5.9E-04	6.0E-04
1955	4.2E-04	4.4E-04	4.5E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	6.2E-04	6.6E-04	6.9E-04	7.1E-04	7.2E-04
1956	2.9E-04	3.0E-04	3.0E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	4.3E-04	4.7E-04	5.1E-04	5.3E-04	5.4E-04
1957	1.5E-04	1.5E-04	1.3E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	2.4E-04	3.0E-04	3.4E-04	3.7E-04	3.8E-04
1958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1962	7.5E-03	8.0E-03	8.5E-03	8.8E-03	9.1E-03	9.5E-03	9.9E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
1963	7.3E-03	7.8E-03	8.3E-03	8.6E-03	8.9E-03	9.3E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.1E-02
1964	5.5E-03	5.9E-03	6.2E-03	6.5E-03	6.8E-03	7.0E-03	7.3E-03	7.6E-03	7.7E-03	7.9E-03	7.9E-03	8.0E-03	8.0E-03
1965	5.6E-03	6.0E-03	6.3E-03	6.6E-03	6.8E-03	7.1E-03	7.4E-03	7.7E-03	7.8E-03	7.9E-03	8.0E-03	8.1E-03	8.1E-03
1966	4.3E-03	4.6E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	6.0E-03	6.1E-03	6.2E-03	6.3E-03	6.4E-03	6.4E-03
1967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1971	3.6E-03	3.8E-03	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03
1972	5.0E-03	5.4E-03	5.7E-03	6.0E-03	6.2E-03	6.4E-03	6.7E-03	7.0E-03	7.1E-03	7.2E-03	7.4E-03	7.4E-03	7.5E-03
1973	4.2E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03
1974	3.4E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.1E-03	5.1E-03
1975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1976	4.1E-03	4.4E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03
1977	3.4E-03	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.1E-03
1978	4.1E-03	4.3E-03	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03
1979	3.4E-03	3.6E-03	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03
1980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
1981	3.9E-03	4.2E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.3E-03	5.5E-03	5.6E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03
1982	3.4E-03	3.6E-03	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.1E-03
1983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1990	4.1E-03	4.4E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03
1991	5.5E-04	5.9E-04	6.0E-04	5.6E-04	5.1E-04	5.0E-04	5.1E-04	5.2E-04	6.8E-04	8.2E-04	9.2E-04	9.9E-04	1.0E-03
1992	8.2E-04	8.9E-04	9.3E-04	9.3E-04	9.3E-04	9.5E-04	9.8E-04	1.0E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03
1993	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03
1994	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03
1995	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03
1996	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03
1997	2.1E-03	2.2E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03
1998	1.8E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03
1999	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03
2000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2003	3.0E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.6E-03	4.7E-03
2004	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03
2005	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03
2006	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03
2007	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
2008	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03
2009	3.8E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.8E-03	5.1E-03	5.3E-03	5.5E-03	5.6E-03	5.7E-03	5.8E-03	5.9E-03
2010	2.9E-03	3.1E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.5E-03
2011	2.3E-03	2.5E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03
2012	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
2013	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03
2014	1.6E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03
2015	4.3E-03	4.6E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.8E-03	6.1E-03	6.2E-03	6.4E-03	6.5E-03	6.6E-03	6.6E-03
2016	3.2E-03	3.5E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.8E-03	4.9E-03	4.9E-03	5.0E-03
2017	2.5E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	3.9E-03
2018	2.2E-03	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03
2019	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03
2020	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03
2021	4.7E-03	5.0E-03	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.3E-03	6.5E-03	6.7E-03	6.9E-03	7.0E-03	7.1E-03	7.1E-03
2022	3.5E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03
2023	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03
2024	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.4E-03	3.5E-03	3.5E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2025	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03
2026	1.7E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03
2027	5.0E-03	5.4E-03	5.7E-03	5.9E-03	6.2E-03	6.4E-03	6.7E-03	7.0E-03	7.2E-03	7.3E-03	7.4E-03	7.5E-03	7.6E-03
2028	3.6E-03	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03	5.5E-03	5.5E-03
2029	2.9E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.4E-03
2030	2.4E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03
2031	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03
2032	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
2033	7.7E-03	8.2E-03	8.7E-03	9.1E-03	9.5E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
2034	5.2E-03	5.5E-03	5.9E-03	6.1E-03	6.3E-03	6.6E-03	6.9E-03	7.2E-03	7.3E-03	7.5E-03	7.6E-03	7.6E-03	7.7E-03
2035	3.8E-03	4.0E-03	4.3E-03	4.5E-03	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03	5.7E-03
2036	3.0E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.5E-03
2037	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.7E-03
2038	1.9E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03
2039	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03
2040	7.9E-03	8.5E-03	8.9E-03	9.4E-03	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02
2041	5.3E-03	5.7E-03	6.0E-03	6.3E-03	6.5E-03	6.8E-03	7.0E-03	7.3E-03	7.5E-03	7.6E-03	7.7E-03	7.8E-03	7.8E-03
2042	3.9E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.6E-03	5.7E-03	5.7E-03	5.8E-03
2043	3.0E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.5E-03	4.6E-03
2044	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03
2045	1.9E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03
2046	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03
2047	7.8E-03	8.3E-03	8.8E-03	9.2E-03	9.5E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
2048	5.8E-03	6.2E-03	6.6E-03	6.8E-03	7.1E-03	7.4E-03	7.7E-03	8.0E-03	8.1E-03	8.3E-03	8.4E-03	8.5E-03	8.5E-03
2049	4.0E-03	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.6E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03
2050	3.0E-03	3.2E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.5E-03	4.5E-03
2051	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03
2052	1.9E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03
2053	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
2054	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03
2055	7.6E-03	8.1E-03	8.6E-03	8.9E-03	9.3E-03	9.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
2056	5.6E-03	6.0E-03	6.4E-03	6.7E-03	6.9E-03	7.2E-03	7.5E-03	7.8E-03	7.9E-03	8.0E-03	8.1E-03	8.2E-03	8.2E-03
2057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2058	3.1E-03	3.3E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.5E-03	4.6E-03	4.6E-03
2059	2.4E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03
2060	1.9E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03
2061	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
2062	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03
2063	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
2064	5.5E-03	5.9E-03	6.2E-03	6.5E-03	6.7E-03	7.0E-03	7.3E-03	7.6E-03	7.7E-03	7.8E-03	7.9E-03	8.0E-03	8.0E-03
2065	4.1E-03	4.4E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03
2066	3.2E-03	3.4E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.6E-03	4.7E-03	4.7E-03
2067	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03
2068	2.0E-03	2.1E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2071	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03
2072	6.0E-04	6.3E-04	6.5E-04	6.7E-04	7.1E-04	7.4E-04	7.8E-04	8.2E-04	8.8E-04	9.2E-04	9.5E-04	9.7E-04	9.8E-04
2073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2074	4.2E-03	4.5E-03	4.8E-03	5.0E-03	5.1E-03	5.3E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03
2075	3.3E-03	3.5E-03	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.8E-03	4.8E-03	4.9E-03
2076	2.6E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03	3.8E-03
2077	2.1E-03	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
2078	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03
2079	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
2080	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03
2081	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03
2082	6.5E-04	6.8E-04	7.1E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.1E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03
2083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2084	3.4E-03	3.6E-03	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03
2085	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.8E-03	3.8E-03	3.9E-03	4.0E-03	4.0E-03	4.1E-03
2086	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03
2087	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03
2088	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03
2089	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03
2090	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03
2091	6.5E-04	6.9E-04	7.1E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.1E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03
2092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2097	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03
2098	1.4E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03
2099	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03
2100	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
2101	7.1E-04	7.6E-04	7.9E-04	8.2E-04	8.7E-04	9.1E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2102	2.9E-03	3.1E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	4.3E-03	4.4E-03
2103	2.4E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.7E-03	3.7E-03
2104	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.9E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
2105	1.7E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03
2106	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03
2107	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03
2108	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
2109	8.5E-04	9.1E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2110	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03
2111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2112	2.4E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2113	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03
2114	1.7E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03
2115	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
2116	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03
2117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2118	7.2E-04	7.7E-04	8.0E-04	8.4E-04	8.8E-04	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2119	8.5E-04	9.1E-04	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2120	2.8E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03	4.2E-03	4.2E-03
2121	2.4E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03
2122	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03
2123	1.7E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
2124	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
2125	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03
2126	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03
2127	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03
2128	7.2E-04	7.7E-04	8.1E-04	8.5E-04	8.9E-04	9.4E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2129	8.6E-04	9.2E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2130	2.8E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03
2131	2.4E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03
2132	2.0E-03	2.1E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03
2133	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
2134	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
2135	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03
2136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2137	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03
2138	7.4E-04	7.9E-04	8.3E-04	8.7E-04	9.2E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
2139	8.8E-04	9.5E-04	9.9E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2142	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03
2143	1.7E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03
2144	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
2145	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03
2146	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03
2147	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03
2148	7.6E-04	8.1E-04	8.5E-04	9.0E-04	9.5E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2149	9.0E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
2150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2154	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03
2155	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03
2156	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2158	7.8E-04	8.3E-04	8.8E-04	9.2E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
2159	9.1E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
2160	3.3E-03	3.5E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03
2161	2.8E-03	3.0E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.2E-03	4.3E-03	4.3E-03
2162	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03
2163	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
2164	1.7E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03
2165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2166	1.4E-03	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
2167	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03
2168	7.9E-04	8.4E-04	8.9E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2169	9.1E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
2170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2172	2.4E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03
2173	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.9E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
2174	1.7E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03
2175	1.6E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03
2176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2178	8.0E-04	8.6E-04	9.0E-04	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2179	8.9E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03
2180	3.5E-03	3.8E-03	4.0E-03	4.2E-03	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03	5.3E-03	5.4E-03	5.4E-03
2181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2182	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.2E-03
2183	2.4E-03	2.6E-03	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.4E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.7E-03
2184	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03
2185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2186	1.5E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03
2187	1.4E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
2188	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
2189	8.7E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2190	3.9E-03	4.2E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.7E-03	5.7E-03	5.8E-03
2191	3.4E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03	5.1E-03	5.2E-03	5.2E-03
2192	3.0E-03	3.2E-03	3.4E-03	3.6E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.7E-03	4.7E-03
2193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2199	8.7E-04	9.3E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2201	3.7E-03	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.4E-03	5.5E-03	5.5E-03
2202	3.2E-03	3.5E-03	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03
2203	2.9E-03	3.1E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.4E-03	4.4E-03
2204	2.6E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	3.9E-03	4.0E-03	4.0E-03
2205	2.3E-03	2.5E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03
2206	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
2207	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03
2208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2209	8.9E-04	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
2210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2225	3.6E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	5.0E-03	5.1E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03
2226	3.3E-03	3.5E-03	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03
2227	2.9E-03	3.1E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.2E-03	4.3E-03	4.4E-03	4.4E-03
2228	2.7E-03	2.9E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.0E-03	4.0E-03
2229	2.4E-03	2.6E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03
2230	2.2E-03	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03
2231	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03
2232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2236	3.4E-03	3.6E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	5.0E-03
2237	3.1E-03	3.3E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.5E-03	4.6E-03	4.6E-03
2238	2.8E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03	4.2E-03	4.2E-03
2239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2241	2.1E-03	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03
2242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2245	3.4E-03	3.6E-03	3.9E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.7E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	4.9E-03
2246	3.2E-03	3.4E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.4E-03	4.4E-03	4.5E-03	4.6E-03	4.6E-03	4.6E-03
2247	2.9E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.2E-03	4.3E-03	4.3E-03
2248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2249	2.5E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03
2250	2.3E-03	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03
2251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2253	3.4E-03	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.7E-03	4.8E-03	4.8E-03	4.9E-03
2254	3.2E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.6E-03	4.6E-03	4.6E-03
2255	2.9E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	4.1E-03	4.1E-03	4.2E-03	4.3E-03	4.3E-03	4.3E-03
2256	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.6E-03	3.8E-03	3.8E-03	3.9E-03	4.0E-03	4.0E-03	4.0E-03
2257	2.5E-03	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03	3.8E-03
2258	2.3E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03
2259	2.2E-03	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03
2260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2261	3.1E-03	3.3E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.4E-03	4.5E-03	4.5E-03
2262	2.9E-03	3.1E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.2E-03	4.3E-03	4.3E-03
2263	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.8E-03	3.9E-03	3.9E-03	4.0E-03	4.0E-03	4.0E-03
2264	2.5E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03	3.8E-03
2265	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03
2266	2.2E-03	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.2E-03	3.2E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03
2267	3.0E-03	3.2E-03	3.4E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.2E-03	4.2E-03	4.3E-03
2268	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03	4.2E-03
2269	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	3.9E-03	4.0E-03	4.0E-03
2270	2.5E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03
2271	2.4E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03
2272	2.3E-03	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03
2273	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03
2274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2275	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03
2276	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03	3.8E-03	3.8E-03
2277	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.7E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03
2278	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.7E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03
2279	2.7E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.7E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03
2280	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03	3.8E-03	3.8E-03
2281	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03	3.7E-03
2282	2.4E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03
2283	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03
2284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2290	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03
2291	2.5E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03
2292	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03	3.6E-03
2293	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03
2294	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03
2295	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	3.0E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03
2296	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03
2297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2298	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03
2299	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03
2300	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03
2301	2.3E-03	2.4E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03
2302	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03
2303	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03	3.4E-03
2304	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03
2305	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	3.0E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03
2306	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.9E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
2307	2.0E-03	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03
2308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2314	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
2315	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
2316	2.1E-03	2.2E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03
2317	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03
2318	2.1E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
2319	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	3.0E-03
2320	2.0E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03
2321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2324	1.8E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03
2325	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03
2326	1.9E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03
2327	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03
2328	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03
2329	1.9E-03	2.0E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03
2330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2331	-7.6E-04	-8.2E-04	-8.9E-04	-9.9E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03
2332	-6.6E-04	-7.1E-04	-7.9E-04	-8.9E-04	-9.9E-04	-1.1E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.0E-03	-9.2E-04	-8.7E-04	-8.5E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2333	-5.5E-04	-5.9E-04	-6.6E-04	-7.6E-04	-8.6E-04	-9.4E-04	-1.0E-03	-1.1E-03	-9.4E-04	-8.3E-04	-7.4E-04	-6.9E-04	-6.6E-04
2334	-1.9E-04	-2.0E-04	-2.4E-04	-3.0E-04	-3.7E-04	-4.2E-04	-4.5E-04	-4.9E-04	-3.7E-04	-2.7E-04	-2.0E-04	-1.5E-04	-1.2E-04
2335	-3.4E-04	-3.7E-04	-4.2E-04	-5.1E-04	-6.1E-04	-6.8E-04	-7.4E-04	-7.9E-04	-6.5E-04	-5.3E-04	-4.4E-04	-3.8E-04	-3.5E-04
2336	6.3E-05	7.2E-05	5.5E-05	7.3E-06	-4.4E-05	-7.8E-05	-9.5E-05	-1.1E-04	1.7E-05	1.2E-04	2.0E-04	2.6E-04	2.9E-04
2337	3.4E-04	3.7E-04	3.8E-04	3.6E-04	3.4E-04	3.3E-04	3.4E-04	3.5E-04	4.6E-04	5.6E-04	6.3E-04	6.8E-04	7.0E-04
2338	-1.6E-05	-1.5E-05	-4.7E-05	-1.2E-04	-2.0E-04	-2.5E-04	-2.8E-04	-3.0E-04	-1.6E-04	-2.8E-05	6.7E-05	1.3E-04	1.6E-04
2339	3.8E-04	4.2E-04	4.3E-04	4.0E-04	3.7E-04	3.6E-04	3.7E-04	3.7E-04	5.1E-04	6.2E-04	7.0E-04	7.6E-04	7.9E-04
2340	6.3E-04	6.8E-04	7.1E-04	7.1E-04	7.1E-04	7.2E-04	7.5E-04	7.8E-04	9.0E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03
2341	9.2E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03
2342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2344	-6.0E-04	-6.3E-04	-6.8E-04	-7.5E-04	-8.2E-04	-8.9E-04	-9.4E-04	-1.0E-03	-8.9E-04	-8.0E-04	-7.4E-04	-6.9E-04	-6.7E-04
2345	-4.8E-04	-5.1E-04	-5.5E-04	-6.1E-04	-6.8E-04	-7.3E-04	-7.8E-04	-8.3E-04	-7.4E-04	-6.7E-04	-6.1E-04	-5.8E-04	-5.6E-04
2346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2349	-9.4E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03
2350	-7.8E-04	-8.4E-04	-9.1E-04	-9.9E-04	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03
2351	-5.7E-04	-6.1E-04	-6.7E-04	-7.4E-04	-8.2E-04	-8.9E-04	-9.5E-04	-1.0E-03	-9.1E-04	-8.4E-04	-7.8E-04	-7.4E-04	-7.3E-04
2352	-4.1E-04	-4.4E-04	-4.8E-04	-5.3E-04	-5.9E-04	-6.4E-04	-6.9E-04	-7.3E-04	-6.3E-04	-5.5E-04	-4.9E-04	-4.5E-04	-4.4E-04
2353	-1.8E-04	-1.9E-04	-2.2E-04	-2.6E-04	-3.1E-04	-3.5E-04	-3.8E-04	-4.1E-04	-3.5E-04	-3.0E-04	-2.6E-04	-2.4E-04	-2.3E-04
2354	9.9E-06	7.5E-06	-6.8E-06	-3.5E-05	-6.6E-05	-9.1E-05	-1.1E-04	-1.3E-04	-8.0E-05	-3.9E-05	-8.8E-06	1.2E-05	2.2E-05
2355	1.3E-04	1.4E-04	1.4E-04	1.2E-04	1.0E-04	8.8E-05	8.0E-05	7.4E-05	1.2E-04	1.5E-04	1.8E-04	2.0E-04	2.1E-04
2356	2.2E-04	2.3E-04	2.4E-04	2.3E-04	2.2E-04	2.1E-04	2.1E-04	2.2E-04	2.5E-04	2.9E-04	3.1E-04	3.3E-04	3.4E-04
2357	-4.8E-04	-5.1E-04	-5.6E-04	-6.2E-04	-6.9E-04	-7.4E-04	-8.0E-04	-8.5E-04	-7.4E-04	-6.5E-04	-5.9E-04	-5.4E-04	-5.2E-04
2358	-2.0E-04	-2.2E-04	-2.5E-04	-3.0E-04	-3.5E-04	-3.9E-04	-4.3E-04	-4.6E-04	-4.0E-04	-3.5E-04	-3.1E-04	-2.9E-04	-2.7E-04
2359	6.7E-06	3.7E-06	-1.2E-05	-4.2E-05	-7.5E-05	-1.0E-04	-1.2E-04	-1.4E-04	-9.4E-05	-5.1E-05	-1.9E-05	2.3E-06	1.3E-05
2360	1.4E-04	1.4E-04	1.4E-04	1.2E-04	1.0E-04	8.8E-05	7.9E-05	7.2E-05	1.2E-04	1.5E-04	1.8E-04	2.0E-04	2.1E-04
2361	2.1E-04	2.3E-04	2.3E-04	2.2E-04	2.1E-04	2.0E-04	2.0E-04	2.0E-04	2.4E-04	2.8E-04	3.1E-04	3.3E-04	3.3E-04
2362	2.4E-04	2.6E-04	2.7E-04	2.6E-04	2.6E-04	2.6E-04	2.6E-04	2.7E-04	3.1E-04	3.4E-04	3.7E-04	3.9E-04	3.9E-04
2363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2365	3.2E-06	-2.7E-08	-1.6E-05	-4.9E-05	-8.3E-05	-1.1E-04	-1.3E-04	-1.5E-04	-1.0E-04	-5.6E-05	-2.1E-05	1.6E-06	1.3E-05
2366	1.3E-04	1.3E-04	1.3E-04	1.1E-04	8.8E-05	7.2E-05	6.2E-05	5.5E-05	1.0E-04	1.4E-04	1.8E-04	2.0E-04	2.1E-04
2367	1.9E-04	2.0E-04	2.0E-04	1.9E-04	1.8E-04	1.7E-04	1.7E-04	1.7E-04	2.1E-04	2.5E-04	2.8E-04	3.0E-04	3.1E-04
2368	2.1E-04	2.3E-04	2.3E-04	2.2E-04	2.2E-04	2.1E-04	2.1E-04	2.2E-04	2.6E-04	3.0E-04	3.3E-04	3.5E-04	3.6E-04
2369	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04	2.8E-04	3.2E-04	3.5E-04	3.7E-04	3.8E-04
2370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2375	-1.7E-05	-2.1E-05	-4.0E-05	-7.4E-05	-1.1E-04	-1.4E-04	-1.7E-04	-1.9E-04	-1.3E-04	-7.8E-05	-4.0E-05	-1.5E-05	-2.5E-06
2376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2377	1.4E-04	1.5E-04	1.5E-04	1.3E-04	1.2E-04	1.1E-04	1.0E-04	9.7E-05	1.5E-04	1.9E-04	2.3E-04	2.5E-04	2.6E-04
2378	1.5E-04	1.6E-04	1.7E-04	1.6E-04	1.4E-04	1.4E-04	1.3E-04	1.3E-04	1.9E-04	2.3E-04	2.6E-04	2.9E-04	3.0E-04
2379	1.5E-04	1.6E-04	1.7E-04	1.6E-04	1.5E-04	1.5E-04	1.5E-04	1.5E-04	2.0E-04	2.5E-04	2.8E-04	3.0E-04	3.2E-04
2380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2386	1.5E-05	1.5E-05	1.6E-06	-2.7E-05	-5.7E-05	-8.2E-05	-1.0E-04	-1.2E-04	-5.4E-05	-9.1E-07	3.9E-05	6.5E-05	7.8E-05
2387	5.6E-05	6.0E-05	5.3E-05	3.2E-05	9.0E-06	-9.3E-06	-2.1E-05	-3.0E-05	3.0E-05	8.2E-05	1.2E-04	1.5E-04	1.6E-04
2388	7.3E-05	8.0E-05	7.7E-05	6.1E-05	4.4E-05	3.1E-05	2.4E-05	1.9E-05	8.0E-05	1.3E-04	1.7E-04	2.0E-04	2.1E-04
2389	7.4E-05	8.2E-05	8.1E-05	6.9E-05	5.5E-05	4.5E-05	4.1E-05	3.8E-05	9.9E-05	1.5E-04	1.9E-04	2.1E-04	2.3E-04
2390	6.3E-05	7.1E-05	7.0E-05	5.9E-05	4.7E-05	3.8E-05	3.5E-05	3.3E-05	9.2E-05	1.4E-04	1.8E-04	2.0E-04	2.2E-04
2391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2398	-6.4E-05	-6.6E-05	-8.1E-05	-1.1E-04	-1.4E-04	-1.7E-04	-1.9E-04	-2.0E-04	-1.3E-04	-6.5E-05	-1.8E-05	1.3E-05	2.9E-05
2399	-3.3E-05	-3.2E-05	-4.1E-05	-6.4E-05	-8.8E-05	-1.1E-04	-1.2E-04	-1.3E-04	-6.0E-05	1.9E-06	4.8E-05	7.9E-05	9.5E-05
2400	-2.6E-05	-2.4E-05	-3.1E-05	-5.0E-05	-7.0E-05	-8.8E-05	-9.8E-05	-1.1E-04	-3.7E-05	2.3E-05	6.7E-05	9.7E-05	1.1E-04
2401	-3.5E-05	-3.4E-05	-4.1E-05	-5.9E-05	-7.7E-05	-9.3E-05	-1.0E-04	-1.1E-04	-4.6E-05	9.9E-06	5.2E-05	8.0E-05	9.3E-05
2402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2404	-3.2E-04	-3.4E-04	-3.7E-04	-4.2E-04	-4.7E-04	-5.2E-04	-5.5E-04	-5.9E-04	-4.9E-04	-4.0E-04	-3.3E-04	-2.9E-04	-2.7E-04
2405	-2.1E-04	-2.2E-04	-2.4E-04	-2.8E-04	-3.2E-04	-3.6E-04	-3.8E-04	-4.1E-04	-3.2E-04	-2.4E-04	-1.8E-04	-1.5E-04	-1.3E-04
2406	-1.6E-04	-1.6E-04	-1.8E-04	-2.1E-04	-2.4E-04	-2.7E-04	-2.9E-04	-3.1E-04	-2.3E-04	-1.5E-04	-9.9E-05	-6.3E-05	-4.4E-05
2407	-1.4E-04	-1.5E-04	-1.6E-04	-1.9E-04	-2.1E-04	-2.4E-04	-2.6E-04	-2.7E-04	-1.9E-04	-1.2E-04	-7.2E-05	-3.8E-05	-2.1E-05
2408	-1.4E-04	-1.5E-04	-1.6E-04	-1.8E-04	-2.1E-04	-2.3E-04	-2.5E-04	-2.6E-04	-1.9E-04	-1.2E-04	-7.3E-05	-4.1E-05	-2.5E-05
2409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2411	-7.0E-04	-7.5E-04	-8.1E-04	-9.0E-04	-9.8E-04	-1.1E-03	-1.1E-03	-1.2E-03	-1.1E-03	-9.9E-04	-9.2E-04	-8.7E-04	-8.5E-04
2412	-5.0E-04	-5.3E-04	-5.8E-04	-6.4E-04	-7.1E-04	-7.7E-04	-8.2E-04	-8.7E-04	-7.7E-04	-6.8E-04	-6.1E-04	-5.7E-04	-5.4E-04
2413	-3.5E-04	-3.8E-04	-4.1E-04	-4.6E-04	-5.1E-04	-5.6E-04	-6.0E-04	-6.3E-04	-5.3E-04	-4.5E-04	-3.9E-04	-3.5E-04	-3.3E-04
2414	-2.8E-04	-3.0E-04	-3.2E-04	-3.6E-04	-4.1E-04	-4.4E-04	-4.7E-04	-5.0E-04	-4.1E-04	-3.4E-04	-2.8E-04	-2.5E-04	-2.3E-04
2415	-2.4E-04	-2.6E-04	-2.8E-04	-3.2E-04	-3.5E-04	-3.9E-04	-4.1E-04	-4.4E-04	-3.6E-04	-2.9E-04	-2.4E-04	-2.0E-04	-1.9E-04
2416	-2.2E-04	-2.3E-04	-2.5E-04	-2.8E-04	-3.1E-04	-3.4E-04	-3.7E-04	-3.9E-04	-3.2E-04	-2.5E-04	-2.1E-04	-1.7E-04	-1.6E-04
2417	-1.7E-04	-1.8E-04	-2.0E-04	-2.2E-04	-2.5E-04	-2.8E-04	-3.0E-04	-3.2E-04	-2.5E-04	-1.9E-04	-1.4E-04	-1.2E-04	-1.0E-04
2418	5.1E-04	5.4E-04	5.6E-04	5.9E-04	6.2E-04	6.5E-04	6.9E-04	7.2E-04	7.6E-04	8.0E-04	8.2E-04	8.4E-04	8.5E-04
2419	-9.1E-04	-9.8E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03
2420	-6.5E-04	-7.0E-04	-7.6E-04	-8.4E-04	-9.2E-04	-9.9E-04	-1.1E-03	-1.1E-03	-1.0E-03	-9.3E-04	-8.6E-04	-8.2E-04	-8.0E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2421	-4.5E-04	-4.8E-04	-5.3E-04	-5.9E-04	-6.5E-04	-7.1E-04	-7.6E-04	-8.0E-04	-7.1E-04	-6.3E-04	-5.8E-04	-5.4E-04	-5.2E-04
2422	-3.6E-04	-3.8E-04	-4.2E-04	-4.7E-04	-5.2E-04	-5.7E-04	-6.1E-04	-6.5E-04	-5.7E-04	-5.0E-04	-4.4E-04	-4.1E-04	-3.9E-04
2423	-3.1E-04	-3.3E-04	-3.6E-04	-4.0E-04	-4.5E-04	-4.9E-04	-5.2E-04	-5.5E-04	-4.8E-04	-4.2E-04	-3.7E-04	-3.4E-04	-3.2E-04
2424	-2.5E-04	-2.6E-04	-2.9E-04	-3.3E-04	-3.7E-04	-4.0E-04	-4.3E-04	-4.6E-04	-3.9E-04	-3.3E-04	-2.9E-04	-2.6E-04	-2.5E-04
2425	-1.7E-04	-1.8E-04	-2.0E-04	-2.3E-04	-2.6E-04	-2.9E-04	-3.1E-04	-3.3E-04	-2.7E-04	-2.1E-04	-1.7E-04	-1.5E-04	-1.3E-04
2426	-8.6E-05	-8.9E-05	-1.0E-04	-1.3E-04	-1.5E-04	-1.7E-04	-1.8E-04	-2.0E-04	-1.4E-04	-8.7E-05	-5.0E-05	-2.5E-05	-1.2E-05
2427	-7.5E-04	-8.0E-04	-8.7E-04	-9.6E-04	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.0E-03	-9.9E-04	-9.7E-04
2428	-5.3E-04	-5.7E-04	-6.2E-04	-6.9E-04	-7.6E-04	-8.3E-04	-8.8E-04	-9.4E-04	-8.5E-04	-7.8E-04	-7.2E-04	-6.8E-04	-6.6E-04
2429	-4.2E-04	-4.5E-04	-4.9E-04	-5.5E-04	-6.1E-04	-6.6E-04	-7.1E-04	-7.5E-04	-6.7E-04	-6.1E-04	-5.6E-04	-5.2E-04	-5.1E-04
2430	-3.4E-04	-3.6E-04	-4.0E-04	-4.5E-04	-5.0E-04	-5.5E-04	-5.8E-04	-6.2E-04	-5.5E-04	-4.9E-04	-4.4E-04	-4.1E-04	-4.0E-04
2431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2432	-1.5E-04	-1.6E-04	-1.8E-04	-2.1E-04	-2.4E-04	-2.6E-04	-2.9E-04	-3.0E-04	-2.4E-04	-1.9E-04	-1.5E-04	-1.3E-04	-1.1E-04
2433	-4.7E-05	-4.8E-05	-5.9E-05	-8.1E-05	-1.0E-04	-1.2E-04	-1.3E-04	-1.4E-04	-8.5E-05	-3.6E-05	7.5E-07	2.5E-05	3.8E-05
2434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2435	-8.5E-04	-9.1E-04	-9.9E-04	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.1E-03
2436	-6.1E-04	-6.5E-04	-7.1E-04	-7.9E-04	-8.7E-04	-9.5E-04	-1.0E-03	-1.1E-03	-9.8E-04	-9.1E-04	-8.5E-04	-8.1E-04	-8.0E-04
2437	-4.6E-04	-4.9E-04	-5.4E-04	-6.1E-04	-6.7E-04	-7.3E-04	-7.8E-04	-8.3E-04	-7.5E-04	-6.8E-04	-6.4E-04	-6.0E-04	-5.9E-04
2438	-3.4E-04	-3.6E-04	-4.0E-04	-4.5E-04	-5.0E-04	-5.5E-04	-5.9E-04	-6.3E-04	-5.6E-04	-4.9E-04	-4.5E-04	-4.2E-04	-4.0E-04
2439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2440	-9.6E-05	-1.0E-04	-1.2E-04	-1.5E-04	-1.8E-04	-2.0E-04	-2.2E-04	-2.3E-04	-1.7E-04	-1.2E-04	-7.8E-05	-5.1E-05	-3.8E-05
2441	1.1E-05	1.4E-05	6.9E-06	-1.2E-05	-3.2E-05	-4.7E-05	-5.5E-05	-6.1E-05	-1.5E-06	4.9E-05	8.7E-05	1.1E-04	1.3E-04
2442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2443	-6.1E-04	-6.5E-04	-7.1E-04	-8.0E-04	-8.8E-04	-9.6E-04	-1.0E-03	-1.1E-03	-9.9E-04	-9.1E-04	-8.6E-04	-8.2E-04	-8.0E-04
2444	-4.4E-04	-4.7E-04	-5.2E-04	-5.8E-04	-6.5E-04	-7.1E-04	-7.6E-04	-8.1E-04	-7.2E-04	-6.5E-04	-6.0E-04	-5.7E-04	-5.5E-04
2445	-2.8E-04	-3.0E-04	-3.3E-04	-3.8E-04	-4.3E-04	-4.8E-04	-5.1E-04	-5.5E-04	-4.7E-04	-4.1E-04	-3.6E-04	-3.3E-04	-3.1E-04
2446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2447	-1.1E-05	-9.6E-06	-2.0E-05	-4.4E-05	-7.0E-05	-8.9E-05	-1.0E-04	-1.1E-04	-4.3E-05	1.3E-05	5.6E-05	8.4E-05	9.8E-05
2448	9.2E-05	1.0E-04	1.0E-04	8.6E-05	7.0E-05	6.1E-05	5.8E-05	5.8E-05	1.2E-04	1.7E-04	2.1E-04	2.4E-04	2.5E-04
2449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2451	-5.2E-04	-5.6E-04	-6.1E-04	-6.9E-04	-7.7E-04	-8.4E-04	-9.0E-04	-9.6E-04	-8.7E-04	-7.8E-04	-7.2E-04	-6.8E-04	-6.6E-04
2452	-3.3E-04	-3.5E-04	-3.9E-04	-4.5E-04	-5.1E-04	-5.6E-04	-6.0E-04	-6.4E-04	-5.6E-04	-4.8E-04	-4.3E-04	-3.9E-04	-3.7E-04
2453	-1.5E-04	-1.6E-04	-1.9E-04	-2.3E-04	-2.7E-04	-3.1E-04	-3.3E-04	-3.6E-04	-2.8E-04	-2.1E-04	-1.6E-04	-1.2E-04	-1.1E-04
2454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2459	-1.5E-04	-1.6E-04	-1.8E-04	-2.3E-04	-2.8E-04	-3.2E-04	-3.5E-04	-3.8E-04	-2.8E-04	-2.0E-04	-1.4E-04	-1.0E-04	-8.3E-05
2460	4.2E-05	4.8E-05	3.7E-05	6.4E-06	-2.6E-05	-4.9E-05	-6.0E-05	-7.0E-05	1.7E-05	9.1E-05	1.5E-04	1.8E-04	2.0E-04
2461	1.8E-04	2.0E-04	2.0E-04	1.9E-04	1.7E-04	1.6E-04	1.6E-04	1.6E-04	2.4E-04	3.1E-04	3.6E-04	4.0E-04	4.1E-04
2462	2.9E-04	3.1E-04	3.2E-04	3.2E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	4.1E-04	4.7E-04	5.2E-04	5.5E-04	5.6E-04
2463	3.6E-04	3.9E-04	4.1E-04	4.1E-04	4.1E-04	4.2E-04	4.4E-04	4.6E-04	5.2E-04	5.8E-04	6.3E-04	6.6E-04	6.7E-04
2464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2466	2.7E-04	2.9E-04	3.0E-04	2.8E-04	2.7E-04	2.6E-04	2.7E-04	2.7E-04	3.7E-04	4.5E-04	5.1E-04	5.5E-04	5.7E-04
2467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2468	4.7E-04	5.1E-04	5.4E-04	5.5E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.9E-04	7.6E-04	8.0E-04	8.4E-04	8.5E-04
2469	5.2E-04	5.7E-04	6.0E-04	6.1E-04	6.2E-04	6.4E-04	6.7E-04	7.0E-04	7.7E-04	8.3E-04	8.7E-04	9.0E-04	9.2E-04
2470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2472	5.2E-04	5.6E-04	5.8E-04	5.9E-04	5.9E-04	6.0E-04	6.2E-04	6.4E-04	7.5E-04	8.3E-04	8.9E-04	9.4E-04	9.6E-04
2473	6.1E-04	6.6E-04	6.9E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	8.0E-04	8.9E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03
2474	6.6E-04	7.1E-04	7.5E-04	7.7E-04	7.9E-04	8.2E-04	8.5E-04	8.9E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2475	6.8E-04	7.3E-04	7.8E-04	8.0E-04	8.2E-04	8.5E-04	8.9E-04	9.3E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03
2476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2479	7.6E-04	8.2E-04	8.7E-04	8.9E-04	9.0E-04	9.3E-04	9.7E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2480	8.2E-04	8.9E-04	9.3E-04	9.6E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03
2481	8.4E-04	9.1E-04	9.6E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2486	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03
2487	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
2488	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03
2489	3.1E-04	3.1E-04	3.0E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	4.0E-04	4.3E-04	4.5E-04	4.6E-04	4.7E-04
2490	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03
2491	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03
2492	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.2E-04	5.6E-04	5.9E-04	6.2E-04	6.4E-04	6.5E-04
2493	4.3E-04	4.6E-04	4.8E-04	4.9E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.6E-04	7.0E-04	7.3E-04	7.5E-04	7.5E-04
2494	6.2E-04	6.7E-04	7.0E-04	7.3E-04	7.8E-04	8.2E-04	8.7E-04	9.1E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03
2495	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.1E-04	7.5E-04	7.9E-04	8.4E-04	8.8E-04	9.1E-04	9.3E-04	9.4E-04
2496	5.4E-04	5.8E-04	6.0E-04	6.3E-04	6.7E-04	7.0E-04	7.4E-04	7.8E-04	8.3E-04	8.7E-04	9.0E-04	9.2E-04	9.3E-04
2497	5.9E-04	6.4E-04	6.7E-04	7.0E-04	7.4E-04	7.8E-04	8.2E-04	8.7E-04	9.2E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03
2498	6.1E-04	6.5E-04	6.8E-04	7.1E-04	7.5E-04	7.9E-04	8.4E-04	8.8E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.0E-03
2499	6.0E-04	6.4E-04	6.7E-04	7.0E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.0E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03
2500	6.1E-04	6.5E-04	6.8E-04	7.2E-04	7.6E-04	7.9E-04	8.3E-04	8.8E-04	9.2E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03
2501	6.3E-04	6.7E-04	7.1E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.1E-04	9.5E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03
2502	6.5E-04	6.9E-04	7.3E-04	7.7E-04	8.1E-04	8.5E-04	8.9E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03
2503	6.6E-04	7.1E-04	7.5E-04	7.9E-04	8.3E-04	8.7E-04	9.1E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2504	6.8E-04	7.3E-04	7.7E-04	8.1E-04	8.5E-04	8.9E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2505	7.6E-04	8.2E-04	8.7E-04	9.1E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03
2506	9.0E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
2507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2508	3.4E-04	3.6E-04	3.6E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.9E-04	5.2E-04	5.4E-04	5.6E-04	5.6E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2509	2.5E-04	2.6E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.2E-04
2510	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.4E-04	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.4E-04
2511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2512	2.5E-04	2.7E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.6E-04
2513	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.4E-04	3.6E-04	4.0E-04	4.3E-04	4.6E-04	4.7E-04	4.8E-04
2514	2.4E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.5E-04
2515	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.4E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04
2516	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.3E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04
2517	2.5E-04	2.6E-04	2.6E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.2E-04	3.5E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04
2518	2.8E-04	2.9E-04	2.9E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.5E-04
2519	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	5.0E-04	5.2E-04	5.4E-04	5.4E-04
2520	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	5.2E-04	5.5E-04	5.7E-04	5.8E-04	5.9E-04
2521	3.9E-04	4.2E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	6.0E-04	6.3E-04	6.6E-04	6.7E-04	6.8E-04
2522	2.6E-04	2.8E-04	2.8E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.7E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04
2523	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.6E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04
2524	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.9E-04	4.2E-04	4.4E-04	4.5E-04	4.6E-04
2525	4.8E-04	5.1E-04	5.4E-04	5.6E-04	6.0E-04	6.3E-04	6.6E-04	7.0E-04	7.5E-04	7.9E-04	8.2E-04	8.4E-04	8.5E-04
2526	5.1E-04	5.5E-04	5.8E-04	6.2E-04	6.6E-04	6.9E-04	7.3E-04	7.8E-04	8.4E-04	8.9E-04	9.3E-04	9.5E-04	9.6E-04
2527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2530	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03
2531	9.8E-04	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
2532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2533	9.7E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
2534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2536	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
2537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2553	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
2554	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
2555	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
2556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2561	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
2562	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03
2563	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03
2564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2573	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
2574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2581	6.1E-04	6.6E-04	7.1E-04	7.5E-04	7.9E-04	8.4E-04	8.9E-04	9.4E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2582	5.2E-04	5.6E-04	6.0E-04	6.4E-04	6.8E-04	7.2E-04	7.6E-04	8.0E-04	8.6E-04	9.1E-04	9.5E-04	9.7E-04	9.9E-04
2583	5.3E-04	5.7E-04	6.0E-04	6.3E-04	6.6E-04	7.0E-04	7.4E-04	7.8E-04	8.3E-04	8.7E-04	9.0E-04	9.2E-04	9.3E-04
2584	5.5E-04	6.0E-04	6.4E-04	6.8E-04	7.2E-04	7.6E-04	8.1E-04	8.5E-04	9.1E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03
2585	5.3E-04	5.7E-04	6.0E-04	6.3E-04	6.7E-04	7.0E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	8.9E-04	9.1E-04	9.1E-04
2586	5.2E-04	5.6E-04	6.0E-04	6.4E-04	6.8E-04	7.2E-04	7.6E-04	8.1E-04	8.7E-04	9.1E-04	9.5E-04	9.8E-04	9.9E-04
2587	5.2E-04	5.6E-04	6.0E-04	6.3E-04	6.7E-04	7.0E-04	7.4E-04	7.8E-04	8.3E-04	8.7E-04	9.0E-04	9.2E-04	9.3E-04
2588	5.5E-04	5.9E-04	6.2E-04	6.5E-04	6.9E-04	7.2E-04	7.6E-04	8.0E-04	8.4E-04	8.8E-04	9.1E-04	9.2E-04	9.3E-04
2589	3.7E-04	4.1E-04	4.3E-04	4.6E-04	4.9E-04	5.2E-04	5.5E-04	5.8E-04	6.4E-04	6.8E-04	7.1E-04	7.4E-04	7.5E-04
2590	5.6E-04	6.1E-04	6.5E-04	6.9E-04	7.3E-04	7.8E-04	8.2E-04	8.7E-04	9.3E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03
2591	5.2E-04	5.6E-04	6.0E-04	6.3E-04	6.7E-04	7.0E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	8.9E-04	9.1E-04	9.2E-04
2592	5.7E-04	6.1E-04	6.4E-04	6.7E-04	7.1E-04	7.5E-04	7.9E-04	8.3E-04	8.7E-04	9.1E-04	9.3E-04	9.5E-04	9.6E-04
2593	4.1E-04	4.4E-04	4.7E-04	5.0E-04	5.4E-04	5.7E-04	6.0E-04	6.4E-04	6.9E-04	7.4E-04	7.8E-04	8.0E-04	8.1E-04
2594	5.4E-04	5.9E-04	6.3E-04	6.7E-04	7.1E-04	7.5E-04	7.9E-04	8.4E-04	9.0E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03
2595	5.4E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.2E-04	7.5E-04	8.0E-04	8.4E-04	8.7E-04	9.0E-04	9.2E-04	9.3E-04
2596	5.8E-04	6.3E-04	6.6E-04	7.0E-04	7.4E-04	7.7E-04	8.1E-04	8.6E-04	9.0E-04	9.3E-04	9.6E-04	9.8E-04	9.8E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2597	3.3E-04	3.6E-04	3.8E-04	4.1E-04	4.3E-04	4.6E-04	4.9E-04	5.2E-04	5.8E-04	6.2E-04	6.6E-04	6.8E-04	6.9E-04
2598	4.5E-04	4.9E-04	5.2E-04	5.5E-04	5.9E-04	6.3E-04	6.6E-04	7.0E-04	7.6E-04	8.1E-04	8.5E-04	8.8E-04	8.9E-04
2599	5.4E-04	5.9E-04	6.2E-04	6.6E-04	7.0E-04	7.4E-04	7.8E-04	8.3E-04	8.8E-04	9.2E-04	9.6E-04	9.8E-04	9.9E-04
2600	5.5E-04	5.9E-04	6.3E-04	6.6E-04	7.0E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.0E-04	9.2E-04	9.4E-04	9.5E-04
2601	6.0E-04	6.5E-04	6.8E-04	7.2E-04	7.6E-04	8.0E-04	8.4E-04	8.8E-04	9.2E-04	9.6E-04	9.8E-04	1.0E-03	1.0E-03
2602	3.4E-04	3.7E-04	4.0E-04	4.2E-04	4.5E-04	4.8E-04	5.1E-04	5.4E-04	6.0E-04	6.4E-04	6.8E-04	7.0E-04	7.2E-04
2603	4.7E-04	5.2E-04	5.5E-04	5.9E-04	6.3E-04	6.7E-04	7.1E-04	7.5E-04	8.1E-04	8.6E-04	9.0E-04	9.3E-04	9.4E-04
2604	5.4E-04	5.9E-04	6.3E-04	6.6E-04	7.0E-04	7.4E-04	7.9E-04	8.3E-04	8.8E-04	9.2E-04	9.6E-04	9.8E-04	9.9E-04
2605	5.7E-04	6.1E-04	6.5E-04	6.8E-04	7.2E-04	7.6E-04	8.0E-04	8.4E-04	8.8E-04	9.2E-04	9.5E-04	9.6E-04	9.7E-04
2606	6.2E-04	6.6E-04	7.0E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.1E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03
2607	3.7E-04	4.0E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04
2608	3.5E-04	3.8E-04	4.1E-04	4.4E-04	4.7E-04	4.9E-04	5.3E-04	5.6E-04	6.2E-04	6.6E-04	7.0E-04	7.3E-04	7.4E-04
2609	4.7E-04	5.1E-04	5.5E-04	5.8E-04	6.2E-04	6.6E-04	7.0E-04	7.4E-04	8.0E-04	8.5E-04	8.9E-04	9.1E-04	9.2E-04
2610	5.6E-04	6.0E-04	6.4E-04	6.8E-04	7.2E-04	7.6E-04	8.1E-04	8.5E-04	9.0E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03
2611	5.8E-04	6.3E-04	6.6E-04	7.0E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.1E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03
2612	6.3E-04	6.8E-04	7.2E-04	7.6E-04	8.0E-04	8.5E-04	8.9E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03
2613	6.9E-04	7.4E-04	7.9E-04	8.3E-04	8.7E-04	9.2E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2614	3.8E-04	4.1E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	6.0E-04	6.3E-04	6.5E-04	6.7E-04	6.7E-04
2615	3.6E-04	4.0E-04	4.3E-04	4.5E-04	4.8E-04	5.1E-04	5.4E-04	5.8E-04	6.4E-04	6.8E-04	7.2E-04	7.4E-04	7.6E-04
2616	4.7E-04	5.2E-04	5.5E-04	5.9E-04	6.3E-04	6.7E-04	7.1E-04	7.5E-04	8.1E-04	8.6E-04	8.9E-04	9.2E-04	9.3E-04
2617	5.7E-04	6.2E-04	6.6E-04	7.0E-04	7.4E-04	7.9E-04	8.3E-04	8.8E-04	9.3E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03
2618	6.0E-04	6.4E-04	6.8E-04	7.2E-04	7.7E-04	8.1E-04	8.5E-04	9.0E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03
2619	6.5E-04	7.0E-04	7.4E-04	7.9E-04	8.3E-04	8.7E-04	9.2E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2620	7.1E-04	7.6E-04	8.0E-04	8.5E-04	9.0E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
2621	3.7E-04	4.1E-04	4.4E-04	4.7E-04	5.0E-04	5.3E-04	5.6E-04	5.9E-04	6.5E-04	7.0E-04	7.4E-04	7.7E-04	7.8E-04
2622	4.9E-04	5.3E-04	5.7E-04	6.1E-04	6.5E-04	6.9E-04	7.3E-04	7.7E-04	8.3E-04	8.9E-04	9.3E-04	9.5E-04	9.7E-04
2623	5.9E-04	6.4E-04	6.8E-04	7.3E-04	7.7E-04	8.2E-04	8.6E-04	9.1E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2624	6.2E-04	6.7E-04	7.2E-04	7.6E-04	8.0E-04	8.5E-04	8.9E-04	9.4E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2625	6.9E-04	7.4E-04	7.9E-04	8.4E-04	8.8E-04	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
2626	7.5E-04	8.1E-04	8.6E-04	9.1E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2627	8.0E-04	8.7E-04	9.2E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03
2628	3.8E-04	4.2E-04	4.5E-04	4.8E-04	5.1E-04	5.4E-04	5.8E-04	6.1E-04	6.8E-04	7.3E-04	7.7E-04	7.9E-04	8.0E-04
2629	4.9E-04	5.4E-04	5.8E-04	6.2E-04	6.7E-04	7.1E-04	7.5E-04	8.0E-04	8.9E-04	9.5E-04	1.0E-03	1.0E-03	1.1E-03
2630	6.3E-04	6.9E-04	7.5E-04	8.0E-04	8.6E-04	9.1E-04	9.7E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2631	7.2E-04	7.9E-04	8.5E-04	9.2E-04	9.8E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
2632	9.0E-04	9.8E-04	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03
2633	8.4E-04	9.1E-04	9.7E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
2634	8.6E-04	9.3E-04	9.9E-04	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
2635	4.2E-04	4.6E-04	5.0E-04	5.3E-04	5.6E-04	5.9E-04	6.3E-04	6.6E-04	7.2E-04	7.6E-04	7.9E-04	8.2E-04	8.3E-04
2636	4.7E-04	5.3E-04	5.8E-04	6.3E-04	6.8E-04	7.2E-04	7.8E-04	8.3E-04	9.5E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03
2637	7.5E-04	8.3E-04	9.0E-04	9.7E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03
2638	6.9E-04	7.5E-04	8.1E-04	8.7E-04	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03
2639	7.3E-04	7.9E-04	8.5E-04	9.0E-04	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2640	7.3E-04	7.9E-04	8.4E-04	8.8E-04	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2641	7.9E-04	8.5E-04	9.1E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2642	8.6E-04	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03
2643	5.2E-04	5.7E-04	6.1E-04	6.5E-04	6.9E-04	7.3E-04	7.7E-04	8.1E-04	8.7E-04	9.1E-04	9.4E-04	9.7E-04	9.8E-04
2644	7.5E-04	8.2E-04	8.9E-04	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
2645	6.8E-04	7.3E-04	7.9E-04	8.3E-04	8.8E-04	9.3E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
2646	6.9E-04	7.4E-04	7.9E-04	8.4E-04	8.8E-04	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2647	7.1E-04	7.7E-04	8.1E-04	8.6E-04	9.1E-04	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
2648	7.5E-04	8.1E-04	8.5E-04	9.0E-04	9.5E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2649	8.1E-04	8.7E-04	9.2E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2650	8.2E-04	8.9E-04	9.6E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03
2651	7.8E-04	8.5E-04	9.1E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2652	7.9E-04	8.5E-04	9.0E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2653	8.2E-04	8.8E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2654	7.6E-04	8.2E-04	8.7E-04	9.2E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2655	8.3E-04	9.0E-04	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03
2656	9.1E-04	9.8E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
2657	7.4E-04	8.0E-04	8.6E-04	9.1E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2658	6.4E-04	6.9E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.1E-04	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2659	6.5E-04	7.0E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.1E-04	9.5E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03
2660	6.9E-04	7.4E-04	7.8E-04	8.2E-04	8.7E-04	9.1E-04	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2661	7.6E-04	8.1E-04	8.6E-04	9.1E-04	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2662	8.3E-04	8.9E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2664	6.2E-04	6.7E-04	7.1E-04	7.5E-04	7.9E-04	8.3E-04	8.8E-04	9.2E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03
2665	6.2E-04	6.7E-04	7.1E-04	7.5E-04	7.9E-04	8.3E-04	8.7E-04	9.1E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03
2666	6.7E-04	7.2E-04	7.6E-04	8.0E-04	8.4E-04	8.8E-04	9.2E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2667	7.3E-04	7.9E-04	8.3E-04	8.8E-04	9.2E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
2668	8.0E-04	8.6E-04	9.1E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2669	8.8E-04	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2670	6.2E-04	6.7E-04	7.1E-04	7.5E-04	8.0E-04	8.4E-04	8.8E-04	9.2E-04	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03
2671	6.2E-04	6.7E-04	7.1E-04	7.4E-04	7.8E-04	8.2E-04	8.6E-04	9.0E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03	1.0E-03
2672	6.6E-04	7.1E-04	7.5E-04	7.9E-04	8.3E-04	8.7E-04	9.1E-04	9.5E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03
2673	7.2E-04	7.7E-04	8.2E-04	8.6E-04	9.0E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03
2674	7.9E-04	8.5E-04	9.0E-04	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
2675	8.8E-04	9.4E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2676	6.3E-04	6.8E-04	7.2E-04	7.6E-04	8.0E-04	8.4E-04	8.8E-04	9.2E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2677	6.7E-04	7.2E-04	7.6E-04	8.0E-04	8.4E-04	8.8E-04	9.2E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2678	7.2E-04	7.7E-04	8.2E-04	8.6E-04	9.1E-04	9.5E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2679	7.9E-04	8.5E-04	9.0E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03
2680	8.7E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03
2681	6.5E-04	7.0E-04	7.4E-04	7.8E-04	8.3E-04	8.6E-04	9.1E-04	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2682	6.7E-04	7.2E-04	7.6E-04	8.0E-04	8.4E-04	8.8E-04	9.2E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2683	7.2E-04	7.7E-04	8.2E-04	8.6E-04	9.1E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03
2684	7.8E-04	8.4E-04	8.9E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2685	8.6E-04	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03
2686	6.7E-04	7.3E-04	7.7E-04	8.1E-04	8.6E-04	8.9E-04	9.4E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2687	7.2E-04	7.7E-04	8.2E-04	8.6E-04	9.0E-04	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03
2688	7.8E-04	8.3E-04	8.8E-04	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2689	8.4E-04	9.1E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2690	9.2E-04	9.9E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2691	7.1E-04	7.6E-04	8.1E-04	8.5E-04	8.9E-04	9.3E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2692	7.6E-04	8.2E-04	8.7E-04	9.1E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2693	8.2E-04	8.8E-04	9.4E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2694	9.1E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2696	8.2E-04	8.8E-04	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2697	8.8E-04	9.4E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03
2698	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2699	8.5E-04	9.1E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2700	9.1E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2701	9.7E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
2702	1.6E-03	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03
2703	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03
2704	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03
2705	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03
2706	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03
2707	8.6E-04	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03
2708	9.2E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2709	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
2710	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
2711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2713	1.5E-03	1.6E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
2714	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
2715	1.6E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
2716	1.6E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
2717	9.2E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2718	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2719	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03
2720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2725	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03
2726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2727	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03
2728	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2730	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
2731	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
2732	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
2733	9.1E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2743	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03
2744	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
2745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2751	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03
2752	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
2753	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03
2754	3.7E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	5.1E-04	5.4E-04	5.7E-04	6.2E-04	6.6E-04	6.9E-04	7.1E-04	7.2E-04
2755	3.4E-04	3.7E-04	3.9E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.2E-04	6.3E-04
2756	3.5E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.2E-04	5.5E-04	5.7E-04	5.9E-04	6.0E-04	6.1E-04
2757	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.3E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04
2758	3.1E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.5E-04	4.8E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04
2759	2.9E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	4.1E-04	4.3E-04	4.6E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04
2760	3.4E-04	3.7E-04	3.9E-04	4.0E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04
2761	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	5.0E-04	5.4E-04	5.7E-04	5.8E-04	5.9E-04
2762	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.1E-04	5.4E-04	5.7E-04	6.1E-04	6.5E-04	6.8E-04	7.0E-04	7.1E-04
2763	3.1E-04	3.4E-04	3.6E-04	3.9E-04	4.1E-04	4.4E-04	4.7E-04	5.0E-04	5.6E-04	6.1E-04	6.5E-04	6.8E-04	6.9E-04
2764	4.2E-04	4.6E-04	4.9E-04	5.2E-04	5.6E-04	5.9E-04	6.3E-04	6.7E-04	7.4E-04	7.9E-04	8.4E-04	8.6E-04	8.8E-04
2765	3.4E-04	3.7E-04	3.9E-04	4.1E-04	4.4E-04	4.7E-04	4.9E-04	5.2E-04	5.8E-04	6.2E-04	6.6E-04	6.8E-04	6.9E-04
2766	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.4E-04
2767	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.2E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04
2768	2.4E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.5E-04	3.8E-04	4.0E-04	4.1E-04	4.1E-04
2769	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.9E-04	4.2E-04	4.3E-04	4.5E-04	4.5E-04
2770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2772	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.3E-04	3.5E-04	3.7E-04	4.1E-04	4.4E-04	4.7E-04	4.8E-04	4.9E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2774	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04
2775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2776	2.0E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	3.0E-04	3.2E-04	3.4E-04	3.5E-04	3.5E-04
2777	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.4E-04	3.6E-04	3.9E-04	4.2E-04	4.5E-04	4.6E-04	4.7E-04
2778	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04
2779	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.7E-04	2.9E-04	3.1E-04	3.2E-04	3.2E-04
2780	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.3E-04	2.5E-04	2.7E-04	2.7E-04	2.8E-04
2781	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04
2782	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04
2783	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.3E-04	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04
2784	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	2.0E-04	2.1E-04	2.3E-04	2.3E-04	2.4E-04
2785	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.1E-04	2.3E-04	2.5E-04	2.5E-04	2.6E-04
2786	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.4E-04	2.6E-04	2.8E-04	2.9E-04	2.9E-04
2787	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	2.0E-04	2.1E-04	2.3E-04	2.3E-04	2.4E-04
2788	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.1E-04	2.3E-04	2.5E-04	2.6E-04	2.6E-04
2789	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.4E-04	2.6E-04	2.8E-04	2.9E-04	2.9E-04
2790	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.1E-04	2.2E-04	2.4E-04	2.5E-04	2.5E-04
2791	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.2E-04	2.4E-04	2.6E-04	2.7E-04	2.7E-04
2792	1.8E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.7E-04	2.9E-04	3.0E-04	3.0E-04
2793	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04
2794	1.7E-04	1.8E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04
2795	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.4E-04	2.6E-04	2.8E-04	2.9E-04	2.9E-04
2796	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04
2797	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04
2798	2.0E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	3.0E-04	3.2E-04	3.4E-04	3.5E-04	3.5E-04
2799	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	3.8E-04
2800	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.6E-04	3.8E-04	4.0E-04	4.1E-04	4.1E-04
2801	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.5E-04	3.6E-04	3.9E-04	4.2E-04	4.4E-04	4.5E-04	4.5E-04
2802	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04
2803	4.5E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.5E-04
2804	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04
2805	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	6.0E-04	6.1E-04	6.3E-04	6.3E-04
2806	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.8E-04	6.2E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04
2807	3.4E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.5E-04	5.6E-04	5.7E-04
2808	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04
2809	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.0E-04
2810	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.2E-04	4.4E-04	4.6E-04	4.7E-04	4.7E-04
2811	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04
2812	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04
2813	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04
2814	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04
2815	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04
2816	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2817	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
2818	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04
2819	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
2820	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04
2821	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04
2822	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04
2823	1.7E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04
2824	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04
2825	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.1E-04
2826	1.9E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.7E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04
2827	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04
2828	1.9E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.1E-04	3.3E-04	3.3E-04	3.4E-04
2829	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04
2830	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	2.7E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04
2831	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04
2832	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04
2833	2.0E-04	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.5E-04
2834	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.2E-04	3.4E-04	3.6E-04	3.8E-04	3.9E-04	3.9E-04
2835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2836	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04
2837	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.2E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.1E-04	4.1E-04
2838	2.5E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.9E-04	4.2E-04	4.3E-04	4.5E-04	4.5E-04
2839	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.2E-04	3.4E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04
2840	2.5E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.9E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04
2841	2.6E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.2E-04	4.5E-04	4.7E-04	4.9E-04	4.9E-04
2842	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04
2843	2.6E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.2E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04
2844	2.4E-04	2.7E-04	2.8E-04	3.0E-04	3.2E-04	3.4E-04	3.6E-04	3.9E-04	4.4E-04	4.8E-04	5.1E-04	5.4E-04	5.5E-04
2845	2.6E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.6E-04	4.6E-04
2846	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.4E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04
2847	2.5E-04	2.7E-04	2.9E-04	3.1E-04	3.3E-04	3.5E-04	3.8E-04	4.0E-04	4.5E-04	5.0E-04	5.3E-04	5.6E-04	5.7E-04
2848	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04
2849	2.9E-04	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.3E-04
2850	2.6E-04	2.9E-04	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.2E-04	4.7E-04	5.2E-04	5.5E-04	5.7E-04	5.9E-04
2851	3.0E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.6E-04
2852	2.5E-04	2.8E-04	3.0E-04	3.2E-04	3.4E-04	3.6E-04	3.9E-04	4.1E-04	4.8E-04	5.3E-04	5.7E-04	6.0E-04	6.1E-04
2853	3.2E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.5E-04	4.7E-04	5.1E-04	5.3E-04	5.6E-04	5.7E-04	5.8E-04
2854	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04
2855	4.5E-04	4.8E-04	5.0E-04	5.2E-04	5.5E-04	5.7E-04	6.0E-04	6.4E-04	6.7E-04	7.0E-04	7.3E-04	7.4E-04	7.5E-04
2856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2857	3.9E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04
2858	4.2E-04	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.4E-04	5.6E-04	5.9E-04	6.3E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04
2859	4.5E-04	4.8E-04	5.1E-04	5.3E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.6E-04
2860	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2861	4.0E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04
2862	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.1E-04	6.5E-04	6.8E-04	7.0E-04	7.1E-04	7.2E-04
2863	4.6E-04	4.9E-04	5.2E-04	5.4E-04	5.7E-04	5.9E-04	6.2E-04	6.6E-04	7.0E-04	7.3E-04	7.5E-04	7.7E-04	7.8E-04
2864	3.6E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.2E-04	5.5E-04	5.7E-04	5.9E-04	6.0E-04	6.1E-04
2865	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04
2866	4.2E-04	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	6.0E-04	6.3E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04
2867	4.5E-04	4.8E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.1E-04	7.3E-04	7.4E-04	7.5E-04
2868	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.3E-04	5.5E-04	5.6E-04	5.8E-04	5.8E-04
2869	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.0E-04	6.2E-04	6.2E-04
2870	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	5.9E-04
2871	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04
2872	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	5.8E-04
2873	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	6.0E-04	6.1E-04	6.3E-04	6.3E-04
2874	3.9E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	6.0E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04
2875	3.9E-04	4.2E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.8E-04	6.9E-04
2876	4.0E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.3E-04	6.6E-04	6.9E-04	7.0E-04	7.1E-04
2877	3.5E-04	3.9E-04	4.1E-04	4.4E-04	4.6E-04	4.9E-04	5.2E-04	5.5E-04	6.2E-04	6.8E-04	7.2E-04	7.5E-04	7.6E-04
2878	3.6E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.2E-04	5.5E-04	6.0E-04	6.4E-04	6.8E-04	7.0E-04	7.1E-04
2879	3.5E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.2E-04	5.7E-04	6.2E-04	6.5E-04	6.7E-04	6.9E-04
2880	3.2E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	5.3E-04	5.7E-04	6.1E-04	6.3E-04	6.5E-04
2881	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.1E-04	4.7E-04	5.2E-04	5.6E-04	5.9E-04	6.0E-04
2882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2885	3.7E-04	4.0E-04	4.2E-04	4.5E-04	4.7E-04	4.9E-04	5.2E-04	5.4E-04	5.7E-04	6.0E-04	6.2E-04	6.3E-04	6.4E-04
2886	3.9E-04	4.2E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04
2887	4.0E-04	4.3E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.3E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04
2888	4.1E-04	4.4E-04	4.7E-04	4.9E-04	5.2E-04	5.4E-04	5.7E-04	6.0E-04	6.4E-04	6.8E-04	7.0E-04	7.2E-04	7.3E-04
2889	3.6E-04	4.0E-04	4.3E-04	4.5E-04	4.8E-04	5.1E-04	5.4E-04	5.7E-04	6.4E-04	6.9E-04	7.3E-04	7.6E-04	7.7E-04
2890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2891	3.5E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.3E-04	5.9E-04	6.4E-04	6.8E-04	7.1E-04	7.2E-04
2892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2895	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.2E-04	5.4E-04	5.7E-04	6.0E-04	6.1E-04	6.3E-04	6.3E-04
2896	4.0E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04
2897	4.1E-04	4.4E-04	4.7E-04	4.9E-04	5.2E-04	5.4E-04	5.7E-04	6.0E-04	6.4E-04	6.6E-04	6.9E-04	7.0E-04	7.1E-04
2898	4.2E-04	4.5E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.6E-04	6.9E-04	7.2E-04	7.3E-04	7.4E-04
2899	4.0E-04	4.3E-04	4.6E-04	4.8E-04	5.1E-04	5.4E-04	5.7E-04	6.0E-04	6.6E-04	7.1E-04	7.5E-04	7.7E-04	7.8E-04
2900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2905	3.4E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.6E-04	5.7E-04	5.8E-04
2906	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04
2907	4.0E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04
2908	4.2E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.7E-04	6.9E-04	7.1E-04	7.2E-04
2909	4.3E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	6.0E-04	6.3E-04	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.5E-04
2910	4.2E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.7E-04	7.2E-04	7.5E-04	7.7E-04	7.8E-04
2911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2915	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.2E-04	5.4E-04	5.5E-04	5.7E-04	5.7E-04
2916	3.7E-04	3.9E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.0E-04	6.2E-04	6.2E-04
2917	4.0E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04
2918	4.2E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.2E-04
2919	4.4E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.2E-04	7.4E-04	7.6E-04	7.6E-04
2920	4.4E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.9E-04	7.3E-04	7.6E-04	7.7E-04	7.8E-04
2921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2925	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.2E-04	5.4E-04	5.5E-04	5.7E-04	5.7E-04
2926	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04
2927	4.0E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04
2928	4.3E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.6E-04	5.9E-04	6.2E-04	6.6E-04	6.9E-04	7.1E-04	7.3E-04	7.3E-04
2929	4.5E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.5E-04	6.9E-04	7.2E-04	7.5E-04	7.6E-04	7.7E-04
2930	4.6E-04	4.9E-04	5.2E-04	5.4E-04	5.7E-04	6.0E-04	6.3E-04	6.6E-04	7.1E-04	7.4E-04	7.7E-04	7.9E-04	8.0E-04
2931	4.4E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.5E-04	7.1E-04	7.6E-04	8.0E-04	8.2E-04	8.3E-04
2932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2937	3.2E-04	3.4E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.4E-04
2938	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.7E-04
2939	3.7E-04	3.9E-04	4.2E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04
2940	4.0E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04
2941	4.3E-04	4.7E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	6.0E-04	6.3E-04	6.6E-04	6.9E-04	7.1E-04	7.3E-04	7.4E-04
2942	4.6E-04	5.0E-04	5.2E-04	5.5E-04	5.7E-04	6.0E-04	6.3E-04	6.7E-04	7.0E-04	7.4E-04	7.6E-04	7.8E-04	7.9E-04
2943	4.7E-04	5.0E-04	5.3E-04	5.6E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.2E-04	7.6E-04	7.9E-04	8.0E-04	8.1E-04
2944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2948	3.0E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	4.9E-04	5.0E-04	5.0E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2949	3.2E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04
2950	3.4E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.8E-04
2951	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.1E-04	6.2E-04	6.2E-04
2952	4.0E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	6.8E-04
2953	4.4E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.7E-04	6.0E-04	6.3E-04	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.4E-04
2954	4.7E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.8E-04	7.1E-04	7.5E-04	7.7E-04	7.9E-04	8.0E-04
2955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2960	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04	4.8E-04
2961	3.0E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.1E-04
2962	3.2E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04
2963	3.4E-04	3.7E-04	3.9E-04	4.0E-04	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.8E-04
2964	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04
2965	4.0E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	6.8E-04
2966	4.4E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.7E-04	6.0E-04	6.3E-04	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.4E-04
2967	4.8E-04	5.1E-04	5.4E-04	5.6E-04	5.9E-04	6.2E-04	6.5E-04	6.8E-04	7.2E-04	7.6E-04	7.8E-04	8.0E-04	8.1E-04
2968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2972	2.9E-04	3.1E-04	3.3E-04	3.5E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	4.8E-04	4.9E-04
2973	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.2E-04
2974	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04	5.5E-04
2975	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	5.8E-04
2976	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04
2977	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	6.8E-04
2978	4.4E-04	4.8E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.7E-04	7.0E-04	7.3E-04	7.4E-04	7.5E-04
2979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2983	2.8E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.6E-04	4.7E-04
2984	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04
2985	3.1E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.3E-04
2986	3.3E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.4E-04	5.5E-04	5.6E-04
2987	3.5E-04	3.8E-04	4.0E-04	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.7E-04	5.8E-04	5.9E-04
2988	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.2E-04	5.4E-04	5.7E-04	6.0E-04	6.2E-04	6.3E-04	6.4E-04
2989	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.2E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04
2990	4.5E-04	4.8E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.7E-04	7.0E-04	7.3E-04	7.4E-04	7.5E-04
2991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
2993	2.8E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.6E-04	4.7E-04	4.7E-04
2994	3.0E-04	3.2E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.0E-04
2995	3.2E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04
2996	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.6E-04	5.7E-04
2997	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.7E-04	5.8E-04	5.9E-04	6.0E-04
2998	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.3E-04	6.4E-04	6.4E-04
2999	2.9E-04	3.1E-04	3.2E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.7E-04	4.8E-04
3000	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.1E-04
3001	3.2E-04	3.5E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.4E-04
3002	3.4E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.8E-04
3003	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.3E-04	5.5E-04	5.8E-04	6.0E-04	6.1E-04	6.1E-04
3004	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04
3005	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.2E-04	5.2E-04
3006	3.3E-04	3.6E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04	5.6E-04
3007	3.5E-04	3.8E-04	4.0E-04	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.7E-04	5.8E-04	5.9E-04
3008	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04
3009	3.2E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.3E-04
3010	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.5E-04	5.6E-04	5.7E-04
3011	3.0E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	4.9E-04	5.0E-04	5.0E-04
3012	3.2E-04	3.5E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.4E-04
3013	3.0E-04	3.2E-04	3.4E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.4E-04	4.6E-04	4.8E-04	4.9E-04	5.0E-04	5.1E-04
3014	3.3E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.5E-04	4.7E-04	4.9E-04	5.2E-04	5.3E-04	5.4E-04	5.5E-04
3015	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04
3016	3.0E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.0E-04
3017	3.2E-04	3.5E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.4E-04
3018	2.7E-04	2.9E-04	3.0E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.5E-04
3019	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	4.9E-04	4.9E-04
3020	3.2E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.3E-04
3021	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04
3022	2.8E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.3E-04	4.5E-04	4.6E-04	4.7E-04	4.7E-04
3023	2.4E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04
3024	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.5E-04	4.5E-04
3025	2.3E-04	2.4E-04	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04
3026	2.1E-04	2.2E-04	2.4E-04	2.4E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.6E-04
3027	1.9E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	2.7E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04
3028	2.1E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.6E-04
3029	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.3E-04	2.4E-04	2.6E-04	2.6E-04	2.7E-04
3030	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
3031	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.3E-04	2.4E-04	2.6E-04	2.6E-04	2.7E-04
3032	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	2.0E-04	2.1E-04	2.3E-04	2.3E-04	2.4E-04
3033	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
3034	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04
3035	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04
3036	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3037	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.8E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04
3038	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04
3039	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04
3040	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04
3041	-4.3E-04	-4.5E-04	-4.9E-04	-5.4E-04	-6.0E-04	-6.5E-04	-7.0E-04	-7.4E-04	-6.5E-04	-5.7E-04	-5.1E-04	-4.7E-04	-4.6E-04
3042	2.3E-04	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.5E-04
3043	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.6E-04	3.9E-04	4.1E-04	4.3E-04	4.4E-04
3044	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.5E-04	3.8E-04	4.0E-04	4.2E-04	4.3E-04
3045	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.3E-04	3.6E-04	3.9E-04	4.1E-04	4.1E-04
3046	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	3.2E-04	3.5E-04	3.7E-04	3.9E-04	4.0E-04
3047	1.9E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	3.0E-04	3.3E-04	3.6E-04	3.8E-04	3.8E-04
3048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3052	1.7E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.8E-04	3.3E-04	3.6E-04	3.8E-04	3.9E-04
3053	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.9E-04	3.3E-04	3.6E-04	3.8E-04	4.0E-04
3054	2.6E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.2E-04	4.5E-04	4.7E-04	4.9E-04	5.0E-04
3055	2.5E-04	2.7E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	4.0E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04
3056	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.9E-04	4.2E-04	4.5E-04	4.6E-04	4.7E-04
3057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3067	1.6E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.6E-04	3.1E-04	3.4E-04	3.6E-04	3.7E-04
3068	1.6E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.7E-04	3.1E-04	3.4E-04	3.7E-04	3.8E-04
3069	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.8E-04	3.2E-04	3.6E-04	3.8E-04	3.9E-04
3070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3071	1.7E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04	2.4E-04	2.9E-04	3.4E-04	3.8E-04	4.0E-04	4.1E-04
3072	3.0E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.9E-04	5.2E-04	5.5E-04	5.6E-04	5.7E-04
3073	2.6E-04	2.9E-04	3.1E-04	3.2E-04	3.4E-04	3.6E-04	3.9E-04	4.1E-04	4.7E-04	5.1E-04	5.5E-04	5.7E-04	5.9E-04
3074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3087	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.4E-04	2.9E-04	3.2E-04	3.4E-04	3.6E-04
3088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3091	1.6E-04	1.7E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.7E-04	3.2E-04	3.6E-04	3.9E-04	4.0E-04
3092	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.8E-04	3.2E-04	3.5E-04	3.7E-04	3.8E-04
3093	1.8E-04	2.0E-04	2.1E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.8E-04	3.1E-04	3.4E-04	3.6E-04	3.7E-04
3094	3.4E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.0E-04	5.4E-04	5.7E-04	5.9E-04	6.0E-04	6.1E-04
3095	3.2E-04	3.4E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.5E-04	4.7E-04	5.1E-04	5.4E-04	5.7E-04	5.9E-04	5.9E-04
3096	2.8E-04	3.0E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.1E-04	4.3E-04	4.9E-04	5.3E-04	5.7E-04	5.9E-04	6.0E-04
3097	2.8E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.6E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04
3098	2.7E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.4E-04	4.7E-04	5.0E-04	5.1E-04	5.2E-04
3099	2.6E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	4.1E-04	4.5E-04	4.8E-04	4.9E-04	5.0E-04
3100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3114	1.4E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.5E-04	3.0E-04	3.4E-04	3.7E-04	3.8E-04
3115	1.6E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.6E-04	3.0E-04	3.3E-04	3.5E-04	3.6E-04
3116	1.7E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04	2.6E-04	3.0E-04	3.2E-04	3.4E-04	3.5E-04
3117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3118	3.6E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	5.0E-04	5.3E-04	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.3E-04
3119	3.5E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.3E-04
3120	3.3E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.3E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04
3121	2.9E-04	3.2E-04	3.4E-04	3.6E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	5.1E-04	5.6E-04	5.9E-04	6.1E-04	6.2E-04
3122	3.0E-04	3.2E-04	3.4E-04	3.6E-04	3.8E-04	3.9E-04	4.2E-04	4.4E-04	4.8E-04	5.2E-04	5.5E-04	5.6E-04	5.7E-04
3123	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.1E-04	4.6E-04	4.9E-04	5.2E-04	5.4E-04	5.5E-04
3124	2.7E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	4.3E-04	4.7E-04	4.9E-04	5.1E-04	5.2E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3134	1.1E-04	1.2E-04	1.3E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.8E-04	2.3E-04	2.7E-04	2.9E-04	3.0E-04
3135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3137	1.2E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04	1.3E-04	1.4E-04	1.4E-04	2.0E-04	2.5E-04	2.9E-04	3.1E-04	3.2E-04
3138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3139	1.2E-04	1.4E-04	1.4E-04	1.5E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	2.3E-04	2.8E-04	3.2E-04	3.5E-04	3.6E-04
3140	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	2.3E-04	2.8E-04	3.1E-04	3.3E-04	3.4E-04
3141	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04	1.8E-04	1.8E-04	1.9E-04	2.4E-04	2.7E-04	3.0E-04	3.2E-04	3.3E-04
3142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3143	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04	2.6E-04	3.0E-04	3.2E-04	3.4E-04	3.5E-04
3144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3145	3.6E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04
3146	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.7E-04	4.9E-04	5.1E-04	5.4E-04	5.8E-04	6.0E-04	6.2E-04	6.4E-04	6.4E-04
3147	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.4E-04	5.8E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04
3148	3.4E-04	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.1E-04	5.5E-04	5.9E-04	6.2E-04	6.3E-04	6.4E-04
3149	3.1E-04	3.4E-04	3.6E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.4E-04	5.9E-04	6.2E-04	6.5E-04	6.6E-04
3150	3.2E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	5.1E-04	5.5E-04	5.8E-04	6.0E-04	6.0E-04
3151	3.0E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.4E-04	4.8E-04	5.2E-04	5.5E-04	5.7E-04	5.8E-04
3152	2.8E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.8E-04	4.0E-04	4.5E-04	4.9E-04	5.2E-04	5.4E-04	5.5E-04
3153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3164	9.9E-05	1.1E-04	1.2E-04	1.1E-04	1.1E-04	1.0E-04	1.1E-04	1.1E-04	1.7E-04	2.3E-04	2.7E-04	2.9E-04	3.1E-04
3165	9.6E-05	1.1E-04	1.1E-04	1.1E-04	1.0E-04	9.6E-05	9.7E-05	1.0E-04	1.6E-04	2.1E-04	2.5E-04	2.8E-04	2.9E-04
3166	7.7E-05	9.1E-05	9.7E-05	9.4E-05	9.0E-05	8.8E-05	9.1E-05	9.6E-05	1.7E-04	2.3E-04	2.8E-04	3.1E-04	3.3E-04
3167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3169	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	2.1E-04	2.5E-04	2.8E-04	2.9E-04	3.0E-04
3170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3171	1.7E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.5E-04	2.8E-04	3.1E-04	3.3E-04	3.3E-04
3172	3.0E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.5E-04	5.1E-04	5.6E-04	6.0E-04	6.3E-04	6.4E-04
3173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3174	3.6E-04	3.9E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04
3175	3.7E-04	4.0E-04	4.3E-04	4.5E-04	4.7E-04	5.0E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.3E-04	6.5E-04	6.5E-04
3176	3.7E-04	4.0E-04	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.2E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.5E-04	6.6E-04
3177	3.6E-04	3.9E-04	4.1E-04	4.3E-04	4.6E-04	4.8E-04	5.1E-04	5.3E-04	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.7E-04
3178	3.3E-04	3.6E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.1E-04	5.7E-04	6.1E-04	6.5E-04	6.7E-04	6.8E-04
3179	3.4E-04	3.6E-04	3.9E-04	4.0E-04	4.2E-04	4.5E-04	4.7E-04	4.9E-04	5.4E-04	5.8E-04	6.1E-04	6.3E-04	6.4E-04
3180	3.2E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	5.1E-04	5.5E-04	5.8E-04	6.0E-04	6.1E-04
3181	2.9E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.7E-04	5.1E-04	5.4E-04	5.6E-04	5.7E-04
3182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3191	6.1E-05	6.8E-05	6.7E-05	5.7E-05	4.6E-05	3.9E-05	3.6E-05	3.5E-05	9.1E-05	1.4E-04	1.7E-04	2.0E-04	2.1E-04
3192	5.8E-05	6.6E-05	6.6E-05	5.7E-05	4.7E-05	4.0E-05	3.7E-05	3.7E-05	9.9E-05	1.5E-04	1.9E-04	2.2E-04	2.3E-04
3193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3194	6.1E-05	7.0E-05	7.1E-05	6.3E-05	5.3E-05	4.7E-05	4.5E-05	4.4E-05	1.1E-04	1.6E-04	2.1E-04	2.3E-04	2.5E-04
3195	5.4E-05	6.6E-05	6.9E-05	6.3E-05	5.5E-05	5.1E-05	5.1E-05	5.3E-05	1.3E-04	1.9E-04	2.4E-04	2.7E-04	2.8E-04
3196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3198	1.2E-04	1.3E-04	1.4E-04	1.3E-04	1.3E-04	1.2E-04	1.3E-04	1.3E-04	1.8E-04	2.2E-04	2.5E-04	2.7E-04	2.8E-04
3199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3200	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	2.2E-04	2.5E-04	2.8E-04	2.9E-04	3.0E-04
3201	2.0E-04	2.2E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.7E-04	2.8E-04	3.3E-04	3.7E-04	4.0E-04	4.2E-04	4.3E-04
3202	4.5E-04	5.0E-04	5.5E-04	6.0E-04	6.4E-04	6.8E-04	7.3E-04	7.8E-04	8.9E-04	9.9E-04	1.1E-03	1.1E-03	1.1E-03
3203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3206	3.1E-05	3.6E-05	3.1E-05	1.7E-05	3.3E-06	-6.3E-06	-1.2E-05	-1.5E-05	4.2E-05	8.9E-05	1.2E-04	1.5E-04	1.6E-04
3207	1.5E-05	1.9E-05	1.4E-05	-1.1E-06	-1.7E-05	-2.8E-05	-3.5E-05	-4.0E-05	2.0E-05	7.0E-05	1.1E-04	1.3E-04	1.4E-04
3208	6.6E-06	1.1E-05	6.8E-06	-7.9E-06	-2.3E-05	-3.5E-05	-4.2E-05	-4.8E-05	1.8E-05	7.2E-05	1.1E-04	1.4E-04	1.5E-04
3209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3210	2.0E-05	2.7E-05	2.5E-05	1.3E-05	-4.4E-08	-1.0E-05	-1.5E-05	-1.9E-05	5.1E-05	1.1E-04	1.5E-04	1.8E-04	2.0E-04
3211	2.3E-05	3.2E-05	3.2E-05	2.3E-05	1.2E-05	4.6E-06	1.8E-06	6.9E-07	7.7E-05	1.4E-04	1.9E-04	2.2E-04	2.4E-04
3212	2.9E-05	4.0E-05	4.3E-05	3.6E-05	2.8E-05	2.3E-05	2.3E-05	2.4E-05	1.1E-04	1.7E-04	2.3E-04	2.6E-04	2.8E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3213	7.9E-05	8.9E-05	9.1E-05	8.4E-05	7.6E-05	7.0E-05	7.0E-05	7.0E-05	1.3E-04	1.8E-04	2.2E-04	2.4E-04	2.5E-04
3214	9.8E-05	1.1E-04	1.1E-04	1.0E-04	9.6E-05	9.1E-05	9.1E-05	9.2E-05	1.4E-04	1.9E-04	2.2E-04	2.4E-04	2.5E-04
3215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3216	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.5E-04	1.5E-04	1.5E-04	1.5E-04	2.0E-04	2.3E-04	2.6E-04	2.8E-04	2.8E-04
3217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3218	1.1E-04	1.2E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	2.6E-04	3.3E-04	3.8E-04	4.1E-04	4.3E-04
3219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3221	-2.5E-05	-2.3E-05	-3.1E-05	-5.0E-05	-6.9E-05	-8.2E-05	-9.2E-05	-9.9E-05	-3.5E-05	1.9E-05	5.9E-05	8.5E-05	9.9E-05
3222	-5.6E-05	-5.6E-05	-6.6E-05	-8.7E-05	-1.1E-04	-1.2E-04	-1.4E-04	-1.5E-04	-7.9E-05	-2.2E-05	2.1E-05	4.9E-05	6.3E-05
3223	-7.2E-05	-7.2E-05	-8.2E-05	-1.0E-04	-1.3E-04	-1.4E-04	-1.6E-04	-1.7E-04	-9.3E-05	-3.2E-05	1.4E-05	4.5E-05	6.0E-05
3224	-5.2E-05	-4.7E-05	-5.1E-05	-6.7E-05	-8.4E-05	-9.7E-05	-1.1E-04	-1.1E-04	-2.3E-05	5.0E-05	1.0E-04	1.4E-04	1.6E-04
3225	-4.3E-05	-3.9E-05	-4.5E-05	-6.1E-05	-7.8E-05	-9.2E-05	-1.0E-04	-1.1E-04	-2.8E-05	3.8E-05	8.8E-05	1.2E-04	1.4E-04
3226	-3.4E-05	-2.7E-05	-3.0E-05	-4.3E-05	-5.7E-05	-6.9E-05	-7.5E-05	-7.9E-05	7.1E-06	7.8E-05	1.3E-04	1.7E-04	1.9E-04
3227	-2.7E-05	-1.7E-05	-1.5E-05	-2.4E-05	-3.4E-05	-4.0E-05	-4.2E-05	-4.2E-05	5.8E-05	1.4E-04	2.0E-04	2.4E-04	2.6E-04
3228	4.2E-05	5.1E-05	5.2E-05	4.3E-05	3.3E-05	2.6E-05	2.4E-05	2.3E-05	9.3E-05	1.5E-04	1.9E-04	2.2E-04	2.4E-04
3229	6.8E-05	7.7E-05	7.9E-05	7.1E-05	6.2E-05	5.6E-05	5.5E-05	5.5E-05	1.2E-04	1.7E-04	2.0E-04	2.3E-04	2.4E-04
3230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3231	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	2.0E-04	2.4E-04	2.7E-04	2.9E-04	3.0E-04
3232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3233	8.2E-05	9.8E-05	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	2.0E-04	2.6E-04	3.1E-04	3.4E-04	3.6E-04
3234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3237	-1.0E-04	-1.0E-04	-1.1E-04	-1.3E-04	-1.5E-04	-1.7E-04	-1.9E-04	-2.0E-04	-1.1E-04	-3.8E-05	1.6E-05	5.2E-05	7.0E-05
3238	-8.4E-05	-8.1E-05	-8.7E-05	-1.0E-04	-1.2E-04	-1.4E-04	-1.5E-04	-1.6E-04	-6.6E-05	8.8E-06	6.5E-05	1.0E-04	1.2E-04
3239	-8.9E-05	-8.1E-05	-8.2E-05	-9.3E-05	-1.1E-04	-1.2E-04	-1.2E-04	-1.2E-04	-1.0E-05	8.2E-05	1.5E-04	2.0E-04	2.2E-04
3240	6.0E-06	1.3E-05	1.1E-05	-1.1E-06	-1.5E-05	-2.5E-05	-3.0E-05	-3.3E-05	4.1E-05	1.0E-04	1.5E-04	1.8E-04	1.9E-04
3241	4.1E-05	4.9E-05	4.8E-05	3.8E-05	2.6E-05	1.7E-05	1.4E-05	1.2E-05	7.5E-05	1.3E-04	1.7E-04	1.9E-04	2.1E-04
3242	8.1E-05	9.1E-05	9.4E-05	8.7E-05	7.8E-05	7.3E-05	7.3E-05	7.5E-05	1.3E-04	1.8E-04	2.2E-04	2.4E-04	2.6E-04
3243	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04	1.3E-04	1.4E-04	1.4E-04	2.0E-04	2.4E-04	2.8E-04	3.0E-04	3.1E-04
3244	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.7E-04	3.2E-04	3.5E-04	3.7E-04	3.9E-04
3245	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.5E-04	4.0E-04	4.4E-04	4.7E-04	4.8E-04
3246	2.4E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	4.3E-04	4.8E-04	5.2E-04	5.4E-04	5.6E-04
3247	4.3E-04	4.7E-04	5.1E-04	5.4E-04	5.7E-04	6.0E-04	6.4E-04	6.7E-04	7.5E-04	8.1E-04	8.6E-04	8.9E-04	9.0E-04
3248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3251	-1.1E-04	-1.1E-04	-1.2E-04	-1.5E-04	-1.7E-04	-1.9E-04	-2.1E-04	-2.2E-04	-1.4E-04	-6.6E-05	-1.4E-05	2.1E-05	3.8E-05
3252	-1.3E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.7E-04	-1.9E-04	-2.0E-04	-2.1E-04	-1.0E-04	-1.3E-05	5.4E-05	9.8E-05	1.2E-04
3253	-2.2E-05	-2.0E-05	-2.8E-05	-4.6E-05	-6.6E-05	-8.1E-05	-9.2E-05	-1.0E-04	-3.6E-05	1.7E-05	5.8E-05	8.5E-05	9.8E-05
3254	2.7E-05	3.1E-05	2.6E-05	9.9E-06	-7.2E-06	-2.0E-05	-2.8E-05	-3.5E-05	1.8E-05	6.2E-05	9.5E-05	1.2E-04	1.3E-04
3255	6.8E-05	7.4E-05	7.1E-05	5.9E-05	4.5E-05	3.5E-05	3.0E-05	2.7E-05	7.2E-05	1.1E-04	1.4E-04	1.6E-04	1.7E-04
3256	1.2E-04	1.2E-04	1.3E-04	1.2E-04	1.1E-04	1.0E-04	1.0E-04	1.0E-04	1.4E-04	1.8E-04	2.0E-04	2.2E-04	2.3E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3257	1.7E-04	1.8E-04	1.8E-04	1.8E-04	1.8E-04	1.8E-04	1.8E-04	1.9E-04	2.3E-04	2.6E-04	2.9E-04	3.1E-04	3.1E-04
3258	2.2E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.2E-04	3.6E-04	3.9E-04	4.1E-04	4.1E-04
3259	2.8E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.3E-04	4.8E-04	5.1E-04	5.3E-04	5.4E-04
3260	3.4E-04	3.7E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.9E-04	5.2E-04	5.8E-04	6.3E-04	6.7E-04	7.0E-04	7.1E-04
3261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3263	-1.7E-04	-1.8E-04	-1.9E-04	-2.2E-04	-2.5E-04	-2.8E-04	-3.0E-04	-3.2E-04	-2.3E-04	-1.6E-04	-1.1E-04	-7.2E-05	-5.4E-05
3264	-1.7E-04	-1.8E-04	-1.9E-04	-2.1E-04	-2.4E-04	-2.6E-04	-2.8E-04	-2.9E-04	-1.9E-04	-1.1E-04	-4.7E-05	-5.5E-06	1.5E-05
3265	-5.2E-05	-5.3E-05	-6.5E-05	-8.8E-05	-1.1E-04	-1.3E-04	-1.5E-04	-1.6E-04	-9.8E-05	-4.6E-05	-6.8E-06	1.9E-05	3.2E-05
3266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3267	7.1E-05	7.6E-05	7.1E-05	5.7E-05	4.1E-05	2.9E-05	2.3E-05	1.8E-05	6.0E-05	9.7E-05	1.2E-04	1.4E-04	1.5E-04
3268	1.2E-04	1.3E-04	1.3E-04	1.2E-04	1.1E-04	1.0E-04	9.9E-05	9.9E-05	1.4E-04	1.7E-04	2.0E-04	2.1E-04	2.2E-04
3269	1.8E-04	1.9E-04	2.0E-04	2.0E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.3E-04	2.7E-04	2.9E-04	3.1E-04	3.2E-04
3270	2.4E-04	2.5E-04	2.7E-04	2.7E-04	2.7E-04	2.7E-04	2.8E-04	2.9E-04	3.3E-04	3.7E-04	3.9E-04	4.1E-04	4.2E-04
3271	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.3E-04	4.6E-04	4.9E-04	5.1E-04	5.2E-04
3272	3.4E-04	3.7E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.9E-04	5.3E-04	5.7E-04	6.0E-04	6.2E-04	6.3E-04
3273	-2.5E-04	-2.6E-04	-2.9E-04	-3.2E-04	-3.6E-04	-4.0E-04	-4.2E-04	-4.5E-04	-3.6E-04	-2.9E-04	-2.3E-04	-1.9E-04	-1.7E-04
3274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3282	3.3E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.4E-04	4.6E-04	5.0E-04	5.3E-04	5.6E-04	5.8E-04	5.9E-04
3283	-3.5E-04	-3.7E-04	-4.0E-04	-4.5E-04	-5.0E-04	-5.4E-04	-5.8E-04	-6.1E-04	-5.2E-04	-4.5E-04	-3.9E-04	-3.5E-04	-3.4E-04
3284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3285	-1.5E-04	-1.6E-04	-1.8E-04	-2.2E-04	-2.6E-04	-2.9E-04	-3.1E-04	-3.3E-04	-2.7E-04	-2.1E-04	-1.7E-04	-1.5E-04	-1.3E-04
3286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3297	1.8E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	3.1E-04	3.6E-04	4.0E-04	4.2E-04	4.3E-04
3298	1.7E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.4E-04	2.5E-04	2.7E-04	3.4E-04	4.1E-04	4.6E-04	4.9E-04	5.0E-04
3299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3300	2.3E-04	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.7E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3301	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.3E-04	3.6E-04	3.9E-04	4.1E-04	4.3E-04	4.3E-04
3302	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.6E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04
3303	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.5E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04
3304	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.4E-04	3.7E-04	3.9E-04	4.1E-04	4.1E-04
3305	2.1E-04	2.2E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.2E-04	3.5E-04	3.8E-04	3.9E-04	4.0E-04
3306	2.0E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	3.1E-04	3.4E-04	3.7E-04	3.8E-04	3.9E-04
3307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3311	1.9E-04	2.0E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.6E-04	3.1E-04	3.5E-04	3.8E-04	4.0E-04	4.1E-04
3312	1.9E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	3.1E-04	3.5E-04	3.8E-04	4.0E-04	4.2E-04
3313	2.5E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.6E-04	4.0E-04	4.3E-04	4.5E-04	4.6E-04	4.7E-04
3314	2.4E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.9E-04	4.2E-04	4.4E-04	4.5E-04	4.6E-04
3315	2.8E-04	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	4.0E-04	4.2E-04	4.6E-04	4.9E-04	5.2E-04	5.3E-04	5.4E-04
3316	3.2E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	5.1E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04
3317	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.5E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04
3318	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.2E-04	3.5E-04	3.8E-04	3.9E-04	4.0E-04
3319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3327	8.2E-03	8.7E-03	9.2E-03	9.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02
3328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3333	5.6E-03	5.9E-03	6.3E-03	6.6E-03	6.8E-03	7.1E-03	7.4E-03	7.7E-03	7.8E-03	8.0E-03	8.1E-03	8.2E-03	8.2E-03
3334	5.1E-03	5.4E-03	5.8E-03	6.0E-03	6.2E-03	6.5E-03	6.7E-03	7.0E-03	7.2E-03	7.3E-03	7.4E-03	7.5E-03	7.5E-03
3335	4.6E-03	5.0E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.4E-03	6.6E-03	6.7E-03	6.8E-03	6.9E-03	6.9E-03
3336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3357	9.1E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02	8.7E-03	9.2E-03	9.6E-03	9.7E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02
3358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3359	8.5E-03	9.0E-03	9.0E-03	7.8E-03	7.7E-03	7.8E-03	8.2E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	8.9E-03	9.0E-03
3360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3364	5.5E-03	5.8E-03	6.0E-03	6.0E-03	6.1E-03	6.4E-03	6.6E-03	7.0E-03	7.1E-03	7.1E-03	7.2E-03	7.2E-03	7.3E-03
3365	4.3E-03	4.5E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.0E-03
3366	3.8E-03	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03	5.5E-03	5.5E-03	5.5E-03
3367	3.8E-03	4.0E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.4E-03	5.4E-03	5.4E-03
3368	3.5E-03	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03
3369	3.4E-03	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.6E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03
3370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3411	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
3412	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
3413	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03
3414	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03
3415	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03
3416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3424	9.9E-04	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
3425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3428	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
3429	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03
3430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3539	-4.2E-04	-4.4E-04	-4.8E-04	-5.4E-04	-5.9E-04	-6.4E-04	-6.8E-04	-7.3E-04	-6.4E-04	-5.6E-04	-5.1E-04	-4.7E-04	-4.5E-04
3540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3554	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.5E-03	-2.5E-03
3555	-1.4E-03	-1.6E-03	-1.7E-03	-1.8E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.5E-03	-2.4E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.1E-03
3556	-1.4E-03	-1.5E-03	-1.6E-03	-1.8E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.4E-03	-2.2E-03	-2.1E-03	-2.1E-03	-2.0E-03	-2.0E-03
3557	-1.6E-03	-1.7E-03	-1.9E-03	-2.1E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.4E-03
3558	-1.7E-03	-1.8E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.7E-03	-2.9E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.6E-03	-2.5E-03
3559	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.8E-03	-3.1E-03	-3.3E-03	-3.2E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.9E-03
3560	-1.7E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.6E-03	-3.0E-03	-3.4E-03	-3.8E-03	-3.7E-03	-3.6E-03	-3.5E-03	-3.4E-03	-3.4E-03
3561	-1.6E-03	-1.8E-03	-2.0E-03	-2.3E-03	-2.5E-03	-2.9E-03	-3.4E-03	-3.8E-03	-3.6E-03	-3.5E-03	-3.5E-03	-3.4E-03	-3.4E-03
3562	-1.7E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.9E-03	-3.3E-03	-3.7E-03	-3.6E-03	-3.5E-03	-3.4E-03	-3.4E-03	-3.3E-03
3563	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.6E-03	-2.9E-03	-3.3E-03	-3.6E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.3E-03	-3.2E-03
3564	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-3.0E-03	-3.4E-03	-3.7E-03	-3.6E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.3E-03

Location	Adult Resident												
	2025-2044	2026-2045	2027-2046	2028-2047	2029-2048	2030-2049	2031-2050	2032-2051	2033-2052	2034-2053	2035-2054	2036-2055	2037-2056
3565	-1.8E-03	-2.0E-03	-2.2E-03	-2.4E-03	-2.6E-03	-2.9E-03	-3.2E-03	-3.5E-03	-3.4E-03	-3.3E-03	-3.2E-03	-3.2E-03	-3.1E-03
3566	-1.8E-03	-1.9E-03	-2.1E-03	-2.3E-03	-2.5E-03	-2.8E-03	-3.0E-03	-3.3E-03	-3.1E-03	-3.0E-03	-2.9E-03	-2.9E-03	-2.9E-03
3567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3579	-1.3E-02	-1.4E-02	-1.5E-02	-1.6E-02	-1.7E-02	-1.8E-02	-1.9E-02	-2.0E-02	-1.9E-02	-1.9E-02	-1.9E-02	-1.9E-02	-1.9E-02
3580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3584	3.6E-02	3.9E-02	4.2E-02	4.4E-02	4.6E-02	4.8E-02	5.0E-02	5.3E-02	5.4E-02	5.4E-02	5.5E-02	5.5E-02	5.5E-02
3585	3.8E-02	4.1E-02	4.4E-02	4.6E-02	4.8E-02	5.1E-02	5.3E-02	5.6E-02	5.7E-02	5.7E-02	5.8E-02	5.8E-02	5.8E-02
3586	4.2E-02	4.5E-02	4.7E-02	5.0E-02	5.2E-02	5.5E-02	5.8E-02	6.0E-02	6.1E-02	6.2E-02	6.2E-02	6.2E-02	6.3E-02
3587	4.7E-02	5.1E-02	5.4E-02	5.7E-02	5.9E-02	6.2E-02	6.5E-02	6.8E-02	6.9E-02	7.0E-02	7.0E-02	7.1E-02	7.1E-02
3588	5.1E-02	5.5E-02	5.8E-02	6.1E-02	6.4E-02	6.7E-02	7.0E-02	7.4E-02	7.4E-02	7.5E-02	7.5E-02	7.6E-02	7.6E-02
3589	5.2E-02	5.5E-02	5.9E-02	6.2E-02	6.4E-02	6.7E-02	7.1E-02	7.4E-02	7.5E-02	7.5E-02	7.6E-02	7.6E-02	7.6E-02
3590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2	3.7E-05	4.6E-05	5.4E-05	6.0E-05	6.7E-05	7.5E-05	8.3E-05	9.2E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04
3	1.4E-03	1.6E-03	1.8E-03	2.0E-03	2.2E-03	2.3E-03	2.5E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	3.0E-03
4	7.5E-04	8.9E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
5	1.6E-04	1.9E-04	2.1E-04	2.3E-04	2.5E-04	2.7E-04	2.9E-04	3.2E-04	3.4E-04	3.6E-04	3.8E-04	3.9E-04	3.9E-04
6	1.7E-06	4.7E-06	5.7E-06	4.5E-06	3.0E-06	2.2E-06	2.6E-06	3.4E-06	1.6E-05	2.7E-05	3.6E-05	4.1E-05	4.4E-05
7	-1.5E-06	1.2E-06	1.1E-06	-2.4E-06	-6.2E-06	-8.4E-06	-8.9E-06	-8.8E-06	7.6E-06	2.2E-05	3.2E-05	3.9E-05	4.2E-05
8	6.2E-05	7.6E-05	8.7E-05	9.8E-05	1.1E-04	1.2E-04	1.3E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
9	1.7E-04	2.0E-04	2.3E-04	2.5E-04	2.6E-04	2.8E-04	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04
10	7.8E-06	1.1E-05	1.3E-05	1.3E-05	1.2E-05	1.3E-05	1.4E-05	1.6E-05	2.6E-05	3.5E-05	4.2E-05	4.7E-05	4.9E-05
11	-1.6E-05	-1.3E-05	-1.3E-05	-1.5E-05	-1.7E-05	-1.8E-05	-1.9E-05	-1.8E-05	1.1E-06	1.7E-05	2.9E-05	3.7E-05	4.1E-05
12	3.3E-05	4.1E-05	4.7E-05	5.3E-05	5.9E-05	6.5E-05	7.3E-05	8.0E-05	8.8E-05	9.5E-05	1.0E-04	1.0E-04	1.1E-04
13	1.9E-04	2.2E-04	2.5E-04	2.8E-04	3.0E-04	3.2E-04	3.5E-04	3.8E-04	4.0E-04	4.2E-04	4.4E-04	4.5E-04	4.5E-04
14	1.9E-05	2.6E-05	3.2E-05	3.6E-05	4.1E-05	4.6E-05	5.2E-05	5.8E-05	7.0E-05	8.0E-05	8.7E-05	9.2E-05	9.4E-05
15	9.3E-04	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
16	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
17	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
18	3.8E-05	4.5E-05	5.0E-05	5.5E-05	6.2E-05	6.9E-05	7.7E-05	8.5E-05	9.4E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
19	4.0E-05	4.7E-05	5.3E-05	5.8E-05	6.6E-05	7.3E-05	8.1E-05	9.0E-05	9.9E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04
20	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
21	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
22	2.2E-05	3.0E-05	3.7E-05	4.3E-05	5.0E-05	5.7E-05	6.4E-05	7.2E-05	8.4E-05	9.3E-05	1.0E-04	1.0E-04	1.1E-04
23	1.7E-04	2.0E-04	2.3E-04	2.5E-04	2.6E-04	2.9E-04	3.1E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	3.9E-04	4.0E-04
24	1.7E-04	2.0E-04	2.3E-04	2.5E-04	2.7E-04	2.9E-04	3.1E-04	3.4E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.5E-04
25	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
26	1.6E-04	2.0E-04	2.3E-04	2.5E-04	2.6E-04	2.8E-04	3.1E-04	3.3E-04	3.6E-04	3.9E-04	4.0E-04	4.2E-04	4.2E-04
27	4.7E-04	5.4E-04	6.0E-04	6.3E-04	6.7E-04	7.0E-04	7.6E-04	8.2E-04	8.5E-04	8.7E-04	8.9E-04	9.0E-04	9.0E-04
28	5.2E-04	6.0E-04	6.8E-04	7.3E-04	7.8E-04	8.2E-04	8.9E-04	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03
29	1.6E-04	1.9E-04	2.2E-04	2.4E-04	2.6E-04	2.8E-04	3.0E-04	3.3E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04
30	6.7E-04	7.8E-04	8.7E-04	9.5E-04	1.0E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
31	1.2E-04	1.4E-04	1.6E-04	1.7E-04	1.9E-04	2.0E-04	2.2E-04	2.4E-04	2.5E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04
32	2.4E-04	2.8E-04	3.1E-04	3.3E-04	3.5E-04	3.8E-04	4.0E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	4.8E-04	4.9E-04
33	3.6E-04	4.3E-04	4.9E-04	5.4E-04	5.8E-04	6.3E-04	6.8E-04	7.4E-04	7.7E-04	8.0E-04	8.2E-04	8.4E-04	8.5E-04
34	5.5E-05	6.8E-05	7.9E-05	9.0E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04
35	5.9E-05	7.0E-05	7.7E-05	8.5E-05	9.7E-05	1.1E-04	1.2E-04	1.3E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04
36	3.8E-04	4.5E-04	5.0E-04	5.5E-04	5.9E-04	6.3E-04	6.8E-04	7.3E-04	7.7E-04	8.0E-04	8.2E-04	8.4E-04	8.4E-04
37	1.7E-05	2.0E-05	2.3E-05	2.5E-05	2.8E-05	3.1E-05	3.4E-05	3.8E-05	4.3E-05	4.8E-05	5.1E-05	5.4E-05	5.5E-05
38	1.3E-05	1.7E-05	1.8E-05	1.7E-05	1.6E-05	1.5E-05	1.6E-05	1.7E-05	3.0E-05	4.0E-05	4.8E-05	5.4E-05	5.6E-05
39	5.4E-05	6.6E-05	7.7E-05	8.7E-05	9.8E-05	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
40	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
41	3.2E-05	3.9E-05	4.4E-05	4.9E-05	5.5E-05	6.1E-05	6.7E-05	7.4E-05	8.2E-05	8.8E-05	9.3E-05	9.6E-05	9.8E-05
42	4.7E-05	5.9E-05	6.9E-05	7.8E-05	8.8E-05	9.8E-05	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
43	4.3E-05	5.4E-05	6.3E-05	7.2E-05	8.2E-05	9.2E-05	1.0E-04	1.1E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04
44	4.0E-05	4.7E-05	5.3E-05	5.8E-05	6.6E-05	7.3E-05	8.1E-05	9.0E-05	9.9E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
45	2.7E-05	3.3E-05	3.6E-05	4.0E-05	4.5E-05	5.0E-05	5.6E-05	6.2E-05	6.9E-05	7.5E-05	8.0E-05	8.3E-05	8.5E-05
46	3.7E-04	4.4E-04	5.0E-04	5.4E-04	5.8E-04	6.3E-04	6.8E-04	7.3E-04	7.6E-04	7.9E-04	8.2E-04	8.3E-04	8.4E-04
47	3.8E-04	4.5E-04	5.1E-04	5.5E-04	5.9E-04	6.4E-04	6.9E-04	7.4E-04	7.7E-04	8.0E-04	8.3E-04	8.4E-04	8.5E-04
48	2.6E-04	3.0E-04	3.5E-04	3.8E-04	4.1E-04	4.4E-04	4.8E-04	5.2E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04	5.9E-04
49	2.2E-04	2.7E-04	3.0E-04	3.3E-04	3.6E-04	3.9E-04	4.2E-04	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.3E-04
50	-1.2E-05	-1.4E-05	-1.9E-05	-2.7E-05	-3.5E-05	-4.2E-05	-4.8E-05	-5.2E-05	-3.9E-05	-2.7E-05	-1.8E-05	-1.2E-05	-9.3E-06
51	2.7E-04	3.2E-04	3.7E-04	4.0E-04	4.3E-04	4.7E-04	5.1E-04	5.5E-04	5.8E-04	6.1E-04	6.4E-04	6.5E-04	6.6E-04
52	2.9E-04	3.4E-04	3.8E-04	4.2E-04	4.5E-04	4.8E-04	5.2E-04	5.6E-04	5.8E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04
53	9.2E-05	1.1E-04	1.3E-04	1.4E-04	1.6E-04	1.8E-04	1.9E-04	2.1E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04
54	2.2E-04	2.6E-04	3.0E-04	3.3E-04	3.5E-04	3.8E-04	4.1E-04	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.2E-04
55	5.8E-06	1.2E-05	1.6E-05	1.9E-05	2.1E-05	2.4E-05	2.8E-05	3.2E-05	4.8E-05	6.0E-05	7.0E-05	7.7E-05	8.0E-05
56	4.0E-04	4.8E-04	5.4E-04	6.0E-04	6.4E-04	6.9E-04	7.5E-04	8.2E-04	8.6E-04	9.0E-04	9.3E-04	9.5E-04	9.6E-04
57	5.9E-05	7.2E-05	8.4E-05	9.5E-05	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
58	2.4E-05	2.9E-05	3.2E-05	3.6E-05	4.2E-05	4.9E-05	5.6E-05	6.3E-05	7.7E-05	8.8E-05	9.6E-05	1.0E-04	1.0E-04
59	2.3E-04	2.8E-04	3.2E-04	3.5E-04	3.8E-04	4.1E-04	4.5E-04	4.9E-04	5.2E-04	5.5E-04	5.7E-04	5.9E-04	5.9E-04
60	1.7E-05	2.5E-05	3.0E-05	3.6E-05	4.2E-05	4.8E-05	5.5E-05	6.2E-05	7.4E-05	8.4E-05	9.1E-05	9.6E-05	9.8E-05
61	-2.0E-06	3.1E-06	6.5E-06	8.1E-06	9.7E-06	1.2E-05	1.5E-05	1.9E-05	3.5E-05	4.9E-05	5.9E-05	6.6E-05	6.9E-05
62	5.8E-04	6.8E-04	7.7E-04	8.4E-04	9.0E-04	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
63	2.2E-04	2.6E-04	3.0E-04	3.3E-04	3.6E-04	3.9E-04	4.2E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.3E-04
64	3.3E-05	3.9E-05	4.3E-05	4.7E-05	5.3E-05	5.9E-05	6.6E-05	7.3E-05	8.1E-05	8.9E-05	9.4E-05	9.8E-05	1.0E-04
65	5.0E-04	5.8E-04	6.5E-04	7.1E-04	7.5E-04	8.0E-04	8.7E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03
66	4.0E-04	4.8E-04	5.5E-04	6.0E-04	6.4E-04	7.0E-04	7.6E-04	8.2E-04	8.6E-04	9.0E-04	9.3E-04	9.5E-04	9.6E-04
67	7.4E-05	9.2E-05	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.6E-04	1.8E-04	2.0E-04	2.2E-04	2.3E-04	2.3E-04
68	4.0E-06	7.1E-06	8.4E-06	7.4E-06	6.2E-06	5.7E-06	6.3E-06	7.3E-06	1.9E-05	3.0E-05	3.7E-05	4.2E-05	4.5E-05
69	3.3E-05	3.9E-05	4.4E-05	4.9E-05	5.5E-05	6.1E-05	6.7E-05	7.5E-05	8.2E-05	8.9E-05	9.4E-05	9.7E-05	9.9E-05
70	2.9E-04	3.4E-04	3.8E-04	4.2E-04	4.5E-04	4.8E-04	5.2E-04	5.6E-04	5.8E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04
71	-2.4E-05	-2.4E-05	-2.7E-05	-3.3E-05	-4.0E-05	-4.5E-05	-4.9E-05	-5.2E-05	-3.2E-05	-1.5E-05	-1.8E-06	6.7E-06	1.1E-05
72	1.9E-04	2.2E-04	2.5E-04	2.7E-04	2.9E-04	3.1E-04	3.4E-04	3.6E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04
73	1.1E-03	1.3E-03	1.5E-03	1.6E-03	1.8E-03	1.9E-03	2.0E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03
74	5.7E-05	6.9E-05	7.8E-05	8.8E-05	9.9E-05	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04
75	6.8E-04	7.6E-04	8.3E-04	8.1E-04	8.4E-04	8.7E-04	9.5E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
76	2.2E-04	2.6E-04	3.0E-04	3.3E-04	3.6E-04	3.9E-04	4.2E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.3E-04
77	1.2E-04	1.4E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04
78	7.9E-04	9.4E-04	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03
79	1.7E-04	2.0E-04	2.2E-04	2.4E-04	2.6E-04	2.8E-04	3.0E-04	3.3E-04	3.5E-04	3.6E-04	3.8E-04	3.8E-04	3.9E-04
80	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
81	2.2E-05	3.1E-05	3.8E-05	4.4E-05	5.2E-05	5.9E-05	6.7E-05	7.5E-05	8.8E-05	9.9E-05	1.1E-04	1.1E-04	1.1E-04
82	4.4E-04	5.2E-04	5.9E-04	6.4E-04	6.9E-04	7.4E-04	8.0E-04	8.6E-04	8.9E-04	9.2E-04	9.4E-04	9.5E-04	9.6E-04
83	3.0E-05	3.6E-05	4.1E-05	4.6E-05	5.1E-05	5.7E-05	6.3E-05	7.0E-05	7.7E-05	8.3E-05	8.7E-05	9.0E-05	9.1E-05
84	2.6E-04	3.0E-04	3.3E-04	3.6E-04	3.8E-04	4.1E-04	4.4E-04	4.7E-04	5.0E-04	5.2E-04	5.3E-04	5.4E-04	5.4E-04
85	-7.8E-05	-8.8E-05	-1.0E-04	-1.2E-04	-1.4E-04	-1.6E-04	-1.7E-04	-1.9E-04	-1.6E-04	-1.4E-04	-1.2E-04	-1.1E-04	-1.0E-04
86	7.4E-04	8.7E-04	9.8E-04	1.1E-03	1.2E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
87	2.6E-05	3.3E-05	3.9E-05	4.4E-05	5.0E-05	5.6E-05	6.3E-05	7.0E-05	7.8E-05	8.5E-05	9.0E-05	9.4E-05	9.6E-05
88	-3.6E-04	-4.2E-04	-4.9E-04	-5.8E-04	-6.8E-04	-7.5E-04	-8.3E-04	-9.0E-04	-8.2E-04	-7.7E-04	-7.2E-04	-6.9E-04	-6.8E-04

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
89	5.9E-04	6.7E-04	7.5E-04	8.0E-04	8.3E-04	8.5E-04	9.3E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
90	1.4E-05	1.7E-05	1.9E-05	2.1E-05	2.3E-05	2.6E-05	2.8E-05	3.2E-05	3.7E-05	4.1E-05	4.5E-05	4.7E-05	4.8E-05
91	1.4E-05	1.7E-05	1.9E-05	2.1E-05	2.4E-05	2.6E-05	2.9E-05	3.2E-05	3.7E-05	4.2E-05	4.5E-05	4.7E-05	4.8E-05
92	3.5E-04	4.1E-04	4.7E-04	5.1E-04	5.5E-04	5.9E-04	6.4E-04	6.9E-04	7.2E-04	7.4E-04	7.6E-04	7.8E-04	7.8E-04
93	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
94	8.1E-05	9.8E-05	1.1E-04	1.3E-04	1.4E-04	1.6E-04	1.7E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04
95	1.4E-05	1.7E-05	1.9E-05	2.1E-05	2.3E-05	2.5E-05	2.8E-05	3.1E-05	3.7E-05	4.1E-05	4.4E-05	4.6E-05	4.8E-05
96	-4.5E-05	-4.6E-05	-5.1E-05	-5.8E-05	-6.6E-05	-7.3E-05	-7.9E-05	-8.3E-05	-5.9E-05	-3.9E-05	-2.4E-05	-1.4E-05	-8.4E-06
97	2.0E-05	2.5E-05	2.9E-05	3.3E-05	3.7E-05	4.1E-05	4.6E-05	5.1E-05	5.8E-05	6.4E-05	6.8E-05	7.1E-05	7.2E-05
98	2.0E-05	2.5E-05	2.9E-05	3.3E-05	3.7E-05	4.1E-05	4.6E-05	5.1E-05	5.8E-05	6.4E-05	6.8E-05	7.1E-05	7.2E-05
99	6.2E-06	1.3E-05	1.9E-05	2.4E-05	2.9E-05	3.4E-05	4.0E-05	4.6E-05	6.2E-05	7.4E-05	8.4E-05	9.0E-05	9.3E-05
100	1.5E-04	1.7E-04	2.0E-04	2.2E-04	2.4E-04	2.5E-04	2.8E-04	3.0E-04	3.2E-04	3.4E-04	3.6E-04	3.7E-04	3.7E-04
101	2.2E-04	2.6E-04	2.9E-04	3.1E-04	3.3E-04	3.5E-04	3.8E-04	4.1E-04	4.2E-04	4.4E-04	4.5E-04	4.5E-04	4.6E-04
102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
599	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
600	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
601	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
602	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
603	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
604	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
605	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
606	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
607	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
608	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
610	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
611	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
612	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
613	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
614	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
615	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
616	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
617	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
618	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
620	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
622	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
623	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
624	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
625	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
626	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
627	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
628	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
630	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
631	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
632	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
633	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
634	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
674	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
680	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
743	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
744	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
762	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
763	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
764	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
765	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
766	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
767	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
768	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
769	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
772	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
774	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
776	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
777	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
778	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
779	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
780	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
781	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
782	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
784	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
785	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
786	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
788	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
789	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
790	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
792	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
808	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
809	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
810	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
811	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
812	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
814	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
815	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
816	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
817	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
818	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
823	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
824	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
825	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
826	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
827	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
828	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
829	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
830	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
831	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
832	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
833	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
834	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
836	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
837	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
838	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
839	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
840	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
841	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
854	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
897	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
916	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
917	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
919	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
920	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
925	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
926	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
928	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
929	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
931	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
938	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
939	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
940	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
941	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
953	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
962	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
963	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
964	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
965	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
966	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
972	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
973	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
974	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
976	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
977	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
990	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
993	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
994	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
995	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
996	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
997	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
998	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
999	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1003	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1004	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1005	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1006	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1007	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1008	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1009	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1010	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1011	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1012	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1013	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1014	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1015	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1016	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1017	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1018	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1019	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1020	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1021	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1023	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1024	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1025	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1026	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1028	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1029	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1030	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1031	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1033	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1034	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1035	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1036	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1042	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1043	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1044	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1045	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1046	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1047	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1052	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1053	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1054	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1055	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1056	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1067	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1068	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1071	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1072	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1097	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1098	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1099	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1599	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1600	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1601	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1602	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1603	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1604	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1605	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1606	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1607	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1608	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1610	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1611	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1612	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1613	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1614	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1615	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1616	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1617	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1618	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1620	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1622	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1623	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1624	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1625	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1626	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1627	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1628	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1630	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1631	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1632	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1633	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1634	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1674	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1680	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1743	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1744	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1762	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1763	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1764	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1765	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1766	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1767	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1768	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1769	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1772	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1774	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1776	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1777	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1778	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1779	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1780	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1781	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1782	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1784	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1785	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1786	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1788	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1789	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1790	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1792	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1808	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1809	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1810	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1811	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1812	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1814	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1815	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1816	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1817	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1818	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1823	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1824	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1825	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1826	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1827	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1828	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1829	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1830	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1831	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1832	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1833	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1834	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1836	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1837	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1838	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1839	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1840	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1841	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1854	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1897	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1916	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1917	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1919	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1920	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1925	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1926	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1928	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1929	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1931	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1938	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1939	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1940	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1941	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1953	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1962	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1963	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1964	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1965	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1966	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1972	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1973	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1974	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1976	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1977	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
1981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1990	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1993	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1994	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1995	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1996	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1997	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1998	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1999	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2003	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2004	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2005	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2006	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2007	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2008	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2009	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2010	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2011	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2012	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2013	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2014	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2015	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2016	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2017	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2018	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2019	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2020	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2021	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2023	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2024	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2025	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2026	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2028	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2029	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2030	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2031	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2033	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2034	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2035	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2036	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2042	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2043	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2044	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2045	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2046	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2047	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2052	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2053	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2054	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2055	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2056	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2067	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2068	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2071	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2072	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2097	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2098	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2099	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2599	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2600	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2601	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2602	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2603	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2604	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2605	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2606	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2607	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2608	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2610	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2611	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2612	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2613	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2614	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2615	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2616	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2617	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2618	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2620	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2622	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2623	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2624	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2625	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2626	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2627	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2628	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2630	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2631	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2632	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2633	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2634	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2674	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2680	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2743	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2744	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2762	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2763	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2764	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2765	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2766	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2767	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2768	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2769	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2772	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2774	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2776	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2777	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2778	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2779	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2780	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2781	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2782	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2784	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2785	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2786	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2788	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2789	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2790	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2792	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2808	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2809	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2810	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2811	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2812	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2814	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2815	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2816	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2817	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2818	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2823	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2824	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2825	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2826	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2827	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2828	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2829	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2830	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2831	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2832	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2833	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2834	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2836	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2837	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2838	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2839	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2840	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2841	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2854	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2897	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2916	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2917	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2919	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2920	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2925	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2926	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2928	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2929	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2931	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2938	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2939	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2940	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2941	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2953	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2962	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2963	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2964	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2965	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2966	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2972	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2973	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2974	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2976	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2977	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2990	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
2993	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2994	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2995	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2996	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2997	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2998	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2999	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3003	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3004	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3005	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3006	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3007	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3008	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3009	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3010	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3011	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3012	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3013	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3014	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3015	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3016	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3017	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3018	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3019	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3020	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3021	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3023	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3024	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3025	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3026	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3028	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3029	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3030	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3031	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3033	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3034	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3035	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3036	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3042	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3043	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3044	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3045	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3046	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3047	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3052	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3053	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3054	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3055	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3056	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3067	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3068	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3071	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3072	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3097	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3098	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3099	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Child School												
	2025-2036	2026-2037	2027-2038	2028-2039	2029-2040	2030-2041	2031-2042	2032-2043	2033-2044	2034-2045	2035-2046	2036-2047	2037-2048
3565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.3E-04	4.4E-04	4.4E-04
2	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
3	3.3E-03	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.4E-03	4.5E-03	4.5E-03	4.5E-03
4	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03
5	4.2E-04	4.4E-04	4.6E-04	4.8E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.8E-04	5.9E-04	5.9E-04
6	3.6E-05	3.8E-05	3.9E-05	3.8E-05	3.7E-05	3.6E-05	3.6E-05	3.7E-05	4.6E-05	5.4E-05	6.0E-05	6.4E-05	6.6E-05
7	3.2E-05	3.4E-05	3.4E-05	3.2E-05	2.9E-05	2.7E-05	2.7E-05	2.7E-05	3.9E-05	4.9E-05	5.7E-05	6.2E-05	6.4E-05
8	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04
9	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.3E-04	5.5E-04	5.6E-04	5.7E-04	5.8E-04	5.9E-04	5.9E-04
10	4.4E-05	4.7E-05	4.8E-05	4.8E-05	4.8E-05	4.8E-05	4.9E-05	5.0E-05	5.8E-05	6.4E-05	6.9E-05	7.3E-05	7.4E-05
11	2.1E-05	2.3E-05	2.3E-05	2.2E-05	2.0E-05	1.9E-05	1.9E-05	1.9E-05	3.3E-05	4.5E-05	5.4E-05	6.0E-05	6.3E-05
12	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
13	4.9E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04	6.8E-04	6.9E-04
14	8.8E-05	9.3E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
15	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03
16	8.8E-05	9.3E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
17	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
18	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
19	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04
20	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
21	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04
22	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
23	4.4E-04	4.6E-04	4.8E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	6.0E-04	6.0E-04	6.1E-04
24	4.8E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04
25	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.1E-04	5.1E-04	5.2E-04	5.2E-04
26	4.5E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.3E-04	6.4E-04	6.4E-04
27	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
28	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
29	4.2E-04	4.5E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.3E-04	5.5E-04	5.6E-04	5.7E-04	5.8E-04	5.9E-04	5.9E-04
30	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
31	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.4E-04
32	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.2E-04	7.3E-04	7.3E-04	7.4E-04	7.4E-04
33	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
34	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
35	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.7E-04
36	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
37	5.5E-05	5.8E-05	6.0E-05	6.1E-05	6.3E-05	6.6E-05	6.8E-05	7.1E-05	7.5E-05	7.8E-05	8.1E-05	8.2E-05	8.3E-05
38	5.4E-05	5.7E-05	5.8E-05	5.7E-05	5.6E-05	5.5E-05	5.6E-05	5.7E-05	6.6E-05	7.4E-05	8.0E-05	8.4E-05	8.5E-05
39	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
40	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.3E-04
41	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
42	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
43	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04	2.3E-04
44	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
45	8.7E-05	9.1E-05	9.3E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
46	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
47	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
48	6.5E-04	6.9E-04	7.2E-04	7.4E-04	7.6E-04	7.9E-04	8.1E-04	8.4E-04	8.6E-04	8.7E-04	8.8E-04	8.9E-04	9.0E-04
49	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.3E-04	7.5E-04	7.7E-04	7.8E-04	7.9E-04	8.0E-04	8.0E-04
50	-1.6E-05	-1.8E-05	-2.1E-05	-2.7E-05	-3.3E-05	-3.8E-05	-4.2E-05	-4.6E-05	-3.5E-05	-2.7E-05	-2.1E-05	-1.6E-05	-1.4E-05
51	7.2E-04	7.6E-04	7.9E-04	8.1E-04	8.4E-04	8.6E-04	8.9E-04	9.2E-04	9.4E-04	9.7E-04	9.8E-04	9.9E-04	1.0E-03
52	7.2E-04	7.6E-04	7.9E-04	8.1E-04	8.3E-04	8.6E-04	8.9E-04	9.1E-04	9.3E-04	9.5E-04	9.7E-04	9.8E-04	9.8E-04
53	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.8E-04
54	5.7E-04	6.0E-04	6.2E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.3E-04	7.5E-04	7.6E-04	7.8E-04	7.8E-04	7.9E-04
55	6.7E-05	7.2E-05	7.5E-05	7.6E-05	7.8E-05	8.0E-05	8.3E-05	8.6E-05	9.7E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04
56	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03
57	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04	2.6E-04
58	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
59	6.3E-04	6.7E-04	7.0E-04	7.2E-04	7.5E-04	7.7E-04	8.0E-04	8.3E-04	8.5E-04	8.7E-04	8.8E-04	8.9E-04	9.0E-04
60	9.0E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
61	5.3E-05	5.7E-05	5.9E-05	6.1E-05	6.2E-05	6.3E-05	6.6E-05	6.8E-05	8.0E-05	9.0E-05	9.8E-05	1.0E-04	1.1E-04
62	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03
63	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.2E-04	7.5E-04	7.7E-04	7.8E-04	7.9E-04	8.0E-04	8.0E-04
64	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
65	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03
66	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03
67	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04
68	3.8E-05	4.1E-05	4.1E-05	4.1E-05	4.0E-05	4.0E-05	4.0E-05	4.1E-05	5.0E-05	5.7E-05	6.3E-05	6.6E-05	6.8E-05
69	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
70	7.2E-04	7.6E-04	7.9E-04	8.1E-04	8.3E-04	8.6E-04	8.9E-04	9.2E-04	9.4E-04	9.5E-04	9.7E-04	9.8E-04	9.8E-04
71	-9.0E-06	-9.0E-06	-1.1E-05	-1.5E-05	-2.0E-05	-2.4E-05	-2.7E-05	-2.9E-05	-1.4E-05	-2.0E-06	7.3E-06	1.4E-05	1.7E-05
72	4.8E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04
73	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03	3.7E-03
74	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
75	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
76	5.8E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	7.0E-04	7.2E-04	7.5E-04	7.6E-04	7.8E-04	7.9E-04	7.9E-04	8.0E-04
77	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.1E-04
78	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03
79	4.3E-04	4.5E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.3E-04	5.4E-04	5.6E-04	5.7E-04	5.8E-04	5.8E-04	5.9E-04
80	4.3E-05	4.5E-05	4.6E-05	4.7E-05	4.9E-05	5.0E-05	5.2E-05	5.4E-05	5.8E-05	6.1E-05	6.3E-05	6.5E-05	6.6E-05
81	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
82	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03
83	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
84	6.2E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.2E-04	7.5E-04	7.7E-04	7.9E-04	8.0E-04	8.1E-04	8.2E-04	8.2E-04
85	-1.4E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.8E-04	-2.0E-04	-2.1E-04	-2.2E-04	-2.0E-04	-1.8E-04	-1.7E-04	-1.6E-04	-1.6E-04
86	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03
87	9.4E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04
88	-7.9E-04	-8.4E-04	-8.9E-04	-9.6E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
89	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03
90	4.8E-05	5.0E-05	5.2E-05	5.3E-05	5.5E-05	5.6E-05	5.8E-05	6.1E-05	6.4E-05	6.8E-05	7.0E-05	7.2E-05	7.2E-05
91	4.8E-05	5.1E-05	5.2E-05	5.3E-05	5.5E-05	5.7E-05	5.9E-05	6.1E-05	6.5E-05	6.8E-05	7.1E-05	7.2E-05	7.3E-05
92	8.7E-04	9.1E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
93	9.2E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
94	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.5E-04
95	4.8E-05	5.0E-05	5.1E-05	5.3E-05	5.4E-05	5.6E-05	5.8E-05	6.0E-05	6.4E-05	6.7E-05	7.0E-05	7.1E-05	7.2E-05
96	-3.9E-05	-4.0E-05	-4.4E-05	-4.9E-05	-5.5E-05	-6.0E-05	-6.4E-05	-6.7E-05	-5.0E-05	-3.5E-05	-2.4E-05	-1.6E-05	-1.3E-05
97	7.1E-05	7.5E-05	7.8E-05	8.1E-05	8.4E-05	8.7E-05	9.0E-05	9.4E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
98	7.1E-05	7.5E-05	7.8E-05	8.1E-05	8.4E-05	8.7E-05	9.0E-05	9.4E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
99	7.8E-05	8.3E-05	8.7E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
100	4.0E-04	4.2E-04	4.4E-04	4.5E-04	4.6E-04	4.8E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.6E-04	5.6E-04
101	5.2E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.1E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04	6.9E-04	6.9E-04	6.9E-04
102	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.3E-03	5.5E-03	5.5E-03	5.6E-03	5.6E-03	5.6E-03	5.6E-03
103	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.4E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03	5.5E-03
104	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.3E-03	5.4E-03	5.4E-03	5.4E-03
105	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	5.0E-03	5.0E-03	5.1E-03	5.1E-03	5.1E-03	5.1E-03
106	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03	4.9E-03	4.9E-03
107	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.6E-03	4.7E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03	4.8E-03
108	3.5E-03	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.5E-03	4.5E-03	4.6E-03	4.6E-03	4.6E-03
109	5.3E-04	5.4E-04	4.9E-04	3.5E-04	2.1E-04	1.8E-04	1.8E-04	1.8E-04	2.5E-04	3.1E-04	3.6E-04	3.9E-04	4.0E-04
110	5.6E-04	5.8E-04	5.2E-04	3.9E-04	2.5E-04	2.1E-04	2.1E-04	2.2E-04	2.9E-04	3.6E-04	4.1E-04	4.4E-04	4.6E-04
111	3.5E-04	3.6E-04	3.0E-04	1.9E-04	6.6E-05	3.0E-05	2.5E-05	2.0E-05	1.0E-04	1.7E-04	2.2E-04	2.6E-04	2.7E-04
112	7.1E-04	7.3E-04	6.8E-04	5.5E-04	4.2E-04	3.9E-04	4.0E-04	4.1E-04	4.8E-04	5.5E-04	6.0E-04	6.3E-04	6.5E-04
113	4.9E-04	5.0E-04	4.6E-04	3.5E-04	2.3E-04	2.0E-04	2.0E-04	2.1E-04	2.9E-04	3.6E-04	4.1E-04	4.4E-04	4.6E-04
114	9.1E-04	9.4E-04	9.0E-04	7.8E-04	6.5E-04	6.3E-04	6.5E-04	6.7E-04	7.5E-04	8.2E-04	8.7E-04	9.1E-04	9.2E-04
115	6.8E-04	7.0E-04	6.7E-04	5.7E-04	4.7E-04	4.5E-04	4.6E-04	4.7E-04	5.5E-04	6.2E-04	6.7E-04	7.1E-04	7.2E-04
116	6.1E-04	6.4E-04	6.2E-04	5.5E-04	4.8E-04	4.6E-04	4.7E-04	4.9E-04	5.5E-04	6.1E-04	6.6E-04	6.9E-04	7.0E-04
117	1.2E-03	1.2E-03	1.2E-03	1.1E-03	9.8E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
118	9.3E-04	9.7E-04	9.5E-04	8.6E-04	7.8E-04	7.7E-04	7.9E-04	8.2E-04	9.0E-04	9.7E-04	1.0E-03	1.1E-03	1.1E-03
119	8.5E-04	8.9E-04	8.8E-04	8.2E-04	7.6E-04	7.6E-04	7.8E-04	8.1E-04	8.8E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03
120	1.5E-03	1.6E-03	1.6E-03	1.5E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03
121	1.2E-03	1.3E-03	1.3E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
122	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
123	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
124	1.9E-03	2.0E-03	2.1E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03
125	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03
126	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03
127	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
128	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03
129	2.1E-03	2.2E-03	2.3E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03
130	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03
131	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03
132	3.1E-03	3.3E-03	3.4E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.2E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
133	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03	3.5E-03
134	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03
135	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
136	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.1E-03	5.1E-03	5.2E-03
137	3.1E-03	3.3E-03	3.4E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03	4.2E-03	4.2E-03
138	2.6E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03	3.6E-03
139	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03
140	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03
141	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03
142	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03
143	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03
144	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.1E-03	6.3E-03	6.6E-03	6.7E-03	6.8E-03	6.8E-03	6.9E-03	6.9E-03
145	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03
146	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.6E-03	4.6E-03	4.6E-03
147	2.9E-03	3.0E-03	3.2E-03	3.2E-03	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03
148	5.6E-03	5.9E-03	6.1E-03	6.3E-03	6.5E-03	6.7E-03	7.0E-03	7.3E-03	7.4E-03	7.5E-03	7.6E-03	7.6E-03	7.6E-03
149	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03
150	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03
151	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.1E-03	4.2E-03	4.2E-03	4.2E-03
152	6.0E-03	6.3E-03	6.6E-03	6.8E-03	7.0E-03	7.3E-03	7.6E-03	7.9E-03	8.0E-03	8.1E-03	8.2E-03	8.2E-03	8.2E-03
153	4.7E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.2E-03	6.3E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03
154	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.2E-03	5.3E-03	5.3E-03	5.3E-03
155	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.4E-03	4.5E-03	4.5E-03	4.5E-03
156	6.3E-03	6.7E-03	7.0E-03	7.2E-03	7.4E-03	7.7E-03	8.0E-03	8.3E-03	8.5E-03	8.6E-03	8.6E-03	8.7E-03	8.7E-03
157	5.0E-03	5.2E-03	5.5E-03	5.6E-03	5.8E-03	6.0E-03	6.3E-03	6.5E-03	6.6E-03	6.7E-03	6.8E-03	6.8E-03	6.8E-03
158	4.1E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.5E-03	5.6E-03	5.6E-03	5.6E-03
159	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03	4.8E-03
160	6.6E-03	6.9E-03	7.2E-03	7.5E-03	7.7E-03	8.0E-03	8.4E-03	8.7E-03	8.8E-03	8.9E-03	9.0E-03	9.0E-03	9.0E-03
161	5.2E-03	5.5E-03	5.7E-03	5.9E-03	6.1E-03	6.3E-03	6.6E-03	6.8E-03	6.9E-03	7.0E-03	7.1E-03	7.1E-03	7.1E-03
162	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03	5.8E-03	5.8E-03	5.9E-03
163	3.6E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	5.0E-03	5.0E-03
164	6.7E-03	7.0E-03	7.3E-03	7.6E-03	7.9E-03	8.1E-03	8.5E-03	8.8E-03	8.9E-03	9.0E-03	9.1E-03	9.1E-03	9.2E-03
165	5.4E-03	5.7E-03	5.9E-03	6.1E-03	6.3E-03	6.6E-03	6.8E-03	7.1E-03	7.2E-03	7.3E-03	7.4E-03	7.4E-03	7.4E-03
166	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.1E-03	6.2E-03
167	3.8E-03	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.1E-03	5.2E-03	5.2E-03	5.2E-03
168	9.3E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
169	6.7E-03	7.0E-03	7.3E-03	7.6E-03	7.9E-03	8.2E-03	8.5E-03	8.8E-03	8.9E-03	9.0E-03	9.1E-03	9.1E-03	9.2E-03
170	5.5E-03	5.8E-03	6.1E-03	6.3E-03	6.5E-03	6.8E-03	7.0E-03	7.3E-03	7.4E-03	7.5E-03	7.6E-03	7.6E-03	7.6E-03
171	4.6E-03	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.1E-03	6.2E-03	6.3E-03	6.3E-03	6.4E-03	6.4E-03
172	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03
173	8.7E-03	9.2E-03	9.6E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
174	6.6E-03	7.0E-03	7.3E-03	7.6E-03	7.8E-03	8.1E-03	8.4E-03	8.8E-03	8.9E-03	9.0E-03	9.0E-03	9.1E-03	9.1E-03
175	5.7E-03	6.0E-03	6.3E-03	6.5E-03	6.7E-03	6.9E-03	7.2E-03	7.5E-03	7.6E-03	7.7E-03	7.8E-03	7.8E-03	7.8E-03
176	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.1E-03	6.4E-03	6.5E-03	6.5E-03	6.6E-03	6.6E-03	6.7E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
177	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03	5.7E-03	5.7E-03
178	8.6E-03	9.0E-03	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
179	6.6E-03	6.9E-03	7.2E-03	7.5E-03	7.7E-03	8.0E-03	8.3E-03	8.7E-03	8.8E-03	8.9E-03	8.9E-03	9.0E-03	9.0E-03
180	5.8E-03	6.1E-03	6.4E-03	6.6E-03	6.8E-03	7.1E-03	7.3E-03	7.6E-03	7.7E-03	7.8E-03	7.9E-03	7.9E-03	7.9E-03
181	4.9E-03	5.2E-03	5.4E-03	5.6E-03	5.8E-03	6.0E-03	6.3E-03	6.5E-03	6.6E-03	6.7E-03	6.7E-03	6.8E-03	6.8E-03
182	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
183	8.4E-03	8.8E-03	9.3E-03	9.6E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02
184	6.4E-03	6.8E-03	7.1E-03	7.3E-03	7.6E-03	7.8E-03	8.2E-03	8.5E-03	8.6E-03	8.7E-03	8.7E-03	8.8E-03	8.8E-03
185	5.8E-03	6.1E-03	6.4E-03	6.6E-03	6.8E-03	7.1E-03	7.3E-03	7.6E-03	7.7E-03	7.8E-03	7.9E-03	7.9E-03	7.9E-03
186	5.0E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.1E-03	6.4E-03	6.6E-03	6.7E-03	6.8E-03	6.8E-03	6.9E-03	6.9E-03
187	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.7E-02
188	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
189	8.1E-03	8.5E-03	8.9E-03	9.3E-03	9.6E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
190	6.2E-03	6.6E-03	6.9E-03	7.1E-03	7.4E-03	7.6E-03	7.9E-03	8.2E-03	8.3E-03	8.4E-03	8.5E-03	8.5E-03	8.5E-03
191	5.7E-03	6.0E-03	6.3E-03	6.5E-03	6.8E-03	7.0E-03	7.3E-03	7.5E-03	7.6E-03	7.7E-03	7.8E-03	7.8E-03	7.9E-03
192	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02
193	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
194	9.3E-03	9.8E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02
195	7.8E-03	8.3E-03	8.6E-03	9.0E-03	9.3E-03	9.6E-03	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
196	7.2E-03	7.6E-03	8.0E-03	8.3E-03	8.5E-03	8.8E-03	9.2E-03	9.5E-03	9.6E-03	9.7E-03	9.8E-03	9.8E-03	9.9E-03
197	5.7E-03	6.0E-03	6.3E-03	6.5E-03	6.8E-03	7.0E-03	7.3E-03	7.5E-03	7.6E-03	7.7E-03	7.8E-03	7.8E-03	7.9E-03
198	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.7E-02
199	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
200	8.9E-03	9.3E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
201	7.5E-03	7.9E-03	8.3E-03	8.6E-03	8.8E-03	9.2E-03	9.5E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
202	6.8E-03	7.1E-03	7.5E-03	7.8E-03	8.0E-03	8.3E-03	8.6E-03	8.9E-03	9.0E-03	9.1E-03	9.2E-03	9.3E-03	9.3E-03
203	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02
204	1.1E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
205	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02
206	8.8E-03	9.3E-03	9.7E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
207	7.6E-03	8.0E-03	8.4E-03	8.7E-03	9.0E-03	9.3E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
208	6.7E-03	7.0E-03	7.3E-03	7.6E-03	7.9E-03	8.1E-03	8.4E-03	8.7E-03	8.8E-03	8.9E-03	9.0E-03	9.0E-03	9.0E-03
209	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02
210	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02
211	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
212	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02
213	9.7E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
214	8.4E-03	8.9E-03	9.3E-03	9.6E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
215	7.3E-03	7.6E-03	8.0E-03	8.3E-03	8.5E-03	8.8E-03	9.1E-03	9.4E-03	9.6E-03	9.7E-03	9.7E-03	9.8E-03	9.8E-03
216	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02
217	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02
218	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
219	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
220	9.5E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
221	8.3E-03	8.8E-03	9.2E-03	9.5E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
222	7.3E-03	7.7E-03	8.0E-03	8.3E-03	8.6E-03	8.9E-03	9.2E-03	9.5E-03	9.6E-03	9.7E-03	9.7E-03	9.8E-03	9.8E-03
223	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02
224	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
225	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02
226	9.2E-03	9.7E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
227	8.2E-03	8.6E-03	9.0E-03	9.3E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
228	7.2E-03	7.6E-03	7.9E-03	8.2E-03	8.5E-03	8.7E-03	9.0E-03	9.3E-03	9.4E-03	9.5E-03	9.6E-03	9.6E-03	9.6E-03
229	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
230	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
231	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
232	9.0E-03	9.5E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
233	8.0E-03	8.4E-03	8.8E-03	9.1E-03	9.4E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02
234	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
235	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
236	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
237	8.9E-03	9.3E-03	9.7E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
238	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
239	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
240	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02
241	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02
242	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02
243	9.5E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
244	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
245	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
246	9.4E-03	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
247	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02
248	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
249	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02
250	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02
251	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
252	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
253	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
254	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
255	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
256	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
257	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
258	9.4E-03	9.8E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
259	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
260	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
261	9.2E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
262	1.7E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02
263	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
264	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
265	9.0E-03	9.3E-03	9.7E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
266	1.8E-02	1.8E-02	1.9E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02
267	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
268	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
269	8.9E-03	9.2E-03	9.5E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02
270	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02
271	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
272	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
273	8.8E-03	9.1E-03	9.4E-03	9.7E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
274	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.7E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
275	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
276	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
277	8.6E-03	9.0E-03	9.3E-03	9.5E-03	9.7E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
278	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
279	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
280	9.9E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
281	8.5E-03	8.8E-03	9.1E-03	9.3E-03	9.5E-03	9.6E-03	9.7E-03	9.9E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
282	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
283	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
284	9.5E-03	9.9E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
285	8.2E-03	8.6E-03	8.8E-03	9.1E-03	9.2E-03	9.3E-03	9.4E-03	9.6E-03	9.5E-03	9.6E-03	9.7E-03	9.7E-03	9.7E-03
286	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
287	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
288	9.1E-03	9.5E-03	9.8E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
289	8.0E-03	8.3E-03	8.6E-03	8.8E-03	8.9E-03	9.0E-03	9.1E-03	9.3E-03	9.2E-03	9.3E-03	9.3E-03	9.4E-03	9.4E-03
290	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02
291	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
292	8.8E-03	9.1E-03	9.4E-03	9.6E-03	9.7E-03	9.7E-03	9.8E-03	9.9E-03	9.9E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02
293	7.7E-03	8.0E-03	8.3E-03	8.5E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	8.9E-03	9.0E-03	9.0E-03	9.0E-03	9.1E-03
294	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.2E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
295	9.6E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02
296	8.4E-03	8.7E-03	9.0E-03	9.2E-03	9.3E-03	9.4E-03	9.4E-03	9.5E-03	9.5E-03	9.6E-03	9.6E-03	9.6E-03	9.6E-03
297	7.4E-03	7.7E-03	8.0E-03	8.2E-03	8.3E-03	8.4E-03	8.5E-03	8.6E-03	8.6E-03	8.7E-03	8.7E-03	8.7E-03	8.8E-03
298	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
299	9.2E-03	9.5E-03	9.7E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
300	8.1E-03	8.4E-03	8.6E-03	8.8E-03	8.9E-03	9.0E-03	9.1E-03	9.2E-03	9.1E-03	9.2E-03	9.3E-03	9.3E-03	9.3E-03
301	7.2E-03	7.5E-03	7.7E-03	7.9E-03	8.0E-03	8.1E-03	8.2E-03	8.4E-03	8.3E-03	8.4E-03	8.4E-03	8.5E-03	8.5E-03
302	9.9E-03	1.0E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
303	8.7E-03	9.0E-03	9.3E-03	9.5E-03	9.6E-03	9.6E-03	9.6E-03	9.7E-03	9.6E-03	9.7E-03	9.8E-03	9.8E-03	9.8E-03
304	7.7E-03	8.0E-03	8.3E-03	8.5E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	8.9E-03	8.9E-03	9.0E-03	9.0E-03	9.0E-03
305	9.3E-03	9.6E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02	1.0E-02
306	8.3E-03	8.6E-03	8.8E-03	9.0E-03	9.1E-03	9.2E-03	9.3E-03	9.4E-03	9.3E-03	9.4E-03	9.4E-03	9.5E-03	9.5E-03
307	7.4E-03	7.7E-03	7.9E-03	8.1E-03	8.3E-03	8.4E-03	8.5E-03	8.6E-03	8.6E-03	8.6E-03	8.7E-03	8.7E-03	8.7E-03
308	8.7E-03	9.0E-03	9.3E-03	9.5E-03	9.6E-03	9.7E-03	9.8E-03	9.9E-03	9.8E-03	9.9E-03	9.9E-03	1.0E-02	1.0E-02

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
309	7.8E-03	8.2E-03	8.4E-03	8.6E-03	8.7E-03	8.8E-03	8.9E-03	9.1E-03	9.0E-03	9.1E-03	9.1E-03	9.2E-03	9.2E-03
310	8.2E-03	8.5E-03	8.8E-03	9.0E-03	9.1E-03	9.3E-03	9.4E-03	9.5E-03	9.5E-03	9.6E-03	9.6E-03	9.6E-03	9.6E-03
311	7.5E-03	7.8E-03	8.0E-03	8.3E-03	8.4E-03	8.5E-03	8.6E-03	8.8E-03	8.7E-03	8.8E-03	8.8E-03	8.9E-03	8.9E-03
312	7.7E-03	8.0E-03	8.3E-03	8.6E-03	8.7E-03	8.8E-03	9.0E-03	9.2E-03	9.2E-03	9.2E-03	9.3E-03	9.3E-03	9.3E-03
313	7.1E-03	7.4E-03	7.7E-03	7.9E-03	8.0E-03	8.2E-03	8.3E-03	8.5E-03	8.5E-03	8.5E-03	8.5E-03	8.6E-03	8.6E-03
314	6.5E-03	6.8E-03	7.1E-03	7.3E-03	7.4E-03	7.5E-03	7.7E-03	7.8E-03	7.8E-03	7.9E-03	7.9E-03	7.9E-03	7.9E-03
315	7.3E-03	7.6E-03	7.9E-03	8.1E-03	8.3E-03	8.4E-03	8.6E-03	8.8E-03	8.8E-03	8.9E-03	8.9E-03	8.9E-03	9.0E-03
316	6.8E-03	7.1E-03	7.3E-03	7.5E-03	7.7E-03	7.8E-03	8.0E-03	8.2E-03	8.2E-03	8.2E-03	8.3E-03	8.3E-03	8.3E-03
317	6.3E-03	6.5E-03	6.8E-03	7.0E-03	7.1E-03	7.3E-03	7.4E-03	7.6E-03	7.6E-03	7.6E-03	7.7E-03	7.7E-03	7.7E-03
318	5.8E-03	6.0E-03	6.3E-03	6.5E-03	6.6E-03	6.7E-03	6.9E-03	7.0E-03	7.0E-03	7.1E-03	7.1E-03	7.1E-03	7.1E-03
319	5.3E-03	5.6E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03	6.4E-03	6.5E-03	6.5E-03	6.6E-03	6.6E-03	6.6E-03	6.6E-03
320	6.9E-03	7.2E-03	7.5E-03	7.7E-03	7.9E-03	8.1E-03	8.3E-03	8.5E-03	8.5E-03	8.5E-03	8.6E-03	8.6E-03	8.6E-03
321	6.4E-03	6.7E-03	7.0E-03	7.2E-03	7.4E-03	7.5E-03	7.7E-03	7.9E-03	7.9E-03	7.9E-03	8.0E-03	8.0E-03	8.0E-03
322	6.0E-03	6.3E-03	6.5E-03	6.7E-03	6.9E-03	7.0E-03	7.2E-03	7.3E-03	7.3E-03	7.4E-03	7.4E-03	7.4E-03	7.5E-03
323	5.6E-03	5.8E-03	6.1E-03	6.2E-03	6.4E-03	6.5E-03	6.7E-03	6.8E-03	6.8E-03	6.9E-03	6.9E-03	6.9E-03	6.9E-03
324	5.2E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.2E-03	6.3E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03	6.5E-03
325	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.7E-03	5.9E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03	6.0E-03
326	5.0E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.9E-03	6.0E-03	6.2E-03	6.2E-03	6.2E-03	6.3E-03	6.3E-03	6.3E-03
327	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.8E-03	5.8E-03	5.8E-03	5.8E-03	5.9E-03	5.9E-03
328	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.2E-03	5.4E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03	5.5E-03
329	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03	6.1E-03	6.1E-03
330	4.5E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.5E-03	5.6E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03	5.7E-03
331	4.2E-03	4.4E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03	5.1E-03	5.3E-03	5.3E-03	5.3E-03	5.4E-03	5.4E-03	5.4E-03
332	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03
333	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03	5.3E-03	5.5E-03	5.5E-03	5.5E-03	5.6E-03	5.6E-03	5.6E-03
334	4.1E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.2E-03	5.2E-03	5.2E-03	5.2E-03	5.3E-03	5.3E-03
335	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	4.9E-03	5.0E-03	5.0E-03
336	4.5E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.4E-03	5.5E-03	5.7E-03	5.7E-03	5.7E-03	5.8E-03	5.8E-03	5.8E-03
337	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.4E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03
338	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.1E-03	5.1E-03	5.1E-03	5.1E-03	5.2E-03
339	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.6E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03
340	4.4E-03	4.6E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.5E-03	5.5E-03	5.6E-03	5.6E-03	5.6E-03	5.6E-03
341	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.2E-03	5.3E-03	5.3E-03	5.3E-03	5.3E-03
342	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03	5.0E-03
343	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.7E-03	4.7E-03	4.7E-03	4.8E-03	4.8E-03
344	4.3E-03	4.5E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03
345	4.0E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.1E-03	5.1E-03	5.1E-03	5.2E-03	5.2E-03	5.2E-03
346	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03	4.9E-03	4.9E-03
347	3.6E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.6E-03	4.6E-03	4.6E-03	4.7E-03	4.7E-03
348	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03	5.2E-03	5.2E-03	5.3E-03	5.3E-03	5.3E-03	5.3E-03
349	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03	5.0E-03	5.1E-03
350	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.6E-03	4.7E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03	4.8E-03
351	7.9E-03	8.2E-03	8.6E-03	8.9E-03	9.1E-03	9.3E-03	9.6E-03	9.8E-03	9.9E-03	1.0E-02	1.0E-02	1.0E-02	1.0E-02
352	7.8E-03	8.2E-03	8.5E-03	8.8E-03	9.0E-03	9.2E-03	9.4E-03	9.7E-03	9.7E-03	9.8E-03	9.9E-03	9.9E-03	9.9E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
353	7.7E-03	8.1E-03	8.4E-03	8.7E-03	8.9E-03	9.1E-03	9.3E-03	9.6E-03	9.6E-03	9.7E-03	9.7E-03	9.8E-03	9.8E-03
354	7.7E-03	8.0E-03	8.3E-03	8.6E-03	8.8E-03	9.0E-03	9.2E-03	9.4E-03	9.5E-03	9.5E-03	9.6E-03	9.6E-03	9.6E-03
355	7.6E-03	8.0E-03	8.3E-03	8.5E-03	8.7E-03	8.9E-03	9.1E-03	9.3E-03	9.3E-03	9.4E-03	9.5E-03	9.5E-03	9.5E-03
356	7.6E-03	7.9E-03	8.2E-03	8.5E-03	8.6E-03	8.8E-03	9.0E-03	9.2E-03	9.2E-03	9.3E-03	9.3E-03	9.4E-03	9.4E-03
357	7.4E-03	7.7E-03	8.0E-03	8.3E-03	8.5E-03	8.6E-03	8.8E-03	9.0E-03	9.0E-03	9.1E-03	9.1E-03	9.2E-03	9.2E-03
358	7.3E-03	7.6E-03	7.9E-03	8.1E-03	8.3E-03	8.4E-03	8.6E-03	8.8E-03	8.8E-03	8.8E-03	8.9E-03	8.9E-03	8.9E-03
359	6.8E-03	7.1E-03	7.4E-03	7.6E-03	7.8E-03	7.9E-03	8.0E-03	8.2E-03	8.2E-03	8.3E-03	8.3E-03	8.4E-03	8.4E-03
360	6.7E-03	7.0E-03	7.2E-03	7.5E-03	7.6E-03	7.7E-03	7.9E-03	8.0E-03	8.0E-03	8.1E-03	8.1E-03	8.2E-03	8.2E-03
361	6.6E-03	6.9E-03	7.2E-03	7.4E-03	7.5E-03	7.6E-03	7.8E-03	7.9E-03	7.9E-03	8.0E-03	8.0E-03	8.1E-03	8.1E-03
362	6.5E-03	6.8E-03	7.0E-03	7.2E-03	7.3E-03	7.5E-03	7.6E-03	7.7E-03	7.7E-03	7.8E-03	7.8E-03	7.9E-03	7.9E-03
363	6.4E-03	6.6E-03	6.9E-03	7.1E-03	7.2E-03	7.3E-03	7.4E-03	7.6E-03	7.6E-03	7.6E-03	7.7E-03	7.7E-03	7.7E-03
364	6.2E-03	6.5E-03	6.7E-03	6.9E-03	7.0E-03	7.2E-03	7.3E-03	7.4E-03	7.4E-03	7.5E-03	7.5E-03	7.6E-03	7.6E-03
365	6.1E-03	6.3E-03	6.6E-03	6.8E-03	6.9E-03	7.0E-03	7.1E-03	7.3E-03	7.3E-03	7.3E-03	7.4E-03	7.4E-03	7.4E-03
366	-7.0E-05	-8.1E-05	-1.3E-04	-2.3E-04	-3.2E-04	-3.7E-04	-3.9E-04	-4.1E-04	-3.4E-04	-2.8E-04	-2.4E-04	-2.1E-04	-2.0E-04
367	1.1E-04	1.0E-04	4.5E-05	-6.5E-05	-1.8E-04	-2.2E-04	-2.4E-04	-2.5E-04	-1.8E-04	-1.3E-04	-8.1E-05	-5.2E-05	-3.7E-05
368	3.4E-05	2.7E-05	-2.7E-05	-1.3E-04	-2.4E-04	-2.8E-04	-3.0E-04	-3.1E-04	-2.5E-04	-1.9E-04	-1.4E-04	-1.1E-04	-9.8E-05
369	-5.7E-05	-6.7E-05	-1.2E-04	-2.0E-04	-2.9E-04	-3.3E-04	-3.6E-04	-3.8E-04	-3.2E-04	-2.6E-04	-2.3E-04	-2.0E-04	-1.9E-04
370	2.2E-04	2.2E-04	1.6E-04	4.0E-05	-8.6E-05	-1.3E-04	-1.4E-04	-1.5E-04	-8.1E-05	-2.0E-05	2.6E-05	5.6E-05	7.1E-05
371	1.2E-04	1.2E-04	6.1E-05	-5.0E-05	-1.6E-04	-2.0E-04	-2.2E-04	-2.3E-04	-1.6E-04	-9.8E-05	-5.1E-05	-2.0E-05	-4.2E-06
372	2.9E-05	2.2E-05	-2.6E-05	-1.2E-04	-2.1E-04	-2.5E-04	-2.7E-04	-2.8E-04	-2.2E-04	-1.7E-04	-1.3E-04	-1.0E-04	-9.0E-05
373	2.0E-04	2.0E-04	1.5E-04	3.1E-05	-8.8E-05	-1.3E-04	-1.4E-04	-1.5E-04	-7.7E-05	-1.4E-05	3.3E-05	6.5E-05	8.1E-05
374	1.1E-04	1.1E-04	6.6E-05	-2.6E-05	-1.2E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.2E-04	-6.9E-05	-2.9E-05	-2.4E-06	1.1E-05
375	2.4E-04	2.4E-04	2.0E-04	1.1E-04	2.1E-05	-1.0E-05	-1.9E-05	-2.6E-05	3.8E-05	9.3E-05	1.3E-04	1.6E-04	1.8E-04
376	3.4E-04	3.5E-04	3.1E-04	2.3E-04	1.4E-04	1.2E-04	1.1E-04	1.1E-04	1.8E-04	2.4E-04	2.8E-04	3.1E-04	3.2E-04
377	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
378	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
379	9.1E-04	9.5E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
380	8.9E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
381	8.9E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
382	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
383	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
384	9.0E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
385	8.9E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
386	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
387	8.7E-04	9.1E-04	9.4E-04	9.7E-04	9.9E-04	9.9E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
388	8.3E-04	8.7E-04	9.0E-04	9.2E-04	9.5E-04	9.5E-04	9.5E-04	9.8E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
389	8.1E-04	8.5E-04	8.8E-04	9.0E-04	9.3E-04	9.4E-04	9.4E-04	9.7E-04	9.8E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03
390	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
391	8.4E-04	8.8E-04	9.1E-04	9.4E-04	9.6E-04	9.5E-04	9.4E-04	9.8E-04	9.8E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03
392	7.9E-04	8.3E-04	8.6E-04	8.8E-04	9.1E-04	9.1E-04	9.0E-04	9.3E-04	9.4E-04	9.5E-04	9.6E-04	9.6E-04	9.6E-04
393	7.7E-04	8.0E-04	8.4E-04	8.6E-04	8.8E-04	8.9E-04	8.9E-04	9.2E-04	9.3E-04	9.4E-04	9.4E-04	9.5E-04	9.5E-04
394	9.2E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
395	8.2E-04	8.6E-04	8.9E-04	9.1E-04	9.3E-04	9.2E-04	9.2E-04	9.5E-04	9.5E-04	9.6E-04	9.7E-04	9.7E-04	9.7E-04
396	7.7E-04	8.0E-04	8.4E-04	8.6E-04	8.8E-04	8.8E-04	8.7E-04	9.0E-04	9.1E-04	9.2E-04	9.2E-04	9.3E-04	9.3E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
397	7.4E-04	7.8E-04	8.1E-04	8.3E-04	8.5E-04	8.5E-04	8.6E-04	8.8E-04	8.9E-04	9.0E-04	9.1E-04	9.1E-04	9.1E-04
398	9.0E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
399	8.0E-04	8.4E-04	8.7E-04	8.9E-04	9.1E-04	9.0E-04	8.9E-04	9.2E-04	9.3E-04	9.4E-04	9.4E-04	9.5E-04	9.5E-04
400	7.5E-04	7.8E-04	8.1E-04	8.4E-04	8.6E-04	8.5E-04	8.5E-04	8.8E-04	8.8E-04	8.9E-04	9.0E-04	9.0E-04	9.0E-04
401	7.2E-04	7.6E-04	7.8E-04	8.1E-04	8.3E-04	8.3E-04	8.3E-04	8.6E-04	8.7E-04	8.7E-04	8.8E-04	8.9E-04	8.9E-04
402	8.7E-04	9.1E-04	9.5E-04	9.7E-04	9.9E-04	9.7E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
403	7.8E-04	8.1E-04	8.4E-04	8.7E-04	8.8E-04	8.8E-04	8.7E-04	9.0E-04	9.0E-04	9.1E-04	9.2E-04	9.2E-04	9.2E-04
404	7.3E-04	7.6E-04	7.9E-04	8.1E-04	8.3E-04	8.3E-04	8.3E-04	8.5E-04	8.6E-04	8.7E-04	8.8E-04	8.8E-04	8.8E-04
405	7.0E-04	7.4E-04	7.6E-04	7.8E-04	8.0E-04	8.1E-04	8.1E-04	8.3E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04	8.6E-04
406	8.4E-04	8.7E-04	9.1E-04	9.3E-04	9.4E-04	9.3E-04	9.2E-04	9.5E-04	9.5E-04	9.6E-04	9.7E-04	9.7E-04	9.7E-04
407	7.5E-04	7.9E-04	8.2E-04	8.4E-04	8.6E-04	8.5E-04	8.4E-04	8.7E-04	8.7E-04	8.8E-04	8.9E-04	8.9E-04	8.9E-04
408	7.1E-04	7.4E-04	7.7E-04	7.9E-04	8.1E-04	8.1E-04	8.0E-04	8.3E-04	8.4E-04	8.5E-04	8.5E-04	8.6E-04	8.6E-04
409	6.8E-04	7.2E-04	7.4E-04	7.6E-04	7.8E-04	7.8E-04	7.8E-04	8.1E-04	8.2E-04	8.3E-04	8.3E-04	8.4E-04	8.4E-04
410	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	2.6E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
411	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.2E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
412	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	1.7E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
413	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.4E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
414	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.2E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
415	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.1E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03
416	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
417	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
418	9.1E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	9.9E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
419	8.1E-04	8.4E-04	8.7E-04	8.9E-04	9.1E-04	8.9E-04	8.6E-04	8.9E-04	9.0E-04	9.1E-04	9.1E-04	9.2E-04	9.2E-04
420	7.4E-04	7.7E-04	8.0E-04	8.2E-04	8.3E-04	8.2E-04	8.1E-04	8.3E-04	8.4E-04	8.5E-04	8.5E-04	8.6E-04	8.6E-04
421	7.0E-04	7.3E-04	7.5E-04	7.7E-04	7.9E-04	7.8E-04	7.8E-04	8.0E-04	8.1E-04	8.2E-04	8.2E-04	8.3E-04	8.3E-04
422	6.7E-04	7.0E-04	7.3E-04	7.4E-04	7.6E-04	7.6E-04	7.6E-04	7.9E-04	8.0E-04	8.1E-04	8.1E-04	8.2E-04	8.2E-04
423	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	1.9E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
424	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	1.8E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
425	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.6E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
426	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.3E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
427	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.1E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03
428	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.0E-03	9.4E-04	9.7E-04	9.7E-04	9.8E-04	9.9E-04	9.9E-04	9.9E-04
429	9.2E-04	9.5E-04	9.9E-04	1.0E-03	1.0E-03	9.6E-04	9.0E-04	9.2E-04	9.3E-04	9.4E-04	9.4E-04	9.5E-04	9.5E-04
430	8.7E-04	9.0E-04	9.3E-04	9.5E-04	9.7E-04	9.2E-04	8.8E-04	9.1E-04	9.1E-04	9.2E-04	9.3E-04	9.3E-04	9.3E-04
431	8.2E-04	8.5E-04	8.8E-04	9.0E-04	9.2E-04	8.9E-04	8.5E-04	8.8E-04	8.9E-04	9.0E-04	9.0E-04	9.0E-04	9.1E-04
432	7.7E-04	8.0E-04	8.3E-04	8.5E-04	8.6E-04	8.4E-04	8.2E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04	8.7E-04	8.7E-04
433	7.2E-04	7.5E-04	7.8E-04	8.0E-04	8.1E-04	8.0E-04	7.8E-04	8.0E-04	8.1E-04	8.2E-04	8.3E-04	8.3E-04	8.3E-04
434	6.8E-04	7.1E-04	7.4E-04	7.6E-04	7.8E-04	7.7E-04	7.6E-04	7.8E-04	7.9E-04	8.0E-04	8.0E-04	8.1E-04	8.1E-04
435	6.5E-04	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.4E-04	7.4E-04	7.7E-04	7.8E-04	7.8E-04	7.9E-04	8.0E-04	8.0E-04
436	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.4E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
437	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.4E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
438	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.2E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
439	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.1E-03	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
440	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	9.8E-04	8.9E-04	9.2E-04	9.3E-04	9.4E-04	9.4E-04	9.5E-04	9.5E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
441	8.8E-04	9.1E-04	9.5E-04	9.7E-04	9.9E-04	9.2E-04	8.5E-04	8.8E-04	8.9E-04	8.9E-04	9.0E-04	9.0E-04	9.1E-04
442	8.1E-04	8.4E-04	8.7E-04	8.9E-04	9.1E-04	8.6E-04	8.2E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04	8.7E-04	8.7E-04
443	7.6E-04	8.0E-04	8.3E-04	8.5E-04	8.6E-04	8.3E-04	8.0E-04	8.2E-04	8.3E-04	8.4E-04	8.4E-04	8.5E-04	8.5E-04
444	7.3E-04	7.6E-04	7.9E-04	8.1E-04	8.2E-04	8.0E-04	7.8E-04	8.0E-04	8.1E-04	8.2E-04	8.2E-04	8.3E-04	8.3E-04
445	6.9E-04	7.2E-04	7.5E-04	7.7E-04	7.9E-04	7.7E-04	7.5E-04	7.8E-04	7.9E-04	7.9E-04	8.0E-04	8.0E-04	8.1E-04
446	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.5E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04	7.9E-04	7.9E-04
447	6.4E-04	6.7E-04	6.9E-04	7.1E-04	7.3E-04	7.3E-04	7.2E-04	7.5E-04	7.6E-04	7.7E-04	7.7E-04	7.8E-04	7.8E-04
448	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.2E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
449	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.2E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
450	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.1E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
451	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.0E-03	9.2E-04	9.5E-04	9.5E-04	9.6E-04	9.7E-04	9.7E-04	9.7E-04
452	9.3E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03	9.5E-04	8.7E-04	8.9E-04	9.0E-04	9.1E-04	9.2E-04	9.2E-04	9.2E-04
453	8.4E-04	8.7E-04	9.0E-04	9.2E-04	9.5E-04	8.8E-04	8.2E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04	8.7E-04	8.7E-04
454	7.8E-04	8.1E-04	8.4E-04	8.6E-04	8.8E-04	8.3E-04	7.9E-04	8.1E-04	8.2E-04	8.3E-04	8.3E-04	8.4E-04	8.4E-04
455	7.3E-04	7.6E-04	7.9E-04	8.1E-04	8.3E-04	7.9E-04	7.6E-04	7.9E-04	8.0E-04	8.0E-04	8.1E-04	8.1E-04	8.1E-04
456	7.0E-04	7.3E-04	7.6E-04	7.8E-04	7.9E-04	7.7E-04	7.5E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04	8.0E-04	8.0E-04
457	6.7E-04	7.0E-04	7.3E-04	7.5E-04	7.6E-04	7.5E-04	7.3E-04	7.5E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04	7.8E-04
458	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.3E-04	7.2E-04	7.4E-04	7.5E-04	7.6E-04	7.6E-04	7.7E-04	7.7E-04
459	6.3E-04	6.6E-04	6.8E-04	7.0E-04	7.2E-04	7.1E-04	7.1E-04	7.3E-04	7.4E-04	7.5E-04	7.6E-04	7.6E-04	7.6E-04
460	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.1E-03	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
461	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.0E-03	9.2E-04	9.5E-04	9.6E-04	9.6E-04	9.7E-04	9.7E-04	9.7E-04
462	9.4E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	9.6E-04	8.8E-04	9.0E-04	9.1E-04	9.2E-04	9.2E-04	9.3E-04	9.3E-04
463	8.6E-04	9.0E-04	9.3E-04	9.5E-04	9.7E-04	8.9E-04	8.3E-04	8.5E-04	8.6E-04	8.7E-04	8.7E-04	8.8E-04	8.8E-04
464	7.9E-04	8.2E-04	8.5E-04	8.7E-04	8.9E-04	8.3E-04	7.8E-04	8.1E-04	8.2E-04	8.2E-04	8.3E-04	8.4E-04	8.4E-04
465	7.5E-04	7.8E-04	8.1E-04	8.3E-04	8.5E-04	8.0E-04	7.6E-04	7.8E-04	7.9E-04	8.0E-04	8.1E-04	8.1E-04	8.1E-04
466	7.1E-04	7.4E-04	7.7E-04	7.8E-04	8.0E-04	7.7E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04	7.9E-04	7.9E-04
467	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.7E-04	7.4E-04	7.2E-04	7.4E-04	7.5E-04	7.6E-04	7.7E-04	7.7E-04	7.7E-04
468	6.5E-04	6.8E-04	7.1E-04	7.2E-04	7.4E-04	7.2E-04	7.1E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.6E-04	7.6E-04
469	6.3E-04	6.6E-04	6.9E-04	7.0E-04	7.2E-04	7.1E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.4E-04	7.5E-04	7.5E-04
470	6.1E-04	6.4E-04	6.7E-04	6.8E-04	7.0E-04	7.0E-04	6.9E-04	7.1E-04	7.2E-04	7.3E-04	7.4E-04	7.4E-04	7.5E-04
471	8.8E-04	9.2E-04	9.5E-04	9.7E-04	1.0E-03	9.0E-04	8.3E-04	8.6E-04	8.7E-04	8.7E-04	8.8E-04	8.8E-04	8.9E-04
472	8.2E-04	8.5E-04	8.8E-04	9.0E-04	9.3E-04	8.5E-04	7.9E-04	8.2E-04	8.3E-04	8.3E-04	8.4E-04	8.4E-04	8.5E-04
473	7.7E-04	8.0E-04	8.3E-04	8.5E-04	8.7E-04	8.1E-04	7.6E-04	7.8E-04	7.9E-04	8.0E-04	8.1E-04	8.1E-04	8.1E-04
474	7.2E-04	7.5E-04	7.8E-04	8.0E-04	8.2E-04	7.7E-04	7.4E-04	7.6E-04	7.7E-04	7.7E-04	7.8E-04	7.8E-04	7.9E-04
475	6.9E-04	7.2E-04	7.5E-04	7.7E-04	7.8E-04	7.5E-04	7.2E-04	7.4E-04	7.5E-04	7.6E-04	7.6E-04	7.7E-04	7.7E-04
476	6.6E-04	6.9E-04	7.1E-04	7.3E-04	7.5E-04	7.2E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.5E-04
477	6.3E-04	6.6E-04	6.9E-04	7.0E-04	7.2E-04	7.0E-04	6.9E-04	7.1E-04	7.2E-04	7.3E-04	7.3E-04	7.4E-04	7.4E-04
478	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.0E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
479	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.6E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
480	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.4E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
481	7.2E-04	7.5E-04	7.8E-04	8.1E-04	8.3E-04	8.0E-04	7.9E-04	8.1E-04	8.2E-04	8.3E-04	8.3E-04	8.4E-04	8.4E-04
482	8.7E-04	9.1E-04	9.4E-04	9.7E-04	1.0E-03	9.5E-04	9.1E-04	9.4E-04	9.5E-04	9.5E-04	9.6E-04	9.6E-04	9.6E-04
483	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.1E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
484	6.5E-04	6.8E-04	7.0E-04	7.3E-04	7.5E-04	7.4E-04	7.3E-04	7.5E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04	7.8E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
485	7.3E-04	7.6E-04	7.9E-04	8.2E-04	8.5E-04	8.1E-04	8.0E-04	8.2E-04	8.3E-04	8.4E-04	8.4E-04	8.5E-04	8.5E-04
486	8.9E-04	9.3E-04	9.6E-04	9.9E-04	1.0E-03	9.6E-04	9.3E-04	9.5E-04	9.6E-04	9.7E-04	9.7E-04	9.8E-04	9.8E-04
487	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
488	6.5E-04	6.8E-04	7.1E-04	7.4E-04	7.6E-04	7.4E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04	7.9E-04	7.9E-04
489	7.4E-04	7.7E-04	8.0E-04	8.3E-04	8.6E-04	8.2E-04	8.1E-04	8.3E-04	8.4E-04	8.5E-04	8.5E-04	8.5E-04	8.6E-04
490	9.0E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	9.7E-04	9.4E-04	9.6E-04	9.7E-04	9.7E-04	9.8E-04	9.8E-04	9.8E-04
491	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.3E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
492	6.6E-04	7.0E-04	7.2E-04	7.5E-04	7.7E-04	7.5E-04	7.5E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04	8.0E-04	8.0E-04
493	7.5E-04	7.9E-04	8.2E-04	8.4E-04	8.7E-04	8.3E-04	8.1E-04	8.4E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04	8.6E-04
494	9.2E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	9.8E-04	9.4E-04	9.7E-04	9.8E-04	9.8E-04	9.9E-04	9.9E-04	9.9E-04
495	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
496	6.8E-04	7.1E-04	7.4E-04	7.6E-04	7.9E-04	7.6E-04	7.6E-04	7.8E-04	7.9E-04	8.0E-04	8.0E-04	8.1E-04	8.1E-04
497	7.6E-04	8.0E-04	8.3E-04	8.6E-04	8.8E-04	8.4E-04	8.2E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04	8.7E-04	8.7E-04
498	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	9.8E-04	9.4E-04	9.7E-04	9.8E-04	9.8E-04	9.8E-04	9.9E-04	9.9E-04
499	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.2E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
500	7.0E-04	7.4E-04	7.7E-04	7.9E-04	8.2E-04	7.9E-04	7.9E-04	8.1E-04	8.2E-04	8.2E-04	8.3E-04	8.3E-04	8.4E-04
501	7.9E-04	8.2E-04	8.5E-04	8.8E-04	9.1E-04	8.6E-04	8.4E-04	8.7E-04	8.8E-04	8.8E-04	8.9E-04	8.9E-04	8.9E-04
502	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.0E-03	9.7E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
503	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.2E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
504	7.6E-04	8.0E-04	8.3E-04	8.6E-04	8.9E-04	8.6E-04	8.6E-04	8.9E-04	8.9E-04	9.0E-04	9.0E-04	9.1E-04	9.1E-04
505	8.6E-04	8.9E-04	9.3E-04	9.6E-04	9.9E-04	9.4E-04	9.2E-04	9.5E-04	9.6E-04	9.6E-04	9.7E-04	9.7E-04	9.7E-04
506	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.1E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
507	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
508	7.2E-04	7.6E-04	7.8E-04	8.1E-04	8.4E-04	8.1E-04	8.0E-04	8.3E-04	8.3E-04	8.4E-04	8.4E-04	8.5E-04	8.5E-04
509	8.2E-04	8.5E-04	8.9E-04	9.2E-04	9.5E-04	8.9E-04	8.7E-04	9.0E-04	9.0E-04	9.1E-04	9.1E-04	9.2E-04	9.2E-04
510	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.0E-03	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
511	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.2E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
512	7.3E-04	7.6E-04	7.9E-04	8.2E-04	8.5E-04	8.2E-04	8.1E-04	8.4E-04	8.4E-04	8.5E-04	8.5E-04	8.6E-04	8.6E-04
513	8.2E-04	8.5E-04	8.9E-04	9.2E-04	9.5E-04	8.9E-04	8.7E-04	9.0E-04	9.1E-04	9.1E-04	9.2E-04	9.2E-04	9.2E-04
514	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.0E-03	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
515	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
516	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.4E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
517	8.3E-04	8.7E-04	9.0E-04	9.4E-04	9.7E-04	9.4E-04	9.4E-04	9.7E-04	9.8E-04	9.8E-04	9.9E-04	9.9E-04	9.9E-04
518	9.0E-04	9.4E-04	9.8E-04	1.0E-03	1.1E-03	1.0E-03	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
519	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
520	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.3E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
521	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.4E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
522	7.9E-04	8.3E-04	8.6E-04	8.9E-04	9.2E-04	8.7E-04	8.5E-04	8.8E-04	8.9E-04	8.9E-04	9.0E-04	9.0E-04	9.0E-04
523	8.9E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	9.6E-04	9.3E-04	9.6E-04	9.6E-04	9.7E-04	9.7E-04	9.8E-04	9.8E-04
524	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.1E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
525	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.2E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
526	8.0E-04	8.4E-04	8.7E-04	9.0E-04	9.3E-04	8.7E-04	8.4E-04	8.6E-04	8.7E-04	8.8E-04	8.8E-04	8.8E-04	8.9E-04
527	9.1E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	9.5E-04	9.0E-04	9.3E-04	9.4E-04	9.5E-04	9.5E-04	9.5E-04	9.5E-04
528	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.0E-03	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
529	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.1E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
530	8.2E-04	8.5E-04	8.8E-04	9.1E-04	9.4E-04	8.6E-04	8.3E-04	8.5E-04	8.6E-04	8.7E-04	8.7E-04	8.8E-04	8.8E-04
531	9.0E-04	9.4E-04	9.7E-04	1.0E-03	1.0E-03	9.3E-04	8.8E-04	9.1E-04	9.2E-04	9.2E-04	9.3E-04	9.3E-04	9.3E-04
532	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.0E-03	9.3E-04	9.6E-04	9.7E-04	9.8E-04	9.8E-04	9.8E-04	9.9E-04
533	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.1E-03	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
534	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.1E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
535	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03
536	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
537	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03
538	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
539	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
540	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
541	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
542	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03
543	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
544	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
545	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
546	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03
547	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
548	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
549	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
550	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03
551	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
552	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
553	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03
554	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03
555	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03
556	2.1E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03
557	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
558	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03
559	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
560	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
561	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03
562	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03
563	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
564	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
565	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
566	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
567	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
568	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
569	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03
570	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03
571	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
572	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
573	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03
574	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03
575	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
576	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
577	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
578	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
579	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
580	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
581	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03
582	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03
583	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
584	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
585	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03
586	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
587	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
588	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
589	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03
590	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03
591	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
592	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
593	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
594	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
595	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
596	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
597	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
598	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
599	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
600	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
601	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03
602	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
603	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
604	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
605	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03
606	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
607	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
608	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03
609	2.5E-03	2.6E-03	2.7E-03	2.6E-03	2.6E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
610	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	3.0E-03
611	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03	3.2E-03
612	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.0E-03	3.1E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03
613	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03	3.2E-03	3.2E-03
614	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
615	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
616	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
617	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
618	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
619	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
620	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
621	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03
622	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
623	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03
624	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03
625	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
626	2.5E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03
627	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.6E-03	2.7E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
628	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03
629	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
630	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
631	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03
632	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
633	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
634	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
635	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03
636	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
637	2.3E-03	2.4E-03	2.4E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
638	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
639	2.3E-03	2.4E-03	2.5E-03	2.4E-03	2.5E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03
640	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03
641	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03
642	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03
643	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
644	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
645	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
646	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
647	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
648	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03
649	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
650	2.2E-03	2.3E-03	2.3E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
651	2.1E-03	2.2E-03	2.3E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
652	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
653	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
654	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03
655	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
656	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
657	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
658	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
659	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03
660	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
661	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
662	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03
663	2.1E-03	2.2E-03	2.3E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
664	2.0E-03	2.1E-03	2.2E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
665	2.0E-03	2.1E-03	2.2E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03
666	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
667	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
668	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
669	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
670	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03
671	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
672	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
673	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
674	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03
675	2.1E-03	2.2E-03	2.2E-03	2.1E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
676	2.0E-03	2.1E-03	2.1E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03
677	1.9E-03	2.0E-03	2.1E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
678	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
679	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
680	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
681	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
682	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03
683	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
684	2.0E-03	2.1E-03	2.1E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
685	1.9E-03	1.9E-03	2.0E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
686	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
687	1.7E-03	1.8E-03	1.9E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03
688	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03
689	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
690	1.9E-03	2.0E-03	2.0E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
691	1.8E-03	1.9E-03	1.9E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03
692	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
693	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
694	1.6E-03	1.7E-03	1.8E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03
695	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
696	1.9E-03	2.0E-03	2.0E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
697	1.7E-03	1.8E-03	1.9E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
698	1.6E-03	1.7E-03	1.8E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
699	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
700	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
701	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
702	1.9E-03	1.9E-03	2.0E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
703	1.7E-03	1.8E-03	1.8E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
704	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
705	1.5E-03	1.6E-03	1.7E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03
706	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
707	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
708	1.8E-03	1.9E-03	1.9E-03	1.8E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
709	1.7E-03	1.7E-03	1.8E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
710	1.6E-03	1.6E-03	1.7E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
711	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
712	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
713	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03
714	1.8E-03	1.9E-03	1.9E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
715	1.6E-03	1.7E-03	1.7E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
716	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
717	1.5E-03	1.5E-03	1.6E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03
718	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
719	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
720	1.7E-03	1.8E-03	1.8E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
721	1.6E-03	1.6E-03	1.7E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
722	1.5E-03	1.5E-03	1.6E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
723	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
724	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
725	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
726	1.7E-03	1.7E-03	1.8E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
727	1.5E-03	1.6E-03	1.6E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
728	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
729	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
730	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
731	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
732	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
733	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
734	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
735	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
736	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
737	1.6E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
738	1.5E-03	1.5E-03	1.6E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
739	1.4E-03	1.5E-03	1.5E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03
740	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
741	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
742	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
743	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
744	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
745	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
746	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
747	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
748	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
749	1.5E-03	1.6E-03	1.6E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
750	1.6E-03	1.7E-03	1.6E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
751	1.6E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
752	1.7E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
753	1.7E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
754	1.7E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
755	1.6E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
756	1.5E-03	1.6E-03	1.6E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03
757	1.4E-03	1.5E-03	1.5E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
758	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
759	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
760	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03
761	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
762	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
763	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
764	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
765	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03
766	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
767	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
768	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
769	1.4E-03	1.5E-03	1.5E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
770	1.5E-03	1.5E-03	1.5E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
771	1.5E-03	1.6E-03	1.5E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
772	1.5E-03	1.6E-03	1.6E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
773	1.5E-03	1.6E-03	1.6E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
774	1.5E-03	1.5E-03	1.5E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
775	1.4E-03	1.5E-03	1.5E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
776	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
777	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03
778	1.3E-03	1.3E-03	1.4E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
779	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
780	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
781	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
782	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
783	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
784	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
785	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
786	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
787	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
788	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03
789	1.4E-03	1.4E-03	1.4E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
790	1.4E-03	1.4E-03	1.4E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
791	1.4E-03	1.4E-03	1.4E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
792	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
793	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
794	1.3E-03	1.4E-03	1.4E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
795	1.3E-03	1.3E-03	1.4E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
796	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
797	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
798	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
799	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
800	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03
801	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
802	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
803	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
804	1.3E-03	1.3E-03	1.4E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
805	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
806	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
807	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
808	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
809	1.3E-03	1.3E-03	1.4E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
810	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
811	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
812	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
813	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
814	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
815	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
816	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
817	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
818	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
819	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
820	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
821	1.2E-03	1.2E-03	1.3E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
822	1.2E-03	1.2E-03	1.3E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
823	1.2E-03	1.2E-03	1.3E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
824	1.2E-03	1.3E-03	1.3E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
825	1.2E-03	1.3E-03	1.3E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
826	1.2E-03	1.3E-03	1.3E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
827	1.2E-03	1.2E-03	1.3E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
828	1.2E-03	1.2E-03	1.3E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
829	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
830	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
831	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
832	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
833	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
834	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
835	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
836	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
837	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
838	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
839	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
840	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
841	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
842	1.7E-04	1.8E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
843	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04
844	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
845	1.4E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
846	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04
847	6.4E-05	5.0E-05	2.6E-05	1.2E-05	1.2E-05	1.1E-05	1.2E-05	1.3E-05	2.5E-05	3.6E-05	4.3E-05	4.8E-05	5.1E-05
848	5.2E-04	5.1E-04	4.9E-04	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	5.8E-04	5.8E-04	5.9E-04	5.9E-04
849	6.3E-04	6.2E-04	5.9E-04	5.9E-04	6.2E-04	6.4E-04	6.7E-04	7.0E-04	7.0E-04	7.0E-04	7.1E-04	7.1E-04	7.1E-04
850	1.4E-04	1.4E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
851	1.8E-04	1.7E-04	1.5E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04
852	1.3E-04	9.9E-05	5.7E-05	3.3E-05	3.4E-05	3.4E-05	3.6E-05	3.8E-05	5.2E-05	6.4E-05	7.3E-05	7.9E-05	8.2E-05
853	3.6E-04	3.4E-04	3.0E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04	3.6E-04
854	1.2E-04	1.1E-04	1.0E-04	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
855	1.4E-04	1.3E-04	1.2E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
856	1.5E-04	1.4E-04	1.2E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
857	3.6E-04	3.4E-04	3.1E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.8E-04
858	1.1E-04	1.1E-04	9.9E-05	9.4E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
859	1.1E-04	1.1E-04	8.7E-05	7.9E-05	8.1E-05	8.4E-05	8.7E-05	9.1E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
860	2.7E-04	2.5E-04	2.3E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.8E-04	2.8E-04
861	2.5E-04	2.3E-04	1.9E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
862	1.1E-04	1.1E-04	9.5E-05	9.0E-05	9.4E-05	9.7E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04
863	1.1E-04	1.0E-04	8.4E-05	7.6E-05	7.9E-05	8.1E-05	8.4E-05	8.8E-05	9.9E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04
864	2.5E-04	2.4E-04	2.1E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.7E-04
865	9.7E-05	9.1E-05	7.7E-05	7.0E-05	7.3E-05	7.5E-05	7.8E-05	8.2E-05	9.3E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04
866	2.3E-04	2.2E-04	2.0E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
867	-4.4E-05	-7.0E-05	-1.1E-04	-1.4E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.6E-04	-1.4E-04	-1.3E-04	-1.2E-04	-1.1E-04	-1.1E-04
868	8.7E-05	8.1E-05	6.6E-05	5.9E-05	6.1E-05	6.3E-05	6.6E-05	6.9E-05	8.0E-05	8.9E-05	9.6E-05	1.0E-04	1.0E-04
869	2.3E-04	2.2E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
870	1.8E-04	1.7E-04	1.4E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04
871	8.8E-05	8.3E-05	6.9E-05	6.3E-05	6.5E-05	6.7E-05	7.0E-05	7.3E-05	8.4E-05	9.3E-05	1.0E-04	1.0E-04	1.1E-04
872	2.3E-04	2.3E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04
873	2.2E-04	2.1E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
874	1.4E-04	1.3E-04	1.1E-04	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
875	2.1E-04	2.1E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
876	2.0E-04	2.0E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
877	1.7E-04	1.7E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04
878	-1.9E-05	-4.9E-05	-9.1E-05	-1.2E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.4E-04	-1.2E-04	-1.1E-04	-9.6E-05	-8.9E-05	-8.5E-05
879	2.5E-04	2.3E-04	2.0E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04
880	5.3E-04	5.3E-04	5.1E-04	5.1E-04	5.3E-04	5.5E-04	5.8E-04	6.0E-04	6.0E-04	6.1E-04	6.1E-04	6.1E-04	6.1E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
881	3.1E-04	3.0E-04	2.7E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04
882	2.1E-04	1.9E-04	1.7E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
883	3.3E-04	3.1E-04	2.9E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04
884	2.6E-04	2.3E-04	1.9E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04
885	2.0E-04	1.9E-04	1.7E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.1E-04
886	3.1E-04	2.9E-04	2.6E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.2E-04
887	2.9E-04	2.6E-04	2.1E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
888	8.4E-05	5.5E-05	1.2E-05	-1.4E-05	-1.5E-05	-1.6E-05	-1.7E-05	-1.7E-05	-1.0E-06	1.2E-05	2.1E-05	2.8E-05	3.1E-05
889	2.6E-04	2.3E-04	1.9E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04
890	1.1E-04	7.8E-05	3.5E-05	1.0E-05	1.0E-05	9.8E-06	1.0E-05	1.1E-05	2.6E-05	3.9E-05	4.8E-05	5.4E-05	5.7E-05
891	2.8E-04	2.5E-04	2.0E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04
892	1.5E-04	1.4E-04	1.3E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
893	3.6E-04	3.6E-04	3.4E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04
894	1.3E-04	1.3E-04	1.2E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04
895	1.7E-04	1.6E-04	1.5E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
896	4.1E-04	4.2E-04	4.1E-04	4.1E-04	4.2E-04	4.4E-04	4.6E-04	4.8E-04	4.8E-04	4.9E-04	4.9E-04	4.9E-04	4.9E-04
897	1.1E-04	1.1E-04	1.0E-04	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
898	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03	3.5E-03	3.5E-03
899	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03	3.5E-03	3.5E-03	3.6E-03
900	2.7E-03	2.8E-03	3.0E-03	3.0E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03	3.4E-03
901	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03
902	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	3.1E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03
903	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03
904	2.6E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03
905	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03	3.1E-03
906	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03	3.2E-03
907	2.4E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03	3.1E-03
908	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
909	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03
910	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.1E-03	-2.1E-03	-2.0E-03
911	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.1E-03	-2.1E-03	-2.0E-03	-2.0E-03	-2.0E-03	-1.9E-03
912	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.7E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03
913	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.0E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.8E-03	-1.8E-03
914	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.6E-03	-1.7E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.5E-03	-1.5E-03
915	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.8E-03	-1.9E-03	-1.9E-03	-1.8E-03	-1.8E-03	-1.7E-03	-1.7E-03
916	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.4E-03
917	-9.4E-04	-9.9E-04	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.2E-03
918	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.7E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03
919	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.4E-03	-1.4E-03	-1.4E-03	-1.4E-03
920	-8.9E-04	-9.4E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03
921	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.5E-03	-1.5E-03	-1.5E-03
922	-9.9E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.3E-03
923	-8.4E-04	-8.9E-04	-9.4E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.1E-03
924	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.5E-03	-1.4E-03	-1.4E-03	-1.4E-03	-1.4E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
925	-9.2E-04	-9.7E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.2E-03
926	-7.9E-04	-8.3E-04	-8.8E-04	-9.5E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03	-1.0E-03
927	-9.7E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.2E-03
928	-8.5E-04	-8.9E-04	-9.5E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.1E-03
929	-7.3E-04	-7.7E-04	-8.2E-04	-8.9E-04	-9.5E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.0E-03	-9.8E-04	-9.6E-04	-9.5E-04
930	-8.9E-04	-9.4E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.1E-03
931	-7.8E-04	-8.2E-04	-8.7E-04	-9.4E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03	-1.0E-03
932	-8.2E-04	-8.6E-04	-9.3E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.0E-03
933	-8.2E-04	-8.6E-04	-9.2E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03
934	-7.1E-04	-7.4E-04	-8.0E-04	-8.7E-04	-9.4E-04	-9.9E-04	-1.0E-03	-1.1E-03	-1.0E-03	-9.8E-04	-9.5E-04	-9.2E-04	-9.1E-04
935	-7.2E-04	-7.6E-04	-8.2E-04	-9.0E-04	-9.8E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.0E-03	-9.7E-04	-9.4E-04	-9.3E-04
936	-7.2E-04	-7.6E-04	-8.2E-04	-8.9E-04	-9.7E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.1E-03	-9.9E-04	-9.5E-04	-9.2E-04	-9.1E-04
937	-6.3E-04	-6.6E-04	-7.2E-04	-7.9E-04	-8.7E-04	-9.3E-04	-9.7E-04	-1.0E-03	-9.5E-04	-8.9E-04	-8.5E-04	-8.2E-04	-8.1E-04
938	-3.5E-03	-3.7E-03	-3.9E-03	-4.1E-03	-4.3E-03	-4.5E-03	-4.7E-03	-4.9E-03	-4.9E-03	-4.8E-03	-4.8E-03	-4.8E-03	-4.7E-03
939	-2.5E-03	-2.7E-03	-2.8E-03	-2.9E-03	-3.1E-03	-3.2E-03	-3.4E-03	-3.5E-03	-3.5E-03	-3.4E-03	-3.4E-03	-3.4E-03	-3.4E-03
940	-2.2E-03	-2.4E-03	-2.5E-03	-2.6E-03	-2.8E-03	-2.9E-03	-3.0E-03	-3.1E-03	-3.1E-03	-3.0E-03	-3.0E-03	-3.0E-03	-3.0E-03
941	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.3E-03
942	-1.9E-03	-2.0E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.5E-03	-2.6E-03	-2.7E-03	-2.7E-03	-2.6E-03	-2.6E-03	-2.6E-03	-2.6E-03
943	-2.1E-03	-2.2E-03	-2.3E-03	-2.5E-03	-2.6E-03	-2.7E-03	-2.8E-03	-2.9E-03	-2.9E-03	-2.8E-03	-2.8E-03	-2.8E-03	-2.8E-03
944	-1.6E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.2E-03	-2.1E-03	-2.1E-03	-2.1E-03	-2.0E-03
945	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.3E-03	-2.2E-03	-2.2E-03	-2.2E-03	-2.1E-03
946	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.3E-03	-2.2E-03	-2.2E-03
947	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.9E-03	-1.8E-03	-1.8E-03
948	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.3E-03
949	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-1.9E-03	-2.0E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.9E-03	-1.9E-03
950	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.4E-03	-2.4E-03
951	-1.5E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.0E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.9E-03	-1.9E-03
952	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.3E-03	-2.4E-03	-2.5E-03	-2.6E-03	-2.5E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.4E-03
953	-1.5E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.0E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.9E-03
954	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.4E-03	-2.4E-03
955	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.9E-03	-1.9E-03
956	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.3E-03
957	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.2E-03	-2.2E-03
958	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.3E-03	-2.2E-03	-2.2E-03	-2.2E-03	-2.1E-03
959	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.2E-03	-2.1E-03	-2.1E-03	-2.1E-03	-2.1E-03
960	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.1E-03	-2.0E-03	-2.0E-03	-2.0E-03	-2.0E-03
961	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.6E-03	-1.7E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.6E-03
962	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.5E-03	-1.5E-03	-1.5E-03
963	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.5E-03
964	-4.8E-04	-5.1E-04	-5.5E-04	-5.9E-04	-6.3E-04	-6.9E-04	-7.4E-04	-8.0E-04	-7.7E-04	-7.5E-04	-7.4E-04	-7.3E-04	-7.2E-04
965	-4.7E-04	-5.0E-04	-5.3E-04	-5.7E-04	-6.1E-04	-6.6E-04	-7.1E-04	-7.6E-04	-7.4E-04	-7.2E-04	-7.0E-04	-6.9E-04	-6.9E-04
966	-4.5E-04	-4.8E-04	-5.1E-04	-5.5E-04	-5.9E-04	-6.3E-04	-6.8E-04	-7.2E-04	-7.0E-04	-6.8E-04	-6.7E-04	-6.6E-04	-6.5E-04
967	-4.4E-04	-4.6E-04	-4.9E-04	-5.3E-04	-5.6E-04	-6.1E-04	-6.5E-04	-6.9E-04	-6.7E-04	-6.5E-04	-6.3E-04	-6.2E-04	-6.2E-04
968	-4.2E-04	-4.4E-04	-4.7E-04	-5.0E-04	-5.4E-04	-5.8E-04	-6.2E-04	-6.5E-04	-6.3E-04	-6.1E-04	-6.0E-04	-5.9E-04	-5.8E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
969	-3.9E-04	-4.2E-04	-4.4E-04	-4.7E-04	-5.1E-04	-5.4E-04	-5.8E-04	-6.1E-04	-5.9E-04	-5.7E-04	-5.5E-04	-5.4E-04	-5.4E-04
970	-3.6E-04	-3.8E-04	-4.0E-04	-4.3E-04	-4.6E-04	-4.9E-04	-5.2E-04	-5.5E-04	-5.3E-04	-5.1E-04	-5.0E-04	-4.9E-04	-4.8E-04
971	-3.4E-04	-3.6E-04	-3.8E-04	-4.1E-04	-4.4E-04	-4.7E-04	-5.0E-04	-5.3E-04	-5.0E-04	-4.8E-04	-4.7E-04	-4.6E-04	-4.6E-04
972	-3.1E-04	-3.2E-04	-3.5E-04	-3.7E-04	-4.0E-04	-4.3E-04	-4.5E-04	-4.8E-04	-4.6E-04	-4.4E-04	-4.3E-04	-4.2E-04	-4.1E-04
973	-5.0E-04	-5.3E-04	-5.6E-04	-6.1E-04	-6.5E-04	-7.2E-04	-7.8E-04	-8.4E-04	-8.2E-04	-8.0E-04	-7.8E-04	-7.7E-04	-7.7E-04
974	-4.8E-04	-5.1E-04	-5.4E-04	-5.8E-04	-6.3E-04	-6.9E-04	-7.4E-04	-8.0E-04	-7.8E-04	-7.6E-04	-7.4E-04	-7.3E-04	-7.3E-04
975	-4.7E-04	-5.0E-04	-5.3E-04	-5.7E-04	-6.1E-04	-6.6E-04	-7.2E-04	-7.7E-04	-7.4E-04	-7.2E-04	-7.1E-04	-7.0E-04	-6.9E-04
976	-4.5E-04	-4.8E-04	-5.1E-04	-5.5E-04	-5.9E-04	-6.4E-04	-6.8E-04	-7.3E-04	-7.0E-04	-6.8E-04	-6.7E-04	-6.6E-04	-6.5E-04
977	-4.3E-04	-4.6E-04	-4.9E-04	-5.2E-04	-5.6E-04	-6.0E-04	-6.5E-04	-6.9E-04	-6.6E-04	-6.4E-04	-6.3E-04	-6.2E-04	-6.1E-04
978	-4.1E-04	-4.3E-04	-4.6E-04	-5.0E-04	-5.3E-04	-5.7E-04	-6.1E-04	-6.4E-04	-6.2E-04	-6.0E-04	-5.8E-04	-5.7E-04	-5.7E-04
979	-3.7E-04	-3.9E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.5E-04	-5.8E-04	-5.6E-04	-5.4E-04	-5.2E-04	-5.1E-04	-5.1E-04
980	-3.6E-04	-3.8E-04	-4.0E-04	-4.3E-04	-4.6E-04	-4.9E-04	-5.2E-04	-5.5E-04	-5.3E-04	-5.1E-04	-5.0E-04	-4.9E-04	-4.8E-04
981	-3.2E-04	-3.4E-04	-3.6E-04	-3.9E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-4.9E-04	-4.7E-04	-4.5E-04	-4.5E-04	-4.4E-04
982	-2.9E-04	-3.0E-04	-3.2E-04	-3.5E-04	-3.8E-04	-4.0E-04	-4.3E-04	-4.5E-04	-4.3E-04	-4.2E-04	-4.0E-04	-4.0E-04	-3.9E-04
983	-4.8E-04	-5.1E-04	-5.5E-04	-5.9E-04	-6.4E-04	-7.1E-04	-7.8E-04	-8.5E-04	-8.3E-04	-8.1E-04	-7.9E-04	-7.8E-04	-7.7E-04
984	-4.8E-04	-5.1E-04	-5.5E-04	-5.9E-04	-6.3E-04	-7.0E-04	-7.5E-04	-8.1E-04	-7.9E-04	-7.7E-04	-7.5E-04	-7.4E-04	-7.4E-04
985	-4.7E-04	-5.0E-04	-5.3E-04	-5.7E-04	-6.1E-04	-6.7E-04	-7.2E-04	-7.7E-04	-7.5E-04	-7.3E-04	-7.1E-04	-7.0E-04	-7.0E-04
986	-4.5E-04	-4.8E-04	-5.1E-04	-5.5E-04	-5.9E-04	-6.3E-04	-6.8E-04	-7.3E-04	-7.0E-04	-6.8E-04	-6.7E-04	-6.6E-04	-6.5E-04
987	-4.3E-04	-4.6E-04	-4.9E-04	-5.2E-04	-5.6E-04	-6.0E-04	-6.4E-04	-6.8E-04	-6.6E-04	-6.4E-04	-6.2E-04	-6.1E-04	-6.0E-04
988	-3.9E-04	-4.1E-04	-4.4E-04	-4.7E-04	-5.1E-04	-5.4E-04	-5.8E-04	-6.1E-04	-5.9E-04	-5.7E-04	-5.6E-04	-5.5E-04	-5.4E-04
989	-3.8E-04	-4.0E-04	-4.2E-04	-4.5E-04	-4.9E-04	-5.2E-04	-5.5E-04	-5.9E-04	-5.6E-04	-5.4E-04	-5.3E-04	-5.2E-04	-5.1E-04
990	-3.4E-04	-3.6E-04	-3.8E-04	-4.1E-04	-4.4E-04	-4.7E-04	-5.0E-04	-5.3E-04	-5.1E-04	-4.9E-04	-4.8E-04	-4.7E-04	-4.7E-04
991	-3.1E-04	-3.2E-04	-3.5E-04	-3.7E-04	-4.0E-04	-4.3E-04	-4.6E-04	-4.8E-04	-4.6E-04	-4.4E-04	-4.3E-04	-4.2E-04	-4.2E-04
992	-2.8E-04	-2.9E-04	-3.1E-04	-3.4E-04	-3.6E-04	-3.9E-04	-4.1E-04	-4.4E-04	-4.2E-04	-4.0E-04	-3.9E-04	-3.8E-04	-3.8E-04
993	-4.9E-04	-5.2E-04	-5.6E-04	-6.0E-04	-6.4E-04	-7.0E-04	-7.6E-04	-8.2E-04	-7.9E-04	-7.7E-04	-7.6E-04	-7.5E-04	-7.4E-04
994	-4.7E-04	-5.0E-04	-5.4E-04	-5.8E-04	-6.2E-04	-6.7E-04	-7.2E-04	-7.7E-04	-7.5E-04	-7.2E-04	-7.1E-04	-7.0E-04	-6.9E-04
995	-4.5E-04	-4.8E-04	-5.1E-04	-5.5E-04	-5.9E-04	-6.3E-04	-6.8E-04	-7.2E-04	-7.0E-04	-6.8E-04	-6.6E-04	-6.5E-04	-6.5E-04
996	-4.2E-04	-4.4E-04	-4.7E-04	-5.1E-04	-5.4E-04	-5.8E-04	-6.2E-04	-6.6E-04	-6.3E-04	-6.1E-04	-6.0E-04	-5.9E-04	-5.8E-04
997	-4.0E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.2E-04	-5.6E-04	-5.9E-04	-6.3E-04	-6.0E-04	-5.8E-04	-5.7E-04	-5.6E-04	-5.5E-04
998	-3.6E-04	-3.8E-04	-4.1E-04	-4.4E-04	-4.7E-04	-5.0E-04	-5.4E-04	-5.7E-04	-5.5E-04	-5.3E-04	-5.1E-04	-5.0E-04	-5.0E-04
999	-3.3E-04	-3.5E-04	-3.7E-04	-4.0E-04	-4.3E-04	-4.6E-04	-4.8E-04	-5.1E-04	-4.9E-04	-4.7E-04	-4.6E-04	-4.5E-04	-4.5E-04
1000	-3.0E-04	-3.2E-04	-3.4E-04	-3.6E-04	-3.9E-04	-4.2E-04	-4.5E-04	-4.7E-04	-4.5E-04	-4.3E-04	-4.2E-04	-4.1E-04	-4.1E-04
1001	-4.9E-04	-5.2E-04	-5.5E-04	-5.9E-04	-6.3E-04	-6.8E-04	-7.3E-04	-7.8E-04	-7.5E-04	-7.3E-04	-7.1E-04	-7.0E-04	-7.0E-04
1002	-4.5E-04	-4.7E-04	-5.0E-04	-5.4E-04	-5.7E-04	-6.2E-04	-6.6E-04	-7.0E-04	-6.7E-04	-6.5E-04	-6.4E-04	-6.3E-04	-6.2E-04
1003	-4.3E-04	-4.5E-04	-4.8E-04	-5.2E-04	-5.5E-04	-5.9E-04	-6.3E-04	-6.7E-04	-6.4E-04	-6.2E-04	-6.0E-04	-5.9E-04	-5.9E-04
1004	-3.9E-04	-4.1E-04	-4.4E-04	-4.7E-04	-5.0E-04	-5.4E-04	-5.7E-04	-6.0E-04	-5.8E-04	-5.6E-04	-5.5E-04	-5.4E-04	-5.3E-04
1005	-3.5E-04	-3.7E-04	-3.9E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.4E-04	-5.2E-04	-5.0E-04	-4.9E-04	-4.8E-04	-4.8E-04
1006	-3.2E-04	-3.3E-04	-3.6E-04	-3.8E-04	-4.1E-04	-4.4E-04	-4.7E-04	-4.9E-04	-4.7E-04	-4.6E-04	-4.4E-04	-4.3E-04	-4.3E-04
1007	-4.8E-04	-5.0E-04	-5.4E-04	-5.7E-04	-6.1E-04	-6.6E-04	-7.0E-04	-7.4E-04	-7.2E-04	-7.0E-04	-6.8E-04	-6.7E-04	-6.6E-04
1008	-4.6E-04	-4.9E-04	-5.2E-04	-5.5E-04	-5.9E-04	-6.3E-04	-6.7E-04	-7.1E-04	-6.8E-04	-6.6E-04	-6.5E-04	-6.4E-04	-6.3E-04
1009	-4.1E-04	-4.4E-04	-4.7E-04	-5.0E-04	-5.3E-04	-5.7E-04	-6.1E-04	-6.4E-04	-6.2E-04	-6.0E-04	-5.8E-04	-5.8E-04	-5.7E-04
1010	-3.7E-04	-3.9E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.5E-04	-5.8E-04	-5.5E-04	-5.4E-04	-5.2E-04	-5.1E-04	-5.1E-04
1011	-3.4E-04	-3.6E-04	-3.8E-04	-4.1E-04	-4.4E-04	-4.7E-04	-5.0E-04	-5.3E-04	-5.0E-04	-4.9E-04	-4.7E-04	-4.6E-04	-4.6E-04
1012	-5.1E-04	-5.4E-04	-5.8E-04	-6.2E-04	-6.6E-04	-7.0E-04	-7.5E-04	-7.9E-04	-7.7E-04	-7.5E-04	-7.3E-04	-7.2E-04	-7.1E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1013	-4.9E-04	-5.2E-04	-5.5E-04	-5.9E-04	-6.3E-04	-6.8E-04	-7.2E-04	-7.6E-04	-7.3E-04	-7.1E-04	-6.9E-04	-6.8E-04	-6.8E-04
1014	-4.4E-04	-4.7E-04	-5.0E-04	-5.3E-04	-5.7E-04	-6.1E-04	-6.5E-04	-6.8E-04	-6.6E-04	-6.4E-04	-6.3E-04	-6.2E-04	-6.1E-04
1015	-4.0E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.5E-04	-5.8E-04	-6.1E-04	-5.9E-04	-5.7E-04	-5.6E-04	-5.5E-04	-5.4E-04
1016	-3.7E-04	-3.9E-04	-4.1E-04	-4.4E-04	-4.7E-04	-5.0E-04	-5.3E-04	-5.6E-04	-5.4E-04	-5.2E-04	-5.1E-04	-5.0E-04	-4.9E-04
1017	-5.7E-04	-6.0E-04	-6.4E-04	-6.8E-04	-7.2E-04	-7.7E-04	-8.2E-04	-8.7E-04	-8.4E-04	-8.2E-04	-8.0E-04	-7.9E-04	-7.8E-04
1018	-5.5E-04	-5.8E-04	-6.1E-04	-6.5E-04	-7.0E-04	-7.4E-04	-7.9E-04	-8.3E-04	-8.0E-04	-7.8E-04	-7.7E-04	-7.5E-04	-7.5E-04
1019	-5.0E-04	-5.2E-04	-5.6E-04	-5.9E-04	-6.3E-04	-6.7E-04	-7.1E-04	-7.5E-04	-7.3E-04	-7.1E-04	-6.9E-04	-6.8E-04	-6.8E-04
1020	-4.4E-04	-4.7E-04	-5.0E-04	-5.3E-04	-5.7E-04	-6.1E-04	-6.4E-04	-6.8E-04	-6.5E-04	-6.3E-04	-6.2E-04	-6.1E-04	-6.0E-04
1021	-3.9E-04	-4.2E-04	-4.4E-04	-4.7E-04	-5.1E-04	-5.4E-04	-5.7E-04	-6.0E-04	-5.8E-04	-5.6E-04	-5.4E-04	-5.3E-04	-5.3E-04
1022	-6.8E-04	-7.2E-04	-7.6E-04	-8.1E-04	-8.6E-04	-9.2E-04	-9.8E-04	-1.0E-03	-1.0E-03	-9.8E-04	-9.6E-04	-9.5E-04	-9.4E-04
1023	-6.0E-04	-6.4E-04	-6.7E-04	-7.2E-04	-7.6E-04	-8.1E-04	-8.6E-04	-9.0E-04	-8.8E-04	-8.5E-04	-8.4E-04	-8.2E-04	-8.2E-04
1024	-5.4E-04	-5.7E-04	-6.1E-04	-6.5E-04	-6.9E-04	-7.3E-04	-7.7E-04	-8.1E-04	-7.9E-04	-7.7E-04	-7.5E-04	-7.4E-04	-7.3E-04
1025	-4.8E-04	-5.1E-04	-5.4E-04	-5.8E-04	-6.2E-04	-6.6E-04	-6.9E-04	-7.3E-04	-7.0E-04	-6.8E-04	-6.7E-04	-6.6E-04	-6.5E-04
1026	-4.3E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.5E-04	-5.8E-04	-6.1E-04	-6.5E-04	-6.2E-04	-6.0E-04	-5.8E-04	-5.7E-04	-5.7E-04
1027	-7.6E-04	-8.0E-04	-8.5E-04	-9.0E-04	-9.6E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03
1028	-6.6E-04	-6.9E-04	-7.4E-04	-7.8E-04	-8.3E-04	-8.8E-04	-9.3E-04	-9.8E-04	-9.5E-04	-9.3E-04	-9.1E-04	-8.9E-04	-8.9E-04
1029	-5.9E-04	-6.2E-04	-6.6E-04	-7.0E-04	-7.5E-04	-7.9E-04	-8.4E-04	-8.8E-04	-8.5E-04	-8.3E-04	-8.1E-04	-8.0E-04	-7.9E-04
1030	-5.2E-04	-5.5E-04	-5.8E-04	-6.2E-04	-6.6E-04	-7.0E-04	-7.4E-04	-7.8E-04	-7.5E-04	-7.3E-04	-7.2E-04	-7.0E-04	-7.0E-04
1031	-4.6E-04	-4.9E-04	-5.2E-04	-5.5E-04	-5.9E-04	-6.2E-04	-6.6E-04	-6.9E-04	-6.7E-04	-6.4E-04	-6.3E-04	-6.2E-04	-6.1E-04
1032	-8.3E-04	-8.8E-04	-9.3E-04	-9.9E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.1E-03
1033	-7.2E-04	-7.6E-04	-8.1E-04	-8.6E-04	-9.1E-04	-9.6E-04	-1.0E-03	-1.1E-03	-1.0E-03	-1.0E-03	-9.9E-04	-9.7E-04	-9.7E-04
1034	-6.4E-04	-6.8E-04	-7.2E-04	-7.7E-04	-8.1E-04	-8.6E-04	-9.1E-04	-9.5E-04	-9.2E-04	-9.0E-04	-8.8E-04	-8.7E-04	-8.6E-04
1035	-5.7E-04	-6.0E-04	-6.3E-04	-6.8E-04	-7.2E-04	-7.6E-04	-8.0E-04	-8.4E-04	-8.1E-04	-7.9E-04	-7.7E-04	-7.6E-04	-7.5E-04
1036	-5.0E-04	-5.3E-04	-5.6E-04	-6.0E-04	-6.4E-04	-6.8E-04	-7.1E-04	-7.5E-04	-7.2E-04	-7.0E-04	-6.8E-04	-6.7E-04	-6.6E-04
1037	-9.1E-04	-9.6E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03
1038	-7.9E-04	-8.3E-04	-8.8E-04	-9.4E-04	-9.9E-04	-1.1E-03	-1.1E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.1E-03
1039	-7.1E-04	-7.5E-04	-7.9E-04	-8.4E-04	-8.9E-04	-9.4E-04	-9.9E-04	-1.0E-03	-1.0E-03	-9.8E-04	-9.6E-04	-9.5E-04	-9.4E-04
1040	-6.2E-04	-6.6E-04	-7.0E-04	-7.4E-04	-7.9E-04	-8.3E-04	-8.8E-04	-9.2E-04	-8.9E-04	-8.6E-04	-8.4E-04	-8.3E-04	-8.2E-04
1041	-5.5E-04	-5.8E-04	-6.1E-04	-6.5E-04	-6.9E-04	-7.3E-04	-7.7E-04	-8.1E-04	-7.8E-04	-7.5E-04	-7.3E-04	-7.2E-04	-7.2E-04
1042	-8.8E-04	-9.3E-04	-9.8E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03
1043	-7.8E-04	-8.2E-04	-8.7E-04	-9.2E-04	-9.8E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03
1044	-6.9E-04	-7.3E-04	-7.7E-04	-8.2E-04	-8.7E-04	-9.1E-04	-9.6E-04	-1.0E-03	-9.7E-04	-9.5E-04	-9.2E-04	-9.1E-04	-9.0E-04
1045	-9.5E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.3E-03
1046	-8.5E-04	-9.0E-04	-9.5E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.1E-03
1047	-3.5E-03	-3.7E-03	-3.9E-03	-4.1E-03	-4.3E-03	-4.5E-03	-4.7E-03	-4.9E-03	-4.9E-03	-4.8E-03	-4.8E-03	-4.8E-03	-4.7E-03
1048	-2.7E-03	-2.8E-03	-3.0E-03	-3.2E-03	-3.3E-03	-3.5E-03	-3.6E-03	-3.8E-03	-3.7E-03	-3.7E-03	-3.7E-03	-3.6E-03	-3.6E-03
1049	-2.5E-03	-2.6E-03	-2.7E-03	-2.9E-03	-3.0E-03	-3.2E-03	-3.3E-03	-3.5E-03	-3.4E-03	-3.4E-03	-3.3E-03	-3.3E-03	-3.3E-03
1050	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.7E-03	-2.8E-03	-2.9E-03	-2.9E-03	-2.8E-03	-2.8E-03	-2.8E-03	-2.8E-03
1051	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.3E-03	-2.3E-03
1052	-2.5E-03	-2.6E-03	-2.8E-03	-2.9E-03	-3.1E-03	-3.2E-03	-3.3E-03	-3.5E-03	-3.4E-03	-3.4E-03	-3.4E-03	-3.3E-03	-3.3E-03
1053	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.7E-03	-2.8E-03	-2.8E-03	-2.7E-03	-2.7E-03	-2.7E-03	-2.7E-03
1054	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.2E-03	-2.2E-03	-2.2E-03	-2.1E-03	-2.1E-03
1055	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-1.8E-03	-1.8E-03	-1.8E-03	-1.7E-03	-1.7E-03
1056	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.5E-03	-2.6E-03	-2.6E-03	-2.5E-03	-2.5E-03	-2.5E-03	-2.5E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1057	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.1E-03	-2.0E-03	-2.0E-03	-2.0E-03	-2.0E-03
1058	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.4E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.3E-03
1059	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.9E-03	-1.9E-03
1060	-7.5E-04	-7.9E-04	-8.4E-04	-8.9E-04	-9.4E-04	-9.9E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03	-1.0E-03	-9.9E-04
1061	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.7E-03	-1.7E-03	-1.7E-03	-1.7E-03	-1.6E-03	-1.6E-03
1062	-1.1E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.4E-03	-1.4E-03	-1.4E-03
1063	-9.3E-04	-9.8E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.2E-03
1064	-8.2E-04	-8.6E-04	-9.1E-04	-9.6E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.1E-03
1065	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.8E-03	-1.9E-03	-1.9E-03	-1.9E-03	-1.8E-03	-1.8E-03	-1.8E-03
1066	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.6E-03
1067	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.5E-03	-1.4E-03	-1.4E-03	-1.4E-03	-1.4E-03	-1.4E-03
1068	-8.9E-04	-9.4E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03
1069	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.1E-03	-2.1E-03	-2.1E-03	-2.0E-03	-2.0E-03
1070	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.7E-03	-1.8E-03	-1.9E-03	-1.9E-03	-1.8E-03	-1.8E-03	-1.8E-03	-1.8E-03
1071	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.5E-03	-1.5E-03	-1.5E-03
1072	-9.9E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.4E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03
1073	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.4E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.3E-03
1074	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.1E-03	-2.1E-03	-2.1E-03	-2.1E-03	-2.0E-03
1075	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.7E-03	-1.8E-03	-1.8E-03	-1.7E-03	-1.7E-03	-1.7E-03	-1.7E-03
1076	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.5E-03
1077	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.6E-03	-2.7E-03	-2.8E-03	-2.7E-03	-2.7E-03	-2.7E-03	-2.7E-03	-2.7E-03
1078	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.4E-03	-2.5E-03	-2.4E-03	-2.4E-03	-2.4E-03	-2.3E-03	-2.3E-03
1079	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.0E-03	-2.0E-03	-2.0E-03	-1.9E-03	-1.9E-03	-1.9E-03
1080	-1.2E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.7E-03	-1.7E-03	-1.7E-03	-1.7E-03	-1.6E-03	-1.6E-03
1081	4.1E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.2E-03	5.3E-03	5.3E-03	5.3E-03	5.3E-03
1082	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	4.9E-03	5.0E-03	5.0E-03
1083	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03	4.8E-03	4.9E-03
1084	3.9E-03	4.1E-03	4.3E-03	4.4E-03	4.5E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.1E-03	5.1E-03	5.1E-03
1085	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03
1086	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.6E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03	4.7E-03
1087	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.7E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03
1088	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.5E-03	4.5E-03	4.5E-03	4.6E-03	4.6E-03
1089	3.4E-03	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.3E-03	4.4E-03	4.4E-03	4.4E-03	4.4E-03
1090	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.6E-03	4.6E-03	4.6E-03	4.7E-03	4.7E-03
1091	3.4E-03	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.4E-03	4.4E-03	4.4E-03	4.5E-03	4.5E-03	4.5E-03
1092	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.2E-03	4.2E-03	4.2E-03	4.3E-03	4.3E-03	4.3E-03
1093	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	4.3E-03	4.3E-03	4.3E-03	4.3E-03
1094	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03	4.1E-03
1095	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.2E-03	4.3E-03	4.3E-03	4.3E-03	4.3E-03
1096	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.2E-03	4.2E-03	4.3E-03	4.3E-03	4.3E-03	4.3E-03
1097	-7.8E-04	-8.3E-04	-8.8E-04	-9.3E-04	-9.8E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03
1098	-8.6E-04	-9.1E-04	-9.6E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.1E-03
1099	-9.4E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.3E-03
1100	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.4E-03	-1.4E-03	-1.4E-03	-1.4E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1101	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.6E-03
1102	5.9E-04	6.2E-04	6.4E-04	6.7E-04	6.9E-04	6.8E-04	6.9E-04	7.1E-04	7.2E-04	7.3E-04	7.4E-04	7.4E-04	7.4E-04
1103	6.0E-04	6.2E-04	6.5E-04	6.7E-04	7.0E-04	6.9E-04	6.9E-04	7.2E-04	7.3E-04	7.3E-04	7.4E-04	7.4E-04	7.5E-04
1104	6.0E-04	6.3E-04	6.6E-04	6.8E-04	7.0E-04	7.0E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.5E-04
1105	6.1E-04	6.4E-04	6.7E-04	6.9E-04	7.2E-04	7.1E-04	7.1E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.6E-04	7.6E-04
1106	6.3E-04	6.6E-04	6.8E-04	7.1E-04	7.3E-04	7.2E-04	7.2E-04	7.5E-04	7.6E-04	7.6E-04	7.7E-04	7.7E-04	7.7E-04
1107	6.5E-04	6.9E-04	7.1E-04	7.4E-04	7.7E-04	7.5E-04	7.5E-04	7.8E-04	7.9E-04	7.9E-04	8.0E-04	8.0E-04	8.0E-04
1108	7.1E-04	7.5E-04	7.8E-04	8.1E-04	8.4E-04	8.3E-04	8.3E-04	8.6E-04	8.6E-04	8.7E-04	8.7E-04	8.8E-04	8.8E-04
1109	6.6E-04	6.9E-04	7.2E-04	7.5E-04	7.7E-04	7.6E-04	7.6E-04	7.8E-04	7.9E-04	8.0E-04	8.0E-04	8.1E-04	8.1E-04
1110	6.7E-04	7.0E-04	7.3E-04	7.6E-04	7.8E-04	7.7E-04	7.6E-04	7.9E-04	8.0E-04	8.1E-04	8.1E-04	8.1E-04	8.2E-04
1111	7.6E-04	7.9E-04	8.2E-04	8.6E-04	8.9E-04	8.8E-04	8.8E-04	9.1E-04	9.2E-04	9.2E-04	9.2E-04	9.3E-04	9.3E-04
1112	7.1E-04	7.4E-04	7.7E-04	8.0E-04	8.3E-04	8.0E-04	7.9E-04	8.2E-04	8.3E-04	8.3E-04	8.4E-04	8.4E-04	8.4E-04
1113	6.6E-04	6.9E-04	7.2E-04	7.4E-04	7.7E-04	7.4E-04	7.3E-04	7.6E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04	7.8E-04
1114	7.2E-04	7.5E-04	7.8E-04	8.0E-04	8.3E-04	7.9E-04	7.7E-04	8.0E-04	8.0E-04	8.1E-04	8.2E-04	8.2E-04	8.2E-04
1115	7.3E-04	7.6E-04	7.9E-04	8.2E-04	8.4E-04	7.9E-04	7.7E-04	7.9E-04	8.0E-04	8.1E-04	8.1E-04	8.1E-04	8.2E-04
1116	1.5E-04	1.4E-04	1.3E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04
1117	3.6E-04	3.6E-04	3.5E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04	4.3E-04
1118	2.4E-04	2.3E-04	2.1E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
1119	2.5E-04	2.4E-04	2.1E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04
1120	1.4E-04	1.3E-04	1.2E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
1121	1.5E-04	1.4E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04
1122	1.3E-04	1.3E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
1123	1.5E-04	1.4E-04	1.2E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
1124	1.4E-04	1.3E-04	1.2E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
1125	1.2E-04	1.2E-04	1.1E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
1126	1.4E-04	1.3E-04	1.2E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04
1127	1.3E-04	1.2E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
1128	1.5E-04	1.4E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
1129	1.1E-04	1.1E-04	1.0E-04	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04
1130	9.5E-05	9.4E-05	8.7E-05	8.4E-05	8.7E-05	9.0E-05	9.3E-05	9.7E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
1131	9.5E-05	9.4E-05	8.6E-05	8.4E-05	8.7E-05	8.9E-05	9.2E-05	9.6E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
1132	9.4E-05	9.1E-05	8.4E-05	8.1E-05	8.3E-05	8.6E-05	8.9E-05	9.3E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
1133	9.0E-05	8.8E-05	7.9E-05	7.6E-05	7.8E-05	8.1E-05	8.4E-05	8.7E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04
1134	8.8E-05	8.5E-05	7.6E-05	7.2E-05	7.5E-05	7.7E-05	8.0E-05	8.4E-05	9.4E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
1135	8.6E-05	8.3E-05	7.3E-05	7.0E-05	7.2E-05	7.4E-05	7.7E-05	8.1E-05	9.2E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
1136	7.6E-05	7.3E-05	6.2E-05	5.8E-05	6.0E-05	6.1E-05	6.4E-05	6.7E-05	7.8E-05	8.8E-05	9.5E-05	1.0E-04	1.0E-04
1137	7.4E-05	7.0E-05	6.0E-05	5.5E-05	5.7E-05	5.8E-05	6.0E-05	6.3E-05	7.5E-05	8.4E-05	9.1E-05	9.6E-05	9.8E-05
1138	7.9E-05	7.5E-05	6.6E-05	6.1E-05	6.4E-05	6.5E-05	6.8E-05	7.1E-05	8.2E-05	9.1E-05	9.8E-05	1.0E-04	1.1E-04
1139	2.2E-04	2.2E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.8E-04
1140	2.2E-04	2.2E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.8E-04	2.8E-04
1141	1.9E-04	2.0E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
1142	8.9E-05	8.6E-05	7.6E-05	7.1E-05	7.4E-05	7.6E-05	8.0E-05	8.3E-05	9.6E-05	1.1E-04	1.2E-04	1.2E-04	1.2E-04
1143	1.7E-04	1.6E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
1144	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03	4.2E-03	4.2E-03	4.2E-03	4.2E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1145	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.4E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03	5.5E-03
1146	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03
1147	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.4E-03	3.5E-03	3.7E-03	3.8E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03
1148	2.7E-03	2.8E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03	3.5E-03	3.5E-03
1149	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03	3.6E-03
1150	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03
1151	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
1152	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03
1153	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03	3.4E-03	3.5E-03	3.5E-03
1154	2.4E-03	2.5E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03
1155	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03	3.0E-03
1156	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03
1157	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	3.0E-03
1158	2.1E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
1159	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03	3.2E-03
1160	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
1161	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
1162	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03
1163	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
1164	2.3E-03	2.4E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	3.0E-03
1165	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03
1166	2.2E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03
1167	-5.1E-04	-5.4E-04	-5.9E-04	-6.6E-04	-7.4E-04	-7.9E-04	-8.3E-04	-8.6E-04	-8.0E-04	-7.5E-04	-7.1E-04	-6.9E-04	-6.8E-04
1168	-3.6E-04	-3.8E-04	-4.3E-04	-5.0E-04	-5.7E-04	-6.2E-04	-6.5E-04	-6.9E-04	-6.3E-04	-5.7E-04	-5.4E-04	-5.1E-04	-5.0E-04
1169	-3.5E-04	-3.8E-04	-4.2E-04	-4.8E-04	-5.4E-04	-5.9E-04	-6.2E-04	-6.5E-04	-6.0E-04	-5.6E-04	-5.3E-04	-5.1E-04	-5.0E-04
1170	-2.0E-04	-2.1E-04	-2.6E-04	-3.4E-04	-4.2E-04	-4.7E-04	-4.9E-04	-5.2E-04	-4.6E-04	-4.1E-04	-3.7E-04	-3.4E-04	-3.3E-04
1171	-2.5E-04	-2.7E-04	-3.1E-04	-3.8E-04	-4.5E-04	-4.9E-04	-5.1E-04	-5.4E-04	-4.9E-04	-4.5E-04	-4.2E-04	-4.0E-04	-3.9E-04
1172	-2.4E-04	-2.5E-04	-2.9E-04	-3.4E-04	-4.0E-04	-4.3E-04	-4.6E-04	-4.8E-04	-4.4E-04	-4.0E-04	-3.7E-04	-3.6E-04	-3.5E-04
1173	-1.2E-04	-1.3E-04	-1.7E-04	-2.4E-04	-3.1E-04	-3.4E-04	-3.6E-04	-3.9E-04	-3.4E-04	-2.9E-04	-2.6E-04	-2.4E-04	-2.3E-04
1174	-1.1E-04	-1.2E-04	-1.5E-04	-2.0E-04	-2.5E-04	-2.8E-04	-3.0E-04	-3.2E-04	-2.7E-04	-2.4E-04	-2.1E-04	-1.9E-04	-1.8E-04
1175	3.1E-05	2.7E-05	-5.1E-06	-6.8E-05	-1.3E-04	-1.6E-04	-1.8E-04	-1.9E-04	-1.4E-04	-9.5E-05	-6.1E-05	-3.9E-05	-2.8E-05
1176	4.3E-05	4.2E-05	2.1E-05	-2.3E-05	-7.0E-05	-9.2E-05	-1.0E-04	-1.1E-04	-6.8E-05	-2.8E-05	1.3E-06	2.1E-05	3.1E-05
1177	3.1E-04	3.2E-04	3.0E-04	2.5E-04	2.0E-04	1.9E-04	1.9E-04	1.9E-04	2.4E-04	2.9E-04	3.3E-04	3.5E-04	3.6E-04
1178	3.0E-04	3.2E-04	3.1E-04	2.8E-04	2.5E-04	2.4E-04	2.4E-04	2.4E-04	2.9E-04	3.3E-04	3.7E-04	3.9E-04	4.0E-04
1179	3.3E-04	3.5E-04	3.5E-04	3.3E-04	3.1E-04	3.1E-04	3.1E-04	3.2E-04	3.6E-04	4.0E-04	4.3E-04	4.5E-04	4.6E-04
1180	6.6E-04	6.9E-04	7.0E-04	6.7E-04	6.3E-04	6.3E-04	6.5E-04	6.7E-04	7.3E-04	7.8E-04	8.2E-04	8.4E-04	8.5E-04
1181	6.0E-04	6.3E-04	6.4E-04	6.3E-04	6.1E-04	6.2E-04	6.3E-04	6.5E-04	7.0E-04	7.5E-04	7.8E-04	8.0E-04	8.1E-04
1182	5.8E-04	6.1E-04	6.2E-04	6.2E-04	6.1E-04	6.2E-04	6.4E-04	6.6E-04	7.1E-04	7.4E-04	7.7E-04	7.9E-04	8.0E-04
1183	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
1184	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
1185	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
1186	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1187	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
1188	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1189	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03
1190	-4.4E-04	-4.7E-04	-5.1E-04	-5.6E-04	-6.2E-04	-6.6E-04	-7.0E-04	-7.3E-04	-6.9E-04	-6.5E-04	-6.2E-04	-6.0E-04	-5.9E-04
1191	-3.2E-04	-3.4E-04	-3.7E-04	-4.2E-04	-4.7E-04	-5.1E-04	-5.4E-04	-5.6E-04	-5.3E-04	-4.9E-04	-4.7E-04	-4.5E-04	-4.4E-04
1192	-1.7E-04	-1.8E-04	-2.1E-04	-2.5E-04	-2.9E-04	-3.1E-04	-3.3E-04	-3.5E-04	-3.1E-04	-2.8E-04	-2.6E-04	-2.4E-04	-2.4E-04
1193	-6.7E-05	-7.2E-05	-9.1E-05	-1.2E-04	-1.6E-04	-1.8E-04	-2.0E-04	-2.1E-04	-1.7E-04	-1.4E-04	-1.1E-04	-9.8E-05	-9.0E-05
1194	7.7E-05	8.0E-05	6.8E-05	4.1E-05	1.1E-05	-3.3E-06	-9.7E-06	-1.5E-05	2.4E-05	5.8E-05	8.4E-05	1.0E-04	1.1E-04
1195	1.5E-04	1.6E-04	1.6E-04	1.4E-04	1.2E-04	1.1E-04	1.1E-04	1.1E-04	1.5E-04	1.8E-04	2.0E-04	2.2E-04	2.3E-04
1196	3.2E-04	3.3E-04	3.4E-04	3.3E-04	3.2E-04	3.2E-04	3.3E-04	3.4E-04	3.8E-04	4.1E-04	4.3E-04	4.5E-04	4.6E-04
1197	5.0E-04	5.2E-04	5.4E-04	5.4E-04	5.4E-04	5.5E-04	5.7E-04	5.8E-04	6.2E-04	6.6E-04	6.8E-04	7.0E-04	7.1E-04
1198	4.9E-04	5.2E-04	5.4E-04	5.4E-04	5.5E-04	5.6E-04	5.7E-04	5.9E-04	6.3E-04	6.6E-04	6.8E-04	7.0E-04	7.1E-04
1199	7.0E-04	7.3E-04	7.6E-04	7.7E-04	7.8E-04	8.0E-04	8.3E-04	8.6E-04	9.0E-04	9.3E-04	9.6E-04	9.7E-04	9.8E-04
1200	6.4E-04	6.8E-04	7.0E-04	7.2E-04	7.3E-04	7.5E-04	7.7E-04	8.0E-04	8.3E-04	8.7E-04	8.9E-04	9.0E-04	9.1E-04
1201	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1202	9.0E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
1203	8.0E-04	8.4E-04	8.7E-04	8.9E-04	9.1E-04	9.4E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1204	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03
1205	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1206	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1207	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
1208	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03
1209	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1210	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
1211	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03
1212	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03
1213	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
1214	2.8E-03	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03	3.8E-03	3.8E-03
1215	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03	3.1E-03
1216	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
1217	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03
1218	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1219	3.0E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.2E-03	4.2E-03
1220	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03
1221	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03
1222	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
1223	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
1224	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.7E-03	5.8E-03	5.8E-03	5.8E-03
1225	3.3E-03	3.4E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.3E-03	4.4E-03	4.4E-03	4.4E-03	4.5E-03
1226	2.6E-03	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03
1227	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
1228	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
1229	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03
1230	4.4E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.0E-03	6.1E-03
1231	3.4E-03	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.5E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03
1232	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.6E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03	3.7E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1233	2.2E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03
1234	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
1235	5.7E-03	6.0E-03	6.3E-03	6.5E-03	6.7E-03	7.0E-03	7.2E-03	7.5E-03	7.6E-03	7.7E-03	7.7E-03	7.8E-03	7.8E-03
1236	4.5E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.1E-03	6.2E-03	6.2E-03
1237	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.7E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03	4.9E-03
1238	2.9E-03	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03
1239	2.3E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03
1240	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
1241	5.4E-03	5.7E-03	6.0E-03	6.2E-03	6.4E-03	6.6E-03	6.9E-03	7.1E-03	7.2E-03	7.3E-03	7.3E-03	7.4E-03	7.4E-03
1242	4.5E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03	6.1E-03
1243	3.6E-03	3.8E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03	4.9E-03
1244	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	3.9E-03	4.0E-03	4.0E-03	4.0E-03	4.0E-03
1245	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03
1246	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03
1247	6.0E-03	6.4E-03	6.6E-03	6.9E-03	7.1E-03	7.3E-03	7.6E-03	7.8E-03	7.9E-03	8.0E-03	8.0E-03	8.1E-03	8.1E-03
1248	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03	6.1E-03
1249	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.6E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03	5.0E-03	5.0E-03
1250	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03
1251	2.5E-03	2.6E-03	2.8E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03
1252	7.1E-03	7.4E-03	7.7E-03	8.0E-03	8.3E-03	8.5E-03	8.8E-03	9.0E-03	9.1E-03	9.2E-03	9.2E-03	9.3E-03	9.3E-03
1253	5.7E-03	6.0E-03	6.2E-03	6.4E-03	6.6E-03	6.8E-03	7.0E-03	7.3E-03	7.3E-03	7.4E-03	7.5E-03	7.5E-03	7.5E-03
1254	4.6E-03	4.8E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.7E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03
1255	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03
1256	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03	4.2E-03
1257	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03	3.4E-03
1258	6.9E-03	7.2E-03	7.5E-03	7.8E-03	8.0E-03	8.2E-03	8.4E-03	8.7E-03	8.7E-03	8.8E-03	8.8E-03	8.9E-03	8.9E-03
1259	5.5E-03	5.8E-03	6.1E-03	6.3E-03	6.5E-03	6.6E-03	6.8E-03	7.1E-03	7.1E-03	7.2E-03	7.2E-03	7.3E-03	7.3E-03
1260	4.5E-03	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03	5.9E-03
1261	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03	4.9E-03	5.0E-03
1262	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.9E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03	4.1E-03
1263	6.7E-03	7.1E-03	7.4E-03	7.6E-03	7.8E-03	8.0E-03	8.2E-03	8.4E-03	8.5E-03	8.5E-03	8.6E-03	8.6E-03	8.6E-03
1264	5.4E-03	5.7E-03	5.9E-03	6.1E-03	6.3E-03	6.5E-03	6.7E-03	6.9E-03	6.9E-03	7.0E-03	7.0E-03	7.0E-03	7.1E-03
1265	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.5E-03	5.6E-03	5.6E-03	5.7E-03	5.7E-03
1266	3.7E-03	3.9E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.7E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03	4.9E-03
1267	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	4.0E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03
1268	6.6E-03	6.9E-03	7.2E-03	7.4E-03	7.6E-03	7.8E-03	8.0E-03	8.2E-03	8.2E-03	8.2E-03	8.3E-03	8.3E-03	8.3E-03
1269	5.3E-03	5.5E-03	5.8E-03	6.0E-03	6.1E-03	6.3E-03	6.4E-03	6.6E-03	6.7E-03	6.7E-03	6.8E-03	6.8E-03	6.8E-03
1270	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03
1271	3.6E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.6E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03	4.7E-03
1272	6.4E-03	6.7E-03	7.0E-03	7.2E-03	7.4E-03	7.5E-03	7.7E-03	7.9E-03	7.9E-03	7.9E-03	8.0E-03	8.0E-03	8.0E-03
1273	5.1E-03	5.4E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.2E-03	6.4E-03	6.4E-03	6.4E-03	6.5E-03	6.5E-03	6.5E-03
1274	4.1E-03	4.3E-03	4.5E-03	4.7E-03	4.8E-03	4.9E-03	5.1E-03	5.2E-03	5.2E-03	5.3E-03	5.3E-03	5.4E-03	5.4E-03
1275	5.0E-03	5.2E-03	5.4E-03	5.6E-03	5.7E-03	5.8E-03	6.0E-03	6.1E-03	6.2E-03	6.2E-03	6.2E-03	6.3E-03	6.3E-03
1276	4.8E-03	5.0E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.8E-03	5.9E-03	5.9E-03	6.0E-03	6.0E-03	6.0E-03	6.1E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1277	4.7E-03	4.9E-03	5.1E-03	5.2E-03	5.3E-03	5.4E-03	5.6E-03	5.7E-03	5.7E-03	5.8E-03	5.8E-03	5.8E-03	5.8E-03
1278	5.9E-03	6.1E-03	6.4E-03	6.5E-03	6.7E-03	6.8E-03	6.9E-03	7.0E-03	7.0E-03	7.1E-03	7.1E-03	7.2E-03	7.2E-03
1279	6.1E-03	6.3E-03	6.5E-03	6.7E-03	6.9E-03	7.0E-03	7.1E-03	7.3E-03	7.2E-03	7.3E-03	7.3E-03	7.4E-03	7.4E-03
1280	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	3.9E-03	4.0E-03	4.0E-03	4.0E-03	4.0E-03
1281	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	4.3E-03	4.4E-03	4.4E-03	4.4E-03
1282	3.0E-03	3.1E-03	3.2E-03	3.4E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03
1283	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.2E-03	4.3E-03	4.3E-03	4.3E-03
1284	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03	3.7E-03
1285	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03	4.1E-03
1286	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03	3.7E-03
1287	4.7E-03	4.9E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03	5.6E-03	5.8E-03	5.8E-03	5.8E-03	5.9E-03	5.9E-03	5.9E-03
1288	3.8E-03	4.0E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.6E-03	4.7E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03	4.8E-03
1289	3.1E-03	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03	3.9E-03	4.0E-03
1290	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03
1291	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.2E-03	5.4E-03	5.5E-03	5.6E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03	5.7E-03
1292	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03	4.8E-03	4.8E-03
1293	3.1E-03	3.2E-03	3.3E-03	3.5E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03	3.9E-03
1294	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03
1295	4.4E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03	5.2E-03	5.3E-03	5.4E-03	5.4E-03	5.5E-03	5.5E-03	5.5E-03	5.5E-03
1296	3.7E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.6E-03	4.6E-03	4.6E-03	4.7E-03	4.7E-03	4.7E-03
1297	3.0E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03	3.9E-03	3.9E-03	3.9E-03	3.9E-03
1298	2.5E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03
1299	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03	3.0E-03
1300	4.9E-03	5.1E-03	5.3E-03	5.5E-03	5.6E-03	5.8E-03	5.9E-03	6.0E-03	6.0E-03	6.1E-03	6.1E-03	6.1E-03	6.1E-03
1301	4.2E-03	4.4E-03	4.6E-03	4.7E-03	4.9E-03	5.0E-03	5.1E-03	5.2E-03	5.2E-03	5.3E-03	5.3E-03	5.3E-03	5.3E-03
1302	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.5E-03	4.5E-03	4.5E-03	4.5E-03	4.6E-03
1303	3.0E-03	3.1E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.8E-03	3.8E-03	3.8E-03	3.9E-03
1304	2.5E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03
1305	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03
1306	4.1E-03	4.3E-03	4.4E-03	4.6E-03	4.7E-03	4.8E-03	4.9E-03	5.0E-03	5.1E-03	5.1E-03	5.1E-03	5.1E-03	5.2E-03
1307	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.4E-03	4.4E-03	4.4E-03	4.4E-03	4.5E-03	4.5E-03
1308	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03	3.8E-03	3.8E-03	3.8E-03
1309	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03	3.2E-03
1310	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
1311	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03
1312	3.4E-03	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	4.3E-03	4.3E-03	4.3E-03	4.3E-03
1313	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03	3.8E-03	3.8E-03	3.8E-03
1314	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03
1315	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03
1316	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
1317	3.3E-03	3.4E-03	3.5E-03	3.7E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.1E-03	4.1E-03	4.2E-03	4.2E-03	4.2E-03
1318	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03
1319	2.4E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03	3.1E-03	3.2E-03	3.2E-03
1320	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1321	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
1322	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03
1323	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.1E-03	3.1E-03	3.1E-03	3.1E-03
1324	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03
1325	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
1326	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03
1327	2.7E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03	3.6E-03
1328	-5.9E-04	-6.2E-04	-6.7E-04	-7.2E-04	-7.7E-04	-8.2E-04	-8.6E-04	-9.0E-04	-8.6E-04	-8.2E-04	-7.9E-04	-7.7E-04	-7.6E-04
1329	-5.2E-04	-5.5E-04	-5.9E-04	-6.5E-04	-7.0E-04	-7.5E-04	-7.8E-04	-8.2E-04	-7.8E-04	-7.4E-04	-7.1E-04	-6.9E-04	-6.8E-04
1330	-4.2E-04	-4.4E-04	-4.7E-04	-5.2E-04	-5.6E-04	-6.0E-04	-6.3E-04	-6.6E-04	-6.2E-04	-5.9E-04	-5.7E-04	-5.5E-04	-5.4E-04
1331	-3.8E-04	-4.0E-04	-4.4E-04	-4.8E-04	-5.3E-04	-5.7E-04	-6.0E-04	-6.3E-04	-5.9E-04	-5.6E-04	-5.3E-04	-5.2E-04	-5.1E-04
1332	-3.0E-04	-3.2E-04	-3.5E-04	-3.8E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.0E-04	-4.7E-04	-4.4E-04	-4.2E-04	-4.0E-04	-4.0E-04
1333	-2.6E-04	-2.8E-04	-3.0E-04	-3.4E-04	-3.8E-04	-4.1E-04	-4.4E-04	-4.6E-04	-4.2E-04	-3.9E-04	-3.7E-04	-3.6E-04	-3.5E-04
1334	-1.7E-04	-1.9E-04	-2.1E-04	-2.4E-04	-2.7E-04	-2.9E-04	-3.1E-04	-3.3E-04	-2.9E-04	-2.7E-04	-2.5E-04	-2.3E-04	-2.3E-04
1335	-1.1E-04	-1.2E-04	-1.3E-04	-1.6E-04	-1.9E-04	-2.1E-04	-2.3E-04	-2.4E-04	-2.1E-04	-1.8E-04	-1.6E-04	-1.4E-04	-1.4E-04
1336	-1.6E-05	-1.8E-05	-3.0E-05	-5.5E-05	-8.1E-05	-9.7E-05	-1.1E-04	-1.2E-04	-8.1E-05	-5.1E-05	-2.9E-05	-1.4E-05	-6.8E-06
1337	9.6E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
1338	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1339	9.3E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1340	9.5E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1341	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1342	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04	7.0E-04	7.0E-04	7.1E-04
1343	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1344	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1345	5.5E-04	5.8E-04	6.0E-04	6.3E-04	6.5E-04	6.5E-04	6.6E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04	7.2E-04	7.2E-04
1346	8.3E-04	8.7E-04	9.1E-04	9.3E-04	9.6E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1347	8.5E-04	8.9E-04	9.3E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1348	8.8E-04	9.2E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1349	9.1E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1350	5.7E-04	6.0E-04	6.2E-04	6.5E-04	6.7E-04	6.7E-04	6.8E-04	7.1E-04	7.2E-04	7.3E-04	7.3E-04	7.4E-04	7.4E-04
1351	8.2E-04	8.6E-04	8.9E-04	9.2E-04	9.5E-04	9.7E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
1352	8.4E-04	8.8E-04	9.2E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1353	8.7E-04	9.1E-04	9.5E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1354	9.0E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
1355	6.1E-04	6.4E-04	6.6E-04	6.9E-04	7.1E-04	7.2E-04	7.3E-04	7.5E-04	7.6E-04	7.7E-04	7.7E-04	7.8E-04	7.8E-04
1356	7.3E-04	7.7E-04	8.0E-04	8.2E-04	8.4E-04	8.6E-04	8.8E-04	9.1E-04	9.2E-04	9.3E-04	9.4E-04	9.4E-04	9.5E-04
1357	7.5E-04	7.9E-04	8.2E-04	8.4E-04	8.6E-04	8.8E-04	9.0E-04	9.4E-04	9.5E-04	9.6E-04	9.7E-04	9.7E-04	9.7E-04
1358	7.7E-04	8.1E-04	8.4E-04	8.6E-04	8.9E-04	9.1E-04	9.3E-04	9.7E-04	9.8E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03
1359	8.0E-04	8.4E-04	8.7E-04	8.9E-04	9.1E-04	9.3E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
1360	7.1E-04	7.5E-04	7.8E-04	8.1E-04	8.4E-04	8.4E-04	8.6E-04	8.9E-04	9.0E-04	9.0E-04	9.1E-04	9.1E-04	9.1E-04
1361	6.9E-04	7.2E-04	7.5E-04	7.7E-04	7.9E-04	8.0E-04	8.2E-04	8.5E-04	8.6E-04	8.7E-04	8.7E-04	8.8E-04	8.8E-04
1362	7.0E-04	7.4E-04	7.6E-04	7.8E-04	8.0E-04	8.2E-04	8.4E-04	8.7E-04	8.8E-04	8.9E-04	9.0E-04	9.0E-04	9.1E-04
1363	7.2E-04	7.6E-04	7.8E-04	8.0E-04	8.2E-04	8.4E-04	8.6E-04	9.0E-04	9.1E-04	9.2E-04	9.3E-04	9.3E-04	9.3E-04
1364	7.4E-04	7.8E-04	8.0E-04	8.2E-04	8.4E-04	8.6E-04	8.9E-04	9.2E-04	9.3E-04	9.4E-04	9.5E-04	9.6E-04	9.6E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1365	7.0E-04	7.3E-04	7.7E-04	8.0E-04	8.3E-04	8.3E-04	8.4E-04	8.7E-04	8.8E-04	8.9E-04	8.9E-04	9.0E-04	9.0E-04
1366	6.5E-04	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.6E-04	7.7E-04	8.0E-04	8.1E-04	8.2E-04	8.3E-04	8.3E-04	8.4E-04
1367	6.6E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.8E-04	7.9E-04	8.2E-04	8.3E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04
1368	6.8E-04	7.1E-04	7.4E-04	7.6E-04	7.8E-04	7.9E-04	8.1E-04	8.4E-04	8.6E-04	8.7E-04	8.7E-04	8.8E-04	8.8E-04
1369	6.9E-04	7.3E-04	7.6E-04	7.7E-04	7.9E-04	8.1E-04	8.3E-04	8.6E-04	8.8E-04	8.9E-04	9.0E-04	9.0E-04	9.0E-04
1370	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.9E-04	6.8E-04	6.9E-04	7.1E-04	7.2E-04	7.3E-04	7.4E-04	7.4E-04	7.4E-04
1371	6.2E-04	6.5E-04	6.8E-04	6.9E-04	7.1E-04	7.2E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.9E-04	8.0E-04	8.0E-04
1372	6.3E-04	6.6E-04	6.9E-04	7.0E-04	7.2E-04	7.4E-04	7.5E-04	7.8E-04	7.9E-04	8.0E-04	8.1E-04	8.2E-04	8.2E-04
1373	6.4E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.5E-04	7.7E-04	8.0E-04	8.1E-04	8.2E-04	8.3E-04	8.4E-04	8.4E-04
1374	6.6E-04	6.9E-04	7.2E-04	7.3E-04	7.5E-04	7.7E-04	7.9E-04	8.2E-04	8.3E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04
1375	5.8E-04	6.1E-04	6.3E-04	6.6E-04	6.8E-04	6.6E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.0E-04	7.1E-04	7.1E-04
1376	5.9E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.5E-04
1377	6.0E-04	6.2E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04	7.1E-04	7.3E-04	7.4E-04	7.5E-04	7.6E-04	7.6E-04	7.7E-04
1378	6.0E-04	6.3E-04	6.6E-04	6.8E-04	6.9E-04	7.1E-04	7.2E-04	7.5E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04	7.8E-04
1379	6.2E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.2E-04	7.4E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04	8.0E-04	8.0E-04
1380	5.3E-04	5.6E-04	5.8E-04	6.0E-04	6.2E-04	6.1E-04	6.0E-04	6.2E-04	6.3E-04	6.4E-04	6.5E-04	6.5E-04	6.5E-04
1381	6.0E-04	6.2E-04	6.5E-04	6.7E-04	6.9E-04	6.6E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04	6.9E-04	7.0E-04	7.0E-04
1382	6.8E-04	7.1E-04	7.4E-04	7.6E-04	7.9E-04	7.3E-04	7.1E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.6E-04	7.6E-04
1383	7.7E-04	8.0E-04	8.3E-04	8.5E-04	8.8E-04	8.0E-04	7.6E-04	7.9E-04	8.0E-04	8.0E-04	8.1E-04	8.1E-04	8.1E-04
1384	8.4E-04	8.7E-04	9.0E-04	9.3E-04	9.5E-04	8.6E-04	8.0E-04	8.3E-04	8.4E-04	8.4E-04	8.5E-04	8.5E-04	8.5E-04
1385	8.6E-04	9.0E-04	9.3E-04	9.5E-04	9.8E-04	8.8E-04	8.2E-04	8.5E-04	8.5E-04	8.6E-04	8.7E-04	8.7E-04	8.7E-04
1386	8.2E-04	8.5E-04	8.8E-04	9.0E-04	9.3E-04	8.5E-04	7.9E-04	8.1E-04	8.2E-04	8.3E-04	8.3E-04	8.4E-04	8.4E-04
1387	7.3E-04	7.6E-04	7.9E-04	8.1E-04	8.3E-04	7.8E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04	7.9E-04	7.9E-04
1388	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.3E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.4E-04	7.5E-04	7.5E-04
1389	6.2E-04	6.4E-04	6.7E-04	6.9E-04	7.0E-04	6.9E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.2E-04	7.2E-04	7.2E-04
1390	5.9E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	6.7E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04	7.1E-04
1391	5.7E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.6E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.2E-04	7.2E-04	7.3E-04
1392	5.7E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04	7.0E-04	7.1E-04	7.2E-04	7.3E-04	7.4E-04	7.4E-04
1393	5.8E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.5E-04
1394	5.9E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	6.9E-04	7.1E-04	7.3E-04	7.4E-04	7.6E-04	7.6E-04	7.7E-04	7.7E-04
1395	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.2E-04	6.0E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04	6.3E-04	6.4E-04	6.4E-04
1396	5.9E-04	6.2E-04	6.4E-04	6.6E-04	6.9E-04	6.5E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04	6.7E-04	6.8E-04	6.8E-04
1397	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.5E-04	6.9E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04	7.1E-04	7.2E-04
1398	6.9E-04	7.2E-04	7.5E-04	7.7E-04	7.9E-04	7.3E-04	7.0E-04	7.2E-04	7.3E-04	7.3E-04	7.4E-04	7.4E-04	7.5E-04
1399	7.1E-04	7.4E-04	7.7E-04	7.9E-04	8.1E-04	7.5E-04	7.1E-04	7.3E-04	7.4E-04	7.4E-04	7.5E-04	7.5E-04	7.5E-04
1400	7.1E-04	7.4E-04	7.6E-04	7.8E-04	8.1E-04	7.5E-04	7.1E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.6E-04	7.6E-04
1401	6.7E-04	6.9E-04	7.2E-04	7.4E-04	7.6E-04	7.2E-04	6.8E-04	7.0E-04	7.1E-04	7.2E-04	7.3E-04	7.3E-04	7.3E-04
1402	6.3E-04	6.5E-04	6.8E-04	7.0E-04	7.1E-04	6.8E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.0E-04	7.1E-04	7.1E-04
1403	5.9E-04	6.2E-04	6.4E-04	6.6E-04	6.7E-04	6.5E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04	6.8E-04	6.9E-04	6.9E-04
1404	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.4E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04	6.8E-04	6.8E-04	6.8E-04
1405	5.5E-04	5.8E-04	6.0E-04	6.1E-04	6.3E-04	6.3E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04	6.8E-04	6.8E-04	6.9E-04
1406	5.5E-04	5.7E-04	6.0E-04	6.1E-04	6.3E-04	6.3E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04	6.9E-04	6.9E-04	6.9E-04
1407	5.5E-04	5.8E-04	6.0E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04	7.0E-04	7.0E-04	7.0E-04
1408	5.5E-04	5.8E-04	6.0E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04	7.2E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1409	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.5E-04	5.5E-04	5.7E-04	5.7E-04	5.8E-04	5.9E-04	5.9E-04	5.9E-04
1410	5.3E-04	5.5E-04	5.8E-04	5.9E-04	6.1E-04	5.9E-04	5.8E-04	5.9E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04	6.2E-04
1411	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.2E-04	6.0E-04	6.2E-04	6.3E-04	6.4E-04	6.4E-04	6.4E-04	6.5E-04
1412	6.0E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	6.4E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04	6.7E-04	6.7E-04
1413	6.2E-04	6.4E-04	6.7E-04	6.9E-04	7.1E-04	6.6E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04	6.7E-04	6.8E-04	6.8E-04
1414	6.3E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	6.7E-04	6.5E-04	6.7E-04	6.7E-04	6.8E-04	6.9E-04	6.9E-04	6.9E-04
1415	6.1E-04	6.3E-04	6.6E-04	6.8E-04	6.9E-04	6.6E-04	6.4E-04	6.6E-04	6.7E-04	6.7E-04	6.8E-04	6.8E-04	6.8E-04
1416	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.4E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04	6.7E-04	6.7E-04	6.7E-04
1417	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.3E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04	6.6E-04
1418	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.2E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04	6.6E-04
1419	5.3E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.1E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04	6.7E-04
1420	5.3E-04	5.6E-04	5.8E-04	5.9E-04	6.1E-04	6.1E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04	6.7E-04	6.7E-04	6.7E-04
1421	5.3E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04	6.8E-04	6.8E-04	6.8E-04
1422	5.4E-04	5.6E-04	5.9E-04	6.0E-04	6.2E-04	6.3E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04	6.9E-04	6.9E-04	6.9E-04
1423	4.8E-04	5.0E-04	5.2E-04	5.4E-04	5.6E-04	5.4E-04	5.3E-04	5.5E-04	5.6E-04	5.6E-04	5.7E-04	5.7E-04	5.8E-04
1424	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.9E-04	5.6E-04	5.5E-04	5.7E-04	5.8E-04	5.8E-04	5.9E-04	5.9E-04	5.9E-04
1425	5.3E-04	5.6E-04	5.8E-04	5.9E-04	6.1E-04	5.8E-04	5.7E-04	5.9E-04	5.9E-04	6.0E-04	6.1E-04	6.1E-04	6.1E-04
1426	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.0E-04	5.8E-04	6.0E-04	6.1E-04	6.1E-04	6.2E-04	6.2E-04	6.2E-04
1427	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.1E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04	6.3E-04	6.4E-04	6.4E-04
1428	5.6E-04	5.8E-04	6.0E-04	6.2E-04	6.4E-04	6.1E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04	6.3E-04	6.4E-04	6.4E-04
1429	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.0E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04	6.3E-04	6.3E-04	6.4E-04
1430	5.3E-04	5.6E-04	5.8E-04	5.9E-04	6.1E-04	6.0E-04	5.9E-04	6.1E-04	6.1E-04	6.2E-04	6.3E-04	6.3E-04	6.3E-04
1431	5.2E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	5.9E-04	5.9E-04	6.1E-04	6.2E-04	6.2E-04	6.3E-04	6.3E-04	6.4E-04
1432	5.2E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04	5.9E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04	6.3E-04	6.4E-04	6.4E-04
1433	5.1E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	5.9E-04	6.0E-04	6.2E-04	6.3E-04	6.4E-04	6.4E-04	6.5E-04	6.5E-04
1434	5.2E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04	6.0E-04	6.0E-04	6.2E-04	6.3E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04
1435	4.8E-04	5.1E-04	5.3E-04	5.4E-04	5.6E-04	5.4E-04	5.3E-04	5.4E-04	5.5E-04	5.6E-04	5.6E-04	5.7E-04	5.7E-04
1436	5.0E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.5E-04	5.4E-04	5.5E-04	5.6E-04	5.7E-04	5.8E-04	5.8E-04	5.8E-04
1437	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	5.6E-04	5.5E-04	5.6E-04	5.7E-04	5.8E-04	5.9E-04	5.9E-04	5.9E-04
1438	5.1E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	5.7E-04	5.6E-04	5.8E-04	5.8E-04	5.9E-04	6.0E-04	6.0E-04	6.0E-04
1439	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.9E-04	5.7E-04	5.6E-04	5.8E-04	5.9E-04	5.9E-04	6.0E-04	6.0E-04	6.0E-04
1440	5.1E-04	5.3E-04	5.5E-04	5.6E-04	5.8E-04	5.7E-04	5.6E-04	5.8E-04	5.9E-04	5.9E-04	6.0E-04	6.0E-04	6.1E-04
1441	5.0E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.7E-04	5.6E-04	5.8E-04	5.9E-04	6.0E-04	6.0E-04	6.1E-04	6.1E-04
1442	5.0E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.7E-04	5.7E-04	5.9E-04	6.0E-04	6.1E-04	6.1E-04	6.2E-04	6.2E-04
1443	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.9E-04	5.9E-04	5.9E-04	6.1E-04	6.3E-04	6.3E-04	6.4E-04	6.5E-04	6.5E-04
1444	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.2E-04	5.3E-04	5.5E-04	5.6E-04	5.7E-04	5.7E-04	5.8E-04	5.8E-04
1445	4.7E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.4E-04	5.4E-04	5.6E-04	5.7E-04	5.8E-04	5.9E-04	5.9E-04	5.9E-04
1446	5.5E-04	5.8E-04	6.0E-04	6.3E-04	6.5E-04	6.7E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.6E-04
1447	7.1E-04	7.4E-04	7.8E-04	8.1E-04	8.4E-04	8.7E-04	9.0E-04	9.3E-04	9.4E-04	9.5E-04	9.6E-04	9.6E-04	9.7E-04
1448	5.4E-04	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.6E-04	6.9E-04	7.0E-04	7.1E-04	7.2E-04	7.2E-04	7.2E-04
1449	5.8E-04	6.1E-04	6.4E-04	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04	8.0E-04	8.0E-04
1450	6.5E-04	6.9E-04	7.2E-04	7.5E-04	7.8E-04	8.0E-04	8.3E-04	8.6E-04	8.7E-04	8.8E-04	8.8E-04	8.9E-04	8.9E-04
1451	6.1E-04	6.4E-04	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.9E-04	8.0E-04	8.0E-04	8.1E-04	8.2E-04	8.2E-04
1452	5.0E-04	5.2E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.5E-04	6.6E-04	6.7E-04	6.7E-04	6.8E-04	6.8E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1453	6.9E-04	7.3E-04	7.6E-04	7.9E-04	8.3E-04	8.5E-04	8.8E-04	9.1E-04	9.2E-04	9.3E-04	9.3E-04	9.4E-04	9.4E-04
1454	6.4E-04	6.7E-04	7.0E-04	7.3E-04	7.6E-04	7.7E-04	7.9E-04	8.2E-04	8.3E-04	8.4E-04	8.5E-04	8.5E-04	8.5E-04
1455	4.4E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.8E-04	5.9E-04	5.9E-04	6.0E-04	6.0E-04	6.1E-04
1456	5.3E-04	5.6E-04	5.8E-04	6.1E-04	6.3E-04	6.4E-04	6.6E-04	6.9E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04	7.1E-04
1457	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.9E-04	7.0E-04	7.2E-04	7.4E-04	7.5E-04	7.6E-04	7.7E-04	7.7E-04	7.7E-04
1458	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.4E-04	5.7E-04	5.7E-04	5.8E-04	5.9E-04	5.9E-04	6.0E-04
1459	5.0E-04	5.2E-04	5.5E-04	5.7E-04	5.9E-04	6.0E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04	6.7E-04	6.7E-04
1460	5.7E-04	6.0E-04	6.3E-04	6.5E-04	6.8E-04	6.9E-04	7.0E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.6E-04	7.6E-04
1461	4.2E-04	4.4E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.6E-04	5.6E-04	5.6E-04
1462	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04	5.6E-04	5.8E-04	5.9E-04	6.0E-04	6.1E-04	6.1E-04	6.1E-04
1463	5.7E-04	6.0E-04	6.3E-04	6.5E-04	6.8E-04	6.8E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.5E-04
1464	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.2E-04	5.3E-04	5.3E-04
1465	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.4E-04	5.6E-04	5.7E-04	5.8E-04	5.8E-04	5.9E-04	5.9E-04
1466	5.0E-04	5.3E-04	5.5E-04	5.7E-04	6.0E-04	6.0E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04	6.6E-04
1467	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.5E-04	4.5E-04	4.6E-04	4.8E-04	4.9E-04	5.0E-04	5.0E-04	5.1E-04	5.1E-04
1468	4.2E-04	4.4E-04	4.5E-04	4.7E-04	4.9E-04	4.9E-04	5.0E-04	5.2E-04	5.3E-04	5.4E-04	5.4E-04	5.5E-04	5.5E-04
1469	3.7E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.8E-04	4.8E-04	4.9E-04	4.9E-04
1470	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.7E-04	4.7E-04	4.8E-04	5.0E-04	5.0E-04	5.1E-04	5.2E-04	5.2E-04	5.2E-04
1471	3.8E-04	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.5E-04	4.6E-04	4.8E-04	4.9E-04	4.9E-04	5.0E-04	5.0E-04	5.0E-04
1472	3.9E-04	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04	5.1E-04
1473	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.7E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04	5.2E-04
1474	4.3E-04	4.5E-04	4.7E-04	4.8E-04	5.0E-04	4.9E-04	4.9E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04	5.4E-04	5.4E-04
1475	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03
1476	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
1477	1.7E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
1478	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
1479	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03
1480	1.6E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
1481	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03
1482	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03
1483	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
1484	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
1485	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
1486	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
1487	1.8E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
1488	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03
1489	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
1490	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03
1491	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1492	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.3E-03
1493	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03
1494	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
1495	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
1496	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1497	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03
1498	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03
1499	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03
1500	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1501	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
1502	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
1503	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
1504	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
1505	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03
1506	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
1507	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
1508	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
1509	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1510	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
1511	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1512	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03
1513	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03
1514	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03
1515	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03
1516	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1517	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03
1518	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1519	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
1520	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1521	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1522	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1523	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
1524	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1525	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03
1526	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1527	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1528	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
1529	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1530	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03
1531	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1532	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1533	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03
1534	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1535	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
1536	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03
1537	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03
1538	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1539	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1540	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1541	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1542	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
1543	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03
1544	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1545	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1546	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
1547	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1548	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
1549	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03
1550	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1551	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1552	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
1553	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1554	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1555	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03
1556	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1557	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
1558	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1559	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03
1560	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1561	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03
1562	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03
1563	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03
1564	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1565	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1566	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1567	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1568	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1569	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1570	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1571	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1572	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1573	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03
1574	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1575	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1576	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1577	1.1E-03	1.1E-03	1.2E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1578	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1579	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1580	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1581	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1582	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1583	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1584	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1585	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1586	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1587	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1588	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
1589	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1590	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1591	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
1592	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
1593	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
1594	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1595	9.5E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1596	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1597	9.0E-04	9.5E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1598	9.3E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1599	9.5E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1600	9.2E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
1601	9.2E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
1602	9.3E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1603	9.4E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1604	9.4E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1605	9.3E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1606	9.2E-04	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1607	9.0E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1608	8.8E-04	9.3E-04	9.6E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
1609	8.2E-04	8.7E-04	9.0E-04	9.1E-04	9.4E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1610	8.5E-04	8.9E-04	9.2E-04	9.3E-04	9.6E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1611	8.5E-04	8.9E-04	9.2E-04	9.3E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1612	8.6E-04	9.0E-04	9.3E-04	9.4E-04	9.6E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1613	8.7E-04	9.2E-04	9.4E-04	9.5E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1614	8.8E-04	9.3E-04	9.6E-04	9.6E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1615	8.8E-04	9.3E-04	9.6E-04	9.7E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1616	8.8E-04	9.2E-04	9.6E-04	9.7E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1617	8.7E-04	9.2E-04	9.5E-04	9.6E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1618	8.6E-04	9.0E-04	9.4E-04	9.5E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1619	7.6E-04	8.0E-04	8.3E-04	8.4E-04	8.6E-04	8.8E-04	9.1E-04	9.5E-04	9.6E-04	9.7E-04	9.8E-04	9.9E-04	9.9E-04
1620	7.8E-04	8.2E-04	8.5E-04	8.6E-04	8.9E-04	9.1E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
1621	7.9E-04	8.3E-04	8.6E-04	8.7E-04	8.9E-04	9.2E-04	9.5E-04	9.8E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
1622	8.1E-04	8.5E-04	8.7E-04	8.9E-04	9.1E-04	9.3E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
1623	8.2E-04	8.6E-04	8.9E-04	9.0E-04	9.2E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03
1624	8.3E-04	8.7E-04	9.0E-04	9.1E-04	9.3E-04	9.5E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
1625	8.3E-04	8.8E-04	9.1E-04	9.2E-04	9.4E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1626	8.3E-04	8.7E-04	9.1E-04	9.2E-04	9.4E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1627	8.3E-04	8.7E-04	9.0E-04	9.1E-04	9.3E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
1628	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1629	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	3.9E-04
1630	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04
1631	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04
1632	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04
1633	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	3.9E-04
1634	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.1E-04
1635	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	3.9E-04
1636	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.3E-04	4.4E-04
1637	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.2E-04	4.2E-04
1638	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.1E-04	4.1E-04
1639	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.2E-04	4.2E-04
1640	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.3E-04	4.4E-04
1641	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.5E-04	4.6E-04
1642	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04
1643	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04
1644	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04
1645	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.3E-04	4.4E-04
1646	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.5E-04	4.5E-04
1647	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04
1648	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04	4.3E-04
1649	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.3E-04	4.4E-04	4.4E-04
1650	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04
1651	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.5E-04	4.5E-04
1652	3.3E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.6E-04	4.6E-04	4.7E-04	4.7E-04
1653	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
1654	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
1655	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04
1656	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04
1657	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
1658	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
1659	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04
1660	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04
1661	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
1662	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04
1663	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
1664	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04
1665	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
1666	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
1667	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04
1668	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
1669	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04
1670	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04
1671	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04
1672	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1673	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04
1674	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
1675	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04
1676	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04
1677	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
1678	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
1679	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
1680	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04	3.0E-04
1681	2.2E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04
1682	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04	3.0E-04
1683	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04
1684	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04
1685	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.5E-04	4.6E-04	4.6E-04
1686	5.0E-04	5.2E-04	5.4E-04	5.7E-04	5.9E-04	6.2E-04	6.4E-04	6.7E-04	6.8E-04	6.8E-04	6.9E-04	6.9E-04	6.9E-04
1687	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	3.9E-04
1688	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04
1689	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
1690	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.6E-04	5.7E-04	5.7E-04	5.7E-04	5.7E-04
1691	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.6E-04	5.6E-04	5.6E-04
1692	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.0E-04	5.1E-04	5.1E-04	5.2E-04
1693	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04
1694	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.7E-04
1695	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.3E-04	4.3E-04	4.4E-04
1696	6.1E-04	6.4E-04	6.7E-04	6.9E-04	7.3E-04	7.6E-04	7.9E-04	8.2E-04	8.2E-04	8.2E-04	8.2E-04	8.2E-04	8.3E-04
1697	5.5E-04	5.8E-04	6.0E-04	6.3E-04	6.5E-04	6.8E-04	7.1E-04	7.4E-04	7.4E-04	7.5E-04	7.5E-04	7.5E-04	7.5E-04
1698	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04
1699	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.6E-04
1700	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.1E-04	3.2E-04
1701	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.1E-04	5.1E-04	5.2E-04	5.2E-04
1702	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.2E-04	4.4E-04	4.6E-04	4.6E-04	4.7E-04	4.8E-04	4.8E-04	4.8E-04
1703	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.2E-04
1704	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04
1705	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04	2.6E-04
1706	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04
1707	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04
1708	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.6E-04
1709	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.1E-04
1710	1.6E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
1711	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04
1712	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04
1713	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04
1714	8.4E-05	8.6E-05	8.3E-05	8.2E-05	8.4E-05	8.7E-05	9.1E-05	9.5E-05	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04
1715	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04
1716	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1717	1.5E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04
1718	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04
1719	9.0E-05	9.2E-05	8.9E-05	8.7E-05	9.0E-05	9.3E-05	9.7E-05	1.0E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04
1720	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04
1721	1.4E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
1722	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
1723	1.1E-04	1.2E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04
1724	7.1E-05	7.1E-05	6.7E-05	6.4E-05	6.5E-05	6.7E-05	7.0E-05	7.3E-05	8.9E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04
1725	1.3E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
1726	1.3E-04	1.3E-04	1.3E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04
1727	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
1728	7.2E-05	7.1E-05	6.6E-05	6.2E-05	6.4E-05	6.6E-05	6.9E-05	7.2E-05	8.8E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04
1729	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04
1730	1.1E-04	1.1E-04	1.1E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
1731	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.1E-04
1732	1.1E-04	1.0E-04	9.9E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
1733	4.8E-06	-5.5E-07	-1.1E-05	-1.9E-05	-2.0E-05	-2.2E-05	-2.2E-05	-2.3E-05	-4.2E-06	1.1E-05	2.2E-05	2.9E-05	3.3E-05
1734	-2.3E-04	-2.4E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.6E-04	-3.4E-04	-3.2E-04	-3.1E-04	-3.0E-04	-3.0E-04
1735	-2.7E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.5E-04	-3.7E-04	-3.9E-04	-4.1E-04	-3.9E-04	-3.8E-04	-3.6E-04	-3.6E-04	-3.5E-04
1736	-2.7E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.5E-04	-3.7E-04	-3.9E-04	-4.1E-04	-3.9E-04	-3.7E-04	-3.6E-04	-3.5E-04	-3.5E-04
1737	-4.3E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.5E-04	-5.8E-04	-6.2E-04	-6.5E-04	-6.3E-04	-6.1E-04	-5.9E-04	-5.9E-04	-5.8E-04
1738	-4.4E-04	-4.7E-04	-5.0E-04	-5.4E-04	-5.7E-04	-6.2E-04	-6.6E-04	-7.0E-04	-6.7E-04	-6.5E-04	-6.4E-04	-6.3E-04	-6.2E-04
1739	9.4E-05	9.2E-05	8.7E-05	8.5E-05	8.8E-05	9.0E-05	9.4E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
1740	1.1E-04	1.1E-04	9.8E-05	9.5E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
1741	1.3E-04	1.2E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
1742	7.4E-05	7.5E-05	7.3E-05	7.2E-05	7.5E-05	7.7E-05	7.9E-05	8.3E-05	8.9E-05	9.4E-05	9.8E-05	1.0E-04	1.0E-04
1743	8.2E-05	8.2E-05	7.9E-05	7.7E-05	8.0E-05	8.2E-05	8.5E-05	8.8E-05	9.5E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04
1744	9.4E-05	9.3E-05	8.7E-05	8.5E-05	8.8E-05	9.0E-05	9.3E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
1745	1.1E-04	1.1E-04	1.0E-04	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
1746	6.9E-05	7.0E-05	6.9E-05	6.9E-05	7.2E-05	7.4E-05	7.6E-05	7.9E-05	8.6E-05	9.1E-05	9.5E-05	9.8E-05	9.9E-05
1747	7.4E-05	7.5E-05	7.3E-05	7.2E-05	7.4E-05	7.6E-05	7.9E-05	8.2E-05	8.9E-05	9.4E-05	9.8E-05	1.0E-04	1.0E-04
1748	8.2E-05	8.2E-05	7.8E-05	7.7E-05	8.0E-05	8.2E-05	8.5E-05	8.8E-05	9.5E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04
1749	9.6E-05	9.4E-05	8.8E-05	8.5E-05	8.8E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
1750	6.9E-05	7.0E-05	6.9E-05	7.0E-05	7.2E-05	7.4E-05	7.6E-05	7.9E-05	8.6E-05	9.1E-05	9.5E-05	9.8E-05	1.0E-04
1751	7.4E-05	7.5E-05	7.3E-05	7.2E-05	7.5E-05	7.7E-05	7.9E-05	8.3E-05	8.9E-05	9.5E-05	9.9E-05	1.0E-04	1.0E-04
1752	8.3E-05	8.3E-05	7.9E-05	7.8E-05	8.0E-05	8.2E-05	8.5E-05	8.9E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
1753	9.7E-05	9.5E-05	8.9E-05	8.6E-05	8.9E-05	9.2E-05	9.5E-05	9.9E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
1754	7.0E-05	7.2E-05	7.2E-05	7.3E-05	7.5E-05	7.7E-05	8.0E-05	8.4E-05	9.1E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04
1755	7.0E-05	7.1E-05	7.0E-05	7.0E-05	7.3E-05	7.5E-05	7.7E-05	8.0E-05	8.7E-05	9.3E-05	9.7E-05	1.0E-04	1.0E-04
1756	7.5E-05	7.6E-05	7.3E-05	7.3E-05	7.5E-05	7.7E-05	8.0E-05	8.3E-05	9.0E-05	9.6E-05	1.0E-04	1.0E-04	1.0E-04
1757	8.4E-05	8.3E-05	8.0E-05	7.8E-05	8.1E-05	8.3E-05	8.6E-05	8.9E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
1758	9.9E-05	9.7E-05	9.0E-05	8.8E-05	9.0E-05	9.3E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
1759	7.3E-05	7.5E-05	7.5E-05	7.6E-05	7.9E-05	8.2E-05	8.5E-05	8.8E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
1760	7.1E-05	7.3E-05	7.2E-05	7.2E-05	7.4E-05	7.6E-05	7.9E-05	8.2E-05	8.9E-05	9.5E-05	9.9E-05	1.0E-04	1.0E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1761	7.6E-05	7.7E-05	7.4E-05	7.4E-05	7.6E-05	7.8E-05	8.1E-05	8.5E-05	9.2E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04
1762	8.5E-05	8.5E-05	8.1E-05	7.9E-05	8.2E-05	8.4E-05	8.7E-05	9.1E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
1763	1.0E-04	9.9E-05	9.2E-05	8.9E-05	9.2E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04
1764	7.7E-05	8.0E-05	8.0E-05	8.1E-05	8.4E-05	8.7E-05	9.0E-05	9.4E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
1765	7.4E-05	7.5E-05	7.4E-05	7.4E-05	7.6E-05	7.9E-05	8.1E-05	8.5E-05	9.2E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04
1766	7.8E-05	7.9E-05	7.6E-05	7.6E-05	7.8E-05	8.0E-05	8.3E-05	8.6E-05	9.4E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04
1767	8.7E-05	8.6E-05	8.2E-05	8.0E-05	8.3E-05	8.5E-05	8.8E-05	9.2E-05	9.9E-05	1.1E-04	1.1E-04	1.1E-04	1.2E-04
1768	8.4E-05	8.7E-05	8.7E-05	8.9E-05	9.2E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
1769	7.7E-05	7.8E-05	7.7E-05	7.7E-05	8.0E-05	8.2E-05	8.5E-05	8.9E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
1770	8.1E-05	8.2E-05	7.9E-05	7.8E-05	8.1E-05	8.3E-05	8.6E-05	9.0E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
1771	8.9E-05	8.8E-05	8.3E-05	8.1E-05	8.4E-05	8.6E-05	8.9E-05	9.3E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
1772	8.9E-05	9.2E-05	9.3E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
1773	8.2E-05	8.4E-05	8.2E-05	8.2E-05	8.5E-05	8.8E-05	9.1E-05	9.5E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
1774	8.4E-05	8.4E-05	8.1E-05	8.0E-05	8.3E-05	8.5E-05	8.8E-05	9.2E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04
1775	8.9E-05	8.8E-05	8.2E-05	8.0E-05	8.3E-05	8.5E-05	8.8E-05	9.2E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
1776	8.9E-05	9.2E-05	9.2E-05	9.3E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
1777	8.8E-05	8.9E-05	8.8E-05	8.8E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
1778	8.6E-05	8.7E-05	8.3E-05	8.2E-05	8.5E-05	8.8E-05	9.1E-05	9.5E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
1779	8.5E-05	8.4E-05	7.7E-05	7.5E-05	7.7E-05	7.9E-05	8.2E-05	8.6E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04
1780	9.6E-05	9.8E-05	9.8E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
1781	9.6E-05	9.8E-05	9.6E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
1782	9.4E-05	9.5E-05	9.1E-05	9.1E-05	9.4E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
1783	6.8E-05	6.6E-05	5.8E-05	5.5E-05	5.6E-05	5.8E-05	6.0E-05	6.3E-05	7.5E-05	8.4E-05	9.1E-05	9.6E-05	9.8E-05
1784	9.8E-05	1.0E-04	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04
1785	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
1786	1.1E-04	1.1E-04	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
1787	3.5E-05	3.1E-05	2.1E-05	1.6E-05	1.6E-05	1.6E-05	1.7E-05	1.8E-05	3.2E-05	4.3E-05	5.2E-05	5.7E-05	6.0E-05
1788	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
1789	1.3E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
1790	9.2E-05	9.3E-05	8.9E-05	8.8E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04
1791	2.4E-04	2.4E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04	3.1E-04
1792	1.3E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
1793	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04
1794	4.8E-05	4.5E-05	3.7E-05	3.2E-05	3.3E-05	3.4E-05	3.5E-05	3.7E-05	5.1E-05	6.3E-05	7.2E-05	7.7E-05	8.0E-05
1795	1.4E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04
1796	8.9E-05	8.9E-05	8.2E-05	8.0E-05	8.3E-05	8.6E-05	8.9E-05	9.3E-05	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
1797	1.4E-04	1.4E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04
1798	1.0E-04	1.0E-04	9.9E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04
1799	1.3E-04	1.3E-04	1.3E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
1800	1.6E-04	1.5E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
1801	1.5E-04	1.5E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
1802	1.4E-04	1.4E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
1803	1.6E-04	1.6E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
1804	1.2E-04	1.2E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1805	1.2E-04	1.2E-04	1.1E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
1806	1.0E-04	9.6E-05	8.4E-05	7.7E-05	7.9E-05	8.2E-05	8.5E-05	8.8E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
1807	4.5E-05	3.6E-05	2.0E-05	9.8E-06	9.3E-06	9.1E-06	9.7E-06	1.1E-05	2.7E-05	4.1E-05	5.1E-05	5.8E-05	6.1E-05
1808	9.6E-05	9.5E-05	9.1E-05	8.9E-05	9.2E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04
1809	1.1E-04	1.1E-04	9.9E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
1810	1.2E-04	1.2E-04	1.1E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04
1811	1.2E-04	1.2E-04	1.1E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04
1812	6.4E-05	5.4E-05	3.7E-05	2.6E-05	2.6E-05	2.7E-05	2.8E-05	3.0E-05	4.4E-05	5.5E-05	6.4E-05	7.0E-05	7.3E-05
1813	5.5E-05	4.4E-05	2.6E-05	1.3E-05	1.3E-05	1.3E-05	1.4E-05	1.5E-05	3.2E-05	4.5E-05	5.5E-05	6.1E-05	6.5E-05
1814	8.4E-05	8.4E-05	8.1E-05	8.0E-05	8.2E-05	8.5E-05	8.8E-05	9.1E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
1815	9.4E-05	9.3E-05	8.9E-05	8.7E-05	9.0E-05	9.2E-05	9.6E-05	9.9E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
1816	1.1E-04	1.1E-04	9.8E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
1817	1.2E-04	1.2E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04
1818	1.3E-04	1.2E-04	1.1E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
1819	1.3E-04	1.2E-04	1.1E-04	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04
1820	1.2E-04	1.1E-04	8.9E-05	7.7E-05	7.9E-05	8.2E-05	8.5E-05	8.9E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04
1821	1.5E-04	1.4E-04	1.3E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
1822	3.3E-04	3.3E-04	3.2E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04	4.0E-04	4.0E-04
1823	7.5E-05	7.6E-05	7.4E-05	7.3E-05	7.6E-05	7.8E-05	8.0E-05	8.4E-05	9.0E-05	9.5E-05	9.9E-05	1.0E-04	1.0E-04
1824	-3.7E-04	-3.9E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.4E-04	-5.7E-04	-5.4E-04	-5.3E-04	-5.1E-04	-5.0E-04	-5.0E-04
1825	-4.0E-04	-4.3E-04	-4.5E-04	-4.9E-04	-5.2E-04	-5.5E-04	-5.9E-04	-6.2E-04	-6.0E-04	-5.8E-04	-5.6E-04	-5.5E-04	-5.5E-04
1826	-3.3E-04	-3.5E-04	-3.8E-04	-4.0E-04	-4.3E-04	-4.6E-04	-4.9E-04	-5.2E-04	-4.9E-04	-4.8E-04	-4.6E-04	-4.5E-04	-4.5E-04
1827	-3.5E-04	-3.7E-04	-4.0E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.3E-04	-5.1E-04	-4.9E-04	-4.8E-04	-4.7E-04	-4.7E-04
1828	-9.5E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.2E-03
1829	-8.7E-04	-9.1E-04	-9.7E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.1E-03
1830	-7.9E-04	-8.3E-04	-8.9E-04	-9.5E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03	-1.0E-03
1831	-7.3E-04	-7.7E-04	-8.2E-04	-8.8E-04	-9.4E-04	-1.0E-03	-1.0E-03	-1.1E-03	-1.0E-03	-1.0E-03	-9.7E-04	-9.5E-04	-9.4E-04
1832	-9.7E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03	-1.3E-03
1833	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.6E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.5E-03
1834	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.4E-03	-1.4E-03	-1.4E-03	-1.3E-03	-1.3E-03
1835	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.5E-03	-1.5E-03
1836	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.6E-03	-1.7E-03	-1.6E-03	-1.6E-03	-1.6E-03	-1.5E-03	-1.5E-03
1837	-7.1E-04	-7.5E-04	-7.9E-04	-8.4E-04	-8.9E-04	-9.4E-04	-9.9E-04	-1.0E-03	-1.0E-03	-9.7E-04	-9.5E-04	-9.3E-04	-9.2E-04
1838	-7.1E-04	-7.5E-04	-7.9E-04	-8.4E-04	-8.9E-04	-9.4E-04	-9.8E-04	-1.0E-03	-9.9E-04	-9.6E-04	-9.4E-04	-9.3E-04	-9.2E-04
1839	-6.9E-04	-7.2E-04	-7.7E-04	-8.1E-04	-8.7E-04	-9.1E-04	-9.6E-04	-1.0E-03	-9.6E-04	-9.3E-04	-9.1E-04	-8.9E-04	-8.9E-04
1840	-6.6E-04	-6.9E-04	-7.3E-04	-7.8E-04	-8.3E-04	-8.8E-04	-9.2E-04	-9.6E-04	-9.2E-04	-8.9E-04	-8.7E-04	-8.5E-04	-8.5E-04
1841	-6.2E-04	-6.6E-04	-7.0E-04	-7.4E-04	-7.9E-04	-8.4E-04	-8.8E-04	-9.2E-04	-8.8E-04	-8.5E-04	-8.2E-04	-8.1E-04	-8.0E-04
1842	-4.4E-04	-4.7E-04	-5.0E-04	-5.3E-04	-5.7E-04	-6.1E-04	-6.4E-04	-6.7E-04	-6.3E-04	-6.1E-04	-5.9E-04	-5.7E-04	-5.6E-04
1843	-6.0E-04	-6.3E-04	-6.7E-04	-7.1E-04	-7.6E-04	-8.1E-04	-8.5E-04	-8.8E-04	-8.4E-04	-8.1E-04	-7.9E-04	-7.7E-04	-7.6E-04
1844	-5.5E-04	-5.8E-04	-6.2E-04	-6.6E-04	-7.1E-04	-7.5E-04	-7.9E-04	-8.2E-04	-7.8E-04	-7.5E-04	-7.3E-04	-7.1E-04	-7.0E-04
1845	-5.1E-04	-5.4E-04	-5.8E-04	-6.2E-04	-6.7E-04	-7.1E-04	-7.4E-04	-7.8E-04	-7.4E-04	-7.1E-04	-6.8E-04	-6.7E-04	-6.6E-04
1846	-6.6E-04	-7.0E-04	-7.4E-04	-7.8E-04	-8.3E-04	-8.8E-04	-9.2E-04	-9.6E-04	-9.2E-04	-8.9E-04	-8.7E-04	-8.5E-04	-8.4E-04
1847	-7.0E-04	-7.3E-04	-7.8E-04	-8.2E-04	-8.7E-04	-9.2E-04	-9.6E-04	-1.0E-03	-9.7E-04	-9.5E-04	-9.3E-04	-9.1E-04	-9.1E-04
1848	-7.6E-04	-8.0E-04	-8.4E-04	-9.0E-04	-9.5E-04	-1.0E-03	-1.0E-03	-1.1E-03	-1.1E-03	-1.0E-03	-1.0E-03	-9.9E-04	-9.9E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1849	-5.6E-04	-5.9E-04	-6.3E-04	-6.7E-04	-7.1E-04	-7.5E-04	-7.8E-04	-8.2E-04	-7.9E-04	-7.6E-04	-7.5E-04	-7.3E-04	-7.3E-04
1850	-4.0E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.4E-04	-5.7E-04	-6.0E-04	-5.7E-04	-5.5E-04	-5.3E-04	-5.2E-04	-5.1E-04
1851	-3.8E-04	-4.0E-04	-4.2E-04	-4.6E-04	-4.9E-04	-5.2E-04	-5.4E-04	-5.7E-04	-5.4E-04	-5.2E-04	-5.0E-04	-4.9E-04	-4.8E-04
1852	-5.7E-04	-6.0E-04	-6.4E-04	-6.8E-04	-7.2E-04	-7.6E-04	-8.0E-04	-8.3E-04	-7.9E-04	-7.6E-04	-7.4E-04	-7.2E-04	-7.1E-04
1853	-4.6E-04	-4.8E-04	-5.1E-04	-5.4E-04	-5.8E-04	-6.1E-04	-6.4E-04	-6.7E-04	-6.4E-04	-6.1E-04	-5.9E-04	-5.8E-04	-5.7E-04
1854	-4.4E-04	-4.6E-04	-4.9E-04	-5.2E-04	-5.6E-04	-5.9E-04	-6.2E-04	-6.5E-04	-6.2E-04	-6.0E-04	-5.8E-04	-5.7E-04	-5.6E-04
1855	-5.3E-04	-5.6E-04	-5.9E-04	-6.3E-04	-6.7E-04	-7.1E-04	-7.4E-04	-7.8E-04	-7.5E-04	-7.2E-04	-7.0E-04	-6.9E-04	-6.8E-04
1856	-4.7E-04	-5.0E-04	-5.3E-04	-5.7E-04	-6.0E-04	-6.4E-04	-6.7E-04	-7.0E-04	-6.7E-04	-6.5E-04	-6.3E-04	-6.2E-04	-6.1E-04
1857	-4.2E-04	-4.4E-04	-4.7E-04	-5.0E-04	-5.3E-04	-5.6E-04	-5.9E-04	-6.2E-04	-5.9E-04	-5.7E-04	-5.5E-04	-5.4E-04	-5.4E-04
1858	-4.1E-04	-4.4E-04	-4.6E-04	-5.0E-04	-5.3E-04	-5.6E-04	-5.9E-04	-6.2E-04	-5.9E-04	-5.7E-04	-5.5E-04	-5.4E-04	-5.3E-04
1859	-3.0E-04	-3.1E-04	-3.3E-04	-3.6E-04	-3.9E-04	-4.1E-04	-4.3E-04	-4.6E-04	-4.3E-04	-4.0E-04	-3.9E-04	-3.8E-04	-3.7E-04
1860	-3.7E-04	-3.9E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.4E-04	-5.7E-04	-5.3E-04	-5.1E-04	-4.9E-04	-4.7E-04	-4.7E-04
1861	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.7E-04	-4.0E-04	-4.2E-04	-4.4E-04	-4.1E-04	-3.9E-04	-3.7E-04	-3.6E-04	-3.5E-04
1862	-3.5E-04	-3.7E-04	-4.0E-04	-4.3E-04	-4.7E-04	-4.9E-04	-5.2E-04	-5.5E-04	-5.1E-04	-4.9E-04	-4.7E-04	-4.5E-04	-4.5E-04
1863	-2.7E-04	-2.9E-04	-3.1E-04	-3.3E-04	-3.6E-04	-3.9E-04	-4.1E-04	-4.3E-04	-4.0E-04	-3.7E-04	-3.5E-04	-3.4E-04	-3.4E-04
1864	-2.2E-04	-2.3E-04	-2.5E-04	-2.7E-04	-2.9E-04	-3.2E-04	-3.3E-04	-3.5E-04	-3.2E-04	-3.0E-04	-2.8E-04	-2.7E-04	-2.7E-04
1865	-3.4E-04	-3.6E-04	-3.8E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.3E-04	-5.0E-04	-4.7E-04	-4.5E-04	-4.4E-04	-4.3E-04
1866	-2.6E-04	-2.7E-04	-3.0E-04	-3.2E-04	-3.5E-04	-3.8E-04	-4.0E-04	-4.2E-04	-3.9E-04	-3.6E-04	-3.4E-04	-3.3E-04	-3.2E-04
1867	-2.1E-04	-2.2E-04	-2.4E-04	-2.6E-04	-2.8E-04	-3.1E-04	-3.2E-04	-3.4E-04	-3.1E-04	-2.9E-04	-2.7E-04	-2.6E-04	-2.5E-04
1868	-4.3E-04	-4.5E-04	-4.8E-04	-5.2E-04	-5.7E-04	-6.0E-04	-6.3E-04	-6.6E-04	-6.3E-04	-5.9E-04	-5.7E-04	-5.6E-04	-5.5E-04
1869	-3.3E-04	-3.5E-04	-3.7E-04	-4.0E-04	-4.4E-04	-4.7E-04	-4.9E-04	-5.2E-04	-4.9E-04	-4.6E-04	-4.4E-04	-4.2E-04	-4.2E-04
1870	-2.5E-04	-2.6E-04	-2.8E-04	-3.1E-04	-3.4E-04	-3.7E-04	-3.9E-04	-4.1E-04	-3.8E-04	-3.5E-04	-3.3E-04	-3.2E-04	-3.1E-04
1871	-1.9E-04	-2.0E-04	-2.2E-04	-2.4E-04	-2.7E-04	-2.9E-04	-3.1E-04	-3.2E-04	-2.9E-04	-2.7E-04	-2.5E-04	-2.4E-04	-2.3E-04
1872	-3.1E-04	-3.3E-04	-3.6E-04	-3.9E-04	-4.3E-04	-4.6E-04	-4.8E-04	-5.1E-04	-4.7E-04	-4.4E-04	-4.2E-04	-4.1E-04	-4.0E-04
1873	-2.3E-04	-2.5E-04	-2.7E-04	-3.0E-04	-3.3E-04	-3.5E-04	-3.7E-04	-3.9E-04	-3.6E-04	-3.3E-04	-3.1E-04	-3.0E-04	-2.9E-04
1874	-1.7E-04	-1.8E-04	-1.9E-04	-2.2E-04	-2.4E-04	-2.6E-04	-2.8E-04	-2.9E-04	-2.6E-04	-2.4E-04	-2.2E-04	-2.1E-04	-2.0E-04
1875	-2.1E-04	-2.2E-04	-2.4E-04	-2.7E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.6E-04	-3.3E-04	-3.0E-04	-2.8E-04	-2.7E-04	-2.6E-04
1876	-6.9E-04	-7.3E-04	-7.7E-04	-8.2E-04	-8.7E-04	-9.1E-04	-9.6E-04	-1.0E-03	-9.7E-04	-9.4E-04	-9.2E-04	-9.1E-04	-9.0E-04
1877	-5.5E-04	-5.8E-04	-6.1E-04	-6.5E-04	-6.9E-04	-7.3E-04	-7.7E-04	-8.0E-04	-7.6E-04	-7.3E-04	-7.0E-04	-6.8E-04	-6.8E-04
1878	-3.9E-04	-4.1E-04	-4.3E-04	-4.6E-04	-4.9E-04	-5.2E-04	-5.4E-04	-5.7E-04	-5.3E-04	-5.1E-04	-4.8E-04	-4.7E-04	-4.6E-04
1879	-3.3E-04	-3.5E-04	-3.7E-04	-4.0E-04	-4.3E-04	-4.5E-04	-4.7E-04	-5.0E-04	-4.7E-04	-4.5E-04	-4.3E-04	-4.2E-04	-4.2E-04
1880	-3.2E-04	-3.4E-04	-3.6E-04	-3.8E-04	-4.1E-04	-4.3E-04	-4.5E-04	-4.8E-04	-4.5E-04	-4.3E-04	-4.2E-04	-4.1E-04	-4.0E-04
1881	-2.6E-04	-2.7E-04	-2.9E-04	-3.2E-04	-3.4E-04	-3.6E-04	-3.8E-04	-4.0E-04	-3.8E-04	-3.6E-04	-3.4E-04	-3.3E-04	-3.3E-04
1882	-2.5E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.6E-04	-3.8E-04	-3.6E-04	-3.4E-04	-3.2E-04	-3.1E-04	-3.1E-04
1883	-2.3E-04	-2.5E-04	-2.6E-04	-2.8E-04	-3.1E-04	-3.3E-04	-3.5E-04	-3.6E-04	-3.4E-04	-3.2E-04	-3.0E-04	-2.9E-04	-2.9E-04
1884	-3.5E-04	-3.7E-04	-3.9E-04	-4.2E-04	-4.5E-04	-4.7E-04	-5.0E-04	-5.2E-04	-5.0E-04	-4.8E-04	-4.7E-04	-4.6E-04	-4.6E-04
1885	-3.1E-04	-3.3E-04	-3.5E-04	-3.8E-04	-4.0E-04	-4.3E-04	-4.5E-04	-4.8E-04	-4.5E-04	-4.3E-04	-4.2E-04	-4.1E-04	-4.1E-04
1886	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.7E-04	-3.9E-04	-4.1E-04	-4.4E-04	-4.2E-04	-4.0E-04	-3.9E-04	-3.8E-04	-3.7E-04
1887	-5.9E-04	-6.2E-04	-6.6E-04	-7.0E-04	-7.4E-04	-7.9E-04	-8.3E-04	-8.7E-04	-8.3E-04	-8.1E-04	-7.8E-04	-7.7E-04	-7.6E-04
1888	-2.2E-04	-2.3E-04	-2.5E-04	-2.7E-04	-2.9E-04	-3.1E-04	-3.3E-04	-3.5E-04	-3.3E-04	-3.2E-04	-3.0E-04	-2.9E-04	-2.9E-04
1889	-2.6E-04	-2.7E-04	-2.9E-04	-3.1E-04	-3.4E-04	-3.6E-04	-3.8E-04	-4.0E-04	-3.8E-04	-3.6E-04	-3.5E-04	-3.4E-04	-3.4E-04
1890	-2.7E-04	-2.9E-04	-3.1E-04	-3.3E-04	-3.6E-04	-3.8E-04	-4.1E-04	-4.3E-04	-4.1E-04	-3.9E-04	-3.8E-04	-3.7E-04	-3.6E-04
1891	-3.3E-04	-3.4E-04	-3.7E-04	-3.9E-04	-4.2E-04	-4.5E-04	-4.7E-04	-5.0E-04	-4.7E-04	-4.5E-04	-4.4E-04	-4.3E-04	-4.2E-04
1892	-3.9E-04	-4.1E-04	-4.3E-04	-4.6E-04	-4.9E-04	-5.2E-04	-5.5E-04	-5.8E-04	-5.5E-04	-5.2E-04	-5.1E-04	-4.9E-04	-4.9E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1893	-4.2E-04	-4.5E-04	-4.7E-04	-5.1E-04	-5.4E-04	-5.7E-04	-6.0E-04	-6.3E-04	-6.0E-04	-5.7E-04	-5.6E-04	-5.4E-04	-5.4E-04
1894	-2.8E-04	-2.9E-04	-3.1E-04	-3.4E-04	-3.6E-04	-3.8E-04	-4.0E-04	-4.2E-04	-4.0E-04	-3.8E-04	-3.7E-04	-3.6E-04	-3.6E-04
1895	-2.4E-04	-2.6E-04	-2.7E-04	-2.9E-04	-3.1E-04	-3.3E-04	-3.5E-04	-3.7E-04	-3.4E-04	-3.3E-04	-3.1E-04	-3.0E-04	-3.0E-04
1896	-2.0E-04	-2.2E-04	-2.3E-04	-2.5E-04	-2.7E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.0E-04	-2.8E-04	-2.7E-04	-2.6E-04	-2.6E-04
1897	-1.7E-04	-1.8E-04	-1.9E-04	-2.1E-04	-2.3E-04	-2.4E-04	-2.5E-04	-2.7E-04	-2.5E-04	-2.4E-04	-2.2E-04	-2.2E-04	-2.1E-04
1898	-2.7E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.7E-04	-3.8E-04	-4.0E-04	-3.8E-04	-3.6E-04	-3.5E-04	-3.4E-04	-3.4E-04
1899	-2.3E-04	-2.4E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.1E-04	-3.3E-04	-3.5E-04	-3.3E-04	-3.1E-04	-3.0E-04	-2.9E-04	-2.9E-04
1900	-1.8E-04	-1.9E-04	-2.1E-04	-2.2E-04	-2.4E-04	-2.6E-04	-2.7E-04	-2.9E-04	-2.7E-04	-2.6E-04	-2.4E-04	-2.4E-04	-2.3E-04
1901	-1.5E-04	-1.6E-04	-1.7E-04	-1.8E-04	-2.0E-04	-2.1E-04	-2.2E-04	-2.4E-04	-2.2E-04	-2.0E-04	-1.9E-04	-1.8E-04	-1.8E-04
1902	-1.2E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.9E-04	-1.7E-04	-1.6E-04	-1.4E-04	-1.4E-04	-1.3E-04
1903	-2.3E-04	-2.5E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.6E-04	-3.4E-04	-3.3E-04	-3.1E-04	-3.1E-04	-3.0E-04
1904	-1.9E-04	-2.0E-04	-2.1E-04	-2.3E-04	-2.5E-04	-2.7E-04	-2.8E-04	-3.0E-04	-2.8E-04	-2.7E-04	-2.6E-04	-2.5E-04	-2.4E-04
1905	-1.6E-04	-1.7E-04	-1.8E-04	-2.0E-04	-2.1E-04	-2.3E-04	-2.4E-04	-2.5E-04	-2.3E-04	-2.2E-04	-2.1E-04	-2.0E-04	-1.9E-04
1906	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.9E-04	-2.0E-04	-2.1E-04	-1.9E-04	-1.7E-04	-1.6E-04	-1.5E-04	-1.5E-04
1907	-8.7E-05	-9.2E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.4E-04	-1.5E-04	-1.5E-04	-1.4E-04	-1.3E-04	-1.2E-04	-1.1E-04	-1.1E-04
1908	-2.0E-04	-2.1E-04	-2.2E-04	-2.4E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.1E-04	-3.0E-04	-2.8E-04	-2.7E-04	-2.6E-04	-2.6E-04
1909	-1.7E-04	-1.8E-04	-1.9E-04	-2.1E-04	-2.3E-04	-2.4E-04	-2.6E-04	-2.7E-04	-2.5E-04	-2.4E-04	-2.2E-04	-2.1E-04	-2.1E-04
1910	-1.4E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.9E-04	-2.0E-04	-2.1E-04	-2.3E-04	-2.1E-04	-1.9E-04	-1.7E-04	-1.7E-04	-1.6E-04
1911	-9.3E-05	-9.8E-05	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.5E-04	-1.4E-04	-1.3E-04	-1.2E-04	-1.2E-04
1912	-2.1E-04	-2.2E-04	-2.4E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.2E-04	-3.0E-04	-2.9E-04	-2.9E-04	-2.8E-04
1913	-1.8E-04	-1.9E-04	-2.1E-04	-2.3E-04	-2.4E-04	-2.6E-04	-2.8E-04	-2.9E-04	-2.7E-04	-2.6E-04	-2.4E-04	-2.3E-04	-2.3E-04
1914	-1.5E-04	-1.6E-04	-1.7E-04	-1.8E-04	-2.0E-04	-2.2E-04	-2.3E-04	-2.4E-04	-2.2E-04	-2.0E-04	-1.9E-04	-1.8E-04	-1.8E-04
1915	-1.0E-04	-1.1E-04	-1.1E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.6E-04	-1.5E-04	-1.4E-04	-1.3E-04	-1.3E-04
1916	-5.8E-05	-6.2E-05	-6.9E-05	-7.9E-05	-9.0E-05	-9.9E-05	-1.1E-04	-1.2E-04	-1.0E-04	-9.1E-05	-8.3E-05	-7.7E-05	-7.5E-05
1917	-1.6E-04	-1.6E-04	-1.7E-04	-1.9E-04	-2.1E-04	-2.2E-04	-2.4E-04	-2.5E-04	-2.3E-04	-2.1E-04	-2.0E-04	-1.9E-04	-1.8E-04
1918	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.6E-04	-1.5E-04	-1.4E-04	-1.3E-04	-1.3E-04
1919	-6.1E-05	-6.5E-05	-7.2E-05	-8.3E-05	-9.4E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.1E-04	-9.5E-05	-8.6E-05	-8.1E-05	-7.8E-05
1920	-1.6E-04	-1.7E-04	-1.9E-04	-2.0E-04	-2.2E-04	-2.4E-04	-2.5E-04	-2.6E-04	-2.4E-04	-2.2E-04	-2.1E-04	-2.0E-04	-2.0E-04
1921	-1.1E-04	-1.1E-04	-1.2E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.8E-04	-1.9E-04	-1.7E-04	-1.6E-04	-1.5E-04	-1.4E-04	-1.4E-04
1922	-6.6E-05	-7.0E-05	-7.7E-05	-8.8E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.1E-04	-1.0E-04	-9.1E-05	-8.5E-05	-8.2E-05
1923	-1.8E-04	-1.9E-04	-2.0E-04	-2.2E-04	-2.4E-04	-2.5E-04	-2.7E-04	-2.9E-04	-2.6E-04	-2.4E-04	-2.3E-04	-2.2E-04	-2.2E-04
1924	-1.2E-04	-1.2E-04	-1.3E-04	-1.5E-04	-1.6E-04	-1.8E-04	-1.9E-04	-2.0E-04	-1.8E-04	-1.7E-04	-1.6E-04	-1.5E-04	-1.5E-04
1925	-7.3E-05	-7.8E-05	-8.6E-05	-9.7E-05	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.2E-04	-1.1E-04	-9.9E-05	-9.3E-05	-8.9E-05
1926	-2.0E-04	-2.1E-04	-2.2E-04	-2.4E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.1E-04	-2.9E-04	-2.7E-04	-2.6E-04	-2.5E-04	-2.4E-04
1927	-1.3E-04	-1.4E-04	-1.5E-04	-1.7E-04	-1.8E-04	-2.0E-04	-2.1E-04	-2.3E-04	-2.1E-04	-1.9E-04	-1.8E-04	-1.7E-04	-1.7E-04
1928	-8.8E-05	-9.3E-05	-1.0E-04	-1.1E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.4E-04	-1.3E-04	-1.2E-04	-1.1E-04	-1.0E-04
1929	-2.3E-04	-2.4E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.6E-04	-3.3E-04	-3.1E-04	-2.9E-04	-2.8E-04	-2.8E-04
1930	-1.6E-04	-1.7E-04	-1.8E-04	-2.0E-04	-2.2E-04	-2.3E-04	-2.5E-04	-2.6E-04	-2.4E-04	-2.2E-04	-2.1E-04	-2.0E-04	-2.0E-04
1931	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.9E-04	-1.7E-04	-1.6E-04	-1.5E-04	-1.4E-04	-1.3E-04
1932	-2.7E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.7E-04	-3.8E-04	-4.0E-04	-3.8E-04	-3.5E-04	-3.4E-04	-3.2E-04	-3.2E-04
1933	-1.9E-04	-2.0E-04	-2.2E-04	-2.3E-04	-2.5E-04	-2.7E-04	-2.9E-04	-3.0E-04	-2.8E-04	-2.6E-04	-2.5E-04	-2.4E-04	-2.3E-04
1934	-1.4E-04	-1.5E-04	-1.6E-04	-1.8E-04	-1.9E-04	-2.1E-04	-2.2E-04	-2.3E-04	-2.1E-04	-2.0E-04	-1.8E-04	-1.7E-04	-1.7E-04
1935	-2.3E-04	-2.4E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.3E-04	-3.5E-04	-3.2E-04	-3.0E-04	-2.8E-04	-2.7E-04	-2.7E-04
1936	-1.8E-04	-1.9E-04	-2.0E-04	-2.2E-04	-2.4E-04	-2.5E-04	-2.7E-04	-2.8E-04	-2.5E-04	-2.3E-04	-2.2E-04	-2.1E-04	-2.0E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1937	-2.7E-04	-2.9E-04	-3.0E-04	-3.3E-04	-3.5E-04	-3.7E-04	-3.9E-04	-4.1E-04	-3.9E-04	-3.7E-04	-3.5E-04	-3.4E-04	-3.3E-04
1938	-2.2E-04	-2.3E-04	-2.5E-04	-2.7E-04	-2.9E-04	-3.1E-04	-3.2E-04	-3.4E-04	-3.1E-04	-2.9E-04	-2.8E-04	-2.7E-04	-2.7E-04
1939	-3.4E-04	-3.6E-04	-3.8E-04	-4.0E-04	-4.3E-04	-4.6E-04	-4.8E-04	-5.1E-04	-4.8E-04	-4.6E-04	-4.4E-04	-4.3E-04	-4.2E-04
1940	-3.1E-04	-3.3E-04	-3.5E-04	-3.8E-04	-4.0E-04	-4.3E-04	-4.5E-04	-4.7E-04	-4.5E-04	-4.3E-04	-4.2E-04	-4.1E-04	-4.1E-04
1941	-3.2E-04	-3.3E-04	-3.5E-04	-3.8E-04	-4.0E-04	-4.3E-04	-4.5E-04	-4.7E-04	-4.5E-04	-4.3E-04	-4.1E-04	-4.0E-04	-4.0E-04
1942	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04
1943	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04
1944	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.8E-04	2.9E-04	2.9E-04
1945	2.1E-04	2.2E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04
1946	2.1E-04	2.3E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04
1947	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04
1948	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04
1949	2.1E-04	2.2E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04
1950	2.1E-04	2.3E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04
1951	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04
1952	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04
1953	7.1E-05	7.3E-05	7.2E-05	7.2E-05	7.4E-05	7.6E-05	7.9E-05	8.2E-05	8.9E-05	9.4E-05	9.8E-05	1.0E-04	1.0E-04
1954	1.0E-04	1.0E-04	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
1955	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
1956	8.1E-05	8.3E-05	8.2E-05	8.3E-05	8.6E-05	8.9E-05	9.3E-05	9.7E-05	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
1957	4.6E-05	4.6E-05	4.3E-05	4.2E-05	4.4E-05	4.5E-05	4.7E-05	5.0E-05	6.3E-05	7.5E-05	8.3E-05	8.9E-05	9.1E-05
1958	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
1959	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04
1960	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04	1.9E-04
1961	1.5E-04	1.6E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04
1962	1.9E-03	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03
1963	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.5E-03	2.5E-03
1964	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
1965	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
1966	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1967	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
1968	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1969	1.4E-03	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
1970	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1971	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
1972	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03
1973	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
1974	9.0E-04	9.5E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1975	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
1976	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03
1977	8.9E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1978	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1979	8.9E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1980	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1981	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1982	8.9E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
1983	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
1984	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1985	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1986	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03
1987	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
1988	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03
1989	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
1990	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03
1991	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.5E-04	1.4E-04	1.5E-04	1.5E-04	1.8E-04	2.0E-04	2.2E-04	2.4E-04	2.4E-04
1992	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04	2.9E-04	3.1E-04	3.3E-04	3.4E-04	3.5E-04
1993	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.8E-04	3.9E-04	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.0E-04
1994	3.5E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04	4.1E-04	4.3E-04	4.5E-04	4.8E-04	4.9E-04	5.1E-04	5.1E-04
1995	3.5E-04	3.7E-04	3.9E-04	4.0E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.9E-04	5.0E-04	5.1E-04	5.2E-04
1996	3.6E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.2E-04
1997	5.6E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04	6.5E-04	6.7E-04	7.0E-04	7.3E-04	7.6E-04	7.8E-04	7.9E-04	8.0E-04
1998	4.8E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.6E-04	6.7E-04	6.9E-04	6.9E-04
1999	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.4E-04
2000	4.3E-04	4.6E-04	4.8E-04	4.9E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.7E-04	5.9E-04	6.0E-04	6.1E-04	6.1E-04
2001	4.1E-04	4.3E-04	4.5E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04	5.6E-04	5.7E-04	5.8E-04
2002	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.3E-04	5.3E-04
2003	7.9E-04	8.3E-04	8.7E-04	8.9E-04	9.2E-04	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2004	6.4E-04	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.9E-04	8.2E-04	8.4E-04	8.7E-04	8.8E-04	9.0E-04	9.0E-04
2005	5.4E-04	5.7E-04	6.0E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.2E-04	7.4E-04	7.5E-04	7.6E-04	7.7E-04
2006	4.9E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.6E-04	6.8E-04	6.9E-04	6.9E-04
2007	4.4E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.1E-04	6.1E-04	6.2E-04
2008	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.6E-04	5.6E-04	5.7E-04
2009	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2010	7.7E-04	8.1E-04	8.4E-04	8.7E-04	9.0E-04	9.2E-04	9.5E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2011	6.2E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.9E-04	8.1E-04	8.3E-04	8.5E-04	8.6E-04	8.6E-04
2012	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.4E-04	6.6E-04	6.9E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04
2013	4.7E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04	6.5E-04	6.5E-04	6.6E-04
2014	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.3E-04	5.5E-04	5.6E-04	5.8E-04	5.9E-04	5.9E-04	5.9E-04
2015	1.1E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03
2016	8.5E-04	9.0E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
2017	6.7E-04	7.0E-04	7.3E-04	7.6E-04	7.8E-04	8.0E-04	8.3E-04	8.5E-04	8.8E-04	9.0E-04	9.1E-04	9.3E-04	9.3E-04
2018	5.7E-04	6.0E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.3E-04	7.5E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04
2019	5.0E-04	5.2E-04	5.5E-04	5.6E-04	5.8E-04	6.0E-04	6.2E-04	6.4E-04	6.5E-04	6.7E-04	6.8E-04	6.8E-04	6.9E-04
2020	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04
2021	1.2E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
2022	9.1E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
2023	7.1E-04	7.5E-04	7.8E-04	8.0E-04	8.3E-04	8.5E-04	8.8E-04	9.1E-04	9.3E-04	9.5E-04	9.7E-04	9.8E-04	9.9E-04
2024	6.0E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.2E-04	7.5E-04	7.7E-04	7.9E-04	8.1E-04	8.2E-04	8.3E-04	8.3E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2025	5.1E-04	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04
2026	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04	6.3E-04	6.3E-04
2027	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
2028	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2029	7.6E-04	8.0E-04	8.3E-04	8.6E-04	8.8E-04	9.1E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2030	6.2E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.5E-04	7.7E-04	8.0E-04	8.1E-04	8.3E-04	8.4E-04	8.5E-04	8.6E-04
2031	5.2E-04	5.4E-04	5.7E-04	5.8E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04
2032	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.0E-04	6.1E-04	6.1E-04
2033	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03
2034	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
2035	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03
2036	7.8E-04	8.2E-04	8.6E-04	8.8E-04	9.1E-04	9.3E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2037	6.3E-04	6.7E-04	6.9E-04	7.2E-04	7.4E-04	7.6E-04	7.8E-04	8.1E-04	8.3E-04	8.4E-04	8.6E-04	8.7E-04	8.7E-04
2038	5.1E-04	5.3E-04	5.6E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.6E-04	6.8E-04	6.9E-04	6.9E-04	7.0E-04
2039	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04
2040	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03
2041	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03
2042	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2043	8.0E-04	8.4E-04	8.7E-04	9.0E-04	9.3E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2044	6.3E-04	6.6E-04	6.9E-04	7.1E-04	7.3E-04	7.5E-04	7.8E-04	8.0E-04	8.2E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04
2045	5.1E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.0E-04
2046	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.3E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04	6.0E-04	6.1E-04	6.1E-04
2047	2.0E-03	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03
2048	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
2049	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2050	7.9E-04	8.3E-04	8.7E-04	9.0E-04	9.2E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2051	6.2E-04	6.6E-04	6.8E-04	7.1E-04	7.2E-04	7.4E-04	7.7E-04	7.9E-04	8.1E-04	8.3E-04	8.4E-04	8.5E-04	8.5E-04
2052	5.1E-04	5.3E-04	5.6E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.0E-04
2053	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.1E-04	6.1E-04	6.2E-04
2054	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.6E-04	5.7E-04	5.7E-04
2055	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
2056	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03
2057	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2058	8.1E-04	8.5E-04	8.8E-04	9.1E-04	9.4E-04	9.6E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2059	6.2E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.9E-04	8.0E-04	8.2E-04	8.3E-04	8.4E-04	8.4E-04
2060	5.1E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.0E-04
2061	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.5E-04	5.7E-04	5.9E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04
2062	4.0E-04	4.2E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.5E-04	5.6E-04
2063	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04
2064	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
2065	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
2066	8.3E-04	8.7E-04	9.0E-04	9.3E-04	9.6E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2067	6.3E-04	6.7E-04	6.9E-04	7.1E-04	7.3E-04	7.5E-04	7.8E-04	8.0E-04	8.2E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04
2068	5.2E-04	5.5E-04	5.7E-04	5.9E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2069	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.2E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.1E-04	6.1E-04	6.2E-04
2070	3.9E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04	5.4E-04
2071	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04
2072	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
2073	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
2074	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03
2075	8.5E-04	9.0E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2076	6.7E-04	7.1E-04	7.3E-04	7.6E-04	7.8E-04	8.0E-04	8.3E-04	8.5E-04	8.7E-04	8.9E-04	9.0E-04	9.1E-04	9.1E-04
2077	5.5E-04	5.8E-04	6.0E-04	6.2E-04	6.4E-04	6.5E-04	6.8E-04	7.0E-04	7.1E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04
2078	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04	6.4E-04	6.4E-04
2079	3.9E-04	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.3E-04	5.4E-04	5.4E-04	5.4E-04
2080	3.6E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04
2081	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.4E-04	4.4E-04	4.5E-04	4.5E-04
2082	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
2083	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04
2084	8.9E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2085	7.1E-04	7.5E-04	7.8E-04	8.1E-04	8.3E-04	8.5E-04	8.8E-04	9.1E-04	9.3E-04	9.4E-04	9.5E-04	9.6E-04	9.7E-04
2086	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04
2087	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04	6.7E-04	6.7E-04
2088	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.6E-04	5.7E-04	5.7E-04
2089	3.7E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04	5.2E-04
2090	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.5E-04
2091	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
2092	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.7E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04
2093	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03
2094	7.5E-04	7.9E-04	8.2E-04	8.5E-04	8.7E-04	9.0E-04	9.3E-04	9.6E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2095	6.2E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	7.9E-04	8.1E-04	8.2E-04	8.3E-04	8.4E-04	8.4E-04
2096	5.2E-04	5.5E-04	5.7E-04	5.9E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.1E-04	7.2E-04
2097	4.4E-04	4.6E-04	4.8E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	6.0E-04	6.0E-04	6.1E-04
2098	3.7E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.5E-04	4.6E-04	4.8E-04	4.9E-04	5.0E-04	5.1E-04	5.2E-04	5.2E-04
2099	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04
2100	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.0E-04
2101	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.8E-04
2102	7.6E-04	8.0E-04	8.4E-04	8.7E-04	8.9E-04	9.2E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2103	6.4E-04	6.7E-04	7.0E-04	7.3E-04	7.4E-04	7.7E-04	7.9E-04	8.2E-04	8.4E-04	8.5E-04	8.7E-04	8.7E-04	8.8E-04
2104	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04
2105	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04	6.3E-04
2106	3.9E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.3E-04	5.3E-04	5.4E-04
2107	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.5E-04	4.6E-04	4.6E-04	4.7E-04	4.7E-04
2108	3.0E-04	3.1E-04	3.3E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.1E-04	4.1E-04
2109	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.3E-04
2110	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	3.9E-04
2111	7.6E-04	8.0E-04	8.3E-04	8.6E-04	8.8E-04	9.1E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2112	6.4E-04	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	7.9E-04	8.2E-04	8.3E-04	8.5E-04	8.6E-04	8.7E-04	8.8E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2113	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.7E-04	6.9E-04	7.0E-04	7.2E-04	7.3E-04	7.3E-04	7.4E-04
2114	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04	6.3E-04
2115	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.2E-04	5.3E-04	5.4E-04	5.4E-04	5.4E-04
2116	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.7E-04	4.8E-04
2117	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04
2118	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.8E-04
2119	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.3E-04
2120	7.4E-04	7.8E-04	8.1E-04	8.3E-04	8.6E-04	8.8E-04	9.1E-04	9.4E-04	9.6E-04	9.7E-04	9.9E-04	9.9E-04	1.0E-03
2121	6.2E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.8E-04	8.0E-04	8.2E-04	8.3E-04	8.3E-04	8.4E-04
2122	5.3E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.2E-04	7.2E-04
2123	4.5E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04
2124	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.3E-04	5.3E-04	5.4E-04	5.4E-04
2125	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.7E-04	4.8E-04
2126	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04
2127	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04	3.8E-04
2128	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.8E-04
2129	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04
2130	7.3E-04	7.7E-04	8.0E-04	8.3E-04	8.5E-04	8.7E-04	9.0E-04	9.3E-04	9.5E-04	9.6E-04	9.8E-04	9.8E-04	9.9E-04
2131	6.2E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.8E-04	8.0E-04	8.1E-04	8.3E-04	8.3E-04	8.4E-04
2132	5.2E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04
2133	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.1E-04	6.1E-04	6.1E-04
2134	3.9E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.3E-04	5.3E-04	5.3E-04
2135	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04	4.7E-04
2136	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.1E-04
2137	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.7E-04
2138	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	2.9E-04
2139	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.4E-04
2140	7.3E-04	7.6E-04	8.0E-04	8.2E-04	8.5E-04	8.7E-04	9.0E-04	9.3E-04	9.5E-04	9.6E-04	9.8E-04	9.9E-04	9.9E-04
2141	6.3E-04	6.6E-04	6.9E-04	7.1E-04	7.3E-04	7.5E-04	7.8E-04	8.0E-04	8.2E-04	8.3E-04	8.5E-04	8.5E-04	8.6E-04
2142	5.3E-04	5.6E-04	5.8E-04	6.0E-04	6.2E-04	6.3E-04	6.5E-04	6.8E-04	6.9E-04	7.1E-04	7.2E-04	7.3E-04	7.3E-04
2143	4.5E-04	4.8E-04	5.0E-04	5.1E-04	5.3E-04	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04	6.3E-04
2144	3.9E-04	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04	5.4E-04
2145	3.4E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04	4.7E-04	4.7E-04
2146	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.2E-04	4.2E-04
2147	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04
2148	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	2.9E-04	2.9E-04
2149	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.5E-04
2150	7.7E-04	8.1E-04	8.5E-04	8.7E-04	9.0E-04	9.3E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03
2151	6.6E-04	6.9E-04	7.2E-04	7.5E-04	7.7E-04	7.9E-04	8.2E-04	8.5E-04	8.7E-04	8.9E-04	9.0E-04	9.1E-04	9.2E-04
2152	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.2E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04
2153	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.6E-04	5.8E-04	6.0E-04	6.2E-04	6.3E-04	6.4E-04	6.5E-04	6.5E-04
2154	4.0E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04	5.6E-04	5.7E-04	5.7E-04
2155	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04	4.8E-04	4.8E-04
2156	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04	4.3E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2157	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04
2158	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04	3.0E-04
2159	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04
2160	8.6E-04	9.1E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2161	7.4E-04	7.8E-04	8.2E-04	8.4E-04	8.7E-04	8.9E-04	9.2E-04	9.6E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2162	6.3E-04	6.6E-04	6.9E-04	7.1E-04	7.3E-04	7.6E-04	7.8E-04	8.1E-04	8.3E-04	8.4E-04	8.6E-04	8.6E-04	8.7E-04
2163	5.4E-04	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.2E-04	7.3E-04	7.4E-04	7.4E-04
2164	4.6E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.3E-04	6.4E-04	6.4E-04	6.5E-04
2165	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.7E-04	5.9E-04	6.0E-04	6.1E-04	6.1E-04
2166	3.8E-04	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.6E-04	4.8E-04	4.9E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04	5.5E-04
2167	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.5E-04
2168	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04	3.0E-04
2169	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04
2170	8.3E-04	8.8E-04	9.2E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03
2171	7.3E-04	7.6E-04	8.0E-04	8.3E-04	8.5E-04	8.8E-04	9.1E-04	9.4E-04	9.6E-04	9.8E-04	9.9E-04	1.0E-03	1.0E-03
2172	6.3E-04	6.6E-04	6.9E-04	7.1E-04	7.3E-04	7.6E-04	7.8E-04	8.1E-04	8.3E-04	8.4E-04	8.6E-04	8.6E-04	8.7E-04
2173	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04
2174	4.6E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.5E-04
2175	4.1E-04	4.4E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04	5.7E-04	5.8E-04	5.9E-04	5.9E-04
2176	4.5E-04	4.8E-04	5.0E-04	5.3E-04	5.4E-04	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.6E-04	6.7E-04	6.8E-04	6.9E-04
2177	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.2E-04
2178	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04	3.1E-04
2179	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.5E-04
2180	9.3E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2181	8.1E-04	8.6E-04	9.0E-04	9.3E-04	9.6E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2182	7.2E-04	7.6E-04	7.9E-04	8.2E-04	8.4E-04	8.7E-04	9.0E-04	9.3E-04	9.5E-04	9.7E-04	9.8E-04	9.9E-04	1.0E-03
2183	6.3E-04	6.6E-04	6.9E-04	7.2E-04	7.4E-04	7.6E-04	7.9E-04	8.1E-04	8.3E-04	8.5E-04	8.6E-04	8.7E-04	8.7E-04
2184	5.4E-04	5.7E-04	6.0E-04	6.2E-04	6.4E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04
2185	4.7E-04	4.9E-04	5.2E-04	5.3E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.4E-04	6.5E-04	6.5E-04	6.6E-04
2186	4.1E-04	4.3E-04	4.5E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	5.8E-04	5.9E-04
2187	3.7E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.9E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04	5.4E-04
2188	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.4E-04	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.2E-04	5.3E-04	5.3E-04
2189	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.4E-04
2190	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03
2191	9.0E-04	9.5E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2192	7.9E-04	8.4E-04	8.7E-04	9.1E-04	9.3E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2193	7.0E-04	7.4E-04	7.8E-04	8.0E-04	8.3E-04	8.5E-04	8.8E-04	9.1E-04	9.3E-04	9.5E-04	9.7E-04	9.8E-04	9.8E-04
2194	6.2E-04	6.6E-04	6.9E-04	7.1E-04	7.3E-04	7.5E-04	7.8E-04	8.1E-04	8.2E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04
2195	5.4E-04	5.7E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.6E-04
2196	4.7E-04	5.0E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04
2197	4.2E-04	4.4E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04	5.7E-04	5.8E-04	5.8E-04	5.9E-04
2198	3.7E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.6E-04	4.8E-04	4.9E-04	5.0E-04	5.1E-04	5.2E-04	5.2E-04
2199	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.4E-04
2200	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.7E-04	3.7E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2201	9.7E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
2202	8.5E-04	9.0E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2203	7.6E-04	8.0E-04	8.4E-04	8.6E-04	8.9E-04	9.2E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03
2204	6.8E-04	7.2E-04	7.5E-04	7.8E-04	8.0E-04	8.2E-04	8.5E-04	8.9E-04	9.1E-04	9.3E-04	9.4E-04	9.5E-04	9.6E-04
2205	6.1E-04	6.4E-04	6.7E-04	6.9E-04	7.2E-04	7.4E-04	7.6E-04	7.9E-04	8.1E-04	8.2E-04	8.3E-04	8.4E-04	8.5E-04
2206	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	7.0E-04	7.1E-04	7.3E-04	7.4E-04	7.4E-04	7.5E-04
2207	4.7E-04	5.0E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04
2208	4.2E-04	4.4E-04	4.6E-04	4.8E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.8E-04	5.8E-04	5.9E-04
2209	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.5E-04
2210	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04
2211	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04
2212	3.3E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.7E-04	4.8E-04	4.8E-04
2213	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.0E-04
2214	9.1E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2215	8.0E-04	8.5E-04	8.8E-04	9.1E-04	9.4E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2216	7.3E-04	7.7E-04	8.0E-04	8.3E-04	8.5E-04	8.8E-04	9.1E-04	9.4E-04	9.6E-04	9.8E-04	9.9E-04	1.0E-03	1.0E-03
2217	6.5E-04	6.9E-04	7.2E-04	7.5E-04	7.7E-04	8.0E-04	8.2E-04	8.5E-04	8.8E-04	9.0E-04	9.2E-04	9.3E-04	9.3E-04
2218	5.9E-04	6.2E-04	6.5E-04	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	7.9E-04	8.0E-04	8.1E-04	8.2E-04	8.2E-04
2219	5.3E-04	5.6E-04	5.8E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.9E-04	7.0E-04	7.1E-04	7.2E-04	7.3E-04	7.3E-04
2220	4.7E-04	5.0E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04
2221	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.3E-04
2222	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.6E-04	4.6E-04	4.6E-04
2223	4.1E-04	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04	6.3E-04
2224	5.0E-04	5.3E-04	5.6E-04	5.8E-04	6.1E-04	6.3E-04	6.6E-04	6.8E-04	7.1E-04	7.2E-04	7.4E-04	7.5E-04	7.5E-04
2225	9.4E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03
2226	8.6E-04	9.0E-04	9.4E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2227	7.6E-04	8.0E-04	8.4E-04	8.7E-04	8.9E-04	9.2E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2228	7.0E-04	7.4E-04	7.7E-04	7.9E-04	8.2E-04	8.4E-04	8.7E-04	9.0E-04	9.2E-04	9.4E-04	9.5E-04	9.6E-04	9.6E-04
2229	6.4E-04	6.7E-04	7.0E-04	7.2E-04	7.5E-04	7.7E-04	8.0E-04	8.3E-04	8.5E-04	8.6E-04	8.8E-04	8.9E-04	8.9E-04
2230	5.8E-04	6.1E-04	6.3E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.5E-04	7.6E-04	7.8E-04	7.9E-04	8.0E-04	8.0E-04
2231	5.2E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.2E-04	7.2E-04
2232	2.9E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.3E-04	4.3E-04
2233	3.4E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.0E-04
2234	4.7E-04	4.9E-04	5.2E-04	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04	6.8E-04	6.8E-04
2235	9.5E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03
2236	8.8E-04	9.2E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2237	8.1E-04	8.5E-04	8.8E-04	9.1E-04	9.4E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2238	7.3E-04	7.7E-04	8.0E-04	8.3E-04	8.5E-04	8.8E-04	9.1E-04	9.4E-04	9.6E-04	9.8E-04	9.9E-04	1.0E-03	1.0E-03
2239	6.7E-04	7.1E-04	7.4E-04	7.6E-04	7.9E-04	8.1E-04	8.4E-04	8.7E-04	8.9E-04	9.0E-04	9.1E-04	9.2E-04	9.2E-04
2240	6.1E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	8.0E-04	8.2E-04	8.3E-04	8.4E-04	8.5E-04	8.5E-04
2241	5.5E-04	5.8E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04
2242	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04
2243	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.4E-04	4.5E-04
2244	3.7E-04	3.9E-04	4.0E-04	4.2E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.1E-04	5.2E-04	5.2E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2245	8.9E-04	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
2246	8.2E-04	8.7E-04	9.0E-04	9.3E-04	9.5E-04	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2247	7.6E-04	7.9E-04	8.3E-04	8.6E-04	8.8E-04	9.0E-04	9.4E-04	9.7E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2248	6.8E-04	7.2E-04	7.5E-04	7.8E-04	8.0E-04	8.2E-04	8.5E-04	8.8E-04	9.0E-04	9.2E-04	9.3E-04	9.4E-04	9.4E-04
2249	6.4E-04	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.8E-04	8.0E-04	8.3E-04	8.5E-04	8.6E-04	8.7E-04	8.8E-04	8.8E-04
2250	5.9E-04	6.3E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	7.9E-04	8.0E-04	8.1E-04	8.2E-04	8.2E-04
2251	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04
2252	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.5E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.2E-04	5.3E-04	5.3E-04
2253	8.8E-04	9.2E-04	9.6E-04	9.8E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03
2254	8.2E-04	8.7E-04	9.0E-04	9.3E-04	9.5E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2255	7.7E-04	8.1E-04	8.4E-04	8.7E-04	8.9E-04	9.1E-04	9.5E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2256	7.1E-04	7.4E-04	7.8E-04	8.0E-04	8.2E-04	8.5E-04	8.8E-04	9.1E-04	9.2E-04	9.4E-04	9.5E-04	9.6E-04	9.6E-04
2257	6.6E-04	6.9E-04	7.2E-04	7.5E-04	7.7E-04	7.9E-04	8.2E-04	8.5E-04	8.7E-04	8.8E-04	9.0E-04	9.0E-04	9.1E-04
2258	6.2E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	8.0E-04	8.1E-04	8.3E-04	8.4E-04	8.4E-04	8.5E-04
2259	5.7E-04	6.0E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04
2260	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.7E-04	4.7E-04
2261	8.1E-04	8.5E-04	8.9E-04	9.1E-04	9.3E-04	9.5E-04	9.9E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
2262	7.6E-04	8.0E-04	8.3E-04	8.6E-04	8.8E-04	9.0E-04	9.3E-04	9.7E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2263	7.1E-04	7.5E-04	7.8E-04	8.1E-04	8.3E-04	8.5E-04	8.8E-04	9.1E-04	9.3E-04	9.4E-04	9.5E-04	9.6E-04	9.6E-04
2264	6.6E-04	7.0E-04	7.3E-04	7.5E-04	7.7E-04	7.9E-04	8.2E-04	8.5E-04	8.7E-04	8.8E-04	9.0E-04	9.0E-04	9.1E-04
2265	6.3E-04	6.6E-04	6.9E-04	7.1E-04	7.3E-04	7.5E-04	7.8E-04	8.1E-04	8.3E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04
2266	5.9E-04	6.2E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.4E-04	7.6E-04	7.8E-04	7.9E-04	8.0E-04	8.1E-04	8.1E-04
2267	7.7E-04	8.1E-04	8.4E-04	8.6E-04	8.8E-04	9.0E-04	9.3E-04	9.7E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03
2268	7.5E-04	7.8E-04	8.2E-04	8.4E-04	8.6E-04	8.8E-04	9.1E-04	9.4E-04	9.6E-04	9.7E-04	9.8E-04	9.9E-04	9.9E-04
2269	7.1E-04	7.4E-04	7.7E-04	8.0E-04	8.2E-04	8.4E-04	8.7E-04	9.0E-04	9.1E-04	9.3E-04	9.4E-04	9.4E-04	9.5E-04
2270	6.6E-04	7.0E-04	7.3E-04	7.5E-04	7.7E-04	7.9E-04	8.2E-04	8.5E-04	8.6E-04	8.7E-04	8.8E-04	8.9E-04	8.9E-04
2271	6.2E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	8.0E-04	8.2E-04	8.3E-04	8.4E-04	8.5E-04	8.5E-04
2272	6.0E-04	6.3E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	7.8E-04	8.0E-04	8.1E-04	8.2E-04	8.2E-04
2273	5.6E-04	5.9E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.3E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04
2274	6.4E-04	6.7E-04	7.0E-04	7.1E-04	7.3E-04	7.5E-04	7.7E-04	8.0E-04	8.1E-04	8.3E-04	8.3E-04	8.4E-04	8.4E-04
2275	6.7E-04	7.1E-04	7.3E-04	7.5E-04	7.7E-04	7.9E-04	8.1E-04	8.4E-04	8.5E-04	8.7E-04	8.7E-04	8.8E-04	8.8E-04
2276	7.0E-04	7.3E-04	7.6E-04	7.7E-04	7.9E-04	8.1E-04	8.4E-04	8.7E-04	8.8E-04	8.9E-04	9.0E-04	9.1E-04	9.1E-04
2277	7.1E-04	7.5E-04	7.8E-04	7.9E-04	8.1E-04	8.3E-04	8.6E-04	8.9E-04	9.0E-04	9.2E-04	9.2E-04	9.3E-04	9.3E-04
2278	7.1E-04	7.5E-04	7.8E-04	7.9E-04	8.1E-04	8.3E-04	8.6E-04	8.9E-04	9.1E-04	9.2E-04	9.3E-04	9.3E-04	9.4E-04
2279	7.1E-04	7.4E-04	7.7E-04	7.9E-04	8.1E-04	8.3E-04	8.6E-04	8.9E-04	9.0E-04	9.2E-04	9.2E-04	9.3E-04	9.3E-04
2280	6.9E-04	7.2E-04	7.5E-04	7.7E-04	7.9E-04	8.1E-04	8.4E-04	8.7E-04	8.9E-04	9.0E-04	9.1E-04	9.1E-04	9.2E-04
2281	6.5E-04	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.7E-04	8.0E-04	8.3E-04	8.4E-04	8.5E-04	8.6E-04	8.7E-04	8.7E-04
2282	6.2E-04	6.5E-04	6.8E-04	6.9E-04	7.1E-04	7.3E-04	7.6E-04	7.9E-04	8.0E-04	8.2E-04	8.3E-04	8.3E-04	8.4E-04
2283	5.9E-04	6.2E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.3E-04	7.6E-04	7.7E-04	7.9E-04	8.0E-04	8.1E-04	8.1E-04
2284	5.6E-04	5.9E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.3E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04
2285	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.6E-04	6.7E-04	7.0E-04	7.1E-04	7.2E-04	7.2E-04	7.3E-04	7.3E-04
2286	5.9E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	6.9E-04	7.1E-04	7.4E-04	7.5E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04
2287	6.1E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.1E-04	7.4E-04	7.6E-04	7.7E-04	7.9E-04	7.9E-04	8.0E-04	8.0E-04
2288	6.3E-04	6.6E-04	6.9E-04	7.0E-04	7.2E-04	7.4E-04	7.6E-04	7.9E-04	8.0E-04	8.1E-04	8.2E-04	8.3E-04	8.3E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2289	6.5E-04	6.8E-04	7.1E-04	7.2E-04	7.4E-04	7.6E-04	7.8E-04	8.1E-04	8.3E-04	8.4E-04	8.4E-04	8.5E-04	8.5E-04
2290	6.5E-04	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.7E-04	7.9E-04	8.2E-04	8.3E-04	8.4E-04	8.5E-04	8.6E-04	8.6E-04
2291	6.5E-04	6.8E-04	7.1E-04	7.3E-04	7.5E-04	7.7E-04	7.9E-04	8.2E-04	8.3E-04	8.5E-04	8.5E-04	8.6E-04	8.6E-04
2292	6.3E-04	6.7E-04	6.9E-04	7.1E-04	7.3E-04	7.5E-04	7.8E-04	8.0E-04	8.2E-04	8.3E-04	8.4E-04	8.4E-04	8.5E-04
2293	6.0E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.7E-04	7.8E-04	8.0E-04	8.0E-04	8.1E-04	8.1E-04
2294	5.8E-04	6.1E-04	6.4E-04	6.6E-04	6.8E-04	6.9E-04	7.2E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04
2295	5.6E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.6E-04	7.6E-04
2296	5.3E-04	5.6E-04	5.9E-04	6.1E-04	6.2E-04	6.4E-04	6.6E-04	6.9E-04	7.0E-04	7.2E-04	7.2E-04	7.3E-04	7.3E-04
2297	5.2E-04	5.5E-04	5.7E-04	5.9E-04	6.0E-04	6.1E-04	6.2E-04	6.5E-04	6.6E-04	6.7E-04	6.7E-04	6.8E-04	6.8E-04
2298	5.4E-04	5.6E-04	5.9E-04	6.0E-04	6.2E-04	6.3E-04	6.5E-04	6.7E-04	6.8E-04	7.0E-04	7.0E-04	7.1E-04	7.1E-04
2299	5.6E-04	5.8E-04	6.1E-04	6.2E-04	6.4E-04	6.5E-04	6.7E-04	7.0E-04	7.1E-04	7.2E-04	7.3E-04	7.3E-04	7.3E-04
2300	5.8E-04	6.0E-04	6.3E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.6E-04	7.6E-04
2301	5.9E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	6.9E-04	7.2E-04	7.4E-04	7.5E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04
2302	6.0E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.3E-04	7.6E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04	7.9E-04
2303	6.0E-04	6.3E-04	6.6E-04	6.7E-04	6.9E-04	7.1E-04	7.3E-04	7.6E-04	7.7E-04	7.8E-04	7.9E-04	8.0E-04	8.0E-04
2304	5.8E-04	6.1E-04	6.4E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.4E-04	7.5E-04	7.6E-04	7.7E-04	7.8E-04	7.8E-04
2305	5.6E-04	5.9E-04	6.2E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.6E-04	7.6E-04
2306	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	7.0E-04	7.1E-04	7.2E-04	7.3E-04	7.4E-04	7.4E-04
2307	5.2E-04	5.5E-04	5.8E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04	7.2E-04
2308	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.3E-04	5.2E-04	5.4E-04	5.5E-04	5.6E-04	5.6E-04	5.7E-04	5.7E-04
2309	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.4E-04	5.4E-04	5.5E-04	5.6E-04	5.7E-04	5.8E-04	5.8E-04	5.8E-04
2310	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.5E-04	5.5E-04	5.7E-04	5.8E-04	5.8E-04	5.9E-04	5.9E-04	6.0E-04
2311	4.8E-04	5.0E-04	5.2E-04	5.4E-04	5.5E-04	5.6E-04	5.6E-04	5.8E-04	5.9E-04	6.0E-04	6.1E-04	6.1E-04	6.1E-04
2312	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.6E-04	5.7E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04	6.3E-04	6.3E-04	6.4E-04
2313	5.0E-04	5.3E-04	5.5E-04	5.6E-04	5.7E-04	5.9E-04	6.0E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04	6.6E-04	6.6E-04
2314	5.1E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	6.0E-04	6.2E-04	6.4E-04	6.5E-04	6.6E-04	6.7E-04	6.8E-04	6.8E-04
2315	5.3E-04	5.6E-04	5.8E-04	5.9E-04	6.1E-04	6.2E-04	6.4E-04	6.7E-04	6.8E-04	6.9E-04	6.9E-04	7.0E-04	7.0E-04
2316	5.4E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.4E-04	6.6E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04	7.2E-04	7.2E-04
2317	5.5E-04	5.8E-04	6.0E-04	6.2E-04	6.3E-04	6.5E-04	6.7E-04	7.0E-04	7.1E-04	7.2E-04	7.3E-04	7.3E-04	7.3E-04
2318	5.5E-04	5.8E-04	6.1E-04	6.2E-04	6.4E-04	6.6E-04	6.8E-04	7.0E-04	7.2E-04	7.3E-04	7.3E-04	7.4E-04	7.4E-04
2319	5.4E-04	5.7E-04	5.9E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.9E-04	7.0E-04	7.1E-04	7.2E-04	7.2E-04	7.2E-04
2320	5.3E-04	5.5E-04	5.8E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04	7.2E-04
2321	5.1E-04	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04	6.9E-04	7.0E-04	7.0E-04
2322	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.4E-04	5.5E-04	5.7E-04	5.8E-04	5.9E-04	5.9E-04	6.0E-04	6.0E-04
2323	4.7E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.5E-04	5.6E-04	5.8E-04	5.9E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04
2324	4.8E-04	5.0E-04	5.2E-04	5.3E-04	5.5E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04	6.3E-04	6.3E-04
2325	4.9E-04	5.2E-04	5.4E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.2E-04	6.3E-04	6.4E-04	6.5E-04	6.5E-04	6.5E-04
2326	5.0E-04	5.3E-04	5.5E-04	5.6E-04	5.8E-04	5.9E-04	6.1E-04	6.3E-04	6.4E-04	6.5E-04	6.6E-04	6.7E-04	6.7E-04
2327	5.1E-04	5.4E-04	5.6E-04	5.7E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04	6.8E-04	6.8E-04	6.8E-04
2328	5.1E-04	5.4E-04	5.6E-04	5.8E-04	5.9E-04	6.1E-04	6.3E-04	6.5E-04	6.6E-04	6.7E-04	6.8E-04	6.9E-04	6.9E-04
2329	5.0E-04	5.2E-04	5.5E-04	5.6E-04	5.8E-04	5.9E-04	6.1E-04	6.4E-04	6.5E-04	6.6E-04	6.7E-04	6.7E-04	6.7E-04
2330	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
2331	-1.9E-04	-2.0E-04	-2.2E-04	-2.4E-04	-2.6E-04	-2.7E-04	-2.9E-04	-3.1E-04	-2.8E-04	-2.7E-04	-2.5E-04	-2.4E-04	-2.4E-04
2332	-1.7E-04	-1.8E-04	-1.9E-04	-2.1E-04	-2.3E-04	-2.5E-04	-2.6E-04	-2.7E-04	-2.5E-04	-2.3E-04	-2.2E-04	-2.1E-04	-2.0E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2333	-1.4E-04	-1.4E-04	-1.6E-04	-1.8E-04	-2.0E-04	-2.1E-04	-2.2E-04	-2.4E-04	-2.1E-04	-1.9E-04	-1.7E-04	-1.6E-04	-1.6E-04
2334	-4.2E-05	-4.5E-05	-5.1E-05	-6.3E-05	-7.6E-05	-8.6E-05	-9.2E-05	-9.9E-05	-7.7E-05	-5.8E-05	-4.4E-05	-3.4E-05	-3.0E-05
2335	-8.2E-05	-8.7E-05	-9.7E-05	-1.1E-04	-1.3E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.4E-04	-1.2E-04	-1.0E-04	-8.9E-05	-8.3E-05
2336	2.6E-05	2.7E-05	2.4E-05	1.5E-05	5.1E-06	-1.3E-06	-4.5E-06	-7.2E-06	1.7E-05	3.7E-05	5.3E-05	6.3E-05	6.8E-05
2337	9.8E-05	1.0E-04	1.1E-04	1.0E-04	9.8E-05	9.7E-05	9.8E-05	1.0E-04	1.2E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04
2338	4.6E-06	4.8E-06	-1.2E-06	-1.5E-05	-3.0E-05	-3.9E-05	-4.5E-05	-5.0E-05	-2.2E-05	2.3E-06	2.0E-05	3.2E-05	3.8E-05
2339	1.1E-04	1.2E-04	1.2E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.3E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04
2340	1.7E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04
2341	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04
2342	-2.1E-04	-2.2E-04	-2.3E-04	-2.5E-04	-2.7E-04	-2.8E-04	-3.0E-04	-3.1E-04	-3.0E-04	-2.8E-04	-2.7E-04	-2.6E-04	-2.6E-04
2343	-1.8E-04	-1.9E-04	-2.0E-04	-2.2E-04	-2.4E-04	-2.5E-04	-2.7E-04	-2.8E-04	-2.6E-04	-2.5E-04	-2.3E-04	-2.3E-04	-2.2E-04
2344	-1.5E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.9E-04	-2.0E-04	-2.1E-04	-2.2E-04	-2.0E-04	-1.8E-04	-1.7E-04	-1.6E-04	-1.6E-04
2345	-1.2E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.8E-04	-1.7E-04	-1.5E-04	-1.4E-04	-1.4E-04	-1.3E-04
2346	-8.0E-05	-8.4E-05	-9.0E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.2E-04	-1.3E-04	-1.1E-04	-1.0E-04	-9.0E-05	-8.3E-05	-8.0E-05
2347	-3.6E-05	-3.8E-05	-4.3E-05	-5.0E-05	-5.8E-05	-6.5E-05	-7.0E-05	-7.5E-05	-6.4E-05	-5.5E-05	-4.8E-05	-4.3E-05	-4.1E-05
2348	4.7E-06	4.4E-06	2.0E-06	-3.0E-06	-8.3E-06	-1.3E-05	-1.6E-05	-1.8E-05	-9.8E-06	-2.2E-06	3.4E-06	7.1E-06	9.0E-06
2349	-2.4E-04	-2.5E-04	-2.7E-04	-2.9E-04	-3.1E-04	-3.3E-04	-3.5E-04	-3.7E-04	-3.5E-04	-3.3E-04	-3.2E-04	-3.1E-04	-3.1E-04
2350	-2.0E-04	-2.1E-04	-2.2E-04	-2.4E-04	-2.5E-04	-2.7E-04	-2.8E-04	-3.0E-04	-2.8E-04	-2.6E-04	-2.5E-04	-2.4E-04	-2.4E-04
2351	-1.4E-04	-1.5E-04	-1.6E-04	-1.8E-04	-1.9E-04	-2.0E-04	-2.1E-04	-2.3E-04	-2.1E-04	-1.9E-04	-1.8E-04	-1.8E-04	-1.7E-04
2352	-9.9E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.4E-04	-1.3E-04	-1.1E-04	-1.1E-04	-1.0E-04
2353	-4.4E-05	-4.7E-05	-5.2E-05	-6.1E-05	-6.9E-05	-7.7E-05	-8.3E-05	-8.9E-05	-7.7E-05	-6.8E-05	-6.1E-05	-5.6E-05	-5.4E-05
2354	2.9E-06	2.5E-06	-2.7E-07	-5.7E-06	-1.1E-05	-1.6E-05	-2.0E-05	-2.3E-05	-1.4E-05	-6.4E-06	-6.3E-07	3.2E-06	5.2E-06
2355	3.5E-05	3.7E-05	3.6E-05	3.3E-05	2.9E-05	2.7E-05	2.5E-05	2.4E-05	3.2E-05	3.9E-05	4.4E-05	4.7E-05	4.9E-05
2356	5.8E-05	6.0E-05	6.1E-05	6.0E-05	5.8E-05	5.7E-05	5.7E-05	5.7E-05	6.4E-05	7.1E-05	7.6E-05	7.9E-05	8.1E-05
2357	-1.2E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.9E-04	-1.7E-04	-1.5E-04	-1.4E-04	-1.3E-04	-1.2E-04
2358	-5.1E-05	-5.4E-05	-6.0E-05	-6.9E-05	-7.9E-05	-8.8E-05	-9.5E-05	-1.0E-04	-9.0E-05	-8.0E-05	-7.3E-05	-6.8E-05	-6.5E-05
2359	1.9E-06	1.3E-06	-1.6E-06	-7.5E-06	-1.4E-05	-1.9E-05	-2.3E-05	-2.7E-05	-1.7E-05	-9.1E-06	-3.0E-06	1.1E-06	3.1E-06
2360	3.6E-05	3.8E-05	3.7E-05	3.3E-05	3.0E-05	2.7E-05	2.5E-05	2.4E-05	3.2E-05	4.0E-05	4.5E-05	4.9E-05	5.1E-05
2361	5.6E-05	5.9E-05	6.0E-05	5.8E-05	5.6E-05	5.5E-05	5.5E-05	5.5E-05	6.3E-05	6.9E-05	7.5E-05	7.8E-05	8.0E-05
2362	6.5E-05	6.8E-05	7.0E-05	6.9E-05	6.8E-05	6.8E-05	6.9E-05	7.0E-05	7.7E-05	8.4E-05	8.9E-05	9.2E-05	9.4E-05
2363	6.7E-05	7.0E-05	7.2E-05	7.2E-05	7.2E-05	7.2E-05	7.3E-05	7.5E-05	8.3E-05	8.9E-05	9.4E-05	9.8E-05	9.9E-05
2364	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04
2365	1.2E-06	6.1E-07	-2.5E-06	-8.6E-06	-1.5E-05	-2.1E-05	-2.5E-05	-2.9E-05	-1.9E-05	-1.0E-05	-3.4E-06	9.2E-07	3.1E-06
2366	3.4E-05	3.5E-05	3.4E-05	3.1E-05	2.7E-05	2.4E-05	2.2E-05	2.0E-05	2.9E-05	3.7E-05	4.3E-05	4.7E-05	4.9E-05
2367	5.1E-05	5.3E-05	5.4E-05	5.2E-05	4.9E-05	4.8E-05	4.7E-05	4.7E-05	5.6E-05	6.3E-05	6.9E-05	7.3E-05	7.5E-05
2368	5.7E-05	6.0E-05	6.1E-05	6.0E-05	5.8E-05	5.8E-05	5.8E-05	5.9E-05	6.7E-05	7.5E-05	8.0E-05	8.4E-05	8.6E-05
2369	5.8E-05	6.1E-05	6.2E-05	6.1E-05	6.0E-05	6.0E-05	6.1E-05	6.2E-05	7.1E-05	7.8E-05	8.4E-05	8.8E-05	9.0E-05
2370	5.5E-05	5.9E-05	6.0E-05	6.0E-05	5.9E-05	6.0E-05	6.1E-05	6.2E-05	7.1E-05	7.9E-05	8.5E-05	8.8E-05	9.0E-05
2371	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
2372	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04
2373	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
2374	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04
2375	-3.4E-06	-4.2E-06	-7.6E-06	-1.4E-05	-2.1E-05	-2.7E-05	-3.2E-05	-3.6E-05	-2.5E-05	-1.5E-05	-7.8E-06	-3.0E-06	-5.8E-07
2376	2.6E-05	2.7E-05	2.6E-05	2.1E-05	1.7E-05	1.3E-05	1.1E-05	8.9E-06	1.9E-05	2.8E-05	3.5E-05	3.9E-05	4.1E-05

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2377	3.9E-05	4.1E-05	4.1E-05	3.8E-05	3.5E-05	3.3E-05	3.2E-05	3.1E-05	4.1E-05	4.9E-05	5.6E-05	6.0E-05	6.2E-05
2378	4.3E-05	4.5E-05	4.6E-05	4.4E-05	4.1E-05	4.0E-05	4.0E-05	4.0E-05	4.9E-05	5.8E-05	6.4E-05	6.9E-05	7.1E-05
2379	4.4E-05	4.6E-05	4.7E-05	4.5E-05	4.4E-05	4.3E-05	4.3E-05	4.3E-05	5.4E-05	6.2E-05	6.9E-05	7.3E-05	7.5E-05
2380	4.1E-05	4.4E-05	4.5E-05	4.4E-05	4.2E-05	4.2E-05	4.2E-05	4.3E-05	5.3E-05	6.1E-05	6.8E-05	7.2E-05	7.4E-05
2381	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04
2382	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04
2383	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
2384	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04
2385	-1.7E-05	-1.9E-05	-2.3E-05	-3.0E-05	-3.8E-05	-4.5E-05	-5.1E-05	-5.5E-05	-4.3E-05	-3.2E-05	-2.3E-05	-1.8E-05	-1.5E-05
2386	6.5E-06	6.5E-06	4.0E-06	-1.3E-06	-7.1E-06	-1.2E-05	-1.5E-05	-1.8E-05	-6.5E-06	3.6E-06	1.1E-05	1.6E-05	1.9E-05
2387	1.8E-05	1.9E-05	1.8E-05	1.4E-05	9.3E-06	5.8E-06	3.7E-06	1.9E-06	1.3E-05	2.3E-05	3.1E-05	3.6E-05	3.8E-05
2388	2.4E-05	2.5E-05	2.5E-05	2.2E-05	1.8E-05	1.6E-05	1.4E-05	1.4E-05	2.5E-05	3.5E-05	4.2E-05	4.7E-05	5.0E-05
2389	2.5E-05	2.6E-05	2.6E-05	2.4E-05	2.1E-05	1.9E-05	1.9E-05	1.8E-05	3.0E-05	3.9E-05	4.7E-05	5.2E-05	5.4E-05
2390	2.2E-05	2.4E-05	2.4E-05	2.2E-05	1.9E-05	1.8E-05	1.7E-05	1.7E-05	2.8E-05	3.7E-05	4.5E-05	4.9E-05	5.2E-05
2391	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04
2392	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04
2393	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
2394	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.7E-04
2395	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.7E-04	2.8E-04	2.8E-04	2.8E-04
2396	-4.9E-05	-5.2E-05	-5.8E-05	-6.7E-05	-7.7E-05	-8.6E-05	-9.3E-05	-1.0E-04	-8.5E-05	-7.2E-05	-6.2E-05	-5.6E-05	-5.3E-05
2397	-2.6E-05	-2.8E-05	-3.2E-05	-3.9E-05	-4.7E-05	-5.4E-05	-5.9E-05	-6.4E-05	-4.9E-05	-3.7E-05	-2.8E-05	-2.2E-05	-1.9E-05
2398	-1.1E-05	-1.1E-05	-1.4E-05	-1.9E-05	-2.5E-05	-3.0E-05	-3.4E-05	-3.7E-05	-2.3E-05	-1.1E-05	-2.1E-06	3.9E-06	6.9E-06
2399	-1.8E-06	-1.6E-06	-3.4E-06	-7.7E-06	-1.2E-05	-1.6E-05	-1.9E-05	-2.1E-05	-6.9E-06	4.9E-06	1.4E-05	2.0E-05	2.3E-05
2400	4.1E-07	8.2E-07	-6.0E-07	-4.2E-06	-8.1E-06	-1.1E-05	-1.3E-05	-1.5E-05	-1.7E-06	9.6E-06	1.8E-05	2.4E-05	2.7E-05
2401	-2.2E-06	-2.0E-06	-3.4E-06	-6.7E-06	-1.0E-05	-1.3E-05	-1.5E-05	-1.7E-05	-4.3E-06	6.3E-06	1.4E-05	2.0E-05	2.2E-05
2402	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.1E-04
2403	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.5E-04	-1.4E-04	-1.2E-04	-1.1E-04	-1.1E-04
2404	-7.4E-05	-7.7E-05	-8.3E-05	-9.3E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.1E-04	-8.9E-05	-7.6E-05	-6.8E-05	-6.4E-05
2405	-4.6E-05	-4.8E-05	-5.3E-05	-6.0E-05	-6.7E-05	-7.4E-05	-7.9E-05	-8.4E-05	-6.7E-05	-5.2E-05	-4.1E-05	-3.4E-05	-3.0E-05
2406	-3.2E-05	-3.4E-05	-3.7E-05	-4.3E-05	-4.9E-05	-5.4E-05	-5.8E-05	-6.2E-05	-4.5E-05	-3.1E-05	-2.1E-05	-1.4E-05	-1.1E-05
2407	-2.8E-05	-2.9E-05	-3.2E-05	-3.7E-05	-4.2E-05	-4.7E-05	-5.0E-05	-5.3E-05	-3.8E-05	-2.4E-05	-1.5E-05	-8.2E-06	-4.9E-06
2408	-2.8E-05	-2.9E-05	-3.2E-05	-3.6E-05	-4.1E-05	-4.5E-05	-4.9E-05	-5.1E-05	-3.7E-05	-2.4E-05	-1.5E-05	-9.0E-06	-5.9E-06
2409	-2.9E-05	-2.9E-05	-3.2E-05	-3.6E-05	-4.0E-05	-4.4E-05	-4.7E-05	-4.9E-05	-3.4E-05	-2.1E-05	-1.2E-05	-5.1E-06	-1.9E-06
2410	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
2411	-1.7E-04	-1.8E-04	-1.9E-04	-2.1E-04	-2.3E-04	-2.4E-04	-2.6E-04	-2.7E-04	-2.5E-04	-2.3E-04	-2.2E-04	-2.1E-04	-2.0E-04
2412	-1.2E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.9E-04	-1.7E-04	-1.5E-04	-1.4E-04	-1.3E-04	-1.3E-04
2413	-8.3E-05	-8.7E-05	-9.4E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.2E-04	-1.0E-04	-9.0E-05	-8.2E-05	-7.8E-05
2414	-6.4E-05	-6.7E-05	-7.2E-05	-8.0E-05	-8.8E-05	-9.5E-05	-1.0E-04	-1.1E-04	-9.0E-05	-7.6E-05	-6.5E-05	-5.8E-05	-5.4E-05
2415	-5.5E-05	-5.8E-05	-6.2E-05	-6.9E-05	-7.6E-05	-8.2E-05	-8.8E-05	-9.2E-05	-7.7E-05	-6.4E-05	-5.4E-05	-4.8E-05	-4.4E-05
2416	-4.9E-05	-5.1E-05	-5.5E-05	-6.1E-05	-6.7E-05	-7.3E-05	-7.8E-05	-8.2E-05	-6.8E-05	-5.6E-05	-4.7E-05	-4.1E-05	-3.8E-05
2417	-3.7E-05	-3.9E-05	-4.2E-05	-4.8E-05	-5.3E-05	-5.8E-05	-6.1E-05	-6.5E-05	-5.2E-05	-4.1E-05	-3.2E-05	-2.7E-05	-2.4E-05
2418	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
2419	-2.3E-04	-2.4E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.3E-04	-3.5E-04	-3.3E-04	-3.1E-04	-3.0E-04	-2.9E-04	-2.8E-04
2420	-1.6E-04	-1.7E-04	-1.8E-04	-2.0E-04	-2.1E-04	-2.3E-04	-2.4E-04	-2.5E-04	-2.3E-04	-2.1E-04	-2.0E-04	-1.9E-04	-1.9E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2421	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.6E-04	-1.5E-04	-1.3E-04	-1.3E-04	-1.2E-04
2422	-8.7E-05	-9.2E-05	-9.9E-05	-1.1E-04	-1.2E-04	-1.3E-04	-1.3E-04	-1.4E-04	-1.3E-04	-1.1E-04	-1.0E-04	-9.7E-05	-9.4E-05
2423	-7.4E-05	-7.7E-05	-8.3E-05	-9.2E-05	-1.0E-04	-1.1E-04	-1.1E-04	-1.2E-04	-1.1E-04	-9.5E-05	-8.6E-05	-8.0E-05	-7.7E-05
2424	-5.9E-05	-6.2E-05	-6.7E-05	-7.4E-05	-8.2E-05	-8.8E-05	-9.4E-05	-9.9E-05	-8.6E-05	-7.5E-05	-6.7E-05	-6.2E-05	-5.9E-05
2425	-3.8E-05	-4.0E-05	-4.4E-05	-5.0E-05	-5.6E-05	-6.1E-05	-6.5E-05	-6.9E-05	-5.7E-05	-4.7E-05	-3.9E-05	-3.4E-05	-3.2E-05
2426	-1.7E-05	-1.8E-05	-2.0E-05	-2.4E-05	-2.9E-05	-3.3E-05	-3.5E-05	-3.8E-05	-2.7E-05	-1.7E-05	-1.0E-05	-5.3E-06	-2.9E-06
2427	-1.9E-04	-2.0E-04	-2.1E-04	-2.3E-04	-2.5E-04	-2.6E-04	-2.8E-04	-2.9E-04	-2.7E-04	-2.6E-04	-2.4E-04	-2.3E-04	-2.3E-04
2428	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.8E-04	-1.9E-04	-2.0E-04	-2.1E-04	-1.9E-04	-1.8E-04	-1.7E-04	-1.6E-04	-1.6E-04
2429	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.5E-04	-1.4E-04	-1.3E-04	-1.2E-04	-1.2E-04
2430	-8.4E-05	-8.8E-05	-9.5E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.2E-04	-1.1E-04	-1.0E-04	-9.8E-05	-9.5E-05
2431	-6.1E-05	-6.5E-05	-7.0E-05	-7.8E-05	-8.6E-05	-9.3E-05	-9.8E-05	-1.0E-04	-9.1E-05	-8.1E-05	-7.3E-05	-6.8E-05	-6.5E-05
2432	-3.3E-05	-3.5E-05	-3.9E-05	-4.5E-05	-5.1E-05	-5.6E-05	-6.0E-05	-6.3E-05	-5.2E-05	-4.2E-05	-3.5E-05	-3.0E-05	-2.7E-05
2433	-7.1E-06	-7.3E-06	-9.4E-06	-1.4E-05	-1.8E-05	-2.1E-05	-2.4E-05	-2.5E-05	-1.4E-05	-5.1E-06	1.9E-06	6.6E-06	9.0E-06
2434	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
2435	-2.2E-04	-2.3E-04	-2.4E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.3E-04	-3.1E-04	-2.9E-04	-2.8E-04	-2.7E-04	-2.7E-04
2436	-1.5E-04	-1.6E-04	-1.7E-04	-1.9E-04	-2.0E-04	-2.2E-04	-2.3E-04	-2.4E-04	-2.3E-04	-2.1E-04	-2.0E-04	-1.9E-04	-1.9E-04
2437	-1.2E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.9E-04	-1.7E-04	-1.6E-04	-1.5E-04	-1.4E-04	-1.4E-04
2438	-8.3E-05	-8.8E-05	-9.5E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.3E-04	-1.1E-04	-1.0E-04	-9.9E-05	-9.6E-05
2439	-5.2E-05	-5.5E-05	-6.0E-05	-6.8E-05	-7.6E-05	-8.3E-05	-8.8E-05	-9.3E-05	-8.1E-05	-7.0E-05	-6.2E-05	-5.6E-05	-5.4E-05
2440	-2.0E-05	-2.1E-05	-2.4E-05	-3.0E-05	-3.5E-05	-4.0E-05	-4.3E-05	-4.6E-05	-3.4E-05	-2.4E-05	-1.7E-05	-1.2E-05	-9.1E-06
2441	8.1E-06	8.7E-06	7.3E-06	3.7E-06	-1.1E-07	-2.9E-06	-4.4E-06	-5.7E-06	5.7E-06	1.5E-05	2.3E-05	2.7E-05	3.0E-05
2442	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.1E-04
2443	-1.5E-04	-1.6E-04	-1.7E-04	-1.9E-04	-2.1E-04	-2.2E-04	-2.3E-04	-2.4E-04	-2.3E-04	-2.1E-04	-2.0E-04	-1.9E-04	-1.9E-04
2444	-1.1E-04	-1.2E-04	-1.2E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.6E-04	-1.5E-04	-1.4E-04	-1.3E-04	-1.3E-04
2445	-6.8E-05	-7.2E-05	-7.8E-05	-8.8E-05	-9.8E-05	-1.1E-04	-1.1E-04	-1.2E-04	-1.0E-04	-9.3E-05	-8.4E-05	-7.8E-05	-7.5E-05
2446	-3.1E-05	-3.2E-05	-3.6E-05	-4.3E-05	-5.0E-05	-5.6E-05	-6.0E-05	-6.4E-05	-5.1E-05	-4.0E-05	-3.1E-05	-2.5E-05	-2.3E-05
2447	2.5E-06	2.8E-06	8.1E-07	-3.8E-06	-8.6E-06	-1.2E-05	-1.4E-05	-1.6E-05	-3.6E-06	7.2E-06	1.5E-05	2.1E-05	2.3E-05
2448	3.0E-05	3.1E-05	3.1E-05	2.8E-05	2.6E-05	2.4E-05	2.3E-05	2.3E-05	3.5E-05	4.5E-05	5.3E-05	5.8E-05	6.1E-05
2449	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
2450	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
2451	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.8E-04	-1.9E-04	-2.0E-04	-2.1E-04	-2.0E-04	-1.8E-04	-1.7E-04	-1.6E-04	-1.6E-04
2452	-8.0E-05	-8.4E-05	-9.2E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.2E-04	-1.1E-04	-9.9E-05	-9.2E-05	-8.9E-05
2453	-3.4E-05	-3.6E-05	-4.0E-05	-4.8E-05	-5.7E-05	-6.4E-05	-6.9E-05	-7.3E-05	-5.8E-05	-4.5E-05	-3.5E-05	-2.8E-05	-2.5E-05
2454	5.9E-06	6.3E-06	4.1E-06	-1.2E-06	-6.8E-06	-1.1E-05	-1.3E-05	-1.5E-05	-9.0E-07	1.1E-05	2.0E-05	2.7E-05	3.0E-05
2455	3.7E-05	3.9E-05	3.9E-05	3.6E-05	3.3E-05	3.1E-05	3.0E-05	3.0E-05	4.4E-05	5.5E-05	6.4E-05	7.0E-05	7.2E-05
2456	6.1E-05	6.4E-05	6.6E-05	6.4E-05	6.3E-05	6.2E-05	6.3E-05	6.5E-05	7.8E-05	8.8E-05	9.6E-05	1.0E-04	1.0E-04
2457	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04
2458	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04
2459	-3.2E-05	-3.3E-05	-3.9E-05	-4.8E-05	-5.8E-05	-6.6E-05	-7.1E-05	-7.6E-05	-5.8E-05	-4.3E-05	-3.1E-05	-2.4E-05	-2.0E-05
2460	1.8E-05	1.9E-05	1.7E-05	1.1E-05	4.7E-06	4.0E-07	-1.8E-06	-3.7E-06	1.3E-05	2.7E-05	3.8E-05	4.5E-05	4.8E-05
2461	5.5E-05	5.8E-05	5.8E-05	5.5E-05	5.2E-05	5.0E-05	5.1E-05	5.1E-05	6.6E-05	7.9E-05	8.9E-05	9.5E-05	9.9E-05
2462	8.1E-05	8.6E-05	8.8E-05	8.7E-05	8.6E-05	8.6E-05	8.8E-05	9.0E-05	1.0E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
2463	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04
2464	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2465	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04
2466	7.8E-05	8.3E-05	8.4E-05	8.1E-05	7.8E-05	7.7E-05	7.8E-05	7.9E-05	9.7E-05	1.1E-04	1.2E-04	1.3E-04	1.3E-04
2467	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04
2468	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04
2469	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04
2470	9.9E-05	1.0E-04	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
2471	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2472	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.6E-04	1.6E-04	1.7E-04	1.9E-04	2.0E-04	2.2E-04	2.2E-04	2.3E-04
2473	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.2E-04	2.3E-04	2.5E-04	2.5E-04	2.6E-04
2474	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04
2475	1.8E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04
2476	9.3E-05	9.5E-05	9.5E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
2477	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
2478	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
2479	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	3.1E-04	3.1E-04	3.2E-04
2480	2.2E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04
2481	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04
2482	8.6E-05	8.8E-05	8.7E-05	8.7E-05	9.0E-05	9.3E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
2483	1.0E-04	1.0E-04	1.0E-04	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
2484	1.2E-04	1.2E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2485	1.1E-04	1.0E-04	9.4E-05	8.9E-05	9.2E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
2486	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04
2487	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04
2488	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04
2489	8.1E-05	8.2E-05	8.0E-05	8.0E-05	8.2E-05	8.5E-05	8.8E-05	9.2E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
2490	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	4.9E-04
2491	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04
2492	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2493	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2494	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04
2495	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
2496	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
2497	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04
2498	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04
2499	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04
2500	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04
2501	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04
2502	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
2503	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
2504	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.6E-04	2.7E-04
2505	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04
2506	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04
2507	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.4E-04	4.5E-04	4.5E-04	4.6E-04	4.6E-04	4.6E-04
2508	9.2E-05	9.5E-05	9.6E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.3E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2509	6.8E-05	7.0E-05	6.9E-05	6.9E-05	7.2E-05	7.4E-05	7.6E-05	8.0E-05	8.6E-05	9.1E-05	9.5E-05	9.8E-05	9.9E-05
2510	7.1E-05	7.3E-05	7.4E-05	7.5E-05	7.7E-05	8.0E-05	8.3E-05	8.6E-05	9.2E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04
2511	7.9E-05	8.2E-05	8.2E-05	8.4E-05	8.7E-05	9.0E-05	9.3E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
2512	6.9E-05	7.2E-05	7.3E-05	7.5E-05	7.8E-05	8.1E-05	8.4E-05	8.7E-05	9.4E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04
2513	7.2E-05	7.5E-05	7.7E-05	7.8E-05	8.1E-05	8.4E-05	8.8E-05	9.1E-05	9.9E-05	1.1E-04	1.1E-04	1.1E-04	1.1E-04
2514	6.7E-05	7.0E-05	7.1E-05	7.3E-05	7.5E-05	7.8E-05	8.1E-05	8.4E-05	9.2E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04
2515	6.3E-05	6.6E-05	6.6E-05	6.7E-05	7.0E-05	7.2E-05	7.5E-05	7.8E-05	8.4E-05	9.0E-05	9.4E-05	9.7E-05	9.8E-05
2516	6.3E-05	6.5E-05	6.5E-05	6.6E-05	6.8E-05	7.0E-05	7.3E-05	7.6E-05	8.2E-05	8.7E-05	9.1E-05	9.4E-05	9.5E-05
2517	6.7E-05	6.9E-05	6.9E-05	7.0E-05	7.2E-05	7.4E-05	7.7E-05	8.0E-05	8.6E-05	9.2E-05	9.6E-05	9.8E-05	9.9E-05
2518	7.4E-05	7.6E-05	7.6E-05	7.7E-05	8.0E-05	8.2E-05	8.5E-05	8.8E-05	9.5E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04
2519	8.7E-05	9.1E-05	9.2E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
2520	9.4E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
2521	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2522	7.1E-05	7.3E-05	7.4E-05	7.5E-05	7.7E-05	8.0E-05	8.2E-05	8.6E-05	9.2E-05	9.7E-05	1.0E-04	1.0E-04	1.0E-04
2523	6.5E-05	6.8E-05	7.0E-05	7.1E-05	7.4E-05	7.6E-05	7.9E-05	8.2E-05	8.9E-05	9.4E-05	9.8E-05	1.0E-04	1.0E-04
2524	7.4E-05	7.7E-05	7.8E-05	7.9E-05	8.2E-05	8.4E-05	8.8E-05	9.1E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
2525	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
2526	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04
2527	-1.9E-04	-2.0E-04	-2.1E-04	-2.3E-04	-2.5E-04	-2.7E-04	-2.8E-04	-2.9E-04	-2.8E-04	-2.6E-04	-2.5E-04	-2.5E-04	-2.4E-04
2528	5.0E-05	5.2E-05	5.2E-05	5.0E-05	4.8E-05	4.7E-05	4.7E-05	4.7E-05	5.4E-05	6.0E-05	6.5E-05	6.8E-05	7.0E-05
2529	7.4E-05	7.8E-05	8.0E-05	8.0E-05	8.1E-05	8.1E-05	8.3E-05	8.5E-05	9.1E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04
2530	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.7E-04
2531	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04	3.6E-04	3.6E-04
2532	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.0E-04
2533	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04	3.6E-04
2534	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.8E-04	3.9E-04
2535	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04
2536	2.5E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04	3.3E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.5E-04
2537	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.7E-04	3.7E-04	3.7E-04
2538	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.1E-04	4.1E-04
2539	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.4E-04	4.5E-04	4.5E-04
2540	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.6E-04	3.7E-04
2541	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04	4.0E-04
2542	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04	4.3E-04
2543	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.1E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.5E-04	4.6E-04	4.6E-04
2544	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.4E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04	4.9E-04	4.9E-04
2545	4.1E-04	4.3E-04	4.5E-04	4.6E-04	4.8E-04	4.7E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.0E-04	5.1E-04	5.1E-04
2546	4.5E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.0E-04	4.9E-04	5.1E-04	5.2E-04	5.2E-04	5.3E-04	5.3E-04	5.3E-04
2547	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.6E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.8E-04
2548	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.0E-04	4.1E-04
2549	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04	4.3E-04
2550	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.0E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.5E-04	4.6E-04
2551	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04	4.4E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04	4.6E-04
2552	3.9E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.4E-04	4.4E-04	4.6E-04	4.7E-04	4.7E-04	4.8E-04	4.8E-04	4.8E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2553	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.7E-04	3.7E-04
2554	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04	3.8E-04	3.8E-04
2555	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.8E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.0E-04
2556	3.1E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.7E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.2E-04	4.2E-04
2557	3.3E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04	4.3E-04
2558	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.4E-04	4.4E-04	4.5E-04
2559	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.3E-04	4.2E-04	4.2E-04	4.4E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04	4.6E-04
2560	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.5E-04	4.4E-04	4.4E-04	4.6E-04	4.7E-04	4.7E-04	4.8E-04	4.8E-04	4.8E-04
2561	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.6E-04	3.7E-04
2562	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04	3.8E-04
2563	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.4E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	3.9E-04
2564	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04	4.0E-04
2565	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.1E-04	4.1E-04	4.1E-04
2566	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04	4.3E-04
2567	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.1E-04	4.3E-04	4.4E-04	4.4E-04	4.5E-04	4.5E-04	4.5E-04
2568	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.3E-04	4.3E-04	4.3E-04	4.5E-04	4.6E-04	4.6E-04	4.7E-04	4.7E-04	4.7E-04
2569	3.8E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.4E-04	4.5E-04	4.7E-04	4.7E-04	4.8E-04	4.9E-04	4.9E-04	4.9E-04
2570	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.6E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04	5.2E-04	5.2E-04
2571	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04	5.1E-04	5.1E-04	5.2E-04	5.3E-04	5.3E-04	5.4E-04
2572	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04	5.4E-04	5.4E-04
2573	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.2E-04	3.2E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04	3.6E-04	3.7E-04
2574	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04
2575	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	3.9E-04
2576	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.0E-04	4.1E-04
2577	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04
2578	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.2E-04	4.3E-04	4.3E-04	4.4E-04	4.4E-04	4.4E-04
2579	3.5E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04	4.6E-04
2580	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.3E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.7E-04	4.8E-04	4.8E-04	4.9E-04
2581	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.7E-04
2582	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04
2583	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
2584	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04
2585	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
2586	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04
2587	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
2588	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
2589	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2590	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04
2591	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
2592	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04
2593	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
2594	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04
2595	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
2596	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2597	9.5E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04
2598	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04
2599	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04
2600	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04	2.3E-04
2601	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04
2602	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
2603	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04
2604	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04
2605	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
2606	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04	2.5E-04
2607	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
2608	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04
2609	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
2610	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04
2611	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04
2612	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
2613	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04
2614	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2615	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2616	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
2617	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04
2618	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04
2619	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04	2.6E-04
2620	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.8E-04
2621	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04
2622	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04
2623	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
2624	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.6E-04
2625	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.8E-04
2626	2.0E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04
2627	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.2E-04
2628	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
2629	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
2630	1.8E-04	1.9E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04
2631	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04
2632	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04
2633	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04
2634	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04
2635	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04
2636	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.4E-04	2.5E-04	2.7E-04	2.8E-04	2.8E-04
2637	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04
2638	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04
2639	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04	3.1E-04
2640	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	2.9E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2641	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04
2642	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04
2643	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
2644	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04
2645	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	2.9E-04
2646	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.8E-04
2647	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.8E-04
2648	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	2.9E-04	2.9E-04
2649	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04
2650	2.3E-04	2.4E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04
2651	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.3E-04
2652	2.1E-04	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04	3.1E-04	3.1E-04
2653	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04
2654	2.0E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	2.9E-04	3.0E-04
2655	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04	3.2E-04
2656	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.5E-04
2657	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04
2658	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
2659	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04	2.5E-04
2660	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.6E-04	2.7E-04
2661	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	2.9E-04	2.9E-04
2662	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.1E-04	3.2E-04
2663	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.4E-04	3.5E-04
2664	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04
2665	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04	2.4E-04
2666	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
2667	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.8E-04	2.8E-04
2668	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04	3.0E-04
2669	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.3E-04	3.3E-04
2670	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
2671	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04
2672	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04	2.5E-04
2673	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04	2.8E-04
2674	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04	3.0E-04
2675	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.3E-04
2676	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04
2677	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
2678	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04	2.8E-04
2679	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04
2680	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.3E-04
2681	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
2682	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.6E-04
2683	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04	2.8E-04
2684	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2685	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04	3.2E-04
2686	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04	2.6E-04
2687	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04	2.7E-04
2688	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	2.9E-04	2.9E-04
2689	2.2E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.1E-04	3.1E-04
2690	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.4E-04
2691	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04
2692	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	2.9E-04
2693	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04	3.1E-04
2694	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.3E-04	3.3E-04
2695	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04	3.6E-04
2696	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04	3.0E-04	3.0E-04
2697	2.3E-04	2.4E-04	2.6E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.2E-04	3.2E-04
2698	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.4E-04	3.5E-04
2699	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04
2700	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.3E-04	3.3E-04
2701	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.5E-04
2702	4.2E-04	4.4E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.6E-04	5.6E-04	5.6E-04
2703	4.3E-04	4.5E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.6E-04	5.7E-04	5.7E-04	5.8E-04
2704	4.4E-04	4.6E-04	4.8E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.8E-04	5.8E-04	5.9E-04	5.9E-04
2705	4.5E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	5.8E-04	5.9E-04	6.0E-04	6.0E-04
2706	4.4E-04	4.6E-04	4.8E-04	4.9E-04	5.1E-04	5.2E-04	5.4E-04	5.6E-04	5.7E-04	5.8E-04	5.9E-04	5.9E-04	5.9E-04
2707	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.2E-04	3.2E-04
2708	2.4E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.4E-04
2709	2.5E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.5E-04
2710	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.5E-04	3.6E-04
2711	3.8E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.0E-04	5.1E-04
2712	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04	5.2E-04
2713	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.6E-04	4.7E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.2E-04	5.3E-04	5.3E-04
2714	4.1E-04	4.3E-04	4.4E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04	5.4E-04	5.4E-04
2715	4.1E-04	4.3E-04	4.5E-04	4.6E-04	4.8E-04	4.9E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04	5.5E-04	5.5E-04	5.5E-04
2716	4.2E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.1E-04	5.3E-04	5.4E-04	5.5E-04	5.5E-04	5.6E-04	5.6E-04
2717	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.3E-04
2718	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.3E-04	3.4E-04
2719	2.5E-04	2.6E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04
2720	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04
2721	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.7E-04	3.7E-04
2722	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04	3.8E-04	3.8E-04
2723	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.6E-04	3.8E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.0E-04
2724	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	4.0E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04
2725	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.4E-04	4.4E-04
2726	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04	4.6E-04
2727	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.7E-04	4.7E-04
2728	3.6E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.8E-04	4.9E-04	4.9E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2729	3.7E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	4.9E-04	5.0E-04	5.0E-04
2730	3.8E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04	5.1E-04
2731	3.9E-04	4.1E-04	4.2E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04	5.2E-04	5.2E-04
2732	3.9E-04	4.1E-04	4.2E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.9E-04	5.0E-04	5.1E-04	5.1E-04	5.2E-04	5.2E-04
2733	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.3E-04
2734	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04	3.4E-04	3.4E-04
2735	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.5E-04
2736	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04	3.6E-04	3.6E-04
2737	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04	3.8E-04	3.8E-04
2738	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.8E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04	4.0E-04
2739	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.2E-04	4.2E-04
2740	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04	4.3E-04	4.3E-04
2741	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.4E-04	4.5E-04	4.5E-04
2742	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.6E-04	4.6E-04
2743	3.5E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.5E-04	4.5E-04	4.6E-04	4.7E-04	4.7E-04	4.7E-04
2744	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.6E-04	4.6E-04	4.7E-04	4.8E-04	4.8E-04	4.8E-04
2745	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.3E-04	3.3E-04
2746	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.4E-04	3.5E-04
2747	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04	3.6E-04	3.6E-04
2748	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.6E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04	3.8E-04
2749	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	3.9E-04	3.9E-04
2750	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.6E-04	3.7E-04	3.9E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.1E-04
2751	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04	4.3E-04
2752	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.3E-04	4.4E-04	4.4E-04
2753	3.3E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.4E-04	4.5E-04	4.5E-04
2754	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
2755	9.5E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2756	9.5E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04
2757	7.7E-05	8.1E-05	8.3E-05	8.5E-05	8.8E-05	9.2E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
2758	8.6E-05	9.0E-05	9.3E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
2759	8.2E-05	8.6E-05	8.9E-05	9.2E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
2760	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04
2761	8.7E-05	9.1E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
2762	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
2763	9.2E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2764	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04
2765	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2766	5.5E-05	5.7E-05	5.7E-05	5.8E-05	6.0E-05	6.2E-05	6.4E-05	6.6E-05	7.1E-05	7.6E-05	7.9E-05	8.1E-05	8.2E-05
2767	6.0E-05	6.2E-05	6.3E-05	6.4E-05	6.7E-05	6.9E-05	7.1E-05	7.4E-05	7.9E-05	8.3E-05	8.6E-05	8.8E-05	8.9E-05
2768	6.6E-05	6.8E-05	7.0E-05	7.1E-05	7.4E-05	7.6E-05	7.9E-05	8.2E-05	8.7E-05	9.2E-05	9.5E-05	9.7E-05	9.8E-05
2769	7.2E-05	7.5E-05	7.7E-05	7.8E-05	8.1E-05	8.4E-05	8.7E-05	9.1E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04
2770	9.3E-05	9.7E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
2771	8.6E-05	9.0E-05	9.2E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04
2772	7.2E-05	7.5E-05	7.7E-05	7.9E-05	8.3E-05	8.6E-05	8.9E-05	9.3E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2773	8.0E-05	8.3E-05	8.4E-05	8.6E-05	9.0E-05	9.3E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
2774	6.0E-05	6.3E-05	6.5E-05	6.6E-05	6.8E-05	7.1E-05	7.3E-05	7.6E-05	8.1E-05	8.5E-05	8.9E-05	9.1E-05	9.2E-05
2775	7.6E-05	8.0E-05	8.3E-05	8.5E-05	8.9E-05	9.3E-05	9.7E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
2776	5.6E-05	5.8E-05	5.9E-05	6.0E-05	6.3E-05	6.4E-05	6.7E-05	6.9E-05	7.4E-05	7.8E-05	8.1E-05	8.3E-05	8.4E-05
2777	7.0E-05	7.4E-05	7.5E-05	7.7E-05	8.0E-05	8.3E-05	8.7E-05	9.0E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
2778	4.7E-05	4.9E-05	5.0E-05	5.1E-05	5.2E-05	5.4E-05	5.6E-05	5.8E-05	6.2E-05	6.5E-05	6.8E-05	7.0E-05	7.1E-05
2779	5.1E-05	5.3E-05	5.4E-05	5.5E-05	5.7E-05	5.9E-05	6.1E-05	6.3E-05	6.8E-05	7.2E-05	7.4E-05	7.6E-05	7.7E-05
2780	4.4E-05	4.6E-05	4.7E-05	4.7E-05	4.9E-05	5.0E-05	5.2E-05	5.4E-05	5.8E-05	6.1E-05	6.4E-05	6.6E-05	6.6E-05
2781	4.8E-05	5.0E-05	5.1E-05	5.2E-05	5.4E-05	5.5E-05	5.7E-05	5.9E-05	6.4E-05	6.8E-05	7.0E-05	7.2E-05	7.3E-05
2782	4.1E-05	4.3E-05	4.4E-05	4.5E-05	4.6E-05	4.7E-05	4.8E-05	5.0E-05	5.4E-05	5.8E-05	6.0E-05	6.2E-05	6.3E-05
2783	4.7E-05	4.9E-05	5.0E-05	5.1E-05	5.2E-05	5.3E-05	5.5E-05	5.7E-05	6.2E-05	6.6E-05	6.9E-05	7.0E-05	7.1E-05
2784	3.7E-05	3.9E-05	3.9E-05	4.0E-05	4.1E-05	4.2E-05	4.3E-05	4.5E-05	4.9E-05	5.2E-05	5.4E-05	5.6E-05	5.7E-05
2785	4.0E-05	4.2E-05	4.3E-05	4.3E-05	4.5E-05	4.6E-05	4.7E-05	4.9E-05	5.3E-05	5.6E-05	5.9E-05	6.1E-05	6.2E-05
2786	4.6E-05	4.8E-05	4.9E-05	4.9E-05	5.1E-05	5.2E-05	5.4E-05	5.6E-05	6.0E-05	6.4E-05	6.7E-05	6.9E-05	7.0E-05
2787	3.7E-05	3.9E-05	4.0E-05	4.0E-05	4.1E-05	4.2E-05	4.3E-05	4.5E-05	4.9E-05	5.2E-05	5.5E-05	5.6E-05	5.7E-05
2788	4.1E-05	4.2E-05	4.3E-05	4.4E-05	4.5E-05	4.6E-05	4.7E-05	4.9E-05	5.3E-05	5.7E-05	5.9E-05	6.1E-05	6.2E-05
2789	4.6E-05	4.8E-05	4.9E-05	4.9E-05	5.1E-05	5.2E-05	5.4E-05	5.6E-05	6.0E-05	6.4E-05	6.7E-05	6.9E-05	7.0E-05
2790	3.9E-05	4.1E-05	4.1E-05	4.2E-05	4.3E-05	4.4E-05	4.5E-05	4.7E-05	5.1E-05	5.5E-05	5.7E-05	5.9E-05	5.9E-05
2791	4.2E-05	4.4E-05	4.5E-05	4.5E-05	4.7E-05	4.8E-05	4.9E-05	5.1E-05	5.5E-05	5.9E-05	6.2E-05	6.4E-05	6.4E-05
2792	4.8E-05	5.0E-05	5.0E-05	5.1E-05	5.2E-05	5.4E-05	5.5E-05	5.8E-05	6.3E-05	6.7E-05	7.0E-05	7.2E-05	7.3E-05
2793	4.2E-05	4.4E-05	4.4E-05	4.5E-05	4.6E-05	4.8E-05	4.9E-05	5.1E-05	5.5E-05	5.9E-05	6.1E-05	6.3E-05	6.4E-05
2794	4.6E-05	4.7E-05	4.8E-05	4.9E-05	5.0E-05	5.1E-05	5.3E-05	5.5E-05	6.0E-05	6.3E-05	6.6E-05	6.8E-05	6.9E-05
2795	4.6E-05	4.8E-05	4.8E-05	4.9E-05	5.1E-05	5.2E-05	5.4E-05	5.6E-05	6.0E-05	6.4E-05	6.7E-05	6.8E-05	6.9E-05
2796	5.0E-05	5.2E-05	5.3E-05	5.4E-05	5.5E-05	5.7E-05	5.9E-05	6.1E-05	6.6E-05	7.0E-05	7.3E-05	7.5E-05	7.6E-05
2797	5.0E-05	5.2E-05	5.3E-05	5.4E-05	5.6E-05	5.8E-05	6.0E-05	6.2E-05	6.6E-05	7.0E-05	7.3E-05	7.5E-05	7.6E-05
2798	5.5E-05	5.8E-05	5.9E-05	6.0E-05	6.2E-05	6.4E-05	6.6E-05	6.9E-05	7.4E-05	7.8E-05	8.1E-05	8.2E-05	8.3E-05
2799	6.0E-05	6.3E-05	6.4E-05	6.6E-05	6.8E-05	7.1E-05	7.3E-05	7.6E-05	8.1E-05	8.5E-05	8.8E-05	9.0E-05	9.1E-05
2800	6.5E-05	6.8E-05	7.0E-05	7.2E-05	7.4E-05	7.7E-05	8.0E-05	8.3E-05	8.8E-05	9.2E-05	9.6E-05	9.8E-05	9.9E-05
2801	7.1E-05	7.4E-05	7.6E-05	7.9E-05	8.1E-05	8.4E-05	8.7E-05	9.1E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04
2802	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.6E-04
2803	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04
2804	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.6E-04
2805	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2806	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.6E-04
2807	9.2E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04
2808	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
2809	8.1E-05	8.5E-05	8.7E-05	9.0E-05	9.4E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
2810	7.6E-05	8.0E-05	8.2E-05	8.4E-05	8.7E-05	9.0E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04
2811	6.5E-05	6.8E-05	7.0E-05	7.2E-05	7.4E-05	7.7E-05	8.0E-05	8.3E-05	8.7E-05	9.1E-05	9.4E-05	9.5E-05	9.6E-05
2812	4.8E-05	5.1E-05	5.2E-05	5.3E-05	5.5E-05	5.7E-05	5.9E-05	6.1E-05	6.5E-05	6.8E-05	7.1E-05	7.2E-05	7.3E-05
2813	3.4E-05	3.6E-05	3.6E-05	3.7E-05	3.8E-05	3.9E-05	4.0E-05	4.2E-05	4.5E-05	4.8E-05	5.0E-05	5.2E-05	5.2E-05
2814	3.7E-05	3.8E-05	3.9E-05	4.0E-05	4.1E-05	4.2E-05	4.3E-05	4.5E-05	4.8E-05	5.2E-05	5.4E-05	5.5E-05	5.6E-05
2815	3.4E-05	3.6E-05	3.7E-05	3.8E-05	3.9E-05	4.0E-05	4.1E-05	4.3E-05	4.6E-05	4.9E-05	5.1E-05	5.2E-05	5.3E-05
2816	3.7E-05	3.8E-05	3.9E-05	4.0E-05	4.1E-05	4.2E-05	4.4E-05	4.5E-05	4.9E-05	5.2E-05	5.4E-05	5.6E-05	5.6E-05

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2817	3.9E-05	4.1E-05	4.2E-05	4.3E-05	4.4E-05	4.5E-05	4.6E-05	4.8E-05	5.2E-05	5.5E-05	5.8E-05	5.9E-05	6.0E-05
2818	3.7E-05	3.9E-05	4.0E-05	4.1E-05	4.2E-05	4.3E-05	4.5E-05	4.7E-05	5.0E-05	5.3E-05	5.5E-05	5.6E-05	5.7E-05
2819	4.0E-05	4.1E-05	4.2E-05	4.3E-05	4.5E-05	4.6E-05	4.7E-05	4.9E-05	5.3E-05	5.6E-05	5.8E-05	6.0E-05	6.0E-05
2820	4.3E-05	4.5E-05	4.6E-05	4.7E-05	4.8E-05	5.0E-05	5.1E-05	5.3E-05	5.7E-05	6.1E-05	6.3E-05	6.5E-05	6.5E-05
2821	4.1E-05	4.3E-05	4.4E-05	4.5E-05	4.7E-05	4.8E-05	5.0E-05	5.2E-05	5.5E-05	5.8E-05	6.1E-05	6.2E-05	6.3E-05
2822	4.4E-05	4.6E-05	4.7E-05	4.9E-05	5.0E-05	5.2E-05	5.4E-05	5.6E-05	5.9E-05	6.3E-05	6.5E-05	6.7E-05	6.7E-05
2823	4.8E-05	5.0E-05	5.1E-05	5.2E-05	5.4E-05	5.6E-05	5.8E-05	6.0E-05	6.4E-05	6.7E-05	7.0E-05	7.2E-05	7.3E-05
2824	4.5E-05	4.7E-05	4.8E-05	5.0E-05	5.1E-05	5.3E-05	5.5E-05	5.7E-05	6.1E-05	6.4E-05	6.6E-05	6.8E-05	6.8E-05
2825	4.9E-05	5.1E-05	5.2E-05	5.4E-05	5.6E-05	5.7E-05	5.9E-05	6.2E-05	6.6E-05	6.9E-05	7.2E-05	7.3E-05	7.4E-05
2826	5.3E-05	5.5E-05	5.7E-05	5.8E-05	6.0E-05	6.2E-05	6.4E-05	6.7E-05	7.1E-05	7.5E-05	7.7E-05	7.9E-05	8.0E-05
2827	4.8E-05	5.1E-05	5.2E-05	5.4E-05	5.6E-05	5.8E-05	6.0E-05	6.2E-05	6.6E-05	6.9E-05	7.2E-05	7.3E-05	7.4E-05
2828	5.3E-05	5.5E-05	5.7E-05	5.9E-05	6.1E-05	6.3E-05	6.5E-05	6.8E-05	7.2E-05	7.5E-05	7.8E-05	8.0E-05	8.1E-05
2829	5.8E-05	6.0E-05	6.2E-05	6.4E-05	6.6E-05	6.8E-05	7.1E-05	7.3E-05	7.8E-05	8.2E-05	8.5E-05	8.7E-05	8.8E-05
2830	5.2E-05	5.5E-05	5.6E-05	5.8E-05	6.0E-05	6.2E-05	6.4E-05	6.7E-05	7.1E-05	7.4E-05	7.7E-05	7.8E-05	7.9E-05
2831	5.7E-05	6.0E-05	6.1E-05	6.3E-05	6.6E-05	6.8E-05	7.0E-05	7.3E-05	7.8E-05	8.1E-05	8.4E-05	8.6E-05	8.7E-05
2832	6.1E-05	6.4E-05	6.6E-05	6.8E-05	7.0E-05	7.2E-05	7.5E-05	7.8E-05	8.3E-05	8.7E-05	9.0E-05	9.2E-05	9.3E-05
2833	5.5E-05	5.8E-05	6.0E-05	6.1E-05	6.4E-05	6.6E-05	6.8E-05	7.1E-05	7.5E-05	7.8E-05	8.1E-05	8.3E-05	8.4E-05
2834	6.1E-05	6.4E-05	6.6E-05	6.8E-05	7.1E-05	7.3E-05	7.6E-05	7.9E-05	8.4E-05	8.7E-05	9.0E-05	9.2E-05	9.3E-05
2835	6.5E-05	6.8E-05	7.0E-05	7.2E-05	7.5E-05	7.7E-05	8.0E-05	8.4E-05	8.9E-05	9.3E-05	9.6E-05	9.8E-05	9.9E-05
2836	5.9E-05	6.2E-05	6.4E-05	6.6E-05	6.9E-05	7.1E-05	7.4E-05	7.7E-05	8.1E-05	8.5E-05	8.7E-05	8.9E-05	9.0E-05
2837	6.4E-05	6.7E-05	7.0E-05	7.2E-05	7.5E-05	7.7E-05	8.0E-05	8.4E-05	8.8E-05	9.2E-05	9.5E-05	9.7E-05	9.9E-05
2838	6.9E-05	7.3E-05	7.6E-05	7.8E-05	8.1E-05	8.4E-05	8.7E-05	9.1E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04
2839	6.4E-05	6.7E-05	6.9E-05	7.2E-05	7.5E-05	7.7E-05	8.0E-05	8.3E-05	8.8E-05	9.2E-05	9.4E-05	9.6E-05	9.7E-05
2840	6.9E-05	7.3E-05	7.5E-05	7.8E-05	8.1E-05	8.4E-05	8.7E-05	9.0E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04
2841	7.4E-05	7.8E-05	8.1E-05	8.4E-05	8.7E-05	9.0E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
2842	6.8E-05	7.2E-05	7.4E-05	7.7E-05	8.0E-05	8.3E-05	8.6E-05	8.9E-05	9.4E-05	9.8E-05	1.0E-04	1.0E-04	1.0E-04
2843	7.3E-05	7.7E-05	8.0E-05	8.2E-05	8.6E-05	8.9E-05	9.2E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04
2844	7.2E-05	7.7E-05	8.0E-05	8.4E-05	8.7E-05	9.1E-05	9.5E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
2845	7.2E-05	7.6E-05	7.9E-05	8.1E-05	8.5E-05	8.8E-05	9.1E-05	9.5E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04
2846	7.7E-05	8.1E-05	8.4E-05	8.7E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
2847	7.5E-05	7.9E-05	8.3E-05	8.6E-05	9.0E-05	9.4E-05	9.9E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
2848	7.6E-05	8.0E-05	8.3E-05	8.6E-05	9.0E-05	9.3E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
2849	8.1E-05	8.5E-05	8.9E-05	9.2E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
2850	7.8E-05	8.3E-05	8.6E-05	9.0E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
2851	8.4E-05	8.9E-05	9.3E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
2852	7.7E-05	8.2E-05	8.6E-05	9.0E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04
2853	8.8E-05	9.2E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
2854	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.6E-04
2855	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2856	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
2857	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
2858	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.7E-04
2859	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04
2860	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2861	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2862	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
2863	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04	1.8E-04
2864	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04
2865	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.5E-04
2866	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
2867	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2868	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
2869	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
2870	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
2871	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2872	9.4E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
2873	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2874	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2875	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.6E-04
2876	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
2877	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2878	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
2879	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2880	9.1E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2881	8.3E-05	8.8E-05	9.1E-05	9.3E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
2882	7.3E-05	7.7E-05	8.0E-05	8.2E-05	8.4E-05	8.6E-05	9.0E-05	9.3E-05	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
2883	6.2E-05	6.6E-05	6.8E-05	6.9E-05	7.0E-05	7.2E-05	7.4E-05	7.7E-05	8.9E-05	9.9E-05	1.1E-04	1.1E-04	1.1E-04
2884	5.2E-05	5.5E-05	5.7E-05	5.7E-05	5.7E-05	5.8E-05	6.0E-05	6.3E-05	7.5E-05	8.4E-05	9.2E-05	9.7E-05	9.9E-05
2885	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2886	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2887	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
2888	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
2889	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04
2890	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04
2891	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
2892	9.5E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
2893	8.6E-05	9.2E-05	9.5E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
2894	7.6E-05	8.0E-05	8.3E-05	8.5E-05	8.7E-05	9.0E-05	9.3E-05	9.7E-05	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04
2895	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2896	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2897	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
2898	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2899	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04
2900	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04
2901	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2902	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
2903	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2904	8.5E-05	9.0E-05	9.3E-05	9.5E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2905	9.3E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
2906	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2907	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2908	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
2909	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2910	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04
2911	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
2912	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04
2913	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2914	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
2915	9.1E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04
2916	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
2917	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2918	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
2919	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04
2920	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04	1.9E-04
2921	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04
2922	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
2923	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04
2924	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
2925	9.1E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
2926	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
2927	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2928	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.7E-04
2929	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04
2930	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
2931	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04
2932	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04
2933	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
2934	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04
2935	-1.4E-04	-1.4E-04	-1.5E-04	-1.7E-04	-1.8E-04	-1.9E-04	-2.0E-04	-2.1E-04	-2.0E-04	-1.9E-04	-1.8E-04	-1.7E-04	-1.6E-04
2936	-1.3E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.7E-04	-1.8E-04	-1.9E-04	-2.0E-04	-1.8E-04	-1.7E-04	-1.6E-04	-1.5E-04	-1.5E-04
2937	8.6E-05	9.0E-05	9.4E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
2938	9.2E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
2939	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
2940	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2941	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04
2942	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
2943	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
2944	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
2945	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
2946	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04
2947	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
2948	8.1E-05	8.5E-05	8.9E-05	9.2E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2949	8.6E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
2950	9.2E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
2951	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2952	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2953	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2954	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
2955	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04
2956	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04
2957	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04
2958	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
2959	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04
2960	7.8E-05	8.2E-05	8.5E-05	8.8E-05	9.2E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04
2961	8.2E-05	8.6E-05	9.0E-05	9.3E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04
2962	8.8E-05	9.2E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
2963	9.3E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
2964	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2965	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
2966	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2967	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
2968	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04
2969	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04
2970	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.1E-04
2971	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.1E-04
2972	7.9E-05	8.3E-05	8.6E-05	8.9E-05	9.3E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
2973	8.4E-05	8.8E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04
2974	8.9E-05	9.3E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.3E-04
2975	9.4E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
2976	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2977	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.6E-04
2978	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2979	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
2980	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
2981	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04
2982	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
2983	7.6E-05	8.0E-05	8.3E-05	8.6E-05	8.9E-05	9.2E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04
2984	8.0E-05	8.4E-05	8.7E-05	9.0E-05	9.4E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
2985	8.5E-05	8.9E-05	9.3E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04
2986	9.0E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.3E-04
2987	9.5E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
2988	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
2989	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04	1.6E-04
2990	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04
2991	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
2992	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2993	7.6E-05	8.0E-05	8.3E-05	8.6E-05	9.0E-05	9.3E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04
2994	8.1E-05	8.5E-05	8.8E-05	9.2E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
2995	8.6E-05	9.1E-05	9.4E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
2996	9.1E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04
2997	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.4E-04
2998	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.5E-04
2999	7.7E-05	8.1E-05	8.4E-05	8.7E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04
3000	8.2E-05	8.7E-05	9.0E-05	9.3E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04
3001	8.8E-05	9.2E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
3002	9.3E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
3003	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04
3004	7.9E-05	8.3E-05	8.6E-05	8.9E-05	9.2E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
3005	8.4E-05	8.8E-05	9.2E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04
3006	9.0E-05	9.4E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.3E-04
3007	9.5E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
3008	8.0E-05	8.4E-05	8.7E-05	9.0E-05	9.4E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
3009	8.6E-05	9.0E-05	9.3E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
3010	9.2E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04
3011	8.1E-05	8.5E-05	8.8E-05	9.2E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
3012	8.7E-05	9.2E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
3013	8.1E-05	8.6E-05	8.9E-05	9.2E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.2E-04
3014	8.8E-05	9.2E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
3015	7.5E-05	7.9E-05	8.2E-05	8.4E-05	8.8E-05	9.1E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04
3016	8.1E-05	8.5E-05	8.8E-05	9.1E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
3017	8.8E-05	9.2E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
3018	7.3E-05	7.7E-05	7.9E-05	8.2E-05	8.5E-05	8.9E-05	9.2E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04
3019	7.9E-05	8.3E-05	8.6E-05	8.9E-05	9.3E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
3020	8.6E-05	9.0E-05	9.3E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
3021	7.0E-05	7.3E-05	7.6E-05	7.9E-05	8.2E-05	8.5E-05	8.8E-05	9.1E-05	9.5E-05	9.9E-05	1.0E-04	1.0E-04	1.0E-04
3022	7.6E-05	8.0E-05	8.3E-05	8.6E-05	8.9E-05	9.2E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04
3023	6.6E-05	6.9E-05	7.2E-05	7.4E-05	7.7E-05	8.0E-05	8.3E-05	8.6E-05	9.0E-05	9.3E-05	9.6E-05	9.8E-05	9.8E-05
3024	7.2E-05	7.6E-05	7.9E-05	8.1E-05	8.4E-05	8.7E-05	9.1E-05	9.4E-05	9.9E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04
3025	6.2E-05	6.5E-05	6.7E-05	6.9E-05	7.2E-05	7.4E-05	7.7E-05	8.0E-05	8.4E-05	8.7E-05	9.0E-05	9.1E-05	9.2E-05
3026	5.7E-05	6.0E-05	6.2E-05	6.4E-05	6.6E-05	6.8E-05	7.1E-05	7.4E-05	7.8E-05	8.1E-05	8.3E-05	8.5E-05	8.6E-05
3027	5.3E-05	5.5E-05	5.7E-05	5.8E-05	6.0E-05	6.2E-05	6.5E-05	6.7E-05	7.1E-05	7.4E-05	7.7E-05	7.8E-05	7.9E-05
3028	5.7E-05	6.0E-05	6.2E-05	6.4E-05	6.6E-05	6.8E-05	7.0E-05	7.3E-05	7.7E-05	8.1E-05	8.4E-05	8.5E-05	8.6E-05
3029	4.2E-05	4.4E-05	4.5E-05	4.6E-05	4.8E-05	4.9E-05	5.1E-05	5.3E-05	5.6E-05	5.9E-05	6.1E-05	6.3E-05	6.4E-05
3030	4.0E-05	4.1E-05	4.3E-05	4.4E-05	4.5E-05	4.6E-05	4.8E-05	4.9E-05	5.3E-05	5.6E-05	5.8E-05	6.0E-05	6.0E-05
3031	4.2E-05	4.4E-05	4.5E-05	4.6E-05	4.7E-05	4.9E-05	5.0E-05	5.2E-05	5.6E-05	5.9E-05	6.1E-05	6.3E-05	6.4E-05
3032	3.7E-05	3.9E-05	4.0E-05	4.0E-05	4.2E-05	4.3E-05	4.4E-05	4.6E-05	4.9E-05	5.2E-05	5.4E-05	5.6E-05	5.6E-05
3033	3.9E-05	4.1E-05	4.2E-05	4.3E-05	4.4E-05	4.5E-05	4.7E-05	4.8E-05	5.2E-05	5.5E-05	5.7E-05	5.9E-05	6.0E-05
3034	3.3E-05	3.5E-05	3.6E-05	3.7E-05	3.8E-05	3.9E-05	4.0E-05	4.1E-05	4.5E-05	4.7E-05	4.9E-05	5.1E-05	5.1E-05
3035	3.5E-05	3.6E-05	3.7E-05	3.8E-05	3.9E-05	4.0E-05	4.1E-05	4.3E-05	4.6E-05	4.9E-05	5.1E-05	5.2E-05	5.3E-05
3036	3.3E-05	3.4E-05	3.5E-05	3.6E-05	3.7E-05	3.8E-05	3.9E-05	4.0E-05	4.3E-05	4.6E-05	4.8E-05	5.0E-05	5.0E-05

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3037	3.4E-05	3.6E-05	3.6E-05	3.7E-05	3.8E-05	3.9E-05	4.0E-05	4.2E-05	4.5E-05	4.8E-05	5.0E-05	5.2E-05	5.2E-05
3038	3.1E-05	3.3E-05	3.4E-05	3.4E-05	3.5E-05	3.6E-05	3.7E-05	3.9E-05	4.2E-05	4.4E-05	4.6E-05	4.8E-05	4.8E-05
3039	3.2E-05	3.4E-05	3.5E-05	3.5E-05	3.6E-05	3.7E-05	3.8E-05	4.0E-05	4.3E-05	4.6E-05	4.8E-05	4.9E-05	5.0E-05
3040	3.5E-05	3.6E-05	3.7E-05	3.8E-05	3.9E-05	4.0E-05	4.1E-05	4.2E-05	4.6E-05	4.9E-05	5.1E-05	5.3E-05	5.3E-05
3041	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.5E-04	-1.6E-04	-1.4E-04	-1.3E-04	-1.2E-04	-1.1E-04	-1.1E-04
3042	6.6E-05	7.0E-05	7.3E-05	7.4E-05	7.6E-05	7.9E-05	8.2E-05	8.5E-05	9.2E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04
3043	6.4E-05	6.8E-05	7.0E-05	7.2E-05	7.4E-05	7.6E-05	7.9E-05	8.2E-05	8.9E-05	9.5E-05	9.9E-05	1.0E-04	1.0E-04
3044	6.2E-05	6.6E-05	6.8E-05	7.0E-05	7.2E-05	7.4E-05	7.6E-05	7.9E-05	8.6E-05	9.2E-05	9.7E-05	1.0E-04	1.0E-04
3045	6.0E-05	6.4E-05	6.6E-05	6.7E-05	6.9E-05	7.1E-05	7.3E-05	7.6E-05	8.3E-05	8.9E-05	9.4E-05	9.7E-05	9.8E-05
3046	5.8E-05	6.1E-05	6.3E-05	6.4E-05	6.5E-05	6.7E-05	6.9E-05	7.2E-05	7.9E-05	8.6E-05	9.0E-05	9.3E-05	9.5E-05
3047	5.5E-05	5.8E-05	6.0E-05	6.1E-05	6.2E-05	6.4E-05	6.6E-05	6.8E-05	7.5E-05	8.2E-05	8.7E-05	9.0E-05	9.1E-05
3048	5.3E-05	5.6E-05	5.7E-05	5.8E-05	5.9E-05	6.0E-05	6.2E-05	6.4E-05	7.2E-05	7.8E-05	8.3E-05	8.7E-05	8.8E-05
3049	5.1E-05	5.4E-05	5.6E-05	5.6E-05	5.7E-05	5.8E-05	5.9E-05	6.1E-05	7.0E-05	7.6E-05	8.1E-05	8.5E-05	8.7E-05
3050	5.0E-05	5.3E-05	5.5E-05	5.6E-05	5.6E-05	5.7E-05	5.9E-05	6.1E-05	6.9E-05	7.7E-05	8.2E-05	8.6E-05	8.8E-05
3051	5.2E-05	5.6E-05	5.8E-05	6.0E-05	6.1E-05	6.2E-05	6.4E-05	6.7E-05	7.9E-05	8.8E-05	9.6E-05	1.0E-04	1.0E-04
3052	5.1E-05	5.5E-05	5.7E-05	5.7E-05	5.8E-05	5.9E-05	6.1E-05	6.3E-05	7.3E-05	8.1E-05	8.7E-05	9.1E-05	9.3E-05
3053	5.2E-05	5.6E-05	5.8E-05	5.8E-05	5.9E-05	6.0E-05	6.2E-05	6.4E-05	7.4E-05	8.2E-05	8.8E-05	9.2E-05	9.4E-05
3054	7.3E-05	7.7E-05	8.0E-05	8.3E-05	8.6E-05	8.9E-05	9.2E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
3055	7.1E-05	7.5E-05	7.8E-05	8.1E-05	8.3E-05	8.6E-05	8.9E-05	9.3E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04
3056	6.9E-05	7.3E-05	7.6E-05	7.8E-05	8.0E-05	8.3E-05	8.6E-05	8.9E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
3057	6.7E-05	7.1E-05	7.4E-05	7.5E-05	7.7E-05	8.0E-05	8.3E-05	8.6E-05	9.3E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04
3058	6.5E-05	6.8E-05	7.1E-05	7.3E-05	7.4E-05	7.6E-05	7.9E-05	8.2E-05	9.0E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04
3059	6.2E-05	6.6E-05	6.8E-05	7.0E-05	7.1E-05	7.3E-05	7.6E-05	7.9E-05	8.6E-05	9.2E-05	9.7E-05	1.0E-04	1.0E-04
3060	6.0E-05	6.3E-05	6.5E-05	6.7E-05	6.8E-05	7.0E-05	7.2E-05	7.5E-05	8.2E-05	8.9E-05	9.4E-05	9.7E-05	9.8E-05
3061	5.7E-05	6.0E-05	6.2E-05	6.3E-05	6.4E-05	6.6E-05	6.8E-05	7.0E-05	7.8E-05	8.5E-05	8.9E-05	9.3E-05	9.4E-05
3062	5.4E-05	5.7E-05	5.9E-05	6.0E-05	6.1E-05	6.2E-05	6.4E-05	6.6E-05	7.4E-05	8.0E-05	8.5E-05	8.9E-05	9.0E-05
3063	5.0E-05	5.3E-05	5.5E-05	5.6E-05	5.6E-05	5.7E-05	5.9E-05	6.1E-05	6.9E-05	7.6E-05	8.1E-05	8.4E-05	8.6E-05
3064	4.9E-05	5.1E-05	5.3E-05	5.3E-05	5.4E-05	5.4E-05	5.6E-05	5.8E-05	6.6E-05	7.3E-05	7.8E-05	8.2E-05	8.3E-05
3065	4.8E-05	5.1E-05	5.2E-05	5.2E-05	5.3E-05	5.3E-05	5.5E-05	5.6E-05	6.5E-05	7.3E-05	7.8E-05	8.2E-05	8.4E-05
3066	4.8E-05	5.2E-05	5.4E-05	5.4E-05	5.5E-05	5.6E-05	5.8E-05	6.0E-05	7.0E-05	8.0E-05	8.6E-05	9.1E-05	9.3E-05
3067	4.8E-05	5.1E-05	5.3E-05	5.3E-05	5.4E-05	5.4E-05	5.6E-05	5.8E-05	6.8E-05	7.6E-05	8.3E-05	8.7E-05	8.9E-05
3068	4.9E-05	5.2E-05	5.4E-05	5.4E-05	5.5E-05	5.5E-05	5.7E-05	5.9E-05	6.9E-05	7.7E-05	8.3E-05	8.8E-05	9.0E-05
3069	5.0E-05	5.4E-05	5.6E-05	5.6E-05	5.7E-05	5.8E-05	5.9E-05	6.1E-05	7.2E-05	8.0E-05	8.7E-05	9.1E-05	9.4E-05
3070	4.8E-05	5.2E-05	5.4E-05	5.6E-05	5.7E-05	5.9E-05	6.1E-05	6.4E-05	7.9E-05	9.2E-05	1.0E-04	1.1E-04	1.1E-04
3071	5.2E-05	5.6E-05	5.8E-05	5.9E-05	5.9E-05	6.1E-05	6.2E-05	6.5E-05	7.5E-05	8.4E-05	9.1E-05	9.6E-05	9.8E-05
3072	8.5E-05	9.0E-05	9.4E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04
3073	7.7E-05	8.2E-05	8.6E-05	9.0E-05	9.3E-05	9.7E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
3074	7.6E-05	8.1E-05	8.4E-05	8.7E-05	9.0E-05	9.3E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
3075	7.4E-05	7.8E-05	8.1E-05	8.3E-05	8.6E-05	8.9E-05	9.2E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
3076	7.1E-05	7.5E-05	7.8E-05	8.0E-05	8.2E-05	8.5E-05	8.8E-05	9.2E-05	9.9E-05	1.1E-04	1.1E-04	1.1E-04	1.2E-04
3077	6.8E-05	7.2E-05	7.5E-05	7.7E-05	7.9E-05	8.1E-05	8.4E-05	8.7E-05	9.5E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
3078	6.5E-05	6.9E-05	7.2E-05	7.3E-05	7.5E-05	7.7E-05	8.0E-05	8.3E-05	9.1E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04
3079	6.2E-05	6.6E-05	6.8E-05	7.0E-05	7.1E-05	7.3E-05	7.6E-05	7.8E-05	8.6E-05	9.3E-05	9.8E-05	1.0E-04	1.0E-04
3080	5.9E-05	6.3E-05	6.5E-05	6.6E-05	6.7E-05	6.9E-05	7.1E-05	7.4E-05	8.2E-05	8.8E-05	9.3E-05	9.7E-05	9.8E-05

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3081	5.6E-05	5.9E-05	6.1E-05	6.2E-05	6.3E-05	6.4E-05	6.6E-05	6.8E-05	7.6E-05	8.3E-05	8.8E-05	9.2E-05	9.3E-05
3082	5.2E-05	5.5E-05	5.7E-05	5.7E-05	5.8E-05	5.9E-05	6.1E-05	6.3E-05	7.1E-05	7.8E-05	8.3E-05	8.6E-05	8.8E-05
3083	4.8E-05	5.1E-05	5.2E-05	5.2E-05	5.3E-05	5.3E-05	5.5E-05	5.7E-05	6.5E-05	7.2E-05	7.7E-05	8.1E-05	8.3E-05
3084	4.5E-05	4.8E-05	4.9E-05	4.9E-05	4.9E-05	5.0E-05	5.1E-05	5.3E-05	6.1E-05	6.9E-05	7.4E-05	7.8E-05	7.9E-05
3085	4.4E-05	4.7E-05	4.8E-05	4.8E-05	4.8E-05	4.8E-05	4.9E-05	5.1E-05	6.0E-05	6.8E-05	7.3E-05	7.7E-05	7.9E-05
3086	4.5E-05	4.8E-05	5.0E-05	5.0E-05	5.1E-05	5.2E-05	5.3E-05	5.5E-05	6.7E-05	7.6E-05	8.4E-05	8.8E-05	9.1E-05
3087	4.5E-05	4.8E-05	4.9E-05	4.9E-05	4.9E-05	5.0E-05	5.1E-05	5.3E-05	6.3E-05	7.2E-05	7.8E-05	8.3E-05	8.5E-05
3088	4.6E-05	4.9E-05	5.0E-05	5.0E-05	5.0E-05	5.1E-05	5.2E-05	5.3E-05	6.4E-05	7.2E-05	7.9E-05	8.3E-05	8.5E-05
3089	4.7E-05	5.0E-05	5.2E-05	5.2E-05	5.3E-05	5.3E-05	5.5E-05	5.6E-05	6.7E-05	7.6E-05	8.2E-05	8.7E-05	8.9E-05
3090	4.5E-05	4.9E-05	5.1E-05	5.2E-05	5.3E-05	5.4E-05	5.6E-05	5.8E-05	7.3E-05	8.5E-05	9.4E-05	1.0E-04	1.0E-04
3091	4.9E-05	5.2E-05	5.4E-05	5.5E-05	5.5E-05	5.6E-05	5.8E-05	6.0E-05	7.1E-05	8.1E-05	8.8E-05	9.2E-05	9.5E-05
3092	5.1E-05	5.5E-05	5.7E-05	5.7E-05	5.7E-05	5.8E-05	6.0E-05	6.2E-05	7.1E-05	7.9E-05	8.4E-05	8.8E-05	9.0E-05
3093	5.2E-05	5.5E-05	5.7E-05	5.8E-05	5.8E-05	5.9E-05	6.0E-05	6.2E-05	7.0E-05	7.7E-05	8.2E-05	8.6E-05	8.7E-05
3094	9.4E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04
3095	8.9E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
3096	8.1E-05	8.7E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
3097	8.0E-05	8.5E-05	8.8E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
3098	7.7E-05	8.1E-05	8.4E-05	8.7E-05	9.0E-05	9.3E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
3099	7.3E-05	7.8E-05	8.1E-05	8.3E-05	8.5E-05	8.8E-05	9.1E-05	9.5E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
3100	7.0E-05	7.4E-05	7.6E-05	7.8E-05	8.0E-05	8.3E-05	8.6E-05	8.9E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
3101	6.6E-05	7.0E-05	7.2E-05	7.4E-05	7.5E-05	7.7E-05	8.0E-05	8.3E-05	9.1E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04
3102	6.2E-05	6.6E-05	6.8E-05	7.0E-05	7.1E-05	7.3E-05	7.5E-05	7.8E-05	8.6E-05	9.3E-05	9.8E-05	1.0E-04	1.0E-04
3103	5.9E-05	6.2E-05	6.4E-05	6.5E-05	6.6E-05	6.8E-05	7.0E-05	7.2E-05	8.1E-05	8.8E-05	9.3E-05	9.6E-05	9.8E-05
3104	5.4E-05	5.8E-05	5.9E-05	6.0E-05	6.1E-05	6.2E-05	6.4E-05	6.6E-05	7.5E-05	8.2E-05	8.7E-05	9.0E-05	9.2E-05
3105	5.0E-05	5.3E-05	5.5E-05	5.5E-05	5.5E-05	5.6E-05	5.8E-05	6.0E-05	6.8E-05	7.5E-05	8.1E-05	8.4E-05	8.6E-05
3106	4.6E-05	4.9E-05	5.0E-05	5.0E-05	5.0E-05	5.0E-05	5.2E-05	5.3E-05	6.2E-05	6.9E-05	7.5E-05	7.8E-05	8.0E-05
3107	4.2E-05	4.4E-05	4.5E-05	4.5E-05	4.4E-05	4.5E-05	4.6E-05	4.7E-05	5.6E-05	6.3E-05	6.9E-05	7.2E-05	7.4E-05
3108	4.0E-05	4.2E-05	4.3E-05	4.2E-05	4.2E-05	4.2E-05	4.3E-05	4.4E-05	5.3E-05	6.1E-05	6.7E-05	7.1E-05	7.3E-05
3109	4.0E-05	4.3E-05	4.4E-05	4.4E-05	4.4E-05	4.4E-05	4.5E-05	4.7E-05	5.8E-05	6.7E-05	7.5E-05	7.9E-05	8.2E-05
3110	4.2E-05	4.4E-05	4.6E-05	4.6E-05	4.5E-05	4.6E-05	4.7E-05	4.8E-05	5.9E-05	6.8E-05	7.5E-05	7.9E-05	8.1E-05
3111	4.2E-05	4.5E-05	4.7E-05	4.6E-05	4.6E-05	4.6E-05	4.7E-05	4.8E-05	5.9E-05	6.8E-05	7.4E-05	7.9E-05	8.1E-05
3112	4.4E-05	4.7E-05	4.8E-05	4.8E-05	4.8E-05	4.9E-05	5.0E-05	5.1E-05	6.2E-05	7.1E-05	7.7E-05	8.2E-05	8.4E-05
3113	4.2E-05	4.5E-05	4.7E-05	4.7E-05	4.8E-05	4.8E-05	5.0E-05	5.2E-05	6.6E-05	7.7E-05	8.6E-05	9.2E-05	9.5E-05
3114	4.5E-05	4.8E-05	5.0E-05	5.0E-05	5.0E-05	5.1E-05	5.2E-05	5.4E-05	6.6E-05	7.6E-05	8.4E-05	8.8E-05	9.1E-05
3115	4.8E-05	5.1E-05	5.3E-05	5.3E-05	5.3E-05	5.4E-05	5.5E-05	5.7E-05	6.6E-05	7.4E-05	8.0E-05	8.4E-05	8.6E-05
3116	4.9E-05	5.2E-05	5.4E-05	5.4E-05	5.4E-05	5.5E-05	5.6E-05	5.8E-05	6.6E-05	7.3E-05	7.8E-05	8.2E-05	8.4E-05
3117	5.0E-05	5.3E-05	5.4E-05	5.4E-05	5.5E-05	5.5E-05	5.6E-05	5.8E-05	6.5E-05	7.2E-05	7.7E-05	8.0E-05	8.1E-05
3118	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
3119	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
3120	9.3E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
3121	8.6E-05	9.1E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
3122	8.4E-05	8.9E-05	9.3E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04
3123	8.0E-05	8.5E-05	8.8E-05	9.1E-05	9.4E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
3124	7.6E-05	8.0E-05	8.3E-05	8.6E-05	8.8E-05	9.1E-05	9.4E-05	9.8E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3125	7.1E-05	7.5E-05	7.8E-05	8.0E-05	8.2E-05	8.4E-05	8.8E-05	9.1E-05	9.9E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04
3126	6.7E-05	7.1E-05	7.3E-05	7.4E-05	7.6E-05	7.8E-05	8.1E-05	8.4E-05	9.3E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
3127	6.2E-05	6.6E-05	6.8E-05	6.9E-05	7.1E-05	7.3E-05	7.5E-05	7.8E-05	8.6E-05	9.3E-05	9.9E-05	1.0E-04	1.0E-04
3128	5.8E-05	6.1E-05	6.3E-05	6.4E-05	6.5E-05	6.6E-05	6.8E-05	7.1E-05	7.9E-05	8.7E-05	9.2E-05	9.6E-05	9.8E-05
3129	5.2E-05	5.6E-05	5.7E-05	5.8E-05	5.8E-05	5.9E-05	6.1E-05	6.3E-05	7.2E-05	7.9E-05	8.5E-05	8.8E-05	9.0E-05
3130	4.7E-05	5.0E-05	5.1E-05	5.1E-05	5.1E-05	5.2E-05	5.3E-05	5.5E-05	6.4E-05	7.1E-05	7.7E-05	8.1E-05	8.3E-05
3131	4.3E-05	4.6E-05	4.7E-05	4.6E-05	4.6E-05	4.7E-05	4.8E-05	4.9E-05	5.8E-05	6.5E-05	7.1E-05	7.5E-05	7.6E-05
3132	3.8E-05	4.1E-05	4.1E-05	4.1E-05	4.0E-05	4.0E-05	4.1E-05	4.2E-05	5.1E-05	5.9E-05	6.4E-05	6.8E-05	7.0E-05
3133	3.6E-05	3.8E-05	3.8E-05	3.7E-05	3.7E-05	3.6E-05	3.7E-05	3.8E-05	4.7E-05	5.5E-05	6.1E-05	6.5E-05	6.7E-05
3134	3.5E-05	3.8E-05	3.8E-05	3.8E-05	3.7E-05	3.7E-05	3.7E-05	3.8E-05	4.9E-05	5.8E-05	6.5E-05	6.9E-05	7.2E-05
3135	4.2E-05	4.5E-05	4.7E-05	4.7E-05	4.7E-05	4.7E-05	4.8E-05	5.0E-05	6.3E-05	7.4E-05	8.2E-05	8.7E-05	9.0E-05
3136	3.8E-05	4.1E-05	4.2E-05	4.1E-05	4.1E-05	4.1E-05	4.1E-05	4.2E-05	5.3E-05	6.2E-05	6.9E-05	7.4E-05	7.6E-05
3137	3.9E-05	4.1E-05	4.2E-05	4.2E-05	4.1E-05	4.1E-05	4.2E-05	4.3E-05	5.4E-05	6.3E-05	7.0E-05	7.5E-05	7.7E-05
3138	3.7E-05	4.0E-05	4.1E-05	4.1E-05	4.1E-05	4.1E-05	4.3E-05	4.4E-05	5.8E-05	7.0E-05	7.9E-05	8.5E-05	8.8E-05
3139	4.0E-05	4.3E-05	4.5E-05	4.5E-05	4.5E-05	4.5E-05	4.6E-05	4.8E-05	6.0E-05	7.1E-05	7.9E-05	8.4E-05	8.6E-05
3140	4.5E-05	4.7E-05	4.9E-05	4.9E-05	4.9E-05	4.9E-05	5.0E-05	5.1E-05	6.1E-05	6.9E-05	7.5E-05	8.0E-05	8.2E-05
3141	4.6E-05	4.8E-05	5.0E-05	5.0E-05	4.9E-05	5.0E-05	5.1E-05	5.2E-05	6.1E-05	6.8E-05	7.3E-05	7.7E-05	7.9E-05
3142	4.7E-05	4.9E-05	5.1E-05	5.1E-05	5.0E-05	5.1E-05	5.2E-05	5.3E-05	6.1E-05	6.7E-05	7.2E-05	7.5E-05	7.7E-05
3143	5.0E-05	5.3E-05	5.5E-05	5.5E-05	5.6E-05	5.6E-05	5.8E-05	5.9E-05	6.7E-05	7.3E-05	7.8E-05	8.1E-05	8.2E-05
3144	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04
3145	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
3146	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.5E-04
3147	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.5E-04
3148	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
3149	9.1E-05	9.6E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04
3150	8.9E-05	9.4E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
3151	8.5E-05	9.0E-05	9.3E-05	9.6E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
3152	7.9E-05	8.4E-05	8.7E-05	8.9E-05	9.2E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
3153	7.3E-05	7.8E-05	8.0E-05	8.2E-05	8.4E-05	8.7E-05	9.0E-05	9.4E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
3154	6.8E-05	7.2E-05	7.4E-05	7.5E-05	7.7E-05	7.9E-05	8.2E-05	8.5E-05	9.4E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
3155	6.2E-05	6.6E-05	6.8E-05	6.9E-05	7.0E-05	7.2E-05	7.4E-05	7.7E-05	8.6E-05	9.4E-05	1.0E-04	1.0E-04	1.1E-04
3156	5.7E-05	6.0E-05	6.2E-05	6.2E-05	6.3E-05	6.5E-05	6.7E-05	6.9E-05	7.8E-05	8.6E-05	9.1E-05	9.5E-05	9.7E-05
3157	5.0E-05	5.3E-05	5.5E-05	5.5E-05	5.5E-05	5.6E-05	5.8E-05	6.0E-05	6.9E-05	7.7E-05	8.3E-05	8.6E-05	8.8E-05
3158	4.4E-05	4.6E-05	4.8E-05	4.7E-05	4.7E-05	4.7E-05	4.9E-05	5.0E-05	5.9E-05	6.7E-05	7.3E-05	7.7E-05	7.9E-05
3159	3.9E-05	4.1E-05	4.2E-05	4.1E-05	4.1E-05	4.1E-05	4.1E-05	4.2E-05	5.2E-05	6.0E-05	6.5E-05	6.9E-05	7.1E-05
3160	3.4E-05	3.6E-05	3.6E-05	3.5E-05	3.4E-05	3.4E-05	3.4E-05	3.5E-05	4.5E-05	5.2E-05	5.8E-05	6.2E-05	6.4E-05
3161	3.0E-05	3.2E-05	3.2E-05	3.1E-05	3.0E-05	2.9E-05	2.9E-05	2.9E-05	3.9E-05	4.7E-05	5.3E-05	5.7E-05	6.0E-05
3162	2.9E-05	3.1E-05	3.1E-05	3.0E-05	2.9E-05	2.8E-05	2.8E-05	2.8E-05	3.9E-05	4.7E-05	5.4E-05	5.8E-05	6.0E-05
3163	3.6E-05	3.8E-05	3.9E-05	3.9E-05	3.8E-05	3.8E-05	3.9E-05	4.0E-05	5.3E-05	6.4E-05	7.2E-05	7.7E-05	8.0E-05
3164	3.3E-05	3.6E-05	3.7E-05	3.6E-05	3.5E-05	3.4E-05	3.5E-05	3.6E-05	4.8E-05	5.8E-05	6.6E-05	7.1E-05	7.3E-05
3165	3.2E-05	3.4E-05	3.5E-05	3.4E-05	3.3E-05	3.2E-05	3.2E-05	3.3E-05	4.5E-05	5.4E-05	6.2E-05	6.7E-05	6.9E-05
3166	3.0E-05	3.3E-05	3.4E-05	3.3E-05	3.3E-05	3.2E-05	3.3E-05	3.4E-05	4.8E-05	6.0E-05	6.9E-05	7.5E-05	7.8E-05
3167	3.4E-05	3.7E-05	3.8E-05	3.8E-05	3.7E-05	3.7E-05	3.8E-05	3.9E-05	5.2E-05	6.4E-05	7.2E-05	7.7E-05	8.0E-05
3168	4.0E-05	4.2E-05	4.4E-05	4.3E-05	4.2E-05	4.2E-05	4.3E-05	4.4E-05	5.4E-05	6.3E-05	6.9E-05	7.3E-05	7.5E-05

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3169	4.1E-05	4.4E-05	4.5E-05	4.4E-05	4.4E-05	4.4E-05	4.4E-05	4.5E-05	5.4E-05	6.1E-05	6.7E-05	7.1E-05	7.2E-05
3170	4.2E-05	4.5E-05	4.6E-05	4.6E-05	4.5E-05	4.5E-05	4.6E-05	4.7E-05	5.5E-05	6.1E-05	6.6E-05	6.9E-05	7.1E-05
3171	4.8E-05	5.1E-05	5.2E-05	5.3E-05	5.3E-05	5.3E-05	5.4E-05	5.6E-05	6.3E-05	7.0E-05	7.5E-05	7.8E-05	8.0E-05
3172	8.7E-05	9.3E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04
3173	2.0E-04	2.2E-04	2.3E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	3.0E-04	3.2E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04
3174	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
3175	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04
3176	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
3177	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04
3178	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
3179	9.4E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
3180	9.0E-05	9.5E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04
3181	8.3E-05	8.8E-05	9.1E-05	9.4E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04
3182	7.6E-05	8.1E-05	8.3E-05	8.5E-05	8.8E-05	9.0E-05	9.4E-05	9.7E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04
3183	6.9E-05	7.3E-05	7.5E-05	7.7E-05	7.8E-05	8.1E-05	8.3E-05	8.7E-05	9.6E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04
3184	6.2E-05	6.6E-05	6.8E-05	6.9E-05	7.0E-05	7.1E-05	7.4E-05	7.6E-05	8.6E-05	9.4E-05	1.0E-04	1.0E-04	1.1E-04
3185	5.5E-05	5.8E-05	6.0E-05	6.1E-05	6.1E-05	6.2E-05	6.4E-05	6.7E-05	7.6E-05	8.4E-05	9.1E-05	9.5E-05	9.7E-05
3186	4.8E-05	5.0E-05	5.2E-05	5.1E-05	5.1E-05	5.2E-05	5.4E-05	5.5E-05	6.5E-05	7.3E-05	8.0E-05	8.4E-05	8.6E-05
3187	3.9E-05	4.2E-05	4.2E-05	4.2E-05	4.1E-05	4.1E-05	4.2E-05	4.3E-05	5.3E-05	6.1E-05	6.8E-05	7.2E-05	7.4E-05
3188	3.4E-05	3.6E-05	3.6E-05	3.5E-05	3.4E-05	3.3E-05	3.4E-05	3.5E-05	4.4E-05	5.3E-05	5.9E-05	6.3E-05	6.5E-05
3189	2.7E-05	2.9E-05	2.9E-05	2.7E-05	2.6E-05	2.5E-05	2.5E-05	2.5E-05	3.5E-05	4.4E-05	5.0E-05	5.4E-05	5.6E-05
3190	2.3E-05	2.4E-05	2.4E-05	2.2E-05	2.0E-05	1.9E-05	1.9E-05	1.8E-05	2.9E-05	3.7E-05	4.4E-05	4.8E-05	5.0E-05
3191	2.1E-05	2.3E-05	2.3E-05	2.1E-05	1.9E-05	1.7E-05	1.7E-05	1.7E-05	2.7E-05	3.6E-05	4.3E-05	4.7E-05	4.9E-05
3192	2.2E-05	2.4E-05	2.4E-05	2.2E-05	2.0E-05	1.8E-05	1.8E-05	1.8E-05	3.0E-05	4.0E-05	4.7E-05	5.2E-05	5.4E-05
3193	2.9E-05	3.1E-05	3.2E-05	3.1E-05	3.0E-05	2.9E-05	2.9E-05	3.0E-05	4.4E-05	5.6E-05	6.5E-05	7.1E-05	7.4E-05
3194	2.3E-05	2.5E-05	2.5E-05	2.4E-05	2.2E-05	2.1E-05	2.0E-05	2.0E-05	3.3E-05	4.3E-05	5.1E-05	5.6E-05	5.9E-05
3195	2.4E-05	2.6E-05	2.7E-05	2.5E-05	2.4E-05	2.3E-05	2.3E-05	2.4E-05	3.8E-05	5.0E-05	5.9E-05	6.5E-05	6.7E-05
3196	2.7E-05	3.0E-05	3.1E-05	3.0E-05	2.9E-05	2.8E-05	2.9E-05	2.9E-05	4.4E-05	5.5E-05	6.4E-05	7.0E-05	7.3E-05
3197	3.4E-05	3.6E-05	3.7E-05	3.6E-05	3.5E-05	3.4E-05	3.5E-05	3.5E-05	4.6E-05	5.5E-05	6.2E-05	6.6E-05	6.8E-05
3198	3.6E-05	3.9E-05	3.9E-05	3.9E-05	3.7E-05	3.7E-05	3.7E-05	3.8E-05	4.7E-05	5.5E-05	6.0E-05	6.4E-05	6.6E-05
3199	3.8E-05	4.0E-05	4.1E-05	4.1E-05	4.0E-05	3.9E-05	4.0E-05	4.0E-05	4.9E-05	5.5E-05	6.0E-05	6.4E-05	6.6E-05
3200	4.3E-05	4.5E-05	4.7E-05	4.6E-05	4.6E-05	4.6E-05	4.7E-05	4.8E-05	5.5E-05	6.2E-05	6.7E-05	7.0E-05	7.2E-05
3201	5.9E-05	6.3E-05	6.5E-05	6.7E-05	6.8E-05	6.9E-05	7.1E-05	7.3E-05	8.3E-05	9.0E-05	9.6E-05	1.0E-04	1.0E-04
3202	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.2E-04	2.4E-04	2.6E-04	2.7E-04	2.7E-04
3203	3.5E-05	3.7E-05	3.8E-05	3.6E-05	3.5E-05	3.5E-05	3.6E-05	3.7E-05	4.7E-05	5.6E-05	6.3E-05	6.7E-05	7.0E-05
3204	2.6E-05	2.8E-05	2.8E-05	2.6E-05	2.5E-05	2.4E-05	2.4E-05	2.4E-05	3.5E-05	4.4E-05	5.0E-05	5.5E-05	5.7E-05
3205	1.9E-05	2.0E-05	2.0E-05	1.8E-05	1.5E-05	1.4E-05	1.3E-05	1.3E-05	2.4E-05	3.3E-05	3.9E-05	4.4E-05	4.6E-05
3206	1.3E-05	1.4E-05	1.4E-05	1.1E-05	8.3E-06	6.4E-06	5.4E-06	4.7E-06	1.6E-05	2.5E-05	3.1E-05	3.6E-05	3.8E-05
3207	9.7E-06	1.0E-05	9.5E-06	6.7E-06	3.7E-06	1.6E-06	2.7E-07	-7.0E-07	1.1E-05	2.0E-05	2.7E-05	3.2E-05	3.4E-05
3208	8.6E-06	9.5E-06	8.6E-06	5.8E-06	2.8E-06	6.0E-07	-7.5E-07	-1.8E-06	1.1E-05	2.1E-05	2.9E-05	3.4E-05	3.7E-05
3209	1.6E-05	1.8E-05	1.8E-05	1.6E-05	1.4E-05	1.2E-05	1.2E-05	1.1E-05	2.6E-05	3.9E-05	4.8E-05	5.4E-05	5.8E-05
3210	1.3E-05	1.5E-05	1.4E-05	1.2E-05	9.3E-06	7.4E-06	6.4E-06	5.7E-06	1.9E-05	3.0E-05	3.8E-05	4.4E-05	4.7E-05
3211	1.6E-05	1.7E-05	1.7E-05	1.6E-05	1.4E-05	1.2E-05	1.2E-05	1.1E-05	2.6E-05	3.8E-05	4.7E-05	5.3E-05	5.6E-05
3212	1.9E-05	2.1E-05	2.1E-05	2.0E-05	1.9E-05	1.8E-05	1.8E-05	1.8E-05	3.4E-05	4.6E-05	5.6E-05	6.3E-05	6.6E-05

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3213	2.7E-05	2.9E-05	2.9E-05	2.8E-05	2.6E-05	2.5E-05	2.5E-05	2.6E-05	3.7E-05	4.6E-05	5.3E-05	5.8E-05	6.0E-05
3214	3.1E-05	3.2E-05	3.3E-05	3.2E-05	3.0E-05	2.9E-05	2.9E-05	2.9E-05	3.9E-05	4.7E-05	5.3E-05	5.7E-05	5.9E-05
3215	3.4E-05	3.6E-05	3.6E-05	3.5E-05	3.4E-05	3.3E-05	3.4E-05	3.4E-05	4.3E-05	5.0E-05	5.5E-05	5.9E-05	6.0E-05
3216	4.0E-05	4.2E-05	4.3E-05	4.2E-05	4.2E-05	4.1E-05	4.2E-05	4.3E-05	5.1E-05	5.8E-05	6.3E-05	6.6E-05	6.8E-05
3217	5.1E-05	5.4E-05	5.5E-05	5.6E-05	5.6E-05	5.7E-05	5.8E-05	6.0E-05	6.9E-05	7.6E-05	8.2E-05	8.6E-05	8.7E-05
3218	4.0E-05	4.4E-05	4.7E-05	4.8E-05	4.9E-05	5.0E-05	5.2E-05	5.5E-05	7.0E-05	8.3E-05	9.2E-05	9.8E-05	1.0E-04
3219	3.0E-04	3.3E-04	3.5E-04	3.7E-04	3.9E-04	4.1E-04	4.3E-04	4.5E-04	4.9E-04	5.2E-04	5.4E-04	5.5E-04	5.6E-04
3220	6.7E-06	7.5E-06	6.4E-06	3.2E-06	1.7E-07	-1.9E-06	-3.1E-06	-4.0E-06	8.2E-06	1.8E-05	2.6E-05	3.1E-05	3.3E-05
3221	-9.9E-08	2.7E-07	-1.3E-06	-4.8E-06	-8.4E-06	-1.1E-05	-1.3E-05	-1.4E-05	-1.9E-06	8.3E-06	1.6E-05	2.1E-05	2.3E-05
3222	-7.7E-06	-7.7E-06	-9.5E-06	-1.4E-05	-1.8E-05	-2.1E-05	-2.3E-05	-2.5E-05	-1.2E-05	-1.2E-06	6.9E-06	1.2E-05	1.5E-05
3223	-1.1E-05	-1.1E-05	-1.3E-05	-1.7E-05	-2.1E-05	-2.4E-05	-2.7E-05	-2.9E-05	-1.5E-05	-3.1E-06	5.6E-06	1.1E-05	1.4E-05
3224	-2.3E-06	-1.3E-06	-2.2E-06	-5.2E-06	-8.4E-06	-1.1E-05	-1.2E-05	-1.4E-05	3.1E-06	1.7E-05	2.7E-05	3.4E-05	3.8E-05
3225	-1.6E-06	-8.9E-07	-1.9E-06	-5.0E-06	-8.3E-06	-1.1E-05	-1.3E-05	-1.4E-05	1.2E-06	1.4E-05	2.3E-05	3.0E-05	3.3E-05
3226	2.4E-06	3.6E-06	3.1E-06	6.3E-07	-2.1E-06	-4.2E-06	-5.4E-06	-6.2E-06	1.0E-05	2.4E-05	3.4E-05	4.1E-05	4.4E-05
3227	7.3E-06	9.3E-06	9.6E-06	8.0E-06	6.1E-06	4.9E-06	4.6E-06	4.6E-06	2.4E-05	3.9E-05	5.1E-05	5.9E-05	6.3E-05
3228	1.9E-05	2.1E-05	2.1E-05	2.0E-05	1.8E-05	1.6E-05	1.6E-05	1.6E-05	2.9E-05	4.0E-05	4.9E-05	5.4E-05	5.7E-05
3229	2.4E-05	2.6E-05	2.6E-05	2.5E-05	2.3E-05	2.2E-05	2.2E-05	2.2E-05	3.3E-05	4.3E-05	5.0E-05	5.5E-05	5.7E-05
3230	3.2E-05	3.4E-05	3.4E-05	3.3E-05	3.2E-05	3.1E-05	3.2E-05	3.2E-05	4.3E-05	5.2E-05	5.8E-05	6.3E-05	6.5E-05
3231	3.9E-05	4.2E-05	4.3E-05	4.2E-05	4.2E-05	4.1E-05	4.2E-05	4.3E-05	5.3E-05	6.1E-05	6.7E-05	7.1E-05	7.3E-05
3232	4.9E-05	5.2E-05	5.3E-05	5.4E-05	5.4E-05	5.5E-05	5.6E-05	5.8E-05	6.7E-05	7.6E-05	8.2E-05	8.6E-05	8.8E-05
3233	3.3E-05	3.5E-05	3.7E-05	3.8E-05	3.8E-05	3.8E-05	4.0E-05	4.2E-05	5.6E-05	6.7E-05	7.6E-05	8.2E-05	8.5E-05
3234	9.8E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04
3235	-2.8E-05	-2.9E-05	-3.2E-05	-3.8E-05	-4.3E-05	-4.8E-05	-5.1E-05	-5.4E-05	-4.0E-05	-2.7E-05	-1.8E-05	-1.2E-05	-9.2E-06
3236	-2.1E-05	-2.1E-05	-2.3E-05	-2.7E-05	-3.1E-05	-3.5E-05	-3.8E-05	-4.0E-05	-2.2E-05	-7.0E-06	4.2E-06	1.2E-05	1.5E-05
3237	-1.6E-05	-1.6E-05	-1.8E-05	-2.2E-05	-2.6E-05	-2.9E-05	-3.2E-05	-3.4E-05	-1.8E-05	-3.9E-06	6.4E-06	1.3E-05	1.7E-05
3238	-1.0E-05	-9.6E-06	-1.1E-05	-1.4E-05	-1.8E-05	-2.1E-05	-2.3E-05	-2.4E-05	-6.8E-06	7.5E-06	1.8E-05	2.5E-05	2.9E-05
3239	-6.4E-06	-4.8E-06	-5.0E-06	-7.3E-06	-9.8E-06	-1.2E-05	-1.2E-05	-1.3E-05	8.6E-06	2.6E-05	3.9E-05	4.8E-05	5.3E-05
3240	1.0E-05	1.2E-05	1.1E-05	9.1E-06	6.5E-06	4.6E-06	3.7E-06	3.0E-06	1.7E-05	2.9E-05	3.8E-05	4.3E-05	4.6E-05
3241	1.8E-05	1.9E-05	1.9E-05	1.7E-05	1.5E-05	1.3E-05	1.3E-05	1.2E-05	2.4E-05	3.4E-05	4.2E-05	4.7E-05	4.9E-05
3242	2.8E-05	3.0E-05	3.0E-05	2.9E-05	2.7E-05	2.6E-05	2.6E-05	2.6E-05	3.7E-05	4.7E-05	5.4E-05	5.8E-05	6.1E-05
3243	3.9E-05	4.1E-05	4.2E-05	4.1E-05	4.1E-05	4.0E-05	4.1E-05	4.2E-05	5.2E-05	6.1E-05	6.7E-05	7.1E-05	7.4E-05
3244	5.0E-05	5.3E-05	5.5E-05	5.5E-05	5.6E-05	5.6E-05	5.8E-05	6.0E-05	7.0E-05	7.9E-05	8.5E-05	9.0E-05	9.2E-05
3245	6.0E-05	6.4E-05	6.7E-05	6.8E-05	7.0E-05	7.1E-05	7.4E-05	7.7E-05	8.9E-05	9.9E-05	1.1E-04	1.1E-04	1.1E-04
3246	7.3E-05	7.8E-05	8.1E-05	8.4E-05	8.6E-05	8.8E-05	9.2E-05	9.5E-05	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
3247	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.1E-04
3248	-4.6E-05	-4.8E-05	-5.3E-05	-5.9E-05	-6.6E-05	-7.2E-05	-7.7E-05	-8.2E-05	-6.8E-05	-5.6E-05	-4.7E-05	-4.1E-05	-3.8E-05
3249	-3.9E-05	-4.0E-05	-4.4E-05	-4.9E-05	-5.6E-05	-6.1E-05	-6.5E-05	-6.9E-05	-5.3E-05	-4.0E-05	-3.0E-05	-2.3E-05	-2.0E-05
3250	-2.8E-05	-2.8E-05	-3.1E-05	-3.6E-05	-4.1E-05	-4.6E-05	-4.9E-05	-5.2E-05	-3.6E-05	-2.2E-05	-1.2E-05	-5.3E-06	-1.8E-06
3251	-1.9E-05	-1.9E-05	-2.2E-05	-2.6E-05	-3.1E-05	-3.5E-05	-3.7E-05	-4.0E-05	-2.4E-05	-1.1E-05	-8.5E-07	5.8E-06	9.1E-06
3252	-2.0E-05	-1.9E-05	-2.0E-05	-2.4E-05	-2.7E-05	-3.0E-05	-3.2E-05	-3.4E-05	-1.3E-05	3.3E-06	1.6E-05	2.4E-05	2.9E-05
3253	4.3E-07	8.2E-07	-6.0E-07	-4.1E-06	-7.8E-06	-1.1E-05	-1.3E-05	-1.4E-05	-2.3E-06	8.0E-06	1.6E-05	2.1E-05	2.3E-05
3254	1.1E-05	1.2E-05	1.1E-05	8.0E-06	4.8E-06	2.2E-06	7.2E-07	-4.8E-07	9.5E-06	1.8E-05	2.4E-05	2.9E-05	3.1E-05
3255	2.1E-05	2.2E-05	2.2E-05	1.9E-05	1.7E-05	1.5E-05	1.4E-05	1.3E-05	2.2E-05	2.9E-05	3.5E-05	3.8E-05	4.0E-05
3256	3.3E-05	3.5E-05	3.5E-05	3.3E-05	3.2E-05	3.0E-05	3.0E-05	3.0E-05	3.8E-05	4.5E-05	5.0E-05	5.3E-05	5.5E-05

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3257	4.7E-05	4.9E-05	5.0E-05	5.0E-05	4.9E-05	4.9E-05	5.0E-05	5.1E-05	5.8E-05	6.5E-05	7.0E-05	7.3E-05	7.5E-05
3258	6.1E-05	6.5E-05	6.7E-05	6.7E-05	6.8E-05	6.9E-05	7.1E-05	7.3E-05	8.1E-05	8.8E-05	9.3E-05	9.7E-05	9.9E-05
3259	7.8E-05	8.3E-05	8.6E-05	8.8E-05	9.0E-05	9.3E-05	9.6E-05	9.9E-05	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
3260	9.9E-05	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04
3261	-6.2E-05	-6.5E-05	-7.0E-05	-7.8E-05	-8.6E-05	-9.3E-05	-9.9E-05	-1.0E-04	-8.9E-05	-7.7E-05	-6.7E-05	-6.1E-05	-5.8E-05
3262	-4.6E-05	-4.8E-05	-5.2E-05	-5.8E-05	-6.4E-05	-7.0E-05	-7.5E-05	-7.9E-05	-6.2E-05	-4.7E-05	-3.7E-05	-3.0E-05	-2.6E-05
3263	-3.5E-05	-3.6E-05	-4.0E-05	-4.5E-05	-5.1E-05	-5.6E-05	-6.0E-05	-6.3E-05	-4.7E-05	-3.3E-05	-2.3E-05	-1.6E-05	-1.3E-05
3264	-3.3E-05	-3.3E-05	-3.5E-05	-4.0E-05	-4.5E-05	-4.9E-05	-5.2E-05	-5.5E-05	-3.6E-05	-2.0E-05	-8.2E-06	-3.2E-07	3.6E-06
3265	-8.4E-06	-8.6E-06	-1.1E-05	-1.5E-05	-2.0E-05	-2.4E-05	-2.7E-05	-2.9E-05	-1.7E-05	-7.2E-06	2.4E-07	5.2E-06	7.7E-06
3266	9.4E-06	9.8E-06	8.4E-06	4.9E-06	1.1E-06	-1.9E-06	-3.8E-06	-5.4E-06	4.0E-06	1.2E-05	1.8E-05	2.2E-05	2.4E-05
3267	2.1E-05	2.2E-05	2.1E-05	1.8E-05	1.5E-05	1.3E-05	1.1E-05	1.1E-05	1.9E-05	2.6E-05	3.1E-05	3.4E-05	3.6E-05
3268	3.4E-05	3.5E-05	3.5E-05	3.3E-05	3.1E-05	3.0E-05	2.9E-05	2.9E-05	3.7E-05	4.3E-05	4.8E-05	5.1E-05	5.2E-05
3269	4.9E-05	5.2E-05	5.3E-05	5.2E-05	5.1E-05	5.1E-05	5.2E-05	5.3E-05	6.0E-05	6.6E-05	7.0E-05	7.4E-05	7.5E-05
3270	6.5E-05	6.8E-05	7.0E-05	7.1E-05	7.1E-05	7.2E-05	7.4E-05	7.6E-05	8.3E-05	8.9E-05	9.4E-05	9.7E-05	9.9E-05
3271	7.9E-05	8.4E-05	8.7E-05	8.9E-05	9.0E-05	9.2E-05	9.5E-05	9.8E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
3272	9.5E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04
3273	-5.6E-05	-5.8E-05	-6.3E-05	-7.0E-05	-7.7E-05	-8.4E-05	-8.9E-05	-9.4E-05	-7.7E-05	-6.3E-05	-5.2E-05	-4.5E-05	-4.1E-05
3274	-5.2E-05	-5.3E-05	-5.7E-05	-6.3E-05	-6.9E-05	-7.4E-05	-7.8E-05	-8.2E-05	-6.2E-05	-4.5E-05	-3.2E-05	-2.4E-05	-1.9E-05
3275	-2.1E-05	-2.2E-05	-2.5E-05	-3.1E-05	-3.7E-05	-4.1E-05	-4.5E-05	-4.8E-05	-3.6E-05	-2.6E-05	-1.9E-05	-1.4E-05	-1.1E-05
3276	3.3E-06	3.3E-06	1.3E-06	-2.9E-06	-7.4E-06	-1.1E-05	-1.3E-05	-1.6E-05	-6.3E-06	1.6E-06	7.6E-06	1.2E-05	1.4E-05
3277	2.0E-05	2.1E-05	2.0E-05	1.7E-05	1.3E-05	1.1E-05	9.3E-06	8.1E-06	1.6E-05	2.3E-05	2.8E-05	3.1E-05	3.3E-05
3278	3.7E-05	3.9E-05	3.9E-05	3.7E-05	3.5E-05	3.3E-05	3.3E-05	3.3E-05	4.0E-05	4.6E-05	5.1E-05	5.4E-05	5.5E-05
3279	5.4E-05	5.7E-05	5.8E-05	5.7E-05	5.6E-05	5.6E-05	5.7E-05	5.8E-05	6.5E-05	7.1E-05	7.5E-05	7.8E-05	7.9E-05
3280	6.9E-05	7.3E-05	7.5E-05	7.5E-05	7.5E-05	7.6E-05	7.8E-05	8.0E-05	8.7E-05	9.3E-05	9.7E-05	1.0E-04	1.0E-04
3281	8.1E-05	8.5E-05	8.9E-05	9.0E-05	9.1E-05	9.3E-05	9.6E-05	9.9E-05	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
3282	9.1E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04
3283	-8.3E-05	-8.7E-05	-9.3E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.3E-04	-1.2E-04	-1.0E-04	-9.1E-05	-8.3E-05	-8.0E-05
3284	-6.6E-05	-6.8E-05	-7.3E-05	-8.1E-05	-8.9E-05	-9.6E-05	-1.0E-04	-1.1E-04	-8.9E-05	-7.4E-05	-6.3E-05	-5.5E-05	-5.1E-05
3285	-3.5E-05	-3.7E-05	-4.1E-05	-4.8E-05	-5.5E-05	-6.1E-05	-6.6E-05	-7.0E-05	-5.8E-05	-4.7E-05	-4.0E-05	-3.4E-05	-3.2E-05
3286	-2.1E-06	-2.5E-06	-5.0E-06	-9.9E-06	-1.5E-05	-1.9E-05	-2.2E-05	-2.5E-05	-1.6E-05	-7.7E-06	-1.7E-06	2.2E-06	4.2E-06
3287	2.0E-05	2.0E-05	1.9E-05	1.6E-05	1.2E-05	8.9E-06	7.1E-06	5.7E-06	1.4E-05	2.0E-05	2.5E-05	2.9E-05	3.1E-05
3288	4.0E-05	4.2E-05	4.2E-05	4.0E-05	3.8E-05	3.6E-05	3.6E-05	3.5E-05	4.3E-05	4.9E-05	5.3E-05	5.7E-05	5.8E-05
3289	5.8E-05	6.1E-05	6.2E-05	6.2E-05	6.1E-05	6.0E-05	6.1E-05	6.2E-05	6.9E-05	7.5E-05	7.9E-05	8.2E-05	8.4E-05
3290	7.2E-05	7.6E-05	7.8E-05	7.8E-05	7.8E-05	7.9E-05	8.1E-05	8.3E-05	8.9E-05	9.5E-05	1.0E-04	1.0E-04	1.0E-04
3291	8.1E-05	8.5E-05	8.8E-05	8.9E-05	9.1E-05	9.2E-05	9.5E-05	9.7E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04
3292	8.7E-05	9.2E-05	9.5E-05	9.7E-05	9.9E-05	1.0E-04	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04
3293	7.4E-05	7.7E-05	8.0E-05	8.0E-05	8.0E-05	8.1E-05	8.2E-05	8.4E-05	9.1E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04
3294	8.0E-05	8.4E-05	8.7E-05	8.8E-05	8.8E-05	9.0E-05	9.2E-05	9.5E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04
3295	8.3E-05	8.7E-05	9.0E-05	9.2E-05	9.3E-05	9.5E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04
3296	7.7E-05	8.1E-05	8.4E-05	8.5E-05	8.6E-05	8.7E-05	9.0E-05	9.2E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04
3297	5.5E-05	5.9E-05	6.1E-05	6.2E-05	6.3E-05	6.5E-05	6.7E-05	6.9E-05	8.0E-05	9.0E-05	9.6E-05	1.0E-04	1.0E-04
3298	5.5E-05	6.0E-05	6.3E-05	6.5E-05	6.7E-05	6.9E-05	7.2E-05	7.5E-05	9.0E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04
3299	5.5E-05	5.8E-05	6.1E-05	6.1E-05	6.2E-05	6.3E-05	6.5E-05	6.7E-05	7.6E-05	8.3E-05	8.8E-05	9.2E-05	9.4E-05
3300	6.5E-05	6.9E-05	7.2E-05	7.4E-05	7.6E-05	7.9E-05	8.1E-05	8.5E-05	9.1E-05	9.7E-05	1.0E-04	1.0E-04	1.1E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3301	6.4E-05	6.8E-05	7.1E-05	7.3E-05	7.5E-05	7.7E-05	8.0E-05	8.3E-05	9.0E-05	9.5E-05	9.9E-05	1.0E-04	1.0E-04
3302	6.4E-05	6.7E-05	7.0E-05	7.1E-05	7.3E-05	7.6E-05	7.8E-05	8.1E-05	8.8E-05	9.4E-05	9.8E-05	1.0E-04	1.0E-04
3303	6.2E-05	6.6E-05	6.8E-05	7.0E-05	7.2E-05	7.4E-05	7.6E-05	7.9E-05	8.6E-05	9.2E-05	9.6E-05	9.9E-05	1.0E-04
3304	6.0E-05	6.4E-05	6.6E-05	6.8E-05	6.9E-05	7.1E-05	7.4E-05	7.6E-05	8.4E-05	8.9E-05	9.4E-05	9.7E-05	9.8E-05
3305	5.8E-05	6.2E-05	6.4E-05	6.5E-05	6.7E-05	6.8E-05	7.1E-05	7.3E-05	8.0E-05	8.7E-05	9.1E-05	9.4E-05	9.6E-05
3306	5.6E-05	6.0E-05	6.2E-05	6.3E-05	6.4E-05	6.6E-05	6.8E-05	7.0E-05	7.8E-05	8.4E-05	8.8E-05	9.1E-05	9.3E-05
3307	5.5E-05	5.8E-05	6.0E-05	6.1E-05	6.2E-05	6.3E-05	6.5E-05	6.7E-05	7.5E-05	8.1E-05	8.6E-05	8.9E-05	9.1E-05
3308	5.4E-05	5.7E-05	5.9E-05	6.0E-05	6.0E-05	6.2E-05	6.4E-05	6.6E-05	7.4E-05	8.0E-05	8.5E-05	8.8E-05	9.0E-05
3309	5.4E-05	5.7E-05	5.9E-05	6.0E-05	6.0E-05	6.2E-05	6.4E-05	6.6E-05	7.4E-05	8.1E-05	8.6E-05	9.0E-05	9.2E-05
3310	5.6E-05	6.0E-05	6.2E-05	6.4E-05	6.5E-05	6.7E-05	7.0E-05	7.2E-05	8.4E-05	9.4E-05	1.0E-04	1.1E-04	1.1E-04
3311	5.5E-05	5.8E-05	6.1E-05	6.2E-05	6.3E-05	6.4E-05	6.6E-05	6.8E-05	7.8E-05	8.6E-05	9.2E-05	9.6E-05	9.8E-05
3312	5.6E-05	5.9E-05	6.2E-05	6.3E-05	6.4E-05	6.5E-05	6.7E-05	6.9E-05	7.9E-05	8.7E-05	9.3E-05	9.7E-05	9.9E-05
3313	6.9E-05	7.3E-05	7.6E-05	7.9E-05	8.1E-05	8.4E-05	8.7E-05	9.1E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
3314	6.8E-05	7.2E-05	7.5E-05	7.7E-05	7.9E-05	8.2E-05	8.5E-05	8.8E-05	9.5E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04
3315	8.0E-05	8.4E-05	8.8E-05	9.1E-05	9.4E-05	9.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
3316	8.9E-05	9.4E-05	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04
3317	6.2E-05	6.6E-05	6.8E-05	7.0E-05	7.2E-05	7.4E-05	7.7E-05	8.0E-05	8.6E-05	9.2E-05	9.6E-05	9.8E-05	1.0E-04
3318	5.8E-05	6.1E-05	6.4E-05	6.5E-05	6.6E-05	6.8E-05	7.0E-05	7.3E-05	8.0E-05	8.6E-05	9.0E-05	9.3E-05	9.5E-05
3319	5.6E-05	5.9E-05	6.1E-05	6.2E-05	6.3E-05	6.5E-05	6.7E-05	6.9E-05	7.7E-05	8.4E-05	8.8E-05	9.2E-05	9.3E-05
3320	7.0E-03	7.3E-03	7.6E-03	7.8E-03	8.0E-03	8.2E-03	8.3E-03	8.6E-03	8.6E-03	8.6E-03	8.7E-03	8.7E-03	8.7E-03
3321	5.2E-03	5.5E-03	5.7E-03	5.9E-03	6.0E-03	6.1E-03	6.3E-03	6.4E-03	6.4E-03	6.5E-03	6.5E-03	6.5E-03	6.6E-03
3322	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.3E-03	5.4E-03	5.5E-03	5.7E-03	5.7E-03	5.8E-03	5.8E-03	5.8E-03	5.8E-03
3323	4.0E-03	4.2E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.9E-03	5.0E-03	5.0E-03	5.1E-03	5.1E-03	5.1E-03	5.1E-03
3324	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.1E-03	4.1E-03	4.1E-03	4.2E-03	4.2E-03
3325	2.5E-03	2.6E-03	2.8E-03	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03
3326	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03
3327	2.1E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03
3328	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.6E-03	2.7E-03	2.7E-03	2.7E-03	2.7E-03
3329	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
3330	1.6E-03	1.6E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
3331	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03
3332	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
3333	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03
3334	1.3E-03	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
3335	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.6E-03	1.7E-03
3336	1.4E-03	1.4E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03	1.8E-03
3337	1.4E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03	1.9E-03
3338	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03	2.0E-03
3339	1.7E-03	1.7E-03	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.1E-03	2.2E-03	2.2E-03	2.2E-03	2.2E-03
3340	1.8E-03	1.9E-03	2.0E-03	2.0E-03	2.1E-03	2.2E-03	2.2E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.4E-03
3341	2.2E-03	2.3E-03	2.4E-03	2.5E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
3342	2.6E-03	2.7E-03	2.9E-03	3.0E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03	3.4E-03	3.4E-03
3343	3.2E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.1E-03	4.1E-03	4.2E-03	4.2E-03	4.2E-03
3344	3.5E-03	3.6E-03	3.8E-03	3.9E-03	4.0E-03	4.1E-03	4.3E-03	4.4E-03	4.4E-03	4.5E-03	4.5E-03	4.5E-03	4.5E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3345	3.7E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.5E-03	4.6E-03	4.7E-03	4.8E-03	4.8E-03	4.8E-03	4.9E-03	4.9E-03
3346	4.3E-03	4.5E-03	4.7E-03	4.9E-03	5.0E-03	5.2E-03	5.3E-03	5.5E-03	5.6E-03	5.6E-03	5.6E-03	5.7E-03	5.7E-03
3347	4.4E-03	4.6E-03	4.8E-03	5.0E-03	5.1E-03	5.3E-03	5.4E-03	5.6E-03	5.7E-03	5.7E-03	5.7E-03	5.8E-03	5.8E-03
3348	3.9E-03	4.1E-03	4.2E-03	4.4E-03	4.5E-03	4.6E-03	4.8E-03	4.9E-03	5.0E-03	5.0E-03	5.0E-03	5.1E-03	5.1E-03
3349	3.4E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.2E-03	4.3E-03	4.4E-03	4.4E-03	4.4E-03	4.4E-03	4.4E-03
3350	3.2E-03	3.3E-03	3.5E-03	3.6E-03	3.7E-03	3.8E-03	3.9E-03	4.1E-03	4.1E-03	4.1E-03	4.1E-03	4.1E-03	4.1E-03
3351	2.9E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.7E-03	3.7E-03	3.8E-03	3.8E-03	3.8E-03	3.8E-03
3352	2.8E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.6E-03	3.6E-03	3.6E-03	3.7E-03	3.7E-03	3.7E-03
3353	2.8E-03	2.9E-03	3.0E-03	3.1E-03	3.1E-03	3.2E-03	3.3E-03	3.4E-03	3.5E-03	3.5E-03	3.5E-03	3.5E-03	3.5E-03
3354	2.7E-03	2.9E-03	3.0E-03	3.0E-03	3.0E-03	3.1E-03	3.2E-03	3.3E-03	3.3E-03	3.4E-03	3.4E-03	3.4E-03	3.4E-03
3355	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	3.0E-03	3.1E-03	3.2E-03	3.2E-03	3.3E-03	3.3E-03	3.3E-03	3.3E-03
3356	2.4E-03	2.5E-03	2.6E-03	2.7E-03	2.6E-03	2.7E-03	2.8E-03	2.9E-03	2.9E-03	2.9E-03	2.9E-03	3.0E-03	3.0E-03
3357	2.2E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03	2.1E-03	2.2E-03	2.3E-03	2.3E-03	2.3E-03	2.4E-03	2.4E-03	2.4E-03
3358	2.5E-03	2.6E-03	2.7E-03	2.7E-03	2.6E-03	2.5E-03	2.6E-03	2.7E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03	2.8E-03
3359	2.1E-03	2.1E-03	2.1E-03	1.9E-03	1.9E-03	1.9E-03	2.0E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03	2.1E-03
3360	1.6E-03	1.7E-03	1.7E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
3361	1.7E-03	1.8E-03	1.7E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
3362	1.7E-03	1.8E-03	1.7E-03	1.6E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
3363	1.5E-03	1.5E-03	1.6E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.8E-03	1.8E-03
3364	1.4E-03	1.5E-03	1.5E-03	1.5E-03	1.5E-03	1.6E-03	1.6E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03	1.7E-03
3365	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
3366	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
3367	9.8E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03	1.3E-03
3368	9.1E-04	9.6E-04	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
3369	8.6E-04	9.1E-04	9.4E-04	9.7E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
3370	9.0E-04	9.5E-04	9.9E-04	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
3371	7.4E-04	7.8E-04	8.1E-04	8.3E-04	8.6E-04	8.7E-04	8.9E-04	9.2E-04	9.3E-04	9.4E-04	9.5E-04	9.5E-04	9.5E-04
3372	6.5E-04	6.9E-04	7.1E-04	7.3E-04	7.5E-04	7.6E-04	7.7E-04	8.0E-04	8.1E-04	8.2E-04	8.3E-04	8.3E-04	8.3E-04
3373	6.0E-04	6.3E-04	6.5E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.3E-04	7.4E-04	7.5E-04	7.6E-04	7.6E-04	7.6E-04
3374	5.6E-04	5.9E-04	6.1E-04	6.2E-04	6.4E-04	6.5E-04	6.5E-04	6.7E-04	6.9E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04
3375	5.7E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.5E-04	6.5E-04	6.7E-04	6.8E-04	6.9E-04	6.9E-04	7.0E-04	7.0E-04
3376	5.8E-04	6.1E-04	6.3E-04	6.5E-04	6.7E-04	6.6E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.0E-04	7.1E-04	7.1E-04
3377	6.0E-04	6.2E-04	6.5E-04	6.7E-04	6.8E-04	6.8E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.2E-04	7.2E-04	7.2E-04
3378	6.2E-04	6.5E-04	6.7E-04	6.9E-04	7.1E-04	7.1E-04	7.0E-04	7.2E-04	7.3E-04	7.4E-04	7.5E-04	7.5E-04	7.6E-04
3379	6.8E-04	7.1E-04	7.4E-04	7.6E-04	7.7E-04	7.7E-04	7.8E-04	8.0E-04	8.1E-04	8.2E-04	8.3E-04	8.3E-04	8.3E-04
3380	7.6E-04	7.9E-04	8.2E-04	8.4E-04	8.7E-04	8.7E-04	8.7E-04	9.1E-04	9.1E-04	9.2E-04	9.3E-04	9.3E-04	9.4E-04
3381	8.8E-04	9.2E-04	9.6E-04	9.9E-04	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
3382	9.3E-04	9.7E-04	1.0E-03	1.0E-03	1.1E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
3383	9.4E-04	9.8E-04	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03
3384	1.2E-03	1.3E-03	1.3E-03	1.4E-03	1.4E-03	1.2E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.1E-03	1.2E-03
3385	3.9E-03	4.0E-03	4.1E-03	4.2E-03	4.3E-03	3.3E-03	2.5E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03	2.6E-03
3386	1.8E-03	1.9E-03	1.9E-03	2.0E-03	2.0E-03	1.6E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03	1.4E-03
3387	1.2E-03	1.3E-03	1.3E-03	1.3E-03	1.4E-03	1.2E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03	1.2E-03
3388	1.0E-03	1.1E-03	1.1E-03	1.2E-03	1.2E-03	1.1E-03	1.0E-03	1.0E-03	1.0E-03	1.0E-03	1.1E-03	1.1E-03	1.1E-03

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3389	6.6E-04	6.9E-04	7.1E-04	7.4E-04	7.6E-04	7.4E-04	7.4E-04	7.6E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04	7.9E-04
3390	5.7E-04	6.0E-04	6.2E-04	6.4E-04	6.7E-04	6.7E-04	6.7E-04	6.9E-04	7.0E-04	7.1E-04	7.2E-04	7.2E-04	7.3E-04
3391	5.5E-04	5.8E-04	6.0E-04	6.2E-04	6.5E-04	6.5E-04	6.6E-04	6.8E-04	6.9E-04	7.0E-04	7.1E-04	7.1E-04	7.1E-04
3392	5.7E-04	6.0E-04	6.3E-04	6.5E-04	6.8E-04	7.0E-04	7.2E-04	7.4E-04	7.5E-04	7.6E-04	7.7E-04	7.7E-04	7.8E-04
3393	6.8E-04	7.2E-04	7.5E-04	7.8E-04	8.2E-04	8.4E-04	8.7E-04	9.1E-04	9.2E-04	9.2E-04	9.3E-04	9.3E-04	9.4E-04
3394	5.7E-04	6.0E-04	6.3E-04	6.6E-04	6.8E-04	7.1E-04	7.3E-04	7.6E-04	7.7E-04	7.8E-04	7.9E-04	7.9E-04	7.9E-04
3395	4.8E-04	5.1E-04	5.3E-04	5.6E-04	5.8E-04	6.0E-04	6.2E-04	6.4E-04	6.6E-04	6.7E-04	6.8E-04	6.9E-04	6.9E-04
3396	4.4E-04	4.6E-04	4.8E-04	5.0E-04	5.2E-04	5.4E-04	5.6E-04	5.8E-04	6.0E-04	6.1E-04	6.2E-04	6.2E-04	6.3E-04
3397	4.4E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.9E-04	6.1E-04	6.2E-04	6.3E-04	6.4E-04	6.4E-04
3398	4.3E-04	4.5E-04	4.7E-04	4.9E-04	5.1E-04	5.3E-04	5.5E-04	5.7E-04	5.8E-04	6.0E-04	6.1E-04	6.1E-04	6.2E-04
3399	3.8E-04	4.0E-04	4.2E-04	4.3E-04	4.5E-04	4.6E-04	4.8E-04	5.0E-04	5.1E-04	5.2E-04	5.3E-04	5.4E-04	5.4E-04
3400	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.4E-04	4.5E-04	4.7E-04	4.8E-04	4.8E-04	4.9E-04	4.9E-04
3401	3.4E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.7E-04	4.8E-04
3402	3.4E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.8E-04	4.8E-04
3403	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.4E-04	4.5E-04	4.5E-04
3404	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04
3405	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04
3406	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.2E-04	4.3E-04	4.3E-04	4.3E-04
3407	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	4.0E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04
3408	3.0E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.1E-04	4.2E-04	4.3E-04	4.4E-04	4.5E-04	4.5E-04
3409	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.3E-04
3410	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04
3411	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.0E-04
3412	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.1E-04
3413	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	3.9E-04
3414	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	3.9E-04
3415	2.7E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04
3416	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	3.9E-04
3417	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	3.9E-04
3418	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04
3419	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	3.9E-04
3420	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	4.0E-04	4.0E-04	4.1E-04
3421	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04
3422	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.8E-04	3.9E-04	4.0E-04	4.1E-04	4.1E-04	4.2E-04
3423	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.2E-04	4.3E-04	4.4E-04	4.4E-04	4.4E-04
3424	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04
3425	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04
3426	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.7E-04	3.8E-04	3.8E-04
3427	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04
3428	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	3.9E-04
3429	2.7E-04	2.8E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	3.9E-04
3430	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.4E-04	3.5E-04	3.6E-04	3.7E-04	3.8E-04	3.8E-04	3.8E-04
3431	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.8E-04	3.9E-04	3.9E-04
3432	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.6E-04	3.7E-04	3.9E-04	4.0E-04	4.1E-04	4.2E-04	4.2E-04	4.2E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3433	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.3E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	3.9E-04	3.9E-04	4.0E-04	4.0E-04
3434	3.2E-04	3.4E-04	3.5E-04	3.7E-04	3.8E-04	4.0E-04	4.1E-04	4.3E-04	4.4E-04	4.5E-04	4.6E-04	4.7E-04	4.7E-04
3435	2.5E-04	2.6E-04	2.7E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.5E-04	3.5E-04	3.6E-04
3436	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04	3.1E-04
3437	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04	3.1E-04
3438	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.9E-04	2.9E-04	3.0E-04	3.0E-04
3439	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04	2.7E-04
3440	1.8E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04
3441	1.7E-04	1.8E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.3E-04	2.3E-04
3442	1.7E-04	1.7E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
3443	1.6E-04	1.6E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04
3444	1.6E-04	1.6E-04	1.5E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
3445	1.7E-04	1.7E-04	1.6E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04
3446	6.3E-05	6.0E-05	5.1E-05	4.6E-05	4.8E-05	5.0E-05	5.2E-05	5.4E-05	6.9E-05	8.0E-05	8.9E-05	9.4E-05	9.7E-05
3447	8.9E-05	8.7E-05	7.8E-05	7.4E-05	7.7E-05	8.0E-05	8.3E-05	8.7E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04
3448	9.5E-05	9.0E-05	7.6E-05	6.9E-05	7.2E-05	7.4E-05	7.7E-05	8.0E-05	9.3E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04
3449	1.6E-04	1.5E-04	1.3E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
3450	2.0E-04	1.7E-04	1.4E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04
3451	4.1E-04	3.7E-04	3.1E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.3E-04	3.4E-04	3.4E-04	3.5E-04	3.5E-04
3452	2.9E-04	2.6E-04	2.1E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
3453	3.1E-04	2.8E-04	2.4E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.8E-04	2.8E-04	2.8E-04
3454	2.6E-04	2.4E-04	2.1E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04
3455	1.7E-04	1.6E-04	1.4E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04
3456	1.3E-04	1.2E-04	9.8E-05	8.5E-05	8.8E-05	9.1E-05	9.5E-05	9.9E-05	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04
3457	1.0E-04	9.1E-05	7.5E-05	6.4E-05	6.6E-05	6.8E-05	7.1E-05	7.4E-05	8.8E-05	1.0E-04	1.1E-04	1.1E-04	1.2E-04
3458	7.4E-05	6.8E-05	5.7E-05	4.9E-05	5.0E-05	5.1E-05	5.3E-05	5.6E-05	7.0E-05	8.2E-05	9.1E-05	9.7E-05	1.0E-04
3459	8.6E-05	8.3E-05	7.6E-05	7.0E-05	7.2E-05	7.4E-05	7.7E-05	8.0E-05	9.3E-05	1.0E-04	1.1E-04	1.2E-04	1.2E-04
3460	8.6E-05	8.6E-05	8.0E-05	7.6E-05	7.7E-05	8.0E-05	8.3E-05	8.6E-05	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.3E-04
3461	8.4E-05	8.3E-05	7.7E-05	7.3E-05	7.5E-05	7.7E-05	8.0E-05	8.4E-05	9.8E-05	1.1E-04	1.2E-04	1.2E-04	1.3E-04
3462	9.6E-05	9.7E-05	9.3E-05	9.0E-05	9.2E-05	9.5E-05	9.9E-05	1.0E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04
3463	9.6E-05	9.7E-05	9.3E-05	9.1E-05	9.4E-05	9.7E-05	1.0E-04	1.0E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04
3464	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04
3465	1.7E-04	1.8E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.4E-04
3466	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
3467	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.4E-04	2.4E-04	2.5E-04	2.5E-04
3468	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
3469	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.6E-04	2.6E-04	2.7E-04
3470	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	2.7E-04	2.7E-04	2.7E-04
3471	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.4E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04
3472	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04
3473	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
3474	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
3475	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04
3476	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3477	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04
3478	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04
3479	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.6E-04
3480	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.7E-04
3481	1.8E-04	1.9E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.4E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
3482	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04	2.5E-04
3483	1.7E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.5E-04	2.5E-04	2.6E-04	2.6E-04
3484	2.0E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	2.9E-04	2.9E-04
3485	2.1E-04	2.3E-04	2.3E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04
3486	2.2E-04	2.3E-04	2.4E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04
3487	2.2E-04	2.3E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.1E-04	3.2E-04	3.3E-04	3.3E-04
3488	2.2E-04	2.3E-04	2.3E-04	2.3E-04	2.4E-04	2.5E-04	2.6E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04
3489	2.1E-04	2.2E-04	2.3E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04	2.6E-04	2.8E-04	3.0E-04	3.1E-04	3.2E-04	3.2E-04
3490	2.0E-04	2.1E-04	2.2E-04	2.2E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.7E-04	2.9E-04	3.0E-04	3.1E-04	3.1E-04
3491	1.8E-04	1.9E-04	2.0E-04	2.0E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.6E-04	2.7E-04	2.7E-04	2.8E-04
3492	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.5E-04	2.5E-04
3493	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04	2.0E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04	2.5E-04
3494	1.6E-04	1.7E-04	1.7E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.2E-04	2.3E-04	2.4E-04	2.4E-04
3495	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.7E-04	1.8E-04	1.9E-04	2.1E-04	2.1E-04	2.2E-04	2.2E-04
3496	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04
3497	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04	2.2E-04
3498	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.1E-04	2.1E-04
3499	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04	1.8E-04	1.9E-04	2.0E-04	2.0E-04
3500	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.9E-04	1.9E-04
3501	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.8E-04	1.8E-04	1.8E-04
3502	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.7E-04	1.7E-04	1.7E-04
3503	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.7E-04
3504	9.9E-05	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04	1.6E-04
3505	9.5E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.6E-04	1.6E-04
3506	9.3E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.1E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.5E-04	1.5E-04	1.6E-04
3507	8.5E-05	9.1E-05	9.4E-05	9.5E-05	9.8E-05	1.0E-04	1.0E-04	1.1E-04	1.2E-04	1.3E-04	1.4E-04	1.4E-04	1.5E-04
3508	7.6E-05	8.1E-05	8.4E-05	8.5E-05	8.7E-05	9.0E-05	9.3E-05	9.7E-05	1.1E-04	1.2E-04	1.3E-04	1.3E-04	1.4E-04
3509	7.3E-05	7.8E-05	8.1E-05	8.2E-05	8.4E-05	8.6E-05	9.0E-05	9.3E-05	1.1E-04	1.2E-04	1.2E-04	1.3E-04	1.3E-04
3510	6.8E-05	7.3E-05	7.5E-05	7.6E-05	7.8E-05	8.0E-05	8.3E-05	8.6E-05	9.9E-05	1.1E-04	1.2E-04	1.2E-04	1.2E-04
3511	5.4E-05	5.8E-05	5.9E-05	5.9E-05	6.0E-05	6.1E-05	6.4E-05	6.6E-05	7.9E-05	9.0E-05	9.8E-05	1.0E-04	1.1E-04
3512	5.3E-05	5.6E-05	5.8E-05	5.8E-05	5.8E-05	5.9E-05	6.1E-05	6.3E-05	7.6E-05	8.6E-05	9.4E-05	9.9E-05	1.0E-04
3513	4.2E-05	4.5E-05	4.6E-05	4.5E-05	4.5E-05	4.6E-05	4.7E-05	4.9E-05	6.2E-05	7.3E-05	8.2E-05	8.7E-05	9.0E-05
3514	3.8E-05	4.1E-05	4.1E-05	4.0E-05	4.0E-05	4.0E-05	4.1E-05	4.2E-05	5.5E-05	6.5E-05	7.3E-05	7.8E-05	8.1E-05
3515	3.9E-05	4.1E-05	4.2E-05	4.1E-05	4.1E-05	4.1E-05	4.2E-05	4.3E-05	5.6E-05	6.6E-05	7.4E-05	7.9E-05	8.2E-05
3516	4.5E-05	4.8E-05	4.9E-05	4.8E-05	4.8E-05	4.8E-05	5.0E-05	5.1E-05	6.2E-05	7.1E-05	7.7E-05	8.2E-05	8.4E-05
3517	4.6E-05	4.9E-05	5.0E-05	5.0E-05	4.9E-05	5.0E-05	5.1E-05	5.3E-05	6.3E-05	7.2E-05	7.8E-05	8.2E-05	8.5E-05
3518	4.2E-05	4.5E-05	4.6E-05	4.5E-05	4.5E-05	4.5E-05	4.6E-05	4.8E-05	5.8E-05	6.7E-05	7.3E-05	7.7E-05	7.9E-05
3519	3.8E-05	4.0E-05	4.1E-05	4.0E-05	3.9E-05	3.9E-05	4.0E-05	4.1E-05	5.2E-05	6.0E-05	6.7E-05	7.1E-05	7.3E-05
3520	3.6E-05	3.9E-05	3.9E-05	3.8E-05	3.7E-05	3.7E-05	3.8E-05	3.9E-05	4.9E-05	5.8E-05	6.5E-05	6.9E-05	7.1E-05

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3521	2.9E-05	3.1E-05	3.1E-05	2.9E-05	2.8E-05	2.7E-05	2.8E-05	2.8E-05	4.0E-05	5.0E-05	5.8E-05	6.3E-05	6.6E-05
3522	2.6E-05	2.8E-05	2.8E-05	2.6E-05	2.4E-05	2.3E-05	2.4E-05	2.4E-05	3.7E-05	4.7E-05	5.5E-05	6.0E-05	6.3E-05
3523	1.8E-05	2.0E-05	1.9E-05	1.7E-05	1.5E-05	1.4E-05	1.3E-05	1.4E-05	2.7E-05	3.8E-05	4.7E-05	5.2E-05	5.5E-05
3524	7.9E-06	8.8E-06	7.6E-06	4.5E-06	1.4E-06	-6.0E-07	-1.7E-06	-2.5E-06	1.0E-05	2.0E-05	2.8E-05	3.3E-05	3.6E-05
3525	-2.2E-06	-2.0E-06	-3.8E-06	-7.7E-06	-1.2E-05	-1.4E-05	-1.6E-05	-1.8E-05	-5.3E-06	5.0E-06	1.3E-05	1.8E-05	2.0E-05
3526	-1.1E-05	-1.1E-05	-1.4E-05	-1.8E-05	-2.3E-05	-2.6E-05	-2.9E-05	-3.1E-05	-1.8E-05	-7.5E-06	4.2E-07	5.7E-06	8.3E-06
3527	-1.8E-05	-1.8E-05	-2.1E-05	-2.6E-05	-3.1E-05	-3.5E-05	-3.8E-05	-4.0E-05	-2.7E-05	-1.6E-05	-7.8E-06	-2.3E-06	4.3E-07
3528	-1.9E-05	-2.0E-05	-2.2E-05	-2.7E-05	-3.2E-05	-3.6E-05	-3.9E-05	-4.2E-05	-2.8E-05	-1.7E-05	-8.2E-06	-2.5E-06	4.0E-07
3529	-2.8E-05	-2.9E-05	-3.2E-05	-3.7E-05	-4.2E-05	-4.7E-05	-5.0E-05	-5.4E-05	-3.9E-05	-2.7E-05	-1.7E-05	-1.1E-05	-8.2E-06
3530	-4.5E-05	-4.7E-05	-5.1E-05	-5.8E-05	-6.5E-05	-7.1E-05	-7.6E-05	-8.0E-05	-6.6E-05	-5.4E-05	-4.6E-05	-4.0E-05	-3.7E-05
3531	-6.9E-05	-7.3E-05	-7.8E-05	-8.7E-05	-9.5E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.0E-04	-8.9E-05	-8.0E-05	-7.4E-05	-7.1E-05
3532	-7.8E-05	-8.2E-05	-8.8E-05	-9.7E-05	-1.1E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.1E-04	-1.0E-04	-9.2E-05	-8.6E-05	-8.3E-05
3533	-7.4E-05	-7.7E-05	-8.3E-05	-9.2E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.2E-04	-1.1E-04	-9.4E-05	-8.5E-05	-7.9E-05	-7.5E-05
3534	-6.1E-05	-6.4E-05	-6.8E-05	-7.6E-05	-8.3E-05	-9.0E-05	-9.6E-05	-1.0E-04	-8.6E-05	-7.3E-05	-6.3E-05	-5.6E-05	-5.3E-05
3535	-4.9E-05	-5.1E-05	-5.5E-05	-6.1E-05	-6.8E-05	-7.4E-05	-7.8E-05	-8.3E-05	-6.5E-05	-5.1E-05	-4.0E-05	-3.2E-05	-2.9E-05
3536	-5.3E-05	-5.5E-05	-5.9E-05	-6.6E-05	-7.2E-05	-7.9E-05	-8.4E-05	-8.8E-05	-7.1E-05	-5.6E-05	-4.5E-05	-3.8E-05	-3.4E-05
3537	-7.5E-05	-7.8E-05	-8.3E-05	-9.2E-05	-1.0E-04	-1.1E-04	-1.1E-04	-1.2E-04	-1.0E-04	-8.8E-05	-7.7E-05	-6.9E-05	-6.6E-05
3538	-9.0E-05	-9.5E-05	-1.0E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.4E-04	-1.3E-04	-1.1E-04	-9.9E-05	-9.2E-05	-8.8E-05
3539	-1.0E-04	-1.1E-04	-1.1E-04	-1.2E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.4E-04	-1.3E-04	-1.2E-04	-1.1E-04	-1.1E-04
3540	-1.2E-04	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.7E-04	-1.8E-04	-1.9E-04	-1.8E-04	-1.6E-04	-1.5E-04	-1.4E-04	-1.4E-04
3541	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.8E-04	-1.9E-04	-2.0E-04	-2.1E-04	-1.9E-04	-1.8E-04	-1.7E-04	-1.6E-04	-1.6E-04
3542	-1.3E-04	-1.4E-04	-1.5E-04	-1.6E-04	-1.8E-04	-1.9E-04	-2.0E-04	-2.1E-04	-2.0E-04	-1.8E-04	-1.7E-04	-1.7E-04	-1.6E-04
3543	-1.5E-04	-1.6E-04	-1.7E-04	-1.8E-04	-2.0E-04	-2.1E-04	-2.2E-04	-2.4E-04	-2.2E-04	-2.1E-04	-2.0E-04	-1.9E-04	-1.9E-04
3544	-1.7E-04	-1.8E-04	-2.0E-04	-2.1E-04	-2.3E-04	-2.4E-04	-2.6E-04	-2.7E-04	-2.6E-04	-2.4E-04	-2.3E-04	-2.2E-04	-2.2E-04
3545	-2.2E-04	-2.4E-04	-2.5E-04	-2.7E-04	-2.9E-04	-3.1E-04	-3.3E-04	-3.5E-04	-3.3E-04	-3.1E-04	-3.0E-04	-2.9E-04	-2.9E-04
3546	-2.6E-04	-2.7E-04	-2.9E-04	-3.1E-04	-3.4E-04	-3.6E-04	-3.8E-04	-4.0E-04	-3.8E-04	-3.6E-04	-3.5E-04	-3.4E-04	-3.4E-04
3547	-2.7E-04	-2.9E-04	-3.0E-04	-3.3E-04	-3.5E-04	-3.7E-04	-3.9E-04	-4.1E-04	-3.9E-04	-3.8E-04	-3.7E-04	-3.6E-04	-3.5E-04
3548	-2.6E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.6E-04	-3.8E-04	-4.0E-04	-3.8E-04	-3.7E-04	-3.5E-04	-3.5E-04	-3.4E-04
3549	-2.5E-04	-2.6E-04	-2.8E-04	-3.0E-04	-3.2E-04	-3.4E-04	-3.6E-04	-3.7E-04	-3.6E-04	-3.4E-04	-3.3E-04	-3.2E-04	-3.2E-04
3550	-3.2E-04	-3.4E-04	-3.6E-04	-3.9E-04	-4.1E-04	-4.4E-04	-4.6E-04	-4.9E-04	-4.7E-04	-4.5E-04	-4.4E-04	-4.3E-04	-4.2E-04
3551	-3.4E-04	-3.6E-04	-3.9E-04	-4.1E-04	-4.4E-04	-4.7E-04	-4.9E-04	-5.2E-04	-5.0E-04	-4.8E-04	-4.7E-04	-4.6E-04	-4.5E-04
3552	-4.0E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.5E-04	-5.8E-04	-6.1E-04	-5.9E-04	-5.7E-04	-5.6E-04	-5.5E-04	-5.4E-04
3553	-4.1E-04	-4.3E-04	-4.6E-04	-4.9E-04	-5.2E-04	-5.6E-04	-5.9E-04	-6.2E-04	-6.0E-04	-5.8E-04	-5.7E-04	-5.6E-04	-5.5E-04
3554	-4.3E-04	-4.5E-04	-4.8E-04	-5.2E-04	-5.5E-04	-5.9E-04	-6.2E-04	-6.6E-04	-6.3E-04	-6.2E-04	-6.0E-04	-5.9E-04	-5.9E-04
3555	-3.8E-04	-4.0E-04	-4.2E-04	-4.5E-04	-4.8E-04	-5.1E-04	-5.4E-04	-5.7E-04	-5.5E-04	-5.3E-04	-5.2E-04	-5.1E-04	-5.0E-04
3556	-3.6E-04	-3.8E-04	-4.0E-04	-4.3E-04	-4.6E-04	-4.9E-04	-5.2E-04	-5.4E-04	-5.2E-04	-5.0E-04	-4.9E-04	-4.8E-04	-4.7E-04
3557	-4.2E-04	-4.5E-04	-4.7E-04	-5.1E-04	-5.4E-04	-5.8E-04	-6.1E-04	-6.4E-04	-6.2E-04	-6.0E-04	-5.9E-04	-5.8E-04	-5.7E-04
3558	-4.4E-04	-4.6E-04	-4.9E-04	-5.3E-04	-5.6E-04	-6.0E-04	-6.4E-04	-6.7E-04	-6.5E-04	-6.3E-04	-6.2E-04	-6.1E-04	-6.0E-04
3559	-4.8E-04	-5.1E-04	-5.4E-04	-5.8E-04	-6.2E-04	-6.7E-04	-7.2E-04	-7.7E-04	-7.4E-04	-7.2E-04	-7.1E-04	-7.0E-04	-6.9E-04
3560	-4.8E-04	-5.1E-04	-5.5E-04	-6.0E-04	-6.5E-04	-7.3E-04	-8.1E-04	-8.8E-04	-8.6E-04	-8.4E-04	-8.2E-04	-8.1E-04	-8.1E-04
3561	-4.7E-04	-5.1E-04	-5.5E-04	-5.9E-04	-6.4E-04	-7.2E-04	-8.0E-04	-8.8E-04	-8.5E-04	-8.3E-04	-8.2E-04	-8.1E-04	-8.0E-04
3562	-4.8E-04	-5.1E-04	-5.5E-04	-5.9E-04	-6.4E-04	-7.2E-04	-8.0E-04	-8.7E-04	-8.5E-04	-8.2E-04	-8.1E-04	-8.0E-04	-7.9E-04
3563	-4.9E-04	-5.2E-04	-5.6E-04	-6.0E-04	-6.5E-04	-7.1E-04	-7.8E-04	-8.4E-04	-8.2E-04	-8.0E-04	-7.8E-04	-7.7E-04	-7.7E-04
3564	-5.0E-04	-5.3E-04	-5.7E-04	-6.1E-04	-6.6E-04	-7.3E-04	-8.0E-04	-8.7E-04	-8.4E-04	-8.2E-04	-8.1E-04	-8.0E-04	-7.9E-04

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3565	-5.0E-04	-5.3E-04	-5.6E-04	-6.0E-04	-6.5E-04	-7.1E-04	-7.6E-04	-8.2E-04	-8.0E-04	-7.8E-04	-7.6E-04	-7.5E-04	-7.4E-04
3566	-4.8E-04	-5.0E-04	-5.4E-04	-5.7E-04	-6.1E-04	-6.6E-04	-7.1E-04	-7.6E-04	-7.3E-04	-7.1E-04	-7.0E-04	-6.9E-04	-6.8E-04
3567	-5.0E-04	-5.3E-04	-5.6E-04	-6.0E-04	-6.4E-04	-6.9E-04	-7.4E-04	-7.9E-04	-7.6E-04	-7.4E-04	-7.3E-04	-7.1E-04	-7.1E-04
3568	-5.7E-04	-6.1E-04	-6.5E-04	-6.9E-04	-7.4E-04	-7.9E-04	-8.5E-04	-9.0E-04	-8.7E-04	-8.5E-04	-8.3E-04	-8.2E-04	-8.2E-04
3569	-8.7E-04	-9.2E-04	-9.8E-04	-1.0E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.2E-03	-1.2E-03	-1.2E-03	-1.2E-03
3570	-1.1E-03	-1.1E-03	-1.2E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.4E-03	-1.4E-03
3571	-9.7E-04	-1.0E-03	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.4E-03	-1.3E-03	-1.3E-03	-1.3E-03
3572	-1.1E-03	-1.1E-03	-1.2E-03	-1.3E-03	-1.4E-03	-1.4E-03	-1.5E-03	-1.6E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.5E-03	-1.5E-03
3573	-1.7E-03	-1.8E-03	-1.9E-03	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.4E-03	-2.4E-03	-2.3E-03	-2.3E-03	-2.3E-03	-2.3E-03
3574	-3.1E-03	-3.3E-03	-3.5E-03	-3.7E-03	-3.8E-03	-4.0E-03	-4.2E-03	-4.4E-03	-4.3E-03	-4.3E-03	-4.3E-03	-4.2E-03	-4.2E-03
3575	-3.9E-03	-4.1E-03	-4.3E-03	-4.5E-03	-4.7E-03	-5.0E-03	-5.2E-03	-5.4E-03	-5.3E-03	-5.3E-03	-5.3E-03	-5.2E-03	-5.2E-03
3576	-4.3E-03	-4.5E-03	-4.7E-03	-5.0E-03	-5.2E-03	-5.5E-03	-5.7E-03	-5.9E-03	-5.9E-03	-5.8E-03	-5.8E-03	-5.7E-03	-5.7E-03
3577	-4.2E-03	-4.4E-03	-4.7E-03	-4.9E-03	-5.2E-03	-5.4E-03	-5.6E-03	-5.9E-03	-5.8E-03	-5.7E-03	-5.7E-03	-5.7E-03	-5.7E-03
3578	-4.0E-03	-4.2E-03	-4.4E-03	-4.6E-03	-4.8E-03	-5.1E-03	-5.3E-03	-5.5E-03	-5.5E-03	-5.4E-03	-5.4E-03	-5.3E-03	-5.3E-03
3579	-3.3E-03	-3.5E-03	-3.7E-03	-3.9E-03	-4.1E-03	-4.3E-03	-4.5E-03	-4.7E-03	-4.6E-03	-4.5E-03	-4.5E-03	-4.5E-03	-4.5E-03
3580	-2.3E-03	-2.5E-03	-2.6E-03	-2.7E-03	-2.9E-03	-3.0E-03	-3.2E-03	-3.3E-03	-3.2E-03	-3.2E-03	-3.1E-03	-3.1E-03	-3.1E-03
3581	-2.4E-03	-2.6E-03	-2.7E-03	-2.9E-03	-3.0E-03	-3.2E-03	-3.3E-03	-3.4E-03	-3.4E-03	-3.3E-03	-3.3E-03	-3.2E-03	-3.2E-03
3582	-2.4E-03	-2.5E-03	-2.6E-03	-2.8E-03	-2.9E-03	-3.1E-03	-3.2E-03	-3.3E-03	-3.3E-03	-3.2E-03	-3.2E-03	-3.1E-03	-3.1E-03
3583	-2.0E-03	-2.1E-03	-2.2E-03	-2.3E-03	-2.5E-03	-2.6E-03	-2.7E-03	-2.8E-03	-2.8E-03	-2.7E-03	-2.6E-03	-2.6E-03	-2.6E-03
3584	9.6E-03	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
3585	1.0E-02	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02	1.4E-02
3586	1.1E-02	1.1E-02	1.2E-02	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02	1.5E-02
3587	1.2E-02	1.3E-02	1.4E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02
3588	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02
3589	1.3E-02	1.4E-02	1.5E-02	1.5E-02	1.6E-02	1.6E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02
3590	1.2E-02	1.3E-02	1.3E-02	1.4E-02	1.4E-02	1.4E-02	1.5E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02	1.6E-02
3591	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02	2.0E-02
3592	1.6E-02	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.9E-02	1.9E-02
3593	1.6E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02	1.7E-02
3594	1.7E-02	1.7E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02	1.8E-02
3595	1.8E-02	1.8E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02	1.9E-02
3596	1.3E-02	1.3E-02	1.3E-02	1.4E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02	1.3E-02
3597	1.0E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02	1.1E-02
3598	7.9E-03	8.2E-03	8.5E-03	8.7E-03	8.9E-03	9.1E-03	9.2E-03	9.4E-03	9.4E-03	9.4E-03	9.5E-03	9.5E-03	9.5E-03

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
2	9.4E-08	9.6E-08	9.6E-08	9.3E-08	9.3E-08	9.2E-08	9.3E-08	9.5E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07
3	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06
4	9.0E-07	9.2E-07	9.3E-07	9.0E-07	8.5E-07	8.2E-07	8.2E-07	8.2E-07	8.3E-07	8.5E-07	8.7E-07	8.8E-07	8.9E-07
5	2.7E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07
6	9.2E-08	9.6E-08	9.6E-08	9.3E-08	9.0E-08	8.7E-08	8.5E-08	8.3E-08	9.2E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
7	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
8	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
9	2.8E-07	2.9E-07	3.0E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07
10	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07
11	8.8E-08	9.2E-08	9.2E-08	8.9E-08	8.5E-08	8.2E-08	7.9E-08	7.6E-08	9.2E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07
12	7.4E-08	7.6E-08	7.6E-08	7.5E-08	7.4E-08	7.4E-08	7.5E-08	7.7E-08	8.0E-08	8.4E-08	8.6E-08	8.8E-08	8.9E-08
13	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07
14	7.4E-08	7.7E-08	7.7E-08	7.5E-08	7.4E-08	7.3E-08	7.2E-08	7.3E-08	7.9E-08	8.5E-08	8.9E-08	9.2E-08	9.4E-08
15	1.6E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
16	6.8E-08	7.1E-08	7.2E-08	7.3E-08	7.4E-08	7.5E-08	7.7E-08	7.9E-08	8.8E-08	9.6E-08	1.0E-07	1.1E-07	1.1E-07
17	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
18	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
19	1.1E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
20	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07
21	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07
22	7.4E-08	7.7E-08	7.8E-08	7.9E-08	8.1E-08	8.2E-08	8.4E-08	8.8E-08	9.8E-08	1.1E-07	1.1E-07	1.2E-07	1.2E-07
23	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07
24	3.2E-07	3.3E-07	3.3E-07	3.1E-07	2.9E-07	2.8E-07	2.8E-07	2.7E-07	2.9E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07
25	2.3E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07
26	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07
27	7.2E-07	7.4E-07	7.5E-07	7.1E-07	6.8E-07	6.4E-07	6.5E-07	6.7E-07	6.8E-07	6.9E-07	7.0E-07	7.1E-07	7.1E-07
28	7.6E-07	7.9E-07	8.0E-07	7.8E-07	7.5E-07	7.1E-07	7.3E-07	7.5E-07	7.6E-07	7.7E-07	7.8E-07	7.9E-07	8.0E-07
29	2.6E-07	2.7E-07	2.8E-07	2.7E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07
30	8.5E-07	8.8E-07	8.9E-07	8.6E-07	8.3E-07	7.9E-07	7.9E-07	8.0E-07	8.0E-07	8.2E-07	8.3E-07	8.4E-07	8.5E-07
31	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
32	3.9E-07	4.1E-07	4.1E-07	3.9E-07	3.8E-07	3.7E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07	4.1E-07	4.1E-07
33	5.2E-07	5.4E-07	5.5E-07	5.4E-07	5.2E-07	5.0E-07	5.1E-07	5.2E-07	5.4E-07	5.6E-07	5.8E-07	5.9E-07	6.0E-07
34	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
35	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07
36	5.0E-07	5.2E-07	5.2E-07	5.0E-07	4.7E-07	4.5E-07	4.5E-07	4.5E-07	4.6E-07	4.8E-07	4.9E-07	5.0E-07	5.0E-07
37	6.4E-08	6.6E-08	6.6E-08	6.5E-08	6.6E-08	6.6E-08	6.7E-08	6.8E-08	7.1E-08	7.4E-08	7.6E-08	7.7E-08	7.8E-08
38	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
39	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
40	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
41	8.5E-08	8.6E-08	8.5E-08	8.4E-08	8.5E-08	8.6E-08	8.7E-08	9.0E-08	9.3E-08	9.6E-08	9.9E-08	1.0E-07	1.0E-07
42	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07
43	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
44	1.1E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
45	8.7E-08	8.9E-08	8.8E-08	8.7E-08	8.8E-08	8.9E-08	9.0E-08	9.3E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07
46	5.0E-07	5.1E-07	5.1E-07	4.9E-07	4.7E-07	4.5E-07	4.5E-07	4.5E-07	4.6E-07	4.7E-07	4.9E-07	5.0E-07	5.0E-07
47	5.0E-07	5.2E-07	5.2E-07	5.0E-07	4.7E-07	4.5E-07	4.5E-07	4.5E-07	4.6E-07	4.8E-07	4.9E-07	5.0E-07	5.1E-07
48	3.6E-07	3.7E-07	3.8E-07	3.7E-07	3.6E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07
49	3.2E-07	3.3E-07	3.4E-07	3.3E-07	3.2E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07
50	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	9.4E-08	8.9E-08	9.9E-08	1.1E-07	1.2E-07	1.2E-07	1.2E-07
51	3.8E-07	3.9E-07	3.9E-07	3.7E-07	3.5E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07
52	4.0E-07	4.1E-07	4.1E-07	4.0E-07	3.8E-07	3.6E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07
53	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.6E-07
54	3.3E-07	3.4E-07	3.5E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
55	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.7E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07
56	5.6E-07	5.7E-07	5.7E-07	5.5E-07	5.2E-07	5.1E-07	5.1E-07	5.1E-07	5.2E-07	5.4E-07	5.5E-07	5.6E-07	5.7E-07
57	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07
58	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07
59	3.4E-07	3.6E-07	3.6E-07	3.6E-07	3.5E-07	3.4E-07	3.4E-07	3.5E-07	3.8E-07	4.0E-07	4.2E-07	4.3E-07	4.4E-07
60	6.7E-08	7.0E-08	7.1E-08	7.1E-08	7.3E-08	7.4E-08	7.6E-08	7.9E-08	8.9E-08	9.9E-08	1.1E-07	1.1E-07	1.1E-07
61	8.4E-08	8.8E-08	8.9E-08	8.8E-08	8.7E-08	8.6E-08	8.5E-08	8.5E-08	9.9E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
62	7.4E-07	7.6E-07	7.7E-07	7.4E-07	7.1E-07	6.8E-07	6.8E-07	6.8E-07	6.9E-07	7.0E-07	7.2E-07	7.3E-07	7.3E-07
63	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
64	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07
65	7.3E-07	7.6E-07	7.7E-07	7.5E-07	7.2E-07	6.9E-07	7.0E-07	7.2E-07	7.3E-07	7.5E-07	7.6E-07	7.7E-07	7.7E-07
66	5.6E-07	5.7E-07	5.8E-07	5.5E-07	5.3E-07	5.1E-07	5.1E-07	5.1E-07	5.2E-07	5.4E-07	5.5E-07	5.6E-07	5.7E-07
67	2.2E-07	2.3E-07	2.3E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07
68	9.2E-08	9.5E-08	9.6E-08	9.3E-08	9.0E-08	8.8E-08	8.5E-08	8.4E-08	9.2E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
69	9.2E-08	9.3E-08	9.2E-08	9.1E-08	9.2E-08	9.3E-08	9.5E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
70	4.0E-07	4.1E-07	4.1E-07	4.0E-07	3.8E-07	3.6E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07
71	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
72	2.8E-07	2.9E-07	2.9E-07	2.8E-07	2.7E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07
73	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06
74	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
75	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	9.5E-07	9.7E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
76	3.2E-07	3.3E-07	3.3E-07	3.3E-07	3.2E-07	3.1E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07
77	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
78	9.3E-07	9.6E-07	9.5E-07	8.9E-07	8.2E-07	7.9E-07	8.0E-07	8.3E-07	8.5E-07	8.8E-07	9.0E-07	9.2E-07	9.3E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
79	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07
80	5.7E-08	5.9E-08	5.8E-08	5.8E-08	5.8E-08	5.9E-08	5.9E-08	6.0E-08	6.3E-08	6.6E-08	6.8E-08	6.9E-08	7.0E-08
81	9.7E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
82	5.9E-07	6.1E-07	6.1E-07	5.9E-07	5.7E-07	5.5E-07	5.5E-07	5.5E-07	5.6E-07	5.8E-07	5.9E-07	6.0E-07	6.0E-07
83	7.7E-08	7.8E-08	7.8E-08	7.7E-08	7.8E-08	7.8E-08	8.0E-08	8.2E-08	8.5E-08	8.8E-08	9.0E-08	9.2E-08	9.3E-08
84	4.4E-07	4.6E-07	4.6E-07	4.4E-07	4.3E-07	4.2E-07	4.2E-07	4.4E-07	4.5E-07	4.6E-07	4.8E-07	4.8E-07	4.9E-07
85	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.0E-07	8.8E-08	1.0E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07
86	8.8E-07	9.1E-07	9.1E-07	8.8E-07	8.4E-07	8.0E-07	8.0E-07	8.1E-07	8.2E-07	8.4E-07	8.6E-07	8.8E-07	8.8E-07
87	7.4E-08	7.7E-08	7.8E-08	7.8E-08	7.9E-08	8.0E-08	8.2E-08	8.4E-08	9.0E-08	9.5E-08	9.9E-08	1.0E-07	1.0E-07
88	2.6E-07	2.6E-07	2.4E-07	2.0E-07	1.5E-07	1.1E-07	6.5E-08	1.9E-08	5.5E-08	9.0E-08	1.2E-07	1.4E-07	1.5E-07
89	8.8E-07	9.1E-07	9.2E-07	8.8E-07	8.4E-07	7.6E-07	7.8E-07	8.0E-07	8.1E-07	8.2E-07	8.3E-07	8.4E-07	8.5E-07
90	6.2E-08	6.4E-08	6.3E-08	6.3E-08	6.4E-08	6.4E-08	6.4E-08	6.6E-08	6.8E-08	7.1E-08	7.3E-08	7.4E-08	7.5E-08
91	6.2E-08	6.4E-08	6.4E-08	6.3E-08	6.4E-08	6.4E-08	6.4E-08	6.6E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.5E-08
92	4.9E-07	5.1E-07	5.2E-07	5.0E-07	4.9E-07	4.7E-07	4.8E-07	4.9E-07	5.0E-07	5.2E-07	5.3E-07	5.4E-07	5.5E-07
93	7.2E-08	7.5E-08	7.6E-08	7.6E-08	7.7E-08	7.8E-08	8.0E-08	8.2E-08	8.7E-08	9.2E-08	9.5E-08	9.8E-08	9.9E-08
94	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07
95	6.2E-08	6.4E-08	6.3E-08	6.3E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.8E-08	7.1E-08	7.3E-08	7.4E-08	7.5E-08
96	9.8E-08	1.0E-07	1.0E-07	9.7E-08	9.1E-08	8.7E-08	8.0E-08	7.5E-08	9.4E-08	1.1E-07	1.3E-07	1.3E-07	1.4E-07
97	6.4E-08	6.6E-08	6.7E-08	6.6E-08	6.7E-08	6.8E-08	6.9E-08	7.1E-08	7.5E-08	7.8E-08	8.1E-08	8.3E-08	8.4E-08
98	6.4E-08	6.6E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	6.9E-08	7.1E-08	7.5E-08	7.8E-08	8.1E-08	8.3E-08	8.4E-08
99	5.9E-08	6.2E-08	6.3E-08	6.2E-08	6.2E-08	6.3E-08	6.3E-08	6.5E-08	7.8E-08	8.9E-08	9.8E-08	1.0E-07	1.1E-07
100	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
101	3.4E-07	3.5E-07	3.5E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.6E-07
102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
111	7.1E-07	7.2E-07	5.9E-07	3.3E-07	5.1E-08	-4.2E-08	-9.0E-08	-1.3E-07	-5.5E-08	1.6E-08	7.2E-08	1.1E-07	1.3E-07
112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
113	7.1E-07	7.2E-07	5.9E-07	3.3E-07	4.7E-08	-5.0E-08	-9.7E-08	-1.4E-07	-6.5E-08	3.1E-09	5.6E-08	9.5E-08	1.1E-07
114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
115	7.5E-07	7.5E-07	6.3E-07	3.7E-07	9.1E-08	-8.4E-09	-5.1E-08	-8.8E-08	-1.8E-08	4.8E-08	9.9E-08	1.4E-07	1.6E-07
116	7.7E-07	7.9E-07	7.0E-07	5.1E-07	3.0E-07	2.3E-07	2.0E-07	1.7E-07	2.2E-07	2.7E-07	3.0E-07	3.3E-07	3.5E-07
117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
118	7.8E-07	7.9E-07	6.7E-07	4.1E-07	1.4E-07	4.0E-08	2.5E-09	-2.8E-08	4.0E-08	1.1E-07	1.6E-07	1.9E-07	2.1E-07
119	8.0E-07	8.2E-07	7.4E-07	5.4E-07	3.4E-07	2.7E-07	2.4E-07	2.1E-07	2.6E-07	3.1E-07	3.5E-07	3.8E-07	3.9E-07
120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
121	8.2E-07	8.3E-07	7.2E-07	4.7E-07	2.0E-07	1.0E-07	7.0E-08	4.7E-08	1.1E-07	1.8E-07	2.3E-07	2.7E-07	2.9E-07
122	8.4E-07	8.6E-07	7.8E-07	5.9E-07	3.9E-07	3.2E-07	2.9E-07	2.8E-07	3.3E-07	3.7E-07	4.1E-07	4.4E-07	4.6E-07
123	8.0E-07	8.2E-07	7.6E-07	6.1E-07	4.5E-07	3.9E-07	3.7E-07	3.6E-07	4.0E-07	4.4E-07	4.7E-07	5.0E-07	5.1E-07
124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
125	8.7E-07	8.8E-07	7.8E-07	5.4E-07	2.9E-07	1.9E-07	1.7E-07	1.5E-07	2.2E-07	2.8E-07	3.4E-07	3.7E-07	3.9E-07
126	8.9E-07	9.1E-07	8.4E-07	6.5E-07	4.6E-07	3.8E-07	3.7E-07	3.6E-07	4.1E-07	4.6E-07	5.0E-07	5.3E-07	5.4E-07
127	8.5E-07	8.7E-07	8.1E-07	6.7E-07	5.1E-07	4.5E-07	4.4E-07	4.3E-07	4.7E-07	5.1E-07	5.4E-07	5.7E-07	5.8E-07
128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
129	9.2E-07	9.4E-07	8.5E-07	6.2E-07	3.9E-07	2.9E-07	2.8E-07	2.8E-07	3.5E-07	4.1E-07	4.6E-07	5.0E-07	5.2E-07
130	9.5E-07	9.7E-07	9.0E-07	7.2E-07	5.3E-07	4.6E-07	4.6E-07	4.6E-07	5.1E-07	5.6E-07	6.0E-07	6.3E-07	6.4E-07
131	9.0E-07	9.2E-07	8.7E-07	7.3E-07	5.8E-07	5.1E-07	5.1E-07	5.1E-07	5.5E-07	5.9E-07	6.3E-07	6.5E-07	6.7E-07
132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
133	9.9E-07	1.0E-06	9.3E-07	7.2E-07	5.0E-07	4.1E-07	4.1E-07	4.3E-07	4.9E-07	5.6E-07	6.1E-07	6.5E-07	6.7E-07
134	1.0E-06	1.0E-06	9.7E-07	8.0E-07	6.2E-07	5.5E-07	5.6E-07	5.7E-07	6.2E-07	6.7E-07	7.1E-07	7.4E-07	7.5E-07
135	9.5E-07	9.8E-07	9.4E-07	8.0E-07	6.5E-07	5.9E-07	5.9E-07	6.0E-07	6.4E-07	6.8E-07	7.2E-07	7.4E-07	7.6E-07
136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
137	1.1E-06	1.1E-06	1.0E-06	8.3E-07	6.2E-07	5.4E-07	5.5E-07	5.8E-07	6.5E-07	7.1E-07	7.6E-07	8.0E-07	8.2E-07
138	1.1E-06	1.1E-06	1.0E-06	8.9E-07	7.2E-07	6.5E-07	6.6E-07	6.8E-07	7.3E-07	7.8E-07	8.2E-07	8.5E-07	8.7E-07
139	1.0E-06	1.0E-06	1.0E-06	8.7E-07	7.2E-07	6.6E-07	6.8E-07	7.0E-07	7.3E-07	7.8E-07	8.1E-07	8.4E-07	8.5E-07
140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
141	1.1E-06	1.2E-06	1.1E-06	9.4E-07	7.5E-07	6.6E-07	6.9E-07	7.3E-07	8.0E-07	8.7E-07	9.2E-07	9.6E-07	9.8E-07
142	1.1E-06	1.2E-06	1.1E-06	9.8E-07	8.2E-07	7.5E-07	7.7E-07	8.1E-07	8.5E-07	9.1E-07	9.5E-07	9.8E-07	9.9E-07
143	1.1E-06	1.1E-06	1.1E-06	9.5E-07	8.1E-07	7.5E-07	7.7E-07	8.0E-07	8.3E-07	8.8E-07	9.1E-07	9.4E-07	9.5E-07
144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
145	1.2E-06	1.3E-06	1.2E-06	1.1E-06	8.7E-07	7.9E-07	8.4E-07	8.9E-07	9.5E-07	1.0E-06	1.1E-06	1.1E-06	1.1E-06
146	1.2E-06	1.2E-06	1.2E-06	1.1E-06	9.1E-07	8.5E-07	8.8E-07	9.2E-07	9.7E-07	1.0E-06	1.1E-06	1.1E-06	1.1E-06
147	1.1E-06	1.2E-06	1.1E-06	1.0E-06	8.8E-07	8.3E-07	8.5E-07	8.9E-07	9.3E-07	9.7E-07	1.0E-06	1.0E-06	1.0E-06
148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
149	1.3E-06	1.4E-06	1.3E-06	1.2E-06	1.0E-06	9.2E-07	9.8E-07	1.0E-06	1.1E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06
150	1.3E-06	1.3E-06	1.3E-06	1.1E-06	1.0E-06	9.4E-07	9.8E-07	1.0E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06
151	1.2E-06	1.2E-06	1.2E-06	1.1E-06	9.5E-07	9.0E-07	9.3E-07	9.6E-07	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06
152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
153	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.1E-06	1.0E-06	1.1E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06
154	1.3E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06
155	1.2E-06	1.3E-06	1.3E-06	1.1E-06	1.0E-06	9.6E-07	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06
156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
157	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.2E-06	1.1E-06	1.2E-06	1.3E-06	1.3E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06
158	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06
159	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06
160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
161	1.5E-06	1.6E-06	1.6E-06	1.4E-06	1.3E-06	1.2E-06	1.3E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06
162	1.4E-06	1.5E-06	1.5E-06	1.4E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06
163	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
165	1.6E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.4E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06
166	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.3E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.6E-06
167	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06
168	2.7E-06	2.9E-06	2.9E-06	2.7E-06	2.6E-06	2.5E-06	2.7E-06	2.9E-06	2.9E-06	3.0E-06	3.0E-06	3.1E-06	3.1E-06
169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
170	1.6E-06	1.7E-06	1.7E-06	1.6E-06	1.4E-06	1.3E-06	1.4E-06	1.5E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06
171	1.5E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06
172	1.4E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06
173	2.6E-06	2.7E-06	2.7E-06	2.6E-06	2.5E-06	2.4E-06	2.5E-06	2.7E-06	2.7E-06	2.8E-06	2.9E-06	2.9E-06	2.9E-06
174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
178	2.6E-06	2.7E-06	2.7E-06	2.6E-06	2.4E-06	2.4E-06	2.5E-06	2.6E-06	2.7E-06	2.8E-06	2.8E-06	2.9E-06	2.9E-06
179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
180	1.7E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.4E-06	1.5E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.8E-06	1.8E-06
181	1.6E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.4E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06
182	3.3E-06	3.4E-06	3.4E-06	3.3E-06	3.1E-06	3.0E-06	3.2E-06	3.4E-06	3.4E-06	3.5E-06	3.5E-06	3.6E-06	3.6E-06
183	2.5E-06	2.6E-06	2.6E-06	2.5E-06	2.3E-06	2.2E-06	2.4E-06	2.5E-06	2.6E-06	2.6E-06	2.7E-06	2.7E-06	2.8E-06
184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
185	1.6E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.4E-06	1.4E-06	1.5E-06	1.6E-06	1.6E-06	1.7E-06	1.8E-06	1.8E-06
186	1.7E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.8E-06
187	3.9E-06	4.0E-06	4.1E-06	3.9E-06	3.7E-06	3.6E-06	3.8E-06	4.0E-06	4.0E-06	4.1E-06	4.2E-06	4.2E-06	4.2E-06
188	3.1E-06	3.2E-06	3.2E-06	3.1E-06	3.0E-06	2.9E-06	3.0E-06	3.2E-06	3.2E-06	3.3E-06	3.3E-06	3.4E-06	3.4E-06
189	2.5E-06	2.5E-06	2.6E-06	2.4E-06	2.3E-06	2.2E-06	2.3E-06	2.4E-06	2.5E-06	2.5E-06	2.6E-06	2.6E-06	2.7E-06
190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
191	1.6E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.4E-06	1.4E-06	1.5E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06
192	4.4E-06	4.5E-06	4.6E-06	4.4E-06	4.2E-06	4.0E-06	4.2E-06	4.4E-06	4.4E-06	4.5E-06	4.6E-06	4.6E-06	4.6E-06
193	3.6E-06	3.7E-06	3.7E-06	3.6E-06	3.4E-06	3.3E-06	3.4E-06	3.6E-06	3.6E-06	3.7E-06	3.7E-06	3.8E-06	3.8E-06
194	3.0E-06	3.1E-06	3.1E-06	3.0E-06	2.8E-06	2.7E-06	2.8E-06	2.9E-06	3.0E-06	3.0E-06	3.1E-06	3.1E-06	3.1E-06
195	2.4E-06	2.5E-06	2.5E-06	2.4E-06	2.2E-06	2.1E-06	2.2E-06	2.3E-06	2.3E-06	2.4E-06	2.5E-06	2.5E-06	2.5E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
196	2.2E-06	2.2E-06	2.2E-06	2.1E-06	2.0E-06	1.9E-06	1.9E-06	2.0E-06	2.1E-06	2.2E-06	2.2E-06	2.3E-06	2.3E-06
197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
198	3.8E-06	4.0E-06	4.0E-06	3.8E-06	3.6E-06	3.4E-06	3.5E-06	3.6E-06	3.6E-06	3.7E-06	3.8E-06	3.9E-06	3.9E-06
199	3.2E-06	3.3E-06	3.3E-06	3.2E-06	2.9E-06	2.8E-06	2.9E-06	3.0E-06	3.0E-06	3.1E-06	3.2E-06	3.2E-06	3.3E-06
200	2.6E-06	2.7E-06	2.7E-06	2.6E-06	2.4E-06	2.3E-06	2.3E-06	2.4E-06	2.5E-06	2.6E-06	2.6E-06	2.7E-06	2.7E-06
201	2.0E-06	2.1E-06	2.1E-06	2.0E-06	1.8E-06	1.7E-06	1.7E-06	1.8E-06	1.9E-06	1.9E-06	2.0E-06	2.1E-06	2.1E-06
202	1.8E-06	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.4E-06	1.5E-06	1.5E-06	1.6E-06	1.7E-06	1.7E-06	1.8E-06	1.8E-06
203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
369	6.7E-07	6.8E-07	6.0E-07	4.5E-07	2.8E-07	2.2E-07	1.8E-07	1.4E-07	1.9E-07	2.3E-07	2.7E-07	2.9E-07	3.1E-07
370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
372	7.1E-07	7.2E-07	6.4E-07	4.7E-07	2.9E-07	2.3E-07	1.8E-07	1.5E-07	2.0E-07	2.4E-07	2.8E-07	3.0E-07	3.2E-07
373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
374	7.3E-07	7.4E-07	6.5E-07	4.7E-07	2.8E-07	2.1E-07	1.7E-07	1.4E-07	1.8E-07	2.3E-07	2.6E-07	2.9E-07	3.0E-07
375	7.4E-07	7.5E-07	6.6E-07	4.7E-07	2.8E-07	2.1E-07	1.7E-07	1.3E-07	1.8E-07	2.3E-07	2.6E-07	2.9E-07	3.0E-07
376	7.5E-07	7.6E-07	6.8E-07	4.9E-07	2.9E-07	2.2E-07	1.8E-07	1.5E-07	2.0E-07	2.5E-07	2.9E-07	3.2E-07	3.3E-07
377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
512	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.1E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
517	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
548	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06
549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
551	1.4E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
552	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06
553	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
554	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06
555	1.7E-06	1.8E-06	1.8E-06	1.7E-06	1.5E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06
556	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.4E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06
557	1.4E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
558	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
559	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
560	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
567	1.9E-06	2.0E-06	2.0E-06	1.9E-06	1.7E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
568	1.6E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06
569	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.3E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06
570	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
571	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06
572	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	9.7E-07	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
573	2.0E-06	2.1E-06	2.1E-06	2.0E-06	1.8E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06
574	1.7E-06	1.7E-06	1.8E-06	1.7E-06	1.5E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06
575	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.3E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06
576	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
577	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
578	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	9.6E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06
579	2.1E-06	2.2E-06	2.2E-06	2.1E-06	1.9E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06
580	1.7E-06	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06
581	1.5E-06	1.5E-06	1.6E-06	1.5E-06	1.4E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06
582	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06
583	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	9.9E-07	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
584	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	9.4E-07	9.7E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06
585	2.2E-06	2.2E-06	2.3E-06	2.2E-06	2.0E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
586	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.6E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
587	1.5E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
588	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06
589	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	9.8E-07	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
590	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	9.3E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
591	2.2E-06	2.3E-06	2.3E-06	2.3E-06	2.0E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06
592	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.6E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
593	1.5E-06	1.5E-06	1.6E-06	1.5E-06	1.4E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
594	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06
595	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	9.8E-07	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
596	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	9.3E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
597	2.2E-06	2.3E-06	2.3E-06	2.2E-06	2.0E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
598	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.6E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
599	1.5E-06	1.5E-06	1.6E-06	1.5E-06	1.4E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
600	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06
601	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	9.9E-07	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
602	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	9.4E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
603	2.1E-06	2.1E-06	2.2E-06	2.1E-06	1.9E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06
604	1.7E-06	1.7E-06	1.8E-06	1.7E-06	1.6E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
605	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.3E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
606	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
607	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	9.5E-07	9.7E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06
608	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.2E-07	9.4E-07	9.7E-07	9.8E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06
609	2.7E-06	2.8E-06	2.8E-06	2.6E-06	2.4E-06	2.1E-06	2.2E-06	2.2E-06	2.3E-06	2.3E-06	2.3E-06	2.3E-06	2.3E-06
610	3.0E-06	3.1E-06	3.1E-06	3.0E-06	2.8E-06	2.4E-06	2.5E-06	2.6E-06	2.6E-06	2.6E-06	2.7E-06	2.7E-06	2.7E-06
611	3.3E-06	3.4E-06	3.5E-06	3.4E-06	3.3E-06	2.8E-06	2.9E-06	3.0E-06	3.0E-06	3.1E-06	3.1E-06	3.1E-06	3.1E-06
612	3.6E-06	3.7E-06	3.8E-06	3.8E-06	3.6E-06	3.1E-06	3.3E-06	3.4E-06	3.4E-06	3.4E-06	3.4E-06	3.4E-06	3.4E-06
613	3.4E-06	3.6E-06	3.6E-06	3.6E-06	3.5E-06	2.9E-06	3.0E-06	3.2E-06	3.2E-06	3.2E-06	3.2E-06	3.2E-06	3.2E-06
614	3.0E-06	3.1E-06	3.2E-06	3.1E-06	3.0E-06	2.4E-06	2.5E-06	2.6E-06	2.6E-06	2.6E-06	2.6E-06	2.6E-06	2.6E-06
615	2.6E-06	2.7E-06	2.7E-06	2.7E-06	2.5E-06	1.9E-06	1.9E-06	2.0E-06	2.0E-06	2.0E-06	2.1E-06	2.1E-06	2.1E-06
616	2.2E-06	2.3E-06	2.3E-06	2.3E-06	2.1E-06	1.5E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06
617	1.9E-06	2.0E-06	2.0E-06	2.0E-06	1.8E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06
618	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.5E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
619	1.4E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
620	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	9.9E-07	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
622	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.1E-07	9.3E-07	9.6E-07	9.7E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06
623	2.6E-06	2.6E-06	2.6E-06	2.4E-06	2.2E-06	1.9E-06	2.0E-06	2.1E-06	2.1E-06	2.1E-06	2.1E-06	2.1E-06	2.1E-06
624	2.6E-06	2.7E-06	2.7E-06	2.6E-06	2.4E-06	2.1E-06	2.2E-06	2.3E-06	2.3E-06	2.3E-06	2.3E-06	2.3E-06	2.3E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
625	2.8E-06	2.9E-06	3.0E-06	2.8E-06	2.7E-06	2.4E-06	2.4E-06	2.5E-06	2.6E-06	2.6E-06	2.6E-06	2.6E-06	2.6E-06
626	2.9E-06	3.0E-06	3.1E-06	3.0E-06	2.9E-06	2.5E-06	2.6E-06	2.7E-06	2.7E-06	2.8E-06	2.8E-06	2.8E-06	2.8E-06
627	2.9E-06	3.0E-06	3.1E-06	3.0E-06	2.9E-06	2.5E-06	2.6E-06	2.7E-06	2.7E-06	2.7E-06	2.7E-06	2.7E-06	2.7E-06
628	2.7E-06	2.8E-06	2.8E-06	2.8E-06	2.6E-06	2.2E-06	2.3E-06	2.4E-06	2.4E-06	2.4E-06	2.4E-06	2.4E-06	2.4E-06
629	2.4E-06	2.5E-06	2.5E-06	2.5E-06	2.3E-06	1.8E-06	1.9E-06	2.0E-06	2.0E-06	2.0E-06	2.0E-06	2.0E-06	2.0E-06
630	2.1E-06	2.2E-06	2.2E-06	2.1E-06	2.0E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06
631	1.8E-06	1.9E-06	1.9E-06	1.9E-06	1.7E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
632	1.6E-06	1.6E-06	1.7E-06	1.6E-06	1.5E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
633	1.4E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
634	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
636	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.3E-07	9.5E-07	9.8E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06
637	2.4E-06	2.5E-06	2.5E-06	2.1E-06	1.9E-06	1.7E-06	1.8E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06
638	2.4E-06	2.4E-06	2.5E-06	2.2E-06	2.1E-06	1.9E-06	1.9E-06	2.0E-06	2.0E-06	2.0E-06	2.0E-06	2.0E-06	2.1E-06
639	2.4E-06	2.5E-06	2.5E-06	2.4E-06	2.3E-06	2.0E-06	2.1E-06	2.2E-06	2.2E-06	2.2E-06	2.2E-06	2.2E-06	2.2E-06
640	2.5E-06	2.6E-06	2.6E-06	2.5E-06	2.4E-06	2.1E-06	2.2E-06	2.2E-06	2.3E-06	2.3E-06	2.3E-06	2.3E-06	2.3E-06
641	2.4E-06	2.5E-06	2.6E-06	2.5E-06	2.4E-06	2.1E-06	2.1E-06	2.2E-06	2.2E-06	2.2E-06	2.3E-06	2.3E-06	2.3E-06
642	2.3E-06	2.4E-06	2.4E-06	2.4E-06	2.3E-06	1.9E-06	2.0E-06	2.1E-06	2.1E-06	2.1E-06	2.1E-06	2.1E-06	2.1E-06
643	2.1E-06	2.2E-06	2.2E-06	2.2E-06	2.0E-06	1.7E-06	1.7E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.9E-06	1.9E-06
644	1.9E-06	2.0E-06	2.0E-06	1.9E-06	1.8E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06
645	1.7E-06	1.7E-06	1.8E-06	1.7E-06	1.6E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
646	1.5E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
647	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06
648	1.2E-06	1.2E-06	1.3E-06	1.2E-06	1.1E-06	9.7E-07	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
650	2.3E-06	2.4E-06	2.4E-06	1.9E-06	1.8E-06	1.6E-06	1.7E-06	1.7E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06
651	2.2E-06	2.3E-06	2.3E-06	2.0E-06	1.9E-06	1.7E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.9E-06	1.9E-06	1.9E-06
652	2.2E-06	2.2E-06	2.3E-06	2.1E-06	2.0E-06	1.8E-06	1.8E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06
653	2.2E-06	2.2E-06	2.3E-06	2.1E-06	2.0E-06	1.8E-06	1.9E-06	1.9E-06	1.9E-06	2.0E-06	2.0E-06	2.0E-06	2.0E-06
654	2.1E-06	2.2E-06	2.2E-06	2.2E-06	2.0E-06	1.8E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06	2.0E-06	2.0E-06	2.0E-06
655	2.1E-06	2.1E-06	2.2E-06	2.1E-06	2.0E-06	1.7E-06	1.8E-06	1.8E-06	1.8E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06
656	1.9E-06	2.0E-06	2.0E-06	1.9E-06	1.8E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06
657	1.7E-06	1.8E-06	1.8E-06	1.8E-06	1.7E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
658	1.6E-06	1.6E-06	1.7E-06	1.6E-06	1.5E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
659	1.4E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
660	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
661	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	9.4E-07	9.7E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
663	2.3E-06	2.3E-06	2.3E-06	1.8E-06	1.7E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
664	2.1E-06	2.1E-06	2.1E-06	1.8E-06	1.7E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06
665	2.0E-06	2.1E-06	2.1E-06	1.9E-06	1.8E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06
666	1.9E-06	2.0E-06	2.0E-06	1.9E-06	1.8E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06
667	1.9E-06	2.0E-06	2.0E-06	1.9E-06	1.8E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.8E-06	1.8E-06	1.8E-06
668	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.8E-06	1.5E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06
669	1.7E-06	1.8E-06	1.8E-06	1.8E-06	1.7E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06
670	1.6E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06
671	1.5E-06	1.5E-06	1.6E-06	1.5E-06	1.4E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
672	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
673	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	9.9E-07	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
674	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	9.2E-07	9.4E-07	9.8E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06
675	2.2E-06	2.3E-06	2.3E-06	1.8E-06	1.6E-06	1.5E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06
676	2.0E-06	2.1E-06	2.1E-06	1.8E-06	1.6E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06
677	1.9E-06	2.0E-06	2.0E-06	1.8E-06	1.6E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06
678	1.8E-06	1.9E-06	1.9E-06	1.7E-06	1.6E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06
679	1.8E-06	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06
680	1.7E-06	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06
681	1.6E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
682	1.5E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
683	1.4E-06	1.4E-06	1.5E-06	1.4E-06	1.3E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06
684	2.1E-06	2.2E-06	2.1E-06	1.7E-06	1.5E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06
685	1.9E-06	1.9E-06	1.9E-06	1.6E-06	1.5E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
686	1.7E-06	1.8E-06	1.7E-06	1.5E-06	1.4E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
687	1.6E-06	1.7E-06	1.7E-06	1.5E-06	1.4E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
688	1.5E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
689	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06
690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
696	2.0E-06	2.1E-06	2.0E-06	1.6E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
697	1.7E-06	1.8E-06	1.8E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
698	1.5E-06	1.6E-06	1.6E-06	1.4E-06	1.3E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
699	1.4E-06	1.5E-06	1.5E-06	1.3E-06	1.2E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06
700	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
701	1.3E-06	1.3E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
702	2.0E-06	2.1E-06	2.0E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
703	1.7E-06	1.8E-06	1.7E-06	1.4E-06	1.3E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06
704	1.5E-06	1.5E-06	1.5E-06	1.3E-06	1.2E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06
705	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
706	1.3E-06	1.4E-06	1.4E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
707	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
708	2.0E-06	2.1E-06	2.0E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
709	1.7E-06	1.7E-06	1.7E-06	1.4E-06	1.3E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
710	1.5E-06	1.5E-06	1.5E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
711	1.3E-06	1.4E-06	1.4E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
712	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
713	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	9.9E-07	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
714	2.0E-06	2.1E-06	2.0E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
715	1.6E-06	1.7E-06	1.6E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
716	1.4E-06	1.5E-06	1.5E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
717	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
718	1.2E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	9.9E-07	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
719	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	9.5E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06
720	1.9E-06	2.0E-06	1.9E-06	1.5E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
721	1.6E-06	1.6E-06	1.6E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
722	1.4E-06	1.4E-06	1.4E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
723	1.3E-06	1.3E-06	1.3E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
724	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06
725	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.8E-07	9.2E-07	9.5E-07	9.8E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06
726	1.8E-06	1.9E-06	1.8E-06	1.4E-06	1.3E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06
727	1.5E-06	1.6E-06	1.5E-06	1.2E-06	1.2E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
728	1.3E-06	1.4E-06	1.4E-06	1.2E-06	1.1E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
729	1.2E-06	1.3E-06	1.3E-06	1.1E-06	1.0E-06	9.8E-07	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
730	1.1E-06	1.2E-06	1.2E-06	1.0E-06	9.8E-07	9.3E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
731	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.4E-07	8.9E-07	9.2E-07	9.5E-07	9.6E-07	9.7E-07	9.8E-07	9.8E-07	9.9E-07
732	9.5E-07	9.8E-07	9.9E-07	9.6E-07	9.5E-07	9.4E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
733	1.0E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
734	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
735	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
736	1.4E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
737	1.7E-06	1.7E-06	1.7E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
738	1.4E-06	1.5E-06	1.5E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
739	1.3E-06	1.3E-06	1.3E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
740	1.2E-06	1.2E-06	1.2E-06	1.1E-06	9.9E-07	9.5E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06
741	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.5E-07	9.0E-07	9.3E-07	9.6E-07	9.7E-07	9.8E-07	9.9E-07	1.0E-06	1.0E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
742	1.0E-06	1.1E-06	1.1E-06	9.6E-07	9.1E-07	8.7E-07	8.9E-07	9.2E-07	9.3E-07	9.4E-07	9.5E-07	9.6E-07	9.6E-07
743	9.0E-07	9.4E-07	9.4E-07	9.1E-07	9.0E-07	8.9E-07	9.0E-07	9.3E-07	9.4E-07	9.5E-07	9.6E-07	9.7E-07	9.7E-07
744	9.7E-07	1.0E-06	1.0E-06	9.7E-07	9.5E-07	9.4E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
745	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
746	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06
747	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
762	8.8E-07	9.1E-07	9.1E-07	8.8E-07	8.7E-07	8.6E-07	8.7E-07	9.0E-07	9.1E-07	9.2E-07	9.3E-07	9.3E-07	9.4E-07
763	9.4E-07	9.7E-07	9.7E-07	9.3E-07	9.2E-07	9.1E-07	9.3E-07	9.6E-07	9.6E-07	9.7E-07	9.8E-07	9.9E-07	9.9E-07
764	1.0E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	9.9E-07	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
765	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
766	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
767	1.5E-06	1.5E-06	1.5E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
768	1.6E-06	1.6E-06	1.6E-06	1.4E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
769	1.6E-06	1.6E-06	1.6E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
770	1.6E-06	1.7E-06	1.6E-06	1.3E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
771	1.6E-06	1.7E-06	1.6E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
772	1.6E-06	1.7E-06	1.6E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
773	1.6E-06	1.7E-06	1.6E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
774	1.5E-06	1.6E-06	1.5E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06
775	1.4E-06	1.4E-06	1.4E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
776	1.3E-06	1.3E-06	1.3E-06	1.1E-06	1.0E-06	9.7E-07	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
777	1.2E-06	1.2E-06	1.2E-06	1.0E-06	9.6E-07	9.3E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
778	1.1E-06	1.1E-06	1.1E-06	9.7E-07	9.2E-07	8.9E-07	9.1E-07	9.5E-07	9.5E-07	9.6E-07	9.7E-07	9.8E-07	9.8E-07
779	1.0E-06	1.0E-06	1.0E-06	9.3E-07	8.8E-07	8.5E-07	8.7E-07	9.0E-07	9.1E-07	9.2E-07	9.3E-07	9.3E-07	9.4E-07
780	9.6E-07	9.9E-07	9.9E-07	9.0E-07	8.5E-07	8.2E-07	8.4E-07	8.7E-07	8.8E-07	8.9E-07	8.9E-07	9.0E-07	9.0E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
781	8.6E-07	8.9E-07	9.0E-07	8.7E-07	8.5E-07	8.4E-07	8.6E-07	8.8E-07	8.9E-07	9.0E-07	9.1E-07	9.1E-07	9.1E-07
782	9.1E-07	9.5E-07	9.5E-07	9.1E-07	8.9E-07	8.9E-07	9.0E-07	9.3E-07	9.4E-07	9.5E-07	9.5E-07	9.6E-07	9.6E-07
783	1.0E-06	1.0E-06	1.0E-06	9.9E-07	9.7E-07	9.7E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
784	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
785	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
786	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06
787	1.4E-06	1.5E-06	1.5E-06	1.3E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06
788	1.4E-06	1.5E-06	1.4E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
789	1.4E-06	1.5E-06	1.4E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06
790	1.4E-06	1.5E-06	1.4E-06	1.1E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
791	1.4E-06	1.5E-06	1.4E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
792	1.4E-06	1.4E-06	1.4E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
793	1.4E-06	1.4E-06	1.3E-06	1.1E-06	1.0E-06	9.9E-07	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
794	1.3E-06	1.3E-06	1.3E-06	1.1E-06	9.7E-07	9.5E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
795	1.2E-06	1.2E-06	1.2E-06	1.0E-06	9.5E-07	9.2E-07	9.5E-07	9.9E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06
796	1.1E-06	1.1E-06	1.1E-06	9.8E-07	9.2E-07	8.9E-07	9.2E-07	9.5E-07	9.6E-07	9.7E-07	9.8E-07	9.8E-07	9.8E-07
797	1.0E-06	1.1E-06	1.1E-06	9.4E-07	8.8E-07	8.5E-07	8.8E-07	9.1E-07	9.2E-07	9.3E-07	9.3E-07	9.4E-07	9.4E-07
798	9.8E-07	1.0E-06	1.0E-06	9.0E-07	8.5E-07	8.2E-07	8.4E-07	8.7E-07	8.8E-07	8.9E-07	9.0E-07	9.0E-07	9.1E-07
799	9.0E-07	9.3E-07	9.3E-07	9.0E-07	8.8E-07	8.7E-07	8.9E-07	9.2E-07	9.2E-07	9.3E-07	9.4E-07	9.4E-07	9.5E-07
800	9.9E-07	1.0E-06	1.0E-06	9.8E-07	9.6E-07	9.6E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
801	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
802	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
803	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
804	1.3E-06	1.4E-06	1.4E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
805	1.3E-06	1.3E-06	1.3E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06
806	1.3E-06	1.3E-06	1.3E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
807	1.3E-06	1.3E-06	1.2E-06	1.0E-06	9.7E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
808	1.3E-06	1.3E-06	1.2E-06	1.0E-06	9.6E-07	9.5E-07	9.7E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
809	1.3E-06	1.3E-06	1.2E-06	1.0E-06	9.5E-07	9.4E-07	9.7E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
810	1.2E-06	1.3E-06	1.2E-06	1.0E-06	9.4E-07	9.2E-07	9.5E-07	9.8E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06
811	1.2E-06	1.2E-06	1.2E-06	9.9E-07	9.2E-07	9.0E-07	9.3E-07	9.6E-07	9.6E-07	9.7E-07	9.8E-07	9.9E-07	9.9E-07
812	1.1E-06	1.1E-06	1.1E-06	9.6E-07	9.0E-07	8.8E-07	9.0E-07	9.3E-07	9.4E-07	9.5E-07	9.6E-07	9.6E-07	9.7E-07
813	1.0E-06	1.1E-06	1.1E-06	9.3E-07	8.8E-07	8.5E-07	8.8E-07	9.1E-07	9.1E-07	9.2E-07	9.3E-07	9.4E-07	9.4E-07
814	9.9E-07	1.0E-06	1.0E-06	9.0E-07	8.5E-07	8.2E-07	8.4E-07	8.7E-07	8.8E-07	8.9E-07	9.0E-07	9.0E-07	9.1E-07
815	9.4E-07	9.7E-07	9.6E-07	8.7E-07	8.2E-07	7.9E-07	8.1E-07	8.4E-07	8.5E-07	8.6E-07	8.7E-07	8.7E-07	8.8E-07
816	9.8E-07	1.0E-06	1.0E-06	9.8E-07	9.6E-07	9.6E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
817	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
818	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
819	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
820	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
821	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
822	1.1E-06	1.2E-06	1.1E-06	1.0E-06	9.5E-07	9.4E-07	9.6E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
823	1.1E-06	1.2E-06	1.1E-06	9.8E-07	9.2E-07	9.1E-07	9.3E-07	9.6E-07	9.7E-07	9.8E-07	9.8E-07	9.9E-07	9.9E-07
824	1.1E-06	1.2E-06	1.1E-06	9.7E-07	9.0E-07	8.9E-07	9.2E-07	9.5E-07	9.5E-07	9.6E-07	9.7E-07	9.7E-07	9.8E-07
825	1.1E-06	1.2E-06	1.1E-06	9.6E-07	9.0E-07	8.9E-07	9.1E-07	9.4E-07	9.5E-07	9.6E-07	9.6E-07	9.7E-07	9.7E-07
826	1.1E-06	1.2E-06	1.1E-06	9.5E-07	8.9E-07	8.7E-07	9.0E-07	9.3E-07	9.3E-07	9.4E-07	9.5E-07	9.6E-07	9.6E-07
827	1.1E-06	1.1E-06	1.1E-06	9.3E-07	8.7E-07	8.5E-07	8.8E-07	9.1E-07	9.1E-07	9.2E-07	9.3E-07	9.4E-07	9.4E-07
828	1.0E-06	1.1E-06	1.1E-06	9.1E-07	8.6E-07	8.4E-07	8.6E-07	8.9E-07	9.0E-07	9.1E-07	9.2E-07	9.2E-07	9.2E-07
829	9.9E-07	1.0E-06	1.0E-06	8.9E-07	8.4E-07	8.2E-07	8.4E-07	8.7E-07	8.7E-07	8.8E-07	8.9E-07	9.0E-07	9.0E-07
830	9.4E-07	9.8E-07	9.7E-07	8.6E-07	8.2E-07	7.9E-07	8.1E-07	8.4E-07	8.5E-07	8.6E-07	8.6E-07	8.7E-07	8.7E-07
831	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
832	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
833	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
834	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.7E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
835	1.1E-06	1.1E-06	1.1E-06	9.5E-07	9.0E-07	8.9E-07	9.1E-07	9.5E-07	9.5E-07	9.6E-07	9.7E-07	9.7E-07	9.7E-07
836	1.0E-06	1.1E-06	1.1E-06	9.2E-07	8.7E-07	8.6E-07	8.8E-07	9.1E-07	9.2E-07	9.3E-07	9.3E-07	9.4E-07	9.4E-07
837	1.0E-06	1.1E-06	1.1E-06	9.1E-07	8.6E-07	8.5E-07	8.7E-07	9.0E-07	9.0E-07	9.1E-07	9.2E-07	9.2E-07	9.3E-07
838	1.0E-06	1.1E-06	1.0E-06	9.1E-07	8.5E-07	8.4E-07	8.6E-07	8.9E-07	9.0E-07	9.0E-07	9.1E-07	9.2E-07	9.2E-07
839	1.0E-06	1.1E-06	1.0E-06	9.0E-07	8.4E-07	8.3E-07	8.5E-07	8.8E-07	8.8E-07	8.9E-07	9.0E-07	9.0E-07	9.1E-07
840	1.0E-06	1.0E-06	1.0E-06	8.8E-07	8.3E-07	8.1E-07	8.3E-07	8.6E-07	8.7E-07	8.8E-07	8.8E-07	8.9E-07	8.9E-07
841	9.7E-07	1.0E-06	9.9E-07	8.7E-07	8.2E-07	8.0E-07	8.2E-07	8.5E-07	8.6E-07	8.6E-07	8.7E-07	8.8E-07	8.8E-07
842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
854	2.3E-07	2.2E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
894	2.7E-07	2.6E-07	2.3E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
897	2.3E-07	2.2E-07	2.0E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
912	1.5E-07	1.5E-07	1.3E-07	8.4E-08	3.5E-08	3.4E-09	-6.0E-08	-1.2E-07	-6.9E-08	-2.4E-08	1.2E-08	3.8E-08	5.1E-08
913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
914	1.7E-07	1.7E-07	1.5E-07	1.0E-07	5.1E-08	1.9E-08	-4.4E-08	-1.0E-07	-5.2E-08	-7.3E-09	2.8E-08	5.4E-08	6.7E-08
915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
916	1.9E-07	1.9E-07	1.7E-07	1.2E-07	6.9E-08	3.6E-08	-2.4E-08	-8.0E-08	-3.2E-08	1.2E-08	4.7E-08	7.3E-08	8.5E-08
917	2.2E-07	2.2E-07	2.0E-07	1.6E-07	1.1E-07	7.8E-08	2.4E-08	-2.5E-08	1.2E-08	4.8E-08	7.6E-08	9.7E-08	1.1E-07
918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
919	2.1E-07	2.1E-07	1.9E-07	1.4E-07	8.7E-08	5.5E-08	-3.7E-09	-5.8E-08	-1.0E-08	3.4E-08	6.8E-08	9.3E-08	1.1E-07
920	2.3E-07	2.3E-07	2.1E-07	1.7E-07	1.2E-07	9.1E-08	3.8E-08	-1.0E-08	2.7E-08	6.3E-08	9.1E-08	1.1E-07	1.2E-07
921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
922	2.3E-07	2.4E-07	2.1E-07	1.6E-07	1.1E-07	7.4E-08	1.7E-08	-3.5E-08	1.2E-08	5.5E-08	8.9E-08	1.1E-07	1.3E-07
923	2.5E-07	2.5E-07	2.3E-07	1.8E-07	1.3E-07	1.0E-07	5.3E-08	5.9E-09	4.3E-08	7.8E-08	1.1E-07	1.3E-07	1.4E-07
924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
925	2.6E-07	2.6E-07	2.3E-07	1.8E-07	1.2E-07	9.2E-08	3.7E-08	-1.3E-08	3.3E-08	7.6E-08	1.1E-07	1.3E-07	1.5E-07
926	2.7E-07	2.7E-07	2.5E-07	2.0E-07	1.5E-07	1.2E-07	6.7E-08	2.2E-08	5.8E-08	9.3E-08	1.2E-07	1.4E-07	1.5E-07
927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
928	2.8E-07	2.8E-07	2.6E-07	2.0E-07	1.4E-07	1.1E-07	5.6E-08	8.1E-09	5.4E-08	9.6E-08	1.3E-07	1.5E-07	1.7E-07
929	2.9E-07	2.9E-07	2.7E-07	2.2E-07	1.6E-07	1.3E-07	8.2E-08	3.7E-08	7.4E-08	1.1E-07	1.4E-07	1.6E-07	1.7E-07
930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
931	3.0E-07	3.0E-07	2.8E-07	2.2E-07	1.6E-07	1.3E-07	7.4E-08	2.8E-08	7.2E-08	1.1E-07	1.5E-07	1.7E-07	1.8E-07
932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
934	3.3E-07	3.3E-07	3.0E-07	2.4E-07	1.8E-07	1.4E-07	9.1E-08	4.6E-08	9.0E-08	1.3E-07	1.6E-07	1.9E-07	2.0E-07
935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
938	-1.0E-07	-1.2E-07	-1.6E-07	-2.1E-07	-2.7E-07	-3.2E-07	-4.5E-07	-5.8E-07	-5.4E-07	-5.1E-07	-4.8E-07	-4.6E-07	-4.5E-07
939	-7.4E-09	-2.2E-08	-4.9E-08	-9.2E-08	-1.4E-07	-1.8E-07	-2.8E-07	-3.8E-07	-3.4E-07	-3.1E-07	-2.9E-07	-2.7E-07	-2.6E-07
940	-1.5E-09	-1.3E-08	-3.9E-08	-8.0E-08	-1.2E-07	-1.6E-07	-2.5E-07	-3.4E-07	-3.0E-07	-2.7E-07	-2.4E-07	-2.2E-07	-2.1E-07
941	2.8E-08	2.0E-08	-8.7E-10	-3.7E-08	-7.6E-08	-1.1E-07	-1.8E-07	-2.6E-07	-2.1E-07	-1.8E-07	-1.5E-07	-1.2E-07	-1.1E-07
942	1.0E-08	5.1E-10	-2.2E-08	-6.1E-08	-1.0E-07	-1.4E-07	-2.2E-07	-3.0E-07	-2.5E-07	-2.1E-07	-1.8E-07	-1.6E-07	-1.5E-07
943	-3.9E-09	-1.5E-08	-3.9E-08	-8.0E-08	-1.2E-07	-1.6E-07	-2.5E-07	-3.3E-07	-2.8E-07	-2.4E-07	-2.1E-07	-1.9E-07	-1.7E-07
944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
947	4.4E-08	3.9E-08	2.1E-08	-1.4E-08	-5.1E-08	-8.0E-08	-1.4E-07	-2.1E-07	-1.6E-07	-1.1E-07	-7.7E-08	-5.3E-08	-4.0E-08
948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
949	5.1E-08	4.6E-08	2.7E-08	-7.7E-09	-4.6E-08	-7.5E-08	-1.4E-07	-2.0E-07	-1.5E-07	-1.1E-07	-7.6E-08	-5.2E-08	-3.9E-08
950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
951	5.9E-08	5.4E-08	3.5E-08	-1.2E-09	-4.0E-08	-7.0E-08	-1.4E-07	-2.0E-07	-1.5E-07	-1.1E-07	-7.5E-08	-5.0E-08	-3.8E-08
952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
953	6.8E-08	6.3E-08	4.3E-08	6.1E-09	-3.4E-08	-6.4E-08	-1.3E-07	-1.9E-07	-1.5E-07	-1.0E-07	-7.1E-08	-4.7E-08	-3.5E-08
954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
955	7.7E-08	7.3E-08	5.2E-08	1.5E-08	-2.6E-08	-5.6E-08	-1.2E-07	-1.9E-07	-1.4E-07	-9.8E-08	-6.6E-08	-4.2E-08	-3.0E-08
956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
961	1.3E-07	1.2E-07	1.1E-07	7.1E-08	3.2E-08	4.6E-09	-5.5E-08	-1.1E-07	-7.3E-08	-3.9E-08	-1.2E-08	8.4E-09	1.8E-08
962	1.4E-07	1.4E-07	1.2E-07	8.1E-08	4.2E-08	1.4E-08	-4.4E-08	-9.8E-08	-6.2E-08	-2.8E-08	-6.4E-10	1.9E-08	2.9E-08
963	1.5E-07	1.5E-07	1.3E-07	9.2E-08	5.2E-08	2.4E-08	-3.4E-08	-8.7E-08	-5.0E-08	-1.6E-08	1.1E-08	3.1E-08	4.1E-08
964	2.7E-07	2.7E-07	2.6E-07	2.4E-07	2.1E-07	1.5E-07	8.2E-08	1.2E-08	2.7E-08	4.1E-08	5.2E-08	6.1E-08	6.5E-08
965	2.5E-07	2.5E-07	2.4E-07	2.2E-07	1.9E-07	1.4E-07	7.9E-08	1.7E-08	3.1E-08	4.5E-08	5.6E-08	6.5E-08	6.9E-08
966	2.3E-07	2.3E-07	2.2E-07	2.0E-07	1.8E-07	1.3E-07	7.5E-08	2.0E-08	3.5E-08	4.9E-08	6.1E-08	6.9E-08	7.4E-08
967	2.1E-07	2.1E-07	2.0E-07	1.8E-07	1.6E-07	1.2E-07	7.1E-08	2.3E-08	3.9E-08	5.4E-08	6.5E-08	7.4E-08	7.8E-08
968	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.4E-07	1.1E-07	6.8E-08	2.5E-08	4.2E-08	5.8E-08	7.0E-08	8.0E-08	8.4E-08
969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
970	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.2E-07	9.7E-08	6.1E-08	2.7E-08	4.9E-08	6.9E-08	8.4E-08	9.5E-08	1.0E-07
971	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.2E-07	9.8E-08	6.4E-08	3.2E-08	5.3E-08	7.2E-08	8.7E-08	9.8E-08	1.0E-07
972	1.6E-07	1.7E-07	1.6E-07	1.4E-07	1.3E-07	1.0E-07	7.3E-08	4.4E-08	6.2E-08	7.8E-08	9.1E-08	1.0E-07	1.1E-07
973	3.2E-07	3.2E-07	3.1E-07	2.8E-07	2.5E-07	1.8E-07	9.4E-08	7.6E-09	2.3E-08	3.7E-08	4.8E-08	5.7E-08	6.1E-08
974	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.3E-07	1.7E-07	8.9E-08	1.2E-08	2.7E-08	4.1E-08	5.3E-08	6.1E-08	6.6E-08
975	2.5E-07	2.6E-07	2.5E-07	2.3E-07	2.0E-07	1.5E-07	8.1E-08	1.6E-08	3.1E-08	4.6E-08	5.7E-08	6.6E-08	7.0E-08

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
976	2.3E-07	2.3E-07	2.2E-07	2.0E-07	1.8E-07	1.3E-07	7.5E-08	1.9E-08	3.5E-08	5.0E-08	6.2E-08	7.1E-08	7.5E-08
977	2.1E-07	2.1E-07	2.0E-07	1.8E-07	1.6E-07	1.2E-07	7.0E-08	2.2E-08	3.9E-08	5.5E-08	6.7E-08	7.7E-08	8.1E-08
978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
979	1.7E-07	1.8E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	6.6E-08	2.9E-08	4.9E-08	6.6E-08	8.0E-08	9.0E-08	9.5E-08
980	1.7E-07	1.7E-07	1.6E-07	1.4E-07	1.2E-07	9.9E-08	6.3E-08	2.8E-08	4.9E-08	6.9E-08	8.4E-08	9.4E-08	1.0E-07
981	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.3E-07	1.0E-07	7.1E-08	4.0E-08	5.8E-08	7.5E-08	8.8E-08	9.8E-08	1.0E-07
982	1.6E-07	1.7E-07	1.6E-07	1.4E-07	1.3E-07	1.1E-07	7.6E-08	4.8E-08	6.5E-08	8.1E-08	9.3E-08	1.0E-07	1.1E-07
983	3.5E-07	3.5E-07	3.4E-07	3.2E-07	2.9E-07	2.1E-07	1.1E-07	7.4E-09	2.3E-08	3.7E-08	4.9E-08	5.8E-08	6.2E-08
984	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.4E-07	1.7E-07	9.0E-08	1.1E-08	2.7E-08	4.2E-08	5.3E-08	6.2E-08	6.7E-08
985	2.5E-07	2.5E-07	2.4E-07	2.2E-07	2.0E-07	1.5E-07	8.0E-08	1.5E-08	3.1E-08	4.6E-08	5.8E-08	6.7E-08	7.2E-08
986	2.2E-07	2.2E-07	2.2E-07	2.0E-07	1.7E-07	1.3E-07	7.3E-08	1.7E-08	3.5E-08	5.1E-08	6.4E-08	7.3E-08	7.8E-08
987	2.0E-07	2.0E-07	1.9E-07	1.7E-07	1.5E-07	1.2E-07	6.5E-08	1.7E-08	3.7E-08	5.5E-08	6.9E-08	8.0E-08	8.5E-08
988	1.8E-07	1.8E-07	1.8E-07	1.6E-07	1.4E-07	1.1E-07	6.5E-08	2.5E-08	4.5E-08	6.3E-08	7.7E-08	8.7E-08	9.2E-08
989	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	6.1E-08	2.4E-08	4.6E-08	6.5E-08	8.0E-08	9.1E-08	9.7E-08
990	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	7.0E-08	3.7E-08	5.5E-08	7.2E-08	8.5E-08	9.5E-08	1.0E-07
991	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.3E-07	1.1E-07	7.4E-08	4.5E-08	6.2E-08	7.8E-08	9.0E-08	1.0E-07	1.0E-07
992	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.2E-07	1.0E-07	7.6E-08	4.9E-08	6.7E-08	8.2E-08	9.5E-08	1.0E-07	1.1E-07
993	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.3E-07	1.7E-07	8.7E-08	1.0E-08	2.6E-08	4.2E-08	5.4E-08	6.4E-08	6.8E-08
994	2.4E-07	2.5E-07	2.4E-07	2.2E-07	1.9E-07	1.4E-07	7.6E-08	1.3E-08	3.0E-08	4.7E-08	6.0E-08	7.0E-08	7.4E-08
995	2.1E-07	2.1E-07	2.0E-07	1.8E-07	1.6E-07	1.2E-07	6.6E-08	1.3E-08	3.3E-08	5.1E-08	6.6E-08	7.6E-08	8.2E-08
996	1.9E-07	1.9E-07	1.8E-07	1.6E-07	1.4E-07	1.1E-07	6.3E-08	2.0E-08	4.0E-08	5.8E-08	7.3E-08	8.4E-08	8.9E-08
997	1.7E-07	1.8E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	5.9E-08	1.9E-08	4.1E-08	6.1E-08	7.7E-08	8.8E-08	9.4E-08
998	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	6.8E-08	3.3E-08	5.2E-08	6.9E-08	8.2E-08	9.2E-08	9.7E-08
999	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.3E-07	1.0E-07	7.2E-08	4.1E-08	5.9E-08	7.5E-08	8.8E-08	9.7E-08	1.0E-07
1000	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.2E-07	1.0E-07	7.3E-08	4.5E-08	6.3E-08	8.0E-08	9.3E-08	1.0E-07	1.1E-07
1001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1002	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.4E-07	1.1E-07	6.1E-08	1.5E-08	3.6E-08	5.5E-08	7.0E-08	8.0E-08	8.6E-08
1003	1.8E-07	1.8E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	5.6E-08	1.5E-08	3.7E-08	5.8E-08	7.4E-08	8.5E-08	9.1E-08
1004	1.7E-07	1.8E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	6.5E-08	2.9E-08	4.8E-08	6.6E-08	8.0E-08	9.0E-08	9.5E-08
1005	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.3E-07	1.0E-07	6.9E-08	3.8E-08	5.6E-08	7.2E-08	8.6E-08	9.5E-08	1.0E-07
1006	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.2E-07	1.0E-07	7.1E-08	4.3E-08	6.1E-08	7.8E-08	9.1E-08	1.0E-07	1.1E-07
1007	1.9E-07	1.9E-07	1.8E-07	1.6E-07	1.4E-07	1.1E-07	5.8E-08	1.1E-08	3.2E-08	5.1E-08	6.6E-08	7.7E-08	8.3E-08
1008	1.8E-07	1.8E-07	1.7E-07	1.5E-07	1.3E-07	9.8E-08	5.3E-08	9.8E-09	3.3E-08	5.4E-08	7.0E-08	8.2E-08	8.8E-08
1009	1.8E-07	1.8E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	6.2E-08	2.5E-08	4.4E-08	6.2E-08	7.7E-08	8.7E-08	9.2E-08
1010	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.3E-07	1.0E-07	6.7E-08	3.4E-08	5.2E-08	7.0E-08	8.3E-08	9.3E-08	9.8E-08
1011	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.2E-07	9.9E-08	6.8E-08	3.9E-08	5.8E-08	7.5E-08	8.9E-08	9.9E-08	1.0E-07
1012	1.9E-07	1.9E-07	1.8E-07	1.6E-07	1.4E-07	1.0E-07	5.4E-08	6.0E-09	2.7E-08	4.7E-08	6.2E-08	7.3E-08	7.9E-08
1013	1.8E-07	1.8E-07	1.7E-07	1.5E-07	1.3E-07	9.6E-08	4.9E-08	4.5E-09	2.8E-08	5.0E-08	6.6E-08	7.8E-08	8.4E-08
1014	1.7E-07	1.8E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	5.9E-08	2.0E-08	4.0E-08	5.9E-08	7.3E-08	8.4E-08	8.9E-08

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1015	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.2E-07	1.0E-07	6.4E-08	2.9E-08	4.9E-08	6.7E-08	8.1E-08	9.1E-08	9.6E-08
1016	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.2E-07	9.7E-08	6.4E-08	3.4E-08	5.4E-08	7.2E-08	8.7E-08	9.7E-08	1.0E-07
1017	1.8E-07	1.8E-07	1.8E-07	1.5E-07	1.3E-07	9.6E-08	4.6E-08	-2.3E-09	2.0E-08	4.1E-08	5.7E-08	6.8E-08	7.4E-08
1018	1.8E-07	1.8E-07	1.7E-07	1.5E-07	1.2E-07	9.2E-08	4.4E-08	-8.8E-10	2.3E-08	4.4E-08	6.1E-08	7.3E-08	7.9E-08
1019	1.7E-07	1.7E-07	1.6E-07	1.4E-07	1.2E-07	9.3E-08	5.1E-08	1.2E-08	3.3E-08	5.3E-08	6.9E-08	8.0E-08	8.6E-08
1020	1.7E-07	1.7E-07	1.6E-07	1.4E-07	1.2E-07	9.4E-08	5.7E-08	2.2E-08	4.3E-08	6.2E-08	7.7E-08	8.8E-08	9.3E-08
1021	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.2E-07	9.3E-08	6.0E-08	2.9E-08	5.0E-08	6.9E-08	8.4E-08	9.5E-08	1.0E-07
1022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1023	1.7E-07	1.7E-07	1.6E-07	1.4E-07	1.2E-07	8.4E-08	3.6E-08	-9.7E-09	1.5E-08	3.8E-08	5.6E-08	6.9E-08	7.5E-08
1024	1.7E-07	1.7E-07	1.6E-07	1.4E-07	1.2E-07	8.7E-08	4.5E-08	4.2E-09	2.7E-08	4.8E-08	6.5E-08	7.7E-08	8.3E-08
1025	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.1E-07	8.9E-08	5.1E-08	1.5E-08	3.8E-08	5.8E-08	7.4E-08	8.5E-08	9.1E-08
1026	1.6E-07	1.6E-07	1.5E-07	1.3E-07	1.1E-07	8.9E-08	5.5E-08	2.3E-08	4.5E-08	6.6E-08	8.2E-08	9.4E-08	9.9E-08
1027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1028	1.6E-07	1.6E-07	1.5E-07	1.3E-07	1.1E-07	7.7E-08	2.7E-08	-2.0E-08	7.8E-09	3.2E-08	5.1E-08	6.5E-08	7.2E-08
1029	1.6E-07	1.6E-07	1.5E-07	1.3E-07	1.1E-07	8.1E-08	3.7E-08	-4.4E-09	2.1E-08	4.3E-08	6.1E-08	7.4E-08	8.1E-08
1030	1.6E-07	1.6E-07	1.5E-07	1.3E-07	1.1E-07	8.3E-08	4.4E-08	7.6E-09	3.2E-08	5.4E-08	7.1E-08	8.4E-08	9.0E-08
1031	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.1E-07	8.3E-08	4.8E-08	1.5E-08	4.0E-08	6.3E-08	8.0E-08	9.3E-08	9.9E-08
1032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1033	1.6E-07	1.6E-07	1.5E-07	1.2E-07	9.9E-08	6.7E-08	1.6E-08	-3.2E-08	-6.8E-10	2.7E-08	4.9E-08	6.4E-08	7.2E-08
1034	1.5E-07	1.5E-07	1.4E-07	1.2E-07	1.0E-07	7.2E-08	2.7E-08	-1.6E-08	1.3E-08	3.9E-08	5.9E-08	7.3E-08	8.0E-08
1035	1.5E-07	1.5E-07	1.4E-07	1.2E-07	1.0E-07	7.5E-08	3.5E-08	-2.9E-09	2.5E-08	5.0E-08	7.0E-08	8.4E-08	9.1E-08
1036	1.4E-07	1.5E-07	1.4E-07	1.2E-07	9.6E-08	7.4E-08	3.8E-08	4.6E-09	3.3E-08	5.9E-08	7.9E-08	9.3E-08	1.0E-07
1037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1042	1.5E-07	1.5E-07	1.4E-07	1.2E-07	8.9E-08	5.7E-08	1.2E-09	-5.2E-08	-2.0E-08	8.2E-09	3.0E-08	4.6E-08	5.4E-08
1043	1.5E-07	1.5E-07	1.4E-07	1.2E-07	9.1E-08	6.3E-08	1.3E-08	-3.4E-08	-5.7E-09	2.0E-08	4.0E-08	5.5E-08	6.2E-08
1044	1.4E-07	1.4E-07	1.3E-07	1.1E-07	8.4E-08	5.8E-08	1.4E-08	-2.7E-08	7.0E-09	3.7E-08	6.0E-08	7.7E-08	8.5E-08
1045	1.4E-07	1.4E-07	1.3E-07	1.0E-07	7.7E-08	4.5E-08	-1.3E-08	-6.8E-08	-3.2E-08	-3.1E-10	2.4E-08	4.2E-08	5.1E-08
1046	1.4E-07	1.4E-07	1.3E-07	1.0E-07	7.7E-08	4.8E-08	-3.1E-09	-5.2E-08	-1.7E-08	1.3E-08	3.7E-08	5.4E-08	6.3E-08
1047	-8.2E-08	-1.0E-07	-1.4E-07	-1.9E-07	-2.4E-07	-2.9E-07	-4.3E-07	-5.6E-07	-5.3E-07	-4.9E-07	-4.7E-07	-4.5E-07	-4.4E-07
1048	-1.1E-08	-2.6E-08	-5.4E-08	-9.9E-08	-1.5E-07	-1.9E-07	-3.0E-07	-4.0E-07	-3.7E-07	-3.4E-07	-3.1E-07	-3.0E-07	-2.9E-07
1049	3.9E-08	2.6E-08	3.6E-10	-4.1E-08	-8.4E-08	-1.3E-07	-2.3E-07	-3.3E-07	-3.0E-07	-2.7E-07	-2.5E-07	-2.3E-07	-2.3E-07
1050	6.2E-08	5.2E-08	3.0E-08	-8.0E-09	-4.9E-08	-8.8E-08	-1.8E-07	-2.6E-07	-2.4E-07	-2.1E-07	-1.9E-07	-1.7E-07	-1.6E-07
1051	8.6E-08	7.9E-08	5.9E-08	2.5E-08	-1.2E-08	-4.7E-08	-1.2E-07	-2.0E-07	-1.7E-07	-1.4E-07	-1.2E-07	-1.1E-07	-9.8E-08
1052	2.3E-08	9.9E-09	-1.6E-08	-5.8E-08	-1.0E-07	-1.4E-07	-2.5E-07	-3.5E-07	-3.2E-07	-2.9E-07	-2.6E-07	-2.5E-07	-2.4E-07
1053	5.9E-08	5.0E-08	2.7E-08	-1.0E-08	-5.0E-08	-8.7E-08	-1.7E-07	-2.6E-07	-2.3E-07	-2.0E-07	-1.8E-07	-1.6E-07	-1.5E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1054	8.2E-08	7.5E-08	5.6E-08	2.2E-08	-1.4E-08	-4.7E-08	-1.2E-07	-1.9E-07	-1.6E-07	-1.3E-07	-1.1E-07	-9.0E-08	-8.2E-08
1055	8.4E-08	7.9E-08	6.3E-08	3.2E-08	-1.1E-09	-3.1E-08	-9.3E-08	-1.5E-07	-1.2E-07	-8.4E-08	-5.9E-08	-4.1E-08	-3.1E-08
1056	5.6E-08	4.8E-08	2.6E-08	-1.0E-08	-5.0E-08	-8.5E-08	-1.7E-07	-2.4E-07	-2.1E-07	-1.8E-07	-1.6E-07	-1.4E-07	-1.3E-07
1057	6.6E-08	6.0E-08	4.2E-08	8.6E-09	-2.7E-08	-5.8E-08	-1.3E-07	-1.9E-07	-1.5E-07	-1.2E-07	-9.4E-08	-7.5E-08	-6.6E-08
1058	4.3E-08	3.5E-08	1.4E-08	-2.1E-08	-6.0E-08	-9.3E-08	-1.7E-07	-2.4E-07	-2.0E-07	-1.7E-07	-1.4E-07	-1.2E-07	-1.1E-07
1059	5.2E-08	4.7E-08	2.9E-08	-3.2E-09	-3.8E-08	-6.8E-08	-1.3E-07	-1.9E-07	-1.5E-07	-1.1E-07	-8.5E-08	-6.3E-08	-5.2E-08
1060	1.4E-07	1.4E-07	1.3E-07	1.1E-07	8.1E-08	5.5E-08	8.8E-09	-3.4E-08	-3.1E-09	2.5E-08	4.7E-08	6.2E-08	7.0E-08
1061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1062	1.5E-07	1.5E-07	1.3E-07	1.1E-07	7.6E-08	4.3E-08	-1.8E-08	-7.6E-08	-4.8E-08	-2.3E-08	-2.4E-09	1.2E-08	2.0E-08
1063	1.4E-07	1.4E-07	1.3E-07	1.1E-07	7.8E-08	4.8E-08	-6.5E-09	-5.8E-08	-3.0E-08	-4.6E-09	1.5E-08	3.0E-08	3.7E-08
1064	1.4E-07	1.4E-07	1.3E-07	1.1E-07	7.9E-08	5.2E-08	3.8E-09	-4.2E-08	-1.3E-08	1.3E-08	3.3E-08	4.8E-08	5.5E-08
1065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1066	1.4E-07	1.4E-07	1.2E-07	9.7E-08	6.6E-08	3.2E-08	-3.3E-08	-9.4E-08	-6.7E-08	-4.3E-08	-2.3E-08	-9.0E-09	-1.8E-09
1067	1.4E-07	1.4E-07	1.3E-07	1.0E-07	7.0E-08	4.0E-08	-1.8E-08	-7.3E-08	-4.6E-08	-2.1E-08	-1.9E-09	1.2E-08	1.9E-08
1068	1.4E-07	1.4E-07	1.3E-07	1.0E-07	7.3E-08	4.6E-08	-5.4E-09	-5.4E-08	-2.6E-08	-1.2E-09	1.9E-08	3.3E-08	4.0E-08
1069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1070	1.3E-07	1.3E-07	1.1E-07	8.1E-08	4.8E-08	1.3E-08	-5.6E-08	-1.2E-07	-9.5E-08	-7.1E-08	-5.2E-08	-3.7E-08	-3.0E-08
1071	1.4E-07	1.3E-07	1.2E-07	9.0E-08	5.9E-08	2.8E-08	-3.3E-08	-9.1E-08	-6.5E-08	-4.1E-08	-2.2E-08	-7.6E-09	-4.7E-10
1072	1.4E-07	1.3E-07	1.2E-07	9.4E-08	6.5E-08	3.6E-08	-1.8E-08	-6.9E-08	-4.2E-08	-1.7E-08	2.2E-09	1.7E-08	2.4E-08
1073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1074	1.2E-07	1.1E-07	9.3E-08	6.2E-08	2.7E-08	-8.8E-09	-8.3E-08	-1.5E-07	-1.3E-07	-1.0E-07	-8.4E-08	-6.9E-08	-6.2E-08
1075	1.3E-07	1.2E-07	1.1E-07	7.7E-08	4.5E-08	1.2E-08	-5.3E-08	-1.1E-07	-8.9E-08	-6.4E-08	-4.5E-08	-3.1E-08	-2.4E-08
1076	1.3E-07	1.3E-07	1.1E-07	8.4E-08	5.3E-08	2.4E-08	-3.4E-08	-8.8E-08	-6.1E-08	-3.7E-08	-1.7E-08	-2.4E-09	4.8E-09
1077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1078	9.9E-08	9.1E-08	7.2E-08	3.8E-08	9.6E-10	-3.6E-08	-1.2E-07	-1.9E-07	-1.7E-07	-1.4E-07	-1.2E-07	-1.1E-07	-1.0E-07
1079	1.1E-07	1.1E-07	9.1E-08	6.0E-08	2.5E-08	-8.4E-09	-7.9E-08	-1.5E-07	-1.2E-07	-9.4E-08	-7.4E-08	-6.0E-08	-5.3E-08
1080	1.2E-07	1.2E-07	1.0E-07	7.1E-08	4.0E-08	8.9E-09	-5.3E-08	-1.1E-07	-8.4E-08	-5.9E-08	-3.9E-08	-2.4E-08	-1.6E-08
1081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1097	1.3E-07	1.3E-07	1.2E-07	9.7E-08	7.1E-08	4.6E-08	-1.8E-10	-4.3E-08	-1.3E-08	1.4E-08	3.5E-08	5.0E-08	5.7E-08
1098	1.3E-07	1.3E-07	1.2E-07	9.2E-08	6.4E-08	3.8E-08	-1.0E-08	-5.6E-08	-2.6E-08	6.9E-10	2.2E-08	3.7E-08	4.5E-08
1099	1.2E-07	1.2E-07	1.1E-07	8.4E-08	5.5E-08	2.8E-08	-2.3E-08	-7.1E-08	-4.1E-08	-1.4E-08	7.0E-09	2.2E-08	3.0E-08
1100	1.2E-07	1.2E-07	1.0E-07	7.4E-08	4.4E-08	1.6E-08	-3.9E-08	-9.0E-08	-6.0E-08	-3.2E-08	-1.1E-08	5.3E-09	1.3E-08
1101	1.1E-07	1.1E-07	9.0E-08	6.1E-08	2.9E-08	5.6E-10	-5.8E-08	-1.1E-07	-8.3E-08	-5.4E-08	-3.2E-08	-1.6E-08	-7.7E-09
1102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1110	9.2E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	9.7E-07	9.4E-07	9.7E-07	9.7E-07	9.8E-07	9.8E-07	9.8E-07	9.8E-07
1111	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
1112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1120	2.7E-07	2.6E-07	2.2E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
1121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1122	2.6E-07	2.4E-07	2.1E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07
1123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1124	2.7E-07	2.5E-07	2.2E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07
1125	2.5E-07	2.3E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
1126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1127	2.6E-07	2.4E-07	2.1E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
1128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1129	2.3E-07	2.2E-07	1.9E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
1130	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07
1131	1.9E-07	1.8E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1132	1.8E-07	1.8E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
1133	1.8E-07	1.7E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1144	1.7E-06	1.8E-06	1.8E-06	1.7E-06	1.7E-06	1.6E-06	1.6E-06	1.6E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06
1145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1167	4.1E-07	4.2E-07	3.8E-07	3.0E-07	2.1E-07	1.7E-07	1.2E-07	8.3E-08	1.3E-07	1.8E-07	2.1E-07	2.4E-07	2.5E-07
1168	4.9E-07	5.0E-07	4.5E-07	3.5E-07	2.4E-07	2.0E-07	1.5E-07	1.1E-07	1.6E-07	2.0E-07	2.4E-07	2.6E-07	2.8E-07
1169	4.4E-07	4.4E-07	4.1E-07	3.3E-07	2.4E-07	2.0E-07	1.6E-07	1.2E-07	1.5E-07	1.9E-07	2.1E-07	2.3E-07	2.4E-07
1170	5.8E-07	5.9E-07	5.3E-07	4.0E-07	2.6E-07	2.1E-07	1.7E-07	1.3E-07	1.8E-07	2.2E-07	2.5E-07	2.8E-07	2.9E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1171	5.0E-07	5.1E-07	4.6E-07	3.7E-07	2.7E-07	2.2E-07	1.8E-07	1.5E-07	1.8E-07	2.1E-07	2.4E-07	2.6E-07	2.7E-07
1172	4.4E-07	4.4E-07	4.1E-07	3.4E-07	2.6E-07	2.2E-07	1.9E-07	1.6E-07	1.8E-07	2.1E-07	2.3E-07	2.5E-07	2.5E-07
1173	5.6E-07	5.7E-07	5.2E-07	4.1E-07	2.9E-07	2.5E-07	2.1E-07	1.8E-07	2.1E-07	2.4E-07	2.7E-07	2.9E-07	3.0E-07
1174	4.8E-07	4.9E-07	4.5E-07	3.7E-07	2.9E-07	2.5E-07	2.2E-07	1.9E-07	2.2E-07	2.4E-07	2.7E-07	2.8E-07	2.9E-07
1175	6.0E-07	6.1E-07	5.6E-07	4.4E-07	3.1E-07	2.7E-07	2.3E-07	2.0E-07	2.3E-07	2.7E-07	2.9E-07	3.1E-07	3.2E-07
1176	5.2E-07	5.2E-07	4.9E-07	4.1E-07	3.2E-07	2.8E-07	2.5E-07	2.3E-07	2.5E-07	2.8E-07	3.0E-07	3.2E-07	3.3E-07
1177	6.5E-07	6.6E-07	6.1E-07	4.9E-07	3.7E-07	3.2E-07	2.9E-07	2.7E-07	3.0E-07	3.4E-07	3.7E-07	3.9E-07	4.0E-07
1178	5.7E-07	5.8E-07	5.5E-07	4.7E-07	3.8E-07	3.4E-07	3.2E-07	3.0E-07	3.3E-07	3.6E-07	3.8E-07	4.0E-07	4.1E-07
1179	5.2E-07	5.3E-07	5.1E-07	4.5E-07	3.8E-07	3.6E-07	3.4E-07	3.2E-07	3.5E-07	3.7E-07	4.0E-07	4.1E-07	4.2E-07
1180	7.0E-07	7.1E-07	6.7E-07	5.5E-07	4.2E-07	3.7E-07	3.5E-07	3.3E-07	3.7E-07	4.0E-07	4.3E-07	4.5E-07	4.6E-07
1181	6.2E-07	6.3E-07	6.0E-07	5.2E-07	4.3E-07	3.9E-07	3.8E-07	3.6E-07	3.9E-07	4.2E-07	4.4E-07	4.6E-07	4.7E-07
1182	5.6E-07	5.8E-07	5.6E-07	5.0E-07	4.3E-07	4.0E-07	3.9E-07	3.8E-07	4.0E-07	4.3E-07	4.5E-07	4.7E-07	4.7E-07
1183	7.7E-07	7.9E-07	7.5E-07	6.3E-07	5.1E-07	4.6E-07	4.5E-07	4.4E-07	4.7E-07	5.1E-07	5.4E-07	5.6E-07	5.7E-07
1184	6.8E-07	7.0E-07	6.8E-07	6.0E-07	5.1E-07	4.7E-07	4.6E-07	4.6E-07	4.9E-07	5.2E-07	5.4E-07	5.6E-07	5.7E-07
1185	8.7E-07	8.9E-07	8.6E-07	7.4E-07	6.2E-07	5.7E-07	5.7E-07	5.8E-07	6.1E-07	6.5E-07	6.8E-07	7.0E-07	7.1E-07
1186	7.6E-07	7.9E-07	7.7E-07	6.9E-07	6.0E-07	5.6E-07	5.6E-07	5.6E-07	5.9E-07	6.2E-07	6.5E-07	6.7E-07	6.7E-07
1187	9.8E-07	1.0E-06	9.8E-07	8.7E-07	7.5E-07	7.0E-07	7.2E-07	7.4E-07	7.7E-07	8.1E-07	8.4E-07	8.6E-07	8.7E-07
1188	8.5E-07	8.8E-07	8.6E-07	7.8E-07	6.9E-07	6.6E-07	6.6E-07	6.8E-07	7.0E-07	7.3E-07	7.6E-07	7.8E-07	7.9E-07
1189	1.1E-06	1.1E-06	1.1E-06	9.8E-07	8.7E-07	8.2E-07	8.4E-07	8.7E-07	9.1E-07	9.4E-07	9.7E-07	1.0E-06	1.0E-06
1190	3.5E-07	3.6E-07	3.3E-07	2.7E-07	2.1E-07	1.8E-07	1.4E-07	1.0E-07	1.3E-07	1.6E-07	1.8E-07	2.0E-07	2.0E-07
1191	3.6E-07	3.7E-07	3.4E-07	2.9E-07	2.3E-07	2.0E-07	1.6E-07	1.3E-07	1.5E-07	1.8E-07	1.9E-07	2.1E-07	2.2E-07
1192	3.6E-07	3.7E-07	3.5E-07	3.0E-07	2.4E-07	2.2E-07	1.9E-07	1.6E-07	1.8E-07	2.1E-07	2.2E-07	2.4E-07	2.4E-07
1193	4.0E-07	4.0E-07	3.8E-07	3.3E-07	2.7E-07	2.5E-07	2.2E-07	2.0E-07	2.2E-07	2.4E-07	2.6E-07	2.7E-07	2.8E-07
1194	4.3E-07	4.4E-07	4.2E-07	3.7E-07	3.1E-07	2.8E-07	2.6E-07	2.4E-07	2.6E-07	2.9E-07	3.0E-07	3.2E-07	3.3E-07
1195	4.1E-07	4.2E-07	4.1E-07	3.7E-07	3.2E-07	3.0E-07	2.8E-07	2.7E-07	2.9E-07	3.1E-07	3.3E-07	3.4E-07	3.5E-07
1196	4.6E-07	4.7E-07	4.6E-07	4.2E-07	3.7E-07	3.5E-07	3.3E-07	3.2E-07	3.5E-07	3.7E-07	3.9E-07	4.0E-07	4.1E-07
1197	4.9E-07	5.1E-07	5.0E-07	4.6E-07	4.1E-07	3.9E-07	3.8E-07	3.7E-07	3.9E-07	4.2E-07	4.3E-07	4.5E-07	4.5E-07
1198	4.5E-07	4.7E-07	4.6E-07	4.3E-07	4.0E-07	3.8E-07	3.7E-07	3.7E-07	3.8E-07	4.0E-07	4.2E-07	4.3E-07	4.4E-07
1199	5.3E-07	5.5E-07	5.4E-07	5.1E-07	4.6E-07	4.4E-07	4.3E-07	4.3E-07	4.5E-07	4.7E-07	4.9E-07	5.1E-07	5.1E-07
1200	4.9E-07	5.0E-07	5.0E-07	4.7E-07	4.3E-07	4.2E-07	4.1E-07	4.1E-07	4.2E-07	4.4E-07	4.6E-07	4.7E-07	4.8E-07
1201	6.4E-07	6.6E-07	6.5E-07	6.1E-07	5.5E-07	5.3E-07	5.3E-07	5.3E-07	5.5E-07	5.7E-07	5.9E-07	6.1E-07	6.2E-07
1202	5.8E-07	6.0E-07	5.9E-07	5.6E-07	5.1E-07	4.9E-07	4.9E-07	4.9E-07	5.1E-07	5.3E-07	5.5E-07	5.7E-07	5.7E-07
1203	5.2E-07	5.4E-07	5.4E-07	5.1E-07	4.7E-07	4.6E-07	4.5E-07	4.5E-07	4.7E-07	4.9E-07	5.1E-07	5.2E-07	5.3E-07
1204	7.1E-07	7.3E-07	7.3E-07	6.8E-07	6.3E-07	6.0E-07	6.1E-07	6.2E-07	6.4E-07	6.6E-07	6.8E-07	7.0E-07	7.0E-07
1205	6.3E-07	6.5E-07	6.5E-07	6.1E-07	5.7E-07	5.5E-07	5.5E-07	5.5E-07	5.7E-07	5.9E-07	6.1E-07	6.3E-07	6.3E-07
1206	5.6E-07	5.8E-07	5.8E-07	5.5E-07	5.2E-07	5.0E-07	5.0E-07	5.0E-07	5.2E-07	5.4E-07	5.6E-07	5.7E-07	5.7E-07
1207	7.7E-07	8.0E-07	7.9E-07	7.5E-07	6.9E-07	6.7E-07	6.7E-07	6.9E-07	7.1E-07	7.3E-07	7.5E-07	7.7E-07	7.8E-07
1208	6.8E-07	7.0E-07	7.0E-07	6.6E-07	6.2E-07	6.0E-07	6.0E-07	6.1E-07	6.3E-07	6.5E-07	6.7E-07	6.8E-07	6.9E-07
1209	6.0E-07	6.2E-07	6.2E-07	5.9E-07	5.6E-07	5.4E-07	5.4E-07	5.5E-07	5.6E-07	5.8E-07	6.0E-07	6.1E-07	6.2E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1210	9.4E-07	9.7E-07	9.6E-07	9.0E-07	8.2E-07	7.9E-07	8.0E-07	8.3E-07	8.5E-07	8.8E-07	9.0E-07	9.2E-07	9.3E-07
1211	8.3E-07	8.6E-07	8.5E-07	8.1E-07	7.5E-07	7.2E-07	7.3E-07	7.5E-07	7.7E-07	7.9E-07	8.1E-07	8.3E-07	8.4E-07
1212	7.2E-07	7.5E-07	7.5E-07	7.1E-07	6.7E-07	6.4E-07	6.5E-07	6.6E-07	6.8E-07	7.0E-07	7.2E-07	7.3E-07	7.4E-07
1213	6.4E-07	6.6E-07	6.6E-07	6.3E-07	5.9E-07	5.7E-07	5.8E-07	5.9E-07	6.0E-07	6.2E-07	6.4E-07	6.5E-07	6.6E-07
1214	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	9.6E-07	9.8E-07	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
1215	1.0E-06	1.0E-06	1.0E-06	9.7E-07	9.0E-07	8.7E-07	8.8E-07	9.1E-07	9.3E-07	9.6E-07	9.8E-07	1.0E-06	1.0E-06
1216	8.8E-07	9.1E-07	9.1E-07	8.6E-07	8.0E-07	7.7E-07	7.8E-07	8.0E-07	8.2E-07	8.4E-07	8.7E-07	8.8E-07	8.9E-07
1217	7.7E-07	8.0E-07	8.0E-07	7.6E-07	7.1E-07	6.9E-07	6.9E-07	7.1E-07	7.2E-07	7.5E-07	7.6E-07	7.8E-07	7.9E-07
1218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1219	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
1220	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.7E-07	9.3E-07	9.5E-07	9.8E-07	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06
1221	9.3E-07	9.6E-07	9.6E-07	9.1E-07	8.6E-07	8.2E-07	8.3E-07	8.5E-07	8.7E-07	9.0E-07	9.2E-07	9.3E-07	9.4E-07
1222	8.1E-07	8.4E-07	8.4E-07	8.0E-07	7.6E-07	7.3E-07	7.4E-07	7.5E-07	7.7E-07	7.9E-07	8.1E-07	8.2E-07	8.3E-07
1223	7.1E-07	7.3E-07	7.3E-07	7.0E-07	6.6E-07	6.4E-07	6.5E-07	6.5E-07	6.7E-07	6.9E-07	7.1E-07	7.2E-07	7.3E-07
1224	1.5E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06
1225	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
1226	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
1227	9.7E-07	1.0E-06	1.0E-06	9.6E-07	9.1E-07	8.7E-07	8.8E-07	9.0E-07	9.2E-07	9.4E-07	9.7E-07	9.8E-07	9.9E-07
1228	8.5E-07	8.8E-07	8.8E-07	8.5E-07	8.0E-07	7.7E-07	7.8E-07	7.9E-07	8.1E-07	8.3E-07	8.5E-07	8.6E-07	8.7E-07
1229	7.4E-07	7.7E-07	7.7E-07	7.4E-07	7.0E-07	6.8E-07	6.8E-07	6.9E-07	7.0E-07	7.2E-07	7.4E-07	7.5E-07	7.6E-07
1230	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.7E-06
1231	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06
1232	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06
1233	1.0E-06	1.1E-06	1.1E-06	1.0E-06	9.6E-07	9.2E-07	9.4E-07	9.5E-07	9.7E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06
1234	8.9E-07	9.2E-07	9.2E-07	8.8E-07	8.4E-07	8.1E-07	8.1E-07	8.2E-07	8.4E-07	8.6E-07	8.8E-07	9.0E-07	9.0E-07
1235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1236	1.6E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06
1237	1.4E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06
1238	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06
1239	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.7E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06
1240	9.1E-07	9.4E-07	9.5E-07	9.1E-07	8.6E-07	8.3E-07	8.3E-07	8.5E-07	8.6E-07	8.8E-07	9.0E-07	9.2E-07	9.3E-07
1241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1242	1.7E-06	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.8E-06
1243	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
1244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1245	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
1246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1248	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.8E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.8E-06	1.8E-06	1.9E-06	1.9E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1249	1.6E-06	1.6E-06	1.7E-06	1.6E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06
1250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1251	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06
1252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1254	2.0E-06	2.1E-06	2.1E-06	2.0E-06	1.9E-06	1.8E-06	1.8E-06	1.8E-06	1.9E-06	1.9E-06	1.9E-06	2.0E-06	2.0E-06
1255	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06
1256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1257	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
1258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1260	2.1E-06	2.2E-06	2.2E-06	2.1E-06	2.0E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06	2.0E-06	2.0E-06	2.0E-06	2.0E-06
1261	1.7E-06	1.8E-06	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06
1262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1266	1.8E-06	1.8E-06	1.9E-06	1.8E-06	1.7E-06	1.7E-06	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06
1267	1.5E-06	1.6E-06	1.6E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06
1268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1280	1.6E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
1281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1282	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06
1283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1293	1.8E-06	1.8E-06	1.9E-06	1.8E-06	1.7E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06
1294	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
1295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1297	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.6E-06	1.6E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06
1298	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
1299	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
1300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1304	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
1305	1.2E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06
1306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1309	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
1310	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
1311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1312	1.9E-06	1.9E-06	2.0E-06	1.9E-06	1.8E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06	1.7E-06
1313	1.6E-06	1.7E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
1314	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06
1315	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
1316	1.0E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	9.5E-07	9.4E-07	9.4E-07	9.5E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06
1317	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06
1318	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06
1319	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06
1320	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
1321	9.9E-07	1.0E-06	1.0E-06	1.0E-06	9.5E-07	9.1E-07	9.1E-07	9.1E-07	9.1E-07	9.4E-07	9.6E-07	9.7E-07	9.8E-07
1322	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.4E-06	1.4E-06
1323	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
1324	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06
1325	9.6E-07	9.9E-07	1.0E-06	9.7E-07	9.3E-07	8.8E-07	8.8E-07	8.8E-07	8.9E-07	9.2E-07	9.4E-07	9.5E-07	9.6E-07
1326	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1327	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06
1328	2.8E-07	2.8E-07	2.6E-07	2.2E-07	1.7E-07	1.4E-07	1.0E-07	6.1E-08	9.0E-08	1.2E-07	1.4E-07	1.6E-07	1.6E-07
1329	3.0E-07	3.1E-07	2.9E-07	2.4E-07	1.9E-07	1.6E-07	1.2E-07	8.0E-08	1.1E-07	1.4E-07	1.6E-07	1.7E-07	1.8E-07
1330	2.9E-07	2.9E-07	2.8E-07	2.4E-07	1.9E-07	1.6E-07	1.3E-07	9.7E-08	1.2E-07	1.4E-07	1.6E-07	1.8E-07	1.8E-07
1331	3.2E-07	3.2E-07	3.0E-07	2.5E-07	2.0E-07	1.8E-07	1.4E-07	1.1E-07	1.3E-07	1.5E-07	1.7E-07	1.9E-07	1.9E-07
1332	3.0E-07	3.0E-07	2.9E-07	2.5E-07	2.0E-07	1.8E-07	1.5E-07	1.2E-07	1.4E-07	1.6E-07	1.8E-07	1.9E-07	1.9E-07
1333	3.3E-07	3.3E-07	3.1E-07	2.7E-07	2.2E-07	1.9E-07	1.6E-07	1.4E-07	1.5E-07	1.8E-07	1.9E-07	2.1E-07	2.1E-07
1334	3.0E-07	3.1E-07	3.0E-07	2.6E-07	2.2E-07	1.9E-07	1.7E-07	1.5E-07	1.6E-07	1.8E-07	2.0E-07	2.1E-07	2.2E-07
1335	3.3E-07	3.4E-07	3.3E-07	2.9E-07	2.4E-07	2.2E-07	2.0E-07	1.8E-07	1.9E-07	2.1E-07	2.3E-07	2.4E-07	2.5E-07
1336	3.6E-07	3.7E-07	3.6E-07	3.1E-07	2.7E-07	2.5E-07	2.2E-07	2.1E-07	2.2E-07	2.4E-07	2.6E-07	2.7E-07	2.8E-07
1337	8.3E-07	8.6E-07	8.7E-07	8.6E-07	8.6E-07	8.5E-07	8.6E-07	8.8E-07	8.9E-07	9.1E-07	9.2E-07	9.2E-07	9.3E-07
1338	8.3E-07	8.7E-07	8.7E-07	8.5E-07	8.4E-07	8.3E-07	8.5E-07	8.7E-07	8.8E-07	8.9E-07	9.0E-07	9.1E-07	9.1E-07
1339	8.2E-07	8.6E-07	8.7E-07	8.6E-07	8.5E-07	8.4E-07	8.5E-07	8.8E-07	8.9E-07	9.0E-07	9.1E-07	9.1E-07	9.2E-07
1340	8.1E-07	8.4E-07	8.4E-07	8.2E-07	8.1E-07	8.0E-07	8.1E-07	8.4E-07	8.5E-07	8.6E-07	8.6E-07	8.7E-07	8.7E-07
1341	8.2E-07	8.5E-07	8.6E-07	8.4E-07	8.3E-07	8.2E-07	8.3E-07	8.6E-07	8.6E-07	8.7E-07	8.8E-07	8.8E-07	8.8E-07
1342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1343	9.1E-07	9.5E-07	9.7E-07	9.6E-07	9.5E-07	9.5E-07	9.6E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
1344	9.5E-07	9.9E-07	1.0E-06	9.8E-07	9.8E-07	9.7E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
1345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1360	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
1361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1365	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1407	4.8E-07	5.0E-07	5.1E-07	5.0E-07	5.0E-07	4.7E-07	4.5E-07	4.7E-07	4.7E-07	4.8E-07	4.8E-07	4.9E-07	4.9E-07
1408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1421	4.7E-07	4.9E-07	4.9E-07	4.9E-07	4.8E-07	4.6E-07	4.4E-07	4.5E-07	4.6E-07	4.6E-07	4.7E-07	4.7E-07	4.8E-07
1422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1487	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
1488	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
1489	9.6E-07	9.9E-07	1.0E-06	9.8E-07	9.4E-07	9.0E-07	9.2E-07	9.4E-07	9.6E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06
1490	8.7E-07	9.0E-07	9.2E-07	9.0E-07	8.6E-07	8.3E-07	8.4E-07	8.6E-07	8.8E-07	9.0E-07	9.2E-07	9.3E-07	9.4E-07
1491	8.0E-07	8.3E-07	8.5E-07	8.3E-07	8.0E-07	7.7E-07	7.8E-07	8.0E-07	8.2E-07	8.4E-07	8.6E-07	8.7E-07	8.7E-07
1492	1.1E-06	1.1E-06	1.2E-06	1.1E-06	1.1E-06	9.9E-07	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
1493	1.0E-06	1.0E-06	1.1E-06	1.0E-06	9.7E-07	9.2E-07	9.4E-07	9.7E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.1E-06
1494	9.3E-07	9.6E-07	9.8E-07	9.5E-07	9.1E-07	8.7E-07	8.9E-07	9.1E-07	9.3E-07	9.5E-07	9.7E-07	9.8E-07	9.9E-07
1495	8.4E-07	8.7E-07	8.8E-07	8.6E-07	8.2E-07	7.9E-07	8.0E-07	8.2E-07	8.4E-07	8.6E-07	8.8E-07	8.9E-07	9.0E-07
1496	7.7E-07	8.0E-07	8.1E-07	7.9E-07	7.6E-07	7.3E-07	7.4E-07	7.6E-07	7.8E-07	8.0E-07	8.2E-07	8.3E-07	8.3E-07
1497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1502	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.2E-07	9.4E-07	9.7E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06
1503	9.8E-07	1.0E-06	1.0E-06	9.9E-07	9.4E-07	8.8E-07	9.0E-07	9.3E-07	9.4E-07	9.6E-07	9.7E-07	9.8E-07	9.9E-07
1504	9.0E-07	9.3E-07	9.5E-07	9.2E-07	8.8E-07	8.4E-07	8.6E-07	8.8E-07	8.9E-07	9.1E-07	9.3E-07	9.4E-07	9.4E-07
1505	8.0E-07	8.3E-07	8.4E-07	8.2E-07	7.8E-07	7.4E-07	7.6E-07	7.8E-07	7.9E-07	8.1E-07	8.3E-07	8.4E-07	8.4E-07
1506	7.3E-07	7.5E-07	7.6E-07	7.4E-07	7.1E-07	6.8E-07	6.9E-07	7.1E-07	7.3E-07	7.5E-07	7.6E-07	7.7E-07	7.8E-07
1507	1.1E-06	1.1E-06	1.1E-06	1.1E-06	9.9E-07	9.0E-07	9.2E-07	9.5E-07	9.6E-07	9.8E-07	9.9E-07	1.0E-06	1.0E-06
1508	9.6E-07	9.9E-07	1.0E-06	9.8E-07	9.2E-07	8.6E-07	8.8E-07	9.1E-07	9.2E-07	9.3E-07	9.5E-07	9.6E-07	9.6E-07
1509	8.9E-07	9.2E-07	9.3E-07	9.1E-07	8.6E-07	8.2E-07	8.4E-07	8.6E-07	8.7E-07	8.9E-07	9.0E-07	9.1E-07	9.1E-07
1510	7.9E-07	8.1E-07	8.3E-07	8.0E-07	7.7E-07	7.3E-07	7.4E-07	7.7E-07	7.8E-07	7.9E-07	8.0E-07	8.1E-07	8.2E-07
1511	7.1E-07	7.4E-07	7.5E-07	7.3E-07	7.0E-07	6.7E-07	6.8E-07	7.0E-07	7.1E-07	7.3E-07	7.4E-07	7.5E-07	7.5E-07
1512	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.1E-07	9.3E-07	9.6E-07	9.7E-07	9.8E-07	9.9E-07	1.0E-06	1.0E-06
1513	9.6E-07	9.9E-07	1.0E-06	9.8E-07	9.3E-07	8.7E-07	8.9E-07	9.2E-07	9.2E-07	9.4E-07	9.5E-07	9.6E-07	9.6E-07
1514	8.7E-07	9.1E-07	9.2E-07	8.9E-07	8.5E-07	8.1E-07	8.3E-07	8.5E-07	8.6E-07	8.7E-07	8.9E-07	8.9E-07	9.0E-07
1515	7.8E-07	8.1E-07	8.2E-07	8.0E-07	7.6E-07	7.2E-07	7.4E-07	7.6E-07	7.7E-07	7.8E-07	8.0E-07	8.0E-07	8.1E-07
1516	7.1E-07	7.3E-07	7.4E-07	7.2E-07	6.9E-07	6.6E-07	6.8E-07	6.9E-07	7.0E-07	7.2E-07	7.3E-07	7.4E-07	7.5E-07
1517	1.0E-06	1.0E-06	1.1E-06	1.0E-06	9.7E-07	8.8E-07	9.0E-07	9.3E-07	9.4E-07	9.5E-07	9.6E-07	9.7E-07	9.7E-07
1518	9.2E-07	9.6E-07	9.7E-07	9.4E-07	8.9E-07	8.3E-07	8.5E-07	8.8E-07	8.8E-07	9.0E-07	9.1E-07	9.2E-07	9.2E-07
1519	8.5E-07	8.8E-07	8.9E-07	8.7E-07	8.3E-07	7.8E-07	8.0E-07	8.2E-07	8.3E-07	8.4E-07	8.5E-07	8.6E-07	8.7E-07
1520	7.5E-07	7.8E-07	7.9E-07	7.6E-07	7.3E-07	6.9E-07	7.1E-07	7.3E-07	7.4E-07	7.5E-07	7.6E-07	7.7E-07	7.7E-07
1521	6.8E-07	7.1E-07	7.2E-07	7.0E-07	6.7E-07	6.4E-07	6.5E-07	6.7E-07	6.8E-07	6.9E-07	7.0E-07	7.1E-07	7.2E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1522	9.7E-07	1.0E-06	1.0E-06	9.8E-07	9.3E-07	8.4E-07	8.6E-07	8.9E-07	9.0E-07	9.1E-07	9.2E-07	9.3E-07	9.3E-07
1523	8.8E-07	9.1E-07	9.2E-07	8.9E-07	8.4E-07	7.8E-07	8.0E-07	8.3E-07	8.4E-07	8.5E-07	8.6E-07	8.7E-07	8.7E-07
1524	8.0E-07	8.3E-07	8.4E-07	8.1E-07	7.7E-07	7.3E-07	7.5E-07	7.7E-07	7.8E-07	7.9E-07	8.0E-07	8.1E-07	8.1E-07
1525	7.2E-07	7.5E-07	7.6E-07	7.4E-07	7.0E-07	6.7E-07	6.8E-07	7.0E-07	7.1E-07	7.2E-07	7.3E-07	7.4E-07	7.5E-07
1526	6.7E-07	6.9E-07	7.0E-07	6.8E-07	6.5E-07	6.2E-07	6.3E-07	6.5E-07	6.6E-07	6.7E-07	6.9E-07	6.9E-07	7.0E-07
1527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1528	9.2E-07	9.5E-07	9.6E-07	9.3E-07	8.7E-07	7.9E-07	8.1E-07	8.4E-07	8.5E-07	8.6E-07	8.7E-07	8.8E-07	8.8E-07
1529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1531	6.9E-07	7.1E-07	7.2E-07	7.0E-07	6.7E-07	6.3E-07	6.4E-07	6.6E-07	6.7E-07	6.8E-07	6.9E-07	7.0E-07	7.1E-07
1532	6.4E-07	6.6E-07	6.7E-07	6.5E-07	6.2E-07	5.9E-07	6.0E-07	6.2E-07	6.3E-07	6.4E-07	6.5E-07	6.6E-07	6.6E-07
1533	1.3E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
1534	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	9.3E-07	9.6E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
1535	9.8E-07	1.0E-06	1.0E-06	9.9E-07	9.3E-07	8.3E-07	8.5E-07	8.8E-07	8.9E-07	9.0E-07	9.1E-07	9.2E-07	9.2E-07
1536	8.8E-07	9.1E-07	9.2E-07	8.8E-07	8.3E-07	7.6E-07	7.8E-07	8.0E-07	8.1E-07	8.2E-07	8.3E-07	8.4E-07	8.4E-07
1537	7.8E-07	8.1E-07	8.2E-07	7.9E-07	7.5E-07	6.9E-07	7.1E-07	7.3E-07	7.4E-07	7.5E-07	7.6E-07	7.7E-07	7.7E-07
1538	7.2E-07	7.4E-07	7.5E-07	7.2E-07	6.9E-07	6.5E-07	6.6E-07	6.8E-07	6.9E-07	7.0E-07	7.1E-07	7.2E-07	7.2E-07
1539	6.6E-07	6.9E-07	6.9E-07	6.7E-07	6.4E-07	6.0E-07	6.2E-07	6.4E-07	6.4E-07	6.6E-07	6.7E-07	6.7E-07	6.8E-07
1540	6.2E-07	6.4E-07	6.4E-07	6.2E-07	6.0E-07	5.7E-07	5.8E-07	6.0E-07	6.0E-07	6.2E-07	6.3E-07	6.3E-07	6.4E-07
1541	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
1542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1548	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.1E-07	9.4E-07	9.7E-07	9.8E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06
1549	9.6E-07	1.0E-06	1.0E-06	9.6E-07	9.1E-07	8.2E-07	8.5E-07	8.8E-07	8.8E-07	8.9E-07	9.0E-07	9.1E-07	9.1E-07
1550	8.7E-07	9.0E-07	9.1E-07	8.7E-07	8.2E-07	7.5E-07	7.7E-07	8.0E-07	8.0E-07	8.2E-07	8.2E-07	8.3E-07	8.4E-07
1551	7.9E-07	8.2E-07	8.3E-07	7.9E-07	7.5E-07	6.9E-07	7.1E-07	7.3E-07	7.4E-07	7.5E-07	7.6E-07	7.7E-07	7.7E-07
1552	7.2E-07	7.5E-07	7.6E-07	7.3E-07	6.9E-07	6.4E-07	6.6E-07	6.8E-07	6.8E-07	6.9E-07	7.0E-07	7.1E-07	7.1E-07
1553	6.7E-07	6.9E-07	7.0E-07	6.7E-07	6.4E-07	6.0E-07	6.1E-07	6.3E-07	6.4E-07	6.5E-07	6.6E-07	6.7E-07	6.7E-07
1554	9.9E-07	1.0E-06	1.0E-06	9.6E-07	9.2E-07	8.5E-07	8.7E-07	9.0E-07	9.1E-07	9.2E-07	9.3E-07	9.3E-07	9.4E-07
1555	8.9E-07	9.2E-07	9.3E-07	8.8E-07	8.4E-07	7.7E-07	7.9E-07	8.2E-07	8.2E-07	8.3E-07	8.4E-07	8.5E-07	8.5E-07
1556	8.2E-07	8.5E-07	8.5E-07	8.2E-07	7.7E-07	7.1E-07	7.3E-07	7.6E-07	7.6E-07	7.7E-07	7.8E-07	7.9E-07	7.9E-07
1557	7.5E-07	7.8E-07	7.8E-07	7.5E-07	7.1E-07	6.6E-07	6.8E-07	7.0E-07	7.1E-07	7.2E-07	7.3E-07	7.3E-07	7.4E-07
1558	6.9E-07	7.2E-07	7.2E-07	7.0E-07	6.6E-07	6.2E-07	6.3E-07	6.5E-07	6.6E-07	6.7E-07	6.8E-07	6.9E-07	6.9E-07
1559	9.2E-07	9.5E-07	9.6E-07	8.9E-07	8.5E-07	7.9E-07	8.1E-07	8.4E-07	8.5E-07	8.6E-07	8.7E-07	8.8E-07	8.8E-07
1560	8.3E-07	8.6E-07	8.7E-07	8.2E-07	7.8E-07	7.3E-07	7.5E-07	7.7E-07	7.8E-07	7.9E-07	8.0E-07	8.0E-07	8.1E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1561	7.7E-07	8.0E-07	8.1E-07	7.7E-07	7.3E-07	6.8E-07	7.0E-07	7.2E-07	7.3E-07	7.4E-07	7.4E-07	7.5E-07	7.5E-07
1562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1563	8.8E-07	9.1E-07	9.1E-07	8.4E-07	8.0E-07	7.6E-07	7.8E-07	8.1E-07	8.2E-07	8.3E-07	8.3E-07	8.4E-07	8.4E-07
1564	8.0E-07	8.3E-07	8.4E-07	7.8E-07	7.4E-07	7.0E-07	7.2E-07	7.5E-07	7.5E-07	7.6E-07	7.7E-07	7.8E-07	7.8E-07
1565	7.4E-07	7.7E-07	7.7E-07	7.3E-07	7.0E-07	6.6E-07	6.7E-07	7.0E-07	7.0E-07	7.1E-07	7.2E-07	7.3E-07	7.3E-07
1566	6.9E-07	7.2E-07	7.2E-07	6.9E-07	6.6E-07	6.2E-07	6.3E-07	6.5E-07	6.6E-07	6.7E-07	6.8E-07	6.8E-07	6.9E-07
1567	6.5E-07	6.7E-07	6.8E-07	6.5E-07	6.2E-07	5.8E-07	6.0E-07	6.1E-07	6.2E-07	6.3E-07	6.4E-07	6.5E-07	6.5E-07
1568	9.0E-07	9.3E-07	9.3E-07	8.3E-07	7.9E-07	7.6E-07	7.8E-07	8.1E-07	8.2E-07	8.3E-07	8.4E-07	8.4E-07	8.4E-07
1569	8.2E-07	8.5E-07	8.5E-07	7.8E-07	7.5E-07	7.2E-07	7.3E-07	7.6E-07	7.7E-07	7.8E-07	7.8E-07	7.9E-07	7.9E-07
1570	7.6E-07	7.8E-07	7.9E-07	7.3E-07	7.0E-07	6.6E-07	6.8E-07	7.0E-07	7.1E-07	7.2E-07	7.3E-07	7.3E-07	7.4E-07
1571	7.1E-07	7.3E-07	7.3E-07	6.9E-07	6.6E-07	6.3E-07	6.4E-07	6.6E-07	6.7E-07	6.8E-07	6.9E-07	6.9E-07	7.0E-07
1572	6.6E-07	6.8E-07	6.9E-07	6.5E-07	6.2E-07	5.9E-07	6.0E-07	6.2E-07	6.3E-07	6.4E-07	6.5E-07	6.5E-07	6.6E-07
1573	6.2E-07	6.4E-07	6.5E-07	6.2E-07	5.9E-07	5.6E-07	5.7E-07	5.9E-07	6.0E-07	6.1E-07	6.1E-07	6.2E-07	6.2E-07
1574	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
1575	1.1E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
1576	1.0E-06	1.1E-06	1.1E-06	9.7E-07	9.3E-07	9.3E-07	9.5E-07	9.8E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06
1577	9.7E-07	1.0E-06	9.8E-07	8.7E-07	8.3E-07	8.2E-07	8.4E-07	8.7E-07	8.7E-07	8.8E-07	8.9E-07	8.9E-07	9.0E-07
1578	9.7E-07	1.0E-06	9.8E-07	8.6E-07	8.1E-07	8.0E-07	8.2E-07	8.5E-07	8.5E-07	8.6E-07	8.7E-07	8.7E-07	8.8E-07
1579	9.4E-07	9.7E-07	9.5E-07	8.4E-07	7.9E-07	7.7E-07	7.9E-07	8.2E-07	8.3E-07	8.4E-07	8.4E-07	8.5E-07	8.5E-07
1580	8.9E-07	9.2E-07	9.1E-07	8.1E-07	7.7E-07	7.5E-07	7.7E-07	7.9E-07	8.0E-07	8.1E-07	8.2E-07	8.2E-07	8.2E-07
1581	8.3E-07	8.6E-07	8.5E-07	7.7E-07	7.4E-07	7.1E-07	7.3E-07	7.5E-07	7.6E-07	7.7E-07	7.8E-07	7.8E-07	7.8E-07
1582	7.7E-07	8.0E-07	8.0E-07	7.3E-07	7.0E-07	6.7E-07	6.9E-07	7.1E-07	7.2E-07	7.3E-07	7.3E-07	7.4E-07	7.4E-07
1583	7.1E-07	7.4E-07	7.4E-07	6.9E-07	6.6E-07	6.3E-07	6.5E-07	6.7E-07	6.7E-07	6.8E-07	6.9E-07	7.0E-07	7.0E-07
1584	6.7E-07	6.9E-07	7.0E-07	6.6E-07	6.3E-07	6.0E-07	6.1E-07	6.3E-07	6.4E-07	6.5E-07	6.5E-07	6.6E-07	6.6E-07
1585	6.3E-07	6.5E-07	6.5E-07	6.2E-07	6.0E-07	5.7E-07	5.8E-07	6.0E-07	6.0E-07	6.1E-07	6.2E-07	6.3E-07	6.3E-07
1586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1599	9.0E-07	9.4E-07	9.4E-07	9.1E-07	9.0E-07	9.0E-07	9.2E-07	9.5E-07	9.6E-07	9.7E-07	9.7E-07	9.8E-07	9.8E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1600	8.0E-07	8.3E-07	8.2E-07	7.7E-07	7.5E-07	7.4E-07	7.5E-07	7.8E-07	7.9E-07	7.9E-07	8.0E-07	8.1E-07	8.1E-07
1601	7.7E-07	8.0E-07	7.9E-07	7.2E-07	7.0E-07	6.8E-07	7.0E-07	7.2E-07	7.3E-07	7.4E-07	7.4E-07	7.5E-07	7.5E-07
1602	7.6E-07	7.9E-07	7.8E-07	7.1E-07	6.8E-07	6.7E-07	6.8E-07	7.0E-07	7.1E-07	7.2E-07	7.2E-07	7.3E-07	7.3E-07
1603	7.5E-07	7.8E-07	7.7E-07	7.0E-07	6.7E-07	6.5E-07	6.7E-07	6.9E-07	7.0E-07	7.0E-07	7.1E-07	7.2E-07	7.2E-07
1604	7.3E-07	7.6E-07	7.5E-07	6.9E-07	6.5E-07	6.4E-07	6.5E-07	6.7E-07	6.8E-07	6.9E-07	6.9E-07	7.0E-07	7.0E-07
1605	7.0E-07	7.3E-07	7.2E-07	6.6E-07	6.3E-07	6.1E-07	6.3E-07	6.5E-07	6.6E-07	6.6E-07	6.7E-07	6.8E-07	6.8E-07
1606	6.7E-07	6.9E-07	6.9E-07	6.4E-07	6.1E-07	5.9E-07	6.0E-07	6.3E-07	6.3E-07	6.4E-07	6.5E-07	6.5E-07	6.5E-07
1607	6.3E-07	6.6E-07	6.6E-07	6.1E-07	5.9E-07	5.6E-07	5.8E-07	6.0E-07	6.0E-07	6.1E-07	6.2E-07	6.2E-07	6.3E-07
1608	6.0E-07	6.2E-07	6.3E-07	5.9E-07	5.6E-07	5.4E-07	5.5E-07	5.7E-07	5.8E-07	5.8E-07	5.9E-07	6.0E-07	6.0E-07
1609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1610	7.3E-07	7.6E-07	7.6E-07	7.2E-07	7.1E-07	7.0E-07	7.1E-07	7.4E-07	7.5E-07	7.6E-07	7.7E-07	7.8E-07	7.8E-07
1611	7.1E-07	7.3E-07	7.3E-07	6.9E-07	6.7E-07	6.6E-07	6.7E-07	6.9E-07	7.0E-07	7.1E-07	7.1E-07	7.2E-07	7.2E-07
1612	7.0E-07	7.2E-07	7.1E-07	6.6E-07	6.4E-07	6.3E-07	6.4E-07	6.6E-07	6.7E-07	6.8E-07	6.8E-07	6.9E-07	6.9E-07
1613	6.9E-07	7.2E-07	7.1E-07	6.6E-07	6.3E-07	6.1E-07	6.3E-07	6.5E-07	6.5E-07	6.6E-07	6.7E-07	6.7E-07	6.8E-07
1614	6.8E-07	7.1E-07	7.0E-07	6.5E-07	6.2E-07	6.0E-07	6.2E-07	6.4E-07	6.4E-07	6.5E-07	6.6E-07	6.6E-07	6.7E-07
1615	6.7E-07	6.9E-07	6.9E-07	6.3E-07	6.1E-07	5.9E-07	6.0E-07	6.2E-07	6.3E-07	6.4E-07	6.4E-07	6.5E-07	6.5E-07
1616	6.5E-07	6.7E-07	6.7E-07	6.2E-07	5.9E-07	5.7E-07	5.9E-07	6.1E-07	6.1E-07	6.2E-07	6.3E-07	6.3E-07	6.3E-07
1617	6.2E-07	6.5E-07	6.4E-07	6.0E-07	5.7E-07	5.5E-07	5.7E-07	5.9E-07	5.9E-07	6.0E-07	6.1E-07	6.1E-07	6.1E-07
1618	6.0E-07	6.2E-07	6.2E-07	5.8E-07	5.5E-07	5.3E-07	5.4E-07	5.6E-07	5.7E-07	5.8E-07	5.8E-07	5.9E-07	5.9E-07
1619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1620	6.4E-07	6.6E-07	6.6E-07	6.3E-07	6.2E-07	6.1E-07	6.1E-07	6.4E-07	6.5E-07	6.6E-07	6.7E-07	6.8E-07	6.8E-07
1621	6.4E-07	6.6E-07	6.6E-07	6.2E-07	6.0E-07	5.9E-07	6.0E-07	6.2E-07	6.3E-07	6.4E-07	6.4E-07	6.5E-07	6.5E-07
1622	6.4E-07	6.6E-07	6.5E-07	6.1E-07	5.9E-07	5.8E-07	5.9E-07	6.1E-07	6.2E-07	6.2E-07	6.3E-07	6.3E-07	6.4E-07
1623	6.3E-07	6.6E-07	6.5E-07	6.1E-07	5.9E-07	5.7E-07	5.8E-07	6.0E-07	6.1E-07	6.1E-07	6.2E-07	6.3E-07	6.3E-07
1624	6.3E-07	6.5E-07	6.5E-07	6.0E-07	5.8E-07	5.6E-07	5.7E-07	5.9E-07	6.0E-07	6.1E-07	6.1E-07	6.2E-07	6.2E-07
1625	6.2E-07	6.4E-07	6.4E-07	5.9E-07	5.7E-07	5.5E-07	5.6E-07	5.8E-07	5.9E-07	5.9E-07	6.0E-07	6.1E-07	6.1E-07
1626	6.0E-07	6.2E-07	6.2E-07	5.8E-07	5.5E-07	5.4E-07	5.5E-07	5.7E-07	5.7E-07	5.8E-07	5.9E-07	5.9E-07	5.9E-07
1627	5.8E-07	6.0E-07	6.0E-07	5.6E-07	5.4E-07	5.2E-07	5.3E-07	5.5E-07	5.6E-07	5.6E-07	5.7E-07	5.8E-07	5.8E-07
1628	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.6E-07	3.7E-07	3.8E-07	3.8E-07	3.9E-07
1629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1630	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07	3.8E-07
1631	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07
1632	2.7E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07
1633	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
1634	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07
1635	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
1636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1663	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
1664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1674	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07
1675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1680	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07
1681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1737	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	6.5E-08	2.9E-08	4.3E-08	5.6E-08	6.7E-08	7.5E-08	7.9E-08
1738	2.0E-07	2.0E-07	1.9E-07	1.7E-07	1.5E-07	1.2E-07	6.9E-08	2.4E-08	3.8E-08	5.2E-08	6.3E-08	7.1E-08	7.5E-08
1739	1.7E-07	1.7E-07	1.5E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1740	2.0E-07	1.9E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
1741	2.4E-07	2.3E-07	2.0E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07
1742	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
1743	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
1744	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1745	2.1E-07	2.0E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07
1746	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
1747	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1748	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07
1749	1.8E-07	1.8E-07	1.6E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1750	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1751	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07
1752	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1753	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
1754	1.3E-07	1.4E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1755	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1756	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
1757	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1758	2.0E-07	1.9E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
1759	1.4E-07	1.5E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
1760	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
1761	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
1762	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1763	2.0E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
1764	1.5E-07	1.6E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
1765	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1766	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1767	1.7E-07	1.7E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
1768	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07
1769	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1770	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1771	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
1772	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07
1773	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
1774	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
1775	1.7E-07	1.7E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07
1776	1.7E-07	1.8E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07
1777	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
1778	1.7E-07	1.7E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
1779	1.6E-07	1.6E-07	1.4E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07
1780	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07
1781	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07
1782	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
1783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1784	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
1785	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
1786	2.0E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07
1787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1788	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
1789	2.5E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07
1790	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07
1791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1792	2.4E-07	2.5E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07
1793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1808	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1809	1.9E-07	1.8E-07	1.6E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07
1810	2.1E-07	2.0E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
1811	2.2E-07	2.0E-07	1.8E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
1812	8.0E-08	5.3E-08	1.2E-08	-1.6E-08	-2.0E-08	-2.5E-08	-2.9E-08	-3.2E-08	-1.4E-08	1.6E-09	1.3E-08	2.2E-08	2.6E-08
1813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1814	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07
1815	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1816	1.9E-07	1.9E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
1817	2.3E-07	2.2E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07
1818	2.4E-07	2.2E-07	1.9E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07
1819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1823	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07
1824	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.2E-07	9.9E-08	6.8E-08	3.9E-08	5.5E-08	7.0E-08	8.2E-08	9.1E-08	9.6E-08
1825	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	6.5E-08	3.0E-08	4.7E-08	6.2E-08	7.5E-08	8.4E-08	8.8E-08
1826	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.2E-07	1.0E-07	6.9E-08	4.0E-08	5.9E-08	7.6E-08	9.0E-08	1.0E-07	1.0E-07
1827	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.1E-07	9.5E-08	6.7E-08	4.2E-08	5.5E-08	6.8E-08	7.8E-08	8.5E-08	8.9E-08
1828	1.8E-07	1.8E-07	1.6E-07	1.3E-07	8.8E-08	6.1E-08	9.3E-09	-3.8E-08	-5.9E-09	2.5E-08	4.9E-08	6.7E-08	7.6E-08
1829	2.0E-07	2.0E-07	1.8E-07	1.5E-07	1.1E-07	8.0E-08	3.0E-08	-1.6E-08	1.6E-08	4.6E-08	7.0E-08	8.9E-08	9.8E-08
1830	2.2E-07	2.2E-07	2.1E-07	1.7E-07	1.3E-07	9.8E-08	5.0E-08	6.2E-09	3.8E-08	6.8E-08	9.2E-08	1.1E-07	1.2E-07
1831	2.5E-07	2.5E-07	2.3E-07	1.9E-07	1.5E-07	1.2E-07	7.0E-08	2.8E-08	5.9E-08	8.9E-08	1.1E-07	1.3E-07	1.4E-07
1832	8.4E-08	8.2E-08	6.9E-08	4.2E-08	1.3E-08	-1.3E-08	-6.3E-08	-1.1E-07	-6.9E-08	-3.2E-08	-3.8E-09	1.7E-08	2.7E-08
1833	7.2E-08	6.9E-08	5.3E-08	2.2E-08	-1.1E-08	-3.7E-08	-9.5E-08	-1.5E-07	-1.1E-07	-7.0E-08	-4.2E-08	-2.1E-08	-1.1E-08

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1834	3.7E-08	3.5E-08	2.1E-08	-6.7E-09	-3.7E-08	-6.2E-08	-1.1E-07	-1.6E-07	-1.1E-07	-6.0E-08	-2.3E-08	2.3E-09	1.5E-08
1835	1.1E-07	1.1E-07	8.9E-08	5.7E-08	2.2E-08	-5.2E-09	-6.3E-08	-1.2E-07	-8.0E-08	-4.7E-08	-2.0E-08	-1.2E-09	8.4E-09
1836	1.2E-07	1.2E-07	1.0E-07	6.8E-08	3.1E-08	4.3E-09	-5.4E-08	-1.1E-07	-7.2E-08	-3.9E-08	-1.3E-08	6.6E-09	1.6E-08
1837	1.5E-07	1.5E-07	1.4E-07	1.1E-07	8.6E-08	6.6E-08	2.5E-08	-1.2E-08	1.2E-08	3.4E-08	5.2E-08	6.5E-08	7.2E-08
1838	1.6E-07	1.6E-07	1.5E-07	1.2E-07	9.4E-08	7.3E-08	3.3E-08	-4.7E-09	1.9E-08	4.2E-08	6.0E-08	7.4E-08	8.0E-08
1839	1.7E-07	1.7E-07	1.6E-07	1.3E-07	1.0E-07	8.2E-08	4.2E-08	5.1E-09	2.9E-08	5.2E-08	7.0E-08	8.4E-08	9.0E-08
1840	1.8E-07	1.8E-07	1.7E-07	1.4E-07	1.1E-07	9.2E-08	5.2E-08	1.6E-08	4.0E-08	6.3E-08	8.1E-08	9.5E-08	1.0E-07
1841	2.0E-07	2.0E-07	1.9E-07	1.6E-07	1.3E-07	1.0E-07	6.4E-08	2.8E-08	5.2E-08	7.5E-08	9.4E-08	1.1E-07	1.1E-07
1842	2.0E-07	2.0E-07	1.9E-07	1.7E-07	1.4E-07	1.2E-07	9.2E-08	6.3E-08	8.3E-08	1.0E-07	1.2E-07	1.3E-07	1.4E-07
1843	2.1E-07	2.1E-07	2.0E-07	1.7E-07	1.4E-07	1.2E-07	7.6E-08	4.0E-08	6.5E-08	8.8E-08	1.1E-07	1.2E-07	1.3E-07
1844	2.3E-07	2.3E-07	2.2E-07	1.8E-07	1.5E-07	1.3E-07	8.8E-08	5.4E-08	7.8E-08	1.0E-07	1.2E-07	1.3E-07	1.4E-07
1845	2.4E-07	2.5E-07	2.3E-07	2.0E-07	1.6E-07	1.4E-07	1.0E-07	6.6E-08	9.0E-08	1.1E-07	1.3E-07	1.5E-07	1.5E-07
1846	1.0E-07	1.1E-07	9.5E-08	7.3E-08	4.8E-08	2.8E-08	-1.0E-08	-4.6E-08	-9.1E-09	2.3E-08	4.9E-08	6.7E-08	7.6E-08
1847	1.3E-07	1.3E-07	1.2E-07	1.0E-07	7.5E-08	5.5E-08	1.6E-08	-2.0E-08	4.7E-09	2.8E-08	4.6E-08	6.0E-08	6.6E-08
1848	1.4E-07	1.4E-07	1.2E-07	9.9E-08	7.2E-08	5.1E-08	9.7E-09	-2.9E-08	-3.5E-09	2.0E-08	3.9E-08	5.2E-08	5.9E-08
1849	1.5E-07	1.5E-07	1.4E-07	1.2E-07	9.9E-08	8.1E-08	4.7E-08	1.6E-08	3.6E-08	5.6E-08	7.1E-08	8.3E-08	8.9E-08
1850	1.8E-07	1.8E-07	1.7E-07	1.5E-07	1.3E-07	1.1E-07	8.6E-08	6.1E-08	7.8E-08	9.6E-08	1.1E-07	1.2E-07	1.3E-07
1851	1.9E-07	1.9E-07	1.8E-07	1.6E-07	1.4E-07	1.2E-07	9.4E-08	6.9E-08	8.7E-08	1.0E-07	1.2E-07	1.3E-07	1.3E-07
1852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1853	1.2E-07	1.2E-07	1.1E-07	9.0E-08	6.9E-08	5.1E-08	2.1E-08	-6.4E-09	2.9E-08	6.0E-08	8.4E-08	1.0E-07	1.1E-07
1854	1.4E-07	1.4E-07	1.4E-07	1.2E-07	9.7E-08	8.0E-08	5.1E-08	2.5E-08	4.9E-08	7.1E-08	8.9E-08	1.0E-07	1.1E-07
1855	1.4E-07	1.4E-07	1.3E-07	1.1E-07	9.0E-08	7.2E-08	3.9E-08	9.3E-09	3.3E-08	5.6E-08	7.3E-08	8.6E-08	9.3E-08
1856	1.5E-07	1.5E-07	1.4E-07	1.2E-07	1.0E-07	8.6E-08	5.6E-08	2.9E-08	4.8E-08	6.7E-08	8.2E-08	9.3E-08	9.9E-08
1857	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.2E-07	1.0E-07	7.2E-08	4.7E-08	6.4E-08	8.1E-08	9.4E-08	1.0E-07	1.1E-07
1858	1.7E-07	1.7E-07	1.6E-07	1.4E-07	1.2E-07	1.0E-07	7.6E-08	5.1E-08	6.8E-08	8.5E-08	9.8E-08	1.1E-07	1.1E-07
1859	2.0E-07	2.0E-07	1.9E-07	1.7E-07	1.5E-07	1.4E-07	1.1E-07	8.8E-08	1.0E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07
1860	2.1E-07	2.2E-07	2.1E-07	1.8E-07	1.6E-07	1.4E-07	1.1E-07	8.1E-08	1.0E-07	1.2E-07	1.3E-07	1.5E-07	1.5E-07
1861	2.1E-07	2.1E-07	2.0E-07	1.8E-07	1.6E-07	1.4E-07	1.2E-07	9.5E-08	1.1E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07
1862	2.2E-07	2.3E-07	2.2E-07	1.9E-07	1.6E-07	1.4E-07	1.1E-07	8.8E-08	1.1E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07
1863	2.2E-07	2.2E-07	2.1E-07	1.9E-07	1.6E-07	1.5E-07	1.2E-07	1.0E-07	1.2E-07	1.3E-07	1.5E-07	1.6E-07	1.6E-07
1864	2.1E-07	2.2E-07	2.1E-07	1.9E-07	1.7E-07	1.5E-07	1.3E-07	1.1E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07
1865	2.4E-07	2.4E-07	2.3E-07	2.0E-07	1.7E-07	1.5E-07	1.2E-07	9.5E-08	1.1E-07	1.3E-07	1.5E-07	1.6E-07	1.7E-07
1866	2.3E-07	2.3E-07	2.2E-07	2.0E-07	1.7E-07	1.5E-07	1.3E-07	1.1E-07	1.2E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07
1867	2.3E-07	2.3E-07	2.2E-07	2.0E-07	1.8E-07	1.6E-07	1.4E-07	1.2E-07	1.3E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07
1868	2.6E-07	2.6E-07	2.5E-07	2.1E-07	1.8E-07	1.5E-07	1.2E-07	8.7E-08	1.1E-07	1.3E-07	1.5E-07	1.6E-07	1.7E-07
1869	2.5E-07	2.5E-07	2.4E-07	2.1E-07	1.8E-07	1.6E-07	1.3E-07	1.0E-07	1.2E-07	1.4E-07	1.6E-07	1.7E-07	1.7E-07
1870	2.4E-07	2.5E-07	2.4E-07	2.1E-07	1.8E-07	1.6E-07	1.3E-07	1.1E-07	1.3E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07
1871	2.4E-07	2.4E-07	2.4E-07	2.1E-07	1.9E-07	1.7E-07	1.5E-07	1.3E-07	1.4E-07	1.6E-07	1.7E-07	1.8E-07	1.9E-07
1872	2.7E-07	2.7E-07	2.6E-07	2.2E-07	1.9E-07	1.7E-07	1.4E-07	1.1E-07	1.3E-07	1.5E-07	1.6E-07	1.8E-07	1.8E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1873	2.6E-07	2.6E-07	2.5E-07	2.2E-07	1.9E-07	1.7E-07	1.4E-07	1.2E-07	1.4E-07	1.5E-07	1.7E-07	1.8E-07	1.9E-07
1874	2.6E-07	2.6E-07	2.5E-07	2.2E-07	2.0E-07	1.8E-07	1.6E-07	1.4E-07	1.5E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07
1875	2.7E-07	2.8E-07	2.7E-07	2.3E-07	2.0E-07	1.8E-07	1.5E-07	1.3E-07	1.5E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07
1876	1.3E-07	1.3E-07	1.2E-07	9.8E-08	7.3E-08	5.0E-08	7.5E-09	-3.2E-08	9.1E-11	2.8E-08	5.1E-08	6.6E-08	7.4E-08
1877	6.8E-08	6.9E-08	6.1E-08	4.1E-08	1.8E-08	-1.9E-09	-3.6E-08	-6.8E-08	-1.6E-08	2.8E-08	6.2E-08	8.6E-08	9.8E-08
1878	9.8E-08	1.0E-07	9.3E-08	7.6E-08	5.6E-08	3.9E-08	1.2E-08	-1.2E-08	3.0E-08	6.6E-08	9.3E-08	1.1E-07	1.2E-07
1879	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.1E-07	1.0E-07	7.7E-08	5.5E-08	7.3E-08	9.0E-08	1.0E-07	1.1E-07	1.2E-07
1880	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.2E-07	1.1E-07	8.3E-08	6.2E-08	7.8E-08	9.3E-08	1.1E-07	1.1E-07	1.2E-07
1881	1.7E-07	1.8E-07	1.7E-07	1.5E-07	1.4E-07	1.2E-07	1.0E-07	8.3E-08	9.7E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07
1882	1.8E-07	1.8E-07	1.8E-07	1.6E-07	1.4E-07	1.3E-07	1.1E-07	8.9E-08	1.0E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
1883	1.9E-07	1.9E-07	1.9E-07	1.7E-07	1.5E-07	1.4E-07	1.1E-07	9.5E-08	1.1E-07	1.2E-07	1.4E-07	1.5E-07	1.5E-07
1884	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.1E-07	9.8E-08	7.2E-08	4.8E-08	6.4E-08	7.9E-08	9.1E-08	1.0E-07	1.0E-07
1885	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.2E-07	1.1E-07	8.0E-08	5.7E-08	7.6E-08	9.4E-08	1.1E-07	1.2E-07	1.2E-07
1886	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.2E-07	1.0E-07	7.7E-08	5.2E-08	6.9E-08	8.5E-08	9.8E-08	1.1E-07	1.1E-07
1887	1.3E-07	1.3E-07	1.2E-07	1.0E-07	8.0E-08	5.8E-08	2.0E-08	-1.6E-08	1.8E-08	4.9E-08	7.2E-08	8.9E-08	9.7E-08
1888	1.4E-07	1.5E-07	1.4E-07	1.3E-07	1.1E-07	9.5E-08	7.2E-08	5.1E-08	7.0E-08	8.8E-08	1.0E-07	1.1E-07	1.2E-07
1889	1.4E-07	1.4E-07	1.4E-07	1.2E-07	1.1E-07	9.0E-08	6.5E-08	4.2E-08	6.4E-08	8.3E-08	9.8E-08	1.1E-07	1.1E-07
1890	1.4E-07	1.5E-07	1.4E-07	1.2E-07	1.1E-07	8.9E-08	6.2E-08	3.8E-08	6.1E-08	8.1E-08	9.7E-08	1.1E-07	1.1E-07
1891	1.4E-07	1.4E-07	1.3E-07	1.2E-07	9.6E-08	7.7E-08	5.0E-08	2.4E-08	5.0E-08	7.4E-08	9.2E-08	1.1E-07	1.1E-07
1892	1.2E-07	1.2E-07	1.2E-07	9.8E-08	7.8E-08	5.9E-08	3.0E-08	3.1E-09	3.7E-08	6.7E-08	8.9E-08	1.1E-07	1.1E-07
1893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1894	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.1E-07	1.0E-07	8.3E-08	6.4E-08	8.1E-08	9.6E-08	1.1E-07	1.2E-07	1.2E-07
1895	1.4E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.1E-07	9.5E-08	8.0E-08	1.0E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07
1896	1.4E-07	1.4E-07	1.4E-07	1.2E-07	1.1E-07	1.0E-07	8.4E-08	6.9E-08	8.4E-08	9.8E-08	1.1E-07	1.2E-07	1.2E-07
1897	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	9.7E-08	8.2E-08	6.9E-08	8.5E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
1898	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.1E-07	9.1E-08	7.3E-08	9.3E-08	1.1E-07	1.3E-07	1.4E-07	1.4E-07
1899	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.1E-07	1.0E-07	8.3E-08	6.6E-08	8.2E-08	9.6E-08	1.1E-07	1.2E-07	1.2E-07
1900	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.9E-08	8.3E-08	6.8E-08	8.5E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
1901	1.2E-07	1.3E-07	1.3E-07	1.1E-07	1.0E-07	9.3E-08	7.9E-08	6.6E-08	8.7E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
1902	1.2E-07	1.2E-07	1.2E-07	1.1E-07	9.9E-08	9.0E-08	7.8E-08	6.7E-08	9.1E-08	1.1E-07	1.3E-07	1.4E-07	1.4E-07
1903	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.0E-07	8.4E-08	6.6E-08	8.2E-08	9.8E-08	1.1E-07	1.2E-07	1.2E-07
1904	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.1E-07	1.0E-07	8.3E-08	6.6E-08	8.3E-08	9.8E-08	1.1E-07	1.2E-07	1.2E-07
1905	1.2E-07	1.3E-07	1.2E-07	1.1E-07	9.7E-08	8.6E-08	7.0E-08	5.5E-08	7.7E-08	9.6E-08	1.1E-07	1.2E-07	1.3E-07
1906	1.1E-07	1.2E-07	1.2E-07	1.1E-07	9.4E-08	8.5E-08	7.1E-08	5.9E-08	8.6E-08	1.1E-07	1.3E-07	1.4E-07	1.4E-07
1907	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.1E-07	1.1E-07	9.3E-08	8.3E-08	9.7E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
1908	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.0E-07	8.5E-08	6.6E-08	8.4E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07
1909	1.2E-07	1.2E-07	1.2E-07	1.1E-07	9.5E-08	8.3E-08	6.6E-08	5.0E-08	7.6E-08	9.8E-08	1.1E-07	1.3E-07	1.3E-07
1910	1.0E-07	1.1E-07	1.0E-07	9.4E-08	8.1E-08	7.0E-08	5.5E-08	4.2E-08	7.0E-08	9.4E-08	1.1E-07	1.3E-07	1.3E-07
1911	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.1E-07	1.1E-07	9.2E-08	8.1E-08	9.6E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1912	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.0E-07	8.0E-08	6.0E-08	7.7E-08	9.2E-08	1.0E-07	1.1E-07	1.2E-07
1913	1.2E-07	1.2E-07	1.2E-07	1.1E-07	9.1E-08	7.7E-08	5.8E-08	4.1E-08	6.5E-08	8.7E-08	1.0E-07	1.2E-07	1.2E-07
1914	1.0E-07	1.1E-07	1.0E-07	9.2E-08	7.8E-08	6.6E-08	5.0E-08	3.6E-08	6.3E-08	8.7E-08	1.1E-07	1.2E-07	1.3E-07
1915	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.2E-08	8.0E-08	9.6E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
1916	1.4E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.0E-07	9.4E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07
1917	1.1E-07	1.1E-07	1.1E-07	9.4E-08	8.0E-08	6.7E-08	5.0E-08	3.5E-08	6.3E-08	8.6E-08	1.0E-07	1.2E-07	1.2E-07
1918	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.1E-08	7.9E-08	9.5E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
1919	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.0E-07	9.4E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
1920	1.1E-07	1.2E-07	1.1E-07	9.9E-08	8.5E-08	7.1E-08	5.4E-08	3.8E-08	6.4E-08	8.8E-08	1.1E-07	1.2E-07	1.2E-07
1921	1.4E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.1E-08	7.8E-08	9.5E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07
1922	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.4E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
1923	1.2E-07	1.2E-07	1.2E-07	1.0E-07	8.9E-08	7.5E-08	5.6E-08	3.9E-08	6.6E-08	8.9E-08	1.1E-07	1.2E-07	1.3E-07
1924	1.4E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.1E-08	7.7E-08	9.5E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07
1925	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.0E-07	9.3E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
1926	1.2E-07	1.3E-07	1.2E-07	1.1E-07	9.1E-08	7.7E-08	5.7E-08	3.8E-08	6.6E-08	9.0E-08	1.1E-07	1.2E-07	1.3E-07
1927	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.1E-07	8.9E-08	7.5E-08	9.4E-08	1.1E-07	1.3E-07	1.4E-07	1.4E-07
1928	1.5E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.0E-07	9.1E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07
1929	1.2E-07	1.2E-07	1.2E-07	1.0E-07	8.7E-08	7.3E-08	5.1E-08	3.2E-08	6.3E-08	9.0E-08	1.1E-07	1.3E-07	1.3E-07
1930	1.4E-07	1.5E-07	1.4E-07	1.3E-07	1.1E-07	1.0E-07	8.4E-08	6.8E-08	9.1E-08	1.1E-07	1.3E-07	1.4E-07	1.4E-07
1931	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.2E-07	1.1E-07	9.7E-08	8.4E-08	1.0E-07	1.2E-07	1.4E-07	1.5E-07	1.5E-07
1932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1935	1.3E-07	1.3E-07	1.3E-07	1.1E-07	9.7E-08	8.4E-08	6.4E-08	4.7E-08	7.9E-08	1.1E-07	1.3E-07	1.4E-07	1.5E-07
1936	1.3E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.6E-08	7.9E-08	6.4E-08	9.2E-08	1.2E-07	1.3E-07	1.5E-07	1.5E-07
1937	1.4E-07	1.4E-07	1.4E-07	1.2E-07	1.1E-07	9.2E-08	7.0E-08	5.0E-08	7.6E-08	9.9E-08	1.2E-07	1.3E-07	1.4E-07
1938	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.0E-07	8.4E-08	6.7E-08	8.9E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07
1939	1.4E-07	1.5E-07	1.4E-07	1.2E-07	1.0E-07	8.9E-08	6.4E-08	4.2E-08	6.6E-08	8.8E-08	1.1E-07	1.2E-07	1.2E-07
1940	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.1E-07	9.5E-08	7.0E-08	4.7E-08	6.0E-08	7.2E-08	8.2E-08	8.9E-08	9.3E-08
1941	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.1E-07	1.0E-07	7.6E-08	5.5E-08	7.5E-08	9.3E-08	1.1E-07	1.2E-07	1.2E-07
1942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1953	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
1954	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07
1955	2.0E-07	2.1E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
1956	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07
1957	3.6E-08	3.2E-08	2.0E-08	1.2E-08	1.1E-08	8.9E-09	6.9E-09	6.5E-09	2.7E-08	4.4E-08	5.6E-08	6.5E-08	6.9E-08
1958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1962	1.0E-06	1.1E-06	1.1E-06	1.0E-06	9.8E-07	9.4E-07	9.3E-07	9.4E-07	9.4E-07	9.6E-07	9.7E-07	9.8E-07	9.9E-07
1963	1.0E-06	1.1E-06	1.1E-06	1.0E-06	9.9E-07	9.5E-07	9.5E-07	9.5E-07	9.5E-07	9.7E-07	9.8E-07	1.0E-06	1.0E-06
1964	7.6E-07	7.9E-07	7.9E-07	7.7E-07	7.3E-07	7.0E-07	7.0E-07	7.0E-07	7.1E-07	7.2E-07	7.3E-07	7.4E-07	7.5E-07
1965	7.9E-07	8.1E-07	8.2E-07	8.0E-07	7.6E-07	7.3E-07	7.3E-07	7.3E-07	7.4E-07	7.5E-07	7.7E-07	7.8E-07	7.8E-07
1966	6.1E-07	6.3E-07	6.3E-07	6.1E-07	5.8E-07	5.6E-07	5.6E-07	5.7E-07	5.7E-07	5.9E-07	6.0E-07	6.1E-07	6.1E-07
1967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1971	5.2E-07	5.4E-07	5.4E-07	5.3E-07	5.1E-07	4.9E-07	4.9E-07	5.0E-07	5.1E-07	5.2E-07	5.3E-07	5.4E-07	5.5E-07
1972	6.8E-07	7.0E-07	7.1E-07	6.9E-07	6.5E-07	6.3E-07	6.2E-07	6.3E-07	6.5E-07	6.7E-07	7.0E-07	7.1E-07	7.2E-07
1973	6.0E-07	6.2E-07	6.3E-07	6.1E-07	5.8E-07	5.6E-07	5.6E-07	5.7E-07	5.8E-07	6.0E-07	6.2E-07	6.3E-07	6.3E-07
1974	5.1E-07	5.3E-07	5.4E-07	5.2E-07	5.0E-07	4.8E-07	4.8E-07	4.9E-07	5.0E-07	5.2E-07	5.3E-07	5.4E-07	5.5E-07
1975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1976	5.9E-07	6.1E-07	6.1E-07	6.0E-07	5.7E-07	5.5E-07	5.5E-07	5.6E-07	5.7E-07	5.9E-07	6.0E-07	6.1E-07	6.2E-07
1977	5.1E-07	5.3E-07	5.3E-07	5.2E-07	5.0E-07	4.8E-07	4.8E-07	4.9E-07	5.0E-07	5.1E-07	5.3E-07	5.4E-07	5.4E-07
1978	5.7E-07	5.9E-07	5.9E-07	5.8E-07	5.5E-07	5.3E-07	5.3E-07	5.3E-07	5.5E-07	5.7E-07	5.9E-07	6.0E-07	6.1E-07
1979	5.1E-07	5.2E-07	5.3E-07	5.2E-07	5.0E-07	4.8E-07	4.8E-07	4.9E-07	5.0E-07	5.1E-07	5.3E-07	5.3E-07	5.4E-07
1980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1981	5.4E-07	5.6E-07	5.6E-07	5.5E-07	5.2E-07	5.0E-07	5.1E-07	5.1E-07	5.4E-07	5.7E-07	5.9E-07	6.0E-07	6.1E-07
1982	5.1E-07	5.3E-07	5.4E-07	5.2E-07	5.1E-07	4.9E-07	4.9E-07	5.0E-07	5.1E-07	5.3E-07	5.4E-07	5.6E-07	5.6E-07
1983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
1990	6.1E-07	6.3E-07	6.4E-07	6.2E-07	6.0E-07	5.8E-07	5.9E-07	6.0E-07	6.1E-07	6.3E-07	6.5E-07	6.6E-07	6.6E-07
1991	3.3E-07	3.4E-07	3.3E-07	3.1E-07	2.8E-07	2.7E-07	2.5E-07	2.4E-07	2.6E-07	2.7E-07	2.9E-07	3.0E-07	3.0E-07
1992	2.9E-07	3.0E-07	3.0E-07	2.8E-07	2.6E-07	2.5E-07	2.4E-07	2.3E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07
1993	3.8E-07	3.9E-07	3.9E-07	3.7E-07	3.4E-07	3.2E-07	3.1E-07	3.1E-07	3.2E-07	3.4E-07	3.6E-07	3.7E-07	3.7E-07
1994	3.2E-07	3.3E-07	3.3E-07	3.1E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.8E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07
1995	2.8E-07	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.4E-07	2.6E-07	2.7E-07	2.9E-07	3.0E-07	3.0E-07
1996	2.8E-07	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
1997	4.2E-07	4.3E-07	4.3E-07	4.1E-07	3.8E-07	3.7E-07	3.6E-07	3.6E-07	3.8E-07	3.9E-07	4.1E-07	4.2E-07	4.2E-07
1998	3.5E-07	3.6E-07	3.6E-07	3.4E-07	3.2E-07	3.1E-07	3.0E-07	3.0E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07
1999	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.8E-07	2.7E-07	2.7E-07	2.6E-07	2.8E-07	2.9E-07	3.1E-07	3.1E-07	3.2E-07
2000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2003	4.8E-07	5.0E-07	5.0E-07	4.8E-07	4.5E-07	4.3E-07	4.3E-07	4.3E-07	4.5E-07	4.6E-07	4.8E-07	4.9E-07	5.0E-07
2004	3.9E-07	4.0E-07	4.0E-07	3.9E-07	3.7E-07	3.5E-07	3.5E-07	3.5E-07	3.6E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07
2005	3.2E-07	3.3E-07	3.3E-07	3.2E-07	3.0E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07
2006	3.1E-07	3.2E-07	3.2E-07	3.1E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07
2007	2.7E-07	2.8E-07	2.9E-07	2.8E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07
2008	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07
2009	5.4E-07	5.6E-07	5.6E-07	5.4E-07	5.1E-07	4.9E-07	4.9E-07	5.0E-07	5.1E-07	5.3E-07	5.4E-07	5.6E-07	5.6E-07
2010	4.3E-07	4.4E-07	4.5E-07	4.3E-07	4.1E-07	3.9E-07	3.9E-07	3.9E-07	4.0E-07	4.2E-07	4.3E-07	4.4E-07	4.5E-07
2011	3.5E-07	3.6E-07	3.6E-07	3.4E-07	3.3E-07	3.1E-07	3.1E-07	3.1E-07	3.2E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07
2012	3.2E-07	3.3E-07	3.3E-07	3.2E-07	3.1E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07
2013	2.8E-07	2.9E-07	3.0E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
2014	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
2015	6.0E-07	6.2E-07	6.2E-07	5.9E-07	5.6E-07	5.4E-07	5.4E-07	5.5E-07	5.6E-07	5.8E-07	5.9E-07	6.1E-07	6.1E-07
2016	4.6E-07	4.8E-07	4.8E-07	4.6E-07	4.4E-07	4.2E-07	4.2E-07	4.2E-07	4.3E-07	4.5E-07	4.6E-07	4.7E-07	4.8E-07
2017	3.7E-07	3.8E-07	3.8E-07	3.6E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.7E-07	3.7E-07	3.8E-07
2018	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.2E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07
2019	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07
2020	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07
2021	6.3E-07	6.5E-07	6.5E-07	6.3E-07	5.9E-07	5.7E-07	5.7E-07	5.8E-07	5.9E-07	6.1E-07	6.2E-07	6.3E-07	6.4E-07
2022	4.8E-07	5.0E-07	5.0E-07	4.8E-07	4.6E-07	4.4E-07	4.4E-07	4.4E-07	4.5E-07	4.6E-07	4.8E-07	4.9E-07	4.9E-07
2023	3.8E-07	3.9E-07	3.9E-07	3.8E-07	3.6E-07	3.4E-07	3.4E-07	3.4E-07	3.5E-07	3.6E-07	3.8E-07	3.9E-07	3.9E-07
2024	3.4E-07	3.5E-07	3.6E-07	3.4E-07	3.3E-07	3.2E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07
2025	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07
2026	2.7E-07	2.7E-07	2.8E-07	2.7E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07
2027	6.6E-07	6.8E-07	6.8E-07	6.6E-07	6.2E-07	6.0E-07	5.9E-07	6.0E-07	6.1E-07	6.3E-07	6.4E-07	6.5E-07	6.6E-07
2028	4.8E-07	5.0E-07	5.0E-07	4.8E-07	4.5E-07	4.3E-07	4.3E-07	4.3E-07	4.4E-07	4.6E-07	4.8E-07	4.9E-07	4.9E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2029	4.0E-07	4.1E-07	4.1E-07	4.0E-07	3.8E-07	3.6E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	4.0E-07	4.1E-07	4.1E-07
2030	3.5E-07	3.6E-07	3.6E-07	3.5E-07	3.4E-07	3.2E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07
2031	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07
2032	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07
2033	9.7E-07	1.0E-06	1.0E-06	9.7E-07	9.3E-07	8.9E-07	8.9E-07	9.0E-07	9.0E-07	9.3E-07	9.4E-07	9.6E-07	9.7E-07
2034	6.9E-07	7.1E-07	7.1E-07	6.8E-07	6.5E-07	6.2E-07	6.2E-07	6.2E-07	6.3E-07	6.5E-07	6.6E-07	6.7E-07	6.8E-07
2035	5.2E-07	5.3E-07	5.3E-07	5.1E-07	4.8E-07	4.6E-07	4.6E-07	4.6E-07	4.7E-07	4.9E-07	5.0E-07	5.1E-07	5.2E-07
2036	4.2E-07	4.3E-07	4.3E-07	4.2E-07	3.9E-07	3.8E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07
2037	3.6E-07	3.7E-07	3.7E-07	3.6E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07	3.7E-07
2038	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07
2039	2.7E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07
2040	1.0E-06	1.0E-06	1.0E-06	1.0E-06	9.7E-07	9.3E-07	9.3E-07	9.4E-07	9.4E-07	9.6E-07	9.8E-07	9.9E-07	1.0E-06
2041	7.1E-07	7.3E-07	7.3E-07	7.1E-07	6.7E-07	6.4E-07	6.4E-07	6.4E-07	6.5E-07	6.6E-07	6.8E-07	6.9E-07	6.9E-07
2042	5.4E-07	5.6E-07	5.6E-07	5.4E-07	5.1E-07	4.9E-07	4.8E-07	4.8E-07	4.9E-07	5.1E-07	5.2E-07	5.3E-07	5.3E-07
2043	4.3E-07	4.5E-07	4.5E-07	4.3E-07	4.1E-07	3.9E-07	3.9E-07	3.9E-07	4.0E-07	4.1E-07	4.3E-07	4.4E-07	4.4E-07
2044	3.6E-07	3.7E-07	3.7E-07	3.6E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07
2045	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07
2046	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
2047	1.0E-06	1.0E-06	1.0E-06	1.0E-06	9.7E-07	9.3E-07	9.3E-07	9.3E-07	9.3E-07	9.5E-07	9.7E-07	9.8E-07	9.9E-07
2048	7.8E-07	8.1E-07	8.1E-07	7.9E-07	7.5E-07	7.2E-07	7.2E-07	7.2E-07	7.3E-07	7.4E-07	7.6E-07	7.7E-07	7.7E-07
2049	5.5E-07	5.7E-07	5.7E-07	5.5E-07	5.2E-07	5.0E-07	5.0E-07	5.0E-07	5.1E-07	5.2E-07	5.3E-07	5.4E-07	5.5E-07
2050	4.4E-07	4.5E-07	4.5E-07	4.3E-07	4.1E-07	3.9E-07	3.9E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07
2051	3.6E-07	3.7E-07	3.7E-07	3.5E-07	3.4E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07
2052	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07
2053	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07
2054	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07
2055	1.0E-06	1.0E-06	1.0E-06	1.0E-06	9.6E-07	9.1E-07	9.1E-07	9.1E-07	9.1E-07	9.3E-07	9.5E-07	9.6E-07	9.7E-07
2056	7.6E-07	7.8E-07	7.8E-07	7.6E-07	7.2E-07	6.9E-07	6.9E-07	7.0E-07	7.0E-07	7.2E-07	7.3E-07	7.4E-07	7.4E-07
2057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2058	4.4E-07	4.6E-07	4.6E-07	4.4E-07	4.2E-07	4.0E-07	4.0E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07
2059	3.5E-07	3.6E-07	3.6E-07	3.5E-07	3.3E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07
2060	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
2061	2.7E-07	2.7E-07	2.8E-07	2.7E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
2062	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
2063	2.3E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07
2064	7.5E-07	7.7E-07	7.7E-07	7.5E-07	7.1E-07	6.8E-07	6.8E-07	6.8E-07	6.9E-07	7.0E-07	7.2E-07	7.3E-07	7.3E-07
2065	5.7E-07	5.9E-07	5.9E-07	5.7E-07	5.4E-07	5.2E-07	5.2E-07	5.2E-07	5.3E-07	5.4E-07	5.5E-07	5.6E-07	5.7E-07
2066	4.5E-07	4.7E-07	4.7E-07	4.5E-07	4.3E-07	4.1E-07	4.1E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07	4.5E-07	4.5E-07
2067	3.6E-07	3.7E-07	3.7E-07	3.6E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2068	3.1E-07	3.2E-07	3.2E-07	3.1E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07
2069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2071	2.4E-07	2.4E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07
2072	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07
2073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2074	5.9E-07	6.1E-07	6.1E-07	5.9E-07	5.6E-07	5.4E-07	5.4E-07	5.4E-07	5.5E-07	5.6E-07	5.8E-07	5.8E-07	5.9E-07
2075	4.7E-07	4.8E-07	4.9E-07	4.7E-07	4.5E-07	4.3E-07	4.3E-07	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.7E-07	4.8E-07
2076	3.8E-07	4.0E-07	4.0E-07	3.8E-07	3.6E-07	3.5E-07	3.5E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	3.9E-07
2077	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.1E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07
2078	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.7E-07	2.7E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07
2079	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07
2080	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07
2081	2.2E-07	2.2E-07	2.3E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07
2082	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07
2083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2084	4.9E-07	5.0E-07	5.0E-07	4.9E-07	4.7E-07	4.5E-07	4.5E-07	4.6E-07	4.6E-07	4.8E-07	4.9E-07	4.9E-07	5.0E-07
2085	4.1E-07	4.2E-07	4.2E-07	4.1E-07	3.9E-07	3.8E-07	3.8E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07	4.2E-07
2086	3.5E-07	3.6E-07	3.6E-07	3.5E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07
2087	3.0E-07	3.1E-07	3.1E-07	3.1E-07	2.9E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07
2088	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
2089	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07
2090	2.2E-07	2.2E-07	2.3E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07
2091	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
2092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2097	2.9E-07	3.0E-07	3.0E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07
2098	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07
2099	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.2E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
2100	2.0E-07	2.0E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2101	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07
2102	4.5E-07	4.6E-07	4.7E-07	4.5E-07	4.4E-07	4.2E-07	4.2E-07	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.7E-07	4.7E-07
2103	3.9E-07	4.1E-07	4.1E-07	4.0E-07	3.9E-07	3.8E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.3E-07
2104	3.5E-07	3.6E-07	3.7E-07	3.6E-07	3.5E-07	3.4E-07	3.4E-07	3.4E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	3.9E-07
2105	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.9E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07
2106	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2107	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
2108	2.1E-07	2.1E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07
2109	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.7E-07	3.8E-07	3.8E-07	3.9E-07	3.9E-07	4.0E-07
2110	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.4E-07	4.5E-07	4.7E-07	4.8E-07	4.8E-07	4.9E-07	4.9E-07
2111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2112	4.0E-07	4.1E-07	4.2E-07	4.1E-07	3.9E-07	3.8E-07	3.9E-07	3.9E-07	4.0E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07
2113	3.4E-07	3.5E-07	3.6E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
2114	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.0E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07
2115	2.7E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07
2116	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07
2117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2118	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07
2119	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07
2120	4.4E-07	4.6E-07	4.6E-07	4.5E-07	4.3E-07	4.2E-07	4.2E-07	4.2E-07	4.3E-07	4.4E-07	4.6E-07	4.6E-07	4.7E-07
2121	3.8E-07	4.0E-07	4.0E-07	3.9E-07	3.7E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07
2122	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07
2123	3.0E-07	3.1E-07	3.1E-07	3.1E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07
2124	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
2125	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07
2126	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.2E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
2127	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07
2128	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
2129	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07
2130	4.4E-07	4.5E-07	4.6E-07	4.5E-07	4.3E-07	4.2E-07	4.2E-07	4.2E-07	4.3E-07	4.5E-07	4.6E-07	4.7E-07	4.7E-07
2131	3.9E-07	4.0E-07	4.1E-07	4.0E-07	3.8E-07	3.7E-07	3.7E-07	3.8E-07	3.8E-07	4.0E-07	4.1E-07	4.1E-07	4.2E-07
2132	3.4E-07	3.5E-07	3.6E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
2133	3.0E-07	3.1E-07	3.2E-07	3.1E-07	3.0E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07
2134	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07
2135	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.4E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07
2136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2137	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07
2138	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
2139	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
2140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2142	3.7E-07	3.9E-07	4.0E-07	3.9E-07	3.8E-07	3.8E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.3E-07	4.3E-07	4.4E-07
2143	3.2E-07	3.3E-07	3.4E-07	3.3E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
2144	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.8E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07
2145	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2146	2.2E-07	2.3E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
2147	2.1E-07	2.1E-07	2.2E-07	2.1E-07	2.1E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07
2148	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2149	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
2150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2154	3.2E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.8E-07	3.9E-07	3.9E-07	4.0E-07
2155	2.6E-07	2.7E-07	2.8E-07	2.7E-07	2.7E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07
2156	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07
2157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2158	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2159	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07
2160	5.0E-07	5.2E-07	5.3E-07	5.2E-07	5.1E-07	5.0E-07	5.0E-07	5.1E-07	5.4E-07	5.6E-07	5.8E-07	6.0E-07	6.0E-07
2161	4.5E-07	4.6E-07	4.7E-07	4.6E-07	4.5E-07	4.4E-07	4.4E-07	4.5E-07	4.7E-07	4.9E-07	5.0E-07	5.1E-07	5.2E-07
2162	3.9E-07	4.1E-07	4.1E-07	4.1E-07	4.0E-07	3.9E-07	3.9E-07	4.0E-07	4.1E-07	4.3E-07	4.4E-07	4.5E-07	4.5E-07
2163	3.5E-07	3.7E-07	3.7E-07	3.7E-07	3.6E-07	3.5E-07	3.5E-07	3.6E-07	3.7E-07	3.9E-07	4.0E-07	4.0E-07	4.1E-07
2164	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.4E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07
2165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2166	3.3E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	4.0E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07
2167	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07
2168	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2169	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07
2170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2172	3.7E-07	3.9E-07	3.9E-07	3.8E-07	3.7E-07	3.6E-07	3.7E-07	3.7E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07
2173	3.3E-07	3.5E-07	3.5E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.8E-07	3.8E-07	3.9E-07
2174	3.1E-07	3.2E-07	3.3E-07	3.2E-07	3.2E-07	3.1E-07	3.1E-07	3.2E-07	3.3E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
2175	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.6E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07
2176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2178	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
2179	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
2180	5.2E-07	5.4E-07	5.5E-07	5.4E-07	5.2E-07	5.0E-07	5.1E-07	5.2E-07	5.4E-07	5.6E-07	5.8E-07	5.9E-07	6.0E-07
2181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2182	4.1E-07	4.2E-07	4.3E-07	4.2E-07	4.1E-07	4.0E-07	4.0E-07	4.1E-07	4.3E-07	4.4E-07	4.6E-07	4.7E-07	4.7E-07
2183	3.6E-07	3.8E-07	3.8E-07	3.8E-07	3.7E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07
2184	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2186	2.8E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	2.9E-07	3.0E-07	3.0E-07	3.2E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07
2187	2.9E-07	3.1E-07	3.2E-07	3.2E-07	3.1E-07	3.1E-07	3.2E-07	3.3E-07	3.5E-07	3.6E-07	3.8E-07	3.9E-07	3.9E-07
2188	3.4E-07	3.5E-07	3.7E-07	3.7E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.3E-07	4.5E-07	4.7E-07	4.8E-07	4.8E-07
2189	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07
2190	5.8E-07	6.1E-07	6.1E-07	6.0E-07	5.8E-07	5.5E-07	5.6E-07	5.8E-07	5.9E-07	6.1E-07	6.2E-07	6.3E-07	6.3E-07
2191	5.2E-07	5.4E-07	5.5E-07	5.4E-07	5.2E-07	5.0E-07	5.1E-07	5.3E-07	5.4E-07	5.6E-07	5.7E-07	5.8E-07	5.9E-07
2192	4.4E-07	4.6E-07	4.7E-07	4.7E-07	4.6E-07	4.5E-07	4.5E-07	4.7E-07	5.0E-07	5.4E-07	5.6E-07	5.8E-07	5.9E-07
2193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2199	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
2200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2201	5.5E-07	5.7E-07	5.8E-07	5.7E-07	5.4E-07	5.2E-07	5.3E-07	5.5E-07	5.6E-07	5.7E-07	5.8E-07	5.9E-07	5.9E-07
2202	4.8E-07	5.0E-07	5.0E-07	4.9E-07	4.7E-07	4.6E-07	4.6E-07	4.8E-07	4.9E-07	5.1E-07	5.2E-07	5.3E-07	5.3E-07
2203	4.2E-07	4.4E-07	4.4E-07	4.3E-07	4.2E-07	4.1E-07	4.1E-07	4.3E-07	4.5E-07	4.7E-07	4.8E-07	4.9E-07	5.0E-07
2204	3.7E-07	3.9E-07	4.0E-07	3.9E-07	3.8E-07	3.7E-07	3.7E-07	3.8E-07	4.0E-07	4.2E-07	4.4E-07	4.5E-07	4.6E-07
2205	3.4E-07	3.6E-07	3.6E-07	3.6E-07	3.4E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	3.9E-07
2206	3.1E-07	3.2E-07	3.3E-07	3.2E-07	3.1E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07
2207	2.9E-07	3.0E-07	3.0E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07
2208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2209	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07
2210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2225	5.5E-07	5.7E-07	5.8E-07	5.6E-07	5.4E-07	5.1E-07	5.2E-07	5.4E-07	5.4E-07	5.5E-07	5.6E-07	5.7E-07	5.7E-07
2226	4.9E-07	5.1E-07	5.1E-07	5.0E-07	4.8E-07	4.6E-07	4.7E-07	4.8E-07	4.9E-07	5.0E-07	5.1E-07	5.2E-07	5.2E-07
2227	4.2E-07	4.4E-07	4.4E-07	4.3E-07	4.1E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.7E-07
2228	3.9E-07	4.0E-07	4.0E-07	3.9E-07	3.8E-07	3.7E-07	3.7E-07	3.8E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.3E-07
2229	3.5E-07	3.6E-07	3.7E-07	3.6E-07	3.5E-07	3.4E-07	3.4E-07	3.5E-07	3.7E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07
2230	3.2E-07	3.3E-07	3.4E-07	3.3E-07	3.2E-07	3.1E-07	3.2E-07	3.2E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
2231	2.9E-07	3.1E-07	3.1E-07	3.0E-07	3.0E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07	3.4E-07
2232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2236	5.2E-07	5.4E-07	5.4E-07	5.3E-07	5.0E-07	4.8E-07	4.9E-07	5.0E-07	5.1E-07	5.2E-07	5.3E-07	5.4E-07	5.4E-07
2237	4.6E-07	4.8E-07	4.8E-07	4.7E-07	4.5E-07	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.7E-07	4.8E-07	4.9E-07	4.9E-07
2238	4.0E-07	4.2E-07	4.2E-07	4.1E-07	4.0E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07	4.5E-07
2239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2241	3.0E-07	3.2E-07	3.2E-07	3.1E-07	3.1E-07	3.0E-07	3.0E-07	3.1E-07	3.3E-07	3.4E-07	3.6E-07	3.7E-07	3.7E-07
2242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2245	5.5E-07	5.7E-07	5.7E-07	5.5E-07	5.3E-07	5.0E-07	5.1E-07	5.3E-07	5.3E-07	5.4E-07	5.5E-07	5.6E-07	5.6E-07
2246	4.9E-07	5.1E-07	5.1E-07	4.9E-07	4.7E-07	4.5E-07	4.6E-07	4.7E-07	4.8E-07	4.9E-07	5.0E-07	5.1E-07	5.1E-07
2247	4.3E-07	4.5E-07	4.5E-07	4.4E-07	4.2E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.6E-07
2248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2249	3.6E-07	3.7E-07	3.7E-07	3.6E-07	3.5E-07	3.4E-07	3.4E-07	3.5E-07	3.6E-07	3.8E-07	3.8E-07	3.9E-07	4.0E-07
2250	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
2251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2253	5.7E-07	5.9E-07	5.9E-07	5.6E-07	5.4E-07	5.1E-07	5.2E-07	5.4E-07	5.5E-07	5.6E-07	5.6E-07	5.7E-07	5.7E-07
2254	5.1E-07	5.3E-07	5.3E-07	5.1E-07	4.9E-07	4.7E-07	4.8E-07	4.9E-07	5.0E-07	5.1E-07	5.1E-07	5.2E-07	5.2E-07
2255	4.6E-07	4.7E-07	4.8E-07	4.6E-07	4.4E-07	4.2E-07	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.7E-07	4.7E-07	4.8E-07
2256	4.1E-07	4.2E-07	4.2E-07	4.1E-07	4.0E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.2E-07	4.3E-07	4.3E-07
2257	3.6E-07	3.7E-07	3.8E-07	3.7E-07	3.5E-07	3.4E-07	3.4E-07	3.5E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07
2258	3.4E-07	3.5E-07	3.6E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07	3.8E-07
2259	3.2E-07	3.3E-07	3.3E-07	3.2E-07	3.1E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.6E-07
2260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2261	5.2E-07	5.4E-07	5.4E-07	5.1E-07	4.9E-07	4.7E-07	4.8E-07	5.0E-07	5.0E-07	5.1E-07	5.2E-07	5.3E-07	5.3E-07
2262	4.7E-07	4.9E-07	4.9E-07	4.7E-07	4.5E-07	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.7E-07	4.8E-07	4.8E-07	4.8E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2263	4.2E-07	4.4E-07	4.4E-07	4.3E-07	4.1E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07	4.5E-07
2264	3.8E-07	3.9E-07	4.0E-07	3.8E-07	3.7E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07
2265	3.5E-07	3.6E-07	3.6E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.7E-07	3.8E-07	3.8E-07	3.9E-07
2266	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.2E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07
2267	5.1E-07	5.3E-07	5.3E-07	5.0E-07	4.8E-07	4.6E-07	4.7E-07	4.9E-07	5.0E-07	5.0E-07	5.1E-07	5.1E-07	5.2E-07
2268	4.7E-07	4.9E-07	4.9E-07	4.7E-07	4.5E-07	4.3E-07	4.4E-07	4.6E-07	4.6E-07	4.7E-07	4.8E-07	4.8E-07	4.9E-07
2269	4.3E-07	4.5E-07	4.5E-07	4.3E-07	4.2E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.3E-07	4.4E-07	4.5E-07	4.5E-07
2270	3.9E-07	4.1E-07	4.1E-07	4.0E-07	3.8E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07	4.2E-07
2271	3.5E-07	3.6E-07	3.6E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.7E-07	3.8E-07	3.8E-07	3.9E-07
2272	3.3E-07	3.4E-07	3.5E-07	3.4E-07	3.3E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
2273	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.0E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07
2274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2275	5.0E-07	5.2E-07	5.2E-07	4.9E-07	4.8E-07	4.7E-07	4.7E-07	4.9E-07	5.0E-07	5.1E-07	5.1E-07	5.2E-07	5.2E-07
2276	5.1E-07	5.3E-07	5.2E-07	5.0E-07	4.8E-07	4.7E-07	4.7E-07	4.9E-07	5.0E-07	5.0E-07	5.1E-07	5.1E-07	5.2E-07
2277	5.0E-07	5.2E-07	5.2E-07	4.9E-07	4.7E-07	4.6E-07	4.7E-07	4.8E-07	4.9E-07	4.9E-07	5.0E-07	5.0E-07	5.1E-07
2278	4.8E-07	5.0E-07	5.0E-07	4.7E-07	4.6E-07	4.4E-07	4.5E-07	4.6E-07	4.7E-07	4.8E-07	4.8E-07	4.9E-07	4.9E-07
2279	4.6E-07	4.8E-07	4.8E-07	4.5E-07	4.4E-07	4.2E-07	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.6E-07	4.7E-07	4.7E-07
2280	4.3E-07	4.5E-07	4.5E-07	4.3E-07	4.1E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.3E-07	4.4E-07	4.5E-07	4.5E-07
2281	4.0E-07	4.1E-07	4.1E-07	4.0E-07	3.8E-07	3.7E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07	4.1E-07
2282	3.6E-07	3.7E-07	3.8E-07	3.6E-07	3.5E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	3.9E-07
2283	3.3E-07	3.4E-07	3.5E-07	3.4E-07	3.2E-07	3.1E-07	3.1E-07	3.2E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
2284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2290	4.4E-07	4.5E-07	4.5E-07	4.3E-07	4.1E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.3E-07	4.4E-07	4.4E-07	4.5E-07
2291	4.2E-07	4.3E-07	4.4E-07	4.1E-07	4.0E-07	3.9E-07	3.9E-07	4.1E-07	4.1E-07	4.2E-07	4.3E-07	4.3E-07	4.3E-07
2292	4.0E-07	4.1E-07	4.1E-07	3.9E-07	3.8E-07	3.7E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07	4.1E-07	4.1E-07
2293	3.7E-07	3.8E-07	3.8E-07	3.7E-07	3.5E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	3.8E-07	3.9E-07
2294	3.4E-07	3.5E-07	3.5E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
2295	3.2E-07	3.3E-07	3.3E-07	3.2E-07	3.1E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07
2296	3.0E-07	3.1E-07	3.2E-07	3.1E-07	3.0E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07
2297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2298	4.0E-07	4.1E-07	4.2E-07	4.0E-07	4.0E-07	3.8E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.2E-07	4.3E-07
2299	4.0E-07	4.2E-07	4.2E-07	4.0E-07	3.9E-07	3.8E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07	4.2E-07	4.2E-07
2300	4.1E-07	4.2E-07	4.2E-07	4.0E-07	3.9E-07	3.8E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07	4.2E-07	4.2E-07
2301	4.0E-07	4.2E-07	4.2E-07	4.0E-07	3.9E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07	4.1E-07	4.1E-07	4.2E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2302	4.0E-07	4.1E-07	4.1E-07	3.9E-07	3.8E-07	3.7E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07	4.1E-07	4.1E-07
2303	3.8E-07	4.0E-07	4.0E-07	3.8E-07	3.7E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	3.9E-07	4.0E-07	4.0E-07
2304	3.6E-07	3.8E-07	3.8E-07	3.6E-07	3.5E-07	3.4E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07	3.8E-07	3.8E-07
2305	3.4E-07	3.5E-07	3.5E-07	3.4E-07	3.3E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.6E-07	3.6E-07
2306	3.1E-07	3.2E-07	3.3E-07	3.1E-07	3.0E-07	2.9E-07	3.0E-07	3.0E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07
2307	3.0E-07	3.1E-07	3.2E-07	3.1E-07	3.0E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07
2308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2314	3.7E-07	3.8E-07	3.8E-07	3.7E-07	3.6E-07	3.5E-07	3.5E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	3.8E-07	3.9E-07
2315	3.7E-07	3.8E-07	3.8E-07	3.7E-07	3.6E-07	3.5E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07	3.8E-07	3.8E-07	3.8E-07
2316	3.7E-07	3.8E-07	3.8E-07	3.7E-07	3.6E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	3.8E-07	3.8E-07
2317	3.6E-07	3.7E-07	3.8E-07	3.6E-07	3.5E-07	3.4E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07	3.7E-07	3.7E-07	3.8E-07
2318	3.5E-07	3.6E-07	3.7E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07	3.7E-07	3.7E-07
2319	3.3E-07	3.5E-07	3.5E-07	3.3E-07	3.2E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07
2320	3.1E-07	3.2E-07	3.3E-07	3.1E-07	3.0E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07
2321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2324	3.4E-07	3.5E-07	3.5E-07	3.4E-07	3.4E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07
2325	3.4E-07	3.5E-07	3.5E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07	3.6E-07
2326	3.4E-07	3.5E-07	3.5E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07
2327	3.3E-07	3.5E-07	3.5E-07	3.3E-07	3.2E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07
2328	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.2E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07
2329	3.1E-07	3.2E-07	3.2E-07	3.1E-07	3.0E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07
2330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2331	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.4E-07	1.3E-07	1.1E-07	9.6E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
2332	1.9E-07	2.0E-07	1.9E-07	1.7E-07	1.6E-07	1.4E-07	1.2E-07	1.1E-07	1.2E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07
2333	2.2E-07	2.2E-07	2.1E-07	2.0E-07	1.7E-07	1.6E-07	1.4E-07	1.3E-07	1.4E-07	1.5E-07	1.7E-07	1.7E-07	1.8E-07
2334	2.0E-07	2.1E-07	2.1E-07	1.9E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07
2335	2.4E-07	2.5E-07	2.4E-07	2.2E-07	2.0E-07	1.8E-07	1.6E-07	1.5E-07	1.6E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07
2336	2.3E-07	2.4E-07	2.3E-07	2.1E-07	2.0E-07	1.9E-07	1.7E-07	1.6E-07	1.7E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07
2337	2.2E-07	2.2E-07	2.2E-07	2.1E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07
2338	2.8E-07	2.8E-07	2.8E-07	2.5E-07	2.3E-07	2.1E-07	2.0E-07	1.8E-07	2.0E-07	2.1E-07	2.3E-07	2.4E-07	2.4E-07
2339	2.5E-07	2.6E-07	2.6E-07	2.4E-07	2.2E-07	2.1E-07	2.0E-07	1.9E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07
2340	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2341	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	2.2E-07	2.2E-07	2.1E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07
2342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2344	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.0E-07	9.3E-08	1.1E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07
2345	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	9.5E-08	8.4E-08	7.4E-08	9.0E-08	1.0E-07	1.2E-07	1.2E-07	1.3E-07
2346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2349	1.3E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.7E-08	7.7E-08	5.9E-08	7.1E-08	8.3E-08	9.3E-08	1.0E-07	1.0E-07
2350	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.1E-07	1.1E-07	9.1E-08	7.8E-08	9.5E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07
2351	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.0E-07	9.6E-08	8.3E-08	7.2E-08	8.8E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07
2352	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.5E-08	8.9E-08	7.9E-08	7.0E-08	9.3E-08	1.1E-07	1.3E-07	1.4E-07	1.4E-07
2353	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.0E-07	9.6E-08	8.9E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2354	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	9.9E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
2355	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
2356	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
2357	1.1E-07	1.2E-07	1.1E-07	1.1E-07	9.5E-08	8.7E-08	7.6E-08	6.6E-08	9.2E-08	1.1E-07	1.3E-07	1.4E-07	1.5E-07
2358	1.3E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	9.8E-08	9.0E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2359	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
2360	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
2361	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
2362	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2365	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
2366	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2367	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2368	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2369	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2375	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2377	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07
2378	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2379	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2386	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07
2387	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07
2388	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2389	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
2390	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
2391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2398	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07
2399	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2400	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
2401	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.5E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
2402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2404	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	9.8E-08	9.0E-08	1.1E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07
2405	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.0E-07	9.6E-08	1.1E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07
2406	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	9.4E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07
2407	1.1E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	9.5E-08	9.0E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
2408	1.0E-07	1.1E-07	1.1E-07	1.0E-07	9.8E-08	9.5E-08	9.0E-08	8.5E-08	1.0E-07	1.1E-07	1.3E-07	1.3E-07	1.4E-07
2409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2411	1.4E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.1E-07	9.5E-08	8.1E-08	9.9E-08	1.2E-07	1.3E-07	1.4E-07	1.4E-07
2412	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.9E-08	8.8E-08	1.0E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07
2413	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	9.9E-08	9.0E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
2414	1.2E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	9.7E-08	8.9E-08	1.0E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
2415	1.1E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	9.3E-08	8.7E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07
2416	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.5E-08	8.9E-08	8.4E-08	9.7E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2417	1.0E-07	1.1E-07	1.1E-07	1.0E-07	9.7E-08	9.4E-08	8.9E-08	8.5E-08	9.8E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2418	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2419	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.1E-07	9.0E-08	7.3E-08	8.9E-08	1.0E-07	1.2E-07	1.3E-07	1.3E-07
2420	1.4E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.1E-07	9.8E-08	8.5E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07
2421	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.0E-07	9.0E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07
2422	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	9.8E-08	9.0E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2423	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	9.6E-08	8.9E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2424	1.1E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	9.3E-08	8.8E-08	9.8E-08	1.1E-07	1.2E-07	1.2E-07	1.2E-07
2425	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	9.5E-08	9.0E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2426	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	9.7E-08	9.3E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2427	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.2E-07	1.1E-07	9.6E-08	8.1E-08	9.5E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2428	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.8E-08	8.7E-08	9.9E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2429	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	9.7E-08	8.8E-08	9.9E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2430	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	9.7E-08	8.9E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2432	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.4E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2433	1.1E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
2434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2435	1.5E-07	1.6E-07	1.5E-07	1.4E-07	1.2E-07	1.1E-07	9.6E-08	8.0E-08	9.3E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2436	1.4E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.9E-08	8.6E-08	9.8E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2437	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	9.8E-08	8.8E-08	9.9E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2438	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	9.9E-08	9.1E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2440	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
2441	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07
2442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2443	1.5E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.0E-07	9.0E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2444	1.4E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.0E-07	9.4E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2445	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	9.8E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
2446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2447	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
2448	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2451	1.6E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.1E-07	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
2452	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
2453	1.5E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07
2454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2459	1.7E-07	1.8E-07	1.8E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07
2460	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07
2461	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07
2462	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07
2463	1.5E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07
2464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2466	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07
2467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2468	1.7E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07
2469	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
2470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2472	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07
2473	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07
2474	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
2475	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.7E-07	1.7E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07
2476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2479	2.2E-07	2.3E-07	2.3E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07
2480	2.1E-07	2.2E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07
2481	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07
2482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2486	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07
2487	2.3E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.1E-07	2.1E-07	2.2E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
2488	2.1E-07	2.2E-07	2.2E-07	2.1E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
2489	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07
2490	2.5E-07	2.6E-07	2.7E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07
2491	2.2E-07	2.3E-07	2.3E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07
2492	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
2493	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
2494	2.7E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
2495	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
2496	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2497	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07
2498	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
2499	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
2500	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
2501	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
2502	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
2503	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
2504	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
2505	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07
2506	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07	3.4E-07
2507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2508	1.4E-07	1.5E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
2509	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07
2510	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2512	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
2513	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
2514	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07
2515	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07
2516	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07
2517	1.2E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
2518	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07
2519	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07
2520	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
2521	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07
2522	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
2523	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2524	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
2525	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07
2526	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07
2527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2530	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
2531	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
2532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2533	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
2534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2536	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
2537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2553	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
2554	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07
2555	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
2556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2561	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
2562	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
2563	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
2564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2573	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.4E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
2574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2581	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.1E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07
2582	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07
2583	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
2584	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07
2585	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
2586	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07
2587	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
2588	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
2589	9.0E-08	9.5E-08	9.7E-08	9.8E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07
2590	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
2591	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
2592	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
2593	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07
2594	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07
2595	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
2596	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
2597	6.2E-08	6.5E-08	6.6E-08	6.7E-08	6.9E-08	7.1E-08	7.3E-08	7.6E-08	9.2E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2598	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07
2599	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07
2600	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
2601	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
2602	6.3E-08	6.6E-08	6.8E-08	6.9E-08	7.1E-08	7.2E-08	7.5E-08	7.8E-08	9.5E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2603	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.9E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07
2604	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07
2605	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07
2606	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07
2607	7.7E-08	8.0E-08	8.1E-08	8.2E-08	8.3E-08	8.4E-08	8.6E-08	8.9E-08	9.5E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07
2608	6.3E-08	6.7E-08	6.9E-08	7.0E-08	7.2E-08	7.3E-08	7.6E-08	8.0E-08	9.7E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2609	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07
2610	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07
2611	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
2612	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
2613	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2614	7.8E-08	8.1E-08	8.2E-08	8.3E-08	8.4E-08	8.5E-08	8.8E-08	9.1E-08	9.7E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2615	6.5E-08	6.9E-08	7.0E-08	7.2E-08	7.4E-08	7.5E-08	7.8E-08	8.2E-08	9.9E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
2616	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07
2617	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07
2618	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07
2619	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
2620	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
2621	6.5E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.6E-08	8.0E-08	8.4E-08	1.0E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07
2622	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07
2623	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07
2624	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07
2625	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07
2626	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07
2627	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
2628	6.8E-08	7.3E-08	7.5E-08	7.7E-08	7.9E-08	8.1E-08	8.5E-08	8.9E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07
2629	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	2.0E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07
2630	2.0E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.9E-07	3.2E-07	3.4E-07	3.6E-07	3.7E-07	3.8E-07
2631	2.4E-07	2.6E-07	2.7E-07	2.9E-07	3.0E-07	3.1E-07	3.3E-07	3.4E-07	3.8E-07	4.0E-07	4.3E-07	4.4E-07	4.5E-07
2632	3.3E-07	3.5E-07	3.6E-07	3.8E-07	3.9E-07	4.1E-07	4.3E-07	4.5E-07	4.7E-07	5.0E-07	5.1E-07	5.3E-07	5.3E-07
2633	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.4E-07	3.5E-07	3.7E-07	3.8E-07	4.0E-07	4.1E-07	4.1E-07
2634	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.3E-07	3.4E-07	3.6E-07	3.7E-07	3.8E-07	3.8E-07
2635	8.6E-08	9.1E-08	9.4E-08	9.6E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07
2636	1.4E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.4E-07	2.8E-07	3.0E-07	3.2E-07	3.3E-07
2637	3.0E-07	3.2E-07	3.4E-07	3.5E-07	3.7E-07	3.9E-07	4.1E-07	4.3E-07	4.7E-07	5.1E-07	5.4E-07	5.6E-07	5.7E-07
2638	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.8E-07	2.9E-07	3.0E-07	3.3E-07	3.5E-07	3.7E-07	3.8E-07	3.9E-07
2639	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07
2640	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07
2641	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
2642	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07
2643	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07
2644	2.8E-07	2.9E-07	3.1E-07	3.2E-07	3.3E-07	3.5E-07	3.6E-07	3.8E-07	4.1E-07	4.3E-07	4.5E-07	4.6E-07	4.7E-07
2645	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07
2646	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07
2647	1.7E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07
2648	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
2649	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07
2650	3.2E-07	3.4E-07	3.5E-07	3.7E-07	3.9E-07	4.0E-07	4.2E-07	4.4E-07	4.7E-07	4.9E-07	5.1E-07	5.2E-07	5.2E-07
2651	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.3E-07	3.4E-07	3.5E-07	3.7E-07	3.9E-07	4.0E-07	4.0E-07	4.1E-07
2652	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2653	2.4E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.4E-07
2654	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
2655	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07
2656	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.1E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07
2657	2.5E-07	2.6E-07	2.7E-07	2.8E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.5E-07	3.7E-07	3.8E-07	3.9E-07	3.9E-07
2658	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
2659	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
2660	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
2661	1.7E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07
2662	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
2663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2664	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
2665	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
2666	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
2667	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
2668	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
2669	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07
2670	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2671	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
2672	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
2673	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
2674	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
2675	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2676	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07
2677	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
2678	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
2679	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
2680	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
2681	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07
2682	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
2683	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
2684	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
2685	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2686	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
2687	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
2688	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07
2689	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2690	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
2691	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2692	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
2693	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
2694	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07
2695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2696	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
2697	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2698	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
2699	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
2700	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
2701	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
2702	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07
2703	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07
2704	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.9E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07
2705	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07
2706	2.7E-07	2.8E-07	2.9E-07	2.8E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07
2707	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
2708	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2709	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
2710	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07
2711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2713	2.8E-07	2.9E-07	2.9E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
2714	2.8E-07	2.9E-07	2.9E-07	2.8E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
2715	2.8E-07	2.9E-07	2.9E-07	2.8E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07
2716	2.7E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07
2717	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
2718	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07
2719	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.1E-07	2.1E-07	2.1E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
2720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2725	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.8E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07
2726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2727	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07
2728	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07
2729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2730	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2731	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
2732	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
2733	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
2734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2743	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.5E-07	2.4E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
2744	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
2745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2751	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
2752	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07
2753	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
2754	9.8E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
2755	7.4E-08	7.7E-08	7.8E-08	7.9E-08	8.0E-08	8.1E-08	8.3E-08	8.6E-08	9.4E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2756	7.3E-08	7.6E-08	7.6E-08	7.7E-08	7.8E-08	7.9E-08	8.0E-08	8.3E-08	8.8E-08	9.2E-08	9.6E-08	9.8E-08	9.9E-08
2757	9.3E-08	9.6E-08	9.5E-08	9.5E-08	9.6E-08	9.7E-08	9.8E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
2758	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
2759	8.7E-08	9.0E-08	9.0E-08	9.0E-08	9.1E-08	9.2E-08	9.4E-08	9.7E-08	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
2760	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07
2761	8.8E-08	9.1E-08	9.2E-08	9.3E-08	9.5E-08	9.6E-08	9.9E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
2762	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
2763	8.9E-08	9.3E-08	9.5E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.3E-07	1.4E-07	1.6E-07	1.6E-07	1.7E-07
2764	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	2.1E-07	2.2E-07	2.4E-07	2.4E-07	2.5E-07
2765	9.1E-08	9.5E-08	9.7E-08	9.8E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
2766	9.4E-08	9.5E-08	9.3E-08	9.2E-08	9.3E-08	9.4E-08	9.5E-08	9.7E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2767	8.7E-08	8.9E-08	8.7E-08	8.7E-08	8.8E-08	8.9E-08	9.0E-08	9.2E-08	9.6E-08	9.9E-08	1.0E-07	1.0E-07	1.1E-07
2768	9.0E-08	9.2E-08	9.1E-08	9.0E-08	9.1E-08	9.2E-08	9.3E-08	9.5E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2769	9.3E-08	9.5E-08	9.4E-08	9.3E-08	9.5E-08	9.6E-08	9.7E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2772	8.8E-08	9.0E-08	9.0E-08	8.9E-08	9.1E-08	9.3E-08	9.5E-08	9.8E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
2773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2774	7.9E-08	8.0E-08	8.0E-08	7.9E-08	8.0E-08	8.1E-08	8.2E-08	8.4E-08	8.8E-08	9.2E-08	9.5E-08	9.7E-08	9.8E-08
2775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2776	7.9E-08	8.1E-08	8.0E-08	7.9E-08	8.0E-08	8.1E-08	8.2E-08	8.4E-08	8.8E-08	9.2E-08	9.5E-08	9.7E-08	9.8E-08
2777	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
2778	6.9E-08	7.1E-08	7.0E-08	7.0E-08	7.1E-08	7.1E-08	7.1E-08	7.3E-08	7.6E-08	7.9E-08	8.1E-08	8.3E-08	8.4E-08
2779	7.8E-08	8.0E-08	7.9E-08	7.9E-08	7.9E-08	8.0E-08	8.1E-08	8.2E-08	8.7E-08	9.0E-08	9.3E-08	9.5E-08	9.6E-08
2780	6.9E-08	7.1E-08	7.1E-08	7.0E-08	7.1E-08	7.1E-08	7.1E-08	7.3E-08	7.6E-08	7.9E-08	8.1E-08	8.3E-08	8.4E-08
2781	7.9E-08	8.1E-08	8.0E-08	7.9E-08	8.0E-08	8.1E-08	8.2E-08	8.3E-08	8.7E-08	9.1E-08	9.3E-08	9.6E-08	9.7E-08
2782	6.9E-08	7.1E-08	7.0E-08	6.9E-08	7.0E-08	7.0E-08	7.1E-08	7.2E-08	7.5E-08	7.8E-08	8.0E-08	8.2E-08	8.3E-08
2783	8.1E-08	8.3E-08	8.2E-08	8.2E-08	8.3E-08	8.3E-08	8.4E-08	8.5E-08	8.9E-08	9.3E-08	9.6E-08	9.8E-08	9.9E-08
2784	6.2E-08	6.4E-08	6.3E-08	6.3E-08	6.3E-08	6.3E-08	6.4E-08	6.5E-08	6.8E-08	7.0E-08	7.2E-08	7.4E-08	7.5E-08
2785	7.0E-08	7.2E-08	7.1E-08	7.0E-08	7.1E-08	7.1E-08	7.1E-08	7.3E-08	7.6E-08	7.9E-08	8.2E-08	8.3E-08	8.4E-08
2786	8.3E-08	8.4E-08	8.4E-08	8.3E-08	8.4E-08	8.4E-08	8.5E-08	8.7E-08	9.1E-08	9.4E-08	9.7E-08	9.9E-08	1.0E-07
2787	6.3E-08	6.5E-08	6.5E-08	6.4E-08	6.4E-08	6.5E-08	6.5E-08	6.6E-08	6.9E-08	7.2E-08	7.4E-08	7.5E-08	7.6E-08
2788	7.1E-08	7.3E-08	7.2E-08	7.2E-08	7.2E-08	7.2E-08	7.3E-08	7.4E-08	7.7E-08	8.0E-08	8.3E-08	8.5E-08	8.6E-08
2789	8.4E-08	8.6E-08	8.5E-08	8.4E-08	8.5E-08	8.5E-08	8.6E-08	8.8E-08	9.2E-08	9.5E-08	9.8E-08	1.0E-07	1.0E-07
2790	6.6E-08	6.7E-08	6.7E-08	6.6E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	7.1E-08	7.4E-08	7.6E-08	7.8E-08	7.9E-08
2791	7.4E-08	7.5E-08	7.4E-08	7.4E-08	7.4E-08	7.5E-08	7.5E-08	7.6E-08	8.0E-08	8.3E-08	8.6E-08	8.7E-08	8.8E-08
2792	8.6E-08	8.8E-08	8.7E-08	8.6E-08	8.7E-08	8.7E-08	8.8E-08	9.0E-08	9.4E-08	9.7E-08	1.0E-07	1.0E-07	1.0E-07
2793	6.8E-08	7.0E-08	6.9E-08	6.9E-08	6.9E-08	6.9E-08	7.0E-08	7.1E-08	7.4E-08	7.7E-08	8.0E-08	8.1E-08	8.2E-08
2794	7.7E-08	7.8E-08	7.7E-08	7.6E-08	7.7E-08	7.8E-08	7.8E-08	7.9E-08	8.3E-08	8.6E-08	8.9E-08	9.1E-08	9.2E-08
2795	7.1E-08	7.2E-08	7.2E-08	7.1E-08	7.2E-08	7.2E-08	7.2E-08	7.4E-08	7.7E-08	8.0E-08	8.3E-08	8.5E-08	8.5E-08
2796	8.1E-08	8.2E-08	8.1E-08	8.0E-08	8.1E-08	8.2E-08	8.2E-08	8.4E-08	8.8E-08	9.1E-08	9.4E-08	9.6E-08	9.7E-08
2797	7.3E-08	7.5E-08	7.4E-08	7.3E-08	7.4E-08	7.5E-08	7.5E-08	7.7E-08	8.0E-08	8.3E-08	8.6E-08	8.8E-08	8.9E-08
2798	7.6E-08	7.8E-08	7.7E-08	7.6E-08	7.7E-08	7.8E-08	7.8E-08	8.0E-08	8.4E-08	8.7E-08	9.0E-08	9.2E-08	9.3E-08
2799	7.8E-08	8.0E-08	7.9E-08	7.9E-08	8.0E-08	8.0E-08	8.1E-08	8.3E-08	8.7E-08	9.0E-08	9.3E-08	9.5E-08	9.6E-08
2800	8.0E-08	8.2E-08	8.1E-08	8.1E-08	8.2E-08	8.2E-08	8.3E-08	8.5E-08	9.0E-08	9.4E-08	9.7E-08	9.9E-08	1.0E-07
2801	8.2E-08	8.4E-08	8.4E-08	8.4E-08	8.5E-08	8.6E-08	8.7E-08	8.9E-08	9.4E-08	9.8E-08	1.0E-07	1.0E-07	1.1E-07
2802	9.5E-08	9.7E-08	9.6E-08	9.5E-08	9.6E-08	9.7E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07
2803	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
2804	1.0E-07	1.0E-07	1.0E-07	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
2805	9.3E-08	9.4E-08	9.3E-08	9.2E-08	9.3E-08	9.4E-08	9.6E-08	9.8E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2806	1.0E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07
2807	8.5E-08	8.7E-08	8.5E-08	8.5E-08	8.6E-08	8.6E-08	8.8E-08	9.0E-08	9.4E-08	9.7E-08	1.0E-07	1.0E-07	1.0E-07
2808	9.6E-08	9.7E-08	9.6E-08	9.5E-08	9.6E-08	9.7E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2809	7.7E-08	7.9E-08	7.8E-08	7.7E-08	7.8E-08	7.9E-08	8.0E-08	8.2E-08	8.5E-08	8.8E-08	9.1E-08	9.3E-08	9.3E-08
2810	7.8E-08	8.0E-08	7.9E-08	7.8E-08	7.9E-08	8.0E-08	8.1E-08	8.3E-08	8.7E-08	9.0E-08	9.2E-08	9.4E-08	9.5E-08
2811	7.0E-08	7.2E-08	7.1E-08	7.1E-08	7.2E-08	7.2E-08	7.3E-08	7.5E-08	7.8E-08	8.0E-08	8.3E-08	8.4E-08	8.5E-08
2812	6.4E-08	6.5E-08	6.5E-08	6.5E-08	6.5E-08	6.5E-08	6.6E-08	6.7E-08	7.0E-08	7.3E-08	7.5E-08	7.7E-08	7.7E-08
2813	5.3E-08	5.5E-08	5.4E-08	5.4E-08	5.4E-08	5.4E-08	5.4E-08	5.5E-08	5.8E-08	6.0E-08	6.2E-08	6.4E-08	6.4E-08
2814	5.9E-08	6.0E-08	6.0E-08	5.9E-08	6.0E-08	6.0E-08	6.0E-08	6.1E-08	6.4E-08	6.6E-08	6.9E-08	7.0E-08	7.1E-08
2815	5.0E-08	5.1E-08	5.1E-08	5.1E-08	5.1E-08	5.1E-08	5.1E-08	5.2E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08
2816	5.5E-08	5.6E-08	5.6E-08	5.5E-08	5.6E-08	5.6E-08	5.6E-08	5.7E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.6E-08
2817	6.0E-08	6.1E-08	6.1E-08	6.0E-08	6.1E-08	6.1E-08	6.1E-08	6.2E-08	6.5E-08	6.8E-08	7.0E-08	7.2E-08	7.2E-08
2818	5.1E-08	5.2E-08	5.2E-08	5.2E-08	5.2E-08	5.2E-08	5.3E-08	5.3E-08	5.6E-08	5.8E-08	6.0E-08	6.2E-08	6.2E-08
2819	5.6E-08	5.7E-08	5.7E-08	5.6E-08	5.7E-08	5.7E-08	5.7E-08	5.8E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.8E-08
2820	6.2E-08	6.4E-08	6.3E-08	6.3E-08	6.3E-08	6.3E-08	6.4E-08	6.5E-08	6.8E-08	7.1E-08	7.3E-08	7.5E-08	7.5E-08
2821	5.3E-08	5.5E-08	5.4E-08	5.4E-08	5.4E-08	5.5E-08	5.5E-08	5.6E-08	5.9E-08	6.1E-08	6.3E-08	6.4E-08	6.5E-08
2822	5.8E-08	6.0E-08	6.0E-08	5.9E-08	6.0E-08	6.0E-08	6.0E-08	6.1E-08	6.4E-08	6.7E-08	6.9E-08	7.1E-08	7.2E-08
2823	6.5E-08	6.7E-08	6.6E-08	6.6E-08	6.6E-08	6.6E-08	6.7E-08	6.8E-08	7.2E-08	7.5E-08	7.7E-08	7.9E-08	7.9E-08
2824	5.4E-08	5.6E-08	5.6E-08	5.5E-08	5.6E-08	5.6E-08	5.6E-08	5.8E-08	6.0E-08	6.3E-08	6.5E-08	6.6E-08	6.7E-08
2825	6.1E-08	6.2E-08	6.2E-08	6.1E-08	6.2E-08	6.2E-08	6.3E-08	6.4E-08	6.7E-08	7.0E-08	7.2E-08	7.4E-08	7.5E-08
2826	6.8E-08	6.9E-08	6.9E-08	6.8E-08	6.9E-08	7.0E-08	7.0E-08	7.2E-08	7.5E-08	7.8E-08	8.1E-08	8.2E-08	8.3E-08
2827	5.6E-08	5.7E-08	5.7E-08	5.7E-08	5.7E-08	5.8E-08	5.8E-08	5.9E-08	6.2E-08	6.5E-08	6.7E-08	6.8E-08	6.9E-08
2828	6.2E-08	6.4E-08	6.4E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.6E-08	7.0E-08	7.3E-08	7.5E-08	7.7E-08	7.8E-08
2829	7.0E-08	7.2E-08	7.1E-08	7.1E-08	7.2E-08	7.2E-08	7.3E-08	7.4E-08	7.8E-08	8.1E-08	8.4E-08	8.6E-08	8.7E-08
2830	5.7E-08	5.9E-08	5.8E-08	5.8E-08	5.9E-08	5.9E-08	5.9E-08	6.1E-08	6.4E-08	6.6E-08	6.9E-08	7.0E-08	7.1E-08
2831	6.4E-08	6.5E-08	6.5E-08	6.5E-08	6.6E-08	6.6E-08	6.7E-08	6.8E-08	7.2E-08	7.5E-08	7.7E-08	7.9E-08	8.0E-08
2832	7.0E-08	7.2E-08	7.1E-08	7.1E-08	7.2E-08	7.2E-08	7.3E-08	7.5E-08	7.9E-08	8.2E-08	8.5E-08	8.7E-08	8.8E-08
2833	5.7E-08	5.9E-08	5.9E-08	5.9E-08	5.9E-08	5.9E-08	6.0E-08	6.1E-08	6.5E-08	6.7E-08	7.0E-08	7.1E-08	7.2E-08
2834	6.5E-08	6.7E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	6.9E-08	7.0E-08	7.4E-08	7.7E-08	8.0E-08	8.2E-08	8.3E-08
2835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2836	5.9E-08	6.1E-08	6.1E-08	6.1E-08	6.1E-08	6.2E-08	6.2E-08	6.4E-08	6.7E-08	7.0E-08	7.3E-08	7.4E-08	7.5E-08
2837	6.5E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	6.8E-08	6.9E-08	7.1E-08	7.5E-08	7.9E-08	8.1E-08	8.4E-08	8.5E-08
2838	7.2E-08	7.4E-08	7.4E-08	7.4E-08	7.5E-08	7.6E-08	7.7E-08	7.9E-08	8.4E-08	8.8E-08	9.2E-08	9.4E-08	9.6E-08
2839	6.2E-08	6.3E-08	6.4E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.7E-08	7.0E-08	7.4E-08	7.6E-08	7.8E-08	7.9E-08
2840	6.7E-08	6.9E-08	6.9E-08	6.9E-08	7.0E-08	7.1E-08	7.2E-08	7.3E-08	7.8E-08	8.2E-08	8.5E-08	8.8E-08	8.9E-08
2841	7.2E-08	7.5E-08	7.5E-08	7.5E-08	7.6E-08	7.7E-08	7.8E-08	8.0E-08	8.7E-08	9.3E-08	9.8E-08	1.0E-07	1.0E-07
2842	6.3E-08	6.5E-08	6.5E-08	6.5E-08	6.6E-08	6.6E-08	6.7E-08	6.9E-08	7.3E-08	7.6E-08	7.9E-08	8.1E-08	8.2E-08
2843	6.8E-08	7.0E-08	7.0E-08	7.0E-08	7.1E-08	7.2E-08	7.3E-08	7.5E-08	8.0E-08	8.4E-08	8.8E-08	9.0E-08	9.2E-08
2844	6.1E-08	6.4E-08	6.5E-08	6.5E-08	6.7E-08	6.8E-08	7.0E-08	7.3E-08	8.7E-08	9.8E-08	1.1E-07	1.1E-07	1.2E-07
2845	6.4E-08	6.6E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	6.9E-08	7.1E-08	7.5E-08	7.8E-08	8.1E-08	8.3E-08	8.4E-08
2846	6.8E-08	7.0E-08	7.1E-08	7.1E-08	7.2E-08	7.3E-08	7.4E-08	7.6E-08	8.2E-08	8.7E-08	9.1E-08	9.4E-08	9.5E-08
2847	5.7E-08	6.0E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08	6.5E-08	6.8E-08	8.3E-08	9.5E-08	1.0E-07	1.1E-07	1.1E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2848	6.5E-08	6.8E-08	6.8E-08	6.8E-08	6.9E-08	6.9E-08	7.1E-08	7.3E-08	7.7E-08	8.1E-08	8.4E-08	8.6E-08	8.7E-08
2849	6.9E-08	7.1E-08	7.2E-08	7.2E-08	7.3E-08	7.4E-08	7.5E-08	7.7E-08	8.3E-08	8.9E-08	9.3E-08	9.6E-08	9.7E-08
2850	5.5E-08	5.8E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08	6.3E-08	6.5E-08	8.0E-08	9.3E-08	1.0E-07	1.1E-07	1.1E-07
2851	7.0E-08	7.2E-08	7.3E-08	7.3E-08	7.4E-08	7.5E-08	7.6E-08	7.9E-08	8.5E-08	9.1E-08	9.5E-08	9.8E-08	9.9E-08
2852	4.5E-08	4.8E-08	4.9E-08	4.9E-08	5.1E-08	5.2E-08	5.4E-08	5.6E-08	7.5E-08	9.0E-08	1.0E-07	1.1E-07	1.1E-07
2853	7.1E-08	7.3E-08	7.4E-08	7.4E-08	7.5E-08	7.6E-08	7.8E-08	8.0E-08	8.7E-08	9.3E-08	9.7E-08	1.0E-07	1.0E-07
2854	9.0E-08	9.2E-08	9.1E-08	9.0E-08	9.0E-08	9.0E-08	9.1E-08	9.4E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07
2855	9.7E-08	9.9E-08	9.8E-08	9.6E-08	9.6E-08	9.6E-08	9.8E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07
2856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2857	8.7E-08	8.9E-08	8.9E-08	8.8E-08	8.8E-08	8.8E-08	8.9E-08	9.2E-08	9.5E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07
2858	9.4E-08	9.6E-08	9.5E-08	9.3E-08	9.4E-08	9.4E-08	9.5E-08	9.8E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2859	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
2860	8.4E-08	8.6E-08	8.6E-08	8.5E-08	8.5E-08	8.6E-08	8.7E-08	8.9E-08	9.3E-08	9.6E-08	9.8E-08	1.0E-07	1.0E-07
2861	9.2E-08	9.4E-08	9.3E-08	9.2E-08	9.2E-08	9.3E-08	9.4E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2862	9.9E-08	1.0E-07	1.0E-07	9.9E-08	9.9E-08	9.9E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
2863	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
2864	8.0E-08	8.2E-08	8.1E-08	8.0E-08	8.1E-08	8.1E-08	8.2E-08	8.5E-08	8.8E-08	9.1E-08	9.3E-08	9.5E-08	9.6E-08
2865	8.7E-08	8.9E-08	8.8E-08	8.8E-08	8.8E-08	8.9E-08	9.0E-08	9.3E-08	9.6E-08	9.9E-08	1.0E-07	1.0E-07	1.1E-07
2866	9.7E-08	9.9E-08	9.8E-08	9.7E-08	9.8E-08	9.8E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
2867	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
2868	7.6E-08	7.8E-08	7.7E-08	7.6E-08	7.7E-08	7.8E-08	7.9E-08	8.1E-08	8.4E-08	8.7E-08	8.9E-08	9.1E-08	9.2E-08
2869	8.3E-08	8.4E-08	8.4E-08	8.3E-08	8.3E-08	8.4E-08	8.5E-08	8.8E-08	9.1E-08	9.4E-08	9.7E-08	9.9E-08	1.0E-07
2870	7.8E-08	8.0E-08	7.9E-08	7.8E-08	7.9E-08	8.0E-08	8.1E-08	8.3E-08	8.6E-08	8.9E-08	9.2E-08	9.3E-08	9.4E-08
2871	8.6E-08	8.7E-08	8.6E-08	8.6E-08	8.6E-08	8.7E-08	8.9E-08	9.1E-08	9.4E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07
2872	8.0E-08	8.2E-08	8.1E-08	8.0E-08	8.1E-08	8.1E-08	8.3E-08	8.5E-08	8.8E-08	9.1E-08	9.4E-08	9.5E-08	9.6E-08
2873	6.8E-08	7.0E-08	7.0E-08	6.9E-08	6.8E-08	6.8E-08	6.9E-08	7.1E-08	7.4E-08	7.7E-08	7.9E-08	8.1E-08	8.2E-08
2874	7.2E-08	7.4E-08	7.4E-08	7.3E-08	7.2E-08	7.2E-08	7.3E-08	7.4E-08	7.8E-08	8.1E-08	8.4E-08	8.6E-08	8.7E-08
2875	7.4E-08	7.7E-08	7.7E-08	7.5E-08	7.5E-08	7.5E-08	7.5E-08	7.7E-08	8.1E-08	8.5E-08	8.8E-08	9.0E-08	9.2E-08
2876	7.6E-08	7.9E-08	7.9E-08	7.8E-08	7.7E-08	7.7E-08	7.7E-08	7.9E-08	8.5E-08	9.0E-08	9.4E-08	9.7E-08	9.9E-08
2877	6.9E-08	7.2E-08	7.3E-08	7.3E-08	7.3E-08	7.3E-08	7.4E-08	7.7E-08	9.2E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2878	7.6E-08	7.8E-08	7.8E-08	7.6E-08	7.6E-08	7.5E-08	7.5E-08	7.6E-08	8.5E-08	9.3E-08	9.9E-08	1.0E-07	1.1E-07
2879	7.9E-08	8.1E-08	8.1E-08	7.9E-08	7.7E-08	7.7E-08	7.6E-08	7.7E-08	8.5E-08	9.2E-08	9.8E-08	1.0E-07	1.0E-07
2880	8.1E-08	8.3E-08	8.3E-08	8.0E-08	7.8E-08	7.7E-08	7.6E-08	7.6E-08	8.4E-08	9.2E-08	9.8E-08	1.0E-07	1.0E-07
2881	8.3E-08	8.5E-08	8.5E-08	8.1E-08	7.9E-08	7.8E-08	7.6E-08	7.6E-08	8.4E-08	9.1E-08	9.7E-08	1.0E-07	1.0E-07
2882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2885	6.9E-08	7.1E-08	7.1E-08	7.0E-08	6.9E-08	6.9E-08	7.0E-08	7.2E-08	7.5E-08	7.8E-08	8.0E-08	8.2E-08	8.3E-08
2886	7.3E-08	7.5E-08	7.5E-08	7.4E-08	7.4E-08	7.3E-08	7.4E-08	7.6E-08	7.9E-08	8.3E-08	8.5E-08	8.8E-08	8.9E-08

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2887	7.6E-08	7.8E-08	7.8E-08	7.7E-08	7.6E-08	7.6E-08	7.7E-08	7.9E-08	8.3E-08	8.7E-08	9.0E-08	9.2E-08	9.4E-08
2888	7.8E-08	8.1E-08	8.1E-08	7.9E-08	7.9E-08	7.9E-08	7.9E-08	8.1E-08	8.7E-08	9.2E-08	9.6E-08	9.9E-08	1.0E-07
2889	6.7E-08	7.0E-08	7.1E-08	7.0E-08	7.0E-08	7.0E-08	7.1E-08	7.3E-08	8.8E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
2890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2891	7.4E-08	7.7E-08	7.7E-08	7.4E-08	7.3E-08	7.2E-08	7.2E-08	7.2E-08	8.3E-08	9.3E-08	1.0E-07	1.1E-07	1.1E-07
2892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2895	7.0E-08	7.2E-08	7.2E-08	7.1E-08	7.0E-08	7.0E-08	7.1E-08	7.3E-08	7.6E-08	7.9E-08	8.1E-08	8.3E-08	8.4E-08
2896	7.4E-08	7.6E-08	7.6E-08	7.5E-08	7.5E-08	7.5E-08	7.5E-08	7.7E-08	8.1E-08	8.4E-08	8.7E-08	8.9E-08	9.0E-08
2897	7.8E-08	8.0E-08	8.0E-08	7.8E-08	7.8E-08	7.8E-08	7.9E-08	8.0E-08	8.4E-08	8.8E-08	9.2E-08	9.4E-08	9.5E-08
2898	8.1E-08	8.3E-08	8.3E-08	8.1E-08	8.1E-08	8.1E-08	8.1E-08	8.3E-08	8.8E-08	9.3E-08	9.7E-08	1.0E-07	1.0E-07
2899	7.6E-08	7.9E-08	7.9E-08	7.8E-08	7.8E-08	7.8E-08	7.9E-08	8.1E-08	9.2E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
2900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2905	6.6E-08	6.8E-08	6.8E-08	6.7E-08	6.6E-08	6.6E-08	6.7E-08	6.9E-08	7.2E-08	7.5E-08	7.7E-08	7.9E-08	7.9E-08
2906	7.0E-08	7.2E-08	7.2E-08	7.1E-08	7.1E-08	7.1E-08	7.2E-08	7.3E-08	7.7E-08	8.0E-08	8.2E-08	8.4E-08	8.5E-08
2907	7.5E-08	7.8E-08	7.7E-08	7.6E-08	7.6E-08	7.6E-08	7.6E-08	7.8E-08	8.2E-08	8.5E-08	8.8E-08	9.0E-08	9.1E-08
2908	7.9E-08	8.2E-08	8.1E-08	8.0E-08	8.0E-08	7.9E-08	8.0E-08	8.2E-08	8.6E-08	9.0E-08	9.3E-08	9.6E-08	9.7E-08
2909	8.3E-08	8.5E-08	8.5E-08	8.3E-08	8.3E-08	8.3E-08	8.3E-08	8.5E-08	9.0E-08	9.5E-08	9.9E-08	1.0E-07	1.0E-07
2910	8.2E-08	8.5E-08	8.5E-08	8.3E-08	8.3E-08	8.3E-08	8.3E-08	8.5E-08	9.3E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2915	6.6E-08	6.8E-08	6.8E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	6.9E-08	7.2E-08	7.5E-08	7.7E-08	7.9E-08	8.0E-08
2916	7.1E-08	7.3E-08	7.3E-08	7.2E-08	7.2E-08	7.2E-08	7.2E-08	7.4E-08	7.7E-08	8.1E-08	8.3E-08	8.5E-08	8.6E-08
2917	7.6E-08	7.9E-08	7.8E-08	7.7E-08	7.7E-08	7.7E-08	7.8E-08	7.9E-08	8.3E-08	8.6E-08	8.9E-08	9.1E-08	9.2E-08
2918	8.2E-08	8.4E-08	8.4E-08	8.2E-08	8.2E-08	8.1E-08	8.2E-08	8.4E-08	8.8E-08	9.2E-08	9.5E-08	9.7E-08	9.9E-08
2919	8.6E-08	8.8E-08	8.8E-08	8.6E-08	8.6E-08	8.5E-08	8.6E-08	8.8E-08	9.3E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07
2920	8.6E-08	8.9E-08	8.9E-08	8.7E-08	8.6E-08	8.6E-08	8.7E-08	8.8E-08	9.5E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2925	6.7E-08	6.9E-08	6.9E-08	6.8E-08	6.8E-08	6.8E-08	6.9E-08	7.1E-08	7.4E-08	7.6E-08	7.9E-08	8.0E-08	8.1E-08

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2926	7.2E-08	7.4E-08	7.4E-08	7.3E-08	7.3E-08	7.2E-08	7.3E-08	7.5E-08	7.8E-08	8.1E-08	8.4E-08	8.6E-08	8.7E-08
2927	7.8E-08	8.0E-08	8.0E-08	7.8E-08	7.8E-08	7.8E-08	7.9E-08	8.1E-08	8.4E-08	8.8E-08	9.0E-08	9.2E-08	9.4E-08
2928	8.4E-08	8.6E-08	8.6E-08	8.4E-08	8.3E-08	8.3E-08	8.4E-08	8.6E-08	9.0E-08	9.4E-08	9.7E-08	9.9E-08	1.0E-07
2929	8.8E-08	9.0E-08	9.0E-08	8.8E-08	8.7E-08	8.7E-08	8.8E-08	9.0E-08	9.5E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07
2930	9.0E-08	9.3E-08	9.3E-08	9.0E-08	9.0E-08	8.9E-08	9.0E-08	9.2E-08	9.8E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2931	8.8E-08	9.1E-08	9.1E-08	8.9E-08	8.8E-08	8.8E-08	8.9E-08	9.1E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2937	6.5E-08	6.6E-08	6.6E-08	6.5E-08	6.5E-08	6.5E-08	6.6E-08	6.8E-08	7.1E-08	7.3E-08	7.5E-08	7.7E-08	7.8E-08
2938	6.9E-08	7.1E-08	7.0E-08	6.9E-08	6.9E-08	6.9E-08	7.0E-08	7.2E-08	7.5E-08	7.8E-08	8.0E-08	8.2E-08	8.3E-08
2939	7.4E-08	7.6E-08	7.5E-08	7.4E-08	7.4E-08	7.4E-08	7.5E-08	7.7E-08	8.0E-08	8.3E-08	8.6E-08	8.7E-08	8.8E-08
2940	7.9E-08	8.2E-08	8.1E-08	8.0E-08	7.9E-08	7.9E-08	8.0E-08	8.2E-08	8.6E-08	8.9E-08	9.2E-08	9.4E-08	9.5E-08
2941	8.5E-08	8.8E-08	8.7E-08	8.5E-08	8.5E-08	8.5E-08	8.6E-08	8.8E-08	9.2E-08	9.6E-08	9.9E-08	1.0E-07	1.0E-07
2942	9.1E-08	9.3E-08	9.3E-08	9.1E-08	9.0E-08	9.0E-08	9.1E-08	9.3E-08	9.8E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2943	9.4E-08	9.6E-08	9.6E-08	9.3E-08	9.3E-08	9.2E-08	9.3E-08	9.5E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07
2944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2948	6.2E-08	6.4E-08	6.4E-08	6.3E-08	6.3E-08	6.3E-08	6.4E-08	6.6E-08	6.8E-08	7.1E-08	7.3E-08	7.4E-08	7.5E-08
2949	6.6E-08	6.8E-08	6.8E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	6.9E-08	7.2E-08	7.5E-08	7.7E-08	7.9E-08	7.9E-08
2950	7.0E-08	7.2E-08	7.2E-08	7.1E-08	7.1E-08	7.1E-08	7.2E-08	7.3E-08	7.6E-08	7.9E-08	8.2E-08	8.3E-08	8.4E-08
2951	7.5E-08	7.7E-08	7.7E-08	7.6E-08	7.6E-08	7.6E-08	7.7E-08	7.8E-08	8.2E-08	8.5E-08	8.7E-08	8.9E-08	9.0E-08
2952	8.1E-08	8.3E-08	8.3E-08	8.1E-08	8.1E-08	8.1E-08	8.2E-08	8.4E-08	8.8E-08	9.1E-08	9.4E-08	9.6E-08	9.7E-08
2953	8.8E-08	9.0E-08	8.9E-08	8.7E-08	8.7E-08	8.7E-08	8.8E-08	9.0E-08	9.4E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07
2954	9.4E-08	9.6E-08	9.5E-08	9.3E-08	9.2E-08	9.2E-08	9.3E-08	9.6E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2960	6.0E-08	6.1E-08	6.1E-08	6.1E-08	6.1E-08	6.1E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.2E-08	7.2E-08
2961	6.3E-08	6.5E-08	6.5E-08	6.4E-08	6.4E-08	6.4E-08	6.5E-08	6.7E-08	7.0E-08	7.2E-08	7.4E-08	7.6E-08	7.6E-08
2962	6.7E-08	6.9E-08	6.9E-08	6.8E-08	6.8E-08	6.9E-08	6.9E-08	7.1E-08	7.4E-08	7.7E-08	7.9E-08	8.0E-08	8.1E-08
2963	7.2E-08	7.4E-08	7.3E-08	7.2E-08	7.2E-08	7.2E-08	7.3E-08	7.5E-08	7.8E-08	8.1E-08	8.3E-08	8.5E-08	8.6E-08
2964	7.7E-08	7.9E-08	7.8E-08	7.7E-08	7.7E-08	7.7E-08	7.8E-08	8.0E-08	8.3E-08	8.7E-08	8.9E-08	9.1E-08	9.2E-08

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
2965	8.3E-08	8.5E-08	8.4E-08	8.3E-08	8.3E-08	8.3E-08	8.4E-08	8.6E-08	8.9E-08	9.3E-08	9.6E-08	9.8E-08	9.9E-08
2966	9.0E-08	9.2E-08	9.1E-08	8.9E-08	8.9E-08	8.9E-08	9.0E-08	9.2E-08	9.6E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07
2967	9.6E-08	9.9E-08	9.8E-08	9.5E-08	9.5E-08	9.5E-08	9.6E-08	9.8E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2972	6.1E-08	6.3E-08	6.2E-08	6.2E-08	6.2E-08	6.2E-08	6.3E-08	6.5E-08	6.7E-08	7.0E-08	7.2E-08	7.3E-08	7.4E-08
2973	6.5E-08	6.7E-08	6.6E-08	6.6E-08	6.6E-08	6.6E-08	6.7E-08	6.9E-08	7.1E-08	7.4E-08	7.6E-08	7.8E-08	7.8E-08
2974	6.9E-08	7.1E-08	7.1E-08	7.0E-08	7.0E-08	7.0E-08	7.1E-08	7.3E-08	7.6E-08	7.9E-08	8.1E-08	8.3E-08	8.3E-08
2975	7.4E-08	7.6E-08	7.5E-08	7.4E-08	7.4E-08	7.4E-08	7.5E-08	7.7E-08	8.0E-08	8.3E-08	8.6E-08	8.7E-08	8.8E-08
2976	7.9E-08	8.1E-08	8.0E-08	7.9E-08	7.9E-08	7.9E-08	8.0E-08	8.2E-08	8.6E-08	8.9E-08	9.1E-08	9.3E-08	9.4E-08
2977	8.5E-08	8.7E-08	8.6E-08	8.5E-08	8.5E-08	8.5E-08	8.6E-08	8.8E-08	9.2E-08	9.5E-08	9.8E-08	1.0E-07	1.0E-07
2978	9.2E-08	9.4E-08	9.3E-08	9.1E-08	9.1E-08	9.1E-08	9.2E-08	9.4E-08	9.8E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2983	5.9E-08	6.0E-08	6.0E-08	6.0E-08	6.0E-08	6.0E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.9E-08	7.0E-08	7.1E-08
2984	6.2E-08	6.4E-08	6.4E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.6E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.5E-08
2985	6.7E-08	6.8E-08	6.8E-08	6.7E-08	6.8E-08	6.8E-08	6.9E-08	7.1E-08	7.3E-08	7.6E-08	7.8E-08	7.9E-08	8.0E-08
2986	7.1E-08	7.3E-08	7.3E-08	7.2E-08	7.2E-08	7.2E-08	7.3E-08	7.5E-08	7.8E-08	8.1E-08	8.3E-08	8.5E-08	8.6E-08
2987	7.6E-08	7.8E-08	7.7E-08	7.6E-08	7.6E-08	7.7E-08	7.8E-08	8.0E-08	8.3E-08	8.6E-08	8.8E-08	9.0E-08	9.1E-08
2988	8.1E-08	8.3E-08	8.3E-08	8.1E-08	8.2E-08	8.2E-08	8.3E-08	8.5E-08	8.8E-08	9.1E-08	9.4E-08	9.6E-08	9.7E-08
2989	8.7E-08	9.0E-08	8.9E-08	8.7E-08	8.7E-08	8.7E-08	8.8E-08	9.1E-08	9.4E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07
2990	9.4E-08	9.7E-08	9.6E-08	9.4E-08	9.3E-08	9.4E-08	9.5E-08	9.7E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2993	6.0E-08	6.1E-08	6.1E-08	6.1E-08	6.1E-08	6.1E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.2E-08	7.2E-08
2994	6.4E-08	6.5E-08	6.5E-08	6.5E-08	6.5E-08	6.5E-08	6.6E-08	6.8E-08	7.0E-08	7.3E-08	7.5E-08	7.6E-08	7.7E-08
2995	6.8E-08	7.0E-08	6.9E-08	6.9E-08	6.9E-08	6.9E-08	7.0E-08	7.2E-08	7.5E-08	7.8E-08	8.0E-08	8.1E-08	8.2E-08
2996	7.3E-08	7.5E-08	7.4E-08	7.4E-08	7.4E-08	7.4E-08	7.5E-08	7.7E-08	8.0E-08	8.3E-08	8.5E-08	8.7E-08	8.8E-08
2997	7.9E-08	8.0E-08	8.0E-08	7.9E-08	7.9E-08	7.9E-08	8.1E-08	8.3E-08	8.6E-08	8.9E-08	9.1E-08	9.3E-08	9.4E-08
2998	8.4E-08	8.6E-08	8.5E-08	8.4E-08	8.4E-08	8.5E-08	8.6E-08	8.8E-08	9.1E-08	9.5E-08	9.7E-08	9.9E-08	1.0E-07
2999	6.1E-08	6.3E-08	6.2E-08	6.2E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08	6.8E-08	7.0E-08	7.2E-08	7.3E-08	7.4E-08
3000	6.5E-08	6.7E-08	6.7E-08	6.6E-08	6.7E-08	6.7E-08	6.8E-08	7.0E-08	7.2E-08	7.5E-08	7.7E-08	7.8E-08	7.9E-08
3001	7.0E-08	7.1E-08	7.1E-08	7.0E-08	7.1E-08	7.1E-08	7.2E-08	7.4E-08	7.7E-08	8.0E-08	8.2E-08	8.3E-08	8.4E-08
3002	7.5E-08	7.7E-08	7.6E-08	7.6E-08	7.6E-08	7.6E-08	7.8E-08	8.0E-08	8.3E-08	8.5E-08	8.8E-08	8.9E-08	9.0E-08
3003	8.1E-08	8.3E-08	8.3E-08	8.2E-08	8.2E-08	8.2E-08	8.4E-08	8.6E-08	8.9E-08	9.2E-08	9.5E-08	9.7E-08	9.7E-08

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3004	6.2E-08	6.4E-08	6.4E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.7E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.5E-08
3005	6.7E-08	6.8E-08	6.8E-08	6.8E-08	6.8E-08	6.8E-08	7.0E-08	7.1E-08	7.4E-08	7.6E-08	7.8E-08	8.0E-08	8.1E-08
3006	7.2E-08	7.3E-08	7.3E-08	7.2E-08	7.3E-08	7.3E-08	7.4E-08	7.6E-08	7.9E-08	8.2E-08	8.4E-08	8.6E-08	8.6E-08
3007	7.7E-08	7.9E-08	7.8E-08	7.8E-08	7.8E-08	7.9E-08	8.0E-08	8.2E-08	8.5E-08	8.8E-08	9.0E-08	9.2E-08	9.3E-08
3008	6.3E-08	6.5E-08	6.5E-08	6.4E-08	6.5E-08	6.5E-08	6.6E-08	6.8E-08	7.0E-08	7.3E-08	7.5E-08	7.6E-08	7.7E-08
3009	6.8E-08	7.0E-08	7.0E-08	6.9E-08	7.0E-08	7.0E-08	7.1E-08	7.3E-08	7.6E-08	7.8E-08	8.0E-08	8.2E-08	8.3E-08
3010	7.4E-08	7.6E-08	7.5E-08	7.4E-08	7.5E-08	7.5E-08	7.7E-08	7.9E-08	8.2E-08	8.4E-08	8.7E-08	8.8E-08	8.9E-08
3011	6.4E-08	6.6E-08	6.6E-08	6.5E-08	6.6E-08	6.6E-08	6.7E-08	6.9E-08	7.2E-08	7.4E-08	7.6E-08	7.7E-08	7.8E-08
3012	7.0E-08	7.2E-08	7.1E-08	7.1E-08	7.1E-08	7.2E-08	7.3E-08	7.5E-08	7.8E-08	8.0E-08	8.2E-08	8.4E-08	8.5E-08
3013	6.5E-08	6.7E-08	6.6E-08	6.6E-08	6.7E-08	6.7E-08	6.8E-08	7.0E-08	7.2E-08	7.5E-08	7.7E-08	7.8E-08	7.9E-08
3014	7.1E-08	7.3E-08	7.2E-08	7.2E-08	7.2E-08	7.3E-08	7.4E-08	7.6E-08	7.9E-08	8.2E-08	8.4E-08	8.5E-08	8.6E-08
3015	6.0E-08	6.2E-08	6.2E-08	6.2E-08	6.2E-08	6.2E-08	6.3E-08	6.5E-08	6.8E-08	7.0E-08	7.2E-08	7.3E-08	7.4E-08
3016	6.6E-08	6.7E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	6.9E-08	7.1E-08	7.3E-08	7.6E-08	7.8E-08	7.9E-08	8.0E-08
3017	7.2E-08	7.4E-08	7.3E-08	7.3E-08	7.4E-08	7.4E-08	7.5E-08	7.7E-08	8.0E-08	8.3E-08	8.5E-08	8.7E-08	8.8E-08
3018	6.1E-08	6.2E-08	6.2E-08	6.2E-08	6.3E-08	6.3E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.2E-08	7.4E-08	7.4E-08
3019	6.6E-08	6.8E-08	6.8E-08	6.7E-08	6.8E-08	6.8E-08	6.9E-08	7.1E-08	7.4E-08	7.6E-08	7.8E-08	8.0E-08	8.1E-08
3020	7.4E-08	7.5E-08	7.5E-08	7.4E-08	7.5E-08	7.5E-08	7.6E-08	7.8E-08	8.1E-08	8.4E-08	8.6E-08	8.8E-08	8.9E-08
3021	6.1E-08	6.3E-08	6.3E-08	6.3E-08	6.3E-08	6.3E-08	6.4E-08	6.6E-08	6.8E-08	7.1E-08	7.3E-08	7.4E-08	7.5E-08
3022	6.7E-08	6.9E-08	6.9E-08	6.8E-08	6.9E-08	6.9E-08	7.0E-08	7.2E-08	7.5E-08	7.7E-08	7.9E-08	8.1E-08	8.2E-08
3023	6.2E-08	6.3E-08	6.3E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.6E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.5E-08
3024	6.8E-08	7.0E-08	6.9E-08	6.9E-08	7.0E-08	7.0E-08	7.1E-08	7.3E-08	7.5E-08	7.8E-08	8.0E-08	8.2E-08	8.2E-08
3025	6.2E-08	6.4E-08	6.4E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.6E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.6E-08
3026	6.2E-08	6.4E-08	6.4E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.6E-08	6.9E-08	7.2E-08	7.4E-08	7.5E-08	7.6E-08
3027	6.2E-08	6.4E-08	6.4E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.6E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.6E-08
3028	6.9E-08	7.1E-08	7.0E-08	7.0E-08	7.0E-08	7.1E-08	7.1E-08	7.3E-08	7.6E-08	7.9E-08	8.1E-08	8.3E-08	8.4E-08
3029	5.6E-08	5.8E-08	5.8E-08	5.8E-08	5.8E-08	5.8E-08	5.8E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	6.8E-08
3030	5.7E-08	5.8E-08	5.8E-08	5.8E-08	5.8E-08	5.8E-08	5.9E-08	6.0E-08	6.2E-08	6.5E-08	6.7E-08	6.8E-08	6.9E-08
3031	6.2E-08	6.4E-08	6.3E-08	6.3E-08	6.4E-08	6.4E-08	6.4E-08	6.5E-08	6.8E-08	7.1E-08	7.3E-08	7.4E-08	7.5E-08
3032	5.6E-08	5.8E-08	5.8E-08	5.7E-08	5.8E-08	5.8E-08	5.8E-08	5.9E-08	6.2E-08	6.4E-08	6.6E-08	6.7E-08	6.8E-08
3033	6.2E-08	6.3E-08	6.3E-08	6.3E-08	6.3E-08	6.3E-08	6.3E-08	6.5E-08	6.7E-08	7.0E-08	7.2E-08	7.4E-08	7.4E-08
3034	5.1E-08	5.3E-08	5.3E-08	5.3E-08	5.3E-08	5.3E-08	5.3E-08	5.4E-08	5.6E-08	5.9E-08	6.0E-08	6.2E-08	6.2E-08
3035	5.5E-08	5.7E-08	5.6E-08	5.6E-08	5.6E-08	5.6E-08	5.7E-08	5.8E-08	6.0E-08	6.3E-08	6.5E-08	6.6E-08	6.7E-08
3036	5.2E-08	5.3E-08	5.3E-08	5.3E-08	5.3E-08	5.3E-08	5.3E-08	5.4E-08	5.7E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08
3037	5.6E-08	5.7E-08	5.7E-08	5.7E-08	5.7E-08	5.7E-08	5.7E-08	5.8E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.7E-08
3038	4.8E-08	5.0E-08	5.0E-08	4.9E-08	5.0E-08	5.0E-08	5.0E-08	5.1E-08	5.3E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08
3039	5.2E-08	5.3E-08	5.3E-08	5.3E-08	5.3E-08	5.3E-08	5.3E-08	5.4E-08	5.7E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08
3040	5.7E-08	5.9E-08	5.9E-08	5.8E-08	5.8E-08	5.8E-08	5.9E-08	6.0E-08	6.2E-08	6.5E-08	6.7E-08	6.8E-08	6.9E-08
3041	1.2E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	9.1E-08	8.1E-08	9.5E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
3042	6.7E-08	6.9E-08	6.9E-08	6.6E-08	6.5E-08	6.4E-08	6.3E-08	6.3E-08	6.7E-08	7.1E-08	7.4E-08	7.7E-08	7.8E-08

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3043	6.7E-08	6.9E-08	6.9E-08	6.6E-08	6.5E-08	6.3E-08	6.2E-08	6.2E-08	6.6E-08	7.1E-08	7.4E-08	7.6E-08	7.8E-08
3044	6.8E-08	7.0E-08	7.0E-08	6.7E-08	6.5E-08	6.4E-08	6.3E-08	6.2E-08	6.7E-08	7.1E-08	7.4E-08	7.7E-08	7.8E-08
3045	6.9E-08	7.1E-08	7.0E-08	6.8E-08	6.6E-08	6.4E-08	6.3E-08	6.2E-08	6.7E-08	7.1E-08	7.5E-08	7.7E-08	7.9E-08
3046	7.0E-08	7.2E-08	7.2E-08	6.9E-08	6.7E-08	6.5E-08	6.4E-08	6.3E-08	6.8E-08	7.2E-08	7.6E-08	7.8E-08	8.0E-08
3047	7.1E-08	7.3E-08	7.3E-08	7.0E-08	6.8E-08	6.6E-08	6.4E-08	6.3E-08	6.8E-08	7.3E-08	7.7E-08	7.9E-08	8.1E-08
3048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3052	8.0E-08	8.3E-08	8.4E-08	8.1E-08	7.9E-08	7.7E-08	7.5E-08	7.4E-08	8.2E-08	9.0E-08	9.6E-08	1.0E-07	1.0E-07
3053	8.0E-08	8.3E-08	8.3E-08	8.0E-08	7.7E-08	7.6E-08	7.3E-08	7.2E-08	8.0E-08	8.7E-08	9.3E-08	9.7E-08	9.9E-08
3054	6.2E-08	6.4E-08	6.4E-08	6.3E-08	6.2E-08	6.1E-08	6.1E-08	6.1E-08	6.6E-08	7.1E-08	7.5E-08	7.8E-08	7.9E-08
3055	6.5E-08	6.7E-08	6.7E-08	6.5E-08	6.4E-08	6.3E-08	6.2E-08	6.2E-08	6.7E-08	7.1E-08	7.5E-08	7.7E-08	7.9E-08
3056	6.7E-08	7.0E-08	6.9E-08	6.7E-08	6.6E-08	6.5E-08	6.4E-08	6.4E-08	6.8E-08	7.2E-08	7.6E-08	7.8E-08	8.0E-08
3057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3067	8.2E-08	8.6E-08	8.6E-08	8.3E-08	8.0E-08	7.9E-08	7.6E-08	7.5E-08	8.3E-08	9.1E-08	9.7E-08	1.0E-07	1.0E-07
3068	8.2E-08	8.5E-08	8.5E-08	8.2E-08	7.9E-08	7.7E-08	7.4E-08	7.3E-08	8.1E-08	8.8E-08	9.4E-08	9.8E-08	1.0E-07
3069	8.1E-08	8.4E-08	8.4E-08	8.2E-08	7.9E-08	7.7E-08	7.4E-08	7.3E-08	8.2E-08	9.0E-08	9.7E-08	1.0E-07	1.0E-07
3070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3071	7.9E-08	8.2E-08	8.3E-08	8.1E-08	7.8E-08	7.7E-08	7.5E-08	7.4E-08	8.5E-08	9.4E-08	1.0E-07	1.1E-07	1.1E-07
3072	6.4E-08	6.7E-08	6.7E-08	6.6E-08	6.5E-08	6.5E-08	6.5E-08	6.6E-08	7.1E-08	7.6E-08	8.0E-08	8.3E-08	8.4E-08
3073	5.9E-08	6.2E-08	6.3E-08	6.2E-08	6.2E-08	6.2E-08	6.3E-08	6.4E-08	7.7E-08	8.8E-08	9.6E-08	1.0E-07	1.1E-07
3074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3087	8.5E-08	8.8E-08	8.8E-08	8.6E-08	8.3E-08	8.1E-08	7.8E-08	7.6E-08	8.5E-08	9.3E-08	9.9E-08	1.0E-07	1.1E-07
3088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3091	8.0E-08	8.4E-08	8.5E-08	8.2E-08	8.0E-08	7.8E-08	7.6E-08	7.4E-08	8.6E-08	9.6E-08	1.0E-07	1.1E-07	1.1E-07
3092	8.2E-08	8.5E-08	8.6E-08	8.4E-08	8.1E-08	7.9E-08	7.7E-08	7.6E-08	8.4E-08	9.2E-08	9.8E-08	1.0E-07	1.0E-07
3093	8.3E-08	8.6E-08	8.7E-08	8.4E-08	8.2E-08	8.0E-08	7.8E-08	7.7E-08	8.5E-08	9.1E-08	9.7E-08	1.0E-07	1.0E-07
3094	6.7E-08	6.9E-08	6.9E-08	6.8E-08	6.8E-08	6.7E-08	6.7E-08	6.9E-08	7.3E-08	7.6E-08	7.9E-08	8.2E-08	8.3E-08
3095	6.6E-08	6.9E-08	6.9E-08	6.8E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	7.4E-08	7.9E-08	8.3E-08	8.6E-08	8.7E-08
3096	6.2E-08	6.5E-08	6.5E-08	6.5E-08	6.5E-08	6.5E-08	6.5E-08	6.7E-08	7.9E-08	8.9E-08	9.7E-08	1.0E-07	1.1E-07
3097	6.8E-08	7.0E-08	7.0E-08	6.8E-08	6.7E-08	6.7E-08	6.6E-08	6.7E-08	7.3E-08	7.8E-08	8.2E-08	8.6E-08	8.7E-08
3098	7.0E-08	7.2E-08	7.2E-08	7.0E-08	6.9E-08	6.8E-08	6.7E-08	6.7E-08	7.2E-08	7.7E-08	8.1E-08	8.4E-08	8.5E-08
3099	7.2E-08	7.5E-08	7.4E-08	7.2E-08	7.0E-08	6.9E-08	6.8E-08	6.8E-08	7.3E-08	7.8E-08	8.1E-08	8.4E-08	8.5E-08
3100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3114	8.2E-08	8.5E-08	8.6E-08	8.4E-08	8.1E-08	7.9E-08	7.6E-08	7.5E-08	8.8E-08	9.9E-08	1.1E-07	1.1E-07	1.2E-07
3115	8.5E-08	8.8E-08	8.8E-08	8.6E-08	8.3E-08	8.1E-08	7.8E-08	7.7E-08	8.6E-08	9.4E-08	1.0E-07	1.0E-07	1.1E-07
3116	8.6E-08	8.9E-08	9.0E-08	8.7E-08	8.4E-08	8.2E-08	8.0E-08	8.0E-08	8.7E-08	9.4E-08	1.0E-07	1.0E-07	1.1E-07
3117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3118	6.7E-08	6.9E-08	6.9E-08	6.8E-08	6.8E-08	6.7E-08	6.8E-08	6.9E-08	7.3E-08	7.6E-08	7.9E-08	8.1E-08	8.2E-08
3119	6.9E-08	7.1E-08	7.1E-08	7.0E-08	7.0E-08	6.9E-08	6.9E-08	7.1E-08	7.5E-08	7.8E-08	8.2E-08	8.4E-08	8.5E-08
3120	6.8E-08	7.1E-08	7.1E-08	7.0E-08	6.9E-08	6.9E-08	6.9E-08	7.0E-08	7.6E-08	8.1E-08	8.6E-08	8.9E-08	9.0E-08

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3121	6.4E-08	6.7E-08	6.8E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	6.9E-08	8.0E-08	9.0E-08	9.8E-08	1.0E-07	1.1E-07
3122	7.0E-08	7.3E-08	7.3E-08	7.1E-08	7.0E-08	6.9E-08	6.9E-08	6.9E-08	7.6E-08	8.1E-08	8.5E-08	8.9E-08	9.0E-08
3123	7.3E-08	7.5E-08	7.5E-08	7.3E-08	7.2E-08	7.1E-08	7.0E-08	7.0E-08	7.6E-08	8.1E-08	8.4E-08	8.7E-08	8.9E-08
3124	7.5E-08	7.7E-08	7.7E-08	7.4E-08	7.3E-08	7.2E-08	7.0E-08	7.0E-08	7.6E-08	8.0E-08	8.4E-08	8.7E-08	8.9E-08
3125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3134	9.0E-08	9.4E-08	9.4E-08	9.1E-08	8.7E-08	8.5E-08	8.2E-08	8.0E-08	8.9E-08	9.7E-08	1.0E-07	1.1E-07	1.1E-07
3135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3137	8.9E-08	9.2E-08	9.2E-08	8.9E-08	8.5E-08	8.2E-08	7.9E-08	7.6E-08	8.6E-08	9.4E-08	1.0E-07	1.1E-07	1.1E-07
3138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3139	8.3E-08	8.7E-08	8.7E-08	8.5E-08	8.2E-08	8.0E-08	7.7E-08	7.6E-08	8.9E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
3140	8.7E-08	9.0E-08	9.1E-08	8.8E-08	8.5E-08	8.3E-08	8.0E-08	7.8E-08	8.8E-08	9.6E-08	1.0E-07	1.1E-07	1.1E-07
3141	8.8E-08	9.1E-08	9.2E-08	8.9E-08	8.6E-08	8.4E-08	8.2E-08	8.1E-08	8.9E-08	9.6E-08	1.0E-07	1.1E-07	1.1E-07
3142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3143	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
3144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3145	6.5E-08	6.7E-08	6.7E-08	6.6E-08	6.6E-08	6.6E-08	6.6E-08	6.8E-08	7.1E-08	7.4E-08	7.6E-08	7.8E-08	7.9E-08
3146	6.8E-08	7.0E-08	7.1E-08	7.0E-08	6.9E-08	6.9E-08	6.9E-08	7.1E-08	7.4E-08	7.8E-08	8.0E-08	8.2E-08	8.3E-08
3147	7.0E-08	7.3E-08	7.3E-08	7.2E-08	7.1E-08	7.1E-08	7.1E-08	7.2E-08	7.7E-08	8.0E-08	8.4E-08	8.6E-08	8.7E-08
3148	7.0E-08	7.2E-08	7.2E-08	7.1E-08	7.1E-08	7.0E-08	7.1E-08	7.2E-08	7.8E-08	8.4E-08	8.9E-08	9.2E-08	9.4E-08
3149	6.7E-08	7.0E-08	7.1E-08	7.0E-08	7.0E-08	7.0E-08	7.1E-08	7.2E-08	8.4E-08	9.4E-08	1.0E-07	1.1E-07	1.1E-07
3150	7.3E-08	7.6E-08	7.6E-08	7.4E-08	7.3E-08	7.2E-08	7.2E-08	7.3E-08	7.9E-08	8.5E-08	8.9E-08	9.3E-08	9.4E-08
3151	7.6E-08	7.8E-08	7.8E-08	7.6E-08	7.5E-08	7.4E-08	7.3E-08	7.3E-08	7.9E-08	8.4E-08	8.8E-08	9.1E-08	9.3E-08
3152	7.8E-08	8.0E-08	8.0E-08	7.7E-08	7.6E-08	7.5E-08	7.3E-08	7.3E-08	7.9E-08	8.4E-08	8.8E-08	9.1E-08	9.2E-08
3153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3164	1.0E-07	1.0E-07	1.0E-07	1.0E-07	9.8E-08	9.6E-08	9.2E-08	9.0E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07
3165	9.3E-08	9.6E-08	9.6E-08	9.2E-08	8.8E-08	8.5E-08	8.1E-08	7.9E-08	8.8E-08	9.7E-08	1.0E-07	1.1E-07	1.1E-07
3166	8.3E-08	8.7E-08	8.8E-08	8.5E-08	8.1E-08	7.9E-08	7.6E-08	7.3E-08	8.9E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
3167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3169	9.0E-08	9.3E-08	9.4E-08	9.1E-08	8.8E-08	8.6E-08	8.3E-08	8.2E-08	9.0E-08	9.7E-08	1.0E-07	1.1E-07	1.1E-07
3170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3171	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
3172	1.9E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07
3173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3174	6.6E-08	6.8E-08	6.8E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	6.9E-08	7.2E-08	7.5E-08	7.8E-08	8.0E-08	8.1E-08
3175	6.9E-08	7.2E-08	7.2E-08	7.1E-08	7.0E-08	7.0E-08	7.1E-08	7.2E-08	7.6E-08	7.9E-08	8.2E-08	8.4E-08	8.5E-08
3176	7.1E-08	7.4E-08	7.4E-08	7.3E-08	7.2E-08	7.2E-08	7.2E-08	7.3E-08	7.8E-08	8.2E-08	8.5E-08	8.8E-08	8.9E-08
3177	7.1E-08	7.4E-08	7.4E-08	7.3E-08	7.3E-08	7.2E-08	7.3E-08	7.4E-08	8.1E-08	8.7E-08	9.1E-08	9.5E-08	9.6E-08
3178	7.0E-08	7.3E-08	7.3E-08	7.3E-08	7.2E-08	7.3E-08	7.3E-08	7.5E-08	8.6E-08	9.6E-08	1.0E-07	1.1E-07	1.1E-07
3179	7.6E-08	7.9E-08	7.9E-08	7.7E-08	7.6E-08	7.5E-08	7.5E-08	7.6E-08	8.2E-08	8.8E-08	9.3E-08	9.6E-08	9.8E-08
3180	7.9E-08	8.2E-08	8.2E-08	7.9E-08	7.8E-08	7.7E-08	7.6E-08	7.7E-08	8.2E-08	8.8E-08	9.2E-08	9.5E-08	9.7E-08
3181	8.1E-08	8.3E-08	8.3E-08	8.0E-08	7.8E-08	7.7E-08	7.6E-08	7.6E-08	8.2E-08	8.7E-08	9.1E-08	9.5E-08	9.6E-08
3182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3191	9.0E-08	9.3E-08	9.2E-08	8.8E-08	8.3E-08	8.0E-08	7.5E-08	7.2E-08	8.0E-08	8.7E-08	9.2E-08	9.6E-08	9.8E-08
3192	9.7E-08	1.0E-07	1.0E-07	9.7E-08	9.2E-08	8.9E-08	8.5E-08	8.2E-08	9.1E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
3193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3194	9.6E-08	9.9E-08	9.9E-08	9.5E-08	9.1E-08	8.8E-08	8.3E-08	8.0E-08	9.0E-08	1.0E-07	1.1E-07	1.1E-07	1.2E-07
3195	8.7E-08	9.0E-08	9.1E-08	8.7E-08	8.3E-08	8.1E-08	7.7E-08	7.4E-08	8.9E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
3196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3198	9.2E-08	9.6E-08	9.7E-08	9.4E-08	9.0E-08	8.8E-08	8.5E-08	8.4E-08	9.3E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3200	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07
3201	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07
3202	3.2E-07	3.4E-07	3.6E-07	3.7E-07	3.9E-07	4.1E-07	4.2E-07	4.4E-07	4.9E-07	5.2E-07	5.5E-07	5.7E-07	5.8E-07
3203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3206	9.0E-08	9.2E-08	9.1E-08	8.6E-08	8.1E-08	7.7E-08	7.2E-08	6.9E-08	7.6E-08	8.3E-08	8.9E-08	9.3E-08	9.5E-08
3207	9.3E-08	9.6E-08	9.5E-08	9.0E-08	8.4E-08	8.1E-08	7.5E-08	7.1E-08	7.9E-08	8.7E-08	9.3E-08	9.7E-08	1.0E-07
3208	9.9E-08	1.0E-07	1.0E-07	9.7E-08	9.2E-08	8.8E-08	8.3E-08	7.9E-08	8.9E-08	9.8E-08	1.0E-07	1.1E-07	1.1E-07
3209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3210	9.8E-08	1.0E-07	1.0E-07	9.7E-08	9.3E-08	8.9E-08	8.4E-08	8.0E-08	9.1E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
3211	8.9E-08	9.3E-08	9.3E-08	8.9E-08	8.5E-08	8.2E-08	7.7E-08	7.4E-08	8.9E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
3212	8.3E-08	8.7E-08	8.8E-08	8.5E-08	8.1E-08	7.9E-08	7.5E-08	7.3E-08	9.2E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
3213	9.3E-08	9.6E-08	9.7E-08	9.3E-08	8.9E-08	8.7E-08	8.3E-08	8.1E-08	9.2E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
3214	9.5E-08	9.9E-08	9.9E-08	9.6E-08	9.3E-08	9.0E-08	8.8E-08	8.6E-08	9.6E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
3215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3216	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
3217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3218	9.1E-08	9.8E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.4E-07	1.6E-07	1.8E-07	1.9E-07	2.0E-07
3219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3221	8.7E-08	9.0E-08	8.9E-08	8.3E-08	7.7E-08	7.3E-08	6.7E-08	6.3E-08	7.3E-08	8.1E-08	8.8E-08	9.3E-08	9.6E-08
3222	9.1E-08	9.4E-08	9.2E-08	8.7E-08	8.1E-08	7.7E-08	7.0E-08	6.5E-08	7.6E-08	8.5E-08	9.3E-08	9.8E-08	1.0E-07
3223	9.6E-08	1.0E-07	9.9E-08	9.4E-08	8.8E-08	8.4E-08	7.7E-08	7.2E-08	8.4E-08	9.5E-08	1.0E-07	1.1E-07	1.1E-07
3224	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.5E-08	1.1E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07
3225	9.4E-08	9.8E-08	9.8E-08	9.3E-08	8.8E-08	8.5E-08	7.9E-08	7.4E-08	8.9E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
3226	8.4E-08	8.8E-08	8.8E-08	8.4E-08	8.0E-08	7.6E-08	7.1E-08	6.7E-08	8.5E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07
3227	8.1E-08	8.6E-08	8.7E-08	8.5E-08	8.1E-08	7.9E-08	7.6E-08	7.4E-08	9.9E-08	1.2E-07	1.4E-07	1.5E-07	1.5E-07
3228	9.6E-08	1.0E-07	1.0E-07	9.8E-08	9.4E-08	9.2E-08	8.9E-08	8.7E-08	1.0E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07
3229	9.9E-08	1.0E-07	1.0E-07	1.0E-07	9.8E-08	9.6E-08	9.4E-08	9.3E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07
3230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3231	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07
3232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3233	7.1E-08	7.6E-08	7.9E-08	7.9E-08	7.8E-08	7.9E-08	8.0E-08	8.1E-08	1.1E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07
3234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3237	9.6E-08	9.9E-08	9.9E-08	9.5E-08	8.9E-08	8.5E-08	7.9E-08	7.4E-08	9.0E-08	1.0E-07	1.2E-07	1.2E-07	1.3E-07

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3238	8.6E-08	8.9E-08	9.0E-08	8.5E-08	8.0E-08	7.6E-08	7.1E-08	6.6E-08	8.5E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07
3239	7.7E-08	8.3E-08	8.5E-08	8.2E-08	7.9E-08	7.7E-08	7.3E-08	7.1E-08	1.0E-07	1.3E-07	1.5E-07	1.6E-07	1.7E-07
3240	9.9E-08	1.0E-07	1.0E-07	1.0E-07	9.7E-08	9.5E-08	9.2E-08	8.9E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
3241	1.0E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	9.7E-08	9.5E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
3242	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07
3243	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07
3244	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.6E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07
3245	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.7E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07
3246	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.9E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07
3247	2.3E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.4E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07
3248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3251	1.0E-07	1.0E-07	1.0E-07	9.9E-08	9.4E-08	9.0E-08	8.3E-08	7.8E-08	9.3E-08	1.1E-07	1.2E-07	1.3E-07	1.3E-07
3252	7.9E-08	8.4E-08	8.5E-08	8.1E-08	7.7E-08	7.4E-08	6.9E-08	6.6E-08	9.4E-08	1.2E-07	1.4E-07	1.5E-07	1.5E-07
3253	1.0E-07	1.0E-07	1.0E-07	1.0E-07	9.5E-08	9.2E-08	8.7E-08	8.4E-08	9.7E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07
3254	1.0E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.6E-08	9.2E-08	9.0E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07
3255	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	9.9E-08	9.7E-08	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
3256	1.1E-07	1.1E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
3257	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
3258	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
3259	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07
3260	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.3E-07	2.5E-07	2.7E-07	2.7E-07	2.8E-07
3261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3263	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.6E-08	8.9E-08	8.3E-08	9.9E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07
3264	8.7E-08	9.1E-08	9.2E-08	8.7E-08	8.2E-08	7.9E-08	7.3E-08	6.8E-08	9.3E-08	1.1E-07	1.3E-07	1.4E-07	1.5E-07
3265	1.0E-07	1.1E-07	1.1E-07	1.0E-07	9.7E-08	9.3E-08	8.8E-08	8.4E-08	9.6E-08	1.1E-07	1.1E-07	1.2E-07	1.2E-07
3266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3267	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	9.8E-08	9.6E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07
3268	1.1E-07	1.1E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
3269	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
3270	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07
3271	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07
3272	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07
3273	1.1E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	9.2E-08	8.6E-08	1.0E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
3274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3282	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
3283	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	9.2E-08	8.4E-08	1.0E-07	1.1E-07	1.3E-07	1.3E-07	1.4E-07
3284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3285	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.5E-08	8.8E-08	8.3E-08	9.5E-08	1.1E-07	1.2E-07	1.2E-07	1.2E-07
3286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3297	7.8E-08	8.1E-08	8.2E-08	8.0E-08	7.7E-08	7.6E-08	7.4E-08	7.3E-08	8.4E-08	9.3E-08	1.0E-07	1.1E-07	1.1E-07
3298	7.8E-08	8.3E-08	8.5E-08	8.4E-08	8.3E-08	8.3E-08	8.3E-08	8.4E-08	1.0E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07
3299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3300	6.1E-08	6.3E-08	6.3E-08	6.1E-08	6.0E-08	5.9E-08	5.8E-08	5.8E-08	6.2E-08	6.6E-08	6.9E-08	7.2E-08	7.3E-08
3301	6.2E-08	6.4E-08	6.4E-08	6.2E-08	6.1E-08	6.0E-08	5.9E-08	5.9E-08	6.3E-08	6.7E-08	7.0E-08	7.2E-08	7.3E-08
3302	6.4E-08	6.6E-08	6.6E-08	6.4E-08	6.2E-08	6.1E-08	6.0E-08	6.0E-08	6.4E-08	6.8E-08	7.1E-08	7.4E-08	7.5E-08
3303	6.5E-08	6.7E-08	6.7E-08	6.5E-08	6.3E-08	6.2E-08	6.1E-08	6.0E-08	6.5E-08	6.9E-08	7.2E-08	7.5E-08	7.6E-08
3304	6.6E-08	6.8E-08	6.8E-08	6.6E-08	6.4E-08	6.2E-08	6.1E-08	6.1E-08	6.5E-08	6.9E-08	7.3E-08	7.5E-08	7.6E-08
3305	6.8E-08	7.0E-08	6.9E-08	6.7E-08	6.5E-08	6.4E-08	6.2E-08	6.2E-08	6.6E-08	7.0E-08	7.4E-08	7.7E-08	7.8E-08
3306	6.8E-08	7.1E-08	7.0E-08	6.8E-08	6.6E-08	6.4E-08	6.3E-08	6.2E-08	6.7E-08	7.1E-08	7.5E-08	7.7E-08	7.9E-08
3307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3311	7.7E-08	8.0E-08	8.1E-08	7.9E-08	7.6E-08	7.5E-08	7.3E-08	7.2E-08	8.1E-08	8.8E-08	9.4E-08	9.9E-08	1.0E-07
3312	7.7E-08	8.0E-08	8.0E-08	7.8E-08	7.5E-08	7.4E-08	7.1E-08	7.0E-08	7.8E-08	8.5E-08	9.1E-08	9.5E-08	9.7E-08
3313	5.9E-08	6.1E-08	6.1E-08	6.0E-08	5.9E-08	5.8E-08	5.8E-08	5.8E-08	6.3E-08	6.7E-08	7.0E-08	7.3E-08	7.4E-08
3314	6.1E-08	6.3E-08	6.3E-08	6.1E-08	6.0E-08	5.9E-08	5.9E-08	5.9E-08	6.3E-08	6.7E-08	7.1E-08	7.3E-08	7.4E-08
3315	6.1E-08	6.3E-08	6.3E-08	6.2E-08	6.2E-08	6.2E-08	6.2E-08	6.2E-08	6.8E-08	7.4E-08	7.8E-08	8.1E-08	8.3E-08

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3316	6.5E-08	6.7E-08	6.7E-08	6.6E-08	6.5E-08	6.5E-08	6.5E-08	6.6E-08	7.0E-08	7.4E-08	7.7E-08	7.9E-08	8.0E-08
3317	6.1E-08	6.3E-08	6.2E-08	6.0E-08	5.9E-08	5.8E-08	5.7E-08	5.7E-08	6.1E-08	6.5E-08	6.8E-08	7.0E-08	7.1E-08
3318	6.5E-08	6.7E-08	6.7E-08	6.5E-08	6.3E-08	6.2E-08	6.0E-08	6.0E-08	6.5E-08	6.9E-08	7.2E-08	7.5E-08	7.6E-08
3319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3327	1.1E-06	1.1E-06	1.2E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
3328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3333	7.1E-07	7.4E-07	7.4E-07	7.2E-07	6.8E-07	6.5E-07	6.5E-07	6.5E-07	6.7E-07	7.0E-07	7.3E-07	7.5E-07	7.5E-07
3334	6.5E-07	6.7E-07	6.7E-07	6.5E-07	6.2E-07	5.9E-07	5.9E-07	5.9E-07	6.1E-07	6.4E-07	6.7E-07	6.8E-07	6.9E-07
3335	5.9E-07	6.1E-07	6.2E-07	6.0E-07	5.7E-07	5.4E-07	5.4E-07	5.5E-07	5.7E-07	6.0E-07	6.3E-07	6.4E-07	6.5E-07
3336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3357	2.2E-06	2.3E-06	2.3E-06	2.3E-06	2.1E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
3358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3359	2.3E-06	2.4E-06	2.3E-06	1.7E-06	1.5E-06	1.5E-06	1.5E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06	1.6E-06
3360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3364	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
3365	9.6E-07	1.0E-06	1.0E-06	9.8E-07	9.7E-07	9.6E-07	9.8E-07	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06
3366	8.5E-07	8.8E-07	8.9E-07	8.8E-07	8.8E-07	8.7E-07	8.8E-07	9.1E-07	9.2E-07	9.4E-07	9.5E-07	9.5E-07	9.6E-07
3367	8.3E-07	8.7E-07	8.8E-07	8.7E-07	8.6E-07	8.5E-07	8.6E-07	8.9E-07	9.0E-07	9.2E-07	9.3E-07	9.3E-07	9.4E-07
3368	8.3E-07	8.6E-07	8.8E-07	8.7E-07	8.7E-07	8.6E-07	8.6E-07	8.9E-07	9.0E-07	9.1E-07	9.2E-07	9.2E-07	9.3E-07
3369	8.2E-07	8.5E-07	8.6E-07	8.6E-07	8.6E-07	8.5E-07	8.5E-07	8.8E-07	8.8E-07	8.9E-07	8.9E-07	9.0E-07	9.0E-07
3370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3411	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
3412	2.7E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07
3413	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07
3414	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07
3415	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07
3416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3424	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07	3.4E-07
3425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3428	2.7E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07
3429	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07	3.8E-07
3430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3539	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	8.9E-08	7.9E-08	9.2E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07
3540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3554	1.7E-07	1.8E-07	1.7E-07	1.5E-07	1.3E-07	1.0E-07	6.4E-08	2.8E-08	4.2E-08	5.5E-08	6.6E-08	7.4E-08	7.8E-08
3555	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.2E-07	9.9E-08	6.7E-08	3.8E-08	5.4E-08	6.9E-08	8.1E-08	8.9E-08	9.4E-08
3556	1.5E-07	1.6E-07	1.5E-07	1.3E-07	1.2E-07	9.8E-08	6.9E-08	4.2E-08	6.2E-08	7.9E-08	9.3E-08	1.0E-07	1.1E-07
3557	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.3E-07	1.0E-07	6.5E-08	3.0E-08	4.4E-08	5.7E-08	6.8E-08	7.6E-08	8.0E-08
3558	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.3E-07	1.1E-07	6.5E-08	2.6E-08	4.0E-08	5.3E-08	6.3E-08	7.1E-08	7.5E-08
3559	2.4E-07	2.4E-07	2.3E-07	2.1E-07	1.8E-07	1.4E-07	7.4E-08	1.5E-08	3.0E-08	4.3E-08	5.4E-08	6.3E-08	6.7E-08
3560	4.1E-07	4.1E-07	4.0E-07	3.7E-07	3.4E-07	2.4E-07	1.2E-07	2.9E-09	1.8E-08	3.2E-08	4.4E-08	5.2E-08	5.7E-08
3561	4.1E-07	4.1E-07	4.0E-07	3.8E-07	3.5E-07	2.4E-07	1.2E-07	4.1E-09	1.9E-08	3.4E-08	4.5E-08	5.4E-08	5.8E-08
3562	3.9E-07	3.9E-07	3.8E-07	3.5E-07	3.2E-07	2.3E-07	1.2E-07	5.5E-09	2.1E-08	3.6E-08	4.7E-08	5.6E-08	6.1E-08
3563	3.3E-07	3.3E-07	3.2E-07	3.0E-07	2.7E-07	1.9E-07	9.9E-08	8.2E-09	2.4E-08	3.9E-08	5.1E-08	6.0E-08	6.4E-08
3564	3.4E-07	3.4E-07	3.3E-07	3.1E-07	2.8E-07	2.0E-07	1.0E-07	5.7E-09	2.2E-08	3.8E-08	5.0E-08	5.9E-08	6.4E-08
3565	2.8E-07	2.8E-07	2.7E-07	2.5E-07	2.2E-07	1.6E-07	8.3E-08	8.8E-09	2.6E-08	4.2E-08	5.5E-08	6.5E-08	6.9E-08
3566	2.3E-07	2.3E-07	2.2E-07	2.0E-07	1.7E-07	1.3E-07	6.9E-08	1.1E-08	3.0E-08	4.8E-08	6.2E-08	7.2E-08	7.7E-08
3567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3579	-9.7E-08	-1.2E-07	-1.5E-07	-2.0E-07	-2.6E-07	-3.1E-07	-4.4E-07	-5.6E-07	-5.2E-07	-4.8E-07	-4.5E-07	-4.3E-07	-4.2E-07
3580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3584	2.8E-06	3.0E-06	3.0E-06	2.8E-06	2.7E-06	2.6E-06	2.8E-06	3.0E-06	3.0E-06	3.1E-06	3.2E-06	3.2E-06	3.2E-06
3585	3.0E-06	3.1E-06	3.2E-06	3.0E-06	2.9E-06	2.8E-06	3.0E-06	3.2E-06	3.2E-06	3.3E-06	3.4E-06	3.4E-06	3.4E-06
3586	3.3E-06	3.5E-06	3.5E-06	3.4E-06	3.2E-06	3.1E-06	3.3E-06	3.5E-06	3.6E-06	3.6E-06	3.7E-06	3.7E-06	3.8E-06
3587	3.9E-06	4.1E-06	4.1E-06	3.9E-06	3.8E-06	3.6E-06	3.8E-06	4.1E-06	4.1E-06	4.2E-06	4.2E-06	4.3E-06	4.3E-06
3588	4.4E-06	4.5E-06	4.6E-06	4.4E-06	4.2E-06	4.0E-06	4.2E-06	4.4E-06	4.5E-06	4.5E-06	4.6E-06	4.6E-06	4.7E-06

Location	Lifetime Resident												
	2025 - 2050	2026 - 2051	2027 - 2052	2028 - 2053	2029 - 2054	2030 - 2055	2031 - 2056	2032 - 2057	2033 - 2058	2034 - 2059	2035 - 2060	2036 - 2061	2037 - 2062
3589	4.5E-06	4.6E-06	4.7E-06	4.5E-06	4.2E-06	4.1E-06	4.2E-06	4.4E-06	4.5E-06	4.5E-06	4.6E-06	4.6E-06	4.7E-06
3590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2	5.6E-09	5.9E-09	5.8E-09	5.4E-09	5.3E-09	5.3E-09	5.5E-09	5.8E-09	6.6E-09	7.3E-09	7.8E-09	8.2E-09	8.4E-09
3	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	9.7E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07
4	7.5E-08	7.9E-08	7.9E-08	7.4E-08	6.7E-08	6.2E-08	5.9E-08	5.7E-08	5.7E-08	6.0E-08	6.2E-08	6.3E-08	6.4E-08
5	2.0E-08	2.1E-08	2.1E-08	2.0E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08
6	5.0E-09	5.5E-09	5.5E-09	5.1E-09	4.5E-09	4.2E-09	4.1E-09	4.1E-09	5.4E-09	6.5E-09	7.4E-09	7.9E-09	8.2E-09
7	8.2E-09	8.8E-09	8.8E-09	8.0E-09	7.1E-09	6.6E-09	6.5E-09	6.5E-09	7.7E-09	8.8E-09	9.6E-09	1.0E-08	1.0E-08
8	7.6E-09	8.5E-09	8.7E-09	9.0E-09	9.5E-09	9.8E-09	1.0E-08	1.1E-08	1.2E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08
9	2.1E-08	2.2E-08	2.3E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
10	4.7E-09	5.4E-09	5.8E-09	5.6E-09	5.4E-09	5.4E-09	5.6E-09	5.9E-09	7.4E-09	8.7E-09	9.7E-09	1.0E-08	1.1E-08
11	3.1E-09	3.6E-09	3.7E-09	3.1E-09	2.5E-09	2.1E-09	2.0E-09	2.0E-09	4.3E-09	6.3E-09	7.8E-09	8.8E-09	9.2E-09
12	4.6E-09	4.9E-09	4.9E-09	4.7E-09	4.7E-09	4.6E-09	4.8E-09	5.0E-09	5.4E-09	5.8E-09	6.1E-09	6.3E-09	6.4E-09
13	2.3E-08	2.4E-08	2.5E-08	2.3E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08
14	4.2E-09	4.6E-09	4.5E-09	4.2E-09	4.0E-09	4.0E-09	4.0E-09	4.2E-09	5.0E-09	5.7E-09	6.2E-09	6.6E-09	6.8E-09
15	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	8.7E-08	9.1E-08	9.6E-08	9.7E-08	9.8E-08	9.9E-08	1.0E-07	1.0E-07
16	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
17	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
18	6.5E-09	6.8E-09	6.5E-09	6.3E-09	6.6E-09	6.8E-09	7.2E-09	7.7E-09	8.3E-09	8.8E-09	9.2E-09	9.5E-09	9.7E-09
19	6.8E-09	7.0E-09	6.8E-09	6.7E-09	6.9E-09	7.1E-09	7.5E-09	8.0E-09	8.6E-09	9.2E-09	9.6E-09	9.9E-09	1.0E-08
20	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
21	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
22	1.9E-09	2.4E-09	2.6E-09	2.7E-09	2.9E-09	3.1E-09	3.5E-09	4.0E-09	5.5E-09	6.8E-09	7.7E-09	8.4E-09	8.7E-09
23	2.0E-08	2.2E-08	2.2E-08	2.0E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
24	2.4E-08	2.6E-08	2.6E-08	2.3E-08	2.0E-08	1.8E-08	1.7E-08	1.7E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08
25	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
26	2.3E-08	2.4E-08	2.4E-08	2.2E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
27	5.8E-08	6.1E-08	6.2E-08	5.6E-08	5.1E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08
28	5.9E-08	6.3E-08	6.4E-08	6.1E-08	5.6E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08
29	1.8E-08	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
30	7.1E-08	7.4E-08	7.5E-08	7.2E-08	6.6E-08	6.1E-08	5.8E-08	5.5E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08
31	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08
32	3.0E-08	3.2E-08	3.2E-08	2.9E-08	2.8E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08	2.9E-08
33	3.6E-08	3.9E-08	4.0E-08	3.8E-08	3.5E-08	3.3E-08	3.2E-08	3.3E-08	3.5E-08	3.8E-08	4.1E-08	4.2E-08	4.3E-08
34	7.1E-09	8.2E-09	8.8E-09	9.2E-09	9.8E-09	1.0E-08	1.1E-08	1.2E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08
35	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	2.0E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08
36	4.1E-08	4.3E-08	4.3E-08	4.0E-08	3.6E-08	3.3E-08	3.1E-08	3.0E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08	3.6E-08
37	3.7E-09	4.0E-09	3.9E-09	3.9E-09	4.0E-09	4.0E-09	4.2E-09	4.4E-09	4.8E-09	5.1E-09	5.4E-09	5.6E-09	5.6E-09
38	7.3E-09	8.0E-09	8.1E-09	7.5E-09	6.9E-09	6.5E-09	6.4E-09	6.4E-09	7.6E-09	8.7E-09	9.5E-09	1.0E-08	1.0E-08
39	6.6E-09	7.4E-09	7.7E-09	8.0E-09	8.4E-09	8.8E-09	9.4E-09	1.0E-08	1.1E-08	1.2E-08	1.3E-08	1.3E-08	1.4E-08

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
40	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
41	5.1E-09	5.4E-09	5.2E-09	5.1E-09	5.2E-09	5.3E-09	5.6E-09	5.9E-09	6.4E-09	6.8E-09	7.1E-09	7.3E-09	7.4E-09
42	5.7E-09	6.5E-09	6.9E-09	7.2E-09	7.7E-09	8.1E-09	8.8E-09	9.5E-09	1.1E-08	1.2E-08	1.3E-08	1.3E-08	1.3E-08
43	5.2E-09	6.1E-09	6.5E-09	6.9E-09	7.4E-09	7.9E-09	8.6E-09	9.4E-09	1.1E-08	1.2E-08	1.3E-08	1.4E-08	1.4E-08
44	6.8E-09	7.1E-09	6.8E-09	6.7E-09	6.9E-09	7.2E-09	7.6E-09	8.1E-09	8.7E-09	9.2E-09	9.7E-09	9.9E-09	1.0E-08
45	5.0E-09	5.3E-09	5.0E-09	4.9E-09	5.1E-09	5.2E-09	5.5E-09	5.9E-09	6.5E-09	7.0E-09	7.4E-09	7.6E-09	7.7E-09
46	4.1E-08	4.3E-08	4.3E-08	4.0E-08	3.6E-08	3.3E-08	3.1E-08	3.0E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08
47	4.1E-08	4.4E-08	4.3E-08	4.1E-08	3.6E-08	3.3E-08	3.2E-08	3.0E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08	3.6E-08
48	2.6E-08	2.8E-08	2.9E-08	2.7E-08	2.5E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08	2.8E-08	2.8E-08	2.9E-08
49	2.3E-08	2.4E-08	2.5E-08	2.4E-08	2.2E-08	2.0E-08	2.0E-08	2.0E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08
50	7.4E-09	7.9E-09	7.7E-09	6.7E-09	5.6E-09	4.9E-09	4.5E-09	4.3E-09	5.7E-09	7.0E-09	8.0E-09	8.6E-09	9.0E-09
51	3.0E-08	3.2E-08	3.2E-08	2.9E-08	2.6E-08	2.3E-08	2.2E-08	2.1E-08	2.2E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08
52	3.3E-08	3.4E-08	3.4E-08	3.2E-08	2.9E-08	2.7E-08	2.5E-08	2.4E-08	2.5E-08	2.6E-08	2.8E-08	2.8E-08	2.9E-08
53	1.3E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08
54	2.3E-08	2.5E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.6E-08	2.6E-08	2.7E-08
55	2.1E-09	3.2E-09	4.0E-09	4.2E-09	4.4E-09	4.8E-09	5.4E-09	6.1E-09	9.1E-09	1.2E-08	1.3E-08	1.5E-08	1.5E-08
56	4.5E-08	4.7E-08	4.7E-08	4.4E-08	4.0E-08	3.7E-08	3.6E-08	3.5E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08
57	7.6E-09	8.7E-09	9.3E-09	9.8E-09	1.0E-08	1.1E-08	1.1E-08	1.2E-08	1.3E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08
58	4.5E-09	4.8E-09	4.4E-09	4.3E-09	4.7E-09	5.1E-09	5.7E-09	6.4E-09	8.2E-09	9.7E-09	1.1E-08	1.2E-08	1.2E-08
59	2.0E-08	2.2E-08	2.3E-08	2.2E-08	2.0E-08	1.9E-08	1.9E-08	2.0E-08	2.3E-08	2.6E-08	2.9E-08	3.1E-08	3.1E-08
60	1.4E-09	1.9E-09	2.0E-09	2.1E-09	2.3E-09	2.5E-09	2.8E-09	3.2E-09	4.8E-09	6.1E-09	7.1E-09	7.8E-09	8.2E-09
61	2.6E-09	3.2E-09	3.4E-09	3.1E-09	2.9E-09	2.8E-09	3.0E-09	3.2E-09	5.2E-09	6.8E-09	8.1E-09	8.9E-09	9.3E-09
62	6.1E-08	6.5E-08	6.5E-08	6.2E-08	5.6E-08	5.2E-08	4.9E-08	4.8E-08	4.8E-08	4.9E-08	5.1E-08	5.2E-08	5.2E-08
63	2.3E-08	2.5E-08	2.5E-08	2.4E-08	2.3E-08	2.1E-08	2.1E-08	2.1E-08	2.3E-08	2.4E-08	2.6E-08	2.6E-08	2.7E-08
64	5.9E-09	6.1E-09	5.8E-09	5.6E-09	5.9E-09	6.1E-09	6.4E-09	6.9E-09	7.6E-09	8.2E-09	8.6E-09	8.9E-09	9.1E-09
65	5.5E-08	5.9E-08	6.1E-08	5.8E-08	5.3E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08
66	4.5E-08	4.7E-08	4.8E-08	4.4E-08	4.0E-08	3.7E-08	3.6E-08	3.5E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08
67	1.5E-08	1.6E-08	1.7E-08	1.5E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08
68	5.0E-09	5.5E-09	5.6E-09	5.2E-09	4.6E-09	4.3E-09	4.2E-09	4.3E-09	5.4E-09	6.5E-09	7.3E-09	7.9E-09	8.1E-09
69	5.5E-09	5.7E-09	5.5E-09	5.4E-09	5.5E-09	5.7E-09	6.0E-09	6.4E-09	6.9E-09	7.3E-09	7.7E-09	7.9E-09	8.0E-09
70	3.3E-08	3.5E-08	3.4E-08	3.2E-08	2.9E-08	2.7E-08	2.5E-08	2.4E-08	2.5E-08	2.6E-08	2.8E-08	2.8E-08	2.9E-08
71	6.6E-09	7.2E-09	7.1E-09	6.3E-09	5.4E-09	4.8E-09	4.5E-09	4.4E-09	6.3E-09	7.9E-09	9.2E-09	1.0E-08	1.0E-08
72	2.3E-08	2.4E-08	2.4E-08	2.2E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
73	1.1E-07	1.1E-07	1.1E-07	1.1E-07	9.7E-08	9.0E-08	8.6E-08	8.3E-08	8.3E-08	8.6E-08	8.8E-08	9.0E-08	9.1E-08
74	7.8E-09	8.5E-09	8.5E-09	8.7E-09	9.1E-09	9.4E-09	1.0E-08	1.1E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.4E-08
75	9.7E-08	1.0E-07	1.0E-07	8.3E-08	7.4E-08	6.5E-08	6.8E-08	7.1E-08	7.2E-08	7.3E-08	7.4E-08	7.5E-08	7.5E-08
76	2.2E-08	2.4E-08	2.5E-08	2.4E-08	2.2E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08
77	1.5E-08	1.6E-08	1.7E-08	1.6E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08
78	7.8E-08	8.3E-08	8.2E-08	7.2E-08	6.2E-08	5.6E-08	5.6E-08	5.6E-08	5.8E-08	6.1E-08	6.4E-08	6.5E-08	6.6E-08

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
79	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
80	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
81	2.6E-09	3.3E-09	3.6E-09	3.8E-09	4.2E-09	4.6E-09	5.1E-09	5.8E-09	7.5E-09	9.0E-09	1.0E-08	1.1E-08	1.1E-08
82	4.7E-08	4.9E-08	5.0E-08	4.7E-08	4.3E-08	4.0E-08	3.9E-08	3.8E-08	3.8E-08	4.0E-08	4.2E-08	4.3E-08	4.3E-08
83	4.7E-09	4.9E-09	4.8E-09	4.7E-09	4.8E-09	4.9E-09	5.1E-09	5.4E-09	5.8E-09	6.1E-09	6.4E-09	6.6E-09	6.7E-09
84	3.1E-08	3.4E-08	3.4E-08	3.1E-08	2.9E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08	3.5E-08
85	9.6E-09	1.0E-08	9.6E-09	8.0E-09	6.4E-09	5.1E-09	4.4E-09	3.9E-09	5.7E-09	7.5E-09	8.8E-09	9.7E-09	1.0E-08
86	7.3E-08	7.7E-08	7.7E-08	7.3E-08	6.6E-08	6.0E-08	5.8E-08	5.6E-08	5.6E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08
87	3.4E-09	3.8E-09	3.9E-09	3.9E-09	4.1E-09	4.3E-09	4.6E-09	4.9E-09	5.7E-09	6.4E-09	6.9E-09	7.3E-09	7.4E-09
88	2.4E-08	2.4E-08	2.0E-08	1.3E-08	5.2E-09	4.6E-10	-2.2E-09	-4.6E-09	1.1E-10	4.5E-09	7.8E-09	1.0E-08	1.1E-08
89	7.3E-08	7.7E-08	7.8E-08	7.3E-08	6.5E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.9E-08	6.0E-08	6.0E-08	6.1E-08
90	3.6E-09	3.8E-09	3.8E-09	3.7E-09	3.8E-09	3.8E-09	4.0E-09	4.2E-09	4.6E-09	4.9E-09	5.2E-09	5.4E-09	5.4E-09
91	3.6E-09	3.8E-09	3.8E-09	3.7E-09	3.8E-09	3.8E-09	4.0E-09	4.3E-09	4.6E-09	5.0E-09	5.2E-09	5.4E-09	5.5E-09
92	3.5E-08	3.8E-08	3.9E-08	3.7E-08	3.4E-08	3.2E-08	3.2E-08	3.2E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	3.9E-08
93	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
94	1.2E-08	1.3E-08	1.3E-08	1.4E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	2.1E-08	2.2E-08	2.2E-08	2.2E-08
95	3.6E-09	3.8E-09	3.8E-09	3.7E-09	3.8E-09	3.8E-09	4.0E-09	4.2E-09	4.6E-09	4.9E-09	5.2E-09	5.3E-09	5.4E-09
96	3.4E-09	3.9E-09	3.9E-09	3.1E-09	2.1E-09	1.5E-09	1.2E-09	1.1E-09	3.9E-09	6.4E-09	8.3E-09	9.5E-09	1.0E-08
97	3.3E-09	3.6E-09	3.6E-09	3.6E-09	3.8E-09	3.8E-09	4.0E-09	4.3E-09	4.9E-09	5.4E-09	5.7E-09	6.0E-09	6.1E-09
98	3.3E-09	3.6E-09	3.6E-09	3.6E-09	3.8E-09	3.8E-09	4.0E-09	4.3E-09	4.9E-09	5.4E-09	5.7E-09	6.0E-09	6.1E-09
99	6.5E-10	1.1E-09	1.2E-09	1.1E-09	1.2E-09	1.2E-09	1.5E-09	1.8E-09	3.7E-09	5.3E-09	6.5E-09	7.3E-09	7.7E-09
100	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08
101	2.6E-08	2.8E-08	2.8E-08	2.6E-08	2.4E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08
102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
599	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
600	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
601	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
602	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
603	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
604	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
605	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
606	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
607	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
608	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
610	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
611	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
612	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
613	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
614	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
615	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
616	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
617	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
618	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
620	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
622	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
623	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
624	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
625	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
626	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
627	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
628	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
630	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
631	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
632	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
633	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
634	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
674	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
680	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
743	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
744	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
762	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
763	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
764	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
765	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
766	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
767	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
768	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
769	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
772	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
774	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
776	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
777	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
778	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
779	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
780	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
781	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
782	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
784	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
785	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
786	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
788	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
789	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
790	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
792	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
808	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
809	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
810	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
811	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
812	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
814	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
815	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
816	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
817	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
818	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
823	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
824	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
825	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
826	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
827	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
828	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
829	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
830	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
831	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
832	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
833	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
834	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
836	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
837	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
838	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
839	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
840	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
841	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
854	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
897	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
916	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
917	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
919	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
920	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
925	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
926	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
928	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
929	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
931	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
938	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
939	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
940	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
941	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
953	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
962	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
963	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
964	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
965	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
966	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
972	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
973	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
974	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
976	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
977	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
990	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
993	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
994	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
995	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
996	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
997	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
998	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
999	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1003	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1004	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1005	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1006	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1007	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1008	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1009	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1010	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1011	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1012	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1013	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1014	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1015	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1016	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1017	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1018	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1019	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1020	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1021	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1023	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1024	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1025	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1026	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1028	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1029	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1030	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1031	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1033	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1034	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1035	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1036	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1042	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1043	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1044	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1045	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1046	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1047	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1052	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1053	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1054	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1055	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1056	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1067	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1068	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1071	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1072	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1097	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1098	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1099	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1599	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1600	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1601	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1602	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1603	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1604	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1605	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1606	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1607	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1608	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1610	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1611	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1612	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1613	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1614	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1615	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1616	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1617	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1618	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1620	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1622	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1623	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1624	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1625	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1626	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1627	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1628	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1630	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1631	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1632	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1633	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1634	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1674	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1680	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1743	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1744	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1762	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1763	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1764	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1765	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1766	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1767	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1768	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1769	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1772	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1774	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1776	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1777	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1778	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1779	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1780	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1781	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1782	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1784	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1785	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1786	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1788	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1789	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1790	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1792	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1808	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1809	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1810	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1811	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1812	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1814	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1815	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1816	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1817	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1818	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1823	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1824	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1825	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1826	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1827	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1828	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1829	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1830	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1831	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1832	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1833	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1834	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1836	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1837	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1838	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1839	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1840	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1841	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1854	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1897	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1916	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1917	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1919	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1920	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1925	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1926	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1928	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1929	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1931	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1938	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1939	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1940	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1941	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1953	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1962	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1963	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1964	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1965	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1966	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1972	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1973	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1974	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1976	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1977	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
1990	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1993	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1994	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1995	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1996	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1997	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1998	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
1999	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2003	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2004	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2005	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2006	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2007	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2008	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2009	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2010	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2011	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2012	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2013	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2014	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2015	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2016	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2017	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2018	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2019	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2020	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2021	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2023	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2024	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2025	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2026	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2028	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2029	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2030	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2031	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2033	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2034	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2035	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2036	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2042	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2043	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2044	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2045	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2046	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2047	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2052	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2053	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2054	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2055	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2056	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2067	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2068	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2071	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2072	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2097	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2098	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2099	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2599	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2600	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2601	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2602	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2603	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2604	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2605	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2606	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2607	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2608	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2609	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2610	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2611	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2612	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2613	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2614	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2615	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2616	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2617	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2618	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2619	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2620	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2621	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2622	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2623	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2624	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2625	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2626	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2627	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2628	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2629	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2630	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2631	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2632	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2633	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2634	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2635	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2636	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2637	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2638	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2639	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2640	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2641	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2642	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2643	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2644	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2645	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2646	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2647	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2648	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2649	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2650	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2651	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2652	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2653	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2654	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2655	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2656	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2657	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2658	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2659	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2660	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2661	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2662	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2663	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2664	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2665	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2666	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2667	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2668	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2669	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2670	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2671	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2672	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2673	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2674	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2675	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2676	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2677	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2678	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2679	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2680	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2681	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2682	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2683	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2684	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2685	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2686	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2687	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2688	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2689	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2690	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2691	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2692	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2693	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2694	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2695	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2696	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2697	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2698	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2699	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2700	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2701	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2702	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2703	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2704	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2705	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2706	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2707	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2708	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2709	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2710	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2711	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2712	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2713	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2714	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2715	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2716	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2717	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2718	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2719	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2720	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2721	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2722	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2723	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2724	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2725	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2726	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2727	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2728	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2729	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2730	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2731	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2732	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2733	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2734	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2735	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2736	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2737	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2738	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2739	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2740	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2741	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2742	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2743	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2744	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2745	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2746	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2747	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2748	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2749	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2750	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2751	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2752	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2753	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2754	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2755	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2756	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2757	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2758	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2759	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2760	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2761	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2762	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2763	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2764	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2765	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2766	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2767	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2768	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2769	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2770	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2771	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2772	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2773	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2774	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2775	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2776	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2777	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2778	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2779	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2780	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2781	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2782	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2783	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2784	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2785	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2786	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2787	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2788	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2789	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2790	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2791	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2792	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2793	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2794	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2795	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2796	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2797	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2798	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2799	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2800	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2801	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2802	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2803	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2804	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2805	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2806	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2807	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2808	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2809	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2810	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2811	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2812	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2813	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2814	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2815	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2816	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2817	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2818	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2819	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2820	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2821	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2822	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2823	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2824	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2825	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2826	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2827	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2828	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2829	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2830	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2831	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2832	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2833	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2834	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2835	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2836	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2837	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2838	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2839	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2840	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2841	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2842	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2843	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2844	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2845	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2846	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2847	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2848	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2849	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2850	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2851	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2852	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2853	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2854	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2855	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2856	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2857	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2858	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2859	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2860	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2861	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2862	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2863	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2864	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2865	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2866	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2867	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2868	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2869	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2870	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2871	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2872	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2873	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2874	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2875	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2876	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2877	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2878	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2879	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2880	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2881	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2882	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2883	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2884	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2885	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2886	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2887	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2888	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2889	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2890	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2891	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2892	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2893	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2894	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2895	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2896	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2897	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2898	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2899	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2900	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2901	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2902	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2903	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2904	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2905	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2906	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2907	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2908	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2909	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2910	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2911	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2912	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2913	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2914	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2915	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2916	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2917	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2918	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2919	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2920	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2921	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2922	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2923	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2924	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2925	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2926	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2927	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2928	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2929	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2930	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2931	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2932	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2933	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2934	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2935	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2936	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2937	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2938	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2939	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2940	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2941	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2942	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2943	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2944	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2945	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2946	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2947	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2948	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2949	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2950	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2951	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2952	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2953	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2954	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2955	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2956	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2957	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2958	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2959	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2960	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2961	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2962	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2963	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2964	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
2965	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2966	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2967	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2968	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2969	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2970	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2971	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2972	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2973	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2974	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2975	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2976	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2977	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2978	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2979	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2980	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2981	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2982	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2983	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2984	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2985	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2986	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2987	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2988	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2989	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2990	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2991	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2992	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2993	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2994	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2995	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2996	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2997	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2998	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
2999	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3000	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3001	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3002	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3003	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3004	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3005	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3006	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3007	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3008	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3009	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3010	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3011	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3012	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3013	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3014	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3015	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3016	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3017	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3018	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3019	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3020	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3021	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3022	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3023	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3024	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3025	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3026	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3027	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3028	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3029	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3030	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3031	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3032	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3033	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3034	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3035	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3036	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3037	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3038	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3039	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3040	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3041	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3042	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3043	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3044	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3045	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3046	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3047	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3048	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3049	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3050	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3051	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3052	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3053	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3054	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3055	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3056	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3057	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3058	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3059	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3060	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3061	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3062	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3063	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3064	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3065	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3066	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3067	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3068	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3069	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3070	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3071	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3072	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3073	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3074	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3075	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3076	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3077	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3078	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3079	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3080	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3081	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3082	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3083	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3084	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3085	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3086	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3087	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3088	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3089	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3090	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3091	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3092	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3093	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3094	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3095	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3096	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3097	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3098	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3099	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3100	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3101	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3102	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3103	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3104	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3105	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3106	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3107	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3108	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3109	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3110	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3111	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3112	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3113	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3114	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3115	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3116	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3117	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3118	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3119	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3120	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3121	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3122	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3123	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3124	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3125	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3126	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3127	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3128	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3129	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3130	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3131	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3132	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3133	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3134	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3135	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3136	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3137	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3138	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3139	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3140	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3141	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3142	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3143	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3144	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3145	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3146	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3147	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3148	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3149	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3150	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3151	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3152	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3153	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3154	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3155	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3156	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3157	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3158	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3159	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3160	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3161	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3162	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3163	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3164	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3165	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3166	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3167	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3168	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3169	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3170	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3171	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3172	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3173	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3174	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3175	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3176	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3177	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3178	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3179	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3180	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3181	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3182	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3183	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3184	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3185	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3186	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3187	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3188	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3189	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3190	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3191	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3192	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3193	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3194	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3195	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3196	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3197	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3198	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3199	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3200	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3201	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3202	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3203	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3204	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3205	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3206	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3207	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3208	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3209	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3210	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3211	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3212	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3213	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3214	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3215	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3216	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3217	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3218	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3219	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3220	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3221	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3222	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3223	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3224	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3225	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3226	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3227	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3228	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3229	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3230	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3231	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3232	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3233	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3234	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3235	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3236	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3237	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3238	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3239	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3240	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3241	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3242	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3243	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3244	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3245	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3246	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3247	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3248	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3249	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3250	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3251	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3252	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3253	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3254	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3255	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3256	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3257	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3258	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3259	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3260	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3261	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3262	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3263	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3264	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3265	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3266	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3267	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3268	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3269	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3270	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3271	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3272	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3273	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3274	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3275	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3276	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3277	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3278	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3279	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3280	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3281	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3282	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3283	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3284	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3285	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3286	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3287	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3288	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3289	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3290	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3291	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3292	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3293	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3294	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3295	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3296	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3297	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3298	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3299	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3300	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3301	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3302	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3303	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3304	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3305	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3306	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3307	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3308	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3309	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3310	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3311	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3312	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3313	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3314	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3315	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3316	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3317	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3318	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3319	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3320	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3321	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3322	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3323	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3324	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3325	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3326	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3327	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3328	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3329	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3330	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3331	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3332	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3333	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3334	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3335	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3336	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3337	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3338	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3339	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3340	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3341	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3342	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3343	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3344	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3345	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3346	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3347	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3348	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3349	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3350	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3351	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3352	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3353	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3354	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3355	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3356	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3357	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3358	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3359	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3360	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3361	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3362	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3363	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3364	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3365	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3366	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3367	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3368	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3369	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3370	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3371	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3372	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3373	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3374	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3375	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3376	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3377	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3378	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3379	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3380	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3381	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3382	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3383	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3384	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3385	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3386	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3387	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3388	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3389	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3390	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3391	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3392	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3393	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3394	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3395	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3396	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3397	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3398	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3399	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3400	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3401	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3402	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3403	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3404	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3405	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3406	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3407	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3408	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3409	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3410	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3411	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3412	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3413	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3414	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3415	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3416	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3417	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3418	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3419	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3420	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3421	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3422	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3423	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3424	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3425	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3426	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3427	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3428	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3429	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3430	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3431	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3432	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3433	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3434	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3435	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3436	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3437	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3438	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3439	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3440	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3441	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3442	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3443	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3444	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3445	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3446	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3447	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3448	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3449	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3450	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3451	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3452	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3453	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3454	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3455	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3456	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3457	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3458	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3459	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3460	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3461	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3462	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3463	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3464	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3465	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3466	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3467	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3468	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3469	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3470	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3471	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3472	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3473	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3474	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3475	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3476	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3477	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3478	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3479	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3480	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3481	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3482	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3483	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3484	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3485	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3486	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3487	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3488	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3489	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3490	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3491	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3492	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3493	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3494	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3495	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3496	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3497	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3498	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3499	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3500	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3501	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3502	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3503	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3504	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3505	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3506	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3507	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3508	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3509	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3510	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3511	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3512	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3513	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3514	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3515	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3516	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3517	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3518	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3519	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3520	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3521	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3522	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3523	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3524	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3525	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3526	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3527	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3528	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3529	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3530	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3531	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3532	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3533	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3534	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3535	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3536	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3537	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3538	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3539	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3540	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3541	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3542	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3543	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3544	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3545	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3546	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3547	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3548	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3549	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3550	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3551	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3552	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3553	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3554	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3555	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3556	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3557	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3558	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3559	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3560	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3561	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3562	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3563	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3564	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3565	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3566	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3567	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3568	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3569	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3570	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3571	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3572	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3573	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3574	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3575	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3576	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3577	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3578	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3579	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3580	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3581	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3582	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3583	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3584	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3585	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3586	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3587	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3588	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	School Child												
	2025 - 2036	2026 - 2037	2027 - 2038	2028 - 2039	2029 - 2040	2030 - 2041	2031 - 2042	2032 - 2043	2033 - 2044	2034 - 2045	2035 - 2046	2036 - 2047	2037 - 2048
3589	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3590	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3591	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3592	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3593	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3594	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3595	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3596	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3597	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
3598	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1	5.5E-08	5.7E-08	5.7E-08	5.5E-08	5.4E-08	5.1E-08	4.9E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08	5.2E-08
2	2.0E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08
3	3.1E-07	3.1E-07	3.1E-07	3.0E-07	2.8E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
4	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
5	5.8E-08	6.0E-08	6.0E-08	5.7E-08	5.4E-08	5.2E-08	5.1E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08
6	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08
7	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
8	3.3E-08	3.4E-08	3.4E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	4.0E-08	4.1E-08	4.1E-08	4.2E-08
9	6.2E-08	6.3E-08	6.4E-08	6.1E-08	5.8E-08	5.6E-08	5.5E-08	5.5E-08	5.6E-08	5.7E-08	5.9E-08	5.9E-08	6.0E-08
10	2.5E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
11	2.0E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.2E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08
12	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08
13	6.5E-08	6.6E-08	6.6E-08	6.3E-08	6.0E-08	5.7E-08	5.6E-08	5.4E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08	5.9E-08
14	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
15	3.6E-07	3.7E-07	3.7E-07	3.5E-07	3.3E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
16	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
17	2.3E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08
18	2.4E-08	2.5E-08	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	2.7E-08	2.7E-08	2.8E-08	2.8E-08
19	2.5E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08
20	3.6E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.8E-08	5.1E-08	5.4E-08	5.5E-08	5.6E-08
21	3.9E-08	4.1E-08	4.0E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.8E-08
22	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	2.0E-08	2.2E-08	2.4E-08	2.5E-08	2.5E-08
23	5.6E-08	5.7E-08	5.7E-08	5.4E-08	5.1E-08	4.9E-08	4.7E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
24	6.9E-08	7.1E-08	7.0E-08	6.6E-08	6.1E-08	5.7E-08	5.6E-08	5.4E-08	5.7E-08	5.9E-08	6.2E-08	6.3E-08	6.4E-08
25	5.0E-08	5.1E-08	5.1E-08	4.9E-08	4.6E-08	4.4E-08	4.3E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.6E-08
26	6.6E-08	6.8E-08	6.7E-08	6.4E-08	6.0E-08	5.7E-08	5.6E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08	6.2E-08
27	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
28	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
29	5.7E-08	5.9E-08	5.9E-08	5.8E-08	5.6E-08	5.4E-08	5.3E-08	5.3E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08	5.9E-08
30	1.8E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
31	4.6E-08	4.7E-08	4.7E-08	4.6E-08	4.4E-08	4.2E-08	4.1E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.5E-08	4.6E-08
32	8.6E-08	8.8E-08	8.8E-08	8.3E-08	8.0E-08	7.7E-08	7.6E-08	7.6E-08	7.7E-08	7.8E-08	7.9E-08	8.0E-08	8.0E-08
33	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
34	3.3E-08	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08
35	5.5E-08	5.7E-08	5.7E-08	5.7E-08	5.9E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.9E-08	7.1E-08	7.2E-08	7.2E-08
36	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.5E-08	9.0E-08	8.6E-08	8.3E-08	8.4E-08	8.6E-08	8.8E-08	9.0E-08	9.0E-08
37	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
38	2.8E-08	2.9E-08	2.9E-08	2.8E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
39	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
40	4.2E-08	4.4E-08	4.4E-08	4.4E-08	4.5E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.1E-08	5.2E-08	5.3E-08	5.3E-08
41	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
42	2.9E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08
43	2.9E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08
44	2.5E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.6E-08	2.7E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08	2.9E-08
45	1.9E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08
46	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.4E-08	8.9E-08	8.5E-08	8.2E-08	8.3E-08	8.5E-08	8.8E-08	8.9E-08	9.0E-08
47	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.6E-08	9.0E-08	8.6E-08	8.3E-08	8.4E-08	8.6E-08	8.8E-08	9.0E-08	9.0E-08
48	7.6E-08	7.9E-08	7.9E-08	7.6E-08	7.2E-08	6.9E-08	6.8E-08	6.8E-08	6.9E-08	7.1E-08	7.3E-08	7.4E-08	7.5E-08
49	6.8E-08	7.0E-08	7.1E-08	6.8E-08	6.4E-08	6.1E-08	6.0E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.7E-08	6.8E-08
50	2.7E-08	2.8E-08	2.8E-08	2.7E-08	2.5E-08	2.4E-08	2.4E-08	2.3E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08
51	8.0E-08	8.2E-08	8.1E-08	7.6E-08	7.0E-08	6.6E-08	6.3E-08	6.1E-08	6.2E-08	6.5E-08	6.7E-08	6.8E-08	6.9E-08
52	8.6E-08	8.8E-08	8.7E-08	8.3E-08	7.7E-08	7.3E-08	7.0E-08	6.7E-08	6.8E-08	7.0E-08	7.1E-08	7.2E-08	7.3E-08
53	5.9E-08	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08	6.8E-08	7.0E-08	7.2E-08	7.3E-08	7.5E-08	7.5E-08	7.6E-08
54	7.0E-08	7.2E-08	7.3E-08	7.1E-08	6.8E-08	6.5E-08	6.4E-08	6.4E-08	6.5E-08	6.7E-08	6.9E-08	7.0E-08	7.1E-08
55	2.8E-08	3.0E-08	3.1E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.8E-08	4.2E-08	4.5E-08	4.7E-08	4.7E-08
56	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	9.7E-08	9.5E-08	9.5E-08	9.8E-08	9.9E-08	1.0E-07	1.0E-07
57	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08	3.9E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.5E-08	4.6E-08
58	2.6E-08	2.6E-08	2.5E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08
59	7.2E-08	7.5E-08	7.5E-08	7.3E-08	7.0E-08	6.7E-08	6.6E-08	6.6E-08	7.1E-08	7.6E-08	8.0E-08	8.2E-08	8.3E-08
60	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08
61	1.9E-08	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.2E-08	2.5E-08	2.7E-08	2.8E-08	2.8E-08
62	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
63	6.9E-08	7.2E-08	7.2E-08	7.0E-08	6.7E-08	6.4E-08	6.3E-08	6.3E-08	6.5E-08	6.7E-08	6.9E-08	7.0E-08	7.0E-08
64	2.3E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08
65	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
66	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	9.7E-08	9.5E-08	9.5E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07
67	4.9E-08	5.0E-08	5.0E-08	4.8E-08	4.5E-08	4.4E-08	4.3E-08	4.3E-08	4.4E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08
68	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08
69	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08
70	8.6E-08	8.8E-08	8.7E-08	8.3E-08	7.7E-08	7.3E-08	7.0E-08	6.8E-08	6.8E-08	7.0E-08	7.1E-08	7.2E-08	7.3E-08
71	2.9E-08	3.0E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.8E-08	3.1E-08	3.2E-08	3.4E-08	3.4E-08
72	6.1E-08	6.2E-08	6.1E-08	5.9E-08	5.5E-08	5.2E-08	5.0E-08	4.9E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
73	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.4E-07	2.3E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
74	3.2E-08	3.3E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08	3.9E-08
75	2.5E-07	2.6E-07	2.6E-07	2.3E-07	2.1E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
76	6.7E-08	7.0E-08	7.0E-08	6.7E-08	6.4E-08	6.1E-08	6.0E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.7E-08	6.7E-08
77	4.8E-08	5.0E-08	5.0E-08	4.9E-08	4.7E-08	4.5E-08	4.5E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
78	1.9E-07	2.0E-07	2.0E-07	1.8E-07	1.6E-07	1.5E-07	1.5E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
79	6.1E-08	6.3E-08	6.3E-08	6.1E-08	5.8E-08	5.6E-08	5.5E-08	5.4E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08	5.9E-08
80	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08
81	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
82	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
83	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
84	9.7E-08	1.0E-07	9.9E-08	9.4E-08	9.1E-08	8.7E-08	8.6E-08	8.7E-08	9.0E-08	9.3E-08	9.5E-08	9.6E-08	9.7E-08
85	3.5E-08	3.6E-08	3.6E-08	3.4E-08	3.2E-08	3.0E-08	2.9E-08	2.9E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08
86	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
87	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
88	7.3E-08	7.5E-08	7.1E-08	6.1E-08	5.0E-08	4.5E-08	4.2E-08	3.9E-08	4.5E-08	5.1E-08	5.6E-08	5.9E-08	6.0E-08
89	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
90	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
91	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
92	1.0E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.5E-08	9.3E-08	9.3E-08	9.5E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07
93	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
94	5.2E-08	5.4E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.5E-08	6.5E-08	6.6E-08
95	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
96	2.3E-08	2.4E-08	2.4E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08
97	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08
98	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08
99	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.6E-08	1.9E-08	2.0E-08	2.2E-08	2.2E-08
100	5.5E-08	5.6E-08	5.6E-08	5.4E-08	5.1E-08	4.9E-08	4.8E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
101	7.4E-08	7.6E-08	7.6E-08	7.2E-08	6.9E-08	6.6E-08	6.5E-08	6.6E-08	6.6E-08	6.7E-08	6.8E-08	6.9E-08	6.9E-08
102	4.3E-07	4.4E-07	4.3E-07	4.1E-07	3.7E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07
103	4.5E-07	4.6E-07	4.5E-07	4.3E-07	3.9E-07	3.7E-07	3.6E-07	3.6E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07
104	4.4E-07	4.4E-07	4.4E-07	4.2E-07	3.8E-07	3.7E-07	3.5E-07	3.5E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07
105	4.2E-07	4.3E-07	4.2E-07	4.0E-07	3.7E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
106	4.3E-07	4.4E-07	4.4E-07	4.2E-07	3.9E-07	3.7E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07
107	4.4E-07	4.5E-07	4.5E-07	4.3E-07	4.0E-07	3.9E-07	3.8E-07	3.8E-07	3.8E-07	3.8E-07	3.8E-07	3.8E-07	3.8E-07
108	4.4E-07	4.5E-07	4.5E-07	4.3E-07	4.1E-07	3.9E-07	3.9E-07	3.9E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07
109	2.6E-07	2.6E-07	2.2E-07	1.5E-07	7.9E-08	5.7E-08	5.2E-08	4.7E-08	5.6E-08	6.6E-08	7.3E-08	7.7E-08	8.0E-08
110	2.4E-07	2.4E-07	2.1E-07	1.4E-07	6.0E-08	3.7E-08	3.1E-08	2.6E-08	3.7E-08	4.8E-08	5.7E-08	6.2E-08	6.5E-08
111	1.7E-07	1.7E-07	1.4E-07	7.6E-08	1.2E-08	-1.0E-08	-1.8E-08	-2.4E-08	-9.3E-09	4.5E-09	1.5E-08	2.2E-08	2.5E-08
112	2.4E-07	2.4E-07	2.1E-07	1.3E-07	5.3E-08	2.8E-08	2.1E-08	1.5E-08	2.7E-08	3.8E-08	4.6E-08	5.2E-08	5.5E-08
113	1.7E-07	1.7E-07	1.4E-07	7.4E-08	8.5E-09	-1.5E-08	-2.2E-08	-3.0E-08	-1.6E-08	-2.8E-09	6.9E-09	1.3E-08	1.7E-08
114	2.4E-07	2.4E-07	2.1E-07	1.3E-07	5.2E-08	2.5E-08	1.8E-08	1.1E-08	2.3E-08	3.4E-08	4.2E-08	4.8E-08	5.0E-08
115	1.7E-07	1.7E-07	1.4E-07	8.0E-08	1.5E-08	-8.5E-09	-1.6E-08	-2.4E-08	-1.1E-08	1.6E-09	1.1E-08	1.7E-08	2.0E-08
116	1.8E-07	1.8E-07	1.6E-07	1.1E-07	6.6E-08	4.8E-08	4.2E-08	3.7E-08	4.5E-08	5.4E-08	6.0E-08	6.5E-08	6.7E-08
117	2.4E-07	2.4E-07	2.1E-07	1.3E-07	5.4E-08	2.6E-08	1.9E-08	1.2E-08	2.3E-08	3.4E-08	4.3E-08	4.8E-08	5.1E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
118	1.8E-07	1.8E-07	1.5E-07	8.7E-08	2.3E-08	-2.0E-09	-1.0E-08	-1.7E-08	-4.9E-09	7.3E-09	1.6E-08	2.2E-08	2.6E-08
119	1.8E-07	1.8E-07	1.6E-07	1.2E-07	7.0E-08	5.2E-08	4.6E-08	4.1E-08	4.9E-08	5.7E-08	6.3E-08	6.8E-08	7.0E-08
120	2.4E-07	2.4E-07	2.1E-07	1.3E-07	5.9E-08	2.9E-08	2.2E-08	1.5E-08	2.6E-08	3.7E-08	4.6E-08	5.1E-08	5.4E-08
121	1.8E-07	1.8E-07	1.5E-07	9.4E-08	3.1E-08	5.8E-09	-2.3E-09	-9.8E-09	2.5E-09	1.5E-08	2.4E-08	3.0E-08	3.3E-08
122	1.9E-07	1.9E-07	1.7E-07	1.2E-07	7.7E-08	5.8E-08	5.2E-08	4.7E-08	5.4E-08	6.3E-08	6.9E-08	7.3E-08	7.5E-08
123	1.8E-07	1.8E-07	1.7E-07	1.3E-07	9.2E-08	7.6E-08	7.2E-08	6.7E-08	7.3E-08	8.0E-08	8.5E-08	8.9E-08	9.0E-08
124	2.4E-07	2.4E-07	2.1E-07	1.4E-07	6.4E-08	3.5E-08	2.7E-08	2.0E-08	3.1E-08	4.3E-08	5.1E-08	5.7E-08	6.0E-08
125	1.9E-07	1.9E-07	1.6E-07	1.0E-07	4.3E-08	1.8E-08	1.0E-08	2.8E-09	1.5E-08	2.6E-08	3.5E-08	4.1E-08	4.4E-08
126	2.0E-07	2.0E-07	1.8E-07	1.3E-07	8.6E-08	6.6E-08	6.0E-08	5.5E-08	6.3E-08	7.1E-08	7.8E-08	8.2E-08	8.4E-08
127	1.9E-07	1.9E-07	1.7E-07	1.4E-07	1.0E-07	8.4E-08	7.9E-08	7.5E-08	8.1E-08	8.8E-08	9.3E-08	9.6E-08	9.8E-08
128	2.4E-07	2.4E-07	2.1E-07	1.4E-07	7.5E-08	4.5E-08	3.7E-08	3.0E-08	4.1E-08	5.3E-08	6.2E-08	6.7E-08	7.0E-08
129	2.0E-07	2.0E-07	1.7E-07	1.2E-07	5.9E-08	3.3E-08	2.6E-08	1.8E-08	3.0E-08	4.2E-08	5.0E-08	5.6E-08	5.9E-08
130	2.0E-07	2.1E-07	1.9E-07	1.4E-07	9.7E-08	7.7E-08	7.2E-08	6.7E-08	7.4E-08	8.3E-08	8.9E-08	9.3E-08	9.5E-08
131	1.9E-07	2.0E-07	1.8E-07	1.5E-07	1.1E-07	9.4E-08	8.9E-08	8.5E-08	9.1E-08	9.7E-08	1.0E-07	1.1E-07	1.1E-07
132	2.5E-07	2.5E-07	2.2E-07	1.6E-07	9.1E-08	6.1E-08	5.4E-08	4.7E-08	5.8E-08	7.0E-08	7.9E-08	8.5E-08	8.8E-08
133	2.1E-07	2.1E-07	1.8E-07	1.3E-07	7.6E-08	5.1E-08	4.4E-08	3.7E-08	4.8E-08	6.0E-08	6.8E-08	7.4E-08	7.7E-08
134	2.1E-07	2.2E-07	2.0E-07	1.6E-07	1.1E-07	9.1E-08	8.5E-08	8.0E-08	8.8E-08	9.6E-08	1.0E-07	1.1E-07	1.1E-07
135	2.0E-07	2.1E-07	1.9E-07	1.6E-07	1.2E-07	1.0E-07	1.0E-07	9.6E-08	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
136	2.6E-07	2.6E-07	2.3E-07	1.7E-07	1.1E-07	8.4E-08	7.7E-08	7.0E-08	8.1E-08	9.3E-08	1.0E-07	1.1E-07	1.1E-07
137	2.2E-07	2.2E-07	2.0E-07	1.5E-07	9.6E-08	7.1E-08	6.4E-08	5.8E-08	6.8E-08	8.0E-08	8.8E-08	9.4E-08	9.7E-08
138	2.2E-07	2.3E-07	2.1E-07	1.7E-07	1.3E-07	1.1E-07	1.0E-07	9.5E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
139	2.1E-07	2.2E-07	2.0E-07	1.7E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
140	2.7E-07	2.8E-07	2.5E-07	2.0E-07	1.4E-07	1.1E-07	1.0E-07	9.9E-08	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
141	2.3E-07	2.3E-07	2.1E-07	1.7E-07	1.2E-07	9.1E-08	8.4E-08	7.8E-08	8.9E-08	1.0E-07	1.1E-07	1.1E-07	1.2E-07
142	2.3E-07	2.4E-07	2.2E-07	1.8E-07	1.4E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
143	2.2E-07	2.3E-07	2.2E-07	1.8E-07	1.5E-07	1.3E-07	1.3E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
144	2.9E-07	3.0E-07	2.8E-07	2.2E-07	1.7E-07	1.4E-07	1.4E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07
145	2.4E-07	2.5E-07	2.3E-07	1.8E-07	1.4E-07	1.1E-07	1.1E-07	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07
146	2.4E-07	2.5E-07	2.4E-07	2.0E-07	1.6E-07	1.4E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07
147	2.3E-07	2.4E-07	2.3E-07	1.9E-07	1.6E-07	1.4E-07	1.4E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07
148	3.1E-07	3.2E-07	3.0E-07	2.5E-07	2.0E-07	1.7E-07	1.7E-07	1.6E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07
149	2.6E-07	2.6E-07	2.5E-07	2.1E-07	1.6E-07	1.4E-07	1.3E-07	1.2E-07	1.3E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07
150	2.6E-07	2.6E-07	2.5E-07	2.1E-07	1.7E-07	1.5E-07	1.5E-07	1.4E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
151	2.4E-07	2.5E-07	2.4E-07	2.1E-07	1.7E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
152	3.3E-07	3.4E-07	3.2E-07	2.8E-07	2.3E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07
153	2.7E-07	2.8E-07	2.6E-07	2.2E-07	1.8E-07	1.6E-07	1.5E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07
154	2.7E-07	2.7E-07	2.6E-07	2.3E-07	1.9E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07
155	2.5E-07	2.6E-07	2.5E-07	2.2E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
156	3.5E-07	3.6E-07	3.4E-07	3.0E-07	2.5E-07	2.2E-07	2.2E-07	2.1E-07	2.2E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
157	2.9E-07	2.9E-07	2.8E-07	2.4E-07	2.0E-07	1.7E-07	1.7E-07	1.6E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07
158	2.8E-07	2.8E-07	2.7E-07	2.4E-07	2.0E-07	1.8E-07	1.8E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
159	2.6E-07	2.6E-07	2.6E-07	2.3E-07	2.0E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
160	3.6E-07	3.7E-07	3.6E-07	3.2E-07	2.7E-07	2.4E-07	2.4E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07
161	3.0E-07	3.0E-07	2.9E-07	2.6E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
162	2.9E-07	2.9E-07	2.8E-07	2.5E-07	2.2E-07	2.0E-07	1.9E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
163	2.7E-07	2.7E-07	2.7E-07	2.4E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
164	3.7E-07	3.8E-07	3.7E-07	3.3E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07
165	3.1E-07	3.1E-07	3.0E-07	2.7E-07	2.3E-07	2.0E-07	2.0E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07
166	3.0E-07	3.0E-07	3.0E-07	2.7E-07	2.3E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
167	2.8E-07	2.8E-07	2.8E-07	2.5E-07	2.2E-07	2.0E-07	2.0E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
168	5.3E-07	5.5E-07	5.4E-07	4.9E-07	4.4E-07	4.1E-07	4.1E-07	4.1E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07
169	3.8E-07	3.9E-07	3.7E-07	3.4E-07	2.9E-07	2.7E-07	2.6E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07
170	3.2E-07	3.2E-07	3.1E-07	2.8E-07	2.4E-07	2.1E-07	2.1E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07
171	3.1E-07	3.1E-07	3.1E-07	2.8E-07	2.4E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
172	2.9E-07	3.0E-07	2.9E-07	2.6E-07	2.3E-07	2.1E-07	2.1E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
173	5.1E-07	5.2E-07	5.1E-07	4.7E-07	4.2E-07	3.9E-07	3.9E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07	4.1E-07
174	3.8E-07	3.9E-07	3.8E-07	3.4E-07	3.0E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
175	3.2E-07	3.3E-07	3.2E-07	2.8E-07	2.5E-07	2.2E-07	2.1E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07
176	3.2E-07	3.3E-07	3.2E-07	2.9E-07	2.6E-07	2.4E-07	2.3E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
177	3.0E-07	3.1E-07	3.0E-07	2.7E-07	2.5E-07	2.3E-07	2.2E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
178	5.1E-07	5.2E-07	5.1E-07	4.7E-07	4.2E-07	3.9E-07	3.9E-07	3.8E-07	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07
179	3.8E-07	3.9E-07	3.8E-07	3.4E-07	3.0E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07
180	3.2E-07	3.3E-07	3.2E-07	2.9E-07	2.5E-07	2.2E-07	2.1E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07
181	3.2E-07	3.3E-07	3.2E-07	3.0E-07	2.6E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
182	6.4E-07	6.6E-07	6.5E-07	6.0E-07	5.5E-07	5.2E-07	5.1E-07	5.0E-07	5.0E-07	5.1E-07	5.2E-07	5.2E-07	5.3E-07
183	4.9E-07	5.0E-07	4.9E-07	4.5E-07	4.0E-07	3.7E-07	3.6E-07	3.5E-07	3.5E-07	3.7E-07	3.8E-07	3.8E-07	3.8E-07
184	3.7E-07	3.8E-07	3.7E-07	3.4E-07	3.0E-07	2.7E-07	2.6E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07
185	3.2E-07	3.2E-07	3.1E-07	2.8E-07	2.4E-07	2.2E-07	2.0E-07	1.9E-07	2.0E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07
186	3.3E-07	3.4E-07	3.3E-07	3.0E-07	2.7E-07	2.5E-07	2.4E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07
187	7.6E-07	7.8E-07	7.7E-07	7.3E-07	6.7E-07	6.2E-07	6.1E-07	6.0E-07	6.0E-07	6.1E-07	6.1E-07	6.2E-07	6.2E-07
188	6.1E-07	6.3E-07	6.2E-07	5.8E-07	5.3E-07	4.9E-07	4.8E-07	4.7E-07	4.7E-07	4.8E-07	4.8E-07	4.9E-07	4.9E-07
189	4.8E-07	4.9E-07	4.8E-07	4.4E-07	4.0E-07	3.6E-07	3.5E-07	3.4E-07	3.4E-07	3.6E-07	3.6E-07	3.7E-07	3.7E-07
190	3.7E-07	3.7E-07	3.7E-07	3.3E-07	2.9E-07	2.7E-07	2.5E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07
191	3.0E-07	3.1E-07	3.0E-07	2.7E-07	2.3E-07	2.0E-07	1.8E-07	1.7E-07	1.8E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07
192	8.7E-07	8.9E-07	8.8E-07	8.2E-07	7.5E-07	6.9E-07	6.7E-07	6.6E-07	6.6E-07	6.7E-07	6.7E-07	6.8E-07	6.8E-07
193	7.1E-07	7.3E-07	7.2E-07	6.7E-07	6.1E-07	5.7E-07	5.5E-07	5.4E-07	5.4E-07	5.4E-07	5.5E-07	5.6E-07	5.6E-07
194	5.8E-07	5.9E-07	5.9E-07	5.5E-07	4.9E-07	4.5E-07	4.4E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07	4.5E-07	4.5E-07
195	4.7E-07	4.7E-07	4.7E-07	4.3E-07	3.8E-07	3.5E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
196	4.2E-07	4.3E-07	4.2E-07	3.8E-07	3.4E-07	3.0E-07	2.9E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07
197	3.3E-07	3.3E-07	3.2E-07	2.9E-07	2.5E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07
198	7.6E-07	7.7E-07	7.6E-07	7.0E-07	6.3E-07	5.6E-07	5.3E-07	5.0E-07	5.0E-07	5.2E-07	5.3E-07	5.3E-07	5.4E-07
199	6.2E-07	6.3E-07	6.2E-07	5.7E-07	5.1E-07	4.6E-07	4.3E-07	4.1E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07
200	5.1E-07	5.2E-07	5.1E-07	4.7E-07	4.1E-07	3.7E-07	3.4E-07	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.6E-07
201	3.9E-07	4.0E-07	3.8E-07	3.4E-07	2.9E-07	2.5E-07	2.3E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07
202	3.4E-07	3.4E-07	3.3E-07	2.9E-07	2.5E-07	2.1E-07	1.9E-07	1.7E-07	1.7E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07
203	1.0E-06	1.1E-06	1.0E-06	9.8E-07	8.9E-07	8.0E-07	7.6E-07	7.2E-07	7.0E-07	7.1E-07	7.2E-07	7.2E-07	7.3E-07
204	8.6E-07	8.8E-07	8.7E-07	8.2E-07	7.4E-07	6.8E-07	6.4E-07	6.1E-07	6.0E-07	6.1E-07	6.1E-07	6.2E-07	6.2E-07
205	7.4E-07	7.5E-07	7.4E-07	7.0E-07	6.4E-07	5.9E-07	5.6E-07	5.3E-07	5.2E-07	5.3E-07	5.4E-07	5.4E-07	5.5E-07
206	6.3E-07	6.4E-07	6.3E-07	5.9E-07	5.4E-07	4.9E-07	4.7E-07	4.5E-07	4.4E-07	4.5E-07	4.6E-07	4.6E-07	4.7E-07
207	5.2E-07	5.3E-07	5.2E-07	4.9E-07	4.4E-07	4.0E-07	3.8E-07	3.6E-07	3.6E-07	3.7E-07	3.8E-07	3.9E-07	3.9E-07
208	4.7E-07	4.8E-07	4.7E-07	4.4E-07	4.0E-07	3.7E-07	3.5E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.6E-07
209	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.1E-06	1.0E-06	9.2E-07	8.9E-07	9.0E-07	9.1E-07	9.1E-07	9.2E-07
210	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	9.9E-07	9.2E-07	8.6E-07	8.4E-07	8.5E-07	8.5E-07	8.6E-07	8.6E-07
211	9.8E-07	9.9E-07	9.7E-07	9.1E-07	8.1E-07	7.2E-07	6.6E-07	6.1E-07	6.0E-07	6.1E-07	6.2E-07	6.3E-07	6.3E-07
212	7.6E-07	7.7E-07	7.6E-07	7.0E-07	6.2E-07	5.5E-07	5.0E-07	4.6E-07	4.5E-07	4.7E-07	4.8E-07	4.8E-07	4.9E-07
213	6.3E-07	6.3E-07	6.2E-07	5.7E-07	5.1E-07	4.4E-07	4.0E-07	3.7E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07
214	5.1E-07	5.1E-07	5.0E-07	4.6E-07	4.0E-07	3.4E-07	3.1E-07	2.8E-07	2.8E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07
215	4.0E-07	4.0E-07	3.9E-07	3.5E-07	2.9E-07	2.5E-07	2.2E-07	1.9E-07	1.9E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07
216	1.8E-06	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.4E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
217	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	9.7E-07	9.8E-07	9.8E-07	9.8E-07	9.8E-07
218	1.1E-06	1.2E-06	1.1E-06	1.1E-06	9.9E-07	8.9E-07	8.3E-07	7.7E-07	7.5E-07	7.6E-07	7.6E-07	7.7E-07	7.7E-07
219	9.1E-07	9.3E-07	9.1E-07	8.6E-07	7.9E-07	7.1E-07	6.6E-07	6.2E-07	6.0E-07	6.1E-07	6.2E-07	6.2E-07	6.3E-07
220	7.5E-07	7.6E-07	7.5E-07	7.1E-07	6.5E-07	5.8E-07	5.4E-07	5.1E-07	5.0E-07	5.1E-07	5.2E-07	5.2E-07	5.2E-07
221	6.3E-07	6.4E-07	6.3E-07	5.9E-07	5.3E-07	4.8E-07	4.5E-07	4.2E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07
222	5.3E-07	5.3E-07	5.2E-07	4.9E-07	4.4E-07	4.0E-07	3.7E-07	3.4E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07
223	1.6E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
224	1.2E-06	1.3E-06	1.2E-06	1.2E-06	1.1E-06	9.8E-07	9.1E-07	8.4E-07	8.1E-07	8.1E-07	8.2E-07	8.2E-07	8.2E-07
225	9.9E-07	1.0E-06	1.0E-06	9.5E-07	8.7E-07	7.9E-07	7.4E-07	6.9E-07	6.6E-07	6.7E-07	6.8E-07	6.8E-07	6.8E-07
226	8.2E-07	8.3E-07	8.2E-07	7.8E-07	7.2E-07	6.5E-07	6.1E-07	5.7E-07	5.5E-07	5.6E-07	5.7E-07	5.7E-07	5.7E-07
227	6.9E-07	7.0E-07	6.9E-07	6.5E-07	6.0E-07	5.5E-07	5.1E-07	4.8E-07	4.7E-07	4.8E-07	4.8E-07	4.9E-07	4.9E-07
228	5.9E-07	6.0E-07	5.9E-07	5.6E-07	5.1E-07	4.6E-07	4.4E-07	4.1E-07	4.0E-07	4.1E-07	4.2E-07	4.2E-07	4.2E-07
229	1.7E-06	1.8E-06	1.7E-06	1.7E-06	1.5E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
230	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.0E-06	9.6E-07	8.8E-07	8.4E-07	8.4E-07	8.5E-07	8.5E-07	8.5E-07
231	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.3E-07	8.4E-07	7.8E-07	7.2E-07	7.0E-07	7.0E-07	7.1E-07	7.1E-07	7.1E-07
232	8.7E-07	8.8E-07	8.7E-07	8.3E-07	7.7E-07	7.0E-07	6.5E-07	6.1E-07	5.9E-07	5.9E-07	6.0E-07	6.0E-07	6.0E-07
233	7.3E-07	7.4E-07	7.4E-07	7.0E-07	6.5E-07	5.9E-07	5.5E-07	5.2E-07	5.0E-07	5.1E-07	5.1E-07	5.2E-07	5.2E-07
234	1.8E-06	1.9E-06	1.8E-06	1.8E-06	1.6E-06	1.4E-06	1.3E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.1E-06

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
235	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	9.2E-07	8.6E-07	8.7E-07	8.7E-07	8.8E-07	8.8E-07
236	1.1E-06	1.1E-06	1.1E-06	1.1E-06	9.8E-07	8.9E-07	8.2E-07	7.5E-07	7.2E-07	7.3E-07	7.3E-07	7.3E-07	7.3E-07
237	9.1E-07	9.2E-07	9.2E-07	8.8E-07	8.1E-07	7.4E-07	6.8E-07	6.3E-07	6.1E-07	6.2E-07	6.2E-07	6.2E-07	6.3E-07
238	2.0E-06	2.0E-06	1.9E-06	1.9E-06	1.7E-06	1.5E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
239	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	9.5E-07	8.9E-07	9.0E-07	9.0E-07	9.0E-07	9.1E-07
240	3.5E-06	3.5E-06	3.5E-06	3.4E-06	3.1E-06	2.8E-06	2.5E-06	2.2E-06	2.0E-06	2.0E-06	2.0E-06	2.0E-06	2.0E-06
241	3.6E-06	3.6E-06	3.6E-06	3.5E-06	3.2E-06	2.9E-06	2.6E-06	2.3E-06	2.1E-06	2.1E-06	2.1E-06	2.1E-06	2.1E-06
242	3.8E-06	3.8E-06	3.7E-06	3.6E-06	3.4E-06	3.0E-06	2.7E-06	2.5E-06	2.3E-06	2.3E-06	2.3E-06	2.3E-06	2.3E-06
243	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.1E-07	8.3E-07	7.7E-07	7.3E-07	7.3E-07	7.4E-07	7.4E-07	7.4E-07
244	1.9E-06	2.0E-06	1.9E-06	1.9E-06	1.7E-06	1.5E-06	1.4E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
245	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	9.7E-07	9.1E-07	9.2E-07	9.2E-07	9.2E-07	9.2E-07
246	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.1E-06	9.6E-07	8.9E-07	8.1E-07	7.7E-07	7.8E-07	7.8E-07	7.8E-07	7.8E-07
247	2.1E-06	2.1E-06	2.0E-06	2.0E-06	1.8E-06	1.6E-06	1.5E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
248	1.6E-06	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.1E-06	1.0E-06	9.8E-07	9.8E-07	9.9E-07	9.9E-07	9.9E-07
249	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	9.5E-07	8.8E-07	8.3E-07	8.4E-07	8.4E-07	8.4E-07	8.4E-07
250	2.2E-06	2.2E-06	2.2E-06	2.1E-06	1.9E-06	1.7E-06	1.6E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
251	1.7E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
252	1.3E-06	1.4E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	9.6E-07	9.1E-07	9.2E-07	9.2E-07	9.2E-07	9.2E-07
253	2.3E-06	2.4E-06	2.3E-06	2.3E-06	2.1E-06	1.9E-06	1.8E-06	1.6E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
254	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.7E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
255	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
256	2.6E-06	2.6E-06	2.6E-06	2.5E-06	2.4E-06	2.2E-06	2.0E-06	1.9E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06
257	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.8E-06	1.7E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
258	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
259	2.6E-06	2.6E-06	2.6E-06	2.5E-06	2.4E-06	2.2E-06	2.1E-06	1.9E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06
260	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.8E-06	1.6E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
261	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.1E-06	1.1E-06	1.1E-06
262	4.2E-06	4.3E-06	4.3E-06	4.3E-06	4.1E-06	3.8E-06	3.6E-06	3.4E-06	3.3E-06	3.3E-06	3.3E-06	3.3E-06	3.3E-06
263	2.6E-06	2.7E-06	2.6E-06	2.6E-06	2.5E-06	2.3E-06	2.1E-06	2.0E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06
264	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.7E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
265	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
266	4.5E-06	4.6E-06	4.6E-06	4.6E-06	4.5E-06	4.3E-06	4.1E-06	3.9E-06	3.7E-06	3.7E-06	3.7E-06	3.7E-06	3.7E-06
267	2.8E-06	2.9E-06	2.9E-06	2.8E-06	2.7E-06	2.5E-06	2.4E-06	2.2E-06	2.1E-06	2.1E-06	2.2E-06	2.2E-06	2.2E-06
268	2.0E-06	2.0E-06	2.0E-06	1.9E-06	1.8E-06	1.7E-06	1.6E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
269	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
270	4.1E-06	4.2E-06	4.2E-06	4.1E-06	3.9E-06	3.7E-06	3.5E-06	3.3E-06	3.1E-06	3.1E-06	3.1E-06	3.1E-06	3.1E-06
271	2.9E-06	2.9E-06	2.9E-06	2.9E-06	2.7E-06	2.6E-06	2.4E-06	2.3E-06	2.2E-06	2.2E-06	2.2E-06	2.2E-06	2.2E-06
272	2.0E-06	2.0E-06	2.0E-06	2.0E-06	1.9E-06	1.8E-06	1.7E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
273	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
274	3.6E-06	3.6E-06	3.6E-06	3.5E-06	3.3E-06	3.0E-06	2.8E-06	2.5E-06	2.4E-06	2.4E-06	2.4E-06	2.4E-06	2.4E-06
275	2.7E-06	2.7E-06	2.7E-06	2.7E-06	2.5E-06	2.3E-06	2.2E-06	2.0E-06	1.9E-06	1.9E-06	1.9E-06	1.9E-06	2.0E-06
276	2.0E-06	2.0E-06	2.0E-06	2.0E-06	1.9E-06	1.7E-06	1.6E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.5E-06	1.5E-06
277	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
278	3.1E-06	3.1E-06	3.1E-06	3.0E-06	2.7E-06	2.5E-06	2.2E-06	2.0E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06	1.8E-06
279	2.5E-06	2.5E-06	2.4E-06	2.4E-06	2.2E-06	2.1E-06	1.9E-06	1.7E-06	1.6E-06	1.6E-06	1.6E-06	1.7E-06	1.7E-06
280	1.9E-06	1.9E-06	1.9E-06	1.9E-06	1.8E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
281	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
282	2.8E-06	2.8E-06	2.7E-06	2.6E-06	2.3E-06	2.1E-06	1.8E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
283	2.2E-06	2.2E-06	2.2E-06	2.1E-06	2.0E-06	1.8E-06	1.6E-06	1.5E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.4E-06
284	1.8E-06	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
285	1.4E-06	1.5E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
286	2.5E-06	2.5E-06	2.4E-06	2.3E-06	2.1E-06	1.8E-06	1.5E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
287	2.0E-06	2.0E-06	2.0E-06	1.9E-06	1.8E-06	1.6E-06	1.4E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.2E-06
288	1.7E-06	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.4E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
289	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.2E-06	1.1E-06	9.8E-07	9.3E-07	9.3E-07	9.3E-07	9.3E-07	9.3E-07
290	2.3E-06	2.3E-06	2.2E-06	2.1E-06	1.8E-06	1.6E-06	1.3E-06	1.0E-06	9.0E-07	9.1E-07	9.2E-07	9.2E-07	9.2E-07
291	1.9E-06	1.9E-06	1.8E-06	1.7E-06	1.6E-06	1.4E-06	1.2E-06	1.1E-06	9.8E-07	9.9E-07	9.9E-07	9.9E-07	9.9E-07
292	1.5E-06	1.6E-06	1.5E-06	1.5E-06	1.4E-06	1.2E-06	1.1E-06	1.0E-06	9.4E-07	9.4E-07	9.5E-07	9.5E-07	9.5E-07
293	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	9.8E-07	9.0E-07	8.5E-07	8.5E-07	8.6E-07	8.6E-07	8.6E-07
294	2.1E-06	2.1E-06	2.0E-06	1.9E-06	1.7E-06	1.4E-06	1.1E-06	8.9E-07	7.7E-07	7.7E-07	7.8E-07	7.8E-07	7.8E-07
295	1.7E-06	1.7E-06	1.7E-06	1.6E-06	1.4E-06	1.3E-06	1.1E-06	9.4E-07	8.5E-07	8.6E-07	8.6E-07	8.6E-07	8.7E-07
296	1.4E-06	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.1E-06	1.0E-06	9.0E-07	8.4E-07	8.4E-07	8.5E-07	8.5E-07	8.5E-07
297	1.2E-06	1.2E-06	1.2E-06	1.2E-06	1.1E-06	9.9E-07	9.1E-07	8.3E-07	7.8E-07	7.8E-07	7.8E-07	7.9E-07	7.9E-07
298	1.9E-06	1.9E-06	1.8E-06	1.7E-06	1.5E-06	1.2E-06	1.0E-06	7.9E-07	6.7E-07	6.8E-07	6.8E-07	6.9E-07	6.9E-07
299	1.6E-06	1.6E-06	1.5E-06	1.4E-06	1.3E-06	1.1E-06	9.8E-07	8.3E-07	7.6E-07	7.6E-07	7.6E-07	7.7E-07	7.7E-07
300	1.3E-06	1.3E-06	1.3E-06	1.2E-06	1.1E-06	1.0E-06	9.2E-07	8.1E-07	7.5E-07	7.6E-07	7.6E-07	7.6E-07	7.6E-07
301	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.2E-07	8.4E-07	7.6E-07	7.2E-07	7.2E-07	7.2E-07	7.2E-07	7.2E-07
302	1.7E-06	1.7E-06	1.6E-06	1.5E-06	1.3E-06	1.1E-06	9.2E-07	7.3E-07	6.3E-07	6.4E-07	6.4E-07	6.4E-07	6.4E-07
303	1.4E-06	1.4E-06	1.4E-06	1.3E-06	1.2E-06	1.0E-06	8.9E-07	7.6E-07	6.9E-07	6.9E-07	7.0E-07	7.0E-07	7.0E-07
304	1.2E-06	1.2E-06	1.2E-06	1.1E-06	1.0E-06	9.4E-07	8.4E-07	7.4E-07	6.9E-07	6.9E-07	6.9E-07	7.0E-07	7.0E-07
305	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.0E-06	8.5E-07	6.9E-07	6.2E-07	6.2E-07	6.2E-07	6.3E-07	6.3E-07
306	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.1E-06	9.3E-07	8.1E-07	7.0E-07	6.4E-07	6.4E-07	6.4E-07	6.5E-07	6.5E-07
307	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.6E-07	8.6E-07	7.7E-07	6.8E-07	6.3E-07	6.4E-07	6.4E-07	6.4E-07	6.4E-07
308	1.3E-06	1.3E-06	1.2E-06	1.2E-06	1.1E-06	9.1E-07	7.8E-07	6.6E-07	6.0E-07	6.0E-07	6.1E-07	6.1E-07	6.1E-07
309	1.2E-06	1.2E-06	1.1E-06	1.1E-06	9.7E-07	8.5E-07	7.5E-07	6.5E-07	6.0E-07	6.0E-07	6.0E-07	6.1E-07	6.1E-07
310	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.4E-07	8.3E-07	7.3E-07	6.3E-07	5.8E-07	5.8E-07	5.9E-07	5.9E-07	5.9E-07
311	1.0E-06	1.0E-06	1.0E-06	9.7E-07	8.8E-07	7.8E-07	6.9E-07	6.1E-07	5.7E-07	5.7E-07	5.7E-07	5.7E-07	5.7E-07
312	1.0E-06	1.0E-06	9.8E-07	9.4E-07	8.6E-07	7.6E-07	6.8E-07	6.0E-07	5.6E-07	5.6E-07	5.6E-07	5.7E-07	5.7E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
313	9.4E-07	9.4E-07	9.2E-07	8.8E-07	8.0E-07	7.2E-07	6.4E-07	5.7E-07	5.4E-07	5.4E-07	5.4E-07	5.4E-07	5.4E-07
314	8.7E-07	8.7E-07	8.6E-07	8.2E-07	7.5E-07	6.8E-07	6.1E-07	5.5E-07	5.2E-07	5.2E-07	5.2E-07	5.3E-07	5.3E-07
315	9.0E-07	9.1E-07	8.9E-07	8.5E-07	7.8E-07	7.0E-07	6.3E-07	5.7E-07	5.4E-07	5.4E-07	5.4E-07	5.4E-07	5.4E-07
316	8.5E-07	8.6E-07	8.4E-07	8.0E-07	7.4E-07	6.6E-07	6.0E-07	5.4E-07	5.1E-07	5.1E-07	5.2E-07	5.2E-07	5.2E-07
317	8.0E-07	8.0E-07	7.9E-07	7.6E-07	7.0E-07	6.3E-07	5.7E-07	5.2E-07	4.9E-07	4.9E-07	5.0E-07	5.0E-07	5.0E-07
318	7.4E-07	7.5E-07	7.4E-07	7.1E-07	6.5E-07	6.0E-07	5.4E-07	5.0E-07	4.7E-07	4.8E-07	4.8E-07	4.8E-07	4.8E-07
319	6.9E-07	7.0E-07	6.9E-07	6.6E-07	6.1E-07	5.6E-07	5.2E-07	4.8E-07	4.6E-07	4.6E-07	4.6E-07	4.6E-07	4.6E-07
320	8.2E-07	8.3E-07	8.2E-07	7.8E-07	7.2E-07	6.5E-07	5.9E-07	5.4E-07	5.1E-07	5.2E-07	5.2E-07	5.2E-07	5.2E-07
321	7.8E-07	7.9E-07	7.8E-07	7.4E-07	6.8E-07	6.2E-07	5.6E-07	5.1E-07	4.9E-07	4.9E-07	4.9E-07	4.9E-07	4.9E-07
322	7.4E-07	7.5E-07	7.3E-07	7.0E-07	6.5E-07	5.9E-07	5.4E-07	4.9E-07	4.7E-07	4.7E-07	4.7E-07	4.7E-07	4.8E-07
323	6.9E-07	7.0E-07	6.9E-07	6.6E-07	6.1E-07	5.6E-07	5.1E-07	4.7E-07	4.5E-07	4.5E-07	4.6E-07	4.6E-07	4.6E-07
324	6.5E-07	6.6E-07	6.5E-07	6.2E-07	5.8E-07	5.3E-07	4.9E-07	4.5E-07	4.3E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07
325	6.0E-07	6.1E-07	6.1E-07	5.8E-07	5.4E-07	5.0E-07	4.6E-07	4.3E-07	4.1E-07	4.2E-07	4.2E-07	4.2E-07	4.2E-07
326	6.1E-07	6.2E-07	6.1E-07	5.9E-07	5.5E-07	5.0E-07	4.6E-07	4.3E-07	4.1E-07	4.2E-07	4.2E-07	4.2E-07	4.2E-07
327	5.7E-07	5.8E-07	5.8E-07	5.5E-07	5.2E-07	4.8E-07	4.4E-07	4.1E-07	4.0E-07	4.0E-07	4.0E-07	4.0E-07	4.0E-07
328	5.4E-07	5.5E-07	5.4E-07	5.2E-07	4.9E-07	4.5E-07	4.2E-07	3.9E-07	3.8E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07
329	5.8E-07	5.9E-07	5.8E-07	5.6E-07	5.2E-07	4.7E-07	4.4E-07	4.1E-07	4.0E-07	4.0E-07	4.0E-07	4.0E-07	4.0E-07
330	5.5E-07	5.5E-07	5.5E-07	5.3E-07	4.9E-07	4.5E-07	4.2E-07	4.0E-07	3.8E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07
331	5.2E-07	5.2E-07	5.2E-07	5.0E-07	4.7E-07	4.3E-07	4.0E-07	3.8E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
332	5.5E-07	5.5E-07	5.5E-07	5.3E-07	4.9E-07	4.5E-07	4.2E-07	3.9E-07	3.8E-07	3.8E-07	3.8E-07	3.9E-07	3.9E-07
333	5.2E-07	5.3E-07	5.2E-07	5.0E-07	4.7E-07	4.3E-07	4.0E-07	3.8E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
334	4.9E-07	5.0E-07	5.0E-07	4.8E-07	4.5E-07	4.1E-07	3.9E-07	3.6E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07
335	4.6E-07	4.7E-07	4.7E-07	4.5E-07	4.2E-07	3.9E-07	3.7E-07	3.5E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
336	5.2E-07	5.3E-07	5.2E-07	5.0E-07	4.6E-07	4.3E-07	4.0E-07	3.8E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
337	4.9E-07	5.0E-07	5.0E-07	4.8E-07	4.5E-07	4.1E-07	3.9E-07	3.6E-07	3.5E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07
338	4.7E-07	4.8E-07	4.8E-07	4.6E-07	4.3E-07	4.0E-07	3.7E-07	3.5E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07
339	4.5E-07	4.5E-07	4.5E-07	4.3E-07	4.1E-07	3.8E-07	3.6E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07
340	4.9E-07	5.0E-07	4.9E-07	4.7E-07	4.4E-07	4.1E-07	3.8E-07	3.6E-07	3.5E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07
341	4.7E-07	4.8E-07	4.8E-07	4.6E-07	4.3E-07	3.9E-07	3.7E-07	3.5E-07	3.4E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07
342	4.5E-07	4.6E-07	4.6E-07	4.4E-07	4.1E-07	3.8E-07	3.6E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07
343	4.3E-07	4.4E-07	4.3E-07	4.2E-07	3.9E-07	3.6E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
344	4.7E-07	4.8E-07	4.7E-07	4.5E-07	4.2E-07	3.9E-07	3.7E-07	3.5E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.5E-07
345	4.5E-07	4.6E-07	4.6E-07	4.4E-07	4.1E-07	3.8E-07	3.6E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07
346	4.3E-07	4.4E-07	4.4E-07	4.2E-07	3.9E-07	3.7E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.3E-07
347	4.1E-07	4.2E-07	4.2E-07	4.0E-07	3.7E-07	3.5E-07	3.3E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
348	4.5E-07	4.6E-07	4.5E-07	4.3E-07	4.0E-07	3.7E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07
349	4.3E-07	4.4E-07	4.4E-07	4.2E-07	3.9E-07	3.6E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.3E-07
350	4.2E-07	4.2E-07	4.2E-07	4.0E-07	3.8E-07	3.5E-07	3.3E-07	3.2E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.2E-07
351	8.7E-07	8.8E-07	8.7E-07	8.4E-07	7.8E-07	7.1E-07	6.6E-07	6.2E-07	6.0E-07	6.0E-07	6.0E-07	6.1E-07	6.1E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
352	9.1E-07	9.3E-07	9.2E-07	8.9E-07	8.3E-07	7.6E-07	7.1E-07	6.6E-07	6.3E-07	6.4E-07	6.4E-07	6.4E-07	6.5E-07
353	9.6E-07	9.8E-07	9.7E-07	9.4E-07	8.8E-07	8.1E-07	7.6E-07	7.1E-07	6.8E-07	6.8E-07	6.9E-07	6.9E-07	6.9E-07
354	1.0E-06	1.0E-06	1.0E-06	9.9E-07	9.3E-07	8.6E-07	8.0E-07	7.5E-07	7.2E-07	7.3E-07	7.3E-07	7.3E-07	7.3E-07
355	1.0E-06	1.1E-06	1.1E-06	1.0E-06	9.7E-07	9.0E-07	8.5E-07	7.9E-07	7.6E-07	7.7E-07	7.7E-07	7.7E-07	7.7E-07
356	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.4E-07	8.8E-07	8.3E-07	7.9E-07	8.0E-07	8.0E-07	8.0E-07	8.0E-07
357	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.3E-07	8.7E-07	8.2E-07	7.8E-07	7.9E-07	7.9E-07	7.9E-07	7.9E-07
358	1.1E-06	1.1E-06	1.1E-06	1.0E-06	9.8E-07	9.1E-07	8.5E-07	7.9E-07	7.6E-07	7.6E-07	7.6E-07	7.7E-07	7.7E-07
359	1.0E-06	1.0E-06	1.0E-06	9.8E-07	9.2E-07	8.5E-07	7.9E-07	7.3E-07	7.0E-07	7.0E-07	7.0E-07	7.1E-07	7.1E-07
360	1.0E-06	1.0E-06	1.0E-06	9.8E-07	9.2E-07	8.5E-07	7.9E-07	7.3E-07	7.0E-07	7.0E-07	7.0E-07	7.1E-07	7.1E-07
361	1.0E-06	1.0E-06	1.0E-06	9.9E-07	9.3E-07	8.6E-07	8.0E-07	7.5E-07	7.1E-07	7.1E-07	7.2E-07	7.2E-07	7.2E-07
362	1.0E-06	1.0E-06	1.0E-06	9.8E-07	9.2E-07	8.5E-07	7.9E-07	7.3E-07	7.0E-07	7.0E-07	7.1E-07	7.1E-07	7.1E-07
363	9.9E-07	1.0E-06	9.9E-07	9.6E-07	9.0E-07	8.4E-07	7.8E-07	7.2E-07	6.9E-07	6.9E-07	7.0E-07	7.0E-07	7.0E-07
364	9.6E-07	9.8E-07	9.7E-07	9.4E-07	8.8E-07	8.2E-07	7.6E-07	7.0E-07	6.7E-07	6.8E-07	6.8E-07	6.8E-07	6.8E-07
365	9.3E-07	9.5E-07	9.4E-07	9.1E-07	8.5E-07	7.9E-07	7.3E-07	6.8E-07	6.5E-07	6.5E-07	6.5E-07	6.6E-07	6.6E-07
366	1.7E-07	1.7E-07	1.5E-07	1.1E-07	6.8E-08	5.4E-08	5.0E-08	4.6E-08	5.7E-08	6.7E-08	7.5E-08	8.0E-08	8.2E-08
367	2.0E-07	2.0E-07	1.8E-07	1.3E-07	7.5E-08	5.8E-08	5.4E-08	5.0E-08	6.0E-08	7.0E-08	7.7E-08	8.2E-08	8.4E-08
368	1.8E-07	1.8E-07	1.6E-07	1.1E-07	6.6E-08	5.1E-08	4.6E-08	4.3E-08	5.3E-08	6.4E-08	7.1E-08	7.6E-08	7.9E-08
369	1.6E-07	1.6E-07	1.5E-07	1.1E-07	7.1E-08	5.8E-08	5.4E-08	5.0E-08	5.8E-08	6.6E-08	7.2E-08	7.6E-08	7.8E-08
370	2.1E-07	2.2E-07	1.9E-07	1.3E-07	6.7E-08	4.8E-08	4.3E-08	3.9E-08	5.0E-08	6.0E-08	6.8E-08	7.3E-08	7.5E-08
371	1.8E-07	1.9E-07	1.6E-07	1.1E-07	5.5E-08	3.8E-08	3.3E-08	2.9E-08	4.2E-08	5.3E-08	6.2E-08	6.8E-08	7.1E-08
372	1.7E-07	1.7E-07	1.5E-07	1.1E-07	7.2E-08	5.7E-08	5.3E-08	5.0E-08	5.8E-08	6.6E-08	7.2E-08	7.6E-08	7.8E-08
373	1.8E-07	1.8E-07	1.6E-07	1.0E-07	4.2E-08	2.3E-08	1.7E-08	1.2E-08	2.5E-08	3.6E-08	4.5E-08	5.1E-08	5.4E-08
374	1.7E-07	1.8E-07	1.6E-07	1.1E-07	6.8E-08	5.3E-08	4.9E-08	4.5E-08	5.3E-08	6.1E-08	6.7E-08	7.1E-08	7.3E-08
375	1.8E-07	1.8E-07	1.6E-07	1.1E-07	6.5E-08	4.9E-08	4.4E-08	4.0E-08	4.8E-08	5.6E-08	6.3E-08	6.7E-08	6.9E-08
376	1.8E-07	1.8E-07	1.6E-07	1.1E-07	6.7E-08	5.1E-08	4.6E-08	4.1E-08	5.0E-08	5.9E-08	6.5E-08	7.0E-08	7.2E-08
377	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
378	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.0E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
379	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.7E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
380	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
381	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.6E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
382	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.1E-07	3.1E-07
383	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.8E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
384	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
385	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
386	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.0E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
387	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.5E-07	2.4E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
388	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
389	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
390	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
391	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
392	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
393	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
394	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	2.9E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
395	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
396	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
397	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
398	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
399	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
400	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
401	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
402	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
403	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
404	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	1.9E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
405	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
406	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.3E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
407	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
408	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
409	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.6E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
410	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.4E-06	1.1E-06	8.4E-07	8.7E-07	8.7E-07	8.7E-07	8.7E-07	8.7E-07	8.7E-07
411	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.2E-06	8.9E-07	6.9E-07	7.1E-07	7.1E-07	7.1E-07	7.1E-07	7.1E-07	7.1E-07
412	7.9E-07	8.1E-07	8.3E-07	8.4E-07	8.6E-07	6.6E-07	5.0E-07	5.2E-07	5.2E-07	5.2E-07	5.2E-07	5.2E-07	5.2E-07
413	5.8E-07	5.9E-07	6.1E-07	6.1E-07	6.2E-07	4.9E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07
414	4.7E-07	4.8E-07	4.9E-07	5.0E-07	5.0E-07	4.1E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07
415	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.2E-07	3.5E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
416	3.5E-07	3.7E-07	3.7E-07	3.8E-07	3.8E-07	3.3E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
417	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.2E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
418	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	2.9E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
419	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.3E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
420	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.0E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
421	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
422	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
423	8.6E-07	8.9E-07	9.1E-07	9.3E-07	9.5E-07	7.3E-07	5.9E-07	6.1E-07	6.1E-07	6.1E-07	6.1E-07	6.1E-07	6.1E-07
424	8.1E-07	8.3E-07	8.5E-07	8.7E-07	8.9E-07	6.9E-07	5.5E-07	5.6E-07	5.6E-07	5.6E-07	5.7E-07	5.7E-07	5.7E-07
425	6.7E-07	6.9E-07	7.1E-07	7.2E-07	7.4E-07	5.8E-07	4.5E-07	4.7E-07	4.7E-07	4.7E-07	4.7E-07	4.7E-07	4.7E-07
426	5.3E-07	5.5E-07	5.6E-07	5.7E-07	5.8E-07	4.6E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
427	4.2E-07	4.3E-07	4.4E-07	4.4E-07	4.5E-07	3.6E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
428	3.6E-07	3.7E-07	3.8E-07	3.8E-07	3.8E-07	3.2E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
429	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	2.8E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
430	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.6E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
431	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.4E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
432	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.3E-07	2.1E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
433	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
434	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
435	1.6E-07	1.6E-07	1.7E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07
436	6.1E-07	6.3E-07	6.4E-07	6.6E-07	6.7E-07	5.3E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07
437	5.6E-07	5.7E-07	5.9E-07	6.0E-07	6.1E-07	4.8E-07	3.8E-07	3.9E-07	3.9E-07	4.0E-07	4.0E-07	4.0E-07	4.0E-07
438	4.7E-07	4.8E-07	4.9E-07	5.0E-07	5.1E-07	4.1E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
439	4.0E-07	4.1E-07	4.2E-07	4.2E-07	4.3E-07	3.5E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
440	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.0E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
441	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	2.6E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
442	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.3E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
443	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
444	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.0E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
445	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	1.8E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
446	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
447	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
448	4.9E-07	5.1E-07	5.2E-07	5.3E-07	5.4E-07	4.3E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07
449	4.6E-07	4.8E-07	4.9E-07	5.0E-07	5.0E-07	4.0E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
450	4.2E-07	4.3E-07	4.4E-07	4.5E-07	4.6E-07	3.7E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
451	3.6E-07	3.7E-07	3.7E-07	3.8E-07	3.8E-07	3.2E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
452	3.2E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	2.8E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
453	2.7E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.5E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
454	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.2E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
455	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.0E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
456	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
457	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.7E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
458	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
459	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
460	3.9E-07	4.0E-07	4.1E-07	4.2E-07	4.3E-07	3.5E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
461	3.7E-07	3.8E-07	3.8E-07	3.9E-07	4.0E-07	3.2E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
462	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	2.9E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
463	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	2.6E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
464	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.3E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
465	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.1E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
466	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
467	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	1.8E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
468	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
469	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
470	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
471	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	2.7E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07
472	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.4E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
473	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.2E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
474	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.0E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
475	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	1.9E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
476	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.7E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
477	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
478	9.9E-07	1.0E-06	1.0E-06	1.1E-06	1.1E-06	8.1E-07	6.4E-07	6.6E-07	6.6E-07	6.6E-07	6.6E-07	6.6E-07	6.6E-07
479	7.0E-07	7.2E-07	7.4E-07	7.6E-07	7.7E-07	6.0E-07	4.9E-07	5.0E-07	5.0E-07	5.0E-07	5.0E-07	5.0E-07	5.0E-07
480	5.9E-07	6.1E-07	6.2E-07	6.4E-07	6.5E-07	5.1E-07	4.2E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07
481	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
482	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	2.8E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
483	3.8E-07	4.0E-07	4.1E-07	4.2E-07	4.2E-07	3.6E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
484	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	1.8E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
485	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.2E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
486	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	2.9E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
487	4.4E-07	4.5E-07	4.7E-07	4.8E-07	4.9E-07	4.2E-07	3.8E-07	3.8E-07	3.8E-07	3.8E-07	3.8E-07	3.8E-07	3.8E-07
488	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
489	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.3E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
490	3.1E-07	3.2E-07	3.3E-07	3.3E-07	3.4E-07	3.0E-07	2.7E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
491	4.6E-07	4.7E-07	4.9E-07	5.0E-07	5.1E-07	4.3E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07	3.8E-07	3.8E-07
492	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
493	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
494	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07	3.0E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
495	4.7E-07	4.8E-07	5.0E-07	5.1E-07	5.2E-07	4.3E-07	3.8E-07	3.9E-07	3.9E-07	3.8E-07	3.8E-07	3.8E-07	3.8E-07
496	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.1E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
497	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.4E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
498	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.1E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
499	4.5E-07	4.6E-07	4.7E-07	4.8E-07	4.9E-07	3.9E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
500	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.2E-07	2.1E-07	2.2E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
501	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
502	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.8E-07	3.2E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
503	4.6E-07	4.7E-07	4.9E-07	5.0E-07	5.1E-07	4.1E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07
504	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
505	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.0E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
506	3.7E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	3.6E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
507	4.9E-07	5.0E-07	5.1E-07	5.3E-07	5.4E-07	4.4E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
508	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.3E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
509	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	2.7E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
510	3.5E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	3.4E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
511	4.5E-07	4.6E-07	4.7E-07	4.8E-07	4.9E-07	3.9E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07
512	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
513	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	2.8E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
514	3.4E-07	3.6E-07	3.7E-07	3.7E-07	3.8E-07	3.3E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
515	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.7E-07	3.9E-07	3.4E-07	3.5E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
516	6.2E-07	6.4E-07	6.5E-07	6.7E-07	6.8E-07	5.3E-07	4.4E-07	4.5E-07	4.5E-07	4.5E-07	4.5E-07	4.4E-07	4.4E-07
517	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.3E-07	3.1E-07	3.0E-07	3.1E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
518	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.4E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.2E-07
519	3.8E-07	3.9E-07	4.1E-07	4.2E-07	4.3E-07	3.8E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.6E-07
520	4.6E-07	4.8E-07	4.9E-07	5.1E-07	5.2E-07	4.5E-07	4.1E-07	4.2E-07	4.2E-07	4.2E-07	4.2E-07	4.2E-07	4.1E-07
521	5.8E-07	6.0E-07	6.1E-07	6.3E-07	6.4E-07	5.2E-07	4.5E-07	4.7E-07	4.7E-07	4.7E-07	4.6E-07	4.6E-07	4.6E-07
522	2.7E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	2.7E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
523	3.1E-07	3.3E-07	3.3E-07	3.4E-07	3.5E-07	3.1E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
524	3.7E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	3.6E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07
525	4.6E-07	4.7E-07	4.8E-07	4.9E-07	5.0E-07	4.1E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
526	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	2.7E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
527	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.6E-07	3.0E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
528	3.8E-07	3.9E-07	4.0E-07	4.1E-07	4.2E-07	3.5E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
529	4.3E-07	4.5E-07	4.6E-07	4.7E-07	4.8E-07	3.9E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
530	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	2.6E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
531	3.2E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.0E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
532	3.6E-07	3.7E-07	3.8E-07	3.9E-07	4.0E-07	3.3E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
533	4.0E-07	4.1E-07	4.2E-07	4.3E-07	4.4E-07	3.5E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
534	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.7E-07	3.8E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07
535	3.8E-07	3.9E-07	3.9E-07	3.6E-07	3.0E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
536	3.5E-07	3.6E-07	3.6E-07	3.3E-07	2.8E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07
537	3.2E-07	3.3E-07	3.3E-07	3.1E-07	2.7E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
538	3.4E-07	3.5E-07	3.5E-07	3.4E-07	3.1E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07
539	4.3E-07	4.4E-07	4.5E-07	4.2E-07	3.6E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07
540	3.7E-07	3.9E-07	3.9E-07	3.6E-07	3.2E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07
541	3.4E-07	3.5E-07	3.5E-07	3.3E-07	2.9E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07
542	3.1E-07	3.2E-07	3.2E-07	3.0E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07
543	2.8E-07	2.9E-07	3.0E-07	2.8E-07	2.6E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
544	4.0E-07	4.1E-07	4.1E-07	3.8E-07	3.2E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
545	3.5E-07	3.6E-07	3.7E-07	3.4E-07	2.9E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
546	3.2E-07	3.3E-07	3.3E-07	3.1E-07	2.7E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
547	3.0E-07	3.0E-07	3.1E-07	2.9E-07	2.6E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07
548	2.8E-07	2.8E-07	2.9E-07	2.7E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
549	3.9E-07	4.0E-07	4.0E-07	3.7E-07	3.1E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
550	3.5E-07	3.6E-07	3.6E-07	3.3E-07	2.9E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07
551	3.2E-07	3.2E-07	3.3E-07	3.1E-07	2.7E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
552	2.9E-07	3.0E-07	3.0E-07	2.8E-07	2.5E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
553	2.7E-07	2.8E-07	2.8E-07	2.7E-07	2.4E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07
554	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07
555	3.9E-07	4.0E-07	4.0E-07	3.7E-07	3.1E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
556	3.5E-07	3.5E-07	3.6E-07	3.3E-07	2.9E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07
557	3.2E-07	3.2E-07	3.3E-07	3.1E-07	2.7E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
558	2.9E-07	3.0E-07	3.0E-07	2.8E-07	2.5E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
559	2.7E-07	2.8E-07	2.8E-07	2.6E-07	2.4E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07
560	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.2E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
561	4.0E-07	4.1E-07	4.1E-07	3.9E-07	3.3E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07
562	3.5E-07	3.6E-07	3.6E-07	3.4E-07	3.0E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
563	3.2E-07	3.3E-07	3.3E-07	3.1E-07	2.7E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
564	2.9E-07	3.0E-07	3.0E-07	2.8E-07	2.5E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07
565	2.7E-07	2.7E-07	2.8E-07	2.6E-07	2.4E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
566	2.5E-07	2.6E-07	2.6E-07	2.4E-07	2.2E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
567	4.3E-07	4.3E-07	4.4E-07	4.1E-07	3.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
568	3.6E-07	3.7E-07	3.7E-07	3.5E-07	3.1E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07
569	3.2E-07	3.3E-07	3.3E-07	3.1E-07	2.8E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
570	2.9E-07	3.0E-07	3.0E-07	2.8E-07	2.6E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07
571	2.7E-07	2.8E-07	2.8E-07	2.6E-07	2.4E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
572	2.5E-07	2.6E-07	2.6E-07	2.4E-07	2.2E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
573	4.5E-07	4.6E-07	4.6E-07	4.4E-07	3.9E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07
574	3.7E-07	3.8E-07	3.8E-07	3.7E-07	3.3E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
575	3.2E-07	3.3E-07	3.4E-07	3.2E-07	2.9E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
576	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.6E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
577	2.7E-07	2.7E-07	2.8E-07	2.6E-07	2.4E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
578	2.5E-07	2.5E-07	2.6E-07	2.4E-07	2.2E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
579	4.7E-07	4.8E-07	4.9E-07	4.7E-07	4.2E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
580	3.8E-07	3.9E-07	4.0E-07	3.8E-07	3.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07
581	3.3E-07	3.4E-07	3.4E-07	3.2E-07	2.9E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07
582	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.6E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
583	2.7E-07	2.7E-07	2.8E-07	2.6E-07	2.4E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07
584	2.5E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
585	4.9E-07	5.0E-07	5.1E-07	4.9E-07	4.4E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
586	3.9E-07	4.0E-07	4.0E-07	3.9E-07	3.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
587	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.0E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
588	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.6E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07
589	2.7E-07	2.7E-07	2.8E-07	2.6E-07	2.4E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
590	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
591	5.0E-07	5.1E-07	5.2E-07	5.0E-07	4.5E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
592	4.0E-07	4.0E-07	4.1E-07	3.9E-07	3.6E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07
593	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.0E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
594	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.6E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07
595	2.7E-07	2.7E-07	2.7E-07	2.6E-07	2.4E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
596	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
597	5.0E-07	5.1E-07	5.1E-07	4.9E-07	4.5E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07
598	3.9E-07	4.0E-07	4.1E-07	3.9E-07	3.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
599	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.0E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
600	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.6E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07
601	2.7E-07	2.7E-07	2.7E-07	2.6E-07	2.4E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
602	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
603	4.7E-07	4.8E-07	4.8E-07	4.7E-07	4.2E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
604	3.8E-07	3.9E-07	3.9E-07	3.8E-07	3.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
605	3.2E-07	3.3E-07	3.3E-07	3.2E-07	2.9E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07
606	2.8E-07	2.9E-07	2.9E-07	2.8E-07	2.5E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
607	2.6E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
608	2.4E-07	2.4E-07	2.5E-07	2.3E-07	2.2E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
609	6.1E-07	6.3E-07	6.3E-07	5.7E-07	5.3E-07	4.5E-07	4.6E-07	4.8E-07	4.8E-07	4.8E-07	4.8E-07	4.8E-07	4.8E-07
610	6.7E-07	6.9E-07	7.0E-07	6.6E-07	6.2E-07	5.3E-07	5.5E-07	5.6E-07	5.6E-07	5.7E-07	5.7E-07	5.7E-07	5.7E-07
611	7.4E-07	7.7E-07	7.8E-07	7.6E-07	7.2E-07	6.2E-07	6.4E-07	6.6E-07	6.6E-07	6.6E-07	6.6E-07	6.7E-07	6.7E-07
612	8.1E-07	8.4E-07	8.6E-07	8.5E-07	8.1E-07	6.9E-07	7.2E-07	7.4E-07	7.4E-07	7.4E-07	7.4E-07	7.5E-07	7.5E-07
613	7.7E-07	8.0E-07	8.2E-07	8.1E-07	7.7E-07	6.5E-07	6.7E-07	6.9E-07	6.9E-07	6.9E-07	6.9E-07	6.9E-07	6.9E-07
614	6.8E-07	7.0E-07	7.1E-07	7.0E-07	6.5E-07	5.2E-07	5.3E-07	5.5E-07	5.5E-07	5.5E-07	5.5E-07	5.6E-07	5.6E-07
615	5.9E-07	6.0E-07	6.1E-07	6.0E-07	5.5E-07	4.1E-07	4.2E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07
616	5.0E-07	5.2E-07	5.2E-07	5.1E-07	4.6E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07
617	4.3E-07	4.4E-07	4.4E-07	4.3E-07	3.9E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07
618	3.6E-07	3.7E-07	3.7E-07	3.6E-07	3.3E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
619	3.1E-07	3.2E-07	3.2E-07	3.1E-07	2.8E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
620	2.8E-07	2.9E-07	2.9E-07	2.7E-07	2.5E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
621	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
622	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
623	5.7E-07	5.9E-07	5.9E-07	5.2E-07	4.8E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07
624	5.9E-07	6.1E-07	6.1E-07	5.7E-07	5.3E-07	4.6E-07	4.7E-07	4.9E-07	4.9E-07	4.9E-07	4.9E-07	4.9E-07	4.9E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
625	6.3E-07	6.5E-07	6.6E-07	6.3E-07	6.0E-07	5.2E-07	5.3E-07	5.5E-07	5.5E-07	5.5E-07	5.5E-07	5.5E-07	5.5E-07
626	6.6E-07	6.8E-07	7.0E-07	6.8E-07	6.4E-07	5.6E-07	5.7E-07	5.9E-07	5.9E-07	5.9E-07	6.0E-07	6.0E-07	6.0E-07
627	6.5E-07	6.7E-07	6.9E-07	6.7E-07	6.4E-07	5.4E-07	5.6E-07	5.8E-07	5.8E-07	5.8E-07	5.8E-07	5.8E-07	5.8E-07
628	6.0E-07	6.2E-07	6.3E-07	6.2E-07	5.8E-07	4.8E-07	4.9E-07	5.0E-07	5.0E-07	5.1E-07	5.1E-07	5.1E-07	5.1E-07
629	5.3E-07	5.5E-07	5.6E-07	5.5E-07	5.1E-07	4.0E-07	4.1E-07	4.2E-07	4.2E-07	4.2E-07	4.2E-07	4.2E-07	4.2E-07
630	4.7E-07	4.8E-07	4.9E-07	4.7E-07	4.3E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07
631	4.1E-07	4.2E-07	4.2E-07	4.1E-07	3.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
632	3.6E-07	3.6E-07	3.7E-07	3.5E-07	3.3E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
633	3.1E-07	3.2E-07	3.2E-07	3.1E-07	2.9E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
634	2.8E-07	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
635	2.6E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
636	2.4E-07	2.4E-07	2.5E-07	2.3E-07	2.2E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
637	5.4E-07	5.6E-07	5.5E-07	4.6E-07	4.2E-07	3.7E-07	3.8E-07	3.9E-07	3.9E-07	4.0E-07	4.0E-07	4.0E-07	4.0E-07
638	5.3E-07	5.5E-07	5.5E-07	4.9E-07	4.6E-07	4.0E-07	4.1E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07
639	5.4E-07	5.6E-07	5.6E-07	5.3E-07	5.0E-07	4.4E-07	4.5E-07	4.6E-07	4.6E-07	4.6E-07	4.6E-07	4.6E-07	4.7E-07
640	5.5E-07	5.7E-07	5.8E-07	5.5E-07	5.2E-07	4.5E-07	4.7E-07	4.8E-07	4.8E-07	4.8E-07	4.8E-07	4.9E-07	4.9E-07
641	5.5E-07	5.6E-07	5.7E-07	5.5E-07	5.2E-07	4.5E-07	4.6E-07	4.7E-07	4.8E-07	4.8E-07	4.8E-07	4.8E-07	4.8E-07
642	5.2E-07	5.3E-07	5.4E-07	5.3E-07	5.0E-07	4.2E-07	4.3E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07
643	4.7E-07	4.9E-07	4.9E-07	4.8E-07	4.4E-07	3.6E-07	3.7E-07	3.8E-07	3.8E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07
644	4.2E-07	4.3E-07	4.4E-07	4.2E-07	3.9E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07
645	3.8E-07	3.9E-07	3.9E-07	3.8E-07	3.5E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
646	3.3E-07	3.4E-07	3.5E-07	3.3E-07	3.1E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
647	3.0E-07	3.0E-07	3.1E-07	2.9E-07	2.7E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
648	2.7E-07	2.7E-07	2.8E-07	2.6E-07	2.4E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
649	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
650	5.2E-07	5.4E-07	5.3E-07	4.3E-07	3.9E-07	3.5E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
651	4.9E-07	5.1E-07	5.0E-07	4.4E-07	4.1E-07	3.7E-07	3.7E-07	3.8E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07
652	4.9E-07	5.0E-07	5.0E-07	4.6E-07	4.3E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07	4.0E-07	4.1E-07	4.1E-07	4.1E-07
653	4.8E-07	5.0E-07	5.0E-07	4.7E-07	4.5E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07	4.1E-07	4.2E-07	4.2E-07	4.2E-07
654	4.8E-07	4.9E-07	5.0E-07	4.7E-07	4.5E-07	3.9E-07	4.0E-07	4.1E-07	4.1E-07	4.1E-07	4.1E-07	4.1E-07	4.1E-07
655	4.6E-07	4.7E-07	4.8E-07	4.6E-07	4.3E-07	3.7E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07	3.9E-07
656	4.2E-07	4.4E-07	4.4E-07	4.3E-07	4.0E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.6E-07	3.6E-07
657	3.9E-07	4.0E-07	4.0E-07	3.9E-07	3.6E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07
658	3.5E-07	3.6E-07	3.6E-07	3.5E-07	3.2E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
659	3.2E-07	3.2E-07	3.3E-07	3.1E-07	2.9E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
660	2.8E-07	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07
661	2.6E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07
662	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.1E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
663	5.1E-07	5.2E-07	5.1E-07	4.0E-07	3.7E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
664	4.6E-07	4.8E-07	4.7E-07	4.1E-07	3.7E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07
665	4.5E-07	4.6E-07	4.6E-07	4.2E-07	3.9E-07	3.5E-07	3.6E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
666	4.3E-07	4.5E-07	4.5E-07	4.2E-07	3.9E-07	3.5E-07	3.6E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
667	4.3E-07	4.4E-07	4.4E-07	4.2E-07	3.9E-07	3.5E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07
668	4.1E-07	4.3E-07	4.3E-07	4.1E-07	3.8E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07
669	3.9E-07	4.0E-07	4.0E-07	3.8E-07	3.6E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07
670	3.6E-07	3.7E-07	3.7E-07	3.6E-07	3.3E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07
671	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.0E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
672	3.0E-07	3.1E-07	3.1E-07	3.0E-07	2.7E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
673	2.7E-07	2.8E-07	2.8E-07	2.7E-07	2.5E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
674	2.5E-07	2.5E-07	2.6E-07	2.4E-07	2.3E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
675	5.1E-07	5.2E-07	5.0E-07	3.9E-07	3.6E-07	3.3E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07
676	4.5E-07	4.6E-07	4.6E-07	3.8E-07	3.6E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07
677	4.2E-07	4.3E-07	4.3E-07	3.8E-07	3.6E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
678	4.0E-07	4.1E-07	4.1E-07	3.8E-07	3.5E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
679	3.9E-07	4.0E-07	4.0E-07	3.8E-07	3.5E-07	3.1E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07
680	3.8E-07	3.9E-07	3.9E-07	3.7E-07	3.5E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
681	3.6E-07	3.7E-07	3.7E-07	3.5E-07	3.3E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
682	3.3E-07	3.4E-07	3.5E-07	3.3E-07	3.1E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
683	3.1E-07	3.2E-07	3.2E-07	3.1E-07	2.8E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
684	4.8E-07	4.9E-07	4.7E-07	3.7E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07
685	4.1E-07	4.3E-07	4.2E-07	3.5E-07	3.2E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07
686	3.8E-07	3.9E-07	3.9E-07	3.4E-07	3.1E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
687	3.5E-07	3.7E-07	3.6E-07	3.3E-07	3.1E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
688	3.4E-07	3.5E-07	3.5E-07	3.2E-07	3.0E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
689	3.3E-07	3.4E-07	3.4E-07	3.1E-07	2.9E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
690	4.6E-07	4.7E-07	4.6E-07	3.5E-07	3.2E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
691	4.0E-07	4.1E-07	4.0E-07	3.3E-07	3.0E-07	2.8E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
692	3.6E-07	3.7E-07	3.6E-07	3.1E-07	2.9E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
693	3.4E-07	3.5E-07	3.4E-07	3.0E-07	2.8E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
694	3.2E-07	3.3E-07	3.3E-07	3.0E-07	2.8E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
695	3.1E-07	3.2E-07	3.2E-07	2.9E-07	2.7E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
696	4.6E-07	4.7E-07	4.5E-07	3.4E-07	3.1E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
697	3.9E-07	4.0E-07	3.9E-07	3.1E-07	2.9E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
698	3.4E-07	3.5E-07	3.5E-07	2.9E-07	2.7E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
699	3.2E-07	3.3E-07	3.3E-07	2.8E-07	2.6E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
700	3.0E-07	3.1E-07	3.1E-07	2.8E-07	2.6E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
701	2.9E-07	3.0E-07	3.0E-07	2.7E-07	2.5E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
702	4.6E-07	4.7E-07	4.5E-07	3.4E-07	3.1E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
703	3.8E-07	3.9E-07	3.8E-07	3.0E-07	2.8E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
704	3.3E-07	3.4E-07	3.3E-07	2.8E-07	2.6E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
705	3.1E-07	3.2E-07	3.1E-07	2.7E-07	2.5E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
706	2.9E-07	3.0E-07	3.0E-07	2.6E-07	2.5E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
707	2.7E-07	2.8E-07	2.8E-07	2.6E-07	2.4E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
708	4.6E-07	4.7E-07	4.5E-07	3.4E-07	3.1E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07
709	3.7E-07	3.8E-07	3.7E-07	3.0E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07
710	3.2E-07	3.3E-07	3.3E-07	2.7E-07	2.5E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
711	3.0E-07	3.1E-07	3.0E-07	2.6E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
712	2.8E-07	2.9E-07	2.8E-07	2.5E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
713	2.6E-07	2.7E-07	2.7E-07	2.4E-07	2.3E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
714	4.5E-07	4.6E-07	4.4E-07	3.3E-07	3.0E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
715	3.6E-07	3.7E-07	3.6E-07	2.9E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
716	3.2E-07	3.3E-07	3.2E-07	2.7E-07	2.5E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
717	2.9E-07	3.0E-07	2.9E-07	2.5E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
718	2.7E-07	2.8E-07	2.7E-07	2.4E-07	2.2E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
719	2.5E-07	2.6E-07	2.6E-07	2.3E-07	2.2E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
720	4.3E-07	4.4E-07	4.3E-07	3.2E-07	2.9E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
721	3.5E-07	3.6E-07	3.5E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
722	3.1E-07	3.2E-07	3.1E-07	2.6E-07	2.4E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
723	2.8E-07	2.9E-07	2.8E-07	2.4E-07	2.3E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07
724	2.6E-07	2.7E-07	2.6E-07	2.3E-07	2.2E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
725	2.4E-07	2.5E-07	2.5E-07	2.2E-07	2.1E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
726	4.1E-07	4.2E-07	4.0E-07	3.0E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
727	3.4E-07	3.5E-07	3.4E-07	2.7E-07	2.5E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
728	3.0E-07	3.1E-07	3.0E-07	2.5E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
729	2.7E-07	2.8E-07	2.7E-07	2.4E-07	2.2E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
730	2.5E-07	2.6E-07	2.5E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
731	2.3E-07	2.4E-07	2.4E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
732	2.1E-07	2.2E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
733	2.3E-07	2.3E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
734	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
735	3.0E-07	3.1E-07	3.1E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
736	3.2E-07	3.3E-07	3.3E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
737	3.8E-07	3.9E-07	3.7E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
738	3.2E-07	3.3E-07	3.2E-07	2.6E-07	2.4E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
739	2.9E-07	2.9E-07	2.9E-07	2.4E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
740	2.6E-07	2.7E-07	2.6E-07	2.3E-07	2.1E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
741	2.4E-07	2.5E-07	2.5E-07	2.2E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
742	2.3E-07	2.3E-07	2.3E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
743	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
744	2.1E-07	2.2E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
745	2.4E-07	2.5E-07	2.5E-07	2.3E-07	2.3E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
746	2.8E-07	3.0E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
747	3.0E-07	3.1E-07	3.1E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07
748	3.5E-07	3.6E-07	3.5E-07	3.1E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07
749	4.0E-07	4.1E-07	3.9E-07	3.3E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
750	4.2E-07	4.3E-07	4.0E-07	3.1E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
751	4.4E-07	4.5E-07	4.2E-07	3.1E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
752	4.5E-07	4.6E-07	4.3E-07	3.1E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
753	4.5E-07	4.6E-07	4.3E-07	3.0E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
754	4.3E-07	4.4E-07	4.1E-07	2.9E-07	2.6E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
755	4.0E-07	4.1E-07	3.9E-07	2.8E-07	2.5E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
756	3.5E-07	3.6E-07	3.4E-07	2.6E-07	2.4E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
757	3.0E-07	3.1E-07	3.0E-07	2.5E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
758	2.7E-07	2.8E-07	2.7E-07	2.3E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
759	2.5E-07	2.6E-07	2.5E-07	2.2E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
760	2.3E-07	2.4E-07	2.4E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07
761	2.2E-07	2.3E-07	2.2E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
762	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
763	2.1E-07	2.1E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
764	2.3E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07
765	2.7E-07	2.8E-07	2.8E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07
766	2.9E-07	3.0E-07	2.9E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
767	3.3E-07	3.4E-07	3.3E-07	3.0E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
768	3.5E-07	3.6E-07	3.5E-07	3.0E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
769	3.6E-07	3.7E-07	3.5E-07	2.8E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
770	3.7E-07	3.8E-07	3.5E-07	2.8E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
771	3.7E-07	3.8E-07	3.6E-07	2.7E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
772	3.7E-07	3.8E-07	3.6E-07	2.7E-07	2.4E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
773	3.6E-07	3.7E-07	3.5E-07	2.6E-07	2.4E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07
774	3.4E-07	3.5E-07	3.4E-07	2.6E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
775	3.1E-07	3.2E-07	3.1E-07	2.5E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
776	2.8E-07	2.9E-07	2.8E-07	2.3E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
777	2.6E-07	2.7E-07	2.6E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
778	2.4E-07	2.5E-07	2.4E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
779	2.2E-07	2.3E-07	2.3E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
780	2.1E-07	2.2E-07	2.2E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
781	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
782	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
783	2.2E-07	2.3E-07	2.3E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
784	2.7E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
785	2.8E-07	2.8E-07	2.8E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
786	3.0E-07	3.1E-07	3.1E-07	2.8E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
787	3.2E-07	3.3E-07	3.2E-07	2.9E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
788	3.1E-07	3.2E-07	3.1E-07	2.6E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
789	3.2E-07	3.3E-07	3.1E-07	2.5E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
790	3.2E-07	3.3E-07	3.1E-07	2.5E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
791	3.2E-07	3.3E-07	3.1E-07	2.4E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
792	3.1E-07	3.2E-07	3.1E-07	2.4E-07	2.2E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
793	3.0E-07	3.1E-07	3.0E-07	2.4E-07	2.2E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
794	2.8E-07	2.9E-07	2.8E-07	2.3E-07	2.1E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07
795	2.6E-07	2.7E-07	2.6E-07	2.2E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
796	2.5E-07	2.5E-07	2.5E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
797	2.3E-07	2.4E-07	2.3E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
798	2.2E-07	2.2E-07	2.2E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
799	2.0E-07	2.0E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
800	2.2E-07	2.3E-07	2.3E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
801	2.6E-07	2.7E-07	2.7E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
802	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
803	2.9E-07	3.0E-07	2.9E-07	2.7E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07
804	3.0E-07	3.1E-07	3.0E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
805	2.8E-07	2.9E-07	2.8E-07	2.5E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
806	2.8E-07	2.9E-07	2.8E-07	2.3E-07	2.2E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07
807	2.8E-07	2.9E-07	2.8E-07	2.3E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
808	2.8E-07	2.9E-07	2.8E-07	2.3E-07	2.1E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
809	2.8E-07	2.9E-07	2.7E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
810	2.7E-07	2.8E-07	2.7E-07	2.2E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
811	2.6E-07	2.7E-07	2.6E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
812	2.5E-07	2.5E-07	2.5E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
813	2.3E-07	2.4E-07	2.3E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
814	2.2E-07	2.2E-07	2.2E-07	1.9E-07	1.8E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
815	2.1E-07	2.1E-07	2.1E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
816	2.2E-07	2.2E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
817	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
818	2.6E-07	2.7E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
819	2.7E-07	2.8E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
820	2.8E-07	2.9E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
821	2.6E-07	2.7E-07	2.6E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
822	2.6E-07	2.6E-07	2.5E-07	2.2E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
823	2.5E-07	2.6E-07	2.5E-07	2.1E-07	2.0E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
824	2.5E-07	2.6E-07	2.5E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
825	2.5E-07	2.6E-07	2.5E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
826	2.5E-07	2.5E-07	2.5E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
827	2.4E-07	2.5E-07	2.4E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
828	2.3E-07	2.4E-07	2.3E-07	2.0E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
829	2.2E-07	2.3E-07	2.2E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
830	2.1E-07	2.1E-07	2.1E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
831	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
832	2.6E-07	2.7E-07	2.7E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
833	2.6E-07	2.7E-07	2.7E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
834	2.4E-07	2.5E-07	2.4E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
835	2.4E-07	2.4E-07	2.3E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
836	2.3E-07	2.4E-07	2.3E-07	2.0E-07	1.9E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
837	2.3E-07	2.4E-07	2.3E-07	2.0E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
838	2.3E-07	2.4E-07	2.3E-07	2.0E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
839	2.3E-07	2.3E-07	2.3E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
840	2.2E-07	2.3E-07	2.2E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
841	2.2E-07	2.2E-07	2.2E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
842	4.0E-08	4.1E-08	4.0E-08	3.9E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.6E-08	4.8E-08	4.9E-08	4.9E-08
843	4.3E-08	4.3E-08	4.2E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08	4.5E-08	4.7E-08	4.8E-08	5.0E-08	5.0E-08	5.1E-08
844	4.1E-08	4.1E-08	3.8E-08	3.7E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08
845	3.5E-08	3.4E-08	3.2E-08	3.0E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08
846	2.8E-08	2.7E-08	2.4E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08
847	2.5E-08	1.7E-08	4.4E-09	-3.3E-09	-4.2E-09	-5.3E-09	-5.9E-09	-6.3E-09	-2.8E-09	1.7E-10	2.4E-09	3.8E-09	4.6E-09
848	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
849	3.1E-07	3.1E-07	3.0E-07	2.9E-07	3.1E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
850	6.7E-08	6.3E-08	5.6E-08	5.2E-08	5.4E-08	5.5E-08	5.7E-08	5.9E-08	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08
851	8.4E-08	7.9E-08	6.9E-08	6.5E-08	6.7E-08	6.9E-08	7.1E-08	7.4E-08	7.6E-08	7.7E-08	7.9E-08	8.0E-08	8.0E-08
852	5.5E-08	4.1E-08	1.9E-08	6.3E-09	5.8E-09	5.3E-09	5.2E-09	5.3E-09	9.6E-09	1.3E-08	1.6E-08	1.8E-08	1.8E-08
853	1.8E-07	1.6E-07	1.4E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
854	5.3E-08	5.1E-08	4.5E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.7E-08	4.9E-08	5.0E-08	5.2E-08	5.2E-08	5.3E-08
855	6.4E-08	6.0E-08	5.2E-08	4.8E-08	5.0E-08	5.1E-08	5.3E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08	6.2E-08
856	6.9E-08	6.4E-08	5.4E-08	4.9E-08	5.1E-08	5.2E-08	5.4E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08
857	1.8E-07	1.7E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
858	5.3E-08	5.0E-08	4.3E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.7E-08	4.9E-08	5.1E-08	5.1E-08	5.2E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
859	5.1E-08	4.6E-08	3.7E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.8E-08	4.0E-08	4.2E-08	4.3E-08	4.3E-08
860	1.3E-07	1.2E-07	1.1E-07	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
861	1.2E-07	1.1E-07	8.7E-08	7.6E-08	7.9E-08	8.1E-08	8.4E-08	8.8E-08	9.1E-08	9.3E-08	9.5E-08	9.7E-08	9.7E-08
862	5.1E-08	4.8E-08	4.1E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.6E-08	4.8E-08	5.0E-08	5.1E-08	5.1E-08
863	4.9E-08	4.4E-08	3.5E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.6E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08
864	1.2E-07	1.1E-07	1.0E-07	9.6E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
865	4.3E-08	3.9E-08	3.2E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08	3.1E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08
866	1.1E-07	1.0E-07	9.5E-08	9.1E-08	9.4E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
867	-3.1E-08	-4.5E-08	-6.7E-08	-8.0E-08	-8.5E-08	-8.9E-08	-9.3E-08	-9.7E-08	-9.0E-08	-8.5E-08	-8.1E-08	-7.9E-08	-7.7E-08
868	3.8E-08	3.4E-08	2.6E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.6E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08
869	1.1E-07	1.1E-07	9.6E-08	9.3E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
870	8.6E-08	7.8E-08	6.1E-08	5.3E-08	5.4E-08	5.6E-08	5.8E-08	6.0E-08	6.3E-08	6.6E-08	6.8E-08	6.9E-08	7.0E-08
871	3.8E-08	3.5E-08	2.8E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.6E-08	2.9E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
872	1.1E-07	1.1E-07	1.0E-07	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
873	1.0E-07	1.0E-07	9.5E-08	9.2E-08	9.6E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
874	6.4E-08	5.8E-08	4.7E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.6E-08	5.0E-08	5.3E-08	5.5E-08	5.7E-08	5.7E-08
875	9.9E-08	9.8E-08	9.1E-08	8.9E-08	9.2E-08	9.5E-08	9.9E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
876	9.3E-08	9.1E-08	8.5E-08	8.3E-08	8.6E-08	8.9E-08	9.2E-08	9.6E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07
877	7.9E-08	7.7E-08	6.9E-08	6.6E-08	6.8E-08	7.0E-08	7.3E-08	7.5E-08	7.8E-08	8.0E-08	8.2E-08	8.3E-08	8.4E-08
878	-2.2E-08	-3.9E-08	-6.0E-08	-7.5E-08	-8.0E-08	-8.4E-08	-8.7E-08	-9.1E-08	-8.5E-08	-8.0E-08	-7.6E-08	-7.4E-08	-7.3E-08
879	1.2E-07	1.1E-07	8.9E-08	7.9E-08	8.2E-08	8.4E-08	8.7E-08	9.1E-08	9.3E-08	9.5E-08	9.7E-08	9.8E-08	9.8E-08
880	2.6E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
881	1.5E-07	1.4E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
882	9.6E-08	8.9E-08	7.7E-08	7.1E-08	7.3E-08	7.6E-08	7.8E-08	8.1E-08	8.3E-08	8.5E-08	8.6E-08	8.7E-08	8.7E-08
883	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
884	1.2E-07	1.1E-07	8.6E-08	7.4E-08	7.7E-08	7.9E-08	8.2E-08	8.5E-08	8.8E-08	9.1E-08	9.3E-08	9.4E-08	9.5E-08
885	9.5E-08	8.8E-08	7.6E-08	7.0E-08	7.3E-08	7.5E-08	7.7E-08	8.0E-08	8.2E-08	8.4E-08	8.5E-08	8.6E-08	8.6E-08
886	1.5E-07	1.4E-07	1.2E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
887	1.4E-07	1.2E-07	9.6E-08	8.3E-08	8.5E-08	8.8E-08	9.2E-08	9.5E-08	9.7E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07
888	3.2E-08	1.7E-08	-5.3E-09	-1.9E-08	-2.1E-08	-2.2E-08	-2.4E-08	-2.5E-08	-2.0E-08	-1.6E-08	-1.3E-08	-1.1E-08	-9.9E-09
889	1.2E-07	1.1E-07	8.3E-08	7.1E-08	7.3E-08	7.6E-08	7.9E-08	8.2E-08	8.5E-08	8.8E-08	9.1E-08	9.2E-08	9.3E-08
890	4.4E-08	2.9E-08	6.9E-09	-6.4E-09	-7.4E-09	-8.5E-09	-9.2E-09	-9.6E-09	-5.0E-09	-1.3E-09	1.5E-09	3.4E-09	4.3E-09
891	1.3E-07	1.2E-07	9.1E-08	7.8E-08	8.0E-08	8.3E-08	8.6E-08	8.9E-08	9.2E-08	9.5E-08	9.6E-08	9.7E-08	9.8E-08
892	7.0E-08	6.6E-08	5.7E-08	5.3E-08	5.4E-08	5.6E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08
893	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
894	6.2E-08	5.9E-08	5.2E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08	5.4E-08	5.6E-08	5.7E-08	5.8E-08	5.9E-08	5.9E-08
895	7.9E-08	7.5E-08	6.6E-08	6.2E-08	6.4E-08	6.5E-08	6.8E-08	7.0E-08	7.2E-08	7.4E-08	7.5E-08	7.6E-08	7.7E-08
896	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
897	5.2E-08	5.0E-08	4.4E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
898	4.0E-07	4.1E-07	4.2E-07	3.9E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07
899	4.4E-07	4.6E-07	4.6E-07	4.4E-07	4.0E-07	3.9E-07	4.0E-07	4.0E-07	4.0E-07	4.0E-07	4.0E-07	4.0E-07	4.0E-07
900	3.7E-07	3.8E-07	3.8E-07	3.5E-07	2.9E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
901	3.7E-07	3.8E-07	3.9E-07	3.6E-07	3.1E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
902	3.8E-07	3.9E-07	3.9E-07	3.4E-07	2.8E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
903	3.6E-07	3.6E-07	3.7E-07	3.4E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
904	4.0E-07	4.1E-07	4.1E-07	3.7E-07	3.1E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07
905	3.6E-07	3.7E-07	3.7E-07	3.4E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
906	4.0E-07	4.1E-07	4.1E-07	3.8E-07	3.1E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07
907	3.7E-07	3.8E-07	3.8E-07	3.6E-07	3.1E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07
908	3.8E-07	3.9E-07	3.9E-07	3.6E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
909	3.5E-07	3.6E-07	3.6E-07	3.3E-07	2.9E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07
910	5.4E-08	5.5E-08	5.1E-08	4.2E-08	3.3E-08	2.7E-08	2.4E-08	2.2E-08	3.3E-08	4.3E-08	5.0E-08	5.5E-08	5.7E-08
911	5.7E-08	5.8E-08	5.4E-08	4.5E-08	3.5E-08	2.9E-08	2.6E-08	2.3E-08	3.3E-08	4.2E-08	4.9E-08	5.3E-08	5.6E-08
912	5.4E-08	5.5E-08	5.1E-08	4.2E-08	3.3E-08	2.7E-08	2.4E-08	2.1E-08	3.0E-08	3.9E-08	4.5E-08	4.9E-08	5.1E-08
913	6.1E-08	6.3E-08	5.9E-08	4.9E-08	3.8E-08	3.2E-08	2.9E-08	2.7E-08	3.6E-08	4.5E-08	5.2E-08	5.6E-08	5.8E-08
914	5.7E-08	5.8E-08	5.5E-08	4.5E-08	3.5E-08	2.9E-08	2.6E-08	2.4E-08	3.3E-08	4.1E-08	4.7E-08	5.1E-08	5.3E-08
915	6.7E-08	6.8E-08	6.4E-08	5.4E-08	4.3E-08	3.7E-08	3.4E-08	3.1E-08	4.1E-08	5.0E-08	5.6E-08	6.1E-08	6.3E-08
916	6.1E-08	6.2E-08	5.8E-08	4.9E-08	3.8E-08	3.2E-08	2.9E-08	2.7E-08	3.6E-08	4.4E-08	4.9E-08	5.3E-08	5.5E-08
917	6.5E-08	6.6E-08	6.3E-08	5.4E-08	4.4E-08	3.9E-08	3.6E-08	3.3E-08	4.0E-08	4.6E-08	5.1E-08	5.4E-08	5.5E-08
918	7.2E-08	7.4E-08	7.0E-08	5.9E-08	4.8E-08	4.2E-08	3.9E-08	3.7E-08	4.6E-08	5.5E-08	6.2E-08	6.6E-08	6.8E-08
919	6.5E-08	6.7E-08	6.2E-08	5.2E-08	4.2E-08	3.5E-08	3.3E-08	3.0E-08	3.9E-08	4.6E-08	5.2E-08	5.6E-08	5.8E-08
920	6.8E-08	6.9E-08	6.6E-08	5.7E-08	4.6E-08	4.1E-08	3.8E-08	3.6E-08	4.2E-08	4.8E-08	5.2E-08	5.6E-08	5.7E-08
921	7.8E-08	7.9E-08	7.5E-08	6.4E-08	5.2E-08	4.6E-08	4.3E-08	4.1E-08	5.1E-08	6.0E-08	6.6E-08	7.1E-08	7.3E-08
922	6.9E-08	7.1E-08	6.7E-08	5.6E-08	4.5E-08	3.9E-08	3.6E-08	3.3E-08	4.2E-08	4.9E-08	5.5E-08	5.9E-08	6.1E-08
923	7.1E-08	7.3E-08	6.9E-08	5.9E-08	4.9E-08	4.3E-08	4.0E-08	3.8E-08	4.4E-08	5.0E-08	5.5E-08	5.8E-08	5.9E-08
924	8.3E-08	8.5E-08	8.0E-08	6.8E-08	5.6E-08	4.9E-08	4.7E-08	4.5E-08	5.4E-08	6.3E-08	7.0E-08	7.4E-08	7.6E-08
925	7.4E-08	7.5E-08	7.1E-08	6.0E-08	4.8E-08	4.2E-08	3.9E-08	3.6E-08	4.5E-08	5.2E-08	5.8E-08	6.2E-08	6.4E-08
926	7.5E-08	7.6E-08	7.2E-08	6.2E-08	5.1E-08	4.5E-08	4.2E-08	4.0E-08	4.6E-08	5.2E-08	5.6E-08	5.9E-08	6.1E-08
927	8.7E-08	8.9E-08	8.4E-08	7.2E-08	5.9E-08	5.2E-08	5.0E-08	4.7E-08	5.7E-08	6.6E-08	7.2E-08	7.7E-08	7.9E-08
928	7.8E-08	8.0E-08	7.5E-08	6.3E-08	5.1E-08	4.4E-08	4.1E-08	3.9E-08	4.7E-08	5.5E-08	6.0E-08	6.4E-08	6.6E-08
929	7.8E-08	8.0E-08	7.5E-08	6.5E-08	5.3E-08	4.7E-08	4.4E-08	4.2E-08	4.8E-08	5.4E-08	5.8E-08	6.1E-08	6.3E-08
930	8.5E-08	8.7E-08	8.2E-08	6.8E-08	5.4E-08	4.7E-08	4.4E-08	4.2E-08	5.3E-08	6.3E-08	7.1E-08	7.6E-08	7.8E-08
931	8.3E-08	8.4E-08	7.9E-08	6.7E-08	5.4E-08	4.7E-08	4.4E-08	4.1E-08	4.9E-08	5.7E-08	6.3E-08	6.6E-08	6.8E-08
932	1.0E-07	1.1E-07	9.9E-08	8.5E-08	6.9E-08	6.2E-08	6.0E-08	5.8E-08	6.8E-08	7.8E-08	8.5E-08	9.0E-08	9.3E-08
933	8.2E-08	8.4E-08	7.8E-08	6.3E-08	4.7E-08	4.0E-08	3.7E-08	3.5E-08	4.7E-08	5.9E-08	6.7E-08	7.3E-08	7.6E-08
934	8.7E-08	8.9E-08	8.4E-08	7.0E-08	5.6E-08	4.9E-08	4.6E-08	4.4E-08	5.1E-08	5.9E-08	6.4E-08	6.8E-08	7.0E-08
935	1.1E-07	1.1E-07	1.0E-07	8.9E-08	7.1E-08	6.4E-08	6.2E-08	6.0E-08	7.0E-08	8.0E-08	8.7E-08	9.2E-08	9.5E-08
936	8.9E-08	9.1E-08	8.4E-08	6.8E-08	5.1E-08	4.3E-08	4.1E-08	3.8E-08	5.0E-08	6.1E-08	6.9E-08	7.5E-08	7.8E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
937	1.2E-07	1.2E-07	1.1E-07	9.3E-08	7.4E-08	6.6E-08	6.3E-08	6.1E-08	7.2E-08	8.2E-08	8.9E-08	9.4E-08	9.7E-08
938	2.4E-08	2.4E-08	2.0E-08	1.2E-08	4.5E-09	-2.4E-09	-7.6E-09	-1.2E-08	-7.0E-09	-2.0E-09	1.7E-09	4.2E-09	5.5E-09
939	3.2E-08	3.2E-08	2.9E-08	2.3E-08	1.5E-08	9.3E-09	4.8E-09	6.7E-10	6.3E-09	1.1E-08	1.5E-08	1.8E-08	1.9E-08
940	3.0E-08	3.0E-08	2.7E-08	2.1E-08	1.3E-08	7.6E-09	3.5E-09	-2.7E-10	6.7E-09	1.3E-08	1.8E-08	2.1E-08	2.2E-08
941	3.0E-08	3.1E-08	2.8E-08	2.2E-08	1.5E-08	1.0E-08	6.4E-09	3.0E-09	1.1E-08	1.8E-08	2.3E-08	2.7E-08	2.8E-08
942	2.9E-08	2.9E-08	2.6E-08	2.0E-08	1.3E-08	7.3E-09	3.6E-09	1.1E-10	8.3E-09	1.5E-08	2.1E-08	2.4E-08	2.6E-08
943	2.7E-08	2.8E-08	2.5E-08	1.8E-08	1.1E-08	5.3E-09	1.5E-09	-2.0E-09	6.4E-09	1.4E-08	1.9E-08	2.3E-08	2.5E-08
944	2.8E-08	2.9E-08	2.6E-08	2.0E-08	1.4E-08	8.7E-09	5.4E-09	2.3E-09	1.1E-08	1.9E-08	2.5E-08	2.9E-08	3.1E-08
945	2.9E-08	2.9E-08	2.7E-08	2.0E-08	1.4E-08	8.5E-09	5.1E-09	2.0E-09	1.1E-08	1.9E-08	2.5E-08	2.9E-08	3.1E-08
946	3.0E-08	3.0E-08	2.7E-08	2.1E-08	1.4E-08	8.5E-09	5.1E-09	2.0E-09	1.1E-08	1.9E-08	2.5E-08	2.9E-08	3.1E-08
947	3.0E-08	3.0E-08	2.8E-08	2.2E-08	1.5E-08	1.0E-08	6.9E-09	4.1E-09	1.4E-08	2.2E-08	2.8E-08	3.2E-08	3.4E-08
948	3.0E-08	3.1E-08	2.8E-08	2.1E-08	1.4E-08	8.5E-09	5.1E-09	2.1E-09	1.1E-08	2.0E-08	2.6E-08	3.0E-08	3.2E-08
949	3.2E-08	3.2E-08	3.0E-08	2.3E-08	1.7E-08	1.2E-08	8.5E-09	5.7E-09	1.5E-08	2.3E-08	2.9E-08	3.3E-08	3.5E-08
950	3.1E-08	3.2E-08	2.9E-08	2.2E-08	1.4E-08	8.8E-09	5.4E-09	2.3E-09	1.2E-08	2.0E-08	2.6E-08	3.0E-08	3.2E-08
951	3.4E-08	3.4E-08	3.2E-08	2.5E-08	1.8E-08	1.3E-08	1.0E-08	7.3E-09	1.6E-08	2.4E-08	3.0E-08	3.4E-08	3.6E-08
952	3.3E-08	3.3E-08	3.0E-08	2.3E-08	1.5E-08	9.7E-09	6.3E-09	3.3E-09	1.3E-08	2.1E-08	2.7E-08	3.1E-08	3.3E-08
953	3.6E-08	3.7E-08	3.4E-08	2.7E-08	2.0E-08	1.5E-08	1.2E-08	9.0E-09	1.8E-08	2.5E-08	3.1E-08	3.5E-08	3.7E-08
954	3.5E-08	3.5E-08	3.2E-08	2.5E-08	1.7E-08	1.1E-08	7.8E-09	4.8E-09	1.4E-08	2.2E-08	2.8E-08	3.3E-08	3.5E-08
955	3.8E-08	3.9E-08	3.6E-08	2.9E-08	2.2E-08	1.7E-08	1.3E-08	1.1E-08	1.9E-08	2.7E-08	3.2E-08	3.6E-08	3.8E-08
956	3.1E-08	3.2E-08	2.8E-08	2.1E-08	1.2E-08	6.8E-09	3.5E-09	4.4E-10	1.2E-08	2.2E-08	2.9E-08	3.4E-08	3.6E-08
957	3.4E-08	3.5E-08	3.2E-08	2.4E-08	1.5E-08	9.7E-09	6.4E-09	3.5E-09	1.5E-08	2.4E-08	3.1E-08	3.6E-08	3.9E-08
958	3.8E-08	3.9E-08	3.5E-08	2.7E-08	1.8E-08	1.3E-08	9.6E-09	6.8E-09	1.8E-08	2.7E-08	3.4E-08	3.9E-08	4.2E-08
959	4.1E-08	4.2E-08	3.9E-08	3.1E-08	2.2E-08	1.6E-08	1.3E-08	1.0E-08	2.1E-08	3.1E-08	3.8E-08	4.3E-08	4.5E-08
960	4.4E-08	4.5E-08	4.1E-08	3.3E-08	2.4E-08	1.8E-08	1.5E-08	1.2E-08	2.3E-08	3.3E-08	4.1E-08	4.6E-08	4.8E-08
961	4.7E-08	4.8E-08	4.5E-08	3.8E-08	3.1E-08	2.6E-08	2.3E-08	2.1E-08	2.7E-08	3.3E-08	3.7E-08	4.0E-08	4.2E-08
962	4.9E-08	5.0E-08	4.7E-08	4.0E-08	3.3E-08	2.8E-08	2.5E-08	2.2E-08	2.9E-08	3.5E-08	3.9E-08	4.2E-08	4.3E-08
963	5.1E-08	5.2E-08	4.9E-08	4.2E-08	3.4E-08	2.9E-08	2.7E-08	2.4E-08	3.0E-08	3.6E-08	4.1E-08	4.4E-08	4.5E-08
964	7.1E-08	7.2E-08	7.1E-08	6.6E-08	6.0E-08	4.8E-08	3.6E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
965	6.6E-08	6.7E-08	6.5E-08	6.1E-08	5.6E-08	4.5E-08	3.5E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.3E-08	3.3E-08
966	6.1E-08	6.2E-08	6.0E-08	5.6E-08	5.1E-08	4.2E-08	3.3E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.3E-08
967	5.5E-08	5.6E-08	5.5E-08	5.1E-08	4.6E-08	3.8E-08	3.2E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
968	5.1E-08	5.2E-08	5.1E-08	4.7E-08	4.3E-08	3.6E-08	3.0E-08	2.5E-08	2.7E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
969	4.7E-08	4.8E-08	4.7E-08	4.4E-08	3.9E-08	3.3E-08	2.8E-08	2.3E-08	2.7E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08
970	4.3E-08	4.4E-08	4.3E-08	4.0E-08	3.6E-08	3.1E-08	2.6E-08	2.2E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
971	4.3E-08	4.4E-08	4.3E-08	3.9E-08	3.5E-08	3.0E-08	2.6E-08	2.3E-08	2.7E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
972	4.3E-08	4.4E-08	4.3E-08	4.0E-08	3.6E-08	3.1E-08	2.8E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
973	8.3E-08	8.4E-08	8.2E-08	7.8E-08	7.1E-08	5.5E-08	4.0E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.3E-08
974	7.6E-08	7.7E-08	7.6E-08	7.2E-08	6.6E-08	5.1E-08	3.8E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.3E-08
975	6.8E-08	6.8E-08	6.7E-08	6.3E-08	5.7E-08	4.6E-08	3.5E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
976	6.0E-08	6.1E-08	6.0E-08	5.6E-08	5.1E-08	4.2E-08	3.3E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
977	5.5E-08	5.6E-08	5.5E-08	5.1E-08	4.6E-08	3.8E-08	3.1E-08	2.4E-08	2.7E-08	3.0E-08	3.2E-08	3.4E-08	3.4E-08
978	5.0E-08	5.1E-08	5.0E-08	4.6E-08	4.2E-08	3.5E-08	2.9E-08	2.3E-08	2.7E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08
979	4.7E-08	4.8E-08	4.7E-08	4.3E-08	3.9E-08	3.3E-08	2.8E-08	2.3E-08	2.7E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08
980	4.4E-08	4.5E-08	4.4E-08	4.1E-08	3.7E-08	3.1E-08	2.7E-08	2.2E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
981	4.4E-08	4.5E-08	4.4E-08	4.1E-08	3.7E-08	3.2E-08	2.8E-08	2.4E-08	2.7E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
982	4.3E-08	4.4E-08	4.3E-08	4.0E-08	3.6E-08	3.1E-08	2.8E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
983	9.2E-08	9.3E-08	9.1E-08	8.7E-08	8.0E-08	6.1E-08	4.3E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
984	7.7E-08	7.8E-08	7.6E-08	7.2E-08	6.6E-08	5.2E-08	3.9E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
985	6.7E-08	6.8E-08	6.6E-08	6.2E-08	5.7E-08	4.6E-08	3.5E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
986	6.0E-08	6.1E-08	5.9E-08	5.5E-08	5.1E-08	4.1E-08	3.3E-08	2.4E-08	2.7E-08	3.0E-08	3.2E-08	3.4E-08	3.4E-08
987	5.3E-08	5.4E-08	5.3E-08	4.9E-08	4.5E-08	3.7E-08	3.0E-08	2.3E-08	2.7E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08
988	4.9E-08	4.9E-08	4.8E-08	4.5E-08	4.0E-08	3.4E-08	2.8E-08	2.3E-08	2.7E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08
989	4.6E-08	4.7E-08	4.5E-08	4.2E-08	3.8E-08	3.2E-08	2.7E-08	2.2E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
990	4.5E-08	4.6E-08	4.5E-08	4.1E-08	3.8E-08	3.2E-08	2.8E-08	2.4E-08	2.7E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08
991	4.4E-08	4.5E-08	4.4E-08	4.0E-08	3.6E-08	3.2E-08	2.8E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
992	4.2E-08	4.3E-08	4.2E-08	3.9E-08	3.5E-08	3.1E-08	2.7E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
993	7.6E-08	7.6E-08	7.5E-08	7.1E-08	6.5E-08	5.1E-08	3.8E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.4E-08	3.4E-08
994	6.5E-08	6.6E-08	6.5E-08	6.1E-08	5.6E-08	4.4E-08	3.4E-08	2.4E-08	2.8E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08
995	5.7E-08	5.8E-08	5.6E-08	5.2E-08	4.8E-08	3.9E-08	3.1E-08	2.3E-08	2.7E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08
996	5.0E-08	5.1E-08	5.0E-08	4.6E-08	4.2E-08	3.5E-08	2.9E-08	2.3E-08	2.7E-08	3.0E-08	3.3E-08	3.5E-08	3.5E-08
997	4.7E-08	4.8E-08	4.7E-08	4.3E-08	3.9E-08	3.2E-08	2.7E-08	2.2E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
998	4.6E-08	4.7E-08	4.6E-08	4.2E-08	3.8E-08	3.3E-08	2.8E-08	2.4E-08	2.7E-08	3.1E-08	3.3E-08	3.5E-08	3.5E-08
999	4.4E-08	4.5E-08	4.4E-08	4.1E-08	3.7E-08	3.2E-08	2.8E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
1000	4.2E-08	4.3E-08	4.2E-08	3.9E-08	3.5E-08	3.1E-08	2.7E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08	3.5E-08
1001	5.9E-08	6.0E-08	5.9E-08	5.5E-08	5.0E-08	4.0E-08	3.1E-08	2.3E-08	2.7E-08	3.0E-08	3.3E-08	3.5E-08	3.5E-08
1002	5.2E-08	5.2E-08	5.1E-08	4.7E-08	4.3E-08	3.6E-08	2.9E-08	2.3E-08	2.7E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
1003	4.8E-08	4.9E-08	4.8E-08	4.4E-08	4.0E-08	3.3E-08	2.7E-08	2.2E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
1004	4.7E-08	4.8E-08	4.7E-08	4.3E-08	3.9E-08	3.3E-08	2.8E-08	2.4E-08	2.7E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08
1005	4.5E-08	4.6E-08	4.5E-08	4.1E-08	3.7E-08	3.2E-08	2.8E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08	3.5E-08
1006	4.3E-08	4.4E-08	4.2E-08	3.9E-08	3.5E-08	3.1E-08	2.7E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08
1007	5.2E-08	5.3E-08	5.2E-08	4.8E-08	4.3E-08	3.6E-08	2.9E-08	2.3E-08	2.7E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08
1008	4.9E-08	4.9E-08	4.8E-08	4.4E-08	4.0E-08	3.3E-08	2.7E-08	2.2E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
1009	4.7E-08	4.8E-08	4.7E-08	4.3E-08	3.9E-08	3.3E-08	2.8E-08	2.4E-08	2.7E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08
1010	4.5E-08	4.6E-08	4.5E-08	4.2E-08	3.7E-08	3.2E-08	2.8E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08
1011	4.3E-08	4.4E-08	4.3E-08	3.9E-08	3.5E-08	3.1E-08	2.7E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08
1012	5.2E-08	5.3E-08	5.2E-08	4.8E-08	4.3E-08	3.6E-08	2.9E-08	2.3E-08	2.7E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08
1013	4.9E-08	5.0E-08	4.9E-08	4.5E-08	4.0E-08	3.3E-08	2.7E-08	2.2E-08	2.6E-08	3.0E-08	3.3E-08	3.6E-08	3.7E-08
1014	4.8E-08	4.9E-08	4.7E-08	4.4E-08	3.9E-08	3.3E-08	2.8E-08	2.4E-08	2.7E-08	3.1E-08	3.4E-08	3.5E-08	3.6E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1015	4.6E-08	4.7E-08	4.5E-08	4.2E-08	3.7E-08	3.2E-08	2.8E-08	2.4E-08	2.8E-08	3.1E-08	3.4E-08	3.5E-08	3.6E-08
1016	4.3E-08	4.4E-08	4.3E-08	3.9E-08	3.5E-08	3.1E-08	2.7E-08	2.4E-08	2.8E-08	3.1E-08	3.4E-08	3.6E-08	3.6E-08
1017	5.1E-08	5.2E-08	5.1E-08	4.7E-08	4.2E-08	3.5E-08	2.9E-08	2.3E-08	2.7E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
1018	4.9E-08	5.0E-08	4.9E-08	4.5E-08	4.0E-08	3.3E-08	2.8E-08	2.2E-08	2.7E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
1019	4.7E-08	4.8E-08	4.7E-08	4.3E-08	3.8E-08	3.3E-08	2.8E-08	2.3E-08	2.8E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
1020	4.5E-08	4.6E-08	4.5E-08	4.1E-08	3.7E-08	3.2E-08	2.8E-08	2.4E-08	2.8E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
1021	4.3E-08	4.4E-08	4.3E-08	3.9E-08	3.5E-08	3.1E-08	2.7E-08	2.4E-08	2.8E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
1022	5.7E-08	5.8E-08	5.6E-08	5.2E-08	4.7E-08	3.8E-08	3.1E-08	2.3E-08	2.8E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
1023	4.8E-08	4.9E-08	4.8E-08	4.4E-08	3.9E-08	3.3E-08	2.7E-08	2.2E-08	2.7E-08	3.1E-08	3.4E-08	3.7E-08	3.8E-08
1024	4.7E-08	4.8E-08	4.6E-08	4.2E-08	3.8E-08	3.2E-08	2.8E-08	2.3E-08	2.8E-08	3.2E-08	3.5E-08	3.6E-08	3.7E-08
1025	4.5E-08	4.6E-08	4.5E-08	4.1E-08	3.6E-08	3.1E-08	2.7E-08	2.4E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.7E-08
1026	4.3E-08	4.4E-08	4.3E-08	3.9E-08	3.5E-08	3.0E-08	2.7E-08	2.3E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08
1027	5.5E-08	5.6E-08	5.5E-08	5.0E-08	4.5E-08	3.7E-08	3.0E-08	2.3E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08
1028	4.8E-08	4.9E-08	4.7E-08	4.3E-08	3.8E-08	3.2E-08	2.7E-08	2.2E-08	2.7E-08	3.2E-08	3.5E-08	3.8E-08	3.9E-08
1029	4.6E-08	4.7E-08	4.6E-08	4.2E-08	3.7E-08	3.2E-08	2.7E-08	2.3E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08
1030	4.4E-08	4.5E-08	4.4E-08	4.0E-08	3.6E-08	3.1E-08	2.7E-08	2.3E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08
1031	4.2E-08	4.3E-08	4.2E-08	3.8E-08	3.4E-08	2.9E-08	2.6E-08	2.3E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08
1032	5.4E-08	5.5E-08	5.4E-08	4.9E-08	4.4E-08	3.6E-08	2.9E-08	2.3E-08	2.8E-08	3.3E-08	3.7E-08	3.9E-08	4.1E-08
1033	4.7E-08	4.8E-08	4.6E-08	4.2E-08	3.7E-08	3.1E-08	2.6E-08	2.1E-08	2.7E-08	3.2E-08	3.6E-08	3.9E-08	4.0E-08
1034	4.5E-08	4.6E-08	4.5E-08	4.1E-08	3.6E-08	3.0E-08	2.6E-08	2.2E-08	2.8E-08	3.2E-08	3.6E-08	3.9E-08	4.0E-08
1035	4.3E-08	4.4E-08	4.3E-08	3.9E-08	3.5E-08	3.0E-08	2.6E-08	2.2E-08	2.8E-08	3.3E-08	3.6E-08	3.9E-08	4.0E-08
1036	4.1E-08	4.2E-08	4.1E-08	3.7E-08	3.2E-08	2.8E-08	2.5E-08	2.2E-08	2.7E-08	3.2E-08	3.6E-08	3.9E-08	4.0E-08
1037	5.4E-08	5.5E-08	5.4E-08	4.9E-08	4.4E-08	3.6E-08	3.0E-08	2.3E-08	2.8E-08	3.3E-08	3.6E-08	3.8E-08	3.9E-08
1038	4.8E-08	4.9E-08	4.8E-08	4.3E-08	3.8E-08	3.2E-08	2.7E-08	2.2E-08	2.8E-08	3.3E-08	3.7E-08	3.9E-08	4.0E-08
1039	4.4E-08	4.5E-08	4.4E-08	4.0E-08	3.5E-08	3.0E-08	2.5E-08	2.1E-08	2.8E-08	3.3E-08	3.7E-08	4.0E-08	4.1E-08
1040	4.3E-08	4.4E-08	4.2E-08	3.8E-08	3.4E-08	2.9E-08	2.5E-08	2.2E-08	2.8E-08	3.3E-08	3.7E-08	4.0E-08	4.1E-08
1041	4.0E-08	4.1E-08	4.0E-08	3.6E-08	3.2E-08	2.7E-08	2.4E-08	2.1E-08	2.7E-08	3.3E-08	3.7E-08	4.0E-08	4.1E-08
1042	4.8E-08	4.9E-08	4.7E-08	4.3E-08	3.8E-08	3.2E-08	2.7E-08	2.2E-08	2.8E-08	3.3E-08	3.7E-08	4.0E-08	4.1E-08
1043	4.6E-08	4.7E-08	4.6E-08	4.2E-08	3.7E-08	3.1E-08	2.7E-08	2.3E-08	2.8E-08	3.3E-08	3.6E-08	3.9E-08	4.0E-08
1044	4.2E-08	4.3E-08	4.2E-08	3.8E-08	3.3E-08	2.8E-08	2.4E-08	2.1E-08	2.7E-08	3.3E-08	3.8E-08	4.1E-08	4.2E-08
1045	4.6E-08	4.7E-08	4.6E-08	4.2E-08	3.6E-08	3.0E-08	2.5E-08	2.1E-08	2.8E-08	3.4E-08	3.8E-08	4.1E-08	4.3E-08
1046	4.4E-08	4.5E-08	4.4E-08	3.9E-08	3.5E-08	2.9E-08	2.5E-08	2.1E-08	2.7E-08	3.3E-08	3.8E-08	4.1E-08	4.2E-08
1047	2.8E-08	2.8E-08	2.4E-08	1.7E-08	9.4E-09	2.4E-09	-2.9E-09	-7.9E-09	-2.7E-09	2.1E-09	5.6E-09	8.0E-09	9.2E-09
1048	3.4E-08	3.4E-08	3.1E-08	2.4E-08	1.7E-08	1.1E-08	6.0E-09	1.6E-09	6.7E-09	1.1E-08	1.5E-08	1.7E-08	1.8E-08
1049	4.2E-08	4.3E-08	4.0E-08	3.4E-08	2.7E-08	2.0E-08	1.5E-08	1.1E-08	1.5E-08	1.9E-08	2.2E-08	2.5E-08	2.6E-08
1050	4.3E-08	4.3E-08	4.1E-08	3.5E-08	2.8E-08	2.2E-08	1.7E-08	1.3E-08	1.7E-08	2.2E-08	2.5E-08	2.7E-08	2.8E-08
1051	4.3E-08	4.4E-08	4.2E-08	3.6E-08	3.0E-08	2.4E-08	1.9E-08	1.5E-08	2.0E-08	2.4E-08	2.8E-08	3.0E-08	3.1E-08
1052	3.9E-08	3.9E-08	3.7E-08	3.0E-08	2.3E-08	1.7E-08	1.2E-08	7.6E-09	1.2E-08	1.7E-08	2.0E-08	2.2E-08	2.3E-08
1053	4.1E-08	4.1E-08	3.9E-08	3.3E-08	2.6E-08	2.0E-08	1.6E-08	1.2E-08	1.7E-08	2.1E-08	2.4E-08	2.7E-08	2.8E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1054	4.1E-08	4.2E-08	3.9E-08	3.3E-08	2.7E-08	2.2E-08	1.8E-08	1.4E-08	1.9E-08	2.4E-08	2.8E-08	3.0E-08	3.1E-08
1055	3.8E-08	3.8E-08	3.6E-08	3.1E-08	2.5E-08	2.0E-08	1.6E-08	1.3E-08	1.9E-08	2.5E-08	3.0E-08	3.3E-08	3.4E-08
1056	3.9E-08	3.9E-08	3.6E-08	3.0E-08	2.4E-08	1.8E-08	1.4E-08	1.0E-08	1.6E-08	2.1E-08	2.5E-08	2.7E-08	2.8E-08
1057	3.6E-08	3.6E-08	3.4E-08	2.8E-08	2.2E-08	1.7E-08	1.3E-08	9.8E-09	1.7E-08	2.3E-08	2.7E-08	3.0E-08	3.2E-08
1058	3.3E-08	3.4E-08	3.1E-08	2.5E-08	1.9E-08	1.3E-08	9.7E-09	6.1E-09	1.3E-08	2.0E-08	2.4E-08	2.7E-08	2.9E-08
1059	3.1E-08	3.2E-08	3.0E-08	2.4E-08	1.8E-08	1.3E-08	9.5E-09	6.3E-09	1.4E-08	2.2E-08	2.7E-08	3.1E-08	3.2E-08
1060	4.3E-08	4.4E-08	4.3E-08	3.8E-08	3.3E-08	2.8E-08	2.5E-08	2.1E-08	2.7E-08	3.3E-08	3.7E-08	3.9E-08	4.1E-08
1061	5.2E-08	5.3E-08	5.1E-08	4.6E-08	4.0E-08	3.4E-08	2.8E-08	2.3E-08	2.8E-08	3.2E-08	3.5E-08	3.8E-08	3.9E-08
1062	4.9E-08	5.0E-08	4.9E-08	4.4E-08	3.8E-08	3.2E-08	2.7E-08	2.3E-08	2.8E-08	3.2E-08	3.5E-08	3.8E-08	3.9E-08
1063	4.7E-08	4.8E-08	4.6E-08	4.2E-08	3.6E-08	3.1E-08	2.6E-08	2.2E-08	2.7E-08	3.2E-08	3.5E-08	3.8E-08	3.9E-08
1064	4.4E-08	4.5E-08	4.4E-08	3.9E-08	3.4E-08	2.9E-08	2.5E-08	2.2E-08	2.7E-08	3.2E-08	3.6E-08	3.8E-08	3.9E-08
1065	5.2E-08	5.3E-08	5.1E-08	4.6E-08	4.0E-08	3.3E-08	2.8E-08	2.2E-08	2.7E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
1066	5.0E-08	5.1E-08	4.9E-08	4.4E-08	3.8E-08	3.2E-08	2.7E-08	2.2E-08	2.7E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
1067	4.8E-08	4.8E-08	4.7E-08	4.2E-08	3.7E-08	3.1E-08	2.6E-08	2.2E-08	2.7E-08	3.1E-08	3.5E-08	3.7E-08	3.8E-08
1068	4.5E-08	4.6E-08	4.4E-08	4.0E-08	3.5E-08	2.9E-08	2.6E-08	2.2E-08	2.7E-08	3.1E-08	3.5E-08	3.7E-08	3.8E-08
1069	5.1E-08	5.2E-08	5.0E-08	4.5E-08	3.9E-08	3.2E-08	2.7E-08	2.1E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
1070	4.9E-08	5.0E-08	4.8E-08	4.3E-08	3.7E-08	3.1E-08	2.6E-08	2.2E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
1071	4.8E-08	4.8E-08	4.7E-08	4.2E-08	3.6E-08	3.0E-08	2.6E-08	2.2E-08	2.6E-08	3.0E-08	3.4E-08	3.6E-08	3.7E-08
1072	4.5E-08	4.6E-08	4.5E-08	4.0E-08	3.4E-08	2.9E-08	2.5E-08	2.1E-08	2.6E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
1073	5.0E-08	5.1E-08	4.9E-08	4.3E-08	3.7E-08	3.0E-08	2.5E-08	2.0E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08
1074	4.8E-08	4.9E-08	4.7E-08	4.2E-08	3.6E-08	2.9E-08	2.5E-08	2.0E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08
1075	4.7E-08	4.8E-08	4.6E-08	4.1E-08	3.5E-08	2.9E-08	2.5E-08	2.1E-08	2.5E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08
1076	4.5E-08	4.6E-08	4.4E-08	3.9E-08	3.4E-08	2.8E-08	2.4E-08	2.1E-08	2.5E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
1077	4.8E-08	4.9E-08	4.6E-08	4.1E-08	3.4E-08	2.8E-08	2.2E-08	1.7E-08	2.2E-08	2.6E-08	2.9E-08	3.1E-08	3.2E-08
1078	4.7E-08	4.8E-08	4.5E-08	4.0E-08	3.4E-08	2.7E-08	2.2E-08	1.8E-08	2.2E-08	2.6E-08	2.9E-08	3.1E-08	3.2E-08
1079	4.6E-08	4.7E-08	4.5E-08	4.0E-08	3.4E-08	2.8E-08	2.3E-08	1.9E-08	2.3E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08
1080	4.5E-08	4.6E-08	4.4E-08	3.9E-08	3.3E-08	2.7E-08	2.3E-08	2.0E-08	2.4E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08
1081	4.4E-07	4.5E-07	4.5E-07	4.2E-07	3.9E-07	3.7E-07	3.6E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.6E-07	3.6E-07
1082	4.2E-07	4.2E-07	4.2E-07	4.0E-07	3.8E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07
1083	4.0E-07	4.1E-07	4.1E-07	3.9E-07	3.6E-07	3.4E-07	3.3E-07	3.2E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
1084	4.3E-07	4.4E-07	4.4E-07	4.2E-07	3.9E-07	3.7E-07	3.6E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.6E-07	3.6E-07
1085	4.0E-07	4.1E-07	4.1E-07	3.9E-07	3.6E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07
1086	3.9E-07	4.0E-07	4.0E-07	3.8E-07	3.5E-07	3.3E-07	3.2E-07	3.1E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07
1087	4.1E-07	4.2E-07	4.2E-07	4.0E-07	3.7E-07	3.6E-07	3.5E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.5E-07
1088	3.9E-07	4.0E-07	3.9E-07	3.8E-07	3.5E-07	3.3E-07	3.2E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
1089	3.8E-07	3.8E-07	3.8E-07	3.7E-07	3.4E-07	3.2E-07	3.1E-07	3.1E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
1090	4.2E-07	4.3E-07	4.3E-07	4.1E-07	3.8E-07	3.7E-07	3.6E-07	3.6E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07
1091	4.0E-07	4.1E-07	4.1E-07	3.9E-07	3.6E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07
1092	3.7E-07	3.8E-07	3.8E-07	3.7E-07	3.4E-07	3.3E-07	3.2E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07	3.2E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1093	3.9E-07	4.0E-07	4.0E-07	3.9E-07	3.6E-07	3.5E-07	3.4E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07
1094	3.6E-07	3.7E-07	3.7E-07	3.6E-07	3.3E-07	3.2E-07	3.1E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07
1095	4.2E-07	4.3E-07	4.3E-07	4.2E-07	3.9E-07	3.8E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
1096	4.4E-07	4.6E-07	4.6E-07	4.5E-07	4.2E-07	4.1E-07	4.1E-07	4.1E-07	4.0E-07	4.0E-07	4.1E-07	4.1E-07	4.1E-07
1097	4.2E-08	4.3E-08	4.1E-08	3.7E-08	3.2E-08	2.7E-08	2.4E-08	2.0E-08	2.6E-08	3.1E-08	3.5E-08	3.7E-08	3.9E-08
1098	4.2E-08	4.3E-08	4.2E-08	3.7E-08	3.2E-08	2.7E-08	2.3E-08	2.0E-08	2.6E-08	3.1E-08	3.4E-08	3.7E-08	3.8E-08
1099	4.2E-08	4.3E-08	4.1E-08	3.7E-08	3.1E-08	2.6E-08	2.3E-08	1.9E-08	2.5E-08	3.0E-08	3.4E-08	3.6E-08	3.7E-08
1100	4.2E-08	4.3E-08	4.1E-08	3.6E-08	3.1E-08	2.5E-08	2.2E-08	1.8E-08	2.4E-08	2.9E-08	3.3E-08	3.5E-08	3.7E-08
1101	4.2E-08	4.2E-08	4.0E-08	3.5E-08	2.9E-08	2.4E-08	2.1E-08	1.7E-08	2.3E-08	2.8E-08	3.2E-08	3.4E-08	3.6E-08
1102	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1103	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
1104	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1105	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1106	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1107	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1108	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
1109	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.1E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
1110	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.2E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
1111	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
1112	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
1113	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1114	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.3E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
1115	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.3E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
1116	6.6E-08	6.1E-08	5.2E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08	5.9E-08
1117	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1118	1.1E-07	1.0E-07	9.2E-08	8.5E-08	8.8E-08	9.1E-08	9.4E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07
1119	1.2E-07	1.1E-07	9.6E-08	8.9E-08	9.2E-08	9.5E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1120	6.3E-08	5.8E-08	5.0E-08	4.6E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.6E-08
1121	6.7E-08	6.2E-08	5.2E-08	4.7E-08	4.8E-08	4.9E-08	5.1E-08	5.2E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08	5.9E-08
1122	5.8E-08	5.5E-08	4.8E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.9E-08	5.0E-08	5.2E-08	5.2E-08	5.3E-08	5.3E-08
1123	6.5E-08	6.0E-08	5.2E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.3E-08	5.5E-08	5.6E-08	5.7E-08	5.8E-08	5.8E-08
1124	6.1E-08	5.7E-08	4.9E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.1E-08	5.2E-08	5.4E-08	5.5E-08	5.5E-08	5.6E-08
1125	5.6E-08	5.3E-08	4.6E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.1E-08	5.1E-08	5.2E-08	5.2E-08
1126	6.4E-08	5.9E-08	5.2E-08	4.7E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.5E-08	5.6E-08	5.7E-08	5.8E-08	5.8E-08
1127	5.9E-08	5.5E-08	4.9E-08	4.5E-08	4.6E-08	4.7E-08	4.9E-08	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08
1128	6.7E-08	6.2E-08	5.4E-08	4.9E-08	5.1E-08	5.2E-08	5.4E-08	5.6E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08	6.1E-08
1129	5.2E-08	4.9E-08	4.4E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
1130	4.3E-08	4.2E-08	3.8E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08
1131	4.3E-08	4.1E-08	3.7E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1132	4.2E-08	4.0E-08	3.6E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.9E-08	4.0E-08	4.2E-08	4.2E-08	4.3E-08
1133	4.0E-08	3.8E-08	3.3E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08
1134	3.9E-08	3.7E-08	3.1E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	3.9E-08
1135	3.7E-08	3.5E-08	3.0E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.3E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08
1136	3.2E-08	3.0E-08	2.4E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08
1137	3.1E-08	2.8E-08	2.2E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.3E-08	2.5E-08	2.7E-08	2.9E-08	2.9E-08
1138	3.3E-08	3.0E-08	2.5E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.6E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08
1139	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1140	1.0E-07	1.1E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1141	9.0E-08	9.0E-08	8.6E-08	8.6E-08	8.9E-08	9.2E-08	9.5E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07
1142	3.5E-08	3.3E-08	2.7E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.7E-08	3.8E-08
1143	7.1E-08	6.9E-08	6.3E-08	5.9E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.8E-08	7.0E-08	7.1E-08	7.1E-08	7.2E-08
1144	3.7E-07	3.8E-07	3.7E-07	3.6E-07	3.4E-07	3.1E-07	3.0E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
1145	4.4E-07	4.4E-07	4.4E-07	4.2E-07	3.8E-07	3.6E-07	3.5E-07	3.4E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07
1146	3.4E-07	3.5E-07	3.5E-07	3.3E-07	3.1E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07
1147	3.4E-07	3.4E-07	3.4E-07	3.3E-07	3.1E-07	2.9E-07	2.8E-07	2.8E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
1148	3.0E-07	3.1E-07	3.1E-07	2.9E-07	2.7E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
1149	3.2E-07	3.3E-07	3.3E-07	3.1E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
1150	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.7E-07	2.5E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
1151	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
1152	4.6E-07	4.7E-07	4.7E-07	4.6E-07	4.4E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07
1153	3.3E-07	3.3E-07	3.4E-07	3.2E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07
1154	2.9E-07	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
1155	2.6E-07	2.7E-07	2.7E-07	2.5E-07	2.4E-07	2.2E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
1156	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.0E-07	2.9E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
1157	2.8E-07	2.9E-07	2.9E-07	2.7E-07	2.5E-07	2.4E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
1158	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	2.2E-07	2.2E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
1159	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
1160	2.8E-07	2.9E-07	2.9E-07	2.7E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
1161	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	2.1E-07	2.1E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
1162	3.3E-07	3.4E-07	3.4E-07	3.2E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07
1163	2.8E-07	2.9E-07	2.9E-07	2.7E-07	2.5E-07	2.4E-07	2.4E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
1164	3.3E-07	3.4E-07	3.4E-07	3.2E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07	2.8E-07
1165	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
1166	3.2E-07	3.3E-07	3.3E-07	3.1E-07	2.8E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07
1167	1.0E-07	1.1E-07	9.9E-08	8.1E-08	6.2E-08	5.3E-08	5.0E-08	4.7E-08	5.6E-08	6.4E-08	7.0E-08	7.5E-08	7.7E-08
1168	1.2E-07	1.2E-07	1.1E-07	9.0E-08	6.6E-08	5.6E-08	5.3E-08	5.0E-08	5.8E-08	6.6E-08	7.2E-08	7.6E-08	7.8E-08
1169	1.1E-07	1.1E-07	1.0E-07	8.5E-08	6.6E-08	5.7E-08	5.4E-08	5.2E-08	5.6E-08	6.2E-08	6.6E-08	6.8E-08	6.9E-08
1170	1.4E-07	1.4E-07	1.3E-07	1.0E-07	6.9E-08	5.8E-08	5.4E-08	5.1E-08	5.9E-08	6.7E-08	7.3E-08	7.6E-08	7.8E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1171	1.2E-07	1.3E-07	1.2E-07	9.3E-08	7.0E-08	6.1E-08	5.8E-08	5.5E-08	6.0E-08	6.5E-08	6.9E-08	7.2E-08	7.3E-08
1172	1.1E-07	1.1E-07	1.0E-07	8.6E-08	6.8E-08	6.0E-08	5.7E-08	5.5E-08	5.9E-08	6.3E-08	6.6E-08	6.8E-08	6.9E-08
1173	1.4E-07	1.4E-07	1.3E-07	1.0E-07	7.4E-08	6.4E-08	6.1E-08	5.8E-08	6.3E-08	6.9E-08	7.3E-08	7.6E-08	7.7E-08
1174	1.2E-07	1.2E-07	1.1E-07	9.2E-08	7.3E-08	6.5E-08	6.2E-08	5.9E-08	6.3E-08	6.8E-08	7.1E-08	7.3E-08	7.4E-08
1175	1.4E-07	1.5E-07	1.3E-07	1.1E-07	7.7E-08	6.6E-08	6.3E-08	5.9E-08	6.5E-08	7.0E-08	7.4E-08	7.7E-08	7.8E-08
1176	1.2E-07	1.3E-07	1.2E-07	9.8E-08	7.7E-08	6.9E-08	6.6E-08	6.3E-08	6.7E-08	7.2E-08	7.5E-08	7.7E-08	7.8E-08
1177	1.5E-07	1.5E-07	1.4E-07	1.1E-07	8.5E-08	7.3E-08	7.0E-08	6.6E-08	7.2E-08	7.8E-08	8.2E-08	8.5E-08	8.7E-08
1178	1.3E-07	1.4E-07	1.3E-07	1.1E-07	8.6E-08	7.8E-08	7.5E-08	7.2E-08	7.7E-08	8.2E-08	8.5E-08	8.8E-08	8.9E-08
1179	1.2E-07	1.2E-07	1.2E-07	1.0E-07	8.7E-08	8.0E-08	7.7E-08	7.5E-08	7.9E-08	8.3E-08	8.7E-08	8.9E-08	9.0E-08
1180	1.6E-07	1.6E-07	1.5E-07	1.2E-07	9.1E-08	7.9E-08	7.5E-08	7.1E-08	7.6E-08	8.2E-08	8.6E-08	8.9E-08	9.1E-08
1181	1.4E-07	1.4E-07	1.3E-07	1.1E-07	9.3E-08	8.4E-08	8.1E-08	7.9E-08	8.2E-08	8.7E-08	9.0E-08	9.3E-08	9.4E-08
1182	1.3E-07	1.3E-07	1.2E-07	1.1E-07	9.4E-08	8.6E-08	8.4E-08	8.2E-08	8.5E-08	8.9E-08	9.2E-08	9.4E-08	9.5E-08
1183	1.7E-07	1.7E-07	1.6E-07	1.3E-07	1.0E-07	9.0E-08	8.6E-08	8.3E-08	8.7E-08	9.3E-08	9.7E-08	1.0E-07	1.0E-07
1184	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.1E-07	9.6E-08	9.3E-08	9.0E-08	9.3E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07
1185	1.9E-07	1.9E-07	1.8E-07	1.5E-07	1.2E-07	1.1E-07	1.0E-07	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
1186	1.7E-07	1.7E-07	1.6E-07	1.4E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
1187	2.1E-07	2.1E-07	2.0E-07	1.7E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
1188	1.8E-07	1.8E-07	1.8E-07	1.6E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1189	2.2E-07	2.3E-07	2.2E-07	1.9E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07
1190	9.0E-08	9.2E-08	8.6E-08	7.4E-08	6.0E-08	5.3E-08	5.0E-08	4.8E-08	5.2E-08	5.7E-08	6.0E-08	6.2E-08	6.4E-08
1191	9.1E-08	9.3E-08	8.7E-08	7.5E-08	6.1E-08	5.5E-08	5.2E-08	5.0E-08	5.3E-08	5.7E-08	6.0E-08	6.2E-08	6.3E-08
1192	8.9E-08	9.1E-08	8.7E-08	7.5E-08	6.3E-08	5.7E-08	5.5E-08	5.3E-08	5.6E-08	5.9E-08	6.2E-08	6.3E-08	6.4E-08
1193	9.6E-08	9.7E-08	9.3E-08	8.0E-08	6.7E-08	6.1E-08	5.9E-08	5.7E-08	6.0E-08	6.4E-08	6.6E-08	6.8E-08	6.9E-08
1194	1.0E-07	1.0E-07	1.0E-07	8.7E-08	7.4E-08	6.7E-08	6.5E-08	6.3E-08	6.6E-08	7.0E-08	7.3E-08	7.5E-08	7.6E-08
1195	9.6E-08	9.8E-08	9.5E-08	8.5E-08	7.5E-08	7.0E-08	6.8E-08	6.6E-08	6.9E-08	7.3E-08	7.5E-08	7.7E-08	7.8E-08
1196	1.0E-07	1.1E-07	1.0E-07	9.4E-08	8.3E-08	7.8E-08	7.6E-08	7.5E-08	7.8E-08	8.2E-08	8.4E-08	8.6E-08	8.7E-08
1197	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.0E-08	8.4E-08	8.3E-08	8.1E-08	8.4E-08	8.7E-08	9.0E-08	9.1E-08	9.2E-08
1198	1.0E-07	1.0E-07	1.0E-07	9.5E-08	8.6E-08	8.1E-08	8.0E-08	7.9E-08	8.1E-08	8.4E-08	8.6E-08	8.8E-08	8.8E-08
1199	1.2E-07	1.2E-07	1.2E-07	1.1E-07	9.8E-08	9.2E-08	9.0E-08	8.9E-08	9.1E-08	9.4E-08	9.7E-08	9.8E-08	9.9E-08
1200	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.2E-08	8.7E-08	8.5E-08	8.4E-08	8.6E-08	8.9E-08	9.1E-08	9.2E-08	9.3E-08
1201	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1202	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.0E-07	9.9E-08	9.7E-08	9.9E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07
1203	1.1E-07	1.2E-07	1.2E-07	1.1E-07	9.9E-08	9.4E-08	9.2E-08	9.0E-08	9.2E-08	9.5E-08	9.7E-08	9.8E-08	9.9E-08
1204	1.5E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
1205	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1206	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	9.9E-08	9.7E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07
1207	1.6E-07	1.7E-07	1.7E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07
1208	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1209	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1210	2.0E-07	2.0E-07	2.0E-07	1.8E-07	1.6E-07	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07
1211	1.7E-07	1.8E-07	1.8E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1212	1.5E-07	1.6E-07	1.6E-07	1.5E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1213	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
1214	2.4E-07	2.4E-07	2.3E-07	2.1E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
1215	2.1E-07	2.1E-07	2.1E-07	1.9E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
1216	1.8E-07	1.9E-07	1.9E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1217	1.6E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
1218	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1219	2.5E-07	2.6E-07	2.5E-07	2.3E-07	2.1E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
1220	2.2E-07	2.3E-07	2.2E-07	2.1E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
1221	1.9E-07	2.0E-07	2.0E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
1222	1.7E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1223	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
1224	3.1E-07	3.1E-07	3.1E-07	2.8E-07	2.5E-07	2.3E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
1225	2.7E-07	2.7E-07	2.7E-07	2.5E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
1226	2.3E-07	2.4E-07	2.4E-07	2.2E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
1227	2.0E-07	2.1E-07	2.1E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
1228	1.8E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1229	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1230	3.2E-07	3.3E-07	3.2E-07	3.0E-07	2.7E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
1231	2.8E-07	2.9E-07	2.8E-07	2.6E-07	2.4E-07	2.2E-07	2.2E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07
1232	2.4E-07	2.5E-07	2.5E-07	2.3E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
1233	2.1E-07	2.2E-07	2.2E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1234	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07
1235	3.4E-07	3.5E-07	3.4E-07	3.1E-07	2.7E-07	2.4E-07	2.2E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07
1236	3.3E-07	3.4E-07	3.3E-07	3.1E-07	2.8E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07
1237	3.0E-07	3.0E-07	3.0E-07	2.8E-07	2.6E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07
1238	2.6E-07	2.6E-07	2.6E-07	2.4E-07	2.3E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
1239	2.2E-07	2.3E-07	2.3E-07	2.1E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1240	1.9E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
1241	3.3E-07	3.3E-07	3.2E-07	2.9E-07	2.5E-07	2.2E-07	2.0E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07
1242	3.5E-07	3.5E-07	3.5E-07	3.3E-07	3.0E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
1243	3.1E-07	3.1E-07	3.1E-07	2.9E-07	2.7E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
1244	2.7E-07	2.7E-07	2.7E-07	2.6E-07	2.4E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
1245	2.3E-07	2.4E-07	2.3E-07	2.2E-07	2.0E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
1246	2.0E-07	2.0E-07	2.0E-07	1.9E-07	1.7E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1247	4.8E-07	4.9E-07	4.9E-07	4.6E-07	4.2E-07	3.9E-07	3.6E-07	3.4E-07	3.4E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07
1248	3.8E-07	3.9E-07	3.9E-07	3.7E-07	3.4E-07	3.1E-07	3.0E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1249	3.3E-07	3.4E-07	3.4E-07	3.2E-07	3.0E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07
1250	2.9E-07	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
1251	2.5E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1252	6.6E-07	6.7E-07	6.7E-07	6.4E-07	5.9E-07	5.4E-07	5.1E-07	4.8E-07	4.7E-07	4.7E-07	4.8E-07	4.8E-07	4.8E-07
1253	5.2E-07	5.3E-07	5.2E-07	5.0E-07	4.6E-07	4.3E-07	4.0E-07	3.8E-07	3.8E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07
1254	4.1E-07	4.2E-07	4.2E-07	4.0E-07	3.7E-07	3.5E-07	3.3E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07
1255	3.5E-07	3.6E-07	3.5E-07	3.4E-07	3.2E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07
1256	3.0E-07	3.1E-07	3.0E-07	2.9E-07	2.7E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
1257	2.6E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
1258	7.3E-07	7.4E-07	7.3E-07	7.0E-07	6.5E-07	6.0E-07	5.7E-07	5.3E-07	5.1E-07	5.2E-07	5.2E-07	5.3E-07	5.3E-07
1259	5.5E-07	5.6E-07	5.6E-07	5.4E-07	5.0E-07	4.6E-07	4.4E-07	4.2E-07	4.1E-07	4.1E-07	4.2E-07	4.2E-07	4.2E-07
1260	4.4E-07	4.5E-07	4.4E-07	4.3E-07	4.0E-07	3.7E-07	3.5E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.5E-07	3.5E-07
1261	3.7E-07	3.7E-07	3.7E-07	3.6E-07	3.3E-07	3.1E-07	3.0E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07
1262	3.1E-07	3.2E-07	3.1E-07	3.0E-07	2.8E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07
1263	7.9E-07	8.1E-07	8.0E-07	7.8E-07	7.3E-07	6.7E-07	6.3E-07	5.9E-07	5.7E-07	5.8E-07	5.8E-07	5.8E-07	5.8E-07
1264	5.9E-07	6.0E-07	6.0E-07	5.8E-07	5.4E-07	5.0E-07	4.8E-07	4.5E-07	4.4E-07	4.5E-07	4.5E-07	4.5E-07	4.5E-07
1265	4.5E-07	4.6E-07	4.6E-07	4.4E-07	4.1E-07	3.8E-07	3.6E-07	3.5E-07	3.4E-07	3.5E-07	3.5E-07	3.5E-07	3.6E-07
1266	3.8E-07	3.9E-07	3.8E-07	3.7E-07	3.4E-07	3.2E-07	3.1E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07
1267	3.2E-07	3.2E-07	3.2E-07	3.1E-07	2.9E-07	2.7E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07
1268	8.5E-07	8.6E-07	8.6E-07	8.3E-07	7.8E-07	7.3E-07	6.8E-07	6.4E-07	6.2E-07	6.2E-07	6.3E-07	6.3E-07	6.3E-07
1269	6.2E-07	6.3E-07	6.3E-07	6.1E-07	5.7E-07	5.3E-07	5.0E-07	4.8E-07	4.6E-07	4.7E-07	4.7E-07	4.7E-07	4.7E-07
1270	4.9E-07	5.0E-07	5.0E-07	4.8E-07	4.5E-07	4.2E-07	4.0E-07	3.8E-07	3.7E-07	3.7E-07	3.8E-07	3.8E-07	3.8E-07
1271	3.9E-07	3.9E-07	3.9E-07	3.8E-07	3.5E-07	3.3E-07	3.1E-07	3.0E-07	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07
1272	8.8E-07	8.9E-07	8.8E-07	8.6E-07	8.1E-07	7.5E-07	7.0E-07	6.6E-07	6.3E-07	6.4E-07	6.4E-07	6.4E-07	6.4E-07
1273	6.3E-07	6.5E-07	6.4E-07	6.2E-07	5.8E-07	5.4E-07	5.1E-07	4.8E-07	4.6E-07	4.7E-07	4.7E-07	4.7E-07	4.7E-07
1274	4.8E-07	4.9E-07	4.9E-07	4.7E-07	4.4E-07	4.1E-07	3.8E-07	3.6E-07	3.5E-07	3.6E-07	3.6E-07	3.7E-07	3.7E-07
1275	6.4E-07	6.5E-07	6.5E-07	6.3E-07	5.9E-07	5.4E-07	5.1E-07	4.8E-07	4.6E-07	4.6E-07	4.7E-07	4.7E-07	4.7E-07
1276	6.4E-07	6.5E-07	6.5E-07	6.3E-07	5.9E-07	5.4E-07	5.1E-07	4.8E-07	4.6E-07	4.6E-07	4.7E-07	4.7E-07	4.7E-07
1277	6.4E-07	6.5E-07	6.4E-07	6.2E-07	5.9E-07	5.4E-07	5.1E-07	4.8E-07	4.6E-07	4.6E-07	4.6E-07	4.7E-07	4.7E-07
1278	8.8E-07	8.9E-07	8.8E-07	8.5E-07	8.0E-07	7.4E-07	6.8E-07	6.3E-07	6.0E-07	6.1E-07	6.1E-07	6.1E-07	6.1E-07
1279	8.5E-07	8.5E-07	8.4E-07	8.1E-07	7.5E-07	6.8E-07	6.2E-07	5.7E-07	5.4E-07	5.4E-07	5.4E-07	5.5E-07	5.5E-07
1280	3.4E-07	3.5E-07	3.5E-07	3.3E-07	3.1E-07	2.9E-07	2.8E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07
1281	4.0E-07	4.1E-07	4.1E-07	3.9E-07	3.7E-07	3.4E-07	3.2E-07	3.0E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
1282	3.4E-07	3.4E-07	3.4E-07	3.3E-07	3.1E-07	2.9E-07	2.7E-07	2.6E-07	2.5E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
1283	4.1E-07	4.1E-07	4.1E-07	3.9E-07	3.7E-07	3.4E-07	3.2E-07	3.0E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07
1284	3.3E-07	3.3E-07	3.3E-07	3.2E-07	3.0E-07	2.8E-07	2.6E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07
1285	4.0E-07	4.1E-07	4.1E-07	3.9E-07	3.7E-07	3.4E-07	3.2E-07	3.0E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
1286	3.4E-07	3.5E-07	3.5E-07	3.4E-07	3.1E-07	2.9E-07	2.8E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07
1287	6.7E-07	6.8E-07	6.7E-07	6.5E-07	6.1E-07	5.7E-07	5.3E-07	5.0E-07	4.8E-07	4.8E-07	4.8E-07	4.9E-07	4.9E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1288	5.1E-07	5.2E-07	5.1E-07	5.0E-07	4.6E-07	4.3E-07	4.1E-07	3.8E-07	3.7E-07	3.7E-07	3.7E-07	3.8E-07	3.8E-07
1289	3.9E-07	4.0E-07	3.9E-07	3.8E-07	3.5E-07	3.3E-07	3.1E-07	2.9E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
1290	3.2E-07	3.3E-07	3.3E-07	3.2E-07	3.0E-07	2.8E-07	2.6E-07	2.5E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
1291	6.3E-07	6.4E-07	6.4E-07	6.2E-07	5.8E-07	5.4E-07	5.0E-07	4.7E-07	4.5E-07	4.6E-07	4.6E-07	4.6E-07	4.6E-07
1292	5.0E-07	5.0E-07	5.0E-07	4.9E-07	4.6E-07	4.2E-07	4.0E-07	3.8E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
1293	3.9E-07	4.0E-07	3.9E-07	3.8E-07	3.5E-07	3.3E-07	3.1E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07
1294	3.1E-07	3.2E-07	3.2E-07	3.1E-07	2.8E-07	2.7E-07	2.5E-07	2.4E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
1295	5.8E-07	5.9E-07	5.9E-07	5.7E-07	5.3E-07	5.0E-07	4.7E-07	4.4E-07	4.2E-07	4.2E-07	4.3E-07	4.3E-07	4.3E-07
1296	4.8E-07	4.9E-07	4.8E-07	4.7E-07	4.4E-07	4.1E-07	3.9E-07	3.6E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07
1297	3.8E-07	3.9E-07	3.9E-07	3.7E-07	3.5E-07	3.3E-07	3.1E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
1298	3.1E-07	3.2E-07	3.2E-07	3.0E-07	2.8E-07	2.7E-07	2.5E-07	2.4E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
1299	2.7E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.3E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07
1300	6.4E-07	6.4E-07	6.4E-07	6.1E-07	5.7E-07	5.3E-07	4.9E-07	4.5E-07	4.3E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07
1301	5.4E-07	5.5E-07	5.5E-07	5.3E-07	5.0E-07	4.6E-07	4.3E-07	4.0E-07	3.9E-07	3.9E-07	4.0E-07	4.0E-07	4.0E-07
1302	4.5E-07	4.6E-07	4.6E-07	4.4E-07	4.2E-07	3.9E-07	3.6E-07	3.4E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
1303	3.7E-07	3.8E-07	3.8E-07	3.6E-07	3.4E-07	3.2E-07	3.0E-07	2.9E-07	2.8E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07
1304	3.1E-07	3.1E-07	3.1E-07	3.0E-07	2.8E-07	2.6E-07	2.5E-07	2.4E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
1305	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.4E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
1306	5.0E-07	5.1E-07	5.1E-07	4.9E-07	4.6E-07	4.3E-07	4.0E-07	3.8E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
1307	4.3E-07	4.4E-07	4.4E-07	4.2E-07	4.0E-07	3.7E-07	3.5E-07	3.3E-07	3.2E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07
1308	3.6E-07	3.7E-07	3.7E-07	3.5E-07	3.3E-07	3.1E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07
1309	3.0E-07	3.1E-07	3.0E-07	2.9E-07	2.7E-07	2.6E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07
1310	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
1311	2.1E-07	2.2E-07	2.2E-07	2.1E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
1312	4.1E-07	4.1E-07	4.1E-07	4.0E-07	3.7E-07	3.5E-07	3.3E-07	3.1E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07
1313	3.5E-07	3.6E-07	3.6E-07	3.4E-07	3.2E-07	3.0E-07	2.9E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
1314	2.9E-07	3.0E-07	2.9E-07	2.8E-07	2.7E-07	2.5E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
1315	2.5E-07	2.6E-07	2.5E-07	2.4E-07	2.3E-07	2.1E-07	2.0E-07	2.0E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1316	2.2E-07	2.3E-07	2.2E-07	2.2E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1317	3.8E-07	3.9E-07	3.8E-07	3.7E-07	3.5E-07	3.2E-07	3.1E-07	2.9E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
1318	3.3E-07	3.4E-07	3.4E-07	3.3E-07	3.1E-07	2.9E-07	2.7E-07	2.6E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
1319	2.8E-07	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.4E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07
1320	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	2.1E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
1321	2.1E-07	2.2E-07	2.1E-07	2.1E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1322	3.1E-07	3.2E-07	3.2E-07	3.1E-07	2.9E-07	2.7E-07	2.6E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07
1323	2.8E-07	2.8E-07	2.8E-07	2.7E-07	2.5E-07	2.4E-07	2.3E-07	2.2E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
1324	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.0E-07	1.9E-07	1.9E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1325	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1326	2.3E-07	2.3E-07	2.3E-07	2.2E-07	2.1E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1327	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.7E-07	2.5E-07	2.4E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07
1328	7.4E-08	7.5E-08	7.2E-08	6.3E-08	5.3E-08	4.7E-08	4.4E-08	4.2E-08	4.7E-08	5.1E-08	5.5E-08	5.7E-08	5.8E-08
1329	8.0E-08	8.1E-08	7.7E-08	6.7E-08	5.6E-08	5.0E-08	4.7E-08	4.5E-08	4.9E-08	5.4E-08	5.7E-08	5.9E-08	6.0E-08
1330	7.5E-08	7.6E-08	7.3E-08	6.4E-08	5.4E-08	4.9E-08	4.6E-08	4.4E-08	4.8E-08	5.1E-08	5.4E-08	5.6E-08	5.7E-08
1331	8.1E-08	8.3E-08	7.8E-08	6.8E-08	5.7E-08	5.1E-08	4.9E-08	4.6E-08	5.0E-08	5.3E-08	5.6E-08	5.8E-08	5.9E-08
1332	7.5E-08	7.7E-08	7.3E-08	6.4E-08	5.5E-08	5.0E-08	4.7E-08	4.6E-08	4.8E-08	5.2E-08	5.4E-08	5.6E-08	5.6E-08
1333	8.1E-08	8.3E-08	7.9E-08	6.9E-08	5.8E-08	5.2E-08	5.0E-08	4.8E-08	5.1E-08	5.4E-08	5.7E-08	5.8E-08	5.9E-08
1334	7.5E-08	7.7E-08	7.3E-08	6.5E-08	5.6E-08	5.1E-08	4.9E-08	4.7E-08	5.0E-08	5.3E-08	5.5E-08	5.6E-08	5.7E-08
1335	8.1E-08	8.3E-08	8.0E-08	7.1E-08	6.1E-08	5.6E-08	5.4E-08	5.3E-08	5.5E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08
1336	8.7E-08	8.8E-08	8.5E-08	7.6E-08	6.5E-08	6.0E-08	5.8E-08	5.7E-08	6.0E-08	6.3E-08	6.5E-08	6.7E-08	6.7E-08
1337	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1338	1.8E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
1339	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1340	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1341	1.8E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1342	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
1343	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
1344	2.1E-07	2.2E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
1345	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1346	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1347	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1348	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1349	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1350	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1351	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1352	1.9E-07	1.9E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1353	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1354	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1355	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
1356	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1357	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1358	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1359	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1360	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
1361	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
1362	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1363	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1364	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
1365	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1366	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1367	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1368	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1369	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1370	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1371	1.2E-07	1.2E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
1372	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1373	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1374	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1375	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1376	1.2E-07	1.2E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1377	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1378	1.1E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1379	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
1380	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1381	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	1.7E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1382	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1383	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.4E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
1384	2.9E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	2.6E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
1385	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	2.7E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07
1386	2.7E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.5E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07
1387	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.1E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1388	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	1.8E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1389	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1390	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1391	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1392	1.1E-07	1.1E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07
1393	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.8E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07
1394	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.6E-08	9.7E-08	9.8E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07
1395	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1396	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1397	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1398	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.0E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
1399	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.1E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1400	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.0E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1401	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	1.8E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1402	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.6E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1403	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1404	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1405	1.2E-07	1.2E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1406	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07
1407	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.6E-08	9.7E-08	9.8E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07
1408	1.0E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	9.7E-08	9.3E-08	9.4E-08	9.5E-08	9.6E-08	9.7E-08	9.7E-08	9.8E-08
1409	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1410	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1411	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.6E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1412	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	1.7E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1413	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	1.7E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1414	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	1.7E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1415	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.6E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1416	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
1417	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
1418	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1419	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1420	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.7E-08	9.8E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07
1421	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.8E-08	9.3E-08	9.4E-08	9.5E-08	9.6E-08	9.7E-08	9.7E-08	9.8E-08
1422	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	9.5E-08	9.0E-08	9.1E-08	9.2E-08	9.3E-08	9.4E-08	9.5E-08	9.5E-08
1423	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1424	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1425	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1426	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
1427	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1428	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1429	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1430	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1431	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.1E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1432	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	9.8E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07
1433	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.3E-08	9.4E-08	9.5E-08	9.6E-08	9.6E-08	9.7E-08	9.7E-08
1434	1.0E-07	1.0E-07	1.1E-07	1.0E-07	1.0E-07	9.5E-08	9.0E-08	9.1E-08	9.1E-08	9.2E-08	9.3E-08	9.4E-08	9.4E-08
1435	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1436	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.3E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1437	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1438	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.3E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1439	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1440	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1441	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07
1442	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.4E-08	9.5E-08	9.6E-08	9.7E-08	9.7E-08	9.8E-08	9.8E-08
1443	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1444	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1445	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
1446	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1447	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
1448	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
1449	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
1450	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
1451	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
1452	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1453	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
1454	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
1455	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1456	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1457	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1458	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1459	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1460	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07
1461	9.8E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1462	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1463	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
1464	8.8E-08	9.1E-08	9.3E-08	9.5E-08	9.7E-08	9.4E-08	9.3E-08	9.5E-08	9.6E-08	9.7E-08	9.8E-08	9.9E-08	9.9E-08
1465	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1466	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1467	8.2E-08	8.5E-08	8.7E-08	8.8E-08	9.0E-08	8.6E-08	8.5E-08	8.7E-08	8.8E-08	8.9E-08	9.0E-08	9.0E-08	9.1E-08
1468	9.6E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07
1469	7.8E-08	8.1E-08	8.2E-08	8.4E-08	8.5E-08	8.1E-08	8.0E-08	8.1E-08	8.2E-08	8.3E-08	8.4E-08	8.5E-08	8.5E-08
1470	8.9E-08	9.3E-08	9.5E-08	9.6E-08	9.8E-08	9.3E-08	9.1E-08	9.3E-08	9.4E-08	9.5E-08	9.6E-08	9.6E-08	9.7E-08
1471	8.4E-08	8.7E-08	8.9E-08	9.0E-08	9.2E-08	8.7E-08	8.4E-08	8.6E-08	8.7E-08	8.8E-08	8.9E-08	9.0E-08	9.0E-08
1472	8.9E-08	9.3E-08	9.5E-08	9.6E-08	9.7E-08	9.1E-08	8.7E-08	8.9E-08	9.1E-08	9.2E-08	9.3E-08	9.4E-08	9.4E-08
1473	9.2E-08	9.6E-08	9.8E-08	9.9E-08	1.0E-07	9.3E-08	8.9E-08	9.0E-08	9.2E-08	9.4E-08	9.6E-08	9.6E-08	9.7E-08
1474	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.1E-07	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
1475	2.1E-07	2.2E-07	2.2E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1476	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
1477	2.1E-07	2.2E-07	2.2E-07	2.1E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1478	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1479	2.3E-07	2.3E-07	2.3E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07
1480	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1481	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1482	3.0E-07	3.1E-07	3.2E-07	3.1E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1483	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07
1484	2.2E-07	2.3E-07	2.4E-07	2.3E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07
1485	2.0E-07	2.0E-07	2.1E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07
1486	1.8E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
1487	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
1488	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
1489	2.0E-07	2.1E-07	2.1E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1490	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1491	1.7E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07
1492	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07
1493	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
1494	2.0E-07	2.0E-07	2.1E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
1495	1.8E-07	1.8E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1496	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07
1497	2.3E-07	2.4E-07	2.4E-07	2.3E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1498	2.1E-07	2.2E-07	2.2E-07	2.1E-07	2.0E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1499	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1500	1.7E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1501	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
1502	2.3E-07	2.4E-07	2.4E-07	2.3E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
1503	2.1E-07	2.2E-07	2.2E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
1504	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1505	1.7E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
1506	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07
1507	2.3E-07	2.3E-07	2.4E-07	2.2E-07	2.1E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1508	2.1E-07	2.1E-07	2.2E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1509	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07
1510	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07
1511	1.5E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1512	2.3E-07	2.3E-07	2.4E-07	2.3E-07	2.1E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1513	2.1E-07	2.1E-07	2.2E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07
1514	1.9E-07	1.9E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1515	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1516	1.5E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1517	2.2E-07	2.3E-07	2.3E-07	2.2E-07	2.0E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1518	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
1519	1.8E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1520	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
1521	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1522	2.1E-07	2.2E-07	2.2E-07	2.1E-07	1.9E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1523	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1524	1.7E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07
1525	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1526	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1527	2.3E-07	2.3E-07	2.4E-07	2.2E-07	2.1E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
1528	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.8E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1529	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1530	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1531	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1532	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1533	2.9E-07	3.0E-07	3.0E-07	2.9E-07	2.7E-07	2.3E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
1534	2.5E-07	2.6E-07	2.6E-07	2.4E-07	2.3E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1535	2.2E-07	2.2E-07	2.2E-07	2.1E-07	2.0E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1536	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1537	1.7E-07	1.7E-07	1.8E-07	1.7E-07	1.6E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
1538	1.5E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
1539	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
1540	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1541	2.6E-07	2.7E-07	2.7E-07	2.5E-07	2.4E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
1542	2.3E-07	2.3E-07	2.4E-07	2.2E-07	2.1E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1543	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.8E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1544	1.8E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07
1545	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1546	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1547	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1548	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.1E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1549	2.1E-07	2.2E-07	2.2E-07	2.0E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1550	1.9E-07	1.9E-07	2.0E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1551	1.7E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1552	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
1553	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
1554	2.2E-07	2.2E-07	2.2E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
1555	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
1556	1.8E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1557	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1558	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1559	2.0E-07	2.1E-07	2.1E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1560	1.8E-07	1.9E-07	1.9E-07	1.8E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1561	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
1562	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1563	1.9E-07	2.0E-07	2.0E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1564	1.8E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1565	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1566	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1567	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1568	2.0E-07	2.0E-07	2.0E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1569	1.8E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
1570	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1571	1.5E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
1572	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
1573	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1574	2.6E-07	2.7E-07	2.7E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
1575	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07
1576	2.3E-07	2.4E-07	2.3E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
1577	2.2E-07	2.2E-07	2.2E-07	1.9E-07	1.8E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1578	2.2E-07	2.2E-07	2.1E-07	1.9E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1579	2.1E-07	2.1E-07	2.1E-07	1.8E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1580	2.0E-07	2.0E-07	2.0E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
1581	1.8E-07	1.9E-07	1.9E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
1582	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
1583	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
1584	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1585	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1586	2.4E-07	2.5E-07	2.5E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
1587	2.2E-07	2.3E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
1588	2.0E-07	2.1E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1589	1.9E-07	2.0E-07	1.9E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1590	1.9E-07	1.9E-07	1.9E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1591	1.8E-07	1.9E-07	1.9E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1592	1.8E-07	1.8E-07	1.8E-07	1.6E-07	1.5E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1593	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1594	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1595	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1596	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1597	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
1598	2.0E-07	2.1E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07
1599	2.0E-07	2.1E-07	2.1E-07	2.0E-07	2.0E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1600	1.8E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
1601	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1602	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
1603	1.7E-07	1.7E-07	1.7E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1604	1.6E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1605	1.5E-07	1.6E-07	1.6E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1606	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1607	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1608	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
1609	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1610	1.6E-07	1.7E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1611	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
1612	1.5E-07	1.6E-07	1.6E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1613	1.5E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
1614	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1615	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1616	1.4E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07
1617	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1618	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07
1619	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
1620	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1621	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1622	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1623	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07
1624	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1625	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1626	1.3E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1627	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1628	6.2E-08	6.4E-08	6.5E-08	6.6E-08	6.8E-08	7.0E-08	7.1E-08	7.4E-08	7.7E-08	7.9E-08	8.1E-08	8.2E-08	8.3E-08
1629	5.0E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.3E-08	5.4E-08	5.5E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08
1630	6.0E-08	6.3E-08	6.4E-08	6.5E-08	6.7E-08	6.8E-08	7.0E-08	7.2E-08	7.5E-08	7.8E-08	8.0E-08	8.1E-08	8.2E-08
1631	4.9E-08	5.1E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.3E-08
1632	5.9E-08	6.1E-08	6.2E-08	6.3E-08	6.4E-08	6.6E-08	6.7E-08	6.9E-08	7.2E-08	7.4E-08	7.6E-08	7.7E-08	7.7E-08
1633	5.0E-08	5.2E-08	5.2E-08	5.2E-08	5.3E-08	5.3E-08	5.4E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08
1634	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.4E-08	6.5E-08	6.6E-08	6.8E-08	7.1E-08	7.3E-08	7.4E-08	7.6E-08	7.6E-08
1635	5.0E-08	5.2E-08	5.2E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.2E-08
1636	6.9E-08	7.2E-08	7.3E-08	7.5E-08	7.8E-08	7.9E-08	8.2E-08	8.5E-08	8.8E-08	9.0E-08	9.2E-08	9.3E-08	9.4E-08
1637	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.7E-08	6.8E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.7E-08	7.8E-08	7.8E-08
1638	5.5E-08	5.7E-08	5.7E-08	5.8E-08	5.9E-08	5.9E-08	6.0E-08	6.1E-08	6.3E-08	6.5E-08	6.6E-08	6.7E-08	6.8E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1639	5.4E-08	5.6E-08	5.6E-08	5.6E-08	5.7E-08	5.7E-08	5.7E-08	5.9E-08	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.5E-08
1640	5.3E-08	5.5E-08	5.5E-08	5.6E-08	5.6E-08	5.6E-08	5.6E-08	5.8E-08	6.0E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08
1641	5.5E-08	5.7E-08	5.7E-08	5.7E-08	5.8E-08	5.7E-08	5.8E-08	5.9E-08	6.2E-08	6.4E-08	6.6E-08	6.7E-08	6.8E-08
1642	7.4E-08	7.7E-08	7.9E-08	8.1E-08	8.3E-08	8.5E-08	8.7E-08	9.0E-08	9.3E-08	9.5E-08	9.7E-08	9.8E-08	9.9E-08
1643	6.0E-08	6.3E-08	6.3E-08	6.4E-08	6.6E-08	6.6E-08	6.7E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.6E-08	7.6E-08
1644	5.7E-08	5.9E-08	5.9E-08	6.0E-08	6.1E-08	6.1E-08	6.2E-08	6.3E-08	6.5E-08	6.7E-08	6.8E-08	6.9E-08	7.0E-08
1645	5.7E-08	5.9E-08	5.9E-08	5.9E-08	6.0E-08	6.0E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.7E-08	6.8E-08	6.8E-08
1646	5.8E-08	6.0E-08	6.0E-08	6.0E-08	6.1E-08	6.0E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	6.9E-08	6.9E-08
1647	7.3E-08	7.6E-08	7.8E-08	8.0E-08	8.2E-08	8.3E-08	8.5E-08	8.8E-08	9.1E-08	9.3E-08	9.5E-08	9.6E-08	9.6E-08
1648	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08	6.6E-08	6.8E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.6E-08	7.6E-08
1649	6.0E-08	6.2E-08	6.2E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.6E-08	6.8E-08	7.0E-08	7.2E-08	7.2E-08	7.3E-08
1650	6.1E-08	6.3E-08	6.3E-08	6.4E-08	6.5E-08	6.4E-08	6.5E-08	6.6E-08	6.8E-08	7.0E-08	7.2E-08	7.2E-08	7.3E-08
1651	6.5E-08	6.7E-08	6.8E-08	6.9E-08	7.0E-08	7.1E-08	7.2E-08	7.4E-08	7.6E-08	7.8E-08	7.9E-08	8.0E-08	8.1E-08
1652	6.6E-08	6.8E-08	6.9E-08	7.0E-08	7.1E-08	7.1E-08	7.1E-08	7.3E-08	7.5E-08	7.7E-08	7.9E-08	8.0E-08	8.0E-08
1653	2.9E-08	3.0E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08
1654	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08
1655	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08
1656	2.9E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.9E-08	3.9E-08
1657	3.2E-08	3.2E-08	3.2E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.7E-08
1658	3.1E-08	3.1E-08	3.1E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.6E-08
1659	3.0E-08	3.1E-08	3.0E-08	2.9E-08	2.9E-08	2.9E-08	3.0E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08
1660	3.0E-08	3.0E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08	3.2E-08	3.3E-08	3.5E-08	3.6E-08	3.6E-08
1661	2.9E-08	3.0E-08	2.9E-08	2.7E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08
1662	2.9E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	2.9E-08	3.4E-08	3.8E-08	4.1E-08	4.4E-08	4.5E-08
1663	3.5E-08	3.6E-08	3.6E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08	4.2E-08
1664	3.5E-08	3.6E-08	3.5E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08
1665	3.3E-08	3.4E-08	3.3E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.0E-08
1666	3.1E-08	3.2E-08	3.1E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08
1667	3.0E-08	3.0E-08	2.9E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.4E-08	3.7E-08	3.9E-08	4.1E-08	4.1E-08
1668	3.1E-08	3.1E-08	3.0E-08	2.9E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.3E-08	3.6E-08	3.8E-08	3.9E-08	3.9E-08
1669	4.2E-08	4.3E-08	4.3E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08
1670	4.0E-08	4.1E-08	4.1E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08
1671	3.6E-08	3.7E-08	3.6E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.3E-08	4.5E-08	4.6E-08	4.6E-08
1672	3.2E-08	3.3E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.8E-08	4.0E-08	4.2E-08	4.3E-08	4.4E-08
1673	3.2E-08	3.3E-08	3.2E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.5E-08	3.8E-08	4.0E-08	4.1E-08	4.2E-08
1674	4.8E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08	5.9E-08	6.0E-08	6.0E-08
1675	5.3E-08	5.5E-08	5.5E-08	5.6E-08	5.7E-08	5.9E-08	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08	6.6E-08	6.7E-08
1676	4.7E-08	4.8E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08	6.2E-08
1677	4.0E-08	4.1E-08	4.0E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.7E-08	4.9E-08	5.1E-08	5.2E-08	5.2E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1678	3.5E-08	3.6E-08	3.5E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	4.1E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08
1679	3.3E-08	3.4E-08	3.3E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.9E-08	4.2E-08	4.4E-08	4.6E-08	4.6E-08
1680	6.8E-08	7.0E-08	7.2E-08	7.3E-08	7.5E-08	7.8E-08	8.0E-08	8.3E-08	8.4E-08	8.5E-08	8.6E-08	8.6E-08	8.7E-08
1681	7.3E-08	7.6E-08	7.7E-08	7.9E-08	8.2E-08	8.4E-08	8.7E-08	9.1E-08	9.2E-08	9.3E-08	9.4E-08	9.5E-08	9.5E-08
1682	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.7E-08	6.9E-08	7.1E-08	7.4E-08	7.6E-08	7.8E-08	8.0E-08	8.1E-08	8.2E-08
1683	4.6E-08	4.7E-08	4.7E-08	4.7E-08	4.8E-08	5.0E-08	5.2E-08	5.3E-08	5.7E-08	6.0E-08	6.3E-08	6.4E-08	6.5E-08
1684	3.9E-08	4.0E-08	3.9E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.6E-08	4.8E-08	5.0E-08	5.2E-08	5.2E-08
1685	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
1686	2.1E-07	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
1687	9.3E-08	9.7E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
1688	5.8E-08	6.0E-08	6.0E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	7.1E-08	7.3E-08	7.5E-08	7.6E-08	7.6E-08
1689	4.5E-08	4.6E-08	4.5E-08	4.5E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.1E-08	5.3E-08	5.5E-08	5.5E-08	5.6E-08
1690	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07	2.3E-07
1691	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
1692	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
1693	7.1E-08	7.3E-08	7.3E-08	7.4E-08	7.6E-08	7.9E-08	8.1E-08	8.4E-08	8.6E-08	8.7E-08	8.8E-08	8.9E-08	8.9E-08
1694	5.1E-08	5.2E-08	5.2E-08	5.1E-08	5.2E-08	5.3E-08	5.5E-08	5.6E-08	5.8E-08	5.9E-08	6.1E-08	6.1E-08	6.2E-08
1695	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
1696	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.3E-07	3.4E-07	3.5E-07	3.7E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07	3.6E-07
1697	2.4E-07	2.6E-07	2.7E-07	2.8E-07	2.9E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
1698	8.4E-08	8.7E-08	8.8E-08	8.9E-08	9.2E-08	9.5E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
1699	5.2E-08	5.3E-08	5.2E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08	6.2E-08	6.2E-08
1700	8.0E-08	8.3E-08	8.5E-08	8.6E-08	8.9E-08	9.2E-08	9.6E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07
1701	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
1702	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1703	7.5E-08	7.7E-08	7.8E-08	7.9E-08	8.1E-08	8.4E-08	8.7E-08	9.0E-08	9.2E-08	9.5E-08	9.6E-08	9.7E-08	9.8E-08
1704	4.7E-08	4.7E-08	4.6E-08	4.5E-08	4.6E-08	4.6E-08	4.8E-08	4.9E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08
1705	6.0E-08	6.2E-08	6.2E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.1E-08	7.2E-08	7.3E-08	7.3E-08	7.3E-08
1706	8.3E-08	8.5E-08	8.6E-08	8.8E-08	9.0E-08	9.3E-08	9.7E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07
1707	8.0E-08	8.2E-08	8.3E-08	8.4E-08	8.7E-08	9.0E-08	9.3E-08	9.6E-08	9.8E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07
1708	5.5E-08	5.6E-08	5.5E-08	5.5E-08	5.6E-08	5.8E-08	5.9E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	6.9E-08	6.9E-08
1709	3.6E-08	3.6E-08	3.4E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.7E-08	3.9E-08	4.1E-08	4.2E-08	4.2E-08
1710	4.9E-08	5.0E-08	4.9E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08	5.8E-08	5.8E-08
1711	5.7E-08	5.8E-08	5.8E-08	5.8E-08	5.9E-08	6.1E-08	6.3E-08	6.5E-08	6.6E-08	6.6E-08	6.7E-08	6.8E-08	6.8E-08
1712	5.3E-08	5.4E-08	5.3E-08	5.2E-08	5.3E-08	5.5E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08	6.3E-08
1713	9.1E-08	9.4E-08	9.5E-08	9.6E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
1714	8.1E-09	6.5E-09	2.8E-09	-3.9E-10	-1.6E-09	-2.6E-09	-3.1E-09	-3.5E-09	6.0E-10	4.0E-09	6.6E-09	8.3E-09	9.1E-09
1715	4.3E-08	4.4E-08	4.2E-08	4.2E-08	4.3E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08	4.9E-08
1716	4.7E-08	4.7E-08	4.6E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08	5.3E-08	5.3E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1717	4.4E-08	4.4E-08	4.2E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08
1718	2.4E-08	2.3E-08	2.0E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	2.0E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08
1719	1.4E-08	1.3E-08	8.8E-09	5.7E-09	4.7E-09	4.0E-09	3.6E-09	3.4E-09	7.0E-09	9.9E-09	1.2E-08	1.4E-08	1.4E-08
1720	4.1E-08	4.0E-08	3.9E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08
1721	4.2E-08	4.2E-08	4.0E-08	3.9E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.5E-08	4.6E-08	4.6E-08
1722	4.0E-08	3.9E-08	3.7E-08	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.3E-08
1723	2.9E-08	2.8E-08	2.4E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08
1724	6.1E-09	4.0E-09	-4.6E-10	-4.1E-09	-5.6E-09	-6.7E-09	-7.5E-09	-8.1E-09	-4.1E-09	-7.3E-10	1.8E-09	3.4E-09	4.3E-09
1725	4.0E-08	4.0E-08	3.7E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08
1726	3.8E-08	3.7E-08	3.5E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08
1727	3.0E-08	2.9E-08	2.6E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.5E-08	2.7E-08	2.9E-08	3.0E-08	3.0E-08
1728	8.9E-09	6.6E-09	2.0E-09	-1.8E-09	-3.1E-09	-4.2E-09	-4.9E-09	-5.3E-09	-1.3E-09	2.0E-09	4.5E-09	6.1E-09	6.9E-09
1729	3.8E-08	3.7E-08	3.3E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08
1730	3.1E-08	2.9E-08	2.6E-08	2.3E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
1731	9.0E-08	9.1E-08	9.0E-08	9.1E-08	9.3E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1732	3.1E-08	2.8E-08	2.4E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.3E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08
1733	-2.0E-08	-2.5E-08	-3.2E-08	-3.8E-08	-4.0E-08	-4.3E-08	-4.5E-08	-4.7E-08	-4.1E-08	-3.7E-08	-3.4E-08	-3.1E-08	-3.0E-08
1734	3.6E-08	3.7E-08	3.6E-08	3.3E-08	3.0E-08	2.7E-08	2.5E-08	2.4E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
1735	3.7E-08	3.8E-08	3.7E-08	3.4E-08	3.0E-08	2.8E-08	2.6E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
1736	3.7E-08	3.8E-08	3.7E-08	3.4E-08	3.1E-08	2.8E-08	2.6E-08	2.4E-08	2.6E-08	2.7E-08	2.9E-08	2.9E-08	3.0E-08
1737	4.7E-08	4.8E-08	4.7E-08	4.3E-08	3.9E-08	3.4E-08	2.9E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
1738	5.4E-08	5.5E-08	5.4E-08	5.0E-08	4.5E-08	3.8E-08	3.1E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.3E-08	3.3E-08
1739	3.9E-08	3.8E-08	3.4E-08	3.3E-08	3.3E-08	3.4E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08	3.9E-08
1740	4.6E-08	4.4E-08	3.9E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.2E-08	4.3E-08	4.3E-08	4.4E-08	4.4E-08
1741	5.6E-08	5.2E-08	4.5E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08
1742	3.1E-08	3.1E-08	2.9E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08
1743	3.5E-08	3.4E-08	3.2E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.6E-08
1744	4.0E-08	3.9E-08	3.5E-08	3.4E-08	3.4E-08	3.5E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08	4.0E-08
1745	4.9E-08	4.6E-08	4.1E-08	3.9E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.6E-08	4.6E-08	4.6E-08
1746	2.9E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08
1747	3.1E-08	3.1E-08	3.0E-08	2.9E-08	2.9E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08
1748	3.5E-08	3.5E-08	3.2E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.7E-08
1749	4.2E-08	4.0E-08	3.7E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.1E-08
1750	3.0E-08	3.0E-08	2.9E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08
1751	3.2E-08	3.2E-08	3.0E-08	2.9E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08	3.5E-08
1752	3.6E-08	3.6E-08	3.3E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08	3.8E-08
1753	4.3E-08	4.2E-08	3.8E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.3E-08
1754	3.0E-08	3.1E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08
1755	3.0E-08	3.1E-08	2.9E-08	2.9E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1756	3.3E-08	3.3E-08	3.1E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.6E-08	3.6E-08
1757	3.7E-08	3.6E-08	3.4E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08	3.9E-08
1758	4.5E-08	4.3E-08	3.9E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08
1759	3.2E-08	3.3E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08
1760	3.1E-08	3.2E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08
1761	3.4E-08	3.3E-08	3.2E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.7E-08
1762	3.8E-08	3.7E-08	3.4E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08	4.0E-08
1763	4.6E-08	4.4E-08	4.0E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.6E-08
1764	3.4E-08	3.5E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.3E-08	4.4E-08	4.5E-08	4.5E-08
1765	3.2E-08	3.3E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.7E-08	3.8E-08	3.8E-08	3.8E-08
1766	3.5E-08	3.4E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08
1767	3.9E-08	3.8E-08	3.5E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	4.0E-08	4.0E-08	4.1E-08	4.1E-08
1768	3.8E-08	3.9E-08	3.8E-08	3.8E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08
1769	3.4E-08	3.4E-08	3.3E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.9E-08	4.0E-08	4.0E-08	4.1E-08
1770	3.6E-08	3.6E-08	3.4E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.9E-08	3.9E-08	4.0E-08	4.0E-08
1771	4.0E-08	3.9E-08	3.5E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08
1772	4.0E-08	4.1E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.5E-08	4.7E-08	4.9E-08	5.1E-08	5.3E-08	5.4E-08	5.4E-08
1773	3.6E-08	3.6E-08	3.5E-08	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	4.0E-08	4.1E-08	4.3E-08	4.3E-08	4.4E-08
1774	3.7E-08	3.7E-08	3.4E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	4.0E-08	4.1E-08	4.1E-08	4.2E-08
1775	3.9E-08	3.8E-08	3.5E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.8E-08	4.0E-08	4.1E-08	4.1E-08	4.2E-08
1776	4.0E-08	4.0E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.5E-08	4.7E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08
1777	3.9E-08	3.9E-08	3.8E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
1778	3.8E-08	3.7E-08	3.5E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.9E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08
1779	3.7E-08	3.6E-08	3.2E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08
1780	4.2E-08	4.3E-08	4.2E-08	4.2E-08	4.3E-08	4.4E-08	4.6E-08	4.8E-08	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.4E-08
1781	4.2E-08	4.3E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.6E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
1782	4.1E-08	4.1E-08	3.8E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
1783	2.7E-08	2.6E-08	2.1E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.3E-08	2.5E-08	2.7E-08	2.9E-08	2.9E-08
1784	4.3E-08	4.3E-08	4.3E-08	4.3E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08
1785	4.9E-08	5.0E-08	4.9E-08	4.9E-08	5.0E-08	5.2E-08	5.3E-08	5.5E-08	5.7E-08	5.9E-08	6.1E-08	6.2E-08	6.2E-08
1786	4.6E-08	4.6E-08	4.3E-08	4.2E-08	4.4E-08	4.5E-08	4.6E-08	4.8E-08	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.4E-08
1787	9.1E-09	6.3E-09	6.2E-10	-2.9E-09	-3.6E-09	-4.5E-09	-5.0E-09	-5.2E-09	-8.9E-10	2.7E-09	5.3E-09	7.1E-09	8.0E-09
1788	4.7E-08	4.8E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.2E-08	5.4E-08	5.6E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08
1789	5.7E-08	5.8E-08	5.7E-08	5.7E-08	5.9E-08	6.1E-08	6.3E-08	6.6E-08	6.8E-08	7.1E-08	7.2E-08	7.3E-08	7.4E-08
1790	3.8E-08	3.7E-08	3.4E-08	3.3E-08	3.4E-08	3.4E-08	3.6E-08	3.7E-08	4.0E-08	4.2E-08	4.4E-08	4.6E-08	4.6E-08
1791	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1792	5.4E-08	5.5E-08	5.4E-08	5.5E-08	5.6E-08	5.8E-08	6.0E-08	6.3E-08	6.5E-08	6.8E-08	7.0E-08	7.1E-08	7.1E-08
1793	4.3E-08	4.3E-08	4.1E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.5E-08	4.8E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08
1794	1.3E-08	1.1E-08	5.5E-09	2.2E-09	1.7E-09	1.1E-09	7.9E-10	8.0E-10	5.3E-09	8.9E-09	1.2E-08	1.4E-08	1.4E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1795	5.7E-08	5.8E-08	5.7E-08	5.7E-08	5.9E-08	6.1E-08	6.3E-08	6.6E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.5E-08
1796	3.2E-08	3.0E-08	2.6E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	2.9E-08	3.2E-08	3.5E-08	3.6E-08	3.7E-08
1797	5.6E-08	5.5E-08	5.0E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.5E-08	5.6E-08	5.8E-08	5.8E-08	5.9E-08
1798	3.7E-08	3.6E-08	3.2E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.6E-08	3.8E-08	4.0E-08	4.1E-08	4.2E-08
1799	5.1E-08	5.0E-08	4.6E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.1E-08	5.2E-08	5.3E-08	5.3E-08
1800	6.1E-08	5.9E-08	5.3E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.5E-08	5.6E-08	5.7E-08	5.8E-08	5.9E-08	5.9E-08
1801	5.7E-08	5.5E-08	5.0E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.6E-08
1802	4.8E-08	4.7E-08	4.4E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08
1803	5.5E-08	5.4E-08	5.0E-08	4.8E-08	4.9E-08	4.9E-08	5.1E-08	5.2E-08	5.3E-08	5.5E-08	5.5E-08	5.6E-08	5.6E-08
1804	4.6E-08	4.4E-08	3.9E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08
1805	4.7E-08	4.4E-08	3.8E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08
1806	3.7E-08	3.2E-08	2.5E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.3E-08	2.5E-08	2.7E-08	2.8E-08	2.8E-08
1807	7.1E-09	1.0E-09	-8.0E-09	-1.5E-08	-1.6E-08	-1.8E-08	-1.9E-08	-2.0E-08	-1.5E-08	-1.1E-08	-7.8E-09	-5.7E-09	-4.7E-09
1808	3.8E-08	3.6E-08	3.3E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08
1809	4.3E-08	4.1E-08	3.7E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.1E-08
1810	4.9E-08	4.6E-08	4.1E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.5E-08	4.6E-08
1811	5.0E-08	4.6E-08	4.0E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08
1812	1.8E-08	1.2E-08	2.4E-09	-4.2E-09	-5.3E-09	-6.4E-09	-7.1E-09	-7.5E-09	-3.6E-09	-2.8E-10	2.2E-09	3.8E-09	4.6E-09
1813	1.4E-08	6.5E-09	-3.7E-09	-1.1E-08	-1.3E-08	-1.4E-08	-1.5E-08	-1.6E-08	-1.1E-08	-6.7E-09	-3.8E-09	-1.8E-09	-7.7E-10
1814	3.3E-08	3.3E-08	3.0E-08	2.9E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08
1815	3.8E-08	3.7E-08	3.4E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08	3.8E-08
1816	4.4E-08	4.2E-08	3.8E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08
1817	5.2E-08	4.9E-08	4.3E-08	4.0E-08	4.1E-08	4.1E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.8E-08
1818	5.5E-08	5.1E-08	4.3E-08	3.9E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.4E-08	4.6E-08	4.7E-08	4.8E-08	4.8E-08
1819	5.6E-08	5.0E-08	4.0E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	4.0E-08	4.2E-08	4.4E-08	4.5E-08	4.6E-08
1820	4.8E-08	4.1E-08	3.1E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08	2.8E-08	3.0E-08	3.2E-08	3.4E-08	3.4E-08
1821	6.6E-08	6.1E-08	5.3E-08	4.8E-08	4.9E-08	5.0E-08	5.2E-08	5.4E-08	5.6E-08	5.8E-08	5.9E-08	6.0E-08	6.0E-08
1822	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1823	3.0E-08	3.0E-08	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08
1824	4.3E-08	4.4E-08	4.3E-08	3.9E-08	3.5E-08	3.1E-08	2.8E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
1825	4.6E-08	4.7E-08	4.6E-08	4.2E-08	3.8E-08	3.3E-08	2.9E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.4E-08	3.4E-08
1826	4.3E-08	4.4E-08	4.3E-08	3.9E-08	3.5E-08	3.1E-08	2.8E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08
1827	4.0E-08	4.1E-08	4.0E-08	3.7E-08	3.4E-08	3.0E-08	2.8E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
1828	5.5E-08	5.7E-08	5.4E-08	4.7E-08	3.9E-08	3.4E-08	3.2E-08	3.0E-08	3.5E-08	4.0E-08	4.4E-08	4.6E-08	4.8E-08
1829	6.0E-08	6.1E-08	5.8E-08	5.0E-08	4.2E-08	3.7E-08	3.5E-08	3.2E-08	3.8E-08	4.3E-08	4.7E-08	4.9E-08	5.0E-08
1830	6.4E-08	6.5E-08	6.2E-08	5.4E-08	4.6E-08	4.0E-08	3.8E-08	3.5E-08	4.0E-08	4.6E-08	4.9E-08	5.2E-08	5.3E-08
1831	6.9E-08	7.0E-08	6.7E-08	5.9E-08	4.9E-08	4.4E-08	4.1E-08	3.9E-08	4.4E-08	4.9E-08	5.3E-08	5.5E-08	5.6E-08
1832	3.3E-08	3.4E-08	3.2E-08	2.7E-08	2.1E-08	1.7E-08	1.4E-08	1.1E-08	1.9E-08	2.6E-08	3.1E-08	3.5E-08	3.7E-08
1833	3.3E-08	3.4E-08	3.2E-08	2.6E-08	2.0E-08	1.6E-08	1.3E-08	1.0E-08	1.8E-08	2.5E-08	3.0E-08	3.3E-08	3.5E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1834	2.2E-08	2.3E-08	2.1E-08	1.6E-08	1.1E-08	6.2E-09	3.2E-09	5.2E-10	1.2E-08	2.1E-08	2.8E-08	3.3E-08	3.5E-08
1835	4.2E-08	4.3E-08	4.0E-08	3.4E-08	2.8E-08	2.3E-08	2.0E-08	1.8E-08	2.4E-08	3.0E-08	3.4E-08	3.7E-08	3.9E-08
1836	4.5E-08	4.6E-08	4.3E-08	3.7E-08	3.0E-08	2.5E-08	2.3E-08	2.0E-08	2.6E-08	3.2E-08	3.6E-08	3.9E-08	4.1E-08
1837	4.5E-08	4.6E-08	4.4E-08	4.0E-08	3.4E-08	3.1E-08	2.8E-08	2.6E-08	3.0E-08	3.4E-08	3.7E-08	3.9E-08	4.0E-08
1838	4.8E-08	4.9E-08	4.7E-08	4.2E-08	3.6E-08	3.2E-08	3.0E-08	2.8E-08	3.2E-08	3.6E-08	3.9E-08	4.0E-08	4.1E-08
1839	5.0E-08	5.1E-08	4.9E-08	4.4E-08	3.8E-08	3.4E-08	3.2E-08	3.0E-08	3.4E-08	3.7E-08	4.0E-08	4.2E-08	4.3E-08
1840	5.3E-08	5.4E-08	5.2E-08	4.6E-08	4.0E-08	3.6E-08	3.4E-08	3.2E-08	3.5E-08	3.9E-08	4.2E-08	4.4E-08	4.5E-08
1841	5.5E-08	5.6E-08	5.4E-08	4.9E-08	4.2E-08	3.8E-08	3.6E-08	3.4E-08	3.7E-08	4.1E-08	4.4E-08	4.6E-08	4.7E-08
1842	5.4E-08	5.5E-08	5.4E-08	4.8E-08	4.3E-08	3.9E-08	3.7E-08	3.5E-08	3.8E-08	4.2E-08	4.4E-08	4.6E-08	4.6E-08
1843	5.9E-08	6.0E-08	5.8E-08	5.1E-08	4.5E-08	4.0E-08	3.8E-08	3.6E-08	4.0E-08	4.4E-08	4.7E-08	4.8E-08	4.9E-08
1844	6.2E-08	6.3E-08	6.0E-08	5.4E-08	4.7E-08	4.2E-08	4.0E-08	3.8E-08	4.1E-08	4.5E-08	4.8E-08	5.0E-08	5.1E-08
1845	6.5E-08	6.6E-08	6.4E-08	5.7E-08	4.9E-08	4.4E-08	4.2E-08	4.0E-08	4.3E-08	4.7E-08	5.0E-08	5.2E-08	5.3E-08
1846	3.4E-08	3.5E-08	3.3E-08	2.9E-08	2.4E-08	2.0E-08	1.8E-08	1.5E-08	2.3E-08	2.9E-08	3.4E-08	3.7E-08	3.9E-08
1847	4.1E-08	4.2E-08	4.1E-08	3.6E-08	3.1E-08	2.8E-08	2.5E-08	2.3E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08
1848	4.3E-08	4.3E-08	4.2E-08	3.7E-08	3.2E-08	2.8E-08	2.6E-08	2.4E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08
1849	4.4E-08	4.5E-08	4.3E-08	3.9E-08	3.4E-08	3.1E-08	2.9E-08	2.7E-08	3.1E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08
1850	4.8E-08	4.9E-08	4.8E-08	4.4E-08	3.9E-08	3.6E-08	3.4E-08	3.3E-08	3.5E-08	3.8E-08	4.0E-08	4.2E-08	4.2E-08
1851	5.0E-08	5.1E-08	5.0E-08	4.6E-08	4.1E-08	3.7E-08	3.6E-08	3.4E-08	3.7E-08	4.0E-08	4.2E-08	4.3E-08	4.4E-08
1852	2.9E-08	3.0E-08	2.8E-08	2.4E-08	2.0E-08	1.6E-08	1.3E-08	1.1E-08	2.0E-08	2.8E-08	3.4E-08	3.8E-08	3.9E-08
1853	3.3E-08	3.4E-08	3.3E-08	2.9E-08	2.5E-08	2.1E-08	1.9E-08	1.7E-08	2.4E-08	3.1E-08	3.5E-08	3.8E-08	4.0E-08
1854	4.0E-08	4.1E-08	3.9E-08	3.6E-08	3.1E-08	2.8E-08	2.6E-08	2.5E-08	2.9E-08	3.3E-08	3.6E-08	3.8E-08	3.9E-08
1855	4.0E-08	4.1E-08	4.0E-08	3.6E-08	3.2E-08	2.8E-08	2.6E-08	2.4E-08	2.9E-08	3.3E-08	3.6E-08	3.8E-08	3.9E-08
1856	4.2E-08	4.3E-08	4.2E-08	3.8E-08	3.4E-08	3.0E-08	2.9E-08	2.7E-08	3.0E-08	3.4E-08	3.6E-08	3.8E-08	3.8E-08
1857	4.4E-08	4.5E-08	4.3E-08	4.0E-08	3.6E-08	3.3E-08	3.1E-08	2.9E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08
1858	4.5E-08	4.6E-08	4.5E-08	4.1E-08	3.7E-08	3.4E-08	3.2E-08	3.0E-08	3.3E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08
1859	5.1E-08	5.2E-08	5.1E-08	4.7E-08	4.2E-08	3.9E-08	3.7E-08	3.6E-08	3.8E-08	4.1E-08	4.3E-08	4.4E-08	4.5E-08
1860	5.6E-08	5.7E-08	5.5E-08	5.0E-08	4.4E-08	4.1E-08	3.9E-08	3.7E-08	4.0E-08	4.3E-08	4.5E-08	4.7E-08	4.8E-08
1861	5.3E-08	5.4E-08	5.3E-08	4.8E-08	4.3E-08	4.0E-08	3.8E-08	3.7E-08	3.9E-08	4.2E-08	4.4E-08	4.5E-08	4.6E-08
1862	5.8E-08	5.9E-08	5.7E-08	5.2E-08	4.6E-08	4.2E-08	4.0E-08	3.9E-08	4.1E-08	4.4E-08	4.7E-08	4.8E-08	4.9E-08
1863	5.6E-08	5.7E-08	5.5E-08	5.0E-08	4.5E-08	4.1E-08	4.0E-08	3.8E-08	4.1E-08	4.3E-08	4.5E-08	4.7E-08	4.7E-08
1864	5.4E-08	5.5E-08	5.4E-08	4.9E-08	4.4E-08	4.1E-08	4.0E-08	3.8E-08	4.1E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08
1865	6.1E-08	6.2E-08	6.0E-08	5.4E-08	4.8E-08	4.4E-08	4.2E-08	4.0E-08	4.3E-08	4.6E-08	4.8E-08	5.0E-08	5.0E-08
1866	5.8E-08	5.9E-08	5.8E-08	5.2E-08	4.6E-08	4.3E-08	4.1E-08	3.9E-08	4.2E-08	4.5E-08	4.7E-08	4.8E-08	4.9E-08
1867	5.7E-08	5.8E-08	5.6E-08	5.2E-08	4.6E-08	4.3E-08	4.1E-08	4.0E-08	4.2E-08	4.5E-08	4.7E-08	4.8E-08	4.9E-08
1868	6.8E-08	6.9E-08	6.6E-08	5.9E-08	5.1E-08	4.6E-08	4.4E-08	4.2E-08	4.5E-08	4.9E-08	5.1E-08	5.3E-08	5.4E-08
1869	6.4E-08	6.6E-08	6.3E-08	5.7E-08	4.9E-08	4.5E-08	4.3E-08	4.1E-08	4.4E-08	4.7E-08	5.0E-08	5.1E-08	5.2E-08
1870	6.1E-08	6.2E-08	6.0E-08	5.4E-08	4.8E-08	4.4E-08	4.2E-08	4.1E-08	4.3E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08
1871	6.0E-08	6.1E-08	5.9E-08	5.4E-08	4.8E-08	4.5E-08	4.3E-08	4.2E-08	4.4E-08	4.7E-08	4.9E-08	5.0E-08	5.0E-08
1872	6.8E-08	7.0E-08	6.7E-08	5.9E-08	5.1E-08	4.7E-08	4.5E-08	4.3E-08	4.6E-08	4.9E-08	5.1E-08	5.3E-08	5.3E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1873	6.5E-08	6.6E-08	6.3E-08	5.7E-08	5.0E-08	4.6E-08	4.4E-08	4.2E-08	4.5E-08	4.7E-08	5.0E-08	5.1E-08	5.2E-08
1874	6.3E-08	6.5E-08	6.3E-08	5.7E-08	5.0E-08	4.7E-08	4.5E-08	4.4E-08	4.6E-08	4.9E-08	5.1E-08	5.2E-08	5.3E-08
1875	6.8E-08	7.0E-08	6.7E-08	6.0E-08	5.2E-08	4.8E-08	4.6E-08	4.4E-08	4.7E-08	4.9E-08	5.1E-08	5.3E-08	5.4E-08
1876	4.0E-08	4.1E-08	4.0E-08	3.5E-08	3.1E-08	2.6E-08	2.3E-08	2.0E-08	2.6E-08	3.1E-08	3.5E-08	3.8E-08	4.0E-08
1877	2.3E-08	2.4E-08	2.3E-08	1.9E-08	1.4E-08	1.0E-08	7.6E-09	5.1E-09	1.6E-08	2.6E-08	3.3E-08	3.7E-08	4.0E-08
1878	2.8E-08	2.9E-08	2.8E-08	2.4E-08	2.0E-08	1.7E-08	1.5E-08	1.3E-08	2.2E-08	2.9E-08	3.5E-08	3.9E-08	4.1E-08
1879	4.0E-08	4.1E-08	4.0E-08	3.7E-08	3.4E-08	3.1E-08	2.9E-08	2.8E-08	3.1E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08
1880	4.1E-08	4.2E-08	4.1E-08	3.8E-08	3.5E-08	3.2E-08	3.0E-08	2.9E-08	3.2E-08	3.4E-08	3.6E-08	3.8E-08	3.8E-08
1881	4.5E-08	4.6E-08	4.5E-08	4.1E-08	3.8E-08	3.5E-08	3.4E-08	3.2E-08	3.5E-08	3.7E-08	3.9E-08	4.0E-08	4.0E-08
1882	4.6E-08	4.7E-08	4.6E-08	4.3E-08	3.9E-08	3.6E-08	3.5E-08	3.4E-08	3.6E-08	3.8E-08	4.0E-08	4.1E-08	4.2E-08
1883	4.8E-08	4.9E-08	4.8E-08	4.4E-08	4.0E-08	3.7E-08	3.6E-08	3.5E-08	3.7E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08
1884	4.0E-08	4.1E-08	4.0E-08	3.7E-08	3.4E-08	3.1E-08	2.8E-08	2.7E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08
1885	4.1E-08	4.2E-08	4.1E-08	3.8E-08	3.5E-08	3.2E-08	2.9E-08	2.7E-08	3.1E-08	3.4E-08	3.7E-08	3.8E-08	3.9E-08
1886	4.1E-08	4.2E-08	4.1E-08	3.8E-08	3.5E-08	3.1E-08	2.8E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08
1887	3.9E-08	4.0E-08	3.9E-08	3.5E-08	3.0E-08	2.6E-08	2.3E-08	2.0E-08	2.7E-08	3.3E-08	3.7E-08	4.0E-08	4.2E-08
1888	3.7E-08	3.8E-08	3.7E-08	3.4E-08	3.1E-08	2.7E-08	2.5E-08	2.2E-08	2.6E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08
1889	3.7E-08	3.8E-08	3.7E-08	3.4E-08	3.0E-08	2.7E-08	2.4E-08	2.2E-08	2.6E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08
1890	3.8E-08	3.9E-08	3.8E-08	3.4E-08	3.1E-08	2.7E-08	2.4E-08	2.1E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
1891	3.6E-08	3.7E-08	3.6E-08	3.3E-08	2.9E-08	2.5E-08	2.2E-08	2.0E-08	2.5E-08	3.0E-08	3.3E-08	3.6E-08	3.7E-08
1892	3.3E-08	3.4E-08	3.3E-08	3.0E-08	2.6E-08	2.2E-08	1.9E-08	1.7E-08	2.4E-08	3.0E-08	3.4E-08	3.7E-08	3.9E-08
1893	3.4E-08	3.5E-08	3.4E-08	3.0E-08	2.6E-08	2.2E-08	2.0E-08	1.7E-08	2.4E-08	3.0E-08	3.5E-08	3.8E-08	4.0E-08
1894	3.7E-08	3.8E-08	3.8E-08	3.5E-08	3.3E-08	3.0E-08	2.9E-08	2.8E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08
1895	3.7E-08	3.9E-08	3.8E-08	3.6E-08	3.4E-08	3.2E-08	3.1E-08	3.0E-08	3.4E-08	3.7E-08	4.0E-08	4.2E-08	4.3E-08
1896	3.5E-08	3.6E-08	3.5E-08	3.3E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.9E-08	3.1E-08	3.3E-08	3.5E-08	3.5E-08
1897	3.3E-08	3.4E-08	3.4E-08	3.1E-08	2.9E-08	2.7E-08	2.6E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
1898	3.8E-08	4.0E-08	3.9E-08	3.7E-08	3.4E-08	3.2E-08	3.0E-08	2.9E-08	3.3E-08	3.7E-08	3.9E-08	4.1E-08	4.2E-08
1899	3.6E-08	3.7E-08	3.7E-08	3.4E-08	3.1E-08	2.9E-08	2.7E-08	2.6E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08
1900	3.4E-08	3.5E-08	3.5E-08	3.2E-08	3.0E-08	2.7E-08	2.6E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08	3.5E-08
1901	3.1E-08	3.2E-08	3.2E-08	3.0E-08	2.7E-08	2.5E-08	2.4E-08	2.3E-08	2.7E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
1902	2.9E-08	3.0E-08	3.0E-08	2.8E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.7E-08	3.1E-08	3.5E-08	3.7E-08	3.8E-08
1903	3.8E-08	3.9E-08	3.8E-08	3.6E-08	3.3E-08	3.0E-08	2.8E-08	2.6E-08	2.9E-08	3.2E-08	3.4E-08	3.6E-08	3.7E-08
1904	3.6E-08	3.7E-08	3.6E-08	3.3E-08	3.1E-08	2.8E-08	2.6E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08	3.5E-08
1905	3.1E-08	3.2E-08	3.1E-08	2.9E-08	2.6E-08	2.4E-08	2.2E-08	2.1E-08	2.5E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08
1906	2.8E-08	3.0E-08	2.9E-08	2.7E-08	2.4E-08	2.2E-08	2.1E-08	2.0E-08	2.6E-08	3.1E-08	3.4E-08	3.7E-08	3.8E-08
1907	3.3E-08	3.4E-08	3.3E-08	3.1E-08	2.9E-08	2.7E-08	2.6E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.4E-08	3.4E-08
1908	3.8E-08	3.9E-08	3.8E-08	3.5E-08	3.2E-08	2.9E-08	2.7E-08	2.5E-08	2.9E-08	3.2E-08	3.4E-08	3.6E-08	3.6E-08
1909	3.1E-08	3.2E-08	3.1E-08	2.9E-08	2.6E-08	2.3E-08	2.1E-08	2.0E-08	2.5E-08	3.0E-08	3.3E-08	3.6E-08	3.7E-08
1910	2.6E-08	2.7E-08	2.7E-08	2.4E-08	2.2E-08	1.9E-08	1.8E-08	1.6E-08	2.2E-08	2.8E-08	3.2E-08	3.4E-08	3.6E-08
1911	3.3E-08	3.4E-08	3.4E-08	3.2E-08	2.9E-08	2.7E-08	2.6E-08	2.5E-08	2.8E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1912	3.8E-08	3.9E-08	3.9E-08	3.6E-08	3.2E-08	2.9E-08	2.6E-08	2.4E-08	2.7E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08
1913	3.1E-08	3.2E-08	3.1E-08	2.8E-08	2.5E-08	2.2E-08	2.0E-08	1.8E-08	2.3E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08
1914	2.6E-08	2.7E-08	2.7E-08	2.4E-08	2.1E-08	1.9E-08	1.7E-08	1.5E-08	2.1E-08	2.6E-08	3.0E-08	3.3E-08	3.4E-08
1915	3.4E-08	3.5E-08	3.4E-08	3.2E-08	2.9E-08	2.7E-08	2.6E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
1916	3.5E-08	3.6E-08	3.5E-08	3.3E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.9E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
1917	2.7E-08	2.8E-08	2.7E-08	2.5E-08	2.2E-08	1.9E-08	1.7E-08	1.6E-08	2.1E-08	2.7E-08	3.0E-08	3.3E-08	3.4E-08
1918	3.4E-08	3.5E-08	3.5E-08	3.2E-08	2.9E-08	2.7E-08	2.6E-08	2.4E-08	2.8E-08	3.1E-08	3.3E-08	3.5E-08	3.5E-08
1919	3.5E-08	3.6E-08	3.6E-08	3.3E-08	3.1E-08	2.9E-08	2.8E-08	2.7E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08	3.5E-08
1920	2.9E-08	3.0E-08	2.9E-08	2.6E-08	2.3E-08	2.0E-08	1.8E-08	1.7E-08	2.2E-08	2.7E-08	3.1E-08	3.3E-08	3.5E-08
1921	3.5E-08	3.6E-08	3.5E-08	3.3E-08	3.0E-08	2.7E-08	2.6E-08	2.5E-08	2.8E-08	3.1E-08	3.4E-08	3.5E-08	3.6E-08
1922	3.6E-08	3.7E-08	3.6E-08	3.4E-08	3.1E-08	2.9E-08	2.8E-08	2.7E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08
1923	3.0E-08	3.1E-08	3.1E-08	2.8E-08	2.4E-08	2.1E-08	1.9E-08	1.8E-08	2.3E-08	2.8E-08	3.2E-08	3.4E-08	3.6E-08
1924	3.6E-08	3.7E-08	3.6E-08	3.3E-08	3.0E-08	2.8E-08	2.6E-08	2.5E-08	2.8E-08	3.2E-08	3.4E-08	3.6E-08	3.7E-08
1925	3.7E-08	3.8E-08	3.7E-08	3.5E-08	3.2E-08	3.0E-08	2.8E-08	2.7E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08
1926	3.2E-08	3.3E-08	3.2E-08	2.9E-08	2.5E-08	2.2E-08	2.0E-08	1.8E-08	2.4E-08	2.9E-08	3.3E-08	3.6E-08	3.7E-08
1927	3.6E-08	3.7E-08	3.7E-08	3.4E-08	3.1E-08	2.8E-08	2.6E-08	2.5E-08	2.9E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08
1928	3.7E-08	3.8E-08	3.7E-08	3.5E-08	3.2E-08	3.0E-08	2.8E-08	2.7E-08	3.0E-08	3.3E-08	3.6E-08	3.7E-08	3.8E-08
1929	3.1E-08	3.2E-08	3.1E-08	2.8E-08	2.5E-08	2.2E-08	2.0E-08	1.8E-08	2.4E-08	3.0E-08	3.4E-08	3.7E-08	3.9E-08
1930	3.6E-08	3.7E-08	3.6E-08	3.3E-08	3.0E-08	2.7E-08	2.6E-08	2.4E-08	2.9E-08	3.3E-08	3.6E-08	3.8E-08	3.9E-08
1931	3.6E-08	3.7E-08	3.7E-08	3.4E-08	3.1E-08	2.9E-08	2.8E-08	2.6E-08	3.0E-08	3.4E-08	3.7E-08	3.9E-08	3.9E-08
1932	3.1E-08	3.2E-08	3.1E-08	2.8E-08	2.4E-08	2.1E-08	1.9E-08	1.8E-08	2.5E-08	3.1E-08	3.5E-08	3.8E-08	4.0E-08
1933	3.6E-08	3.7E-08	3.6E-08	3.3E-08	3.0E-08	2.7E-08	2.6E-08	2.4E-08	2.9E-08	3.4E-08	3.7E-08	3.9E-08	4.0E-08
1934	3.7E-08	3.8E-08	3.7E-08	3.5E-08	3.2E-08	2.9E-08	2.8E-08	2.7E-08	3.1E-08	3.4E-08	3.7E-08	3.9E-08	4.0E-08
1935	3.3E-08	3.4E-08	3.3E-08	3.0E-08	2.7E-08	2.4E-08	2.3E-08	2.2E-08	2.8E-08	3.4E-08	3.8E-08	4.1E-08	4.3E-08
1936	3.4E-08	3.5E-08	3.5E-08	3.2E-08	2.9E-08	2.6E-08	2.5E-08	2.4E-08	3.0E-08	3.5E-08	3.8E-08	4.1E-08	4.2E-08
1937	3.7E-08	3.8E-08	3.7E-08	3.4E-08	3.0E-08	2.7E-08	2.6E-08	2.4E-08	2.9E-08	3.4E-08	3.7E-08	3.9E-08	4.1E-08
1938	3.8E-08	3.9E-08	3.8E-08	3.5E-08	3.2E-08	2.9E-08	2.8E-08	2.6E-08	3.1E-08	3.4E-08	3.7E-08	3.9E-08	4.0E-08
1939	3.9E-08	4.0E-08	3.9E-08	3.5E-08	3.1E-08	2.8E-08	2.6E-08	2.5E-08	2.9E-08	3.4E-08	3.7E-08	3.9E-08	4.0E-08
1940	3.8E-08	3.9E-08	3.8E-08	3.5E-08	3.2E-08	2.9E-08	2.7E-08	2.5E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.2E-08
1941	4.0E-08	4.1E-08	4.0E-08	3.7E-08	3.3E-08	3.0E-08	2.9E-08	2.7E-08	3.1E-08	3.4E-08	3.7E-08	3.8E-08	3.9E-08
1942	3.1E-08	3.2E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.8E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08
1943	3.4E-08	3.5E-08	3.2E-08	3.0E-08	2.9E-08	2.9E-08	2.9E-08	2.9E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08
1944	3.6E-08	3.7E-08	3.5E-08	3.1E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08
1945	3.8E-08	3.9E-08	3.6E-08	3.2E-08	3.1E-08	3.1E-08	3.1E-08	3.2E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	3.9E-08
1946	4.0E-08	4.1E-08	3.8E-08	3.4E-08	3.3E-08	3.3E-08	3.3E-08	3.3E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08	4.0E-08
1947	3.2E-08	3.3E-08	3.1E-08	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.1E-08	3.2E-08	3.4E-08	3.5E-08	3.5E-08
1948	3.5E-08	3.6E-08	3.4E-08	3.0E-08	3.0E-08	3.0E-08	3.0E-08	3.0E-08	3.3E-08	3.4E-08	3.6E-08	3.7E-08	3.7E-08
1949	3.8E-08	3.9E-08	3.6E-08	3.2E-08	3.1E-08	3.1E-08	3.1E-08	3.2E-08	3.5E-08	3.7E-08	3.9E-08	4.0E-08	4.1E-08
1950	4.0E-08	4.1E-08	3.8E-08	3.3E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.7E-08	3.9E-08	4.2E-08	4.3E-08	4.4E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1951	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	2.9E-08	3.1E-08	3.3E-08	3.4E-08	3.4E-08
1952	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
1953	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.7E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08
1954	4.0E-08	4.0E-08	4.0E-08	4.0E-08	4.1E-08	4.1E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.8E-08
1955	4.6E-08	4.6E-08	4.6E-08	4.6E-08	4.7E-08	4.8E-08	5.0E-08	5.2E-08	5.4E-08	5.6E-08	5.8E-08	5.9E-08	5.9E-08
1956	2.6E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.6E-08	2.9E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
1957	7.6E-09	6.6E-09	3.9E-09	2.0E-09	1.6E-09	1.0E-09	8.1E-10	8.5E-10	5.3E-09	9.0E-09	1.2E-08	1.4E-08	1.5E-08
1958	4.1E-08	4.1E-08	3.9E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.6E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08
1959	4.6E-08	4.6E-08	4.5E-08	4.4E-08	4.6E-08	4.7E-08	4.8E-08	5.0E-08	5.3E-08	5.6E-08	5.8E-08	5.9E-08	6.0E-08
1960	4.5E-08	4.5E-08	4.3E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.6E-08	4.7E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08
1961	5.0E-08	4.9E-08	4.6E-08	4.5E-08	4.6E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.2E-08	5.3E-08	5.3E-08	5.4E-08
1962	2.2E-07	2.2E-07	2.2E-07	2.1E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07
1963	2.2E-07	2.2E-07	2.2E-07	2.2E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
1964	1.6E-07	1.7E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1965	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1966	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1967	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
1968	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
1969	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
1970	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
1971	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.8E-08	9.6E-08	9.4E-08	9.5E-08	9.7E-08	9.9E-08	1.0E-07	1.0E-07
1972	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
1973	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
1974	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.7E-08	9.5E-08	9.3E-08	9.4E-08	9.7E-08	1.0E-07	1.0E-07	1.0E-07
1975	1.2E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	9.9E-08	9.4E-08	8.9E-08	9.5E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
1976	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
1977	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.7E-08	9.4E-08	9.2E-08	9.4E-08	9.6E-08	9.9E-08	1.0E-07	1.0E-07
1978	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	9.8E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
1979	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.6E-08	9.4E-08	9.2E-08	9.3E-08	9.6E-08	9.8E-08	1.0E-07	1.0E-07
1980	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1981	1.1E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	9.9E-08	9.6E-08	9.4E-08	9.8E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
1982	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.6E-08	9.5E-08	9.7E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07
1983	1.7E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
1984	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07
1985	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
1986	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07
1987	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07
1988	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
1989	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.8E-08	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
1990	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
1991	7.6E-08	7.8E-08	7.7E-08	7.1E-08	6.4E-08	6.1E-08	6.0E-08	5.9E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.7E-08
1992	6.6E-08	6.8E-08	6.7E-08	6.3E-08	5.8E-08	5.5E-08	5.4E-08	5.3E-08	5.5E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08
1993	8.6E-08	8.9E-08	8.7E-08	8.1E-08	7.4E-08	7.0E-08	6.9E-08	6.8E-08	7.0E-08	7.3E-08	7.5E-08	7.6E-08	7.7E-08
1994	7.1E-08	7.3E-08	7.2E-08	6.8E-08	6.3E-08	6.0E-08	5.8E-08	5.8E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.6E-08
1995	6.2E-08	6.4E-08	6.3E-08	6.0E-08	5.6E-08	5.3E-08	5.2E-08	5.1E-08	5.3E-08	5.6E-08	5.8E-08	5.9E-08	6.0E-08
1996	6.1E-08	6.3E-08	6.2E-08	5.9E-08	5.6E-08	5.4E-08	5.3E-08	5.2E-08	5.4E-08	5.6E-08	5.8E-08	5.9E-08	5.9E-08
1997	9.3E-08	9.5E-08	9.4E-08	8.8E-08	8.1E-08	7.7E-08	7.6E-08	7.4E-08	7.6E-08	7.9E-08	8.1E-08	8.2E-08	8.2E-08
1998	7.6E-08	7.8E-08	7.8E-08	7.3E-08	6.8E-08	6.4E-08	6.3E-08	6.2E-08	6.3E-08	6.6E-08	6.8E-08	6.9E-08	7.0E-08
1999	6.6E-08	6.7E-08	6.7E-08	6.3E-08	5.9E-08	5.5E-08	5.4E-08	5.3E-08	5.5E-08	5.8E-08	5.9E-08	6.1E-08	6.1E-08
2000	6.4E-08	6.6E-08	6.5E-08	6.2E-08	5.9E-08	5.6E-08	5.5E-08	5.4E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.0E-08
2001	5.8E-08	5.9E-08	5.9E-08	5.7E-08	5.3E-08	5.1E-08	5.0E-08	4.9E-08	5.1E-08	5.2E-08	5.4E-08	5.5E-08	5.5E-08
2002	5.2E-08	5.3E-08	5.3E-08	5.1E-08	4.8E-08	4.6E-08	4.5E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
2003	1.0E-07	1.1E-07	1.1E-07	1.0E-07	9.2E-08	8.8E-08	8.6E-08	8.4E-08	8.6E-08	8.8E-08	9.0E-08	9.1E-08	9.2E-08
2004	8.5E-08	8.7E-08	8.6E-08	8.1E-08	7.6E-08	7.2E-08	7.0E-08	6.8E-08	7.0E-08	7.2E-08	7.4E-08	7.5E-08	7.6E-08
2005	7.0E-08	7.1E-08	7.1E-08	6.7E-08	6.2E-08	5.9E-08	5.7E-08	5.6E-08	5.7E-08	6.0E-08	6.2E-08	6.3E-08	6.3E-08
2006	6.6E-08	6.8E-08	6.8E-08	6.5E-08	6.1E-08	5.8E-08	5.7E-08	5.5E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.1E-08
2007	5.9E-08	6.1E-08	6.1E-08	5.8E-08	5.5E-08	5.3E-08	5.1E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08
2008	5.4E-08	5.6E-08	5.5E-08	5.3E-08	5.1E-08	4.9E-08	4.8E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08
2009	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	9.8E-08	9.6E-08	9.4E-08	9.5E-08	9.7E-08	9.9E-08	1.0E-07	1.0E-07
2010	9.2E-08	9.5E-08	9.4E-08	8.9E-08	8.3E-08	7.9E-08	7.6E-08	7.4E-08	7.6E-08	7.8E-08	8.0E-08	8.1E-08	8.2E-08
2011	7.4E-08	7.6E-08	7.5E-08	7.1E-08	6.7E-08	6.3E-08	6.1E-08	5.9E-08	6.0E-08	6.3E-08	6.5E-08	6.6E-08	6.6E-08
2012	6.9E-08	7.1E-08	7.0E-08	6.7E-08	6.3E-08	6.0E-08	5.9E-08	5.7E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08
2013	6.1E-08	6.3E-08	6.3E-08	6.0E-08	5.7E-08	5.4E-08	5.3E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.6E-08
2014	5.5E-08	5.7E-08	5.6E-08	5.4E-08	5.2E-08	4.9E-08	4.8E-08	4.7E-08	4.8E-08	4.9E-08	5.1E-08	5.1E-08	5.2E-08
2015	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2016	9.9E-08	1.0E-07	1.0E-07	9.6E-08	8.9E-08	8.4E-08	8.1E-08	7.9E-08	8.0E-08	8.3E-08	8.4E-08	8.5E-08	8.6E-08
2017	7.8E-08	8.0E-08	7.9E-08	7.5E-08	7.0E-08	6.6E-08	6.3E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.8E-08	6.9E-08
2018	7.1E-08	7.3E-08	7.3E-08	6.9E-08	6.5E-08	6.2E-08	6.0E-08	5.9E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08	6.3E-08
2019	6.3E-08	6.4E-08	6.4E-08	6.1E-08	5.8E-08	5.5E-08	5.4E-08	5.2E-08	5.3E-08	5.4E-08	5.6E-08	5.6E-08	5.7E-08
2020	5.6E-08	5.8E-08	5.7E-08	5.5E-08	5.2E-08	5.0E-08	4.9E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
2021	1.3E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2022	1.0E-07	1.1E-07	1.0E-07	9.9E-08	9.2E-08	8.7E-08	8.4E-08	8.1E-08	8.2E-08	8.4E-08	8.6E-08	8.7E-08	8.8E-08
2023	8.1E-08	8.3E-08	8.2E-08	7.8E-08	7.2E-08	6.8E-08	6.5E-08	6.3E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.0E-08
2024	7.4E-08	7.5E-08	7.5E-08	7.1E-08	6.7E-08	6.4E-08	6.2E-08	6.0E-08	6.0E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08
2025	6.4E-08	6.5E-08	6.5E-08	6.2E-08	5.9E-08	5.6E-08	5.4E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08
2026	5.7E-08	5.9E-08	5.8E-08	5.6E-08	5.3E-08	5.1E-08	5.0E-08	4.9E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
2027	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07
2028	1.0E-07	1.1E-07	1.0E-07	9.8E-08	9.0E-08	8.5E-08	8.1E-08	7.8E-08	7.9E-08	8.2E-08	8.4E-08	8.6E-08	8.7E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2029	8.5E-08	8.7E-08	8.6E-08	8.2E-08	7.6E-08	7.1E-08	6.8E-08	6.6E-08	6.7E-08	6.9E-08	7.1E-08	7.3E-08	7.3E-08
2030	7.6E-08	7.7E-08	7.7E-08	7.3E-08	6.9E-08	6.5E-08	6.3E-08	6.1E-08	6.2E-08	6.3E-08	6.5E-08	6.6E-08	6.6E-08
2031	6.5E-08	6.6E-08	6.6E-08	6.3E-08	5.9E-08	5.6E-08	5.5E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08
2032	5.7E-08	5.8E-08	5.8E-08	5.6E-08	5.2E-08	5.0E-08	4.9E-08	4.8E-08	4.8E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08
2033	2.0E-07	2.1E-07	2.1E-07	2.0E-07	1.8E-07	1.7E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07
2034	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
2035	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.7E-08	9.1E-08	8.7E-08	8.4E-08	8.5E-08	8.7E-08	8.9E-08	9.1E-08	9.2E-08
2036	8.9E-08	9.1E-08	9.0E-08	8.6E-08	8.0E-08	7.5E-08	7.2E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.6E-08	7.7E-08
2037	7.7E-08	7.9E-08	7.9E-08	7.5E-08	7.0E-08	6.6E-08	6.4E-08	6.2E-08	6.3E-08	6.4E-08	6.6E-08	6.7E-08	6.7E-08
2038	6.5E-08	6.6E-08	6.6E-08	6.3E-08	5.9E-08	5.6E-08	5.4E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.6E-08
2039	5.8E-08	6.0E-08	6.0E-08	5.7E-08	5.4E-08	5.1E-08	5.0E-08	4.9E-08	4.9E-08	5.1E-08	5.2E-08	5.2E-08	5.2E-08
2040	2.1E-07	2.2E-07	2.2E-07	2.1E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
2041	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
2042	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	9.6E-08	9.2E-08	8.9E-08	8.9E-08	9.1E-08	9.3E-08	9.4E-08	9.5E-08
2043	9.3E-08	9.5E-08	9.4E-08	8.9E-08	8.3E-08	7.8E-08	7.5E-08	7.3E-08	7.3E-08	7.6E-08	7.8E-08	7.9E-08	7.9E-08
2044	7.7E-08	7.9E-08	7.8E-08	7.4E-08	6.9E-08	6.5E-08	6.3E-08	6.1E-08	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08
2045	6.5E-08	6.6E-08	6.6E-08	6.2E-08	5.8E-08	5.5E-08	5.3E-08	5.2E-08	5.2E-08	5.4E-08	5.5E-08	5.5E-08	5.6E-08
2046	5.7E-08	5.9E-08	5.8E-08	5.6E-08	5.2E-08	5.0E-08	4.8E-08	4.7E-08	4.7E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08
2047	2.1E-07	2.2E-07	2.2E-07	2.1E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
2048	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07
2049	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	9.9E-08	9.5E-08	9.2E-08	9.2E-08	9.4E-08	9.6E-08	9.7E-08	9.7E-08
2050	9.3E-08	9.5E-08	9.4E-08	9.0E-08	8.3E-08	7.8E-08	7.5E-08	7.3E-08	7.3E-08	7.6E-08	7.7E-08	7.8E-08	7.9E-08
2051	7.6E-08	7.8E-08	7.7E-08	7.4E-08	6.8E-08	6.5E-08	6.2E-08	6.0E-08	6.0E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08
2052	6.4E-08	6.5E-08	6.5E-08	6.2E-08	5.7E-08	5.4E-08	5.2E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08
2053	5.7E-08	5.8E-08	5.8E-08	5.5E-08	5.2E-08	4.9E-08	4.8E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
2054	5.3E-08	5.5E-08	5.4E-08	5.2E-08	4.9E-08	4.7E-08	4.6E-08	4.5E-08	4.5E-08	4.7E-08	4.8E-08	4.8E-08	4.9E-08
2055	2.1E-07	2.2E-07	2.1E-07	2.1E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07
2056	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
2057	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	9.7E-08	9.4E-08	9.4E-08	9.6E-08	9.8E-08	9.9E-08	9.9E-08
2058	9.4E-08	9.6E-08	9.6E-08	9.1E-08	8.5E-08	8.0E-08	7.7E-08	7.4E-08	7.4E-08	7.7E-08	7.8E-08	7.9E-08	8.0E-08
2059	7.6E-08	7.7E-08	7.7E-08	7.3E-08	6.8E-08	6.4E-08	6.1E-08	5.9E-08	6.0E-08	6.1E-08	6.3E-08	6.3E-08	6.4E-08
2060	6.4E-08	6.6E-08	6.5E-08	6.2E-08	5.8E-08	5.5E-08	5.3E-08	5.1E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08
2061	5.7E-08	5.9E-08	5.8E-08	5.6E-08	5.2E-08	4.9E-08	4.8E-08	4.7E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
2062	5.2E-08	5.4E-08	5.3E-08	5.1E-08	4.8E-08	4.6E-08	4.5E-08	4.4E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2063	4.9E-08	5.1E-08	5.1E-08	4.9E-08	4.6E-08	4.4E-08	4.3E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2064	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
2065	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	9.9E-08	9.6E-08	9.6E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07
2066	9.7E-08	9.9E-08	9.8E-08	9.3E-08	8.7E-08	8.2E-08	7.9E-08	7.6E-08	7.7E-08	7.9E-08	8.0E-08	8.1E-08	8.2E-08
2067	7.8E-08	7.9E-08	7.9E-08	7.5E-08	7.0E-08	6.6E-08	6.3E-08	6.1E-08	6.2E-08	6.3E-08	6.5E-08	6.5E-08	6.6E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2068	6.6E-08	6.8E-08	6.7E-08	6.4E-08	6.0E-08	5.7E-08	5.5E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08
2069	5.8E-08	6.0E-08	5.9E-08	5.7E-08	5.3E-08	5.0E-08	4.9E-08	4.8E-08	4.8E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08
2070	5.2E-08	5.4E-08	5.3E-08	5.1E-08	4.8E-08	4.6E-08	4.4E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2071	5.1E-08	5.2E-08	5.2E-08	5.1E-08	4.8E-08	4.6E-08	4.6E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08
2072	5.0E-08	5.1E-08	5.1E-08	5.1E-08	5.2E-08	5.4E-08	5.5E-08	5.7E-08	5.9E-08	6.1E-08	6.3E-08	6.3E-08	6.4E-08
2073	4.9E-08	4.9E-08	4.8E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.6E-08
2074	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07
2075	1.0E-07	1.0E-07	1.0E-07	9.7E-08	9.1E-08	8.6E-08	8.3E-08	8.1E-08	8.1E-08	8.3E-08	8.5E-08	8.6E-08	8.7E-08
2076	8.2E-08	8.4E-08	8.3E-08	8.0E-08	7.5E-08	7.1E-08	6.8E-08	6.7E-08	6.7E-08	6.9E-08	7.0E-08	7.1E-08	7.1E-08
2077	7.0E-08	7.2E-08	7.1E-08	6.8E-08	6.4E-08	6.1E-08	5.9E-08	5.8E-08	5.8E-08	6.0E-08	6.1E-08	6.1E-08	6.2E-08
2078	6.2E-08	6.3E-08	6.3E-08	6.0E-08	5.7E-08	5.4E-08	5.3E-08	5.2E-08	5.2E-08	5.4E-08	5.5E-08	5.5E-08	5.6E-08
2079	5.4E-08	5.5E-08	5.5E-08	5.3E-08	5.0E-08	4.7E-08	4.6E-08	4.6E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
2080	5.3E-08	5.5E-08	5.5E-08	5.4E-08	5.1E-08	5.0E-08	4.9E-08	4.9E-08	5.1E-08	5.3E-08	5.5E-08	5.6E-08	5.6E-08
2081	4.7E-08	4.8E-08	4.8E-08	4.7E-08	4.5E-08	4.3E-08	4.3E-08	4.2E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	4.8E-08
2082	5.2E-08	5.3E-08	5.3E-08	5.3E-08	5.5E-08	5.6E-08	5.8E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.7E-08	6.7E-08
2083	5.1E-08	5.1E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08	6.0E-08
2084	1.0E-07	1.1E-07	1.1E-07	1.0E-07	9.5E-08	9.0E-08	8.7E-08	8.5E-08	8.5E-08	8.8E-08	8.9E-08	9.0E-08	9.1E-08
2085	8.7E-08	8.9E-08	8.9E-08	8.5E-08	8.0E-08	7.6E-08	7.4E-08	7.2E-08	7.3E-08	7.5E-08	7.6E-08	7.7E-08	7.7E-08
2086	7.5E-08	7.6E-08	7.6E-08	7.3E-08	6.9E-08	6.6E-08	6.4E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08	6.7E-08	6.8E-08
2087	6.5E-08	6.7E-08	6.7E-08	6.4E-08	6.1E-08	5.8E-08	5.7E-08	5.6E-08	5.7E-08	5.8E-08	6.0E-08	6.0E-08	6.1E-08
2088	5.8E-08	6.0E-08	6.0E-08	5.8E-08	5.5E-08	5.4E-08	5.3E-08	5.2E-08	5.4E-08	5.6E-08	5.7E-08	5.8E-08	5.9E-08
2089	5.4E-08	5.6E-08	5.6E-08	5.5E-08	5.2E-08	5.1E-08	5.0E-08	5.0E-08	5.2E-08	5.4E-08	5.6E-08	5.7E-08	5.7E-08
2090	4.7E-08	4.8E-08	4.8E-08	4.7E-08	4.5E-08	4.3E-08	4.2E-08	4.2E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2091	4.7E-08	4.8E-08	4.8E-08	4.8E-08	4.9E-08	5.0E-08	5.2E-08	5.3E-08	5.5E-08	5.7E-08	5.8E-08	5.8E-08	5.9E-08
2092	5.5E-08	5.6E-08	5.6E-08	5.6E-08	5.8E-08	5.9E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.7E-08	6.8E-08	6.9E-08
2093	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.5E-08	9.3E-08	9.0E-08	9.1E-08	9.4E-08	9.5E-08	9.6E-08	9.7E-08
2094	9.2E-08	9.4E-08	9.4E-08	9.0E-08	8.5E-08	8.1E-08	7.9E-08	7.7E-08	7.8E-08	8.0E-08	8.1E-08	8.2E-08	8.3E-08
2095	7.9E-08	8.1E-08	8.1E-08	7.8E-08	7.3E-08	7.0E-08	6.9E-08	6.8E-08	6.9E-08	7.0E-08	7.2E-08	7.3E-08	7.3E-08
2096	7.1E-08	7.4E-08	7.4E-08	7.1E-08	6.8E-08	6.6E-08	6.5E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.1E-08	7.1E-08
2097	6.3E-08	6.5E-08	6.5E-08	6.3E-08	6.0E-08	5.8E-08	5.8E-08	5.7E-08	5.9E-08	6.1E-08	6.3E-08	6.4E-08	6.4E-08
2098	5.4E-08	5.6E-08	5.6E-08	5.4E-08	5.1E-08	5.0E-08	4.9E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08
2099	4.8E-08	5.0E-08	5.0E-08	4.8E-08	4.6E-08	4.4E-08	4.4E-08	4.3E-08	4.4E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08
2100	4.3E-08	4.4E-08	4.4E-08	4.3E-08	4.1E-08	3.9E-08	3.9E-08	3.9E-08	3.9E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08
2101	5.2E-08	5.3E-08	5.3E-08	5.4E-08	5.5E-08	5.7E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08	6.5E-08
2102	9.6E-08	9.8E-08	9.8E-08	9.5E-08	8.9E-08	8.5E-08	8.3E-08	8.2E-08	8.3E-08	8.5E-08	8.7E-08	8.8E-08	8.9E-08
2103	8.5E-08	8.7E-08	8.8E-08	8.5E-08	8.0E-08	7.7E-08	7.6E-08	7.5E-08	7.7E-08	7.9E-08	8.1E-08	8.2E-08	8.3E-08
2104	7.5E-08	7.7E-08	7.8E-08	7.5E-08	7.2E-08	6.9E-08	6.8E-08	6.8E-08	7.0E-08	7.2E-08	7.4E-08	7.5E-08	7.6E-08
2105	6.4E-08	6.6E-08	6.6E-08	6.4E-08	6.1E-08	5.9E-08	5.8E-08	5.7E-08	5.9E-08	6.0E-08	6.2E-08	6.2E-08	6.3E-08
2106	5.6E-08	5.8E-08	5.8E-08	5.6E-08	5.3E-08	5.1E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2107	5.0E-08	5.2E-08	5.2E-08	5.0E-08	4.8E-08	4.6E-08	4.6E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	4.9E-08	5.0E-08
2108	4.5E-08	4.6E-08	4.6E-08	4.5E-08	4.3E-08	4.1E-08	4.1E-08	4.0E-08	4.1E-08	4.3E-08	4.4E-08	4.4E-08	4.4E-08
2109	6.7E-08	6.9E-08	7.0E-08	7.2E-08	7.4E-08	7.6E-08	7.9E-08	8.1E-08	8.3E-08	8.5E-08	8.6E-08	8.7E-08	8.7E-08
2110	8.2E-08	8.5E-08	8.7E-08	8.9E-08	9.2E-08	9.5E-08	9.8E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2111	9.7E-08	9.9E-08	9.9E-08	9.6E-08	9.1E-08	8.7E-08	8.5E-08	8.3E-08	8.5E-08	8.7E-08	8.9E-08	9.1E-08	9.1E-08
2112	8.6E-08	8.8E-08	8.9E-08	8.6E-08	8.2E-08	7.9E-08	7.7E-08	7.6E-08	7.8E-08	8.1E-08	8.3E-08	8.4E-08	8.5E-08
2113	7.4E-08	7.6E-08	7.6E-08	7.4E-08	7.0E-08	6.7E-08	6.6E-08	6.5E-08	6.7E-08	6.8E-08	7.0E-08	7.1E-08	7.1E-08
2114	6.5E-08	6.7E-08	6.7E-08	6.5E-08	6.2E-08	5.9E-08	5.8E-08	5.8E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08	6.3E-08
2115	5.8E-08	5.9E-08	6.0E-08	5.8E-08	5.5E-08	5.3E-08	5.2E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.6E-08
2116	5.2E-08	5.4E-08	5.4E-08	5.2E-08	5.0E-08	4.8E-08	4.7E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08
2117	4.7E-08	4.8E-08	4.8E-08	4.7E-08	4.5E-08	4.3E-08	4.3E-08	4.3E-08	4.3E-08	4.5E-08	4.6E-08	4.6E-08	4.7E-08
2118	4.4E-08	4.5E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.3E-08	5.3E-08	5.4E-08	5.4E-08
2119	5.5E-08	5.7E-08	5.7E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.8E-08	6.8E-08	6.9E-08
2120	9.4E-08	9.7E-08	9.7E-08	9.4E-08	8.9E-08	8.4E-08	8.2E-08	8.1E-08	8.2E-08	8.5E-08	8.6E-08	8.8E-08	8.8E-08
2121	8.2E-08	8.5E-08	8.5E-08	8.2E-08	7.8E-08	7.4E-08	7.3E-08	7.2E-08	7.3E-08	7.5E-08	7.7E-08	7.8E-08	7.8E-08
2122	7.3E-08	7.5E-08	7.6E-08	7.3E-08	6.9E-08	6.6E-08	6.5E-08	6.4E-08	6.5E-08	6.7E-08	6.9E-08	7.0E-08	7.0E-08
2123	6.5E-08	6.7E-08	6.7E-08	6.5E-08	6.2E-08	5.9E-08	5.8E-08	5.8E-08	5.9E-08	6.0E-08	6.2E-08	6.3E-08	6.3E-08
2124	5.8E-08	6.0E-08	6.0E-08	5.8E-08	5.6E-08	5.4E-08	5.3E-08	5.2E-08	5.3E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08
2125	5.3E-08	5.4E-08	5.5E-08	5.3E-08	5.1E-08	4.9E-08	4.8E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
2126	4.8E-08	5.0E-08	5.0E-08	4.8E-08	4.6E-08	4.5E-08	4.4E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.8E-08
2127	4.4E-08	4.6E-08	4.6E-08	4.4E-08	4.3E-08	4.1E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.5E-08
2128	4.0E-08	4.1E-08	4.1E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08	4.4E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08
2129	5.1E-08	5.3E-08	5.3E-08	5.3E-08	5.4E-08	5.5E-08	5.7E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.3E-08	6.4E-08
2130	9.4E-08	9.7E-08	9.7E-08	9.4E-08	8.9E-08	8.5E-08	8.3E-08	8.1E-08	8.3E-08	8.5E-08	8.7E-08	8.8E-08	8.9E-08
2131	8.3E-08	8.6E-08	8.6E-08	8.3E-08	7.9E-08	7.6E-08	7.4E-08	7.3E-08	7.5E-08	7.7E-08	7.9E-08	8.0E-08	8.0E-08
2132	7.4E-08	7.6E-08	7.6E-08	7.4E-08	7.1E-08	6.8E-08	6.6E-08	6.6E-08	6.7E-08	6.9E-08	7.1E-08	7.2E-08	7.2E-08
2133	6.6E-08	6.8E-08	6.8E-08	6.6E-08	6.3E-08	6.0E-08	5.9E-08	5.9E-08	6.0E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08
2134	5.9E-08	6.0E-08	6.1E-08	5.9E-08	5.6E-08	5.4E-08	5.3E-08	5.3E-08	5.4E-08	5.6E-08	5.7E-08	5.8E-08	5.8E-08
2135	5.3E-08	5.4E-08	5.5E-08	5.3E-08	5.1E-08	4.9E-08	4.8E-08	4.8E-08	4.9E-08	5.1E-08	5.2E-08	5.3E-08	5.3E-08
2136	4.8E-08	5.0E-08	5.0E-08	4.8E-08	4.7E-08	4.5E-08	4.5E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08
2137	4.4E-08	4.6E-08	4.6E-08	4.5E-08	4.3E-08	4.2E-08	4.2E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.6E-08
2138	3.9E-08	4.0E-08	3.9E-08	4.0E-08	4.0E-08	4.1E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.6E-08	4.6E-08	4.7E-08
2139	4.9E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.2E-08
2140	9.7E-08	1.0E-07	1.0E-07	9.8E-08	9.3E-08	9.0E-08	8.8E-08	8.7E-08	8.9E-08	9.2E-08	9.4E-08	9.6E-08	9.6E-08
2141	9.0E-08	9.3E-08	9.4E-08	9.1E-08	8.8E-08	8.5E-08	8.4E-08	8.4E-08	8.6E-08	8.9E-08	9.1E-08	9.3E-08	9.3E-08
2142	8.1E-08	8.4E-08	8.5E-08	8.3E-08	8.1E-08	7.9E-08	7.8E-08	7.8E-08	8.0E-08	8.3E-08	8.5E-08	8.7E-08	8.7E-08
2143	7.0E-08	7.2E-08	7.3E-08	7.1E-08	6.9E-08	6.7E-08	6.6E-08	6.6E-08	6.8E-08	7.0E-08	7.2E-08	7.3E-08	7.3E-08
2144	6.1E-08	6.3E-08	6.3E-08	6.1E-08	5.9E-08	5.7E-08	5.7E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08
2145	5.4E-08	5.6E-08	5.6E-08	5.5E-08	5.2E-08	5.1E-08	5.0E-08	5.0E-08	5.2E-08	5.3E-08	5.5E-08	5.5E-08	5.6E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2146	4.9E-08	5.0E-08	5.1E-08	4.9E-08	4.8E-08	4.6E-08	4.6E-08	4.6E-08	4.7E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08
2147	4.5E-08	4.7E-08	4.7E-08	4.6E-08	4.4E-08	4.3E-08	4.3E-08	4.3E-08	4.4E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08
2148	3.8E-08	3.9E-08	3.9E-08	3.9E-08	3.9E-08	4.0E-08	4.0E-08	4.1E-08	4.3E-08	4.4E-08	4.5E-08	4.5E-08	4.6E-08
2149	4.9E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.6E-08	5.8E-08	5.9E-08	6.1E-08	6.2E-08	6.2E-08
2150	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
2151	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
2152	9.3E-08	9.7E-08	9.9E-08	9.8E-08	9.7E-08	9.5E-08	9.6E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2153	7.6E-08	7.9E-08	8.1E-08	8.0E-08	7.8E-08	7.6E-08	7.6E-08	7.7E-08	8.0E-08	8.2E-08	8.5E-08	8.6E-08	8.7E-08
2154	7.0E-08	7.3E-08	7.4E-08	7.3E-08	7.2E-08	7.1E-08	7.1E-08	7.2E-08	7.5E-08	7.8E-08	8.0E-08	8.1E-08	8.2E-08
2155	5.7E-08	5.9E-08	6.0E-08	5.9E-08	5.7E-08	5.6E-08	5.6E-08	5.6E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.3E-08
2156	5.0E-08	5.2E-08	5.3E-08	5.1E-08	5.0E-08	4.8E-08	4.8E-08	4.8E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.4E-08
2157	4.6E-08	4.8E-08	4.8E-08	4.7E-08	4.6E-08	4.5E-08	4.5E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
2158	3.7E-08	3.8E-08	3.8E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.5E-08
2159	4.8E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08	6.1E-08
2160	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	9.9E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07
2161	9.6E-08	9.9E-08	1.0E-07	9.7E-08	9.3E-08	9.0E-08	8.8E-08	8.8E-08	9.0E-08	9.4E-08	9.7E-08	9.8E-08	9.9E-08
2162	8.4E-08	8.7E-08	8.8E-08	8.6E-08	8.2E-08	7.9E-08	7.8E-08	7.8E-08	8.0E-08	8.3E-08	8.5E-08	8.7E-08	8.7E-08
2163	7.6E-08	7.8E-08	7.9E-08	7.7E-08	7.5E-08	7.2E-08	7.1E-08	7.1E-08	7.3E-08	7.6E-08	7.8E-08	7.9E-08	8.0E-08
2164	7.1E-08	7.4E-08	7.5E-08	7.4E-08	7.2E-08	7.0E-08	7.0E-08	7.0E-08	7.2E-08	7.5E-08	7.7E-08	7.9E-08	7.9E-08
2165	7.8E-08	8.2E-08	8.4E-08	8.4E-08	8.3E-08	8.3E-08	8.3E-08	8.5E-08	8.9E-08	9.2E-08	9.5E-08	9.7E-08	9.8E-08
2166	7.3E-08	7.6E-08	7.8E-08	7.8E-08	7.8E-08	7.8E-08	7.9E-08	8.0E-08	8.4E-08	8.8E-08	9.0E-08	9.2E-08	9.3E-08
2167	5.5E-08	5.7E-08	5.8E-08	5.7E-08	5.6E-08	5.5E-08	5.5E-08	5.6E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.3E-08
2168	3.7E-08	3.8E-08	3.8E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.5E-08
2169	4.7E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.6E-08	5.8E-08	5.9E-08	6.0E-08	6.0E-08
2170	9.7E-08	1.0E-07	1.0E-07	9.9E-08	9.5E-08	9.1E-08	9.0E-08	9.0E-08	9.7E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2171	8.9E-08	9.2E-08	9.2E-08	9.0E-08	8.6E-08	8.2E-08	8.1E-08	8.0E-08	8.3E-08	8.7E-08	8.9E-08	9.1E-08	9.2E-08
2172	7.9E-08	8.2E-08	8.3E-08	8.0E-08	7.7E-08	7.4E-08	7.3E-08	7.2E-08	7.5E-08	7.7E-08	8.0E-08	8.1E-08	8.2E-08
2173	7.2E-08	7.4E-08	7.5E-08	7.3E-08	7.0E-08	6.7E-08	6.6E-08	6.6E-08	6.8E-08	7.1E-08	7.3E-08	7.4E-08	7.5E-08
2174	6.7E-08	6.9E-08	7.0E-08	6.8E-08	6.6E-08	6.4E-08	6.4E-08	6.4E-08	6.7E-08	6.9E-08	7.2E-08	7.3E-08	7.4E-08
2175	6.8E-08	7.1E-08	7.3E-08	7.2E-08	7.1E-08	7.0E-08	7.0E-08	7.1E-08	7.4E-08	7.7E-08	8.0E-08	8.1E-08	8.2E-08
2176	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07
2177	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
2178	3.7E-08	3.9E-08	3.9E-08	3.9E-08	3.9E-08	4.0E-08	4.0E-08	4.1E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.6E-08
2179	4.5E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08
2180	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.8E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2181	9.6E-08	1.0E-07	1.0E-07	9.9E-08	9.5E-08	9.2E-08	9.2E-08	9.2E-08	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
2182	8.6E-08	8.9E-08	9.0E-08	8.7E-08	8.3E-08	8.0E-08	7.8E-08	7.8E-08	8.1E-08	8.4E-08	8.7E-08	8.9E-08	9.0E-08
2183	7.8E-08	8.0E-08	8.1E-08	7.8E-08	7.5E-08	7.2E-08	7.1E-08	7.0E-08	7.2E-08	7.5E-08	7.7E-08	7.8E-08	7.9E-08
2184	7.0E-08	7.2E-08	7.3E-08	7.1E-08	6.8E-08	6.5E-08	6.4E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.1E-08	7.2E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2185	6.4E-08	6.6E-08	6.7E-08	6.5E-08	6.3E-08	6.1E-08	6.0E-08	6.0E-08	6.2E-08	6.5E-08	6.7E-08	6.8E-08	6.9E-08
2186	6.1E-08	6.4E-08	6.5E-08	6.4E-08	6.2E-08	6.1E-08	6.1E-08	6.1E-08	6.5E-08	6.8E-08	7.1E-08	7.3E-08	7.3E-08
2187	6.4E-08	6.6E-08	6.8E-08	6.8E-08	6.7E-08	6.6E-08	6.7E-08	6.8E-08	7.2E-08	7.5E-08	7.8E-08	8.0E-08	8.1E-08
2188	7.3E-08	7.7E-08	8.0E-08	8.0E-08	8.1E-08	8.2E-08	8.4E-08	8.6E-08	9.1E-08	9.6E-08	9.9E-08	1.0E-07	1.0E-07
2189	4.3E-08	4.4E-08	4.5E-08	4.5E-08	4.6E-08	4.6E-08	4.7E-08	4.8E-08	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.4E-08
2190	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
2191	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2192	9.4E-08	9.8E-08	9.9E-08	9.6E-08	9.3E-08	8.9E-08	8.9E-08	8.9E-08	9.6E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2193	8.4E-08	8.6E-08	8.7E-08	8.4E-08	8.1E-08	7.7E-08	7.6E-08	7.6E-08	7.9E-08	8.3E-08	8.5E-08	8.7E-08	8.8E-08
2194	7.6E-08	7.8E-08	7.9E-08	7.6E-08	7.3E-08	7.0E-08	6.9E-08	6.8E-08	7.0E-08	7.3E-08	7.5E-08	7.6E-08	7.6E-08
2195	6.9E-08	7.1E-08	7.1E-08	6.9E-08	6.6E-08	6.4E-08	6.3E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	6.9E-08	6.9E-08
2196	6.3E-08	6.5E-08	6.5E-08	6.4E-08	6.1E-08	5.9E-08	5.8E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.5E-08	6.5E-08
2197	5.9E-08	6.1E-08	6.2E-08	6.0E-08	5.9E-08	5.7E-08	5.7E-08	5.7E-08	5.9E-08	6.1E-08	6.3E-08	6.4E-08	6.4E-08
2198	5.7E-08	5.9E-08	6.0E-08	6.0E-08	5.8E-08	5.7E-08	5.7E-08	5.8E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.7E-08
2199	4.4E-08	4.6E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.2E-08	5.4E-08	5.5E-08	5.6E-08	5.6E-08
2200	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08	5.7E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08
2201	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2202	1.0E-07	1.0E-07	1.1E-07	1.0E-07	9.6E-08	9.2E-08	9.0E-08	9.0E-08	9.2E-08	9.5E-08	9.8E-08	9.9E-08	1.0E-07
2203	8.9E-08	9.2E-08	9.2E-08	8.9E-08	8.5E-08	8.2E-08	8.1E-08	8.0E-08	8.4E-08	8.8E-08	9.1E-08	9.3E-08	9.4E-08
2204	7.9E-08	8.2E-08	8.3E-08	8.0E-08	7.7E-08	7.3E-08	7.2E-08	7.2E-08	7.6E-08	8.0E-08	8.3E-08	8.5E-08	8.6E-08
2205	7.3E-08	7.6E-08	7.6E-08	7.4E-08	7.0E-08	6.7E-08	6.6E-08	6.6E-08	6.8E-08	7.0E-08	7.2E-08	7.3E-08	7.4E-08
2206	6.7E-08	6.9E-08	6.9E-08	6.7E-08	6.4E-08	6.2E-08	6.1E-08	6.1E-08	6.2E-08	6.4E-08	6.6E-08	6.7E-08	6.7E-08
2207	6.1E-08	6.3E-08	6.4E-08	6.2E-08	5.9E-08	5.7E-08	5.7E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08
2208	5.7E-08	5.9E-08	5.9E-08	5.8E-08	5.6E-08	5.4E-08	5.4E-08	5.4E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.0E-08
2209	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.8E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.7E-08	6.8E-08
2210	5.5E-08	5.7E-08	5.8E-08	5.9E-08	6.1E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	7.0E-08	7.1E-08	7.2E-08	7.3E-08
2211	6.3E-08	6.6E-08	6.7E-08	6.8E-08	7.0E-08	7.1E-08	7.3E-08	7.5E-08	7.8E-08	8.0E-08	8.2E-08	8.3E-08	8.4E-08
2212	7.7E-08	8.1E-08	8.3E-08	8.5E-08	8.7E-08	8.8E-08	9.0E-08	9.3E-08	9.6E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07
2213	7.5E-08	7.8E-08	8.0E-08	8.1E-08	8.3E-08	8.3E-08	8.4E-08	8.7E-08	8.9E-08	9.2E-08	9.3E-08	9.4E-08	9.5E-08
2214	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.8E-08	9.7E-08	9.7E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07
2215	9.4E-08	9.7E-08	9.7E-08	9.4E-08	8.9E-08	8.4E-08	8.3E-08	8.3E-08	8.5E-08	8.8E-08	9.0E-08	9.2E-08	9.2E-08
2216	8.5E-08	8.8E-08	8.8E-08	8.5E-08	8.1E-08	7.7E-08	7.6E-08	7.6E-08	7.8E-08	8.1E-08	8.4E-08	8.5E-08	8.6E-08
2217	7.4E-08	7.7E-08	7.8E-08	7.5E-08	7.2E-08	6.9E-08	6.8E-08	6.8E-08	7.4E-08	7.9E-08	8.3E-08	8.6E-08	8.7E-08
2218	7.0E-08	7.3E-08	7.3E-08	7.1E-08	6.8E-08	6.5E-08	6.4E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.1E-08	7.2E-08
2219	6.5E-08	6.7E-08	6.7E-08	6.5E-08	6.2E-08	6.0E-08	5.9E-08	5.9E-08	6.0E-08	6.2E-08	6.4E-08	6.5E-08	6.5E-08
2220	6.0E-08	6.2E-08	6.2E-08	6.0E-08	5.8E-08	5.6E-08	5.5E-08	5.5E-08	5.6E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08
2221	7.1E-08	7.4E-08	7.7E-08	7.9E-08	8.2E-08	8.4E-08	8.6E-08	9.0E-08	9.4E-08	9.7E-08	1.0E-07	1.0E-07	1.0E-07
2222	7.6E-08	8.0E-08	8.3E-08	8.5E-08	8.8E-08	9.0E-08	9.3E-08	9.6E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2223	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2224	1.5E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07
2225	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07
2226	1.0E-07	1.1E-07	1.1E-07	1.0E-07	9.8E-08	9.2E-08	9.1E-08	9.1E-08	9.2E-08	9.4E-08	9.5E-08	9.6E-08	9.7E-08
2227	9.0E-08	9.2E-08	9.3E-08	8.9E-08	8.4E-08	8.0E-08	7.9E-08	7.9E-08	8.0E-08	8.3E-08	8.5E-08	8.6E-08	8.7E-08
2228	8.2E-08	8.4E-08	8.5E-08	8.1E-08	7.7E-08	7.4E-08	7.3E-08	7.3E-08	7.5E-08	7.7E-08	7.9E-08	8.0E-08	8.1E-08
2229	7.3E-08	7.6E-08	7.6E-08	7.4E-08	7.0E-08	6.7E-08	6.7E-08	6.7E-08	7.0E-08	7.3E-08	7.6E-08	7.8E-08	7.9E-08
2230	6.8E-08	7.0E-08	7.0E-08	6.8E-08	6.5E-08	6.2E-08	6.2E-08	6.1E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.0E-08
2231	6.3E-08	6.5E-08	6.5E-08	6.3E-08	6.0E-08	5.8E-08	5.7E-08	5.7E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.3E-08
2232	6.8E-08	7.1E-08	7.3E-08	7.5E-08	7.7E-08	7.8E-08	8.0E-08	8.3E-08	8.7E-08	9.0E-08	9.2E-08	9.3E-08	9.4E-08
2233	8.1E-08	8.5E-08	8.8E-08	9.0E-08	9.3E-08	9.5E-08	9.7E-08	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2234	1.3E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07
2235	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2236	1.1E-07	1.1E-07	1.2E-07	1.1E-07	1.0E-07	9.7E-08	9.6E-08	9.6E-08	9.7E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07
2237	9.8E-08	1.0E-07	1.0E-07	9.7E-08	9.2E-08	8.7E-08	8.6E-08	8.6E-08	8.7E-08	8.8E-08	9.0E-08	9.1E-08	9.1E-08
2238	8.6E-08	8.9E-08	8.9E-08	8.5E-08	8.1E-08	7.6E-08	7.5E-08	7.5E-08	7.7E-08	7.9E-08	8.1E-08	8.3E-08	8.3E-08
2239	7.9E-08	8.1E-08	8.1E-08	7.8E-08	7.4E-08	7.1E-08	7.0E-08	7.0E-08	7.1E-08	7.4E-08	7.5E-08	7.6E-08	7.7E-08
2240	7.1E-08	7.4E-08	7.4E-08	7.1E-08	6.8E-08	6.5E-08	6.4E-08	6.4E-08	6.7E-08	7.0E-08	7.2E-08	7.3E-08	7.4E-08
2241	6.4E-08	6.6E-08	6.7E-08	6.5E-08	6.2E-08	5.9E-08	5.9E-08	5.9E-08	6.2E-08	6.5E-08	6.8E-08	6.9E-08	7.0E-08
2242	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08	6.8E-08	7.0E-08	7.2E-08	7.3E-08	7.4E-08	7.5E-08
2243	6.6E-08	6.9E-08	7.0E-08	7.1E-08	7.3E-08	7.4E-08	7.5E-08	7.7E-08	7.9E-08	8.1E-08	8.3E-08	8.4E-08	8.4E-08
2244	8.0E-08	8.4E-08	8.6E-08	8.8E-08	9.0E-08	9.0E-08	9.2E-08	9.5E-08	9.7E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07
2245	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07
2246	1.0E-07	1.1E-07	1.1E-07	1.0E-07	9.8E-08	9.1E-08	9.1E-08	9.1E-08	9.2E-08	9.3E-08	9.4E-08	9.5E-08	9.5E-08
2247	9.3E-08	9.5E-08	9.5E-08	9.1E-08	8.7E-08	8.1E-08	8.1E-08	8.0E-08	8.2E-08	8.3E-08	8.5E-08	8.6E-08	8.6E-08
2248	7.9E-08	8.1E-08	8.2E-08	7.8E-08	7.4E-08	7.0E-08	6.9E-08	6.9E-08	7.1E-08	7.4E-08	7.6E-08	7.8E-08	7.9E-08
2249	7.6E-08	7.8E-08	7.8E-08	7.5E-08	7.2E-08	6.8E-08	6.7E-08	6.7E-08	6.8E-08	7.0E-08	7.2E-08	7.3E-08	7.3E-08
2250	6.9E-08	7.2E-08	7.2E-08	6.9E-08	6.6E-08	6.3E-08	6.2E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	6.9E-08	7.0E-08
2251	7.0E-08	7.4E-08	7.5E-08	7.7E-08	7.9E-08	7.9E-08	8.1E-08	8.3E-08	8.5E-08	8.7E-08	8.8E-08	8.9E-08	8.9E-08
2252	8.6E-08	9.0E-08	9.3E-08	9.5E-08	9.7E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2253	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2254	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.5E-08	9.4E-08	9.5E-08	9.5E-08	9.7E-08	9.8E-08	9.9E-08	9.9E-08
2255	9.8E-08	1.0E-07	1.0E-07	9.6E-08	9.1E-08	8.5E-08	8.5E-08	8.5E-08	8.6E-08	8.7E-08	8.8E-08	8.9E-08	8.9E-08
2256	8.7E-08	8.9E-08	8.9E-08	8.6E-08	8.1E-08	7.6E-08	7.5E-08	7.5E-08	7.7E-08	7.8E-08	8.0E-08	8.1E-08	8.1E-08
2257	7.6E-08	7.9E-08	7.9E-08	7.6E-08	7.2E-08	6.8E-08	6.7E-08	6.7E-08	6.9E-08	7.2E-08	7.4E-08	7.5E-08	7.6E-08
2258	7.3E-08	7.5E-08	7.5E-08	7.2E-08	6.9E-08	6.5E-08	6.4E-08	6.4E-08	6.6E-08	6.7E-08	6.9E-08	7.0E-08	7.0E-08
2259	6.7E-08	6.9E-08	6.9E-08	6.7E-08	6.4E-08	6.1E-08	6.0E-08	6.0E-08	6.1E-08	6.3E-08	6.5E-08	6.6E-08	6.6E-08
2260	6.9E-08	7.2E-08	7.3E-08	7.4E-08	7.5E-08	7.5E-08	7.5E-08	7.7E-08	7.8E-08	8.0E-08	8.1E-08	8.1E-08	8.2E-08
2261	1.1E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	9.7E-08	9.6E-08	9.7E-08	9.8E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07
2262	1.0E-07	1.0E-07	1.0E-07	9.8E-08	9.3E-08	8.8E-08	8.7E-08	8.8E-08	8.8E-08	9.0E-08	9.1E-08	9.1E-08	9.2E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2263	9.1E-08	9.4E-08	9.4E-08	8.9E-08	8.5E-08	8.0E-08	7.9E-08	7.9E-08	8.0E-08	8.1E-08	8.3E-08	8.3E-08	8.4E-08
2264	8.1E-08	8.3E-08	8.3E-08	7.9E-08	7.5E-08	7.1E-08	7.0E-08	7.0E-08	7.2E-08	7.4E-08	7.6E-08	7.7E-08	7.7E-08
2265	7.4E-08	7.6E-08	7.6E-08	7.3E-08	7.0E-08	6.6E-08	6.5E-08	6.5E-08	6.7E-08	6.9E-08	7.1E-08	7.2E-08	7.2E-08
2266	6.9E-08	7.2E-08	7.2E-08	6.9E-08	6.6E-08	6.2E-08	6.2E-08	6.1E-08	6.3E-08	6.5E-08	6.6E-08	6.7E-08	6.8E-08
2267	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.6E-08	9.5E-08	9.6E-08	9.7E-08	9.8E-08	9.9E-08	9.9E-08	1.0E-07
2268	1.0E-07	1.1E-07	1.1E-07	9.9E-08	9.4E-08	8.9E-08	8.8E-08	8.9E-08	9.0E-08	9.1E-08	9.2E-08	9.2E-08	9.3E-08
2269	9.3E-08	9.6E-08	9.6E-08	9.1E-08	8.6E-08	8.1E-08	8.1E-08	8.1E-08	8.2E-08	8.3E-08	8.4E-08	8.5E-08	8.5E-08
2270	8.4E-08	8.7E-08	8.7E-08	8.2E-08	7.8E-08	7.4E-08	7.3E-08	7.3E-08	7.4E-08	7.6E-08	7.7E-08	7.8E-08	7.8E-08
2271	7.4E-08	7.6E-08	7.6E-08	7.3E-08	6.9E-08	6.5E-08	6.4E-08	6.5E-08	6.7E-08	6.9E-08	7.1E-08	7.2E-08	7.3E-08
2272	7.1E-08	7.3E-08	7.3E-08	7.0E-08	6.6E-08	6.3E-08	6.2E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	6.9E-08	6.9E-08
2273	6.5E-08	6.7E-08	6.8E-08	6.5E-08	6.2E-08	5.9E-08	5.8E-08	5.8E-08	6.0E-08	6.2E-08	6.4E-08	6.5E-08	6.5E-08
2274	1.1E-07	1.1E-07	1.1E-07	1.0E-07	1.0E-07	9.8E-08	9.6E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07
2275	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.8E-08	9.7E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07
2276	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.7E-08	9.7E-08	9.8E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07
2277	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.9E-08	9.5E-08	9.5E-08	9.6E-08	9.6E-08	9.8E-08	9.8E-08	9.9E-08	9.9E-08
2278	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.5E-08	9.1E-08	9.1E-08	9.2E-08	9.2E-08	9.4E-08	9.4E-08	9.5E-08	9.5E-08
2279	1.0E-07	1.0E-07	1.0E-07	9.6E-08	9.1E-08	8.7E-08	8.6E-08	8.7E-08	8.8E-08	8.9E-08	9.0E-08	9.0E-08	9.1E-08
2280	9.4E-08	9.6E-08	9.6E-08	9.0E-08	8.6E-08	8.2E-08	8.1E-08	8.2E-08	8.2E-08	8.4E-08	8.4E-08	8.5E-08	8.5E-08
2281	8.5E-08	8.8E-08	8.8E-08	8.3E-08	7.9E-08	7.5E-08	7.4E-08	7.4E-08	7.5E-08	7.7E-08	7.8E-08	7.8E-08	7.9E-08
2282	7.7E-08	7.9E-08	7.9E-08	7.5E-08	7.2E-08	6.8E-08	6.7E-08	6.7E-08	6.9E-08	7.0E-08	7.2E-08	7.3E-08	7.3E-08
2283	7.0E-08	7.3E-08	7.3E-08	6.9E-08	6.6E-08	6.2E-08	6.1E-08	6.1E-08	6.4E-08	6.6E-08	6.8E-08	6.9E-08	7.0E-08
2284	6.7E-08	6.9E-08	7.0E-08	6.7E-08	6.3E-08	6.0E-08	5.9E-08	5.9E-08	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08
2285	1.0E-07	1.0E-07	1.0E-07	1.0E-07	9.8E-08	9.3E-08	9.0E-08	9.1E-08	9.2E-08	9.3E-08	9.4E-08	9.5E-08	9.5E-08
2286	9.6E-08	9.9E-08	9.9E-08	9.5E-08	9.2E-08	8.8E-08	8.6E-08	8.7E-08	8.9E-08	9.2E-08	9.3E-08	9.4E-08	9.5E-08
2287	9.6E-08	9.9E-08	9.9E-08	9.4E-08	9.0E-08	8.7E-08	8.6E-08	8.7E-08	8.8E-08	9.0E-08	9.1E-08	9.2E-08	9.2E-08
2288	9.8E-08	1.0E-07	1.0E-07	9.4E-08	9.0E-08	8.7E-08	8.6E-08	8.7E-08	8.8E-08	8.9E-08	9.0E-08	9.1E-08	9.1E-08
2289	9.7E-08	1.0E-07	9.9E-08	9.3E-08	8.9E-08	8.5E-08	8.5E-08	8.6E-08	8.6E-08	8.7E-08	8.8E-08	8.9E-08	8.9E-08
2290	9.4E-08	9.7E-08	9.6E-08	9.0E-08	8.6E-08	8.3E-08	8.2E-08	8.3E-08	8.4E-08	8.5E-08	8.6E-08	8.6E-08	8.6E-08
2291	9.0E-08	9.3E-08	9.3E-08	8.7E-08	8.3E-08	7.9E-08	7.9E-08	7.9E-08	8.0E-08	8.1E-08	8.2E-08	8.3E-08	8.3E-08
2292	8.5E-08	8.8E-08	8.8E-08	8.3E-08	7.9E-08	7.5E-08	7.4E-08	7.5E-08	7.5E-08	7.7E-08	7.8E-08	7.8E-08	7.9E-08
2293	7.9E-08	8.1E-08	8.1E-08	7.7E-08	7.3E-08	6.9E-08	6.8E-08	6.9E-08	7.0E-08	7.1E-08	7.2E-08	7.3E-08	7.3E-08
2294	7.3E-08	7.5E-08	7.5E-08	7.1E-08	6.7E-08	6.4E-08	6.3E-08	6.3E-08	6.5E-08	6.7E-08	6.8E-08	6.9E-08	7.0E-08
2295	6.8E-08	7.0E-08	7.0E-08	6.7E-08	6.4E-08	6.0E-08	6.0E-08	6.0E-08	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.5E-08
2296	6.5E-08	6.6E-08	6.6E-08	6.4E-08	6.1E-08	5.7E-08	5.7E-08	5.7E-08	5.8E-08	6.0E-08	6.1E-08	6.1E-08	6.2E-08
2297	9.4E-08	9.6E-08	9.7E-08	9.4E-08	9.2E-08	8.7E-08	8.3E-08	8.4E-08	8.5E-08	8.6E-08	8.7E-08	8.8E-08	8.8E-08
2298	8.7E-08	9.0E-08	9.0E-08	8.6E-08	8.4E-08	8.0E-08	7.8E-08	7.9E-08	8.0E-08	8.2E-08	8.4E-08	8.5E-08	8.5E-08
2299	8.7E-08	9.0E-08	9.0E-08	8.5E-08	8.3E-08	7.9E-08	7.7E-08	7.8E-08	8.0E-08	8.1E-08	8.2E-08	8.3E-08	8.3E-08
2300	8.8E-08	9.1E-08	9.0E-08	8.5E-08	8.2E-08	7.9E-08	7.8E-08	7.9E-08	7.9E-08	8.0E-08	8.1E-08	8.2E-08	8.2E-08
2301	8.7E-08	9.0E-08	8.9E-08	8.4E-08	8.1E-08	7.7E-08	7.7E-08	7.7E-08	7.8E-08	7.9E-08	8.0E-08	8.1E-08	8.1E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2302	8.6E-08	8.8E-08	8.8E-08	8.3E-08	7.9E-08	7.6E-08	7.5E-08	7.6E-08	7.6E-08	7.7E-08	7.8E-08	7.9E-08	7.9E-08
2303	8.3E-08	8.5E-08	8.5E-08	8.0E-08	7.6E-08	7.3E-08	7.3E-08	7.3E-08	7.4E-08	7.5E-08	7.6E-08	7.6E-08	7.7E-08
2304	7.8E-08	8.0E-08	8.0E-08	7.6E-08	7.2E-08	6.9E-08	6.8E-08	6.9E-08	6.9E-08	7.1E-08	7.2E-08	7.2E-08	7.2E-08
2305	7.2E-08	7.4E-08	7.4E-08	7.0E-08	6.7E-08	6.4E-08	6.3E-08	6.3E-08	6.5E-08	6.6E-08	6.8E-08	6.8E-08	6.9E-08
2306	6.6E-08	6.8E-08	6.8E-08	6.5E-08	6.2E-08	5.8E-08	5.8E-08	5.8E-08	6.0E-08	6.2E-08	6.4E-08	6.5E-08	6.5E-08
2307	6.5E-08	6.7E-08	6.7E-08	6.4E-08	6.1E-08	5.8E-08	5.7E-08	5.7E-08	5.8E-08	6.0E-08	6.1E-08	6.1E-08	6.2E-08
2308	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
2309	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	9.6E-08	9.7E-08	9.8E-08	9.9E-08	9.9E-08	1.0E-07	1.0E-07
2310	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.5E-08	8.8E-08	8.9E-08	9.0E-08	9.1E-08	9.2E-08	9.2E-08	9.2E-08
2311	9.5E-08	9.8E-08	9.8E-08	9.7E-08	9.5E-08	8.8E-08	8.3E-08	8.4E-08	8.4E-08	8.5E-08	8.6E-08	8.6E-08	8.7E-08
2312	8.7E-08	9.0E-08	9.0E-08	8.7E-08	8.6E-08	8.0E-08	7.7E-08	7.8E-08	7.8E-08	7.9E-08	8.0E-08	8.1E-08	8.1E-08
2313	8.1E-08	8.3E-08	8.3E-08	8.0E-08	7.8E-08	7.4E-08	7.1E-08	7.2E-08	7.4E-08	7.5E-08	7.7E-08	7.8E-08	7.8E-08
2314	8.0E-08	8.3E-08	8.2E-08	7.9E-08	7.6E-08	7.3E-08	7.1E-08	7.2E-08	7.3E-08	7.4E-08	7.5E-08	7.6E-08	7.6E-08
2315	8.1E-08	8.3E-08	8.2E-08	7.8E-08	7.6E-08	7.2E-08	7.1E-08	7.2E-08	7.3E-08	7.4E-08	7.5E-08	7.5E-08	7.5E-08
2316	8.0E-08	8.2E-08	8.2E-08	7.7E-08	7.4E-08	7.1E-08	7.0E-08	7.1E-08	7.2E-08	7.3E-08	7.3E-08	7.4E-08	7.4E-08
2317	7.8E-08	8.1E-08	8.0E-08	7.6E-08	7.3E-08	7.0E-08	6.9E-08	6.9E-08	7.0E-08	7.1E-08	7.2E-08	7.2E-08	7.3E-08
2318	7.6E-08	7.8E-08	7.8E-08	7.4E-08	7.1E-08	6.7E-08	6.7E-08	6.7E-08	6.8E-08	6.9E-08	7.0E-08	7.1E-08	7.1E-08
2319	7.2E-08	7.4E-08	7.4E-08	7.0E-08	6.7E-08	6.4E-08	6.3E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08	6.7E-08	6.7E-08
2320	6.7E-08	6.9E-08	6.9E-08	6.5E-08	6.2E-08	5.9E-08	5.8E-08	5.9E-08	6.0E-08	6.2E-08	6.4E-08	6.5E-08	6.5E-08
2321	6.4E-08	6.6E-08	6.6E-08	6.3E-08	6.0E-08	5.7E-08	5.7E-08	5.7E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.2E-08
2322	8.0E-08	8.3E-08	8.3E-08	8.1E-08	7.9E-08	7.4E-08	7.1E-08	7.2E-08	7.2E-08	7.3E-08	7.4E-08	7.5E-08	7.5E-08
2323	7.5E-08	7.7E-08	7.7E-08	7.5E-08	7.3E-08	6.8E-08	6.6E-08	6.7E-08	6.8E-08	7.0E-08	7.1E-08	7.2E-08	7.3E-08
2324	7.4E-08	7.7E-08	7.6E-08	7.3E-08	7.1E-08	6.7E-08	6.5E-08	6.6E-08	6.7E-08	6.9E-08	7.0E-08	7.0E-08	7.1E-08
2325	7.4E-08	7.6E-08	7.6E-08	7.3E-08	7.0E-08	6.7E-08	6.5E-08	6.6E-08	6.7E-08	6.8E-08	6.9E-08	6.9E-08	7.0E-08
2326	7.4E-08	7.6E-08	7.5E-08	7.2E-08	6.9E-08	6.6E-08	6.5E-08	6.5E-08	6.6E-08	6.7E-08	6.8E-08	6.8E-08	6.9E-08
2327	7.2E-08	7.4E-08	7.4E-08	7.0E-08	6.7E-08	6.4E-08	6.4E-08	6.4E-08	6.5E-08	6.6E-08	6.7E-08	6.7E-08	6.7E-08
2328	7.0E-08	7.2E-08	7.2E-08	6.8E-08	6.5E-08	6.3E-08	6.2E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08	6.6E-08
2329	6.6E-08	6.8E-08	6.8E-08	6.4E-08	6.1E-08	5.9E-08	5.8E-08	5.8E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08	6.3E-08
2330	5.4E-08	5.5E-08	5.4E-08	5.4E-08	5.6E-08	5.8E-08	5.9E-08	6.1E-08	6.4E-08	6.6E-08	6.8E-08	6.9E-08	7.0E-08
2331	4.5E-08	4.6E-08	4.5E-08	4.1E-08	3.8E-08	3.5E-08	3.4E-08	3.3E-08	3.5E-08	3.7E-08	3.9E-08	4.0E-08	4.1E-08
2332	4.8E-08	5.0E-08	4.8E-08	4.5E-08	4.1E-08	3.8E-08	3.7E-08	3.6E-08	3.8E-08	4.0E-08	4.2E-08	4.3E-08	4.3E-08
2333	5.3E-08	5.5E-08	5.3E-08	4.9E-08	4.4E-08	4.2E-08	4.0E-08	3.9E-08	4.1E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08
2334	4.9E-08	5.1E-08	5.0E-08	4.6E-08	4.2E-08	4.0E-08	3.9E-08	3.8E-08	4.0E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08
2335	5.9E-08	6.1E-08	5.9E-08	5.4E-08	4.9E-08	4.5E-08	4.4E-08	4.3E-08	4.5E-08	4.7E-08	4.9E-08	5.0E-08	5.1E-08
2336	5.4E-08	5.6E-08	5.5E-08	5.1E-08	4.7E-08	4.4E-08	4.3E-08	4.2E-08	4.4E-08	4.6E-08	4.8E-08	4.9E-08	4.9E-08
2337	5.0E-08	5.1E-08	5.1E-08	4.8E-08	4.5E-08	4.3E-08	4.2E-08	4.1E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08
2338	6.6E-08	6.7E-08	6.6E-08	6.1E-08	5.5E-08	5.2E-08	5.0E-08	4.9E-08	5.1E-08	5.4E-08	5.6E-08	5.7E-08	5.7E-08
2339	5.9E-08	6.1E-08	6.0E-08	5.6E-08	5.2E-08	4.9E-08	4.8E-08	4.7E-08	4.9E-08	5.1E-08	5.3E-08	5.4E-08	5.4E-08
2340	5.4E-08	5.6E-08	5.5E-08	5.2E-08	4.9E-08	4.6E-08	4.6E-08	4.5E-08	4.7E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2341	5.6E-08	5.8E-08	5.8E-08	5.4E-08	5.1E-08	4.9E-08	4.8E-08	4.7E-08	4.9E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08
2342	3.4E-08	3.5E-08	3.4E-08	3.2E-08	2.9E-08	2.7E-08	2.6E-08	2.4E-08	2.6E-08	2.7E-08	2.9E-08	2.9E-08	3.0E-08
2343	3.3E-08	3.4E-08	3.3E-08	3.1E-08	2.9E-08	2.7E-08	2.6E-08	2.5E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08
2344	3.3E-08	3.5E-08	3.5E-08	3.3E-08	3.1E-08	3.0E-08	3.0E-08	2.9E-08	3.3E-08	3.7E-08	3.9E-08	4.1E-08	4.2E-08
2345	2.9E-08	3.0E-08	3.0E-08	2.8E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.7E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
2346	2.6E-08	2.7E-08	2.7E-08	2.6E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.6E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08
2347	2.9E-08	2.9E-08	2.9E-08	2.8E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08
2348	2.9E-08	2.9E-08	2.9E-08	2.8E-08	2.6E-08	2.5E-08	2.5E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.0E-08
2349	3.5E-08	3.6E-08	3.6E-08	3.3E-08	3.1E-08	2.8E-08	2.7E-08	2.5E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.2E-08
2350	3.4E-08	3.6E-08	3.5E-08	3.3E-08	3.1E-08	2.9E-08	2.8E-08	2.8E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08
2351	3.1E-08	3.2E-08	3.2E-08	3.0E-08	2.7E-08	2.6E-08	2.5E-08	2.4E-08	2.7E-08	3.0E-08	3.2E-08	3.4E-08	3.4E-08
2352	2.7E-08	2.8E-08	2.8E-08	2.6E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.6E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08
2353	3.0E-08	3.1E-08	3.1E-08	2.9E-08	2.7E-08	2.6E-08	2.5E-08	2.4E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08
2354	3.0E-08	3.1E-08	3.1E-08	2.9E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.1E-08
2355	2.9E-08	3.0E-08	3.0E-08	2.9E-08	2.7E-08	2.6E-08	2.6E-08	2.5E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08
2356	2.9E-08	3.0E-08	3.0E-08	2.9E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08
2357	2.8E-08	2.9E-08	2.8E-08	2.7E-08	2.4E-08	2.3E-08	2.2E-08	2.1E-08	2.7E-08	3.2E-08	3.5E-08	3.8E-08	3.9E-08
2358	3.2E-08	3.3E-08	3.2E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.5E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08
2359	3.1E-08	3.2E-08	3.2E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.8E-08	2.9E-08	3.1E-08	3.2E-08	3.2E-08
2360	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.6E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2361	3.0E-08	3.0E-08	3.0E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2362	2.9E-08	3.0E-08	3.0E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2363	2.8E-08	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2364	2.8E-08	2.9E-08	2.8E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08	2.9E-08
2365	3.3E-08	3.4E-08	3.3E-08	3.2E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.9E-08	3.0E-08	3.2E-08	3.3E-08	3.3E-08
2366	3.2E-08	3.3E-08	3.2E-08	3.1E-08	2.9E-08	2.8E-08	2.8E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
2367	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
2368	2.9E-08	3.0E-08	3.0E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2369	2.8E-08	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2370	2.7E-08	2.8E-08	2.8E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2371	2.6E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.3E-08	2.4E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
2372	2.8E-08	2.9E-08	2.8E-08	2.6E-08	2.6E-08	2.5E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08
2373	3.0E-08	3.1E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.0E-08	3.1E-08
2374	3.2E-08	3.2E-08	3.1E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2375	3.4E-08	3.5E-08	3.5E-08	3.3E-08	3.1E-08	2.9E-08	2.8E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08
2376	3.3E-08	3.4E-08	3.4E-08	3.2E-08	3.0E-08	2.9E-08	2.8E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08
2377	3.1E-08	3.2E-08	3.2E-08	3.1E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
2378	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.8E-08	2.8E-08	2.7E-08	2.7E-08	2.9E-08	3.0E-08	3.2E-08	3.2E-08	3.3E-08
2379	2.8E-08	2.9E-08	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2380	2.7E-08	2.8E-08	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2381	2.3E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.5E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08
2382	2.7E-08	2.8E-08	2.7E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08
2383	3.0E-08	3.1E-08	2.9E-08	2.7E-08	2.7E-08	2.6E-08	2.7E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08
2384	3.2E-08	3.3E-08	3.2E-08	2.9E-08	2.9E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08
2385	3.5E-08	3.6E-08	3.6E-08	3.4E-08	3.2E-08	3.0E-08	2.9E-08	2.9E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08
2386	3.4E-08	3.5E-08	3.5E-08	3.3E-08	3.1E-08	3.0E-08	2.9E-08	2.9E-08	3.1E-08	3.2E-08	3.4E-08	3.5E-08	3.5E-08
2387	3.2E-08	3.3E-08	3.3E-08	3.1E-08	3.0E-08	2.9E-08	2.8E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08
2388	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
2389	2.8E-08	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.6E-08	2.6E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2390	2.7E-08	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.8E-08	2.9E-08	3.1E-08	3.1E-08	3.2E-08
2391	2.4E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.5E-08	2.6E-08	2.7E-08	2.7E-08	2.8E-08
2392	2.4E-08	2.4E-08	2.4E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.6E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08
2393	2.9E-08	3.0E-08	2.8E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08
2394	3.2E-08	3.3E-08	3.1E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08
2395	3.5E-08	3.6E-08	3.4E-08	3.1E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08
2396	3.6E-08	3.7E-08	3.7E-08	3.5E-08	3.2E-08	3.1E-08	3.0E-08	2.9E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08	3.7E-08
2397	3.4E-08	3.5E-08	3.5E-08	3.3E-08	3.1E-08	3.0E-08	2.9E-08	2.9E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08	3.6E-08
2398	3.2E-08	3.3E-08	3.3E-08	3.1E-08	3.0E-08	2.8E-08	2.8E-08	2.8E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08	3.5E-08
2399	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.9E-08	3.1E-08	3.3E-08	3.4E-08	3.4E-08
2400	2.8E-08	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
2401	2.6E-08	2.7E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.4E-08	2.4E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08
2402	2.5E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
2403	3.4E-08	3.5E-08	3.5E-08	3.2E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	3.1E-08	3.5E-08	3.7E-08	3.9E-08	4.0E-08
2404	3.2E-08	3.3E-08	3.3E-08	3.1E-08	2.9E-08	2.7E-08	2.7E-08	2.6E-08	3.0E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08
2405	3.1E-08	3.2E-08	3.2E-08	3.0E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	3.0E-08	3.2E-08	3.5E-08	3.6E-08	3.7E-08
2406	2.9E-08	3.0E-08	3.0E-08	2.9E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.9E-08	3.1E-08	3.3E-08	3.5E-08	3.5E-08
2407	2.7E-08	2.8E-08	2.8E-08	2.7E-08	2.5E-08	2.5E-08	2.4E-08	2.4E-08	2.7E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
2408	2.4E-08	2.5E-08	2.6E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.6E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08
2409	2.2E-08	2.3E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08
2410	2.7E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.0E-08
2411	3.7E-08	3.8E-08	3.7E-08	3.5E-08	3.2E-08	3.0E-08	2.9E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.9E-08	4.0E-08
2412	3.4E-08	3.5E-08	3.5E-08	3.3E-08	3.1E-08	2.9E-08	2.8E-08	2.8E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08
2413	3.2E-08	3.3E-08	3.3E-08	3.1E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	3.0E-08	3.2E-08	3.5E-08	3.6E-08	3.7E-08
2414	2.9E-08	3.0E-08	3.0E-08	2.9E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
2415	2.7E-08	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.7E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
2416	2.5E-08	2.6E-08	2.6E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.6E-08	2.8E-08	3.0E-08	3.2E-08	3.2E-08
2417	2.4E-08	2.5E-08	2.5E-08	2.4E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.6E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08
2418	2.9E-08	2.9E-08	2.9E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2419	3.9E-08	4.0E-08	3.9E-08	3.6E-08	3.3E-08	3.1E-08	3.0E-08	2.9E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08
2420	3.6E-08	3.8E-08	3.7E-08	3.5E-08	3.2E-08	3.0E-08	3.0E-08	2.9E-08	3.1E-08	3.4E-08	3.5E-08	3.7E-08	3.7E-08
2421	3.4E-08	3.5E-08	3.4E-08	3.3E-08	3.0E-08	2.9E-08	2.8E-08	2.8E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08	3.5E-08
2422	3.1E-08	3.2E-08	3.2E-08	3.1E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08
2423	2.9E-08	3.0E-08	3.0E-08	2.9E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
2424	2.7E-08	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.1E-08
2425	2.6E-08	2.7E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.4E-08	2.4E-08	2.6E-08	2.8E-08	3.0E-08	3.1E-08	3.1E-08
2426	2.6E-08	2.7E-08	2.7E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.4E-08	2.6E-08	2.8E-08	3.0E-08	3.0E-08	3.1E-08
2427	3.8E-08	3.9E-08	3.8E-08	3.6E-08	3.3E-08	3.1E-08	3.0E-08	2.9E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08
2428	3.5E-08	3.6E-08	3.5E-08	3.3E-08	3.1E-08	2.9E-08	2.9E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08
2429	3.2E-08	3.3E-08	3.3E-08	3.1E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
2430	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.6E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2431	2.9E-08	3.0E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08
2432	2.8E-08	2.9E-08	2.9E-08	2.8E-08	2.6E-08	2.6E-08	2.5E-08	2.5E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08
2433	2.7E-08	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08
2434	3.2E-08	3.3E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08	3.8E-08
2435	3.9E-08	4.0E-08	4.0E-08	3.7E-08	3.4E-08	3.2E-08	3.1E-08	3.0E-08	3.2E-08	3.4E-08	3.6E-08	3.7E-08	3.7E-08
2436	3.6E-08	3.7E-08	3.7E-08	3.4E-08	3.2E-08	3.0E-08	2.9E-08	2.9E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08	3.5E-08
2437	3.4E-08	3.4E-08	3.4E-08	3.2E-08	3.0E-08	2.9E-08	2.8E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08
2438	3.2E-08	3.3E-08	3.2E-08	3.1E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
2439	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2440	2.9E-08	3.0E-08	3.0E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2441	2.9E-08	3.0E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.6E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2442	3.7E-08	3.8E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.4E-08	4.5E-08	4.5E-08	4.5E-08
2443	3.8E-08	3.9E-08	3.8E-08	3.6E-08	3.3E-08	3.1E-08	3.0E-08	3.0E-08	3.2E-08	3.3E-08	3.5E-08	3.6E-08	3.6E-08
2444	3.5E-08	3.6E-08	3.6E-08	3.4E-08	3.1E-08	3.0E-08	2.9E-08	2.9E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08
2445	3.4E-08	3.5E-08	3.4E-08	3.2E-08	3.0E-08	2.9E-08	2.8E-08	2.8E-08	3.0E-08	3.1E-08	3.3E-08	3.3E-08	3.4E-08
2446	3.2E-08	3.3E-08	3.3E-08	3.1E-08	3.0E-08	2.9E-08	2.8E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08
2447	3.1E-08	3.2E-08	3.2E-08	3.1E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
2448	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
2449	2.8E-08	2.8E-08	2.7E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08
2450	4.3E-08	4.4E-08	4.4E-08	4.4E-08	4.5E-08	4.6E-08	4.8E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08
2451	4.1E-08	4.2E-08	4.1E-08	3.8E-08	3.5E-08	3.3E-08	3.2E-08	3.2E-08	3.3E-08	3.5E-08	3.7E-08	3.8E-08	3.8E-08
2452	3.8E-08	3.9E-08	3.9E-08	3.6E-08	3.4E-08	3.2E-08	3.1E-08	3.1E-08	3.2E-08	3.4E-08	3.6E-08	3.6E-08	3.7E-08
2453	3.6E-08	3.7E-08	3.7E-08	3.5E-08	3.3E-08	3.1E-08	3.1E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08	3.6E-08
2454	3.5E-08	3.6E-08	3.6E-08	3.4E-08	3.2E-08	3.1E-08	3.0E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08
2455	3.3E-08	3.4E-08	3.4E-08	3.3E-08	3.1E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08
2456	3.2E-08	3.3E-08	3.3E-08	3.2E-08	3.1E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.4E-08	3.4E-08	3.5E-08
2457	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2458	3.8E-08	3.9E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2459	4.2E-08	4.3E-08	4.2E-08	4.0E-08	3.7E-08	3.5E-08	3.4E-08	3.4E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08
2460	4.0E-08	4.1E-08	4.0E-08	3.8E-08	3.6E-08	3.4E-08	3.4E-08	3.3E-08	3.5E-08	3.6E-08	3.8E-08	3.8E-08	3.9E-08
2461	3.7E-08	3.9E-08	3.8E-08	3.6E-08	3.4E-08	3.3E-08	3.3E-08	3.2E-08	3.4E-08	3.5E-08	3.7E-08	3.7E-08	3.8E-08
2462	3.6E-08	3.7E-08	3.7E-08	3.5E-08	3.3E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08
2463	3.4E-08	3.6E-08	3.6E-08	3.4E-08	3.3E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08
2464	2.9E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08
2465	3.6E-08	3.6E-08	3.5E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.9E-08	4.0E-08	4.0E-08	4.1E-08	4.1E-08
2466	4.3E-08	4.4E-08	4.4E-08	4.1E-08	3.9E-08	3.7E-08	3.7E-08	3.6E-08	3.8E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08
2467	4.0E-08	4.2E-08	4.1E-08	3.9E-08	3.7E-08	3.6E-08	3.5E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08
2468	3.8E-08	4.0E-08	4.0E-08	3.8E-08	3.6E-08	3.5E-08	3.5E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08
2469	3.7E-08	3.8E-08	3.8E-08	3.7E-08	3.5E-08	3.4E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.8E-08	3.8E-08	3.9E-08
2470	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08
2471	3.5E-08	3.5E-08	3.3E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08
2472	4.7E-08	4.8E-08	4.8E-08	4.5E-08	4.3E-08	4.1E-08	4.0E-08	4.0E-08	4.2E-08	4.3E-08	4.5E-08	4.5E-08	4.6E-08
2473	4.4E-08	4.5E-08	4.5E-08	4.3E-08	4.0E-08	3.9E-08	3.9E-08	3.8E-08	4.0E-08	4.1E-08	4.3E-08	4.3E-08	4.4E-08
2474	4.1E-08	4.3E-08	4.3E-08	4.1E-08	3.9E-08	3.8E-08	3.7E-08	3.7E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08
2475	3.9E-08	4.0E-08	4.0E-08	3.9E-08	3.7E-08	3.6E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.0E-08
2476	3.0E-08	3.0E-08	2.8E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08
2477	3.6E-08	3.5E-08	3.3E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08	3.8E-08
2478	4.0E-08	3.9E-08	3.6E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08
2479	5.0E-08	5.2E-08	5.2E-08	4.9E-08	4.6E-08	4.4E-08	4.4E-08	4.3E-08	4.5E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08
2480	4.7E-08	4.9E-08	4.9E-08	4.7E-08	4.4E-08	4.3E-08	4.2E-08	4.2E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2481	4.4E-08	4.6E-08	4.6E-08	4.4E-08	4.2E-08	4.0E-08	4.0E-08	4.0E-08	4.1E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08
2482	3.0E-08	3.0E-08	2.8E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08
2483	3.7E-08	3.6E-08	3.4E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08	3.8E-08
2484	4.4E-08	4.2E-08	3.8E-08	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08
2485	3.6E-08	3.3E-08	2.7E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.0E-08
2486	5.4E-08	5.6E-08	5.5E-08	5.3E-08	5.0E-08	4.8E-08	4.7E-08	4.7E-08	4.8E-08	5.0E-08	5.2E-08	5.2E-08	5.3E-08
2487	5.1E-08	5.3E-08	5.3E-08	5.1E-08	4.8E-08	4.6E-08	4.6E-08	4.5E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.1E-08
2488	4.7E-08	4.8E-08	4.8E-08	4.6E-08	4.4E-08	4.2E-08	4.2E-08	4.1E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08
2489	3.0E-08	3.0E-08	2.8E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08
2490	5.6E-08	5.7E-08	5.8E-08	5.5E-08	5.3E-08	5.1E-08	5.0E-08	5.0E-08	5.2E-08	5.4E-08	5.6E-08	5.7E-08	5.8E-08
2491	4.8E-08	4.9E-08	4.9E-08	4.7E-08	4.5E-08	4.3E-08	4.3E-08	4.2E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	4.8E-08
2492	3.3E-08	3.4E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08	3.7E-08	3.8E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08
2493	3.7E-08	3.8E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	4.9E-08
2494	5.9E-08	6.2E-08	6.3E-08	6.4E-08	6.7E-08	6.9E-08	7.1E-08	7.4E-08	7.7E-08	7.9E-08	8.1E-08	8.2E-08	8.2E-08
2495	4.4E-08	4.6E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.1E-08	5.3E-08	5.5E-08	5.6E-08	5.8E-08	5.9E-08	5.9E-08
2496	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2497	4.3E-08	4.5E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.4E-08	5.5E-08	5.7E-08	5.8E-08	5.8E-08
2498	4.0E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
2499	3.5E-08	3.6E-08	3.6E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.2E-08	4.2E-08	4.3E-08	4.3E-08
2500	3.3E-08	3.4E-08	3.4E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08
2501	3.2E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08
2502	3.2E-08	3.3E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.8E-08	3.8E-08	3.9E-08	3.9E-08
2503	3.2E-08	3.3E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08
2504	3.2E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.0E-08
2505	3.7E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2506	5.3E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08	6.2E-08	6.4E-08	6.7E-08	6.9E-08	7.0E-08	7.2E-08	7.2E-08
2507	6.9E-08	7.1E-08	7.3E-08	7.4E-08	7.5E-08	7.3E-08	7.2E-08	7.4E-08	7.5E-08	7.6E-08	7.7E-08	7.7E-08	7.8E-08
2508	3.3E-08	3.3E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08
2509	2.8E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08
2510	2.6E-08	2.6E-08	2.6E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08
2511	2.5E-08	2.5E-08	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08	2.9E-08
2512	2.8E-08	2.9E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08	3.3E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08
2513	3.1E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.7E-08	3.9E-08	4.0E-08	4.2E-08	4.2E-08	4.3E-08
2514	2.9E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08
2515	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08
2516	2.7E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08	3.3E-08
2517	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08
2518	3.0E-08	3.0E-08	2.9E-08	2.9E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08	3.5E-08
2519	2.7E-08	2.7E-08	2.7E-08	2.6E-08	2.7E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08
2520	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08
2521	2.9E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08
2522	2.6E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08
2523	2.4E-08	2.5E-08	2.5E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2524	2.5E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08
2525	3.7E-08	3.9E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
2526	4.0E-08	4.2E-08	4.3E-08	4.4E-08	4.6E-08	4.7E-08	4.9E-08	5.1E-08	5.4E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08
2527	3.4E-08	3.4E-08	3.4E-08	3.1E-08	2.8E-08	2.6E-08	2.5E-08	2.3E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08	2.8E-08
2528	2.8E-08	2.8E-08	2.9E-08	2.7E-08	2.6E-08	2.6E-08	2.5E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08
2529	2.8E-08	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
2530	4.6E-08	4.8E-08	4.9E-08	4.9E-08	5.0E-08	4.9E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.4E-08
2531	4.5E-08	4.7E-08	4.7E-08	4.8E-08	4.8E-08	4.7E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08
2532	5.4E-08	5.6E-08	5.7E-08	5.7E-08	5.8E-08	5.6E-08	5.6E-08	5.7E-08	5.9E-08	6.0E-08	6.0E-08	6.1E-08	6.1E-08
2533	4.5E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08	4.7E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08	5.1E-08
2534	5.1E-08	5.3E-08	5.4E-08	5.4E-08	5.5E-08	5.3E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08	5.7E-08
2535	6.0E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08	6.2E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08	6.5E-08	6.6E-08	6.6E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2536	4.4E-08	4.6E-08	4.6E-08	4.6E-08	4.7E-08	4.6E-08	4.6E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
2537	4.9E-08	5.1E-08	5.2E-08	5.2E-08	5.2E-08	5.1E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.4E-08	5.4E-08
2538	5.7E-08	5.9E-08	6.0E-08	6.1E-08	6.1E-08	5.9E-08	5.8E-08	5.9E-08	6.0E-08	6.0E-08	6.1E-08	6.2E-08	6.2E-08
2539	6.8E-08	7.1E-08	7.2E-08	7.3E-08	7.3E-08	7.0E-08	6.8E-08	6.9E-08	7.0E-08	7.1E-08	7.2E-08	7.2E-08	7.2E-08
2540	4.7E-08	4.9E-08	5.0E-08	5.0E-08	5.0E-08	4.9E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08	5.2E-08
2541	5.4E-08	5.6E-08	5.7E-08	5.7E-08	5.8E-08	5.5E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.8E-08	5.8E-08	5.9E-08
2542	6.3E-08	6.5E-08	6.6E-08	6.6E-08	6.7E-08	6.4E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08	6.6E-08	6.6E-08
2543	7.4E-08	7.7E-08	7.8E-08	7.9E-08	8.0E-08	7.5E-08	7.2E-08	7.3E-08	7.4E-08	7.6E-08	7.6E-08	7.7E-08	7.7E-08
2544	8.7E-08	9.1E-08	9.2E-08	9.3E-08	9.5E-08	8.7E-08	8.2E-08	8.4E-08	8.6E-08	8.8E-08	9.0E-08	9.1E-08	9.1E-08
2545	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	9.8E-08	9.2E-08	9.3E-08	9.4E-08	9.5E-08	9.6E-08	9.7E-08	9.7E-08
2546	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07	1.0E-07
2547	5.1E-08	5.2E-08	5.3E-08	5.3E-08	5.4E-08	5.2E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.4E-08	5.5E-08
2548	5.7E-08	5.9E-08	5.9E-08	6.0E-08	6.0E-08	5.7E-08	5.6E-08	5.7E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08	6.0E-08
2549	6.6E-08	6.8E-08	6.9E-08	7.0E-08	7.0E-08	6.6E-08	6.4E-08	6.5E-08	6.6E-08	6.7E-08	6.8E-08	6.8E-08	6.9E-08
2550	7.4E-08	7.6E-08	7.8E-08	7.8E-08	7.9E-08	7.3E-08	6.9E-08	7.1E-08	7.3E-08	7.6E-08	7.8E-08	7.9E-08	7.9E-08
2551	8.5E-08	8.8E-08	8.9E-08	9.0E-08	9.0E-08	8.2E-08	7.7E-08	7.8E-08	7.9E-08	8.0E-08	8.1E-08	8.2E-08	8.2E-08
2552	9.4E-08	9.7E-08	9.9E-08	9.9E-08	1.0E-07	9.0E-08	8.3E-08	8.5E-08	8.5E-08	8.6E-08	8.7E-08	8.8E-08	8.8E-08
2553	4.7E-08	4.8E-08	4.9E-08	4.9E-08	4.9E-08	4.7E-08	4.7E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08	5.0E-08
2554	5.2E-08	5.3E-08	5.4E-08	5.4E-08	5.4E-08	5.2E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.4E-08	5.5E-08
2555	5.8E-08	6.0E-08	6.1E-08	6.1E-08	6.2E-08	5.8E-08	5.6E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08	6.1E-08
2556	6.5E-08	6.7E-08	6.8E-08	6.9E-08	6.9E-08	6.4E-08	6.1E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	6.9E-08	7.0E-08
2557	7.3E-08	7.6E-08	7.7E-08	7.7E-08	7.7E-08	7.1E-08	6.7E-08	6.8E-08	6.9E-08	7.0E-08	7.1E-08	7.2E-08	7.2E-08
2558	8.0E-08	8.3E-08	8.4E-08	8.4E-08	8.4E-08	7.6E-08	7.2E-08	7.3E-08	7.4E-08	7.5E-08	7.6E-08	7.6E-08	7.6E-08
2559	8.4E-08	8.7E-08	8.8E-08	8.8E-08	8.8E-08	8.0E-08	7.4E-08	7.5E-08	7.6E-08	7.7E-08	7.8E-08	7.8E-08	7.8E-08
2560	8.7E-08	9.0E-08	9.1E-08	9.0E-08	9.0E-08	8.2E-08	7.6E-08	7.7E-08	7.7E-08	7.8E-08	7.9E-08	7.9E-08	7.9E-08
2561	4.7E-08	4.9E-08	5.0E-08	5.0E-08	5.0E-08	4.7E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08
2562	5.3E-08	5.5E-08	5.5E-08	5.5E-08	5.6E-08	5.2E-08	5.1E-08	5.1E-08	5.2E-08	5.4E-08	5.5E-08	5.5E-08	5.5E-08
2563	5.6E-08	5.8E-08	5.9E-08	5.9E-08	5.9E-08	5.5E-08	5.3E-08	5.3E-08	5.6E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08
2564	6.4E-08	6.6E-08	6.7E-08	6.7E-08	6.7E-08	6.1E-08	5.9E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08	6.4E-08	6.4E-08
2565	6.9E-08	7.1E-08	7.2E-08	7.2E-08	7.2E-08	6.6E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08	6.7E-08	6.7E-08	6.7E-08
2566	7.3E-08	7.5E-08	7.6E-08	7.6E-08	7.6E-08	6.9E-08	6.5E-08	6.6E-08	6.7E-08	6.8E-08	6.9E-08	6.9E-08	7.0E-08
2567	7.5E-08	7.7E-08	7.8E-08	7.7E-08	7.7E-08	7.1E-08	6.6E-08	6.7E-08	6.8E-08	6.9E-08	7.0E-08	7.0E-08	7.0E-08
2568	7.5E-08	7.7E-08	7.8E-08	7.7E-08	7.7E-08	7.0E-08	6.6E-08	6.7E-08	6.8E-08	6.9E-08	6.9E-08	7.0E-08	7.0E-08
2569	7.4E-08	7.6E-08	7.6E-08	7.5E-08	7.5E-08	6.9E-08	6.5E-08	6.5E-08	6.6E-08	6.7E-08	6.8E-08	6.8E-08	6.9E-08
2570	7.1E-08	7.3E-08	7.3E-08	7.2E-08	7.1E-08	6.6E-08	6.3E-08	6.3E-08	6.4E-08	6.5E-08	6.6E-08	6.6E-08	6.7E-08
2571	6.8E-08	7.0E-08	7.0E-08	6.9E-08	6.7E-08	6.3E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08	6.4E-08	6.4E-08	6.5E-08
2572	6.5E-08	6.7E-08	6.7E-08	6.5E-08	6.3E-08	5.9E-08	5.7E-08	5.7E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08	6.3E-08
2573	5.2E-08	5.4E-08	5.4E-08	5.4E-08	5.4E-08	5.1E-08	4.9E-08	4.9E-08	5.1E-08	5.3E-08	5.5E-08	5.6E-08	5.6E-08
2574	5.6E-08	5.8E-08	5.9E-08	5.9E-08	5.9E-08	5.4E-08	5.2E-08	5.2E-08	5.4E-08	5.6E-08	5.7E-08	5.8E-08	5.8E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2575	6.1E-08	6.3E-08	6.3E-08	6.3E-08	6.3E-08	5.8E-08	5.5E-08	5.6E-08	5.7E-08	5.9E-08	6.0E-08	6.0E-08	6.1E-08
2576	6.3E-08	6.6E-08	6.6E-08	6.6E-08	6.6E-08	6.0E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08	6.2E-08	6.2E-08
2577	6.6E-08	6.8E-08	6.8E-08	6.8E-08	6.7E-08	6.2E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08	6.3E-08
2578	6.6E-08	6.8E-08	6.8E-08	6.8E-08	6.7E-08	6.2E-08	5.9E-08	5.9E-08	6.0E-08	6.1E-08	6.2E-08	6.3E-08	6.3E-08
2579	6.5E-08	6.7E-08	6.7E-08	6.6E-08	6.5E-08	6.1E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08	6.2E-08	6.2E-08
2580	6.4E-08	6.6E-08	6.6E-08	6.5E-08	6.4E-08	5.9E-08	5.7E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08	6.1E-08
2581	5.1E-08	5.3E-08	5.5E-08	5.6E-08	5.8E-08	6.0E-08	6.3E-08	6.5E-08	6.9E-08	7.2E-08	7.4E-08	7.6E-08	7.7E-08
2582	3.9E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	5.0E-08	5.4E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08
2583	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08	4.0E-08	4.2E-08	4.3E-08	4.5E-08	4.6E-08	4.6E-08
2584	4.1E-08	4.4E-08	4.5E-08	4.6E-08	4.8E-08	4.9E-08	5.1E-08	5.3E-08	5.6E-08	5.9E-08	6.1E-08	6.3E-08	6.3E-08
2585	3.1E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.0E-08
2586	3.8E-08	4.0E-08	4.1E-08	4.3E-08	4.4E-08	4.6E-08	4.8E-08	4.9E-08	5.3E-08	5.6E-08	5.8E-08	5.9E-08	6.0E-08
2587	3.2E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.3E-08	4.5E-08	4.6E-08	4.6E-08
2588	3.0E-08	3.1E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08
2589	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.7E-08	2.9E-08	3.1E-08	3.3E-08	3.3E-08
2590	4.1E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	5.0E-08	5.2E-08	5.4E-08	5.8E-08	6.1E-08	6.3E-08	6.5E-08	6.6E-08
2591	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08
2592	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08
2593	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	3.2E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08
2594	3.7E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.7E-08	5.0E-08	5.3E-08	5.5E-08	5.6E-08	5.7E-08
2595	2.9E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.5E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08
2596	2.9E-08	3.0E-08	3.1E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08
2597	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.9E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08
2598	2.6E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.4E-08	3.8E-08	4.1E-08	4.3E-08	4.5E-08	4.5E-08
2599	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.2E-08	4.5E-08	4.8E-08	4.9E-08	5.1E-08	5.1E-08
2600	2.8E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08
2601	2.9E-08	3.1E-08	3.1E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08
2602	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.9E-08	2.2E-08	2.5E-08	2.6E-08	2.7E-08
2603	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08	4.1E-08	4.5E-08	4.7E-08	4.9E-08	5.0E-08
2604	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	4.0E-08	4.3E-08	4.5E-08	4.7E-08	4.8E-08	4.8E-08
2605	2.9E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08
2606	3.0E-08	3.1E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08
2607	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.2E-08
2608	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	2.0E-08	2.3E-08	2.5E-08	2.7E-08	2.7E-08
2609	2.6E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.7E-08	4.0E-08	4.2E-08	4.4E-08	4.5E-08
2610	3.2E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.9E-08	4.0E-08	4.3E-08	4.5E-08	4.7E-08	4.8E-08	4.9E-08
2611	2.9E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08	4.0E-08
2612	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.7E-08	3.8E-08	4.0E-08	4.0E-08	4.1E-08
2613	3.3E-08	3.4E-08	3.5E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2614	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
2615	1.3E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	2.0E-08	2.3E-08	2.6E-08	2.7E-08	2.8E-08
2616	2.5E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.6E-08	3.9E-08	4.1E-08	4.3E-08	4.4E-08
2617	3.3E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.2E-08	4.5E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08
2618	3.1E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.7E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08
2619	3.3E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.2E-08	4.4E-08	4.4E-08	4.5E-08
2620	3.5E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2621	1.3E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	2.1E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08
2622	2.6E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.8E-08	4.1E-08	4.4E-08	4.5E-08	4.6E-08
2623	3.5E-08	3.7E-08	3.8E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.6E-08	4.9E-08	5.2E-08	5.5E-08	5.6E-08	5.7E-08
2624	3.4E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.5E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08
2625	3.9E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.8E-08	5.0E-08	5.3E-08	5.4E-08	5.6E-08	5.6E-08
2626	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.3E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.1E-08
2627	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.4E-08	5.6E-08	5.8E-08	6.1E-08	6.2E-08	6.3E-08	6.4E-08
2628	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	2.2E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08
2629	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.6E-08	3.8E-08	4.4E-08	4.9E-08	5.2E-08	5.5E-08	5.6E-08
2630	4.4E-08	4.7E-08	5.0E-08	5.2E-08	5.4E-08	5.7E-08	5.9E-08	6.2E-08	6.9E-08	7.5E-08	7.9E-08	8.2E-08	8.3E-08
2631	5.3E-08	5.7E-08	6.0E-08	6.2E-08	6.5E-08	6.8E-08	7.1E-08	7.5E-08	8.3E-08	8.9E-08	9.4E-08	9.7E-08	9.9E-08
2632	7.2E-08	7.6E-08	8.0E-08	8.3E-08	8.7E-08	9.1E-08	9.5E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
2633	5.8E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	7.1E-08	7.3E-08	7.6E-08	8.1E-08	8.4E-08	8.7E-08	8.9E-08	9.0E-08
2634	5.6E-08	5.9E-08	6.1E-08	6.2E-08	6.5E-08	6.6E-08	6.9E-08	7.1E-08	7.5E-08	7.8E-08	8.0E-08	8.2E-08	8.3E-08
2635	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.6E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08
2636	2.9E-08	3.1E-08	3.3E-08	3.5E-08	3.7E-08	3.9E-08	4.1E-08	4.4E-08	5.3E-08	6.0E-08	6.6E-08	7.0E-08	7.2E-08
2637	6.4E-08	6.9E-08	7.3E-08	7.7E-08	8.1E-08	8.6E-08	9.0E-08	9.4E-08	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07
2638	4.8E-08	5.1E-08	5.3E-08	5.5E-08	5.8E-08	6.0E-08	6.3E-08	6.5E-08	7.2E-08	7.7E-08	8.1E-08	8.4E-08	8.5E-08
2639	4.6E-08	4.9E-08	5.0E-08	5.2E-08	5.4E-08	5.5E-08	5.7E-08	5.9E-08	6.3E-08	6.5E-08	6.8E-08	6.9E-08	7.0E-08
2640	4.0E-08	4.2E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08
2641	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.6E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08	6.4E-08
2642	5.3E-08	5.5E-08	5.7E-08	5.8E-08	6.0E-08	6.1E-08	6.3E-08	6.5E-08	6.8E-08	7.1E-08	7.3E-08	7.4E-08	7.4E-08
2643	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.7E-08	4.0E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08
2644	6.1E-08	6.4E-08	6.8E-08	7.1E-08	7.4E-08	7.7E-08	8.0E-08	8.4E-08	9.0E-08	9.6E-08	1.0E-07	1.0E-07	1.0E-07
2645	4.3E-08	4.6E-08	4.7E-08	4.9E-08	5.1E-08	5.2E-08	5.4E-08	5.6E-08	6.0E-08	6.3E-08	6.5E-08	6.7E-08	6.8E-08
2646	3.9E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	5.0E-08	5.2E-08	5.4E-08	5.5E-08	5.5E-08
2647	3.8E-08	4.0E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
2648	3.9E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08
2649	4.6E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.6E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08
2650	7.0E-08	7.4E-08	7.8E-08	8.2E-08	8.5E-08	8.9E-08	9.3E-08	9.7E-08	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
2651	5.9E-08	6.2E-08	6.4E-08	6.7E-08	6.9E-08	7.2E-08	7.5E-08	7.8E-08	8.2E-08	8.5E-08	8.7E-08	8.9E-08	9.0E-08
2652	5.4E-08	5.6E-08	5.8E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.2E-08	7.3E-08	7.4E-08	7.5E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2653	5.4E-08	5.7E-08	5.8E-08	6.0E-08	6.2E-08	6.3E-08	6.5E-08	6.8E-08	6.9E-08	7.1E-08	7.2E-08	7.2E-08	7.3E-08
2654	4.3E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08	5.4E-08	5.4E-08	5.5E-08	5.5E-08
2655	4.9E-08	5.1E-08	5.2E-08	5.3E-08	5.5E-08	5.6E-08	5.7E-08	5.9E-08	6.0E-08	6.2E-08	6.3E-08	6.3E-08	6.4E-08
2656	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.2E-08	6.3E-08	6.4E-08	6.6E-08	6.8E-08	6.9E-08	7.1E-08	7.1E-08	7.2E-08
2657	5.5E-08	5.8E-08	6.0E-08	6.3E-08	6.5E-08	6.7E-08	7.0E-08	7.3E-08	7.7E-08	8.1E-08	8.3E-08	8.5E-08	8.6E-08
2658	3.5E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2659	3.3E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08
2660	3.4E-08	3.6E-08	3.6E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08	4.2E-08
2661	3.8E-08	4.0E-08	4.0E-08	4.1E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2662	4.2E-08	4.4E-08	4.5E-08	4.5E-08	4.6E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
2663	4.6E-08	4.8E-08	4.9E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.5E-08	5.5E-08	5.6E-08	5.6E-08
2664	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08
2665	3.1E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08	3.8E-08
2666	3.2E-08	3.3E-08	3.3E-08	3.4E-08	3.4E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	3.9E-08
2667	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.7E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08
2668	3.7E-08	3.8E-08	3.8E-08	3.9E-08	3.9E-08	3.9E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.3E-08	4.3E-08
2669	4.0E-08	4.1E-08	4.2E-08	4.2E-08	4.2E-08	4.2E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.5E-08	4.6E-08	4.6E-08
2670	3.4E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.4E-08	4.6E-08	4.6E-08	4.7E-08
2671	3.0E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.7E-08	3.7E-08	3.8E-08	3.8E-08
2672	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08
2673	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.5E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08	3.9E-08
2674	3.5E-08	3.7E-08	3.7E-08	3.7E-08	3.7E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.1E-08
2675	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.1E-08	4.0E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08
2676	3.2E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08
2677	3.2E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08
2678	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.5E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08	3.9E-08
2679	3.5E-08	3.7E-08	3.7E-08	3.7E-08	3.8E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.1E-08
2680	3.9E-08	4.1E-08	4.1E-08	4.1E-08	4.2E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08	4.5E-08
2681	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.0E-08	4.1E-08	4.2E-08	4.4E-08	4.6E-08	4.7E-08	4.8E-08	4.8E-08
2682	3.3E-08	3.4E-08	3.5E-08	3.5E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08
2683	3.3E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.0E-08
2684	3.6E-08	3.7E-08	3.7E-08	3.8E-08	3.8E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08
2685	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.1E-08	4.0E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08
2686	3.5E-08	3.6E-08	3.7E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08
2687	3.4E-08	3.5E-08	3.6E-08	3.6E-08	3.7E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.1E-08
2688	3.6E-08	3.7E-08	3.8E-08	3.8E-08	3.8E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08	4.2E-08
2689	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.1E-08	4.0E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08
2690	4.2E-08	4.4E-08	4.4E-08	4.5E-08	4.5E-08	4.4E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08
2691	3.4E-08	3.6E-08	3.6E-08	3.7E-08	3.7E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2692	3.5E-08	3.7E-08	3.7E-08	3.7E-08	3.8E-08	3.7E-08	3.7E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.2E-08
2693	3.7E-08	3.9E-08	3.9E-08	4.0E-08	4.0E-08	3.9E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08	4.3E-08
2694	4.1E-08	4.3E-08	4.3E-08	4.3E-08	4.4E-08	4.3E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.6E-08	4.6E-08
2695	4.5E-08	4.7E-08	4.8E-08	4.8E-08	4.8E-08	4.7E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08	5.0E-08	5.0E-08
2696	3.7E-08	3.8E-08	3.9E-08	3.9E-08	3.9E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.1E-08	4.2E-08	4.2E-08
2697	3.9E-08	4.1E-08	4.1E-08	4.1E-08	4.2E-08	4.1E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08	4.4E-08
2698	4.3E-08	4.4E-08	4.5E-08	4.5E-08	4.5E-08	4.4E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08	4.7E-08
2699	3.7E-08	3.9E-08	3.9E-08	3.9E-08	3.9E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.2E-08	4.2E-08	4.3E-08
2700	4.0E-08	4.2E-08	4.2E-08	4.2E-08	4.2E-08	4.1E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.5E-08
2701	4.4E-08	4.5E-08	4.6E-08	4.6E-08	4.6E-08	4.4E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08
2702	6.5E-08	6.7E-08	6.6E-08	6.4E-08	6.2E-08	5.9E-08	5.7E-08	5.7E-08	5.8E-08	6.0E-08	6.1E-08	6.1E-08	6.2E-08
2703	6.4E-08	6.6E-08	6.6E-08	6.3E-08	6.1E-08	5.8E-08	5.7E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08	6.0E-08	6.0E-08
2704	6.3E-08	6.5E-08	6.5E-08	6.2E-08	6.0E-08	5.7E-08	5.6E-08	5.6E-08	5.7E-08	5.8E-08	5.9E-08	5.9E-08	6.0E-08
2705	6.2E-08	6.4E-08	6.4E-08	6.1E-08	5.8E-08	5.6E-08	5.5E-08	5.5E-08	5.6E-08	5.7E-08	5.8E-08	5.8E-08	5.8E-08
2706	5.9E-08	6.1E-08	6.1E-08	5.8E-08	5.6E-08	5.3E-08	5.2E-08	5.2E-08	5.3E-08	5.5E-08	5.6E-08	5.6E-08	5.7E-08
2707	3.7E-08	3.8E-08	3.9E-08	3.9E-08	3.9E-08	3.8E-08	3.7E-08	3.8E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08	4.3E-08
2708	4.1E-08	4.2E-08	4.3E-08	4.3E-08	4.3E-08	4.1E-08	4.0E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08
2709	4.4E-08	4.5E-08	4.6E-08	4.6E-08	4.6E-08	4.4E-08	4.3E-08	4.3E-08	4.4E-08	4.6E-08	4.6E-08	4.7E-08	4.7E-08
2710	4.9E-08	5.1E-08	5.1E-08	5.1E-08	5.1E-08	4.8E-08	4.7E-08	4.7E-08	4.9E-08	5.0E-08	5.2E-08	5.2E-08	5.3E-08
2711	6.4E-08	6.6E-08	6.6E-08	6.5E-08	6.3E-08	5.9E-08	5.6E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08	6.1E-08
2712	6.1E-08	6.3E-08	6.3E-08	6.1E-08	5.9E-08	5.5E-08	5.3E-08	5.3E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08
2713	6.1E-08	6.3E-08	6.2E-08	6.0E-08	5.8E-08	5.5E-08	5.4E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.8E-08	5.8E-08
2714	6.0E-08	6.2E-08	6.2E-08	6.0E-08	5.8E-08	5.5E-08	5.3E-08	5.4E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08
2715	6.0E-08	6.1E-08	6.1E-08	5.9E-08	5.7E-08	5.4E-08	5.3E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08	5.6E-08	5.6E-08
2716	5.8E-08	6.0E-08	6.0E-08	5.7E-08	5.5E-08	5.2E-08	5.1E-08	5.2E-08	5.2E-08	5.4E-08	5.4E-08	5.5E-08	5.5E-08
2717	4.2E-08	4.3E-08	4.4E-08	4.4E-08	4.4E-08	4.2E-08	4.1E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.5E-08	4.5E-08
2718	4.6E-08	4.8E-08	4.8E-08	4.8E-08	4.8E-08	4.5E-08	4.4E-08	4.4E-08	4.5E-08	4.7E-08	4.7E-08	4.8E-08	4.8E-08
2719	4.7E-08	4.8E-08	4.9E-08	4.9E-08	4.9E-08	4.6E-08	4.4E-08	4.5E-08	4.7E-08	4.9E-08	5.1E-08	5.2E-08	5.2E-08
2720	5.1E-08	5.3E-08	5.3E-08	5.3E-08	5.3E-08	4.9E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08
2721	5.5E-08	5.7E-08	5.7E-08	5.7E-08	5.7E-08	5.3E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08
2722	5.8E-08	6.0E-08	6.0E-08	6.0E-08	5.9E-08	5.5E-08	5.3E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08
2723	6.0E-08	6.2E-08	6.2E-08	6.1E-08	6.1E-08	5.6E-08	5.4E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08	5.8E-08
2724	6.1E-08	6.2E-08	6.3E-08	6.2E-08	6.1E-08	5.7E-08	5.4E-08	5.5E-08	5.5E-08	5.6E-08	5.7E-08	5.8E-08	5.8E-08
2725	6.1E-08	6.3E-08	6.3E-08	6.2E-08	6.1E-08	5.7E-08	5.4E-08	5.5E-08	5.5E-08	5.6E-08	5.7E-08	5.8E-08	5.8E-08
2726	6.0E-08	6.2E-08	6.2E-08	6.1E-08	6.0E-08	5.6E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08	5.7E-08
2727	5.9E-08	6.1E-08	6.1E-08	6.0E-08	5.9E-08	5.5E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.6E-08	5.7E-08
2728	5.7E-08	5.8E-08	5.8E-08	5.7E-08	5.5E-08	5.2E-08	5.0E-08	5.0E-08	5.2E-08	5.3E-08	5.5E-08	5.5E-08	5.6E-08
2729	5.7E-08	5.9E-08	5.9E-08	5.7E-08	5.5E-08	5.2E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.4E-08	5.5E-08
2730	5.7E-08	5.9E-08	5.8E-08	5.6E-08	5.4E-08	5.2E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.4E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2731	5.6E-08	5.8E-08	5.8E-08	5.5E-08	5.4E-08	5.1E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08	5.3E-08	5.3E-08
2732	5.5E-08	5.6E-08	5.6E-08	5.4E-08	5.2E-08	4.9E-08	4.8E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
2733	4.4E-08	4.5E-08	4.6E-08	4.5E-08	4.5E-08	4.2E-08	4.1E-08	4.2E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	4.8E-08
2734	4.7E-08	4.8E-08	4.9E-08	4.9E-08	4.8E-08	4.5E-08	4.3E-08	4.4E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08
2735	5.1E-08	5.2E-08	5.3E-08	5.2E-08	5.2E-08	4.8E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08
2736	5.3E-08	5.5E-08	5.5E-08	5.5E-08	5.4E-08	5.0E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08	5.2E-08
2737	5.5E-08	5.6E-08	5.7E-08	5.6E-08	5.5E-08	5.1E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08	5.3E-08
2738	5.6E-08	5.7E-08	5.8E-08	5.7E-08	5.6E-08	5.2E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.3E-08	5.3E-08
2739	5.6E-08	5.8E-08	5.8E-08	5.7E-08	5.6E-08	5.2E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.3E-08	5.4E-08
2740	5.6E-08	5.8E-08	5.8E-08	5.7E-08	5.6E-08	5.2E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.3E-08	5.3E-08
2741	5.6E-08	5.7E-08	5.7E-08	5.6E-08	5.5E-08	5.1E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.3E-08	5.3E-08
2742	5.3E-08	5.5E-08	5.5E-08	5.3E-08	5.2E-08	4.9E-08	4.7E-08	4.7E-08	4.9E-08	5.0E-08	5.1E-08	5.2E-08	5.2E-08
2743	5.4E-08	5.5E-08	5.5E-08	5.3E-08	5.2E-08	4.9E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08
2744	5.4E-08	5.5E-08	5.5E-08	5.3E-08	5.1E-08	4.9E-08	4.7E-08	4.8E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.1E-08
2745	4.7E-08	4.8E-08	4.8E-08	4.8E-08	4.7E-08	4.4E-08	4.3E-08	4.3E-08	4.4E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08
2746	4.9E-08	5.0E-08	5.1E-08	5.0E-08	5.0E-08	4.6E-08	4.5E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08	4.8E-08
2747	5.0E-08	5.2E-08	5.2E-08	5.1E-08	5.1E-08	4.7E-08	4.5E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08
2748	5.1E-08	5.3E-08	5.3E-08	5.2E-08	5.2E-08	4.8E-08	4.6E-08	4.7E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08	4.9E-08
2749	5.2E-08	5.4E-08	5.4E-08	5.3E-08	5.2E-08	4.9E-08	4.7E-08	4.7E-08	4.8E-08	4.8E-08	4.9E-08	5.0E-08	5.0E-08
2750	5.2E-08	5.4E-08	5.4E-08	5.3E-08	5.2E-08	4.9E-08	4.7E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08	5.0E-08	5.0E-08
2751	5.2E-08	5.3E-08	5.4E-08	5.2E-08	5.1E-08	4.8E-08	4.6E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08	5.0E-08
2752	4.9E-08	5.0E-08	5.0E-08	4.9E-08	4.8E-08	4.5E-08	4.3E-08	4.3E-08	4.5E-08	4.7E-08	4.8E-08	4.9E-08	4.9E-08
2753	5.1E-08	5.2E-08	5.2E-08	5.0E-08	4.9E-08	4.6E-08	4.5E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.8E-08	4.9E-08
2754	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
2755	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
2756	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
2757	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.5E-08
2758	2.2E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08	2.6E-08	2.7E-08	2.7E-08	2.8E-08	2.8E-08
2759	1.9E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.5E-08
2760	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08
2761	1.9E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08
2762	2.7E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	3.9E-08
2763	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.8E-08	3.1E-08	3.4E-08	3.5E-08	3.6E-08
2764	3.2E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	4.0E-08	4.1E-08	4.6E-08	4.9E-08	5.2E-08	5.4E-08	5.5E-08
2765	2.0E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08
2766	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08
2767	2.0E-08	2.0E-08	2.0E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08
2768	2.0E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08	2.4E-08
2769	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2770	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08	2.7E-08
2771	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.0E-08
2772	1.9E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.4E-08	2.5E-08	2.7E-08	2.8E-08	2.8E-08
2773	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
2774	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
2775	2.5E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.3E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08
2776	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
2777	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.6E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08
2778	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08
2779	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
2780	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08
2781	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
2782	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08
2783	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08
2784	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08
2785	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
2786	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.2E-08
2787	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
2788	1.6E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
2789	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08
2790	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08
2791	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08
2792	2.0E-08	2.0E-08	2.0E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08
2793	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2794	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
2795	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
2796	1.8E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
2797	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08
2798	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
2799	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08
2800	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08
2801	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08
2802	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08
2803	2.4E-08	2.5E-08	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08
2804	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08
2805	2.0E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08
2806	2.3E-08	2.3E-08	2.3E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	2.6E-08	2.6E-08
2807	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08
2808	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08	2.4E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2809	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08
2810	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
2811	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2812	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
2813	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08
2814	1.3E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08
2815	1.1E-08	1.2E-08	1.1E-08	1.1E-08	1.1E-08	1.1E-08	1.2E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08
2816	1.2E-08	1.3E-08	1.3E-08	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08
2817	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
2818	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08
2819	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08
2820	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08
2821	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08
2822	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08
2823	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08
2824	1.2E-08	1.3E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08
2825	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
2826	1.5E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2827	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08
2828	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
2829	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
2830	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
2831	1.4E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
2832	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
2833	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08
2834	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08
2835	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
2836	1.3E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08
2837	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
2838	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
2839	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08
2840	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
2841	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
2842	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
2843	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
2844	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.8E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08
2845	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08
2846	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08
2847	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.7E-08	2.0E-08	2.2E-08	2.3E-08	2.4E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2848	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2849	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
2850	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.7E-08	1.9E-08	2.1E-08	2.3E-08	2.3E-08
2851	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08
2852	9.2E-09	9.8E-09	9.9E-09	9.9E-09	1.0E-08	1.0E-08	1.1E-08	1.1E-08	1.5E-08	1.9E-08	2.1E-08	2.3E-08	2.4E-08
2853	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
2854	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08
2855	2.1E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08
2856	2.3E-08	2.3E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08
2857	1.9E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
2858	2.1E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08
2859	2.2E-08	2.3E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08	2.4E-08
2860	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08
2861	2.0E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08
2862	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08	2.4E-08
2863	2.3E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	2.6E-08
2864	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08
2865	1.9E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08
2866	2.1E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08
2867	2.3E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	2.6E-08	2.6E-08
2868	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
2869	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08
2870	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08
2871	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
2872	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
2873	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
2874	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
2875	1.6E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2876	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08
2877	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.9E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08
2878	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
2879	1.7E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
2880	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
2881	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
2882	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
2883	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
2884	1.9E-08	2.0E-08	2.0E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
2885	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
2886	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2887	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2888	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
2889	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.8E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08
2890	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.7E-08	1.9E-08	2.1E-08	2.2E-08	2.2E-08
2891	1.6E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.7E-08	1.9E-08	2.1E-08	2.1E-08	2.2E-08
2892	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
2893	1.8E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.7E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
2894	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08
2895	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08
2896	1.6E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
2897	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
2898	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
2899	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08
2900	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
2901	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08
2902	2.0E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
2903	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08
2904	2.2E-08	2.3E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08
2905	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08
2906	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
2907	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2908	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
2909	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
2910	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.2E-08	2.2E-08	2.3E-08
2911	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	2.0E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08
2912	2.1E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08
2913	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08
2914	2.3E-08	2.3E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08	2.4E-08
2915	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
2916	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
2917	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2918	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08
2919	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08
2920	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08
2921	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.8E-08	1.8E-08	2.1E-08	2.3E-08	2.5E-08	2.6E-08	2.6E-08
2922	2.1E-08	2.2E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08
2923	2.2E-08	2.3E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08	2.4E-08
2924	2.3E-08	2.4E-08	2.4E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08
2925	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2926	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08
2927	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08
2928	1.8E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
2929	1.9E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
2930	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08
2931	1.9E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.9E-08	1.9E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08
2932	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08
2933	2.3E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08
2934	2.4E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.5E-08
2935	3.1E-08	3.2E-08	3.1E-08	2.9E-08	2.7E-08	2.5E-08	2.4E-08	2.3E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08	2.8E-08
2936	3.0E-08	3.1E-08	3.1E-08	2.9E-08	2.7E-08	2.5E-08	2.4E-08	2.3E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
2937	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08
2938	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08
2939	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
2940	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
2941	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
2942	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08
2943	2.0E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08
2944	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08	2.7E-08
2945	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08
2946	2.3E-08	2.4E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.5E-08
2947	2.5E-08	2.5E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	2.6E-08
2948	1.4E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
2949	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
2950	1.5E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
2951	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2952	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08
2953	1.9E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08
2954	2.0E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.2E-08
2955	2.1E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08
2956	2.0E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.2E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08
2957	2.2E-08	2.3E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08
2958	2.4E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	2.6E-08
2959	2.6E-08	2.6E-08	2.6E-08	2.4E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08
2960	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08
2961	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08
2962	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
2963	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08
2964	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
2965	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
2966	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
2967	2.1E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08
2968	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08
2969	2.1E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.3E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08
2970	2.3E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08	2.7E-08	2.7E-08
2971	2.5E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08	2.7E-08
2972	1.3E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
2973	1.4E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
2974	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
2975	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2976	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
2977	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08
2978	2.0E-08	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08
2979	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08
2980	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08
2981	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.3E-08	2.5E-08	2.7E-08	2.8E-08	2.8E-08
2982	2.4E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08	2.8E-08
2983	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08
2984	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08
2985	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
2986	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08
2987	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08
2988	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08
2989	1.9E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08	2.1E-08
2990	2.1E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08
2991	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08	2.4E-08	2.4E-08
2992	2.3E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08
2993	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08
2994	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08
2995	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08
2996	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
2997	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
2998	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08
2999	1.3E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
3000	1.4E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3001	1.5E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3002	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08
3003	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3004	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08
3005	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
3006	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08
3007	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
3008	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08
3009	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3010	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3011	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3012	1.5E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08
3013	1.4E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3014	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08
3015	1.3E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
3016	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
3017	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3018	1.3E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08
3019	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08
3020	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08
3021	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08
3022	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3023	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08
3024	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08
3025	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3026	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3027	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
3028	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3029	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
3030	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
3031	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
3032	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
3033	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
3034	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08
3035	1.2E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08
3036	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08
3037	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
3038	1.1E-08	1.1E-08	1.1E-08	1.1E-08	1.1E-08	1.1E-08	1.1E-08	1.2E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.3E-08
3039	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.4E-08
3040	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08
3041	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
3042	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3043	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3044	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3045	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3046	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
3047	1.6E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3048	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
3049	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08
3050	1.7E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08
3051	1.9E-08	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.0E-08	2.2E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08
3052	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3053	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
3054	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08
3055	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3056	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3057	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08
3058	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08
3059	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
3060	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
3061	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3062	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3063	1.7E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3064	1.7E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
3065	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
3066	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.9E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08
3067	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08
3068	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3069	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08
3070	1.6E-08	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	2.2E-08	2.6E-08	2.8E-08	3.0E-08	3.1E-08
3071	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.1E-08	2.3E-08	2.4E-08	2.4E-08
3072	1.4E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
3073	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.6E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08
3074	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
3075	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
3076	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
3077	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3078	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3079	1.6E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3080	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3081	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3082	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
3083	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08
3084	1.8E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
3085	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08
3086	2.0E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	2.0E-08	2.2E-08	2.4E-08	2.6E-08	2.7E-08	2.7E-08
3087	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
3088	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3089	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.2E-08	2.2E-08	2.3E-08
3090	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	2.1E-08	2.4E-08	2.7E-08	2.8E-08	2.9E-08
3091	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	2.0E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08
3092	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.8E-08	1.9E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08
3093	1.9E-08	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08
3094	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3095	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08
3096	1.3E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08
3097	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08
3098	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3099	1.6E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08
3100	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
3101	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
3102	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
3103	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
3104	1.7E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3105	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3106	1.8E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
3107	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08
3108	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
3109	2.0E-08	2.1E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08
3110	2.0E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.1E-08	2.2E-08	2.4E-08	2.4E-08	2.5E-08
3111	2.0E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
3112	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
3113	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	2.1E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08
3114	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	2.0E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08
3115	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
3116	1.9E-08	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
3117	2.0E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08
3118	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3119	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
3120	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3121	1.4E-08	1.4E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08
3122	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3123	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3124	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3125	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3126	1.7E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3127	1.7E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.8E-08
3128	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08
3129	1.8E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
3130	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
3131	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
3132	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08
3133	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
3134	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.1E-08	2.2E-08	2.4E-08	2.4E-08	2.5E-08
3135	2.5E-08	2.6E-08	2.6E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.6E-08	2.8E-08	3.1E-08	3.2E-08	3.4E-08	3.4E-08
3136	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08
3137	2.0E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	1.8E-08	2.0E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08
3138	1.9E-08	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	2.1E-08	2.4E-08	2.6E-08	2.8E-08	2.8E-08
3139	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	2.1E-08	2.3E-08	2.5E-08	2.6E-08	2.7E-08
3140	2.0E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	2.0E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08
3141	2.0E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08
3142	2.1E-08	2.1E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.0E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08
3143	2.3E-08	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.0E-08
3144	5.4E-08	5.8E-08	6.0E-08	6.3E-08	6.5E-08	6.7E-08	7.0E-08	7.2E-08	7.8E-08	8.2E-08	8.6E-08	8.8E-08	8.9E-08
3145	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08
3146	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08
3147	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3148	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08
3149	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08
3150	1.6E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
3151	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
3152	1.7E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
3153	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
3154	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08
3155	1.8E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
3156	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
3157	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
3158	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08
3159	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3160	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
3161	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
3162	2.1E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08	2.3E-08
3163	2.5E-08	2.6E-08	2.6E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.3E-08
3164	2.3E-08	2.4E-08	2.4E-08	2.3E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08
3165	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08
3166	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	2.1E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08
3167	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	2.1E-08	2.4E-08	2.5E-08	2.7E-08	2.7E-08
3168	2.0E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.1E-08	2.2E-08	2.4E-08	2.4E-08	2.5E-08
3169	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08
3170	2.1E-08	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08
3171	2.4E-08	2.5E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.6E-08	2.8E-08	2.9E-08	3.1E-08	3.1E-08	3.2E-08
3172	4.4E-08	4.6E-08	4.8E-08	5.0E-08	5.1E-08	5.2E-08	5.4E-08	5.6E-08	6.1E-08	6.4E-08	6.7E-08	6.9E-08	7.0E-08
3173	1.0E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.6E-07	1.7E-07	1.8E-07	1.8E-07	1.9E-07
3174	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08
3175	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08	1.7E-08
3176	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08
3177	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
3178	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08
3179	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08
3180	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08
3181	1.8E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
3182	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
3183	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
3184	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
3185	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	2.0E-08	2.0E-08
3186	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
3187	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
3188	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.0E-08
3189	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08
3190	2.1E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08
3191	2.1E-08	2.2E-08	2.2E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.9E-08	2.1E-08	2.1E-08	2.2E-08	2.2E-08
3192	2.3E-08	2.3E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.0E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08
3193	2.6E-08	2.8E-08	2.8E-08	2.7E-08	2.7E-08	2.6E-08	2.6E-08	2.7E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08
3194	2.2E-08	2.3E-08	2.3E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08
3195	2.0E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	2.1E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08
3196	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	2.1E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08
3197	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08
3198	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3199	2.2E-08	2.3E-08	2.3E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.3E-08	2.4E-08	2.6E-08	2.6E-08	2.7E-08
3200	2.4E-08	2.5E-08	2.5E-08	2.5E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.1E-08
3201	3.1E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	4.0E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08
3202	7.0E-08	7.6E-08	8.0E-08	8.4E-08	8.8E-08	9.2E-08	9.6E-08	1.0E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
3203	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
3204	2.0E-08	2.1E-08	2.1E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
3205	2.1E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	2.0E-08	2.0E-08	2.1E-08	2.1E-08
3206	2.1E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
3207	2.2E-08	2.3E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
3208	2.3E-08	2.4E-08	2.4E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.0E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08
3209	2.7E-08	2.8E-08	2.8E-08	2.7E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08
3210	2.3E-08	2.4E-08	2.4E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.0E-08	2.3E-08	2.4E-08	2.6E-08	2.7E-08	2.7E-08
3211	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.2E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08
3212	1.9E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	2.2E-08	2.5E-08	2.8E-08	3.0E-08	3.0E-08
3213	2.1E-08	2.2E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.2E-08	2.4E-08	2.6E-08	2.7E-08	2.7E-08
3214	2.2E-08	2.3E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.1E-08	2.3E-08	2.4E-08	2.6E-08	2.7E-08	2.7E-08
3215	2.2E-08	2.3E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08	2.8E-08
3216	2.4E-08	2.5E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.2E-08
3217	2.8E-08	2.9E-08	3.0E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.5E-08	3.7E-08	3.9E-08	4.0E-08	4.1E-08
3218	2.0E-08	2.2E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08	3.2E-08	3.7E-08	4.1E-08	4.4E-08	4.5E-08
3219	1.5E-07	1.6E-07	1.7E-07	1.8E-07	1.9E-07	2.0E-07	2.1E-07	2.2E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.8E-07
3220	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.8E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
3221	2.1E-08	2.1E-08	2.1E-08	2.0E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3222	2.2E-08	2.2E-08	2.2E-08	2.1E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	2.0E-08	2.1E-08	2.3E-08	2.3E-08	2.4E-08
3223	2.3E-08	2.4E-08	2.4E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08	2.7E-08
3224	2.5E-08	2.7E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.4E-08	2.4E-08	2.8E-08	3.1E-08	3.4E-08	3.5E-08	3.6E-08
3225	2.2E-08	2.3E-08	2.3E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	2.2E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08
3226	2.0E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	2.1E-08	2.4E-08	2.7E-08	2.8E-08	2.9E-08
3227	1.8E-08	2.0E-08	2.0E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	2.4E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08
3228	2.2E-08	2.3E-08	2.3E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.5E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08
3229	2.3E-08	2.4E-08	2.4E-08	2.3E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08
3230	2.4E-08	2.5E-08	2.6E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
3231	2.6E-08	2.7E-08	2.8E-08	2.8E-08	2.7E-08	2.7E-08	2.8E-08	2.8E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08	3.7E-08
3232	2.8E-08	2.9E-08	3.0E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.5E-08	3.8E-08	4.0E-08	4.1E-08	4.2E-08
3233	1.6E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08	2.4E-08	2.9E-08	3.2E-08	3.5E-08	3.6E-08
3234	4.4E-08	4.7E-08	5.0E-08	5.2E-08	5.3E-08	5.5E-08	5.8E-08	6.0E-08	6.7E-08	7.3E-08	7.7E-08	8.0E-08	8.1E-08
3235	2.4E-08	2.4E-08	2.4E-08	2.3E-08	2.1E-08	2.0E-08	2.0E-08	1.9E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08	2.7E-08
3236	2.5E-08	2.6E-08	2.6E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.7E-08	3.0E-08	3.3E-08	3.5E-08	3.5E-08
3237	2.3E-08	2.4E-08	2.4E-08	2.3E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.3E-08	2.6E-08	2.8E-08	3.0E-08	3.0E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3238	2.0E-08	2.1E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	2.2E-08	2.5E-08	2.8E-08	2.9E-08	3.0E-08
3239	1.8E-08	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	2.5E-08	3.0E-08	3.4E-08	3.7E-08	3.9E-08
3240	2.3E-08	2.4E-08	2.4E-08	2.3E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.6E-08	2.9E-08	3.1E-08	3.3E-08	3.4E-08
3241	2.3E-08	2.5E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.6E-08	2.9E-08	3.1E-08	3.3E-08	3.3E-08
3242	2.5E-08	2.6E-08	2.7E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08	3.7E-08
3243	2.7E-08	2.8E-08	2.9E-08	2.9E-08	2.9E-08	2.9E-08	2.9E-08	3.0E-08	3.3E-08	3.6E-08	3.8E-08	4.0E-08	4.0E-08
3244	2.8E-08	3.0E-08	3.1E-08	3.1E-08	3.1E-08	3.1E-08	3.2E-08	3.3E-08	3.7E-08	4.0E-08	4.2E-08	4.4E-08	4.5E-08
3245	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08	3.9E-08	4.3E-08	4.6E-08	4.8E-08	4.9E-08
3246	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	4.2E-08	4.6E-08	4.9E-08	5.1E-08	5.2E-08
3247	5.2E-08	5.5E-08	5.8E-08	6.0E-08	6.2E-08	6.4E-08	6.7E-08	7.0E-08	7.6E-08	8.1E-08	8.4E-08	8.7E-08	8.8E-08
3248	2.6E-08	2.7E-08	2.7E-08	2.5E-08	2.4E-08	2.2E-08	2.2E-08	2.1E-08	2.3E-08	2.5E-08	2.6E-08	2.7E-08	2.7E-08
3249	2.7E-08	2.8E-08	2.8E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.3E-08	2.6E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08
3250	2.6E-08	2.7E-08	2.7E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.3E-08	2.6E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08
3251	2.4E-08	2.5E-08	2.5E-08	2.4E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.4E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08
3252	1.8E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	2.4E-08	2.9E-08	3.2E-08	3.5E-08	3.6E-08
3253	2.4E-08	2.5E-08	2.5E-08	2.4E-08	2.2E-08	2.2E-08	2.1E-08	2.1E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08
3254	2.4E-08	2.5E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	2.9E-08
3255	2.4E-08	2.5E-08	2.6E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.6E-08	2.7E-08	2.9E-08	3.0E-08	3.0E-08
3256	2.5E-08	2.6E-08	2.6E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.2E-08
3257	2.6E-08	2.7E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.5E-08
3258	2.7E-08	2.9E-08	3.0E-08	2.9E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.3E-08	3.6E-08	3.8E-08	3.9E-08	3.9E-08
3259	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08	3.5E-08	3.5E-08	3.6E-08	4.0E-08	4.3E-08	4.5E-08	4.6E-08	4.7E-08
3260	3.7E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08	4.4E-08	4.6E-08	4.8E-08	5.3E-08	5.7E-08	6.0E-08	6.2E-08	6.3E-08
3261	2.8E-08	2.8E-08	2.8E-08	2.7E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.5E-08	2.6E-08	2.8E-08	2.8E-08	2.9E-08
3262	2.8E-08	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
3263	2.6E-08	2.7E-08	2.7E-08	2.6E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.6E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08
3264	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.4E-08	2.8E-08	3.2E-08	3.4E-08	3.5E-08
3265	2.5E-08	2.6E-08	2.6E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08
3266	2.5E-08	2.6E-08	2.6E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.2E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08
3267	2.5E-08	2.6E-08	2.6E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
3268	2.5E-08	2.6E-08	2.7E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.5E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08
3269	2.6E-08	2.7E-08	2.7E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.8E-08	3.0E-08	3.2E-08	3.2E-08	3.3E-08
3270	2.7E-08	2.9E-08	2.9E-08	2.9E-08	2.8E-08	2.8E-08	2.9E-08	2.9E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08	3.6E-08
3271	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.4E-08	3.6E-08	3.8E-08	4.0E-08	4.1E-08	4.2E-08
3272	3.4E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08	3.9E-08	4.0E-08	4.1E-08	4.5E-08	4.7E-08	4.9E-08	5.1E-08	5.2E-08
3273	2.7E-08	2.9E-08	2.9E-08	2.7E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.7E-08	3.0E-08	3.2E-08	3.4E-08	3.5E-08
3274	2.1E-08	2.2E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	1.9E-08	2.5E-08	3.0E-08	3.3E-08	3.6E-08	3.7E-08
3275	2.6E-08	2.6E-08	2.6E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.4E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08
3276	2.6E-08	2.7E-08	2.7E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.5E-08	2.6E-08	2.8E-08	2.9E-08	2.9E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3277	2.6E-08	2.7E-08	2.7E-08	2.6E-08	2.4E-08	2.4E-08	2.3E-08	2.3E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
3278	2.6E-08	2.7E-08	2.7E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.0E-08
3279	2.6E-08	2.7E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.8E-08	2.9E-08	3.1E-08	3.1E-08	3.2E-08
3280	2.7E-08	2.8E-08	2.9E-08	2.8E-08	2.8E-08	2.7E-08	2.8E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08
3281	2.9E-08	3.0E-08	3.1E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.3E-08	3.5E-08	3.7E-08	3.8E-08	3.8E-08
3282	3.2E-08	3.3E-08	3.4E-08	3.4E-08	3.4E-08	3.5E-08	3.6E-08	3.7E-08	3.9E-08	4.1E-08	4.3E-08	4.4E-08	4.5E-08
3283	2.9E-08	3.0E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
3284	2.4E-08	2.5E-08	2.5E-08	2.4E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.5E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08
3285	2.7E-08	2.7E-08	2.7E-08	2.6E-08	2.4E-08	2.3E-08	2.3E-08	2.2E-08	2.5E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08
3286	2.7E-08	2.8E-08	2.8E-08	2.6E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
3287	2.7E-08	2.8E-08	2.8E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
3288	2.7E-08	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.0E-08
3289	2.7E-08	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08
3290	2.7E-08	2.8E-08	2.8E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
3291	2.8E-08	2.9E-08	3.0E-08	2.9E-08	2.9E-08	2.9E-08	2.9E-08	3.0E-08	3.2E-08	3.3E-08	3.5E-08	3.5E-08	3.6E-08
3292	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.2E-08	3.2E-08	3.2E-08	3.3E-08	3.5E-08	3.7E-08	3.9E-08	4.0E-08	4.0E-08
3293	2.7E-08	2.8E-08	2.9E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08
3294	2.8E-08	2.9E-08	2.9E-08	2.9E-08	2.8E-08	2.8E-08	2.8E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08
3295	2.8E-08	3.0E-08	3.0E-08	3.0E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.3E-08	3.4E-08	3.6E-08	3.7E-08	3.7E-08
3296	2.8E-08	2.9E-08	2.9E-08	2.9E-08	2.9E-08	2.8E-08	2.9E-08	2.9E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08	3.5E-08
3297	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
3298	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.8E-08	1.8E-08	1.9E-08	1.9E-08	2.3E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08
3299	1.8E-08	1.8E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
3300	1.4E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08
3301	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
3302	1.4E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08
3303	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08
3304	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08
3305	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08
3306	1.5E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08
3307	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.7E-08
3308	1.6E-08	1.7E-08	1.7E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
3309	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.7E-08	1.8E-08	1.9E-08	1.9E-08	1.9E-08
3310	1.8E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	1.9E-08	2.2E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08
3311	1.7E-08	1.8E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
3312	1.7E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
3313	1.3E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.2E-08	1.2E-08	1.3E-08	1.3E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
3314	1.4E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.5E-08
3315	1.3E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.3E-08	1.4E-08	1.5E-08	1.6E-08	1.6E-08	1.7E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3316	1.4E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08
3317	1.4E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.3E-08	1.2E-08	1.3E-08	1.3E-08	1.4E-08	1.4E-08	1.5E-08	1.5E-08
3318	1.5E-08	1.5E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.3E-08	1.3E-08	1.4E-08	1.5E-08	1.5E-08	1.6E-08	1.6E-08
3319	1.6E-08	1.6E-08	1.6E-08	1.6E-08	1.5E-08	1.5E-08	1.5E-08	1.5E-08	1.6E-08	1.7E-08	1.7E-08	1.8E-08	1.8E-08
3320	8.1E-07	8.2E-07	8.1E-07	7.7E-07	7.2E-07	6.5E-07	5.9E-07	5.5E-07	5.2E-07	5.2E-07	5.3E-07	5.3E-07	5.3E-07
3321	6.5E-07	6.5E-07	6.5E-07	6.2E-07	5.8E-07	5.3E-07	4.9E-07	4.5E-07	4.3E-07	4.3E-07	4.3E-07	4.4E-07	4.4E-07
3322	5.1E-07	5.2E-07	5.2E-07	5.0E-07	4.6E-07	4.3E-07	4.0E-07	3.7E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07	3.7E-07
3323	4.3E-07	4.4E-07	4.3E-07	4.1E-07	3.9E-07	3.6E-07	3.4E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
3324	3.6E-07	3.7E-07	3.6E-07	3.5E-07	3.3E-07	3.0E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07
3325	2.9E-07	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.5E-07	2.3E-07	2.2E-07	2.2E-07	2.2E-07	2.3E-07	2.3E-07	2.3E-07
3326	2.5E-07	2.6E-07	2.6E-07	2.5E-07	2.3E-07	2.2E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07
3327	2.4E-07	2.4E-07	2.4E-07	2.3E-07	2.2E-07	2.0E-07	2.0E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
3328	2.3E-07	2.3E-07	2.3E-07	2.2E-07	2.1E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07
3329	1.8E-07	1.8E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07
3330	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07
3331	1.6E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07
3332	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
3333	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07
3334	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.1E-07	1.1E-07	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
3335	1.2E-07	1.3E-07	1.3E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	9.7E-08	1.0E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07
3336	1.6E-07	1.6E-07	1.6E-07	1.6E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
3337	1.7E-07	1.7E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07
3338	1.8E-07	1.9E-07	1.9E-07	1.8E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.6E-07	1.6E-07
3339	1.9E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.7E-07	1.7E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
3340	2.1E-07	2.1E-07	2.1E-07	2.1E-07	1.9E-07	1.8E-07	1.8E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
3341	2.5E-07	2.5E-07	2.5E-07	2.4E-07	2.2E-07	2.1E-07	2.1E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07
3342	2.9E-07	3.0E-07	3.0E-07	2.8E-07	2.7E-07	2.5E-07	2.4E-07	2.4E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07
3343	3.4E-07	3.5E-07	3.5E-07	3.4E-07	3.1E-07	2.9E-07	2.8E-07	2.7E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.8E-07
3344	3.7E-07	3.8E-07	3.8E-07	3.6E-07	3.4E-07	3.2E-07	3.0E-07	2.9E-07	2.9E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07
3345	4.0E-07	4.1E-07	4.1E-07	3.9E-07	3.6E-07	3.4E-07	3.3E-07	3.2E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
3346	4.2E-07	4.3E-07	4.2E-07	3.9E-07	3.5E-07	3.3E-07	3.2E-07	3.1E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07
3347	4.3E-07	4.3E-07	4.3E-07	4.0E-07	3.6E-07	3.4E-07	3.2E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
3348	4.1E-07	4.1E-07	4.1E-07	3.9E-07	3.6E-07	3.4E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07	3.3E-07
3349	4.3E-07	4.4E-07	4.5E-07	4.3E-07	4.0E-07	3.9E-07	3.9E-07	3.9E-07	3.8E-07	3.8E-07	3.9E-07	3.9E-07	3.9E-07
3350	4.6E-07	4.7E-07	4.8E-07	4.7E-07	4.4E-07	4.4E-07	4.4E-07	4.4E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07
3351	4.0E-07	4.1E-07	4.2E-07	4.0E-07	3.8E-07	3.7E-07	3.7E-07	3.7E-07	3.6E-07	3.6E-07	3.7E-07	3.7E-07	3.7E-07
3352	4.0E-07	4.1E-07	4.1E-07	3.9E-07	3.7E-07	3.6E-07	3.6E-07	3.6E-07	3.5E-07	3.5E-07	3.6E-07	3.6E-07	3.6E-07
3353	4.1E-07	4.2E-07	4.2E-07	3.9E-07	3.5E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
3354	3.8E-07	3.8E-07	3.9E-07	3.4E-07	2.7E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3355	4.2E-07	4.3E-07	4.4E-07	3.9E-07	3.2E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07
3356	4.2E-07	4.3E-07	4.3E-07	4.0E-07	3.3E-07	3.0E-07	3.1E-07	3.1E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07
3357	5.0E-07	5.1E-07	5.1E-07	5.0E-07	4.5E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.1E-07	3.1E-07	3.1E-07	3.1E-07
3358	5.8E-07	6.0E-07	5.9E-07	5.4E-07	5.0E-07	4.1E-07	4.2E-07	4.3E-07	4.3E-07	4.3E-07	4.4E-07	4.4E-07	4.4E-07
3359	5.3E-07	5.4E-07	5.2E-07	3.8E-07	3.4E-07	3.2E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
3360	4.0E-07	4.1E-07	3.9E-07	2.9E-07	2.5E-07	2.5E-07	2.5E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
3361	4.4E-07	4.5E-07	4.2E-07	3.0E-07	2.6E-07	2.6E-07	2.6E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07	2.7E-07
3362	4.6E-07	4.7E-07	4.3E-07	3.2E-07	2.8E-07	2.8E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
3363	3.7E-07	3.8E-07	3.7E-07	3.3E-07	3.2E-07	3.2E-07	3.3E-07	3.3E-07	3.3E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
3364	3.3E-07	3.4E-07	3.3E-07	3.1E-07	3.0E-07	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07	3.2E-07
3365	2.1E-07	2.2E-07	2.2E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
3366	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07
3367	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
3368	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
3369	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07	1.9E-07
3370	2.2E-07	2.3E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
3371	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07
3372	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
3373	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.2E-07	1.2E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
3374	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.1E-07	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07
3375	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
3376	1.4E-07	1.4E-07	1.5E-07	1.4E-07	1.4E-07	1.3E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07	1.2E-07
3377	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.4E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
3378	1.5E-07	1.5E-07	1.6E-07	1.5E-07	1.5E-07	1.4E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07	1.3E-07
3379	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.7E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
3380	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	1.9E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
3381	2.3E-07	2.4E-07	2.5E-07	2.5E-07	2.6E-07	2.5E-07	2.4E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07	2.5E-07
3382	2.7E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.8E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07	2.6E-07
3383	3.0E-07	3.1E-07	3.2E-07	3.2E-07	3.2E-07	3.0E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07
3384	4.6E-07	4.8E-07	4.9E-07	4.9E-07	5.0E-07	4.1E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07	3.4E-07
3385	1.7E-06	1.8E-06	1.8E-06	1.8E-06	1.9E-06	1.4E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06	1.0E-06
3386	7.6E-07	7.8E-07	8.0E-07	8.1E-07	8.3E-07	6.0E-07	4.7E-07	4.9E-07	4.8E-07	4.8E-07	4.8E-07	4.8E-07	4.8E-07
3387	4.5E-07	4.6E-07	4.7E-07	4.8E-07	5.0E-07	4.1E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07	3.5E-07
3388	3.7E-07	3.8E-07	3.9E-07	4.0E-07	4.0E-07	3.4E-07	2.9E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07	3.0E-07
3389	1.8E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	1.8E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07	1.8E-07
3390	1.5E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
3391	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07
3392	1.6E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07	1.9E-07	1.9E-07	1.9E-07	2.0E-07	2.0E-07	2.0E-07	2.0E-07
3393	2.2E-07	2.3E-07	2.4E-07	2.5E-07	2.6E-07	2.7E-07	2.7E-07	2.8E-07	2.8E-07	2.9E-07	2.9E-07	2.9E-07	2.9E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3394	1.7E-07	1.8E-07	1.8E-07	1.9E-07	2.0E-07	2.0E-07	2.1E-07	2.1E-07	2.1E-07	2.2E-07	2.2E-07	2.2E-07	2.2E-07
3395	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.6E-07	1.6E-07	1.7E-07	1.7E-07	1.7E-07	1.8E-07	1.8E-07	1.8E-07
3396	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
3397	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
3398	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07	1.5E-07
3399	8.3E-08	8.7E-08	8.8E-08	9.0E-08	9.2E-08	9.3E-08	9.4E-08	9.7E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07	1.1E-07
3400	6.7E-08	7.0E-08	7.0E-08	7.1E-08	7.2E-08	7.1E-08	7.2E-08	7.4E-08	7.6E-08	7.7E-08	7.9E-08	8.0E-08	8.0E-08
3401	6.0E-08	6.2E-08	6.2E-08	6.2E-08	6.3E-08	6.2E-08	6.2E-08	6.3E-08	6.5E-08	6.8E-08	6.9E-08	7.0E-08	7.1E-08
3402	6.0E-08	6.2E-08	6.2E-08	6.2E-08	6.2E-08	6.1E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.8E-08	6.9E-08	6.9E-08
3403	5.6E-08	5.8E-08	5.8E-08	5.8E-08	5.8E-08	5.8E-08	5.8E-08	5.9E-08	6.2E-08	6.4E-08	6.5E-08	6.6E-08	6.7E-08
3404	5.4E-08	5.6E-08	5.6E-08	5.6E-08	5.7E-08	5.7E-08	5.7E-08	5.9E-08	6.1E-08	6.3E-08	6.4E-08	6.5E-08	6.5E-08
3405	6.3E-08	6.6E-08	6.7E-08	6.8E-08	6.9E-08	7.0E-08	7.2E-08	7.4E-08	7.7E-08	7.9E-08	8.0E-08	8.1E-08	8.2E-08
3406	6.7E-08	7.0E-08	7.1E-08	7.3E-08	7.5E-08	7.6E-08	7.8E-08	8.1E-08	8.3E-08	8.5E-08	8.7E-08	8.8E-08	8.9E-08
3407	6.3E-08	6.5E-08	6.7E-08	6.8E-08	7.0E-08	7.1E-08	7.3E-08	7.5E-08	7.8E-08	8.0E-08	8.1E-08	8.2E-08	8.3E-08
3408	7.2E-08	7.6E-08	7.8E-08	8.0E-08	8.2E-08	8.4E-08	8.7E-08	9.0E-08	9.3E-08	9.6E-08	9.8E-08	9.9E-08	1.0E-07
3409	6.6E-08	6.9E-08	7.0E-08	7.2E-08	7.4E-08	7.6E-08	7.8E-08	8.0E-08	8.3E-08	8.6E-08	8.8E-08	8.9E-08	8.9E-08
3410	6.0E-08	6.3E-08	6.4E-08	6.5E-08	6.7E-08	6.8E-08	7.0E-08	7.2E-08	7.5E-08	7.7E-08	7.9E-08	8.0E-08	8.0E-08
3411	5.9E-08	6.2E-08	6.3E-08	6.4E-08	6.6E-08	6.7E-08	6.9E-08	7.1E-08	7.3E-08	7.6E-08	7.7E-08	7.8E-08	7.9E-08
3412	5.8E-08	6.1E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08	6.7E-08	6.9E-08	7.2E-08	7.4E-08	7.5E-08	7.6E-08	7.7E-08
3413	5.0E-08	5.2E-08	5.2E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08	6.2E-08
3414	5.0E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.3E-08	5.4E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08	6.1E-08
3415	4.8E-08	5.0E-08	5.0E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08	5.4E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08
3416	4.7E-08	4.9E-08	4.9E-08	4.9E-08	5.0E-08	5.0E-08	5.1E-08	5.2E-08	5.5E-08	5.8E-08	6.0E-08	6.1E-08	6.2E-08
3417	4.9E-08	5.0E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.1E-08
3418	4.9E-08	5.0E-08	5.0E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08	5.3E-08	5.5E-08	5.7E-08	5.9E-08	6.0E-08	6.0E-08
3419	5.1E-08	5.3E-08	5.3E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	6.0E-08	6.1E-08	6.3E-08	6.4E-08	6.4E-08
3420	5.9E-08	6.1E-08	6.2E-08	6.3E-08	6.4E-08	6.6E-08	6.7E-08	6.9E-08	7.2E-08	7.4E-08	7.6E-08	7.7E-08	7.7E-08
3421	6.8E-08	7.0E-08	7.2E-08	7.3E-08	7.5E-08	7.7E-08	7.9E-08	8.2E-08	8.5E-08	8.7E-08	8.9E-08	9.0E-08	9.1E-08
3422	6.5E-08	6.8E-08	6.9E-08	7.0E-08	7.3E-08	7.4E-08	7.6E-08	7.9E-08	8.2E-08	8.5E-08	8.7E-08	8.8E-08	8.9E-08
3423	7.7E-08	8.0E-08	8.2E-08	8.4E-08	8.7E-08	8.9E-08	9.2E-08	9.5E-08	9.8E-08	1.0E-07	1.0E-07	1.0E-07	1.1E-07
3424	5.6E-08	5.7E-08	5.8E-08	5.8E-08	5.9E-08	6.0E-08	6.2E-08	6.4E-08	6.6E-08	6.8E-08	7.0E-08	7.1E-08	7.1E-08
3425	5.1E-08	5.2E-08	5.2E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.9E-08	6.1E-08	6.2E-08	6.3E-08	6.4E-08
3426	5.5E-08	5.6E-08	5.6E-08	5.6E-08	5.8E-08	5.8E-08	5.9E-08	6.1E-08	6.3E-08	6.5E-08	6.6E-08	6.7E-08	6.7E-08
3427	6.2E-08	6.4E-08	6.5E-08	6.6E-08	6.7E-08	6.9E-08	7.0E-08	7.3E-08	7.5E-08	7.7E-08	7.8E-08	7.9E-08	8.0E-08
3428	6.0E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08	6.7E-08	6.8E-08	7.0E-08	7.3E-08	7.5E-08	7.6E-08	7.8E-08	7.8E-08
3429	6.3E-08	6.5E-08	6.6E-08	6.7E-08	6.9E-08	7.0E-08	7.2E-08	7.4E-08	7.6E-08	7.8E-08	8.0E-08	8.1E-08	8.1E-08
3430	6.2E-08	6.4E-08	6.4E-08	6.5E-08	6.6E-08	6.7E-08	6.9E-08	7.1E-08	7.3E-08	7.5E-08	7.6E-08	7.7E-08	7.8E-08
3431	6.6E-08	6.8E-08	6.9E-08	7.0E-08	7.2E-08	7.4E-08	7.6E-08	7.9E-08	8.1E-08	8.3E-08	8.4E-08	8.5E-08	8.6E-08
3432	8.4E-08	8.7E-08	8.8E-08	9.0E-08	9.3E-08	9.6E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3433	8.0E-08	8.3E-08	8.4E-08	8.6E-08	8.8E-08	9.1E-08	9.4E-08	9.7E-08	9.9E-08	1.0E-07	1.0E-07	1.0E-07	1.0E-07
3434	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.3E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.4E-07	1.4E-07
3435	6.8E-08	7.0E-08	7.1E-08	7.2E-08	7.4E-08	7.6E-08	7.8E-08	8.1E-08	8.3E-08	8.5E-08	8.7E-08	8.8E-08	8.8E-08
3436	6.0E-08	6.2E-08	6.2E-08	6.3E-08	6.5E-08	6.6E-08	6.8E-08	7.0E-08	7.3E-08	7.4E-08	7.6E-08	7.7E-08	7.7E-08
3437	5.7E-08	5.8E-08	5.7E-08	5.7E-08	5.9E-08	6.0E-08	6.1E-08	6.3E-08	6.4E-08	6.6E-08	6.7E-08	6.8E-08	6.8E-08
3438	5.5E-08	5.6E-08	5.5E-08	5.5E-08	5.6E-08	5.7E-08	5.9E-08	6.0E-08	6.2E-08	6.3E-08	6.4E-08	6.5E-08	6.5E-08
3439	5.0E-08	5.1E-08	4.9E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08
3440	5.0E-08	5.0E-08	4.8E-08	4.7E-08	4.8E-08	4.8E-08	4.9E-08	5.1E-08	5.2E-08	5.3E-08	5.4E-08	5.4E-08	5.5E-08
3441	5.2E-08	5.2E-08	4.9E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08	5.5E-08
3442	5.5E-08	5.4E-08	5.0E-08	4.9E-08	5.0E-08	5.0E-08	5.2E-08	5.3E-08	5.4E-08	5.5E-08	5.6E-08	5.7E-08	5.7E-08
3443	5.6E-08	5.4E-08	4.9E-08	4.7E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.5E-08	5.5E-08	5.5E-08
3444	6.3E-08	6.1E-08	5.4E-08	5.1E-08	5.2E-08	5.3E-08	5.5E-08	5.7E-08	5.8E-08	5.9E-08	6.0E-08	6.1E-08	6.1E-08
3445	7.6E-08	7.3E-08	6.5E-08	6.1E-08	6.3E-08	6.5E-08	6.7E-08	6.9E-08	7.1E-08	7.2E-08	7.3E-08	7.4E-08	7.4E-08
3446	2.1E-08	1.8E-08	1.3E-08	9.3E-09	9.2E-09	8.9E-09	8.9E-09	9.2E-09	1.4E-08	1.7E-08	2.0E-08	2.2E-08	2.3E-08
3447	3.4E-08	3.2E-08	2.7E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.7E-08	3.8E-08
3448	4.0E-08	3.6E-08	2.8E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08	3.0E-08	3.3E-08	3.5E-08	3.7E-08	3.7E-08
3449	7.2E-08	6.7E-08	5.5E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.7E-08	6.0E-08	6.2E-08	6.4E-08	6.5E-08	6.6E-08
3450	9.1E-08	8.0E-08	6.0E-08	5.0E-08	5.1E-08	5.3E-08	5.4E-08	5.6E-08	6.0E-08	6.2E-08	6.4E-08	6.5E-08	6.6E-08
3451	2.0E-07	1.8E-07	1.5E-07	1.3E-07	1.3E-07	1.4E-07	1.4E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07	1.5E-07
3452	1.3E-07	1.2E-07	9.4E-08	8.1E-08	8.3E-08	8.6E-08	8.9E-08	9.3E-08	9.5E-08	9.8E-08	9.9E-08	1.0E-07	1.0E-07
3453	1.5E-07	1.3E-07	1.1E-07	9.6E-08	9.9E-08	1.0E-07	1.1E-07	1.1E-07	1.1E-07	1.1E-07	1.2E-07	1.2E-07	1.2E-07
3454	1.2E-07	1.1E-07	9.2E-08	8.1E-08	8.4E-08	8.6E-08	9.0E-08	9.3E-08	9.5E-08	9.7E-08	9.8E-08	9.9E-08	9.9E-08
3455	7.4E-08	6.7E-08	5.5E-08	4.8E-08	4.9E-08	5.0E-08	5.1E-08	5.3E-08	5.6E-08	5.8E-08	6.0E-08	6.1E-08	6.1E-08
3456	5.3E-08	4.6E-08	3.5E-08	2.8E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.3E-08	3.5E-08	3.7E-08	3.8E-08	3.9E-08
3457	3.7E-08	3.0E-08	2.1E-08	1.5E-08	1.4E-08	1.4E-08	1.4E-08	1.4E-08	1.8E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08
3458	2.0E-08	1.5E-08	8.2E-09	2.7E-09	1.6E-09	6.8E-10	1.4E-10	-1.4E-10	3.4E-09	6.4E-09	8.7E-09	1.0E-08	1.1E-08
3459	2.2E-08	1.9E-08	1.3E-08	8.6E-09	7.6E-09	6.8E-09	6.4E-09	6.2E-09	9.1E-09	1.1E-08	1.3E-08	1.4E-08	1.5E-08
3460	1.8E-08	1.6E-08	1.1E-08	6.8E-09	5.7E-09	4.8E-09	4.3E-09	4.1E-09	7.0E-09	9.4E-09	1.1E-08	1.2E-08	1.3E-08
3461	1.5E-08	1.3E-08	8.2E-09	4.2E-09	2.9E-09	1.9E-09	1.3E-09	9.9E-10	4.0E-09	6.6E-09	8.5E-09	9.8E-09	1.0E-08
3462	1.8E-08	1.6E-08	1.2E-08	8.6E-09	7.5E-09	6.7E-09	6.3E-09	6.1E-09	9.0E-09	1.1E-08	1.3E-08	1.4E-08	1.5E-08
3463	1.8E-08	1.6E-08	1.2E-08	8.3E-09	7.1E-09	6.4E-09	6.0E-09	5.8E-09	8.7E-09	1.1E-08	1.3E-08	1.4E-08	1.5E-08
3464	3.6E-08	3.6E-08	3.3E-08	3.1E-08	3.1E-08	3.1E-08	3.1E-08	3.2E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08	3.8E-08
3465	4.6E-08	4.6E-08	4.4E-08	4.3E-08	4.4E-08	4.4E-08	4.5E-08	4.7E-08	4.8E-08	5.0E-08	5.1E-08	5.1E-08	5.2E-08
3466	4.6E-08	4.7E-08	4.6E-08	4.5E-08	4.6E-08	4.7E-08	4.8E-08	4.9E-08	5.1E-08	5.3E-08	5.4E-08	5.4E-08	5.5E-08
3467	3.7E-08	3.7E-08	3.6E-08	3.5E-08	3.5E-08	3.6E-08	3.7E-08	3.8E-08	4.0E-08	4.3E-08	4.4E-08	4.6E-08	4.6E-08
3468	3.2E-08	3.3E-08	3.1E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.5E-08	3.7E-08	3.9E-08	4.1E-08	4.1E-08
3469	3.1E-08	3.2E-08	3.0E-08	2.9E-08	2.9E-08	2.9E-08	2.9E-08	3.0E-08	3.4E-08	3.7E-08	3.9E-08	4.1E-08	4.1E-08
3470	3.3E-08	3.4E-08	3.2E-08	3.0E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08	4.0E-08
3471	3.0E-08	3.1E-08	2.9E-08	2.8E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08	3.4E-08	3.8E-08	4.1E-08	4.2E-08	4.3E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3472	2.8E-08	2.9E-08	2.7E-08	2.6E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08	3.1E-08	3.4E-08	3.6E-08	3.8E-08	3.9E-08
3473	2.8E-08	2.8E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.6E-08	2.7E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08	3.5E-08
3474	2.6E-08	2.7E-08	2.6E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08
3475	2.6E-08	2.7E-08	2.6E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
3476	2.6E-08	2.7E-08	2.6E-08	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.3E-08	3.3E-08
3477	2.5E-08	2.6E-08	2.5E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08
3478	2.4E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.3E-08	2.3E-08	2.7E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
3479	3.0E-08	3.0E-08	2.9E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	3.0E-08	3.1E-08	3.1E-08	3.2E-08
3480	3.2E-08	3.2E-08	3.1E-08	2.8E-08	2.8E-08	2.7E-08	2.8E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
3481	3.1E-08	3.1E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	2.9E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08
3482	2.9E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
3483	3.1E-08	3.1E-08	3.0E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08
3484	3.7E-08	3.7E-08	3.5E-08	3.1E-08	3.0E-08	3.0E-08	3.1E-08	3.1E-08	3.4E-08	3.6E-08	3.7E-08	3.8E-08	3.9E-08
3485	4.1E-08	4.2E-08	3.8E-08	3.4E-08	3.2E-08	3.2E-08	3.3E-08	3.3E-08	3.6E-08	3.8E-08	4.0E-08	4.1E-08	4.1E-08
3486	4.3E-08	4.4E-08	4.0E-08	3.5E-08	3.4E-08	3.3E-08	3.4E-08	3.5E-08	3.7E-08	4.0E-08	4.2E-08	4.3E-08	4.3E-08
3487	4.1E-08	4.2E-08	3.9E-08	3.4E-08	3.3E-08	3.3E-08	3.3E-08	3.4E-08	3.8E-08	4.1E-08	4.4E-08	4.5E-08	4.6E-08
3488	4.2E-08	4.3E-08	4.0E-08	3.5E-08	3.4E-08	3.4E-08	3.4E-08	3.4E-08	3.7E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08
3489	4.1E-08	4.2E-08	4.0E-08	3.6E-08	3.4E-08	3.4E-08	3.4E-08	3.5E-08	3.7E-08	3.9E-08	4.1E-08	4.2E-08	4.2E-08
3490	3.8E-08	3.9E-08	3.7E-08	3.4E-08	3.3E-08	3.3E-08	3.3E-08	3.3E-08	3.6E-08	3.9E-08	4.1E-08	4.2E-08	4.3E-08
3491	3.6E-08	3.7E-08	3.5E-08	3.3E-08	3.1E-08	3.1E-08	3.1E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08	3.6E-08	3.6E-08
3492	3.4E-08	3.4E-08	3.3E-08	3.1E-08	3.0E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08
3493	3.4E-08	3.4E-08	3.3E-08	3.1E-08	3.0E-08	2.9E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.3E-08	3.4E-08
3494	3.4E-08	3.5E-08	3.4E-08	3.1E-08	3.0E-08	3.0E-08	3.0E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08	3.4E-08	3.4E-08
3495	3.2E-08	3.3E-08	3.2E-08	3.0E-08	2.9E-08	2.8E-08	2.8E-08	2.9E-08	3.0E-08	3.1E-08	3.2E-08	3.2E-08	3.2E-08
3496	3.0E-08	3.1E-08	3.0E-08	2.8E-08	2.7E-08	2.7E-08	2.7E-08	2.7E-08	2.8E-08	2.9E-08	3.0E-08	3.0E-08	3.1E-08
3497	3.0E-08	3.0E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08	3.0E-08	3.0E-08
3498	2.9E-08	2.9E-08	2.9E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08	2.9E-08
3499	2.8E-08	2.8E-08	2.8E-08	2.6E-08	2.5E-08	2.5E-08	2.5E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08	2.8E-08	2.8E-08
3500	2.6E-08	2.7E-08	2.6E-08	2.5E-08	2.4E-08	2.4E-08	2.4E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08	2.7E-08
3501	2.5E-08	2.6E-08	2.6E-08	2.4E-08	2.3E-08	2.3E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08	2.6E-08
3502	2.5E-08	2.5E-08	2.5E-08	2.4E-08	2.3E-08	2.3E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08
3503	2.5E-08	2.5E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.6E-08
3504	2.4E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08	2.5E-08
3505	2.4E-08	2.4E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.2E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08	2.5E-08	2.5E-08
3506	2.4E-08	2.4E-08	2.4E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08	2.5E-08
3507	2.2E-08	2.3E-08	2.3E-08	2.1E-08	2.1E-08	2.0E-08	2.0E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.4E-08
3508	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
3509	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3510	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3511	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3512	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3513	1.9E-08	1.9E-08	1.9E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.6E-08	1.8E-08	1.9E-08	2.1E-08	2.2E-08	2.2E-08
3514	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3515	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.6E-08	1.6E-08	1.8E-08	1.9E-08	2.1E-08	2.1E-08	2.2E-08
3516	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
3517	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08
3518	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08
3519	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.0E-08	2.1E-08
3520	2.0E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.8E-08	1.7E-08	1.7E-08	1.8E-08	1.9E-08	2.0E-08	2.1E-08	2.1E-08
3521	2.0E-08	2.0E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	2.0E-08	2.1E-08	2.1E-08	2.2E-08
3522	2.0E-08	2.1E-08	2.1E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3523	1.9E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.6E-08	1.6E-08	1.5E-08	1.8E-08	1.9E-08	2.1E-08	2.2E-08	2.2E-08
3524	2.1E-08	2.1E-08	2.1E-08	2.0E-08	1.8E-08	1.7E-08	1.7E-08	1.7E-08	1.8E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3525	2.1E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.8E-08	1.7E-08	1.7E-08	1.9E-08	2.0E-08	2.1E-08	2.2E-08	2.2E-08
3526	2.2E-08	2.3E-08	2.2E-08	2.1E-08	1.9E-08	1.8E-08	1.8E-08	1.8E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.3E-08
3527	2.3E-08	2.4E-08	2.3E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	2.1E-08	2.2E-08	2.3E-08	2.4E-08	2.5E-08
3528	2.4E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.1E-08	2.0E-08	2.0E-08	2.2E-08	2.4E-08	2.5E-08	2.6E-08	2.6E-08
3529	2.3E-08	2.4E-08	2.4E-08	2.2E-08	2.1E-08	2.0E-08	1.9E-08	1.9E-08	2.1E-08	2.3E-08	2.5E-08	2.6E-08	2.6E-08
3530	2.6E-08	2.7E-08	2.6E-08	2.5E-08	2.3E-08	2.2E-08	2.1E-08	2.1E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08	2.7E-08
3531	2.8E-08	2.8E-08	2.8E-08	2.6E-08	2.4E-08	2.3E-08	2.2E-08	2.2E-08	2.3E-08	2.5E-08	2.6E-08	2.6E-08	2.7E-08
3532	2.8E-08	2.9E-08	2.8E-08	2.7E-08	2.5E-08	2.3E-08	2.3E-08	2.2E-08	2.3E-08	2.5E-08	2.6E-08	2.7E-08	2.7E-08
3533	2.8E-08	2.9E-08	2.8E-08	2.7E-08	2.5E-08	2.4E-08	2.3E-08	2.2E-08	2.4E-08	2.6E-08	2.7E-08	2.7E-08	2.8E-08
3534	2.8E-08	2.9E-08	2.8E-08	2.7E-08	2.6E-08	2.4E-08	2.4E-08	2.3E-08	2.5E-08	2.7E-08	2.9E-08	3.0E-08	3.0E-08
3535	2.8E-08	2.9E-08	2.9E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08
3536	2.8E-08	3.0E-08	3.0E-08	2.9E-08	2.7E-08	2.6E-08	2.6E-08	2.6E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08
3537	2.9E-08	3.1E-08	3.1E-08	2.9E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08
3538	3.0E-08	3.1E-08	3.1E-08	3.0E-08	2.8E-08	2.7E-08	2.6E-08	2.6E-08	2.9E-08	3.2E-08	3.4E-08	3.5E-08	3.6E-08
3539	3.0E-08	3.1E-08	3.1E-08	2.9E-08	2.7E-08	2.6E-08	2.5E-08	2.5E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.2E-08
3540	3.0E-08	3.1E-08	3.1E-08	2.9E-08	2.7E-08	2.5E-08	2.4E-08	2.3E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
3541	3.1E-08	3.1E-08	3.1E-08	2.9E-08	2.7E-08	2.5E-08	2.4E-08	2.3E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08	2.8E-08
3542	3.1E-08	3.2E-08	3.1E-08	2.9E-08	2.6E-08	2.5E-08	2.3E-08	2.3E-08	2.4E-08	2.5E-08	2.6E-08	2.7E-08	2.7E-08
3543	3.2E-08	3.2E-08	3.2E-08	2.9E-08	2.7E-08	2.5E-08	2.4E-08	2.3E-08	2.4E-08	2.6E-08	2.7E-08	2.7E-08	2.8E-08
3544	3.3E-08	3.4E-08	3.3E-08	3.0E-08	2.7E-08	2.5E-08	2.4E-08	2.3E-08	2.5E-08	2.6E-08	2.7E-08	2.8E-08	2.8E-08
3545	3.6E-08	3.7E-08	3.6E-08	3.3E-08	2.9E-08	2.7E-08	2.5E-08	2.4E-08	2.5E-08	2.7E-08	2.8E-08	2.8E-08	2.9E-08
3546	3.8E-08	3.9E-08	3.8E-08	3.4E-08	3.0E-08	2.8E-08	2.6E-08	2.4E-08	2.5E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
3547	3.8E-08	3.8E-08	3.7E-08	3.4E-08	3.1E-08	2.8E-08	2.6E-08	2.4E-08	2.6E-08	2.7E-08	2.8E-08	2.9E-08	2.9E-08
3548	3.7E-08	3.8E-08	3.7E-08	3.4E-08	3.1E-08	2.8E-08	2.6E-08	2.4E-08	2.6E-08	2.8E-08	2.9E-08	3.0E-08	3.0E-08
3549	3.6E-08	3.6E-08	3.6E-08	3.3E-08	3.1E-08	2.8E-08	2.6E-08	2.5E-08	2.7E-08	2.9E-08	3.0E-08	3.1E-08	3.1E-08

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3550	3.9E-08	4.0E-08	3.9E-08	3.6E-08	3.3E-08	3.0E-08	2.7E-08	2.5E-08	2.7E-08	2.9E-08	3.1E-08	3.1E-08	3.2E-08
3551	4.0E-08	4.1E-08	4.0E-08	3.7E-08	3.3E-08	3.0E-08	2.8E-08	2.5E-08	2.7E-08	2.9E-08	3.1E-08	3.2E-08	3.2E-08
3552	4.4E-08	4.5E-08	4.4E-08	4.0E-08	3.6E-08	3.2E-08	2.9E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
3553	4.5E-08	4.6E-08	4.5E-08	4.1E-08	3.7E-08	3.3E-08	2.9E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
3554	4.8E-08	4.8E-08	4.7E-08	4.4E-08	3.9E-08	3.4E-08	3.0E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
3555	4.3E-08	4.4E-08	4.3E-08	3.9E-08	3.6E-08	3.2E-08	2.8E-08	2.6E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08	3.5E-08
3556	4.1E-08	4.2E-08	4.1E-08	3.8E-08	3.4E-08	3.1E-08	2.8E-08	2.6E-08	2.9E-08	3.2E-08	3.5E-08	3.6E-08	3.7E-08
3557	4.6E-08	4.7E-08	4.6E-08	4.3E-08	3.8E-08	3.3E-08	2.9E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
3558	4.9E-08	5.0E-08	4.9E-08	4.5E-08	4.1E-08	3.5E-08	3.0E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
3559	6.4E-08	6.4E-08	6.3E-08	5.9E-08	5.3E-08	4.3E-08	3.4E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
3560	1.0E-07	1.1E-07	1.0E-07	9.9E-08	9.1E-08	6.9E-08	4.7E-08	2.5E-08	2.8E-08	3.0E-08	3.1E-08	3.2E-08	3.3E-08
3561	1.1E-07	1.1E-07	1.1E-07	1.0E-07	9.3E-08	7.0E-08	4.8E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.3E-08
3562	1.0E-07	1.0E-07	9.9E-08	9.4E-08	8.8E-08	6.6E-08	4.6E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
3563	8.6E-08	8.6E-08	8.5E-08	8.1E-08	7.5E-08	5.7E-08	4.1E-08	2.5E-08	2.8E-08	3.0E-08	3.2E-08	3.3E-08	3.4E-08
3564	8.8E-08	8.9E-08	8.8E-08	8.3E-08	7.7E-08	5.9E-08	4.2E-08	2.5E-08	2.8E-08	3.1E-08	3.2E-08	3.4E-08	3.4E-08
3565	7.3E-08	7.4E-08	7.3E-08	6.8E-08	6.3E-08	5.0E-08	3.7E-08	2.5E-08	2.8E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08
3566	6.1E-08	6.1E-08	6.0E-08	5.6E-08	5.1E-08	4.1E-08	3.2E-08	2.4E-08	2.7E-08	3.0E-08	3.3E-08	3.4E-08	3.5E-08
3567	5.9E-08	6.0E-08	5.9E-08	5.5E-08	5.0E-08	4.0E-08	3.1E-08	2.3E-08	2.7E-08	3.0E-08	3.3E-08	3.5E-08	3.6E-08
3568	6.1E-08	6.1E-08	6.0E-08	5.6E-08	5.1E-08	4.1E-08	3.2E-08	2.3E-08	2.7E-08	3.1E-08	3.3E-08	3.5E-08	3.6E-08
3569	5.5E-08	5.6E-08	5.4E-08	5.0E-08	4.5E-08	3.7E-08	2.9E-08	2.3E-08	2.8E-08	3.4E-08	3.7E-08	4.0E-08	4.1E-08
3570	5.4E-08	5.5E-08	5.4E-08	4.9E-08	4.4E-08	3.6E-08	2.9E-08	2.3E-08	2.8E-08	3.3E-08	3.6E-08	3.9E-08	4.0E-08
3571	5.2E-08	5.3E-08	5.2E-08	4.7E-08	4.2E-08	3.5E-08	2.9E-08	2.3E-08	2.8E-08	3.3E-08	3.7E-08	3.9E-08	4.0E-08
3572	5.1E-08	5.2E-08	5.0E-08	4.6E-08	4.0E-08	3.3E-08	2.8E-08	2.2E-08	2.8E-08	3.4E-08	3.8E-08	4.0E-08	4.2E-08
3573	5.0E-08	5.1E-08	4.9E-08	4.4E-08	3.7E-08	3.1E-08	2.5E-08	2.0E-08	2.5E-08	2.8E-08	3.1E-08	3.3E-08	3.4E-08
3574	3.8E-08	3.8E-08	3.5E-08	2.9E-08	2.1E-08	1.5E-08	9.3E-09	4.3E-09	9.1E-09	1.4E-08	1.7E-08	1.9E-08	2.0E-08
3575	2.5E-08	2.5E-08	2.1E-08	1.4E-08	5.4E-09	-1.7E-09	-7.2E-09	-1.2E-08	-7.2E-09	-2.3E-09	1.4E-09	3.8E-09	5.0E-09
3576	1.7E-08	1.6E-08	1.2E-08	3.9E-09	-4.7E-09	-1.2E-08	-1.8E-08	-2.3E-08	-1.8E-08	-1.2E-08	-8.7E-09	-6.1E-09	-4.9E-09
3577	1.6E-08	1.5E-08	1.1E-08	2.6E-09	-6.0E-09	-1.3E-08	-1.9E-08	-2.4E-08	-1.8E-08	-1.3E-08	-9.4E-09	-6.9E-09	-5.6E-09
3578	1.7E-08	1.7E-08	1.2E-08	4.6E-09	-3.9E-09	-1.1E-08	-1.6E-08	-2.1E-08	-1.6E-08	-1.0E-08	-6.3E-09	-3.7E-09	-2.4E-09
3579	2.2E-08	2.2E-08	1.8E-08	1.0E-08	2.2E-09	-4.4E-09	-9.2E-09	-1.4E-08	-7.4E-09	-1.7E-09	2.6E-09	5.5E-09	6.9E-09
3580	2.4E-08	2.4E-08	2.1E-08	1.4E-08	6.2E-09	4.9E-10	-3.5E-09	-7.2E-09	2.0E-09	9.9E-09	1.6E-08	2.0E-08	2.2E-08
3581	2.8E-08	2.8E-08	2.5E-08	1.7E-08	9.0E-09	3.1E-09	-8.1E-10	-4.4E-09	4.6E-09	1.3E-08	1.9E-08	2.2E-08	2.4E-08
3582	3.7E-08	3.8E-08	3.4E-08	2.5E-08	1.6E-08	9.5E-09	5.8E-09	2.4E-09	1.2E-08	2.0E-08	2.7E-08	3.1E-08	3.3E-08
3583	5.2E-08	5.3E-08	4.9E-08	3.9E-08	2.8E-08	2.2E-08	1.9E-08	1.6E-08	2.6E-08	3.6E-08	4.3E-08	4.7E-08	5.0E-08
3584	5.5E-07	5.7E-07	5.5E-07	5.1E-07	4.6E-07	4.3E-07	4.3E-07	4.3E-07	4.3E-07	4.4E-07	4.5E-07	4.6E-07	4.6E-07
3585	5.9E-07	6.0E-07	5.9E-07	5.5E-07	5.0E-07	4.7E-07	4.6E-07	4.6E-07	4.6E-07	4.7E-07	4.8E-07	4.9E-07	4.9E-07
3586	6.5E-07	6.7E-07	6.6E-07	6.2E-07	5.6E-07	5.3E-07	5.2E-07	5.2E-07	5.2E-07	5.3E-07	5.4E-07	5.4E-07	5.4E-07
3587	7.7E-07	7.8E-07	7.7E-07	7.3E-07	6.7E-07	6.2E-07	6.1E-07	6.0E-07	6.0E-07	6.1E-07	6.2E-07	6.2E-07	6.2E-07
3588	8.7E-07	8.9E-07	8.8E-07	8.2E-07	7.5E-07	7.0E-07	6.8E-07	6.7E-07	6.6E-07	6.7E-07	6.8E-07	6.8E-07	6.8E-07

Location	Adult Worker												
	2025 - 2049	2026 - 2050	2027 - 2051	2028 - 2052	2029 - 2053	2030 - 2054	2031 - 2055	2032 - 2056	2033 - 2057	2034 - 2058	2035 - 2059	2036 - 2060	2037 - 2061
3589	8.9E-07	9.1E-07	8.9E-07	8.4E-07	7.6E-07	7.0E-07	6.8E-07	6.6E-07	6.6E-07	6.7E-07	6.8E-07	6.8E-07	6.8E-07
3590	9.3E-07	9.4E-07	9.3E-07	8.8E-07	8.0E-07	7.3E-07	6.9E-07	6.6E-07	6.5E-07	6.6E-07	6.6E-07	6.7E-07	6.7E-07
3591	1.5E-06	1.5E-06	1.5E-06	1.4E-06	1.3E-06	1.2E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06	1.1E-06
3592	2.4E-06	2.4E-06	2.3E-06	2.2E-06	2.0E-06	1.8E-06	1.6E-06	1.4E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06	1.3E-06
3593	3.0E-06	3.0E-06	3.0E-06	2.9E-06	2.6E-06	2.3E-06	2.0E-06	1.7E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06	1.5E-06
3594	3.7E-06	3.7E-06	3.7E-06	3.6E-06	3.3E-06	3.0E-06	2.7E-06	2.4E-06	2.2E-06	2.2E-06	2.2E-06	2.2E-06	2.2E-06
3595	4.4E-06	4.5E-06	4.4E-06	4.4E-06	4.1E-06	3.9E-06	3.6E-06	3.4E-06	3.2E-06	3.2E-06	3.2E-06	3.2E-06	3.2E-06
3596	2.7E-06	2.6E-06	2.5E-06	2.4E-06	2.1E-06	1.8E-06	1.4E-06	1.1E-06	9.9E-07	9.9E-07	1.0E-06	1.0E-06	1.0E-06
3597	1.8E-06	1.8E-06	1.7E-06	1.6E-06	1.4E-06	1.1E-06	9.0E-07	6.9E-07	5.8E-07	5.9E-07	5.9E-07	6.0E-07	6.0E-07
3598	1.0E-06	1.0E-06	9.9E-07	9.4E-07	8.6E-07	7.7E-07	6.8E-07	6.1E-07	5.7E-07	5.7E-07	5.7E-07	5.7E-07	5.8E-07

Health Effects of Aviation Ultrafine and Ultra-Ultrafine Particles Technical Report

Introduction & Scope

This technical report summarizes the current state of the science regarding the potential for adverse health effects from exposure to ultrafine particles (UFPs), commonly considered by the scientific community to be particulate matter (PM) with an aerodynamic diameter of 100 nanometers (nm), or 0.1 micrometers (µm), or less. Ultra-ultrafine particles (UUFPs) are a relatively newly measured subset of UFPs, commonly considered to have aerodynamic diameters of less than 20 nm, or 0.020 µm (Austin et al. 2021). There are limited familiar touchstones to contextualize how small UFPs and UUFPs are; for example, a single human hair is more than 1,000 times wider than even the largest UFPs.

Exposure to UFP and UUFP emissions generated by the combustion of jet fuel during aircraft operations, including arrival, descent, landing, taxi-in, taxi-out, takeoff, climb-out, and departure ascent (collectively, "aviation activity"), is examined. Although the Port of Seattle lacks the legal authority to address or mitigate effects from aircraft emissions under Clean Air Act (CAA) section 233, 42 U.S. Code § 7573, it has prepared this technical report as part of its separate disclosure obligations under the Washington State Environmental Policy Act (SEPA) and as part of its SEPA Environmental Impact Statement (EIS), which evaluates the effects of the Near-Term Projects (NTPs) associated with the Seattle-Tacoma International Airport (SEA) Sustainable Airport Master Plan (SAMP).

These UFPs and UUFPs are subsets of broader classifications of PM, including PM with an aerodynamic diameter of 2.5 µm or less ($PM_{2.5}$). Regulatory standards have been established by the U.S. Environmental Protection Agency (EPA) for $PM_{2.5}$. These standards are designed to be protective of public health and welfare from exposure to $PM_{2.5}$. For regulatory standards for UFPs or UUFPs to be considered, the scientific consensus would need to demonstrate specific causal health effects from UFP and UUFP exposures that are distinct and independent from the broader health effects currently addressed by $PM_{2.5}$ standards. The current state of the science has not matured to a point that would support the adoption of regulatory standards for UFPs or UUFPs.

EPA has not proposed or adopted thresholds or policies related to the emission of UFPs. Similarly, neither EPA nor other applicable authorities have established guidance or recommendations for evaluating the isolated health effects of UFP exposure. The most comprehensive reviews to date—including the EPA's 2019/2022 Integrated Science Assessment (ISA) and Bergmann et al.'s 2026 literature meta-analysis—classify the evidence as "suggestive of, but not sufficient to infer, a causal relationship" or "inadequate to infer" causality. While evidence has established a causal relationship between $PM_{2.5}$ and health effects sufficient to warrant regulatory action, the same is not true of UFPs or UUFPs.

Particle Characterization

To support understanding of the state of the science, this section discusses the characteristics of UFP and UUFP emissions and UFP apportionment across sources; spatial gradients and particle number concentrations (PNC); and temporal patterns tied to flight modes.

Black carbon (BC) represents the non-volatile, solid carbonaceous core of many aircraft-emitted UFPs. Formed during incomplete combustion of fuel, BC particles from aviation activity are initially generated in the UUFP size range and dominate near-field PNC. BC UFPs are formed by the combustion of fuels, including from diesel highway vehicles ubiquitous to the urban environment.

The University of Washington's Mobile ObserVations of Ultrafine Particles (MOV-UP) study (2019) at SEA suggested that aircraft operations generate a broad and detectable footprint of UFPs in surrounding communities. The research employed mobile monitoring platforms to sample air quality along transects extending up to 10 miles north and south of the airport, perpendicular to flight paths, and covered four seasons, capturing both north and south runway flows. The study found that total UFP (10 to 1,000 nm) PNC was elevated beneath aircraft flight paths but was highest on Interstate 5 (I-5), indicating that total PNC alone could not distinguish between aircraft and roadway source particles. Levels of BC were also highest on highways, further emphasizing that multiple sources, not only aircraft, contribute to urban UFP and UUFP exposure (Austin et al. 2021).

Principal Component Analysis (PCA) identified two separate features in the SEA data: an "Ultra-UF" feature, strongly correlated with particles in the 10 to 36 nm range and associated with aircraft emissions, and a "Roadway" feature, correlated with particles 20 to 36 nm and linked to BC and vehicle emissions. Spatial mapping revealed that the aircraft-related PNCs were elevated on highways but peaked directly beneath landing paths and shifted with runway direction, while the roadway feature showed a strong gradient around major highways independent of airport operations. **Figure 1**, excerpted from Austin et al.'s study (2021), illustrates this gradient in the vicinity of SEA. The study also found that landing-mode aircraft activity produced greater UFP emissions than takeoff-mode activity (Austin et al. 2021).

A comparable study at Los Angeles International Airport (LAX) reflects similar observations to the MOV-UP study, demonstrating that aircraft engines emit large numbers of UFPs forming persistent plumes extending up to 16 kilometers (km) (10 miles) downwind, with localized peaks up to ten times background levels. The spatial pattern of UFPs from aviation activity at LAX aligned with prevailing winds and flight trajectories, showing consistent impacts year-round and minimal upwind influence (Austin et al. 2011; Hudda et al. 2014).

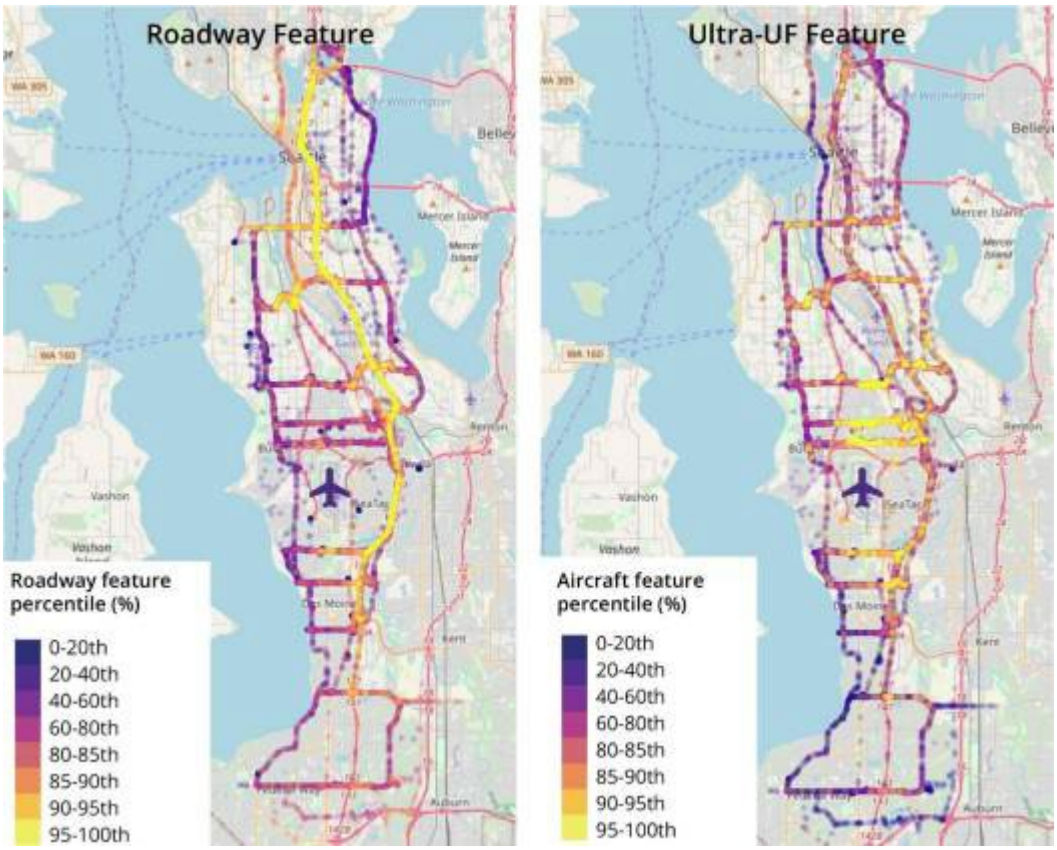

Source: Austin et al. 2021
Notes: Percentiles range from 0th percentile representing the smallest observed value to 100th representing the largest observed value.
Figure 1. Spatial distribution of the "Ultra-UF" and "roadway" features.

Additional studies at other major airports, including at LAX, Hartsfield-Jackson Atlanta International Airport (ATL), and Logan International Airport (BOS) further reinforce these spatial findings, with peak aviation-related PNCs strongly associated with aircraft approach paths, 3-to-5 fold increases in PNCs at distances of 5 to 10 km (3.1 to 6.2 miles) from the airport relative to background, and aviation-related UUFPs community exposure being generally lower than that of roadway-related BC UUFP (17–26 percent of community exposure from aviation sources) (Mueller et al. 2025; Riley et al. 2016; Wang et al. 2024; Zhang et al. 2020).

The overall state of science of particulate characterization has matured significantly since foundational studies, such as the 2003 source apportionment study at LAX, first characterized and apportioned UFP PNCs associated with aviation-related sources from those of broader urban backgrounds and roadway sources (Westerdahl et al. 2008). However, the value of further studies is limited by the more nascent state of independent UFP health effect causality and exposure science.

Health Effects of Ultrafine Particles and Ultra-Ultrafine Particles

Interpreting the health effects discussed in the UFP literature requires an understanding of the methods by which causality—the relationship between exposure to a pollutant and the development of symptoms from that exposure—is characterized. This characterization is based on the consistency of effects, coherence between real-world and experimental results, biological plausibility from the available studies, risk of bias, and other contributing factors (EPA 2019).

Evidence classifications typically used in EPA's ISA, by the U.S. National Institute of Environmental Health Services' Health Assessment and Translation (HAT) group, and used across literature sources include:

- Causal relationship – Evidence is sufficient to conclude that a cause-and-effect relationship exists between exposure and the health outcome, supported by consistent findings across multiple study designs and strong biological plausibility.
- Likely to be a causal relationship – Evidence generally supports a causal interpretation, but critical uncertainties remain, such as limitations in exposure assessment, or a smaller body of supporting studies.
- Suggestive of a causal relationship (or suggestive association) – Evidence suggests an association between exposure and the health outcome, but is limited by inconsistency, limited studies, or methodological constraints that preclude causal conclusions.
- Inadequate to infer a causal relationship (inconclusive) – Available evidence is insufficient in quantity, quality, or consistency to determine whether a causal relationship exists.
- Not likely to be a causal relationship – Evidence suggests that a causal relationship is unlikely, often based on consistent null findings across well-conducted studies.

Within these or other frameworks applicable to the evaluation of health evidence, classifications such as "likely causal" or "suggestive" do not establish definitive cause-and-effect relationships and do not, on their own, attribute specific exposure-related hazards. Instead, in the case of UFPs and UUFPs, these findings generally suggest a need for further research, such as to distinguish the attributable health effects of UFP from those of collective $PM_{2.5}$ or from other co-pollutants (Bergmann et al. 2026).

Cardiovascular

Key Finding: Current research has not established a causal connection between short-term UFP exposure and cardiovascular disease; the evidence across short- and long-term studies is best characterized as inconclusive to suggestive.

Cardiovascular health effects are among the more frequently evaluated health endpoints in available UFP research. Research has shown that UFPs can cross biological transport barriers in the lungs and enter into cardiovascular circulation (Kwon et al. 2020).

Short-term exposure studies near airports and roadways have evaluated high- and low-frequency power—a metric reflecting heart-rate variability across frequency ranges which can be indicative of adverse cardiovascular stress—and drawn a suggestive association of stress to UFP exposure that is greater than that of $PM_{2.5}$ alone (Wang et al. 2024). The broader base of evidence, however, remains inconsistent; of six other studies considering UFP association to cardiovascular mortality, three reported positive associations, two showed no effect, and one reported an inverse association (Ohlwein et al. 2019). A review of cardiovascular-related healthcare utilization from populations exposed to aviation-related UFPs showed a weak positive association which, after the effects of co-pollutants were considered, attenuated to inconclusive independent UFP-specific influence (Ohlwein et al. 2019). A 2013 review from the Health Effects Institute (HEI) similarly identified inconsistent or inconclusive evidence across 15 studies for cardiovascular effects from UFPs (Health Effects Institute 2013).

Long-term epidemiological studies are limited with respect to cardiovascular UFP health effects. The Bergmann et al. (2026) systematic review covered a limited number of long-term studies which evaluated cardiovascular effects and found inconsistent cardiovascular health effects with generally wide confidence intervals. While some cardiovascular associations were observed in single-pollutant models, most attenuated to inconclusive after adjustment for $PM_{2.5}$ or other co-pollutants.

Respiratory

Key Finding: The evidence has not established a causal connection between UFP exposure and adverse respiratory outcomes; some suggestive associations have been proposed for short-term inflammatory responses, but long-term effects remain inconclusive.

Exacerbation of asthma, reduction in lung function, airway inflammation, chronic obstructive pulmonary disease (COPD) progression, lung cancer, and respiratory mortality are commonly hypothesized outcomes of UFP exposure. The biological plausibility of respiratory effects is well understood, with studies indicating aviation-related UFP lung deposition fractions increased to 0.7-0.8, up from 0.5-0.7 under an urban background, due to the smaller size of aviation-related UFPs (Hudda, N. and Fruin, S.A. 2016).

Four of five studies addressing respiratory mortality health effects of UFPs synthesized in Ohlwein et al.'s review (2019) estimated positive but statistically nonsignificant associations, and did not find smaller UFP size fractions, such as those associated with aviation, to be consistently associated with respiratory mortality. Similar to the studies on cardiovascular effects, studies that isolate respiratory UFP effects from those of co-pollutants like nitrogen oxides, PM_{10} and $PM_{2.5}$ are highly limited, and recent literature suggests that where these effects are considered, independent respiratory effects attenuate to inconclusive or no effect levels (Ohlwein et al. 2019; Stacey 2019).

A recent study that evaluated aviation-related UFP exposure among children living near Schiphol Airport found that urban UFPs collectively, including from aviation, roadway, and other sources, could be independently associated with adverse respiratory effects. The study also found that, while aviation-related UFP exposure could be correlated to an increase in wheezing symptoms, "no consistent associations between aviation-related UFP with lung function was observed" (Lenssen et al. 2024). Another study has indicated strong correlations between the estimated lung-particle deposition and

biomarkers in exhaled breath from asthmatic children, which are suggestive of possible airway inflammation (Buonanno et al. 2012; Ohlwein et al. 2019).

A long-term 1.1 million adult cohort study in Toronto, Canada, initially found an increase in COPD cases associated with UFPs, but after correcting for co-pollutant effects, this association attenuated to inconclusive. This study, which remains some of the strongest epidemiological science, also found no observed increase in UFP-associated asthma or lung cancer (Weichenthal et al. 2017).

Neurological & Cognitive

Key Finding: The state of scientific evidence linking UFP exposure to neurological and cognitive effects remains highly limited and can be characterized as inadequate to infer a causal relationship.

Neurological and cognitive health endpoints are not commonly evaluated in the body of UFP literature. Biologically plausible exposure pathways do exist for UFPs to influence neurological endpoints. The same exposure pathways that might lead to cardiovascular health effects—deep penetration into lung tissues and transport across biological barriers—can result in UFPs circulating and diffusing into the nervous system and brain (Kwon et al. 2020). Alternative plausible biological pathways have also been hypothesized, including direct translocation through the olfactory nerve (Bandyopadhyay 2016).

Ohlwein et al.'s 2019 review found that only 4 out of 85 studies published between January 2011 and May 2017 considered neurological effects from aviation-related UFP exposure, and their findings were inconclusive regarding neurological health effects. Recent epidemiological research has expanded the body of science on UFP neurological effects, but studies remain limited. A long-term epidemiological study published in 2021 investigated the occurrence of malignant brain cancer in populations near LAX, tracking brain tumor and cancer cases over about 16 years. The study identified 155 total cases of malignant brain cancers over the studied population which was, in total, 12% more common in communities with higher exposure to aviation UFPs. There was no connection found between UFP exposure and meningioma (non-cancerous brain tumors) among the 420 cases studied (Wu et al. 2021). Although these findings support the idea that airport-related UFP exposure could be a risk factor in brain tumor development, the study did not correct for the effects of other aviation and urban non-aviation pollutants, making it impossible to draw causal connection without further research. Much of the body of current neurological research is cross-focused on reproductive and developmental effects.

Reproductive & Developmental Effects

Key Finding: Direct epidemiological evidence linking UFP exposure to reproductive or developmental outcomes in human populations remains limited and ranges from suggestive to inconclusive.

Reproductive health outcomes are frequently discussed as potential health concerns related to exposure to aviation UFPs. Toxicological studies in animals have provided clear evidence of biological plausibility, demonstrating that maternal exposure to UFPs, including BC, can induce stress, neurological inflammation, and increase the accumulation of misfolded proteins in the brains of offspring (Allen et al. 2014; Onoda et al. 2020). However, while these findings show that UFPs, in general, are capable of crossing biological barriers and interfering in neurological development, studies of this kind involve controlled, elevated exposures to highly specific particles; they are not representative of the real-world

magnitudes of exposures or particle chemistries (laboratory particles are typically diesel-derived) of UFPs from aviation activity.

Few epidemiological population-based studies have been evaluated for reproductive or developmental health endpoints specific to UFP from urban sources or aviation specifically. One study near LAX reported an association between modeled aircraft-related UFP exposure during pregnancy and increased risk of preterm birth (Wing et al. 2020). However, the observational nature of the study, a lack of significant additional corroborating studies at other airports, and the inability to correct for co-pollutant health contributions such as oxides of nitrogen, larger PM size fractions, aviation noise exposures, and other non-aviation pollutant exposures limit the causal findings to no more than suggestive. A more recent long-term exposure assessment near Amsterdam Schiphol Airport (AMS) reported possible associations between prenatal exposure to aviation-related UFPs and developmental outcomes, though findings were limited and not conclusive (Janssen et al. 2022). An ongoing study near Berlin–Brandenburg Airport (BER) is designed to study developmental outcomes in children exposed to aircraft-related UFPs (Soppa et al. 2023). While results are not yet available, additional long-term epidemiological studies on independent UFP reproductive and developmental effects which account for co-pollutant contributions will inform whether UFP-related effect attenuate to inconclusive, as shown with other discussed health endpoints, or continue to support suggestive associations.

States of the Evidence

The most current and comprehensive assessments of UFP health evidence consistently reflect the lowest of evidence classifications. In 2013, the Health Effects Institute (HEI) concluded that existing evidence was insufficient to attribute aviation-related health impacts to UFPs alone and emphasized the challenges in separating UFP health effects from those of co-pollutants, such as nitrogen oxides and $PM_{2.5}$ (HEI 2013; Stacey 2019). Ohlwein et al.'s 2019 review of short- and long-term exposure studies found that only 34 of the 85 studies attempted to adjust for one or more co-pollutants. The authors concluded that, for short-term inflammatory or cardiovascular effects, effects from UFP exposure "may be at least partly independent of other pollutants" but that for all other studied health outcomes "the evidence on independent health effects of UFP remains inconclusive or insufficient" (Ohlwein et al. 2019).

Among the most current meta-analyses, Bergmann et al. (2026) corroborated and expanded on this evidence gap, referencing research published through December of 2024 on 85 long-term exposure studies. In single-pollutant models evaluating UFP exposure (not aviation-specific and not correcting for co-pollutant variables), Bergmann et al. (2026) estimated a hazard ratio of 1.06 for natural mortality, with low confidence in the overall body of evidence. Similarly to HEI and Ohlwein et al, Bergmann et al.'s analysis concluded that fewer than half of the 85 long-term studies adjusted for co-pollutant exposure and that, with respect to causality, "the overall evidence for independent effects of long-term UFP exposure remains inadequate to low" (Bergmann et al. 2026).

While the pool of research has expanded significantly in recent years, few broad-scale multi-city epidemiological studies are available and fewer still attempt to isolate the effects of UFPs from the effects of $PM_{2.5}$ or for other co-pollutant effects. Of those that do, evidence remains inconsistent or

inconclusive for distinct and independent UFP health effects relative to those already addressed by existing $PM_{2.5}$ standards.

These conclusions underscore what further research might meaningfully advance the state of the science. While specific site studies can characterize local exposure conditions, these studies, by their nature and scale, cannot properly employ standard epidemiological exposure assessment methods, adjust for co-pollutant exposures, or implement the long-term follow-up durations needed to evolve the state of the science toward establishing independent "causal" or "non-causal" relationships. Until those foundational broad-scale epidemiological studies are completed, site or project-specific research cannot independently resolve gaps or draw evidence towards causal or non-causal associations, and should not be interpreted as a substitute for, or progress towards, such conclusions (Bergmann et al. 2026; Kumar et al. 2014).

Regulatory Trajectory of Ultrafine and Ultra-Ultrafine Particles

Under CAA section 231, EPA has exclusive authority to issue aircraft emission standards. In issuing these standards, EPA was directed by Congress to balance the health and environmental effects of aircraft emission standards against aircraft safety, cost and noise factors. Since 1973, EPA has issued a series of increasingly stringent aircraft emission standards for particulate matter, greenhouse gas emissions, nitrogen oxides, carbon monoxide and other conventional pollutants. To date, EPA has not regulated UFPs or UUFPs from aircraft emissions and has the exclusive authority to determine when and if the science will have matured to a point where aircraft emission standards might one day include standards for those ultrafine particulates.

Under Sections 108 and 109 of the Clean Air Act (CAA), the EPA periodically reassesses the health effects of pollutants regulated under the National Ambient Air Quality Standards (NAAQS), including PM. This process begins with the ISA, which synthesizes policy-relevant science and evaluates causality based on biological plausibility, epidemiological consistency, and other factors. Subsequent phases include the Risk/Exposure Assessment (REA) and the Policy Assessment (PA), which quantify risks and evaluate regulatory implications (EPA 2025d; EPA 2025e). The most recent ISA, issued in 2019 and supplemented in 2022, concluded there is high confidence in the causal relationship between $PM_{2.5}$ and adverse health effects, leading to more stringent $PM_{2.5}$ standards in 2024 (EPA 2022; EPA 2026a). In contrast, independent health effects of UFPs and UUFPs were classified as having evidence that is "suggestive of, but not sufficient to infer, a causal relationship," or "inadequate to infer" causality, based on limited and conflicting epidemiologic and toxicologic data and insufficient context to infer independent effects from $PM_{2.5}$ (EPA 2022).

In issuing its latest aircraft emissions rule, EPA emphasized that although it was aware of the MOV-UP study and related studies considering exposure to these pollutants from aircraft operating at SEA–they would decline to address these effects at that time (87 Federal Register [FR] 72312). Because EPA has the exclusive power to regulate these emissions, CAA section 233 prohibits local governments, including

the Port of Seattle, the Puget Sound Clean Air Agency, and the Washington Department of Ecology from imposing any standard for mitigation in consideration of these emissions.

Historically, PM regulation has evolved with advancing science: from total suspended particulates (TSP) in 1971, to PM_{10} in 1987, and $PM_{2.5}$ in 1997, with subsequent tightening in 2006, 2012, and 2024 (EPA 1987; EPA 2025a; EPA 2026a; EPA 2026b). These changes were driven by increasingly robust evidence linking fine particles to mortality and morbidity (EPA 2025b; EPA 2025c). While regulatory updates often lag behind scientific consensus due to the time required for ISA, REA, PA, and rulemaking processes, despite growing scientific interest, regulatory development for UFPs and UUFPs has not progressed due to insufficient causal evidence (EPA 2019; EPA 2022; EPA 2025d; EPA 2025e).

For UFPs and UUFPs, the state of future regulatory action will depend on the maturation of broad-scale epidemiological evidence capable of establishing independent causal health effects. Due to the scope and time scale required for such studies, it is not feasible or reasonable for a project-level study to ascertain the likelihood of health effects for UFPs or UUFPs.

Conclusions

This technical report discusses gaps in scientific knowledge relevant to potential UFP- or UUFP-related health impacts of the SEA SAMP NTPs. The current state of the evidence does not support independent causal UFP effects. Although biologically plausible health effect pathways do exist, the limited pool of epidemiological findings does not, to any extent, establish causal health effects from exposure to aviation UFPs or UUFPs that can be discerned as separate and distinct from effects experienced from exposure to $PM_{2.5}$ more broadly, from regulated aviation co-pollutants such as oxides of nitrogen, or from other co-pollutants ubiquitous to the urban background.

EPA has exclusive regulatory authority to control the emissions from aircraft. Gaps in the scientific understanding remain that have prevented EPA from regulating aviation UFPs or UUFPs to date. Studies detailing site-specific plume PNCs and source apportionment are plentiful within the corpus of available literature, including recent studies near SEA. The principal research needs to further the state of the science are broad, multi-year epidemiological studies that characterize the independent influence of UFP and UUFP exposure on health outcomes. Therefore, further studies at the project or site scale would not address these gaps or lead to meaningful additional insights on the health effects of exposure to UFPs and UUFPs.

References

Allen, J.L., Liu, X., Weston, D., Prince, L., Oberdörster, G., and Finkelstein, J.N. 2014. "Developmental exposure to concentrated ambient ultrafine particulate matter air pollution in mice results in persistent and sex-dependent behavioral neurotoxicity and glial activation." *Toxicological Sciences*, 140(1):160–178. https://doi.org/10.1093/toxsci/kfu059.

Austin, E., J. Xiang, T.R. Gould, J.H. Shirai, S. Yun, M.G. Yost, T.V. Larson, and E. Seto. 2021. "Distinct Ultrafine Particle Profiles Associated with Aircraft and Roadway Traffic." *Environmental Science & Technology* 55, no. 5 (March): 2847–2858. https://doi.org/10.1021/acs.est.0c05933.

Bandyopadhyay, A. (2016). "Neurological disorders from ambient (urban) air pollution emphasizing ultrafine particulate matter (UFPM) and $PM_{2.5}$." *Current Pollution Reports*, 2, 203–211. https://doi.org/10.1007/s40726-016-0039-z.

Bergmann, M., P. Haddad-Thoelke, H. Jeong, R. Kappeler, H. Altug, L. Oberwinster, H. Boogaard, et al. 2026. "Systematic Review and Meta-Analysis on the Health Effects of Long-Term Exposure to Ultrafine Particles." *European Respiratory Review* 35: 250156.

Buonanno, G., L. Stabile, and P. Avino. 2012. "Occupational exposure to ultrafine particles and particle number size distribution in an aviation base." *Aerosol and Air Quality Research*, 12(5): 1133–1142.

Environmental Protection Agency (EPA). 2026a. "2006 National Ambient Air Quality Standards (NAAQS) for Particulate Matter ($PM_{2.5}$)." Accessed April 11, 2026. https://www.epa.gov/pm-pollution/2006-national-ambient-air-quality-standards-naaqs-particulate-matter-pm25.

EPA. 2026b. "2012 National Ambient Air Quality Standards (NAAQS) for Particulate Matter (PM)." Accessed April 11, 2026. https://www.epa.gov/pm-pollution/2012-national-ambient-air-quality-standards-naaqs-particulate-matter-pm.

EPA. 2025a. "Timeline of Particulate Matter (PM) National Ambient Air Quality Standards (NAAQS)." Accessed April 11, 2026. https://www.epa.gov/pm-pollution/timeline-particulate-matter-pm-national-ambient-air-quality-standards-naaqs.

EPA. 2025b. *Particle Pollution and Health*. Accessed April 11, 2026. https://www.epa.gov/sites/production/files/2016-04/documents/health_2012_factsheet.pdf.

EPA. 2025c. *Overview of EPA's Revisions to the Air Quality Standards for Particle Pollution (Particulate Matter)*. Accessed April 11, 2026. https://www.epa.gov/sites/production/files/2016-04/documents/overview_factsheet.pdf.

EPA. 2025d. "Process of Reviewing the National Ambient Air Quality Standards." Accessed April 11, 2026. https://www.epa.gov/criteria-air-pollutants/process-reviewing-national-ambient-air-quality-standards.

EPA. 2025e. “Setting and Reviewing Standards to Control Particulate Matter (PM) Pollution.” Accessed April 11, 2026. https://www.epa.gov/pm-pollution/setting-and-reviewing-standards-control-particulate-matter-pm-pollution.

EPA. 2022. *Supplement to the 2019 Integrated Science Assessment for Particulate Matter*. Accessed April 11, 2026. https://www.ncbi.nlm.nih.gov/books/NBK588505/.

EPA. 2019. *Integrated Science Assessment for Particulate Matter*. EPA/600/R-19/188. Research Triangle Park, North Carolina: Office of Research and Development.

EPA. 1987. “Revisions to the National Ambient Air Quality Standards for Particulate Matter.” *Federal Register* 52: 24634 (July 1, 1987).

Health Effects Institute. 2013. *Understanding the Health Effects of Ambient Ultrafine Particles*. HEI Perspectives 3. Boston, Massachusetts: Health Effects Institute.

Hudda, N., and S. A. Fruin. 2016. “International Airport Impacts to Air Quality: Size and Related Properties of Large Increases in Ultrafine Particle Number Concentrations.” *Environmental Science & Technology* 50: 3362–3370.

Janssen, N.A.H., Hoekstra, J., Houthuijs, D., Jacobs, J., Nicolaie, A., and Strak, M. 2022. “Effects of Long-Term Exposure to Ultrafine Particles From Aviation Around Schiphol Airport.” RIVM Report 2022-0068. *National Institute for Public Health and the Environment (RIVM)*, Bilthoven, The Netherlands. Available at: https://rivm.openrepository.com/handle/10029/625854.

Kumar, P., L. Morawska, W. Birmili, P. Paasonen, M. Hu, M. Kulmala, R. M. Harrison, L. Norford, and R. Britter. 2014. “Ultrafine Particles in Cities.” *Environment International* 66: 1–10.

Kwon, H.-S., M. H. Ryu, and C. Carlsten. 2020. “Ultrafine Particles: Unique Physicochemical Properties Relevant to Health and Disease.” *Experimental & Molecular Medicine* 52: 318–328.

Lenssen, E. S., N. A. H. Janssen, M. Oldenwening, K. Meliefste, D. de Jonge, R. J. M. Kamstra, D. van Dinther, S. van der Zee, R. H. Keuken, and G. Hoek. 2024. “Beyond the Runway: Respiratory Health Effects of Ultrafine Particles from Aviation in Children.” *Environment International* 188: 108759. https://doi.org/10.1016/j.envint.2024.108759.

Mueller, S. C., P. Patil, J. I. Levy, N. Hudda, J. L. Durant, E. L. Gause, B. D. van Loenen, et al. 2025. “Quantifying Aviation-Related Contributions to Ambient Ultrafine Particle Number Concentrations Using Interpretable Machine Learning.” *Environmental Science & Technology* 59: 19942–19952.

Ohlwein, S., R. Kappeler, M. Kutlar Joss, N. Künzli, and B. Hoffmann. 2019. “Health Effects of Ultrafine Particles: A Systematic Literature Review Update of Epidemiological Evidence.” *International Journal of Public Health* 64: 547–559. https://doi.org/10.1007/s00038-019-01202-7.

Onoda, A., Kawasaki, T., Tsukiyama, K., Takeda, K., and Umezawa, M. (2020). “Carbon nanoparticles induce endoplasmic reticulum stress around blood vessels with accumulation of misfolded proteins in

the developing brain of offspring." *Scientific Reports*, 10, 10028. https://doi.org/10.1038/s41598-020-66744-w.

Soppa, V., Lucht, S., Ogurtsova, K., Buschka, A., López-Vicente, M., Guxens, M., et al. (2023). "The Berlin–Brandenburg Air Study—A methodological study of a natural experiment investigating health effects related to changes in airport-related exposures." *International Journal of Public Health*, 68, 1606096. https://doi.org/10.3389/ijph.2023.1606096.

Stacey, B. 2019. "Measurement of Ultrafine Particles at Airports: A Review." *Atmospheric Environment* 198: 463–477.

Wang, C., J. Xiang, E. Austin, T. Larson, and E. Seto. 2024. "Quantifying the Contributions of Road and Air Traffic to Ambient Ultrafine Particles in Two Urban Communities." *Environmental Pollution* 348: 123892.

Weichenthal, S., L. Bai, M. Hatzopoulou, K. Van Ryswyk, J.C. Kwong, M. Jerrett, A. van Donkelaar, R.V. Martin, R.T. Burnett, H. Lu, and H. Chen. 2017. "Long-term exposure to ambient ultrafine particles and respiratory disease incidence in Toronto, Canada: A cohort study." *Environmental Health*, 16:64. https://doi.org/10.1186/s12940-017-0276-7.

Westerdahl, D., S.A. Fruin, P.L. Fine, and C. Sioutas. 2008. "The Los Angeles International Airport as a Source of Ultrafine Particles and Other Pollutants to Nearby Communities." *Atmospheric Environment* 42, no. 13 (April): 3143–3155. https://doi.org/10.1016/j.atmosenv.2007.09.006.

Wing, S.E., et al., 2020. Preterm birth among infants exposed to in utero ultrafine particles from aircraft emissions. *Environmental Health Perspectives*, 128(4), 047002.

Wu, A. H., S. Fruin, T. V. Larson, C.-C. Tseng, J. Wu, J. Yang, J. Jain, et al. 2021. "Association between Airport-Related Ultrafine Particles and Risk of Malignant Brain Cancer: A Multiethnic Cohort Study." *Cancer Research* 81(16): 4360–4369. https://doi.org/10.1158/0008-5472.CAN-21-1138.

Zhang, X., M. Karl, L. Zhang, and J. Wang. 2020. "Influence of Aviation Emission on the Particle Number Concentration near Zurich Airport." *Environmental Science & Technology* 54: 14161–14171.

SEA SAMP NTP Climate Synthesis

March 17, 2026
Port of Seattle
Seattle International Airport
RS&H No.: 1047-191-6001

Prepared by RS&H, Inc. at the direction of the Port of Seattle

Table of Contents

1 Introduction 1
2 Affected Environment and Projected Future Climate Conditions 1
3 Potential Impacts to SAMP Projects 3
3.1 Potential Risk Summary 3
3.2 Potential Climate Impacts and Risk to Airfield Projects 4
3.3 Potential Climate Impacts and Risk to Terminal Projects 5
3.4 Potential Climate Impacts and Risk to Cargo Projects 7
3.5 Potential Climate Impacts and Risk to Landside Projects 7
3.6 Potential Climate Impacts and Risk to Airport and Airline Support Projects 8
3.7 Potential Climate Impacts and Risk to Demolished Building Projects 9
3.8 Potential Climate Impacts and Risk to Overall Program Support Projects 10
3.9 Interaction of SAMP Projects with Regional Climate Trends 11
4 Adaptation Practices 11
4.1 Existing Adaptation Practices 12
4.1.1 Water 12
4.1.2 Energy 12
4.2 Planned Adaptation Measures 13
5 Conclusion 14
6 References 16

List of Tables

Table 1: Climate Threats in the Seattle Region 1
Table 2: Potential Risk Summary by Project Type 4
Table 3: Potential Climate Impacts and Risk to Airfield Projects 4
Table 4: Potential Climate Impacts and Risk to Terminal Projects 5
Table 5: Potential Climate Impacts and Risk to Cargo Projects 7
Table 6: Potential Climate Impacts and Risk to Landside Projects 8
Table 7: Potential Climate Impacts and Risk to Airport / Airline Support Projects 8
Table 8: Potential Climate Impacts and Risk to Demolished Building Projects 9
Table 9: Potential Climate Impacts and Risk to Overall Program Support Projects 10
Table 10: Threats and Adaptation Actions 14

1 Introduction

This appendix serves to supplement the Environmental Impact Statement (EIS) created for the Seattle-Tacoma International Airport (SEA) Sustainable Airport Master Plan (SAMP) Near Term Projects (NTPs), in accordance with Washington's State Environmental Policy Act (SEPA). In 2023, the State of Washington passed HB1181, which requires all local comprehensive plans to have a climate element. The Climate Synthesis Appendix provides a high-level review of the current and future climate threats in the Seattle region, the potential impacts of these threats to the SAMP NTPs, and an overview of existing and planned adaptation measures at SEA that can mitigate the potential impacts.

The scope of the Climate Synthesis Appendix is primarily focused on the SAMP NTPs. Climate threats were assessed through a literature review of national and regional sources. The review identified seven primary climate threats - Deficiency in Precipitation, Extreme Cold, Extreme Heat, Heavy Precipitation, Heavy Snow, Ice and Sleet, High Wind, and Wildfire. While sea level rise is a threat to the Seattle area and the Port, it is not considered a primary threat to SEA due to the Airport's elevation and distance from the shoreline. Impacts to the NTPs were broken down into eight functional categories, with an estimated risk level assigned to each climate threat. Existing and planned adaptation actions taken by SEA were then evaluated to determine whether they could be expected to mitigate the identified climate threats.

2 Affected Environment and Projected Future Climate Conditions

This section provides a high-level overview of key climate threats relevant to the proposed projects, along with a summary of historical conditions, observed climate trends, and projected future changes. These threats may pose risks to infrastructure, operations, and performance and are informed by regional climate data and established definitions of climate hazards. **Table 1** provides the historical condition and observed and future trends for each climate threat.

Table 1: Climate Threats in the Seattle Region

Threat	Historical Condition	Observed Trends	Future Trends
Deficiency in Precipitation	Seattle has historically benefitted from reliable precipitation and snowpack supporting water supply and hydropower	Summer precipitation has begun decreasing, with increasing instances of drought and reduced snowpack affecting seasonal water availability[1].	Continued decreases in summer precipitation, increased drought frequency, reduced snowpack, and greater stress on water supply and hydropower reliability[1,2].

[1] Cascadia Consulting Group, (2023). Climate Vulnerability Assessment. Retrieved from https://www.seattle.gov/documents/departments/opcd/seattleplan/seattleclimatevulnerabilityassessmentjuly2023.pdf
[2] Climate Impacts Group, (2022). Biophysical Climate Risks and Economic Impacts for Washington State. Retrieved from https://cig.uw.edu/publications/biophysical-climate-risks-and-economic-impacts-for-washington-state/

Threat	Historical Condition	Observed Trends	Future Trends
Extreme Cold	Seattle's maritime climate typically has moderate winter temperatures, though historical records show occasional prolonged cold and snow events.	Overall warming trend, but periodic extreme cold events still occur due to Arctic air interactions.	Warmer average winters, but continued risk of episodic extreme cold events and occasional severe winter storms[3].
Extreme Heat	Historically mild summers, with relatively few extreme heat events.	Average summer temperatures have increased (~1.5 degrees F since 1950); notable extreme events such as the 2021 heat dome; increasing heatwave frequency.	Significant warming (projected +6.3 degrees F summer maximum); higher frequency and duration of heatwaves; increased risks to human health, infrastructure, and operations.[2]
Heavy Precipitation	Seasonal rainfall patterns with known flood-prone areas, including coastal and urban flooding	Increasing intensity and frequency of heavy rainfall events; more precipitation falling as rain rather than snow.	More intense and frequent extreme precipitation events; especially in winter; increased flood risk and strain on drainage systems; heaviest 24-hour rain events will intensify by 22% on average, by the 2080s.[1]
Heavy Snow, Ice, and Sleet	Moderate snowfall (avg. ~6 inches annually) with occasional large events; established airport response systems.	Episodic large snow events still occur (e.g., 2019), though overall variability remains high.	Potential for less frequent but still impactful snow/ice events; continued need for preparedness despite overall warming trends.[4]
High Winds	Regular winter wind events, with typical gusts of 40-45 mph and occasional severe events exceeding 90 mph.[5]	High wind events remain common, typically associated with winter storm systems.	Likely continuation of strong wind events, potentially increasing in intensity with stronger storm systems.

[3] Seattle Office of Emergency Management, (2014). Seattle Vulnerability Analysis - Snow, Ice, and Extreme Cold. Retrieved from https://www.seattle.gov/documents/Departments/Emergency/PlansOEM/SHIVA/2014-04-23_SnowIceandExtremeCold.pdf
[4] Port of Seattle (N.D.). Winter Operations and Snow Removal at SEA Airport. Retrieved from https://www.portseattle.org/page/winter-operations-and-snow-removal-sea-airport
[5] King County, (2020). King County Regional Hazard Mitigation Plan 2020-2025. Retrieved from https://mrsc.org/getmedia/f5109483-ee3d-4e1e-b840-7704f50d77cf/k5rhmp.pdf

Threat	Historical Condition	Observed Trends	Future Trends
Wildfire	Historically, there has been lower wildfire risk in western Washington compared to eastern regions. Air quality has been impacted by smoke in the past.	Increasing wildfire frequency and intensity statewide due to warming temperatures and drier conditions. Increasing number of poor air quality days resulting from longer smoke seasons.	Longer fire seasons, increased frequency and area burned; moderate increases in western Washington risk, though still lower than eastern regions.[2] More wildfire smoke events worsening air quality.[1]

Overall, climate projections indicate that extreme heat, heavy precipitation, deficiency in precipitation, and reduced air quality from wildfire events will pose the greatest risks to the airport and proposed projects, with each threat expected to intensify in frequency, duration, and severity over time. These evolving conditions have important implications for infrastructure resilience, worker safety, and long-term operational reliability. Proactively addressing these key threats through design, planning, and adaptive management strategies is essential to proposed project performance under future climate conditions.

3 Potential Impacts to SAMP Projects

The SAMP includes capital improvement projects designed to meet SEA's Long-Term Vision to accommodate passenger levels and address identified needs for SEA over a 20-year planning horizon. Identified needs include the improvement of passenger experience at the airport, which is currently hindered by crowded spaces, long lines, and delayed flights. SAMP NTPs are meant to address near-term needs while the Port continues to evaluate long-term projects needed to address airfield and airspace limitations. Because the NTPs focus on a more immediate timeframe and address needs that are distinct from what may come from future planning, they were reviewed independently from the SAMP Long-Term Vision projects.

3.1 Potential Risk Summary

The proposed NTPs can be categorized into the following compartments: Airfield Projects, Terminal Projects, Cargo Projects, Landside Projects, Airport/Airline Support Projects, Relocated Building Projects, Demolished Building Projects, and Overall Program Support Projects. To assess potential impacts from the identified climate threats, projects within each of these categories were broken down into their major components. Relocated Building Projects are not evaluated as the projects within this category are included in other groups (Fuel Rack and Triculator fall within Airport/Airline Support Projects, and Portion of NAE falls within Landside Projects). **Table 2** provides an overview of the potential risk for each project type, which is described in further detail in sections 3.2-3.8. For this analysis, risk is assessed based on the likelihood of the climate threat, projected changes in its frequency and duration, and the perceived severity of the impact. The methodology used for this assessment is derived from the International Civil Aviation Organization (ICAO). After risk is calculated using likelihood and consequence, adaptive capacity is considered to determine whether or not the project will be vulnerable. These potential risks summarized below do not factor in the adaptative capacity at SEA airport, which are covered in Section 4.

Table 2: Potential Risk Summary by Project Type

Climate Threat	Airfield	Terminal	Cargo	Landside	Airport / Airline Support	Demolished Building	Overall Program Support
Deficiency in Precip.	Moderate	Moderate	Moderate	Moderate	Moderate	Low	Moderate
Extreme Cold	Moderate	Low	Low	Low	Low	Low	Moderate
Extreme Heat	Moderate	Moderate	Moderate	Moderate	Moderate	Low	High
Heavy Precipitation	Moderate	High	High	High	High	Low	High
Heavy Snow, Ice, Sleet	Moderate	Low	Low	Moderate	Moderate	Low	Moderate
High Winds	Moderate	Low	Moderate	Low	Moderate	Low	Moderate
Wildfire	Moderate	Moderate	Moderate	Moderate	Moderate	Low	Moderate

3.2 Potential Climate Impacts and Risk to Airfield Projects

Airfield Projects were evaluated based on the primary components of runways, taxiways, airfield operations, NAVAID's, airfield lighting, and signage. The airfield NTPs would upgrade portions of the airfield to meet current FAA airport design standards and improve an inefficient taxiway layout. **Table 3** summarizes potential impacts of climate threats and the estimated level of potential risk to Airfield Projects.

Table 3: Potential Climate Impacts and Risk to Airfield Projects

Airfield Projects		
Threat	**Potential Impacts**	**Potential Risk**
Deficiency in Precipitation	This threat could increase stress on pavement surfaces from soil contraction / subgrade shrinkage and reduce visibility from dust.	Moderate
Extreme Cold	Extreme cold could result in increased deicing operations, causing increased maintenance and potential flight delays. Refueling and servicing the aircraft may be delayed due to unsuitable conditions for workers. Repeat freezing and thawing can cause accelerated freeze thaw cycles, adversely impacting pavement integrity.	Moderate
Extreme Heat	Stress on taxiway pavements from increasing temperatures could cause asphalt to soften and deteriorate and lead to increased stress on electrical equipment, potentially causing	Moderate

	dysfunction, power outages, and disruptions to aircraft navigation and operations. Longer takeoff distances, reduced climb rates, and less thrust may reduce passenger loads and fuel capacity.	
Heavy Precipitation	Heavy precipitation could cause water damage to electrical infrastructure (including NAVAIDs), causing power outages and impacting flight operations. Storm events beyond a 25-year design storm may overload the drainage system. Water accumulation on runways and taxiways is unlikely, as previous vulnerability assessment identified no flooding for the 100-year storm. Flooding on aprons could lead to potential delays, impacting mobility around the airfield. Downstream creeks may experience increased flows resulting in flooding.	Moderate
Heavy Snow, Ice, and Sleet	Winter storm events could lead to damaged equipment. Snow may cause local utility outages. Accumulated snow or ice can block or hinder lighting systems. Increased use of deicing materials and other winter weather mitigation tactics may cause further deterioration. Accumulation of snow above bridges may weaken structural supports, increase the risk of collapse, and lead to mobility concerns for ground vehicles. Drain obstructions could occur due to frozen ground or snow causing flooding.	Moderate
High Winds	High winds may cause aircraft loss of control, aircraft damage, and airside infrastructure damage, resulting in costs, delays and maintenance. Stronger head winds can increase fuel usage and convective weather can force airplanes to extend their routes, thus increasing operational costs. Winds can damage above ground electrical equipment and signage, or deposit foreign object debris on the airfield, disrupting operations.	Moderate
Wildfire	Wildfires could cause power outages and air quality concerns, impacting visibility and leading to possible airfield closure.	Moderate

3.3 Potential Climate Impacts and Risk to Terminal Projects

Terminal Projects were evaluated based on the primary components of terminal, concourse, ramp, aprons, baggage handling operations, HVAC, and passenger services. The landside NTPs address the need for sufficient passenger processing facilities and gates to accommodate 56 million annual passengers at an optimal level of service. **Table 4** summarizes potential impacts of climate threats and the estimated level of potential risk to Terminal Projects.

Table 4: Potential Climate Impacts and Risk to Terminal Projects

Terminal Projects		
Threat	**Potential Impacts**	**Potential Risk**

Deficiency in Precipitation	Reduced water availability may limit cooling capacity, strain electrical systems, and disrupt potable and non-potable water supply. Prolonged drought conditions may cause soil contraction, leading to foundation movement and increased maintenance. Water restrictions may result in passenger discomfort and operational constraints.	Moderate
Extreme Cold	Increased heating demand may strain central utility systems and heating energy supply. Freezing temperatures may cause pipe failures, flooding, and damage to building materials. Repeated freeze–thaw cycles may accelerate pavement deterioration and increase maintenance needs. Cold conditions may reduce passenger comfort and affect outdoor terminal operations.	Low
Extreme Heat	High temperatures may increase cooling demand, stressing HVAC and energy systems. Thermal expansion may damage building components, vapor barriers, and mechanical systems. Overheating of electrical, baggage handling, and TSA equipment may disrupt operations. Heat exposure may pose health risks and reduce overall passenger comfort.	Moderate
Heavy Precipitation	Intense rainfall may cause flooding of utility corridors, parking facilities, and lower-level terminal areas. Water infiltration may damage electrical equipment and disrupt baggage handling and terminal operations. Flooding may restrict access to customer-facing facilities and ground transportation assets. Severe storms may result in localized or regional power outages affecting terminal services.	High
Heavy Snow, Ice, and Sleet	Snow and ice accumulation may damage roofs, pavements, and building systems, increasing maintenance needs. Snow and ice control activities may accelerate pavement wear and increase deicer use. Winter conditions may reduce passenger comfort and pose safety risks to workers and vehicles.	Low
High Winds	High winds may cause regional or local power outages, resulting in delays in operations. High winds may damage terminal structures, canopies, gates, and ground service equipment. Wind-driven debris may impact building envelopes and roof systems.	Moderate
Wildfire	Wildfires are unlikely to damage terminal structures due to buffer zones separating the airport from forested areas. Regional or nearby wildfires could cause operational risks from power shutoffs. Poor air quality may increase HVAC demand and strain the central mechanical plant (CMP). Smoke infiltration may pose health concerns for passengers and staff in the terminal.	Moderate

3.4 Potential Climate Impacts and Risk to Cargo Projects

Cargo Projects were evaluated based on the primary components of warehouse, office space, and ground transportation and logistics. The cargo NTPs address the deficiency in available facilities to accommodate projected cargo levels at the airport. **Table 5** summarizes potential impacts of climate threats and the estimated level of potential risk to Cargo Projects.

Table 5: Potential Climate Impacts and Risk to Cargo Projects

Cargo Projects		
Threat	**Potential Impacts**	**Potential Risk**
Deficiency in Precipitation	Very dry soil conditions could lead to soil subsidence or heaving, potentially affecting building foundations or underground utilities.	Moderate
Extreme Cold	Extreme cold could lead to premature brittle failure of materials such as seals, hoses, or fueling components.	Low
Extreme Heat	Heat waves or excessively high temperatures could lead to premature failure of some roofing components, pavement softening, and increased maintenance needs for HVAC equipment.	Moderate
Heavy Precipitation	Heavy precipitation could cause flooding of loading docks or cargo bays and potentially result in access issues if roadways were flooded.	High
Heavy Snow, Ice, and Sleet	Winter storms could cause structural stress due to roof loading and operational impacts due to ice and snow accumulation restricting access.	Low
High Winds	High winds could potentially damage warehouse roofs, doors, and siding, especially large bay doors.	Moderate
Wildfire	Regional or nearby wildfires could cause operational risks from smoke intrusion by exposing workers and/or sensitive cargo, and could increase HVAC filtration loads, causing systems to clog or fail, or to require additional maintenance.	Moderate

3.5 Potential Climate Impacts and Risk to Landside Projects

Landside Projects primarily consist of uncovered and covered parking facilities, roadways, and ground transportation. The landside NTPs address the existing parking constraints for employees and passengers, as well as the low level of service provided by the arrival and departure curbfronts during peak hours. **Table 6** summarizes potential impacts of climate threats and the estimated level of potential risk to Landside Projects.

Table 6: Potential Climate Impacts and Risk to Landside Projects

Landside Projects		
Threat	**Potential Impacts**	**Potential Risk**
Deficiency in Precipitation	Elevated temperatures and prolonged dry conditions may exceed pavement design thresholds, leading to rutting, reduced pavement service life, and increased maintenance requirements for pavement surfaces.	Moderate
Extreme Cold	Freeze–thaw cycles may cause cracking, potholing, heaving, and subsidence of pavements and structures, increasing maintenance needs and creating localized access and safety issues.	Low
Extreme Heat	Extreme heat may accelerate pavement deterioration, cause rutting or softening of asphalt surfaces, leading to increased maintenance and potential operational disruptions.	Moderate
Heavy Precipitation	Intense rainfall may overwhelm drainage systems, resulting in flooding of roadways, parking facilities, and lower levels of garages, which may restrict access, cause delays, and increase accident risk.	High
Heavy Snow, Ice, and Sleet	Winter storms may restrict roadway access; and elevate safety risks due to reduced traction, visibility, and mobility.	Moderate
High Winds	High winds may damage exterior facilities and canopies and create hazardous conditions for vehicles and pedestrians.	Low
Wildfire	Wildfires may result in roadway closures due to poor visibility, access limitations, and safety concerns.	Moderate

3.6 Potential Climate Impacts and Risk to Airport and Airline Support Projects

Airport and Airline Support Projects primarily consist of fueling infrastructure and operations, ARFF, deicing infrastructure and operations, and maintenance operations. These NTPs address the lack of fuel storage to meet projected demand, as well as SEA's SAF initiative. **Table 7** summarizes potential impacts of climate threats and the estimated level of potential risk to Airport and Airline Support Projects.

Table 7: Potential Climate Impacts and Risk to Airport / Airline Support Projects

Airport / Airline Support Projects		
Threat	**Potential Impacts**	**Potential Risk**
Deficiency in Precipitation	Prolonged drought conditions may cause soil contraction and foundation settlement, disrupt potable and non-potable water supply, and limit water availability for firefighting and facility operations.	Moderate
Extreme Cold	Extreme cold may pose safety risks to outdoor workers, require operational adjustments, and increase staffing needs. Freezing temperatures may cause pipe failures, brittle fuel system components, and disruptions to natural gas supply, resulting in operational delays.	Low

Airport / Airline Support Projects		
Threat	**Potential Impacts**	**Potential Risk**
Extreme Heat	Elevated temperatures may increase cooling demand and maintenance needs, stress HVAC infrastructure, and pose health risks to outdoor workers. It can also increase fueling risks by raising fuel volatility, leading to rapid evaporation and higher concentrations of flammable vapors.	Moderate
Heavy Precipitation	Intense rainfall may cause localized flooding, delay operations, contaminate fuel systems, and create unsafe working conditions due to reduced visibility and surface water accumulation.	High
Heavy Snow, Ice, and Sleet	Winter storms may delay operations, disrupt fueling activities, and increase safety risks for outdoor workers. Snow and ice may damage fuel system components, require additional deicing activities, and reduce operational efficiency.	Moderate
High Winds	High winds may damage aboveground fuel storage tanks and support facilities, create unsafe ramp conditions, and result in temporary operational shutdowns and flight delays.	Moderate
Wildfire	Wildfires may disrupt regional utility and fuel supply chains, increase fire and explosion risk, and cause power outages and operational delays due to safety concerns or preemptive shutdowns. Poor air quality may pose health risks to outdoor workers	Moderate

3.7 Potential Climate Impacts and Risk to Demolished Building Projects

Demolished Building Projects are included in the NTPs to enable the construction of other critical projects. While these projects will not exist in future climate conditions, the climate threats, potential impacts, and estimated potential risk associated with demolition operations are evaluated in **Table 8**.

Table 8: Potential Climate Impacts and Risk to Demolished Building Projects

Demolished Building Projects		
Threat	**Potential Impacts**	**Potential Risk**
Deficiency in Precipitation	This threat could result in an increased need for dust control.	Low
Extreme Cold	Prolonged exposure to extreme cold could lead to cold-related illnesses among construction workers, reduced production, and project delays. Construction materials, such as concrete and asphalt, have specific temperature requirements for proper curing and setting.	Low
Extreme Heat	Extreme heat could result in delays or suspension of work due to extreme heat and increased risk of heat-related	Low

	illnesses among workers, as well as potential damage to heat-sensitive materials.	
Heavy Precipitation	Excessive water could cause soil erosion, instability, and operational challenges which may disrupt or delay demolition processes.	Low
Heavy Snow, Ice, and Sleet	Snow, ice and sleet could create navigational challenges, reduced visibility, and delayed delivery of material supplies, resulting in project delays and downtime, and could lead to Increased safety risks for workers.	Low
High Winds	High wind could cause damages from fallen equipment and debris, resulting in increased costs and project delays.	Low
Wildfire	Wildfire could cause reduced air quality conditions at the airport, resulting in unsafe working conditions and poor visibility, and could potentially increase fire risks, especially near flammable materials. Poor air quality may lead to respiratory issues, fatigue, and other health problems, reducing productivity.	Low

3.8 Potential Climate Impacts and Risk to Overall Program Support Projects

Overall Program Support Projects include upgrades to stormwater infrastructure, utility systems, and the central mechanical plant (CMP). These projects are intended to enable SEA's long-term vision by addressing current needs across airport support systems. **Table 9** summarizes potential impacts of climate threats and the estimated level of potential risk to Overall Program Support Projects.

Table 9: Potential Climate Impacts and Risk to Overall Program Support Projects

Overall Program Support Projects		
Threat	**Potential Impacts**	**Potential Risk**
Deficiency in Precipitation	Reduced water availability may limit cooling capacity, strain electrical systems, and disrupt potable and non-potable water supply. Prolonged drought may cause soil contraction, leading to heaving, subsidence, and damage to underground utilities. Lower streamflows may increase sedimentation and pollutant concentrations and degrading water quality.	Moderate
Extreme Cold	Increased heating demand may strain the CMP. Freezing temperatures may cause pipe failures, frozen water cabinets, and damage to underground and surface infrastructure. Cold-related supply chain disruptions may delay delivery of fuel, utilities, and other critical materials.	Moderate
Extreme Heat	Elevated temperatures may increase cooling demand, stressing the CMP and requiring additional capacity. Thermal expansion may damage pipelines, storage tanks, and electrical components, increasing maintenance needs and outage risk. Higher temperatures may degrade water quality (e.g., nitrification), affecting potable water systems.	High

Heavy Precipitation	Intense rainfall may overwhelm stormwater systems, causing flooding of critical infrastructure. Flooding may damage electrical equipment, degrade water quality, and corrode infrastructure. Flood-related transportation disruptions may delay deliveries and maintenance activities.	High
Heavy Snow, Ice, and Sleet	Snow and ice may cause pipe failures, power outages, and reduced efficiency of power generation. Elevated deicer concentrations may affect stormwater treatment systems. Transportation disruptions may delay fuel, energy, and material deliveries.	Moderate
High Winds	High winds may damage buildings, antennae, and other aboveground facilities. Wind-induced power line damage may result in airport-wide power outages.	Moderate
Wildfire	Fire-related power shutoffs or damage to external utilities may disrupt airport power and fuel supply. Wildfires may degrade raw water supply and water quality. Regional infrastructure damage may result in prolonged supply chain disruptions. Wildfires may clog stormwater systems with ash and debris.	Moderate

3.9 Interaction of SAMP Projects with Regional Climate Trends

Proposed projects that increase water use, add impervious surfaces, or require additional electricity have the potential to interact with regional climate trends, including more frequent drought conditions, higher ambient temperatures, and more intense rainfall events. To avoid exacerbating these regional stressors, project designs can incorporate mitigation measures that improve long-term environmental performance and climate resilience. Water-using systems can be designed for high efficiency and may include reuse or recirculation features to limit potable demand during drought periods. Added impervious areas can be managed through stormwater controls sized for projected increases in rainfall intensity, including enhanced detention, infiltration, and low-impact development practices where feasible. Electrical systems and building envelopes can emphasize energy efficiency, reduced heat gain, and support for renewable or low-carbon energy sources to offset higher cooling loads associated with rising temperatures. These design decisions can minimize adverse interactions with changing climate conditions while maintaining compliance with applicable environmental requirements.

4 Adaptation Practices

The Port of Seattle has implemented and will continue to advance a variety of measures to improve resilience to climate-related risks and support long-term sustainability. These actions address both infrastructure resilience and operational sustainability, helping the airport adapt to changing climate conditions such as increasing temperatures, heavier precipitation events, and changes in extreme weather patterns. The Port integrates climate adaptation into planning, design, and operations through established sustainability programs, infrastructure management practices, and strategic policy goals.

4.1 Existing Adaptation Practices

Several existing climate adaptation practices focus on improving the resilience of airport infrastructure and resource systems. The Port's Sustainable Evaluation Framework (SEF) plays a central role in incorporating resilience into capital project planning. This framework applies to capital projects and organizes them into tiers based on project size and sustainability opportunities. Projects with significant sustainability potential convene a Sustainable Project Assessment and Review Collaboration (SPARC) team, which evaluates early design opportunities and recommends sustainability and resilience concepts. These recommendations are documented in a Sustainable Design Approach presented to the Port Commission and ultimately incorporated into a project's Sustainable Design Strategy. The Port also encourages the use of other third-party frameworks such as Envision and LEED. Projects utilizing these frameworks may evaluate and assess potential risks from climate change. By evaluating resilience and sustainability considerations early in the planning and design process, these frameworks support the integration of resilience-oriented initiatives across the airport campus.

4.1.1 Water

The Port works to maximize the conveyance capacity of stormwater infrastructure through the stormwater utility master plan, as well as on a project-by-project improvements to airport drainage systems. Findings from the Airport's Climate Vulnerability Assessment have also been incorporated into stormwater utility planning to respond to evolving precipitation patterns. Water conservation measures have been implemented across airport facilities, including capturing rainwater from the North Satellite roof to supply restrooms with graywater, installing secondary "purple pipe" systems to enable water reuse where available, establishing water-efficient landscaping standards, and implementing National Pollutant Discharge Elimination System (NPDES) permit measures that allow Industrial Wastewater System (IWS) water to be reused for dust suppression, irrigation, and other construction-related activities. Water conservations measures can increase the Airport's resilience to drought and help minimize its impacts to regional water supplies.

4.1.2 Energy

Energy efficiency, fuel diversification and adequate back-up power systems are also key components of the airport's adaptation approach. SEA has implemented ongoing monitoring of airport energy use relative to ambient air temperatures to better understand climate-related energy demand patterns. The airport has retrofitted older lighting systems with energy-efficient LED lighting and requires new construction projects to meet LEED Silver certification or higher, which incorporates energy and water efficiency strategies. Additional Energy Efficiency Measures have been identified for the airport through the Clean Buildings Performance Standard, which will further reduce electricity and natural gas demand.

Fuel diversification has occurred across the airport's on-road fleet, in its generators, and for building heating. These initiatives include the use of renewable diesel for heavy-duty equipment such as snowplows and sweepers, renewable natural gas in its bus fleet, and electrification of Port-owned vehicles where feasible. The airport's heating system uses a mix of natural gas and renewable natural gas and can also run on renewable diesel or traditional diesel in emergencies. This system is expected to be further

diversified and resilient by moving the airport's central mechanical plant to ground source heat and hot water, rather than natural-gas powered steam.

These operational practices and project-level strategies support the Port of Seattle's broader sustainability commitments under the Century Agenda, which includes goals to meet all increased energy needs with conservation and renewable sources, meet or exceed regulatory requirements for stormwater leaving Port facilities, and reduce projected future water consumption by 12 percent by 2030. Complementary programs such as the Aviation Utilities Group's Energy Efficiency Incentive (EEI) funding further encourage the implementation of energy-efficient equipment and designs that exceed minimum code requirements. Energy conservation measures can also help SEA manage demand and free up capacity to account for demand from future increased temperatures.

In 2018, the airport built an Alternative Utility Facility. The AUF includes 10 generators, a control building, Medium Voltage (MV) switchgear building, and MV automatic transfer switching building, situated on a secure campus linked to SEA's main substation by MV underground ducts. Its main objective is to enhance the airport's ability to withstand utility failures by assuming control of the crucial 115kv feed. The AUF houses dual-fuel generators capable of operating on traditional diesel, renewable diesel, jet fuel and SAF or alternative jet fuel. The system ensures continuous or near-continuous uptime, delivering a reliable 30 megawatts of power through ten 3 MW generators.

4.2 Planned Adaptation Measures

In addition to these existing practices, the Port has identified several planned adaptation measures to strengthen resilience in the future. As airport infrastructure is replaced or upgraded, design standards will be updated to account for climate threats, including increased rainfall intensity and higher summer temperatures. The Port also plans to further integrate climate considerations into future utility master planning; including upgrading the Central Mechanical Plant to ground source heat instead of natural gas and re-examining design criteria for stormwater systems to accommodate larger design storm events off the airfield where feasible. Operational improvements are also planned, including avoiding electrical conductor splicing in underground vaults to reduce vulnerability, implementing systems within the Maximo asset management platform to track weather-related repairs and replacements, and continuing the conversion of gas- and diesel-powered ground support equipment to electric alternatives.

Future initiatives will also focus on fuel diversification and emissions reduction, which enhance operational resilience while reducing greenhouse gas emissions. The Port has developed a Sustainable Fleet Plan to transition fleet vehicles to cleaner fuels and continue expanding electrification. The Port of Seattle has also established one of the most ambitious sustainable aviation fuel (SAF) strategies in the United States, with the goal of ensuring that every flight fueled at SEA uses at least a 10 percent blend of sustainable aviation fuel by 2028. Together, these existing and planned initiatives strengthen the airport's ability to adapt to changing climate conditions while supporting long-term sustainability and operational reliability.

5 Conclusion

The greatest threats to the SAMP NTPs are from heavy precipitation events, closely followed by extreme heat, drought, wildfire (primarily from air quality and regional impacts), and high winds. The climate science review identified that seven climate threats, extreme heat, heavy precipitation, deficiency in precipitation, and wildfire are expected to worsen in the Seattle region. This emphasizes the importance of addressing heavy precipitation, extreme heat, and deficiency in precipitation in the SAMP NTPs.

SEA already has robust environmental and sustainable design programs and procedures in place to maximize resilience. Climate projections of worsening extreme precipitation have been incorporated into the stormwater utility master plan and into individual project improvements to airport drainage systems. Key operational practices such as the Port's Sustainable Evaluation Framework (SEF) and use of third party frameworks play a critical role in incorporating resilience into capital project planning. These processes allow individual projects to evaluate resilience and sustainability considerations early in the planning and design process, which will support the climate resilience of the SAMP NTPs. Overall, the Port's existing and planned adaptation actions are well matched to address the potential impacts to the SAMP NTPs from climate change. **Table 10** provides a crosswalk between the identified climate threats and the adaptation measures that increase SEA's resilience.

Table 10: Threats and Adaptation Actions

Threat	Adaptation Action
Deficiency in Precipitation	Individual project geotechnical investigations evaluate soil conditions and susceptibility to movement. Future projects may include water conservation measures which help mitigate the intensity of drought conditions.
Extreme Cold	This threat is not expected to worsen. Current airport operational procedures and design processes should be sufficient to cope with extreme cold events.
Extreme Heat	As assets are replaced, the airport will confirm they accommodate higher summer temperatures (via design criteria). Monitoring the airport's energy use relative to ambient air temperatures is on-going. Future energy efficiency measures will help mitigate additional demand needed for more extreme heat days.
Heavy Precipitation	As assets are replaced, the airport will confirm they accommodate increased rainfall intensity (via design criteria). SEA will continue to maximize conveyance capacity of the airport on a project-by-project basis. The Airport is re-examining the airport's design criteria (e.g., increasing to a 50- or 100-year storm event where possible) and conveyance modeling, particularly for stormwater systems.
Heavy Snow, Ice, and Sleet	This threat is not expected to worsen. Current airport operational procedures and design processes are expected to be sufficient to address winter storm events.
High Winds	High winds are currently included in SEA's design standards. Potential power outages due to high winds are addressed through the airport's Alternative Utility Facility generators.
Wildfire	Projects are expected utilize the SEF structure or other frameworks which may consider potential impacts from wildfires related to air quality.

6 References

- Cascadia Consulting Group, (2023). Climate Vulnerability Assessment. Retrieved from https://www.seattle.gov/documents/departments/opcd/seattleplan/seattleclimatevulnerabilityassessmentjuly2023.pdf
- Climate Impacts Group, (2022). Biophysical Climate Risks and Economic Impacts for Washington State. Retrieved from https://cig.uw.edu/publications/biophysical-climate-risks-and-economic-impacts-for-washington-state/
- ICAO, (2022). Climate Change: Climate Risk Assessment, Adaptation and Resilience – Key Steps in Aviation Organization Climate Change Risk Assessment and Adaptation Planning. Retrieved from Climate-Risk-Assessment-and-Adaptation-Report_Key-Steps-Risk-Assessment_final.pdf
- Seattle Office of Emergency Management, (2014). Seattle Vulnerability Analysis - Snow, Ice, and Extreme Cold. Retrieved from https://www.seattle.gov/documents/Departments/Emergency/PlansOEM/SHIVA/2014-04-23_SnowIceandExtremeCold.pdf
- Port of Seattle (N.D.). Winter Operations and Snow Removal at SEA Airport. Retrieved from https://www.portseattle.org/page/winter-operations-and-snow-removal-sea-airport
- King County, (2020). King County Regional Hazard Mitigation Plan 2020-2025. Retrieved from https://mrsc.org/getmedia/f5109483-ee3d-4e1e-b840-7704f50d77cf/k5rhmp.pdf